

Test Plot 65#: LTE Band 4_Body Top_50%RB_Middle

DUT: Mobile Phone; Type: X6812B; Serial: SZ1210813-34307E-SA-S_GY2;


Communication System: Generic FDD-LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1732.5 \text{ MHz}$; $\sigma = 1.361 \text{ S/m}$; $\epsilon_r = 40.368$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.39, 8.39, 8.39)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x91x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.140 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 9.381 V/m; Power Drift = -0.06 dB
 Peak SAR (extrapolated) = 0.136 W/kg
SAR(1 g) = 0.109 W/kg; SAR(10 g) = 0.068 W/kg
 Maximum value of SAR (measured) = 0.119 W/kg

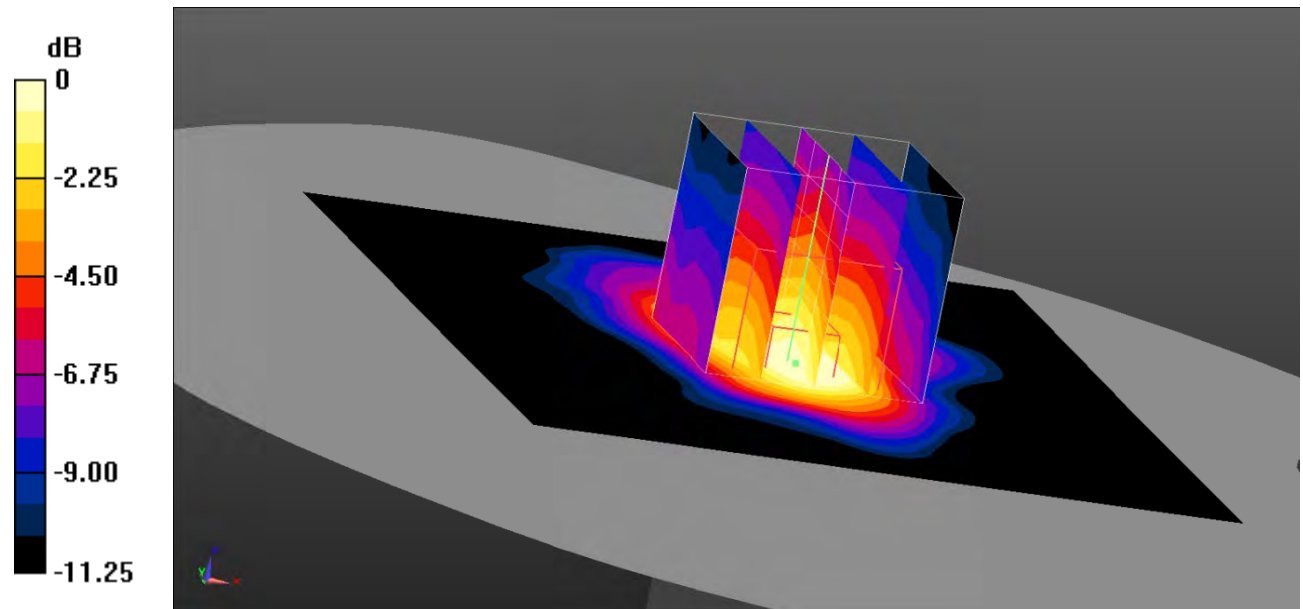

0 dB = 0.119 W/kg = -9.24 dBW/kg

Test Plot 66#: LTE Band 5_Head Left Check_1RB_Middle

DUT: Mobile Phone; Type: X6812B; Serial: SZ1210813-34307E-SA-S_GY2;


Communication System: Generic FDD-LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.923$ S/m; $\epsilon_r = 41.022$; $\rho = 1000$ kg/m³ ;
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
 Maximum value of SAR (interpolated) = 0.518 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 20.83 V/m; Power Drift = -0.01 dB
 Peak SAR (extrapolated) = 0.451 W/kg
SAR(1 g) = 0.437 W/kg; SAR(10 g) = 0.364 W/kg
 Maximum value of SAR (measured) = 0.443 W/kg

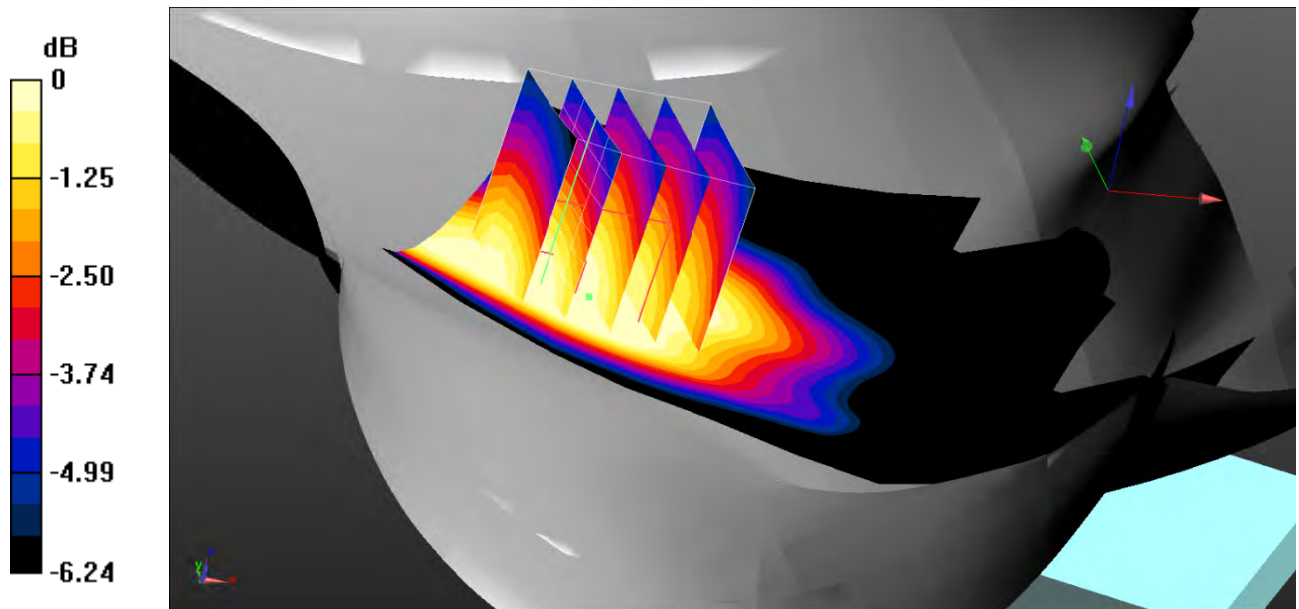

0 dB = 0.443 W/kg = -3.54 dBW/kg

Test Plot 67#: LTE Band 5_Head Left Check_50%RB_Middle

DUT: Mobile Phone; Type: X6812B; Serial: SZ1210813-34307E-SA-S_GY2;


Communication System: Generic FDD-LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 836.5 \text{ MHz}$; $\sigma = 0.923 \text{ S/m}$; $\epsilon_r = 41.022$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x91x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.483 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 18.73 V/m ; Power Drift = -0.05 dB
 Peak SAR (extrapolated) = 0.376 W/kg
SAR(1 g) = 0.363 W/kg ; SAR(10 g) = 0.301 W/kg
 Maximum value of SAR (measured) = 0.376 W/kg

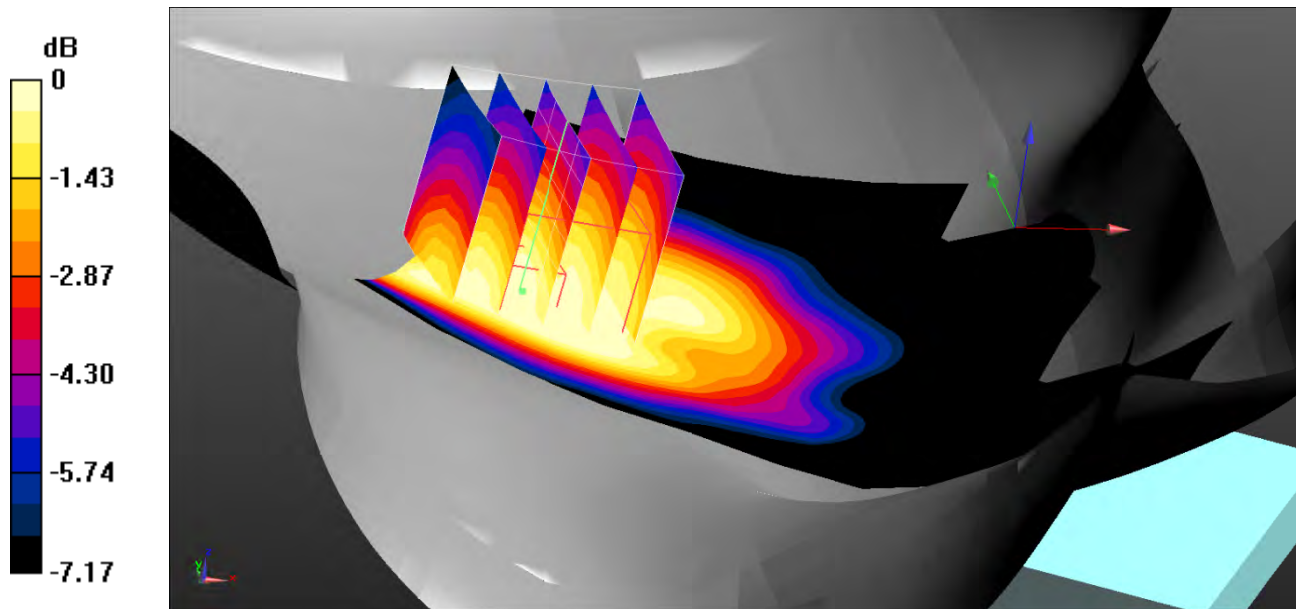

0 dB = $0.376 \text{ W/kg} = -4.25 \text{ dBW/kg}$

Test Plot 68#: LTE Band 5_Head Left Tilt_1RB_Middle

DUT: Mobile Phone; Type: X6812B; Serial: SZ1210813-34307E-SA-S_GY2;


Communication System: Generic FDD-LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 836.5 \text{ MHz}$; $\sigma = 0.923 \text{ S/m}$; $\epsilon_r = 41.022$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x91x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.591 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 22.29 V/m ; Power Drift = -0.08 dB
 Peak SAR (extrapolated) = 0.510 W/kg
SAR(1 g) = 0.466 W/kg ; SAR(10 g) = 0.355 W/kg
 Maximum value of SAR (measured) = 0.482 W/kg

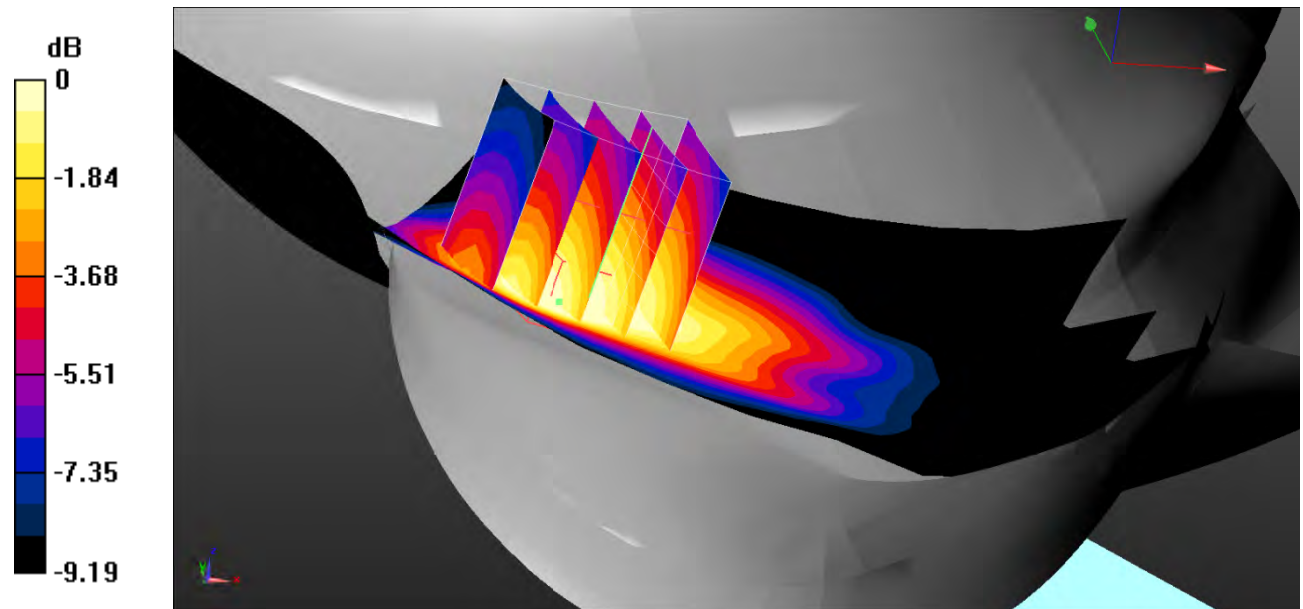

0 dB = $0.482 \text{ W/kg} = -3.17 \text{ dBW/kg}$

Test Plot 69#: LTE Band 5_Head Left Tilt_50%RB_Middle

DUT: Mobile Phone; Type: X6812B; Serial: SZ1210813-34307E-SA-S_GY2;


Communication System: Generic FDD-LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 836.5 \text{ MHz}$; $\sigma = 0.923 \text{ S/m}$; $\epsilon_r = 41.022$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x91x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.482 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 20.10 V/m ; Power Drift = -0.00 dB
 Peak SAR (extrapolated) = 0.406 W/kg
SAR(1 g) = 0.376 W/kg ; SAR(10 g) = 0.287 W/kg
 Maximum value of SAR (measured) = 0.390 W/kg

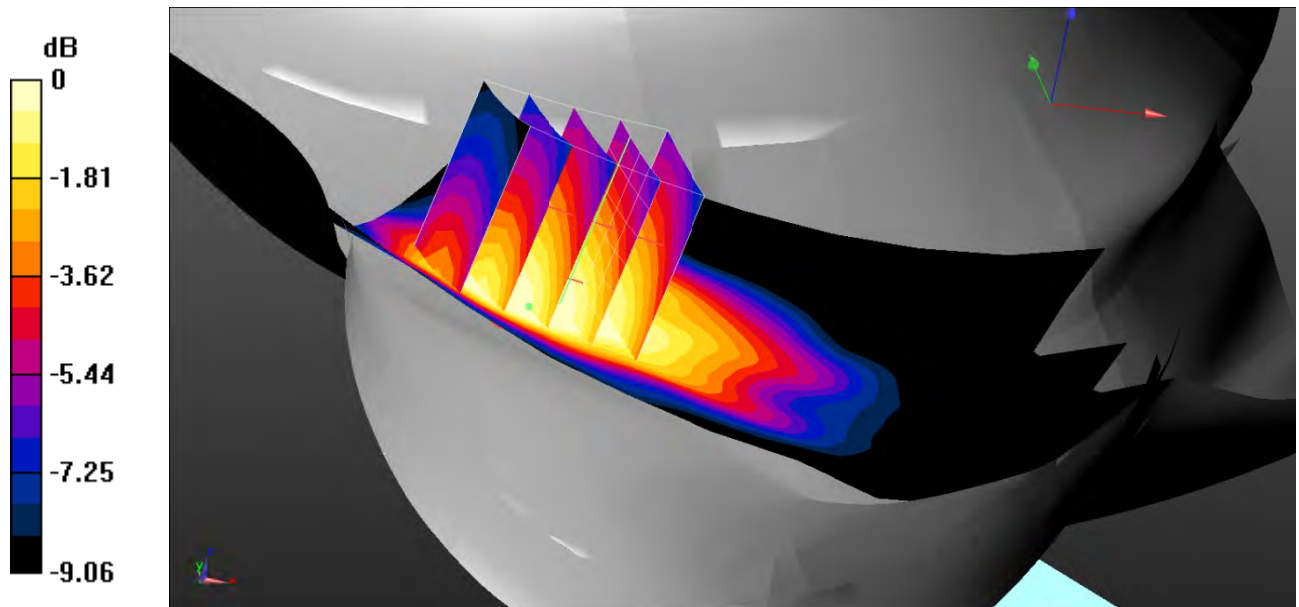

0 dB = 0.390 W/kg = -4.09 dBW/kg

Test Plot 70#: LTE Band 5_Head Right Check_1RB_Middle

DUT: Mobile Phone; Type: X6812B; Serial: SZ1210813-34307E-SA-S_GY2;


Communication System: Generic FDD-LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.923$ S/m; $\epsilon_r = 41.022$; $\rho = 1000$ kg/m³ ;
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
 Maximum value of SAR (interpolated) = 0.875 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 19.83 V/m; Power Drift = -0.15 dB
 Peak SAR (extrapolated) = 0.792 W/kg
SAR(1 g) = 0.697 W/kg; SAR(10 g) = 0.532 W/kg
 Maximum value of SAR (measured) = 0.729 W/kg

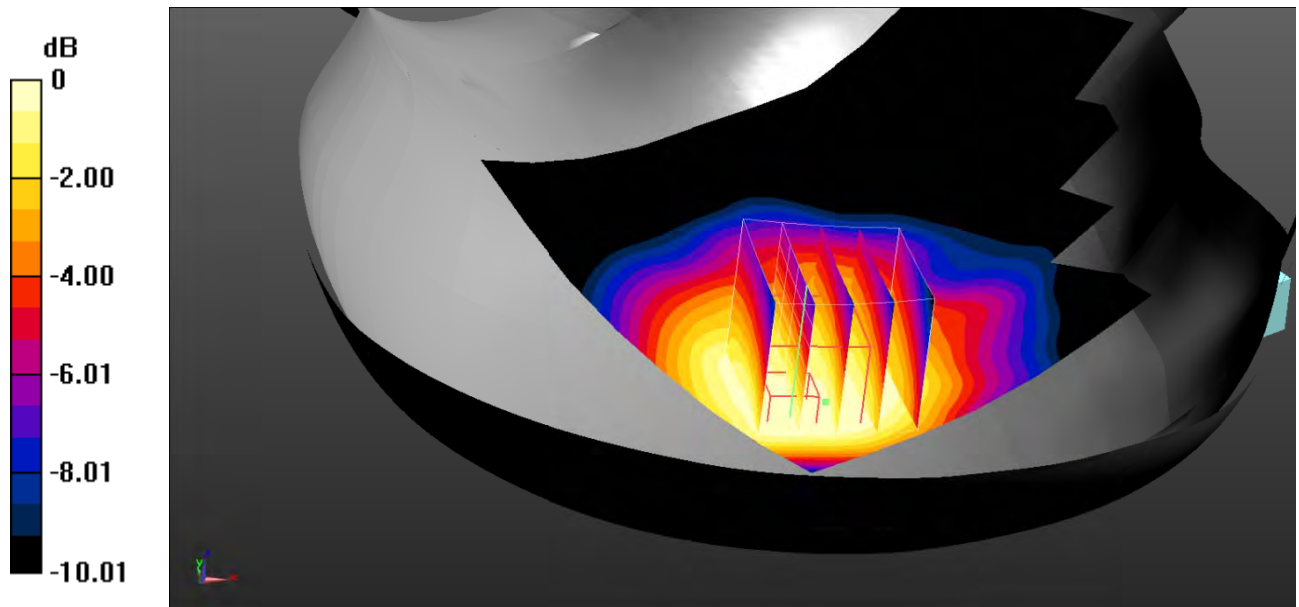

0 dB = 0.729 W/kg = -1.37 dBW/kg

Test Plot 71#: LTE Band 5_Head Right Check_50%RB_Middle

DUT: Mobile Phone; Type: X6812B; Serial: SZ1210813-34307E-SA-S_GY2;


Communication System: Generic FDD-LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.923$ S/m; $\epsilon_r = 41.022$; $\rho = 1000$ kg/m³ ;
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
 Maximum value of SAR (interpolated) = 0.832 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 17.93 V/m; Power Drift = -0.18 dB
 Peak SAR (extrapolated) = 0.701 W/kg
SAR(1 g) = 0.582 W/kg; SAR(10 g) = 0.432 W/kg
 Maximum value of SAR (measured) = 0.607 W/kg

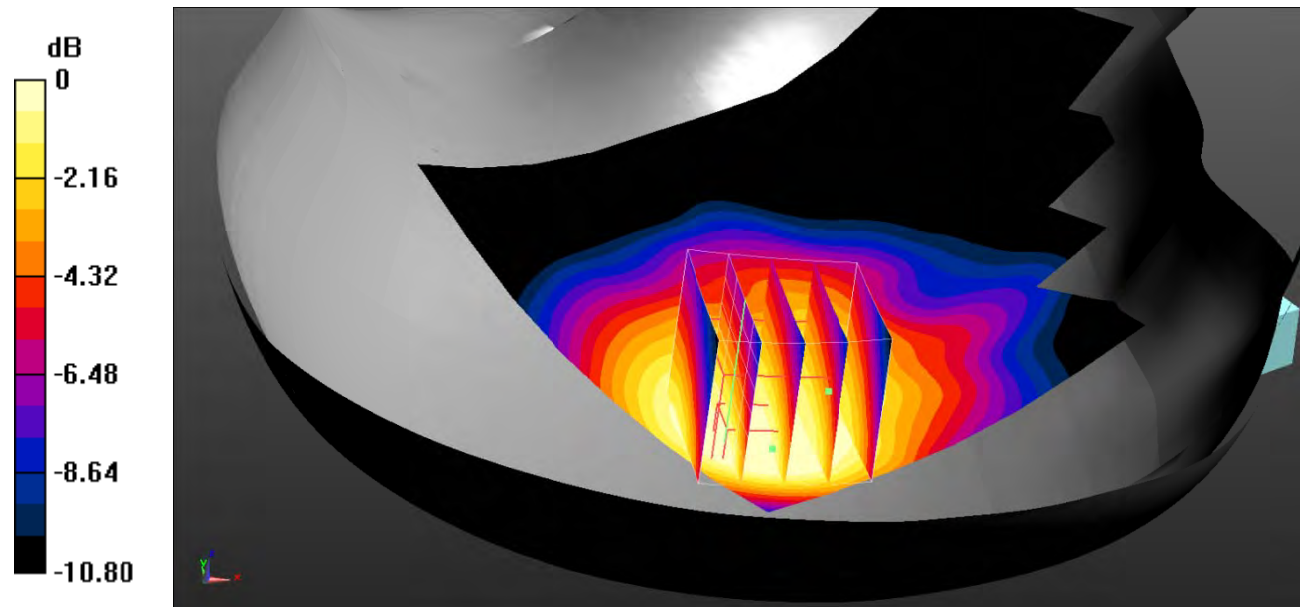

0 dB = 0.607 W/kg = -2.17 dBW/kg

Test Plot 72#: LTE Band 5_Head Right Tilt_1RB_Middle

DUT: Mobile Phone; Type: X6812B; Serial: SZ1210813-34307E-SA-S_GY2;


Communication System: Generic FDD-LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 836.5 \text{ MHz}$; $\sigma = 0.923 \text{ S/m}$; $\epsilon_r = 41.022$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x81x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.870 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 21.74 V/m ; Power Drift = -0.12 dB
 Peak SAR (extrapolated) = 0.971 W/kg
SAR(1 g) = 0.740 W/kg ; SAR(10 g) = 0.478 W/kg
 Maximum value of SAR (measured) = 0.823 W/kg

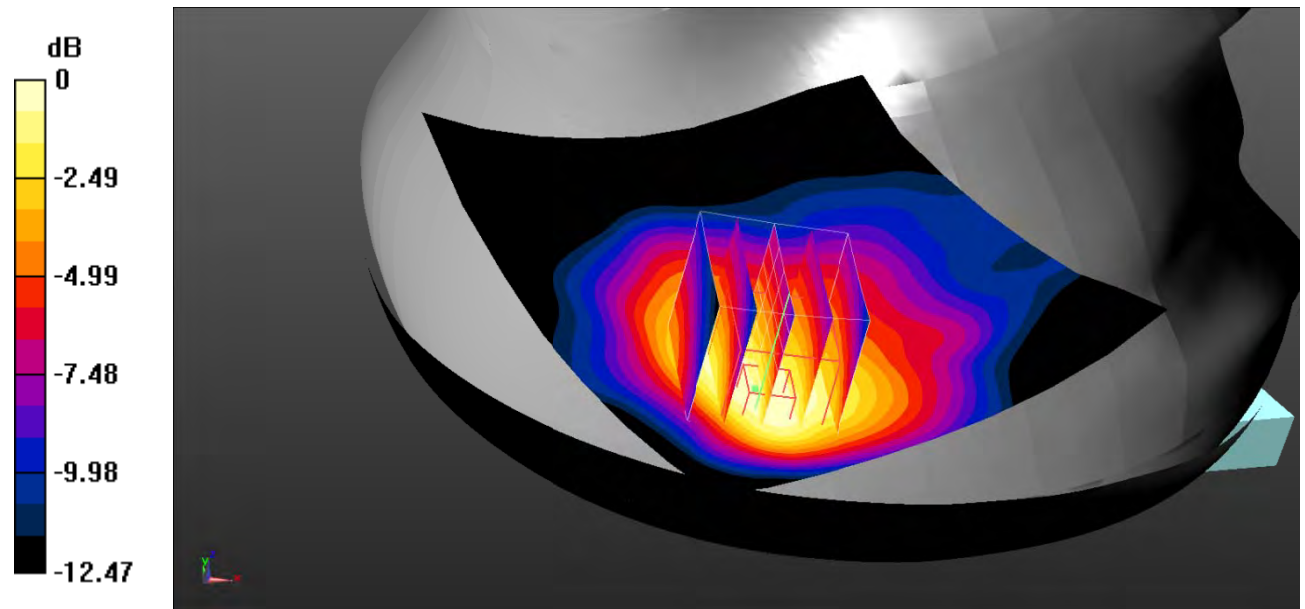

0 dB = $0.823 \text{ W/kg} = -0.85 \text{ dBW/kg}$

Test Plot 73#: LTE Band 5_Head Right Tilt_50%RB_Middle

DUT: Mobile Phone; Type: X6812B; Serial: SZ1210813-34307E-SA-S_GY2;


Communication System: Generic FDD-LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 836.5 \text{ MHz}$; $\sigma = 0.923 \text{ S/m}$; $\epsilon_r = 41.022$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x81x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.682 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 20.10 V/m ; Power Drift = -0.10 dB
 Peak SAR (extrapolated) = 0.775 W/kg
SAR(1 g) = 0.598 W/kg ; SAR(10 g) = 0.386 W/kg
 Maximum value of SAR (measured) = 0.663 W/kg

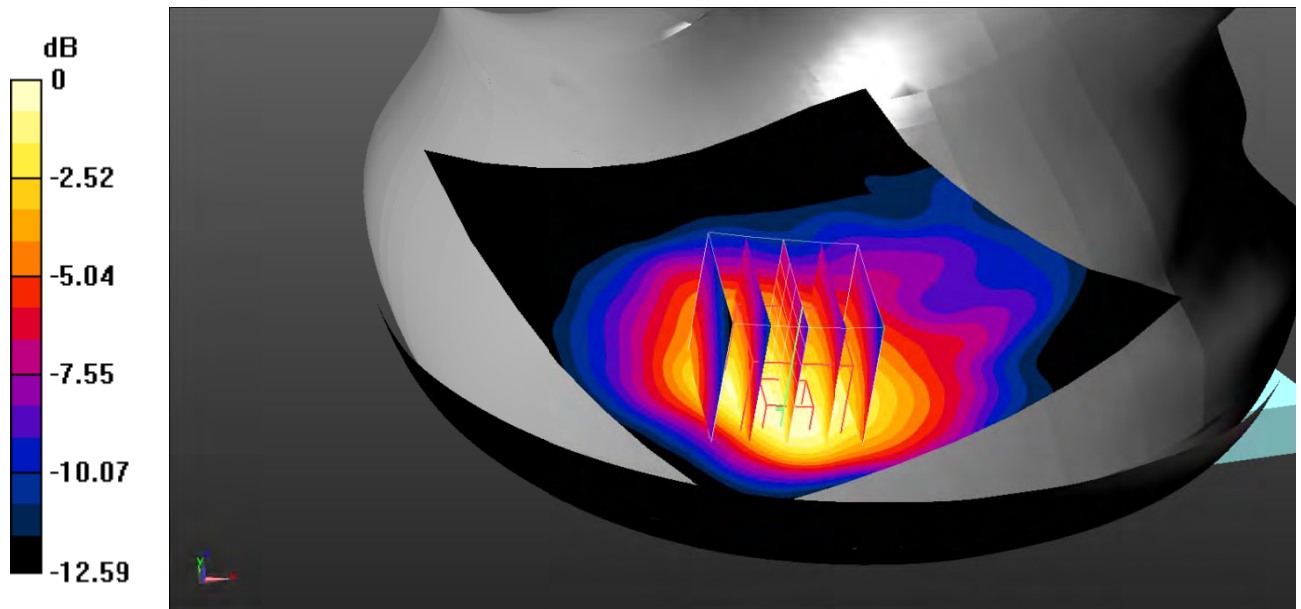

0 dB = $0.663 \text{ W/kg} = -1.78 \text{ dBW/kg}$

Test Plot 74#: LTE Band 5_Body Back_1RB_Middle

DUT: Mobile Phone; Type: X6812B; Serial: SZ1210813-34307E-SA-S_GY2;


Communication System: Generic FDD-LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 836.5 \text{ MHz}$; $\sigma = 0.923 \text{ S/m}$; $\epsilon_r = 41.022$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x91x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.311 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 15.81 V/m ; Power Drift = -0.13 dB
 Peak SAR (extrapolated) = 0.259 W/kg
SAR(1 g) = 0.222 W/kg ; SAR(10 g) = 0.169 W/kg
 Maximum value of SAR (measured) = 0.234 W/kg

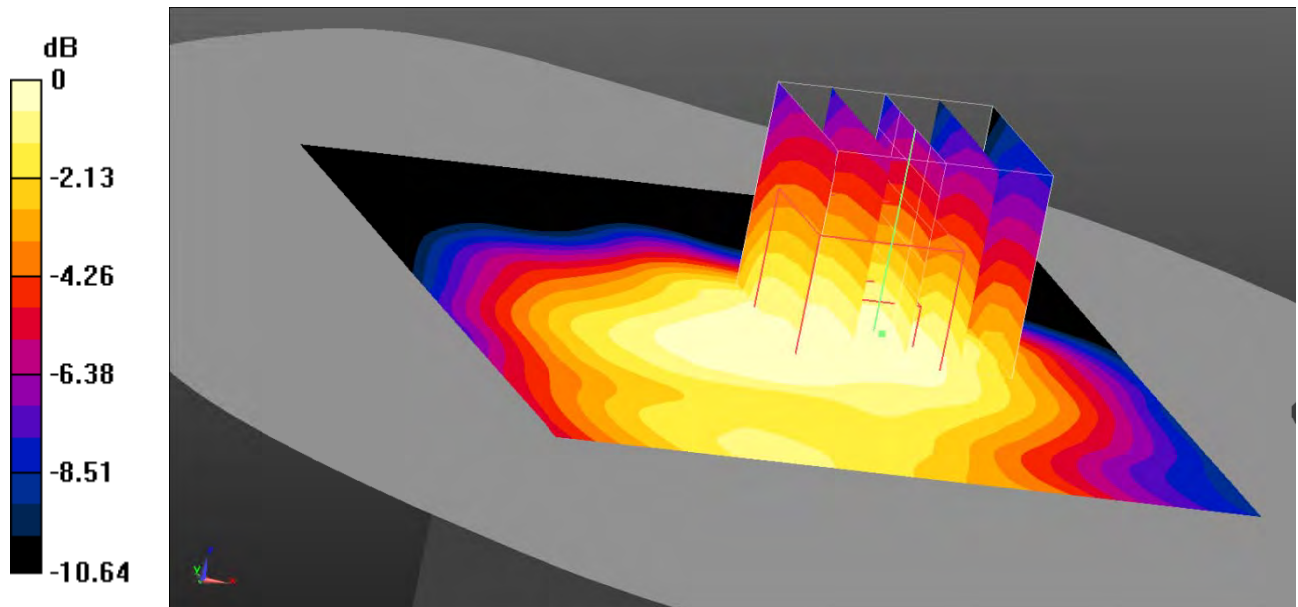

0 dB = 0.234 W/kg = -6.31 dBW/kg

Test Plot 75#: LTE Band 5_Body Back_50%RB_Middle

DUT: Mobile Phone; Type: X6812B; Serial: SZ1210813-34307E-SA-S_GY2;


Communication System: Generic FDD-LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 836.5 \text{ MHz}$; $\sigma = 0.923 \text{ S/m}$; $\epsilon_r = 41.022$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x91x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.293 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 14.19 V/m ; Power Drift = -0.05 dB
 Peak SAR (extrapolated) = 0.225 W/kg
SAR(1 g) = 0.193 W/kg ; SAR(10 g) = 0.144 W/kg
 Maximum value of SAR (measured) = 0.201 W/kg

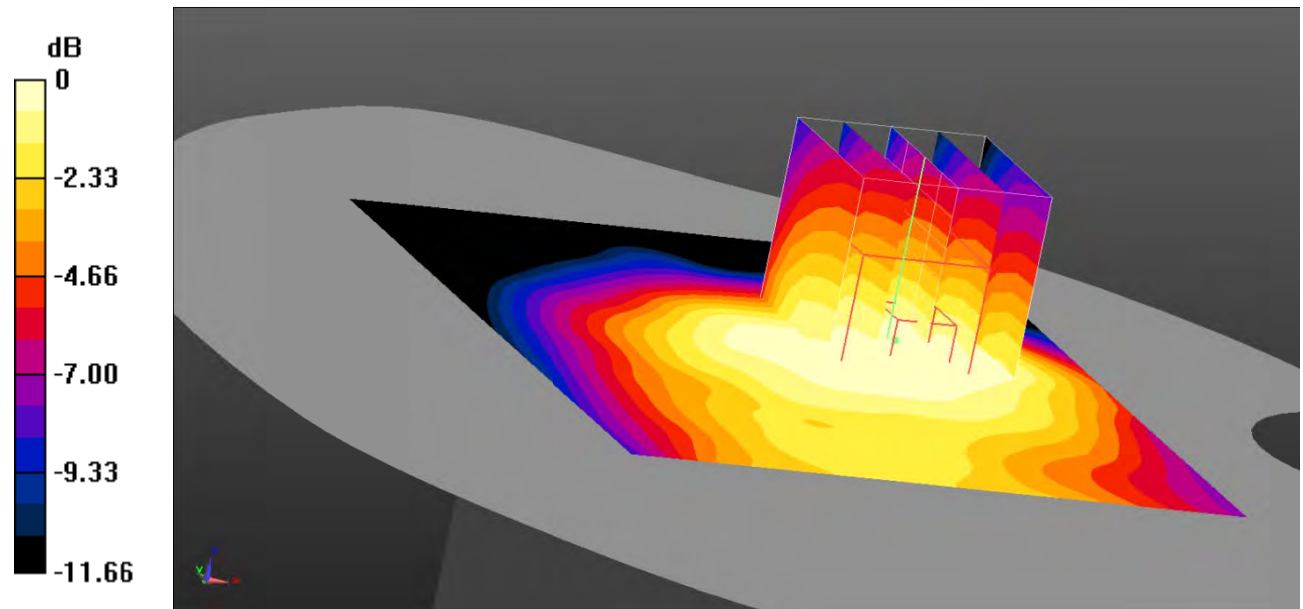

0 dB = $0.201 \text{ W/kg} = -6.97 \text{ dBW/kg}$

Test Plot 76#: LTE Band 5_Body Left_1RB_Middle

DUT: Mobile Phone; Type: X6812B; Serial: SZ1210813-34307E-SA-S_GY2;


Communication System: Generic FDD-LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 836.5 \text{ MHz}$; $\sigma = 0.923 \text{ S/m}$; $\epsilon_r = 41.022$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x91x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.118 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 8.630 V/m; Power Drift = -0.00 dB
 Peak SAR (extrapolated) = 0.102 W/kg
SAR(1 g) = 0.095 W/kg; SAR(10 g) = 0.075 W/kg
 Maximum value of SAR (measured) = 0.0982 W/kg

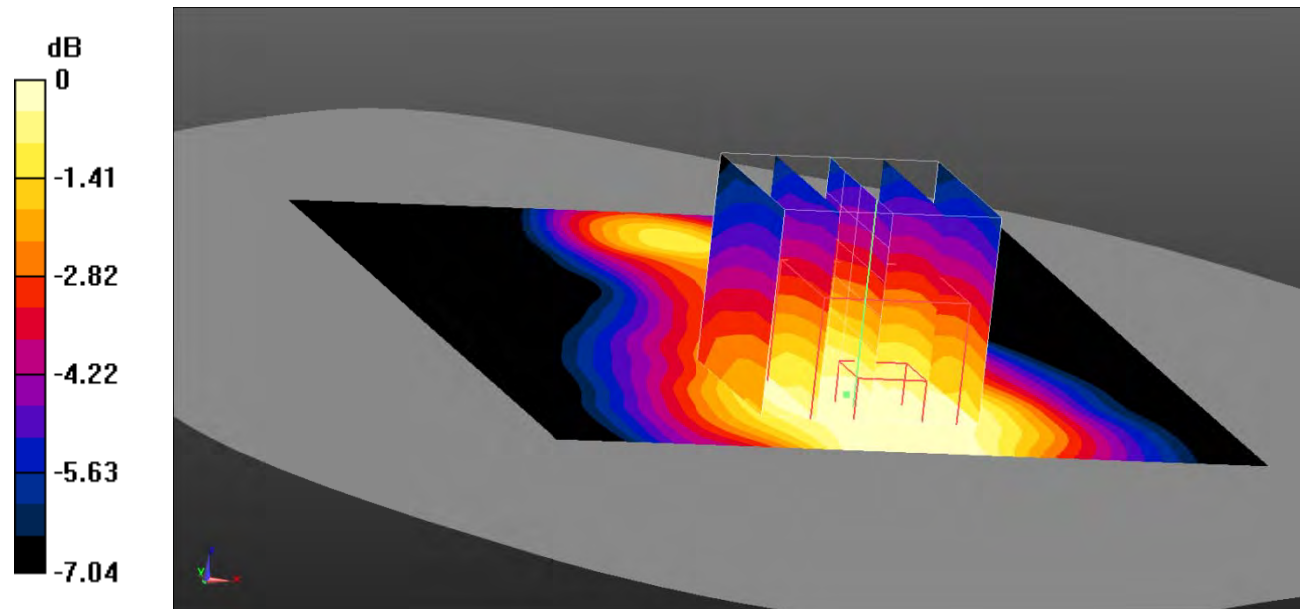

0 dB = 0.0982 W/kg = -10.08 dBW/kg

Test Plot 77#: LTE Band 5_Body Left_50%RB_Middle

DUT: Mobile Phone; Type: X6812B; Serial: SZ1210813-34307E-SA-S_GY2;


Communication System: Generic FDD-LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 836.5 \text{ MHz}$; $\sigma = 0.923 \text{ S/m}$; $\epsilon_r = 41.022$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x91x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.0949 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 7.691 V/m ; Power Drift = -0.04 dB
 Peak SAR (extrapolated) = 0.0830 W/kg
SAR(1 g) = 0.077 W/kg ; SAR(10 g) = 0.060 W/kg
 Maximum value of SAR (measured) = 0.0801 W/kg

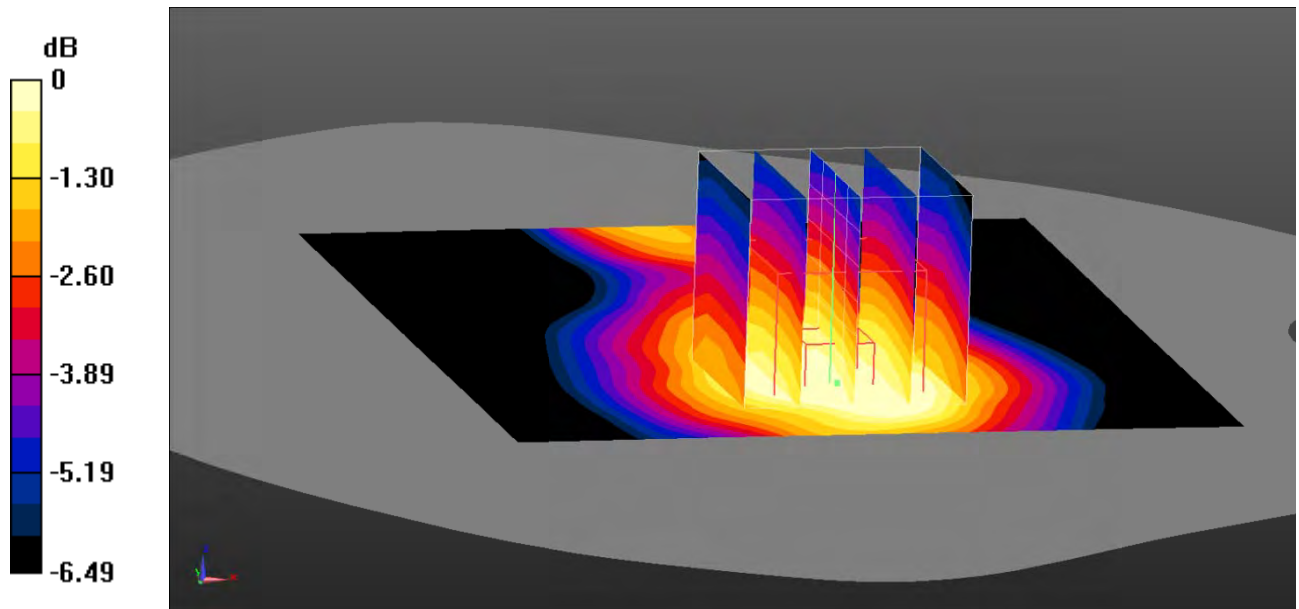

0 dB = 0.0801 W/kg = -10.96 dBW/kg

Test Plot 78#: LTE Band 5_Body Top_1RB_Middle

DUT: Mobile Phone; Type: X6812B; Serial: SZ1210813-34307E-SA-S_GY2;


Communication System: Generic FDD-LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 836.5 \text{ MHz}$; $\sigma = 0.923 \text{ S/m}$; $\epsilon_r = 41.022$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x91x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.224 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 13.37 V/m ; Power Drift = -0.12 dB
 Peak SAR (extrapolated) = 0.197 W/kg
SAR(1 g) = 0.174 W/kg ; SAR(10 g) = 0.128 W/kg
 Maximum value of SAR (measured) = 0.184 W/kg

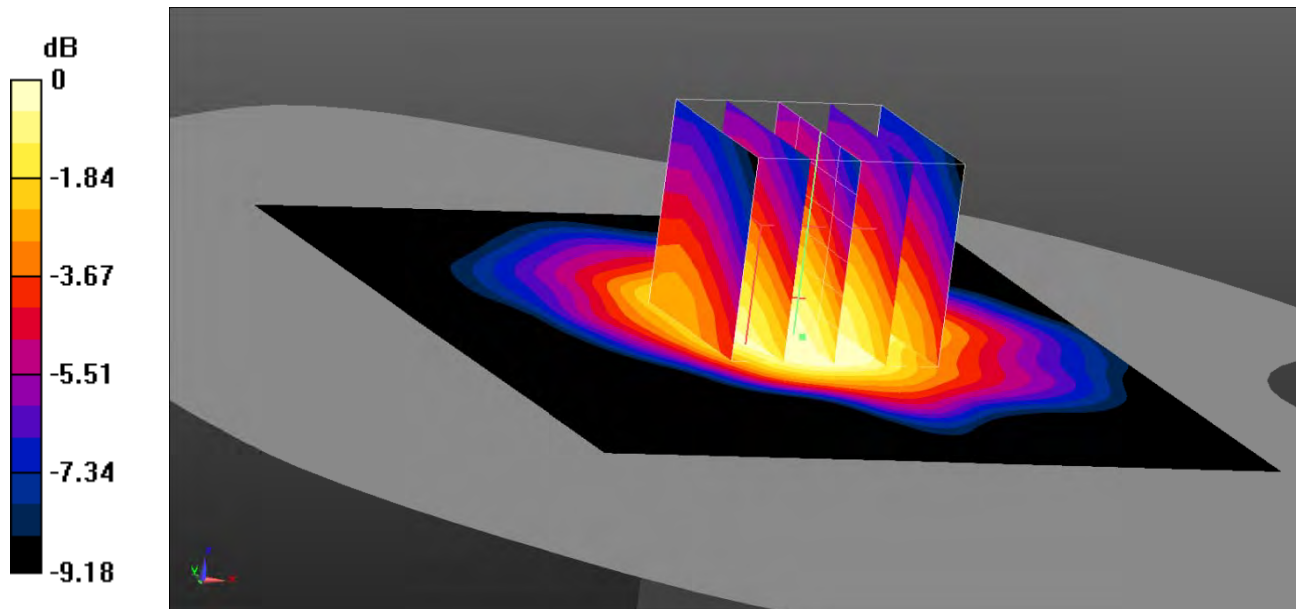

0 dB = $0.184 \text{ W/kg} = -7.35 \text{ dBW/kg}$

Test Plot 79#: LTE Band 5_Body Top_50%RB_Middle

DUT: Mobile Phone; Type: X6812B; Serial: SZ1210813-34307E-SA-S_GY2;


Communication System: Generic FDD-LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 836.5 \text{ MHz}$; $\sigma = 0.923 \text{ S/m}$; $\epsilon_r = 41.022$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x91x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.182 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 11.95 V/m ; Power Drift = -0.02 dB
 Peak SAR (extrapolated) = 0.159 W/kg
SAR(1 g) = 0.140 W/kg ; SAR(10 g) = 0.103 W/kg
 Maximum value of SAR (measured) = 0.148 W/kg

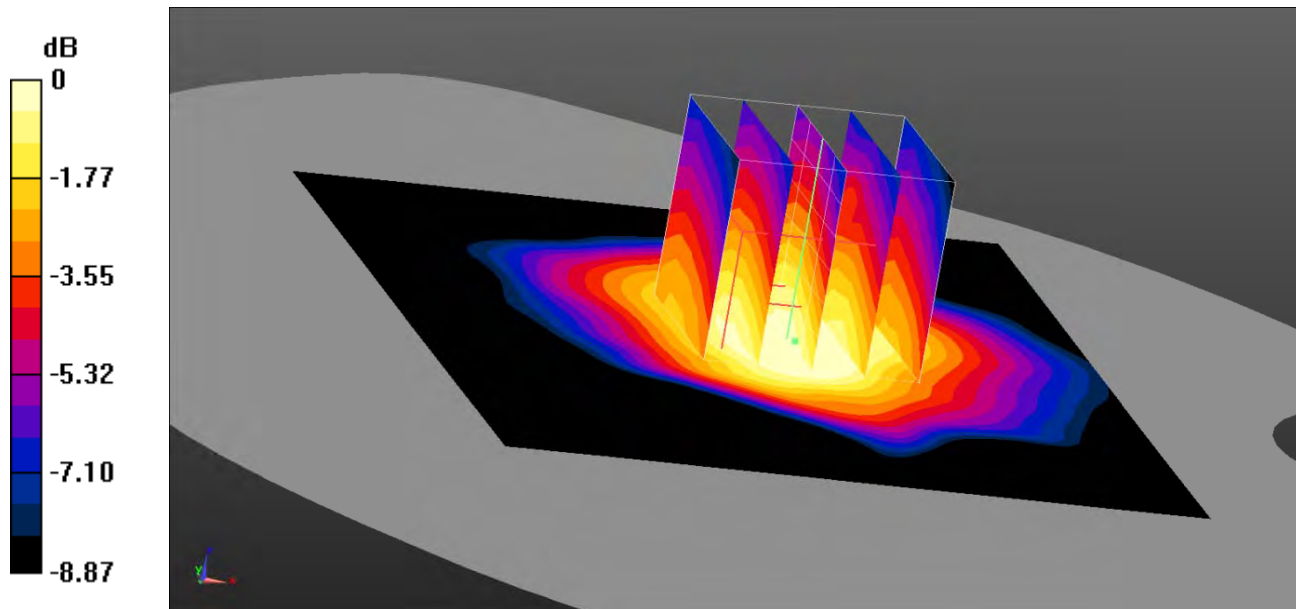

0 dB = $0.148 \text{ W/kg} = -8.30 \text{ dBW/kg}$

Test Plot 80#: LTE Band 7_Head Left Check_1RB_Middle

DUT: Mobile Phone; Type: X6812B; Serial: SZ1210813-34307E-SA-S_GY2;


Communication System: Generic FDD-LTE; Frequency: 2535 MHz;Duty Cycle: 1:1
 Medium parameters used: $f = 2535 \text{ MHz}$; $\sigma = 1.921 \text{ S/m}$; $\epsilon_r = 38.933$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.63, 7.63, 7.63)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562;Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (101x101x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.470 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
 Reference Value = 2.857 V/m ; Power Drift = 0.06 dB
 Peak SAR (extrapolated) = 0.207 W/kg
SAR(1 g) = 0.162 W/kg ; SAR(10 g) = 0.103 W/kg
 Maximum value of SAR (measured) = 0.177 W/kg

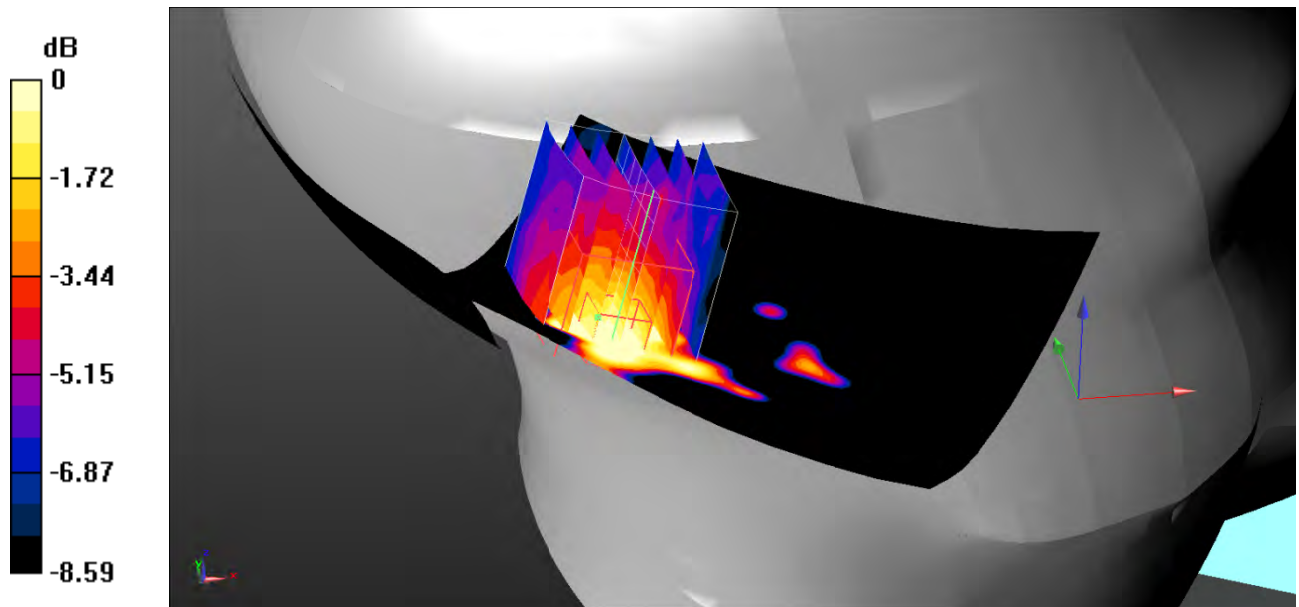

0 dB = $0.177 \text{ W/kg} = -7.52 \text{ dBW/kg}$

Test Plot 81#: LTE Band 7_Head Left Check_50%RB_Middle

DUT: Mobile Phone; Type: X6812B; Serial: SZ1210813-34307E-SA-S_GY2;


Communication System: Generic FDD-LTE; Frequency: 2535 MHz;Duty Cycle: 1:1
 Medium parameters used: $f = 2535 \text{ MHz}$; $\sigma = 1.921 \text{ S/m}$; $\epsilon_r = 38.933$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.63, 7.63, 7.63)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562;Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (101x101x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.498 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
 Reference Value = 3.795 V/m ; Power Drift = 0.05 dB
 Peak SAR (extrapolated) = 0.169 W/kg
SAR(1 g) = 0.140 W/kg ; SAR(10 g) = 0.092 W/kg
 Maximum value of SAR (measured) = 0.151 W/kg

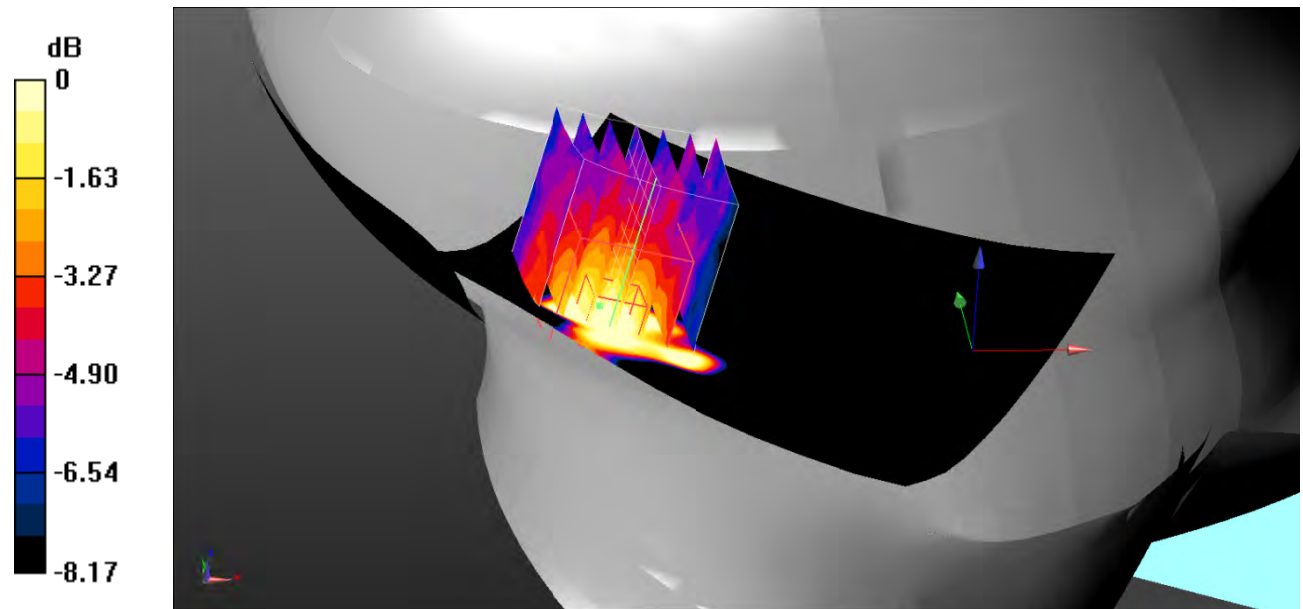

0 dB = $0.151 \text{ W/kg} = -8.21 \text{ dBW/kg}$

Test Plot 82#: LTE Band 7_Head Left Tilt_1RB_Middle

DUT: Mobile Phone; Type: X6812B; Serial: SZ1210813-34307E-SA-S_GY2;


Communication System: Generic FDD-LTE; Frequency: 2535 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2535 \text{ MHz}$; $\sigma = 1.921 \text{ S/m}$; $\epsilon_r = 38.933$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.63, 7.63, 7.63)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (101x101x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.558 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
 Reference Value = 4.878 V/m ; Power Drift = 0.03 dB
 Peak SAR (extrapolated) = 0.327 W/kg
SAR(1 g) = 0.231 W/kg ; SAR(10 g) = 0.131 W/kg
 Maximum value of SAR (measured) = 0.264 W/kg

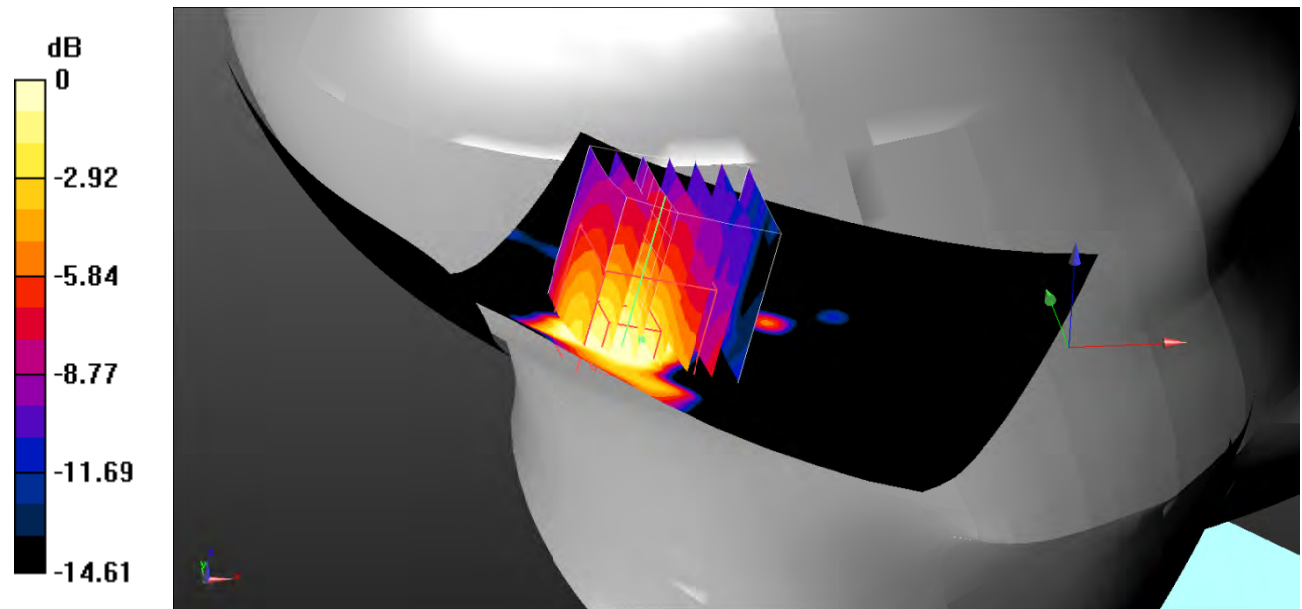

0 dB = $0.264 \text{ W/kg} = -5.78 \text{ dBW/kg}$

Test Plot 83#: LTE Band 7_Head Left Tilt_50%RB_Middle

DUT: Mobile Phone; Type: X6812B; Serial: SZ1210813-34307E-SA-S_GY2;


Communication System: Generic FDD-LTE; Frequency: 2535 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2535 \text{ MHz}$; $\sigma = 1.921 \text{ S/m}$; $\epsilon_r = 38.933$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.63, 7.63, 7.63)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (101x101x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.574 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
 Reference Value = 4.731 V/m ; Power Drift = -0.07 dB
 Peak SAR (extrapolated) = 0.259 W/kg
SAR(1 g) = 0.190 W/kg ; SAR(10 g) = 0.108 W/kg
 Maximum value of SAR (measured) = 0.212 W/kg

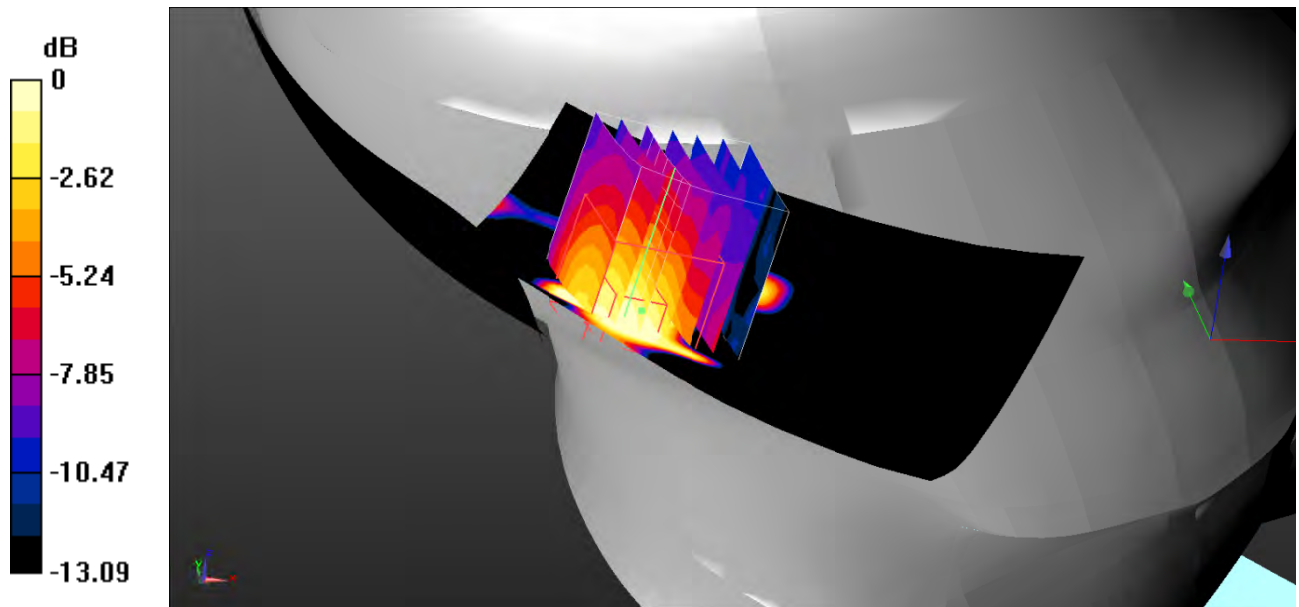

0 dB = $0.212 \text{ W/kg} = -6.74 \text{ dBW/kg}$

Test Plot 84#: LTE Band 7_Head Right Check_1RB_Middle

DUT: Mobile Phone; Type: X6812B; Serial: SZ1210813-34307E-SA-S_GY2;


Communication System: Generic FDD-LTE; Frequency: 2535 MHz;Duty Cycle: 1:1
 Medium parameters used: $f = 2535 \text{ MHz}$; $\sigma = 1.921 \text{ S/m}$; $\epsilon_r = 38.933$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.63, 7.63, 7.63)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562;Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (101x101x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.757 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
 Reference Value = 1.786 V/m ; Power Drift = 0.01 dB
 Peak SAR (extrapolated) = 0.521 W/kg
SAR(1 g) = 0.318 W/kg ; SAR(10 g) = 0.177 W/kg
 Maximum value of SAR (measured) = 0.391 W/kg

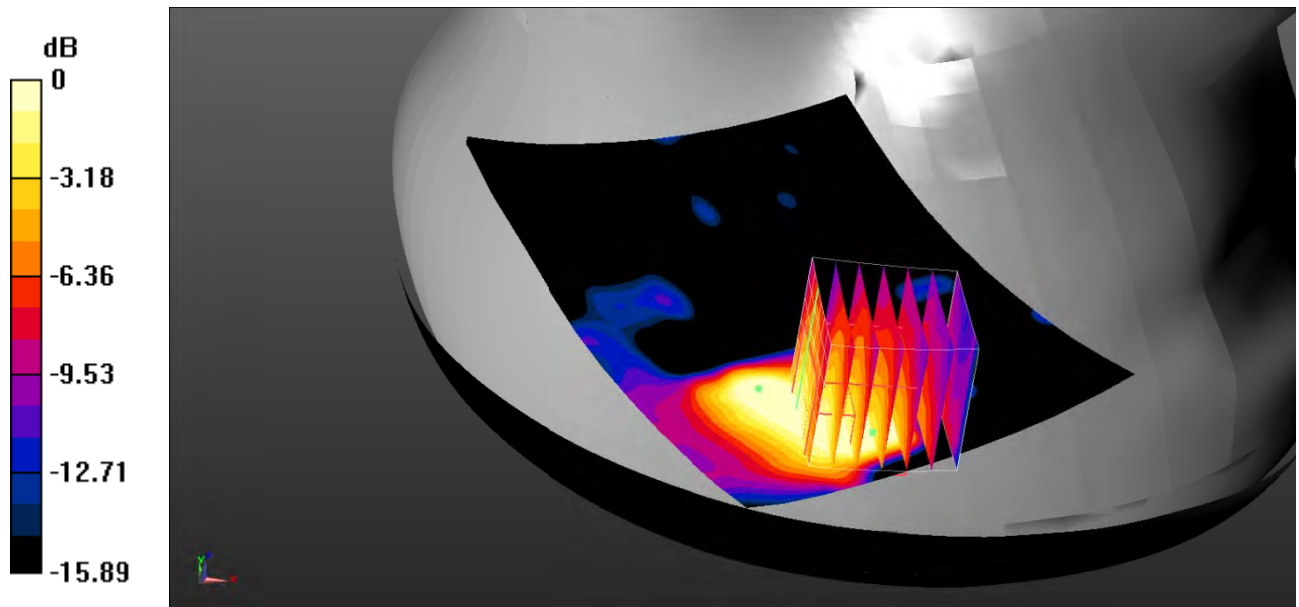

0 dB = $0.391 \text{ W/kg} = -4.08 \text{ dBW/kg}$

Test Plot 85#: LTE Band 7_Head Right Check_50%RB_Middle

DUT: Mobile Phone; Type: X6812B; Serial: SZ1210813-34307E-SA-S_GY2;


Communication System: Generic FDD-LTE; Frequency: 2535 MHz;Duty Cycle: 1:1
 Medium parameters used: $f = 2535 \text{ MHz}$; $\sigma = 1.921 \text{ S/m}$; $\epsilon_r = 38.933$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.63, 7.63, 7.63)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562;Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (101x101x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.405 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
 Reference Value = 0 V/m ; Power Drift = 0.00 dB
 Peak SAR (extrapolated) = 0.394 W/kg
SAR(1 g) = 0.274 W/kg ; SAR(10 g) = 0.161 W/kg
 Maximum value of SAR (measured) = 0.304 W/kg

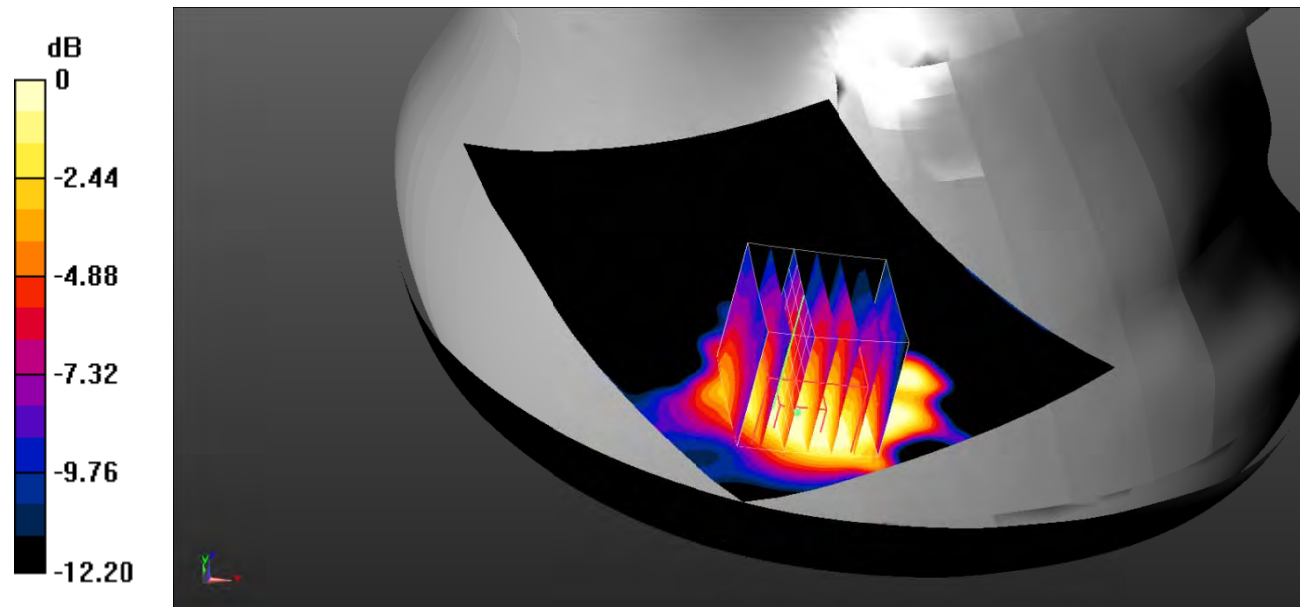

0 dB = $0.304 \text{ W/kg} = -5.17 \text{ dBW/kg}$

Test Plot 86#: LTE Band 7_Head Right Tilt_1RB_Middle

DUT: Mobile Phone; Type: X6812B; Serial: SZ1210813-34307E-SA-S_GY2;


Communication System: Generic FDD-LTE; Frequency: 2535 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2535 \text{ MHz}$; $\sigma = 1.921 \text{ S/m}$; $\epsilon_r = 38.933$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.63, 7.63, 7.63)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (101x121x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.641 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
 Reference Value = 3.984 V/m ; Power Drift = -0.01 dB
 Peak SAR (extrapolated) = 0.723 W/kg
SAR(1 g) = 0.482 W/kg ; SAR(10 g) = 0.259 W/kg
 Maximum value of SAR (measured) = 0.563 W/kg

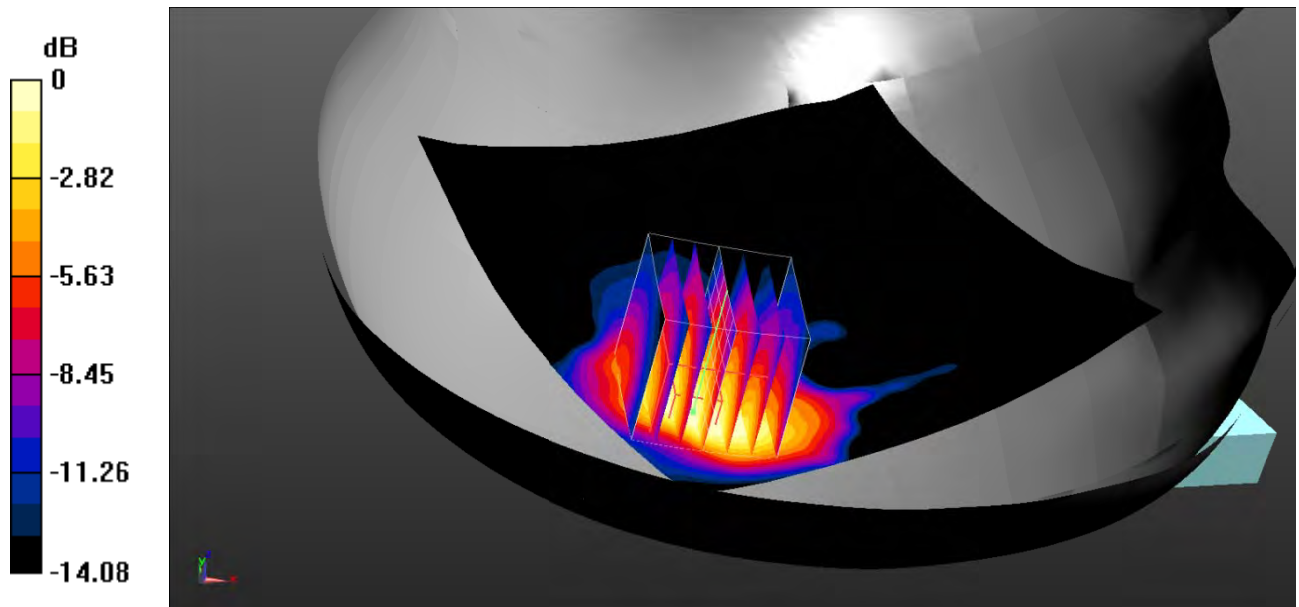

0 dB = $0.563 \text{ W/kg} = -2.49 \text{ dBW/kg}$

Test Plot 87#: LTE Band 7_Head Right Tilt_50%RB_Middle

DUT: Mobile Phone; Type: X6812B; Serial: SZ1210813-34307E-SA-S_GY2;


Communication System: Generic FDD-LTE; Frequency: 2535 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2535 \text{ MHz}$; $\sigma = 1.921 \text{ S/m}$; $\epsilon_r = 38.933$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.63, 7.63, 7.63)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (101x121x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.576 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
 Reference Value = 2.808 V/m ; Power Drift = 0.09 dB
 Peak SAR (extrapolated) = 0.606 W/kg
SAR(1 g) = 0.401 W/kg ; SAR(10 g) = 0.212 W/kg
 Maximum value of SAR (measured) = 0.463 W/kg

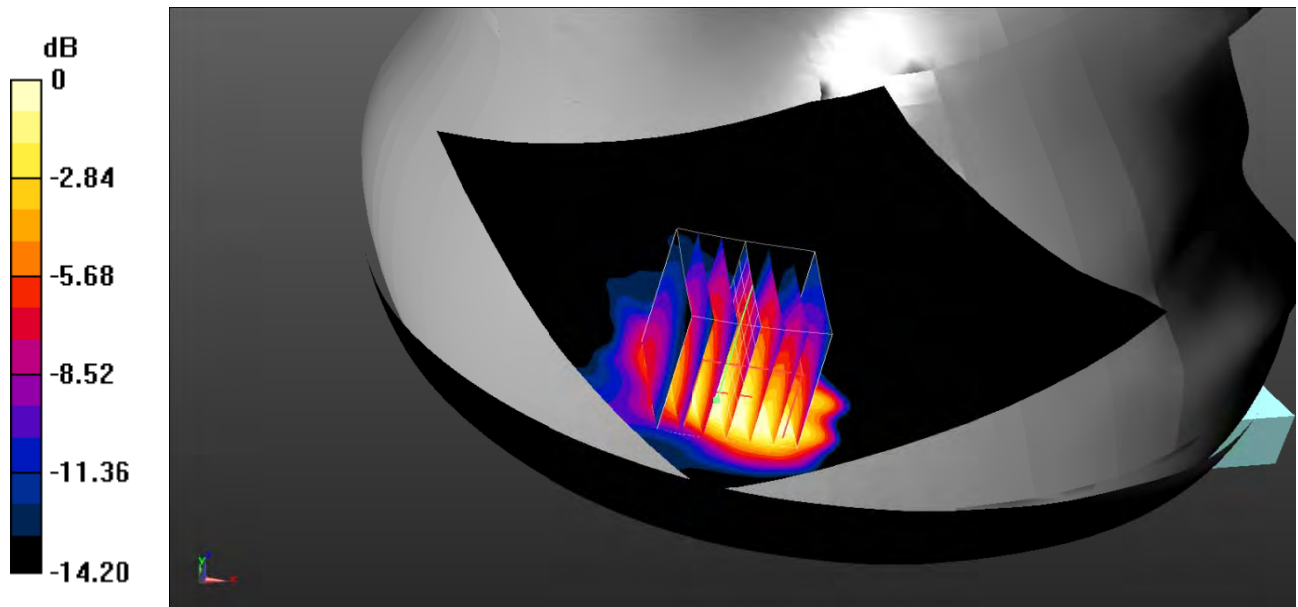

0 dB = 0.463 W/kg = -3.34 dBW/kg

Test Plot 88#: LTE Band 7_Body Back_1RB_Middle

DUT: Mobile Phone; Type: X6812B; Serial: SZ1210813-34307E-SA-S_GY2;


Communication System: Generic FDD-LTE; Frequency: 2535 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2535 \text{ MHz}$; $\sigma = 1.921 \text{ S/m}$; $\epsilon_r = 38.933$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.63, 7.63, 7.63)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (101x101x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.417 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
 Reference Value = 3.350 V/m ; Power Drift = 0.02 dB
 Peak SAR (extrapolated) = 0.417 W/kg
SAR(1 g) = 0.315 W/kg ; SAR(10 g) = 0.182 W/kg
 Maximum value of SAR (measured) = 0.354 W/kg

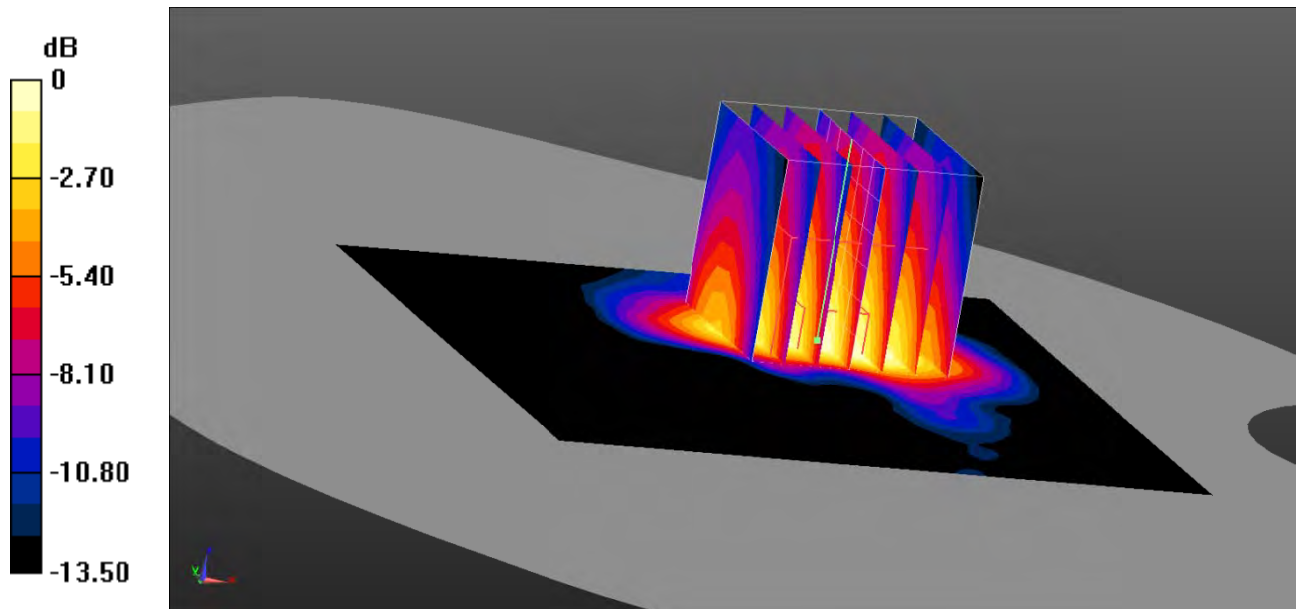

0 dB = 0.354 W/kg = -4.51 dBW/kg

Test Plot 89#: LTE Band 7_Body Back_50%RB_Middle

DUT: Mobile Phone; Type: X6812B; Serial: SZ1210813-34307E-SA-S_GY2;


Communication System: Generic FDD-LTE; Frequency: 2535 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2535 \text{ MHz}$; $\sigma = 1.921 \text{ S/m}$; $\epsilon_r = 38.933$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.63, 7.63, 7.63)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (101x101x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.310 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
 Reference Value = 2.335 V/m ; Power Drift = 0.00 dB
 Peak SAR (extrapolated) = 0.359 W/kg
SAR(1 g) = 0.265 W/kg ; SAR(10 g) = 0.153 W/kg
 Maximum value of SAR (measured) = 0.297 W/kg

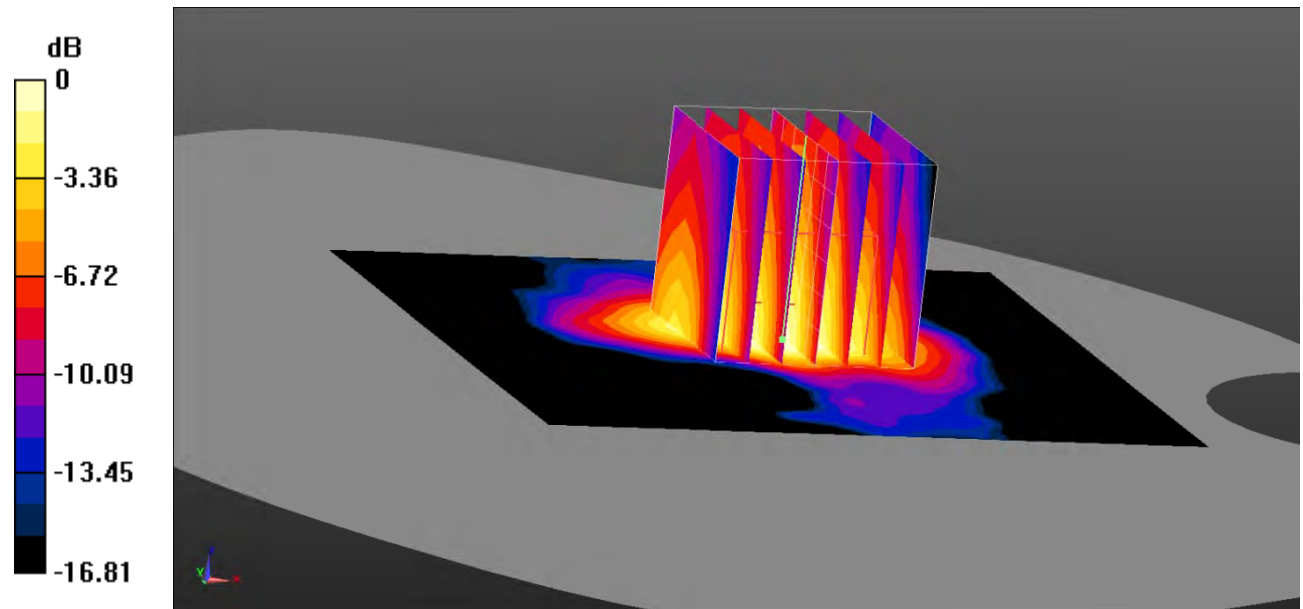

0 dB = 0.297 W/kg = -5.27 dBW/kg

Test Plot 90#: LTE Band 7_Body Left_1RB_Middle

DUT: Mobile Phone; Type: X6812B; Serial: SZ1210813-34307E-SA-S_GY2;


Communication System: Generic FDD-LTE; Frequency: 2535 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2535 \text{ MHz}$; $\sigma = 1.921 \text{ S/m}$; $\epsilon_r = 38.933$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.63, 7.63, 7.63)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (101x101x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.0879 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
 Reference Value = 6.328 V/m ; Power Drift = -0.08 dB
 Peak SAR (extrapolated) = 0.0880 W/kg
SAR(1 g) = 0.063 W/kg ; SAR(10 g) = 0.039 W/kg
 Maximum value of SAR (measured) = 0.0812 W/kg

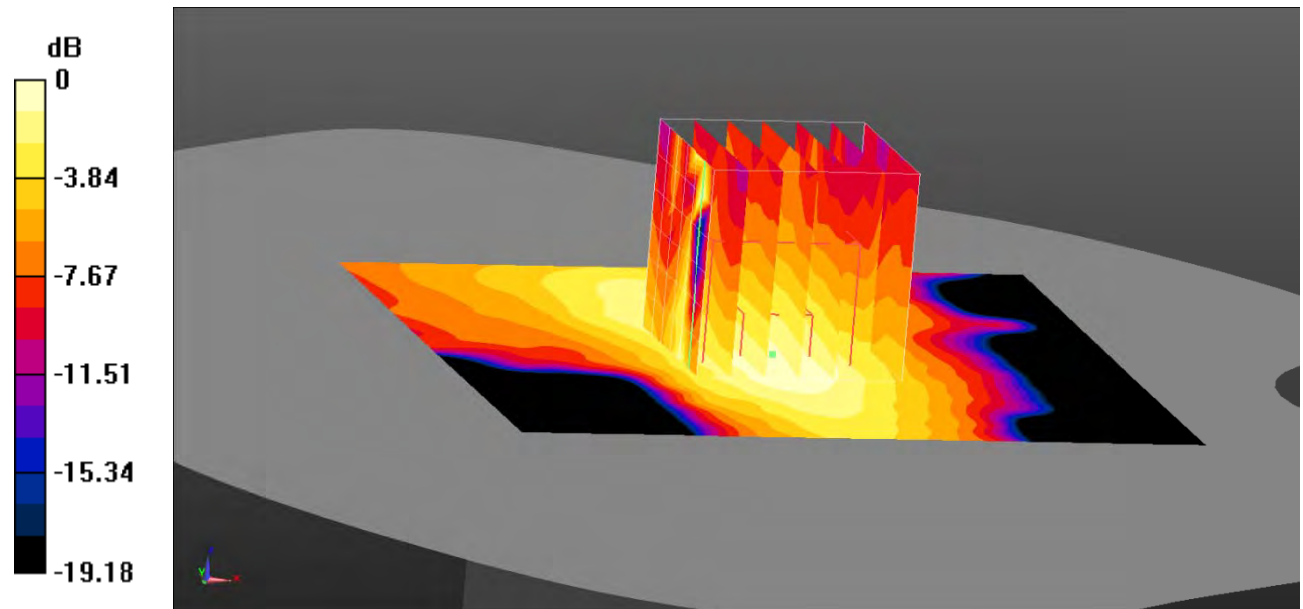

0 dB = 0.0812 W/kg = -10.90 dBW/kg

Test Plot 91#: LTE Band 7_Body Left_50%RB_Middle

DUT: Mobile Phone; Type: X6812B; Serial: SZ1210813-34307E-SA-S_GY2;


Communication System: Generic FDD-LTE; Frequency: 2535 MHz;Duty Cycle: 1:1
 Medium parameters used: $f = 2535 \text{ MHz}$; $\sigma = 1.921 \text{ S/m}$; $\epsilon_r = 38.933$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.63, 7.63, 7.63)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562;Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (101x101x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.0720 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
 Reference Value = 5.723 V/m ; Power Drift = -0.06 dB
 Peak SAR (extrapolated) = 0.0710 W/kg
SAR(1 g) = 0.053 W/kg ; SAR(10 g) = 0.034 W/kg
 Maximum value of SAR (measured) = 0.0582 W/kg

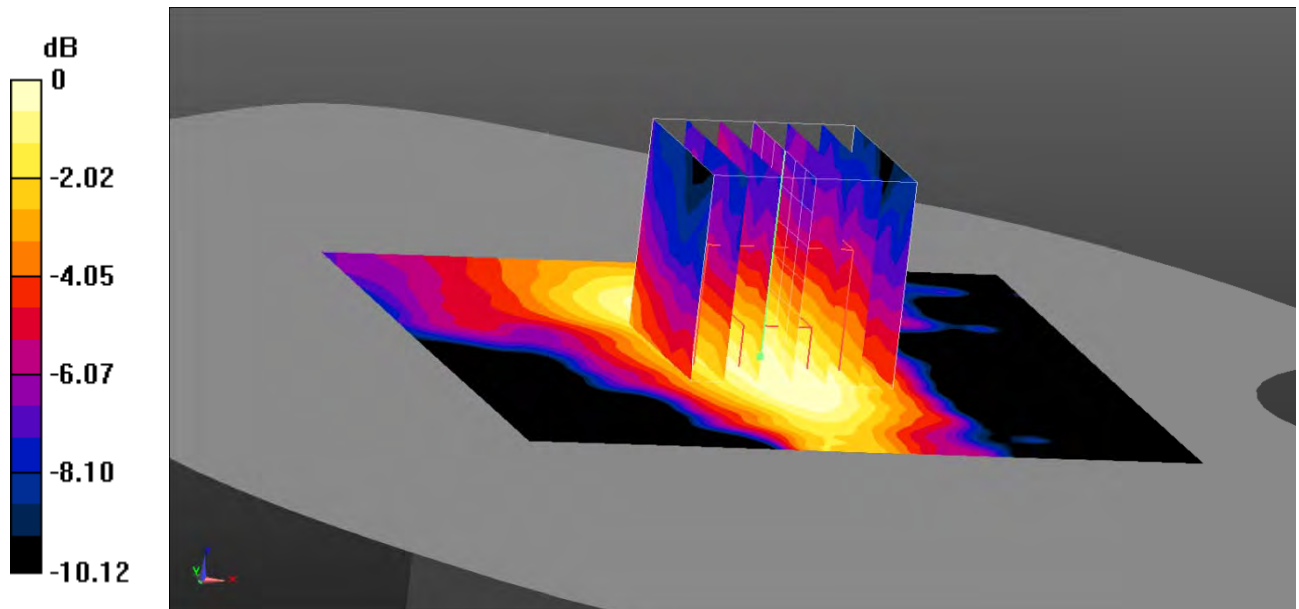

0 dB = 0.0582 W/kg = -12.35 dBW/kg

Test Plot 92#: LTE Band 7_Body Top_1RB_Middle

DUT: Mobile Phone; Type: X6812B; Serial: SZ1210813-34307E-SA-S_GY2;


Communication System: Generic FDD-LTE; Frequency: 2535 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2535 \text{ MHz}$; $\sigma = 1.921 \text{ S/m}$; $\epsilon_r = 38.933$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.63, 7.63, 7.63)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (101x101x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.474 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
 Reference Value = 13.20 V/m ; Power Drift = -0.08 dB
 Peak SAR (extrapolated) = 0.439 W/kg
SAR(1 g) = 0.326 W/kg ; SAR(10 g) = 0.182 W/kg
 Maximum value of SAR (measured) = 0.366 W/kg

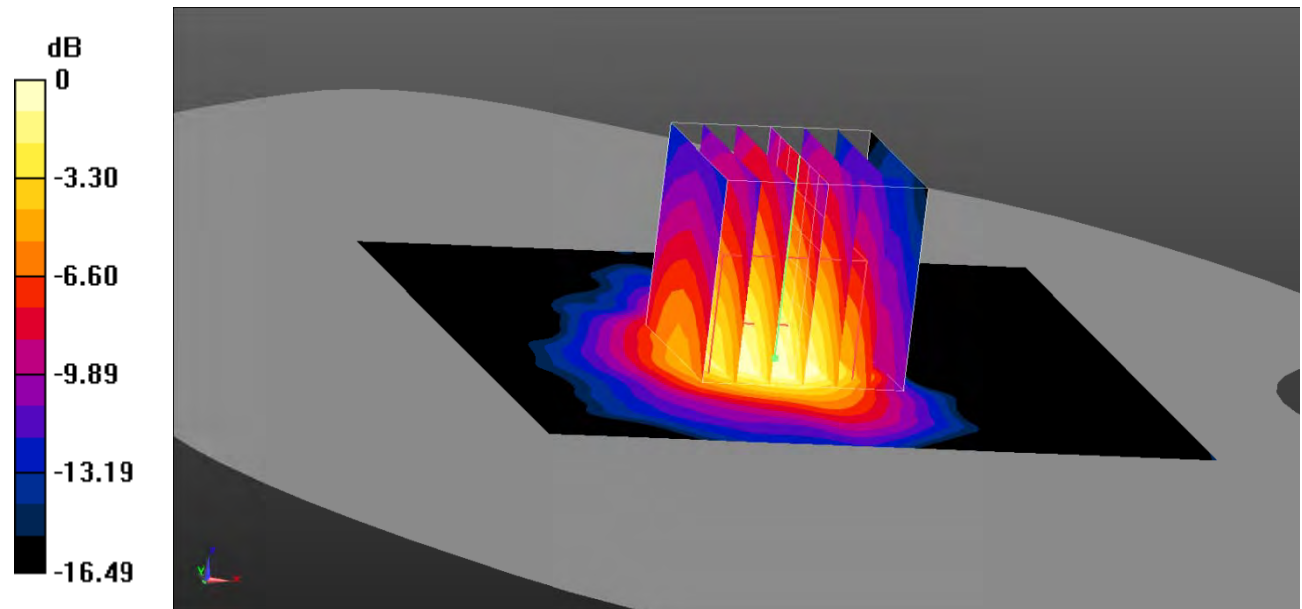

0 dB = 0.366 W/kg = -4.37 dBW/kg

Test Plot 93#: LTE Band 7_Body Top_50%RB_Middle

DUT: Mobile Phone; Type: X6812B; Serial: SZ1210813-34307E-SA-S_GY2;


Communication System: Generic FDD-LTE; Frequency: 2535 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2535 \text{ MHz}$; $\sigma = 1.921 \text{ S/m}$; $\epsilon_r = 38.933$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.63, 7.63, 7.63)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (101x101x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.386 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
 Reference Value = 12.19 V/m ; Power Drift = -0.00 dB
 Peak SAR (extrapolated) = 0.361 W/kg
SAR(1 g) = 0.270 W/kg ; SAR(10 g) = 0.152 W/kg
 Maximum value of SAR (measured) = 0.304 W/kg

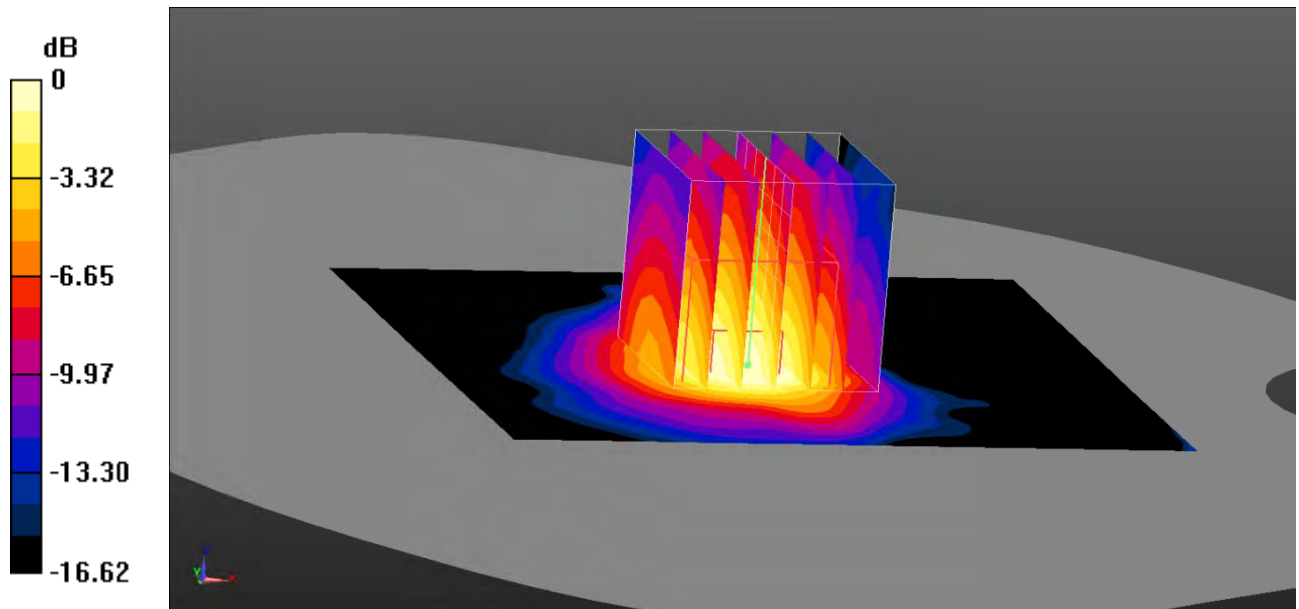

0 dB = 0.304 W/kg = -5.17 dBW/kg

Test Plot 94#: LTE Band 41_Head Left Cheek_1RB_Middle

DUT: Mobile Phone; Type: X6812B; Serial: SZ1210813-34307E-SA-S_GY2;


Communication System: Generic TDD-LTE; Frequency: 2595 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2595 \text{ MHz}$; $\sigma = 1.944 \text{ S/m}$; $\epsilon_r = 38.577$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.33, 7.33, 7.33)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (101x111x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.0936 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
 Reference Value = 0.8160 V/m ; Power Drift = 0.02 dB
 Peak SAR (extrapolated) = 0.0830 W/kg
SAR(1 g) = 0.065 W/kg ; SAR(10 g) = 0.040 W/kg
 Maximum value of SAR (measured) = 0.0705 W/kg

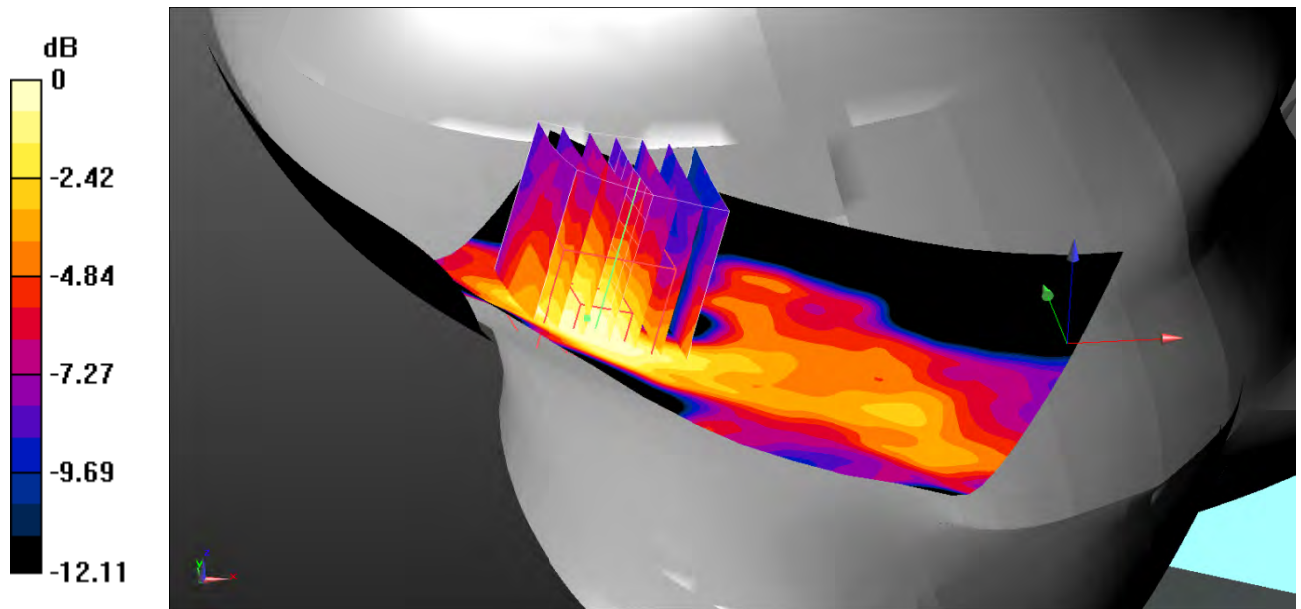

0 dB = 0.0705 W/kg = -11.52 dBW/kg

Test Plot 95#: LTE Band 41_Head Left Cheek_50%RB_Middle

DUT: Mobile Phone; Type: X6812B; Serial: SZ1210813-34307E-SA-S_GY2;


Communication System: Generic TDD-LTE; Frequency: 2595 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2595$ MHz; $\sigma = 1.944$ S/m; $\epsilon_r = 38.577$; $\rho = 1000$ kg/m³ ;
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.33, 7.33, 7.33)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (101x111x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
 Maximum value of SAR (interpolated) = 0.0866 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 2.000 V/m; Power Drift = 0.01 dB
 Peak SAR (extrapolated) = 0.0740 W/kg
SAR(1 g) = 0.057 W/kg; SAR(10 g) = 0.035 W/kg
 Maximum value of SAR (measured) = 0.0708 W/kg

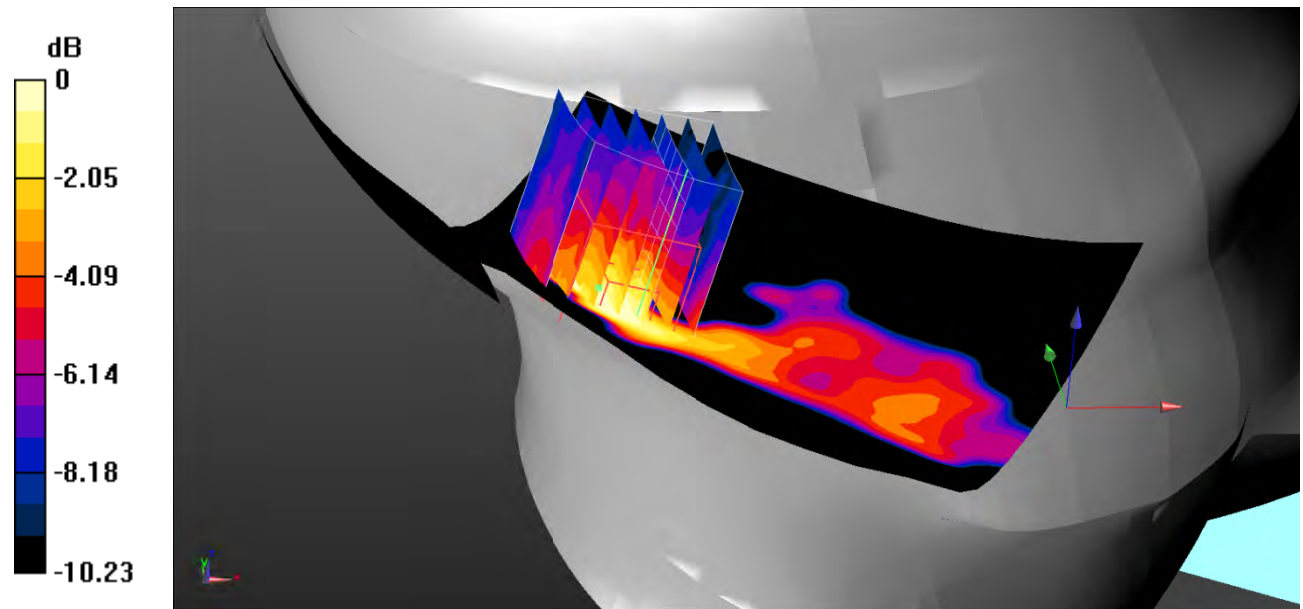

0 dB = 0.0708 W/kg = -11.50 dBW/kg

Test Plot 96#: LTE Band 41_Head Left Tilt_1RB_Middle

DUT: Mobile Phone; Type: X6812B; Serial: SZ1210813-34307E-SA-S_GY2;


Communication System: Generic TDD-LTE; Frequency: 2595 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2595 \text{ MHz}$; $\sigma = 1.944 \text{ S/m}$; $\epsilon_r = 38.577$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.33, 7.33, 7.33)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (101x111x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.171 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
 Reference Value = 3.266 V/m ; Power Drift = -0.04 dB
 Peak SAR (extrapolated) = 0.171 W/kg
SAR(1 g) = 0.128 W/kg ; SAR(10 g) = 0.075 W/kg
 Maximum value of SAR (measured) = 0.140 W/kg

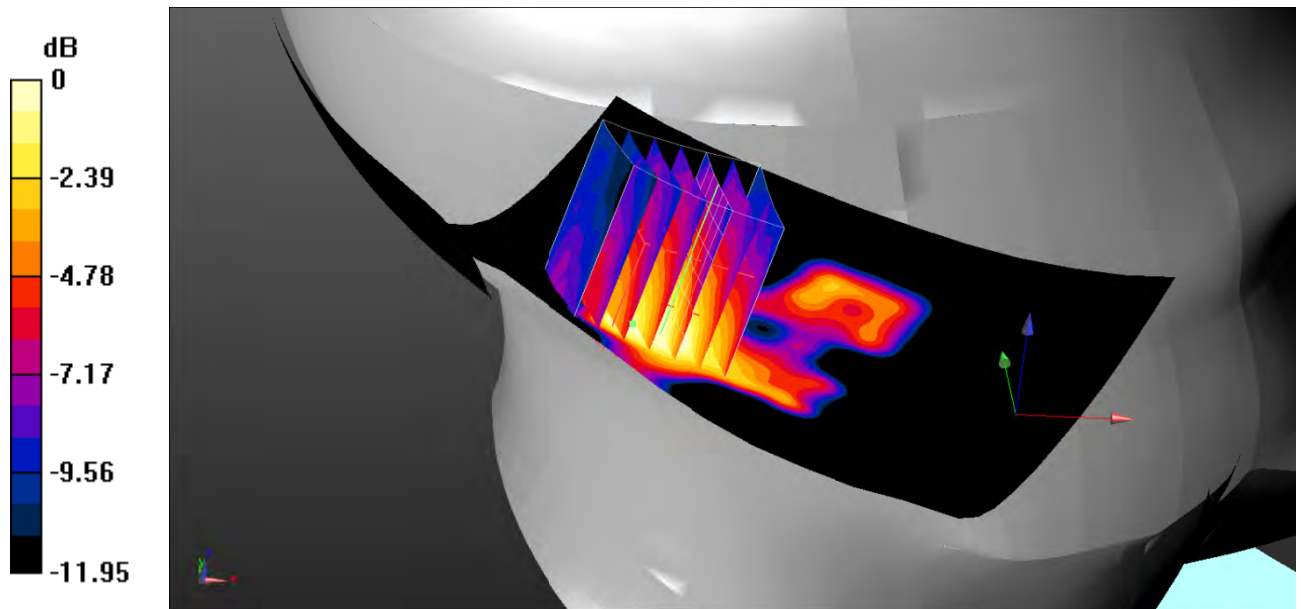

0 dB = 0.140 W/kg = -8.54 dBW/kg

Test Plot 97#: LTE Band 41_Head Left Tilt_50%RB_Middle

DUT: Mobile Phone; Type: X6812B; Serial: SZ1210813-34307E-SA-S_GY2;


Communication System: Generic TDD-LTE; Frequency: 2595 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2595 \text{ MHz}$; $\sigma = 1.944 \text{ S/m}$; $\epsilon_r = 38.577$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.33, 7.33, 7.33)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (101x111x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.143 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
 Reference Value = 2.831 V/m ; Power Drift = -0.04 dB
 Peak SAR (extrapolated) = 0.135 W/kg
SAR(1 g) = 0.102 W/kg ; SAR(10 g) = 0.059 W/kg
 Maximum value of SAR (measured) = 0.114 W/kg

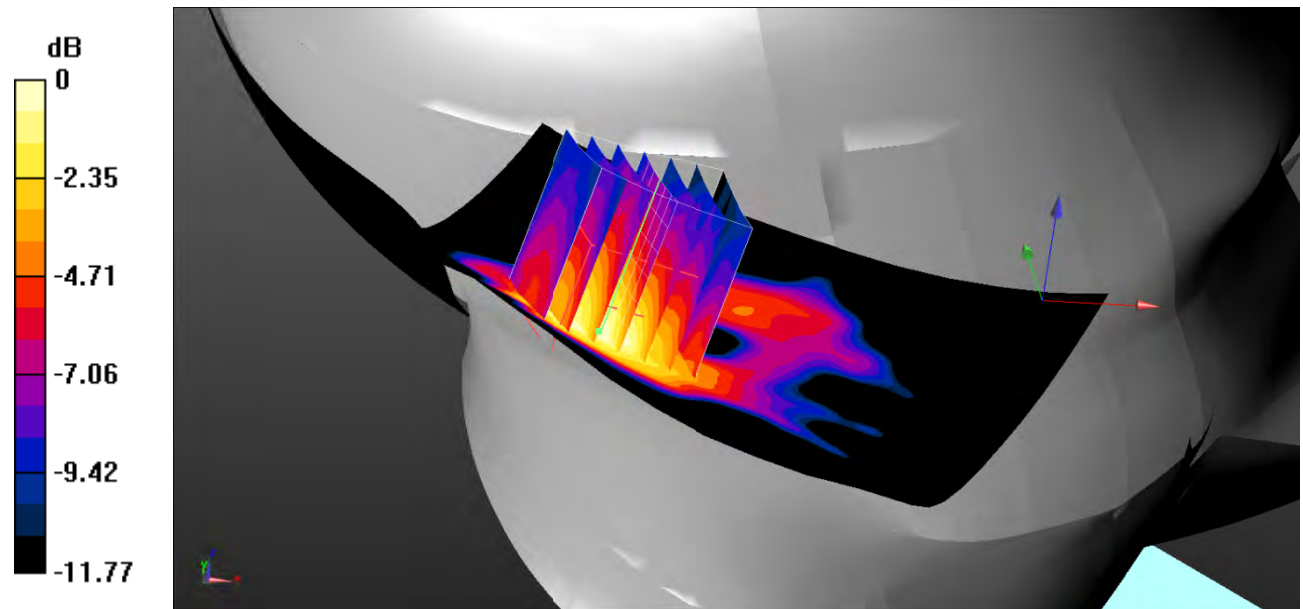

0 dB = 0.114 W/kg = -9.43 dBW/kg

Test Plot 98#: LTE Band 41_Head Right Cheek_1RB_Middle

DUT: Mobile Phone; Type: X6812B; Serial: SZ1210813-34307E-SA-S_GY2;


Communication System: Generic TDD-LTE; Frequency: 2595 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2595 \text{ MHz}$; $\sigma = 1.944 \text{ S/m}$; $\epsilon_r = 38.577$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.33, 7.33, 7.33)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (101x111x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.395 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
 Reference Value = 1.379 V/m ; Power Drift = 0.17 dB
 Peak SAR (extrapolated) = 0.323 W/kg
SAR(1 g) = 0.225 W/kg ; SAR(10 g) = 0.130 W/kg
 Maximum value of SAR (measured) = 0.251 W/kg

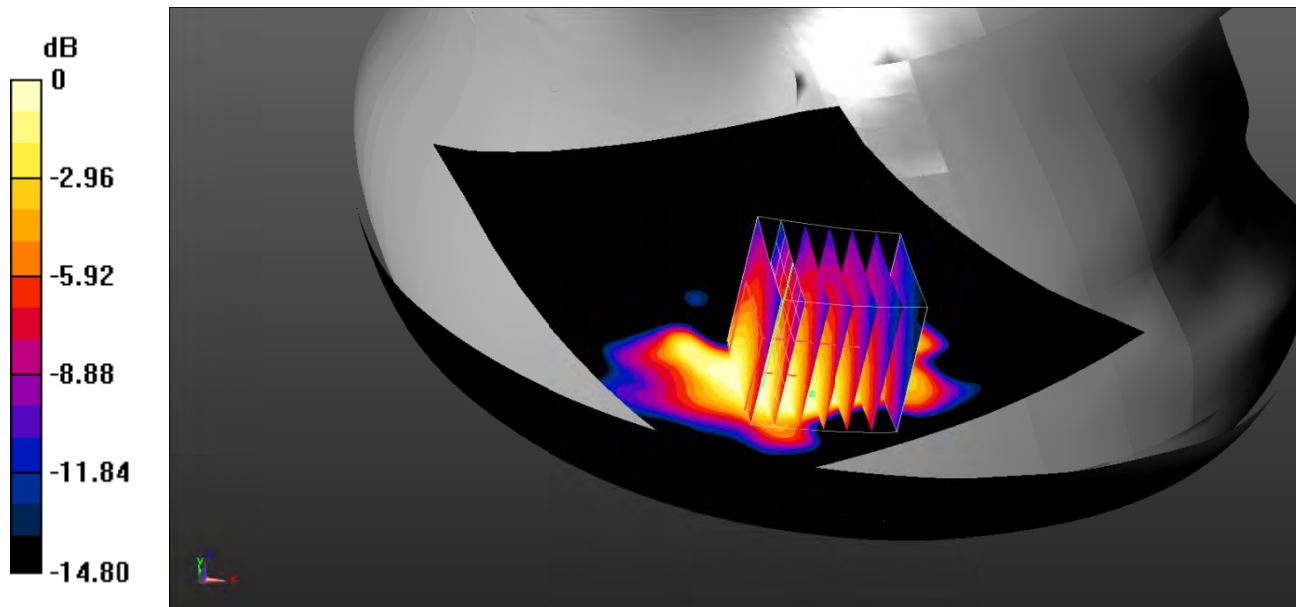

0 dB = $0.251 \text{ W/kg} = -6.00 \text{ dBW/kg}$

Test Plot 99#: LTE Band 41_Head Right Cheek_50%RB_Middle

DUT: Mobile Phone; Type: X6812B; Serial: SZ1210813-34307E-SA-S_GY2;


Communication System: Generic TDD-LTE; Frequency: 2595 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2595 \text{ MHz}$; $\sigma = 1.944 \text{ S/m}$; $\epsilon_r = 38.577$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.33, 7.33, 7.33)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (101x111x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.377 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
 Reference Value = 1.477 V/m ; Power Drift = 0.04 dB
 Peak SAR (extrapolated) = 0.269 W/kg
SAR(1 g) = 0.184 W/kg ; SAR(10 g) = 0.108 W/kg
 Maximum value of SAR (measured) = 0.208 W/kg

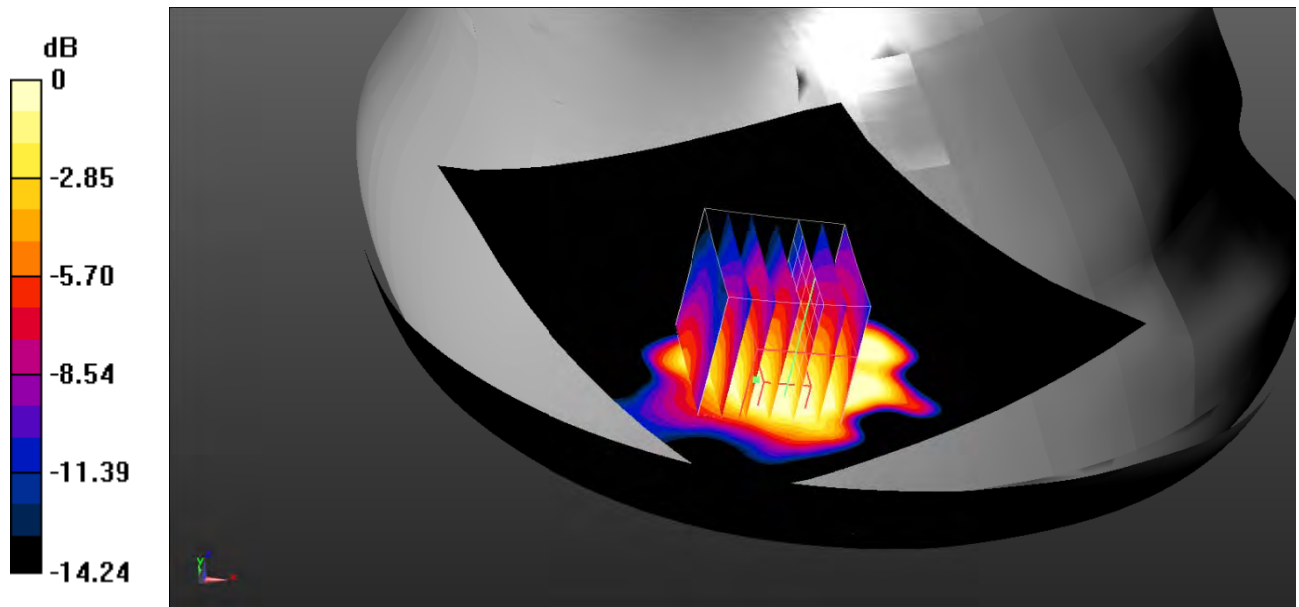

0 dB = $0.208 \text{ W/kg} = -6.82 \text{ dBW/kg}$

Test Plot 100#: LTE Band 41_Head Right Tilt_1RB_Middle

DUT: Mobile Phone; Type: X6812B; Serial: SZ1210813-34307E-SA-S_GY2;


Communication System: Generic TDD-LTE; Frequency: 2595 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2595 \text{ MHz}$; $\sigma = 1.944 \text{ S/m}$; $\epsilon_r = 38.577$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.33, 7.33, 7.33)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (101x111x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.235 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
 Reference Value = 2.545 V/m ; Power Drift = 0.02 dB
 Peak SAR (extrapolated) = 0.260 W/kg
SAR(1 g) = 0.177 W/kg ; SAR(10 g) = 0.098 W/kg
 Maximum value of SAR (measured) = 0.200 W/kg

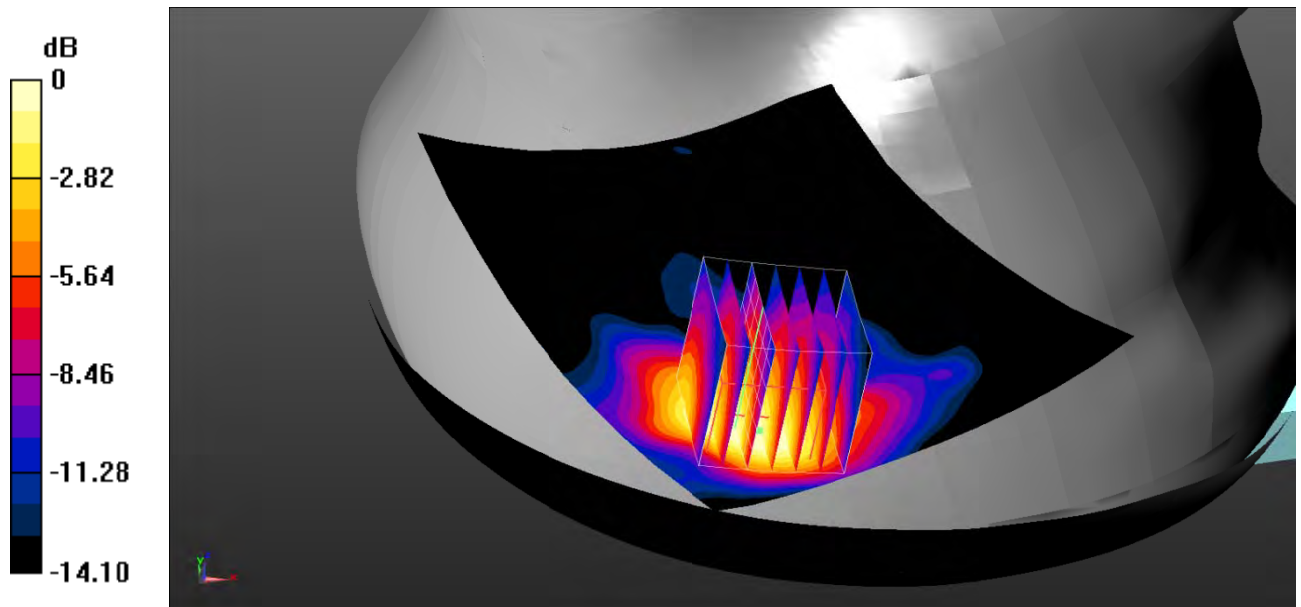

0 dB = $0.200 \text{ W/kg} = -6.99 \text{ dBW/kg}$

Test Plot 101#: LTE Band 41_Head Right Tilt_50%RB_Middle

DUT: Mobile Phone; Type: X6812B; Serial: SZ1210813-34307E-SA-S_GY2;


Communication System: Generic TDD-LTE; Frequency: 2595 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2595 \text{ MHz}$; $\sigma = 1.944 \text{ S/m}$; $\epsilon_r = 38.577$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.33, 7.33, 7.33)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (101x111x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.208 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
 Reference Value = 2.794 V/m ; Power Drift = -0.04 dB
 Peak SAR (extrapolated) = 0.216 W/kg
SAR(1 g) = 0.144 W/kg ; SAR(10 g) = 0.080 W/kg
 Maximum value of SAR (measured) = 0.169 W/kg

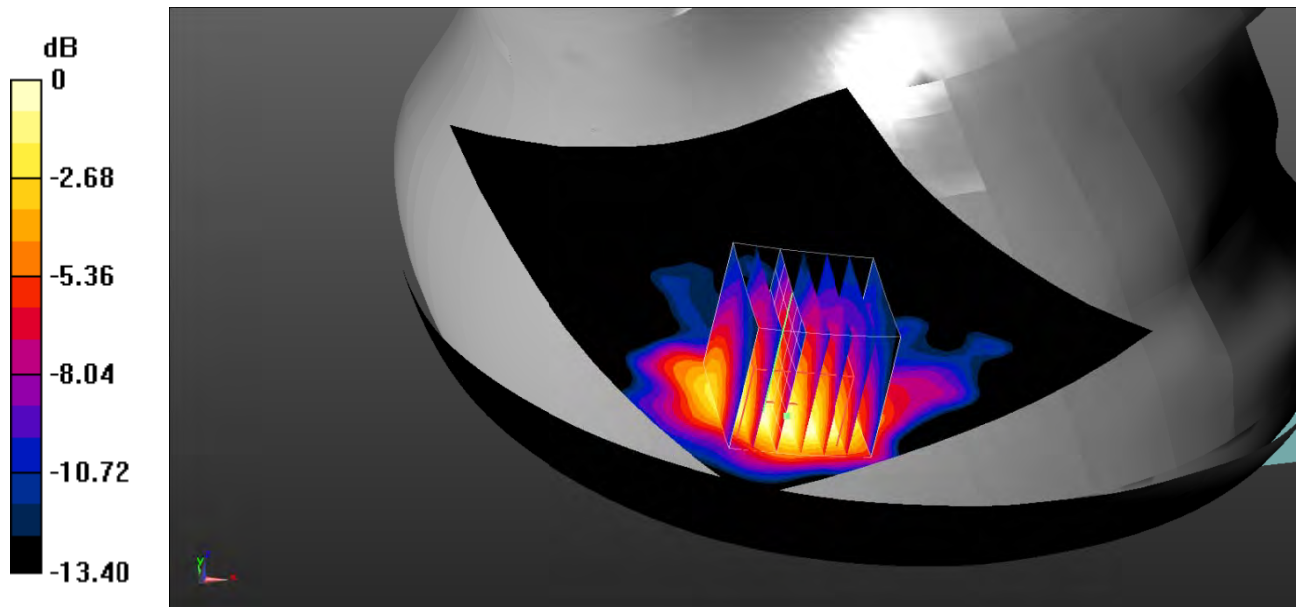

0 dB = $0.169 \text{ W/kg} = -7.72 \text{ dBW/kg}$

Test Plot 102#: LTE Band 41_Body Back_1RB_Middle

DUT: Mobile Phone; Type: X6812B; Serial: SZ1210813-34307E-SA-S_GY2;


Communication System: Generic TDD-LTE; Frequency: 2595 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2595 \text{ MHz}$; $\sigma = 1.944 \text{ S/m}$; $\epsilon_r = 38.577$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.33, 7.33, 7.33)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (101x101x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.247 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
 Reference Value = 2.989 V/m ; Power Drift = 0.07 dB
 Peak SAR (extrapolated) = 0.266 W/kg
SAR(1 g) = 0.198 W/kg ; SAR(10 g) = 0.113 W/kg
 Maximum value of SAR (measured) = 0.218 W/kg

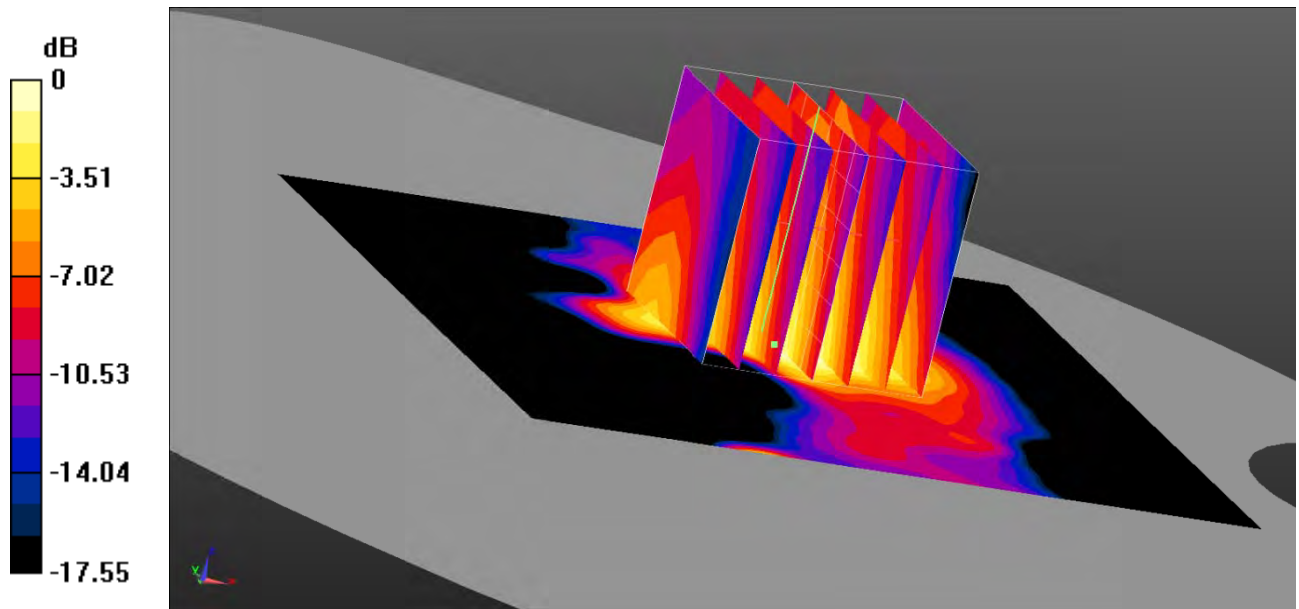

0 dB = 0.218 W/kg = -6.62 dBW/kg

Test Plot 103#: LTE Band 41_Body Back_50%RB_Middle

DUT: Mobile Phone; Type: X6812B; Serial: SZ1210813-34307E-SA-S_GY2;


Communication System: Generic TDD-LTE; Frequency: 2595 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2595 \text{ MHz}$; $\sigma = 1.944 \text{ S/m}$; $\epsilon_r = 38.577$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.33, 7.33, 7.33)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (101x101x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.213 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
 Reference Value = 2.645 V/m ; Power Drift = 0.05 dB
 Peak SAR (extrapolated) = 0.211 W/kg
SAR(1 g) = 0.159 W/kg ; SAR(10 g) = 0.092 W/kg
 Maximum value of SAR (measured) = 0.178 W/kg

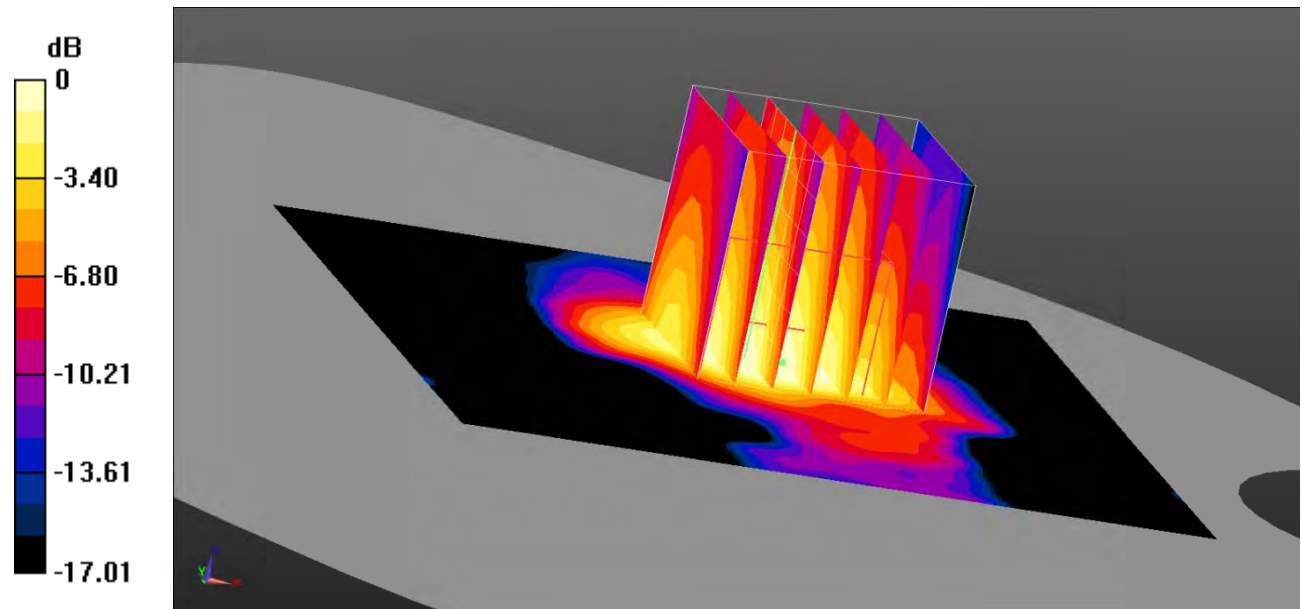

0 dB = 0.178 W/kg = -7.50 dBW/kg

Test Plot 104#: LTE Band 41_Body Left_1RB_Middle

DUT: Mobile Phone; Type: X6812B; Serial: SZ1210813-34307E-SA-S_GY2;


Communication System: Generic TDD-LTE; Frequency: 2595 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2595 \text{ MHz}$; $\sigma = 1.944 \text{ S/m}$; $\epsilon_r = 38.577$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.33, 7.33, 7.33)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (101x101x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.0724 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
 Reference Value = 5.469 V/m ; Power Drift = -0.09 dB
 Peak SAR (extrapolated) = 0.0680 W/kg
SAR(1 g) = 0.050 W/kg ; SAR(10 g) = 0.033 W/kg
 Maximum value of SAR (measured) = 0.0552 W/kg

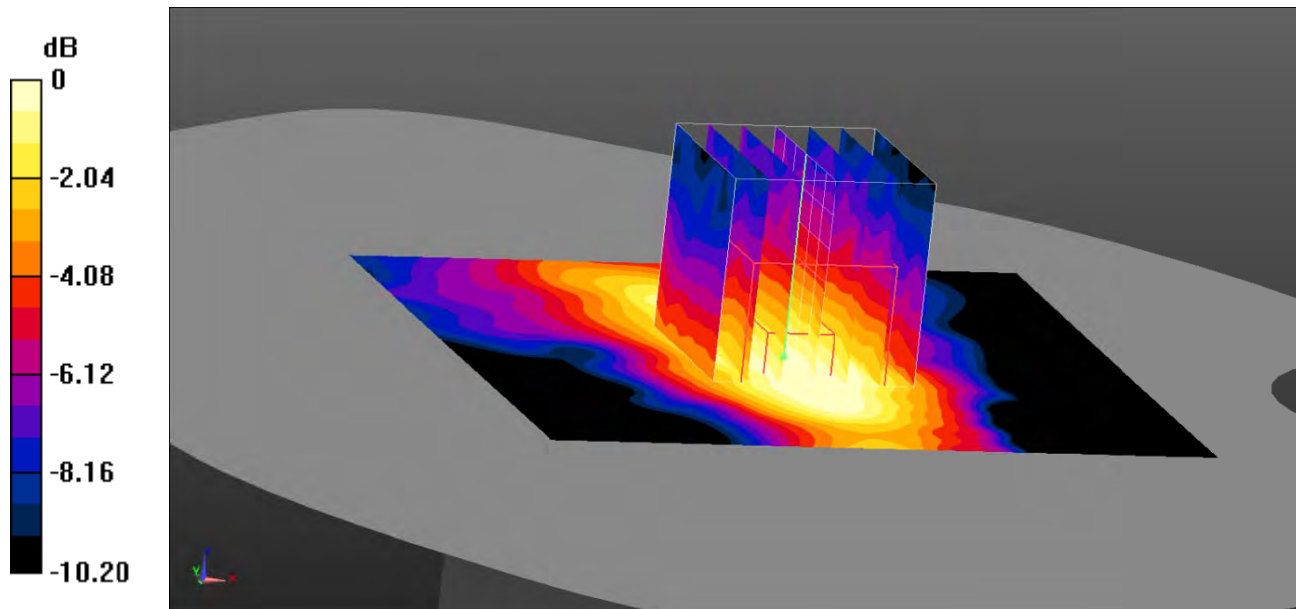

0 dB = 0.0552 W/kg = -12.58 dBW/kg

Test Plot 105#: LTE Band 41_Body Left_50%RB_Middle

DUT: Mobile Phone; Type: X6812B; Serial: SZ1210813-34307E-SA-S_GY2;


Communication System: Generic TDD-LTE; Frequency: 2595 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2595 \text{ MHz}$; $\sigma = 1.944 \text{ S/m}$; $\epsilon_r = 38.577$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.33, 7.33, 7.33)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (101x101x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.0586 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
 Reference Value = 4.677 V/m ; Power Drift = -0.09 dB
 Peak SAR (extrapolated) = 0.0530 W/kg
SAR(1 g) = 0.041 W/kg ; SAR(10 g) = 0.027 W/kg
 Maximum value of SAR (measured) = 0.0453 W/kg

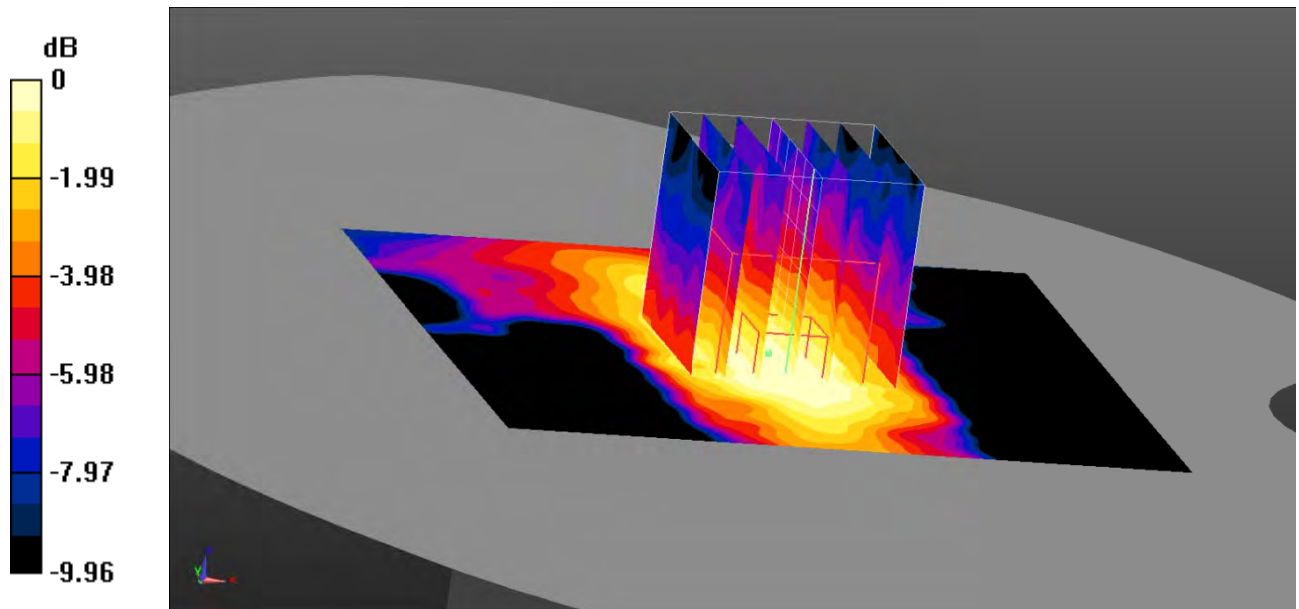

0 dB = 0.0453 W/kg = -13.44 dBW/kg

Test Plot 106#: LTE Band 41_Body Top_1RB_Middle

DUT: Mobile Phone; Type: X6812B; Serial: SZ1210813-34307E-SA-S_GY2;


Communication System: Generic TDD-LTE; Frequency: 2595 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2595 \text{ MHz}$; $\sigma = 1.944 \text{ S/m}$; $\epsilon_r = 38.577$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.33, 7.33, 7.33)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (101x101x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.284 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
 Reference Value = 10.08 V/m ; Power Drift = -0.04 dB
 Peak SAR (extrapolated) = 0.273 W/kg
SAR(1 g) = 0.201 W/kg ; SAR(10 g) = 0.110 W/kg
 Maximum value of SAR (measured) = 0.225 W/kg

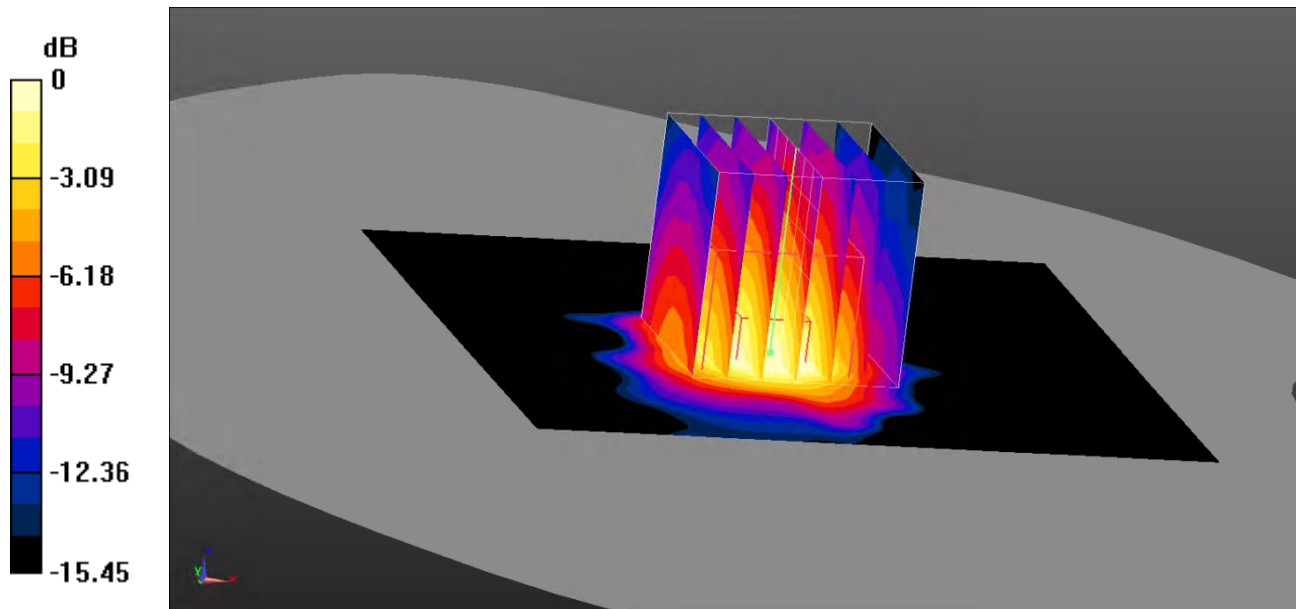

0 dB = 0.225 W/kg = -6.48 dBW/kg

Test Plot 107#: LTE Band 41_Body Top_50%RB_Middle**DUT: Mobile Phone; Type: X6812B; Serial: SZ1210813-34307E-SA-S_GY2;**

Communication System: Generic TDD-LTE; Frequency: 2595 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2595$ MHz; $\sigma = 1.944$ S/m; $\epsilon_r = 38.577$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.33, 7.33, 7.33)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (101x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.292 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.445 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 0.225 W/kg

SAR(1 g) = 0.161 W/kg; SAR(10 g) = 0.091 W/kg

Maximum value of SAR (measured) = 0.184 W/kg

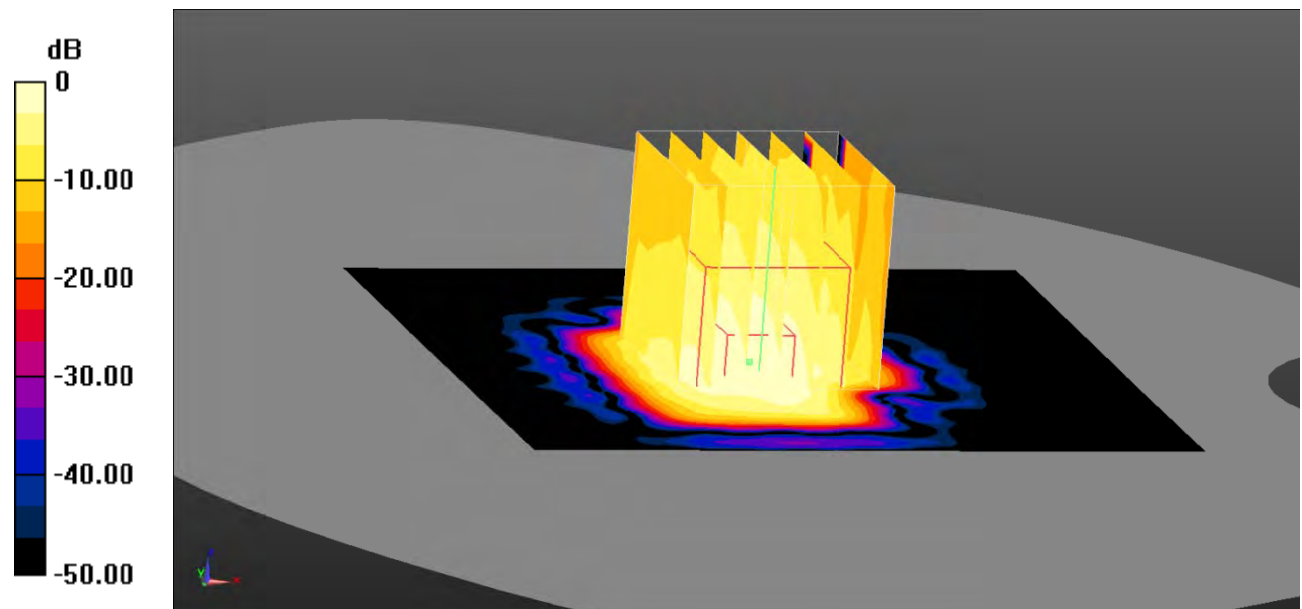

0 dB = 0.184 W/kg = -7.35 dBW/kg

Test Plot 108#:2.4Gwifi_Head Left Cheek_Low

DUT: Mobile Phone; Type: X6812B; Serial: SZ1210813-34307E-SA-S_GY2;

Communication System: UID 0, 2.4G DTS (0); Frequency: 2412 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 2412 \text{ MHz}$; $\sigma = 1.809 \text{ S/m}$; $\epsilon_r = 39.238$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.63, 7.63, 7.63)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562;Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Area Scan (101x101x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 0.407 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 7.544 V/m ; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.351 W/kg

SAR(1 g) = 0.266 W/kg ; SAR(10 g) = 0.170 W/kg

Maximum value of SAR (measured) = 0.292 W/kg

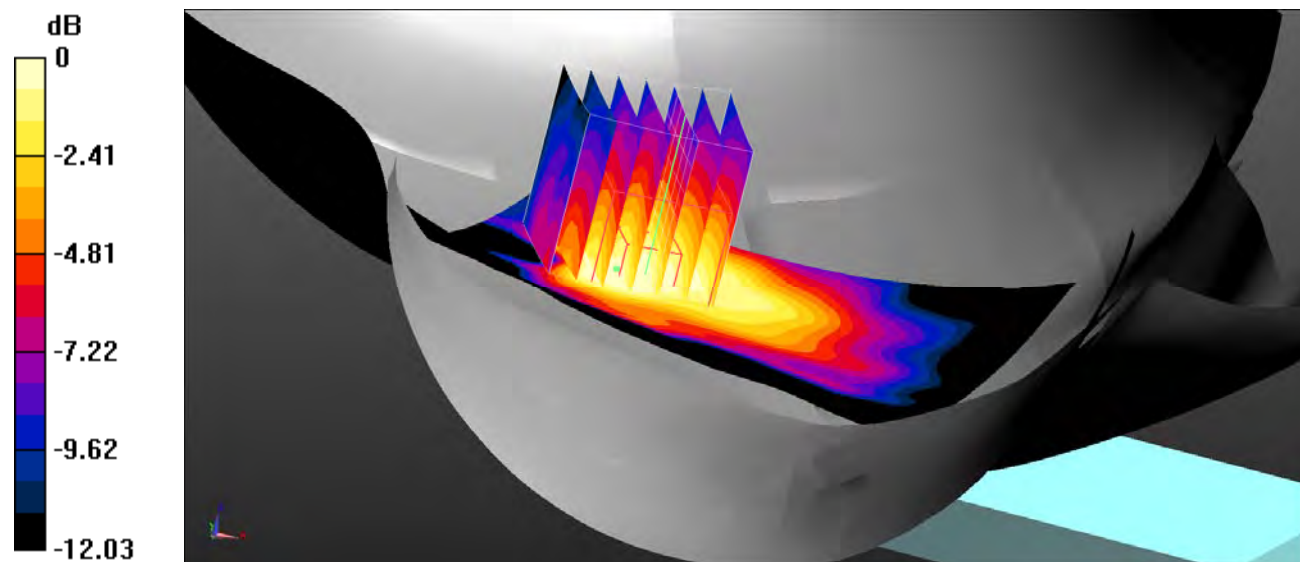

0 dB = $0.292 \text{ W/kg} = -5.35 \text{ dBW/kg}$

Test Plot 109#:2.4Gwifi_Head Left Tilt_Low

DUT: Mobile Phone; Type: X6812B; Serial: SZ1210813-34307E-SA-S_GY2;

Communication System: UID 0, 2.4G DTS (0); Frequency: 2412 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 2412 \text{ MHz}$; $\sigma = 1.809 \text{ S/m}$; $\epsilon_r = 39.238$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.63, 7.63, 7.63)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562;Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Area Scan (101x101x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 0.394 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 8.322 V/m ; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.392 W/kg

SAR(1 g) = 0.277 W/kg ; SAR(10 g) = 0.162 W/kg

Maximum value of SAR (measured) = 0.316 W/kg

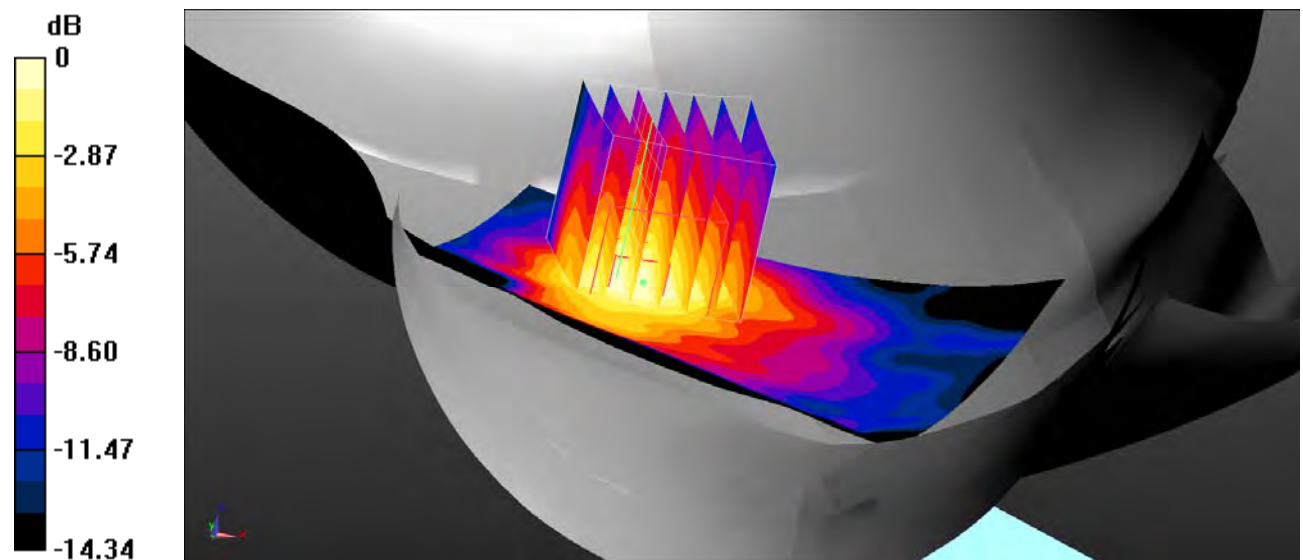

0 dB = 0.316 W/kg = -5.00 dBW/kg

Test Plot 110#:2.4Gwifi_Head Right Cheek_Low

DUT: Mobile Phone; Type: X6812B; Serial: SZ1210813-34307E-SA-S_GY2;

Communication System: UID 0, 2.4G DTS (0); Frequency: 2412 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 2412$ MHz; $\sigma = 1.809$ S/m; $\epsilon_r = 39.238$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.63, 7.63, 7.63)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562;Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Area Scan (101x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.252 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.251 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.156 W/kg

SAR(1 g) = 0.129 W/kg; SAR(10 g) = 0.083 W/kg

Maximum value of SAR (measured) = 0.142 W/kg

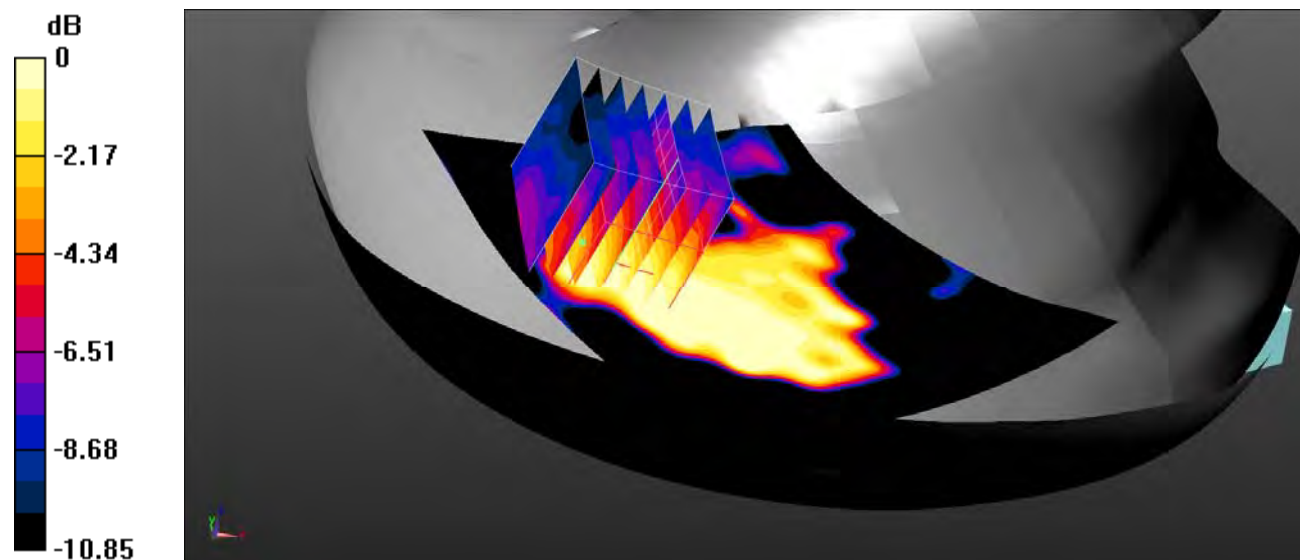

0 dB = 0.142 W/kg = -8.48 dBW/kg

Test Plot 111#:2.4Gwifi_Head Right Tilt_Low

DUT: Mobile Phone; Type: X6812B; Serial: SZ1210813-34307E-SA-S_GY2;

Communication System: UID 0, 2.4G DTS (0); Frequency: 2412 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 2412 \text{ MHz}$; $\sigma = 1.809 \text{ S/m}$; $\epsilon_r = 39.238$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.63, 7.63, 7.63)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562;Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Area Scan (101x101x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 0.218 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 8.482 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.206 W/kg

SAR(1 g) = 0.163 W/kg; SAR(10 g) = 0.108 W/kg

Maximum value of SAR (measured) = 0.184 W/kg

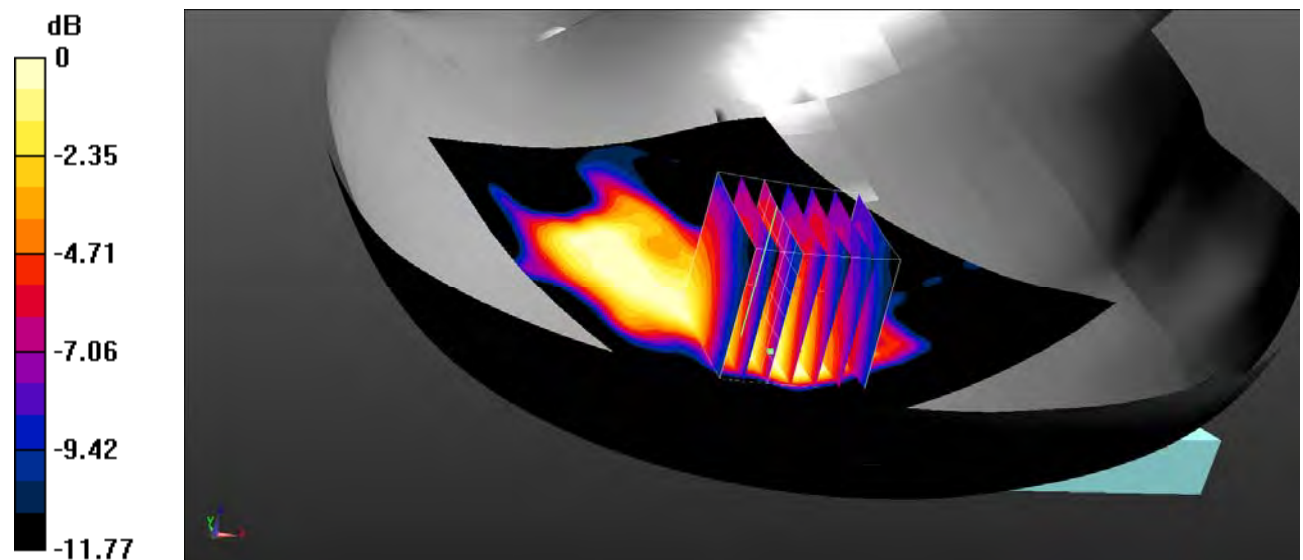

0 dB = 0.184 W/kg = -7.35 dBW/kg

Test Plot 112#:2.4Gwifi_Body Back_Low

DUT: Mobile Phone; Type: X6812B; Serial: SZ1210813-34307E-SA-S_GY2;

Communication System: UID 0, 2.4G DTS (0); Frequency: 2412 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 2412 \text{ MHz}$; $\sigma = 1.809 \text{ S/m}$; $\epsilon_r = 39.238$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.63, 7.63, 7.63)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562;Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Area Scan (101x101x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 0.159 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 5.445 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.186 W/kg

SAR(1 g) = 0.133 W/kg; SAR(10 g) = 0.083 W/kg

Maximum value of SAR (measured) = 0.146 W/kg

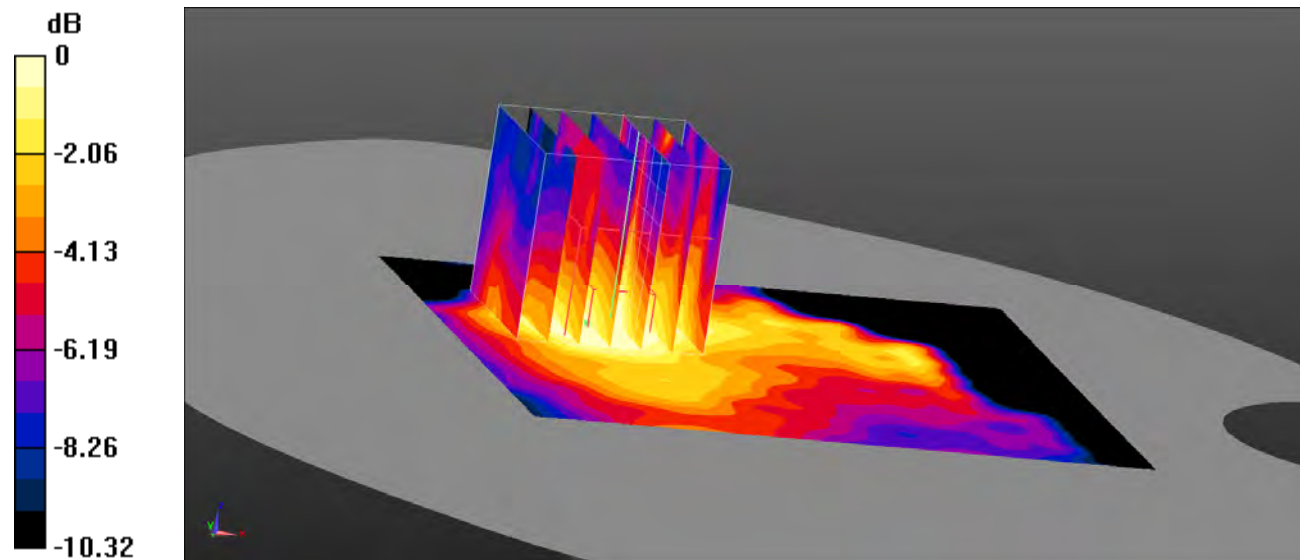

0 dB = 0.146 W/kg = -8.36 dBW/kg

Test Plot 113#:2.4Gwifi_Body Right_Low

DUT: Mobile Phone; Type: X6812B; Serial: SZ1210813-34307E-SA-S_GY2;

Communication System: UID 0, 2.4G DTS (0); Frequency: 2412 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 2412$ MHz; $\sigma = 1.809$ S/m; $\epsilon_r = 39.238$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.63, 7.63, 7.63)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562;Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Area Scan (101x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.104 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.178 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.0570 W/kg

SAR(1 g) = 0.047 W/kg; SAR(10 g) = 0.033 W/kg

Maximum value of SAR (measured) = 0.0501 W/kg

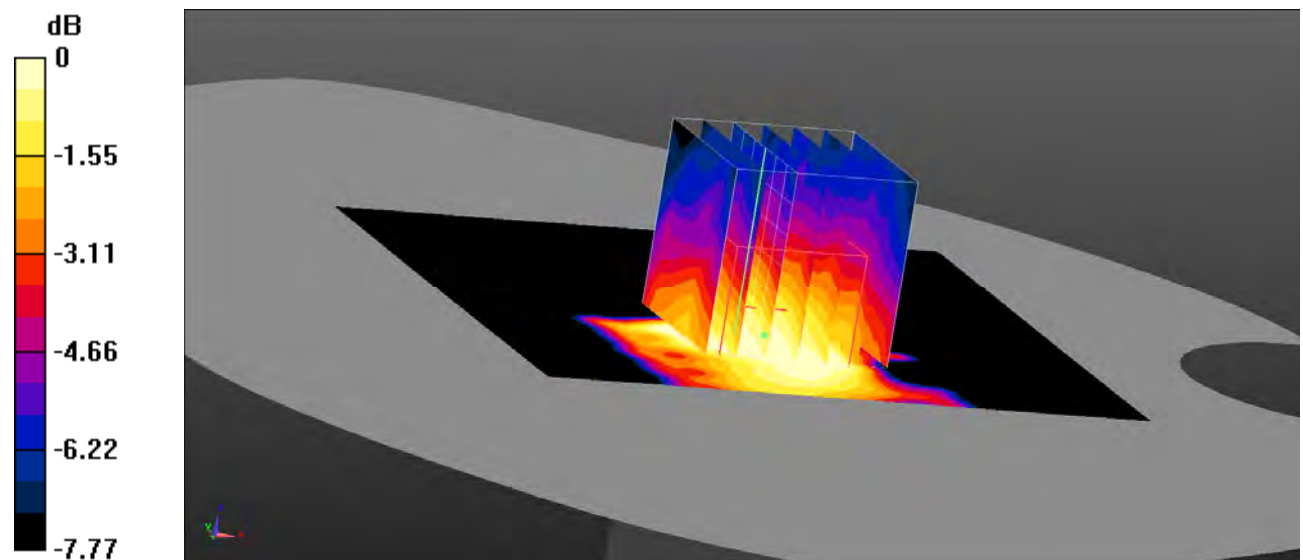

0 dB = 0.0501 W/kg = -13.00 dBW/kg

Test Plot 114#:2.4Gwifi_Body Top_Low

DUT: Mobile Phone; Type: X6812B; Serial: SZ1210813-34307E-SA-S_GY2;

Communication System: UID 0, 2.4G DTS (0); Frequency: 2412 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 2412 \text{ MHz}$; $\sigma = 1.809 \text{ S/m}$; $\epsilon_r = 39.238$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.63, 7.63, 7.63)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562;Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Area Scan (101x101x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 0.101 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 6.091 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 0.0910 W/kg

SAR(1 g) = 0.071 W/kg; SAR(10 g) = 0.049 W/kg

Maximum value of SAR (measured) = 0.0784 W/kg

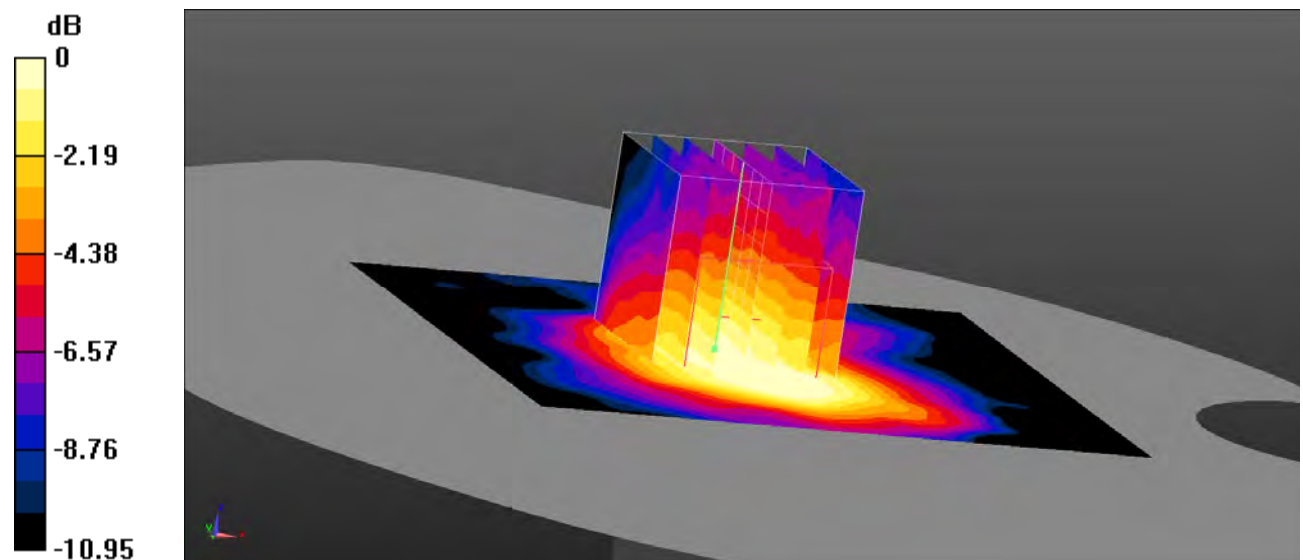

0 dB = 0.0784 W/kg = -11.06 dBW/kg

Test Plot 115#:5.2Gwifi_Head Left Cheek_Middle**DUT: Mobile Phone; Type: X6812B; Serial: SZ1210813-34307E-SA-S_GY2;**

Communication System: UID 0, 5.2G WiFi (0); Frequency: 5200 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 5200$ MHz; $\sigma = 4.637$ S/m; $\epsilon_r = 36.644$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(5.55, 5.55, 5.55)
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562;Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Area Scan (101x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.297 W/kg


Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0.9140 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.323 W/kg

SAR(1 g) = 0.122 W/kg; SAR(10 g) = 0.035 W/kg

Maximum value of SAR (measured) = 0.245 W/kg

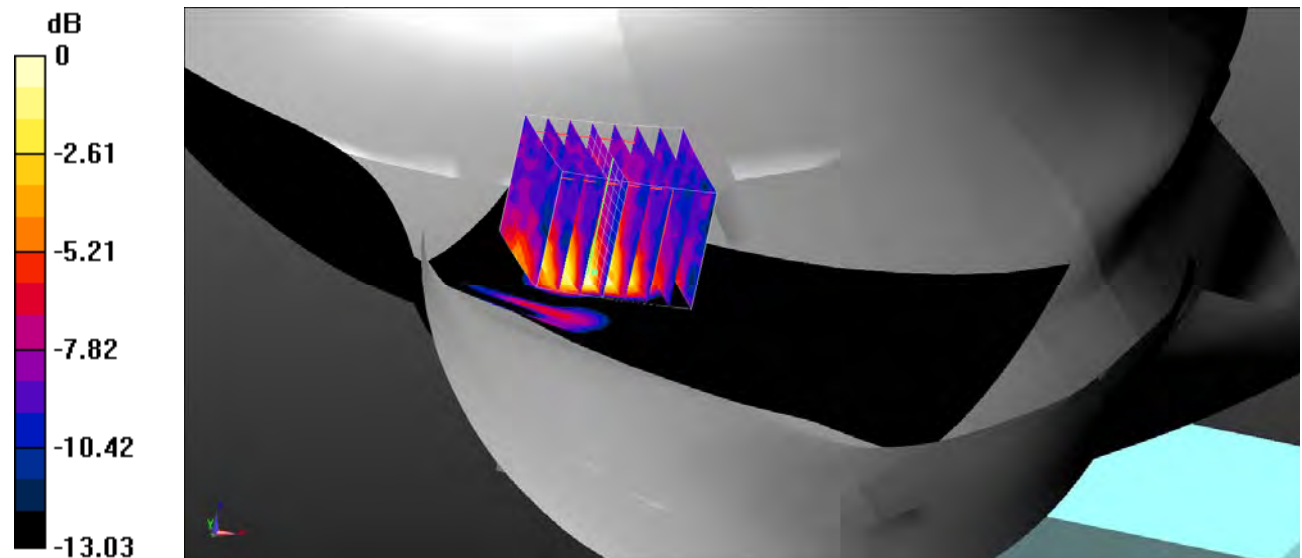

0 dB = 0.245 W/kg = -6.11 dBW/kg

Test Plot 116#:5.2Gwifi_Head Left Tilt_Middle

DUT: Mobile Phone; Type: X6812B; Serial: SZ1210813-34307E-SA-S_GY2;

Communication System: UID 0, 5.2G WiFi (0); Frequency: 5200 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 5200 \text{ MHz}$; $\sigma = 4.637 \text{ S/m}$; $\epsilon_r = 36.644$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(5.55, 5.55, 5.55)
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562;Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Area Scan (101x101x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 0.766 W/kg


Zoom Scan (8x8x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 1.401 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.431 W/kg

SAR(1 g) = 0.247 W/kg; SAR(10 g) = 0.106 W/kg

Maximum value of SAR (measured) = 0.398 W/kg

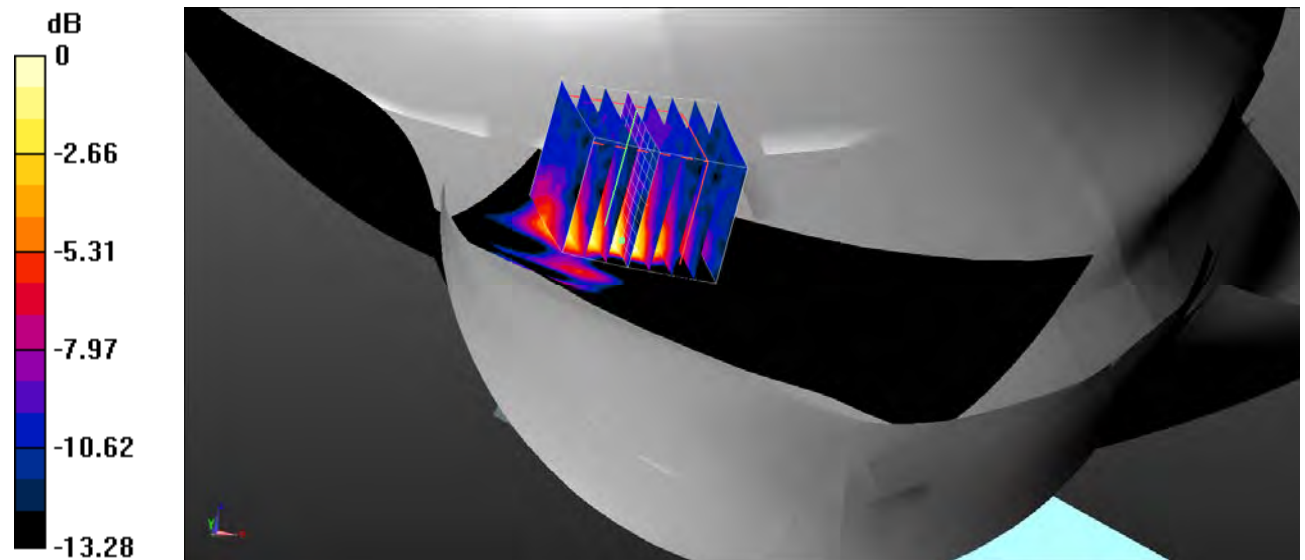

0 dB = 0.398 W/kg = -4.00 dBW/kg

Test Plot 117#:5.2Gwifi_Head Right Cheek_Middle**DUT: Mobile Phone; Type: X6812B; Serial: SZ1210813-34307E-SA-S_GY2;**

Communication System: UID 0, 5.2G WiFi (0); Frequency: 5200 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 5200$ MHz; $\sigma = 4.637$ S/m; $\epsilon_r = 36.644$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(5.55, 5.55, 5.55)
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562;Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Area Scan (101x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.472 W/kg


Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.261 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.517 W/kg

SAR(1 g) = 0.071 W/kg; SAR(10 g) = 0.028 W/kg

Maximum value of SAR (measured) = 0.309 W/kg

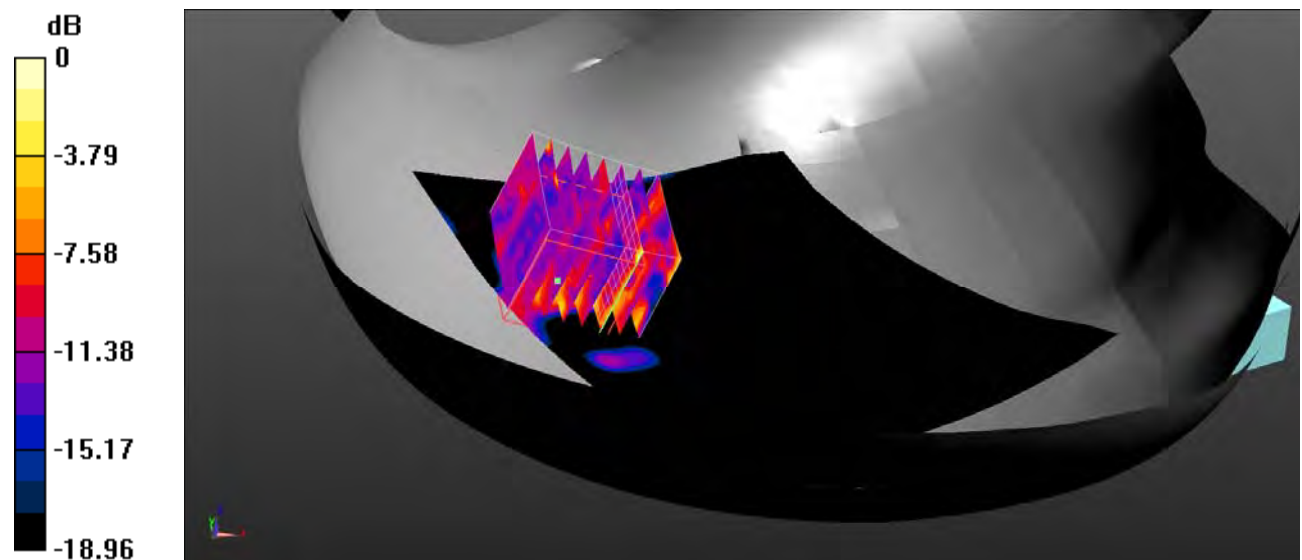

0 dB = 0.309 W/kg = -5.10 dBW/kg

Test Plot 118#:5.2Gwifi_Head Right Tilt_Middle

DUT: Mobile Phone; Type: X6812B; Serial: SZ1210813-34307E-SA-S_GY2;

Communication System: UID 0, 5.2G WiFi (0); Frequency: 5200 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 5200 \text{ MHz}$; $\sigma = 4.637 \text{ S/m}$; $\epsilon_r = 36.644$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(5.55, 5.55, 5.55)
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562;Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Area Scan (101x101x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 0.268 W/kg


Zoom Scan (8x8x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 1.269 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.464 W/kg

SAR(1 g) = 0.147 W/kg; SAR(10 g) = 0.053 W/kg

Maximum value of SAR (measured) = 0.425 W/kg

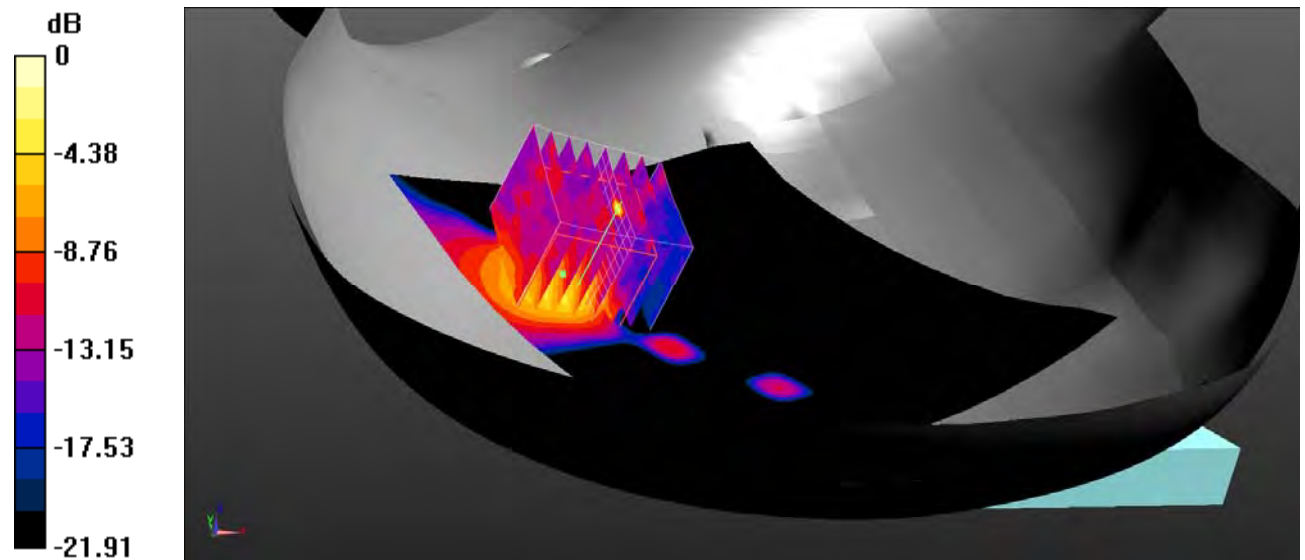

0 dB = 0.425 W/kg = -3.72 dBW/kg

Test Plot 119#:5.2Gwifi_Body Back_Middle

DUT: Mobile Phone; Type: X6812B; Serial: SZ1210813-34307E-SA-S_GY2;

Communication System: UID 0, 5.2G WiFi (0); Frequency: 5200 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 5200 \text{ MHz}$; $\sigma = 4.637 \text{ S/m}$; $\epsilon_r = 36.644$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(5.55, 5.55, 5.55)
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562;Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Area Scan (101x101x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 0.432 W/kg


Zoom Scan (8x8x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 4.193 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.486 W/kg

SAR(1 g) = 0.294 W/kg; SAR(10 g) = 0.135 W/kg

Maximum value of SAR (measured) = 0.482 W/kg

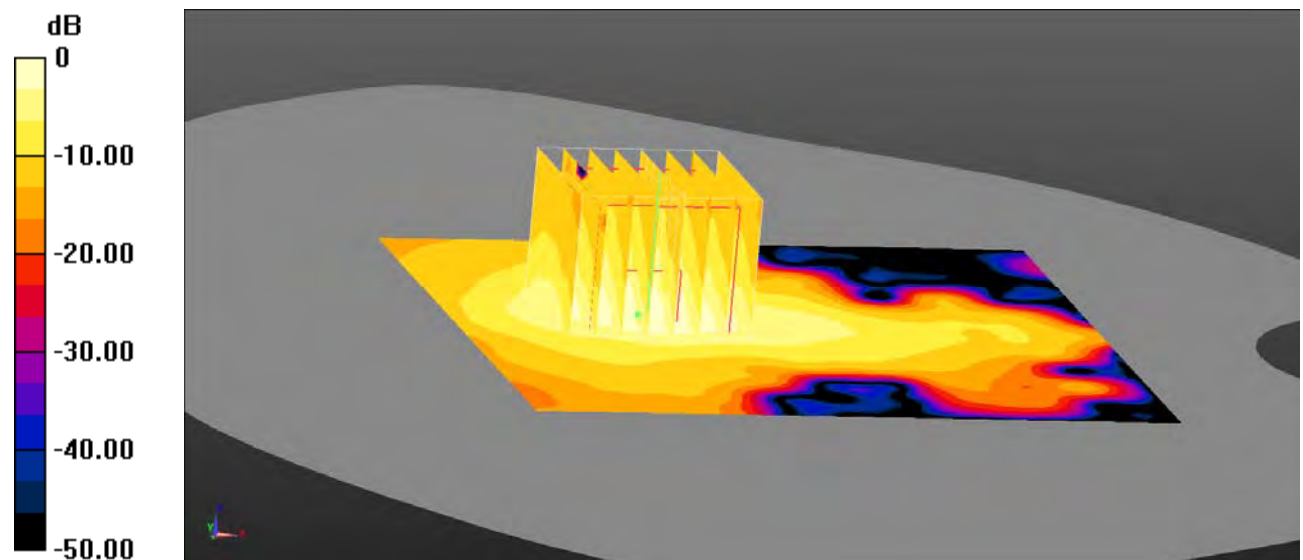

0 dB = 0.482 W/kg = -3.17 dBW/kg

Test Plot 120#:5.2Gwifi_Body Right_Middle

DUT: Mobile Phone; Type: X6812B; Serial: SZ1210813-34307E-SA-S_GY2;

Communication System: UID 0, 5.2G WiFi (0); Frequency: 5200 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 5200 \text{ MHz}$; $\sigma = 4.637 \text{ S/m}$; $\epsilon_r = 36.644$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(5.55, 5.55, 5.55)
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562;Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Area Scan (121x121x1): Interpolated grid: $dx=0.8000 \text{ mm}$, $dy=0.8000 \text{ mm}$

Maximum value of SAR (interpolated) = 0.125 W/kg


Zoom Scan (8x8x16)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 1.709 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.131 W/kg

SAR(1 g) = 0.068 W/kg; SAR(10 g) = 0.041 W/kg

Maximum value of SAR (measured) = 0.104 W/kg

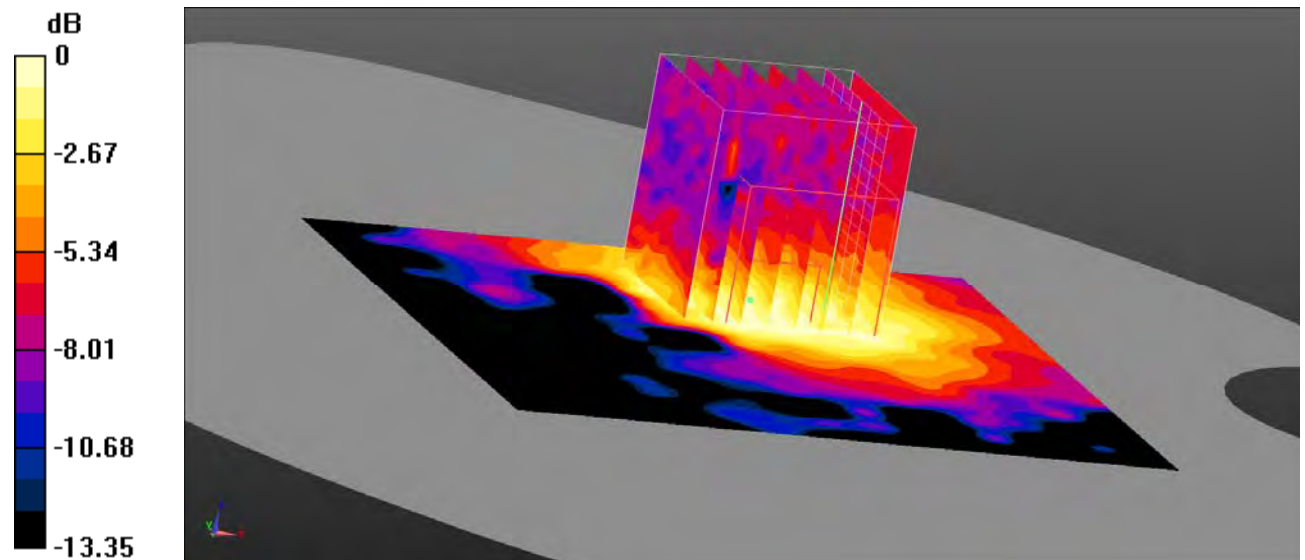

0 dB = 0.104 W/kg = -9.83 dBW/kg

Test Plot 121#:5.2Gwifi_Body Top_Middle

DUT: Mobile Phone; Type: X6812B; Serial: SZ1210813-34307E-SA-S_GY2;

Communication System: UID 0, 5.2G WiFi (0); Frequency: 5200 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 5200 \text{ MHz}$; $\sigma = 4.637 \text{ S/m}$; $\epsilon_r = 36.644$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(5.55, 5.55, 5.55)
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562;Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Area Scan (121x121x1): Interpolated grid: $dx=0.8000 \text{ mm}$, $dy=0.8000 \text{ mm}$

Maximum value of SAR (interpolated) = 0.289 W/kg


Zoom Scan (8x8x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 3.748 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.344 W/kg

SAR(1 g) = 0.204 W/kg; SAR(10 g) = 0.092 W/kg

Maximum value of SAR (measured) = 0.339 W/kg

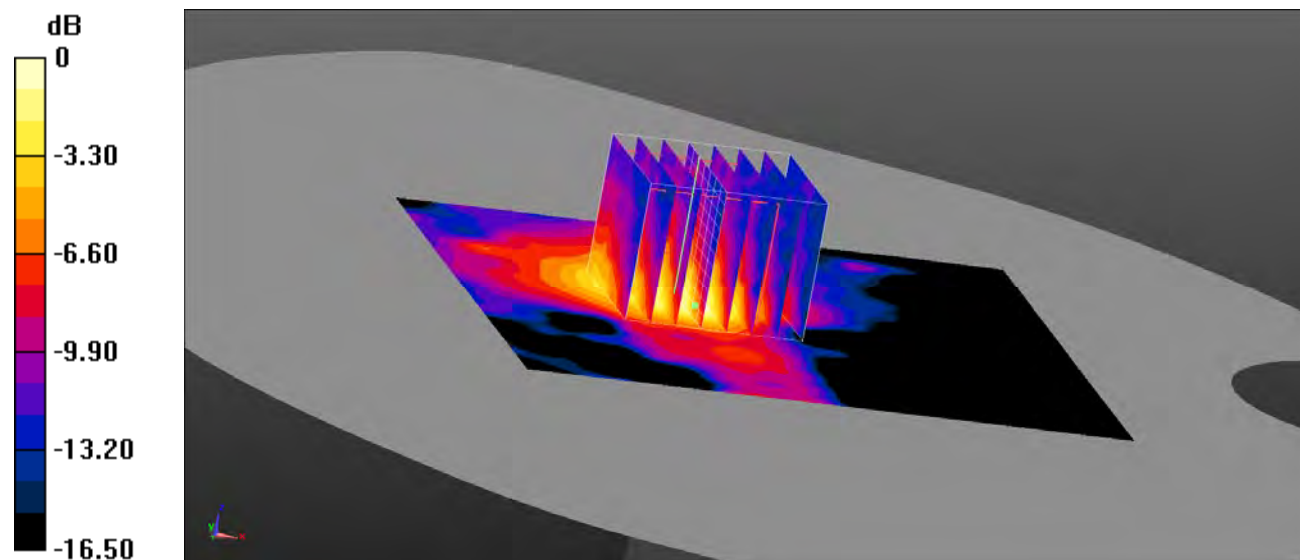

0 dB = 0.339 W/kg = -4.70 dBW/kg

Test Plot 122#:5.8Gwifi_Head Left Cheek_Low

DUT: Mobile Phone; Type: X6812B; Serial: SZ1210813-34307E-SA-S_GY2;

Communication System: UID 0, 5.8G Wi-Fi (0); Frequency: 5745 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 5745 \text{ MHz}$; $\sigma = 5.247 \text{ S/m}$; $\epsilon_r = 35.472$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.72, 4.72, 4.72)
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562;Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Area Scan (101x101x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 0.334 W/kg


Zoom Scan (8x8x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 1.564 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.755 W/kg

SAR(1 g) = 0.194 W/kg; SAR(10 g) = 0.086 W/kg

Maximum value of SAR (measured) = 0.350 W/kg

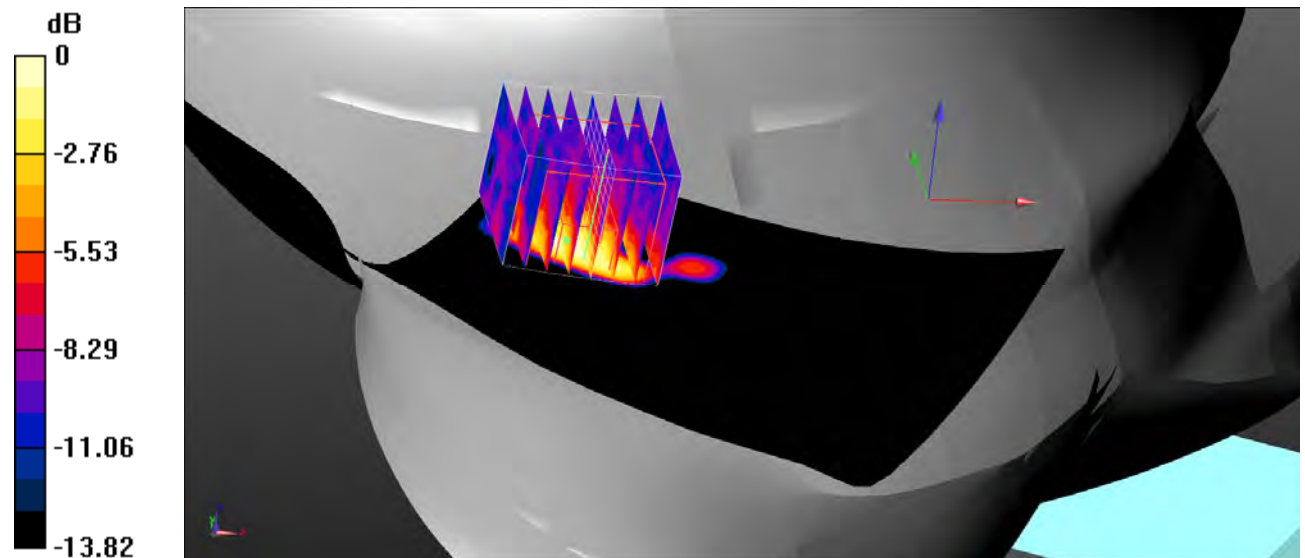

0 dB = 0.350 W/kg = -4.56 dBW/kg

Test Plot 123#:5.8Gwifi_Head Left Tilt_Low

DUT: Mobile Phone; Type: X6812B; Serial: SZ1210813-34307E-SA-S_GY2;

Communication System: UID 0, 5.8G Wi-Fi (0); Frequency: 5745 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 5745 \text{ MHz}$; $\sigma = 5.247 \text{ S/m}$; $\epsilon_r = 35.472$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.72, 4.72, 4.72)
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562;Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Area Scan (101x101x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 0.572 W/kg


Zoom Scan (8x8x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 1.431 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.992 W/kg

SAR(1 g) = 0.266 W/kg; SAR(10 g) = 0.105 W/kg

Maximum value of SAR (measured) = 0.507 W/kg

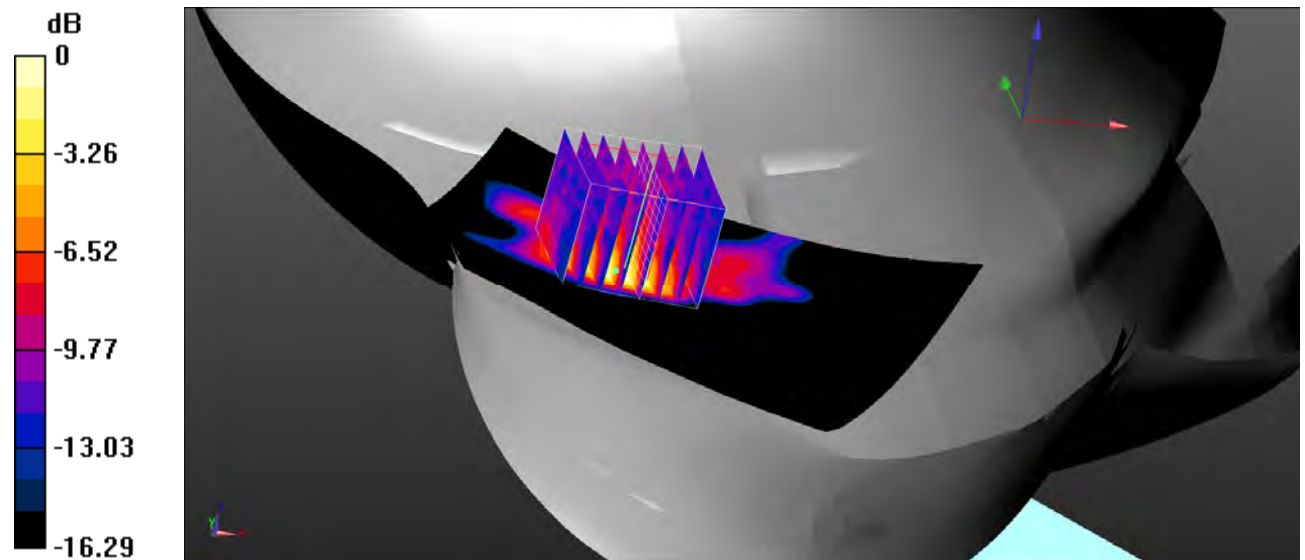

0 dB = 0.507 W/kg = -2.95 dBW/kg

Test Plot 124#:5.8Gwifi_Head Right Cheek_Low

DUT: Mobile Phone; Type: X6812B; Serial: SZ1210813-34307E-SA-S_GY2;

Communication System: UID 0, 5.8G Wi-Fi (0); Frequency: 5745 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 5745 \text{ MHz}$; $\sigma = 5.247 \text{ S/m}$; $\epsilon_r = 35.472$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.72, 4.72, 4.72)
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562;Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Area Scan (101x101x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 0.271 W/kg


Zoom Scan (8x8x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 0.8890 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.523 W/kg

SAR(1 g) = 0.105 W/kg; SAR(10 g) = 0.040 W/kg

Maximum value of SAR (measured) = 0.420 W/kg

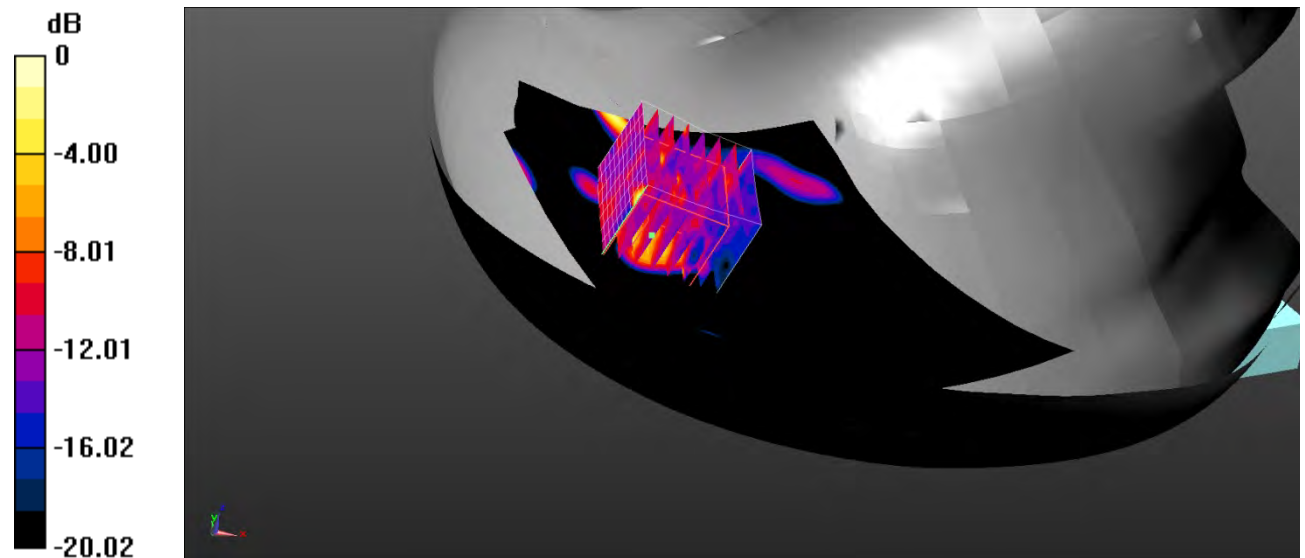

0 dB = 0.420 W/kg = -3.77 dBW/kg

Test Plot 125#:5.8Gwifi_Head Right Tilt_Low**DUT: Mobile Phone; Type: X6812B; Serial: SZ1210813-34307E-SA-S_GY2;**


Communication System: UID 0, 5.8G Wi-Fi (0); Frequency: 5745 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 5745 \text{ MHz}$; $\sigma = 5.247 \text{ S/m}$; $\epsilon_r = 35.472$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.72, 4.72, 4.72)
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562;Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

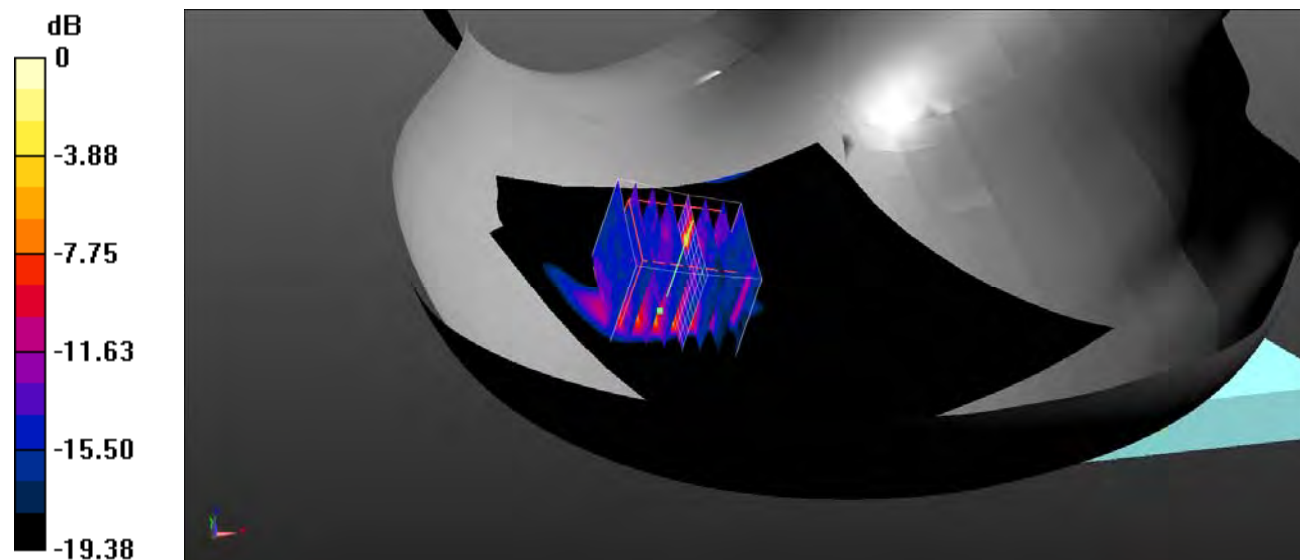Area Scan (101x101x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$ Maximum value of SAR (interpolated) = 0.625 W/kg **Zoom Scan (8x8x12)/Cube 0:** Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$ Reference Value = 0.8070 V/m ; Power Drift = 0.00 dB Peak SAR (extrapolated) = 1.00 W/kg **SAR(1 g) = 0.224 W/kg ; SAR(10 g) = 0.086 W/kg** Maximum value of SAR (measured) = 1.00 W/kg  $0 \text{ dB} = 1.00 \text{ W/kg} = 0.00 \text{ dBW/kg}$

Test Plot 126#:5.8Gwifi_Body Back_Low

DUT: Mobile Phone; Type: X6812B; Serial: SZ1210813-34307E-SA-S_GY2;

Communication System: UID 0, 5.8G Wi-Fi (0); Frequency: 5745 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 5745 \text{ MHz}$; $\sigma = 5.247 \text{ S/m}$; $\epsilon_r = 35.472$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.72, 4.72, 4.72)
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562;Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Area Scan (101x101x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 0.647 W/kg


Zoom Scan (8x8x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 2.826 V/m ; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.649 W/kg

SAR(1 g) = 0.365 W/kg ; SAR(10 g) = 0.153 W/kg

Maximum value of SAR (measured) = 0.630 W/kg

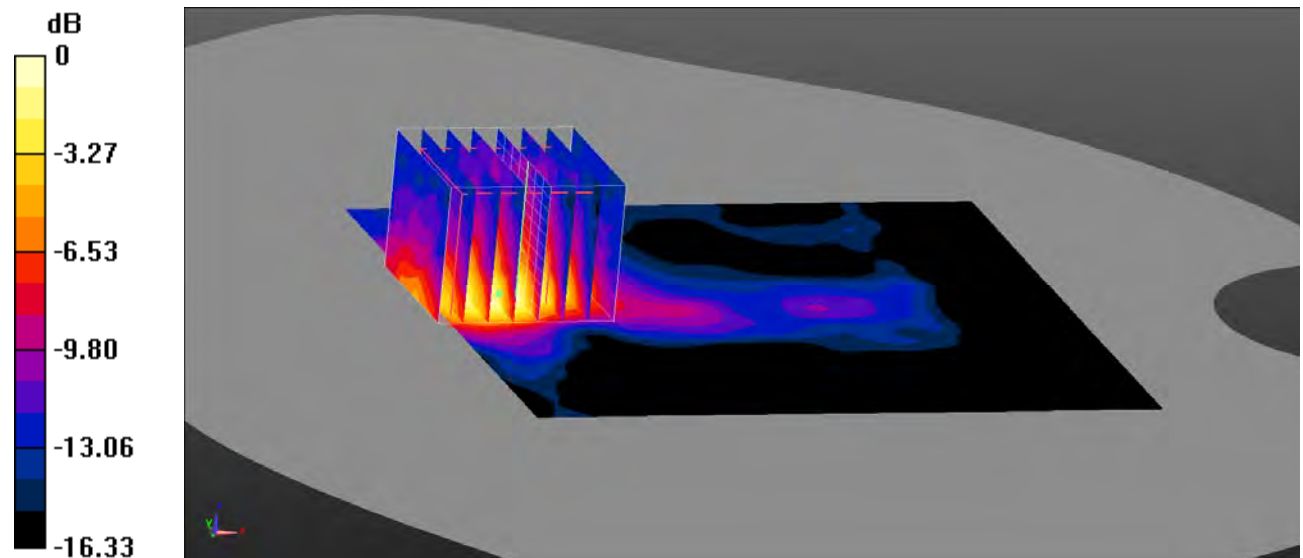

0 dB = 0.630 W/kg = -2.01 dBW/kg

Test Plot 127#:5.8Gwifi_Body Right_Low**DUT: Mobile Phone; Type: X6812B; Serial: SZ1210813-34307E-SA-S_GY2;**

Communication System: UID 0, 5.8G Wi-Fi (0); Frequency: 5745 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 5745$ MHz; $\sigma = 5.247$ S/m; $\epsilon_r = 35.472$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.72, 4.72, 4.72)
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562;Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Area Scan (121x121x1): Interpolated grid: dx=0.8000 mm, dy=0.8000 mm

Maximum value of SAR (interpolated) = 0.213 W/kg


Zoom Scan (8x8x16)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.628 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.476 W/kg

SAR(1 g) = 0.119 W/kg; SAR(10 g) = 0.066 W/kg

Maximum value of SAR (measured) = 0.194 W/kg

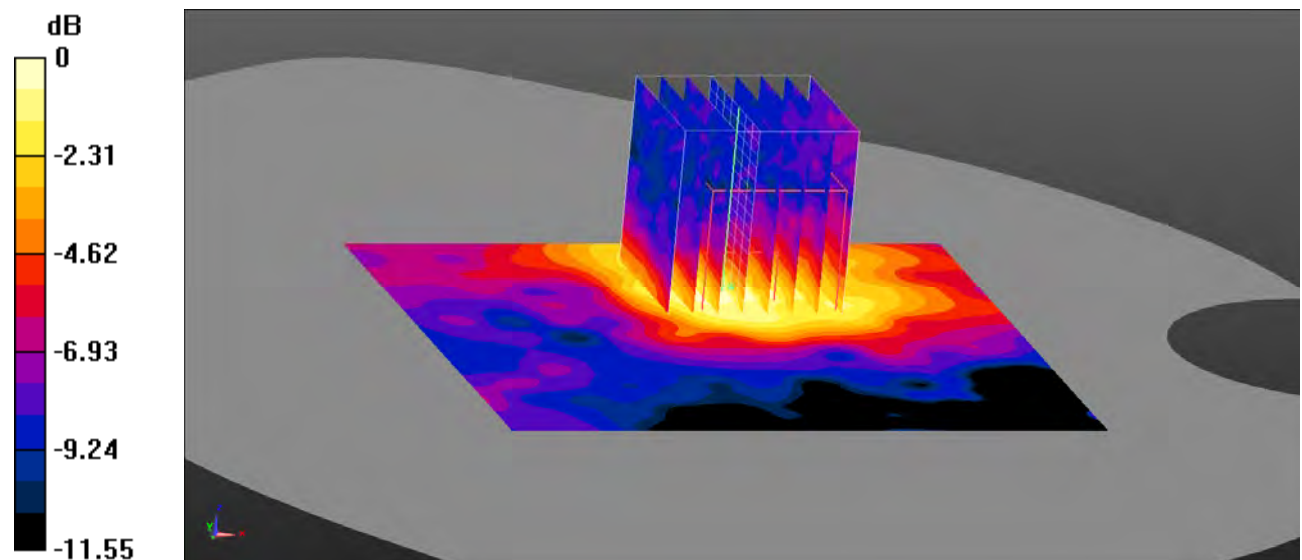

Test Plot 128#:5.8Gwifi_Body Top_Low

DUT: Mobile Phone; Type: X6812B; Serial: SZ1210813-34307E-SA-S_GY2;

Communication System: UID 0, 5.8G Wi-Fi (0); Frequency: 5745 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 5745 \text{ MHz}$; $\sigma = 5.247 \text{ S/m}$; $\epsilon_r = 35.472$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.72, 4.72, 4.72)
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562;Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Area Scan (121x121x1): Interpolated grid: $dx=0.8000 \text{ mm}$, $dy=0.8000 \text{ mm}$

Maximum value of SAR (interpolated) = 0.489 W/kg


Zoom Scan (8x8x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 4.572 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.491 W/kg

SAR(1 g) = 0.266 W/kg; SAR(10 g) = 0.118 W/kg

Maximum value of SAR (measured) = 0.448 W/kg

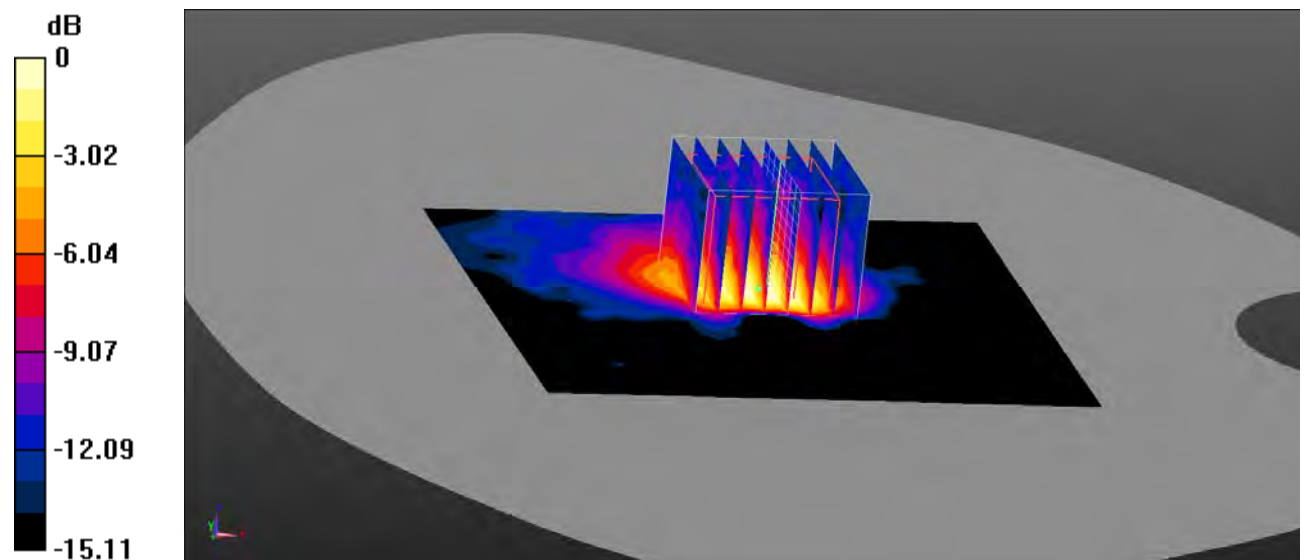

0 dB = 0.448 W/kg = -3.49 dBW/kg