



Test Data


Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	BLE	2402	Ant1	2.976	30	Pass
NVNT	BLE	2442	Ant1	2.465	30	Pass
NVNT	BLE	2480	Ant1	2.118	30	Pass







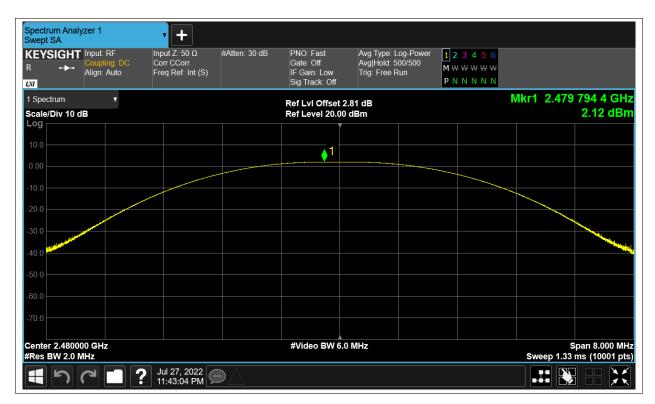





-6dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	limit	Verdic
NVNT	BLE	2402	Ant1	0.681	0.5	Pass
NVNT	BLE	2442	Ant1	0.684	0.5	Pass
NVNT	BLE	2480	Ant1	0.684	0.5	Pass













Occupied Channel Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)	
NVNT	BLE	2402	Ant1	1.045692069	
NVNT	BLE	2442	Ant1	1.048262732	
NVNT	BLE	2480	Ant1	1.046107344	













Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Antenna	Max PSD (dBm)	Limit (dBm)	Verdict
NVNT	BLE	2402	Ant1	-3.356	8	Pass
NVNT	BLE	2442	Ant1	-3.819	8	Pass
NVNT	BLE	2480	Ant1	-4.124	8	Pass















Band Edge

	Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
	NVNT	BLE	2402	Ant1	-50.79	-20	Pass
Ī	NVNT	BLE	2480	Ant1	-50.92	-20	Pass



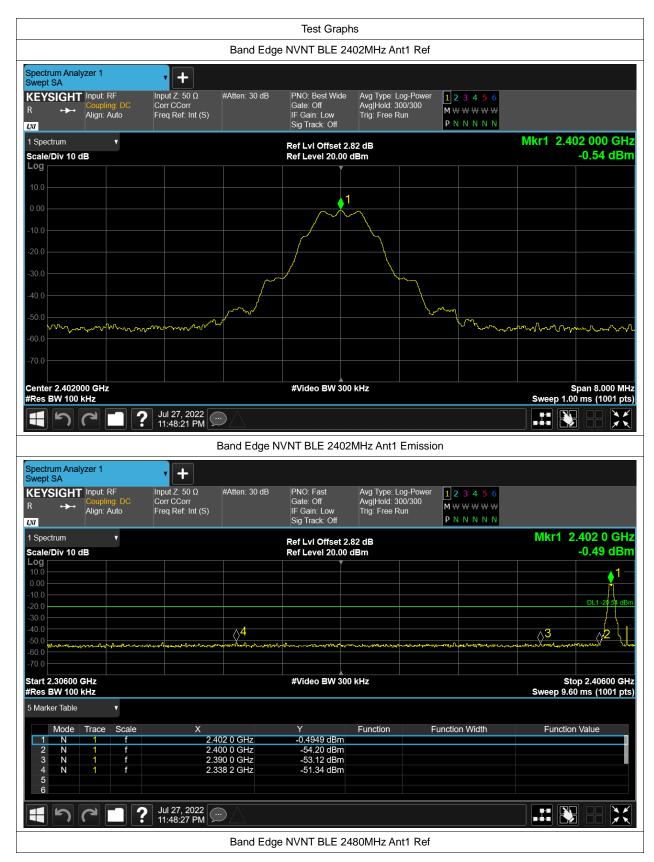



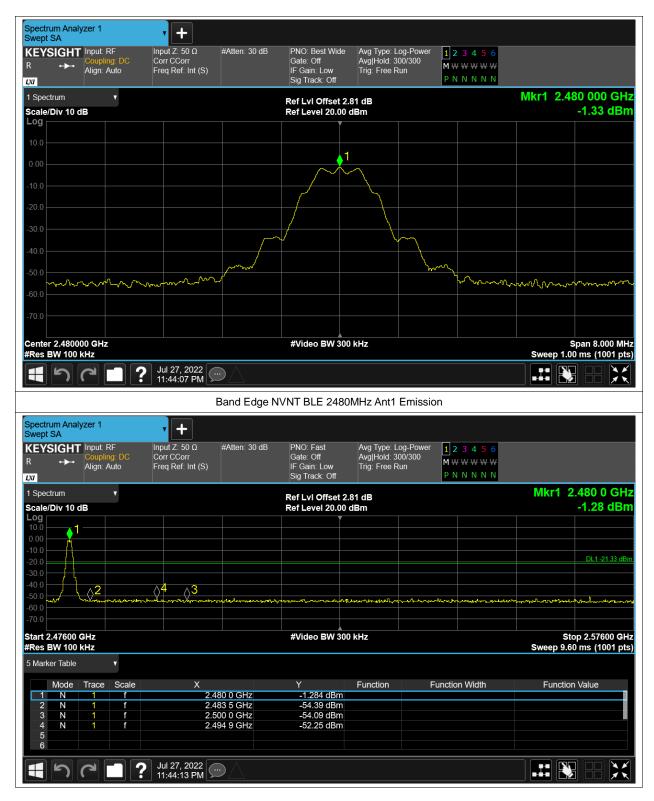





Conducted RF Spurious Emission

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE	2402	Ant1	-45.74	-20	Pass
NVNT	BLE	2442	Ant1	-45.45	-20	Pass
NVNT	BLE	2480	Ant1	-45.71	-20	Pass











