



TESTREPORT

Applicant Name : INFINIX MOBILITY LIMITED
Address : FLAT 39 8/F BLOCK D WAH LOK INDUSTRIAL CENTRE 31-35
SHAN MEI STREET FOTAN NT, Hong Kong
Report Number : SZNS220127-03898E-RF-00C
FCC ID: 2AIZN-X6817B

Test Standard (s)

FCC PART 27; FCC PART 22H; FCC PART 24E

Sample Description

Product Type: Mobile Phone
Model No.: X6817B
Multiple Model(s) No.: N/A
Trade Mark: Infinix
Date Received: 2022/01/27
Date of Test: 2022/02/11~2022/03-24
Report Date: 2022/03/24

Test Result:	Pass*
--------------	-------

* In the configuration tested, the EUT complied with the standards above.

Prepared and Checked By:

Ting Lü
EMC Engineer

Approved By:

Robert Li
EMC Engineer

Note: This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk "★".

Shenzhen Accurate Technology Co., Ltd. is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with an asterisk "*". Customer model name, addresses, names, trademarks etc. are not considered data.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

Shenzhen Accurate Technology Co., Ltd.

1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China

Tel: +86 755-26503290

Fax: +86 755-26503396

Web: www.atc-lab.com

TABLE OF CONTENTS

GENERAL INFORMATION.....	3
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	3
OBJECTIVE	3
TEST METHODOLOGY	4
MEASUREMENT UNCERTAINTY.....	4
TEST FACILITY	4
SYSTEM TEST CONFIGURATION.....	5
DESCRIPTION OF TEST CONFIGURATION	5
EQUIPMENT MODIFICATIONS	6
SUPPORT EQUIPMENT LIST AND DETAILS	6
SUPPORT CABLE DESCRIPTION	6
BLOCK DIAGRAM OF TEST SETUP	7
SUMMARY OF TEST RESULTS	8
TEST EQUIPMENT LIST	9
FCC §1.1307(B)&§2.1093 - RF EXPOSURE INFORMATION.....	11
FCC§2.1047 - MODULATION CHARACTERISTIC	12
FCC § 2.1046,§ 22.913 (A)&§ 24.232(C); §27.50(D)(H)- RF OUTPUT POWER	13
APPLICABLE STANDARD	13
TEST PROCEDURE	13
TEST DATA	13
FCC §2.1049, §22.917, §22.905 & §24.238&§27.53 - OCCUPIED BANDWIDTH.....	35
APPLICABLE STANDARD	35
TEST PROCEDURE	35
TEST DATA	35
FCC §2.1051, §22.917(A) & §24.238(A)& §27.53 - SPURIOUS EMISSIONS AT ANTENNA TERMINALS...62	62
APPLICABLE STANDARD	62
TEST PROCEDURE	62
TEST DATA	62
FCC § 2.1053; § 22.917 (A);§ 24.238 (A); §27.53- SPURIOUS RADIATED EMISSIONS.....	82
APPLICABLE STANDARD	82
TEST PROCEDURE	82
TEST DATA	82
FCC§ 22.917 (A);§ 24.238 (A); §27.53 (H)(M) - BAND EDGES	94
APPLICABLE STANDARD	94
TEST PROCEDURE	94
TEST DATA	94
FCC § 2.1055; § 22.355; § 24.235; §27.54 - FREQUENCY STABILITY	108
APPLICABLE STANDARD	108
TEST PROCEDURE	108
TEST DATA	109

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Frequency Range	GSM 850: 824-849MHz(TX); 869-894MHz(RX) PCS 1900: 1850-1910MHz(TX); 1930-1990MHz(RX) WCDMA Band 2: 1850-1910MHz(TX); 1930-1990MHz(RX) WCDMA Band 4: 1710-1755MHz(TX); 2110-2155MHz(RX) WCDMA Band 5: 824-849MHz(TX); 869-894MHz(RX) LTE Band 2: 1850-1910MHz(TX); 1930-1990MHz(RX) LTE Band 4: 1710-1755MHz(TX); 2110-2155MHz(RX) LTE Band 5: 824-849MHz(TX); 869-894MHz(RX) LTE Band 7: 2500-2570MHz(TX); 2620-2690MHz(RX) LTE Band 38: 2570-2620MHz(TX/RX) LTE Band 41: 2535-2655MHz(TX/RX)
Modulation Technique	2G: GMSK, 8PSK 3G: BPSK, QPSK, 16QAM 4G: QPSK, 16QAM
Antenna Specification*	GSM850/WCDMA Band5/LTE Band 5: -3.8dBi PCS1900/WCDMA Band 2/ LTE Band 2: 0.1dBi WCDMA Band 4/ LTE Band 4: -0.8dBi LTE Band 7: -0.7dBi LTE Band 38/LTE Band 41: -0.7dBi (provided by the applicant)
Voltage Range	DC 3.87V from battery, DC 5.0V or 7.5V from adapter
Sample serial number	SZNS220127-03898E-RF-S1 for Conducted and Radiated Emissions SZNS220127-03898E-RF-S2 for RF Conducted Test (Assigned by ATC)
Sample/EUT Status	Good condition
Adapter information	Model: U180XSA Input: AC 100-240V, 50/60Hz, 0.6A Output: DC 5.0V, 2.4A or 7.5V, 2.4A, 18.0W Max
Extreme condition*	L.V.: Low Voltage 3.45V N.V.: Normal Voltage 3.87V H.V.: High Voltage 4.45V (provided by the applicant)

Objective

This test report is in accordance with Part 2-Subpart J, Part 22-Subpart H, Part 24-Subpart E, and Subpart 27 of the Federal Communication Commission's rules.

The objective is to determine the compliance of the EUT with FCC rules for output power, modulation characteristic, occupied bandwidth, and spurious emission at antenna terminal, spurious radiated emission, frequency stability and band edge.

Test Methodology

All tests and measurements indicated in this document were performed in accordance with the Code of Federal Regulations Title 47 Part 2-Subpart J as well as the following parts:

Part 22 Subpart H - Public Mobile Services
 Part 24 Subpart E - Personal Communication Services
 Part 27 - Miscellaneous Wireless Communications Services

ANSI C63.26-2015: American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services

All emissions measurement was performed at Shenzhen Accurate Technology Co., Ltd. The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement Uncertainty

Parameter		Uncertainty
Occupied Channel Bandwidth		±5%
RF output power, conducted		±0.73dB
Unwanted Emission, conducted		±1.6dB
RF Frequency		±0.082*10 ⁻⁷
Emissions, Radiated	30MHz - 1GHz	±4.28dB
	1GHz - 18GHz	±4.98dB
	18GHz - 26.5GHz	±5.06dB
Temperature		±1°C
Humidity		±6%
Supply voltages		±0.4%

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

Test Facility

The Test site used by Shenzhen Accurate Technology Co., Ltd. to collect test data is located on the 1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No.: 708358, the FCC Designation No.: CN1189. Accredited by American Association for Laboratory Accreditation (A2LA) The Certificate Number is 429 7.01.

Listed by Innovation, Science and Economic Development Canada (ISED), the Registration Number is 5077A.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The final qualification test was performed with the EUT operating at normal mode.

Test was performed as below table:

Frequency band	Bandwidth (MHz)	Test Frequency(MHz)		
		Low	Middle	High
GSM850	0.25	824.2	836.6	848.8
DCS1900	0.25	1850.2	1880	1909.8
WCDMA B2	4.2	1852.4	1880	1907.6
WCDMA B4	4.2	1712.4	1732.6	1752.6
WCDMA B5	4.2	826.4	836.6	846.6
LTE B2	1.4	1850.7	1880	1909.3
	3	1851.5	1880	1908.5
	5	1852.5	1880	1907.5
	10	1855	1880	1905
	15	1857.5	1880	1902.5
	20	1860	1880	1900
LTE B4	1.4	1710.7	1732.5	1754.3
	3	1711.5	1732.5	1753.5
	5	1712.5	1732.5	1752.5
	10	1715	1732.5	1750
	15	1717.5	1732.5	1747.5
	20	1720	1732.5	1745
LTE B5	1.4	824.7	836.5	848.3
	3	825.5	836.5	847.5
	5	826.5	836.5	846.5
	10	829	836.5	844
LTE B7	5	2502.5	2535	2567.5
	10	2505	2535	2565
	15	2507.5	2535	2562.5
	20	2510	2535	2560

Frequency band	Bandwidth (MHz)	Test Frequency(MHz)		
		Low	Middle	High
LTE B38	5	2572.5	2595	2617.5
	10	2575	2595	2615
	15	2577.5	2595	2612.5
	20	2580	2595	2610
LTE B41	5	2537.5	2595	2652.5
	10	2540	2595	2650
	15	2542.5	2595	2647.5
	20	2545	2595	2645

Equipment Modifications

No modification was made to the EUT.


Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
Rohde & Schwarz	Wideband Radio Communication Tester	CMW500	154606

Support Cable Description

Cable Description	Length (m)	From / Port	To
Un-shielded Un-detachable AC cable	1.2	AC Power	CMW500

Block Diagram of Test Setup

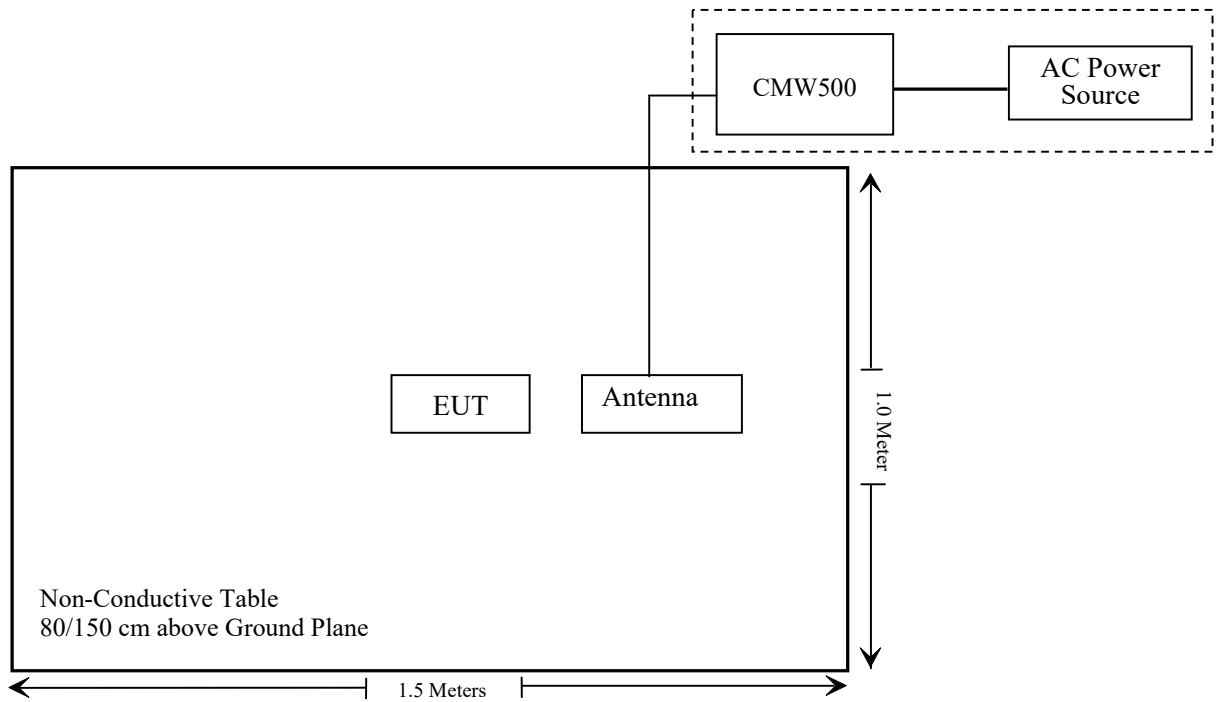

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§ 1.1307 ,§2.1093	RF Exposure (SAR)	Compliant*
§2.1046; § 22.913 (a); § 24.232 (c); §27.50 (d) (h);	RF Output Power	Compliant
§ 2.1047	Modulation Characteristics	Not Applicable
§ 2.1049; § 22.905; § 22.917; § 24.238; §27.53	Occupied Bandwidth	Compliant
§ 2.1051; §22.917 (a); § 24.238 (a); §27.53;	Spurious Emissions at Antenna Terminal	Compliant
§ 2.1053; § 22.917 (a); § 24.238 (a); §27.53	Field Strength of Spurious Radiation	Compliant
§ 22.917 (a); § 24.238 (a); §27.53 (h) (m)	Band Edge	Compliant
§ 2.1055; § 22.355; § 24.235; §27.54;	Frequency stability	Compliant

Note: * Please refer to SAR report number: SZNS220127-03898E-SA.

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Radiated Emission Test					
Rohde& Schwarz	Test Receiver	ESR	102725	2021/12/13	2022/12/12
Rohde&Schwarz	Spectrum Analyzer	FSV40	101949	2021/12/13	2022/12/12
SONOMA INSTRUMENT	Amplifier	310 N	186131	2021/11/09	2022/11/08
A.H. Systems, inc.	Preamplifier	PAM-0118P	135	2021/11/09	2022/11/08
Quinstar	Amplifier	QLW-184055 36-J0	15964001002	2021/11/11	2022/11/10
Radiated Emission Test Software: e3 19821b (V9)					
Unknown	RF Coaxial Cable	No.10	N050	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.11	N1000	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.12	N040	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.13	N300	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.14	N800	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.15	N600	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.16	N650	2021/12/14	2022/12/13
Schwarzbeck	Bilog Antenna	VULB9163	9163-194	2020/01/05	2023/01/04
Schwarzbeck	Bilog Antenna	VULB9163	9163-323	2021/07/06	2024/07/05
Schwarzbeck	Horn Antenna	BBHA9120D	9120D-655	2020/01/05	2023/01/04
Schwarzbeck	Horn Antenna	BBHA9120D	9120D-1067	2020/01/05	2023/01/04
PASTERNAK	Horn Antenn	PE9852/2F-20	1120	2020/01/05	2023/01/04
PASTERNAK	Horn Antenn	PE9852/2F-20	1120	2020/01/05	2023/01/04
Wainwright	High Pass Filter	WHKX3.6/18 G-10SS	5	2021/12/14	2022/12/13
CD	High Pass Filter	HPM-1.2/18G -60	110	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.16	N200	2021/12/14	2022/12/13
Agilent	Signal Generator	N5183A	MY51040755	2021/12/13	2022/12/12

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
RF Conducted Test					
Rohde & Schwarz	Spectrum Analyzer	FSU26	200982	2021/07/06	2022/07/05
Rohde & Schwarz	Spectrum Analyzer	FSV-40	101495	2021/12/13	2022/12/12
Rohde & Schwarz	Wideband Radio Communication Tester	CMW500	154606	2021/12/13	2022/12/12
Mini-Circuits	Power Splitter	DC-18000MHz	SF10944151S	2021/12/14	2022/12/13
Gongwen	Temp. & Humid. Chamber	HSD-500	109	2021/10/14	2022/10/13
HP	6dB Attenuator	8493B 6dB Attenuator	2708A 04769	2021/12/14	2022/12/13
Fluke	Multi Meter	45	7664009	2021/12/14	2022/12/13
Manson	DC Power Source	KPS-6604	ATCS-205	NCR	NCR
Unknown	RF Cable	Unknown	Unknown	Each time	
Unknown	RF Coaxial Cable	No.31	RF-01	Each time	

* Statement of Traceability: Shenzhen Accurate Technology Co., Ltd. attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC §1.1307(b)&§2.1093 - RF EXPOSURE INFORMATION

Applicable Standard

FCC§1.1310 and §2.1093.

Test Result

Compliant, please refer to the SAR report: SZNS220127-03898E-SA.

FCC§2.1047 - MODULATION CHARACTERISTIC

According to FCC § 2.1047(d), Part 22H & 24E& 27, there is no specific requirement for digital modulation, therefore modulation characteristic is not presented.

FCC § 2.1046,§ 22.913 (a)&§ 24.232(c); §27.50(d)(h)- RF OUTPUT POWER

Applicable Standard

According to FCC §2.1046 and §22.913 (a), the ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 watts.

According to FCC §2.1046 and §24.232 (c),mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications.

The peak-to-average power ratio (PAPR) of the transmitter output power must not exceed 13 dB.


According to §27.50(d), Fixed, mobile, and portable (hand-held) stations operating in the 1710-1755 MHz band and mobile and portable stations operating in the 1695-1710 MHz and 1755-1780 MHz bands are limited to 1 watt EIRP.

According to §27.50(h), the maximum EIRP must not exceed 2Watts (33dBm) for 2496-2690 MHz.

Test Procedure

Conducted method:

The RF output of the transmitter was connected to the CMW500 through sufficient attenuation.



Test Data

Environmental Conditions

Temperature:	23.6~24.2 °C
Relative Humidity:	58~63 %
ATM Pressure:	101.0 kPa

The testing was performed by Key Pei from 2022-02-11 to 2022-02-24.

Cellular Band (Part 22H)

Mode	Channel	Frequency (MHz)	Average Output Power (dBm)	ERP(dBm)	Limit (dBm)
GSM	128	824.2	31.72	25.77	38.45
	190	836.6	31.76	25.81	38.45
	251	848.8	31.64	25.69	38.45

Mode	Channel	Frequency (MHz)	Average Output Power (dBm)				ERP(dBm)				Limit (dBm)
			1 slot	2 slots	3 slots	4 slots	1 slot	2 slots	3 slots	4 slots	
GPRS	128	824.2	31.59	30.51	28.59	26.32	25.64	24.56	22.64	20.37	38.45
	190	836.6	31.85	30.77	28.85	26.58	25.90	24.82	22.90	20.63	38.45
	251	848.8	31.63	30.55	28.63	26.36	25.68	24.60	22.68	20.41	38.45

Mode	Channel	Frequency (MHz)	Average Output Power (dBm)				ERP(dBm)				Limit (dBm)
			1 slot	2 slots	3 slots	4 slots	1 slot	2 slots	3 slots	4 slots	
EGPRS	128	824.2	24.94	23.86	21.94	19.67	18.99	17.91	15.99	13.72	38.45
	190	836.6	25.03	23.95	22.03	19.76	19.08	18.00	16.08	13.81	38.45
	251	848.8	24.82	23.74	21.82	19.55	18.87	17.79	15.87	13.60	38.45

Mode	Test Mode	3GPP Sub Test	Average Output Power (dBm)			ERP(dBm)		
			Low	Mid	High	Low	Mid	High
WCDMA (Band 5)	RMC12.2k		20.46	20.61	20.80	14.51	14.66	14.85
	HSDPA	1	21.27	20.97	20.69	15.32	15.02	14.74
		2	21.25	20.98	20.76	15.30	15.03	14.81
		3	21.23	21.02	20.88	15.28	15.07	14.93
		4	21.32	21.05	20.67	15.37	15.10	14.72
	HSUPA	1	21.22	20.35	20.46	15.27	14.40	14.51
		2	21.15	20.39	20.52	15.20	14.44	14.57
		3	21.23	20.44	20.55	15.28	14.49	14.60
		4	21.32	20.53	20.46	15.37	14.58	14.51
		5	21.25	20.64	20.48	15.30	14.69	14.53
HSPA+	1	21.19	20.49	20.65	15.24	14.54	14.70	

Note: ERP(dBm) = Conducted Power(dBm) + Antenna Gain(dBd)
 For GSM850/WCDMA B5: Antenna Gain = -3.8dBi = -5.95dBd (0dBd=2.15dBi)
 Limit: ERP ≤ 38.45dBm

PCS Band (Part 24E)

Mode	Channel	Frequency (MHz)	Average Output Power (dBm)	EIRP(dBm)	Limit (dBm)
GSM	512	1850.2	27.43	27.53	33
	661	1880.0	27.15	27.25	33
	810	1909.8	27.07	27.17	33

Mode	Channel	Frequency (MHz)	Average Output Power (dBm)				EIRP(dBm)				Limit (dBm)
			1 slot	2 slots	3 slots	4 slots	1 slot	2 slots	3 slots	4 slots	
GPRS	512	1850.2	27.75	26.67	24.75	22.48	27.85	26.77	24.85	22.58	33
	661	1880.0	27.54	26.46	24.54	22.27	27.64	26.56	24.64	22.37	33
	810	1909.8	27.48	26.4	24.48	22.21	27.58	26.5	24.58	22.31	33

Mode	Channel	Frequency (MHz)	Average Output Power (dBm)				EIRP(dBm)				Limit (dBm)
			1 slot	2 slots	3 slots	4 slots	1 slot	2 slots	3 slots	4 slots	
EGPRS	512	1850.2	24.99	23.91	21.99	19.72	25.09	24.01	22.09	19.82	33
	661	1880.0	24.83	23.75	21.83	19.56	24.93	23.85	21.93	19.66	33
	810	1909.8	24.79	23.71	21.79	19.52	24.89	23.81	21.89	19.62	33

Mode	Test Mode	3GPP Sub Test	Average Output Power (dBm)			EIRP(dBm)		
			Low	Mid	High	Low	Mid	High
WCDMA (Band 2)	RMC12.2k		17.28	17.02	17.00	17.38	17.12	17.10
	HSDPA	1	17.07	16.27	16.04	17.17	16.37	16.14
		2	17.10	16.45	16.10	17.20	16.55	16.20
		3	17.12	16.38	16.12	17.22	16.48	16.22
		4	17.13	16.52	16.21	17.23	16.62	16.31
	HSUPA	1	16.88	16.37	16.25	16.98	16.47	16.35
		2	16.79	16.38	16.38	16.89	16.48	16.48
		3	16.89	16.78	16.45	16.99	16.88	16.55
		4	16.88	16.82	16.56	16.98	16.92	16.66
		5	16.59	16.79	16.52	16.69	16.89	16.62
	HSPA+	1	16.79	16.82	16.48	16.89	16.92	16.58

Note: EIRP(dBm) = Conducted Power(dBm) + Antenna Gain(dBi)

For PCS1900 : Antenna Gain = 0.1dBi

Limit: EIRP ≤ 33dBm

AWS Band (Part 27)

Mode	Test Mode	3GPP Sub Test	Average Output Power (dBm)			EIRP(dBm)		
			Low	Mid	High	Low	Mid	High
WCDMA (Band 4)	RMC12.2k		17.21	17.48	17.05	16.41	16.68	16.25
	HSDPA	1	16.88	16.88	16.32	16.08	16.08	15.52
		2	16.87	16.78	16.44	16.07	15.98	15.64
		3	16.69	16.58	16.53	15.89	15.78	15.73
		4	16.84	16.72	16.41	16.04	15.92	15.61
	HSUPA	1	16.42	17.13	16.42	15.62	16.33	15.62
		2	16.38	16.45	16.43	15.58	15.65	15.63
		3	16.55	16.45	16.49	15.75	15.65	15.69
		4	16.54	16.59	16.52	15.74	15.79	15.72
		5	16.59	16.47	16.43	15.79	15.67	15.63
	HSPA+	1	16.88	16.44	16.48	16.08	15.64	15.68

Note: EIRP(dBm) = Conducted Power(dBm) + Antenna Gain(dBi)

For Band4: Antenna Gain = -0.8dBi

Limit: EIRP ≤ 30dBm

LTE Band 2

Bandwidth (MHz)	Modulation	RB size/ RB Offset	Conducted Average Output Power (dBm)			EIRP(dBm)		
			Low	Mid	High	Low	Mid	High
1.4	QPSK	RB1#0	15.18	15.20	14.67	15.28	15.30	14.77
		RB1#3	15.29	15.33	14.78	15.39	15.43	14.88
		RB1#5	15.08	15.10	14.64	15.18	15.20	14.74
		RB3#0	15.30	15.29	14.8	15.40	15.39	14.90
		RB3#3	15.30	15.31	14.76	15.40	15.41	14.86
		RB6#0	14.33	14.36	14.88	14.43	14.46	14.98
	16QAM	RB1#0	14.20	14.24	14.89	14.30	14.34	14.99
		RB1#3	14.41	14.42	14.08	14.51	14.52	14.18
		RB1#5	14.23	14.23	14.88	14.33	14.33	14.98
		RB3#0	14.53	14.44	14.85	14.63	14.54	14.95
		RB3#3	14.53	14.40	14.86	14.63	14.50	14.96
		RB6#0	14.34	14.28	13.95	14.44	14.38	14.05
3.0	QPSK	RB1#0	15.14	15.27	14.62	15.24	15.37	14.72
		RB1#8	15.26	15.27	14.78	15.36	15.37	14.88
		RB1#14	15.13	15.11	14.64	15.23	15.21	14.74
		RB6#0	14.30	14.21	14.81	14.40	14.31	14.91
		RB6#9	14.31	14.17	14.87	14.41	14.27	14.97
		RB15#0	14.34	14.31	14.87	14.44	14.41	14.97
	16QAM	RB1#0	14.77	14.42	14.69	14.87	14.52	14.79
		RB1#8	14.90	14.50	14.87	15.00	14.60	14.97
		RB1#14	14.76	14.37	14.76	14.86	14.47	14.86
		RB6#0	14.37	14.39	14.80	14.47	14.49	14.90
		RB6#9	14.37	14.35	14.87	14.47	14.45	14.77
		RB15#0	14.40	14.31	14.97	14.50	14.41	14.87

Bandwidth (MHz)	Modulation	RB size/ RB Offset	Conducted Average Output Power (dBm)			EIRP(dBm)		
			Low	Mid	High	Low	Mid	High
5.0	QPSK	RB1#0	14.86	14.95	14.23	14.96	15.05	14.33
		RB1#13	15.35	15.40	14.79	15.45	15.50	14.89
		RB1#24	14.88	14.89	14.36	14.98	14.99	14.46
		RB15#0	14.27	14.34	14.75	14.37	14.44	14.85
		RB15#10	14.29	14.32	14.83	14.39	14.42	14.93
		RB25#0	14.25	14.30	14.75	14.35	14.40	14.85
	16QAM	RB1#0	14.79	14.28	14.36	14.89	14.38	14.46
		RB1#13	14.30	14.75	14.97	14.40	14.85	15.07
		RB1#24	14.85	14.24	14.52	14.95	14.34	14.62
		RB15#0	14.33	14.31	14.79	14.43	14.41	14.89
		RB15#10	14.32	14.30	14.90	14.42	14.40	15.00
		RB25#0	14.30	14.28	14.81	14.40	14.38	14.91
10.0	QPSK	RB1#0	14.82	15.12	14.69	14.92	15.22	14.79
		RB1#25	15.07	15.31	14.67	15.17	15.41	14.77
		RB1#49	15.50	15.62	15.14	15.60	15.72	15.24
		RB25#0	14.05	14.39	14.82	14.15	14.49	14.92
		RB25#25	14.46	14.63	14.10	14.56	14.73	14.20
		RB50#0	14.26	14.52	14.96	14.36	14.62	15.06
	16QAM	RB1#0	14.39	14.31	14.69	14.49	14.41	14.79
		RB1#25	14.67	14.49	14.76	14.77	14.59	14.86
		RB1#49	15.08	14.82	14.18	15.18	14.92	14.28
		RB25#0	14.14	14.39	14.95	14.24	14.49	15.05
		RB25#25	14.55	14.63	14.23	14.65	14.73	14.33
		RB50#0	14.31	14.50	14.03	14.41	14.60	14.13

Bandwidth (MHz)	Modulation	RB size/ RB Offset	Conducted Average Output Power (dBm)			EIRP(dBm)		
			Low	Mid	High	Low	Mid	High
15.0	QPSK	RB1#0	15.43	15.77	15.55	15.53	15.87	15.65
		RB1#37	15.13	15.29	14.57	15.23	15.39	14.67
		RB1#74	15.58	15.68	15.07	15.68	15.78	15.17
		RB36#0	14.23	14.59	14.18	14.33	14.69	14.28
		RB36#18	14.37	14.56	14.90	14.47	14.66	15.00
		RB36#37	14.29	14.57	14.02	14.39	14.67	14.12
		RB75#0	14.98	15.00	15.05	15.08	15.10	15.15
	16QAM	RB1#0	14.74	14.50	14.10	14.84	14.60	14.20
		RB1#37	15.15	14.92	14.57	15.25	15.02	14.67
		RB1#74	14.38	14.58	14.13	14.48	14.68	14.23
		RB36#0	14.52	14.55	14.84	14.62	14.65	14.94
		RB36#18	14.43	14.56	14.97	14.53	14.66	14.07
		RB36#37	15.43	15.77	15.55	15.53	15.87	15.65
		RB75#0	15.13	15.29	14.57	15.23	15.39	14.67
20.0	QPSK	RB1#0	15.34	15.02	15.86	15.44	15.12	15.96
		RB1#49	15.22	15.38	14.75	15.32	15.48	14.85
		RB1#99	15.43	15.76	14.9	15.53	15.86	15.00
		RB50#0	14.37	14.78	14.65	14.47	14.88	14.75
		RB50#24	14.45	14.61	14.03	14.55	14.71	14.13
		RB50#49	14.40	14.63	14.33	14.50	14.73	14.43
		RB100#0	14.58	15.14	15.55	14.68	15.24	15.65
	16QAM	RB1#0	14.53	14.46	14.46	14.63	14.56	14.56
		RB1#49	14.68	14.86	14.62	14.78	14.96	14.72
		RB1#99	14.41	14.79	14.54	14.51	14.89	14.64
		RB50#0	15.43	15.77	15.55	15.53	15.87	15.65
		RB50#24	15.13	15.29	14.57	15.23	15.39	14.67
		RB50#49	15.58	15.68	15.07	15.68	15.78	15.17
		RB100#0	14.23	14.59	14.18	14.33	14.69	14.28

Note: EIRP(dBm) = Conducted Power(dBm) + Antenna Gain(dBi)

For Band2: Antenna Gain = 0.1dBi

Limit: EIRP ≤ 33dBm

LTE Band 4

Bandwidth (MHz)	Modulation	RB size/ RB Offset	Conducted Average Output Power (dBm)			EIRP(dBm)		
			Low	Mid	High	Low	Mid	High
1.4	QPSK	RB1#0	16.04	15.94	15.64	15.24	15.14	14.84
		RB1#3	16.25	16.14	15.75	15.45	15.34	14.95
		RB1#5	15.92	15.93	15.6	15.12	15.13	14.80
		RB3#0	16.15	16.03	15.72	15.35	15.23	14.92
		RB3#3	16.10	16.06	15.68	15.30	15.26	14.88
		RB6#0	15.21	15.16	14.84	14.41	14.36	14.04
	16QAM	RB1#0	15.07	15.02	14.89	14.27	14.22	14.09
		RB1#3	15.32	15.26	15.07	14.52	14.46	14.27
		RB1#5	14.99	15.09	14.86	14.19	14.29	14.06
		RB3#0	15.42	15.26	14.85	14.62	14.46	14.05
		RB3#3	15.43	15.28	14.85	14.63	14.48	14.05
		RB6#0	15.28	15.04	15.78	14.48	14.24	14.98
3.0	QPSK	RB1#0	16.01	15.92	15.66	15.21	15.12	14.86
		RB1#8	16.18	16.08	15.72	15.38	15.28	14.92
		RB1#14	16.15	15.94	15.57	15.35	15.14	14.77
		RB6#0	15.21	15.14	14.87	14.41	14.34	14.07
		RB6#9	15.32	15.18	14.85	14.52	14.38	14.05
		RB15#0	15.28	15.21	14.88	14.48	14.41	14.08
	16QAM	RB1#0	15.71	15.23	14.81	14.91	14.43	14.01
		RB1#8	15.91	15.38	14.9	15.11	14.58	14.10
		RB1#14	15.87	15.24	14.76	15.07	14.44	13.96
		RB6#0	14.35	14.12	14.74	13.55	13.32	13.94
		RB6#9	15.44	15.17	15.71	14.64	14.37	14.91
		RB15#0	15.40	15.10	14.86	14.60	14.30	14.06

Bandwidth (MHz)	Modulation	RB size/ RB Offset	Conducted Average Output Power (dBm)			EIRP(dBm)		
			Low	Mid	High	Low	Mid	High
5.0	QPSK	RB1#0	15.77	15.69	15.37	14.97	14.89	14.57
		RB1#13	16.41	16.18	15.82	15.61	15.38	15.02
		RB1#24	16.03	15.61	15.26	15.23	14.81	14.46
		RB15#0	15.24	15.14	14.88	14.44	14.34	14.08
		RB15#10	15.39	15.15	14.85	14.59	14.35	14.05
		RB25#0	15.27	15.12	14.82	14.47	14.32	14.02
	16QAM	RB1#0	14.71	15.13	15.59	13.91	14.33	14.79
		RB1#13	15.38	15.63	15.06	14.58	14.83	14.26
		RB1#24	15.01	15.07	15.51	14.21	14.27	14.71
		RB15#0	15.33	15.06	15.81	14.53	14.26	15.01
		RB15#10	15.48	15.07	15.79	14.68	14.27	14.99
		RB25#0	15.37	15.05	15.77	14.57	14.25	14.97
10.0	QPSK	RB1#0	15.45	15.91	15.62	14.65	15.11	14.82
		RB1#25	15.99	15.14	15.7	15.19	14.34	14.90
		RB1#49	15.57	15.19	15.97	14.77	14.39	15.17
		RB25#0	14.94	15.26	14.91	14.14	14.46	14.11
		RB25#25	15.53	15.46	15.12	14.73	14.66	14.32
		RB50#0	15.23	15.37	15.03	14.43	14.57	14.23
	16QAM	RB1#0	15.19	15.19	14.81	14.39	14.39	14.01
		RB1#25	15.75	15.38	14.91	14.95	14.58	14.11
		RB1#49	15.33	15.44	15.18	14.53	14.64	14.38
		RB25#0	15.89	15.14	15.96	15.09	14.34	15.16
		RB25#25	15.48	15.30	15.17	14.68	14.50	14.37
		RB50#0	15.15	15.18	15.02	14.35	14.38	14.22

Bandwidth (MHz)	Modulation	RB size/ RB Offset	Conducted Average Output Power (dBm)			EIRP(dBm)		
			Low	Mid	High	Low	Mid	High
15.0	QPSK	RB1#0	15.12	15.44	15.71	14.32	14.64	14.91
		RB1#38	16.08	16.07	15.90	15.28	15.27	15.10
		RB1#74	15.94	15.06	15.28	15.14	14.26	14.48
		RB36#0	15.14	15.48	15.37	14.34	14.68	14.57
		RB36#39	15.62	15.30	15.19	14.82	14.50	14.39
		RB75#0	15.38	15.39	15.27	14.58	14.59	14.47
	16QAM	RB1#0	15.79	15.97	16.20	14.99	15.17	15.40
		RB1#38	15.85	15.35	15.50	15.05	14.55	14.70
		RB1#74	15.62	15.56	15.77	14.82	14.76	14.97
		RB36#0	15.16	15.41	15.39	14.36	14.61	14.59
		RB36#39	15.63	15.25	15.22	14.83	14.45	14.42
		RB75#0	15.37	15.33	15.30	14.57	14.53	14.50
20.0	QPSK	RB1#0	15.51	16.13	16.05	14.71	15.33	15.25
		RB1#50	15.86	16.08	15.97	15.06	15.28	15.17
		RB1#99	15.44	15.76	15.29	14.64	14.96	14.49
		RB50#0	15.03	15.54	15.69	14.23	14.74	14.89
		RB50#50	15.59	15.33	15.36	14.79	14.53	14.56
		RB100#0	15.31	15.43	15.51	14.51	14.63	14.71
	16QAM	RB1#0	15.04	15.83	15.60	14.24	15.03	14.80
		RB1#50	15.27	15.42	15.76	14.47	14.62	14.96
		RB1#99	16.09	15.44	15.95	15.29	14.64	15.15
		RB50#0	15.90	15.43	15.82	15.10	14.63	15.02
		RB50#50	15.46	15.22	15.46	14.66	14.42	14.66
		RB100#0	15.19	15.32	15.63	14.39	14.52	14.83

Note: EIRP(dBm) = Conducted Power(dBm) + Antenna Gain(dBi)
For Band4: Antenna Gain = -0.8dBi
Limit: EIRP ≤ 30dBm

LTE Band 5

Bandwidth (MHz)	Modulation	RB size/ RB Offset	Conducted Average Output Power (dBm)			ERP(dBm)		
			Low	Mid	High	Low	Mid	High
1.4	QPSK	RB1#0	23.81	23.83	23.73	17.86	17.88	17.78
		RB1#3	23.82	23.94	23.77	17.87	17.99	17.82
		RB1#5	23.83	23.91	23.79	17.88	17.96	17.84
		RB3#0	23.85	24.04	23.81	17.90	18.09	17.86
		RB3#3	23.94	23.99	23.89	17.99	18.04	17.94
		RB6#0	22.85	22.97	22.85	16.90	17.02	16.90
	16QAM	RB1#0	23.36	23.62	23.57	17.41	17.67	17.62
		RB1#3	23.45	23.70	23.67	17.50	17.75	17.72
		RB1#5	23.42	23.66	23.65	17.47	17.71	17.70
		RB3#0	22.74	22.90	22.60	16.79	16.95	16.65
		RB3#3	22.69	22.86	22.67	16.74	16.91	16.72
		RB6#0	21.93	22.15	21.79	15.98	16.20	15.84
3.0	QPSK	RB1#0	23.85	23.98	23.82	17.90	18.03	17.87
		RB1#8	23.77	23.99	23.78	17.82	18.04	17.83
		RB1#14	23.84	24.02	23.85	17.89	18.07	17.90
		RB6#0	22.84	22.95	22.78	16.89	17.00	16.83
		RB6#9	22.87	22.97	22.81	16.92	17.02	16.86
		RB15#0	22.77	22.94	22.79	16.82	16.99	16.84
	16QAM	RB1#0	22.95	23.04	22.31	17.00	17.09	16.36
		RB1#8	22.95	23.03	22.27	17.00	17.08	16.32
		RB1#14	22.97	23.01	22.36	17.02	17.06	16.41
		RB6#0	22.03	22.14	21.82	16.08	16.19	15.87
		RB6#9	22.02	22.15	21.90	16.07	16.20	15.95
		RB15#0	21.91	22.09	21.78	15.96	16.14	15.83

Bandwidth (MHz)	Modulation	RB size/ RB Offset	Conducted Average Output Power (dBm)			ERP(dBm)		
			Low	Mid	High	Low	Mid	High
5.0	QPSK	RB1#0	23.76	24.06	23.72	17.81	18.11	17.77
		RB1#13	23.76	24.05	23.63	17.81	18.10	17.68
		RB1#24	23.85	24.08	23.71	17.90	18.13	17.76
		RB15#0	22.85	22.93	22.80	16.90	16.98	16.85
		RB15#10	22.95	22.93	22.83	17.00	16.98	16.88
		RB25#0	22.93	22.99	22.81	16.98	17.04	16.86
	16QAM	RB1#0	22.09	22.93	22.84	16.14	16.98	16.89
		RB1#13	22.12	22.97	22.83	16.17	17.02	16.88
		RB1#24	22.14	22.99	22.90	16.19	17.04	16.95
		RB15#0	21.98	21.90	21.79	16.03	15.95	15.84
		RB15#10	21.93	21.90	21.71	15.98	15.95	15.76
		RB25#0	22.06	21.96	21.90	16.11	16.01	15.95
10.0	QPSK	RB1#0	23.79	23.90	23.88	17.84	17.95	17.93
		RB1#25	23.86	23.99	23.79	17.91	18.04	17.84
		RB1#49	23.88	23.95	23.75	17.93	18.00	17.80
		RB25#0	22.89	23.00	22.93	16.94	17.05	16.98
		RB25#25	22.81	22.84	22.75	16.86	16.89	16.80
		RB50#0	22.94	22.93	22.85	16.99	16.98	16.90
	16QAM	RB1#0	23.26	23.57	22.73	17.31	17.62	16.78
		RB1#25	23.35	23.71	22.62	17.40	17.76	16.67
		RB1#49	23.33	23.65	22.67	17.38	17.70	16.72
		RB25#0	21.99	22.09	22.14	16.04	16.14	16.19
		RB25#25	22.05	22.05	21.99	16.10	16.10	16.04
		RB50#0	21.90	22.16	21.97	15.95	16.21	16.02

Note: ERP(dBm) = Conducted Power(dBm) + Antenna Gain(dBd)
For Band5: Antenna Gain = -3.8dBi = -5.95dBd (0dBd=2.15dBi)
Limit: ERP ≤ 38.45dBm

LTE Band 7

Bandwidth (MHz)	Modulation	RB size/ RB Offset	Conducted Average Output Power (dBm)			EIRP(dBm)		
			Low	Mid	High	Low	Mid	High
5.0	QPSK	RB1#0	16.95	17.40	17.63	16.25	16.70	16.93
		RB1#13	17.73	17.91	18.00	17.03	17.21	17.30
		RB1#24	17.37	17.48	17.34	16.67	16.78	16.64
		RB15#0	16.62	16.72	17.03	15.92	16.02	16.33
		RB15#10	16.79	16.76	16.94	16.09	16.06	16.24
		RB25#0	16.67	16.71	16.94	15.97	16.01	16.24
	16QAM	RB1#0	16.01	16.64	16.76	15.31	15.94	16.06
		RB1#13	16.74	17.17	17.15	16.04	16.47	16.45
		RB1#24	16.33	16.73	16.52	15.63	16.03	15.82
		RB15#0	15.66	15.69	16.15	14.96	14.99	15.45
		RB15#10	15.84	15.73	16.07	15.14	15.03	15.37
		RB25#0	15.73	15.70	16.08	15.03	15.00	15.38
10.0	QPSK	RB1#0	16.99	17.51	17.93	16.29	16.81	17.23
		RB1#25	17.78	17.85	18.11	17.08	17.15	17.41
		RB1#49	18.13	18.24	17.99	17.43	17.54	17.29
		RB25#0	16.54	16.76	17.21	15.84	16.06	16.51
		RB25#25	17.13	17.12	17.29	16.43	16.42	16.59
		RB50#0	16.85	16.95	17.26	16.15	16.25	16.56
	16QAM	RB1#0	16.66	16.59	17.02	15.96	15.89	16.32
		RB1#25	17.35	16.95	17.19	16.65	16.25	16.49
		RB1#49	17.83	17.35	17.13	17.13	16.65	16.43
		RB25#0	15.67	15.76	16.42	14.97	15.06	15.72
		RB25#25	16.28	16.13	16.50	15.58	15.43	15.80
		RB50#0	15.95	15.94	16.40	15.25	15.24	15.70

Bandwidth (MHz)	Modulation	RB size/ RB Offset	Conducted Average Output Power (dBm)			EIRP(dBm)		
			Low	Mid	High	Low	Mid	High
15.0	QPSK	RB1#0	17.84	18.07	18.71	17.14	17.37	18.01
		RB1#38	17.89	17.83	17.92	17.19	17.13	17.22
		RB1#74	18.47	18.38	18.04	17.77	17.68	17.34
		RB36#0	16.82	16.92	17.33	16.12	16.22	16.63
		RB36#39	17.19	17.09	17.07	16.49	16.39	16.37
		RB75#0	17.02	17.00	17.21	16.32	16.30	16.51
	16QAM	RB1#0	17.35	17.20	18.13	16.65	16.50	17.43
		RB1#38	17.48	16.93	17.37	16.78	16.23	16.67
		RB1#74	18.02	17.51	17.49	17.32	16.81	16.79
		RB36#0	15.94	15.89	16.46	15.24	15.19	15.76
		RB36#39	16.31	16.06	16.17	15.61	15.36	15.47
		RB75#0	16.12	15.96	16.31	15.42	15.26	15.61
20.0	QPSK	RB1#0	17.76	17.93	18.76	17.06	17.23	18.06
		RB1#50	18.03	17.88	18.03	17.33	17.18	17.33
		RB1#99	18.33	18.35	17.95	17.63	17.65	17.25
		RB50#0	17.15	16.98	17.60	16.45	16.28	16.9
		RB50#50	17.43	17.21	17.21	16.73	16.51	16.51
		RB100#0	17.27	17.09	17.39	16.57	16.39	16.69
	16QAM	RB1#0	17.16	17.15	18.35	16.46	16.45	17.65
		RB1#50	17.41	17.05	17.67	16.71	16.35	16.97
		RB1#99	17.76	17.57	17.58	17.06	16.87	16.88
		RB50#0	16.24	15.93	16.76	15.54	15.23	16.06
		RB50#50	16.51	16.15	16.37	15.81	15.45	15.67
		RB100#0	16.39	16.04	16.56	15.69	15.34	15.86

Note: ERP(dBm) = Conducted Power(dBm) + Antenna Gain(dBi)
For Band7: Antenna Gain = -0.7dBi
Limit: EIRP ≤ 33dBm

LTE Band 38

Bandwidth (MHz)	Modulation	RB size/ RB Offset	Conducted Average Output Power (dBm)			EIRP(dBm)		
			Low	Mid	High	Low	Mid	High
5.0	QPSK	RB1#0	17.85	18.67	18.25	17.15	17.97	17.55
		RB1#13	18.36	19.08	18.68	17.66	18.38	17.98
		RB1#24	17.92	18.53	18.14	17.22	17.83	17.44
		RB15#0	17.01	17.98	17.57	16.31	17.28	16.87
		RB15#10	17.06	17.93	17.50	16.36	17.23	16.80
		RB25#0	16.99	17.91	17.55	16.29	17.21	16.85
	16QAM	RB1#0	16.67	17.92	17.29	15.97	17.22	16.59
		RB1#13	17.26	18.32	17.71	16.56	17.62	17.01
		RB1#24	16.82	17.81	17.18	16.12	17.11	16.48
		RB15#0	16.18	17.11	16.62	15.48	16.41	15.92
		RB15#10	16.24	17.05	16.55	15.54	16.35	15.85
		RB25#0	16.19	16.98	16.62	15.49	16.28	15.92
10.0	QPSK	RB1#0	17.92	18.93	18.35	17.22	18.23	17.65
		RB1#25	18.29	18.98	18.75	17.59	18.28	18.05
		RB1#49	18.56	18.96	18.78	17.86	18.26	18.08
		RB25#0	17.01	18.06	17.69	16.31	17.36	16.99
		RB25#25	17.40	18.16	17.86	16.70	17.46	17.16
		RB50#0	17.22	18.13	17.80	16.52	17.43	17.10
	16QAM	RB1#0	16.96	17.97	17.53	16.26	17.27	16.83
		RB1#25	17.35	17.93	17.84	16.65	17.23	17.14
		RB1#49	17.61	18.03	17.97	16.91	17.33	17.27
		RB25#0	16.15	17.14	16.80	15.45	16.44	16.10
		RB25#25	16.51	17.22	16.97	15.81	16.52	16.27
		RB50#0	16.33	17.16	16.88	15.63	16.46	16.18

Bandwidth (MHz)	Modulation	RB size/ RB Offset	Conducted Average Output Power (dBm)			EIRP(dBm)		
			Low	Mid	High	Low	Mid	High
15.0	QPSK	RB1#0	18.55	19.82	19.26	17.85	19.12	18.56
		RB1#38	18.28	18.94	18.80	17.58	18.24	18.10
		RB1#74	18.50	19.25	19.00	17.80	18.55	18.30
		RB36#0	17.22	18.33	18.01	16.52	17.63	17.31
		RB36#39	17.24	18.04	17.96	16.54	17.34	17.26
		RB75#0	17.23	18.18	17.98	16.53	17.48	17.28
	16QAM	RB1#0	17.58	18.79	18.56	16.88	18.09	17.86
		RB1#38	17.32	17.89	18.09	16.62	17.19	17.39
		RB1#74	17.53	18.22	18.29	16.83	17.52	17.59
		RB36#0	16.35	17.34	17.15	15.65	16.64	16.45
		RB36#39	16.36	17.02	17.09	15.66	16.32	16.39
		RB75#0	16.32	17.21	17.07	15.62	16.51	16.37
20.0	QPSK	RB1#0	18.45	19.76	19.47	17.75	19.06	18.77
		RB1#50	18.41	18.89	18.74	17.71	18.19	18.04
		RB1#99	18.31	19.10	19.13	17.61	18.40	18.43
		RB50#0	17.41	18.47	18.25	16.71	17.77	17.55
		RB50#50	17.33	18.08	18.08	16.63	17.38	17.38
		RB100#0	17.36	18.27	18.13	16.66	17.57	17.43
	16QAM	RB1#0	17.33	18.81	18.74	16.63	18.11	18.04
		RB1#50	17.32	17.90	17.97	16.62	17.20	17.27
		RB1#99	17.20	18.15	18.39	16.50	17.45	17.69
		RB50#0	16.50	17.55	17.35	15.80	16.85	16.65
		RB50#50	16.41	17.17	17.19	15.71	16.47	16.49
		RB100#0	16.43	17.31	17.23	15.73	16.61	16.53

Note: EIRP(dBm) = Conducted Power(dBm) + Antenna Gain(dBi)
For Band38: Antenna Gain = -0.7dBi
Limit: EIRP ≤ 33dBm

LTE Band 41

Bandwidth (MHz)	Modulation	RB size/ RB Offset	Conducted Average Output Power (dBm)			EIRP(dBm)		
			Low	Mid	High	Low	Mid	High
5.0	QPSK	RB1#0	17.50	18.07	17.56	16.80	17.37	16.86
		RB1#13	17.81	18.53	17.94	17.11	17.83	17.24
		RB1#24	17.17	17.97	17.31	16.47	17.27	16.61
		RB15#0	16.70	17.34	16.86	16.00	16.64	16.16
		RB15#10	16.57	17.31	16.78	15.87	16.61	16.08
		RB25#0	16.60	17.30	16.79	15.90	16.60	16.09
	16QAM	RB1#0	16.63	17.02	16.64	15.93	16.32	15.94
		RB1#13	16.98	17.47	17.01	16.28	16.77	16.31
		RB1#24	16.31	16.93	16.37	15.61	16.23	15.67
		RB15#0	15.76	16.36	15.92	15.06	15.66	15.22
		RB15#10	15.62	16.32	15.82	14.92	15.62	15.12
		RB25#0	15.61	16.38	15.86	14.91	15.68	15.16
10.0	QPSK	RB1#0	17.61	18.32	17.85	16.91	17.62	17.15
		RB1#25	17.54	18.52	18.07	16.84	17.82	17.37
		RB1#49	17.74	18.40	17.98	17.04	17.70	17.28
		RB25#0	16.60	17.45	17.07	15.90	16.75	16.37
		RB25#25	16.68	17.57	17.14	15.98	16.87	16.44
		RB50#0	16.64	17.51	17.11	15.94	16.81	16.41
	16QAM	RB1#0	16.67	17.24	17.01	15.97	16.54	16.31
		RB1#25	16.72	17.37	17.14	16.02	16.67	16.44
		RB1#49	16.79	17.37	17.15	16.09	16.67	16.45
		RB25#0	15.65	16.52	16.14	14.95	15.82	15.44
		RB25#25	15.71	16.62	16.21	15.01	15.92	15.51
		RB50#0	15.68	16.54	16.17	14.98	15.84	15.47

Bandwidth (MHz)	Modulation	RB size/ RB Offset	Conducted Average Output Power (dBm)			EIRP(dBm)		
			Low	Mid	High	Low	Mid	High
15.0	QPSK	RB1#0	18.25	19.17	18.39	17.55	18.47	17.69
		RB1#38	17.49	18.50	17.87	16.79	17.80	17.17
		RB1#74	17.78	18.62	17.98	17.08	17.92	17.28
		RB36#0	16.73	17.68	17.10	16.03	16.98	16.40
		RB36#39	16.51	17.40	16.89	15.81	16.70	16.19
		RB75#0	16.61	17.54	17.00	15.91	16.84	16.30
	16QAM	RB1#0	17.31	17.96	17.61	16.61	17.26	16.91
		RB1#38	16.66	17.35	17.06	15.96	16.65	16.36
		RB1#74	16.83	17.42	17.18	16.13	16.72	16.48
		RB36#0	15.76	16.70	16.15	15.06	16.00	15.45
		RB36#39	15.54	16.41	15.94	14.84	15.71	15.24
		RB75#0	15.62	16.59	15.99	14.92	15.89	15.29
20.0	QPSK	RB1#0	18.20	19.04	18.23	17.50	18.34	17.53
		RB1#50	17.59	18.50	18.04	16.89	17.80	17.34
		RB1#99	17.83	18.44	17.91	17.13	17.74	17.21
		RB50#0	16.87	17.82	17.18	16.17	17.12	16.48
		RB50#50	16.67	17.46	17.04	15.97	16.76	16.34
		RB100#0	16.76	17.63	17.09	16.06	16.93	16.39
	16QAM	RB1#0	17.11	17.89	17.45	16.41	17.19	16.75
		RB1#50	16.64	17.42	17.21	15.94	16.72	16.51
		RB1#99	16.71	17.27	17.13	16.01	16.57	16.43
		RB50#0	15.88	16.90	16.17	15.18	16.20	15.47
		RB50#50	15.67	16.54	16.03	14.97	15.84	15.33
		RB100#0	15.77	16.67	16.07	15.07	15.97	15.37

Note: EIRP(dBm) = Conducted Power(dBm) + Antenna Gain(dBi)
For Band41: Antenna Gain = - 0.7dBi
Limit: EIRP ≤ 33dBm

Peak-to-average ratio (PAR)**Cellular Band**

Mode	Channel	PAR (dB)	Limit (dB)
GSM	Low	2.94	13
	Middle	2.86	13
	High	2.82	13

Mode	Channel	PAR (dB)	Limit (dB)
EGPRS	Low	2.68	13
	Middle	2.52	13
	High	2.52	13

Mode	Channel	PAR (dB)	Limit (dB)
RMC (BPSK)	Low	3.52	13
	Middle	3.67	13
	High	3.46	13
HSDPA (16QAM)	Low	3.52	13
	Middle	3.57	13
	High	3.59	13
HSUPA (BPSK)	Low	3.47	13
	Middle	3.42	13
	High	3.52	13
HSPA+	Low	3.45	13
	Middle	3.56	13
	High	3.55	13

PCS Band

Mode	Channel	PAR (dB)	Limit (dB)
GSM	Low	2.34	13
	Middle	2.21	13
	High	2.33	13

Mode	Channel	PAR (dB)	Limit (dB)
EGPRS	Low	2.26	13
	Middle	2.14	13
	High	2.46	13

Mode	Channel	PAR (dB)	Limit (dB)
RMC (BPSK)	Low	3.45	13
	Middle	3.56	13
	High	3.58	13
HSDPA (16QAM)	Low	3.51	13
	Middle	3.55	13
	High	3.46	13
HSUPA (BPSK)	Low	3.48	13
	Middle	3.42	13
	High	3.56	13
HSPA+	Low	3.47	13
	Middle	3.52	13
	High	3.46	13

AWS Band

Mode	Channel	PAR (dB)	Limit (dB)
RMC (BPSK)	Low	3.05	13
	Middle	3.16	13
	High	3.28	13
HSDPA (16QAM)	Low	3.34	13
	Middle	3.51	13
	High	3.46	13
HSUPA (BPSK)	Low	3.33	13
	Middle	3.42	13
	High	3.16	13
HSPA+	Low	3.21	13
	Middle	3.09	13
	High	3.36	13

LTE Band 2 20MHz Bandwidth

Modulation	Low channel (dB)	Middle channel (dB)	High channel (dB)	PAR Limit (dB)	Result
QPSK (1RB Size)	5.03	5.10	5.29	13	Pass
QPSK (100RB Size)	5.61	5.51	5.67	13	Pass
16QAM (1RB Size)	6.38	5.51	6.15	13	Pass
16QAM (100RB Size)	6.54	6.35	6.54	13	Pass

LTE Band 4 20MHz Bandwidth

Modulation	Low channel (dB)	Middle channel (dB)	High channel (dB)	PAR Limit (dB)	Result
QPSK (1RB Size)	5.93	5.22	5.61	13	Pass
QPSK (100RB Size)	5.74	5.71	5.74	13	Pass
16QAM (1RB Size)	6.41	6.12	6.86	13	Pass
16QAM (100RB Size)	6.60	6.60	6.67	13	Pass

LTE Band 5 10MHz Bandwidth

Modulation	Low channel (dB)	Middle channel (dB)	High channel (dB)	PAR Limit (dB)	Result
QPSK (1RB Size)	4.55	4.26	4.17	13	Pass
QPSK (50RB Size)	5.45	5.35	5.35	13	Pass
16QAM (1RB Size)	5.93	5.00	4.94	13	Pass
16QAM (50RB Size)	6.25	6.22	6.22	13	Pass

LTE Band 7 20MHz Bandwidth

Modulation	Low channel (dB)	Middle channel (dB)	High channel (dB)	PAR Limit (dB)	Result
QPSK (1RB Size)	5.74	5.42	5.29	13	Pass
QPSK (100RB Size)	5.64	5.64	5.54	13	Pass
16QAM (1RB Size)	6.15	7.15	7.02	13	Pass
16QAM (100RB Size)	6.51	6.51	6.35	13	Pass

LTE Band 38 20MHz Bandwidth

Modulation	Low channel (dB)	Middle channel (dB)	High channel (dB)	PAR Limit (dB)	Result
QPSK (1RB Size)	9.78	7.82	9.95	13	Pass
QPSK (100RB Size)	5.48	10.06	7.92	13	Pass
16QAM (1RB Size)	8.01	8.78	7.85	13	Pass
16QAM (100RB Size)	7.34	10.73	8.43	13	Pass

LTE Band 41 20MHz Bandwidth

Modulation	Low channel (dB)	Middle channel (dB)	High channel (dB)	PAR Limit (dB)	Result
QPSK (1RB Size)	8.21	10.29	8.52	13	Pass
QPSK (100RB Size)	9.49	7.37	8.01	13	Pass
16QAM (1RB Size)	8.24	5.99	8.40	13	Pass
16QAM (100RB Size)	8.08	10.35	8.49	13	Pass

FCC §2.1049, §22.917, §22.905 & §24.238&§27.53 - OCCUPIED BANDWIDTH


Applicable Standard

FCC 47 §2.1049, §22.917, §22.905, §24.238, and §27.53.

Test Procedure

The RF output of the transmitter was connected to the simulator and the spectrum analyzer through sufficient attenuation.

The resolution bandwidth of the spectrum analyzer was set at 1% to 5% of the anticipated emission bandwidth and the 26 dB & 99% bandwidth was recorded.

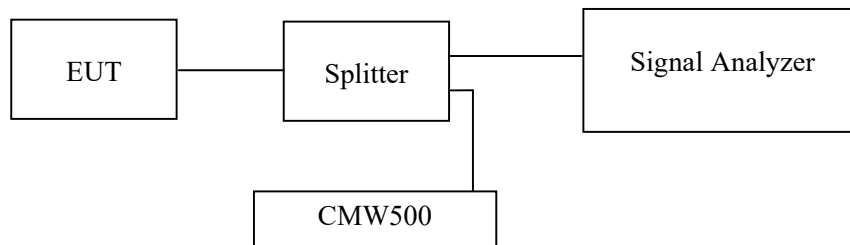

Test Data

Environmental Conditions

Temperature:	23.6~24.2 °C
Relative Humidity:	58~63 %
ATM Pressure:	101.0 kPa

The testing was performed by Key Pei from 2022-02-11 to 2022-03-24.

EUT operation mode: Transmitting

Test Result: Pass

Please refer to the following tables and plots.

Cellular Band (Part 22H)

Mode	Channel	Frequency (MHz)	99% Occupied Bandwidth (kHz)	26 dB Emission Bandwidth (kHz)
GSM(GMSK)	128	824.2	243.13	318.40
	190	836.6	244.57	321.30
	251	848.8	243.13	314.00
EGPRS(8PSK)	128	824.2	244.57	311.10
	190	836.6	243.13	311.10
	251	848.8	246.02	309.70

	Frequency (MHz)	Occupied Bandwidth (MHz)	26dB Bandwidth (MHz)
RMC	826.4	4.14	4.67
	836.6	4.16	4.70
	846.6	4.16	4.68
HSDPA	826.4	4.14	4.68
	836.6	4.16	4.67
	846.6	4.16	4.68
HSUPA	826.4	4.14	4.67
	836.6	4.16	4.67
	846.6	4.16	4.71

PCS Band (Part 24E)

Mode	Channel	Frequency (MHz)	99% Occupied Bandwidth (kHz)	26 dB Emission Bandwidth (kHz)
GSM(GMSK)	512	1850.2	244.57	311.10
	661	1880.0	243.13	315.50
	810	1909.8	241.68	311.10
EGPRS(8PSK)	512	1850.2	243.13	309.70
	661	1880.0	244.57	312.60
	810	1909.8	246.02	308.20


	Frequency (MHz)	Occupied Bandwidth (MHz)	26dB Bandwidth (MHz)
RMC	1852.4	4.16	4.68
	1880.0	4.16	4.66
	1907.6	4.16	4.68
HSDPA	1852.4	4.23	5.35
	1880.0	4.16	4.69
	1907.6	4.16	4.70
HSUPA	1852.4	4.16	4.68
	1880.0	4.16	4.69
	1907.6	4.16	4.68

AWS Band (Part 27)

	Frequency (MHz)	Occupied Bandwidth (MHz)	26dB Bandwidth (MHz)
RMC	1712.4	4.16	4.68
	1732.6	4.16	4.69
	1752.6	4.16	4.69
HSDPA	1712.4	4.16	4.71
	1732.6	4.16	4.69
	1752.6	4.16	4.70
HSUPA	1712.4	4.14	4.67
	1732.6	4.16	4.68
	1752.6	4.16	4.68


Cellular Band (Part 22H)

26 dB Emissions & 99% Occupied Bandwidth for GSM (GMSK) Mode, Low channel

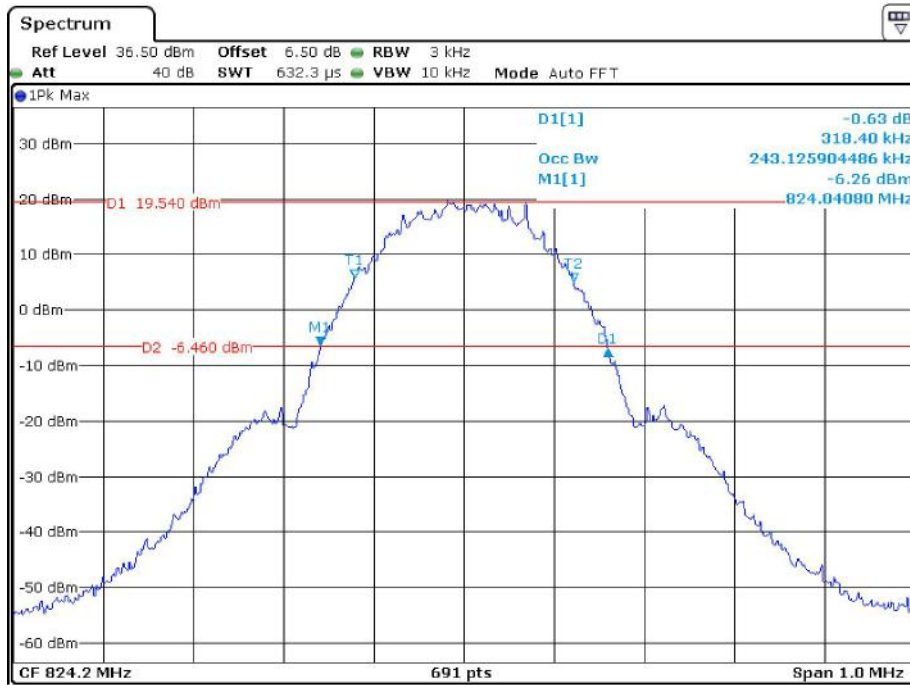


Date: 11.FEB.2022 14:17:51

26 dB Emissions & 99% Occupied Bandwidth for GSM (GMSK) Mode, Middle channel

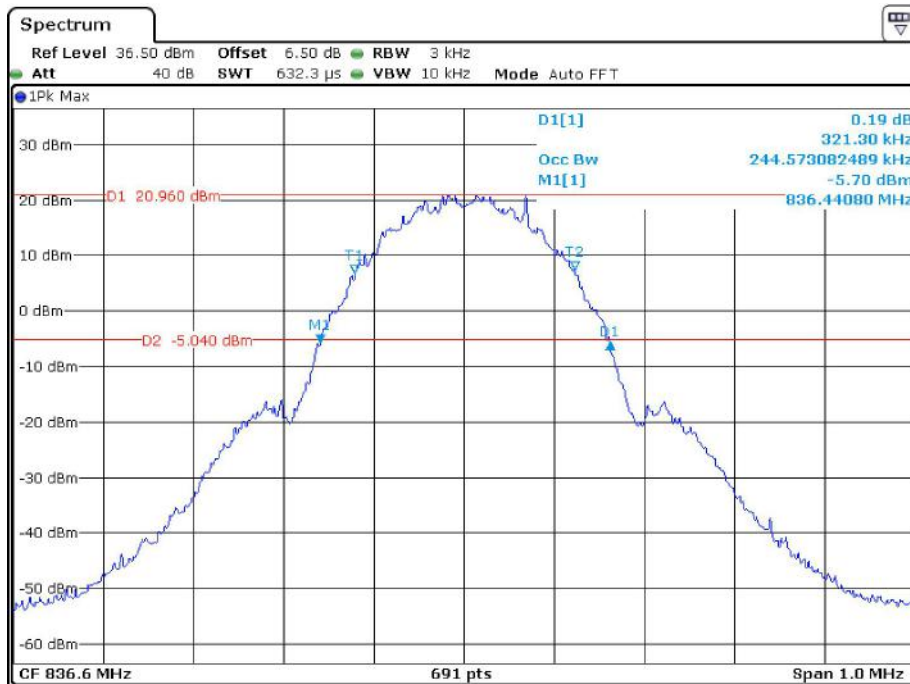


Date: 11.FEB.2022 14:17:09

26 dB Emissions & 99% Occupied Bandwidth for GSM (GMSK) Mode, High channel

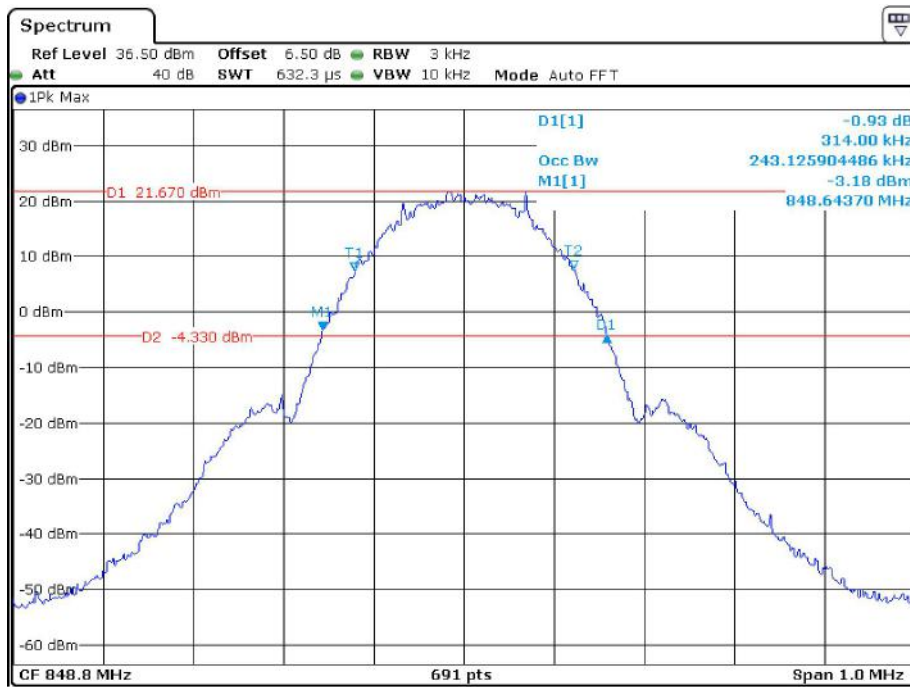


Date: 11.FEB.2022 14:16:12

26 dB Emissions & 99% Occupied Bandwidth for EGPRS (8PSK) Mode, Low channel

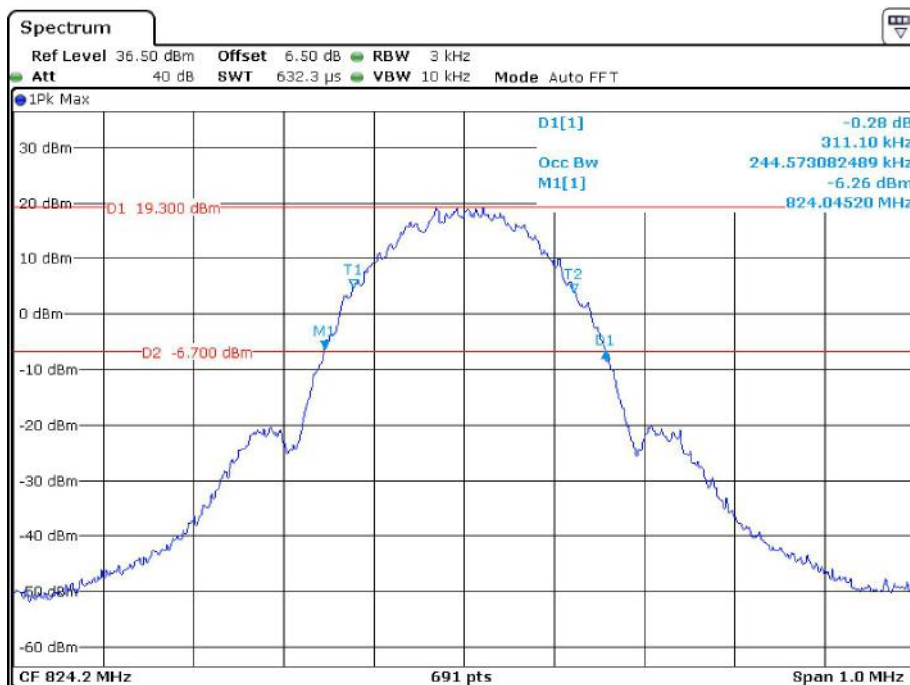


Date: 11.FEB.2022 14:23:28

26 dB Emissions & 99% Occupied Bandwidth for EGPRS (8PSK) Mode, Middle channel

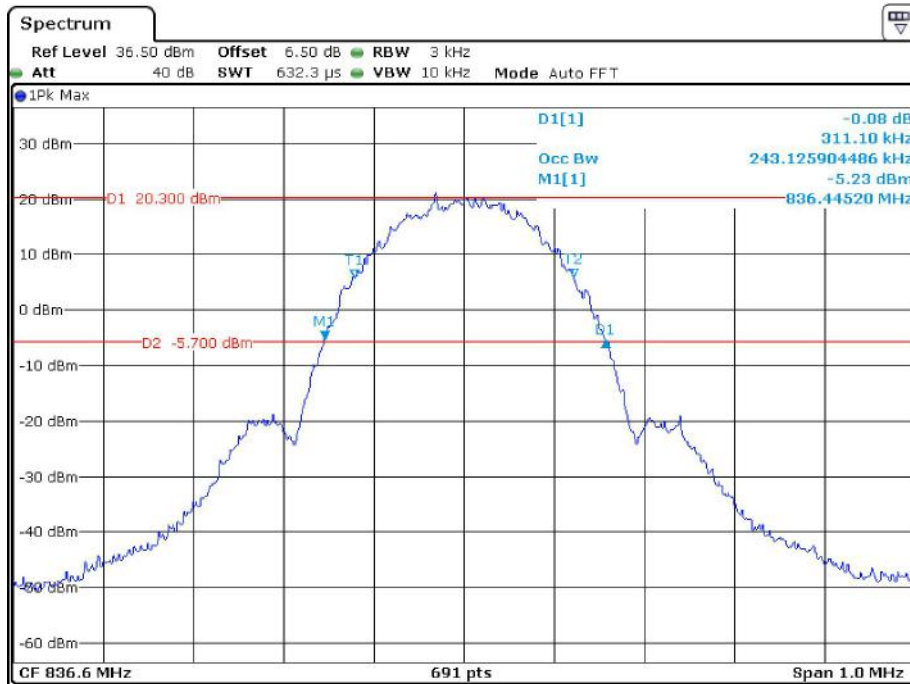


Date: 11.FEB.2022 14:22:38

26 dB Emissions & 99% Occupied Bandwidth for EGPRS (8PSK) Mode, High channel

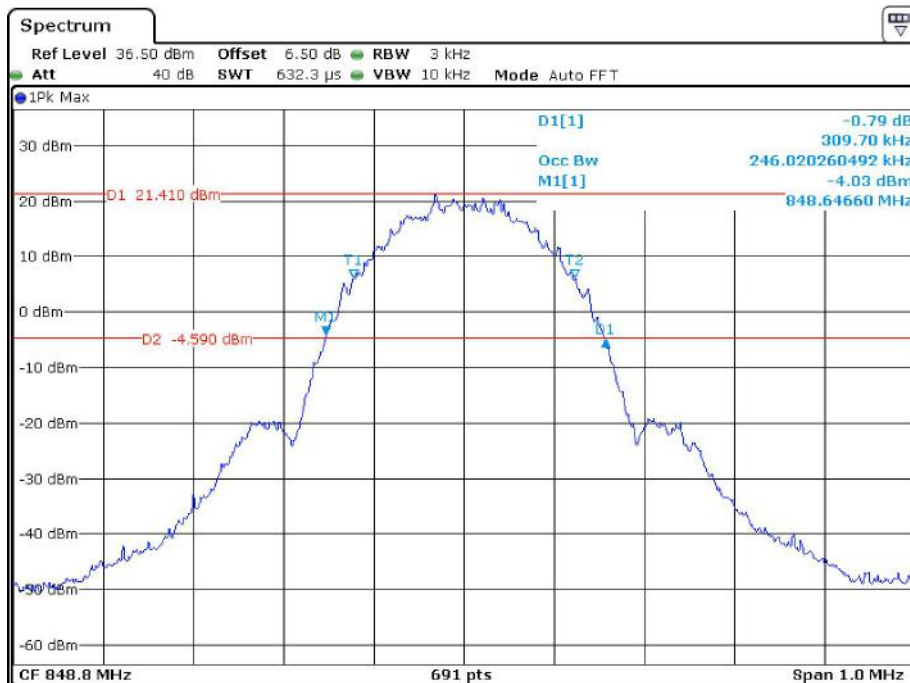


Date: 11.FEB.2022 14:21:31

26 dB Emissions & 99% Occupied Bandwidth for RMC (BPSK) Mode, Low channel

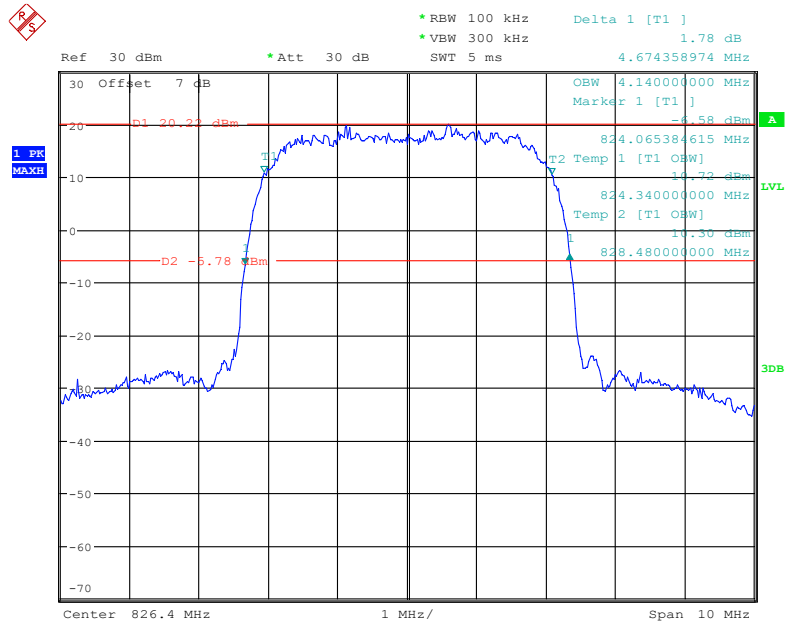


Date: 24.FEB.2022 09:13:52

26 dB Emissions & 99% Occupied Bandwidth for RMC (BPSK) Mode, Middle channel

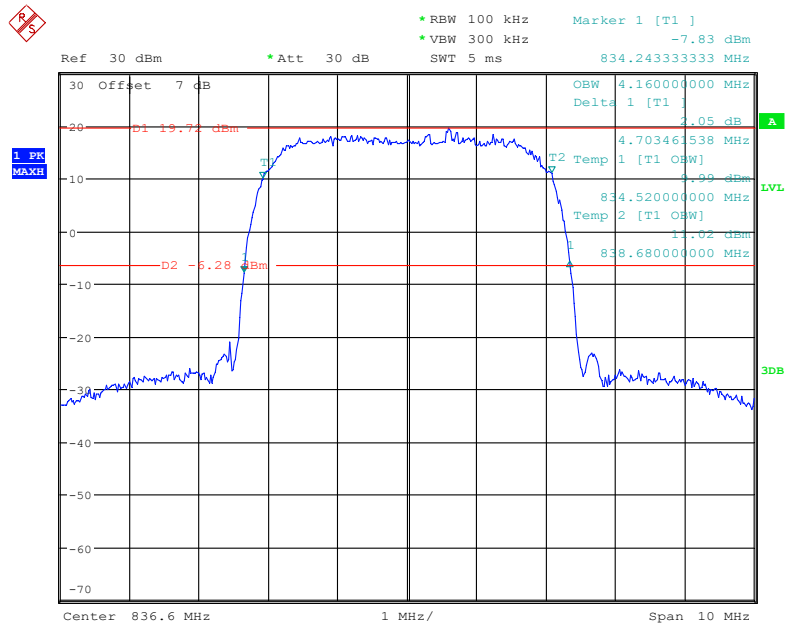


Date: 24.FEB.2022 09:12:51

26 dB Emissions & 99% Occupied Bandwidth for RMC (BPSK) Mode, High channel

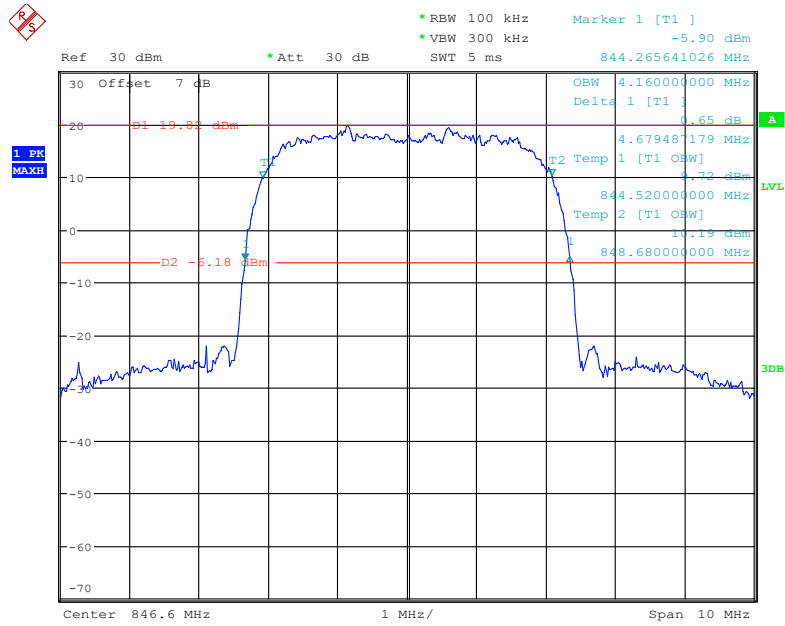


Date: 24.FEB.2022 09:11:24

26 dB Emissions & 99% Occupied Bandwidth for HSUPA (BPSK) Mode, Low channel

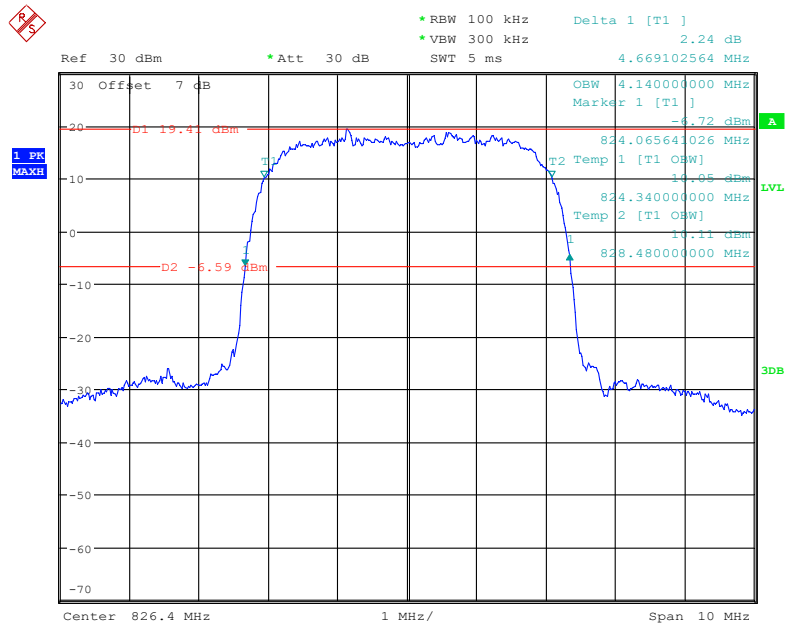


Date: 24.FEB.2022 09:41:59

26 dB Emissions & 99% Occupied Bandwidth for HSUPA (BPSK) Mode, Middle channel

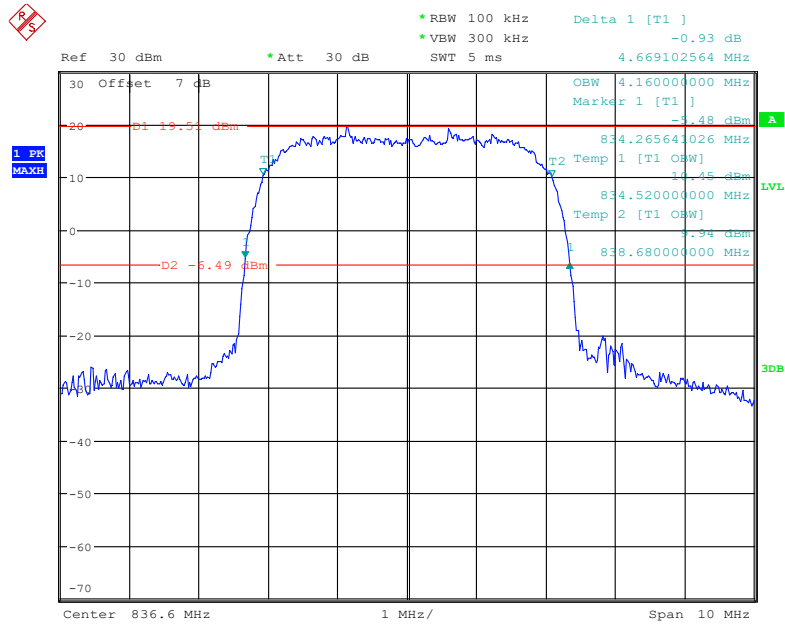


Date: 24.FEB.2022 09:40:35

26 dB Emissions & 99% Occupied Bandwidth for HSUPA (BPSK) Mode, High channel

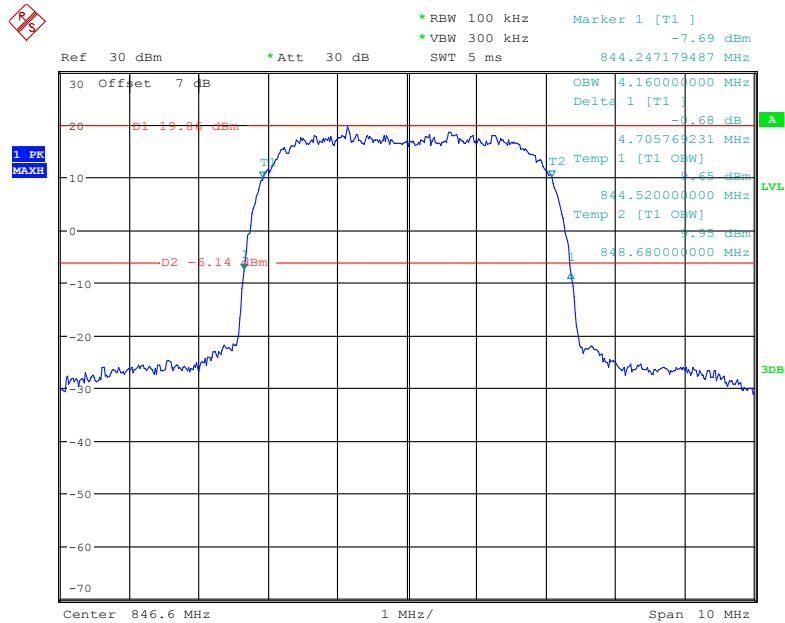


Date: 24.FEB.2022 09:38:42

26 dB Emissions & 99% Occupied Bandwidth for HSDPA (16QAM) Mode, Low channel

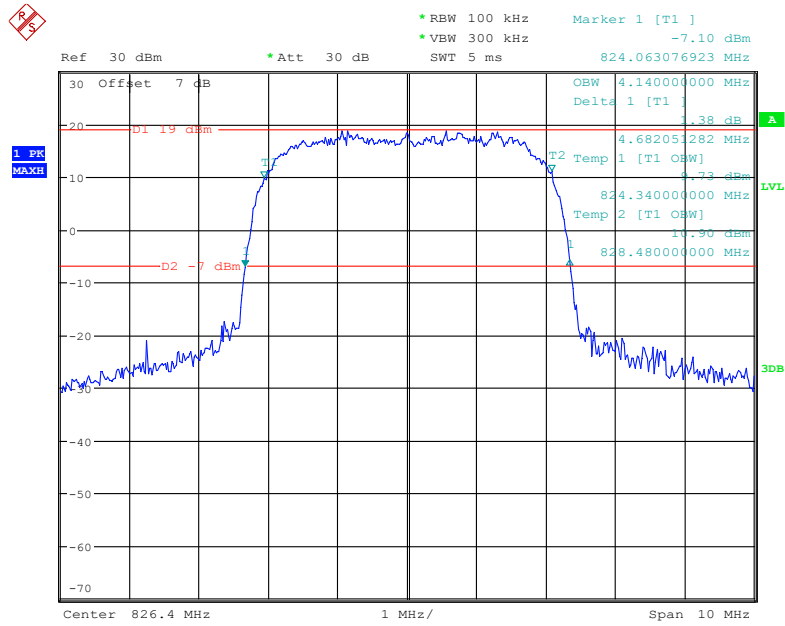


Date: 24.FEB.2022 09:28:25

26 dB Emissions & 99% Occupied Bandwidth for HSDPA (16QAM) Mode, Middle channel

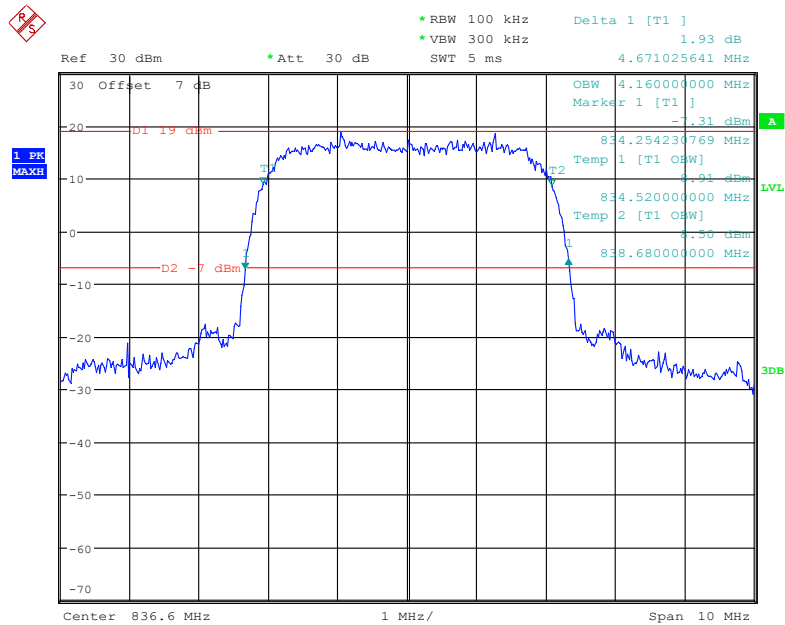

Date: 24.FEB.2022 09:29:11


26 dB Emissions & 99% Occupied Bandwidth for HSDPA (16QAM) Mode, High channel

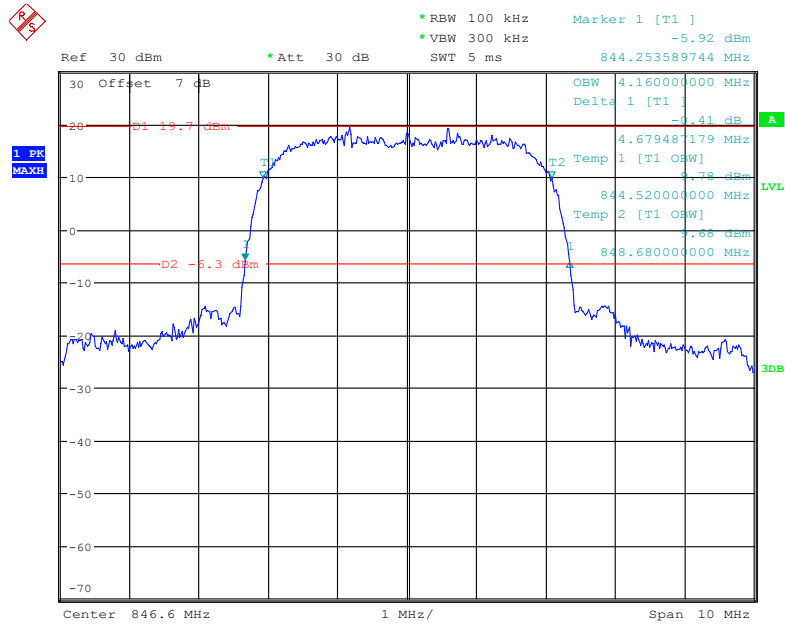

Date: 24.FEB.2022 09:30:10


PCS Band (Part 24E)

26 dB Emissions & 99% Occupied Bandwidth for GSM (GMSK) Mode, Low channel

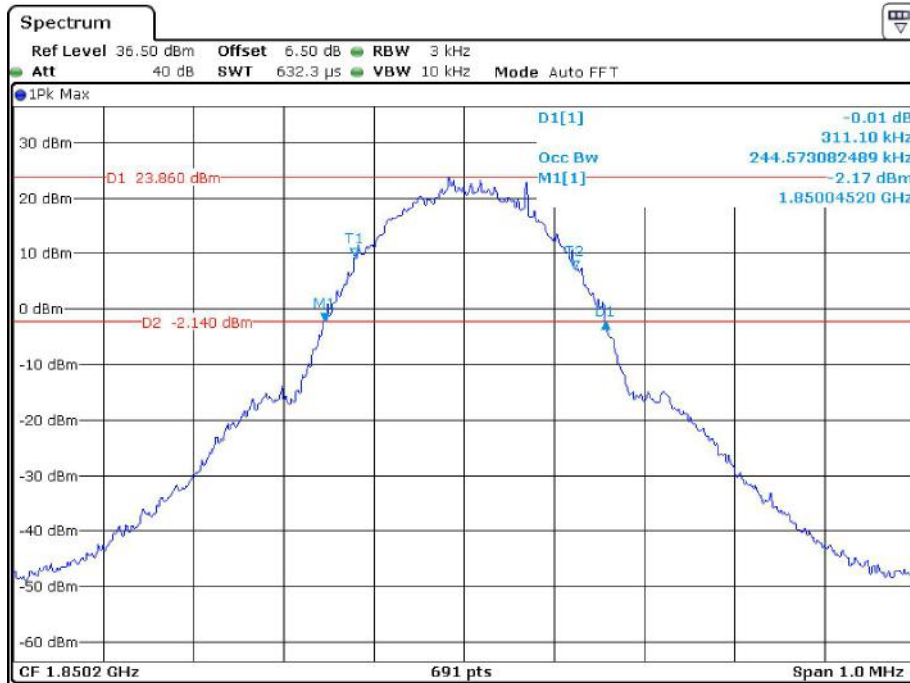


Date: 11.FEB.2022 13:42:31

26 dB Emissions & 99% Occupied Bandwidth for GSM (GMSK) Mode, Middle channel

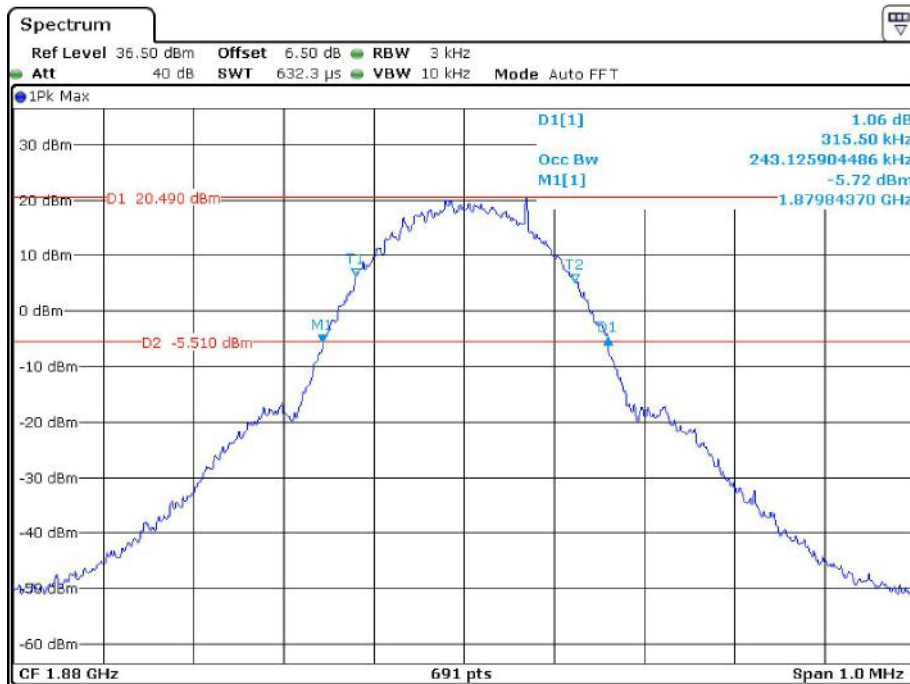


Date: 11.FEB.2022 13:41:35

26 dB Emissions & 99% Occupied Bandwidth for GSM (GMSK) Mode, High channel

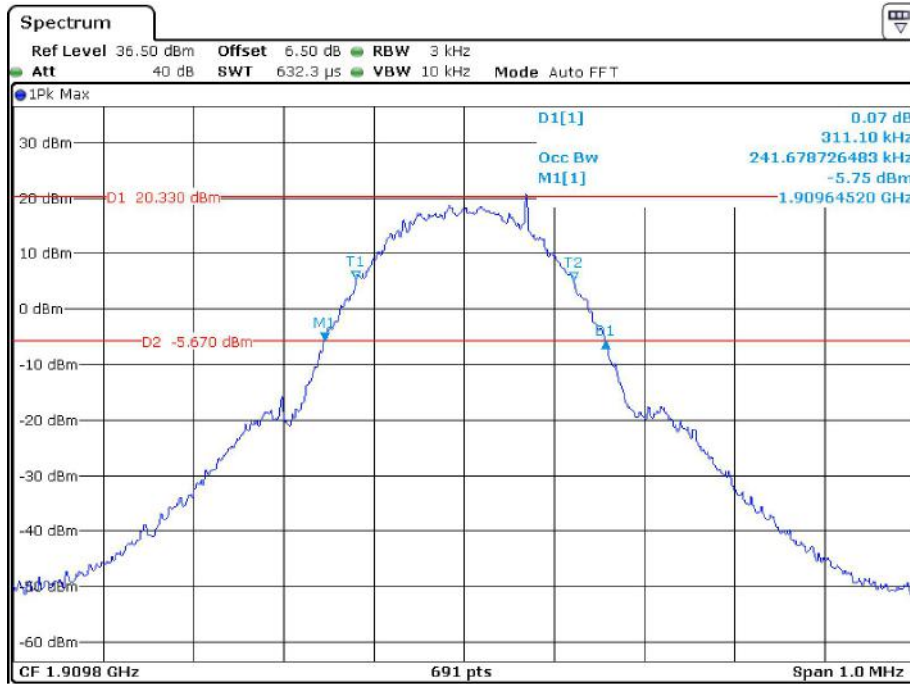


Date: 11.FEB.2022 13:40:52

26 dB Emissions & 99% Occupied Bandwidth for EGPRS (8PSK) Mode, Low channel

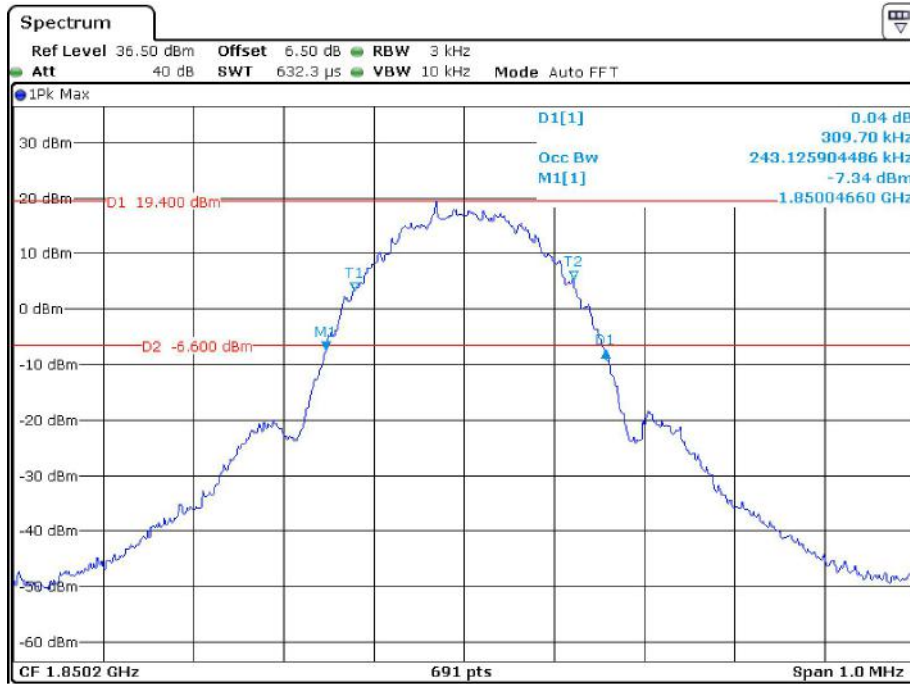


Date: 11.FEB.2022 13:59:47

26 dB Emissions & 99% Occupied Bandwidth for EGPRS (8PSK) Mode, Middle channel

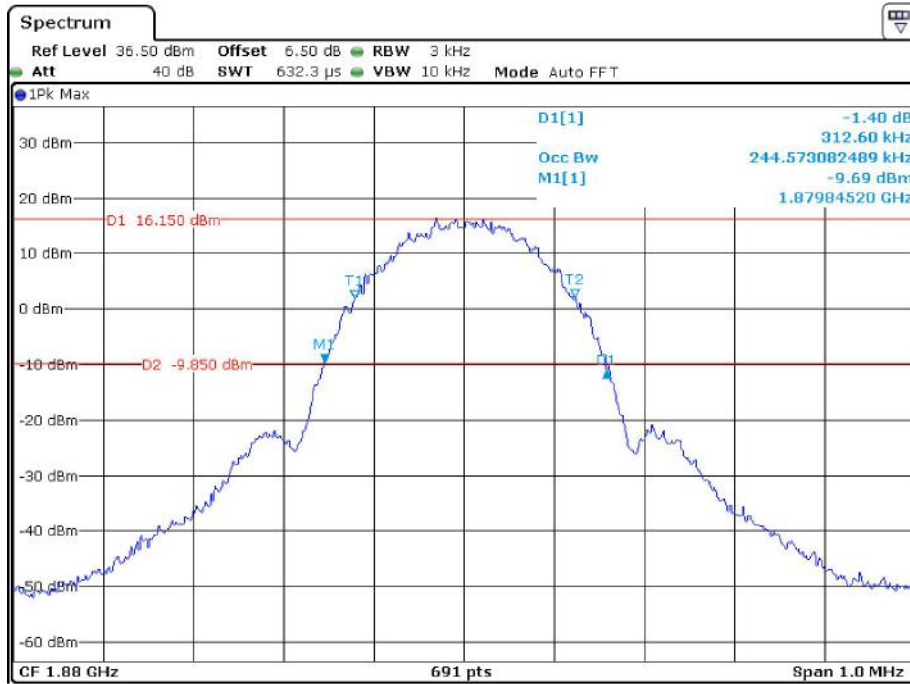


Date: 11.FEB.2022 14:00:24

26 dB Emissions & 99% Occupied Bandwidth for EGPRS (8PSK) Mode, High channel

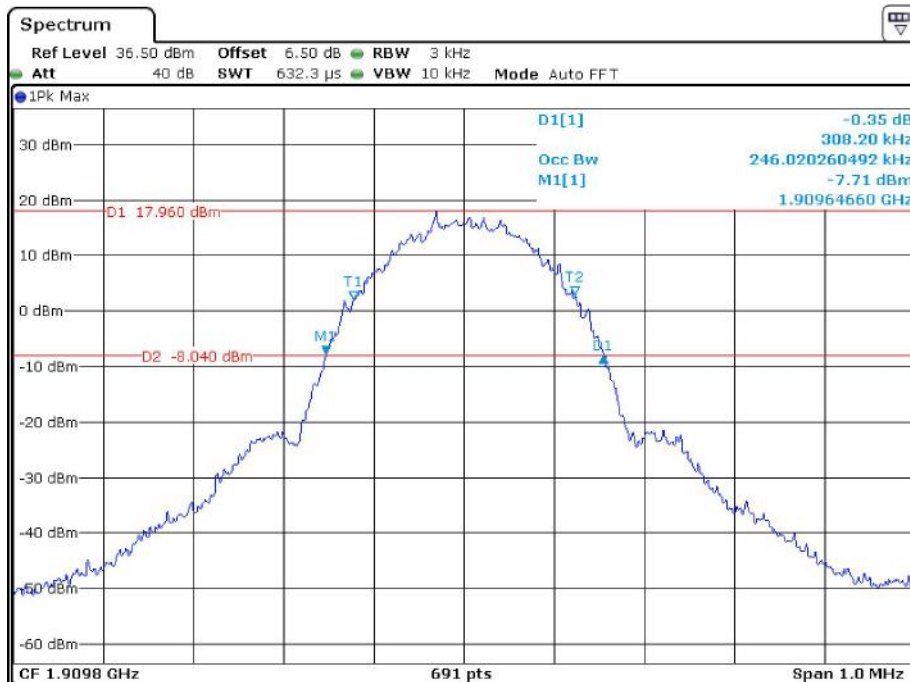


Date: 11.FEB.2022 14:01:10

26 dB Emissions & 99% Occupied Bandwidth for RMC (BPSK) Mode, Low channel

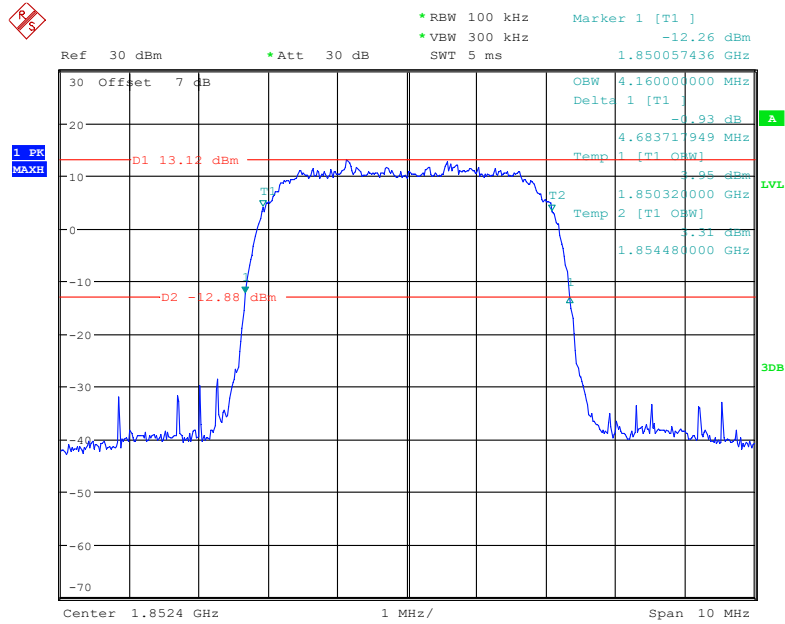


Date: 24.FEB.2022 09:17:31

26 dB Emissions & 99% Occupied Bandwidth for RMC (BPSK) Mode, Middle channel

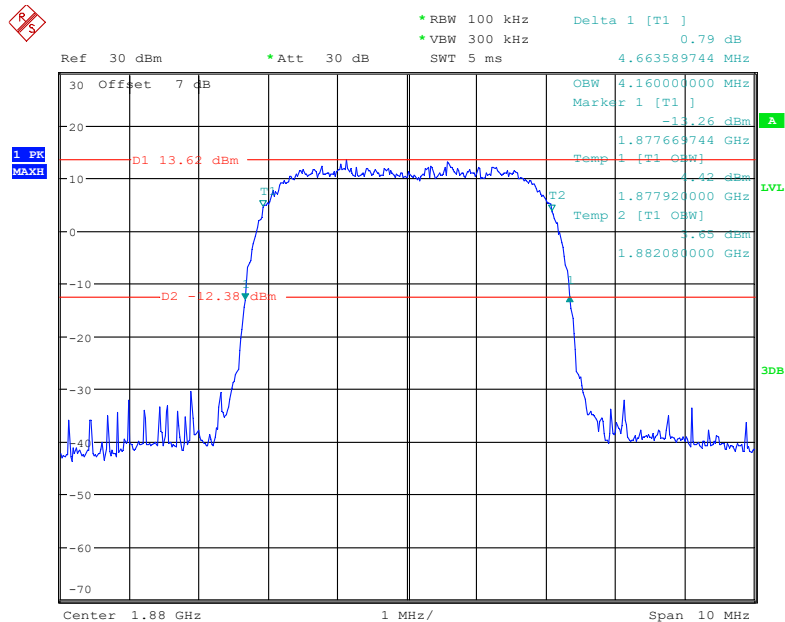


Date: 24.FEB.2022 09:18:25

26 dB Emissions & 99% Occupied Bandwidth for RMC (BPSK) Mode, High channel

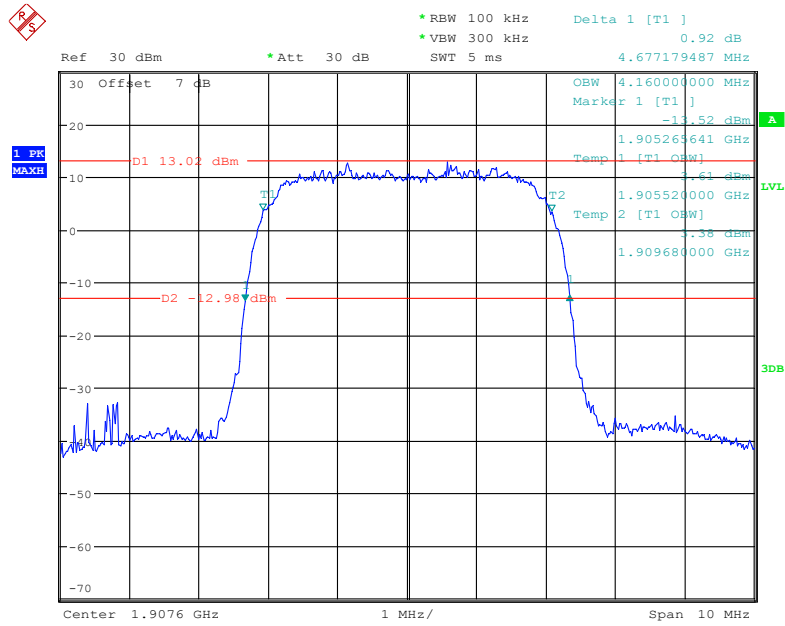


Date: 24.FEB.2022 09:19:24

26 dB Emissions & 99% Occupied Bandwidth for HSUPA (BPSK) Mode, Low channel

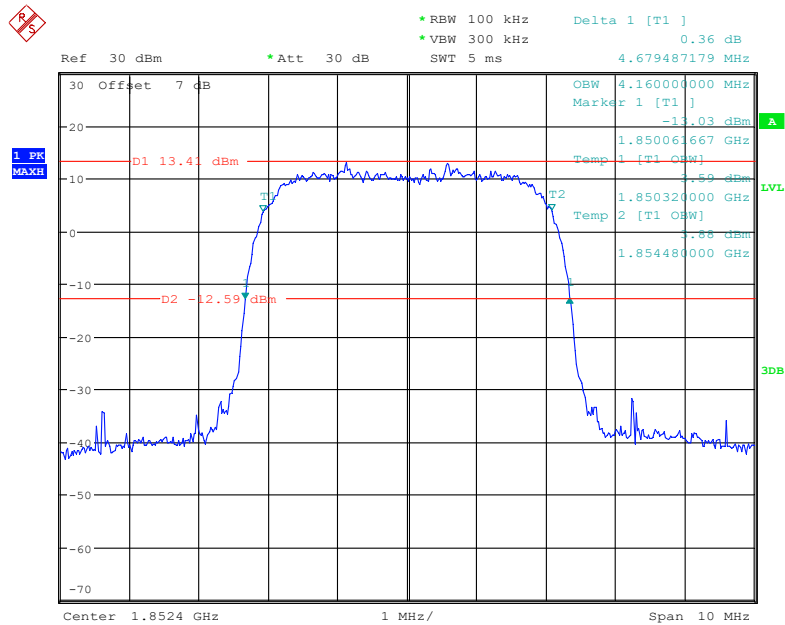


Date: 24.FEB.2022 09:43:01

26 dB Emissions & 99% Occupied Bandwidth for HSUPA (BPSK) Mode, Middle channel

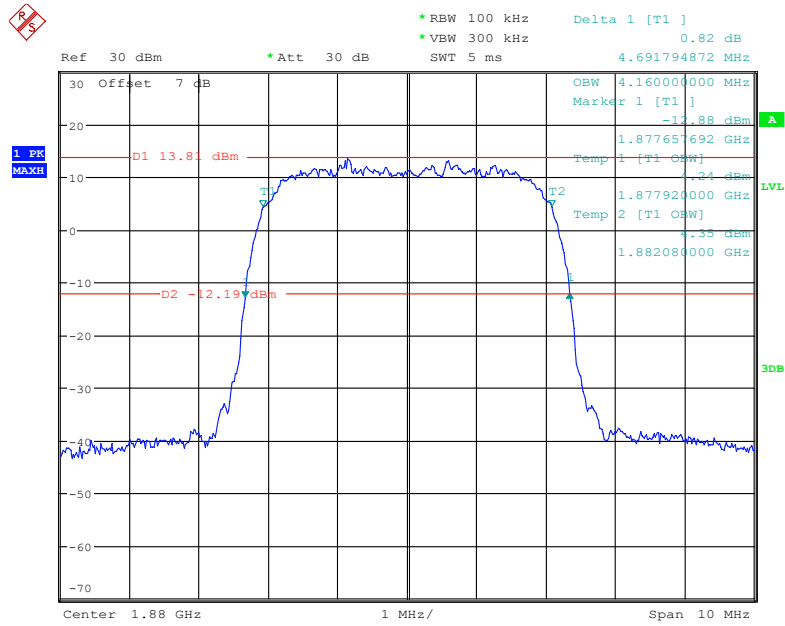


Date: 24.FEB.2022 09:44:19

26 dB Emissions & 99% Occupied Bandwidth for HSUPA (BPSK) Mode, High channel

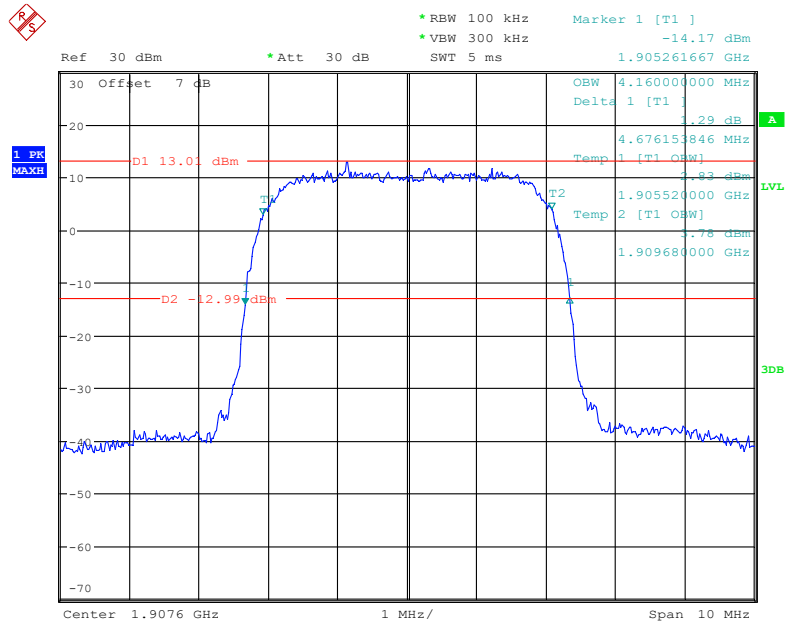


Date: 24.FEB.2022 09:45:24

26 dB Emissions & 99% Occupied Bandwidth for HSDPA (16QAM) Mode, Low channel

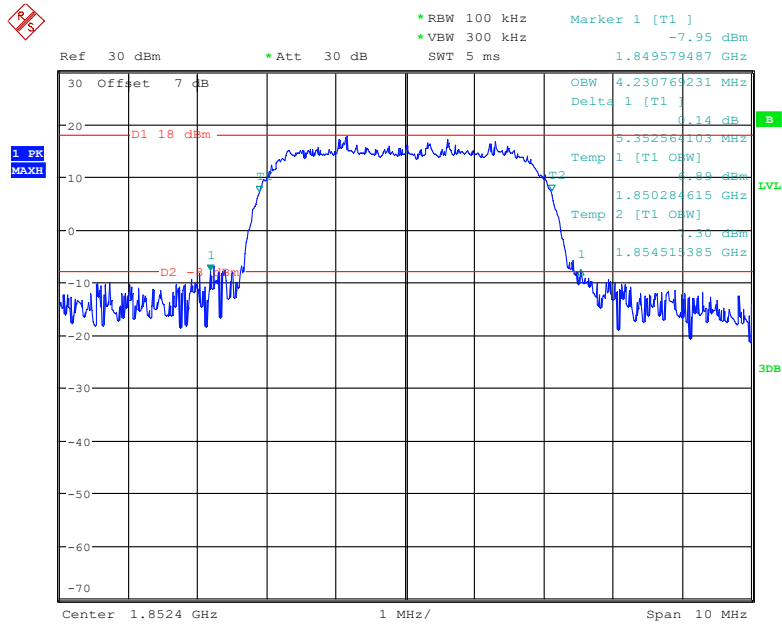


Date: 24.MAR.2022 09:04:18

26 dB Emissions & 99% Occupied Bandwidth for HSDPA (16QAM) Mode, Middle channel

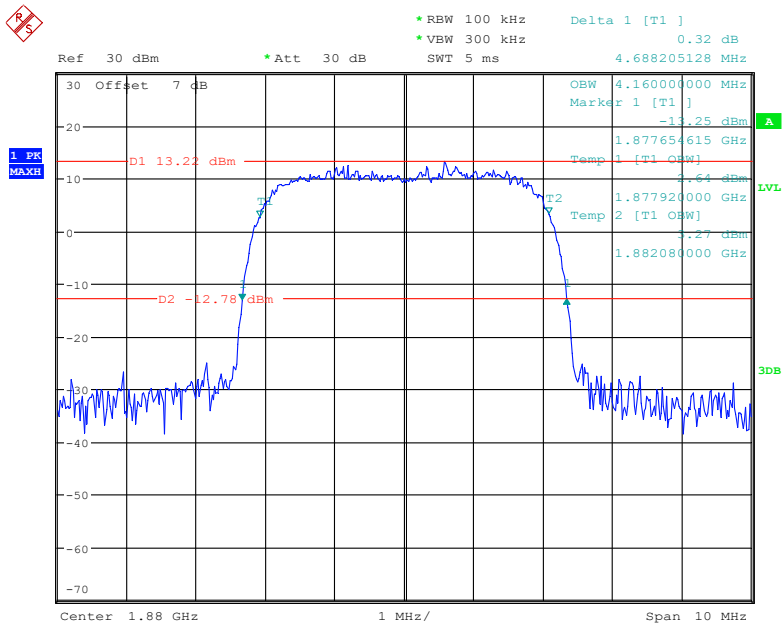

Date: 24.FEB.2022 09:21:55


26 dB Emissions & 99% Occupied Bandwidth for HSDPA (16QAM) Mode, High channel

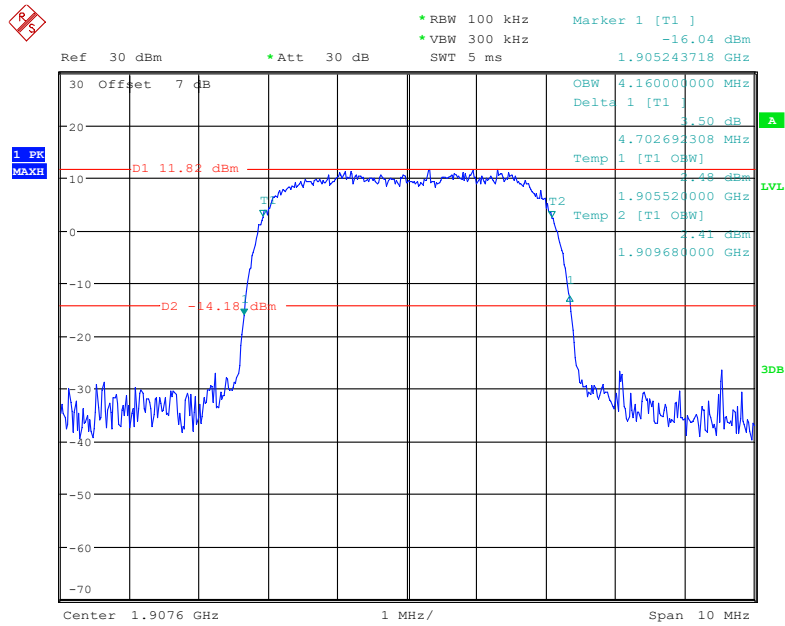

Date: 24.FEB.2022 09:21:05


AWS Band (Part 27)

26 dB Emissions & 99% Occupied Bandwidth for RMC (BPSK) Mode, Low channel

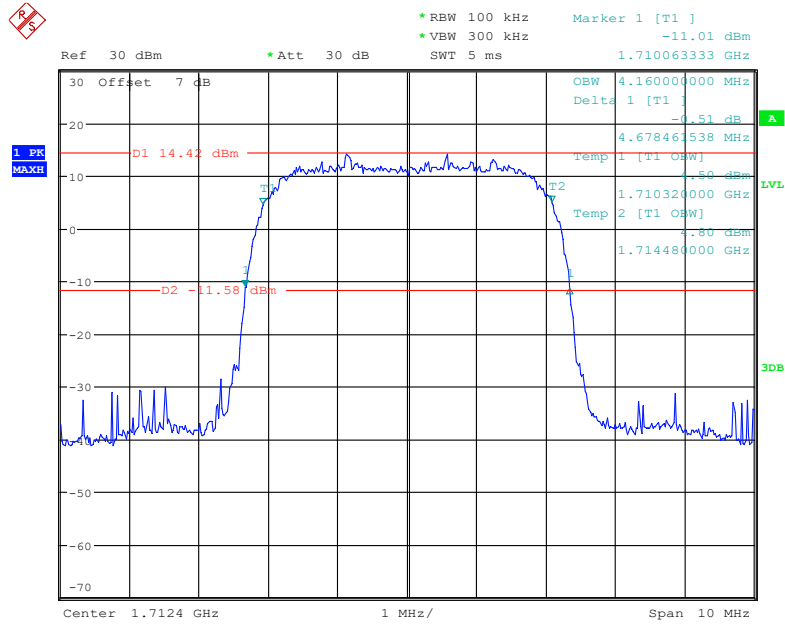


Date: 24.FEB.2022 09:14:49

26 dB Emissions & 99% Occupied Bandwidth for RMC (BPSK) Mode, Middle channel

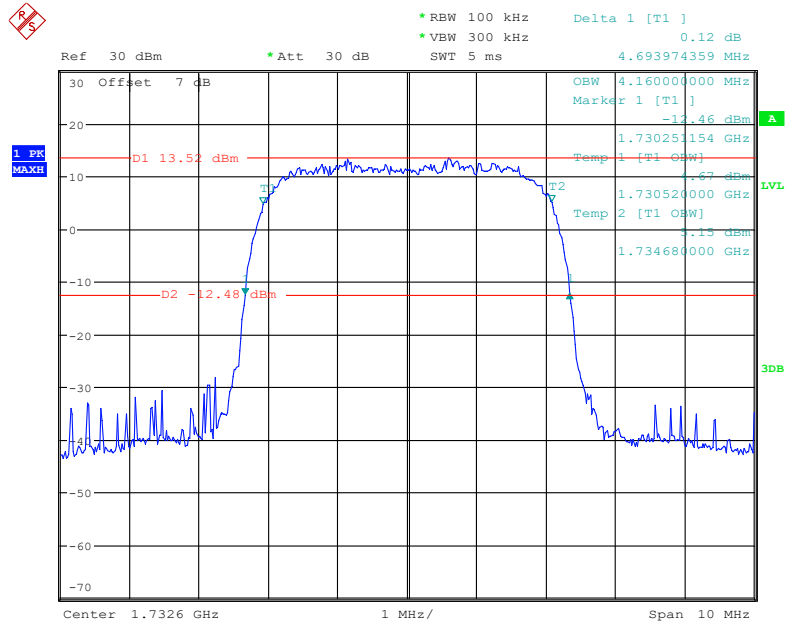


Date: 24.FEB.2022 09:15:41

26 dB Emissions & 99% Occupied Bandwidth for RMC (BPSK) Mode, High channel

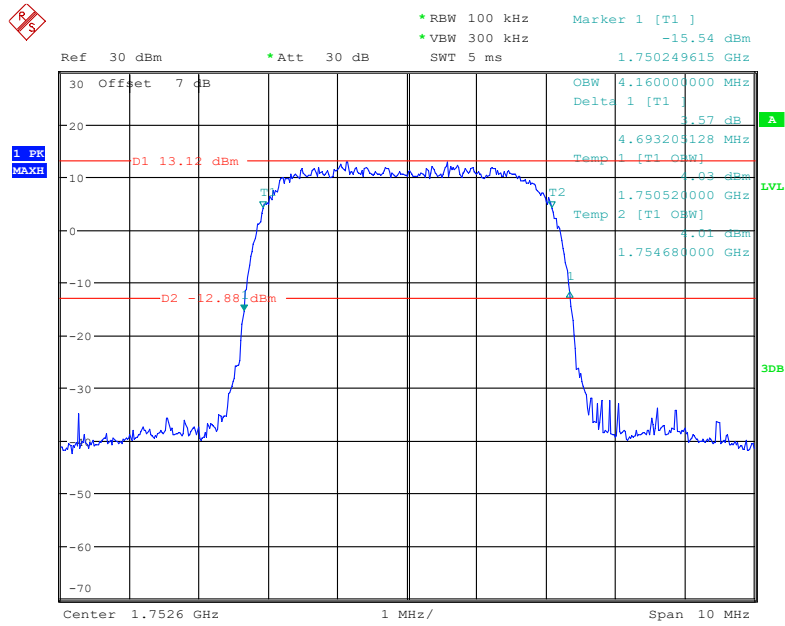


Date: 24.FEB.2022 09:16:34

26 dB Emissions & 99% Occupied Bandwidth for HSUPA (BPSK) Mode, Low channel

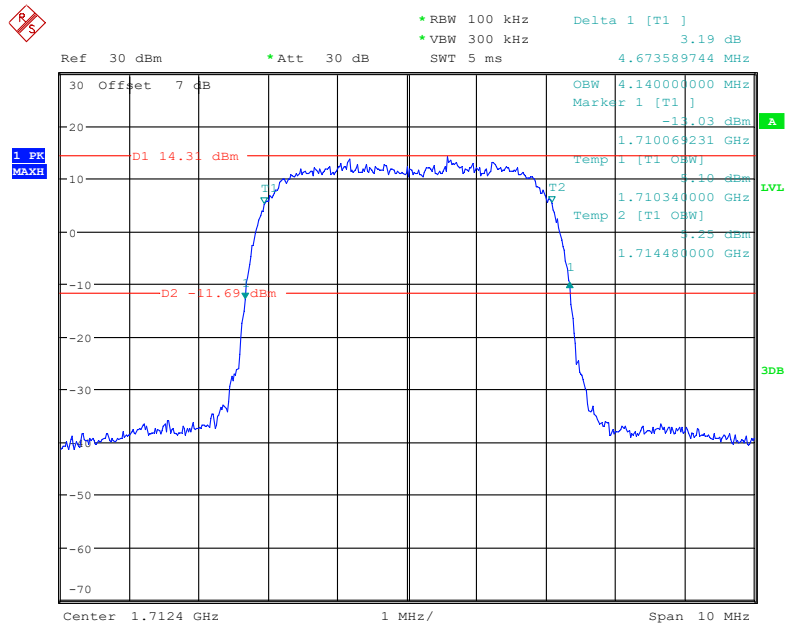


Date: 24.FEB.2022 09:46:56

26 dB Emissions & 99% Occupied Bandwidth for HSUPA (BPSK) Mode, Middle channel

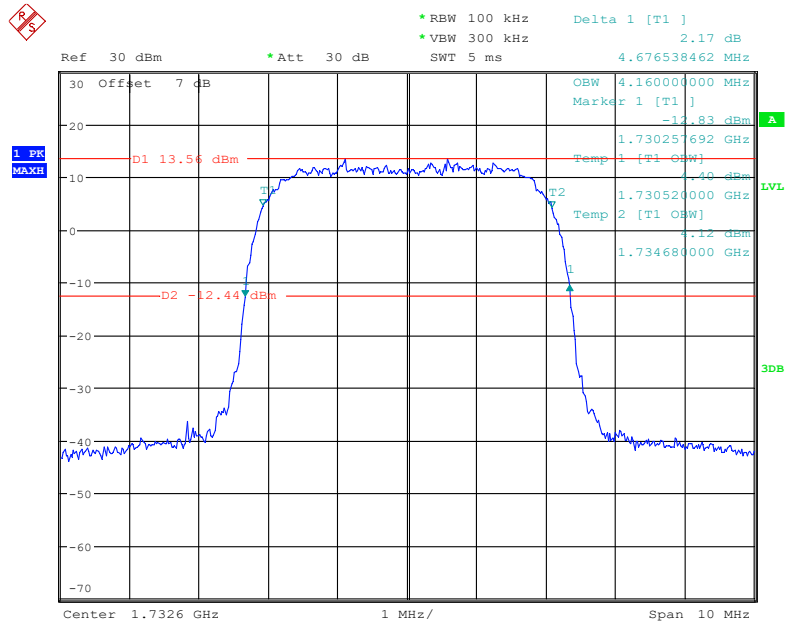


Date: 24.FEB.2022 09:47:56

26 dB Emissions & 99% Occupied Bandwidth for HSUPA (BPSK) Mode, High channel

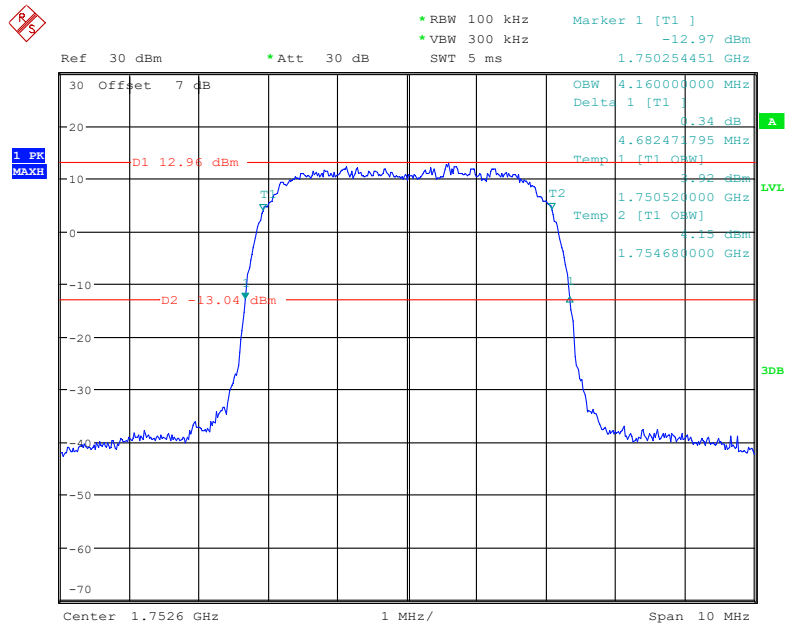


Date: 24.FEB.2022 09:49:04

26 dB Emissions & 99% Occupied Bandwidth for HSDPA (16QAM) Mode, Low channel

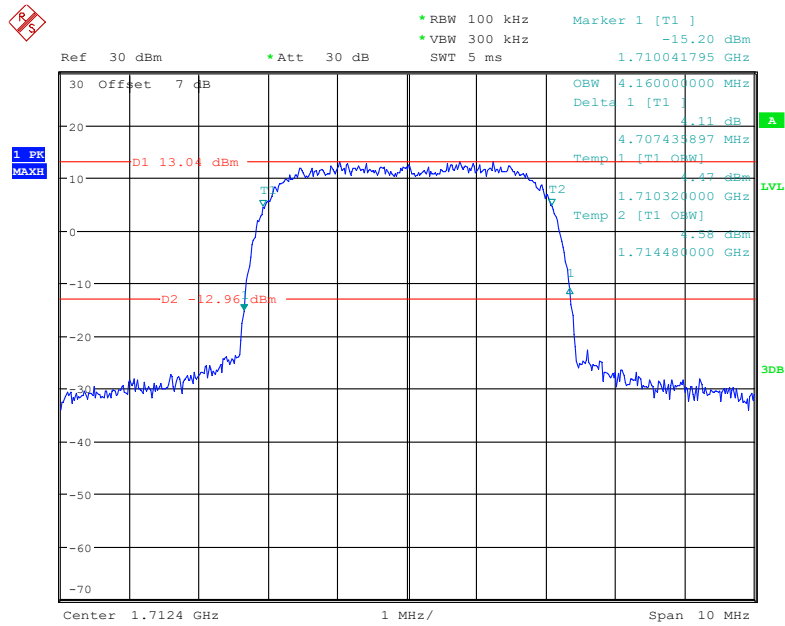


Date: 24.FEB.2022 09:24:05

26 dB Emissions & 99% Occupied Bandwidth for HSDPA (16QAM) Mode, Middle channel

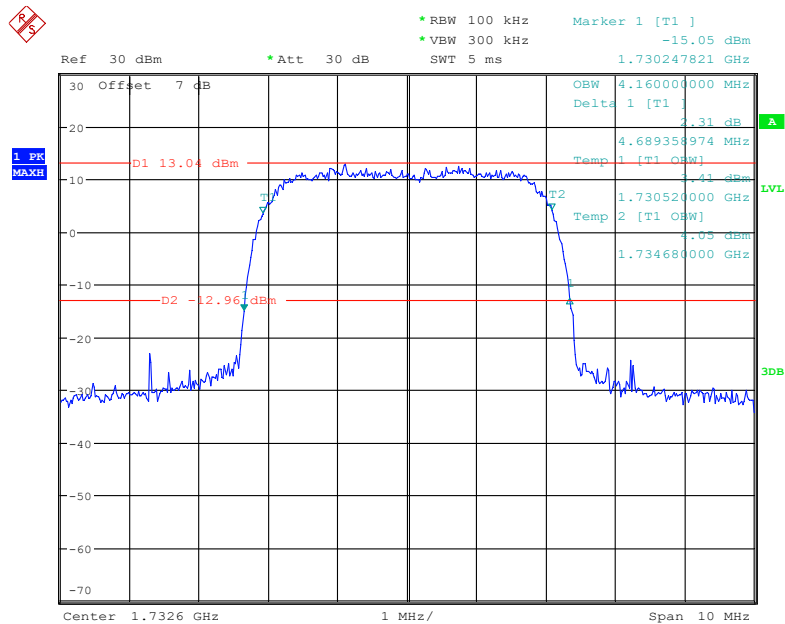

Date: 24.FEB.2022 09:24:52

26 dB Emissions & 99% Occupied Bandwidth for HSDPA (16QAM) Mode, High channel

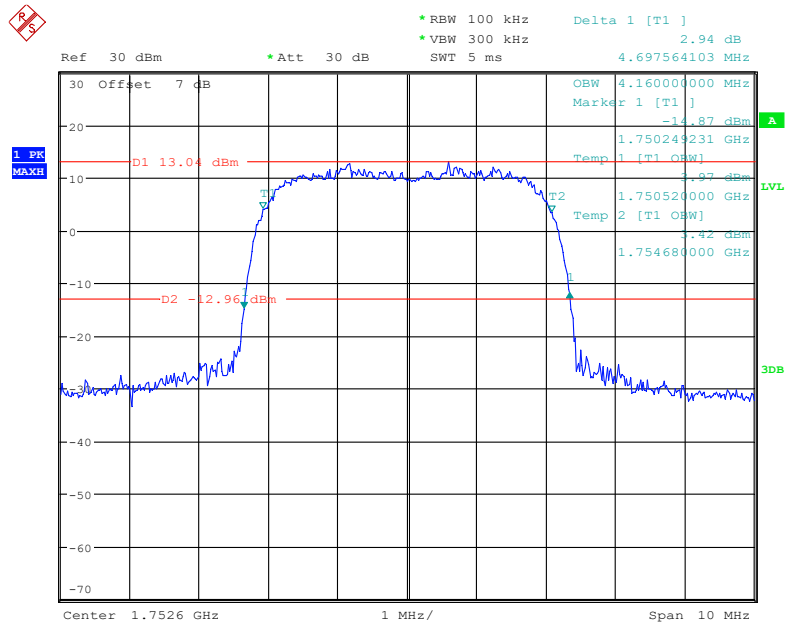

Date: 24.FEB.2022 09:25:51

LTE Band 2:

Bandwidth	Modulation	Low channel		Middle channel		High channel	
		OBW (MHz)	26dB EBW (MHz)	OBW (MHz)	26dB EBW (MHz)	OBW (MHz)	26dB EBW (MHz)
1.4 MHz	QPSK	1.104	1.260	1.110	1.266	1.104	1.248
	16QAM	1.104	1.260	1.104	1.260	1.110	1.254
3 MHz	QPSK	2.712	2.976	2.700	3.012	2.700	3.000
	16QAM	2.700	3.012	2.700	3.012	2.700	3.012
5 MHz	QPSK	4.520	5.000	4.520	5.020	4.520	4.980
	16QAM	4.520	4.960	4.560	5.040	4.540	5.000
10 MHz	QPSK	9.000	9.760	8.960	9.760	8.960	9.760
	16QAM	8.960	9.720	8.960	9.840	8.960	9.760
15 MHz	QPSK	13.620	15.060	13.500	15.000	13.620	15.120
	16QAM	13.620	15.060	13.620	15.120	13.620	15.060
20 MHz	QPSK	18.000	19.600	18.000	19.600	18.080	19.840
	16QAM	18.000	19.840	18.080	19.680	18.000	19.760

LTE Band 4:

Bandwidth	Modulation	Low channel		Middle channel		High channel	
		OBW (MHz)	26dB EBW (MHz)	OBW (MHz)	26dB EBW (MHz)	OBW (MHz)	26dB EBW (MHz)
1.4 MHz	QPSK	1.104	1.254	1.104	1.260	1.104	1.254
	16QAM	1.104	1.254	1.104	1.266	1.104	1.254
3 MHz	QPSK	2.700	2.988	2.712	3.000	2.700	3.000
	16QAM	2.700	3.000	2.688	3.012	2.700	3.012
5 MHz	QPSK	4.520	4.980	4.520	5.040	4.520	4.960
	16QAM	4.520	4.980	4.520	5.020	4.540	5.020
10 MHz	QPSK	9.000	9.680	8.960	9.760	8.960	9.800
	16QAM	8.920	9.720	8.960	9.760	8.960	9.800
15 MHz	QPSK	13.620	15.000	13.500	15.000	13.560	15.060
	16QAM	13.560	15.120	13.620	15.120	13.620	15.180
20 MHz	QPSK	18.000	19.600	18.000	19.680	18.000	19.760
	16QAM	18.000	19.680	18.000	19.920	18.000	19.680

LTE Band 5:

Bandwidth	Modulation	Low channel		Middle channel		High channel	
		OBW (MHz)	26dB EBW (MHz)	OBW (MHz)	26dB EBW (MHz)	OBW (MHz)	26dB EBW (MHz)
1.4 MHz	QPSK	1.104	1.260	1.098	1.260	1.110	1.254
	16QAM	1.116	1.260	1.104	1.260	1.110	1.248
3 MHz	QPSK	2.700	3.000	2.688	3.000	2.688	3.024
	16QAM	2.700	3.012	2.700	3.000	2.700	3.012
5 MHz	QPSK	4.520	5.000	4.520	5.000	4.520	4.980
	16QAM	4.500	4.980	4.520	4.980	4.520	5.040
10 MHz	QPSK	9.000	9.720	8.960	9.720	8.960	9.720
	16QAM	8.960	9.680	9.000	9.800	8.960	9.800

LTE Band 7:

Bandwidth	Modulation	Low channel		Middle channel		High channel	
		OBW (MHz)	26dB EBW (MHz)	OBW (MHz)	26dB EBW (MHz)	OBW (MHz)	26dB EBW (MHz)
5 MHz	QPSK	4.520	4.980	4.520	5.020	4.520	5.000
	16QAM	4.520	4.980	4.540	5.040	4.540	4.960
10 MHz	QPSK	9.000	9.760	8.960	9.760	8.960	9.800
	16QAM	8.960	9.640	9.000	9.760	8.960	9.800
15 MHz	QPSK	13.560	15.120	13.500	15.000	13.620	15.180
	16QAM	13.560	15.060	13.620	15.120	13.620	14.940
20 MHz	QPSK	18.000	19.600	18.000	19.600	18.000	19.840
	16QAM	18.000	19.680	18.000	19.680	18.000	19.760

LTE Band 38

Bandwidth	Modulation	Low channel		Middle channel		High channel	
		OBW (MHz)	26dB EBW (MHz)	OBW (MHz)	26dB EBW (MHz)	OBW (MHz)	26dB EBW (MHz)
5 MHz	QPSK	4.520	5.040	4.520	5.140	4.520	5.000
	16QAM	4.520	5.160	4.520	5.140	4.520	5.120
10 MHz	QPSK	9.000	9.680	9.000	9.760	8.960	9.760
	16QAM	8.960	9.760	8.960	9.800	8.960	9.840
15 MHz	QPSK	13.620	15.060	13.560	15.120	13.560	15.420
	16QAM	13.560	14.400	13.560	15.120	13.620	16.320
20 MHz	QPSK	18.000	19.760	18.000	19.600	18.000	20.000
	16QAM	17.920	19.680	18.000	20.320	18.000	19.600

LTE Band 41

Bandwidth	Modulation	Low channel		Middle channel		High channel	
		OBW (MHz)	26dB EBW (MHz)	OBW (MHz)	26dB EBW (MHz)	OBW (MHz)	26dB EBW (MHz)
5 MHz	QPSK	4.520	5.120	4.520	5.060	4.520	5.000
	16QAM	4.520	5.180	4.520	5.080	4.520	5.160
10 MHz	QPSK	9.000	9.720	8.960	9.800	8.960	9.800
	16QAM	8.960	9.720	8.960	9.760	8.960	9.840
15 MHz	QPSK	13.680	15.840	13.560	15.900	13.560	15.420
	16QAM	13.560	15.600	13.620	15.360	13.620	16.260
20 MHz	QPSK	18.080	19.680	18.000	19.920	18.000	20.240
	16QAM	18.000	20.080	18.000	19.760	18.000	20.000

The test plots of LTE band please refer to the Appendix A.

FCC §2.1051, §22.917(a) & §24.238(a)& §27.53 - SPURIOUS EMISSIONS AT ANTENNA TERMINALS


Applicable Standard

FCC §2.1051, §22.917(a) & §24.238(a)&§27.53.

The spectrum was to be investigated to the tenth harmonics of the highest fundamental frequency as specified in § 2.1051.

Test Procedure

The RF output of the transceiver was connected to a spectrum analyzer and simulator through appropriate attenuation. The resolution bandwidth of the spectrum analyzer was set at 1MHz. Sufficient scans were taken to show any out of band emissions up to 10th harmonic.

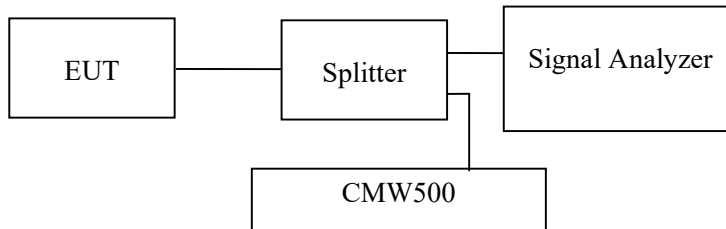

Test Data

Environmental Conditions

Temperature:	27.6 °C
Relative Humidity:	58 %
ATM Pressure:	101.0 kPa

The testing was performed by Gala Liu from 2022-02-21 to 2022-03-24.


EUT operation mode: Transmitting

Test result: Pass

Please refer to the following plots.

Cellular Band (Part 22H)
Low Channel:


30 MHz – 1 GHz (GSM Mode)

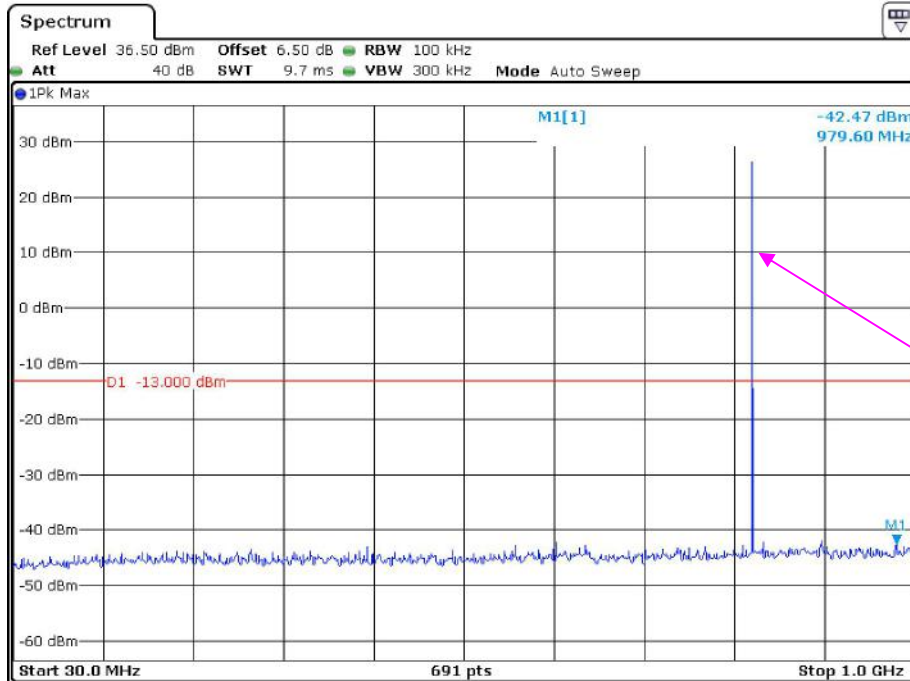

Fundamental test


Date: 11.FEB.2022 14:13:13

1 GHz – 10 GHz (GSM Mode)

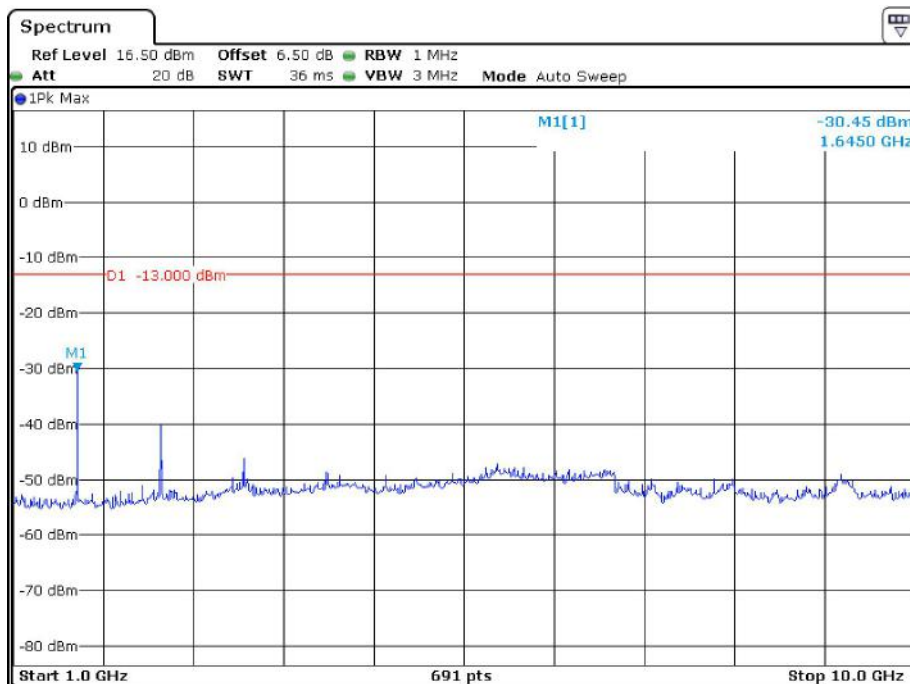


Date: 11.FEB.2022 14:13:49

30 MHz – 1 GHz (WCDMA Mode)

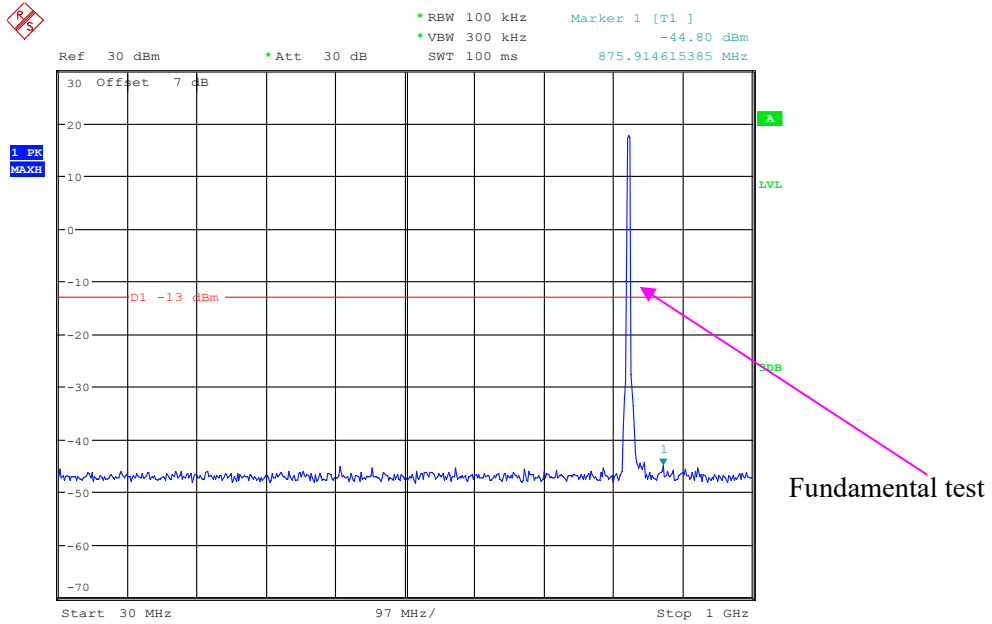

Date: 24.FEB.2022 09:54:41


1 GHz – 20 GHz (WCDMA Mode)

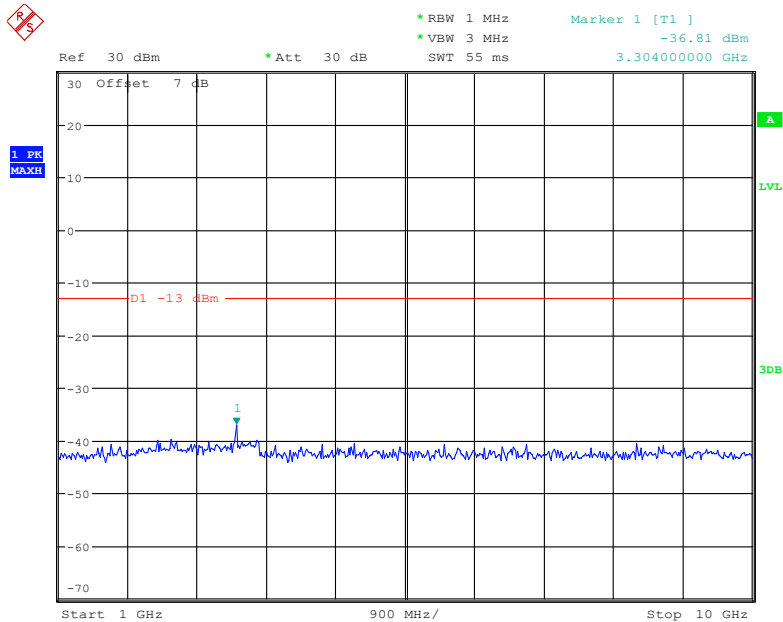

Date: 24.FEB.2022 09:56:54

Middle Channel:


30 MHz – 1 GHz (GSM Mode)

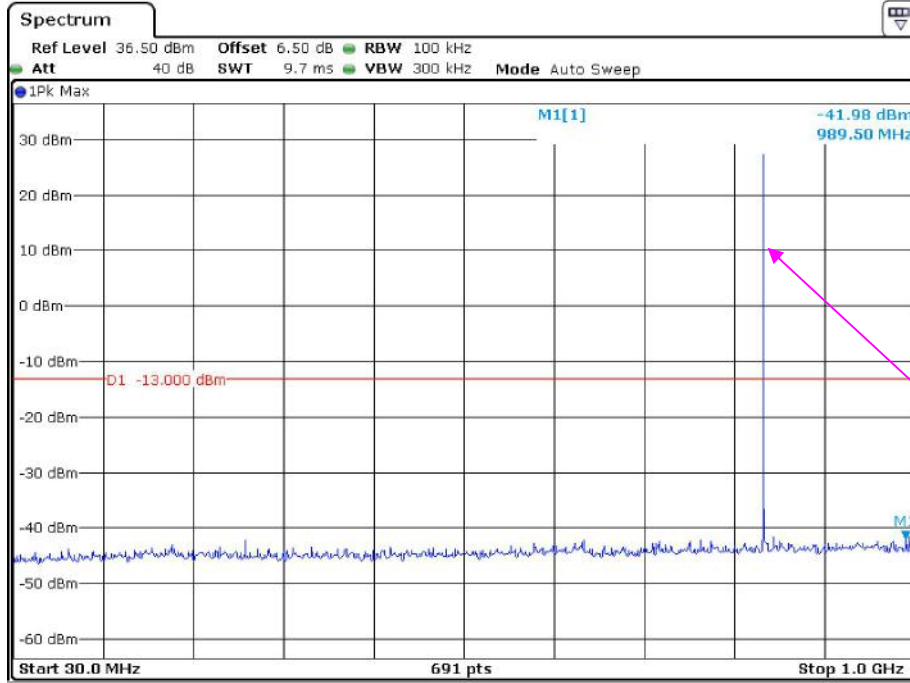

Date: 11.FEB.2022 14:12:59


Fundamental test

1 GHz – 10 GHz (GSM Mode)

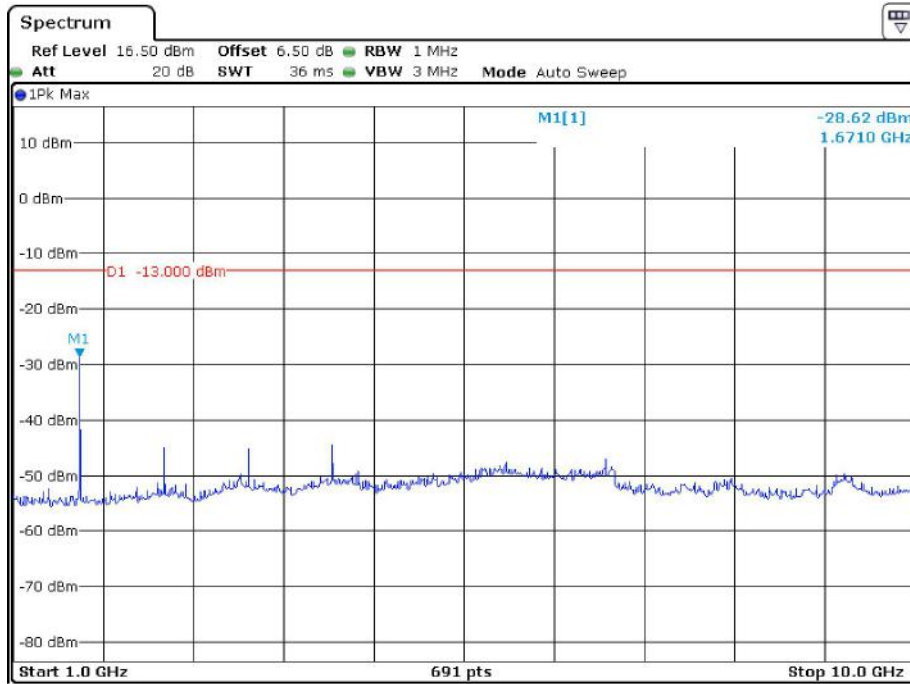


Date: 11.FEB.2022 14:14:11

30 MHz – 1 GHz (WCDMA Mode)

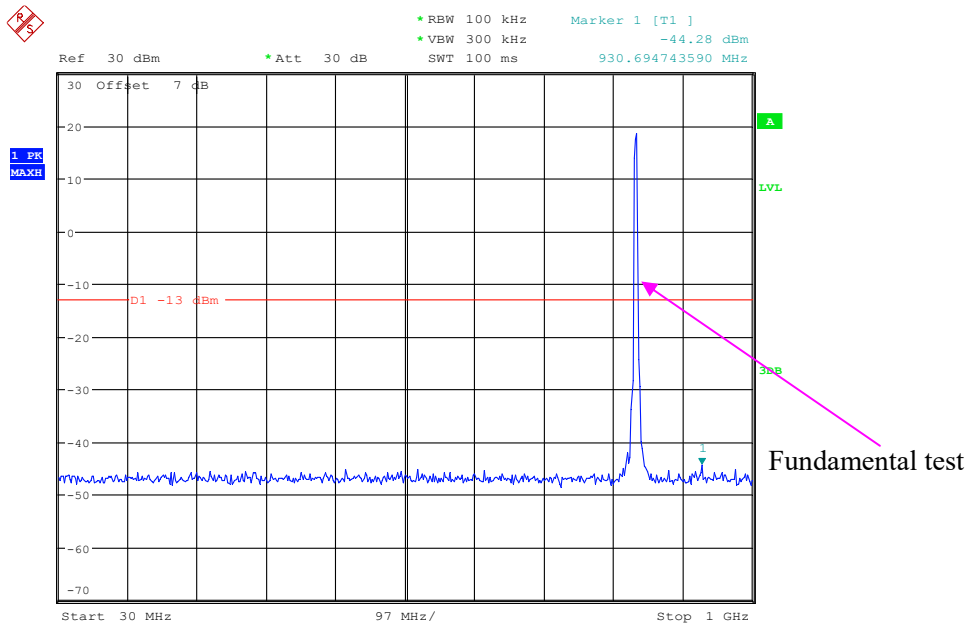

Date: 24.FEB.2022 09:55:30


1 GHz – 20 GHz (WCDMA Mode)

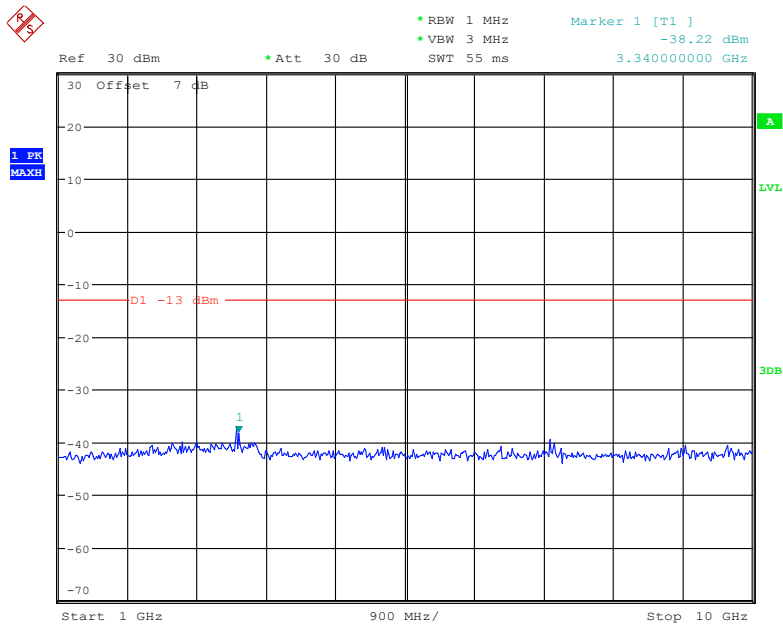

Date: 24.FEB.2022 09:56:48


High Channel:

30 MHz – 1 GHz (GSM Mode)

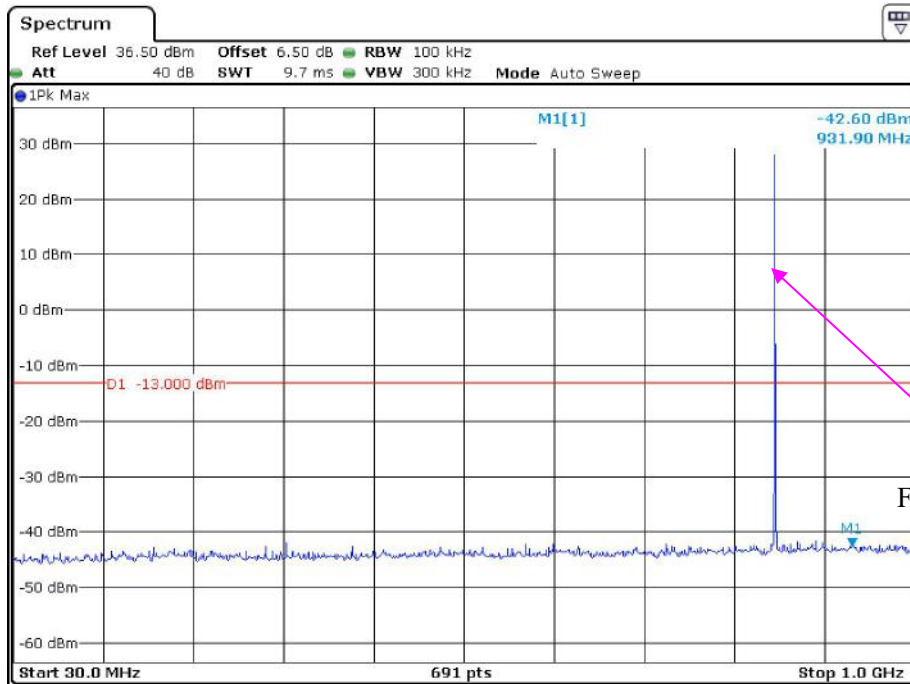


Fundamental test

1 GHz – 10 GHz (GSM Mode)

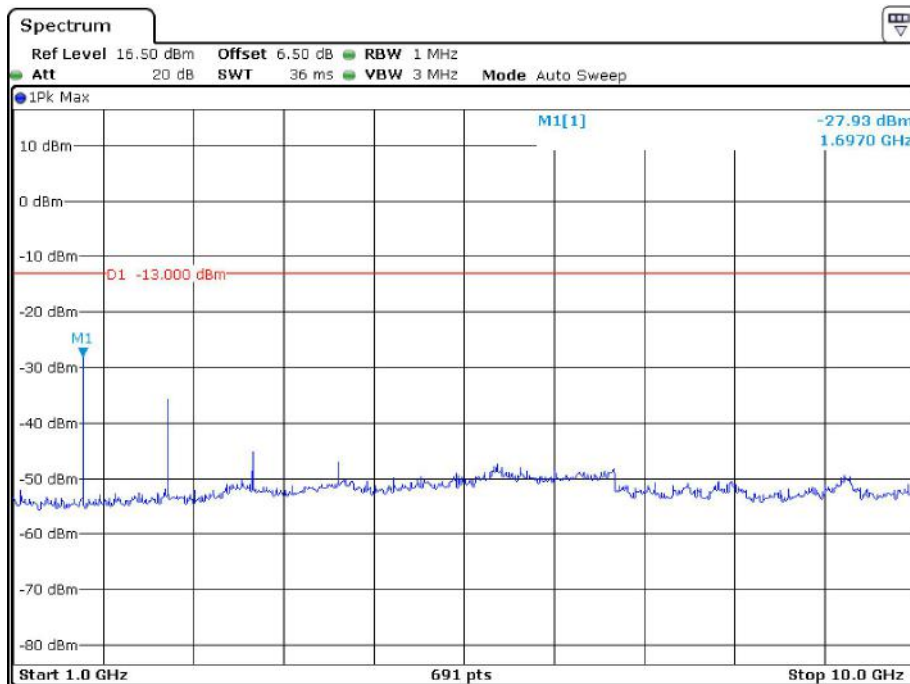


30 MHz – 1 GHz (WCDMA Mode)

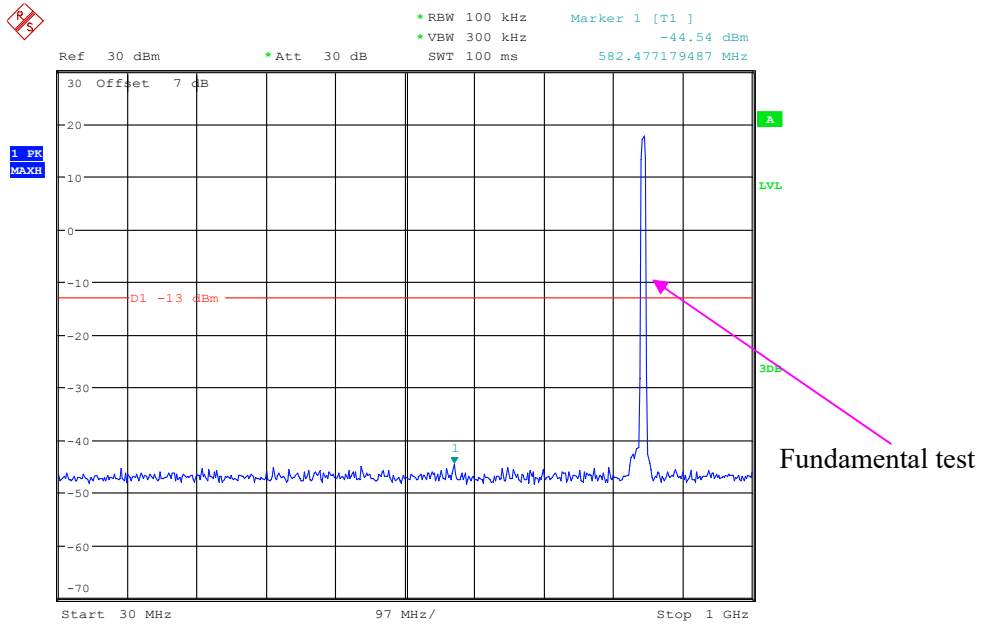

Date: 24.FEB.2022 09:55:58


1 GHz – 20 GHz (WCDMA Mode)

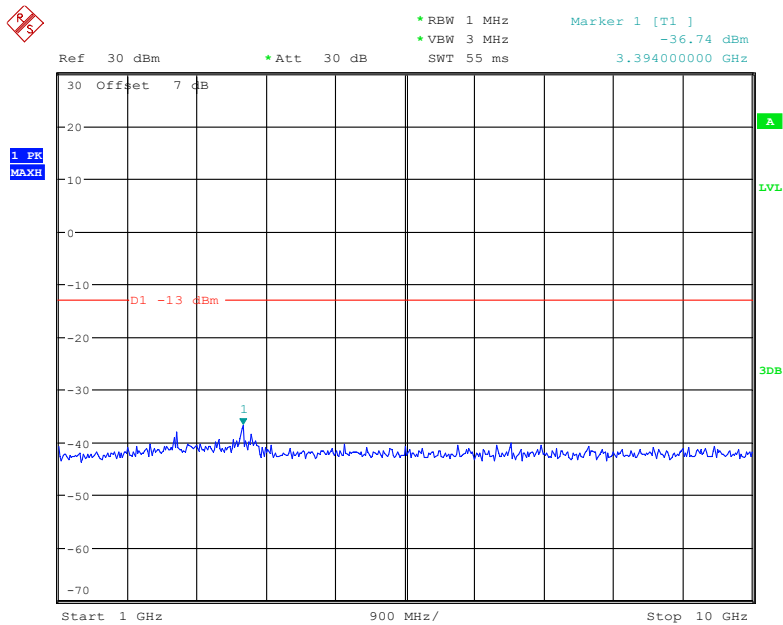

Date: 24.FEB.2022 09:56:20


**PCS Band (Part 24E)
Low Channel:**

30 MHz – 1 GHz (GSM Mode)

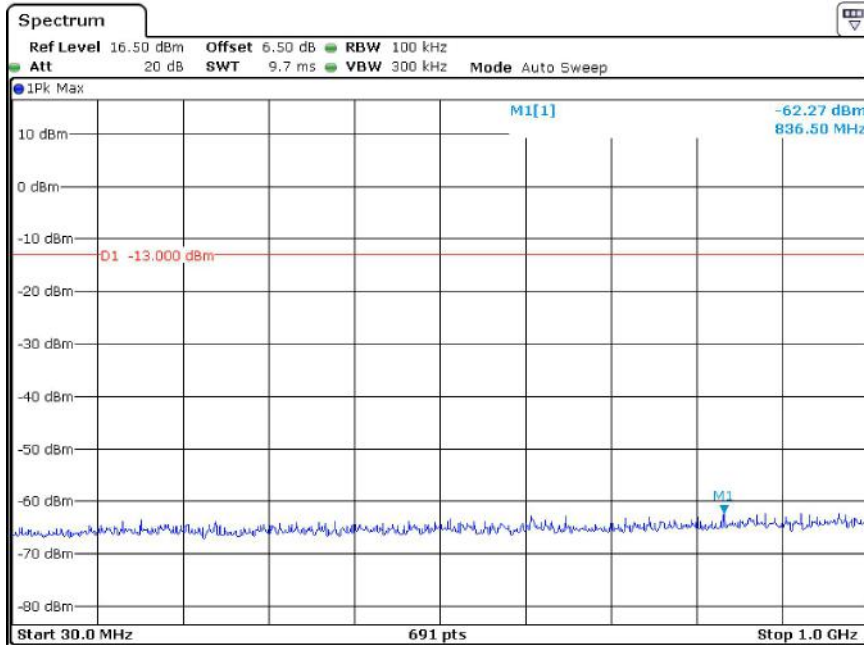

Date: 11.FEB.2022 13:55:25


1 GHz – 20 GHz (GSM Mode)

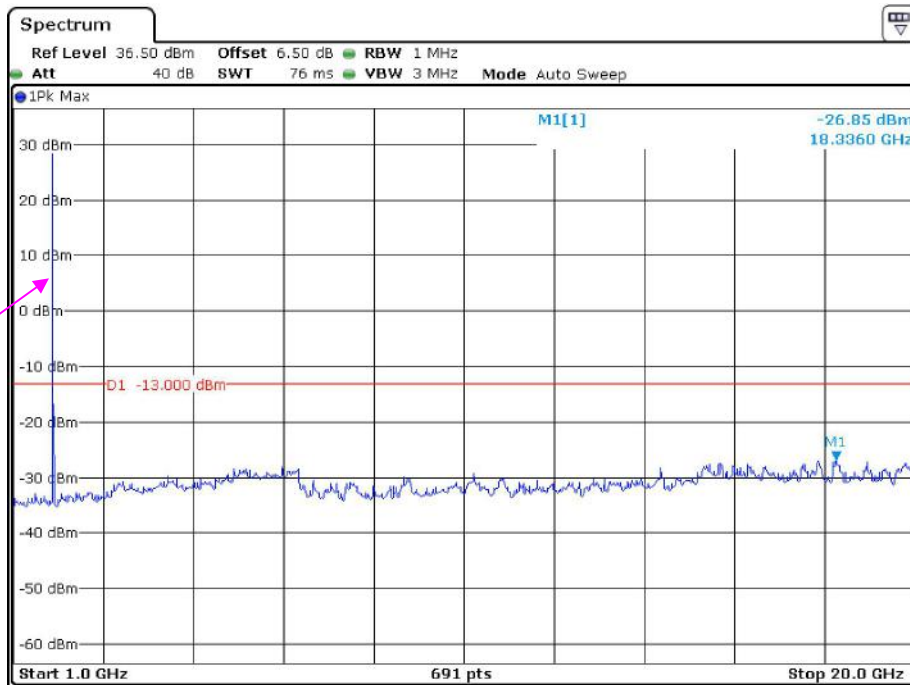

Fundamental test


Date: 11.FEB.2022 13:57:12

30 MHz – 1 GHz (WCDMA Mode)

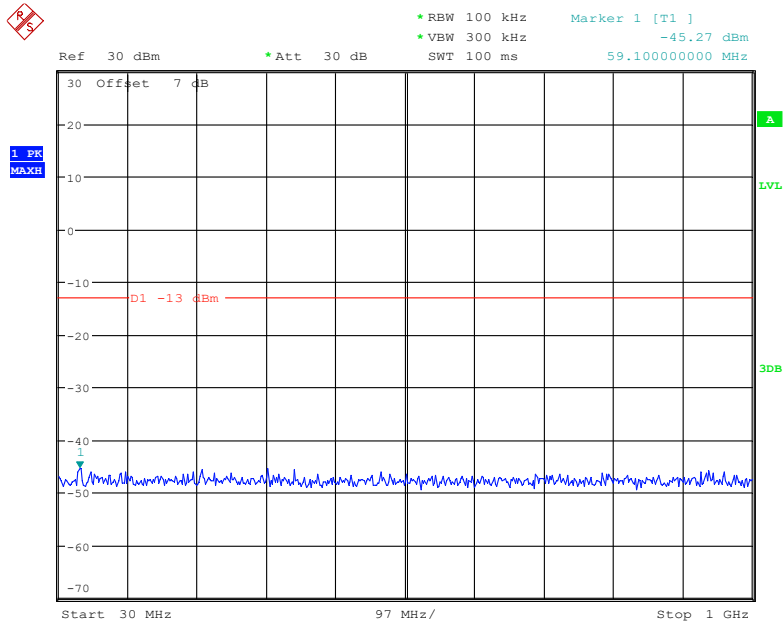

Date: 24.FEB.2022 09:51:51


1 GHz – 2 GHz (WCDMA Mode)

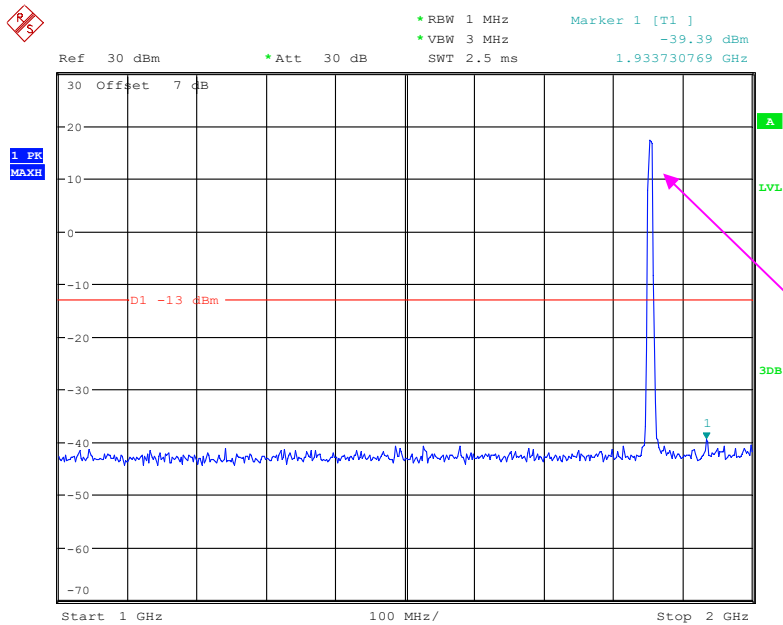

Fundamental test

Date: 24.FEB.2022 10:01:40


2 GHz – 20 GHz (WCDMA Mode)

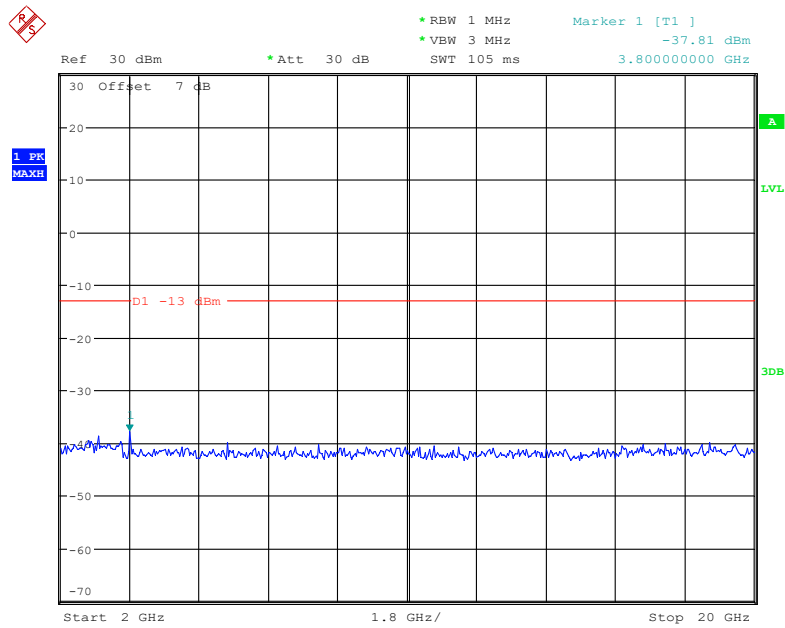

Date: 24.FEB.2022 09:59:31


Middle Channel:

30 MHz – 1 GHz (GSM Mode)

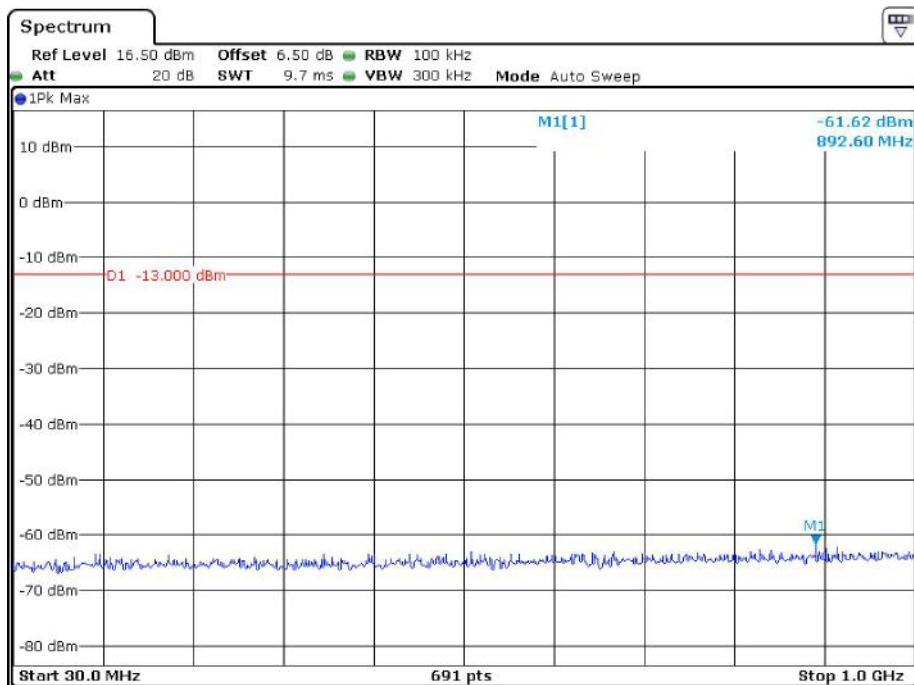

Date: 11.FEB.2022 13:55:39


1 GHz – 20 GHz (GSM Mode)

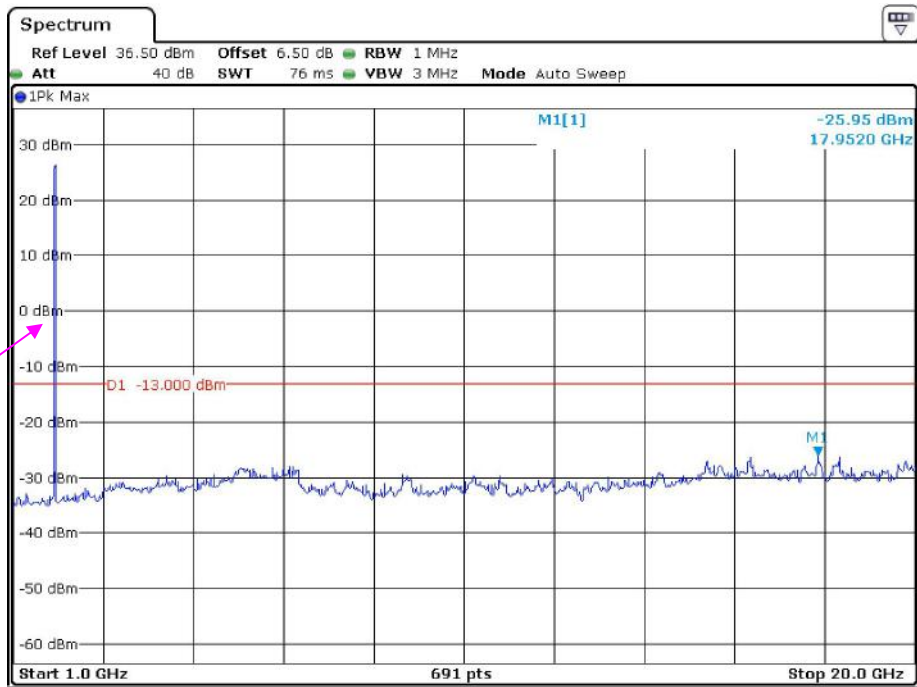

Date: 11.FEB.2022 13:56:55


Fundamental test

30 MHz – 1 GHz (WCDMA Mode)

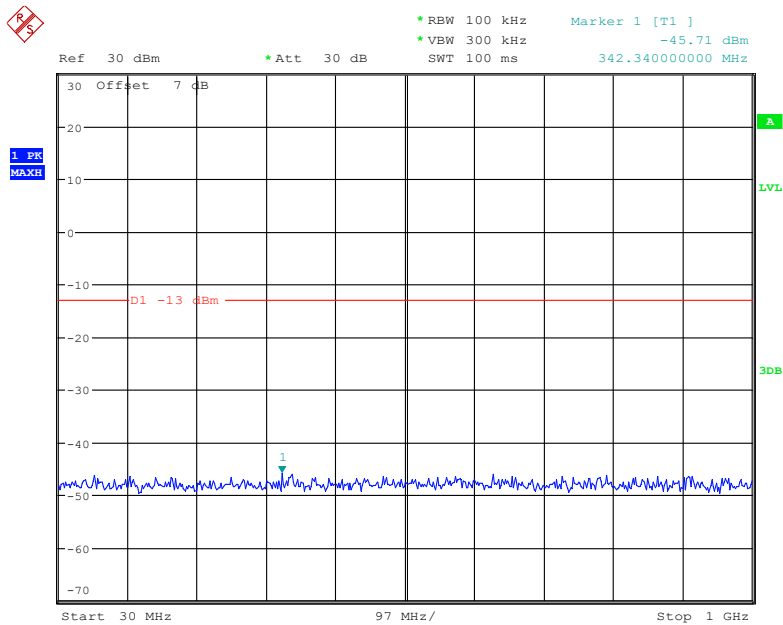


Date: 24.FEB.2022 09:52:20

1 GHz – 2GHz (WCDMA Mode)

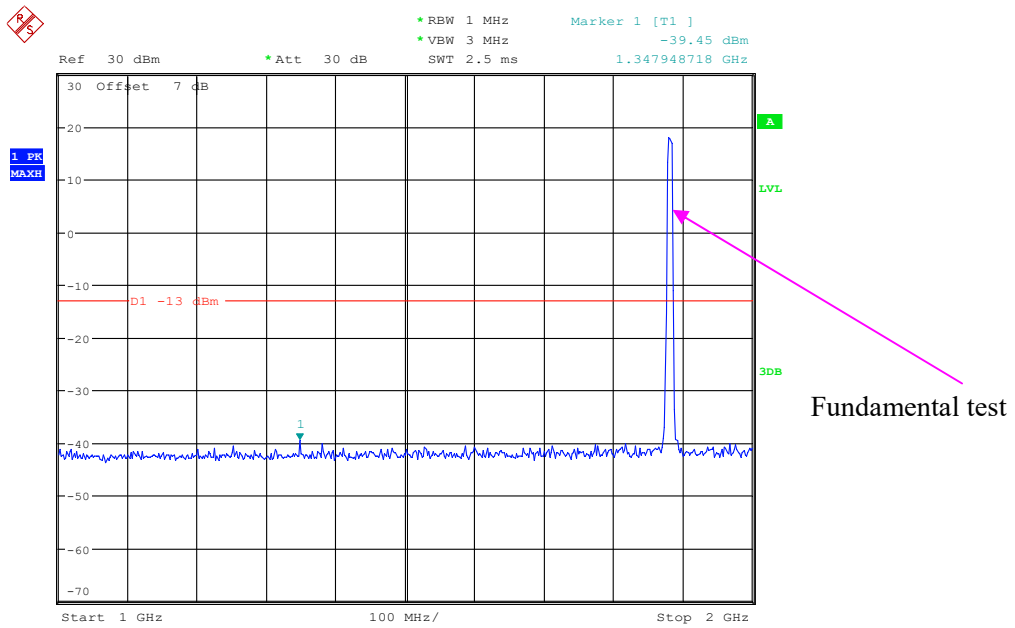

Date: 24.FEB.2022 10:01:21


2 GHz – 20GHz (WCDMA Mode)

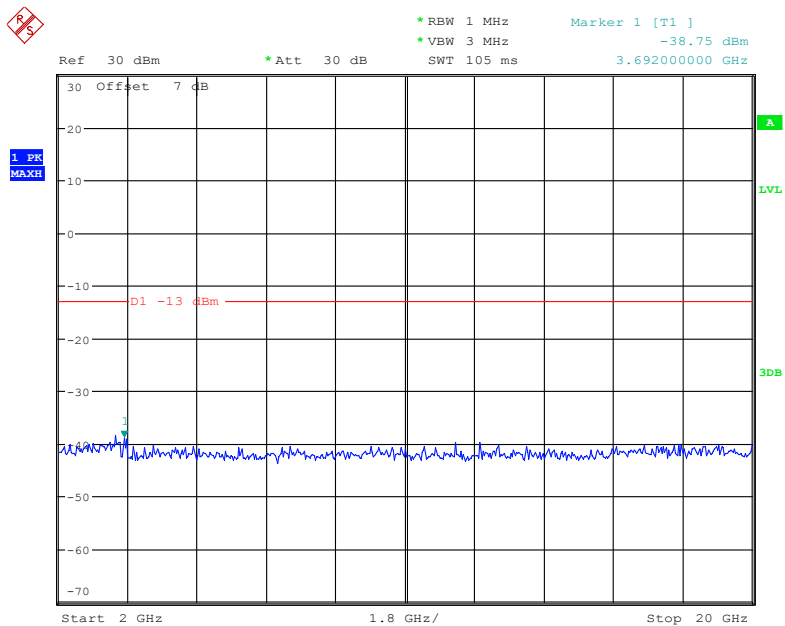

Date: 24.FEB.2022 09:59:47


High Channel:

30 MHz – 1 GHz (GSM Mode)

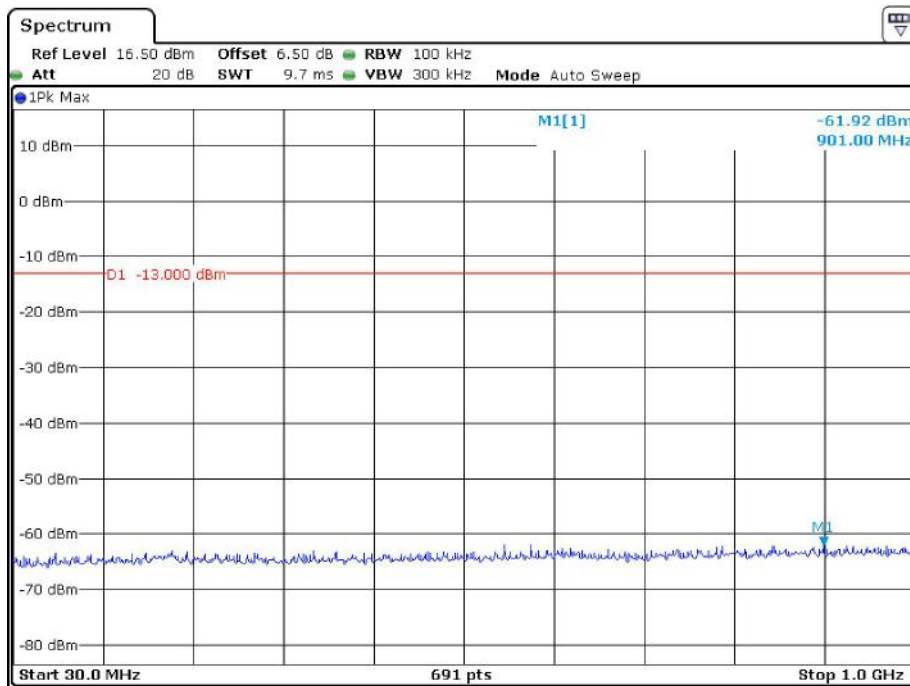


Date: 11.FEB.2022 13:55:17

1 GHz– 20 GHz (GSM Mode)

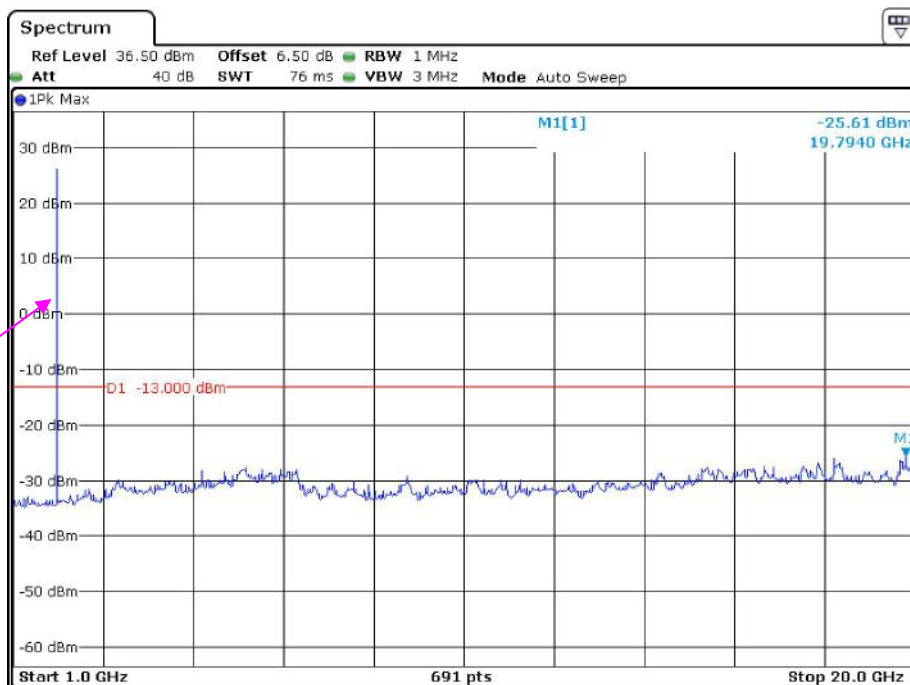


Fundamental test

30 MHz – 1 GHz (WCDMA Mode)

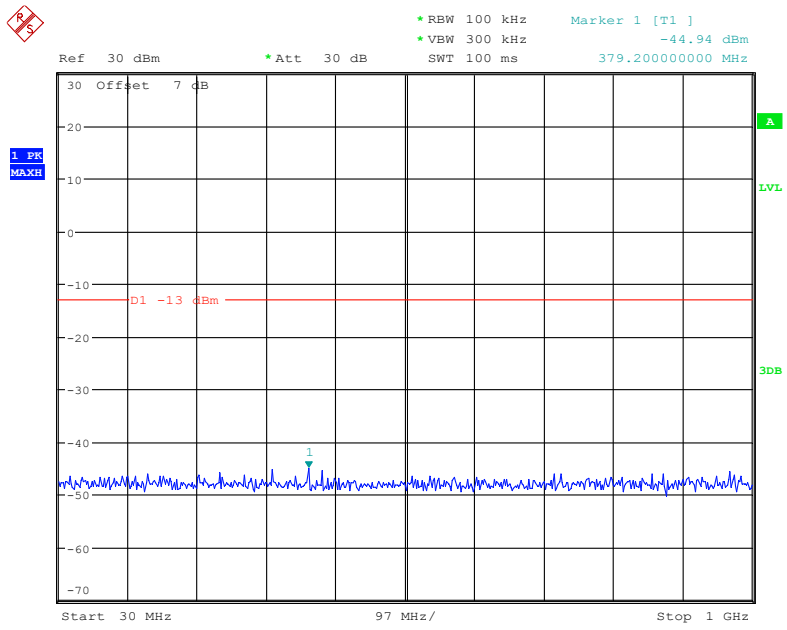


Date: 24.FEB.2022 09:52:32

1 GHz – 2 GHz (WCDMA Mode)

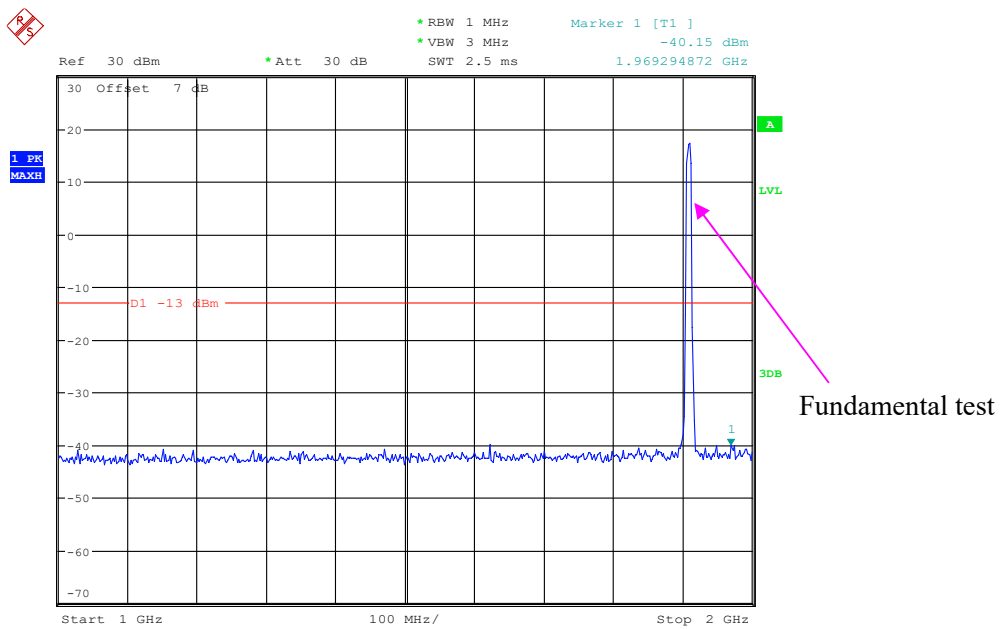

Date: 24.FEB.2022 10:00:40


2GHz – 20 GHz (WCDMA Mode)

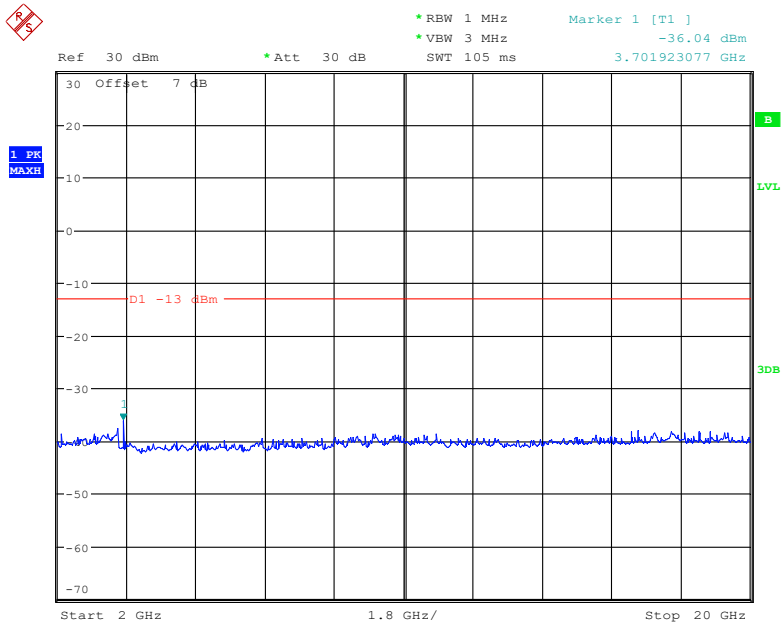

Date: 24.MAR.2022 09:07:37


**AWS Band (Part 27)
Low Channel:**

30 MHz – 1 GHz (WCDMA Mode)

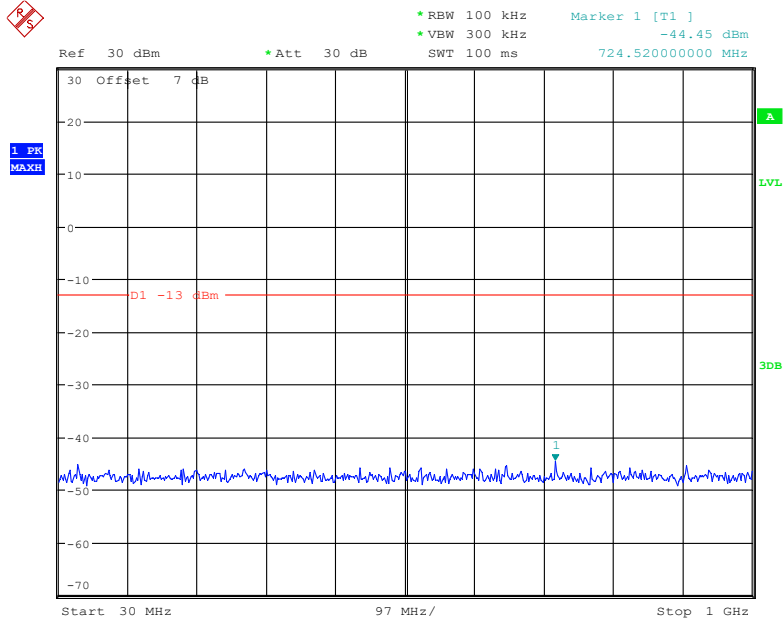


Date: 24.FEB.2022 09:52:56

1 GHz – 2 GHz (WCDMA Mode)

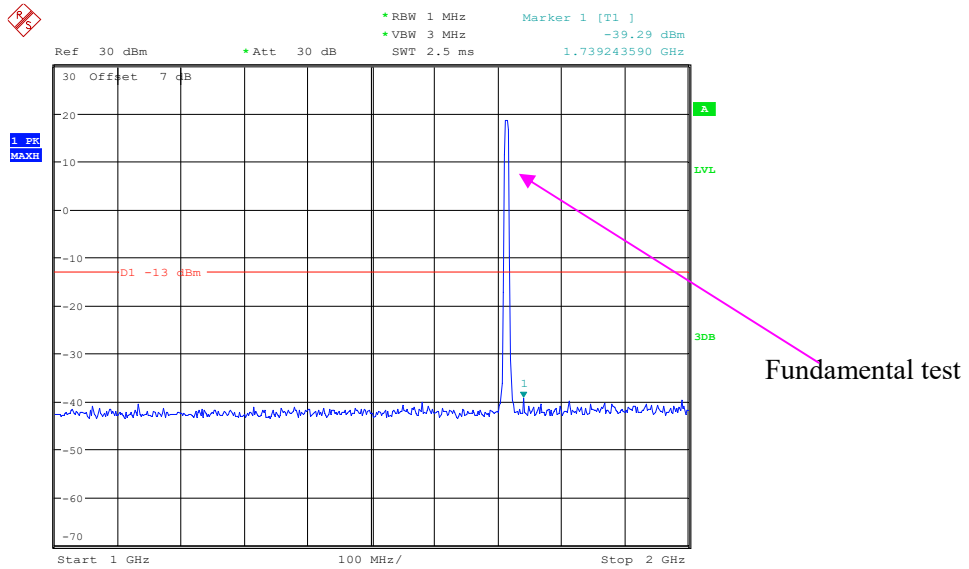

Date: 24.FEB.2022 09:58:21


2 GHz – 20 GHz (WCDMA Mode)

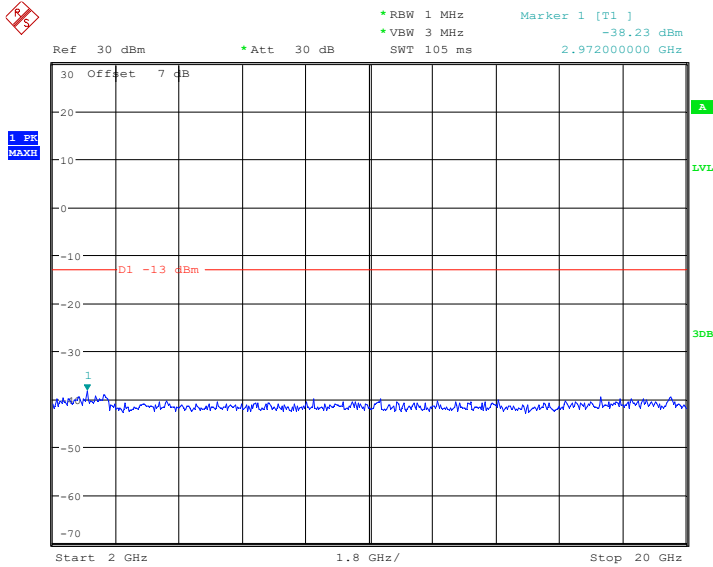

Date: 24.FEB.2022 09:58:46


Middle Channel

30 MHz – 1 GHz (WCDMA Mode)

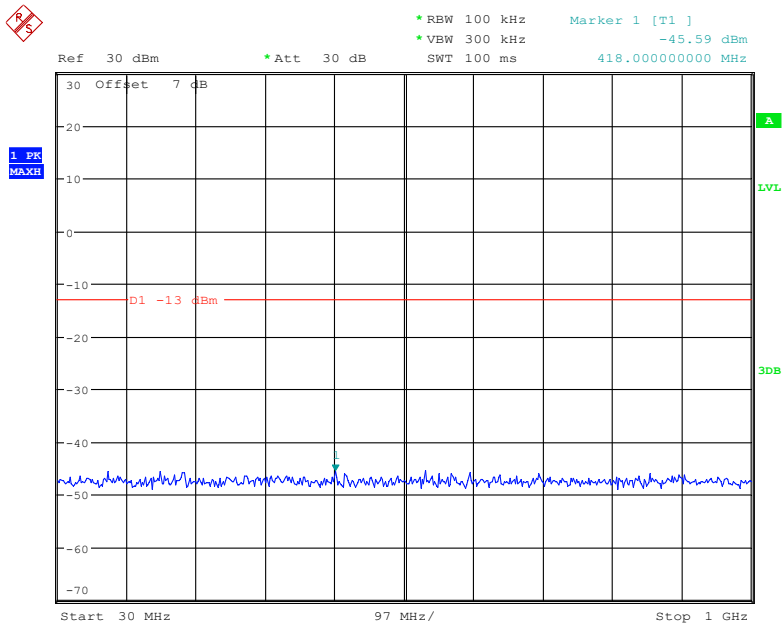


Date: 24.FEB.2022 09:53:33

1 GHz – 2 GHz (WCDMA Mode)

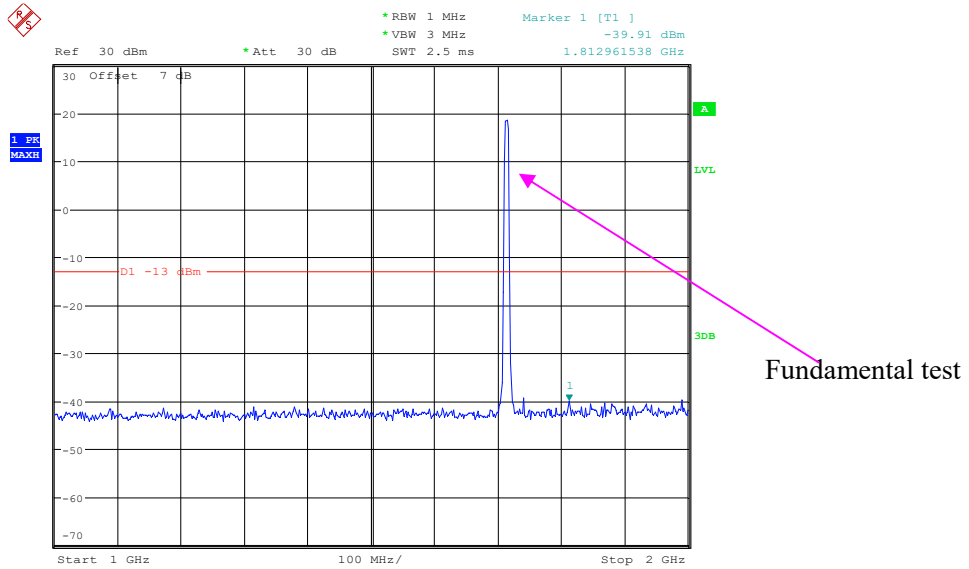

Date: 24.FEB.2022 09:58:14


2 GHz – 20 GHz (WCDMA Mode)

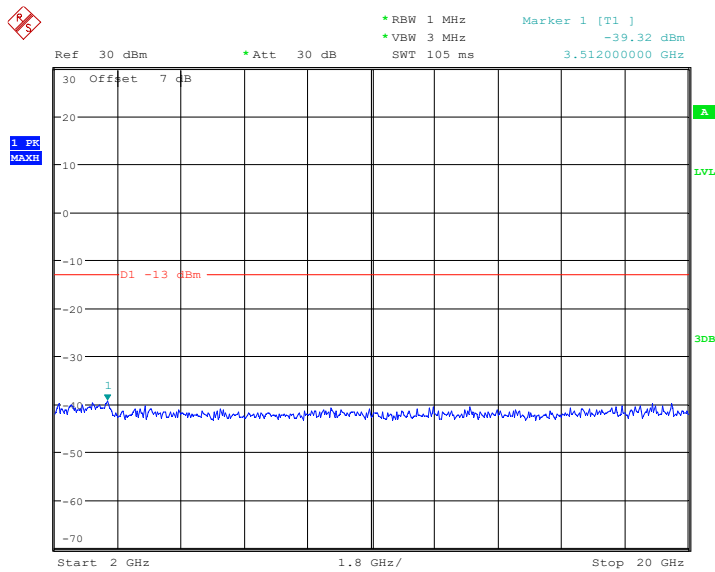

Date: 24.FEB.2022 09:59:01


High Channel:

30 MHz – 1 GHz (WCDMA Mode)

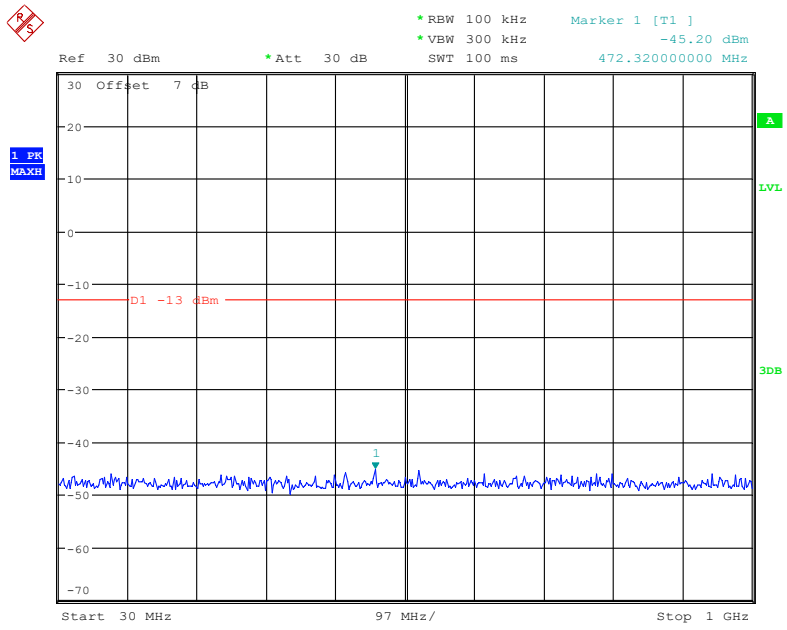


Date: 24.FEB.2022 09:53:47

1 GHz – 2 GHz (WCDMA Mode)

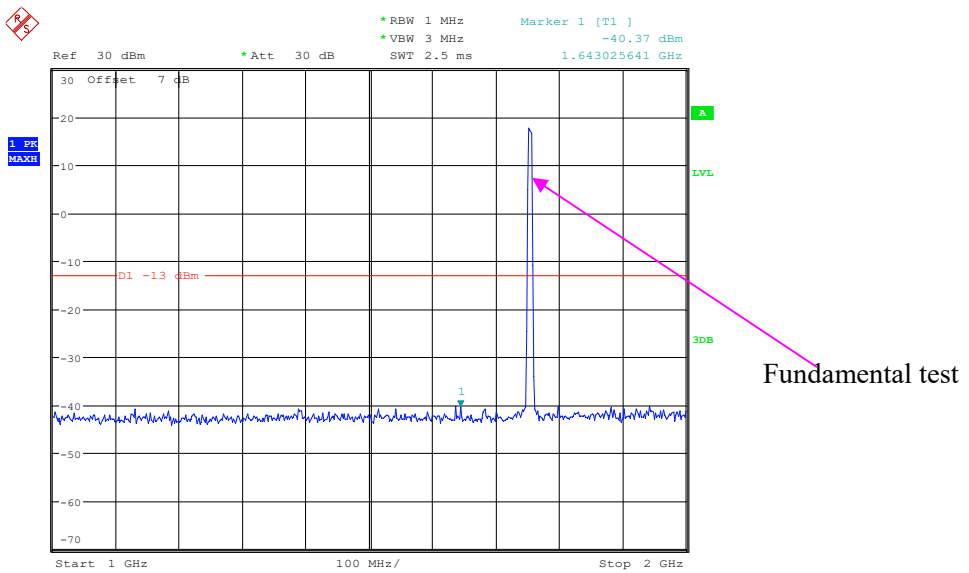

Date: 24.FEB.2022 09:57:14

2 GHz – 20 GHz (WCDMA Mode)

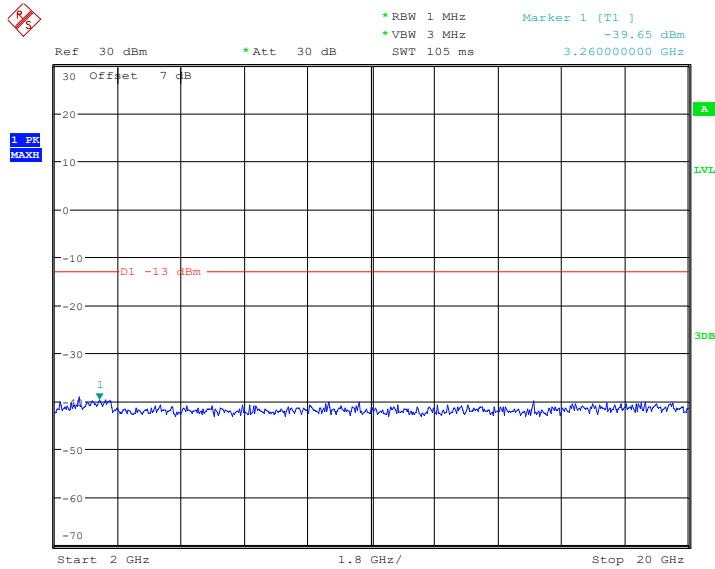

Date: 24.FEB.2022 09:59:13

The test plots of LTE band please refer to the Appendix B.

FCC § 2.1053; § 22.917 (a);§ 24.238 (a); §27.53- SPURIOUS RADIATED EMISSIONS

Applicable Standard

FCC § 2.1053, §22.917(a)& § 24.238(a) &§ 27.53.

Test Procedure

The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load which was also placed on the turntable.

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the receiving antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.

The frequency range up to tenth harmonic of the fundamental frequency was investigated.

Test Data

Environmental Conditions

Temperature:	23.7°C
Relative Humidity:	56 %
ATM Pressure:	101.0kPa

The testing was performed by Caro Hu on 2022-02-11 for below 1GHz and 2022-02-12 for above 1GHz.

Test mode: Transmitting (Pre-scan in the X,Y and Z axes of orientation, the worst case Z-axis of orientation was recorded)

The worst case is as below:

30MHz-10GHz:**Cellular Band (Part 22H)**

Frequency (MHz)	Receiver Reading (dBm)	Turntable Degree	Rx Antenna		Substituted Factor (dB)	Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Height (m)	Polar (H/V)				
GSM850								
Low Channel								
961.5	-76.72	135	1.2	H	10.0	-66.72	-13	53.72
961.5	-75.25	36	1.7	V	11.7	-63.55	-13	50.55
1648.4	-44.40	221	1.9	H	3.5	-40.90	-13	27.90
1648.4	-46.50	331	1.2	V	3.1	-43.40	-13	30.40
2472.6	-39.90	33	2.3	H	6.6	-33.30	-13	20.30
2472.6	-34.10	118	1.5	V	5.8	-28.30	-13	15.30
3296.8	-44.20	141	2.3	H	6.4	-37.80	-13	24.80
3296.8	-49.20	39	1.1	V	5.7	-43.50	-13	30.50
Middle Channel								
960.4	-76.45	10	2.3	H	10.0	-66.45	-13	53.45
960.4	-76.83	328	1.3	V	11.7	-65.13	-13	52.13
1673.2	-48.20	126	1.5	H	3.8	-44.40	-13	31.40
1673.2	-50.50	197	1.6	V	3.1	-47.40	-13	34.40
2509.8	-40.70	265	2.5	H	6.2	-34.50	-13	21.50
2509.8	-34.30	67	2.3	V	5.5	-28.80	-13	15.80
3346.4	-46.40	288	1.1	H	6.6	-39.80	-13	26.80
3346.4	-48.70	293	1.5	V	5.4	-43.30	-13	30.30
High Channel								
961.5	-76.87	38	1.2	H	10.0	-66.87	-13	53.87
961.5	-76.46	150	1.6	V	11.7	-64.76	-13	51.76
1697.6	-51.30	275	1.3	H	4.1	-47.20	-13	34.20
1697.6	-51.80	205	1.8	V	3.1	-48.70	-13	35.70
2546.4	-42.80	298	2.1	H	6.1	-36.70	-13	23.70
2546.4	-39.10	178	1.8	V	5.8	-33.30	-13	20.30
3395.2	-48.80	30	2.1	H	6.2	-42.60	-13	29.60
3395.2	-50.50	143	1.6	V	5.4	-45.10	-13	32.10

Frequency (MHz)	Receiver Reading (dBm)	Turntable Degree	Rx Antenna		Substituted Factor (dB)	Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Height (m)	Polar (H/V)				
WCDMA Band 5								
Low Channel								
953.7	-76.49	276	1.7	H	10.0	-66.49	-13	53.49
953.7	-77.33	66	2.0	V	11.7	-65.63	-13	52.63
1652.8	-55.80	327	1.9	H	3.5	-52.30	-13	39.30
1652.8	-53.70	118	1.8	V	3.1	-50.60	-13	37.60
2479.2	-46.00	238	1.6	H	6.6	-39.40	-13	26.40
2479.2	-45.20	278	1.8	V	5.8	-39.40	-13	26.40
3305.6	-44.50	288	1.1	H	6.4	-38.10	-13	25.10
3305.6	-44.20	334	1.1	V	5.7	-38.50	-13	25.50
Middle Channel								
960.4	-75.36	173	1.8	H	10.0	-65.36	-13	52.36
960.4	-75.13	290	2.3	V	11.7	-63.43	-13	50.43
1673.2	-53.30	29	1.7	H	3.8	-49.50	-13	36.50
1673.2	-51.20	58	1.4	V	3.1	-48.10	-13	35.10
2509.8	-54.90	345	1.3	H	6.2	-48.70	-13	35.70
2509.8	-53.30	201	1.6	V	5.5	-47.80	-13	34.80
3346.4	-44.10	168	1.7	H	6.6	-37.50	-13	24.50
3346.4	-43.90	233	2.4	V	5.4	-38.50	-13	25.50
High Channel								
954.6	-77.68	341	1.0	H	10.0	-67.68	-13	54.68
954.6	-77.54	8	2.2	V	11.7	-65.84	-13	52.84
1693.2	-57.20	341	1.8	H	4.1	-53.10	-13	40.10
1693.2	-54.70	208	1.3	V	3.1	-51.60	-13	38.60
2539.8	-52.90	317	1.4	H	6.1	-46.80	-13	33.80
2539.8	-49.90	317	2.4	V	5.8	-44.10	-13	31.10
3386.4	-43.70	211	2.2	H	6.2	-37.50	-13	24.50
3386.4	-44.80	7	2.3	V	5.4	-39.40	-13	26.40

30MHz-20GHz:**PCS Band (Part 24E)**

Frequency (MHz)	Receiver Reading (dBm)	Turntable Degree	Rx Antenna		Substituted Factor (dB)	Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Height (m)	Polar (H/V)				
GSM 1900								
Low Channel								
958.6	-76.05	14	1.8	H	10.0	-66.05	-13	53.05
958.6	-77.37	60	2.1	V	11.7	-65.67	-13	52.67
3700.4	-52.80	111	2.0	H	8.1	-44.70	-13	31.70
3700.4	-52.60	43	2.0	V	7.6	-45.00	-13	32.00
5550.6	-49.60	278	1.9	H	9.6	-40.00	-13	27.00
5550.6	-48.00	220	1.6	V	9.1	-38.90	-13	25.90
Middle Channel								
959.4	-76.24	143	2.4	H	10.0	-66.24	-13	53.24
959.4	-76.89	268	1.1	V	11.7	-65.19	-13	52.19
3760	-52.80	126	2.4	H	8.8	-44.00	-13	31.00
3760	-52.30	289	2.2	V	8	-44.30	-13	31.30
5640	-50.30	274	1.2	H	10.2	-40.10	-13	27.10
5640	-48.80	33	1.2	V	9.5	-39.30	-13	26.30
High Channel								
948.6	-75.83	106	2.3	H	10.0	-65.83	-13	52.83
948.6	-75.48	201	2.3	V	11.7	-63.78	-13	50.78
3819.6	-50.40	299	1.2	H	8.7	-41.70	-13	28.70
3819.6	-49.90	126	2.2	V	8	-41.90	-13	28.90
5729.4	-49.50	279	1.1	H	10.8	-38.70	-13	25.70
5729.4	-47.80	56	2.1	V	10.4	-37.40	-13	24.40

Frequency (MHz)	Receiver Reading (dBm)	Turntable Degree	Rx Antenna		Substituted Factor (dB)	Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Height (m)	Polar (H/V)				
WCDMA Band 2								
Low Channel								
958.4	-76.96	349	2.0	H	10.0	-66.96	-13	53.96
958.4	-77.55	111	2.4	V	11.7	-65.85	-13	52.85
3704.8	-51.40	142	1.4	H	8.1	-43.30	-13	30.30
3704.8	-51.80	228	1.4	V	7.6	-44.20	-13	31.20
5557.2	-53.30	43	1.6	H	9.6	-43.70	-13	30.70
5557.2	-52.70	173	1.2	V	9.1	-43.60	-13	30.60
Middle Channel								
957.8	-77.29	183	1.1	H	10.0	-67.29	-13	54.29
957.8	-75.63	183	2.4	V	11.7	-63.93	-13	50.93
3760.0	-54.20	275	1.9	H	8.8	-45.40	-13	32.40
3760.0	-53.30	17	1.6	V	8	-45.30	-13	32.30
5640.0	-54.50	193	2.3	H	10.2	-44.30	-13	31.30
5640.0	-54.10	304	1.9	V	9.5	-44.60	-13	31.60
High Channel								
960.8	-76.29	7	2.1	H	10.0	-66.29	-13	53.29
960.8	-74.80	98	2.5	V	11.7	-63.10	-13	50.10
3815.2	-52.30	63	1.9	H	8.7	-43.60	-13	30.60
3815.2	-52.30	163	1.8	V	8	-44.30	-13	31.30
5722.8	-54.20	329	1.1	H	10.4	-43.80	-13	30.80
5722.8	-53.30	211	2.4	V	9.9	-43.40	-13	30.40

30MHz-20GHz:**AWS Band (Part 27E)**

Frequency (MHz)	Receiver Reading (dBm)	Turntable Degree	Rx Antenna		Substituted Factor (dB)	Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Height (m)	Polar (H/V)				
WCDMA Band 4								
Low Channel								
962.1	-75.12	130	1.5	H	10.0	-65.12	-13	52.12
962.1	-76.11	80	1.9	V	11.7	-64.41	-13	51.41
3424.8	-51.30	170	1.8	H	6.4	-44.90	-13	31.90
3424.8	-50.10	301	1.8	V	5.7	-44.40	-13	31.40
5137.2	-56.10	197	2.3	H	11.4	-44.70	-13	31.70
5137.2	-56.00	154	1.4	V	10.7	-45.30	-13	32.30
Middle Channel								
958.3	-77.09	41	1.6	H	10.0	-67.09	-13	54.09
958.3	-75.98	21	2.0	V	11.7	-64.28	-13	51.28
3465.2	-51.30	297	2.0	H	6.9	-44.40	-13	31.40
3465.2	-51.10	130	2.3	V	6.2	-44.90	-13	31.90
5197.8	-54.60	297	1.9	H	10.3	-44.30	-13	31.30
5197.8	-53.80	290	1.2	V	9.8	-44.00	-13	31.00
High Channel								
959.6	-76.08	121	2.1	H	10.0	-66.08	-13	53.08
959.6	-76.53	294	2.4	V	11.7	-64.83	-13	51.83
3505.2	-51.20	73	1.5	H	7.8	-43.40	-13	30.40
3505.2	-50.40	58	1.5	V	6.5	-43.90	-13	30.90
5257.8	-52.90	328	1.3	H	9.4	-43.50	-13	30.50
5257.8	-52.40	350	1.7	V	9	-43.40	-13	30.40

LTE Band: (Pre-scan with all the bandwidth, and worst case as below)

Frequency (MHz)	Receiver Reading (dBm)	Turntable Degree	Rx Antenna		Substituted Factor (dB)	Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Height (m)	Polar (H/V)				
Band 2								
Test frequency range: 30MHz-20GHz								
1.4MHz bandwidth, Low Channel								
958.2	-76.40	351	1.1	H	10.0	-66.40	-13	53.40
958.2	-76.49	239	1.4	V	11.7	-64.79	-13	51.79
3701.4	-51.70	29	1.5	H	8.1	-43.60	-13	30.60
3701.4	-51.50	47	1.1	V	7.6	-43.90	-13	30.90
5552.1	-44.30	178	1.7	H	9.6	-34.70	-13	21.70
5552.1	-43.90	118	1.8	V	9.1	-34.80	-13	21.80
1.4MHz bandwidth, Middle Channel								
955.8	-76.36	214	1.3	H	10.0	-66.36	-13	53.36
955.8	-75.31	201	2.3	V	11.7	-63.61	-13	50.61
3760.0	-53.00	115	2.3	H	8.8	-44.20	-13	31.20
3760.0	-52.90	158	2.4	V	8.0	-44.90	-13	31.90
5640.0	-51.10	264	1.9	H	10.2	-40.90	-13	27.90
5640.0	-48.10	234	1.5	V	9.5	-38.60	-13	25.60
1.4MHz bandwidth, High Channel								
960.4	-77.19	116	1.1	H	10.0	-67.19	-13	54.19
960.4	-74.98	1	2.0	V	11.7	-63.28	-13	50.28
3818.6	-50.30	6	1.3	H	8.7	-41.60	-13	28.60
3818.6	-50.60	13	1.5	V	8.0	-42.60	-13	29.60
5727.9	-51.50	133	1.4	H	10.6	-40.90	-13	27.90
5727.9	-46.60	220	2.3	V	10.2	-36.40	-13	23.40

Frequency (MHz)	Receiver Reading (dBm)	Turntable Degree	Rx Antenna		Substituted Factor (dB)	Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Height (m)	Polar (H/V)				
Band 4								
Test frequency range: 30MHz-20GHz								
1.4MHz bandwidth, Low Channel								
949.6	-77.53	54	1.5	H	10.0	-67.53	-13	54.53
949.6	-75.07	341	1.5	V	11.7	-63.37	-13	50.37
3421.4	-51.00	124	1.1	H	6.4	-44.60	-13	31.60
3421.4	-49.80	227	2.2	V	5.7	-44.10	-13	31.10
5132.1	-56.70	236	2.4	H	11.3	-45.40	-13	32.40
5132.1	-55.50	318	2.3	V	10.8	-44.70	-13	31.70
1.4MHz bandwidth, Middle Channel								
956.9	-76.43	308	1.7	H	10.0	-66.43	-13	53.43
956.9	-77.53	332	1.1	V	11.7	-65.83	-13	52.83
3465.0	-51.00	20	1.5	H	6.9	-44.10	-13	31.10
3465.0	-50.70	320	2.4	V	6.2	-44.50	-13	31.50
5197.5	-55.50	110	2.2	H	10.3	-45.20	-13	32.20
5197.5	-53.90	137	2.2	V	9.8	-44.10	-13	31.10
1.4MHz bandwidth, High Channel								
958.5	-77.22	293	1.0	H	10.0	-67.22	-13	54.22
958.5	-76.21	195	1.3	V	11.7	-64.51	-13	51.51
3508.6	-51.70	193	2.4	H	7.8	-43.90	-13	30.90
3508.6	-50.40	177	2.1	V	6.5	-43.90	-13	30.90
5262.9	-54.00	110	1.0	H	9.5	-44.50	-13	31.50
5262.9	-52.30	313	1.7	V	8.9	-43.40	-13	30.40

Frequency (MHz)	Receiver Reading (dBm)	Turntable Degree	Rx Antenna		Substituted Factor (dB)	Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Height (m)	Polar (H/V)				
Band 5								
Test frequency range: 30MHz-10GHz								
1.4MHz bandwidth, Low Channel								
956.9	-75.88	342	1.8	H	10.0	-65.88	-13	52.88
956.9	-77.48	259	2.1	V	11.7	-65.78	-13	52.78
1649.4	-55.80	191	1.6	H	3.5	-52.30	-13	39.30
1649.4	-55.70	208	2.4	V	3.1	-52.60	-13	39.60
2474.1	-46.60	47	1.9	H	6.6	-40.00	-13	27.00
2474.1	-42.70	347	1.1	V	5.8	-36.90	-13	23.90
3298.8	-36.90	14	2.4	H	6.4	-30.50	-13	17.50
3298.8	-36.80	38	1.5	V	5.7	-31.10	-13	18.10
1.4MHz bandwidth, Middle Channel								
959.7	-75.73	149	2.4	H	10.0	-65.73	-13	52.73
959.7	-76.26	330	1.7	V	11.7	-64.56	-13	51.56
1673.0	-51.90	199	2.5	H	3.8	-48.10	-13	35.10
1673.0	-51.90	325	2.1	V	3.1	-48.80	-13	35.80
2509.5	-45.80	303	2.3	H	6.2	-39.60	-13	26.60
2509.5	-42.80	125	1.8	V	5.5	-37.30	-13	24.30
3346.0	-38.70	231	2.0	H	6.6	-32.10	-13	19.10
3346.0	-38.20	225	2.1	V	5.4	-32.80	-13	19.80
1.4MHz bandwidth, High Channel								
958.3	-75.77	352	1.6	H	10.0	-65.77	-13	52.77
958.3	-76.99	285	1.2	V	11.7	-65.29	-13	52.29
1696.6	-56.00	340	1.8	H	4.1	-51.90	-13	38.90
1696.6	-54.80	357	1.1	V	3.1	-51.70	-13	38.70
2544.9	-46.20	74	1.9	H	6.1	-40.10	-13	27.10
2544.9	-44.70	92	1.2	V	5.8	-38.90	-13	25.90
3393.2	-41.40	142	2.0	H	6.2	-35.20	-13	22.20
3393.2	-41.30	57	2.4	V	5.4	-35.90	-13	22.90

Frequency (MHz)	Receiver Reading (dBm)	Turntable Degree	Rx Antenna		Substituted Factor (dB)	Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Height (m)	Polar (H/V)				
Band 7								
Test frequency range: 30MHz-26.5GHz								
5MHz bandwidth, Low Channel								
956.6	-76.68	163	1.2	H	10.0	-66.68	-25	41.68
956.6	-77.59	242	2.3	V	11.7	-65.89	-25	40.89
5005.0	-56.40	347	2.5	H	10.8	-45.60	-25	20.60
5005.0	-55.30	289	2.5	V	10.1	-45.20	-25	20.20
7507.5	-61.00	275	2.4	H	20.3	-40.70	-25	15.70
7507.5	-61.40	297	1.3	V	19.9	-41.50	-25	16.50
5MHz bandwidth, Middle Channel								
960.3	-78.19	111	2.3	H	10.0	-68.19	-25	43.19
960.3	-78.32	201	2.4	V	11.7	-66.62	-25	41.62
5070.0	-56.10	177	1.1	H	11.1	-45.00	-25	20.00
5070.0	-55.90	102	2.1	V	10.7	-45.20	-25	20.20
7605.0	-64.60	301	1.5	H	21.2	-43.40	-25	18.40
7605.0	-63.90	74	2.0	V	20.0	-43.90	-25	18.90
5MHz bandwidth, High Channel								
958.7	-78.42	173	1.6	H	10.0	-68.42	-25	43.42
958.7	-77.67	297	2.5	V	11.7	-65.97	-25	40.97
5135.0	-56.60	349	1.6	H	11.3	-45.30	-25	20.30
5135.0	-56.20	315	2.4	V	10.8	-45.40	-25	20.40
7702.5	-65.10	7	1.1	H	21.3	-43.80	-25	18.80
7702.5	-65.30	307	1.2	V	21.1	-44.20	-25	19.20

Frequency (MHz)	Receiver Reading (dBm)	Turntable Degree	Rx Antenna		Substituted Factor (dB)	Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Height (m)	Polar (H/V)				
Band 38								
Test frequency range: 30MHz-26.5GHz								
5MHz, Low Channel								
960.5	-77.97	22	1.1	H	10.0	-67.97	-25	42.97
960.5	-77.90	241	2.3	V	11.7	-66.20	-25	41.20
5145.0	-56.20	177	1.2	H	11.4	-44.80	-25	19.80
5145.0	-55.90	129	2.1	V	10.7	-45.20	-25	20.20
7717.5	-62.90	106	1.0	H	20.6	-42.30	-25	17.30
7717.5	-64.00	316	1.6	V	20.4	-43.60	-25	18.60
5MHz, Middle Channel								
959.2	-77.73	267	1.5	H	10.0	-67.73	-25	42.73
959.2	-77.64	220	1.7	V	11.7	-65.94	-25	40.94
5190.0	-55.00	218	2.1	H	10.5	-44.50	-25	19.50
5190.0	-54.40	136	1.6	V	10.0	-44.40	-25	19.40
7785.0	-58.90	312	1.4	H	18.3	-40.60	-25	15.60
7785.0	-59.60	43	2.1	V	18.0	-41.60	-25	16.60
5MHz, High Channel								
958.4	-78.19	18	1.1	H	10.0	-68.19	-25	43.19
958.4	-77.89	189	1.1	V	11.7	-66.19	-25	41.19
5235.0	-53.80	232	1.7	H	9.7	-44.10	-25	19.10
5235.0	-53.60	313	2.4	V	9.3	-44.30	-25	19.30
7852.5	-59.60	95	2.2	H	18.2	-41.40	-25	16.40
7852.5	-59.50	144	1.2	V	17.6	-41.90	-25	16.90

Frequency (MHz)	Receiver Reading (dBm)	Turntable Degree	Rx Antenna		Substituted Factor (dB)	Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Height (m)	Polar (H/V)				
Band 41								
Test frequency range: 1-26.5GHz								
5MHz, Low Channel								
956.9	-78.48	108	1.7	H	10.0	-68.48	-25	43.48
956.9	-76.84	148	2.2	V	11.7	-65.14	-25	40.14
5075.0	-56.00	224	2.3	H	11.1	-44.90	-25	19.90
5075.0	-55.90	180	2.4	V	10.7	-45.20	-25	20.20
7612.5	-65.80	72	2.0	H	21.2	-44.60	-25	19.60
7612.5	-64.40	218	1.1	V	20.2	-44.20	-25	19.20
5MHz bandwidth, Middle Channel								
962.2	-77.42	209	1.5	H	10.0	-67.42	-25	42.42
962.2	-77.68	161	1.6	V	11.7	-65.98	-25	40.98
5190.0	-55.00	61	2.0	H	10.5	-44.50	-25	19.50
5190.0	-54.40	315	1.0	V	10.0	-44.40	-25	19.40
7785.0	-61.10	87	1.8	H	18.3	-42.80	-25	17.80
7785.0	-60.40	144	2.4	V	18.0	-42.40	-25	17.40
5MHz bandwidth, High Channel								
954.8	-78.78	285	1.6	H	10.0	-68.78	-25	43.78
954.8	-76.65	50	2.1	V	11.7	-64.95	-25	39.95
5305.0	-52.90	67	1.1	H	9.6	-43.30	-25	18.30
5305.0	-51.90	81	1.7	V	8.8	-43.10	-25	18.10
7957.5	-62.70	354	2.2	H	18.9	-43.80	-25	18.80
7957.5	-61.80	306	2.2	V	18.5	-43.30	-25	18.30

Note:

Absolute Level = Reading Level + Substituted Factor

Substituted Factor contains: SG Level - Cable loss+ Antenna Gain

Margin = Limit- Absolute Level

FCC§ 22.917 (a);§ 24.238 (a); §27.53 (h)(m) - BAND EDGES

Applicable Standard

According to § 22.917(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.


According to §24.238(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

According to FCC §27.53 (h)(m), the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

Test Procedure

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.

The center of the spectrum analyzer was set to block edge frequency

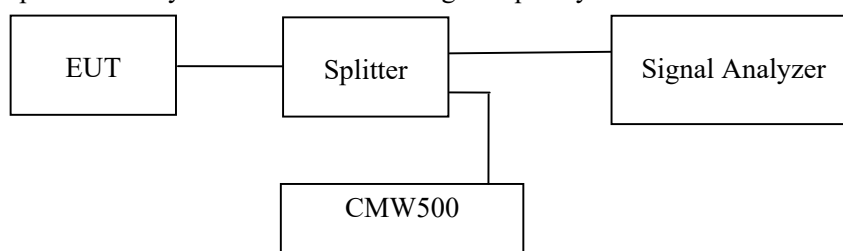

Test Data

Environmental Conditions

Temperature:	23.6~24.2 °C
Relative Humidity:	58~63 %
ATM Pressure:	101.0 kPa


The testing was performed by Key Pei from 2022-02-11 to 2022-02-24.

EUT operation mode: Transmitting (Worst case)

Test Result: Pass


Please refer to the following plots.

Cellular Band, Left Band Edge for GSM (GMSK) Mode

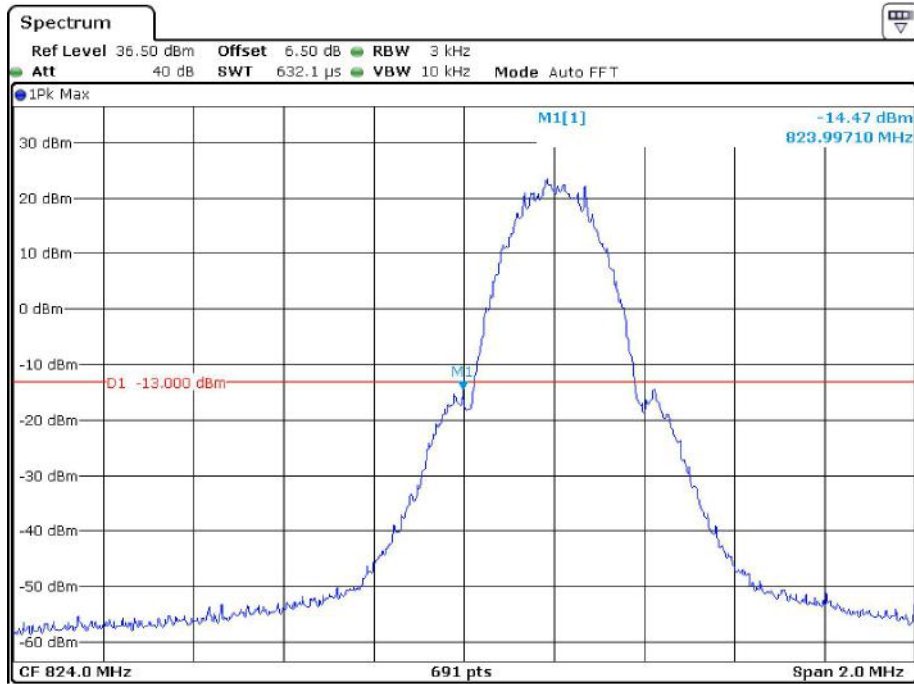


Date: 11.FEB.2022 14:08:00

Cellular Band, Right Band Edge for GSM (GMSK) Mode

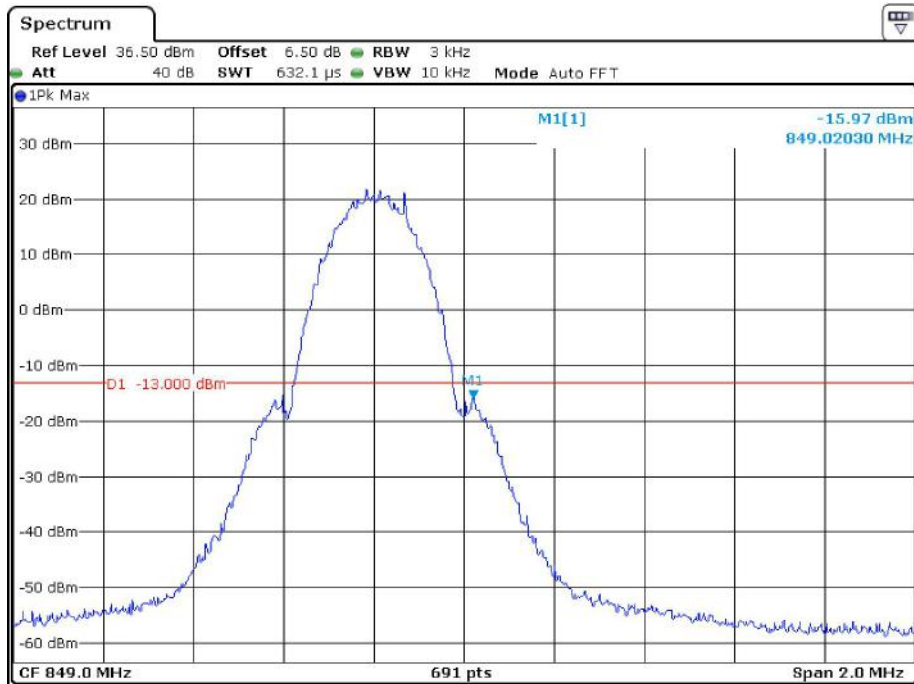


Date: 11.FEB.2022 14:10:46

Cellular Band, Left Band Edge for EGPRS (8PSK) Mode

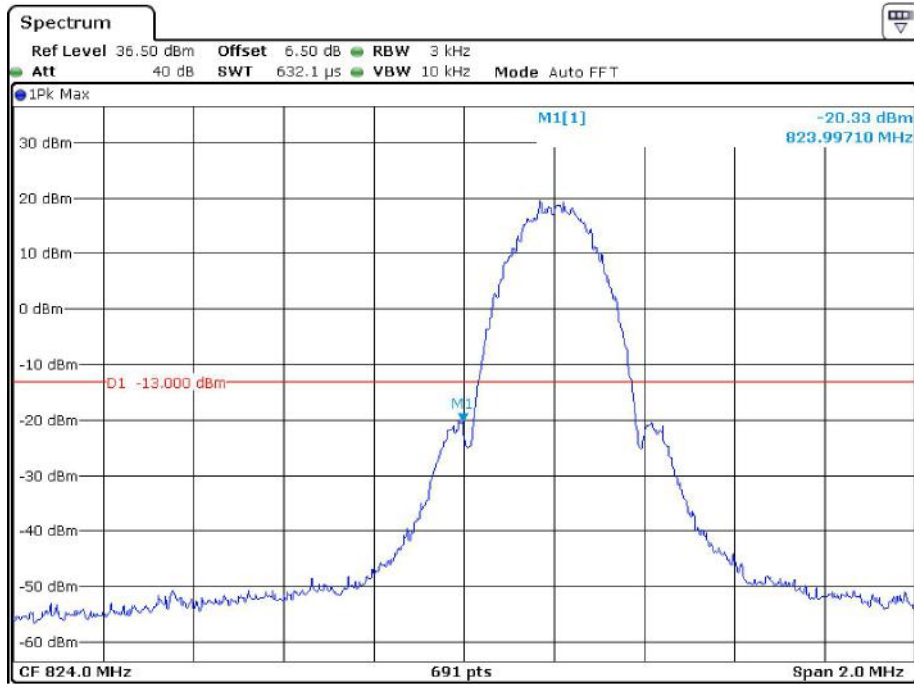


Date: 11.FEB.2022 14:19:46

Cellular Band, Right Band Edge for EGPRS (8PSK) Mode

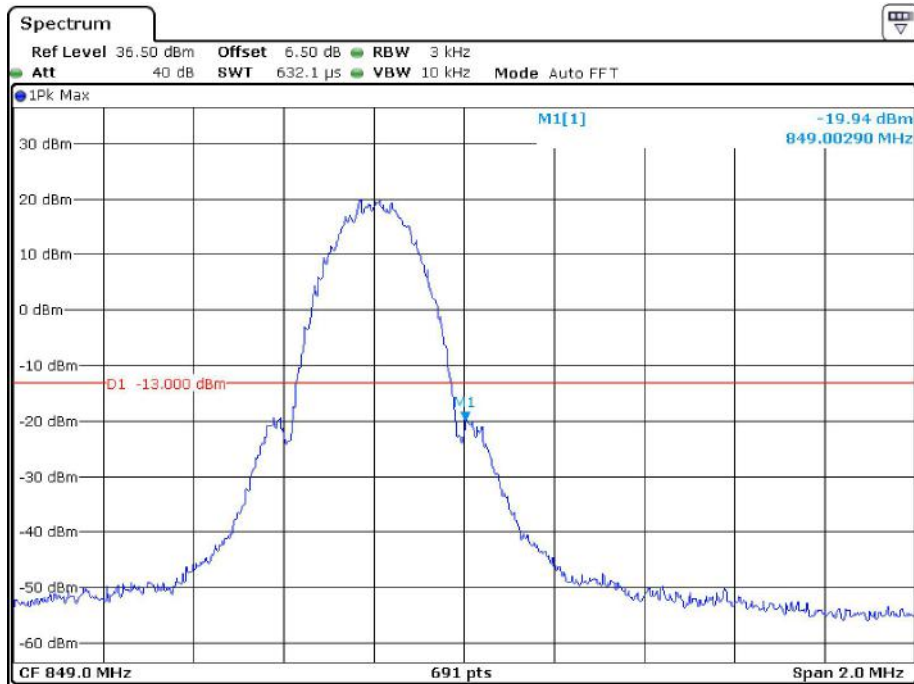


Date: 11.FEB.2022 14:20:04

Cellular Band, Left Band Edge for RMC (BPSK) Mode

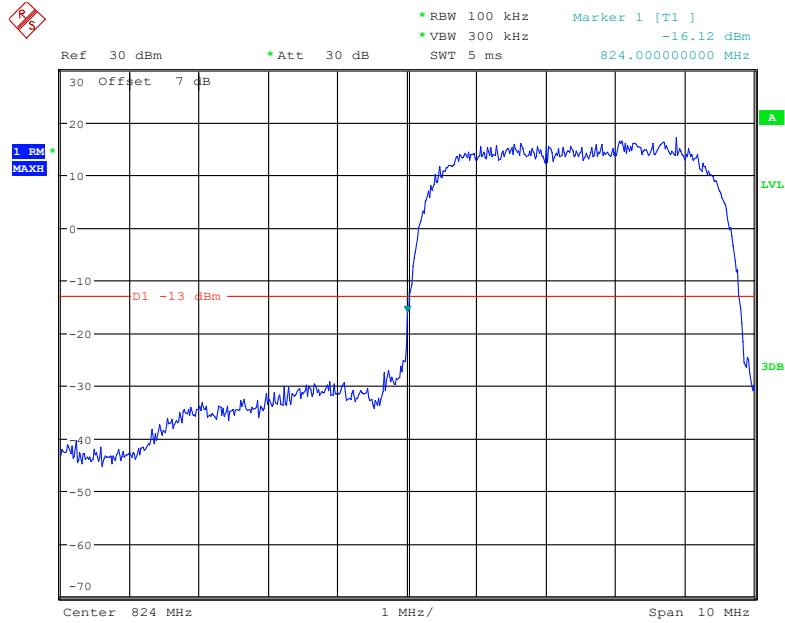


Date: 24.FEB.2022 09:08:58

Cellular Band, Right Band Edge for RMC (BPSK) Mode

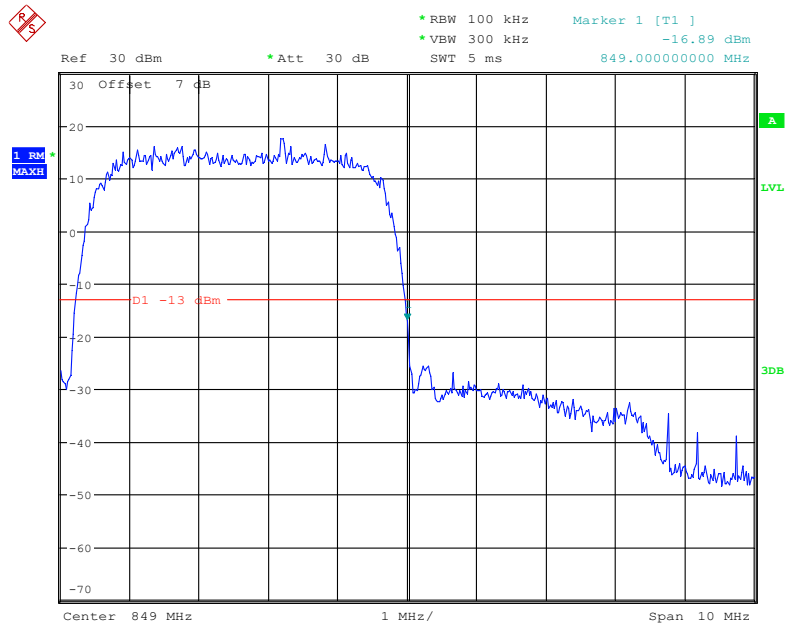


Date: 24.FEB.2022 09:09:22

Cellular Band, Left Band Edge for HSDPA(16QAM) Mode

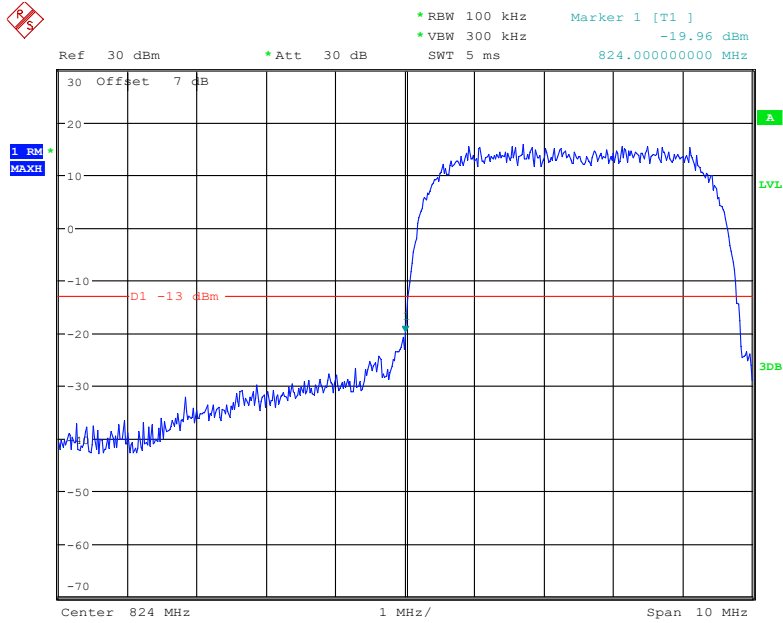


Date: 24.FEB.2022 09:31:23

Cellular Band, Right Band Edge for HSDPA (16QAM) Mode

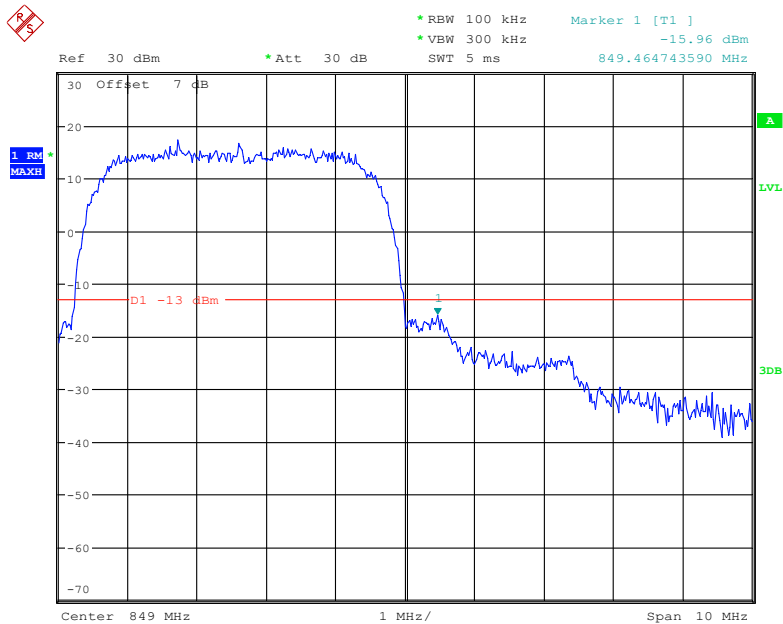


Date: 24.FEB.2022 09:30:58

Cellular Band, Left Band Edge for HSUPA (BPSK) Mode

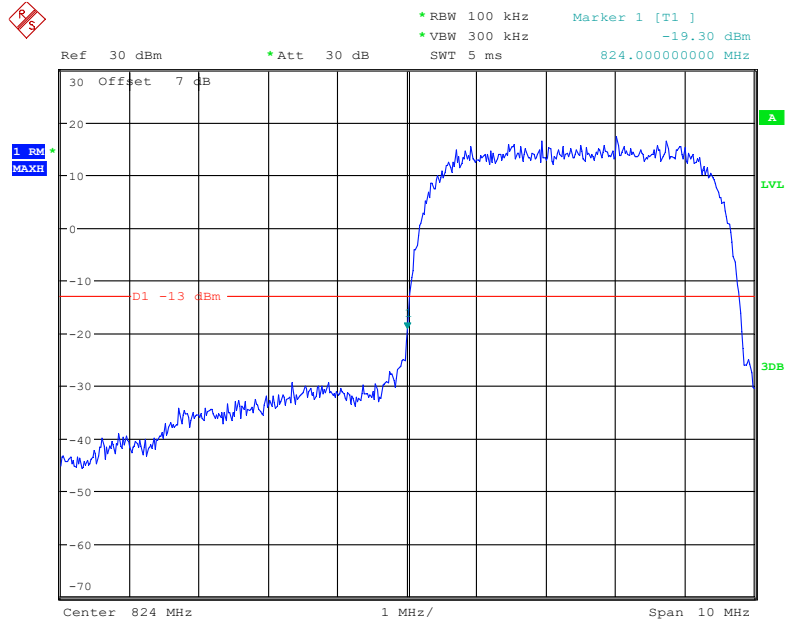


Date: 24.FEB.2022 09:36:41

Cellular Band, Right Band Edge for HSUPA (BPSK) Mode

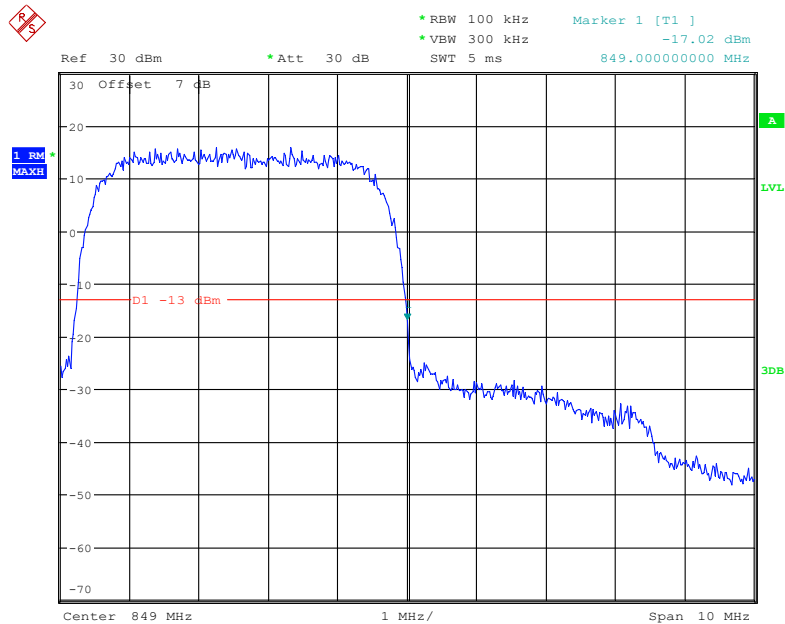


Date: 24.FEB.2022 09:37:03

PCS Band, Left Band Edge for GSM (GMSK) Mode

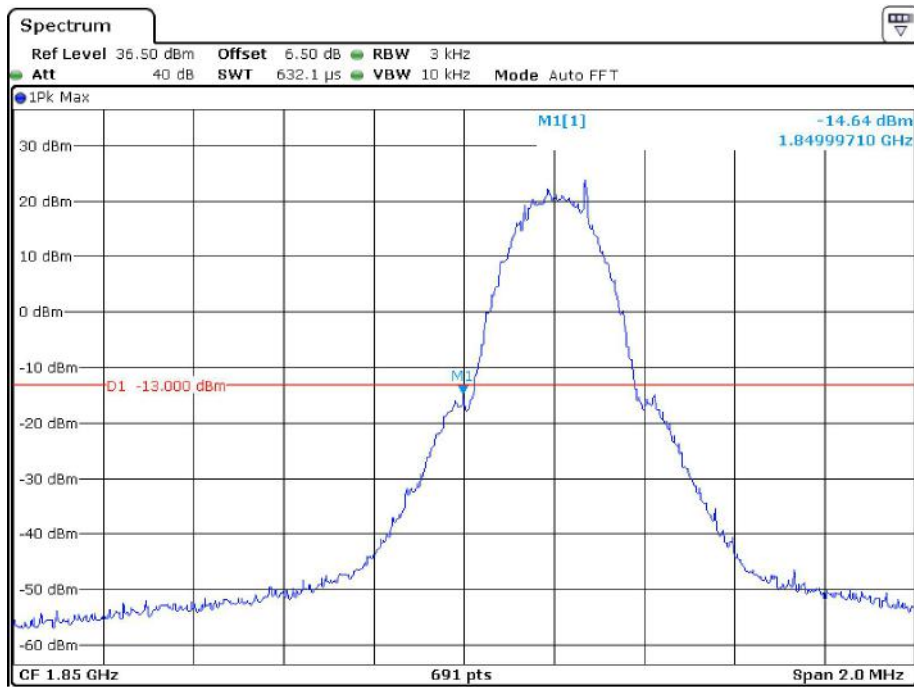


Date: 11.FEB.2022 13:51:58

PCS Band, Right Band Edge for GSM (GMSK) Mode

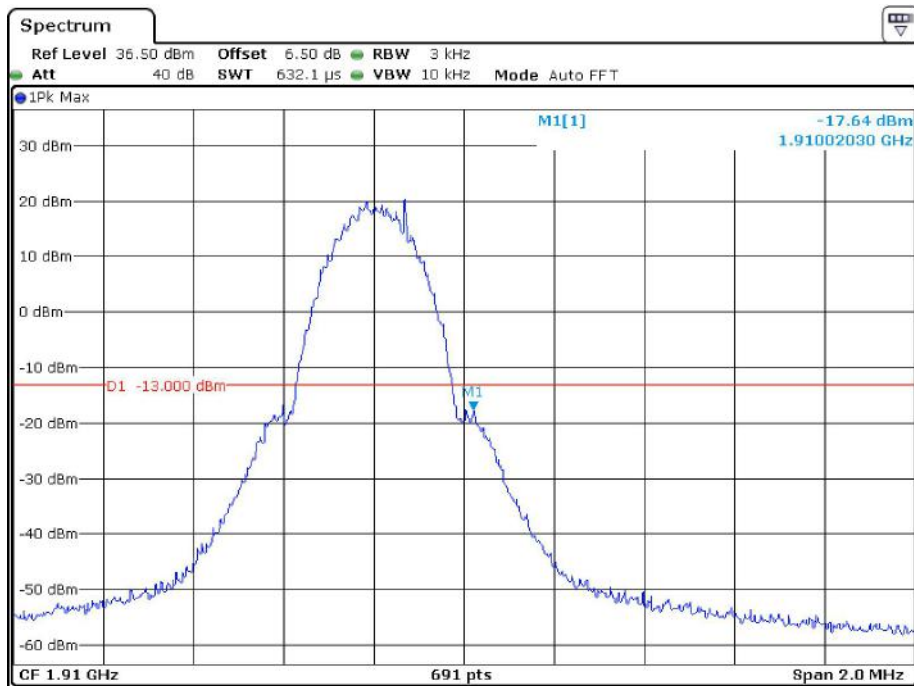


Date: 11.FEB.2022 13:52:22

PCS Band, Left Band Edge for EGPRS (8PSK) Mode

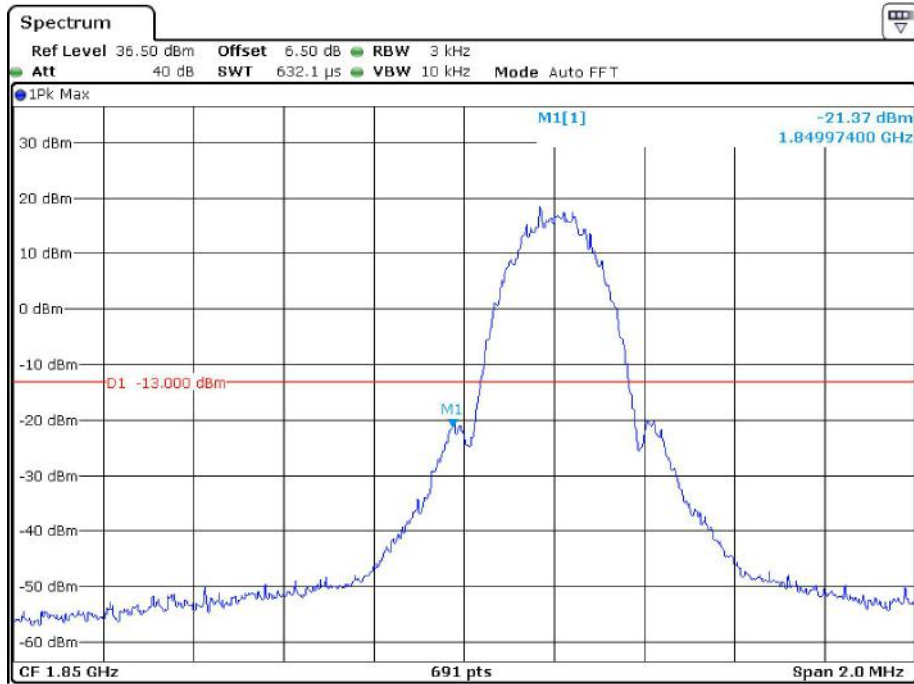


Date: 11.FEB.2022 14:02:06

PCS Band, Right Band Edge for EGPRS (8PSK) Mode

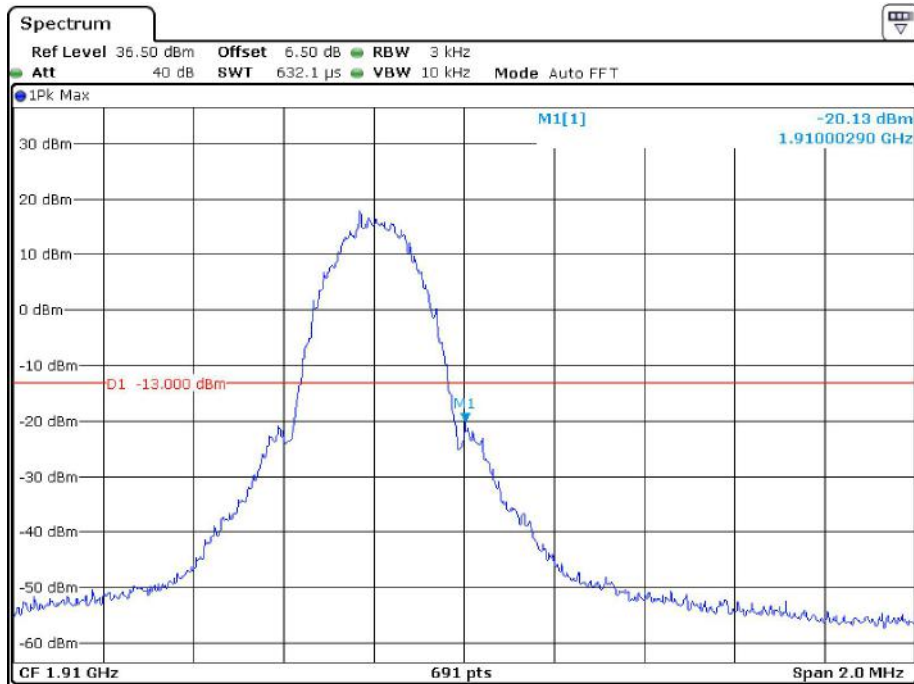


Date: 11.FEB.2022 14:01:42

PCS Band, Left Band Edge for RMC (BPSK) Mode

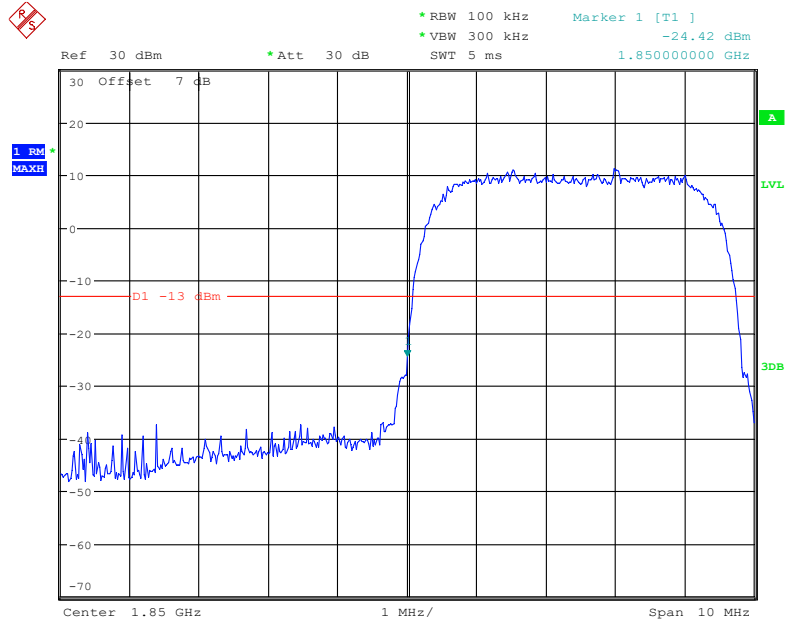


Date: 24.FEB.2022 09:06:54

PCS Band, Right Band Edge for RMC (BPSK) Mode

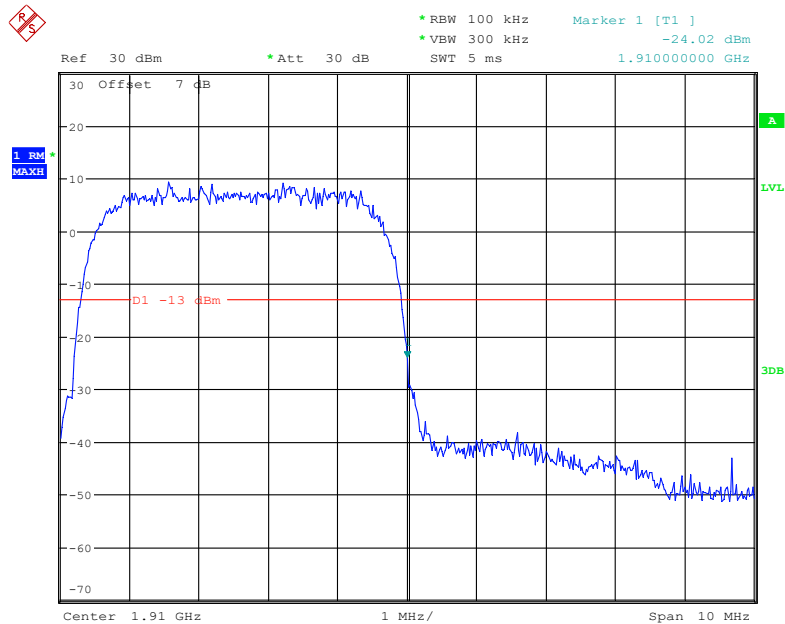


Date: 24.FEB.2022 09:07:52

PCS Band, Left Band Edge for HSDPA(16QAM) Mode

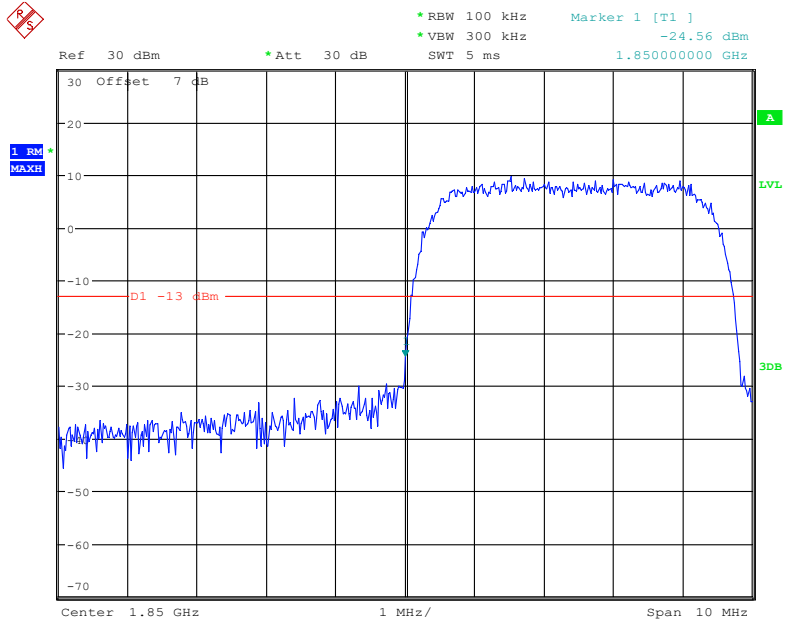


Date: 24.FEB.2022 09:31:47

PCS Band, Right Band Edge for HSDPA (16QAM) Mode

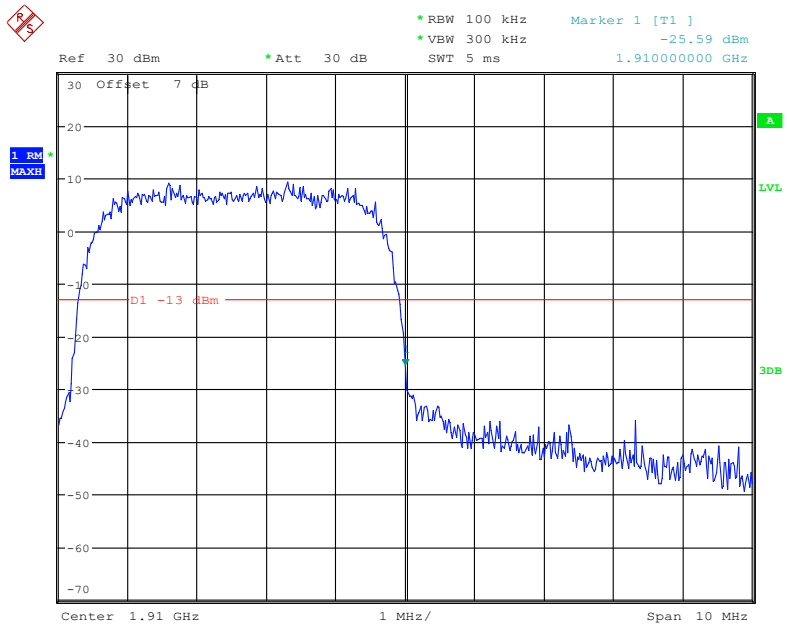


Date: 24.FEB.2022 09:32:08

PCS Band, Left Band Edge for HSUPA (BPSK) Mode

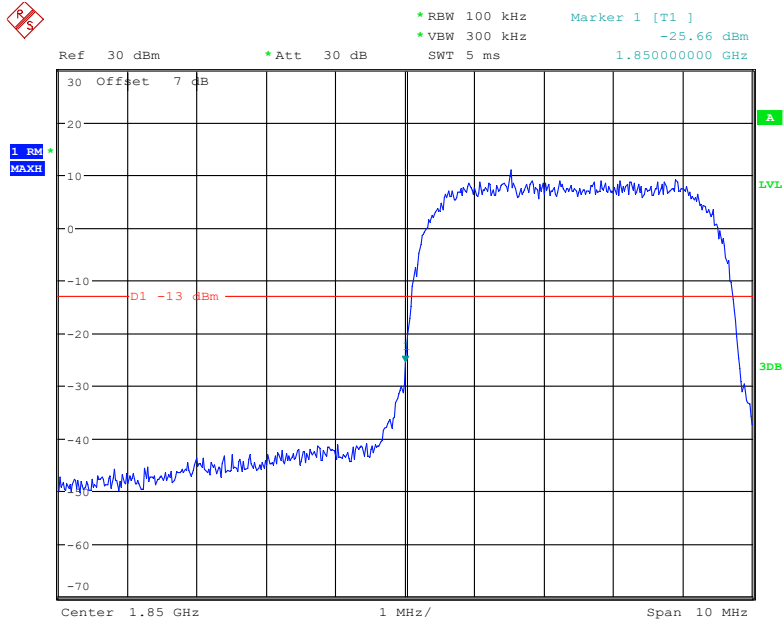


Date: 24.FEB.2022 09:35:14

PCS Band, Right Band Edge for HSUPA (BPSK) Mode

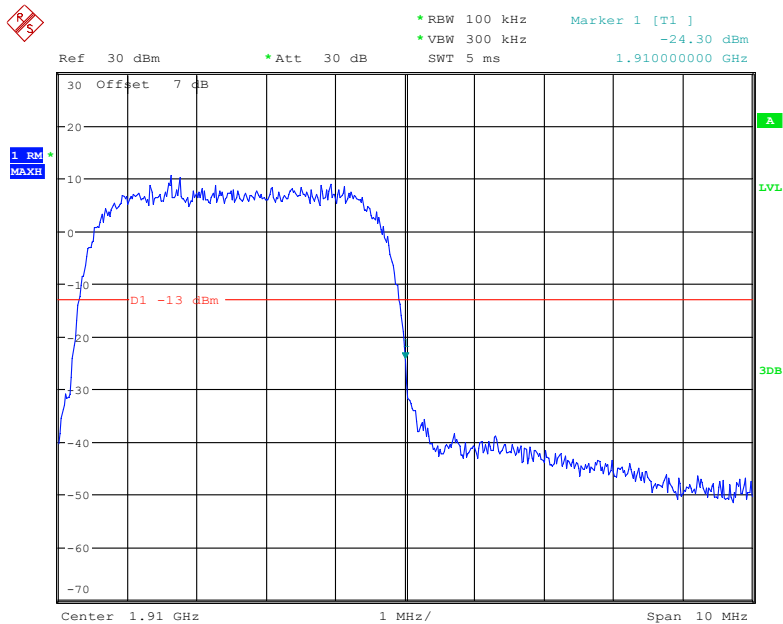


Date: 24.FEB.2022 09:35:39

AWS Band, Left Band Edge for RMC (BPSK) Mode

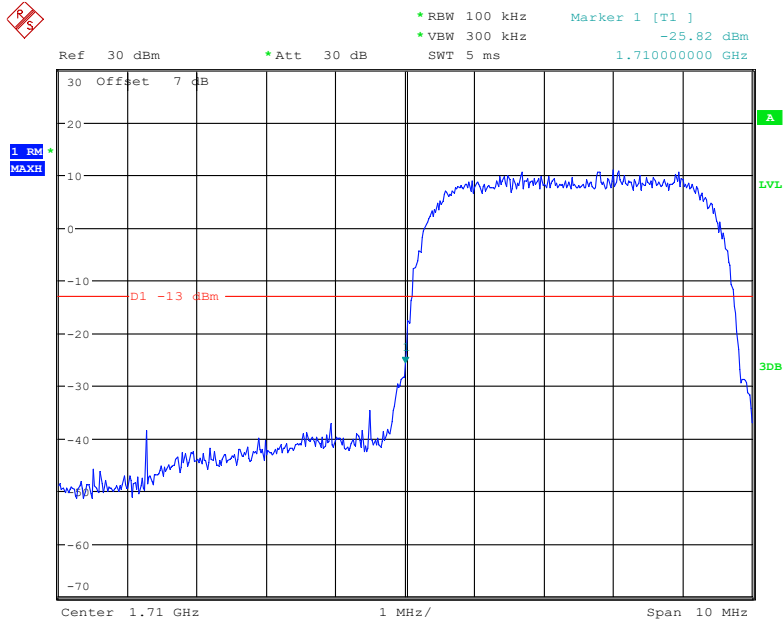


Date: 24.FEB.2022 09:08:31

AWS Band, Right Band Edge for RMC (BPSK) Mode

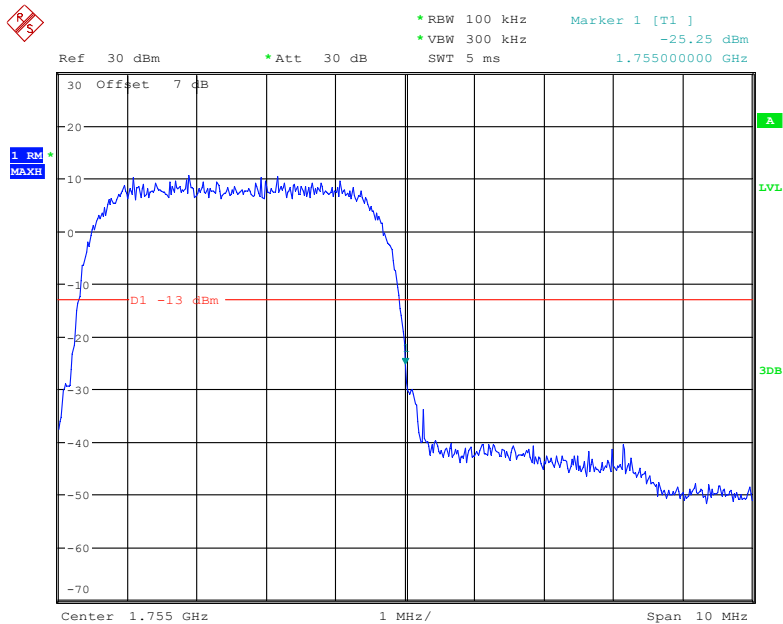


Date: 24.FEB.2022 09:08:13

AWS Band, Left Band Edge for HSDPA(16QAM) Mode

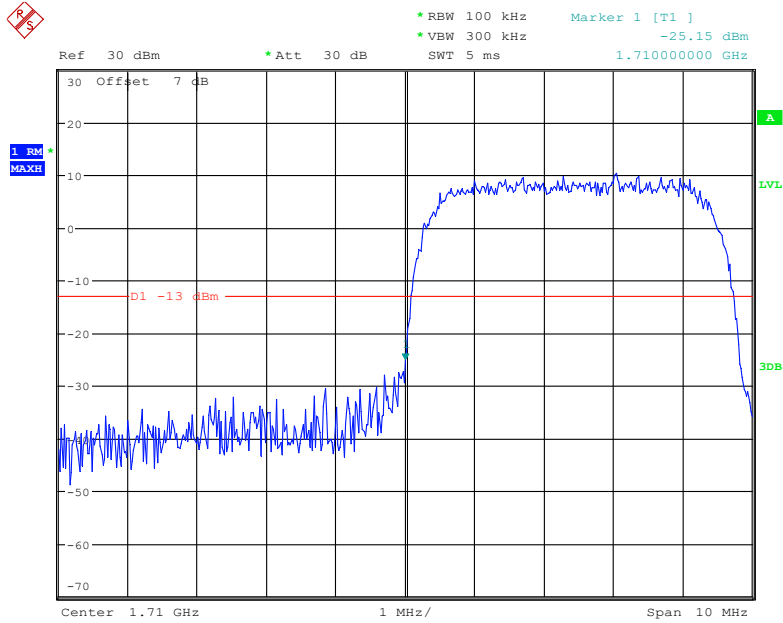


Date: 24.FEB.2022 09:32:45

AWS Band, Right Band Edge for HSDPA (16QAM) Mode

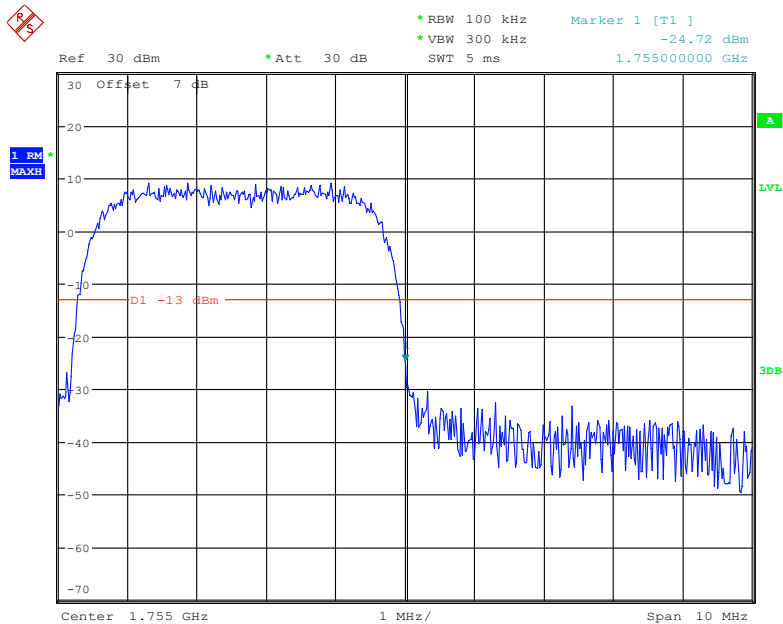


Date: 24.FEB.2022 09:32:26

AWS Band, Left Band Edge for HSUPA (BPSK) Mode

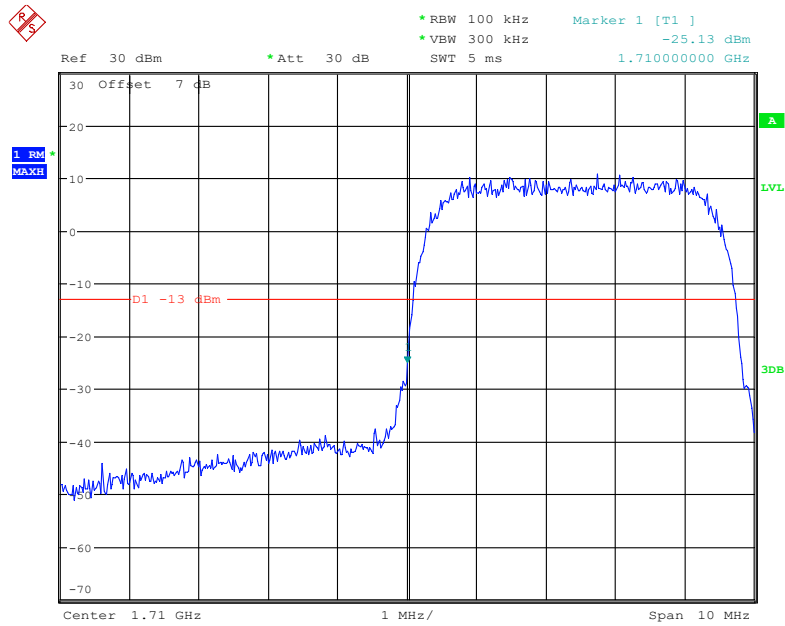

Date: 24.FEB.2022 09:35:55

AWS Band, Right Band Edge for HSUPA (BPSK) Mode

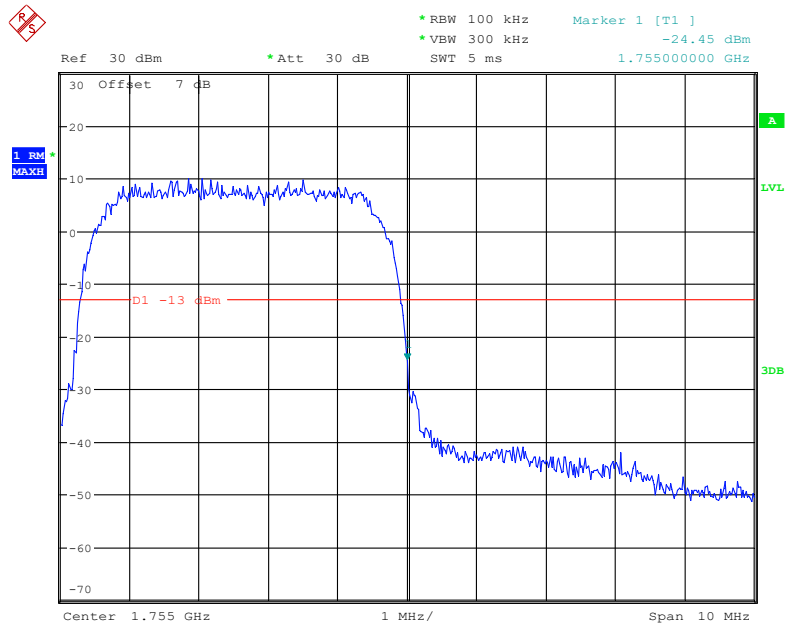

Date: 24.FEB.2022 09:36:24

The test plots of LTE bands please refer to the Appendix C.

FCC § 2.1055; § 22.355; § 24.235; §27.54 - FREQUENCY STABILITY

Applicable Standard

FCC § 2.1055, §22.355, §24.235&§27.54.

According to FCC §2.1055, the frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

According to §22.355, the carrier frequency of each transmitter in the Public Mobile Services must be maintained within the tolerances given in Table below:

Frequency Tolerance for Transmitters in the Public Mobile Services

Frequency Range (MHz)	Base, fixed (ppm)	Mobile ≤ 3 watts (ppm)	Mobile > 3 watts (ppm)
25 to 50	20.0	20.0	50.0
50 to 450	5.0	5.0	50.0
450 to 512	2.5	5.0	5.0
821 to 896	1.5	2.5	2.5
928 to 929.	5.0	N/A	N/A
929 to 960.	1.5	N/A	N/A
2110 to 2220	10.0	N/A	N/A


According to §24.235&§27.54, the frequency stability shall be sufficient to ensure that the fundamental emissions stays within the authorized frequency block.

Test Procedure

Frequency Stability vs. Temperature: The equipment under test was connected to an external AC power supply and the RF output was connected to communication test set via feed-through attenuators. The EUT was placed inside the temperature chamber. The AC leads and RF output cable exited the chamber through an opening made for the purpose.

After the temperature stabilized for approximately 20 minutes, the frequency output was recorded from the communication test set.

Frequency Stability vs. Voltage: For hand carried, battery powered equipment; reduce primary supply voltage to the battery operating end point which shall be specified by the manufacturer.

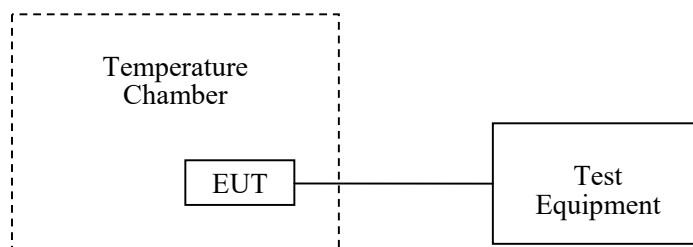

Test Data**Environmental Conditions**

Temperature:	23.6~24.2 °C
Relative Humidity:	58~63 %
ATM Pressure:	101.0 kPa

The testing was performed by Key Pei from 2022-02-11 to 2022-02-24.

EUT operation mode: Transmitting

Test Result: Pass

Please refer to the following tables.

Cellular Band (Part 22H)**GSM Mode**

Middle Channel, $f_0=836.6\text{MHz}$				
Temperature (°C)	Voltage Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-30	N.V.	2	0.0024	2.5
-20		3	0.0036	2.5
-10		4	0.0048	2.5
0		5	0.0060	2.5
10		3	0.0036	2.5
20		4	0.0048	2.5
30		7	0.0084	2.5
40		5	0.0060	2.5
50		4	0.0048	2.5
20		L.V.	3	0.0036
	H.V.	5	0.0060	2.5

EDGE Mode

Middle Channel, $f_0=836.6\text{MHz}$				
Temperature (°C)	Voltage Supplied (V_{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-30	N.V.	5	0.0060	2.5
-20		6	0.0072	2.5
-10		3	0.0036	2.5
0		5	0.0060	2.5
10		7	0.0084	2.5
20		6	0.0072	2.5
30		5	0.0060	2.5
40		7	0.0084	2.5
50		4	0.0048	2.5
20	L.V.	5	0.0060	2.5
	H.V.	6	0.0072	2.5

WCDMA Mode

Middle Channel, $f_0=836.6\text{MHz}$				
Temperature (°C)	Voltage Supplied (V_{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-30	N.V.	0.92	0.0011	2.5
-20		0.78	0.0009	2.5
-10		2.02	0.0024	2.5
0		1.21	0.0014	2.5
10		0.51	0.0006	2.5
20		0.29	0.0003	2.5
30		0.44	0.0005	2.5
40		0.37	0.0004	2.5
50		1.02	0.0012	2.5
20		L.V.	1.11	0.0013
	H.V.	1.09	0.0013	2.5

PCS Band (Part 24E)**GSM Mode**

Middle Channel, $f_0 = 1880.0$ MHz				
Temperature (°C)	Voltage Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Result
-30	N.V.	-2	-0.0011	pass
-20		5	0.0027	pass
-10		4	0.0021	pass
0		3	0.0016	pass
10		0	0.0000	pass
20		-3	-0.0016	pass
30		-2	-0.0011	pass
40		-5	-0.0027	pass
50		-3	-0.0016	pass
20		L.V.	-2	-0.0011
	H.V.	-1	-0.0005	pass

EDGE Mode

Middle Channel, $f_0 = 1880.0$ MHz				
Temperature (°C)	Voltage Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Result
-30	N.V.	-1	-0.0005	pass
-20		-5	-0.0027	pass
-10		-4	-0.0021	pass
0		-6	-0.0032	pass
10		-3	-0.0016	pass
20		0	0.0000	pass
30		-2	-0.0011	pass
40		-4	-0.0021	pass
50		-3	-0.0016	pass
20		L.V.	-2	-0.0011
	H.V.	-5	-0.0027	pass

WCDMA Mode

Middle Channel, $f_0=1880.0$ MHz				
Temperature (°C)	Voltage Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Result
-30	N.V.	-1.02	-0.0005	pass
-20		-0.88	-0.0005	pass
-10		-0.56	-0.0003	pass
0		-0.63	-0.0003	pass
10		-0.72	-0.0004	pass
20		-0.44	-0.0002	pass
30		-0.56	-0.0003	pass
40		-0.73	-0.0004	pass
50		-0.66	-0.0004	pass
20	L.V.	-0.58	-0.0003	pass
	H.V.	-0.86	-0.0005	pass

AWS Band (Part 27)

Temperature (°C)	Power Supplied (V _{DC})	F _L (MHz)	F _H (MHz)	F _L Limit (MHz)	F _H Limit (MHz)
-30	N.V.	1710.0576	1754.9768	1710	1755
-20		1710.0432	1754.9722	1710	1755
-10		1710.0227	1754.9755	1710	1755
0		1710.0215	1754.9769	1710	1755
10		1710.0172	1754.9787	1710	1755
20		1710.0149	1754.9772	1710	1755
30		1710.0132	1754.9781	1710	1755
40		1710.0122	1754.9779	1710	1755
50		1710.0129	1754.9787	1710	1755
20	L.V.	1710.0132	1754.9762	1710	1755
	H.V.	1710.0142	1754.9752	1710	1755

LTE:
QPSK:
Band 2:

10.0 MHz Middle Channel, $f_0 = 1880\text{MHz}$				
Temperature (°C)	Voltage Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Result
-30	7.6	17.27	0.0092	pass
-20		-9.97	-0.0053	pass
-10		-6.13	-0.0033	pass
0		6.17	0.0033	pass
10		7.92	0.0042	pass
20		6.46	0.0034	pass
30		-6.52	-0.0035	pass
40		7.18	0.0038	pass
50		-9.69	-0.0052	pass
20		L.V.	-8.17	-0.0043
	H.V.	-7.05	-0.0038	pass

Band 4:

10 MHz Bandwidth					
Temperature (°C)	Power Supplied (V _{DC})	F _L (MHz)	F _H (MHz)	F _L Limit (MHz)	F _H Limit (MHz)
-30	N.V.	1710.3365	1754.8787	1710	1755
-20		1710.3271	1754.8765	1710	1755
-10		1710.2345	1754.8756	1710	1755
0		1710.2241	1754.8742	1710	1755
10		1710.2568	1754.8736	1710	1755
20		1710.3342	1754.8752	1710	1755
30		1710.3468	1754.8747	1710	1755
40		1710.3156	1754.8726	1710	1755
50		1710.2261	1754.8752	1710	1755
20		L.V.	1710.2242	1754.8752	1710
	H.V.	1710.2252	1754.8741	1710	1755

Band 5:

10.0 MHz Middle Channel, $f_0=836.5\text{MHz}$				
Temperature (°C)	Voltage Supplied (V_{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-30	N.V.	-10.73	-0.0128	2.5
-20		-6.97	-0.0083	2.5
-10		-5.50	-0.0066	2.5
0		6.06	0.0072	2.5
10		9.80	0.0117	2.5
20		5.03	0.0060	2.5
30		-6.62	-0.0079	2.5
40		-8.73	-0.0104	2.5
50		-7.05	-0.0084	2.5
20		L.V.	8.99	0.0107
	H.V.	-7.17	-0.0086	2.5

Band 7:

10 MHz Bandwidth					
Temperature (°C)	Power Supplied (V_{DC})	F_L (MHz)	F_H (MHz)	F_L Limit (MHz)	F_H Limit (MHz)
-30	N.V.	2500.1962	2569.9873	2500	2570
-20		2500.1951	2569.9865	2500	2570
-10		2500.1839	2569.9851	2500	2570
0		2500.1864	2569.9783	2500	2570
10		2500.1922	2569.9865	2500	2570
20		2500.1842	2569.9671	2500	2570
30		2500.1767	2569.9583	2500	2570
40		2500.1658	2569.9832	2500	2570
50		2500.1566	2569.9825	2500	2570
20		L.V.	2500.1442	2569.9722	2500
	H.V.	2500.1567	2569.9667	2500	2570

Band 38:

10 MHz Bandwidth					
Temperature (°C)	Power Supplied (V _{DC})	F _L (MHz)	F _H (MHz)	F _L Limit (MHz)	F _H Limit (MHz)
-30	N.V.	2570.8358	2619.9853	2570	2620
-20		2570.8271	2619.8766	2570	2620
-10		2570.7243	2619.7657	2570	2620
0		2570.6154	2619.6562	2570	2620
10		2570.5147	2619.5446	2570	2620
20		2570.3959	2619.4358	2570	2620
30		2570.2872	2619.3243	2570	2620
40		2570.1746	2619.2152	2570	2620
50		2570.1655	2619.1361	2570	2620
20	L.V.	2570.1549	2619.1256	2570	2620
	H.V.	2570.1356	2619.1151	2570	2620

Band 41:

10 MHz Bandwidth					
Temperature (°C)	Power Supplied (V _{DC})	F _L (MHz)	F _H (MHz)	F _L Limit (MHz)	F _H Limit (MHz)
-30	N.V.	2535.9752	2654.9862	2535	2655
-20		2535.8687	2654.8859	2535	2655
-10		2535.7565	2654.7733	2535	2655
0		2535.6442	2654.6655	2535	2655
10		2535.5351	2654.5548	2535	2655
20		2535.4267	2654.4464	2535	2655
30		2535.3143	2654.3347	2535	2655
40		2535.2159	2654.2252	2535	2655
50		2535.2932	2654.1768	2535	2655
20		L.V.	2535.8655	2654.0152	2535
	H.V.	2535.8536	2654.0252	2535	2655

Note: the applicant declared the frequency range is 2535-2655MHz.

16QAM:**Band 2:**

10.0 MHz Middle Channel, $f_0=1880\text{MHz}$				
Temperature (°C)	Voltage Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Result
-30	N.V.	17.88	0.0095	pass
-20		-6.68	-0.0036	pass
-10		9.77	0.0052	pass
0		-7.62	-0.0041	pass
10		-9.91	-0.0053	pass
20		-9.82	-0.0052	pass
30		-6.68	-0.0036	pass
40		-8.85	-0.0047	pass
50		5.67	0.0030	pass
20		L.V.	6.05	0.0032
	H.V.	7.52	0.0040	pass

Band 4:

10 MHz Bandwidth					
Temperature (°C)	Power Supplied (V _{DC})	F _L (MHz)	F _H (MHz)	F _L Limit (MHz)	F _H Limit (MHz)
-30	N.V.	1710.2765	1754.7652	1710	1755
-20		1710.2752	1754.7563	1710	1755
-10		1710.2743	1754.7651	1710	1755
0		1710.2646	1754.7456	1710	1755
10		1710.2641	1754.7434	1710	1755
20		1710.2657	1754.7873	1710	1755
30		1710.2545	1754.7652	1710	1755
40		1710.2572	1754.7648	1710	1755
50		1710.2655	1754.7753	1710	1755
20		L.V.	1710.2647	1754.7564	1710
	H.V.	1710.2658	1754.7562	1710	1755

Band 5:

10.0 MHz Middle Channel, $f_0=836.5\text{MHz}$				
Temperature (°C)	Voltage Supplied (V_{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-30	N.V.	-30.61	-0.0366	2.5
-20		8.10	0.0097	2.5
-10		-8.59	-0.0103	2.5
0		9.33	0.0112	2.5
10		-6.94	-0.0083	2.5
20		7.54	0.0090	2.5
30		6.43	0.0077	2.5
40		-6.17	-0.0074	2.5
50		-6.44	-0.0077	2.5
20		L.V.	6.34	0.0076
	H.V.	-6.89	-0.0082	2.5

Band 7:

10 MHz Bandwidth					
Temperature (°C)	Power Supplied (V_{DC})	F_L (MHz)	F_H (MHz)	F_L Limit (MHz)	F_H Limit (MHz)
-30	N.V.	2500.7482	2569.8562	2500	2570
-20		2500.7374	2569.8533	2500	2570
-10		2500.7362	2569.8425	2500	2570
0		2500.7246	2569.8529	2500	2570
10		2500.6384	2569.8252	2500	2570
20		2500.6251	2569.7874	2500	2570
30		2500.6334	2569.7851	2500	2570
40		2500.6346	2569.8476	2500	2570
50		2500.6322	2569.8454	2500	2570
20		L.V.	2500.6239	2569.8352	2500
	H.V.	2500.5421	2569.8283	2500	2570

Band 38:

10 MHz Bandwidth					
Temperature (°C)	Power Supplied (V _{DC})	F _L (MHz)	F _H (MHz)	F _L Limit (MHz)	F _H Limit (MHz)
-30	N.V.	2570.9863	2619.9827	2570	2620
-20		2570.8954	2619.8744	2570	2620
-10		2570.7822	2619.7662	2570	2620
0		2570.6741	2619.6545	2570	2620
10		2570.5635	2619.5483	2570	2620
20		2570.4565	2619.4352	2570	2620
30		2570.3452	2619.3295	2570	2620
40		2570.2373	2619.2156	2570	2620
50		2570.1289	2619.1152	2570	2620
20	L.V.	2570.2176	2619.8763	2570	2620
	H.V.	2570.2131	2619.7652	2570	2620

Band 41:

10 MHz Bandwidth					
Temperature (°C)	Power Supplied (V _{DC})	F _L (MHz)	F _H (MHz)	F _L Limit (MHz)	F _H Limit (MHz)
-30	N.V.	2535.9452	2654.9666	2535	2655
-20		2535.8443	2654.8572	2535	2655
-10		2535.7366	2654.7485	2535	2655
0		2535.6267	2654.6372	2535	2655
10		2535.5168	2654.5269	2535	2655
20		2535.4176	2654.4555	2535	2655
30		2535.2962	2654.3562	2535	2655
40		2535.1875	2654.1873	2535	2655
50		2535.1832	2654.1876	2535	2655
20	L.V.	2535.1646	2654.0767	2535	2655
	H.V.	2535.0562	2654.0345	2535	2655

Note: the applicant declared the frequency range is 2535-2655MHz.

***** END OF REPORT *****