




Test Data


Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	BLE	2402	Ant1	-2.273	30	Pass
NVNT	BLE	2442	Ant1	-1.697	30	Pass
NVNT	BLE	2480	Ant1	-1.007	30	Pass



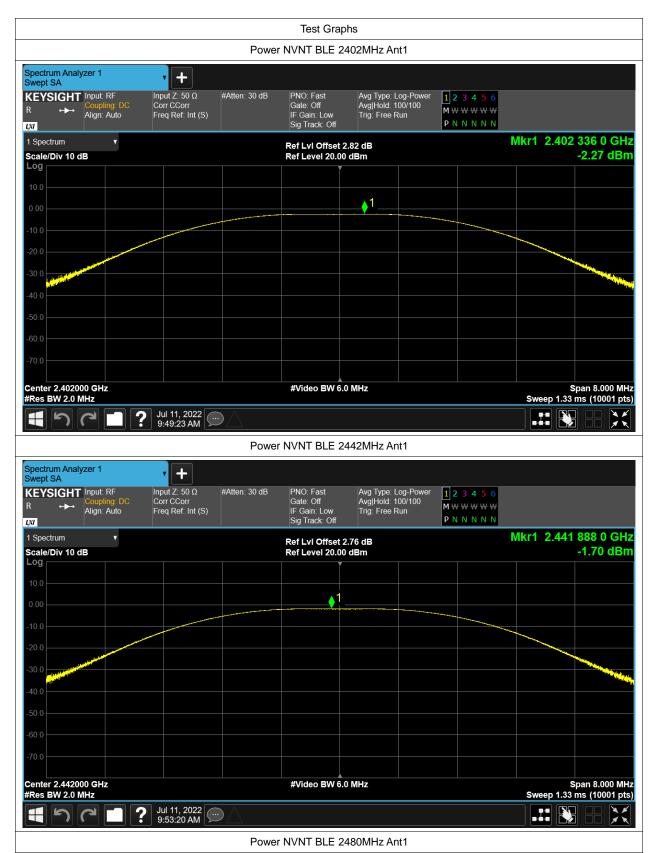



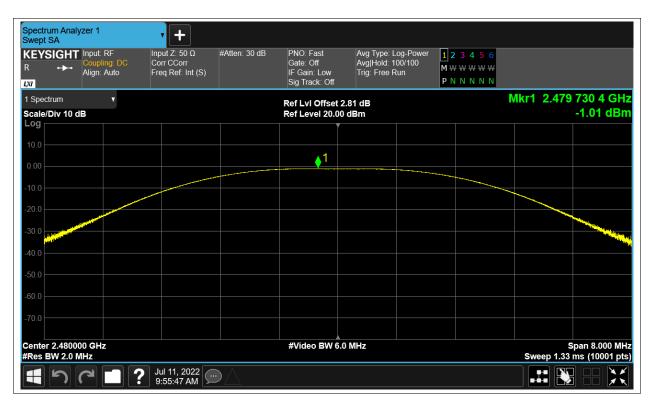





-6dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	limit	Verdic
NVNT	BLE	2402	Ant1	1.271	0.5	Pass
NVNT	BLE	2442	Ant1	1.193	0.5	Pass
NVNT	BLE	2480	Ant1	1.175	0.5	Pass













Occupied Channel Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)	
NVNT	BLE	2402	Ant1	2.080976841	
NVNT	BLE	2442	Ant1	2.090287187	
NVNT	BLE	2480	Ant1	2.081919554	

Project No.: JYTSZR2207003













Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Antenna	Max PSD (dBm)	Limit (dBm)	Verdict
NVNT	BLE	2402	Ant1	-20.975	8	Pass
NVNT	BLE	2442	Ant1	-20.339	8	Pass
NVNT	BLE	2480	Ant1	-19.686	8	Pass















Band Edge

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE	2402	Ant1	-42.67	-20	Pass
NVNT	BLE	2480	Ant1	-45.89	-20	Pass



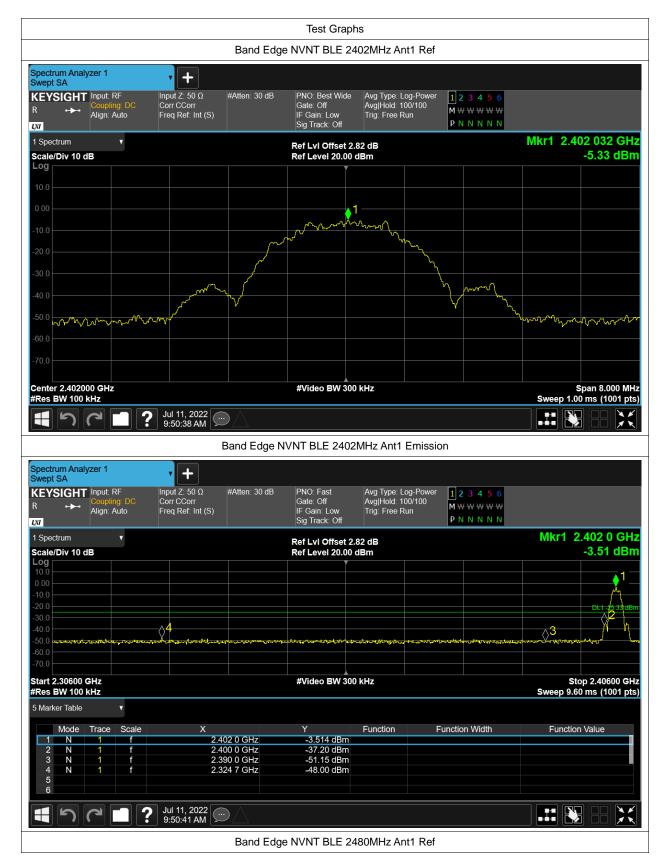



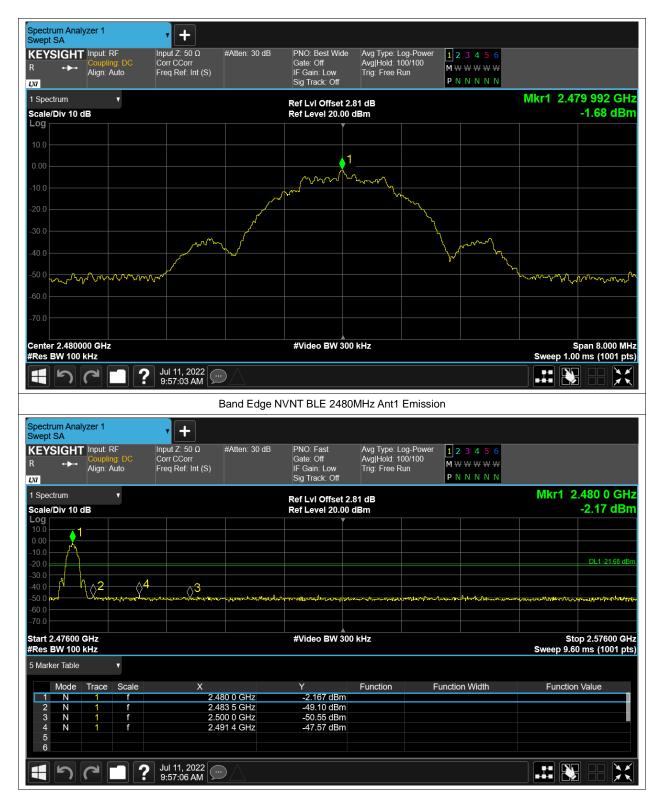





Conducted RF Spurious Emission

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE	2402	Ant1	-40.02	-20	Pass
NVNT	BLE	2442	Ant1	-39.92	-20	Pass
NVNT	BLE	2480	Ant1	-41.04	-20	Pass



