




Test Data


Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	BLE	2402	Ant1	-2.693	30	Pass
NVNT	BLE	2442	Ant1	-2.153	30	Pass
NVNT	BLE	2480	Ant1	-2.073	30	Pass



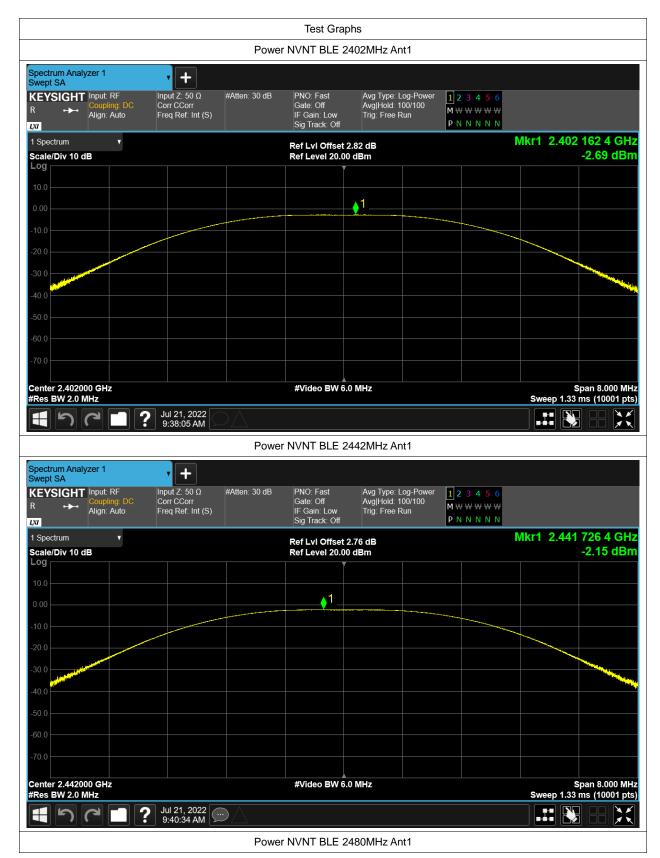



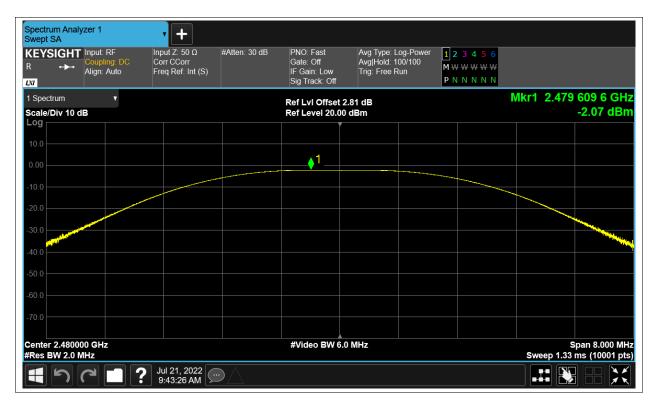





-6dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	limit	Verdic
NVNT	BLE	2402	Ant1	0.95	0.5	Pass
NVNT	BLE	2442	Ant1	1.201	0.5	Pass
NVNT	BLE	2480	Ant1	1.355	0.5	Pass













Occupied Channel Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)	
NVNT	BLE	2402	Ant1	2.081211597	
NVNT	BLE	2442	Ant1	2.086710271	
NVNT	BLE	2480	Ant1	2.08003114	















Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Antenna	Max PSD (dBm)	Limit (dBm)	Verdict
NVNT	BLE	2402	Ant1	-21.325	8	Pass
NVNT	BLE	2442	Ant1	-20.742	8	Pass
NVNT	BLE	2480	Ant1	-20.71	8	Pass



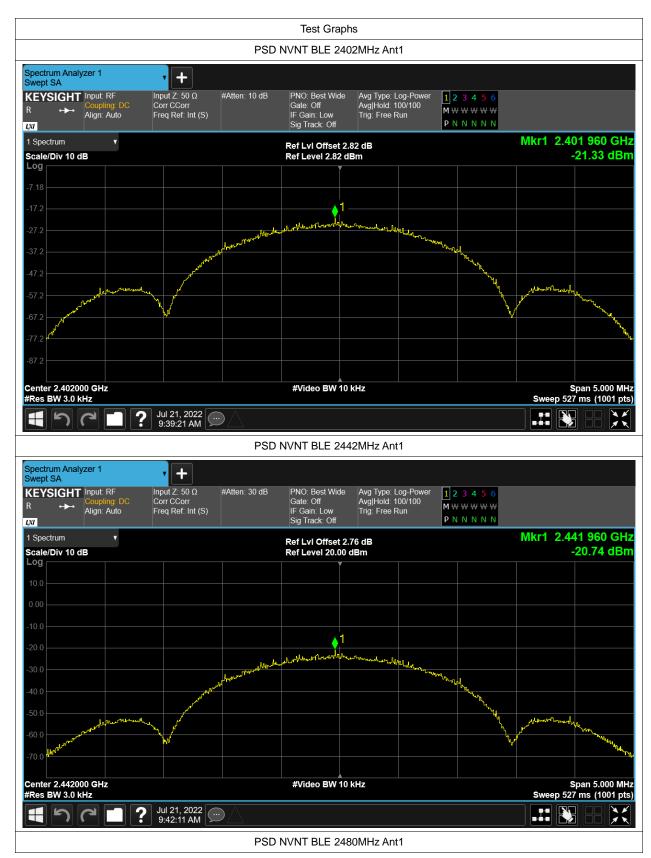



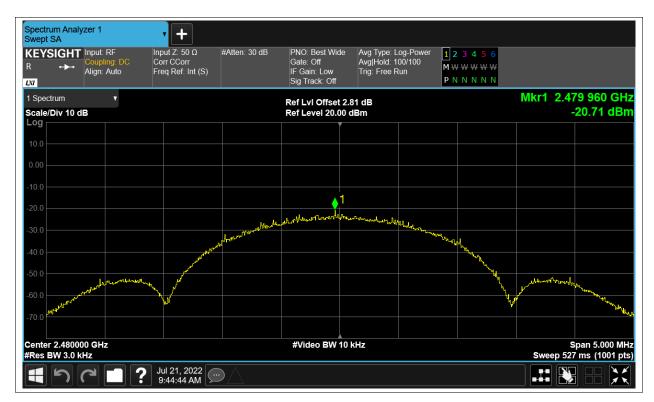






Band Edge

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE	2402	Ant1	-48.51	-20	Pass
NVNT	BLE	2480	Ant1	-48.54	-20	Pass



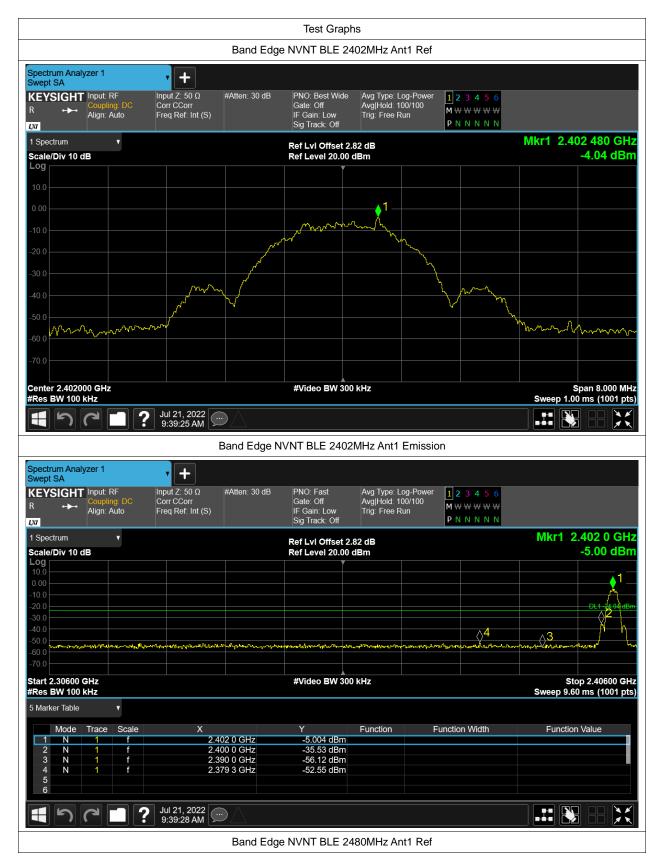









Conducted RF Spurious Emission

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE	2402	Ant1	-43.71	-20	Pass
NVNT	BLE	2442	Ant1	-42.33	-20	Pass
NVNT	BLE	2480	Ant1	-43.94	-20	Pass



