




Test Data

Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	BLE	2402	Ant5	-4.362	30	Pass
NVNT	BLE	2442	Ant5	-2.771	30	Pass
NVNT	BLE	2480	Ant5	-3.687	30	Pass



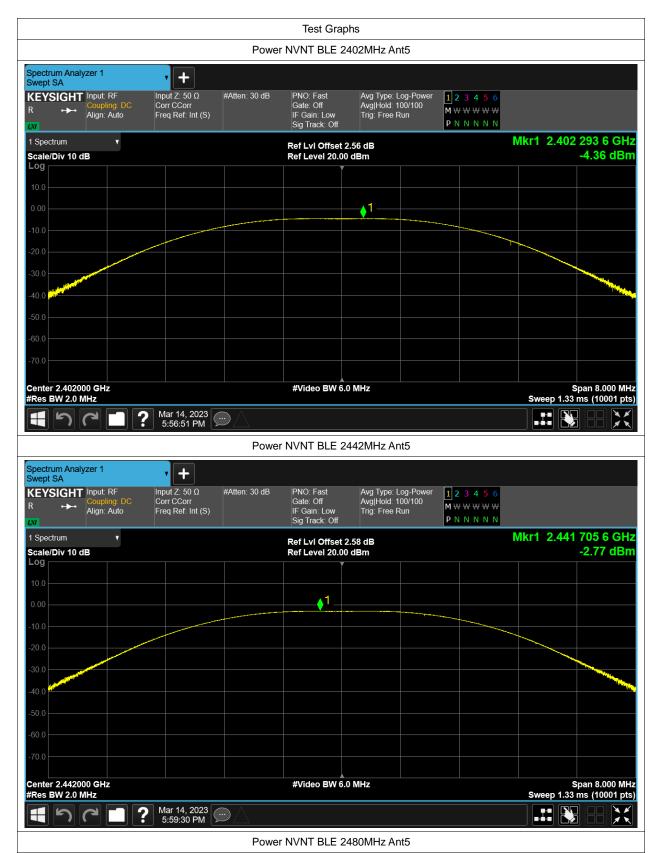









-6dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	limit	Verdic
NVNT	BLE	2402	Ant5	1.148	0.5	Pass
NVNT	BLE	2442	Ant5	1.169	0.5	Pass
NVNT	BLE	2480	Ant5	1.144	0.5	Pass














Occupied Channel Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)	
NVNT	BLE	2402	Ant5	2.074	
NVNT	BLE	2442	Ant5	2.065	
NVNT	BLE	2480	Ant5	2.074	







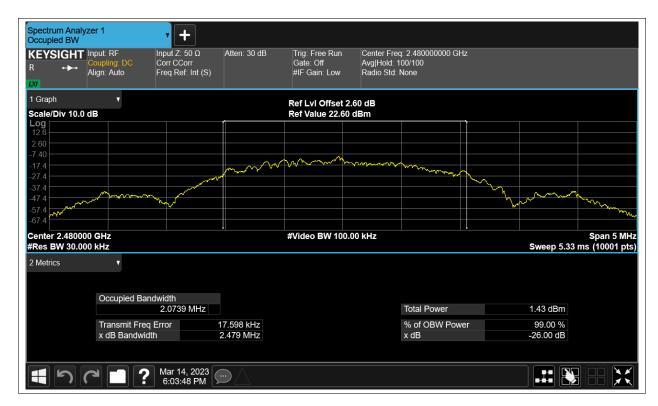






Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Antenna	Max PSD (dBm)	Limit (dBm)	Verdict
NVNT	BLE	2402	Ant5	-21.659	8	Pass
NVNT	BLE	2442	Ant5	-20.097	8	Pass
NVNT	BLE	2480	Ant5	-20.946	8	Pass







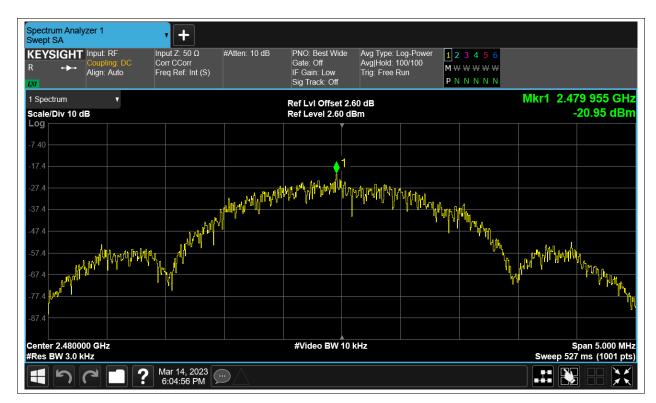





Band Edge

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE	2402	Ant5	-50.82	-20	Pass
NVNT	BLE	2480	Ant5	-51.15	-20	Pass













Conducted RF Spurious Emission

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE	2402	Ant5	-42.73	-20	Pass
NVNT	BLE	2442	Ant5	-44.55	-20	Pass
NVNT	BLE	2480	Ant5	-43.61	-20	Pass



