


Test Data


Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	BLE	2404	Ant12	4.567	30	Pass
NVNT	BLE	2442	Ant12	5.262	30	Pass
NVNT	BLE	2478	Ant12	5.709	30	Pass



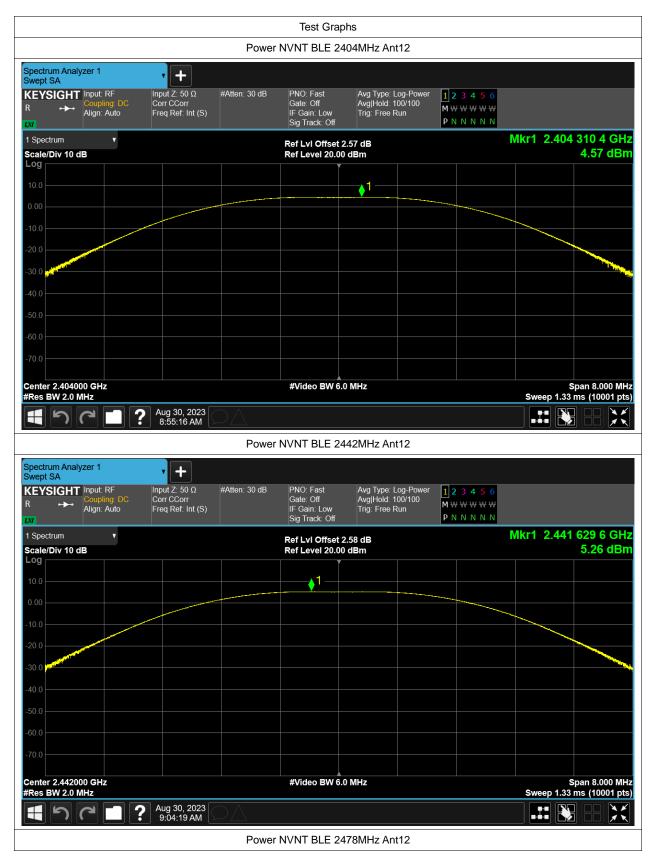



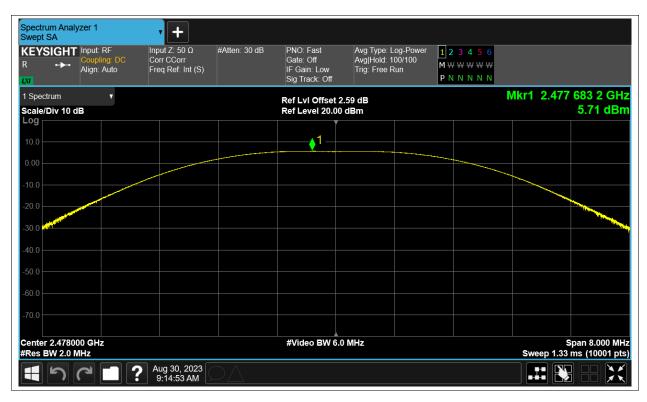




-6dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	limit	Verdic
NVNT	BLE	2404	Ant12	1.14	0.5	Pass
NVNT	BLE	2442	Ant12	1.172	0.5	Pass
NVNT	BLE	2478	Ant12	1.138	0.5	Pass







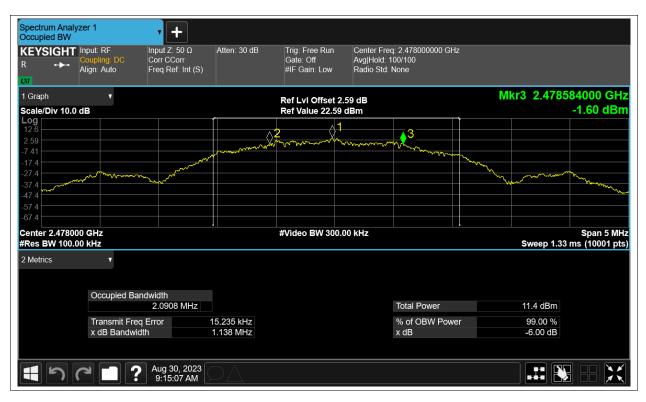




Occupied Channel Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	BLE	2404	Ant12	2.068
NVNT	BLE	2442	Ant12	2.078
NVNT	BLE	2478	Ant12	2.066







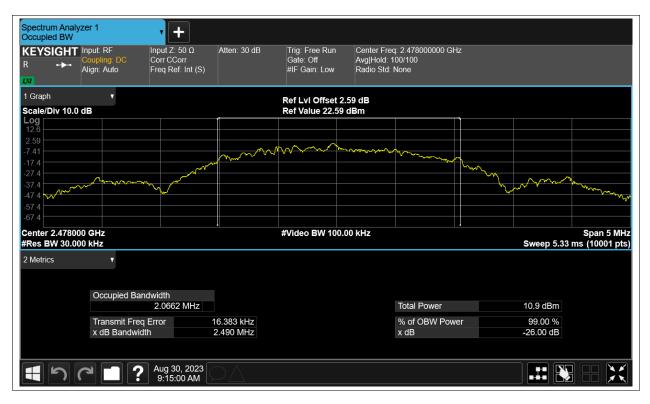




Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Antenna	Max PSD (dBm)	Limit (dBm)	Verdict
NVNT	BLE	2404	Ant12	-12.605	8	Pass
NVNT	BLE	2442	Ant12	-11.921	8	Pass
NVNT	BLE	2478	Ant12	-11.5	8	Pass







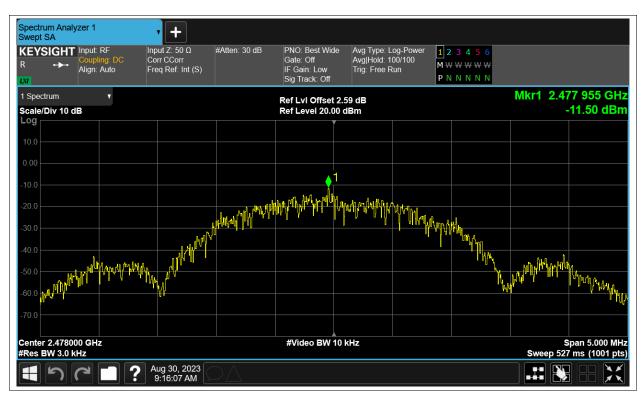



Band Edge

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE	2404	Ant12	-56.83	-20	Pass
NVNT	BLE	2478	Ant12	-57.95	-20	Pass











Conducted RF Spurious Emission

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE	2404	Ant12	-52.61	-20	Pass
NVNT	BLE	2442	Ant12	-51.99	-20	Pass
NVNT	BLE	2478	Ant12	-53.25	-20	Pass







Report No.: JYTSZ-R12-2301183

