



Test Data

Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	BLE	2402	Ant8	3.666	30	Pass
NVNT	BLE	2442	Ant8	4.53	30	Pass
NVNT	BLE	2480	Ant8	4.521	30	Pass













-6dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	limit	Verdic
NVNT	BLE	2402	Ant8	0.701	0.5	Pass
NVNT	BLE	2442	Ant8	0.702	0.5	Pass
NVNT	BLE	2480	Ant8	0.7	0.5	Pass













Occupied Channel Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)	
NVNT	BLE	2402	Ant8	1.044	
NVNT	BLE	2442	Ant8	1.045	
NVNT	BLE	2480	Ant8	1.043	

Project No.: JYTSZR2312025














Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Antenna	Max PSD (dBm)	Limit (dBm)	Verdict
NVNT	BLE	2402	Ant8	-11.416	8	Pass
NVNT	BLE	2442	Ant8	-10.492	8	Pass
NVNT	BLE	2480	Ant8	-10.535	8	Pass



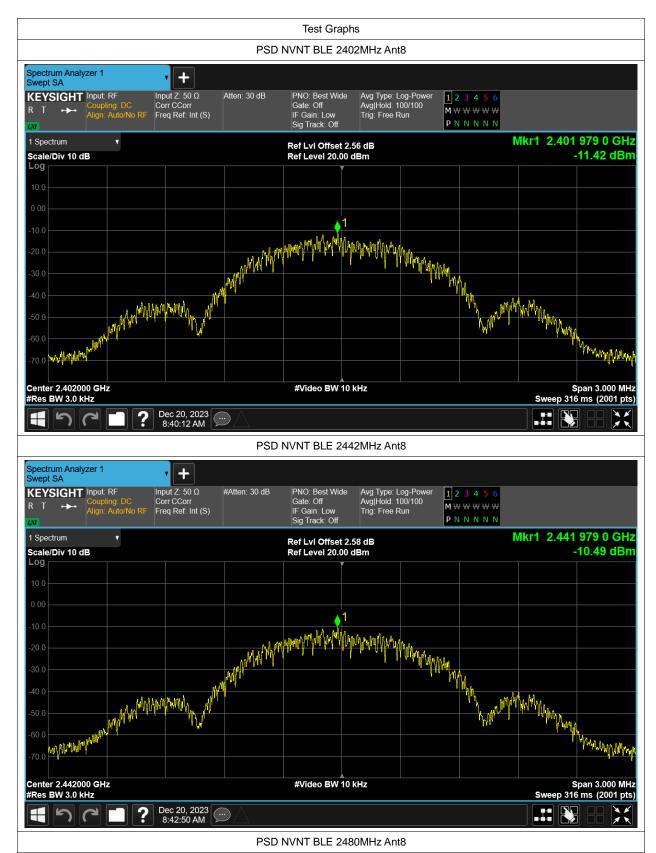










Band Edge

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE	2402	Ant8	-59.32	-20	Pass
NVNT	BLE	2480	Ant8	-59.55	-20	Pass



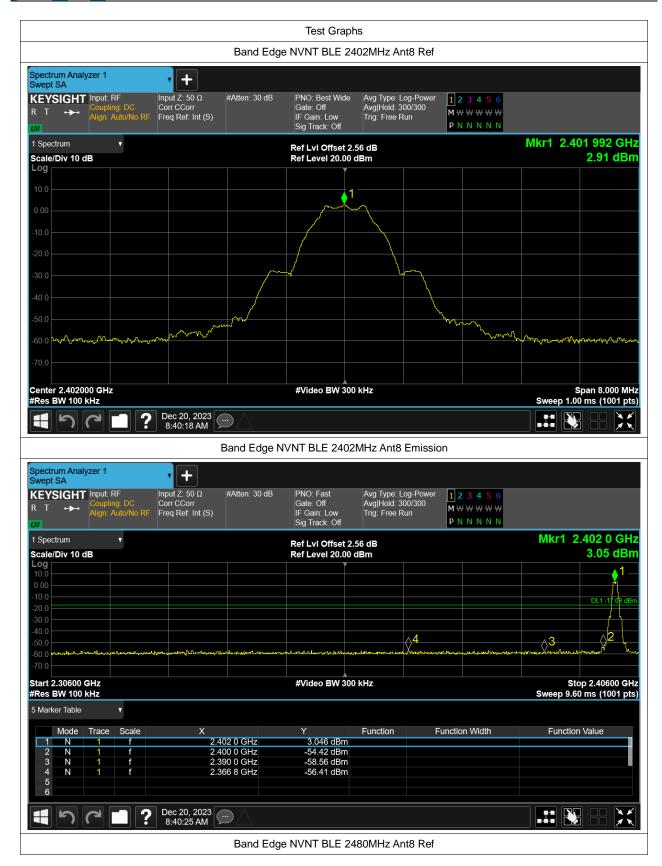









Conducted RF Spurious Emission

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE	2402	Ant8	-51.49	-20	Pass
NVNT	BLE	2442	Ant8	-53.05	-20	Pass
NVNT	BLE	2480	Ant8	-53.14	-20	Pass

Project No.: JYTSZR2312025









Tx. Spurious NVNT BLE 2480MHz Ant8 Ref

-49.31 dBm

23.652 GHz

Dec 20, 2023 8:43:25 AM



