




FCC EMC Test Report


Report No.: JYTSZ-R01-2300635
Applicant: INFINIX MOBILITY LIMITED
Address of Applicant: FLAT N 16/F BLOCK B UNIVERSAL INDUSTRIAL CENTRE
19-25 SHAN MEI STREET FOTAN NT HONGKONG

Equipment Under Test (EUT)

Product Name: Mobile Phone
Model No.: X6851
Trade Mark: Infinix
FCC ID: 2AIZN-X6851
Applicable Standards: FCC CFR Title 47 Part 15B
Date of Sample Receipt: 15 Dec., 2023
Date of Test: 16 Dec., 2023 to Feb 29., 2024
Date of report Issued: 01 Mar., 2024
Test Result: PASS

Project by:	 _____	Date:	01 Mar., 2024 _____
Reviewed by:	 _____	Date:	01 Mar., 2024 _____
Approved by:	 _____	Date:	01 Mar., 2024 _____

Manager



This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in above the application standard version. Test results reported herein relate only to the item(s) tested.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

1 Version

Version No.	Date	Description
00	01 Mar., 2024	Original

2 Contents

Page

Cover Page	1
1 Version	2
2 Contents.....	3
3 General Information.....	4
3.1 Client Information	4
3.2 General Description of E.U.T.	4
3.3 Test Mode	4
3.4 Description of Test Auxiliary Equipment	5
3.5 Description of Cable Used.....	5
3.6 Measurement Uncertainty	5
3.7 Additions to, Deviations, or Exclusions from the Method.....	5
3.8 Laboratory Facility	5
3.9 Laboratory Location.....	6
3.10 Test Instruments List	6
4 Measurement Setup and Procedure	7
4.1 Test Setup	7
4.2 Test Procedure	9
5 Test Results.....	10
5.1 Summary	10
5.1.1 Clause and data summary	10
5.1.2 Test Limit.....	10
5.2 Conducted Emission	11
5.3 Radiated Emission	15

3 General Information

3.1 Client Information

Applicant:	INFINIX MOBILITY LIMITED
Address:	FLAT N 16/F BLOCK B UNIVERSAL INDUSTRIAL CENTRE 19-25 SHAN MEI STREET FOTAN NT HONGKONG
Manufacturer:	INFINIX MOBILITY LIMITED
Address:	FLAT N 16/F BLOCK B UNIVERSAL INDUSTRIAL CENTRE 19-25 SHAN MEI STREET FOTAN NT HONGKONG
Factory:	SHENZHEN TECNO TECHNOLOGY CO., LTD.
Address:	101, Building 24, Waijing Industrial Park, Fumin Community, Fucheng Street, Longhua District, Shenzhen City, P.R.China

3.2 General Description of E.U.T.

Product Name:	Mobile Phone
Model No.:	X6851
Power Supply:	Rechargeable Li-ion Polymer Battery DC3.91V, 4900mAh
AC Adapter:	Model: U450XSB Input: AC100-240V, 50/60Hz, 1.8A Output: DC 5.0V, 3.0A 15.0W or DC 5.0-10.0V, 4.5A or DC 11.0V, 4.1A 45.0W MAX
Test Sample Condition:	The test samples were provided in good working order with no visible defects.
Remark:	EUT has two versions, version 1 has a glass back cover, and the back LED lights flash when charging begins. Version 2 has a leather rear cover, and the LED light on the back does not appear when charging begins. Both versions of EUT were tested in the report, see test data.

3.3 Test Mode

Operating Mode	Detail Description
PC mode	Keep the EUT in Downloading mode
Charging+Recording mode	Keep the EUT in Charging+Recording mode(Worst case)
Charging+Playing mode	Keep the EUT in Charging+Playing mode
FM mode	Keep the EUT in FM receiver mode
GPS mode	Keep the EUT in GPS receiver mode
WPT Charging mode	Keep the EUT in WPT Charging mode

The sample was placed 0.8m above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.

3.4 Description of Test Auxiliary Equipment

Manufacturer	Description	Model	S/N	FCC ID/DoC
Lenovo	Laptop	ThinkPad T14 Gen 1	SL10Z47277	DoC
HP	Printer	HP LaserJet P1007	VNFP409729	DoC
ATORCH	Qi Wireless	Q7	/	DoC

3.5 Description of Cable Used

Cable Type	Description	Length	From	To
Detached USB Cable	Shielding	1.0m	EUT	PC/Adapter
Detached headset cable	Unshielded	1.2m	EUT	Headset

3.6 Measurement Uncertainty

Parameter	Expanded Uncertainty (Confidence of 95%(U = 2Uc(y)))
Conducted Emission for LISN (9kHz ~ 150kHz)	3.57 dB
Conducted Emission for LISN (150kHz ~ 30MHz)	3.14 dB
Radiated Emission (30MHz ~ 200MHz) (3m SAC)	4.6 dB
Radiated Emission (200MHz ~ 1000MHz) (3m SAC)	5.8 dB
Radiated Emission (1GHz ~ 6GHz) (3m SAC)	4.5 dB
Radiated Emission (6GHz ~ 18GHz) (3m SAC)	4.7 dB

ote: All the measurement uncertainty value were shown with a coverage $k=2$ to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

3.7 Additions to, Deviations, or Exclusions from the Method

No

3.8 Laboratory Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **FCC - Designation No.: CN1211**

JianYan Testing Group Shenzhen Co., Ltd. has been accredited as a testing laboratory by FCC(Federal Communications Commission). The test firm Registration No. is 727551.

- **ISED – CAB identifier.: CN0021**

The 3m Semi-anechoic chamber and 10m Semi-anechoic chamber of JianYan Testing Group Shenzhen Co., Ltd. has been Registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 10106A-1.

- **CNAS - Registration No.: CNAS L15527**

JianYan Testing Group Shenzhen Co., Ltd. is accredited to ISO/IEC 17025:2017 General Requirements for the Competence of Testing and Calibration laboratories for the competence of testing. The Registration No. is CNAS L15527.

- **A2LA - Registration No.: 4346.01**

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017 General requirements for the competence of testing and calibration laboratories. The test scope can be found as below link: <https://portal.a2la.org/scopepdf/4346-01.pdf>

3.9 Laboratory Location

JianYan Testing Group Shenzhen Co., Ltd.
 Address: No.101, Building 8, Innovation Wisdom Port, No.155 Hongtian Road, Huangpu Community, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, People's Republic of China.
 Tel: +86-755-23118282, Fax: +86-755-23116366
 Email: info-JYTee@lets.com, Website: <http://jyt.lets.com>

3.10 Test Instruments List


Radiated Emission(3m SAC):					
Test Equipment	Manufacturer	Model No.	Manage No.	Cal. Date (mm-dd-yy)	Cal. Due date (mm-dd-yy)
3m SAC	ETS	9m*6m*6m	WXJ001-1	04-14-2021	04-13-2024
BiConiLog Antenna	Schwarzbeck	VULB9163	WXJ002	02-09-2023	02-08-2024
Horn Antenna	Schwarzbeck	BBHA9120D	WXJ002-2	02-09-2023	02-08-2024
Pre-amplifier (30MHz ~ 1GHz)	Schwarzbeck	BBV9743B	WXJ001-2	01-10-2023	01-09-2024
				12-27-2023	12-26-2024
Pre-amplifier (1GHz ~ 18GHz)	SKET	LNPA_0118G-50	WXJ001-3	01-10-2023	01-09-2024
				12-27-2023	12-26-2024
EMI Test Receiver	Rohde & Schwarz	ESRP7	WXJ003-1	01-11-2023	01-10-2024
				12-27-2023	12-26-2024
Spectrum Analyzer	Rohde & Schwarz	FSP 30	WXJ004	01-10-2023	01-09-2024
				12-27-2023	12-26-2024
Coaxial Cable (30MHz ~ 1GHz)	JYTSZ	JYT3M-1G-NN-8M	WXG001-4	01-18-2023	01-17-2024
				01-17-2024	01-16-2025
Coaxial Cable (1GHz ~ 18GHz)	JYTSZ	JYT3M-18G-NN-8M	WXG001-5	01-18-2023	01-17-2024
				01-17-2024	01-16-2025
Band Reject Filter Group	Tonscend	JS0806-F	WXJ089	N/A	
Test Software	Tonscend	TS+	Version: 3.0.0.1		

Conducted Emission:					
Test Equipment	Manufacturer	Model No.	Manage No.	Cal. Date (mm-dd-yy)	Cal. Due date (mm-dd-yy)
EMI Test Receiver	Rohde & Schwarz	ESR3	WXJ003-2	07-05-2023	07-04-2024
LISN	Schwarzbeck	NSLK 8127	QCJ001-13	01-10-2023	01-09-2024
				12-27-2023	12-26-2024
LISN	Rohde & Schwarz	ESH3-Z5	WXJ005-1	01-11-2023	01-10-2024
				12-27-2023	12-26-2024
LISN Coaxial Cable (9kHz ~ 30MHz)	JYTSZ	JYTCE-1G-NN-2M	WXG003-1	01-18-2023	01-17-2024
				01-17-2024	01-16-2025
RF Switch	TOP PRECISION	RSU0301	WXG003	N/A	
Test Software	AUDIX	E3	Version: 6.110919b		

4 Measurement Setup and Procedure

4.1 Test Setup


1) Conducted emission measurement:

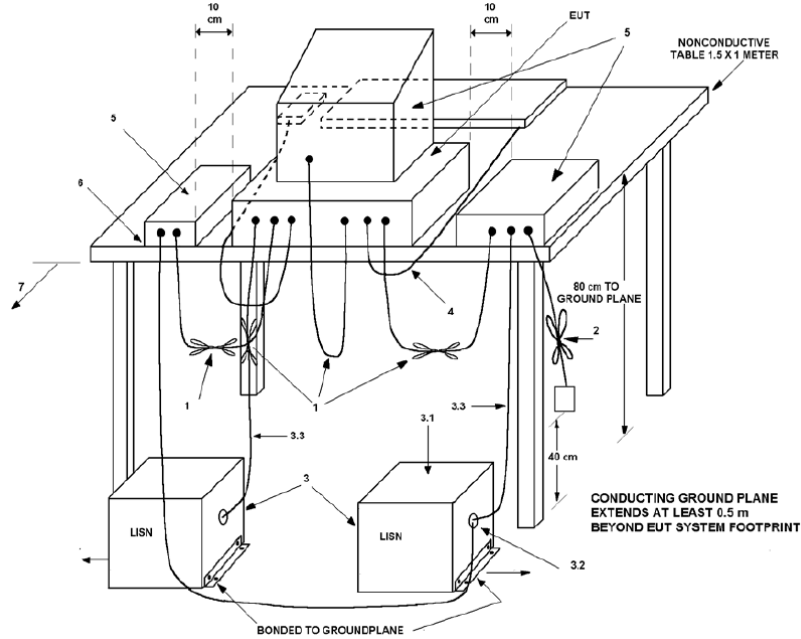


Note: The detailed descriptions please refer to Figure 8 of ANSI C63.4:2014.

2) Radiated emission measurement:

Below 1GHz (3m SAC)

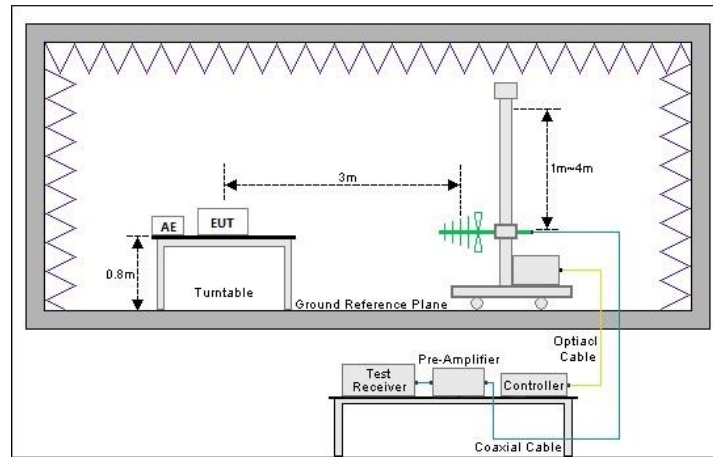

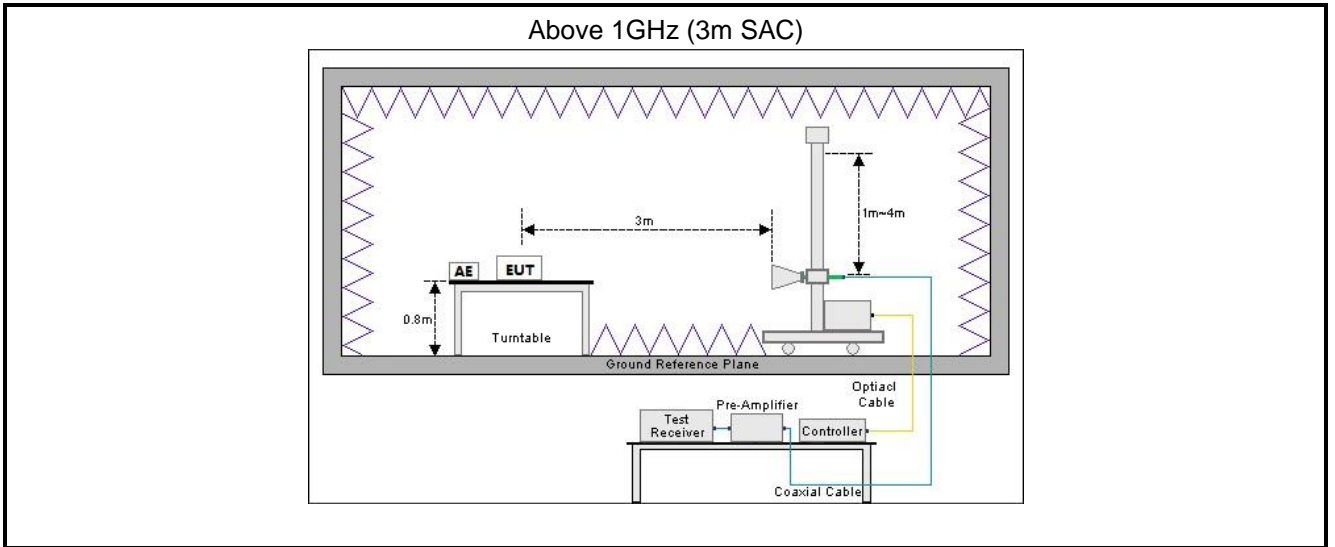

4.2 Test Procedure

Test method	Test step
Conducted emission	<ol style="list-style-type: none"> 1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4 on conducted measurement.
Radiated emission	<p>For below 1GHz:</p> <ol style="list-style-type: none"> 1. The EUT was placed on the tabletop of a rotating table 0.8 m the ground at a 3 m semi anechoic chamber. The measurement distance from the EUT to the receiving antenna is 3 m. 2. EUT works in each mode of operation that needs to be tested, and having the EUT continuously working, respectively on 3 axis (X, Y & Z) and considered typical configuration to obtain worst position. The highest signal levels relative to the limit shall be determined by rotating the EUT from 0° to 360° and with varying the measurement antenna height between 1 m and 4 m in vertical and horizontal polarizations. 3. Open the test software to control the test antenna and test turntable. Perform the test, save the test results, and export the test data. <p>For above 1GHz:</p> <ol style="list-style-type: none"> 1. The EUT was placed on the tabletop of a rotating table 0.8 m the ground at a 3 m fully anechoic room. The measurement distance from the EUT to the receiving antenna is 3 m. 2. EUT works in each mode of operation that needs to be tested, and having the EUT continuously working, respectively on 3 axis (X, Y & Z) and considered typical configuration to obtain worst position. The highest signal levels relative to the limit shall be determined by rotating the EUT from 0° to 360° and with varying the measurement antenna height between 1 m and 4 m in vertical and horizontal polarizations. 3. Open the test software to control the test antenna and test turntable. Perform the test, save the test results, and export the test data.

5 Test Results

5.1 Summary

5.1.1 Clause and data summary

Test items	Standard clause	Test data	Result
Conducted Emission	Part 15.107	See Section 5.2	Pass
Radiated Emission	Part 15.109	See Section 5.3	Pass
Remark: 1. The EUT is a Class B digital device. 2. Pass: The EUT complies with the essential requirements in the standard. 3. N/A: Not Applicable.			
Test Method:	ANSI C63.4:2014		


5.1.2 Test Limit

Test items	Limit					
Conducted Emission	Frequency (MHz)	Class A Limit (dB μ V)		Class B Limit (dB μ V)		
		Quasi-Peak	Average	Quasi-Peak	Average	
	0.15 – 0.5	79	66	66 to 56 <small>Note 1</small>	56 to 46 <small>Note 1</small>	
	0.5 – 5	73	60	56	46	
	5 – 30	73	60	60	50	
Note 1: The limit level in dB μ V decreases linearly with the logarithm of frequency. Note 2: The more stringent limit applies at transition frequencies.						
Radiated Emission	Frequency (MHz)	Class A Limit (dB μ V/m)		Class B Limit (dB μ V/m)		
		Quasi-Peak @ 3m	Quasi-Peak @ 10m	Quasi-Peak @ 3m	Quasi-Peak @ 10m	
	30 – 88	49.0	39.0	40.0	30.0	
	88 – 216	53.5	43.5	43.5	33.5	
	216 – 960	56.0	46.0	46.0	36.0	
	960 – 1000	60.0	50.0	54.0	44.0	
	Note: The more stringent limit applies at transition frequencies.					
	Frequency	Class A Limit (dB μ V/m) @ 3m		Class B Limit (dB μ V/m) @ 3m		
		Average	Peake	Average	Peake	
	Above 1 GHz	60.0	80.0	54.0	74.0	
Note: The measurement bandwidth shall be 1 MHz or greater.						

5.2 Conducted Emission

Version 1:

Product name:	Mobile Phone	Product model:	X6851
Test by:	Asher	Test mode:	Charging & Recording mode
Test frequency:	150 kHz ~ 30 MHz	Phase:	Line
Test voltage:	AC 120 V/60 Hz		

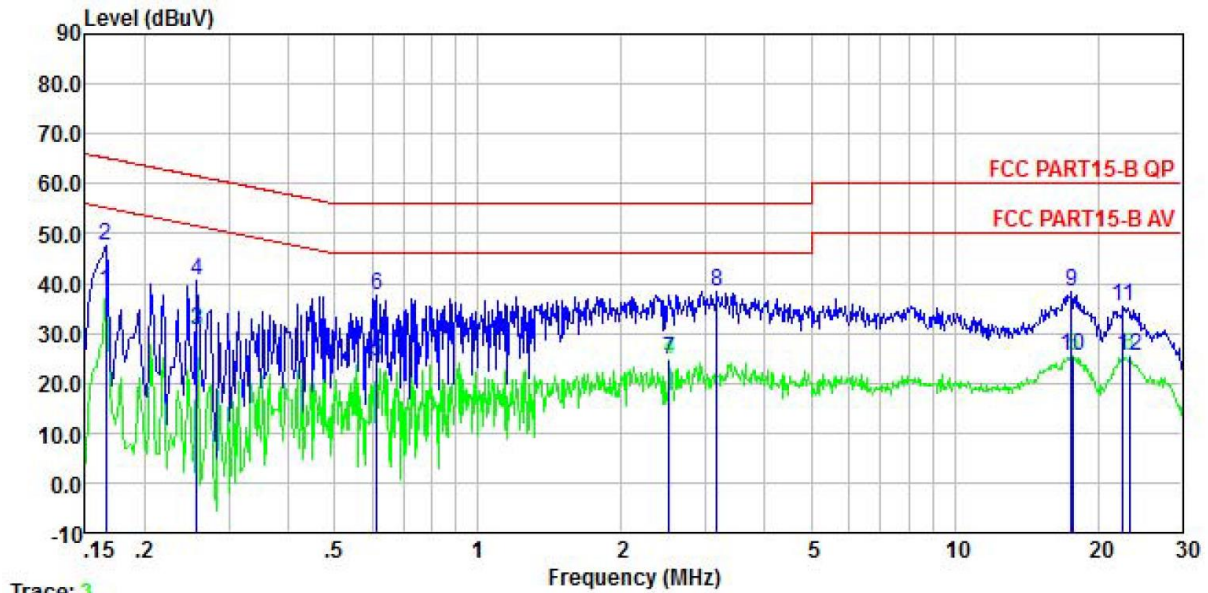


Trace: 3

	Freq	Read Level	LISN Factor	Aux2 Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dB	dBuV	dBuV	dB	
1	0.166	28.27	0.20	9.88	0.01	38.36	55.16	-16.80	Average
2	0.166	37.48	0.20	9.88	0.01	47.57	65.16	-17.59	QP
3	0.258	20.61	0.20	9.88	0.01	30.70	51.51	-20.81	Average
4	0.258	30.53	0.20	9.88	0.01	40.62	61.51	-20.89	QP
5	0.614	14.37	0.20	9.88	0.02	24.47	46.00	-21.53	Average
6	0.614	27.62	0.20	9.88	0.02	37.72	56.00	-18.28	QP
7	2.513	14.49	0.20	9.88	0.13	24.70	46.00	-21.30	Average
8	3.173	28.33	0.20	9.89	0.07	38.49	56.00	-17.51	QP
9	17.568	27.84	0.25	9.95	0.15	38.19	60.00	-21.81	QP
10	17.755	14.99	0.26	9.95	0.15	25.35	50.00	-24.65	Average
11	22.535	25.10	0.30	9.98	0.16	35.54	60.00	-24.46	QP
12	23.263	15.00	0.30	9.99	0.17	25.46	50.00	-24.54	Average

Remark:

1. Level = Read level + LISN Factor + Cable Loss.

Product name:	Mobile Phone	Product model:	X6851
Test by:	Asher	Test mode:	Charging & Recording mode
Test frequency:	150 kHz ~ 30 MHz	Phase:	Neutral
Test voltage:	AC 120 V/60 Hz		

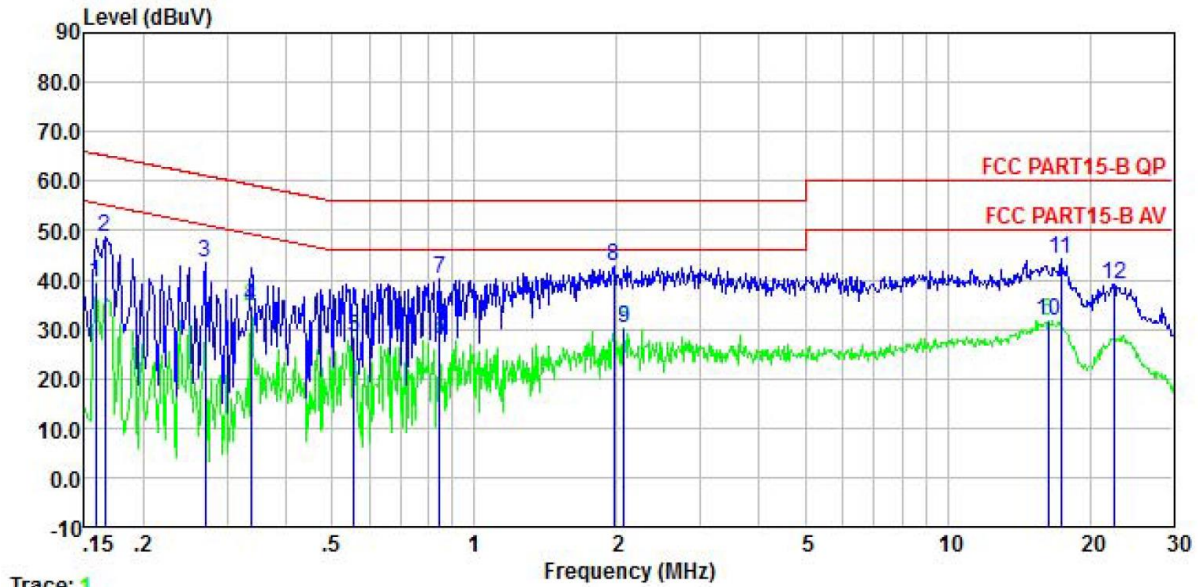

Trace: 1


	Read Freq	Level	LISN Factor	Aux2 Factor	Cable Loss	Level	Limit	Over	Remark
	MHz	dBuV	dB	dB	dB	dBuV	dBuV	dB	
1	0.158	29.41	0.20	9.88	0.01	39.50	55.56	-16.06	Average
2	0.166	38.69	0.20	9.88	0.01	48.78	65.16	-16.38	QP
3	0.270	33.59	0.20	9.88	0.02	43.69	61.12	-17.43	QP
4	0.337	24.66	0.20	9.88	0.02	34.76	49.27	-14.51	Average
5	0.555	18.15	0.20	9.88	0.02	28.25	46.00	-17.75	Average
6	0.844	17.97	0.20	9.88	0.04	28.09	46.00	-17.91	Average
7	0.844	30.02	0.20	9.88	0.04	40.14	56.00	-15.86	QP
8	1.970	32.46	0.30	9.88	0.21	42.85	56.00	-13.15	QP
9	2.066	19.81	0.30	9.88	0.20	30.19	46.00	-15.81	Average
10	16.312	21.33	0.40	9.94	0.16	31.83	50.00	-18.17	Average
11	17.383	33.62	0.40	9.95	0.15	44.12	60.00	-15.88	QP
12	22.535	28.52	0.37	9.98	0.16	39.03	60.00	-20.97	QP

Remark:

1. Level = Read level + LISN Factor + Cable Loss.

Version 2:

Product name:	Mobile Phone	Product model:	X6851
Test by:	Asher	Test mode:	Charging & Recording mode
Test frequency:	150 kHz ~ 30 MHz	Phase:	Line
Test voltage:	AC 120 V/60 Hz		

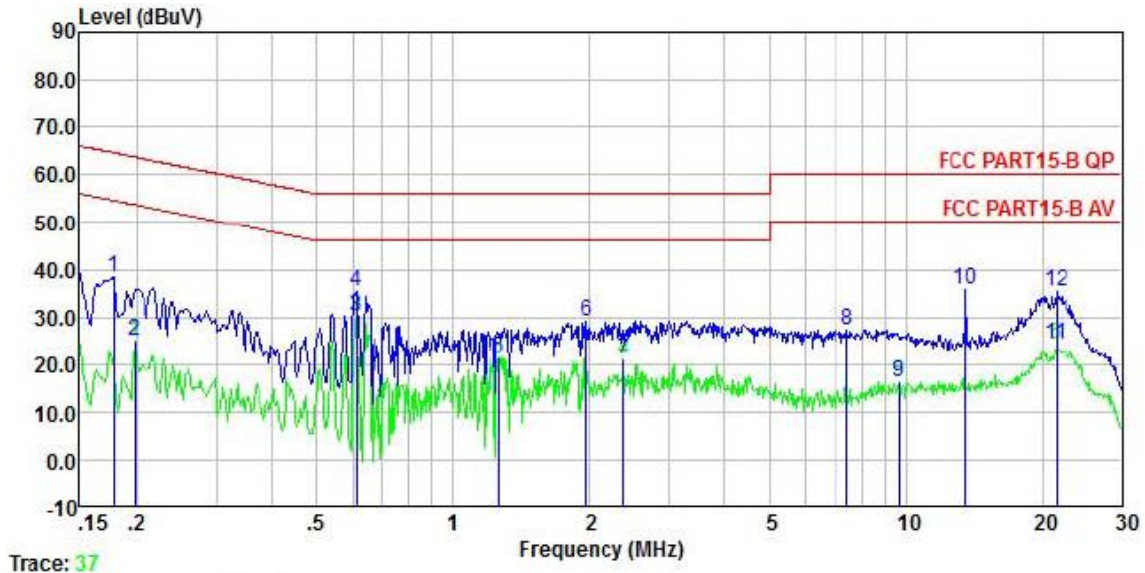


Remark : SZR012300635-3

	Freq	Read Level	LISN Factor	Aux Factor	Aux2 Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dB	dB	dBuV	dBuV	dB	
1	0.178	28.43	0.20	0.00	9.88	0.01	38.52	64.59	-26.07	QP
2	0.198	15.02	0.20	0.00	9.88	0.04	25.14	53.71	-28.57	Average
3	0.611	20.09	0.20	0.00	9.88	0.02	30.19	46.00	-15.81	Average
4	0.611	25.39	0.20	0.00	9.88	0.02	35.49	56.00	-20.51	QP
5	1.262	11.11	0.20	0.00	9.88	0.10	21.29	46.00	-24.71	Average
6	1.959	18.95	0.20	0.00	9.88	0.21	29.24	56.00	-26.76	QP
7	2.384	10.62	0.20	0.00	9.88	0.15	20.85	46.00	-25.15	Average
8	7.446	17.22	0.20	0.00	9.90	0.10	27.42	60.00	-32.58	QP
9	9.654	6.14	0.20	0.00	9.91	0.12	16.37	50.00	-33.63	Average
10	13.623	25.63	0.20	0.00	9.93	0.12	35.88	60.00	-24.12	QP
11	21.486	13.85	0.30	0.00	9.97	0.17	24.29	50.00	-25.71	Average
12	21.600	25.03	0.30	0.00	9.98	0.16	35.47	60.00	-24.53	QP

Remark:

1. Level = Read level + LISN Factor + Cable Loss.

Product name:	Mobile Phone	Product model:	X6851
Test by:	Asher	Test mode:	Charging & Recording mode
Test frequency:	150 kHz ~ 30 MHz	Phase:	Neutral
Test voltage:	AC 120 V/60 Hz		

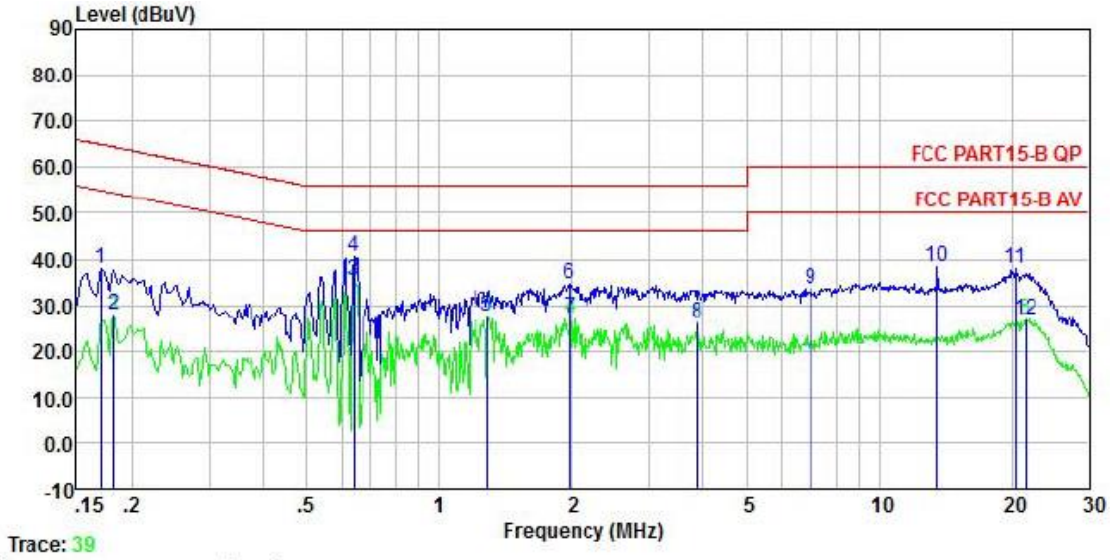

Remark : SZR012300635-3

	Freq	Read Level	LISN Factor	Aux Factor	Aux2 Factor	Cable Loss	Level	Linit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dB	dB	dBuV	dBuV	dB	
1	0.170	28.03	0.20	0.00	9.88	0.01	38.12	64.94	-26.82	QP
2	0.182	18.01	0.20	0.00	9.88	0.01	28.10	54.42	-26.32	Average
3	0.637	25.18	0.20	0.00	9.88	0.02	35.28	46.00	-10.72	Average
4	0.637	30.34	0.20	0.00	9.88	0.02	40.44	56.00	-15.56	QP
5	1.289	17.25	0.24	0.00	9.88	0.11	27.48	46.00	-18.52	Average
6	1.970	24.20	0.30	0.00	9.88	0.21	34.59	56.00	-21.41	QP
7	1.980	16.99	0.30	0.00	9.88	0.21	27.38	46.00	-18.62	Average
8	3.860	15.99	0.30	0.00	9.89	0.08	26.26	46.00	-19.74	Average
9	6.988	23.23	0.30	0.00	9.90	0.10	33.53	60.00	-26.47	QP
10	13.623	27.72	0.40	0.00	9.93	0.12	38.17	60.00	-21.83	QP
11	20.377	27.36	0.40	0.00	9.96	0.19	37.91	60.00	-22.09	QP
12	21.486	16.48	0.38	0.00	9.97	0.17	27.00	50.00	-23.00	Average

Remark:


1. Level = Read level + LISN Factor + Cable Loss.

5.3 Radiated Emission

Below 1GHz:

Version 1:

Product Name:	Mobile Phone	Product Model:	X6851
Test By:	Robin	Test mode:	Charging & Recording mode
Test Frequency:	30 MHz ~ 1 GHz	Polarization:	Vertical
Test Voltage:	AC 120V/60Hz		

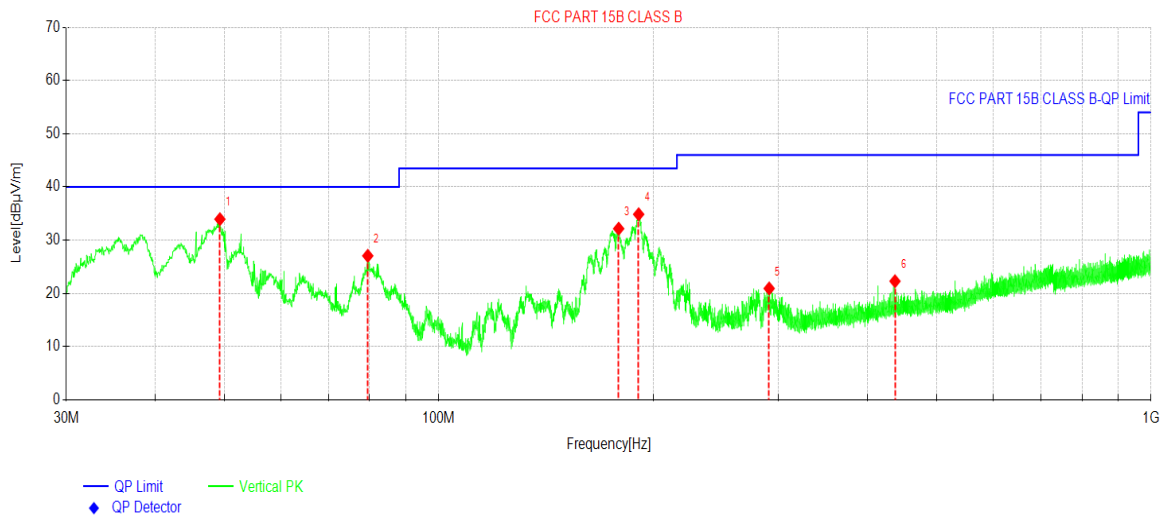


Suspected Data List								
NO.	Freq. [MHz]	Reading[dBµV/m]	Factor [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Trace	Polarity
1	49.3040	46.59	-12.64	33.95	40.00	6.05	PK	Vertical
2	79.5210	45.87	-18.81	27.06	40.00	12.94	PK	Vertical
3	178.950	49.24	-17.08	32.16	43.50	11.34	PK	Vertical
4	190.882	50.34	-15.48	34.86	43.50	8.64	PK	Vertical
5	291.040	33.91	-12.98	20.93	46.00	25.07	PK	Vertical
6	437.129	32.01	-9.72	22.29	46.00	23.71	PK	Vertical

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).

Product Name:	Mobile Phone	Product Model:	X6851
Test By:	Robin	Test mode:	Charging & Recording mode
Test Frequency:	30 MHz ~ 1 GHz	Polarization:	Horizontal
Test Voltage:	AC 120V/60Hz		

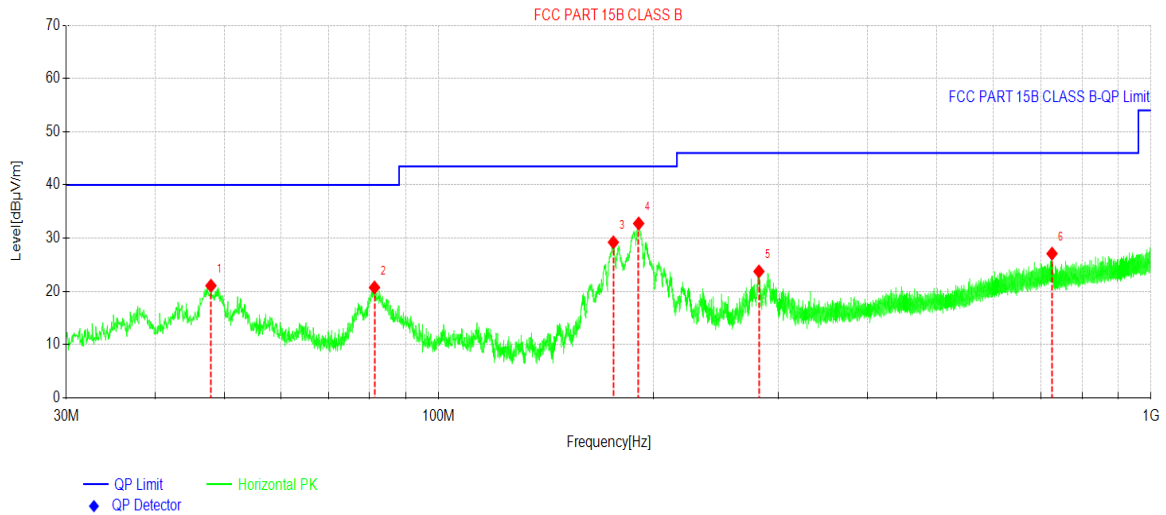


Suspected Data List								
NO.	Freq. [MHz]	Reading[dBµV/m]	Factor [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Trace	Polarity
1	47.8974	33.77	-12.70	21.07	40.00	18.93	PK	Horizontal
2	81.2671	39.26	-18.53	20.73	40.00	19.27	PK	Horizontal
3	175.895	46.08	-16.85	29.23	43.50	14.27	PK	Horizontal
4	190.882	48.24	-15.48	32.76	43.50	10.74	PK	Horizontal
5	281.582	36.97	-13.22	23.75	46.00	22.25	PK	Horizontal
6	726.203	31.65	-4.55	27.10	46.00	18.90	PK	Horizontal

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).

Above 1GHz:

Product Name:	Mobile Phone	Product Model:	X6851
Test By:	Robin	Test mode:	Charging & Recording mode
Test Frequency:	1000 MHz ~ 6000 MHz	Polarization:	Vertical
Test Voltage:	AC 120V/60Hz		

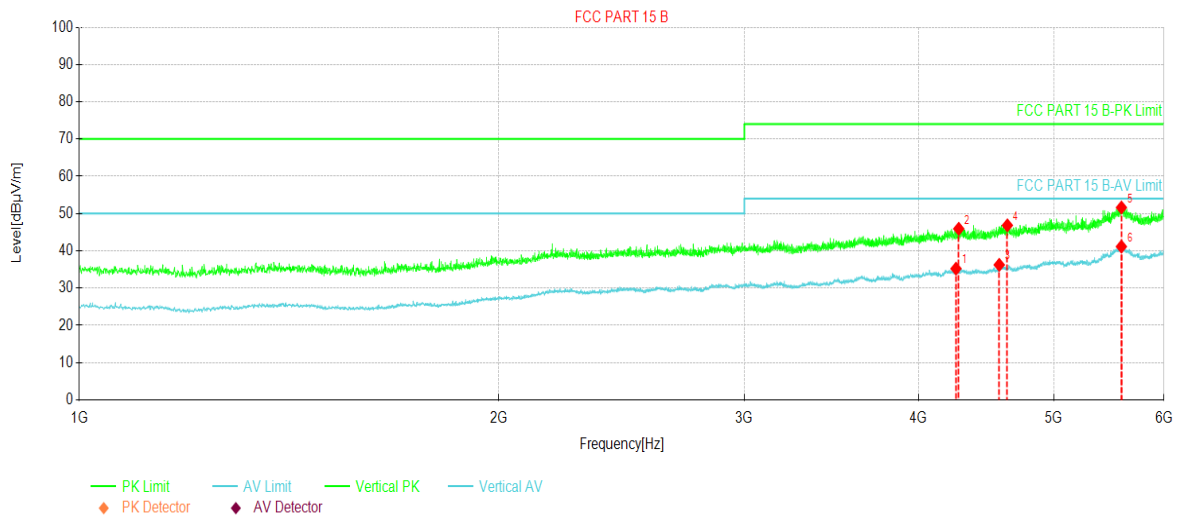


Suspected Data List								
NO.	Freq. [MHz]	Reading [dBµV/m]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Trace	Polarity
1	4255.40	48.30	35.22	-13.08	54.00	18.78	AV	Vertical
2	4274.78	58.66	45.91	-12.75	74.00	28.09	PK	Vertical
3	4570.44	47.78	36.24	-11.54	54.00	17.76	AV	Vertical
4	4632.32	58.19	46.83	-11.36	74.00	27.17	PK	Vertical
5	5592.44	56.55	51.62	-4.93	74.00	22.38	PK	Vertical
6	5592.44	46.07	41.14	-4.93	54.00	12.86	AV	Vertical

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).

Product Name:	Mobile Phone	Product Model:	X6851
Test By:	Robin	Test mode:	Charging & Recording mode
Test Frequency:	1000 MHz ~ 6000 MHz	Polarization:	Horizontal
Test Voltage:	AC 120V/60Hz		

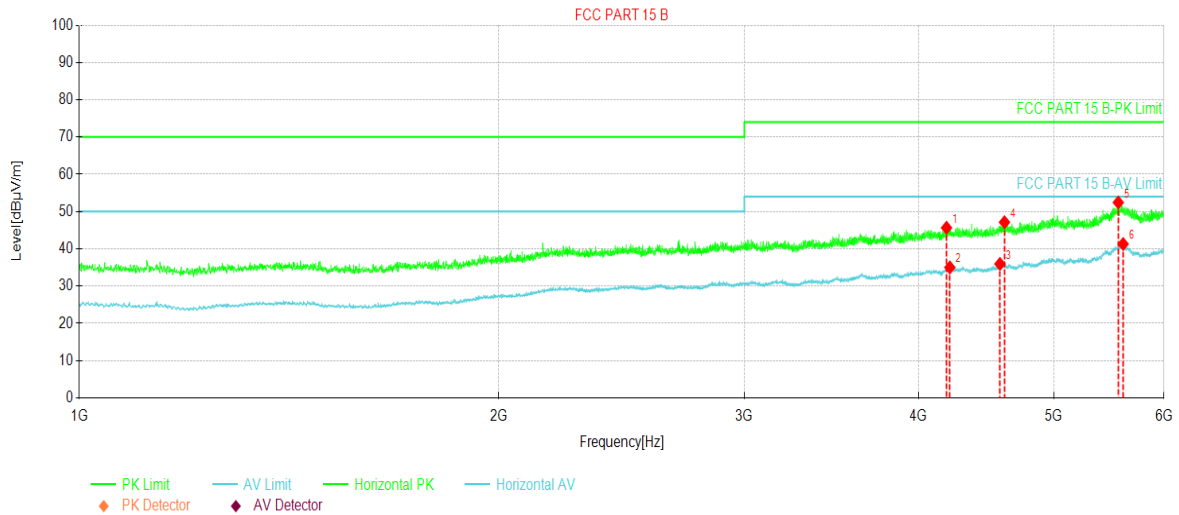

Suspected Data List								
NO.	Freq. [MHz]	Reading [dBµV/m]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Trace	Polarity
1	4189.14	58.46	45.65	-12.81	74.00	28.35	PK	Horizontal
2	4212.27	47.79	35.01	-12.78	54.00	18.99	AV	Horizontal
3	4576.07	47.45	35.94	-11.51	54.00	18.06	AV	Horizontal
4	4609.82	58.49	47.14	-11.35	74.00	26.86	PK	Horizontal
5	5563.69	57.77	52.44	-5.33	74.00	21.56	PK	Horizontal
6	5608.70	46.21	41.30	-4.91	54.00	12.70	AV	Horizontal


Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).

Below 1GHz:

Version 2:

Product Name:	Mobile Phone	Product Model:	X6851
Test By:	Robin	Test mode:	Charging & Recording mode
Test Frequency:	30 MHz ~ 1 GHz	Polarization:	Vertical
Test Voltage:	AC 120V/60Hz		

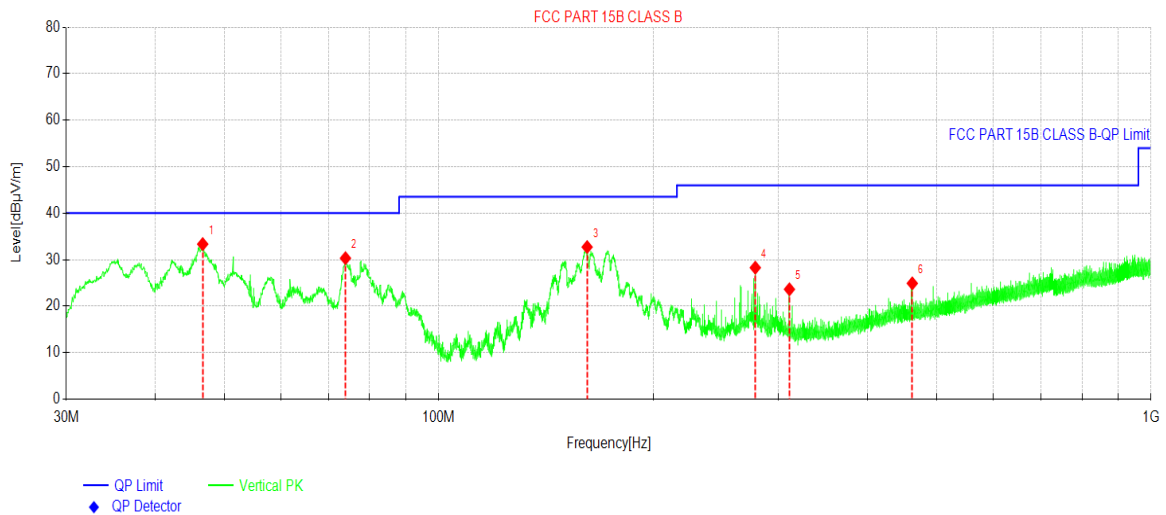


Suspected Data List								
NO.	Freq. [MHz]	Reading[dBµV/m]	Factor [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Trace	Polarity
1	46.6363	47.16	-13.82	33.34	40.00	6.66	PK	Vertical
2	73.9917	47.43	-17.12	30.31	40.00	9.69	PK	Vertical
3	161.587	46.36	-13.64	32.72	43.50	10.78	PK	Vertical
4	278.283	42.65	-14.38	28.27	46.00	17.73	PK	Vertical
5	310.780	36.79	-13.17	23.62	46.00	22.38	PK	Vertical
6	462.302	33.82	-8.92	24.90	46.00	21.10	PK	Vertical

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Pre-amplifier Factor).

Product Name:	Mobile Phone	Product Model:	X6851
Test By:	Robin	Test mode:	Charging & Recording mode
Test Frequency:	30 MHz ~ 1 GHz	Polarization:	Horizontal
Test Voltage:	AC 120V/60Hz		

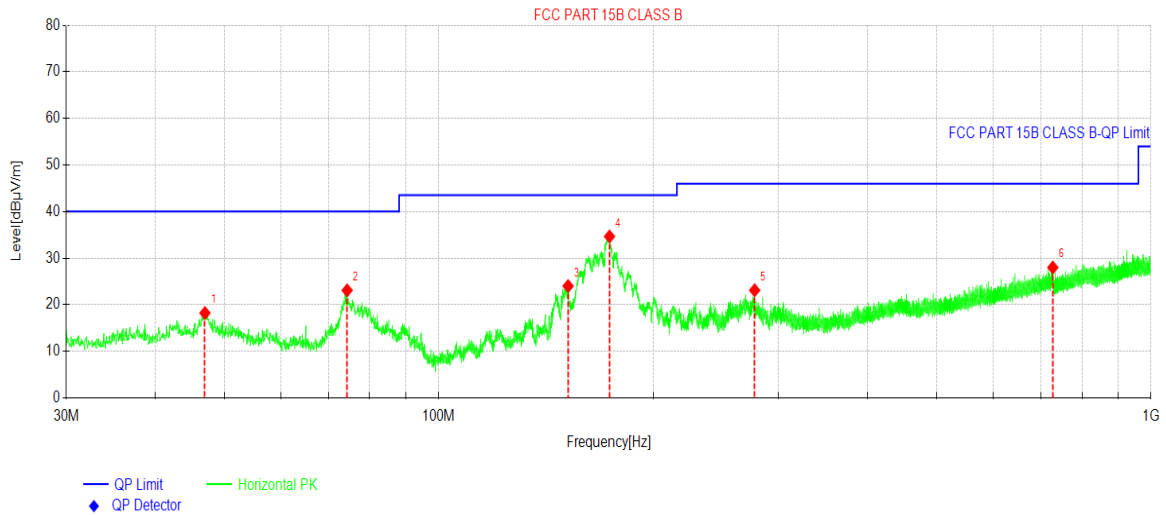

Suspected Data List


NO.	Freq. [MHz]	Reading[dBµV/m]	Factor [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Trace	Polarity
1	46.9758	32.08	-13.86	18.22	40.00	21.78	PK	Horizontal
2	74.3797	40.24	-17.15	23.09	40.00	16.91	PK	Horizontal
3	151.935	37.69	-13.68	24.01	43.50	19.49	PK	Horizontal
4	173.712	49.13	-14.48	34.65	43.50	8.85	PK	Horizontal
5	277.701	37.51	-14.40	23.11	46.00	22.89	PK	Horizontal
6	728.095	31.07	-3.08	27.99	46.00	18.01	PK	Horizontal

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).

Above 1GHz:

Product Name:	Mobile Phone	Product Model:	X6851
Test By:	Robin	Test mode:	Charging & Recording mode
Test Frequency:	1000 MHz ~ 6000 MHz	Polarization:	Vertical
Test Voltage:	AC 120V/60Hz		

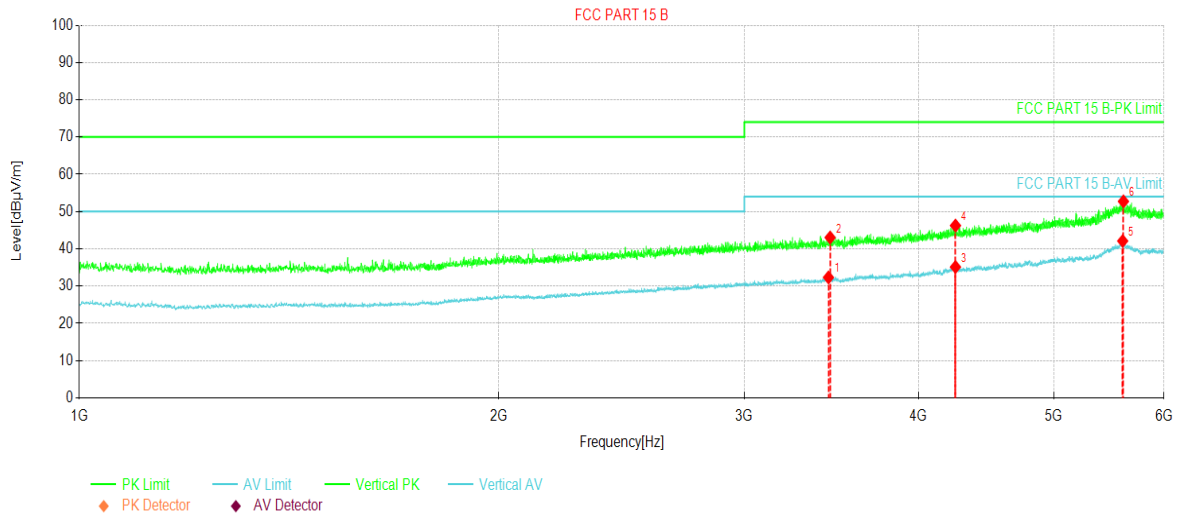


Suspected Data List								
NO.	Freq. [MHz]	Reading [dBµV/m]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Trace	Polarity
1	3447.18	48.32	32.32	-16.00	54.00	21.68	AV	Vertical
2	3456.55	58.99	43.03	-15.96	74.00	30.97	PK	Vertical
3	4251.65	47.70	35.13	-12.57	54.00	18.87	AV	Vertical
4	4251.65	58.81	46.24	-12.57	74.00	27.76	PK	Vertical
5	5604.32	46.50	42.11	-4.39	54.00	11.89	AV	Vertical
6	5611.20	57.17	52.72	-4.45	74.00	21.28	PK	Vertical

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).

Product Name:	Mobile Phone	Product Model:	X6851
Test By:	Robin	Test mode:	Charging & Recording mode
Test Frequency:	1000 MHz ~ 6000 MHz	Polarization:	Horizontal
Test Voltage:	AC 120V/60Hz		

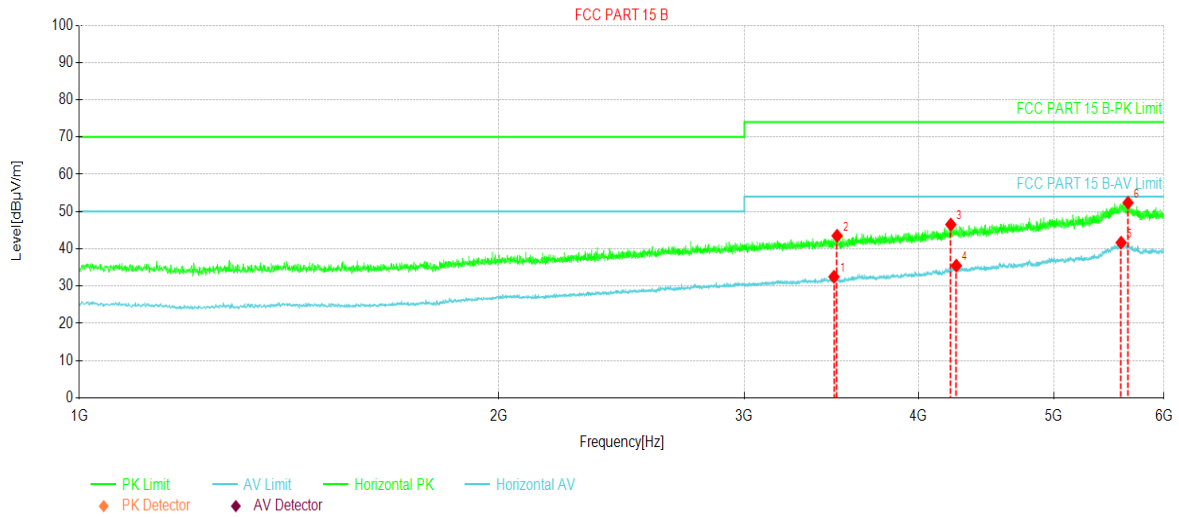

Suspected Data List								
NO.	Freq. [MHz]	Reading [dBµV/m]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Trace	Polarity
1	3478.43	48.37	32.50	-15.87	54.00	21.50	AV	Horizontal
2	3496.56	59.28	43.49	-15.79	74.00	30.51	PK	Horizontal
3	4219.15	59.21	46.51	-12.70	74.00	27.49	PK	Horizontal
4	4257.90	48.02	35.47	-12.55	54.00	18.53	AV	Horizontal
5	5589.94	46.19	41.66	-4.53	54.00	12.34	AV	Horizontal
6	5653.70	57.20	52.35	-4.85	74.00	21.65	PK	Horizontal

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).

-----End of report-----