



22.26. Peak to Average Ratio for SA_Part22-24-27(NTNV)(Channel:664666, Bandwidth:20, SCS:15, OFDM:DFT-s-OFDM, Modulation:16QAM, RB Number:100, RB Position:0)

Center Frequency(MHz)	PAR Percent (%)	PAR (dB)	Upper Limit (dB)	Verdict
3969.99	0.1	6.33	13	Pass

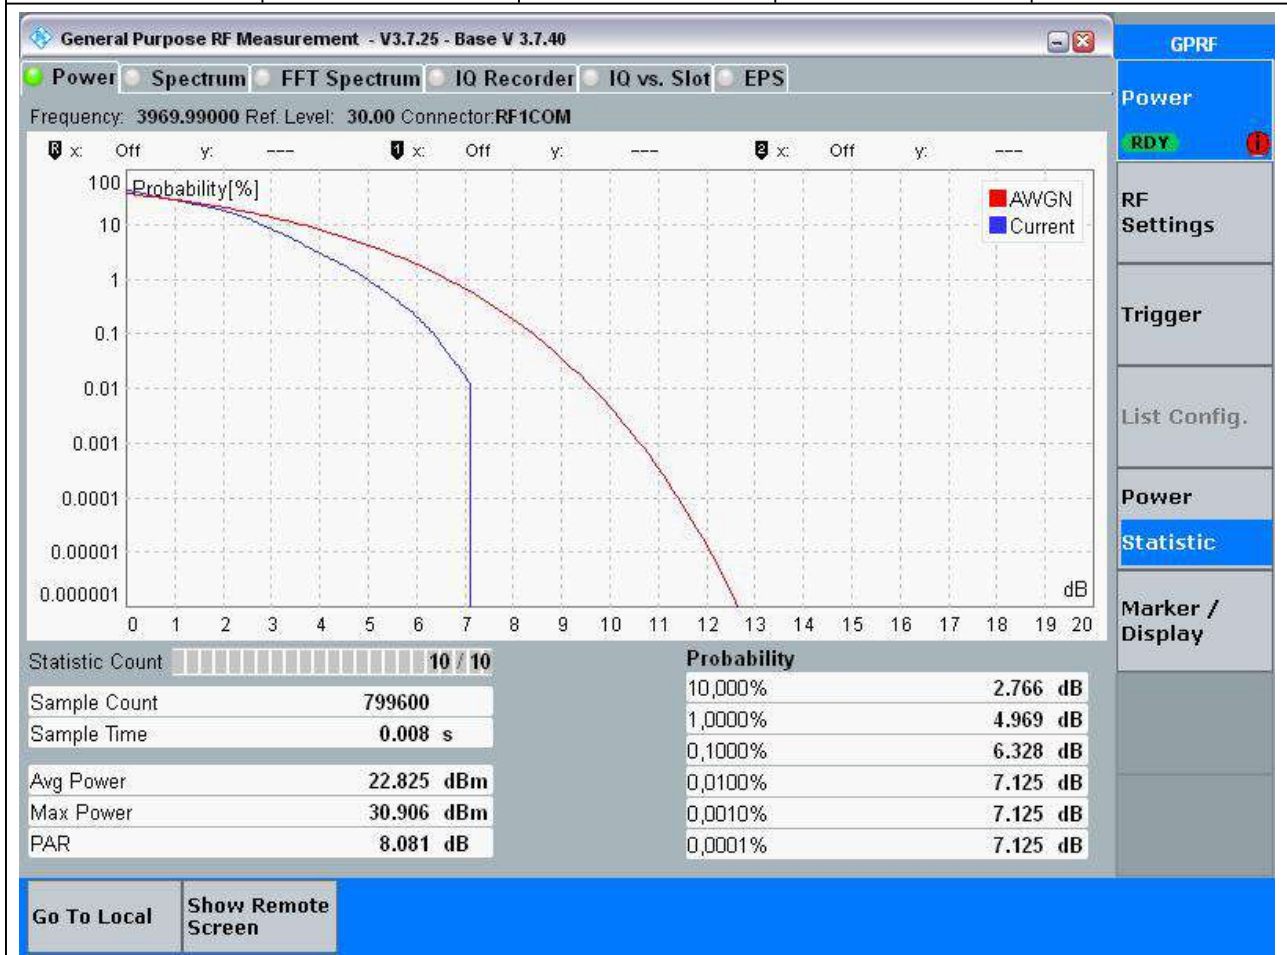


22.27. Peak to Average Ratio for SA_Part22-24-27(NTNV)(Channel:664666, Bandwidth:20, SCS:15, OFDM:DFT-s-OFDM, Modulation:64QAM, RB Number:1, RB Position:0)

Center Frequency(MHz)	PAR Percent (%)	PAR (dB)	Upper Limit (dB)	Verdict
3969.99	0.1	7.59	13	Pass

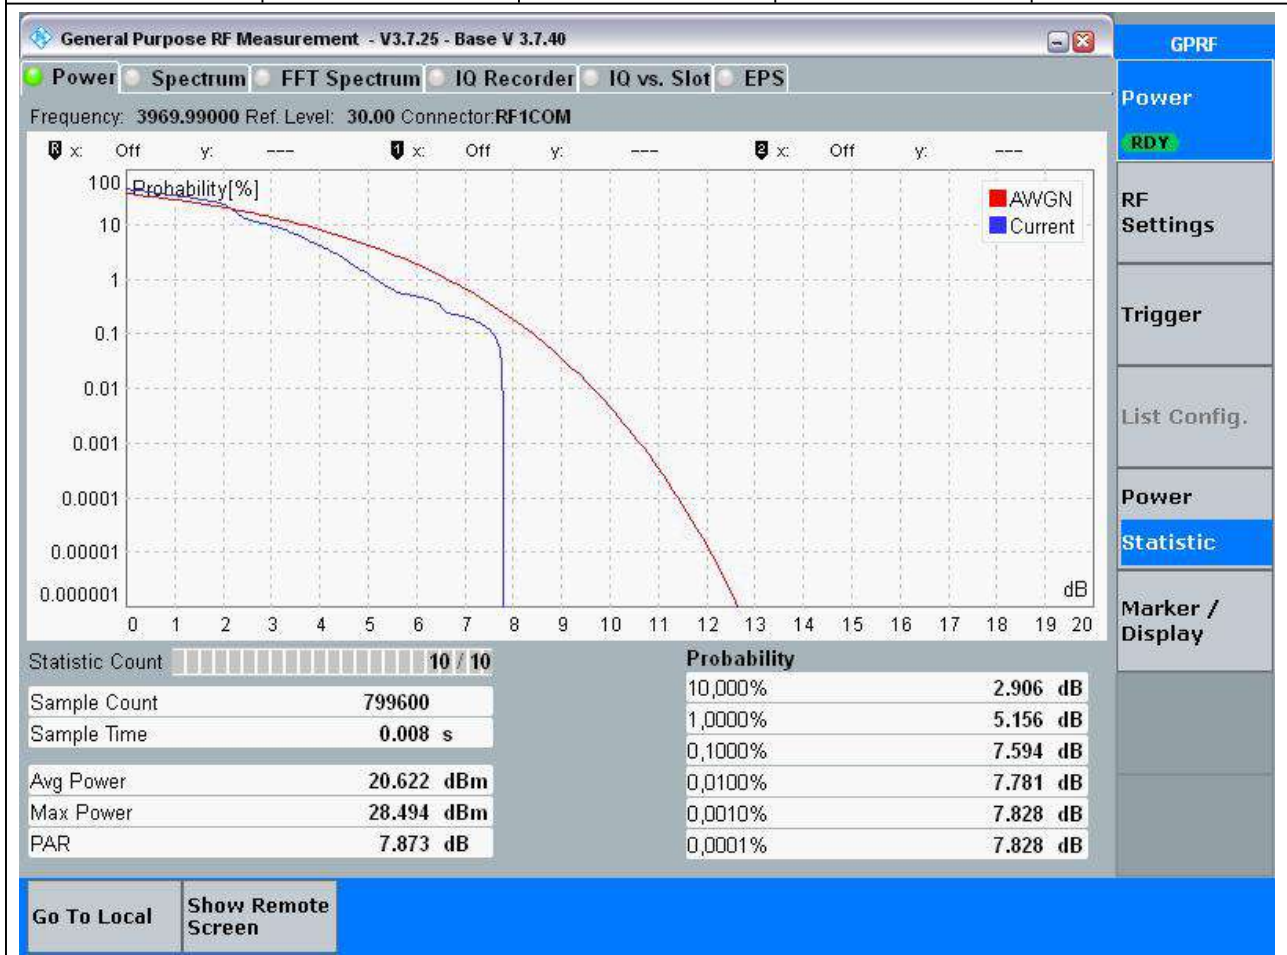


22.28. Peak to Average Ratio for SA_Part22-24-27(NTNV)(Channel:664666, Bandwidth:20, SCS:15, OFDM:DFT-s-OFDM, Modulation:64QAM, RB Number:100, RB Position:0)

Center Frequency(MHz)	PAR Percent (%)	PAR (dB)	Upper Limit (dB)	Verdict
3969.99	0.1	6.66	13	Pass

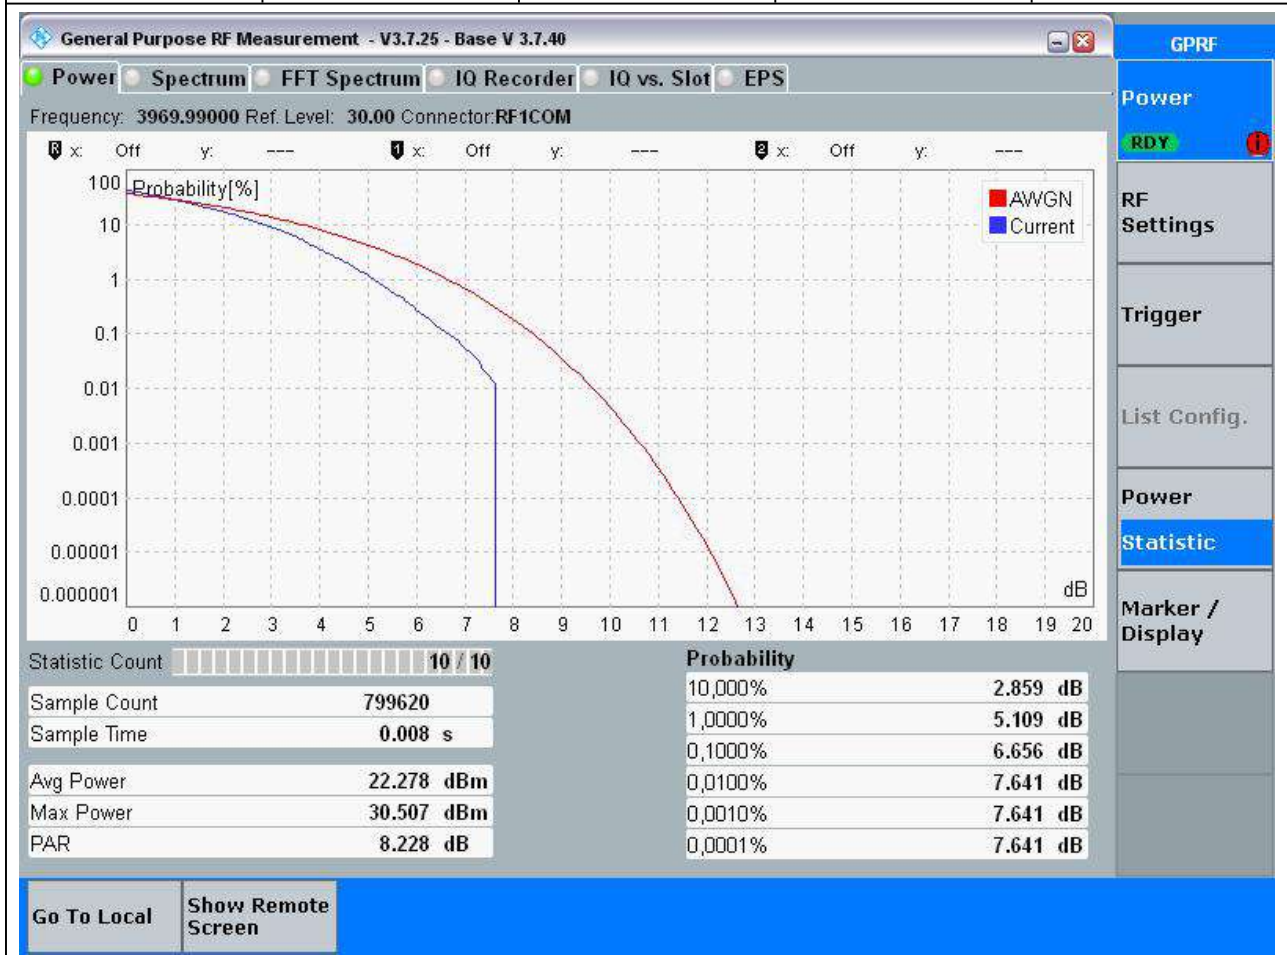


22.29. Peak to Average Ratio for SA_Part22-24-27(NTNV)(Channel:664666, Bandwidth:20, SCS:15, OFDM:DFT-s-OFDM, Modulation:256QAM, RB Number:1, RB Position:0)

Center Frequency(MHz)	PAR Percent (%)	PAR (dB)	Upper Limit (dB)	Verdict
3969.99	0.1	6.52	13	Pass

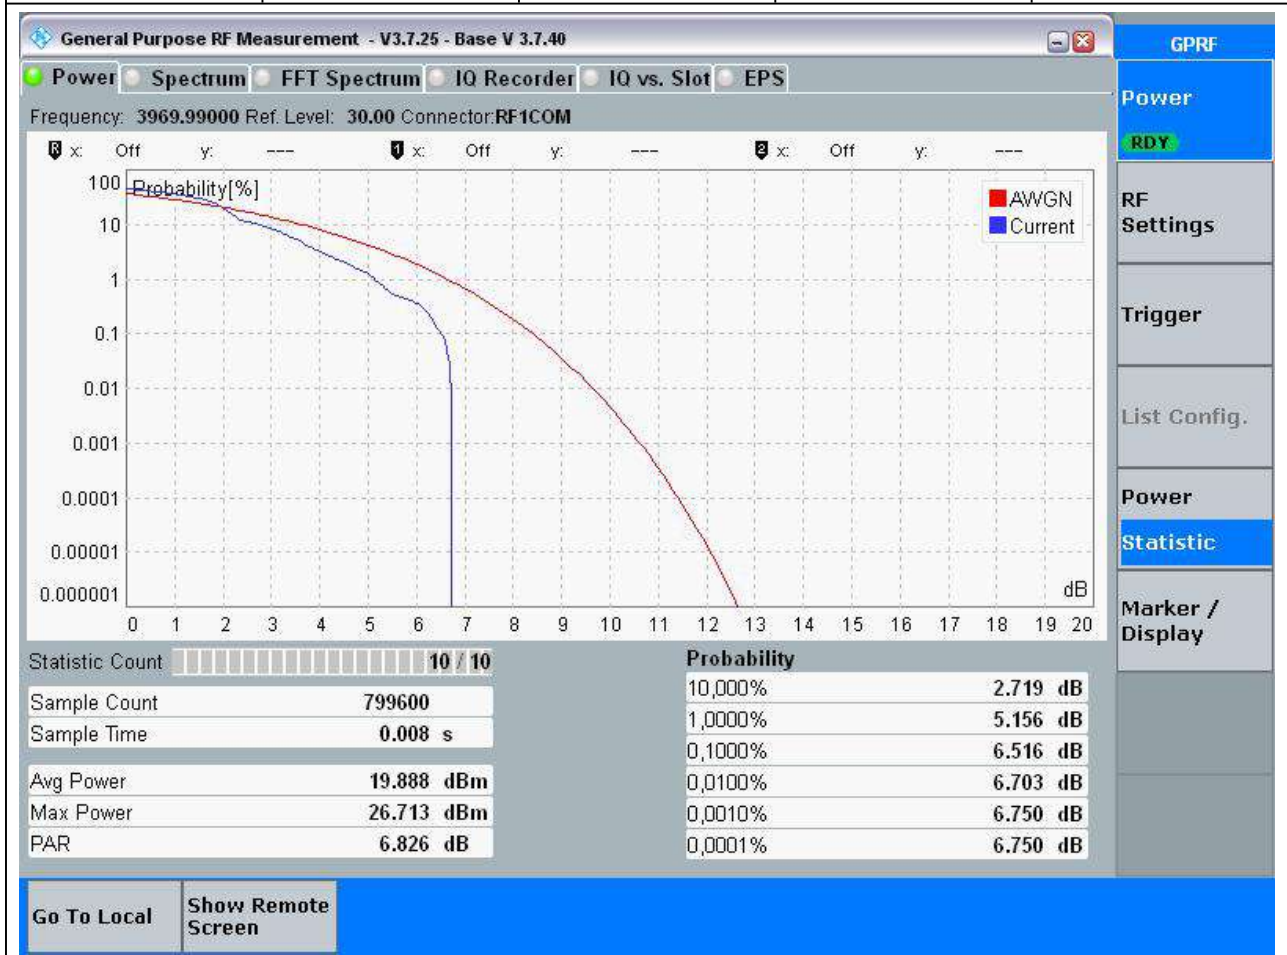


22.30. Peak to Average Ratio for SA_Part22-24-27(NTNV)(Channel:664666, Bandwidth:20, SCS:15, OFDM:DFT-s-OFDM, Modulation:256QAM, RB Number:100, RB Position:0)

Center Frequency(MHz)	PAR Percent (%)	PAR (dB)	Upper Limit (dB)	Verdict
3969.99	0.1	6.75	13	Pass

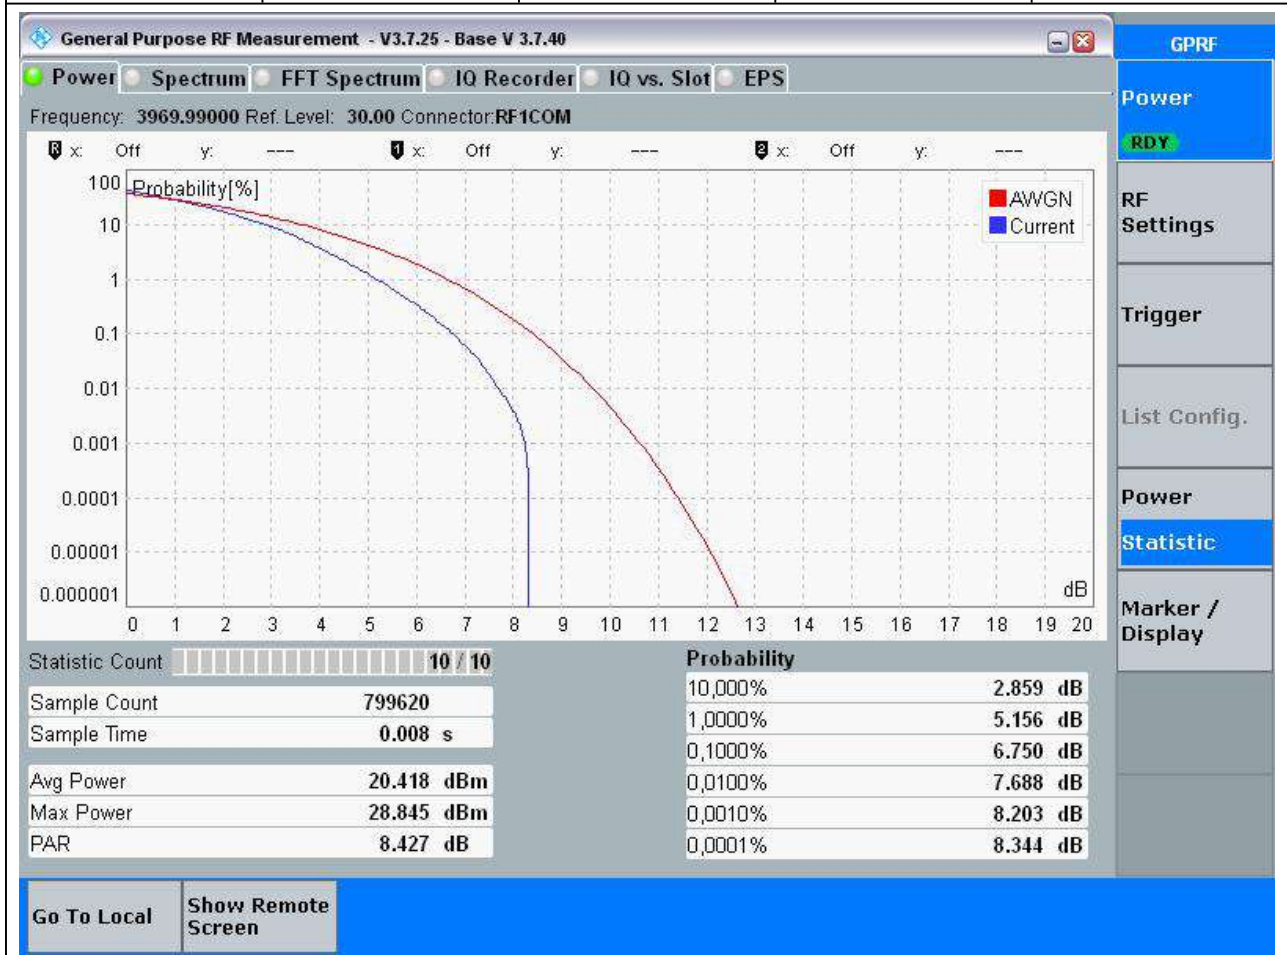


23. n78 (3450-3550)

23.1. Peak to Average Ratio for SA_Part22-24-27(NTNV)(Channel:630668, Bandwidth:20, SCS:15, OFDM:DFT-s-OFDM, Modulation:Pi/2-BPSK, RB Number:1, RB Position:0)

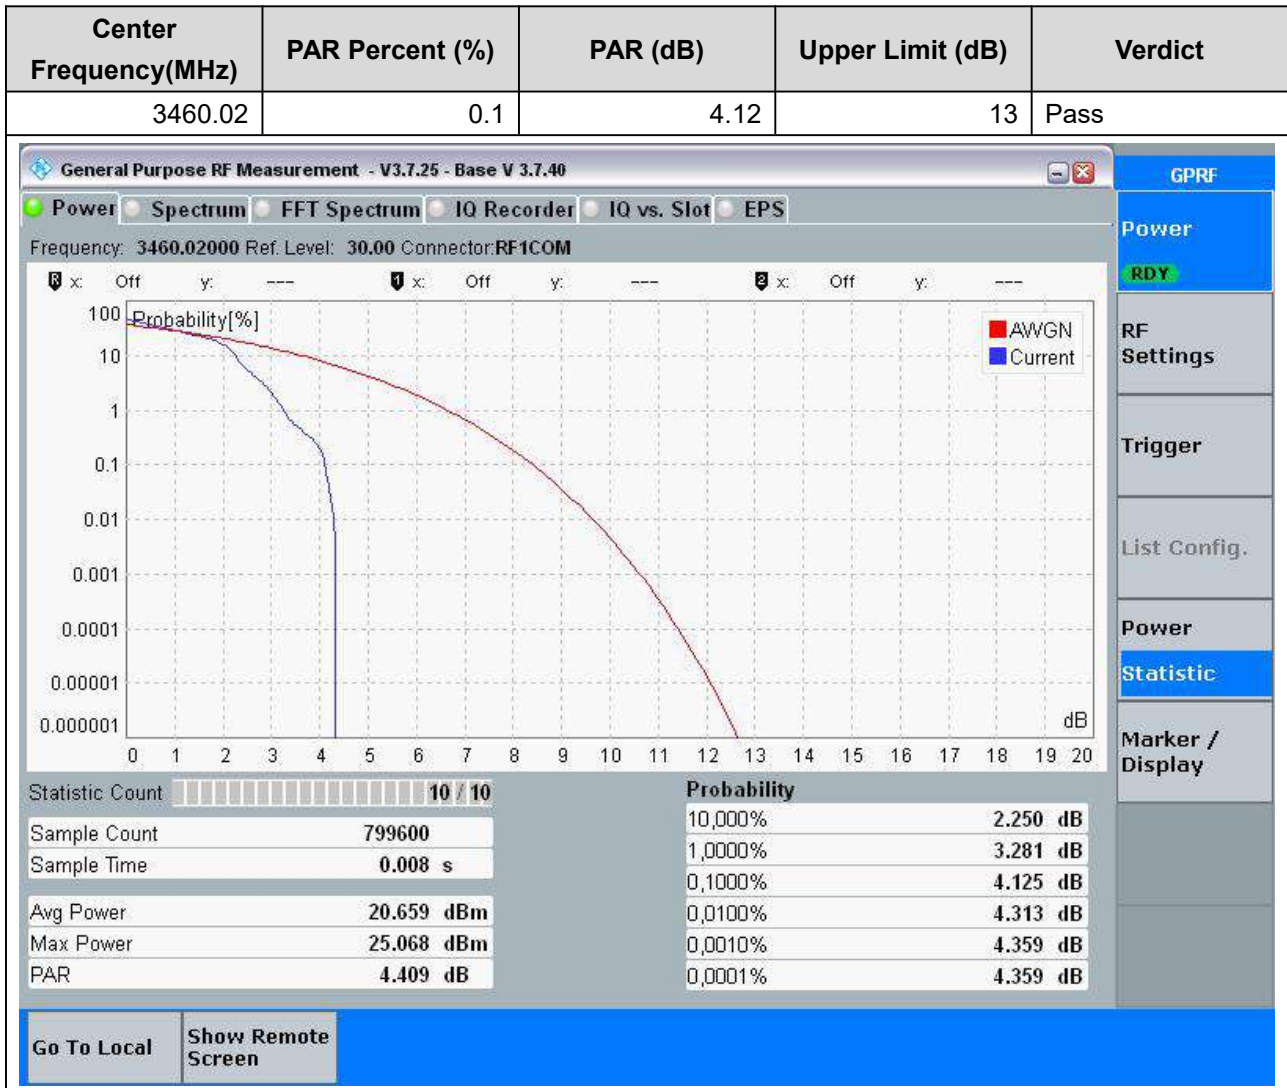


23.2. Peak to Average Ratio for SA_Part22-24-27(NTNV)(Channel:630668, Bandwidth:20, SCS:15, OFDM:DFT-s-OFDM, Modulation:Pi/2-BPSK, RB Number:100, RB Position:0)

Center Frequency(MHz)	PAR Percent (%)	PAR (dB)	Upper Limit (dB)	Verdict
3460.02	0.1	4.36	13	Pass

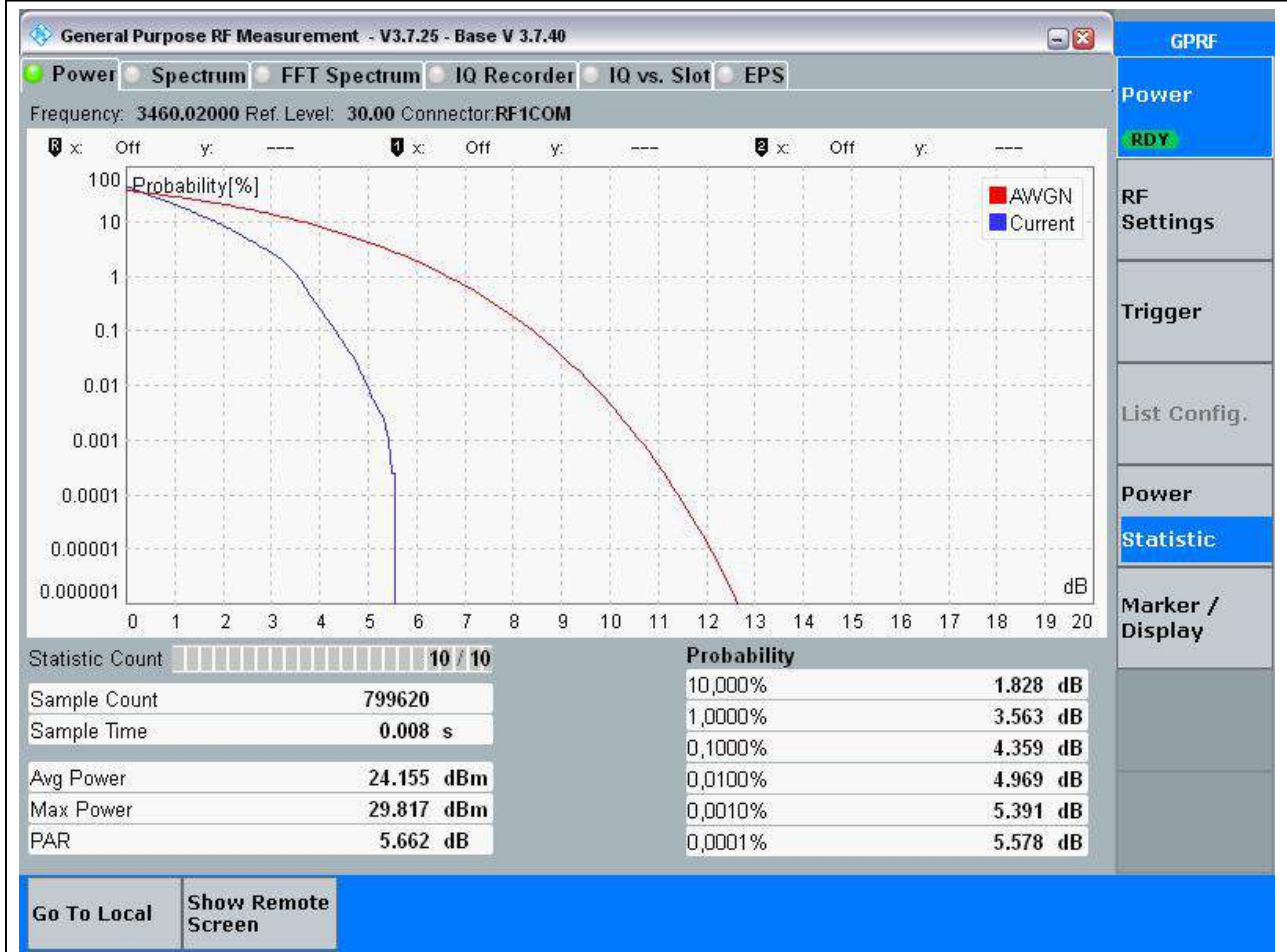


23.3. Peak to Average Ratio for SA_Part22-24-27(NTNV)(Channel:630668, Bandwidth:20, SCS:15, OFDM:DFT-s-OFDM, Modulation:QPSK, RB Number:1, RB Position:0)

Center Frequency(MHz)	PAR Percent (%)	PAR (dB)	Upper Limit (dB)	Verdict
3460.02	0.1	5.91	13	Pass

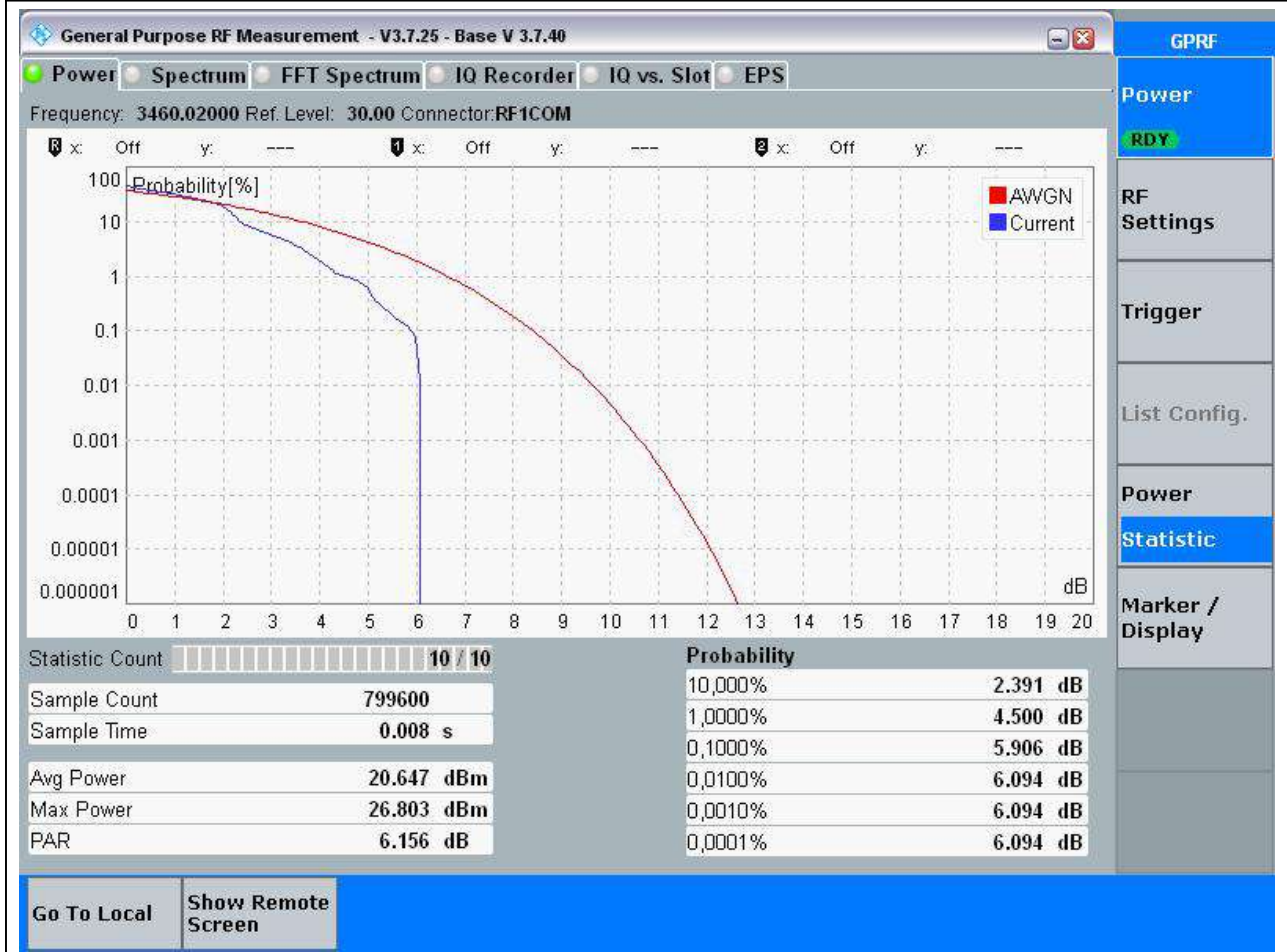


23.4. Peak to Average Ratio for SA_Part22-24-27(NTNV)(Channel:630668, Bandwidth:20, SCS:15, OFDM:DFT-s-OFDM, Modulation:QPSK, RB Number:100, RB Position:0)

Center Frequency(MHz)	PAR Percent (%)	PAR (dB)	Upper Limit (dB)	Verdict
3460.02	0.1	5.53	13	Pass

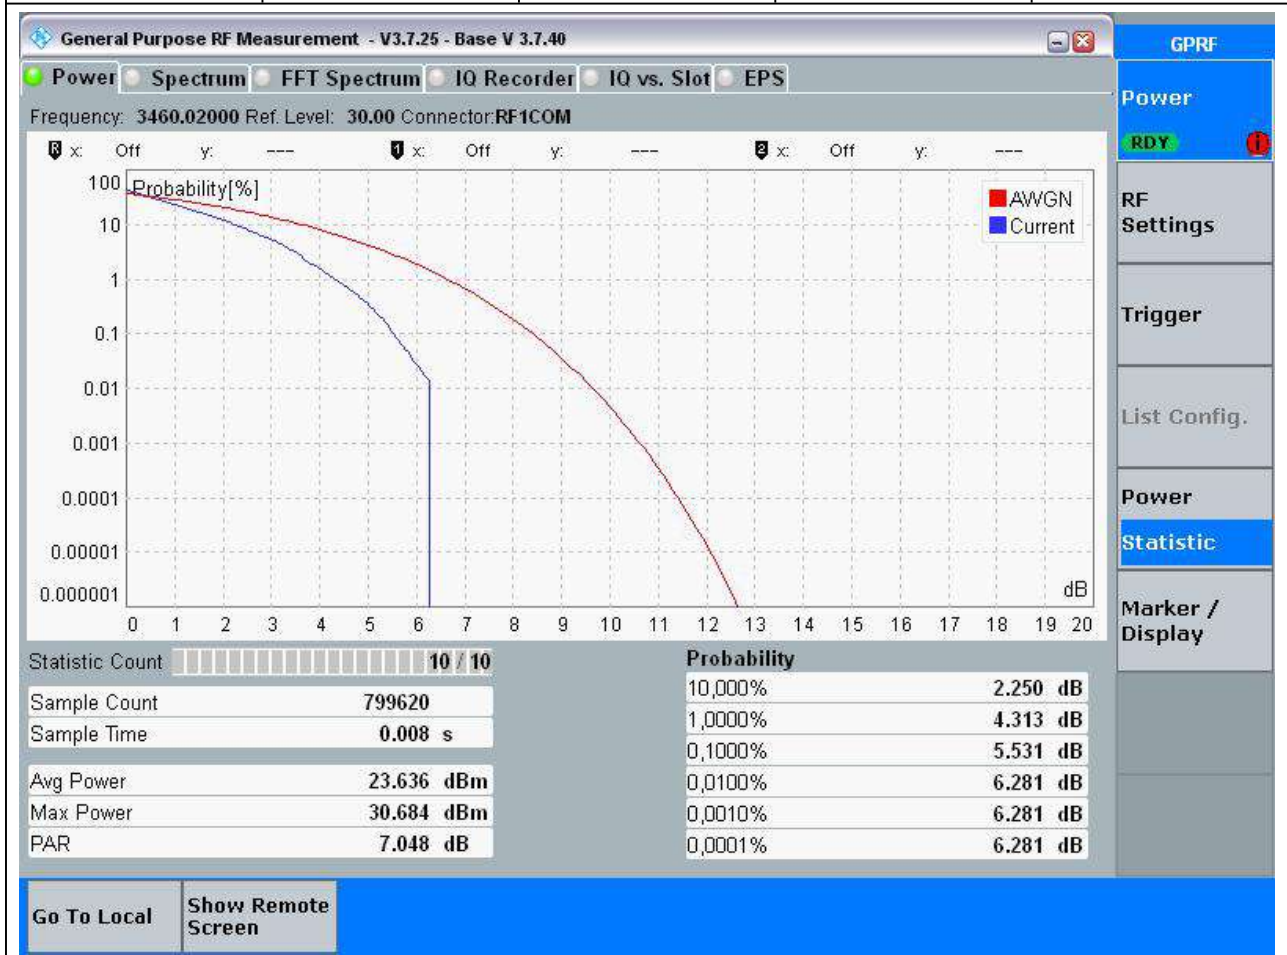


23.5. Peak to Average Ratio for SA_Part22-24-27(NTNV)(Channel:630668, Bandwidth:20, SCS:15, OFDM:DFT-s-OFDM, Modulation:16QAM, RB Number:1, RB Position:0)

Center Frequency(MHz)	PAR Percent (%)	PAR (dB)	Upper Limit (dB)	Verdict
3460.02	0.1	6.98	13	Pass

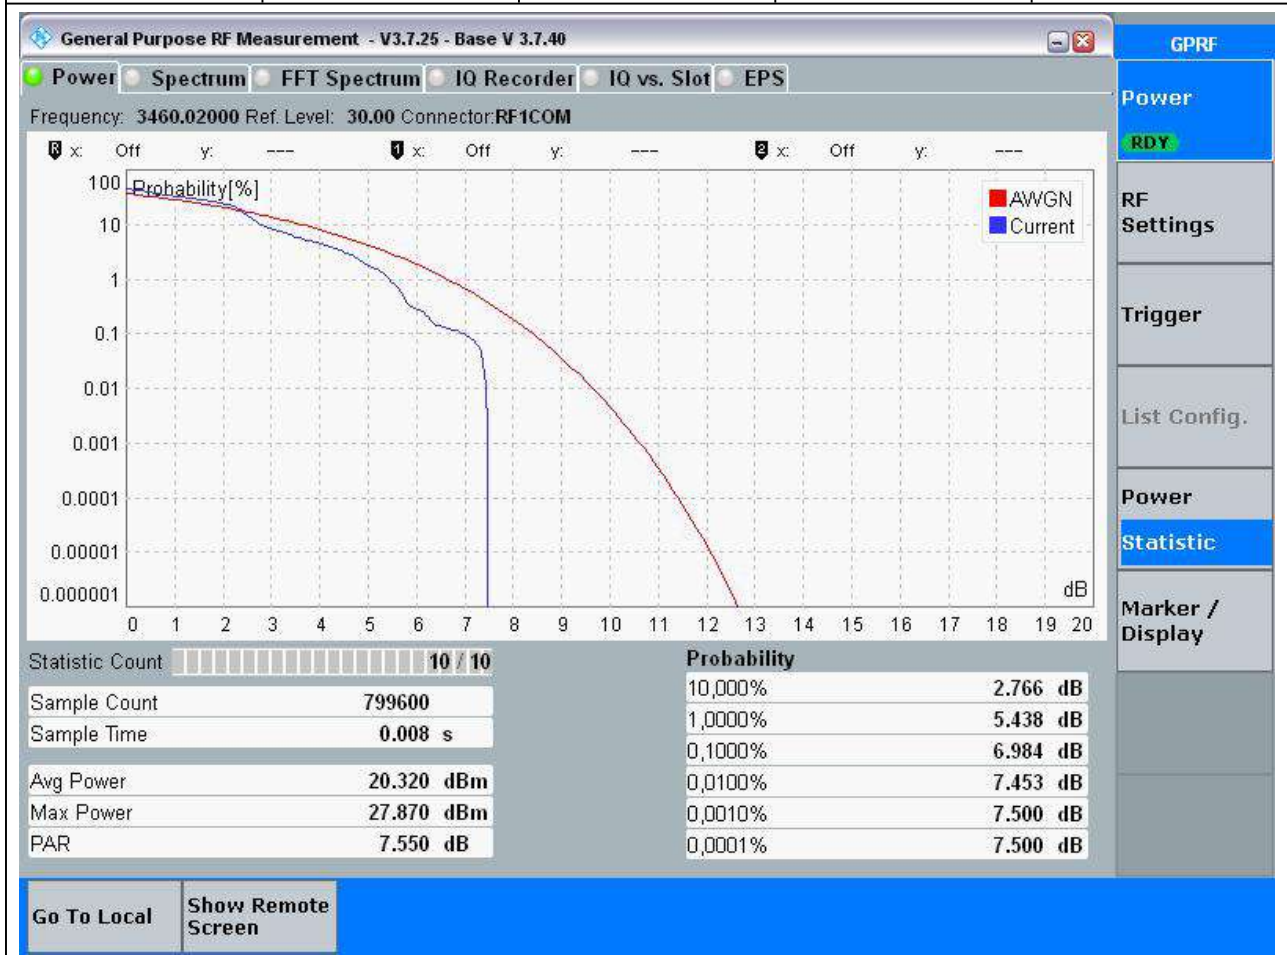


23.6. Peak to Average Ratio for SA_Part22-24-27(NTNV)(Channel:630668, Bandwidth:20, SCS:15, OFDM:DFT-s-OFDM, Modulation:16QAM, RB Number:100, RB Position:0)

Center Frequency(MHz)	PAR Percent (%)	PAR (dB)	Upper Limit (dB)	Verdict
3460.02	0.1	6.28	13	Pass

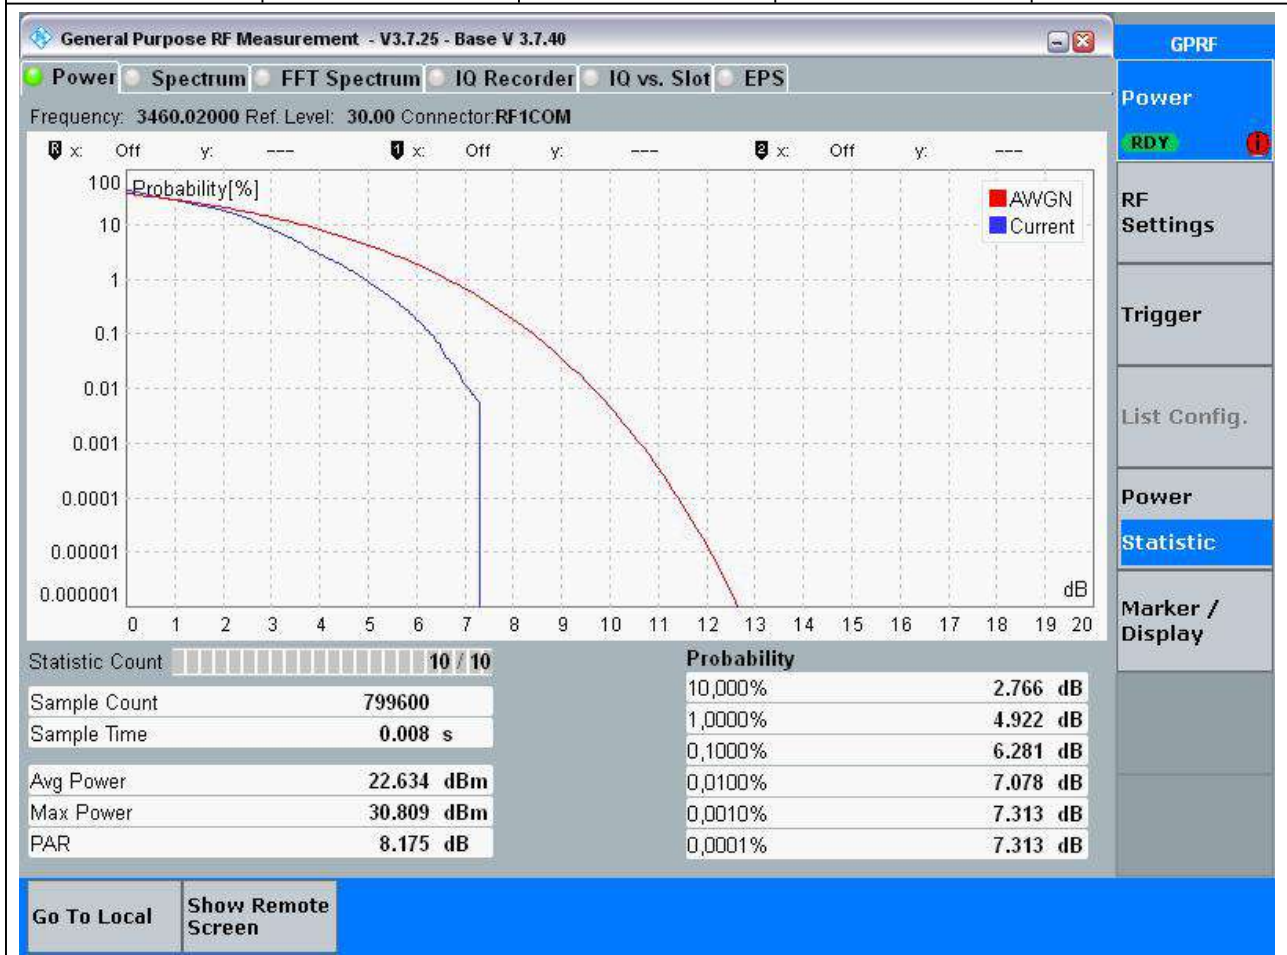


23.7. Peak to Average Ratio for SA_Part22-24-27(NTNV)(Channel:630668, Bandwidth:20, SCS:15, OFDM:DFT-s-OFDM, Modulation:64QAM, RB Number:1, RB Position:0)

Center Frequency(MHz)	PAR Percent (%)	PAR (dB)	Upper Limit (dB)	Verdict
3460.02	0.1	5.95	13	Pass

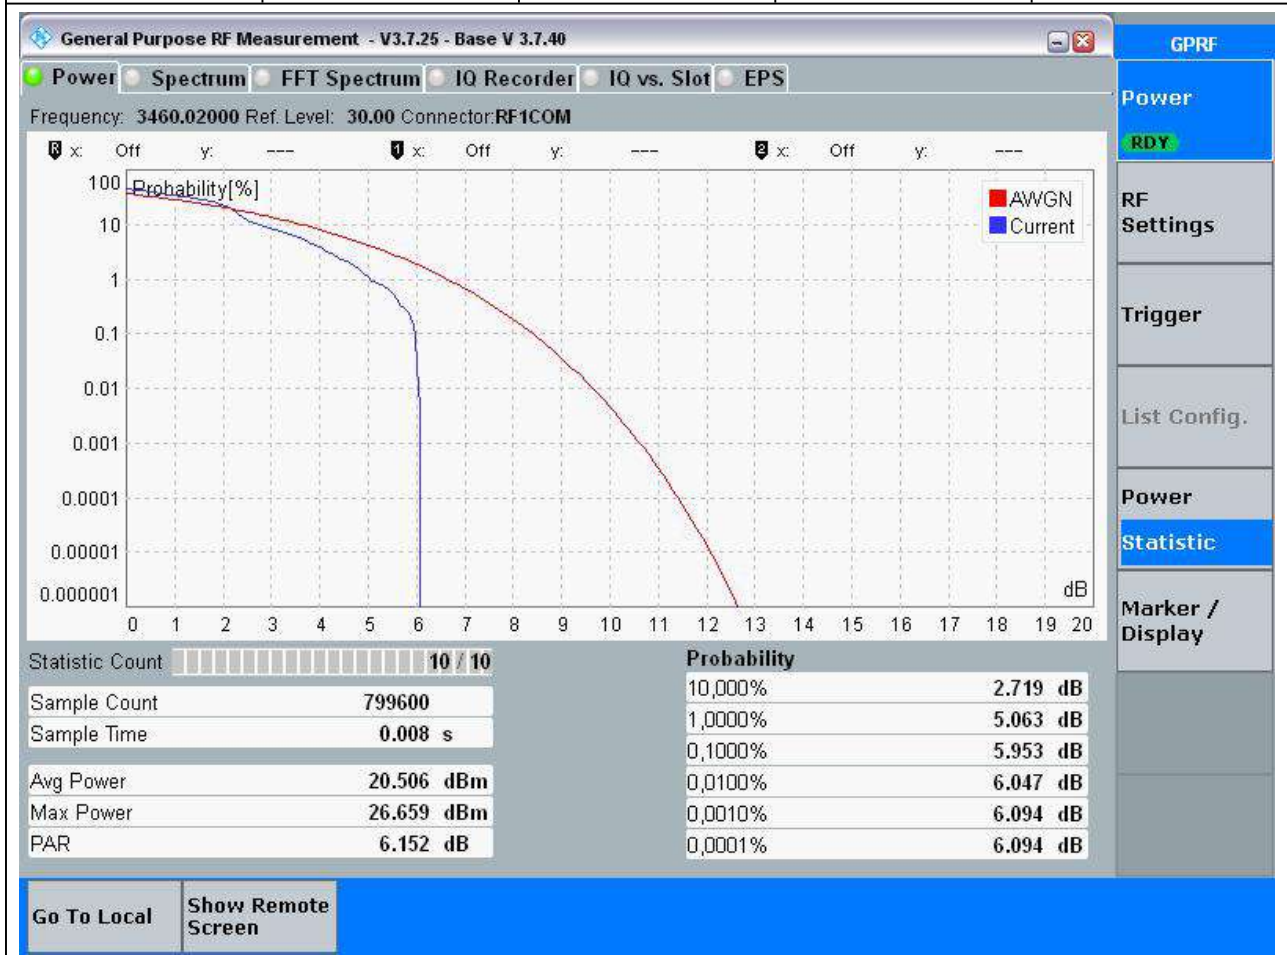


23.8. Peak to Average Ratio for SA_Part22-24-27(NTNV)(Channel:630668, Bandwidth:20, SCS:15, OFDM:DFT-s-OFDM, Modulation:64QAM, RB Number:100, RB Position:0)

Center Frequency(MHz)	PAR Percent (%)	PAR (dB)	Upper Limit (dB)	Verdict
3460.02	0.1	6.61	13	Pass

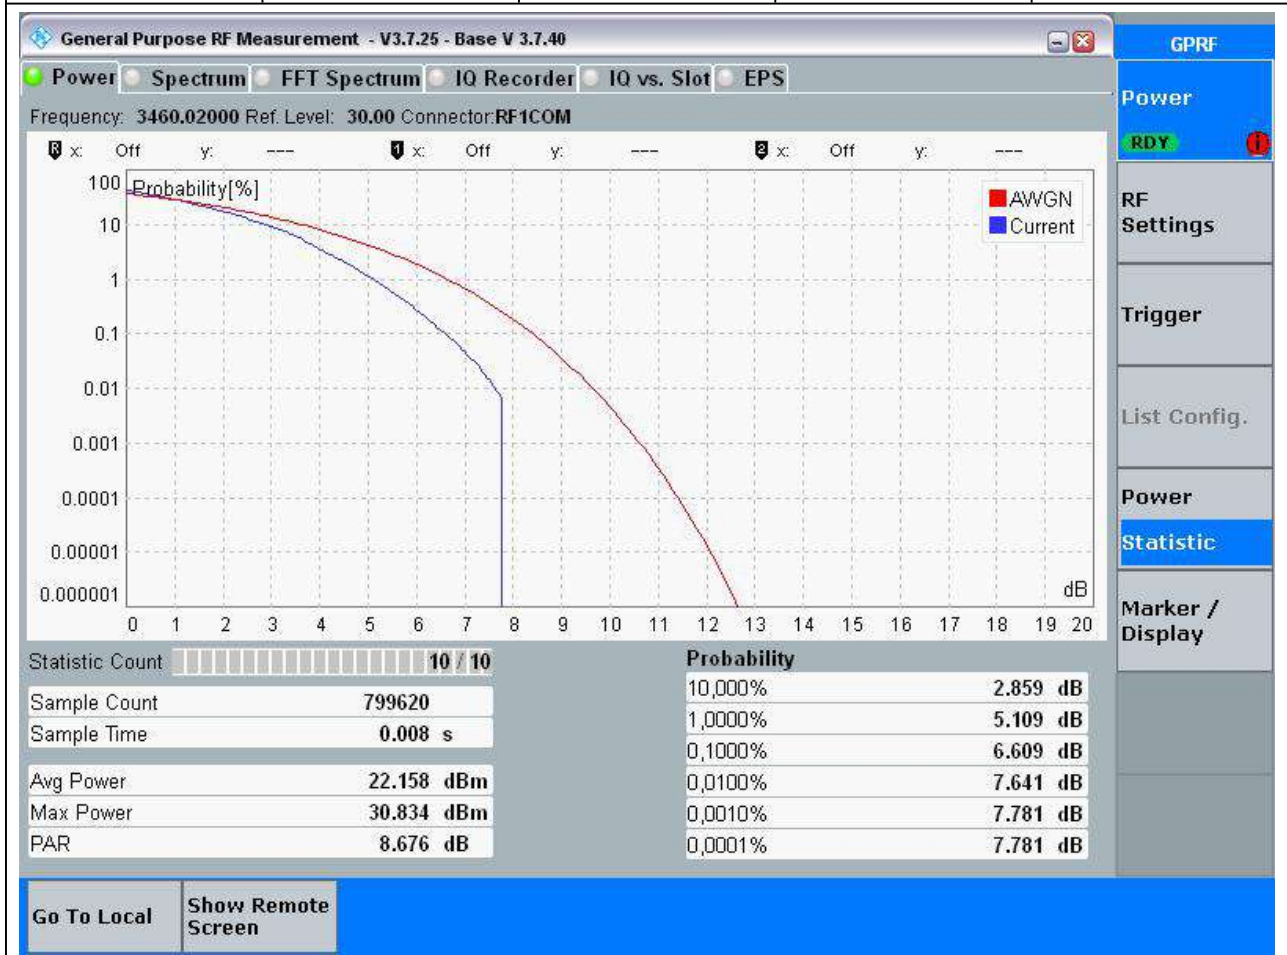


23.9. Peak to Average Ratio for SA_Part22-24-27(NTNV)(Channel:630668, Bandwidth:20, SCS:15, OFDM:DFT-s-OFDM, Modulation:256QAM, RB Number:1, RB Position:0)

Center Frequency(MHz)	PAR Percent (%)	PAR (dB)	Upper Limit (dB)	Verdict
3460.02	0.1	7.03	13	Pass

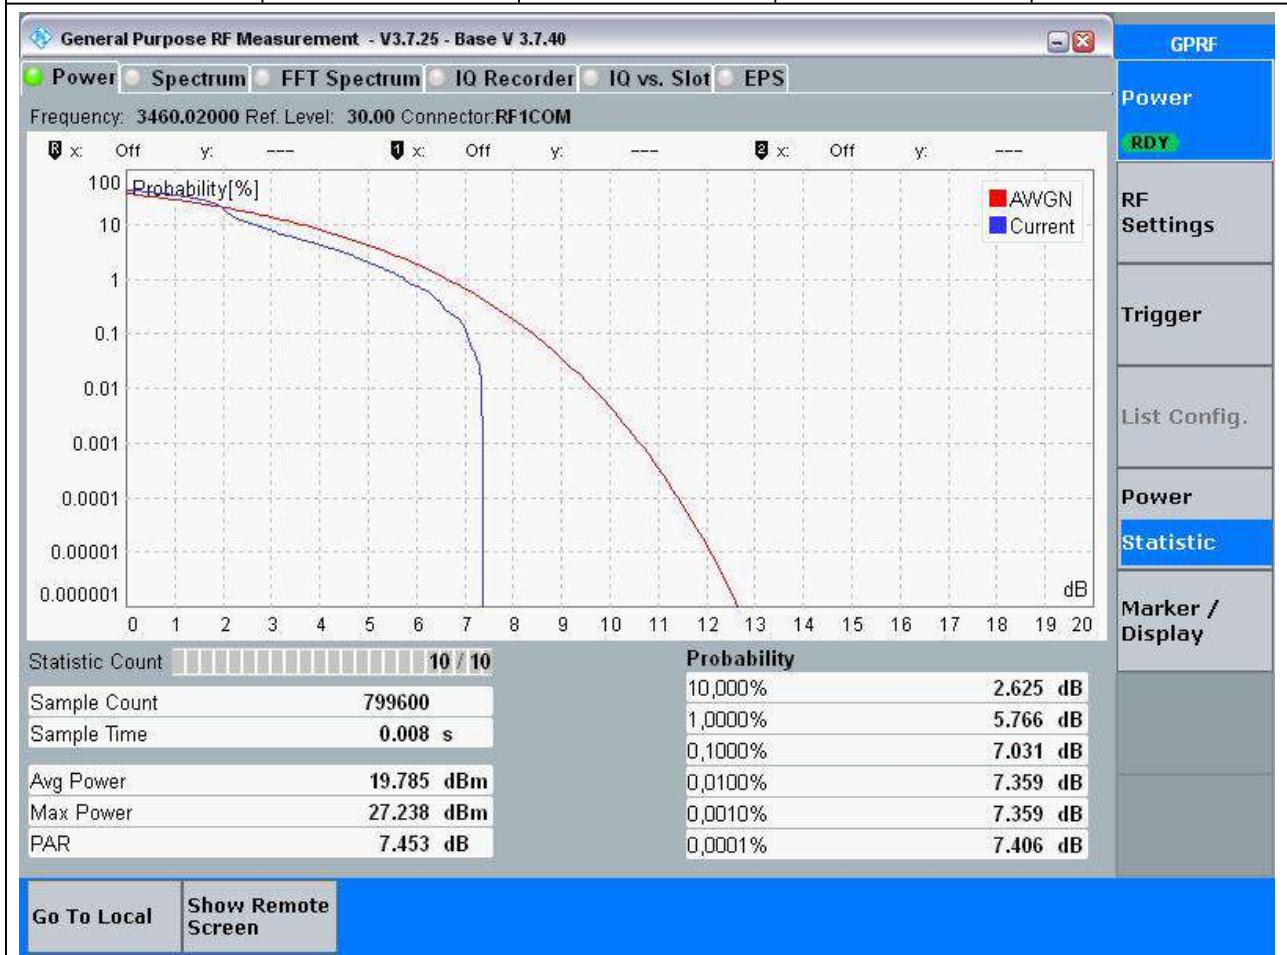


23.10. Peak to Average Ratio for SA_Part22-24-27(NTNV)(Channel:630668, Bandwidth:20, SCS:15, OFDM:DFT-s-OFDM, Modulation:256QAM, RB Number:100, RB Position:0)

Center Frequency(MHz)	PAR Percent (%)	PAR (dB)	Upper Limit (dB)	Verdict
3460.02	0.1	6.7	13	Pass

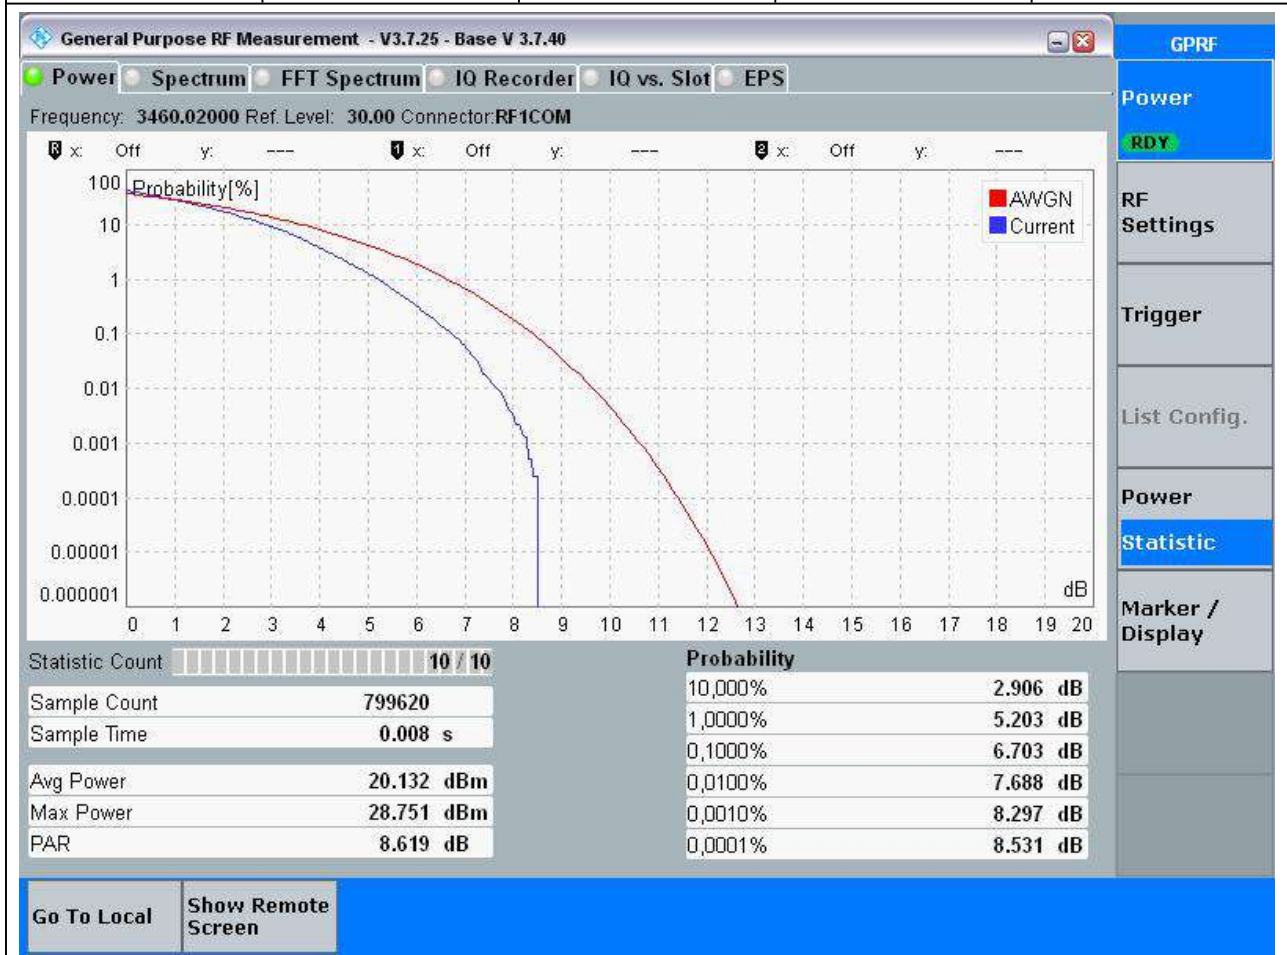


23.11. Peak to Average Ratio for SA_Part22-24-27(NTNV)(Channel:633332, Bandwidth:20, SCS:15, OFDM:DFT-s-OFDM, Modulation:Pi/2-BPSK, RB Number:1, RB Position:0)

Center Frequency(MHz)	PAR Percent (%)	PAR (dB)	Upper Limit (dB)	Verdict
3499.98	0.1	4.27	13	Pass

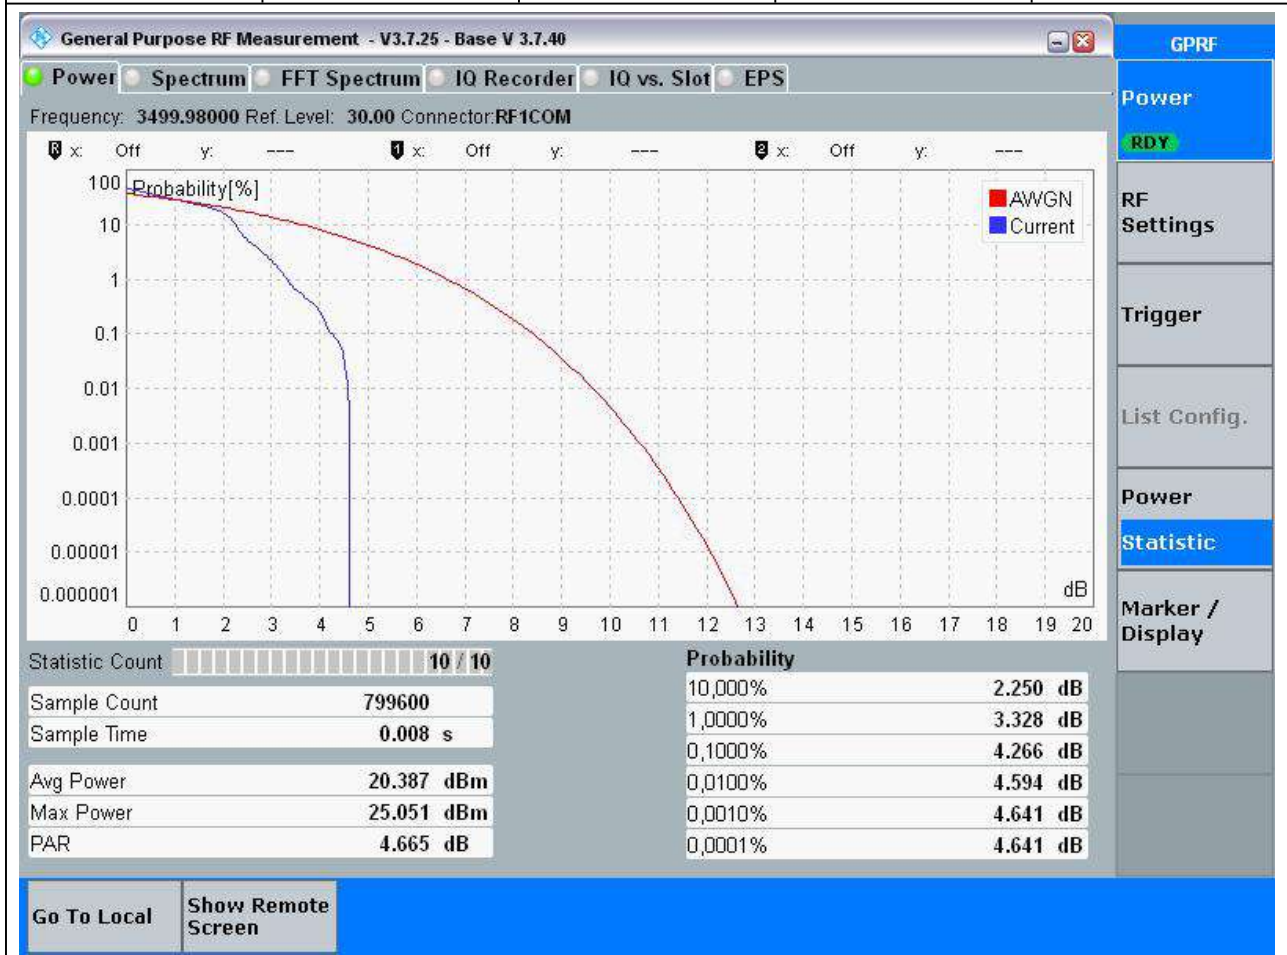


23.12. Peak to Average Ratio for SA_Part22-24-27(NTNV)(Channel:633332, Bandwidth:20, SCS:15, OFDM:DFT-s-OFDM, Modulation:Pi/2-BPSK, RB Number:100, RB Position:0)

Center Frequency(MHz)	PAR Percent (%)	PAR (dB)	Upper Limit (dB)	Verdict
3499.98	0.1	4.31	13	Pass

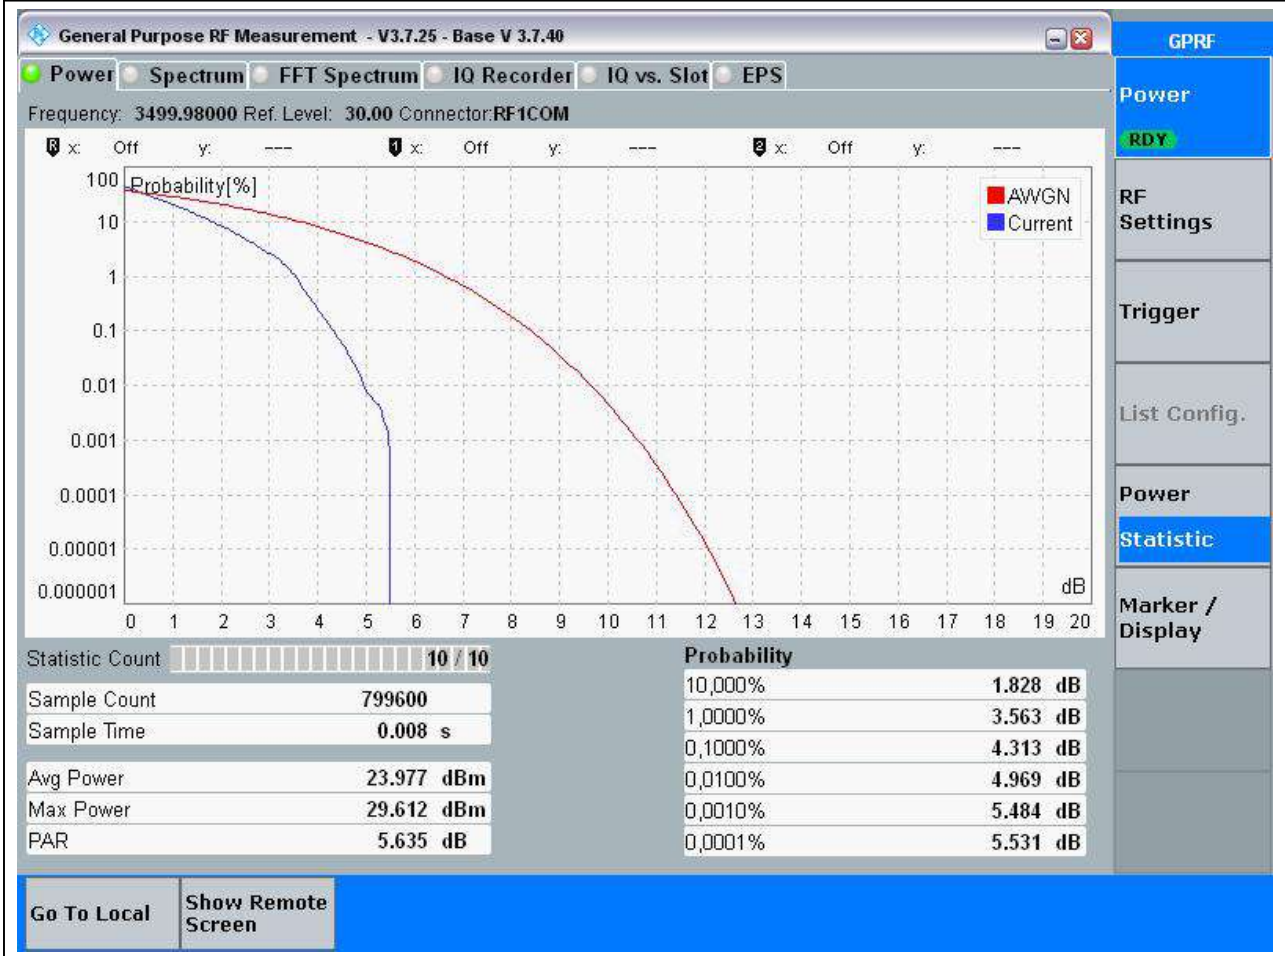


23.13. Peak to Average Ratio for SA_Part22-24-27(NTNV)(Channel:633332, Bandwidth:20, SCS:15, OFDM:DFT-s-OFDM, Modulation:QPSK, RB Number:1, RB Position:0)

Center Frequency(MHz)	PAR Percent (%)	PAR (dB)	Upper Limit (dB)	Verdict
3499.98	0.1	5.86	13	Pass

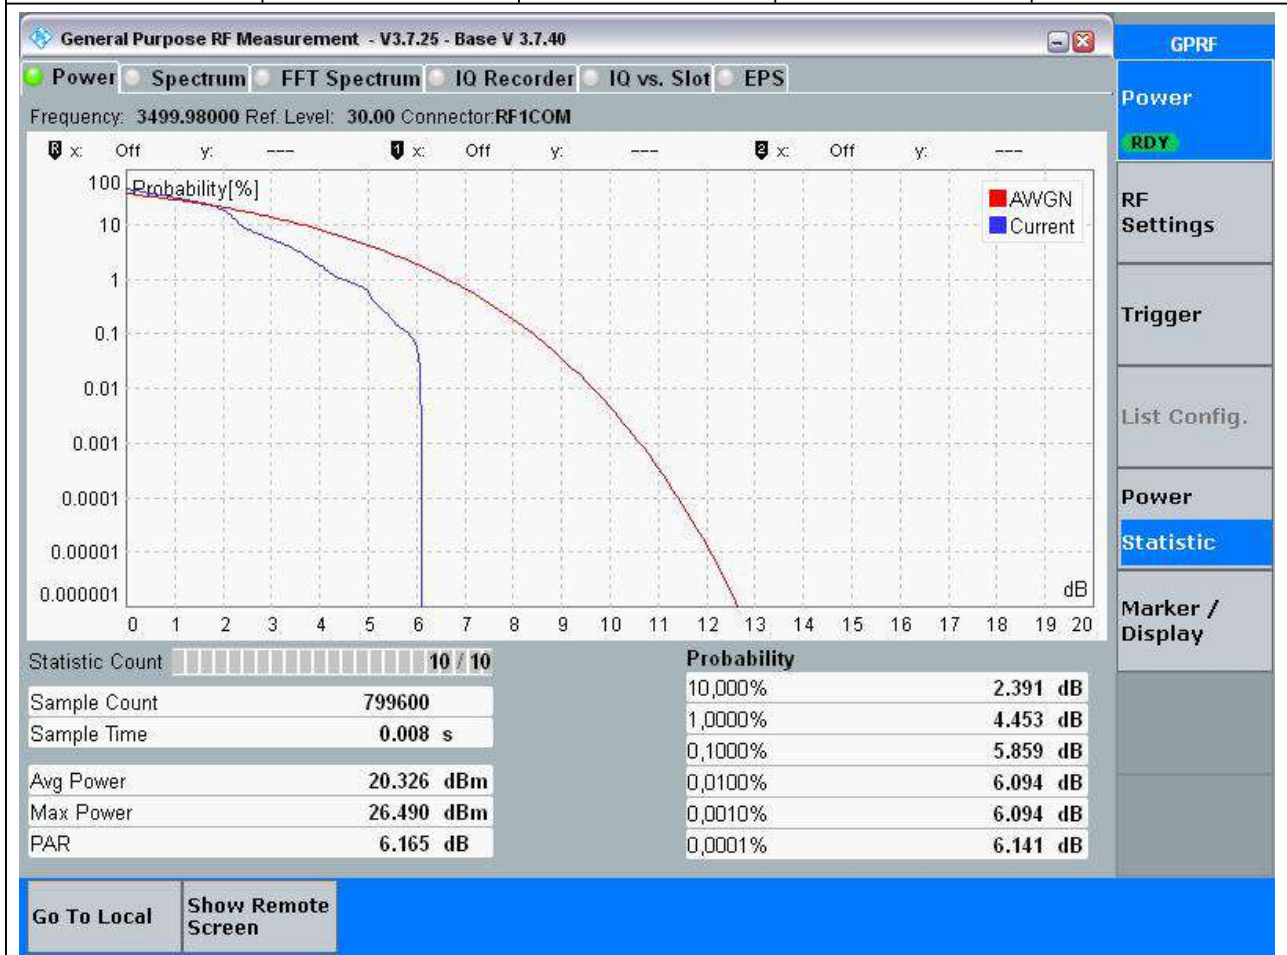


23.14. Peak to Average Ratio for SA_Part22-24-27(NTNV)(Channel:633332, Bandwidth:20, SCS:15, OFDM:DFT-s-OFDM, Modulation:QPSK, RB Number:100, RB Position:0)

Center Frequency(MHz)	PAR Percent (%)	PAR (dB)	Upper Limit (dB)	Verdict
3499.98	0.1	5.53	13	Pass

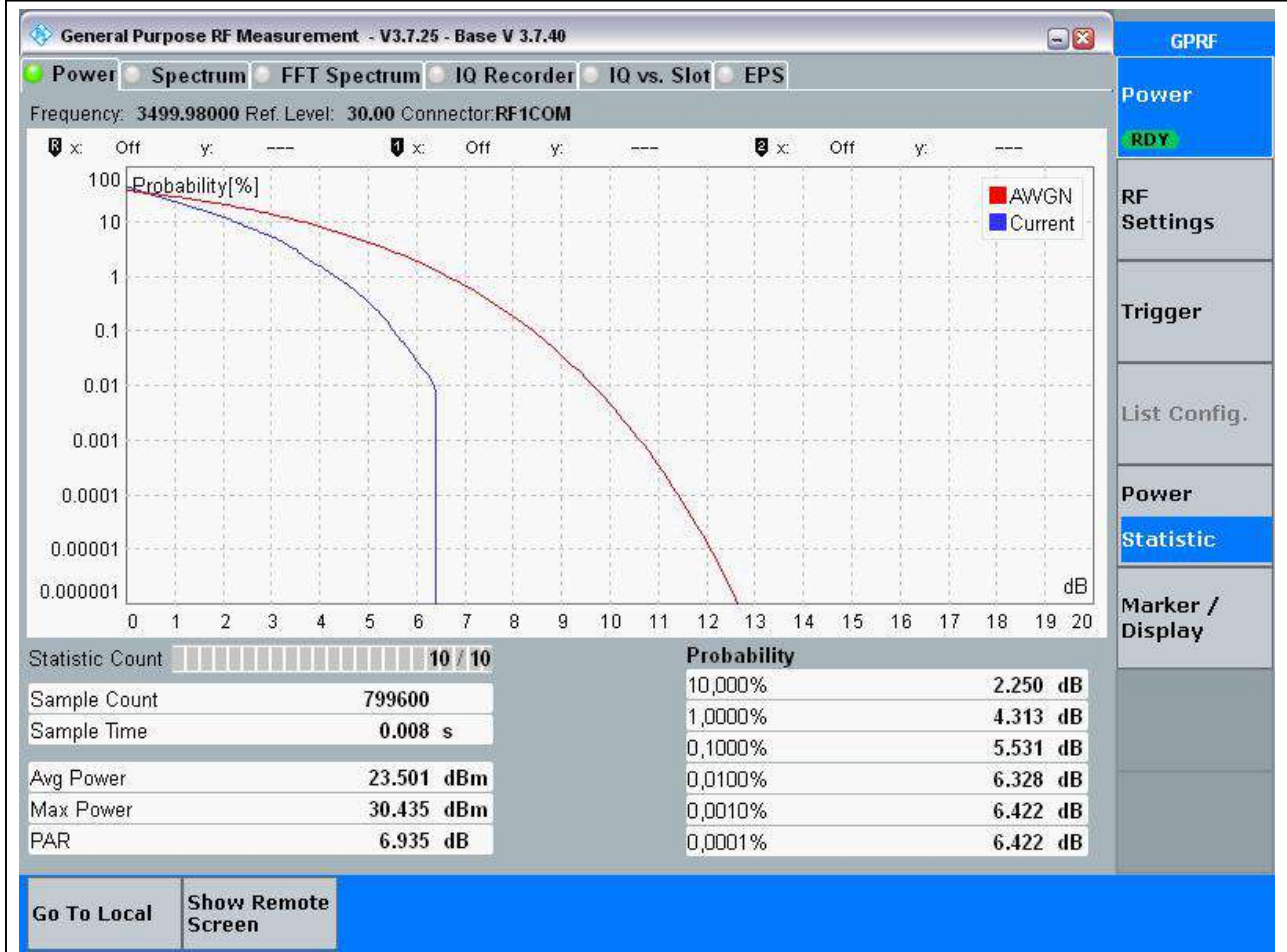

23.15. Peak to Average Ratio for SA_Part22-24-27(NTNV)(Channel:633332, Bandwidth:20, SCS:15, OFDM:DFT-s-OFDM, Modulation:16QAM, RB Number:1, RB Position:0)

Center Frequency(MHz)	PAR Percent (%)	PAR (dB)	Upper Limit (dB)	Verdict
3499.98	0.1	5.81	13	Pass

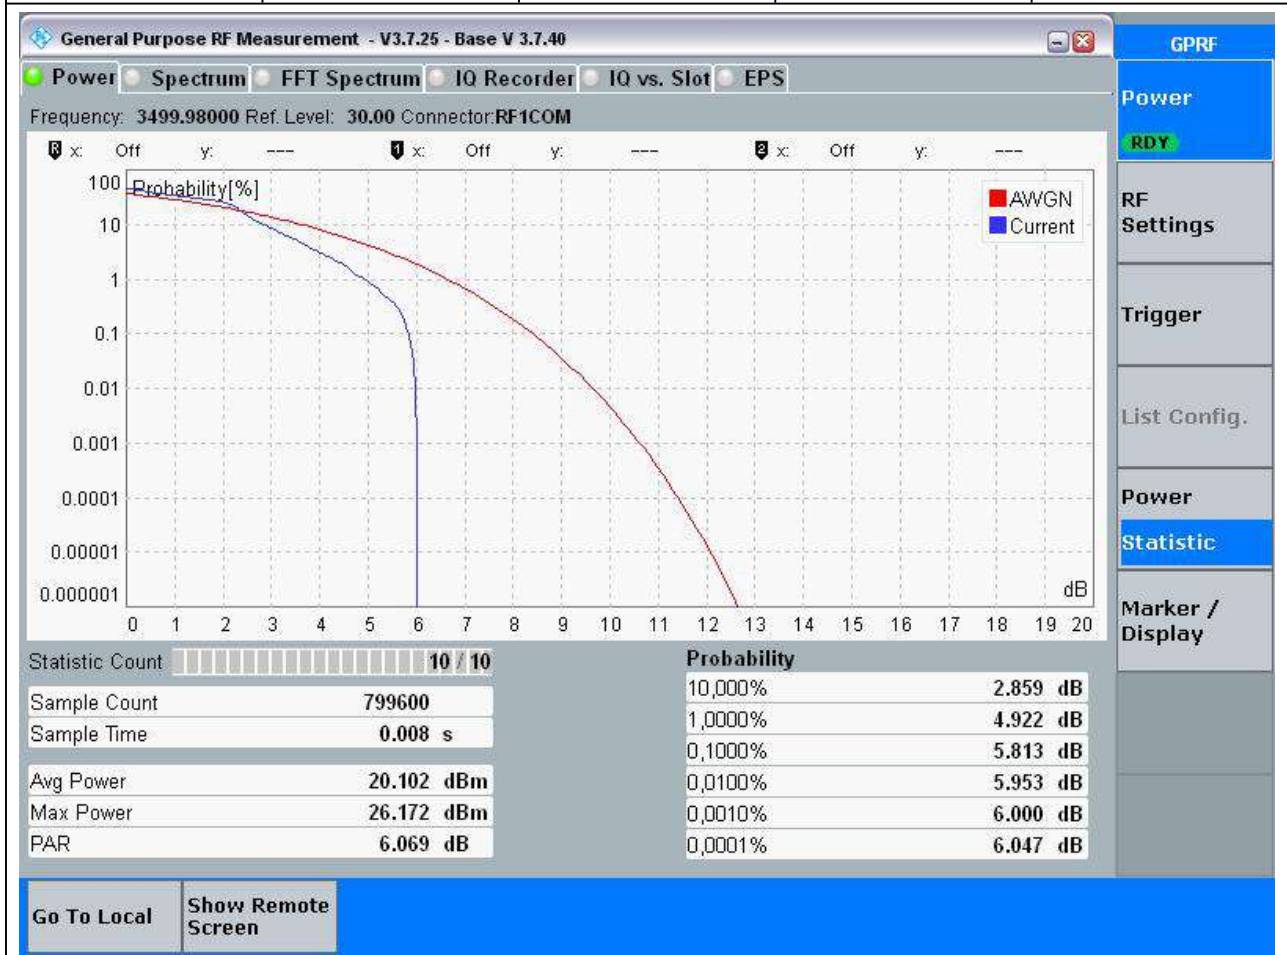

23.16. Peak to Average Ratio for SA_Part22-24-27(NTNV)(Channel:633332, Bandwidth:20, SCS:15, OFDM:DFT-s-OFDM, Modulation:16QAM, RB Number:100, RB Position:0)

Center Frequency(MHz)	PAR Percent (%)	PAR (dB)	Upper Limit (dB)	Verdict
3499.98	0.1	6.28	13	Pass

General Purpose RF Measurement - V3.7.25 - Base V 3.7.40

Power Spectrum FFT Spectrum IQ Recorder IQ vs. Slot EPS

Frequency: 3499.98000 Ref. Level: 30.00 Connector:RF1COM


Probability[%] vs dB plot showing AWGN (red) and Current (blue) curves.

Statistic Count	Value	Probability	Value
Sample Count	799600	10,000%	2.766 dB
Sample Time	0.008 s	1,0000%	4.875 dB
Avg Power	22.463 dBm	0,1000%	6.281 dB
Max Power	30.631 dBm	0,0100%	7.031 dB
PAR	8.168 dB	0,0010%	7.453 dB
		0,0001%	7.453 dB

Go To Local Show Remote Screen


23.17. Peak to Average Ratio for SA_Part22-24-27(NTNV)(Channel:633332, Bandwidth:20, SCS:15, OFDM:DFT-s-OFDM, Modulation:64QAM, RB Number:1, RB Position:0)

Center Frequency(MHz)	PAR Percent (%)	PAR (dB)	Upper Limit (dB)	Verdict
3499.98	0.1	6	13	Pass

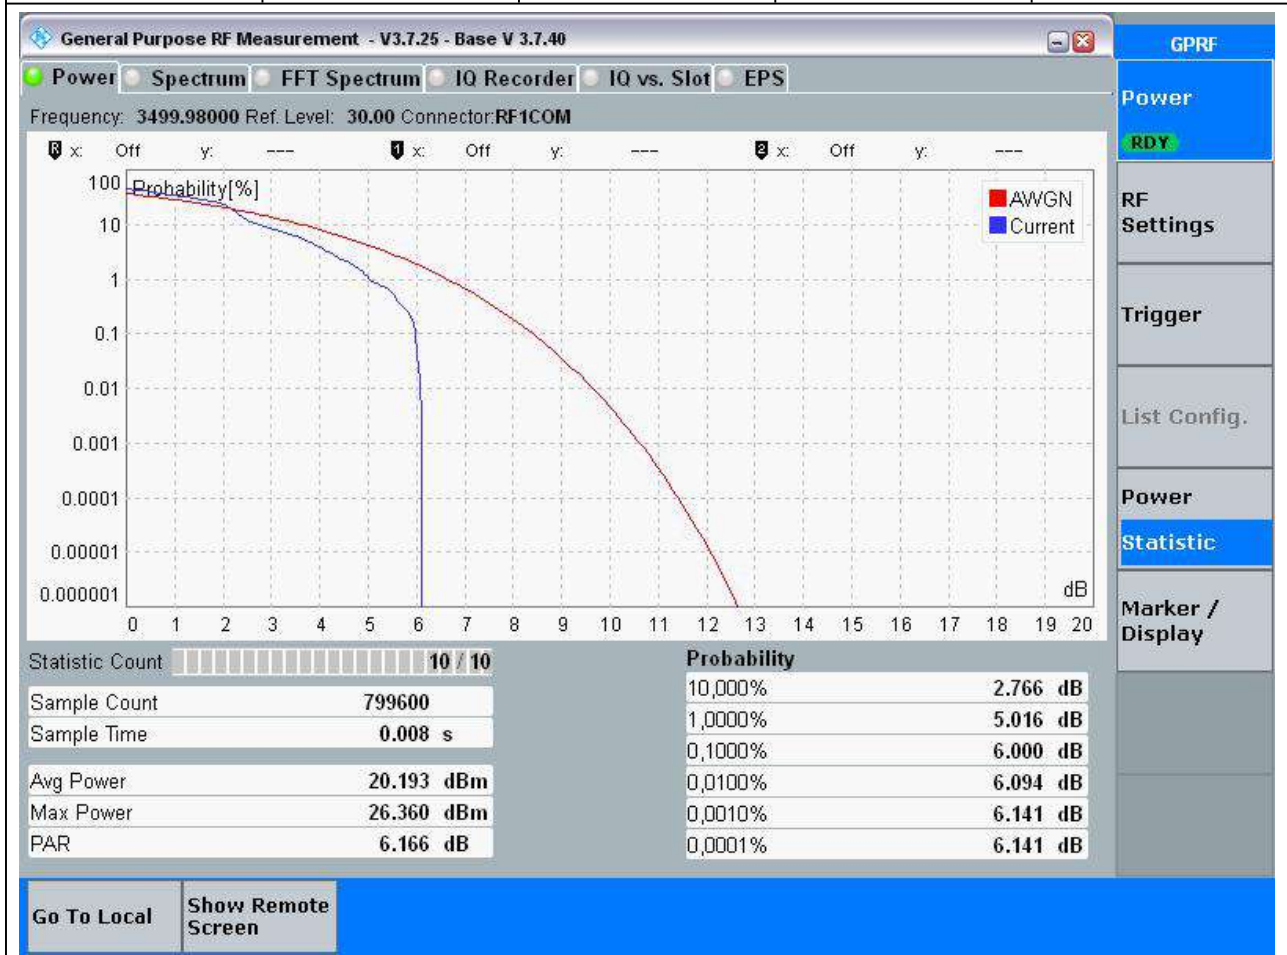

23.18. Peak to Average Ratio for SA_Part22-24-27(NTNV)(Channel:633332, Bandwidth:20, SCS:15, OFDM:DFT-s-OFDM, Modulation:64QAM, RB Number:100, RB Position:0)

Center Frequency(MHz)	PAR Percent (%)	PAR (dB)	Upper Limit (dB)	Verdict
3499.98	0.1	6.61	13	Pass

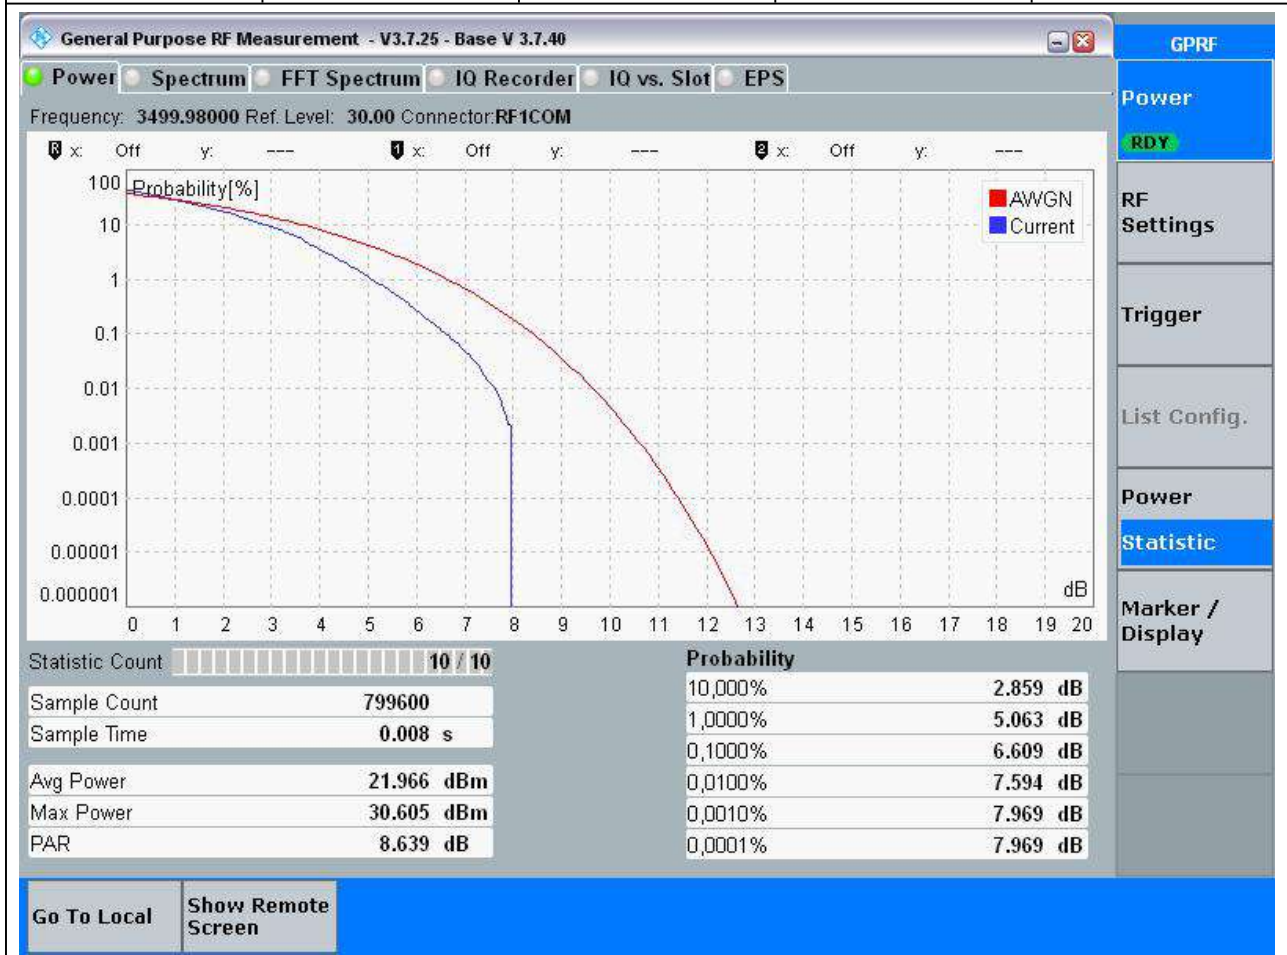

23.19. Peak to Average Ratio for SA_Part22-24-27(NTNV)(Channel:633332, Bandwidth:20, SCS:15, OFDM:DFT-s-OFDM, Modulation:256QAM, RB Number:1, RB Position:0)

Center Frequency(MHz)	PAR Percent (%)	PAR (dB)	Upper Limit (dB)	Verdict
3499.98	0.1	6.52	13	Pass

General Purpose RF Measurement - V3.7.25 - Base V 3.7.40

GPRF

Power Spectrum FFT Spectrum IQ Recorder IQ vs. Slot EPS

Frequency: 3499.98000 Ref. Level: 30.00 Connector:RF1COM

x: Off y: ---
x: Off y: ---
x: Off y: ---

Statistic Count		Probability	
Sample Count	799600	10,000%	2.766 dB
Sample Time	0.008 s	1,0000%	5.156 dB
Avg Power	19.440 dBm	0,1000%	6.516 dB
Max Power	26.215 dBm	0,0100%	6.703 dB
PAR	6.775 dB	0,0010%	6.750 dB
		0,0001%	6.750 dB

Go To Local
Show Remote Screen

GPRF

Power

RDY

RF Settings

Trigger

List Config.


Power

Statistic

Marker / Display


23.20. Peak to Average Ratio for SA_Part22-24-27(NTNV)(Channel:633332, Bandwidth:20, SCS:15, OFDM:DFT-s-OFDM, Modulation:256QAM, RB Number:100, RB Position:0)

Center Frequency(MHz)	PAR Percent (%)	PAR (dB)	Upper Limit (dB)	Verdict
3499.98	0.1	6.7	13	Pass

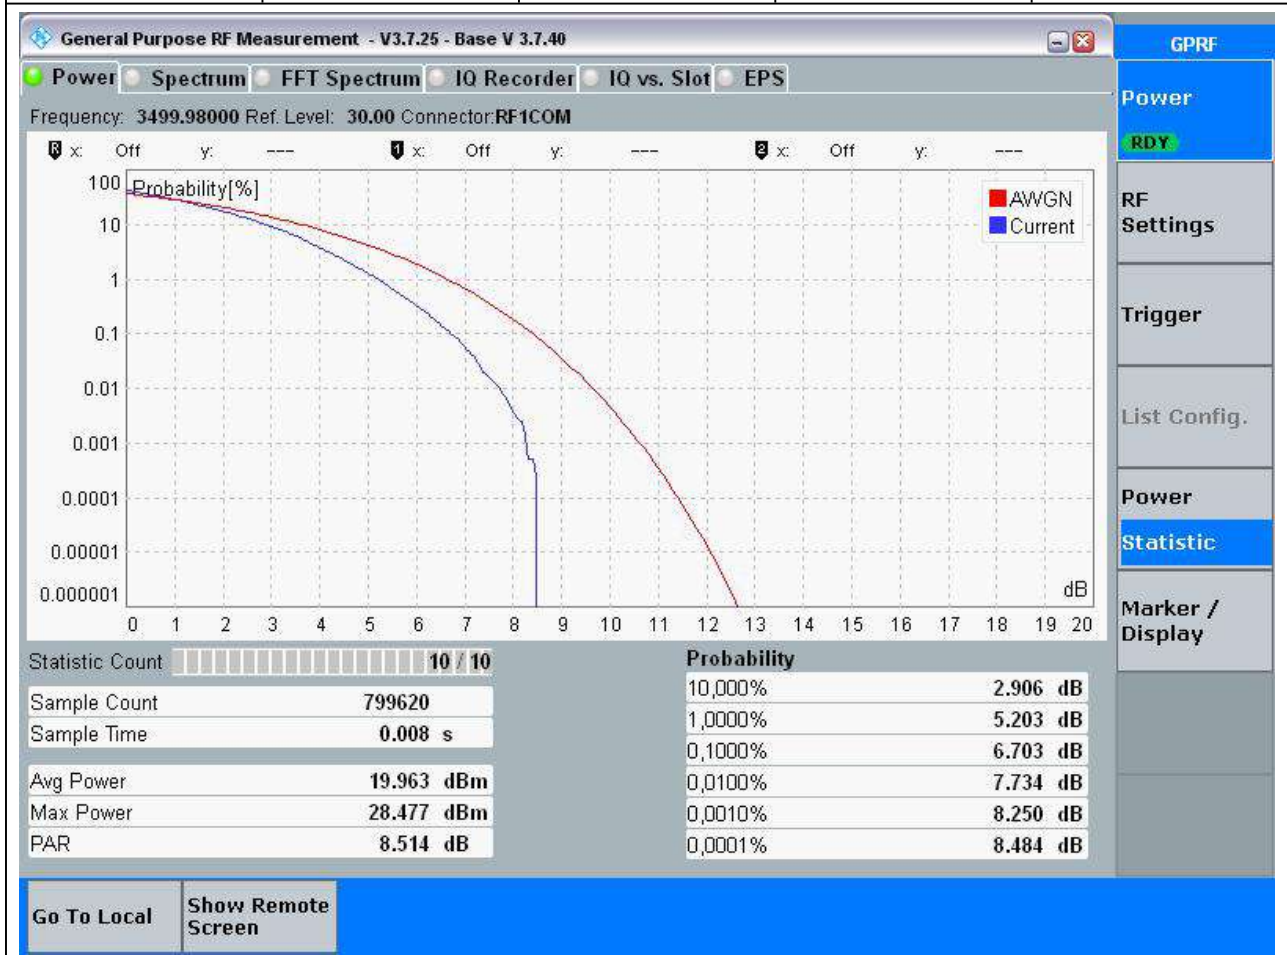


23.21. Peak to Average Ratio for SA_Part22-24-27(NTNV)(Channel:636000, Bandwidth:20, SCS:15, OFDM:DFT-s-OFDM, Modulation:Pi/2-BPSK, RB Number:1, RB Position:0)

Center Frequency(MHz)	PAR Percent (%)	PAR (dB)	Upper Limit (dB)	Verdict
3540	0.1	3.94	13	Pass

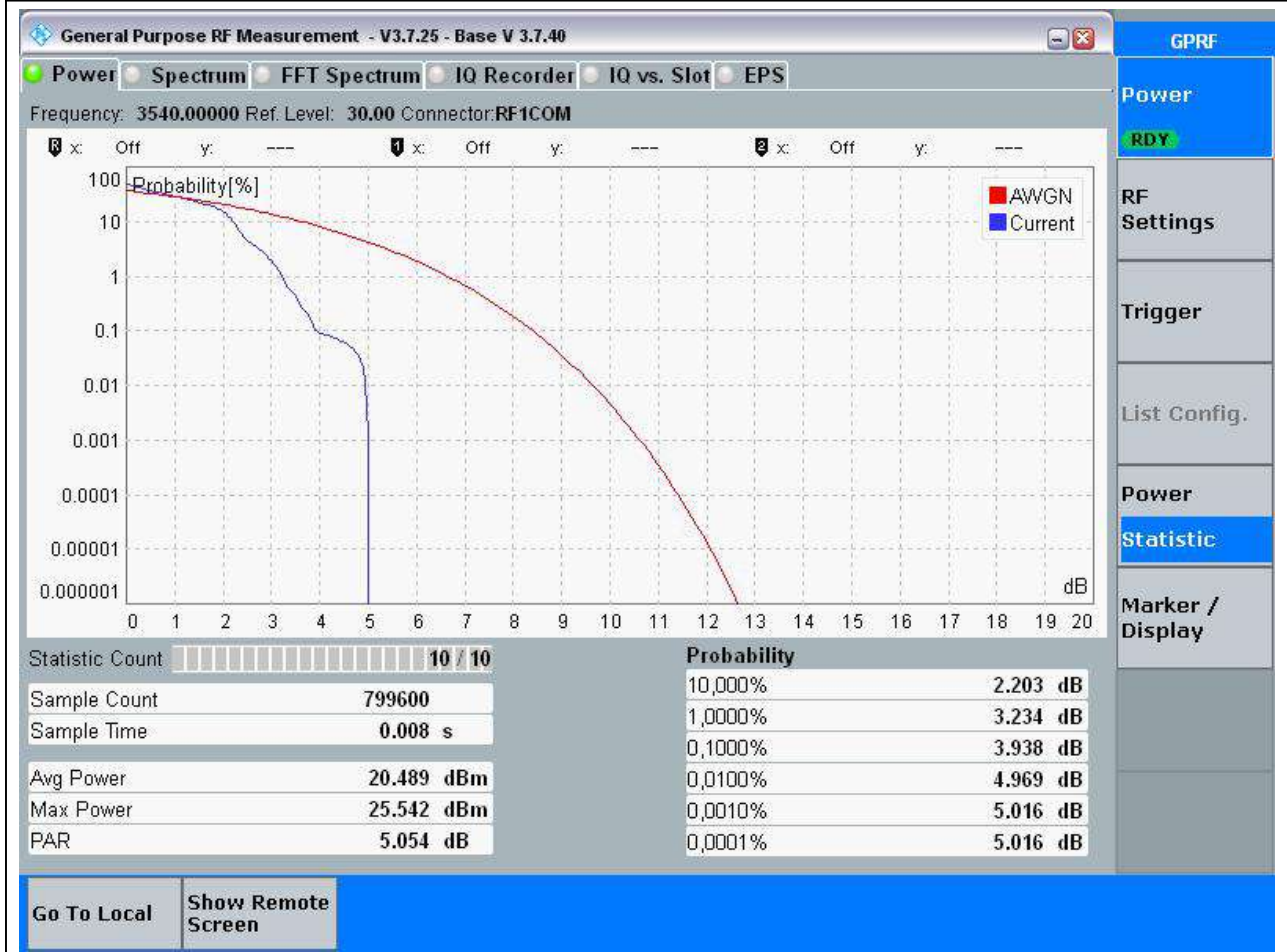


23.22. Peak to Average Ratio for SA_Part22-24-27(NTNV)(Channel:636000, Bandwidth:20, SCS:15, OFDM:DFT-s-OFDM, Modulation:Pi/2-BPSK, RB Number:100, RB Position:0)

Center Frequency(MHz)	PAR Percent (%)	PAR (dB)	Upper Limit (dB)	Verdict
3540	0.1	4.36	13	Pass

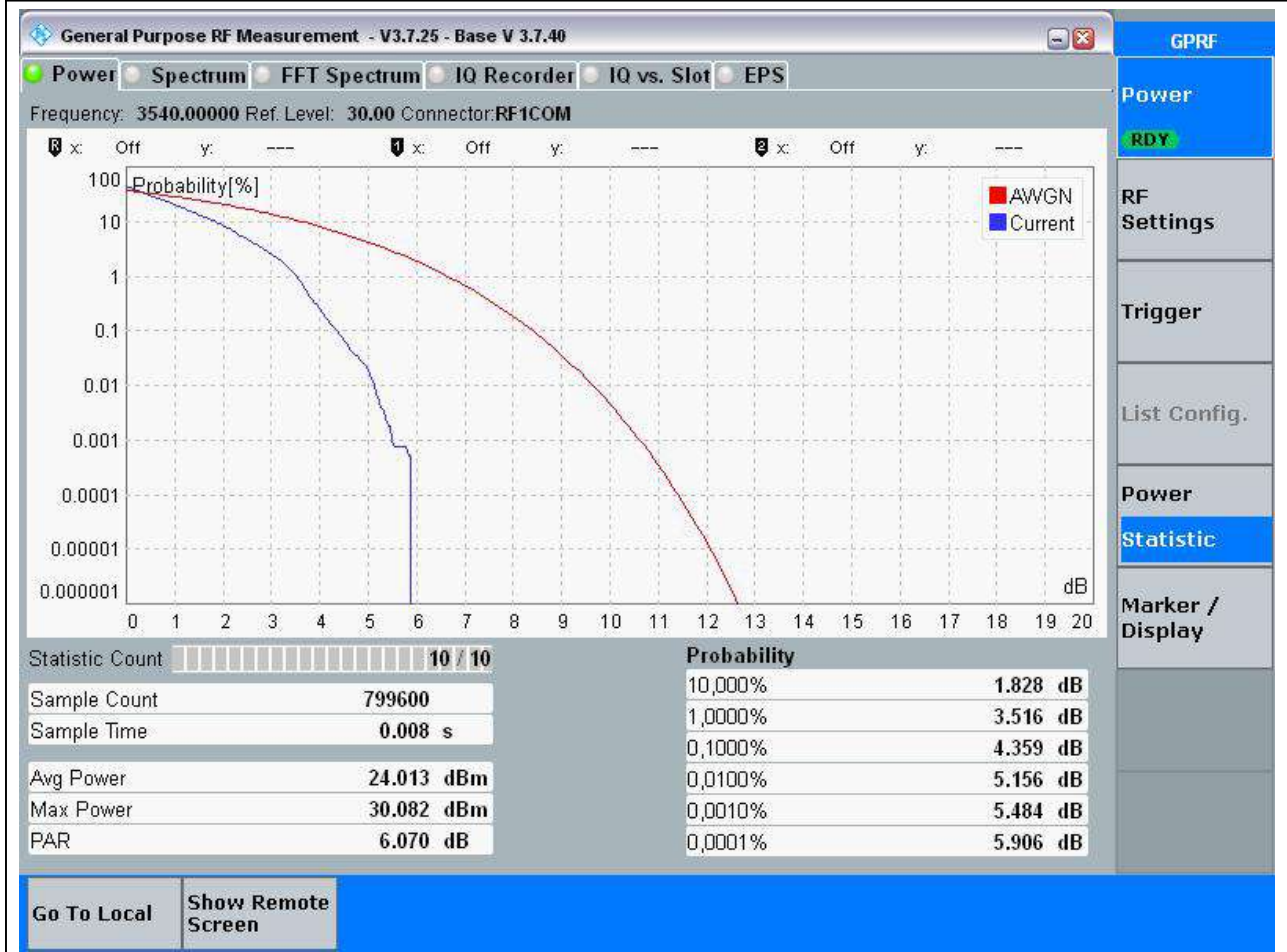


23.23. Peak to Average Ratio for SA_Part22-24-27(NTNV)(Channel:636000, Bandwidth:20, SCS:15, OFDM:DFT-s-OFDM, Modulation:QPSK, RB Number:1, RB Position:0)

Center Frequency(MHz)	PAR Percent (%)	PAR (dB)	Upper Limit (dB)	Verdict
3540	0.1	5.91	13	Pass

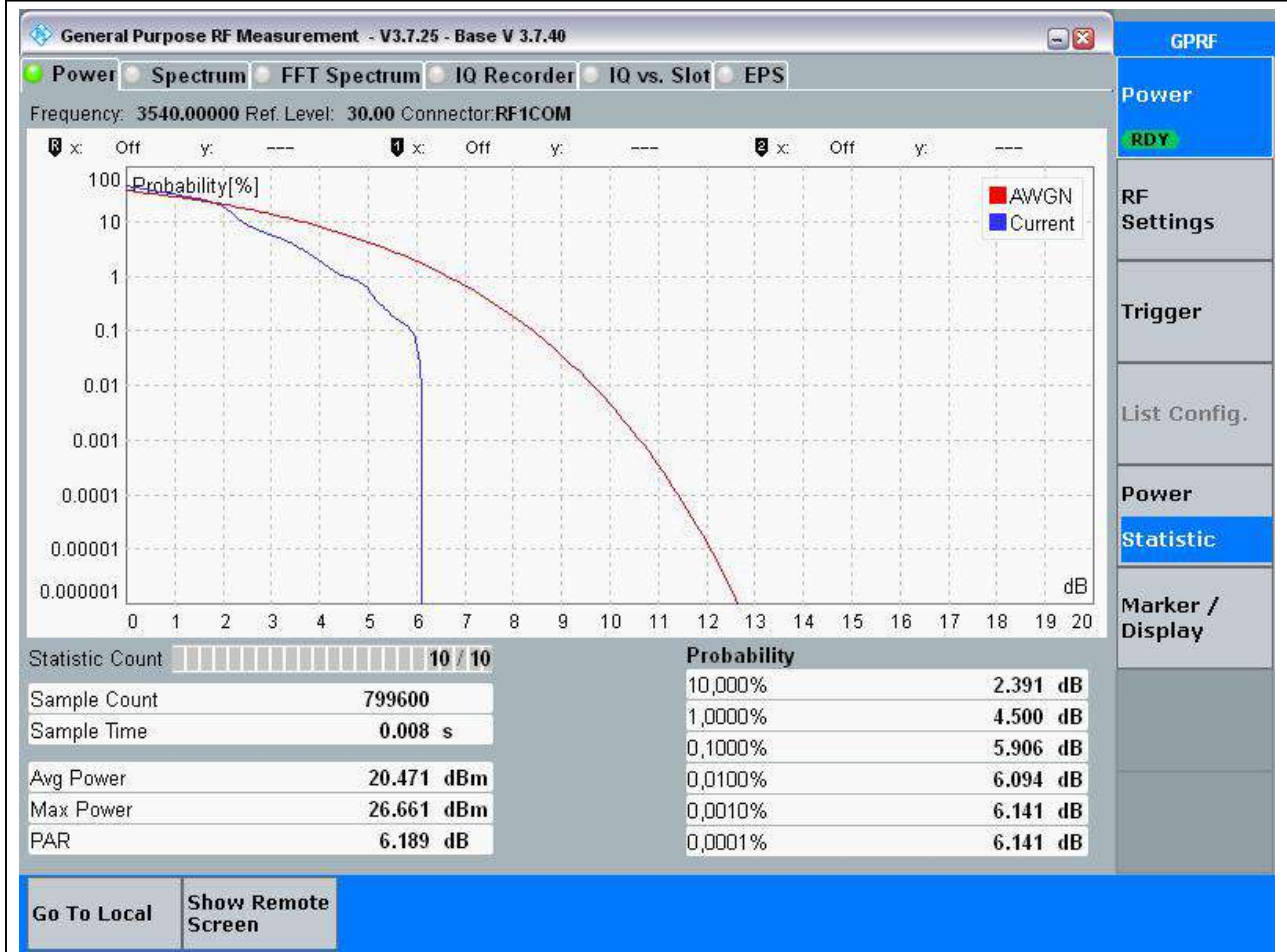

23.24. Peak to Average Ratio for SA_Part22-24-27(NTNV)(Channel:636000, Bandwidth:20, SCS:15, OFDM:DFT-s-OFDM, Modulation:QPSK, RB Number:100, RB Position:0)

Center Frequency(MHz)	PAR Percent (%)	PAR (dB)	Upper Limit (dB)	Verdict
3540	0.1	5.48	13	Pass

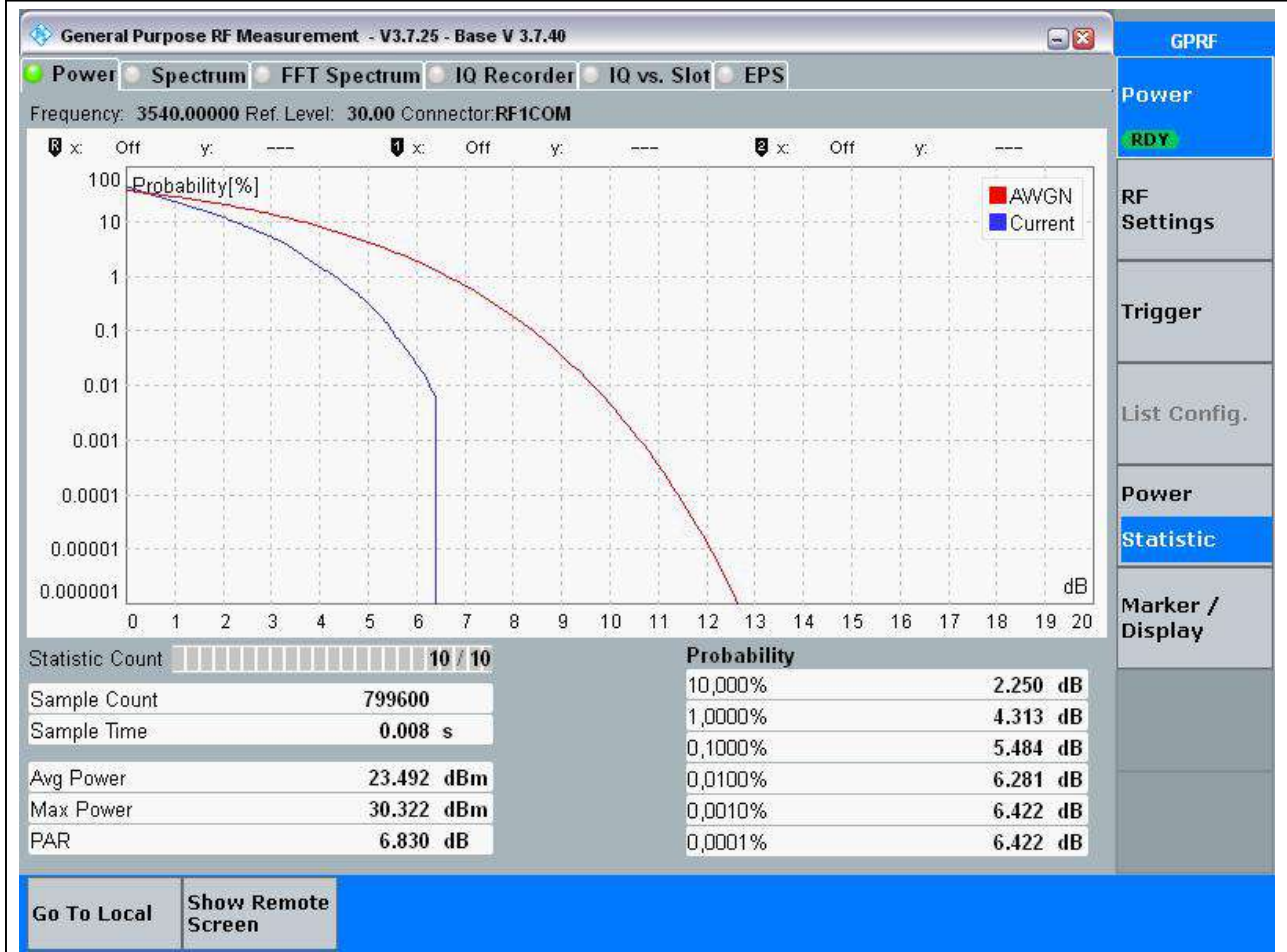

23.25. Peak to Average Ratio for SA_Part22-24-27(NTNV)(Channel:636000, Bandwidth:20, SCS:15, OFDM:DFT-s-OFDM, Modulation:16QAM, RB Number:1, RB Position:0)

Center Frequency(MHz)	PAR Percent (%)	PAR (dB)	Upper Limit (dB)	Verdict
3540	0.1	5.81	13	Pass


The screenshot displays the 'General Purpose RF Measurement' software interface. The main window shows a graph of Probability [%] versus dB. Two curves are plotted: 'AWGN' (red) and 'Current' (blue). The 'Current' curve shows a sharp drop-off around 6 dB, while the 'AWGN' curve is much flatter. Below the graph, a statistics table provides the following data:

Statistic	Value	Probability	Value (dB)
Sample Count	799620	10,000%	2.859
Sample Time	0.008 s	1,0000%	4.969
Avg Power	20.273 dBm	0,1000%	5.813
Max Power	26.289 dBm	0,0100%	5.953
PAR	6.016 dB	0,0010%	5.953
		0,0001%	6.000

Additional interface elements include a sidebar with 'GPRF', 'Power', 'RDY', 'RF Settings', 'Trigger', 'List Config.', 'Power', 'Statistic', and 'Marker / Display'. At the bottom, there are buttons for 'Go To Local' and 'Show Remote Screen'.


23.26. Peak to Average Ratio for SA_Part22-24-27(NTNV)(Channel:636000, Bandwidth:20, SCS:15, OFDM:DFT-s-OFDM, Modulation:16QAM, RB Number:100, RB Position:0)

Center Frequency(MHz)	PAR Percent (%)	PAR (dB)	Upper Limit (dB)	Verdict
3540	0.1	6.28	13	Pass

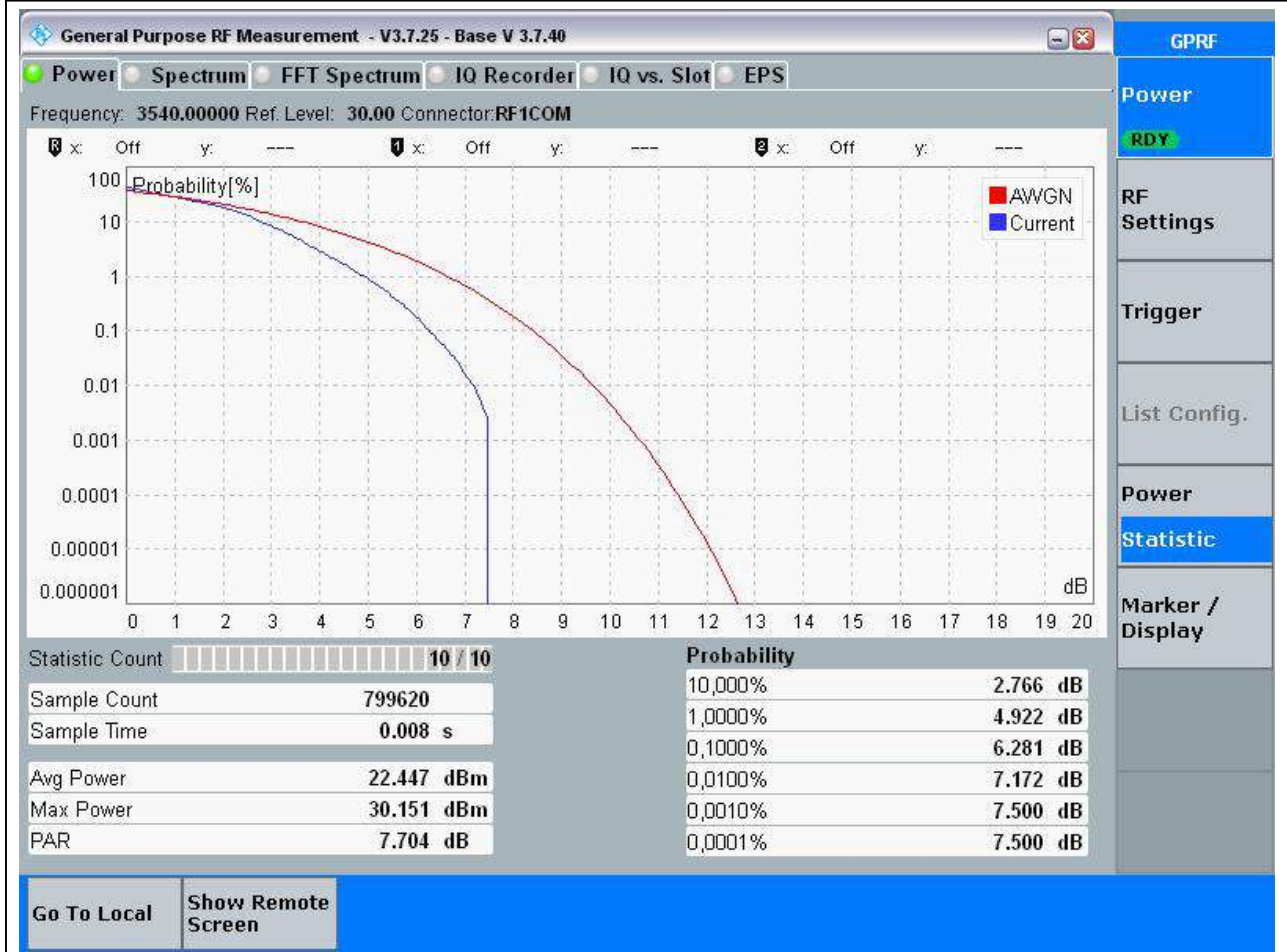


23.27. Peak to Average Ratio for SA_Part22-24-27(NTNV)(Channel:636000, Bandwidth:20, SCS:15, OFDM:DFT-s-OFDM, Modulation:64QAM, RB Number:1, RB Position:0)

Center Frequency(MHz)	PAR Percent (%)	PAR (dB)	Upper Limit (dB)	Verdict
3540	0.1	7.5	13	Pass

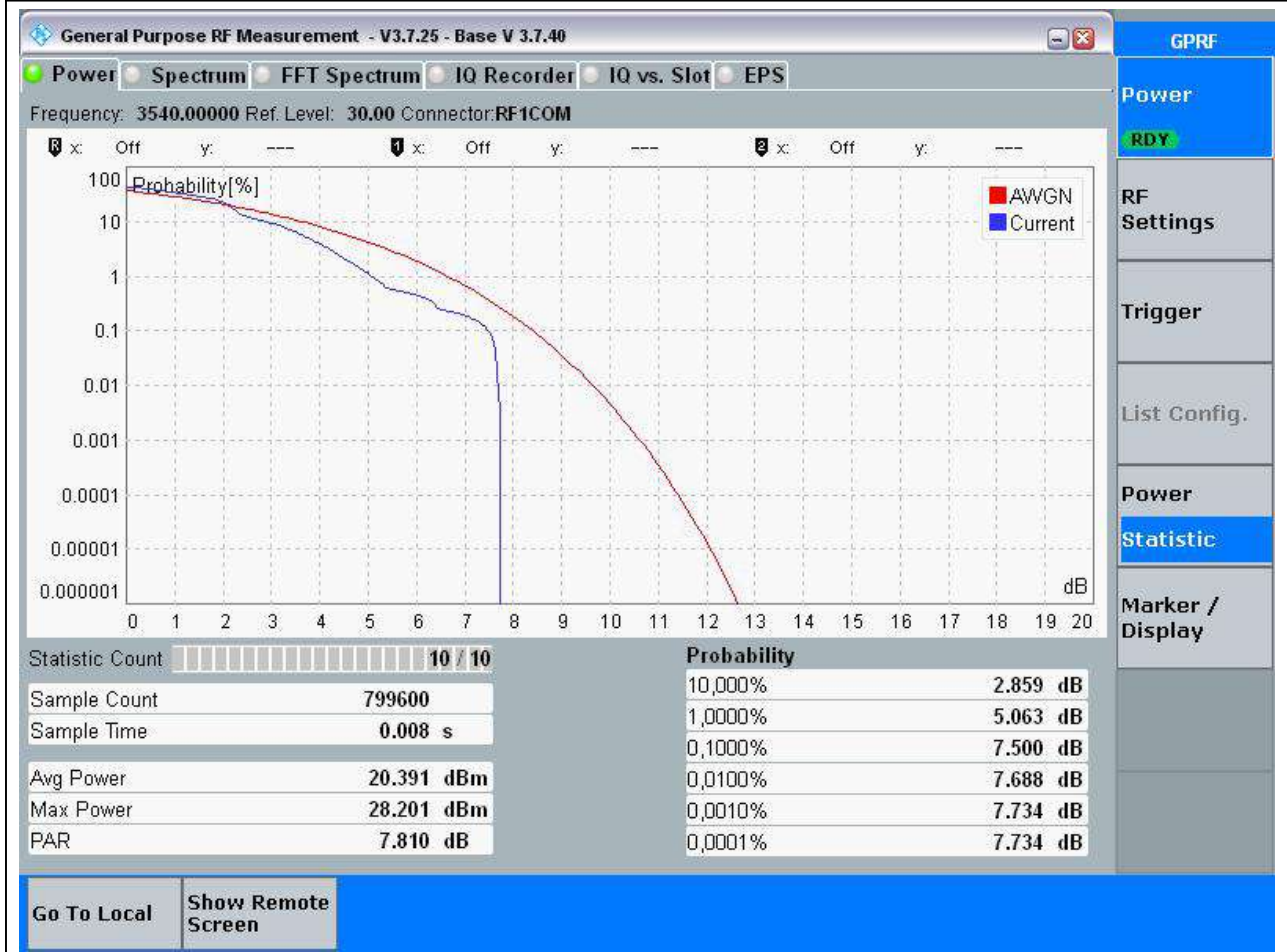


23.28. Peak to Average Ratio for SA_Part22-24-27(NTNV)(Channel:636000, Bandwidth:20, SCS:15, OFDM:DFT-s-OFDM, Modulation:64QAM, RB Number:100, RB Position:0)

Center Frequency(MHz)	PAR Percent (%)	PAR (dB)	Upper Limit (dB)	Verdict
3540	0.1	6.56	13	Pass

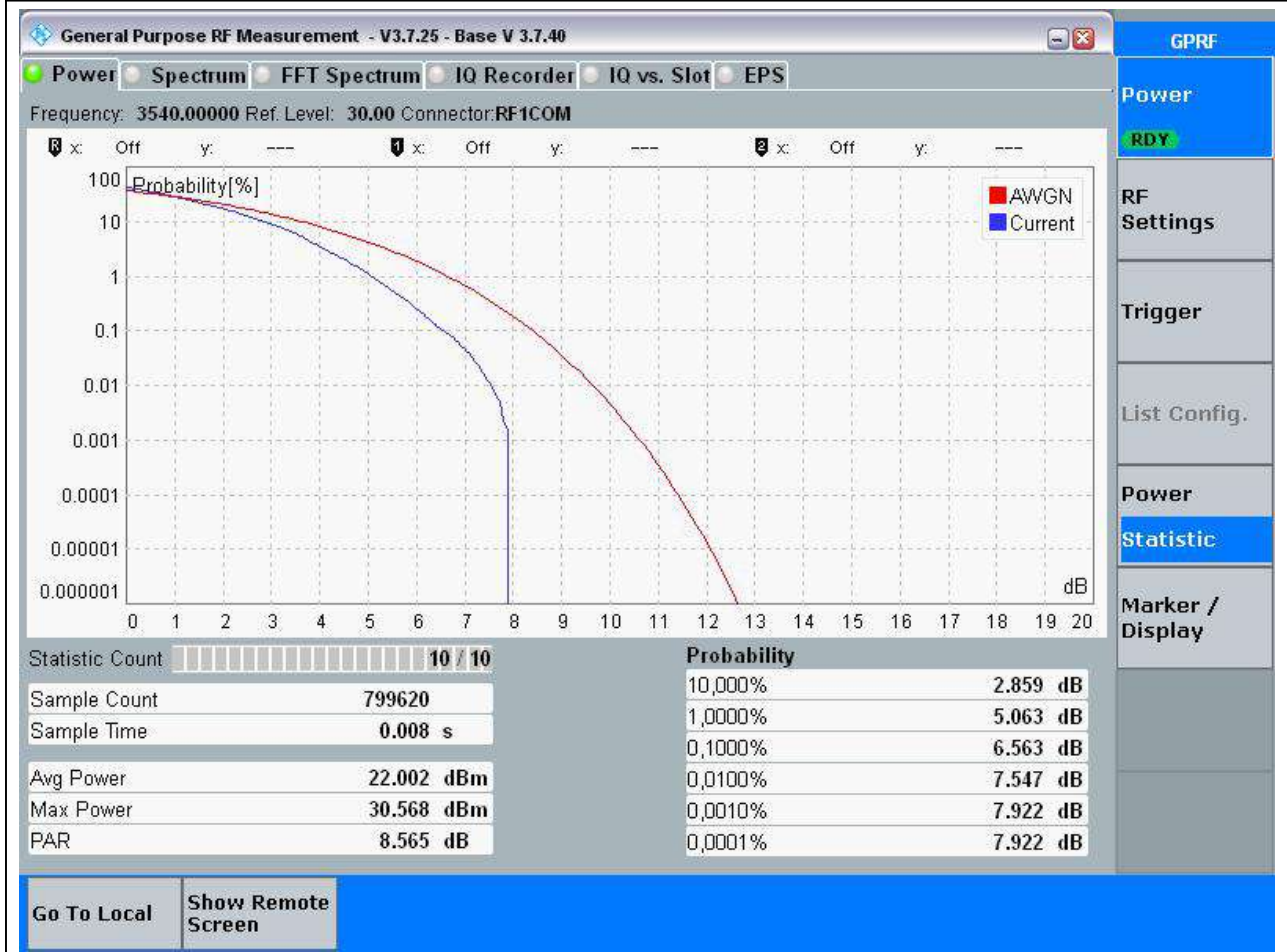


23.29. Peak to Average Ratio for SA_Part22-24-27(NTNV)(Channel:636000, Bandwidth:20, SCS:15, OFDM:DFT-s-OFDM, Modulation:256QAM, RB Number:1, RB Position:0)

Center Frequency(MHz)	PAR Percent (%)	PAR (dB)	Upper Limit (dB)	Verdict
3540	0.1	7.08	13	Pass

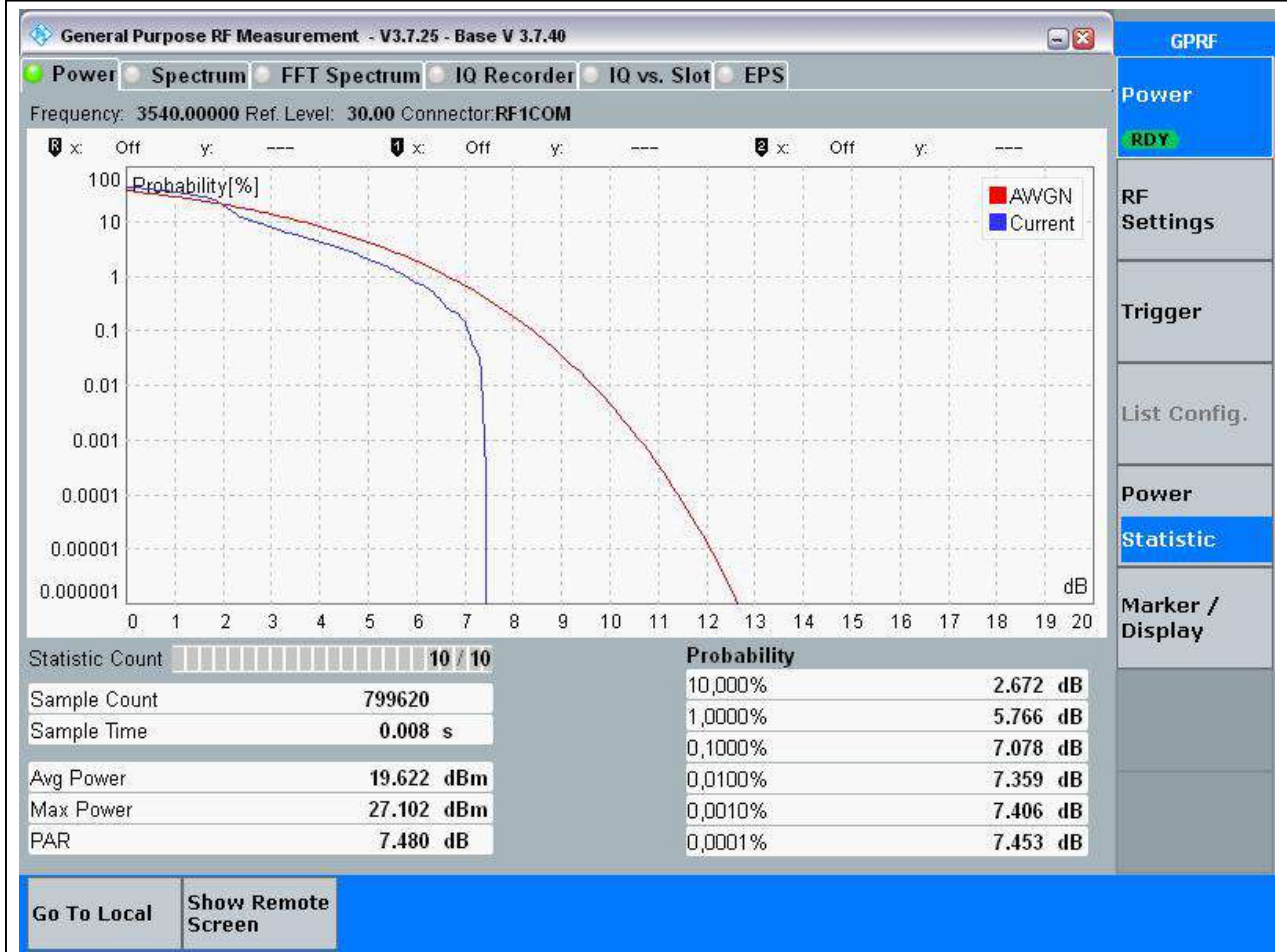


23.30. Peak to Average Ratio for SA_Part22-24-27(NTNV)(Channel:636000, Bandwidth:20, SCS:15, OFDM:DFT-s-OFDM, Modulation:256QAM, RB Number:100, RB Position:0)

Center Frequency(MHz)	PAR Percent (%)	PAR (dB)	Upper Limit (dB)	Verdict
3540	0.1	6.7	13	Pass

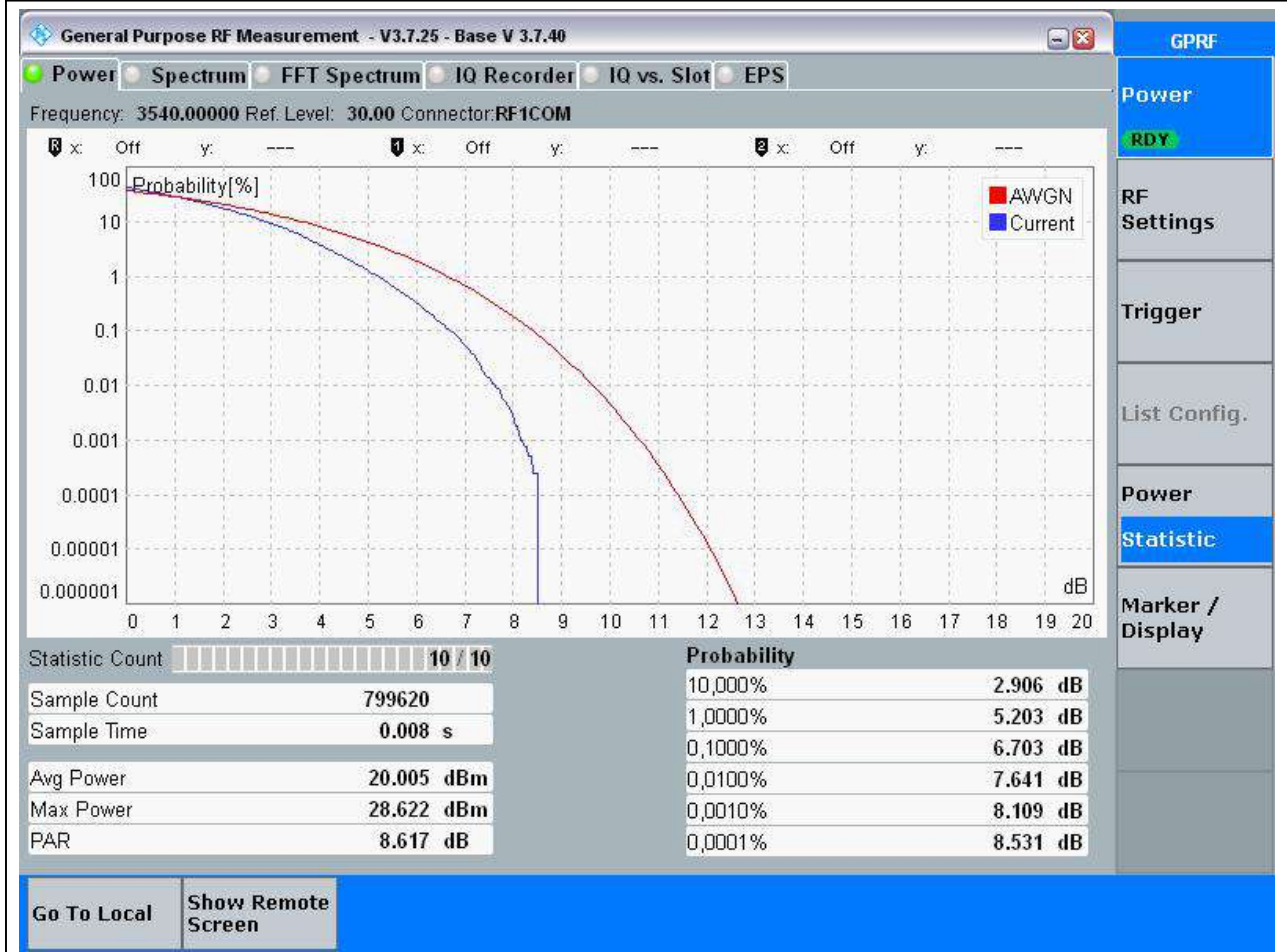


24.n78 (3700-3800)

24.1. Peak to Average Ratio for SA_Part22-24-27(NTNV)(Channel:647334, Bandwidth:20, SCS:15, OFDM:DFT-s-OFDM, Modulation:Pi/2-BPSK, RB Number:1, RB Position:0)

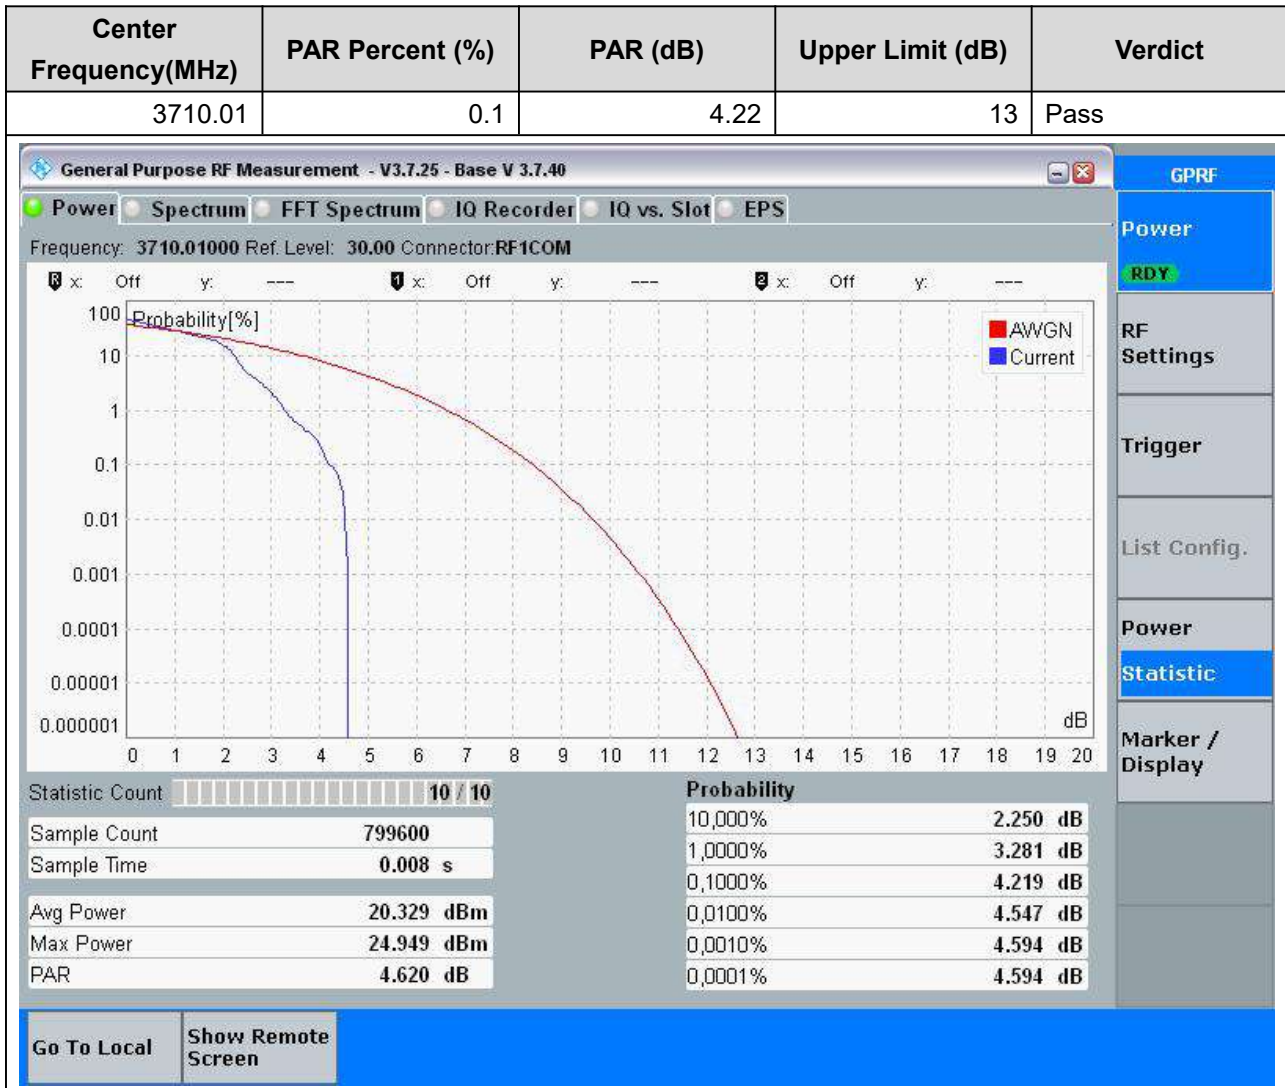


24.2. Peak to Average Ratio for SA_Part22-24-27(NTNV)(Channel:647334, Bandwidth:20, SCS:15, OFDM:DFT-s-OFDM, Modulation:Pi/2-BPSK, RB Number:100, RB Position:0)

Center Frequency(MHz)	PAR Percent (%)	PAR (dB)	Upper Limit (dB)	Verdict
3710.01	0.1	4.36	13	Pass

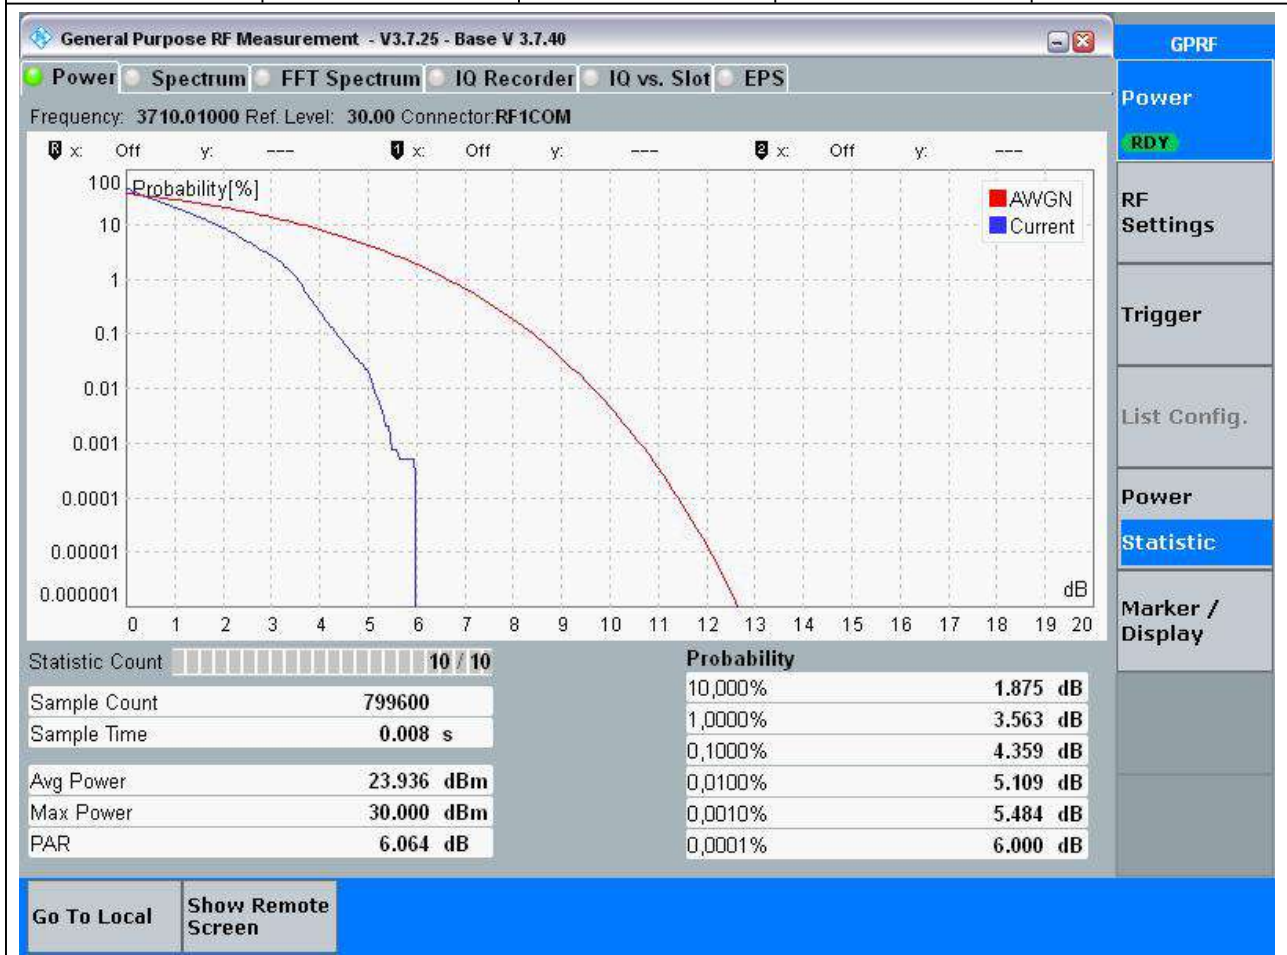


24.3. Peak to Average Ratio for SA_Part22-24-27(NTNV)(Channel:647334, Bandwidth:20, SCS:15, OFDM:DFT-s-OFDM, Modulation:QPSK, RB Number:1, RB Position:0)

Center Frequency(MHz)	PAR Percent (%)	PAR (dB)	Upper Limit (dB)	Verdict
3710.01	0.1	5.86	13	Pass

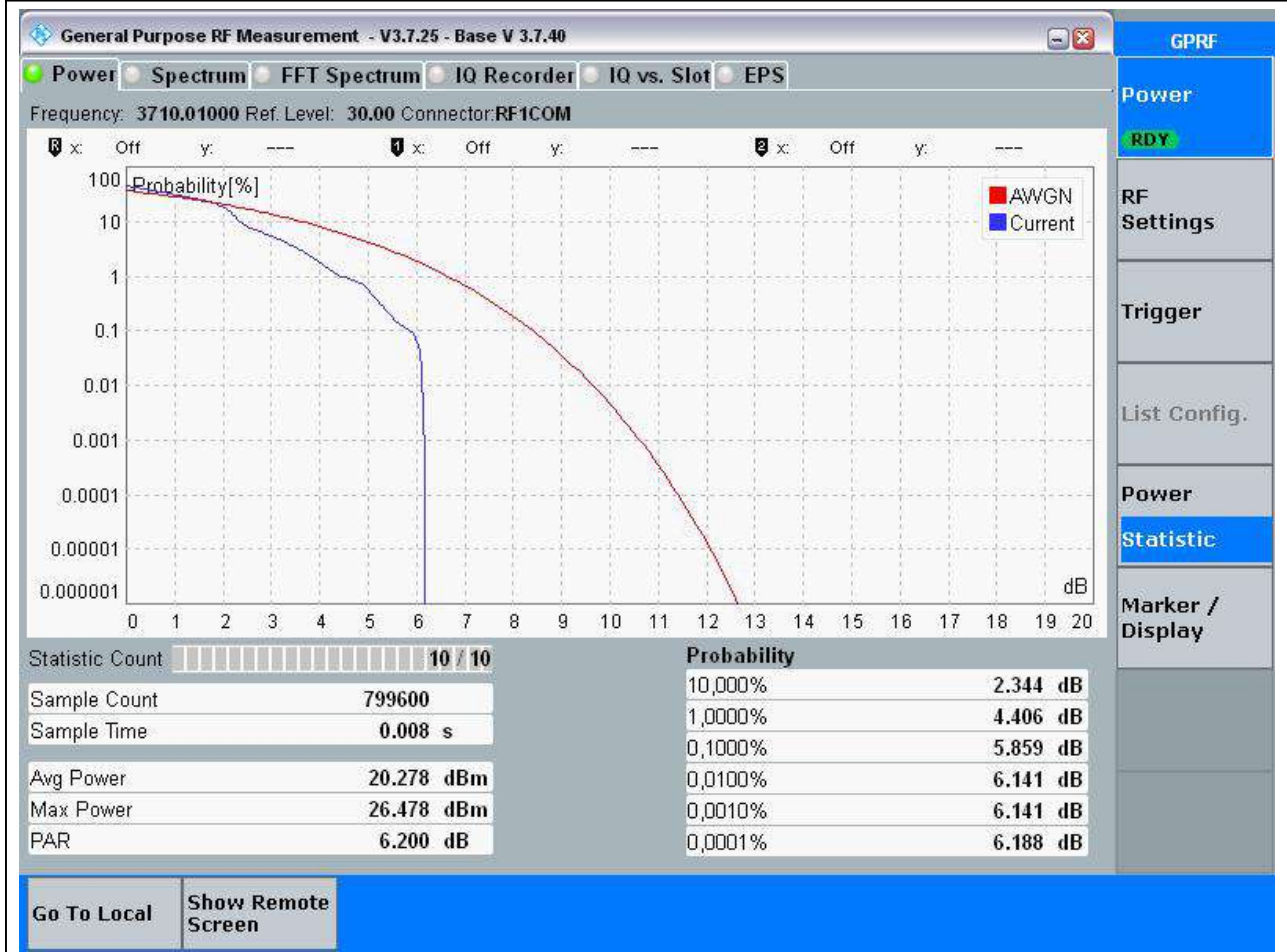


24.4. Peak to Average Ratio for SA_Part22-24-27(NTNV)(Channel:647334, Bandwidth:20, SCS:15, OFDM:DFT-s-OFDM, Modulation:QPSK, RB Number:100, RB Position:0)

Center Frequency(MHz)	PAR Percent (%)	PAR (dB)	Upper Limit (dB)	Verdict
3710.01	0.1	5.48	13	Pass

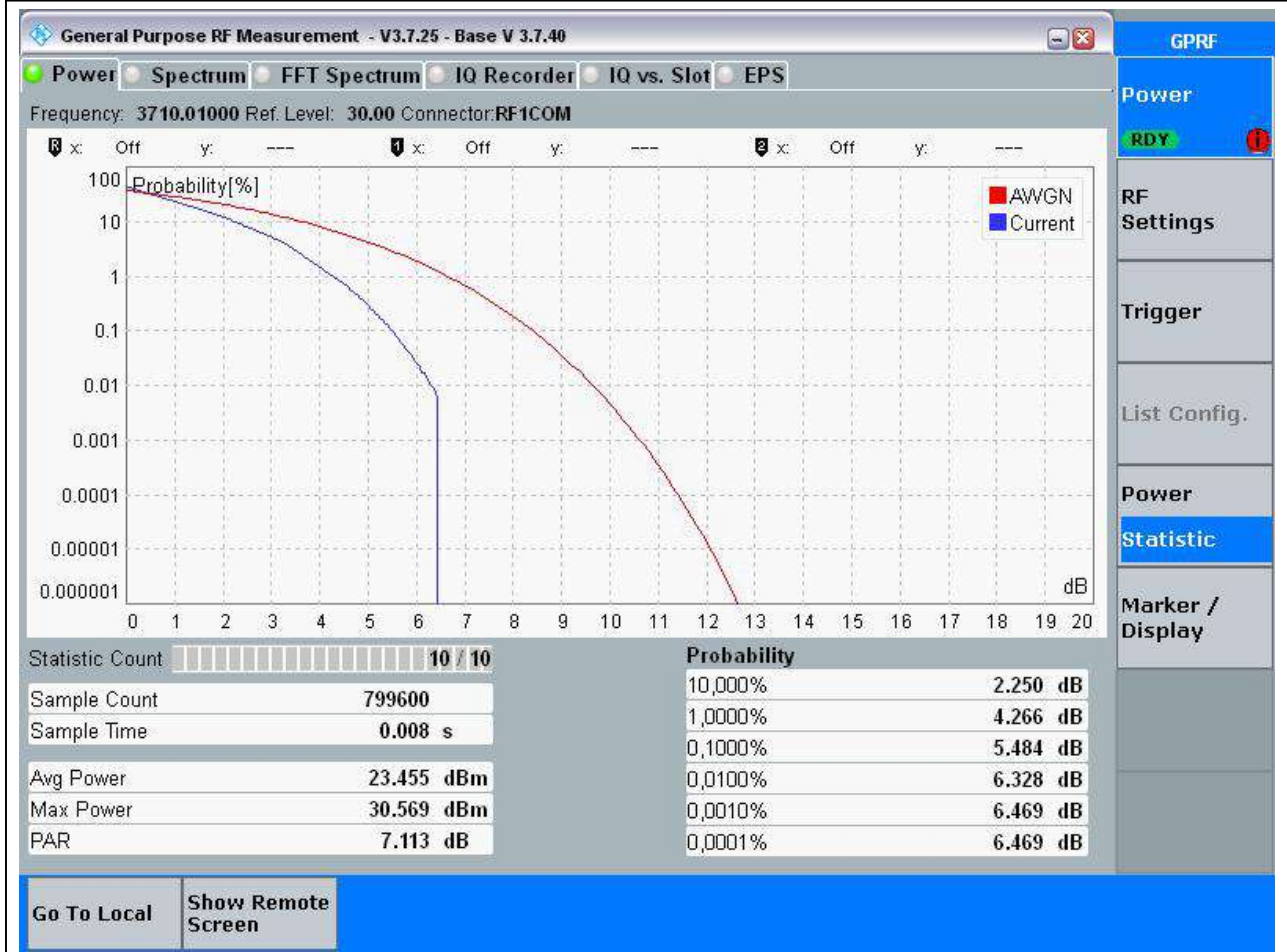


24.5. Peak to Average Ratio for SA_Part22-24-27(NTNV)(Channel:647334, Bandwidth:20, SCS:15, OFDM:DFT-s-OFDM, Modulation:16QAM, RB Number:1, RB Position:0)

Center Frequency(MHz)	PAR Percent (%)	PAR (dB)	Upper Limit (dB)	Verdict
3710.01	0.1	5.81	13	Pass

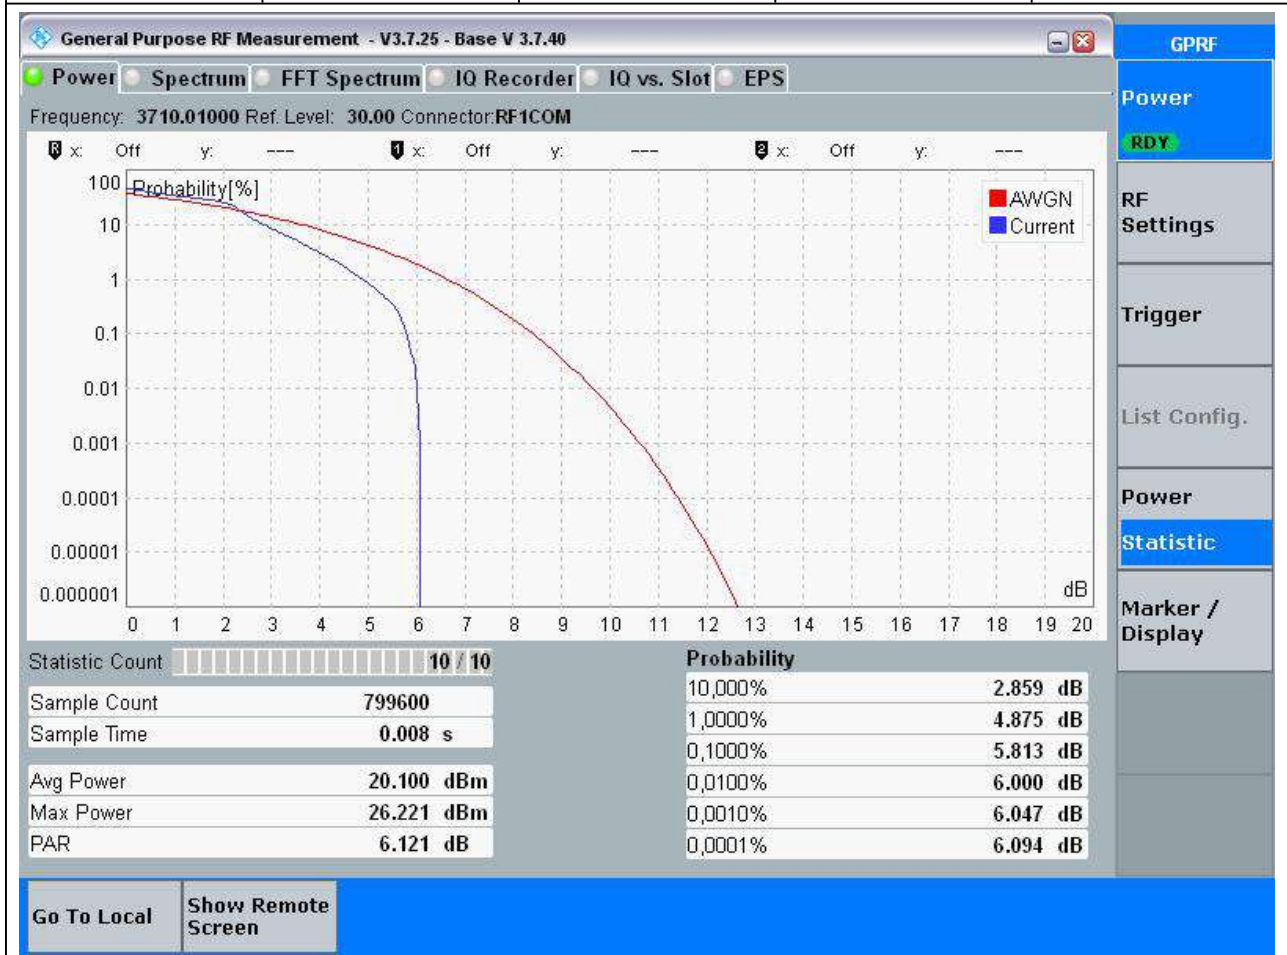


24.6. Peak to Average Ratio for SA_Part22-24-27(NTNV)(Channel:647334, Bandwidth:20, SCS:15, OFDM:DFT-s-OFDM, Modulation:16QAM, RB Number:100, RB Position:0)

Center Frequency(MHz)	PAR Percent (%)	PAR (dB)	Upper Limit (dB)	Verdict
3710.01	0.1	6.23	13	Pass

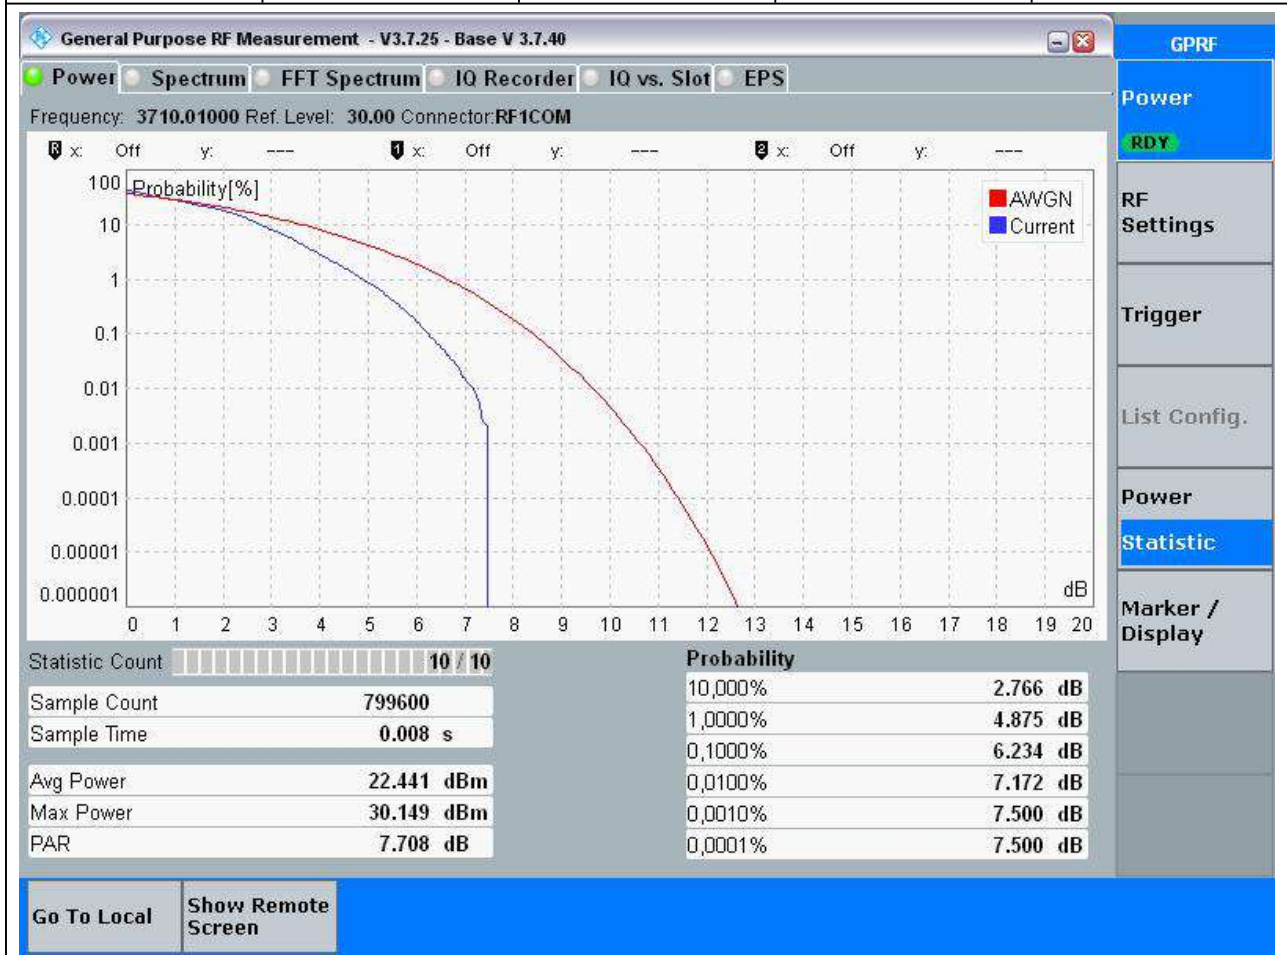


24.7. Peak to Average Ratio for SA_Part22-24-27(NTNV)(Channel:647334, Bandwidth:20, SCS:15, OFDM:DFT-s-OFDM, Modulation:64QAM, RB Number:1, RB Position:0)

Center Frequency(MHz)	PAR Percent (%)	PAR (dB)	Upper Limit (dB)	Verdict
3710.01	0.1	5.91	13	Pass

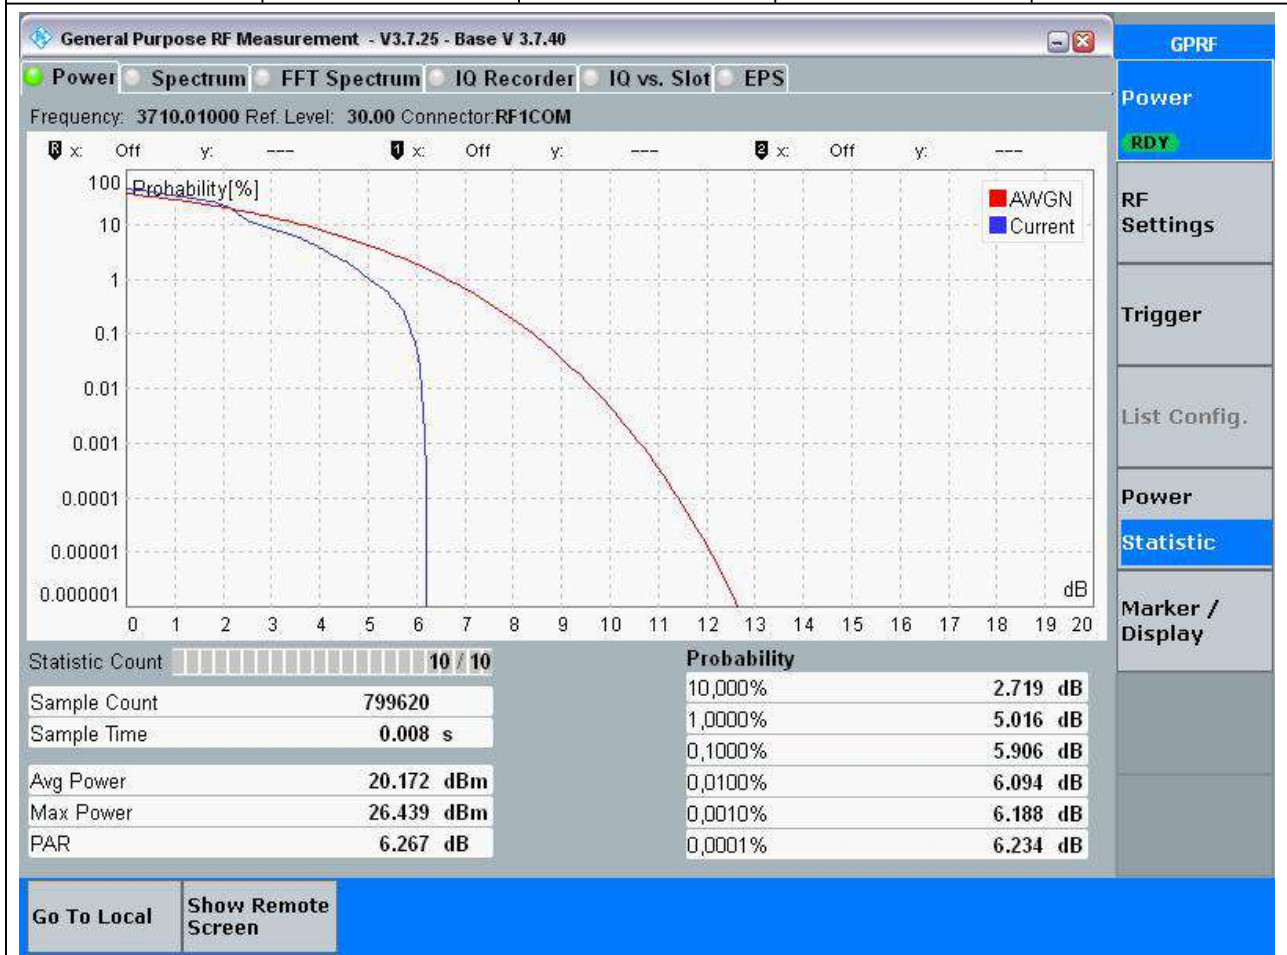


24.8. Peak to Average Ratio for SA_Part22-24-27(NTNV)(Channel:647334, Bandwidth:20, SCS:15, OFDM:DFT-s-OFDM, Modulation:64QAM, RB Number:100, RB Position:0)

Center Frequency(MHz)	PAR Percent (%)	PAR (dB)	Upper Limit (dB)	Verdict
3710.01	0.1	6.56	13	Pass

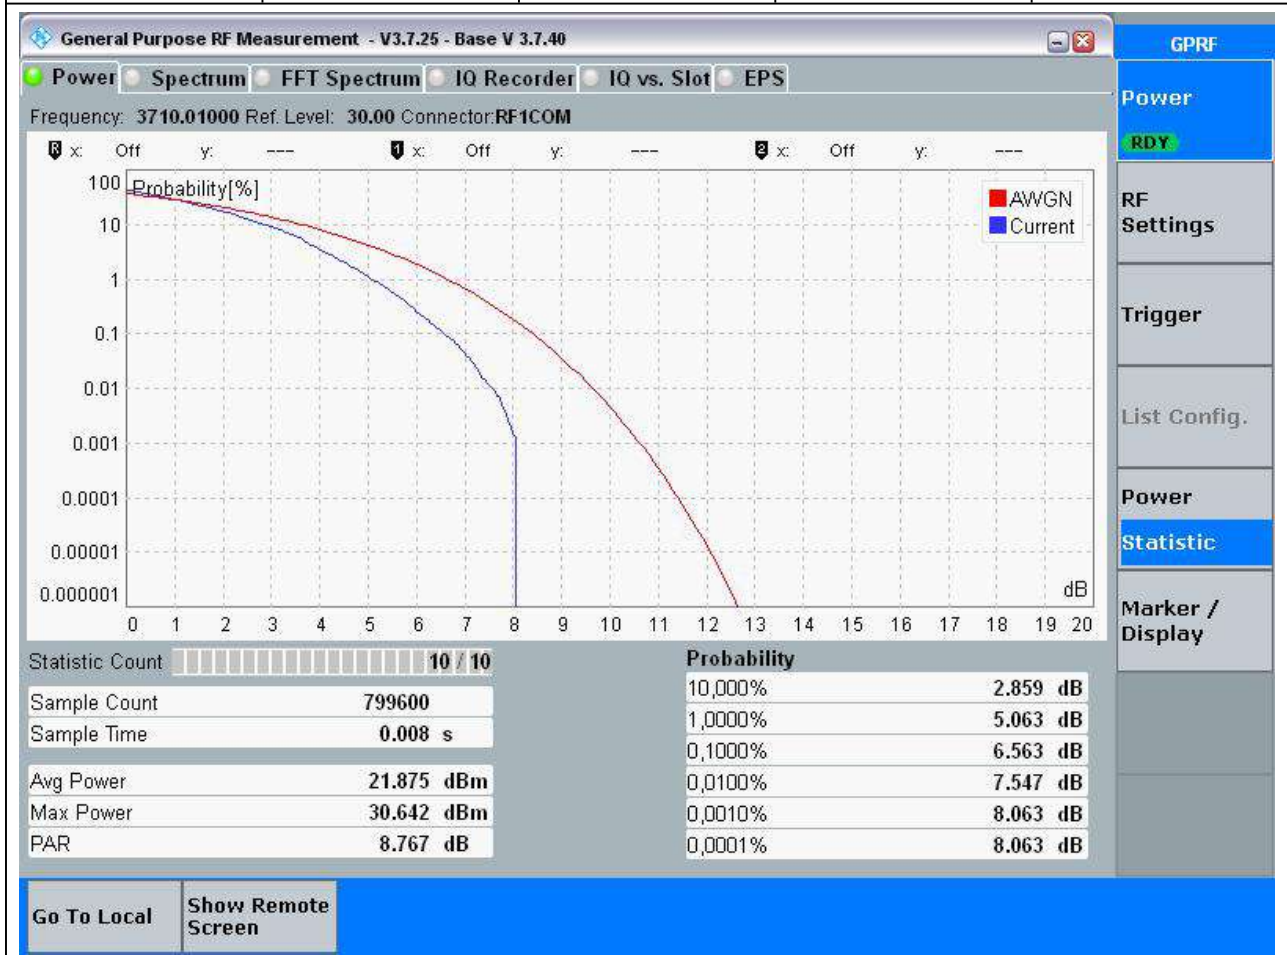


24.9. Peak to Average Ratio for SA_Part22-24-27(NTNV)(Channel:647334, Bandwidth:20, SCS:15, OFDM:DFT-s-OFDM, Modulation:256QAM, RB Number:1, RB Position:0)

Center Frequency(MHz)	PAR Percent (%)	PAR (dB)	Upper Limit (dB)	Verdict
3710.01	0.1	6.52	13	Pass

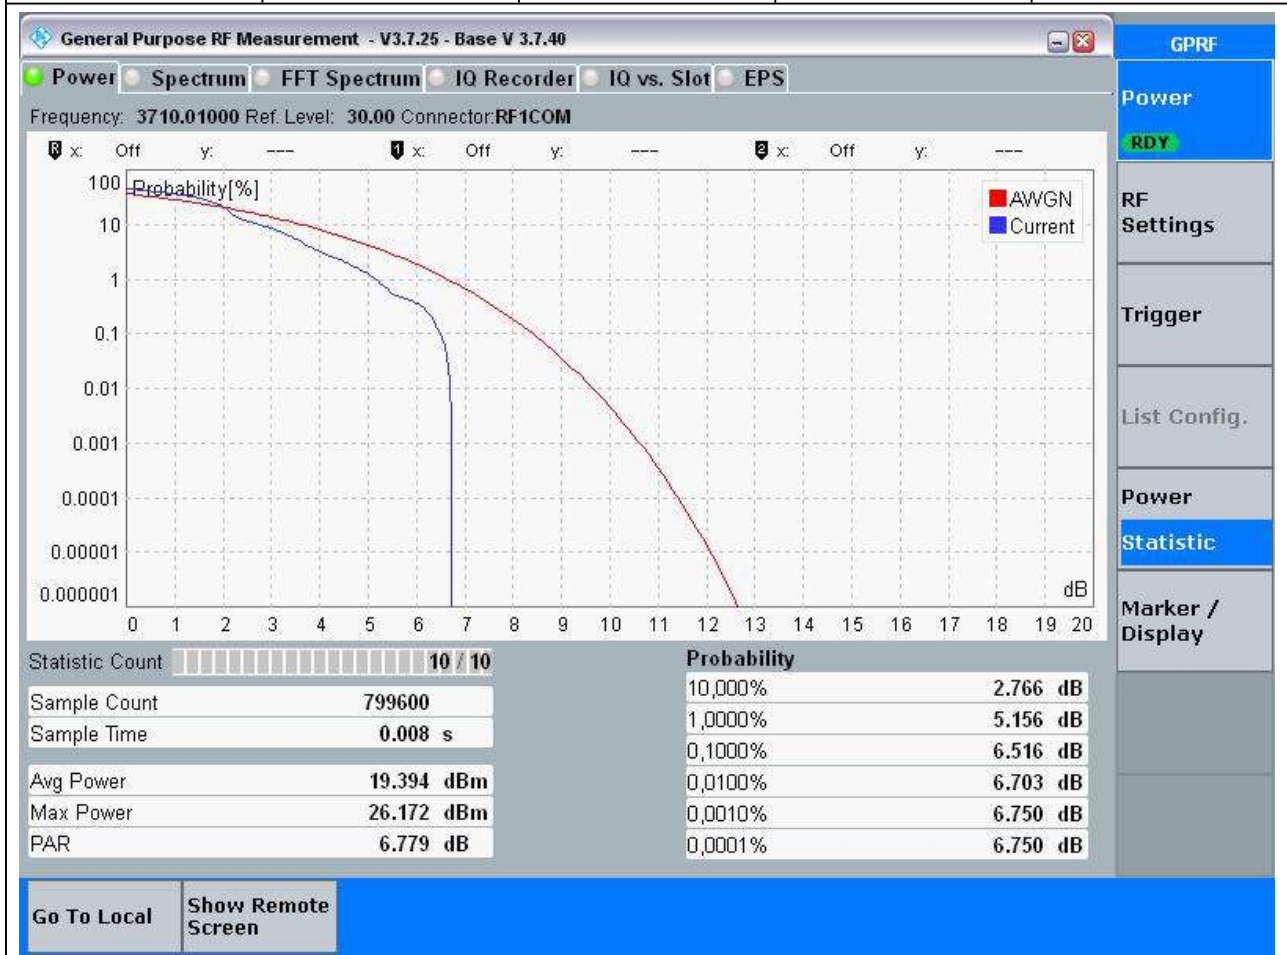


24.10. Peak to Average Ratio for SA_Part22-24-27(NTNV)(Channel:647334, Bandwidth:20, SCS:15, OFDM:DFT-s-OFDM, Modulation:256QAM, RB Number:100, RB Position:0)

Center Frequency(MHz)	PAR Percent (%)	PAR (dB)	Upper Limit (dB)	Verdict
3710.01	0.1	6.7	13	Pass

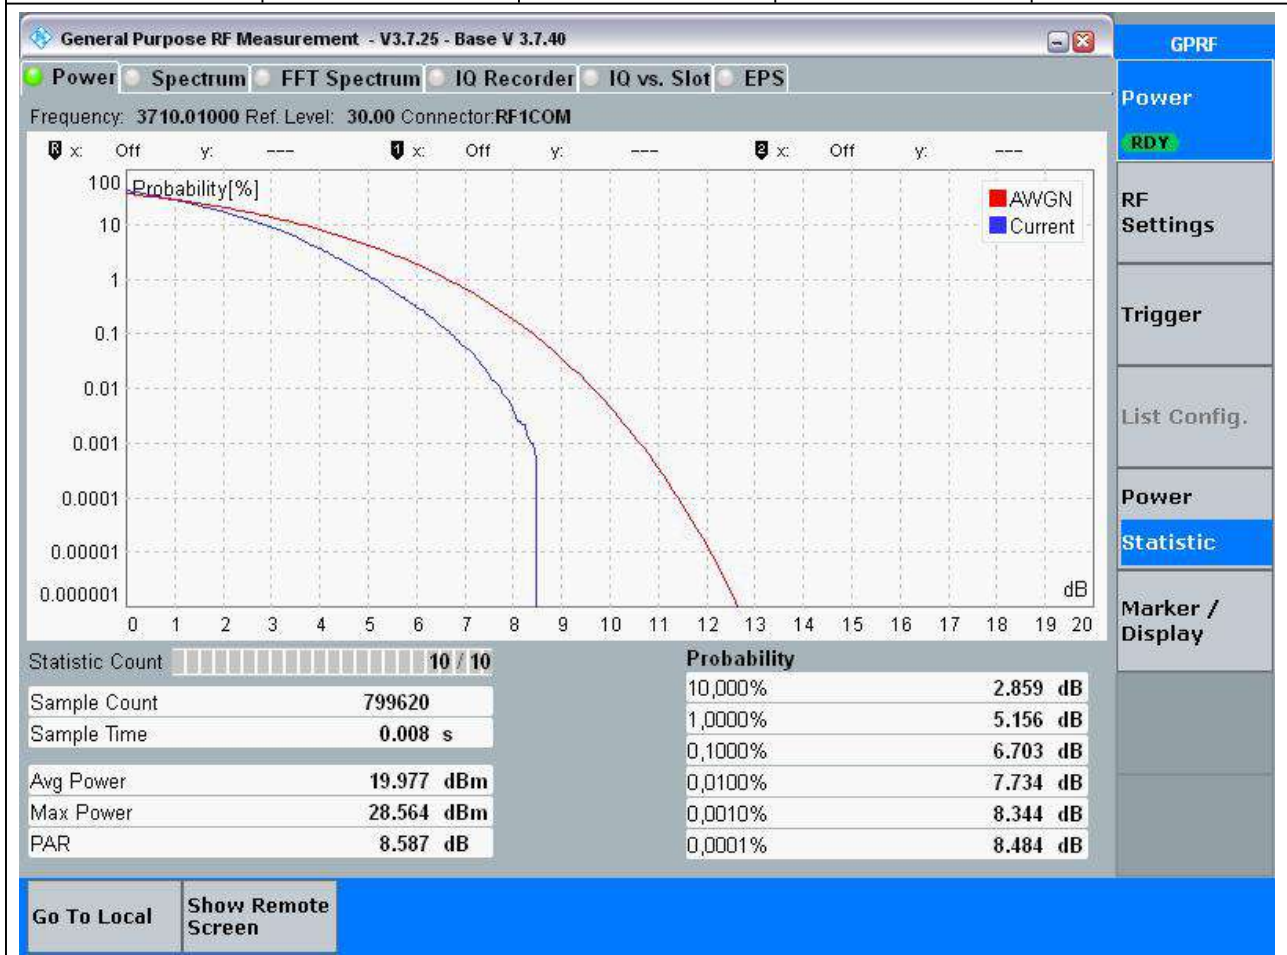


24.11. Peak to Average Ratio for SA_Part22-24-27(NTNV)(Channel:650000, Bandwidth:20, SCS:15, OFDM:DFT-s-OFDM, Modulation:Pi/2-BPSK, RB Number:1, RB Position:0)

Center Frequency(MHz)	PAR Percent (%)	PAR (dB)	Upper Limit (dB)	Verdict
3750	0.1	3.89	13	Pass

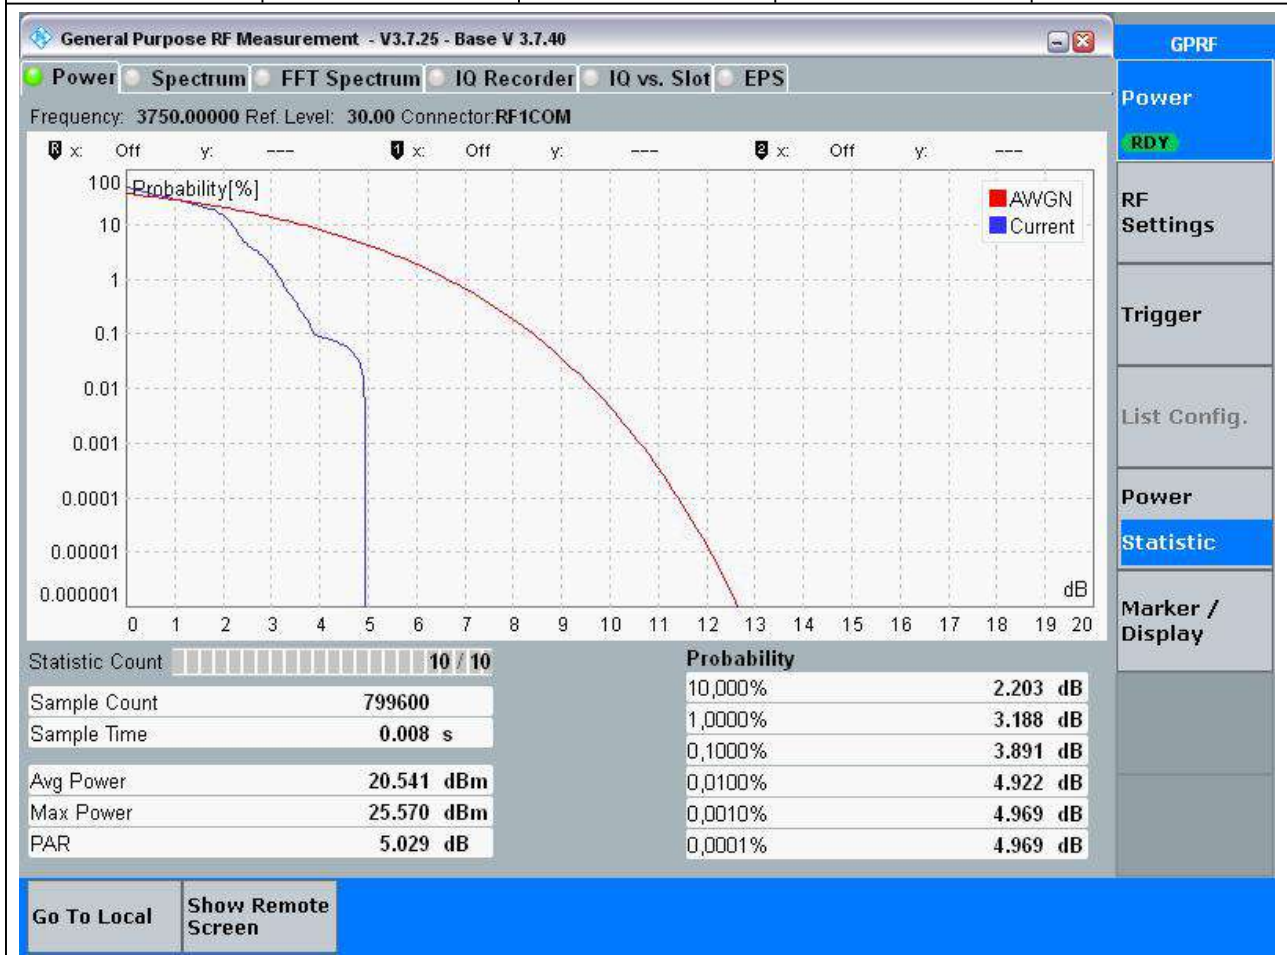


24.12. Peak to Average Ratio for SA_Part22-24-27(NTNV)(Channel:650000, Bandwidth:20, SCS:15, OFDM:DFT-s-OFDM, Modulation:Pi/2-BPSK, RB Number:100, RB Position:0)

Center Frequency(MHz)	PAR Percent (%)	PAR (dB)	Upper Limit (dB)	Verdict
3750	0.1	4.36	13	Pass

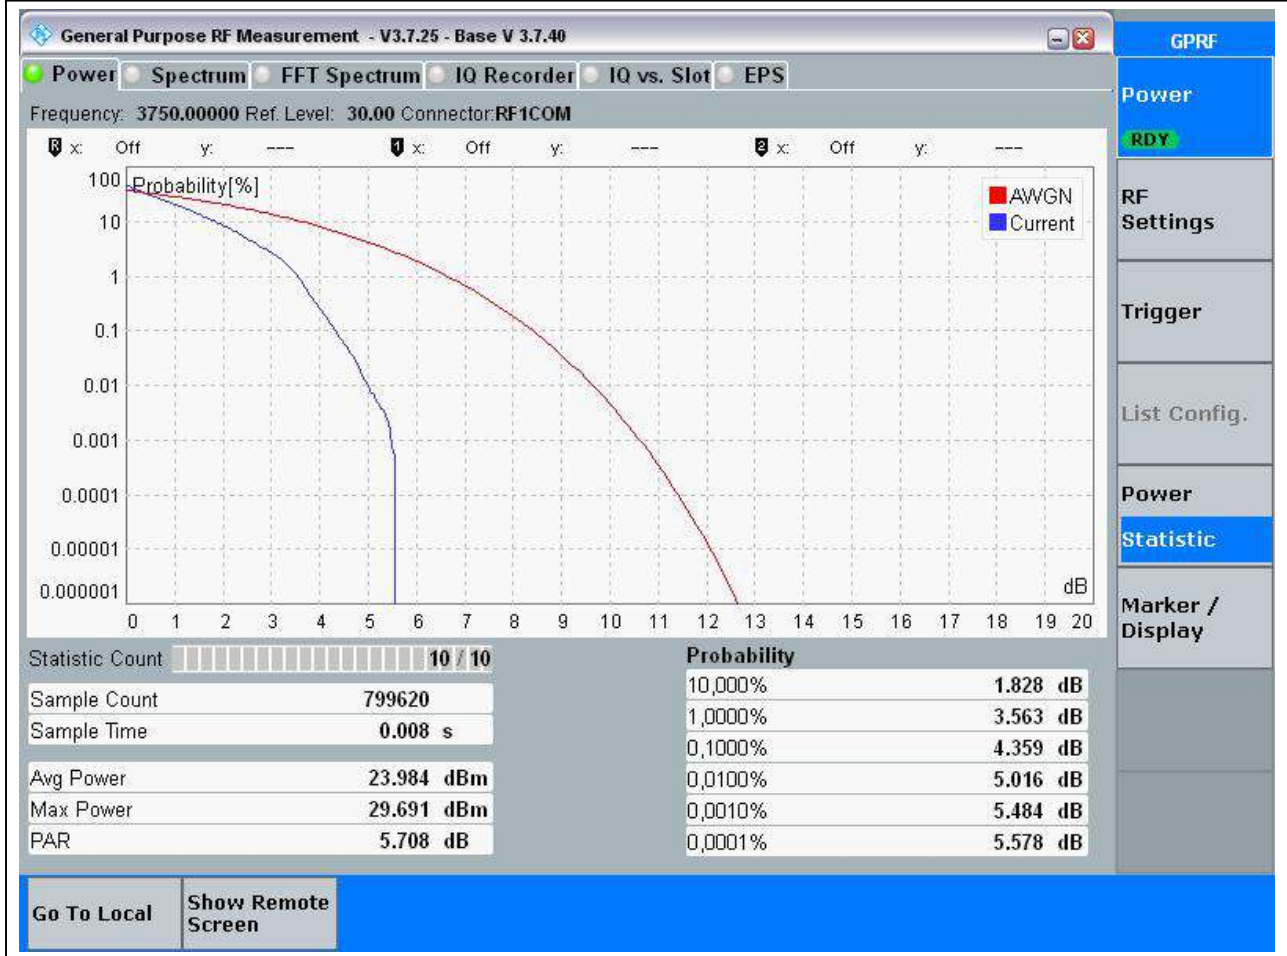


24.13. Peak to Average Ratio for SA_Part22-24-27(NTNV)(Channel:650000, Bandwidth:20, SCS:15, OFDM:DFT-s-OFDM, Modulation:QPSK, RB Number:1, RB Position:0)

Center Frequency(MHz)	PAR Percent (%)	PAR (dB)	Upper Limit (dB)	Verdict
3750	0.1	5.81	13	Pass

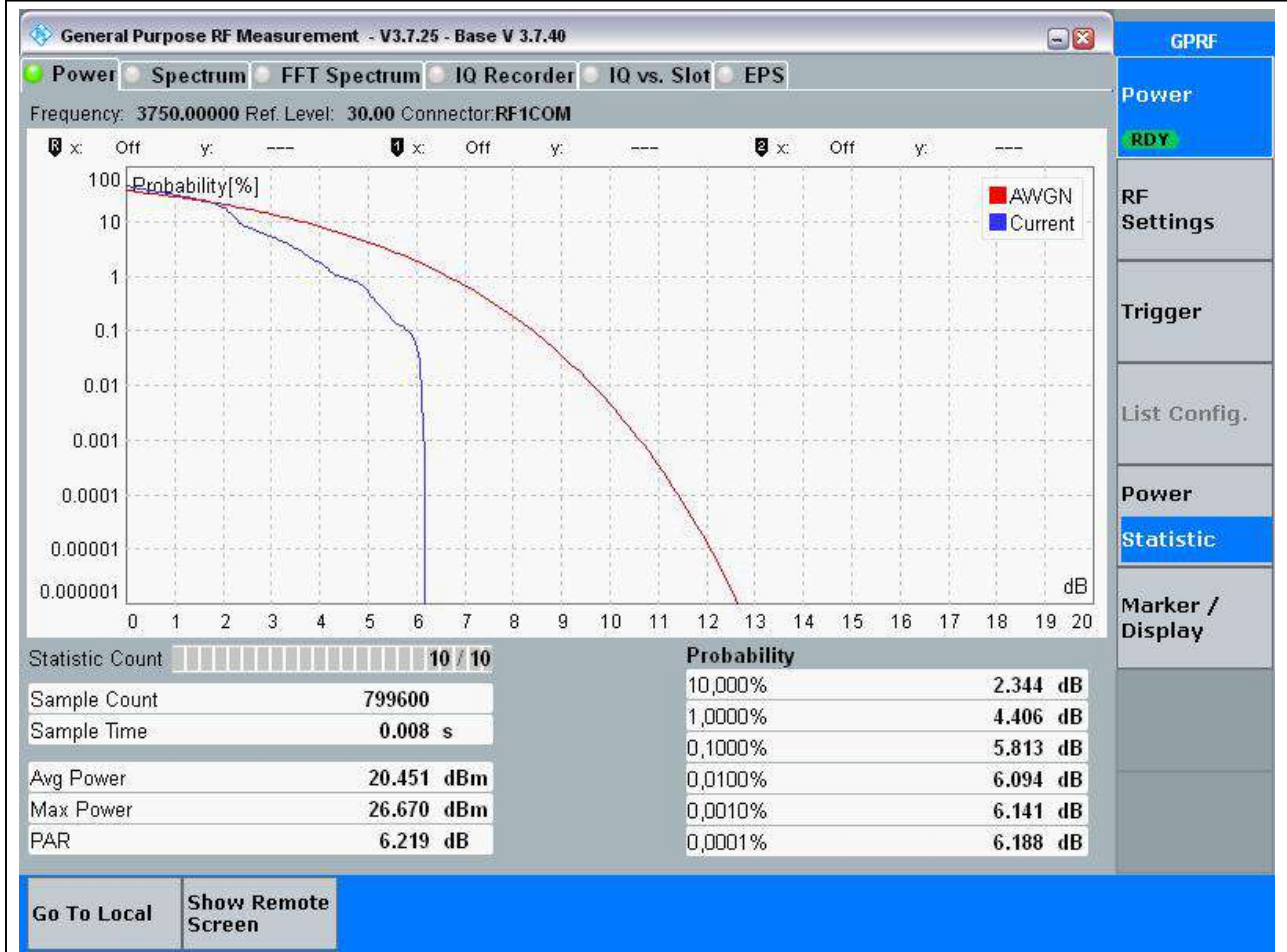


24.14. Peak to Average Ratio for SA_Part22-24-27(NTNV)(Channel:650000, Bandwidth:20, SCS:15, OFDM:DFT-s-OFDM, Modulation:QPSK, RB Number:100, RB Position:0)

Center Frequency(MHz)	PAR Percent (%)	PAR (dB)	Upper Limit (dB)	Verdict
3750	0.1	5.53	13	Pass

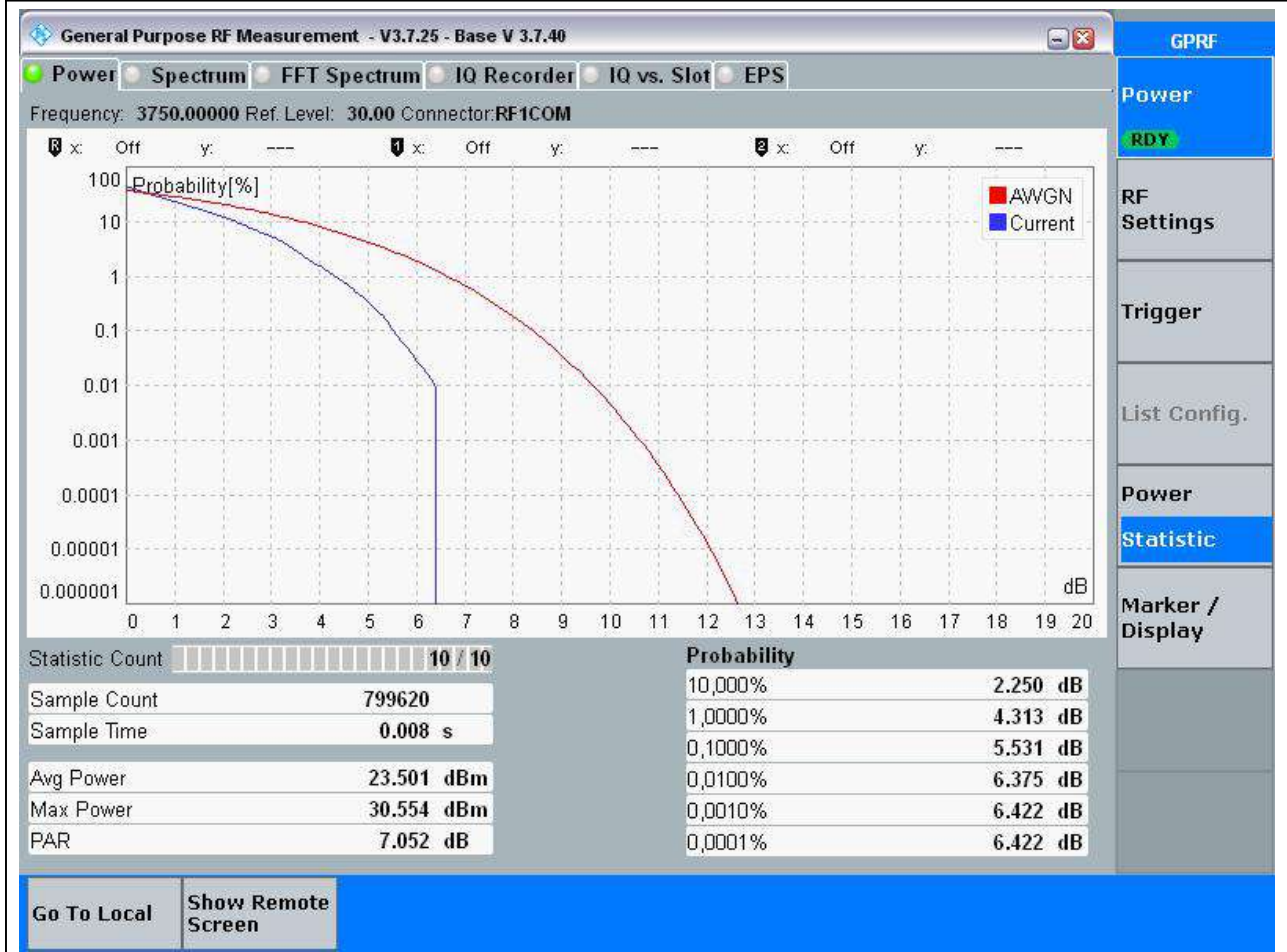


24.15. Peak to Average Ratio for SA_Part22-24-27(NTNV)(Channel:650000, Bandwidth:20, SCS:15, OFDM:DFT-s-OFDM, Modulation:16QAM, RB Number:1, RB Position:0)

Center Frequency(MHz)	PAR Percent (%)	PAR (dB)	Upper Limit (dB)	Verdict
3750	0.1	6.56	13	Pass

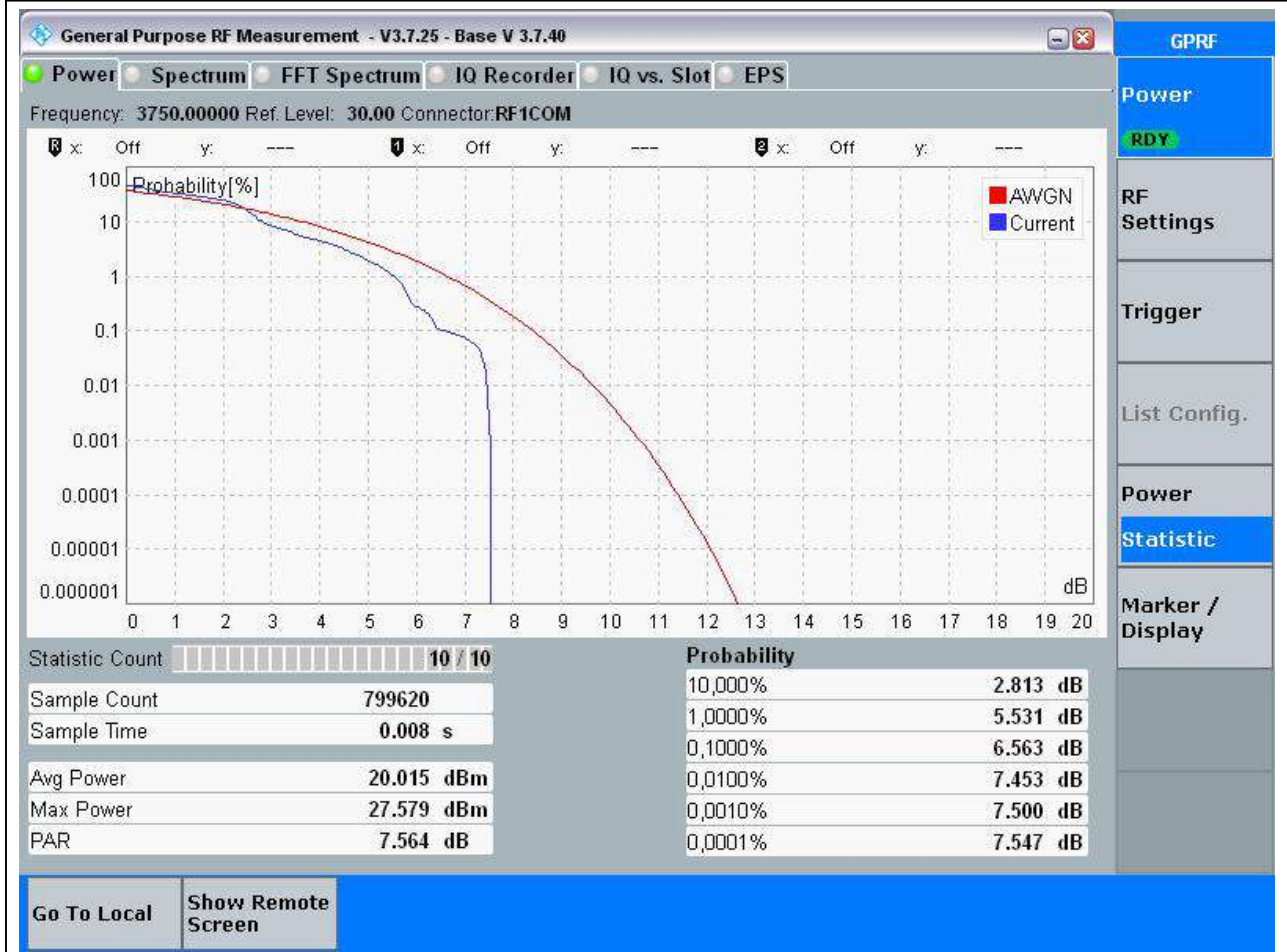

24.16. Peak to Average Ratio for SA_Part22-24-27(NTNV)(Channel:650000, Bandwidth:20, SCS:15, OFDM:DFT-s-OFDM, Modulation:16QAM, RB Number:100, RB Position:0)

Center Frequency(MHz)	PAR Percent (%)	PAR (dB)	Upper Limit (dB)	Verdict
3750	0.1	6.23	13	Pass

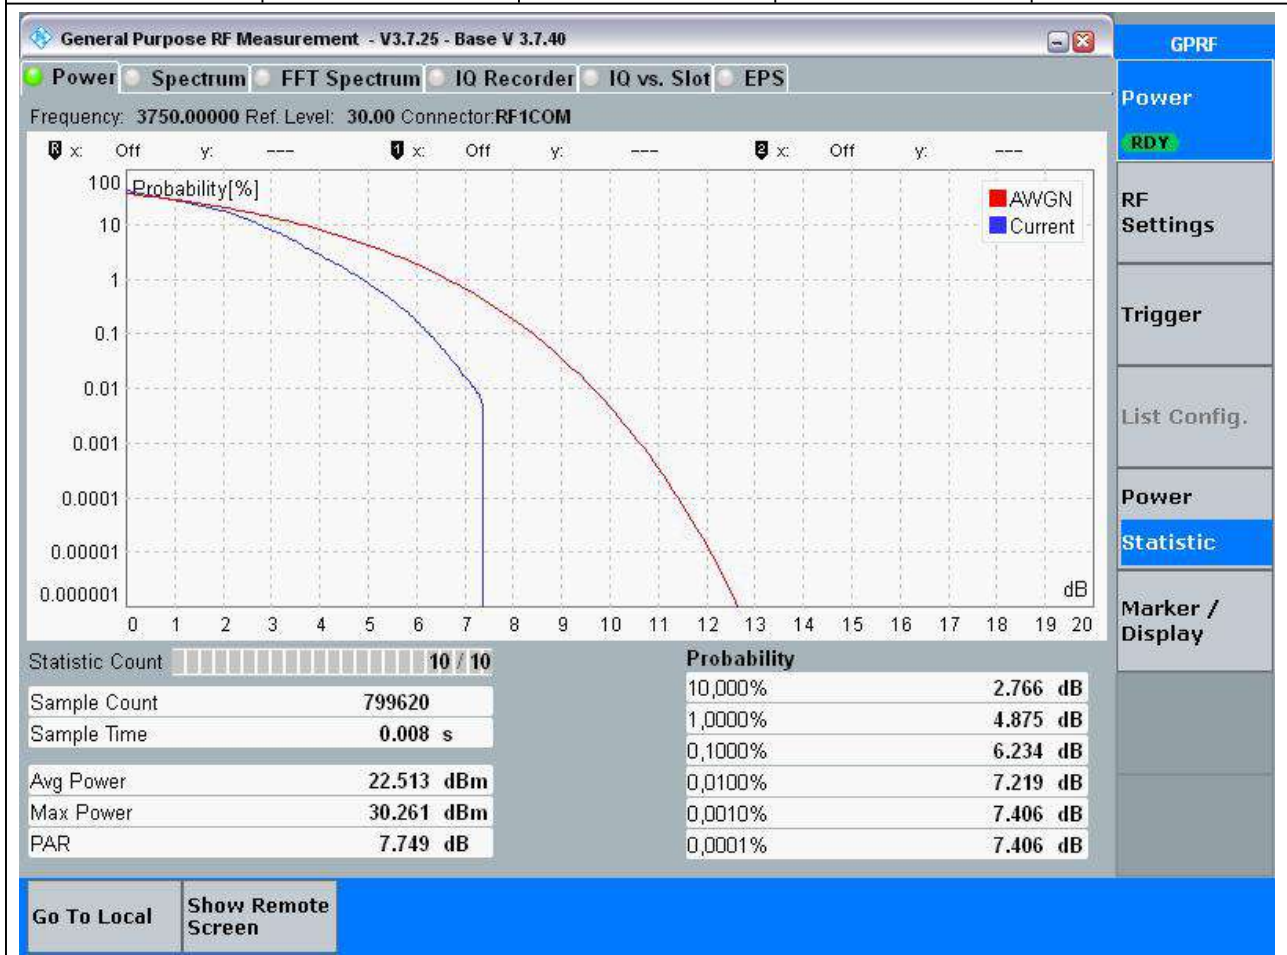

24.17. Peak to Average Ratio for SA_Part22-24-27(NTNV)(Channel:650000, Bandwidth:20, SCS:15, OFDM:DFT-s-OFDM, Modulation:64QAM, RB Number:1, RB Position:0)

Center Frequency(MHz)	PAR Percent (%)	PAR (dB)	Upper Limit (dB)	Verdict
3750	0.1	7.5	13	Pass


The screenshot displays the 'General Purpose RF Measurement' software interface. The main window shows a graph of Probability [%] versus dB. The y-axis ranges from 0.000001 to 100, and the x-axis ranges from 0 to 20. Two curves are plotted: a red line for 'AWGN' and a blue line for 'Current'. The 'Current' curve shows a sharp drop at approximately 7.5 dB, while the 'AWGN' curve is smoother. Below the graph, a statistics table provides the following data:

Statistic Count		Probability	
Sample Count	799600	10,000%	2.906 dB
Sample Time	0.008 s	1,0000%	5.063 dB
Avg Power	20.311 dBm	0,1000%	7.500 dB
Max Power	28.085 dBm	0,0100%	7.688 dB
PAR	7.774 dB	0,0010%	7.688 dB
		0,0001%	7.734 dB

At the bottom of the interface, there are buttons for 'Go To Local' and 'Show Remote Screen'. A sidebar on the right contains various control options like 'GPRF', 'Power', 'RDY', 'RF Settings', 'Trigger', 'List Config.', 'Power', 'Statistic', and 'Marker / Display'.


24.18. Peak to Average Ratio for SA_Part22-24-27(NTNV)(Channel:650000, Bandwidth:20, SCS:15, OFDM:DFT-s-OFDM, Modulation:64QAM, RB Number:100, RB Position:0)

Center Frequency(MHz)	PAR Percent (%)	PAR (dB)	Upper Limit (dB)	Verdict
3750	0.1	6.61	13	Pass

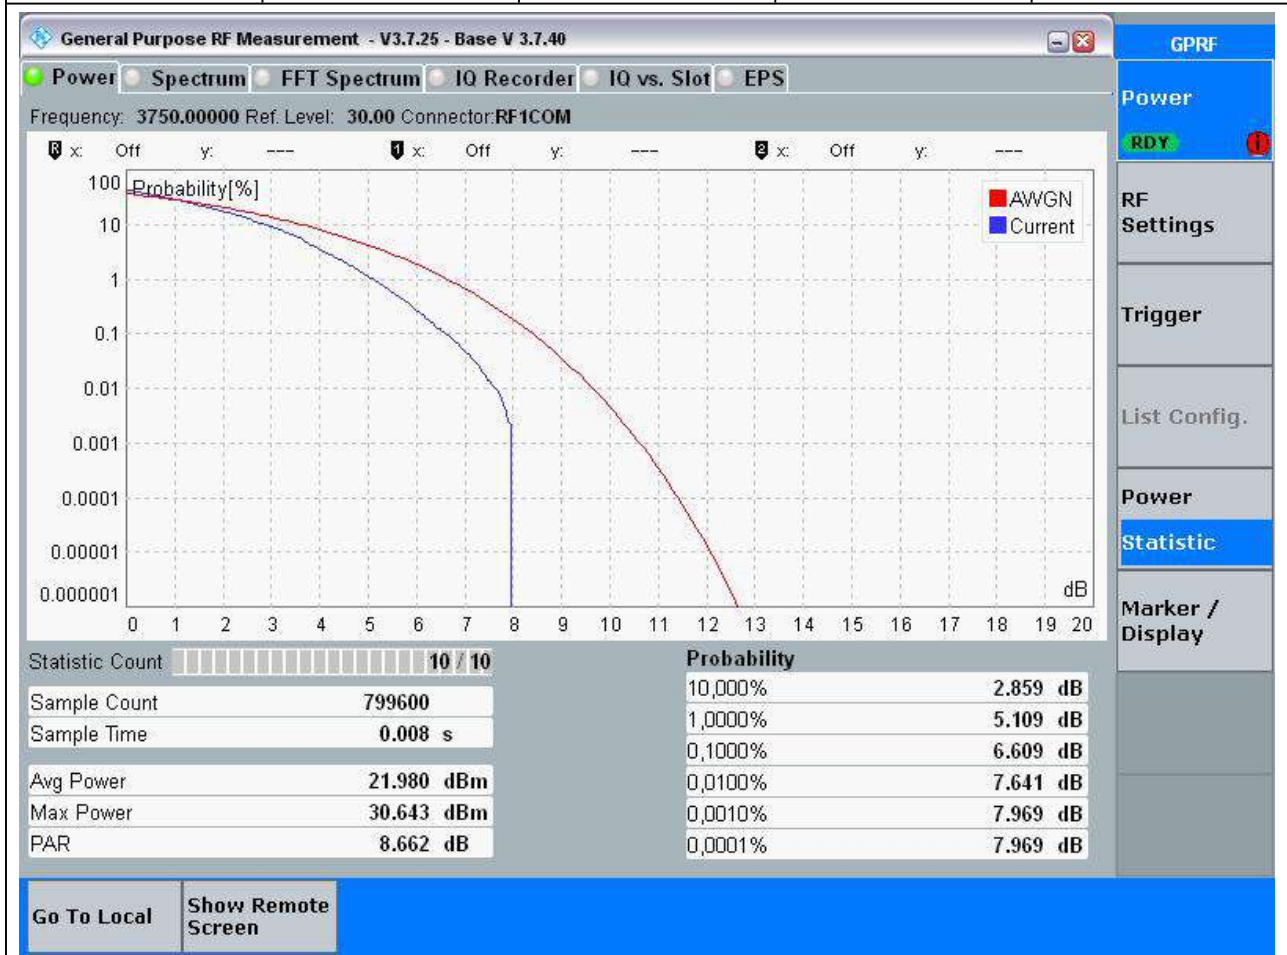


24.19. Peak to Average Ratio for SA_Part22-24-27(NTNV)(Channel:650000, Bandwidth:20, SCS:15, OFDM:DFT-s-OFDM, Modulation:256QAM, RB Number:1, RB Position:0)

Center Frequency(MHz)	PAR Percent (%)	PAR (dB)	Upper Limit (dB)	Verdict
3750	0.1	6.47	13	Pass

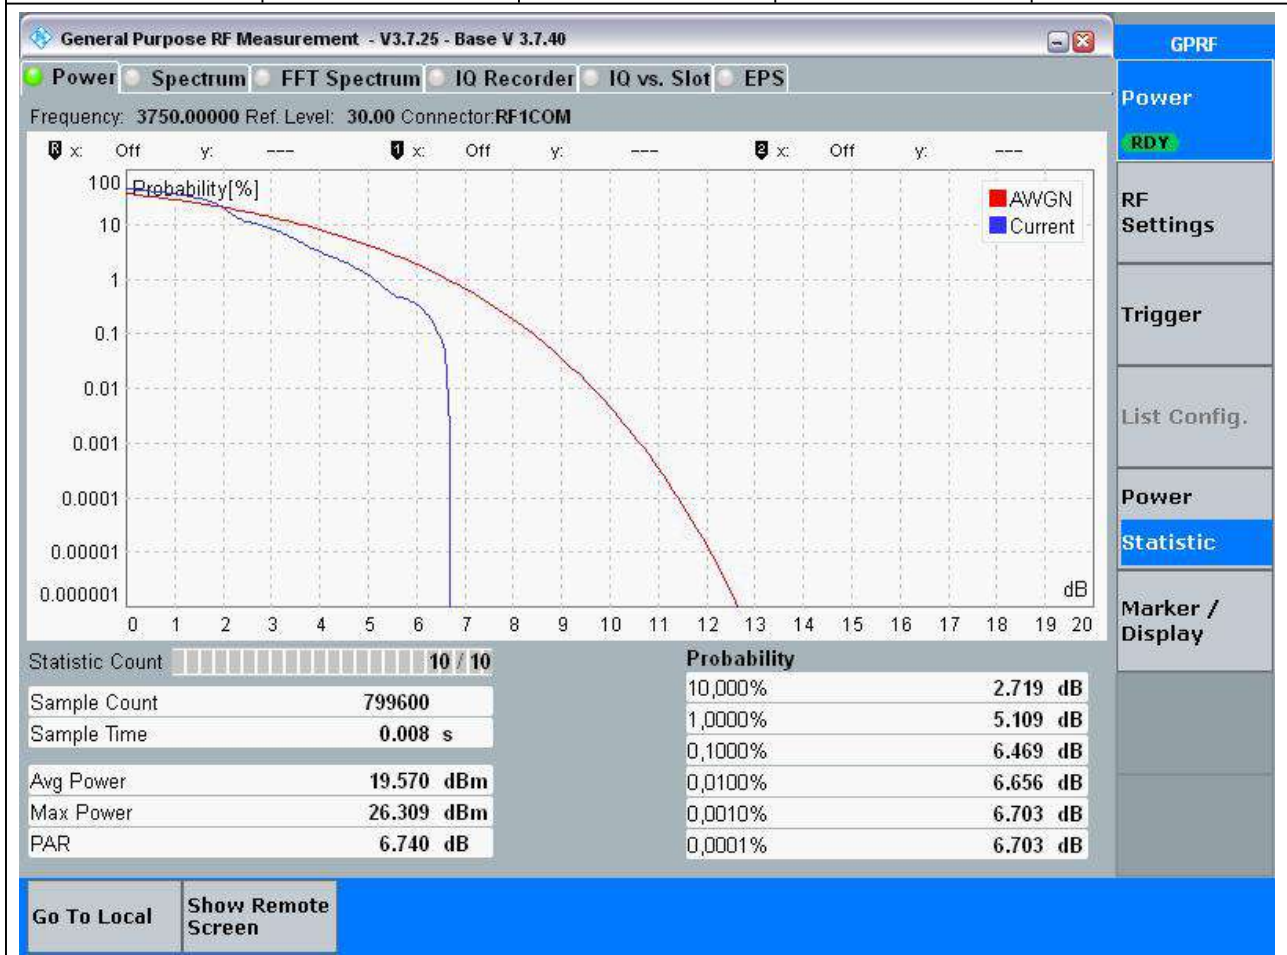


24.20. Peak to Average Ratio for SA_Part22-24-27(NTNV)(Channel:650000, Bandwidth:20, SCS:15, OFDM:DFT-s-OFDM, Modulation:256QAM, RB Number:100, RB Position:0)

Center Frequency(MHz)	PAR Percent (%)	PAR (dB)	Upper Limit (dB)	Verdict
3750	0.1	6.7	13	Pass

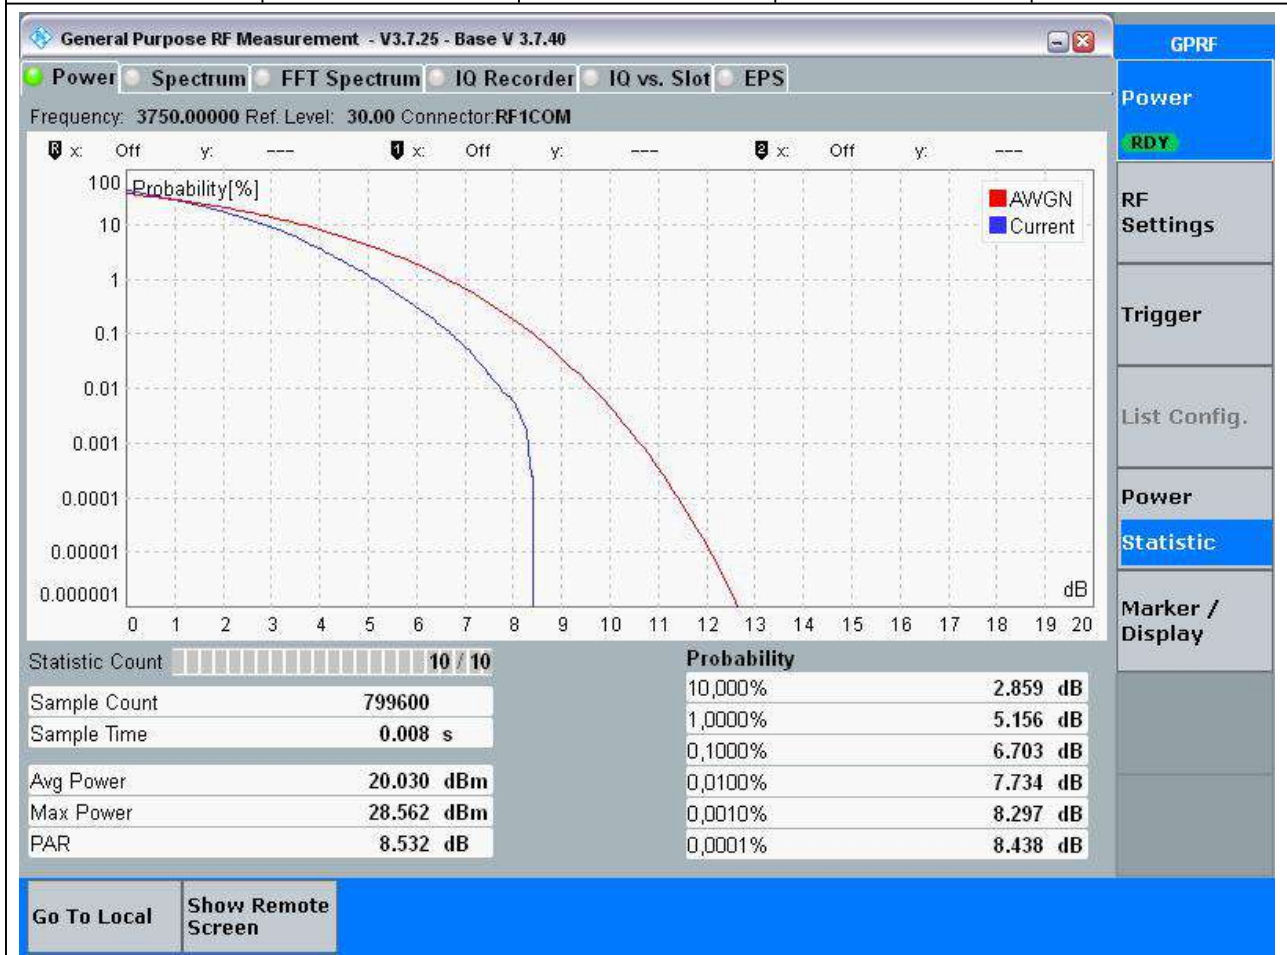


24.21. Peak to Average Ratio for SA_Part22-24-27(NTNV)(Channel:652666, Bandwidth:20, SCS:15, OFDM:DFT-s-OFDM, Modulation:Pi/2-BPSK, RB Number:1, RB Position:0)

Center Frequency(MHz)	PAR Percent (%)	PAR (dB)	Upper Limit (dB)	Verdict
3789.99	0.1	3.89	13	Pass

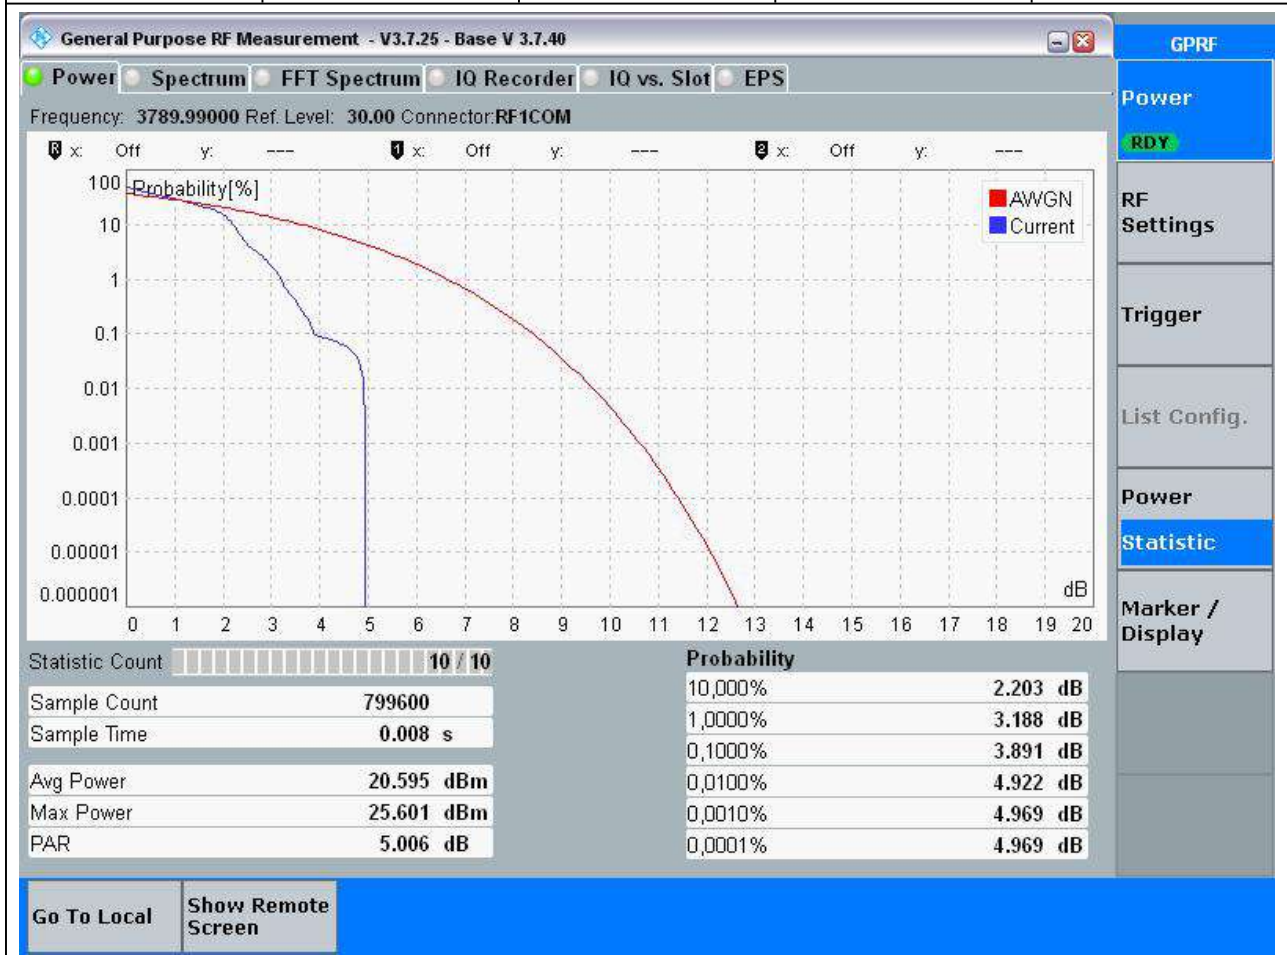


24.22. Peak to Average Ratio for SA_Part22-24-27(NTNV)(Channel:652666, Bandwidth:20, SCS:15, OFDM:DFT-s-OFDM, Modulation:Pi/2-BPSK, RB Number:100, RB Position:0)

Center Frequency(MHz)	PAR Percent (%)	PAR (dB)	Upper Limit (dB)	Verdict
3789.99	0.1	4.36	13	Pass

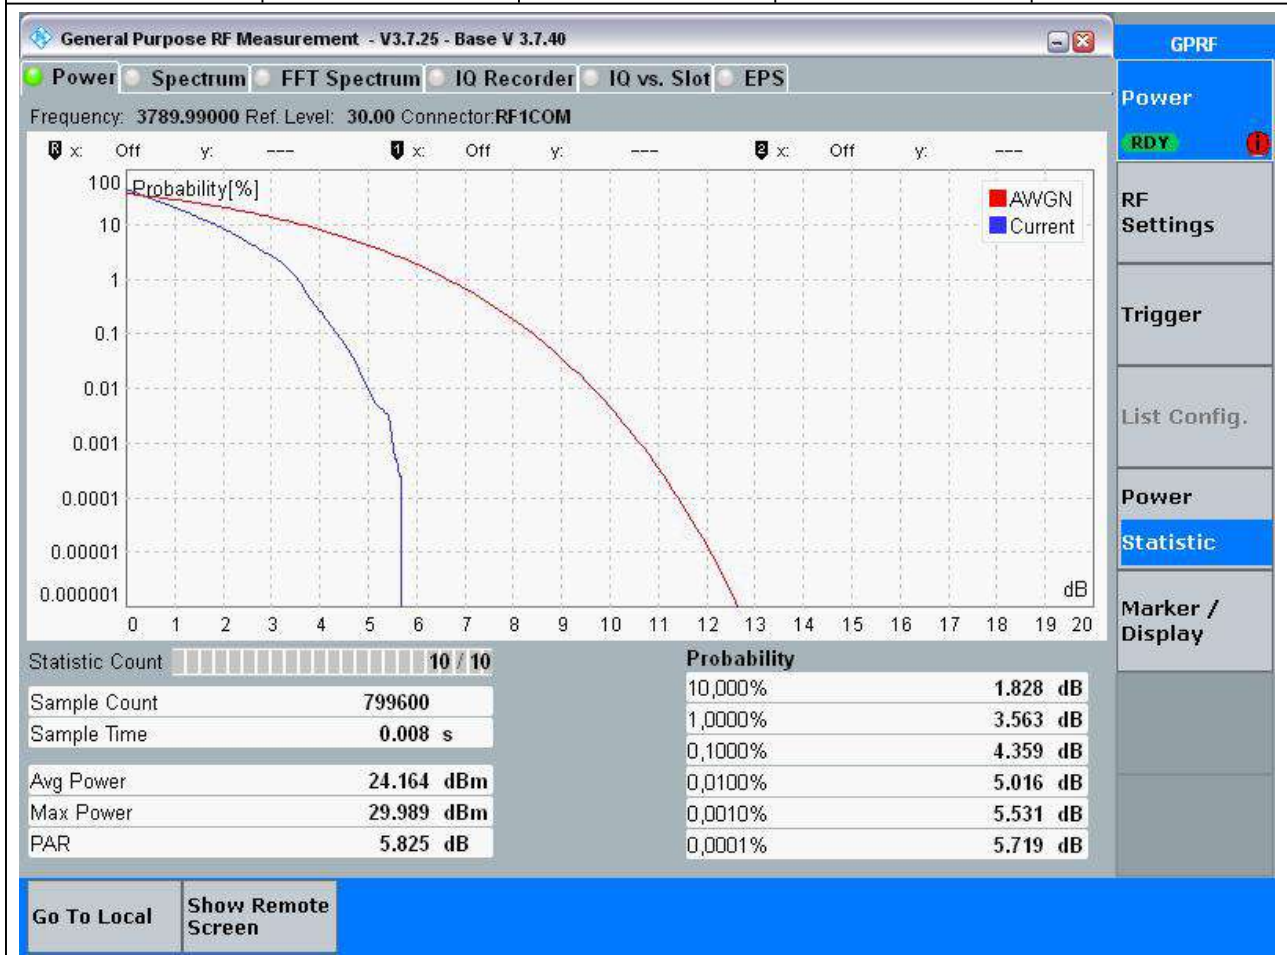


24.23. Peak to Average Ratio for SA_Part22-24-27(NTNV)(Channel:652666, Bandwidth:20, SCS:15, OFDM:DFT-s-OFDM, Modulation:QPSK, RB Number:1, RB Position:0)

Center Frequency(MHz)	PAR Percent (%)	PAR (dB)	Upper Limit (dB)	Verdict
3789.99	0.1	5.86	13	Pass

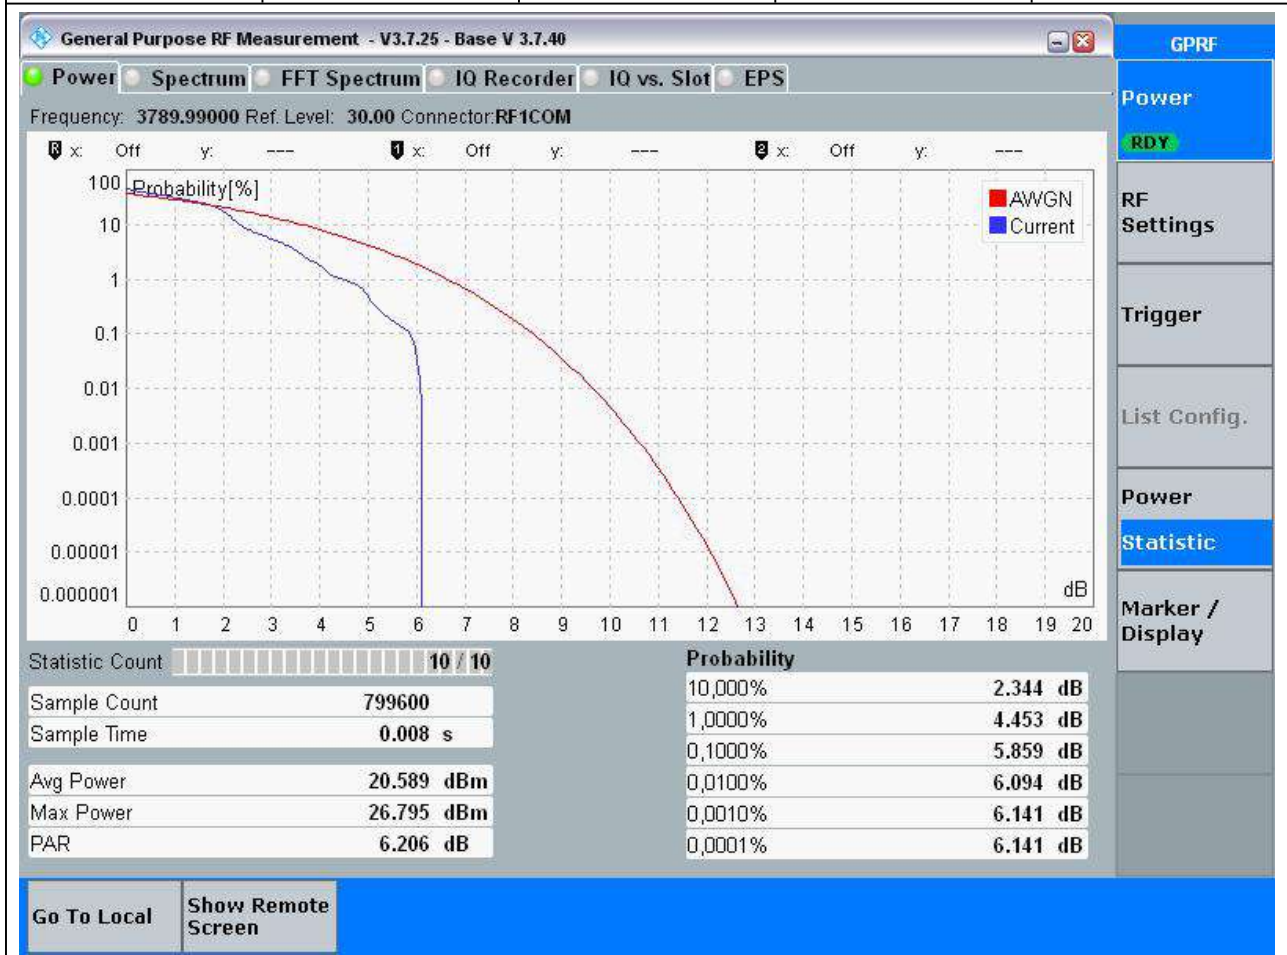


24.24. Peak to Average Ratio for SA_Part22-24-27(NTNV)(Channel:652666, Bandwidth:20, SCS:15, OFDM:DFT-s-OFDM, Modulation:QPSK, RB Number:100, RB Position:0)

Center Frequency(MHz)	PAR Percent (%)	PAR (dB)	Upper Limit (dB)	Verdict
3789.99	0.1	5.58	13	Pass

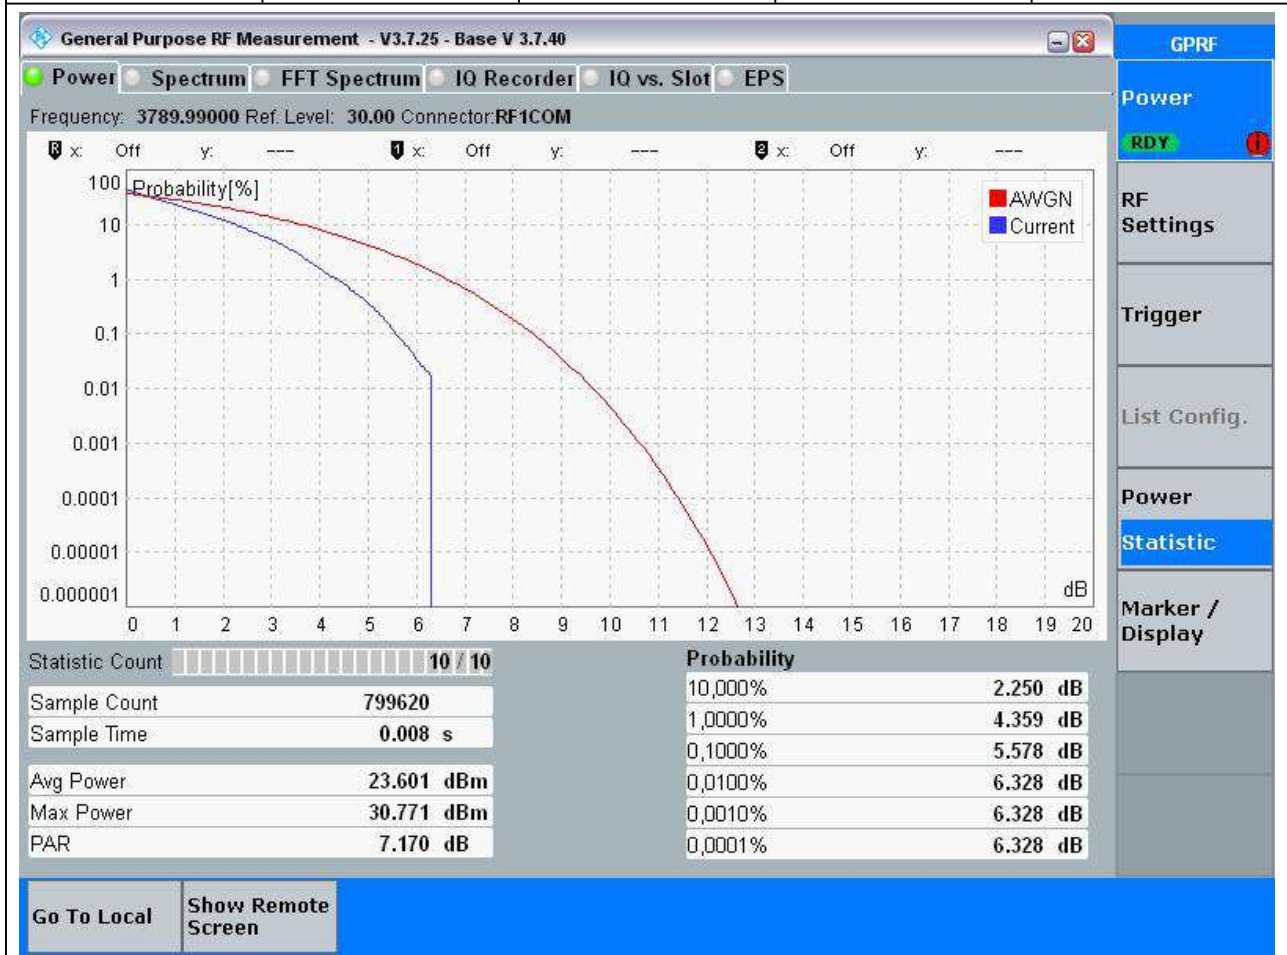


24.25. Peak to Average Ratio for SA_Part22-24-27(NTNV)(Channel:652666, Bandwidth:20, SCS:15, OFDM:DFT-s-OFDM, Modulation:16QAM, RB Number:1, RB Position:0)

Center Frequency(MHz)	PAR Percent (%)	PAR (dB)	Upper Limit (dB)	Verdict
3789.99	0.1	6.94	13	Pass

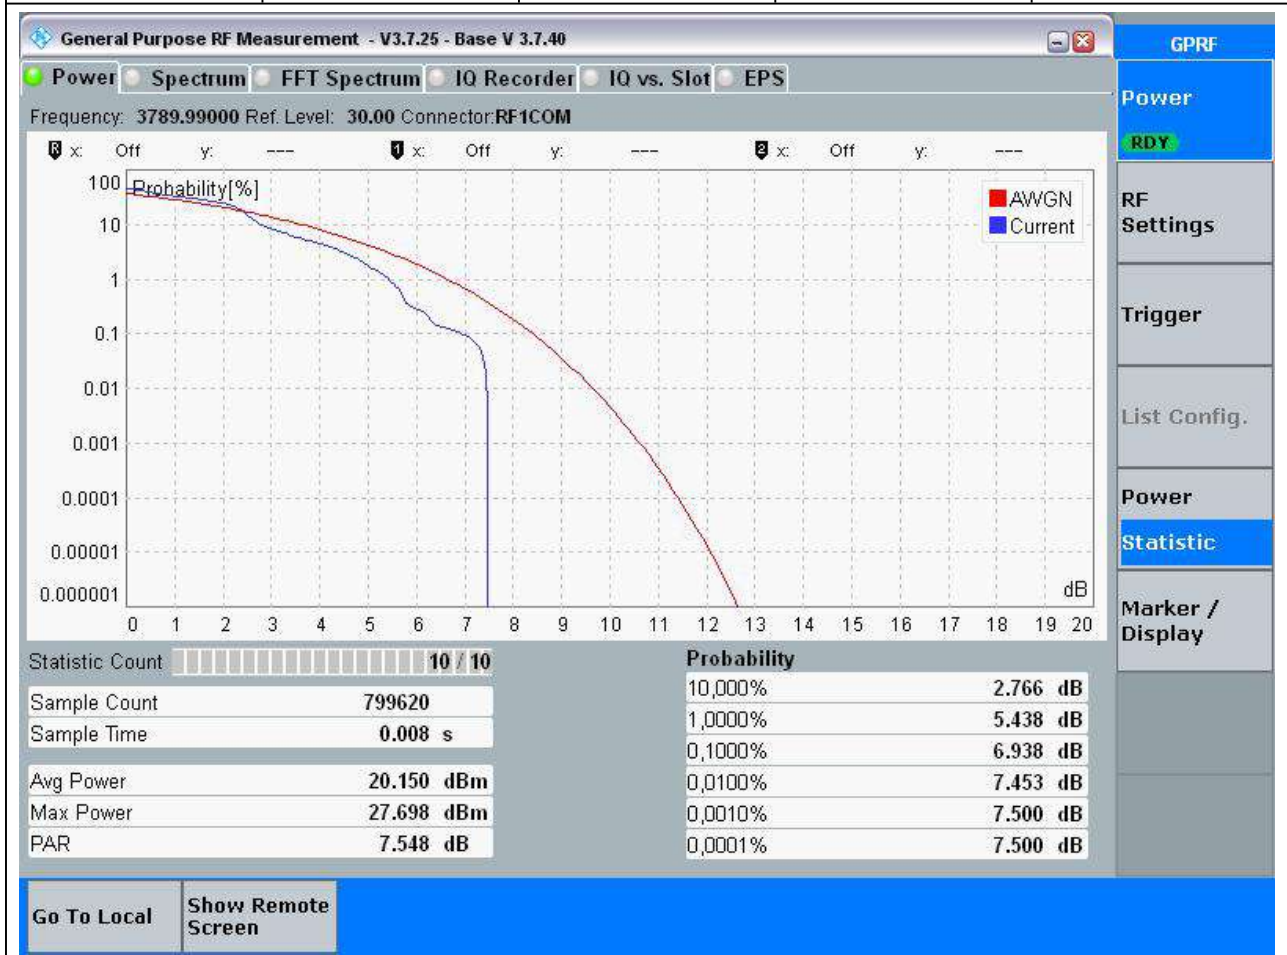


24.26. Peak to Average Ratio for SA_Part22-24-27(NTNV)(Channel:652666, Bandwidth:20, SCS:15, OFDM:DFT-s-OFDM, Modulation:16QAM, RB Number:100, RB Position:0)

Center Frequency(MHz)	PAR Percent (%)	PAR (dB)	Upper Limit (dB)	Verdict
3789.99	0.1	6.33	13	Pass

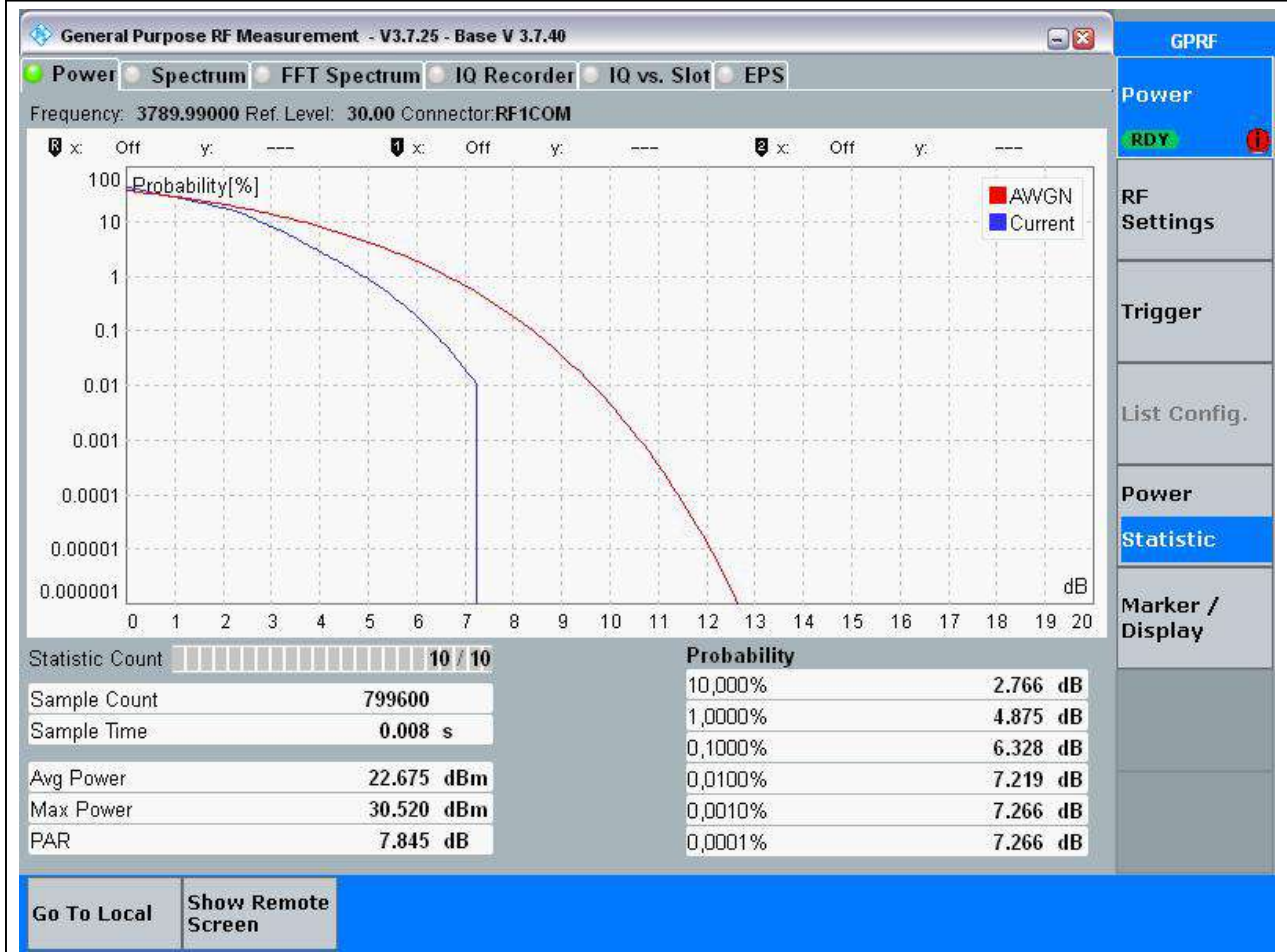


24.27. Peak to Average Ratio for SA_Part22-24-27(NTNV)(Channel:652666, Bandwidth:20, SCS:15, OFDM:DFT-s-OFDM, Modulation:64QAM, RB Number:1, RB Position:0)

Center Frequency(MHz)	PAR Percent (%)	PAR (dB)	Upper Limit (dB)	Verdict
3789.99	0.1	7.55	13	Pass

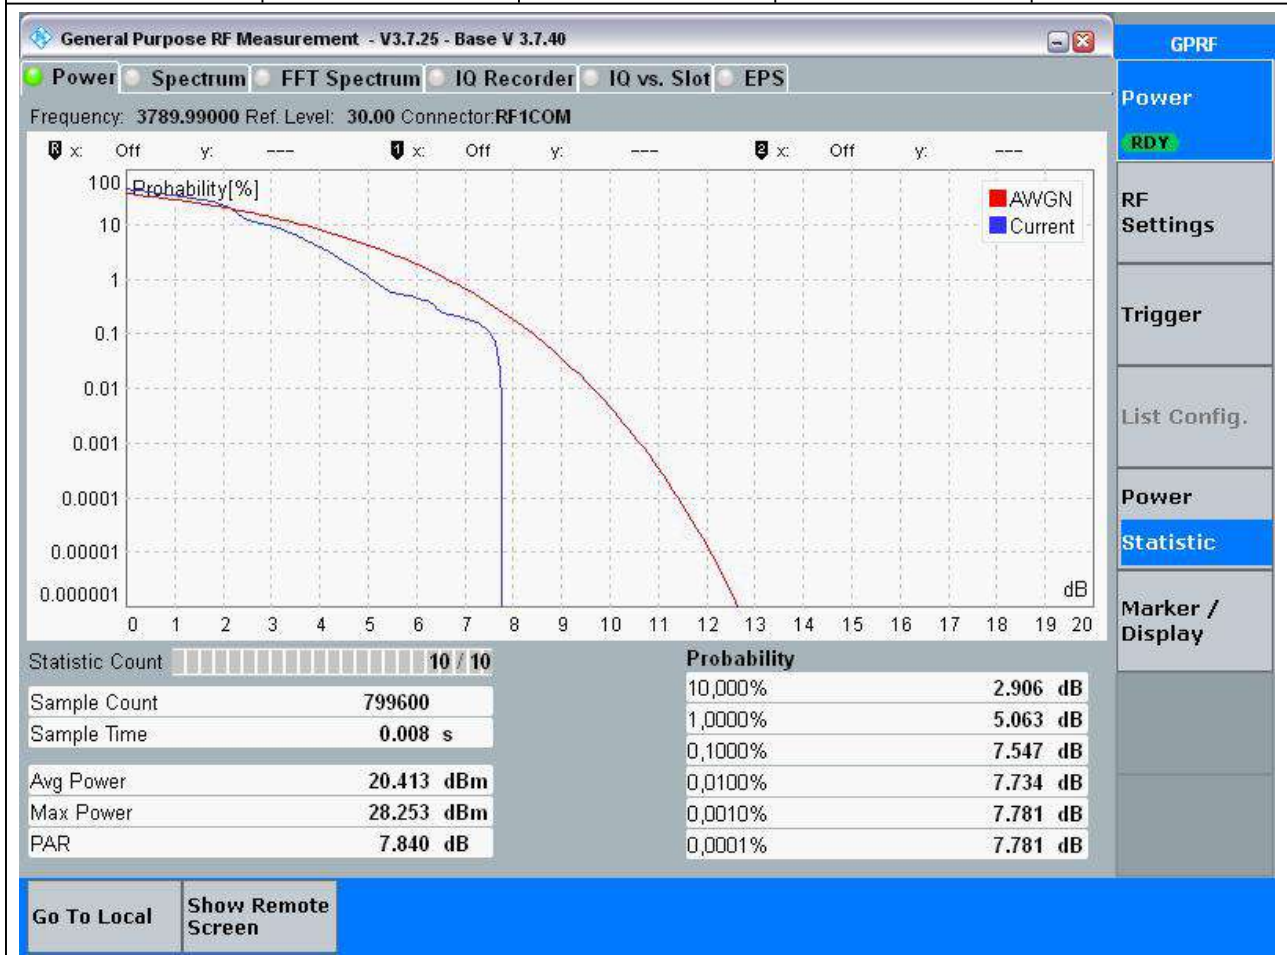

24.28. Peak to Average Ratio for SA_Part22-24-27(NTNV)(Channel:652666, Bandwidth:20, SCS:15, OFDM:DFT-s-OFDM, Modulation:64QAM, RB Number:100, RB Position:0)

Center Frequency(MHz)	PAR Percent (%)	PAR (dB)	Upper Limit (dB)	Verdict
3789.99	0.1	6.61	13	Pass

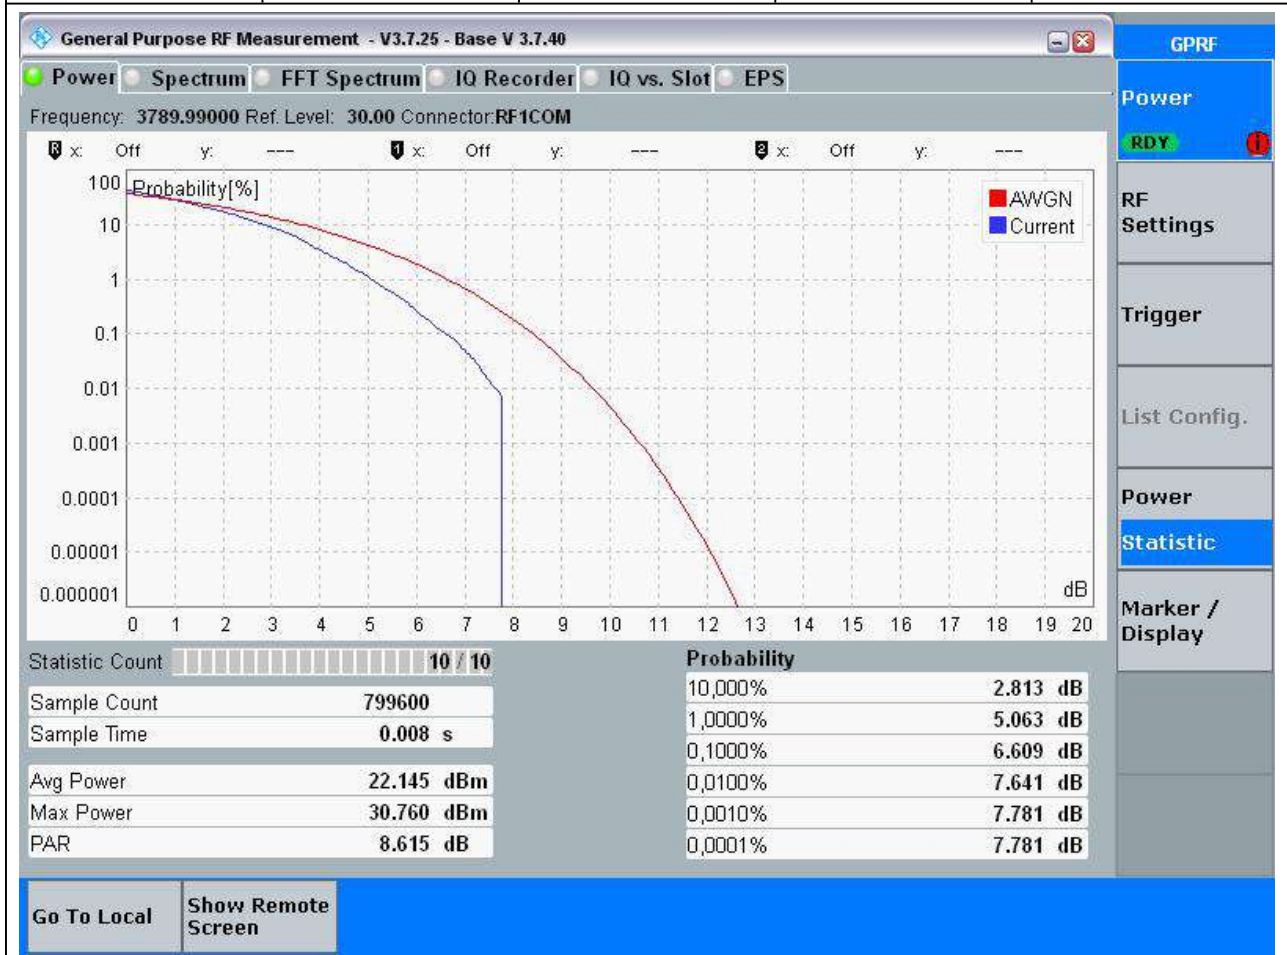

24.29. Peak to Average Ratio for SA_Part22-24-27(NTNV)(Channel:652666, Bandwidth:20, SCS:15, OFDM:DFT-s-OFDM, Modulation:256QAM, RB Number:1, RB Position:0)

Center Frequency(MHz)	PAR Percent (%)	PAR (dB)	Upper Limit (dB)	Verdict
3789.99	0.1	6.47	13	Pass

General Purpose RF Measurement - V3.7.25 - Base V 3.7.40

GPRF

● Power ● Spectrum ● FFT Spectrum ● IQ Recorder ● IQ vs. Slot ● EPS

Frequency: 3789.99000 Ref. Level: 30.00 Connector:RF1COM

x: Off y: ---
x: Off y: ---
x: Off y: ---

Statistic Count 10 / 10	Probability
Sample Count 799620	10,000% 2.719 dB
Sample Time 0.008 s	1,0000% 5.109 dB
Avg Power 19.713 dBm	0,1000% 6.469 dB
Max Power 26.431 dBm	0,0100% 6.609 dB
PAR 6.718 dB	0,0010% 6.656 dB
	0,0001% 6.703 dB

Go To Local
Show Remote Screen

GPRF

Power

RDY

RF Settings

Trigger

List Config.


Power

Statistic

Marker / Display

24.30. Peak to Average Ratio for SA_Part22-24-27(NTNV)(Channel:652666, Bandwidth:20, SCS:15, OFDM:DFT-s-OFDM, Modulation:256QAM, RB Number:100, RB Position:0)

Center Frequency(MHz)	PAR Percent (%)	PAR (dB)	Upper Limit (dB)	Verdict
3789.99	0.1	6.7	13	Pass

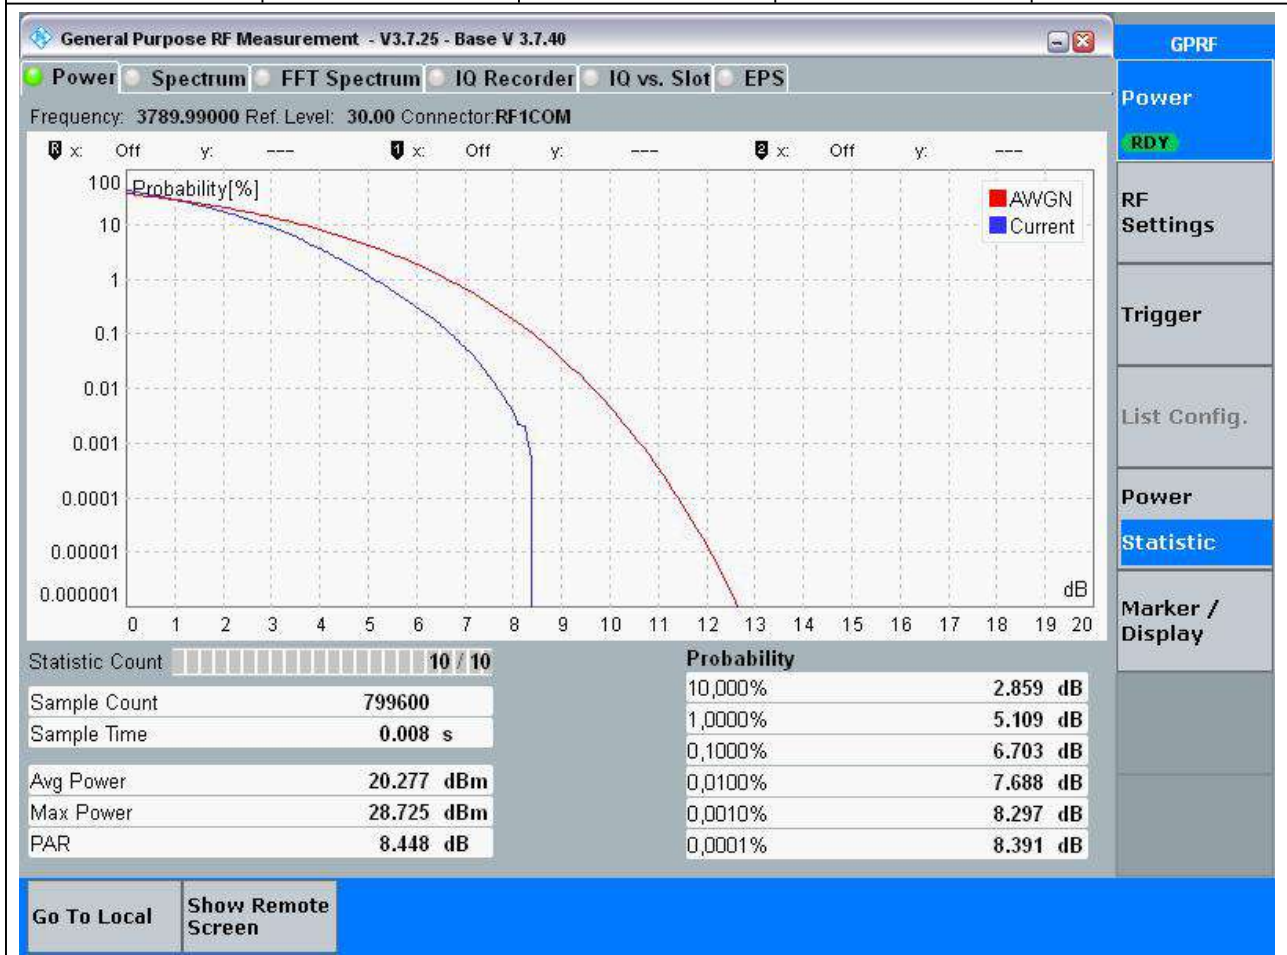

--BLANK BELOW--