

Test Plot 1#: GSM 850_Head Left Cheek_Middle

DUT: Mobile Phone; Type: X688C; Serial: RSZ201102004-SA-S1;

Communication System: Generic GSM; Frequency: 836.6 MHz; Duty Cycle: 1:8
 Medium parameters used: $f = 836.6 \text{ MHz}$; $\sigma = 0.924 \text{ S/m}$; $\epsilon_r = 42.026$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.92, 9.92, 9.92)
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 3/3/2020
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x91x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.233 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 14.73 V/m ; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.309 W/kg

SAR(1 g) = 0.222 W/kg ; SAR(10 g) = 0.156 W/kg

Maximum value of SAR (measured) = 0.233 W/kg

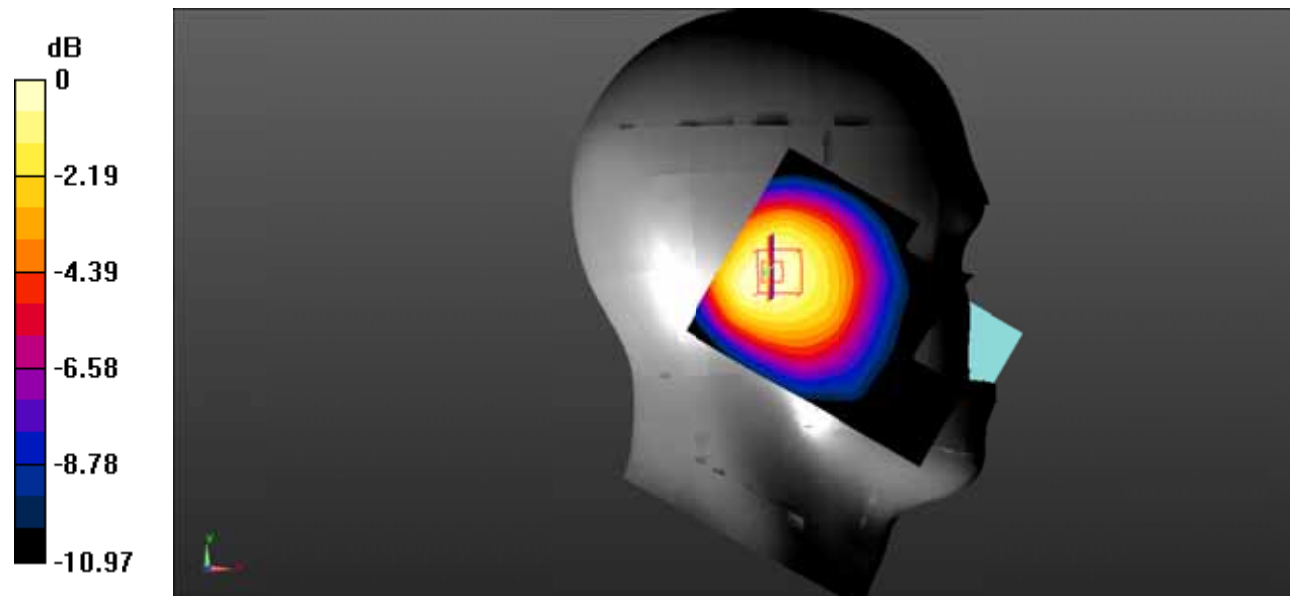

0 dB = $0.233 \text{ W/kg} = -6.33 \text{ dBW/kg}$

Test Plot 2#: GSM 850_Head Left Tilt_Middle

DUT: Mobile Phone; Type: X688C; Serial: RSZ201102004-SA-S1;

Communication System: Generic GSM; Frequency: 836.6 MHz; Duty Cycle: 1:8
 Medium parameters used: $f = 836.6 \text{ MHz}$; $\sigma = 0.924 \text{ S/m}$; $\epsilon_r = 42.026$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Left Section


DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.92, 9.92, 9.92)
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 3/3/2020
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x91x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.238 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 16.08 V/m ; Power Drift = -0.05 dB
 Peak SAR (extrapolated) = 0.332 W/kg

SAR(1 g) = 0.220 W/kg; SAR(10 g) = 0.144 W/kg
 Maximum value of SAR (measured) = 0.231 W/kg

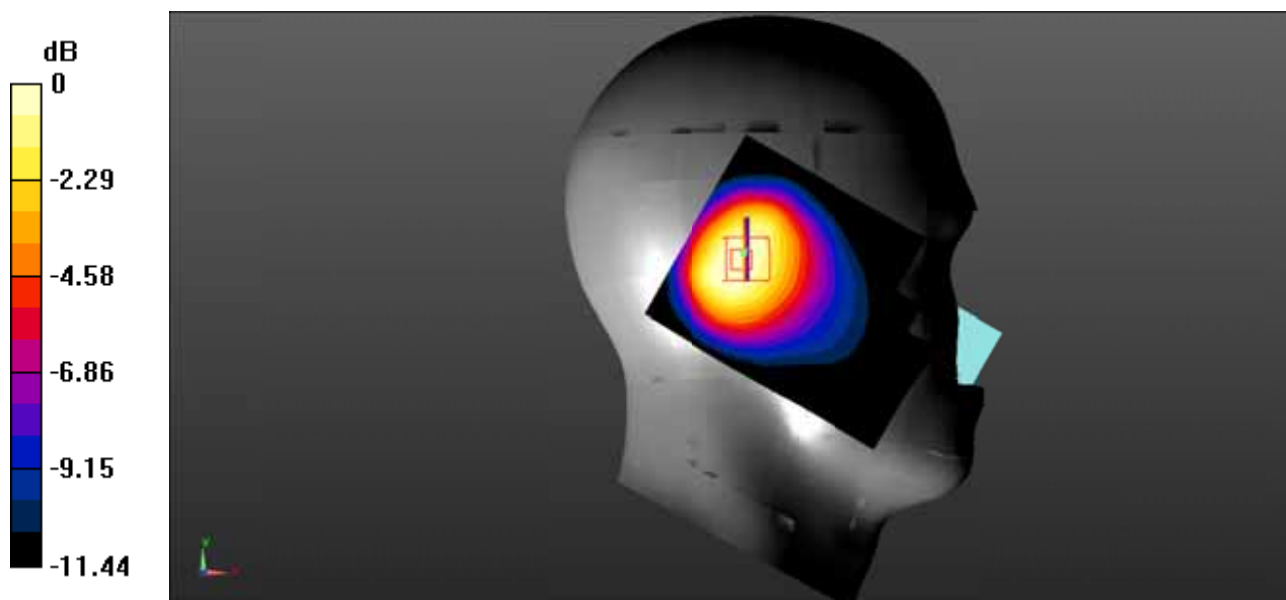

0 dB = $0.231 \text{ W/kg} = -6.36 \text{ dBW/kg}$

Test Plot 3#: GSM 850_Head Right Cheek_Middle

DUT: Mobile Phone; Type: X688C; Serial: RSZ201102004-SA-S1;

Communication System: Generic GSM; Frequency: 836.6 MHz; Duty Cycle: 1:8
 Medium parameters used: $f = 836.6 \text{ MHz}$; $\sigma = 0.924 \text{ S/m}$; $\epsilon_r = 42.026$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Right Section


DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.92, 9.92, 9.92)
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 3/3/2020
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x91x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.351 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 14.21 V/m ; Power Drift = 0.08 dB
 Peak SAR (extrapolated) = 0.593 W/kg

SAR(1 g) = 0.319 W/kg; SAR(10 g) = 0.195 W/kg
 Maximum value of SAR (measured) = 0.334 W/kg

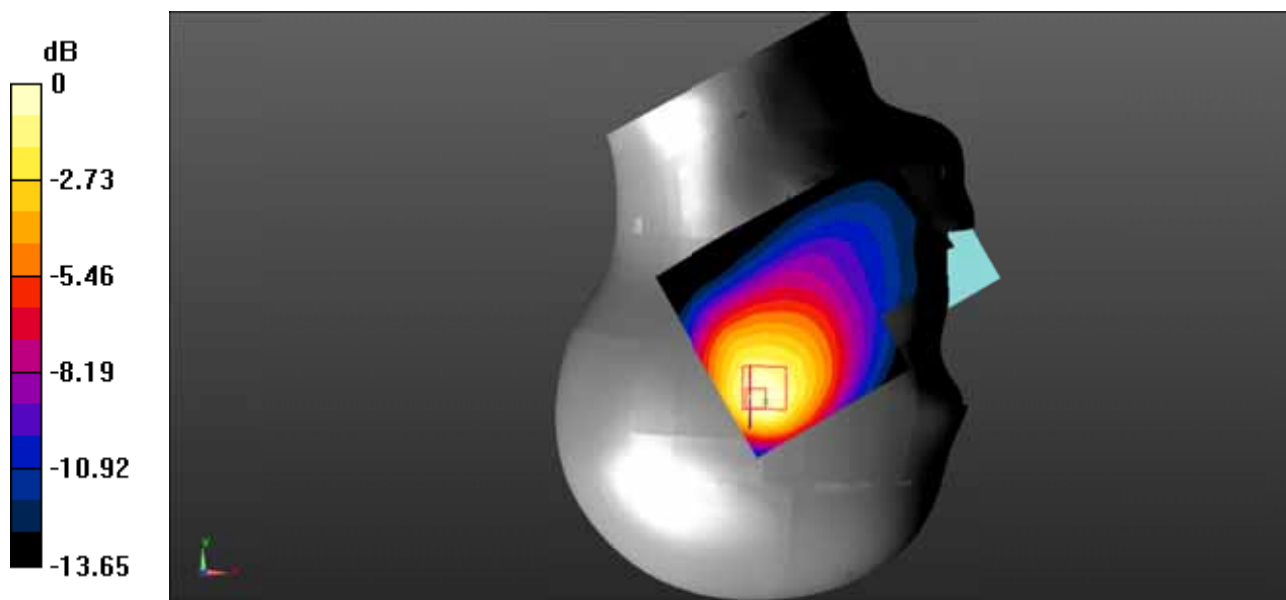

0 dB = $0.334 \text{ W/kg} = -4.76 \text{ dBW/kg}$

Test Plot 4#: GSM 850_Head Right Tilt_Middle

DUT: Mobile Phone; Type: X688C; Serial: RSZ201102004-SA-S1;

Communication System: Generic GSM; Frequency: 836.6 MHz; Duty Cycle: 1:8
 Medium parameters used: $f = 836.6 \text{ MHz}$; $\sigma = 0.924 \text{ S/m}$; $\epsilon_r = 42.026$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Right Section


DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.92, 9.92, 9.92)
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 3/3/2020
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x91x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.290 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 14.92 V/m ; Power Drift = -0.06 dB
 Peak SAR (extrapolated) = 0.536 W/kg

SAR(1 g) = 0.271 W/kg; SAR(10 g) = 0.160 W/kg
 Maximum value of SAR (measured) = 0.289 W/kg

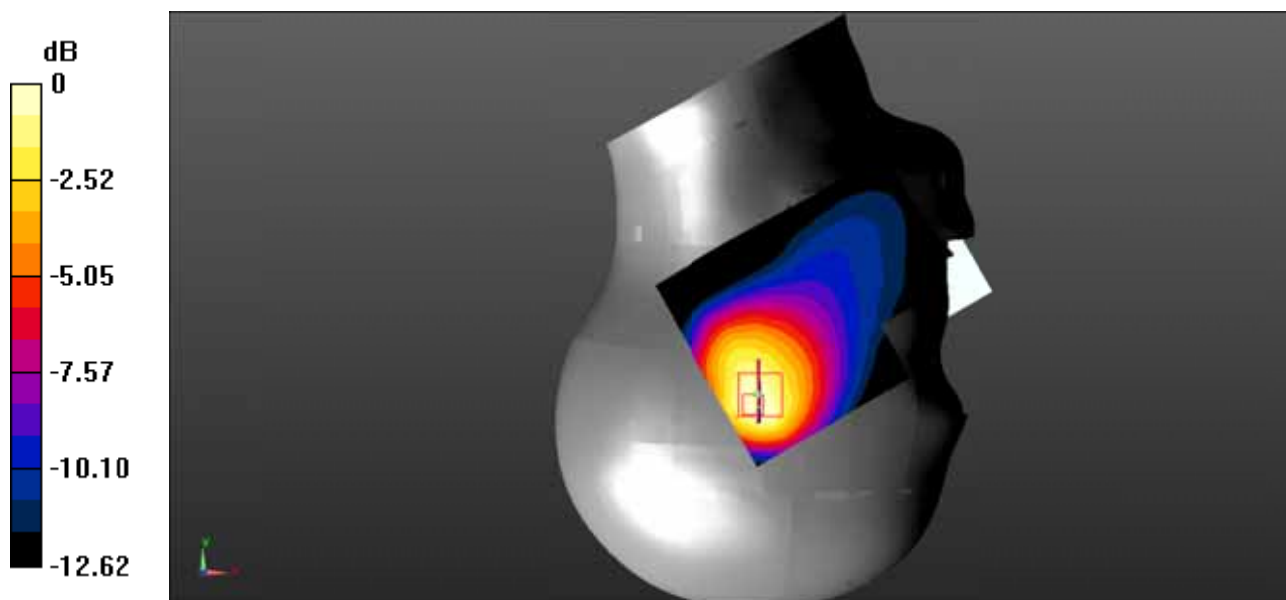

0 dB = $0.289 \text{ W/kg} = -5.39 \text{ dBW/kg}$

Test Plot 5#: GSM 850_Body Worn Back_Middle

DUT: Mobile Phone; Type: X688C; Serial: RSZ201102004-SA-S1;

Communication System: Generic GSM; Frequency: 836.6 MHz; Duty Cycle: 1:8
 Medium parameters used: $f = 836.6 \text{ MHz}$; $\sigma = 0.924 \text{ S/m}$; $\epsilon_r = 42.026$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Flat Section


DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.92, 9.92, 9.92)
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 3/3/2020
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x101x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.0892 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 7.803 V/m; Power Drift = 0.14 dB
 Peak SAR (extrapolated) = 0.118 W/kg

SAR(1 g) = 0.078 W/kg; SAR(10 g) = 0.052 W/kg
 Maximum value of SAR (measured) = 0.0809 W/kg

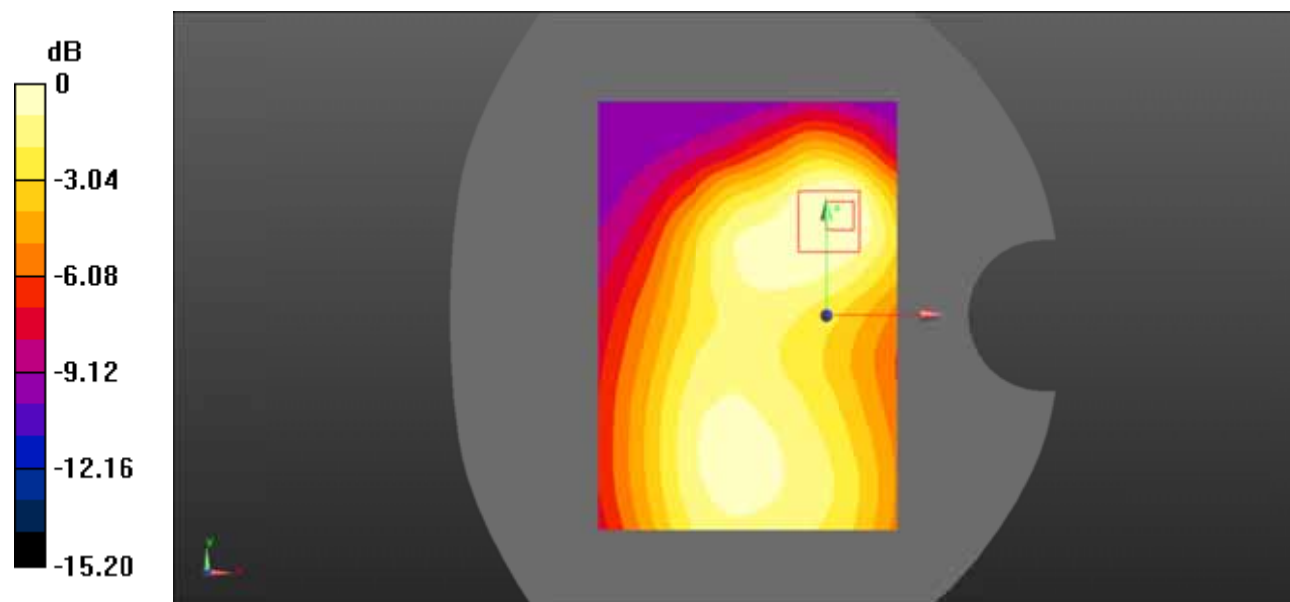

0 dB = 0.0809 W/kg = -10.92 dBW/kg

Test Plot 6#: GSM 850_Body Back_Middle

DUT: Mobile Phone; Type: X688C; Serial: RSZ201102004-SA-S1;

Communication System: Generic GPRS-2 slots; Frequency: 836.6 MHz; Duty Cycle: 1:4
 Medium parameters used: $f = 836.6 \text{ MHz}$; $\sigma = 0.924 \text{ S/m}$; $\epsilon_r = 42.026$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Flat Section


DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.92, 9.92, 9.92)
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 3/3/2020
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x101x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.109 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 8.613 V/m ; Power Drift = 0.12 dB
 Peak SAR (extrapolated) = 0.149 W/kg

SAR(1 g) = 0.096 W/kg; SAR(10 g) = 0.064 W/kg
 Maximum value of SAR (measured) = 0.101 W/kg

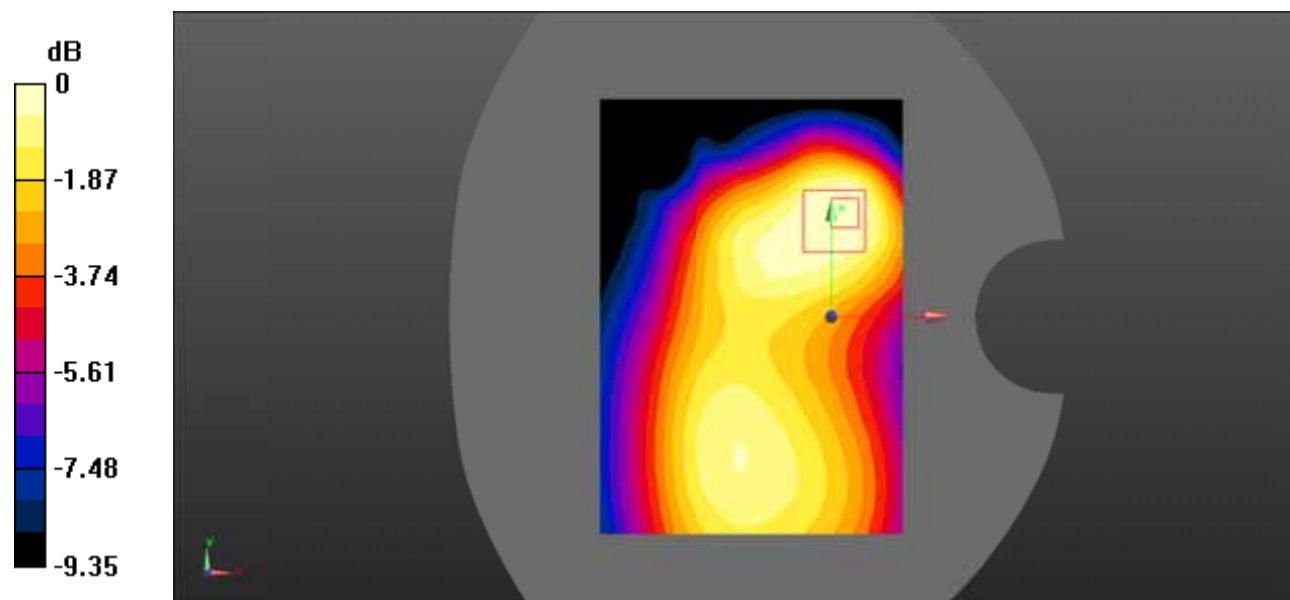

0 dB = $0.101 \text{ W/kg} = -9.96 \text{ dBW/kg}$

Test Plot 7#: GSM 850_Body Left_Middle

DUT: Mobile Phone; Type: X688C; Serial: RSZ201102004-SA-S1;

Communication System: Generic GPRS-2 slots; Frequency: 836.6 MHz; Duty Cycle: 1:4
 Medium parameters used: $f = 836.6 \text{ MHz}$; $\sigma = 0.924 \text{ S/m}$; $\epsilon_r = 42.026$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.92, 9.92, 9.92)
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 3/3/2020
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x101x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.0591 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 5.946 V/m ; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.0820 W/kg

SAR(1 g) = 0.056 W/kg ; SAR(10 g) = 0.041 W/kg

Maximum value of SAR (measured) = 0.0586 W/kg

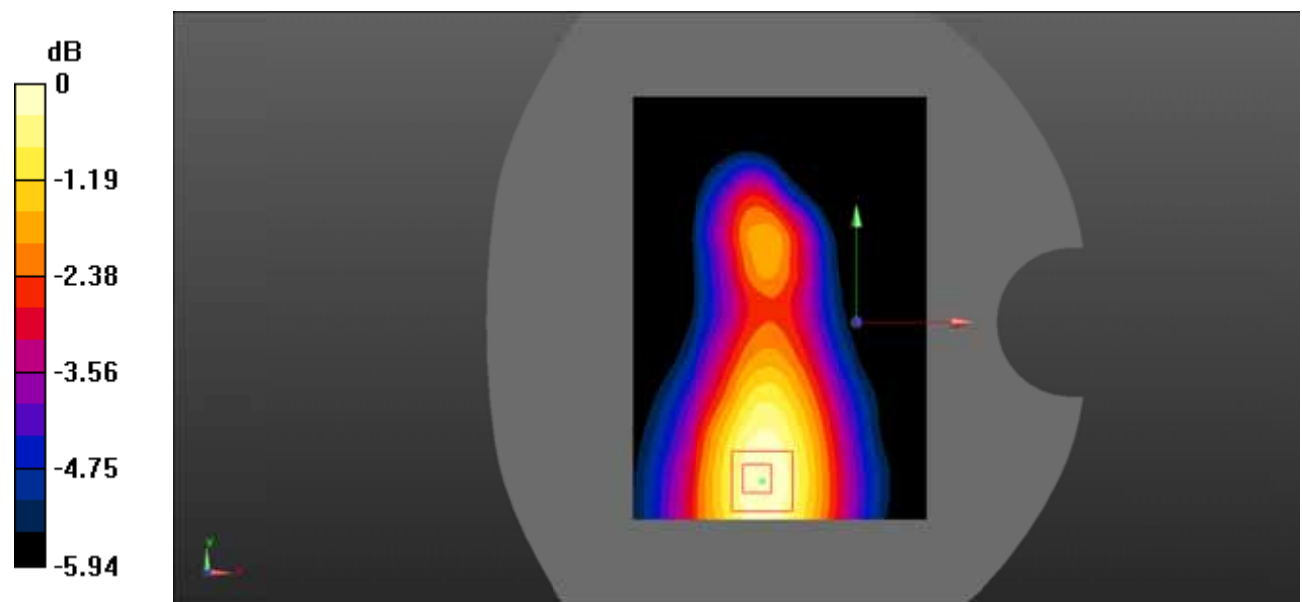

0 dB = $0.0586 \text{ W/kg} = -12.32 \text{ dBW/kg}$

Test Plot 8#: GSM 850_Body Top_Middle

DUT: Mobile Phone; Type: X688C; Serial: RSZ201102004-SA-S1;

Communication System: Generic GPRS-2 slots; Frequency: 836.6 MHz; Duty Cycle: 1:4
 Medium parameters used: $f = 836.6 \text{ MHz}$; $\sigma = 0.924 \text{ S/m}$; $\epsilon_r = 42.026$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Flat Section


DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.92, 9.92, 9.92)
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 3/3/2020
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x91x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.0881 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 8.623 V/m ; Power Drift = -0.09 dB
 Peak SAR (extrapolated) = 0.125 W/kg

SAR(1 g) = 0.082 W/kg; SAR(10 g) = 0.055 W/kg
 Maximum value of SAR (measured) = 0.0870 W/kg

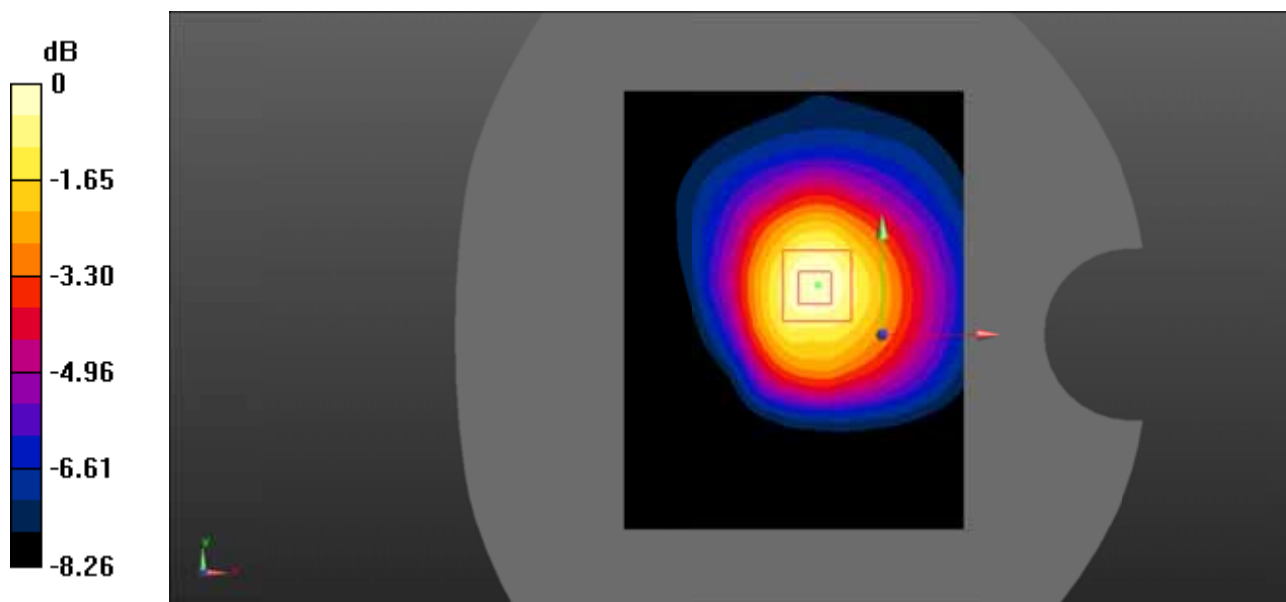

0 dB = $0.0870 \text{ W/kg} = -10.60 \text{ dBW/kg}$

Test Plot 9#: PCS 1900_Head Left Cheek_Middle

DUT: Mobile Phone; Type: X688C; Serial: RSZ201102004-SA-S1;

Communication System: Generic GSM; Frequency: 1880 MHz; Duty Cycle: 1:8
 Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.39 \text{ S/m}$; $\epsilon_r = 39.856$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Left Section


DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.95, 7.95, 7.95)
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 3/3/2020
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x91x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.214 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 11.82 V/m ; Power Drift = -0.04 dB
 Peak SAR (extrapolated) = 0.348 W/kg

SAR(1 g) = 0.197 W/kg; SAR(10 g) = 0.107 W/kg
 Maximum value of SAR (measured) = 0.223 W/kg

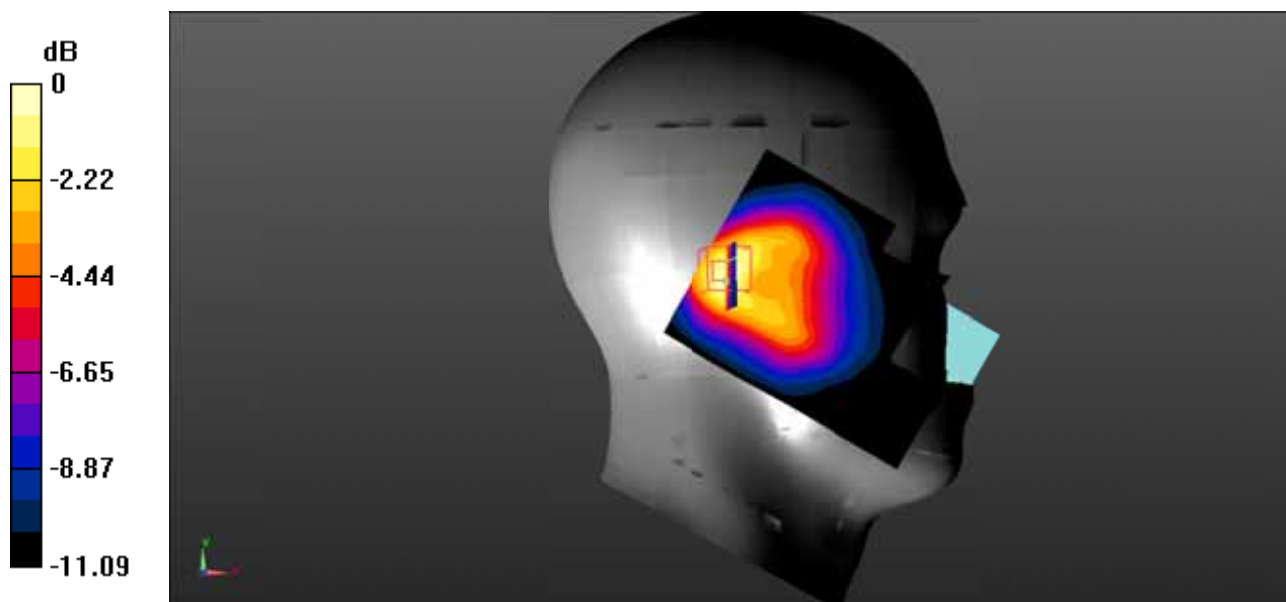

0 dB = $0.223 \text{ W/kg} = -6.52 \text{ dBW/kg}$

Test Plot 10#: PCS 1900_Head Left Tilt_Middle

DUT: Mobile Phone; Type: X688C; Serial: RSZ201102004-SA-S1;

Communication System: Generic GSM; Frequency: 1880 MHz; Duty Cycle: 1:8
 Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.39 \text{ S/m}$; $\epsilon_r = 39.856$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Left Section


DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.95, 7.95, 7.95)
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 3/3/2020
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x91x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.305 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 8.275 V/m ; Power Drift = -0.06 dB
 Peak SAR (extrapolated) = 0.515 W/kg

SAR(1 g) = 0.268 W/kg; SAR(10 g) = 0.141 W/kg
 Maximum value of SAR (measured) = 0.304 W/kg

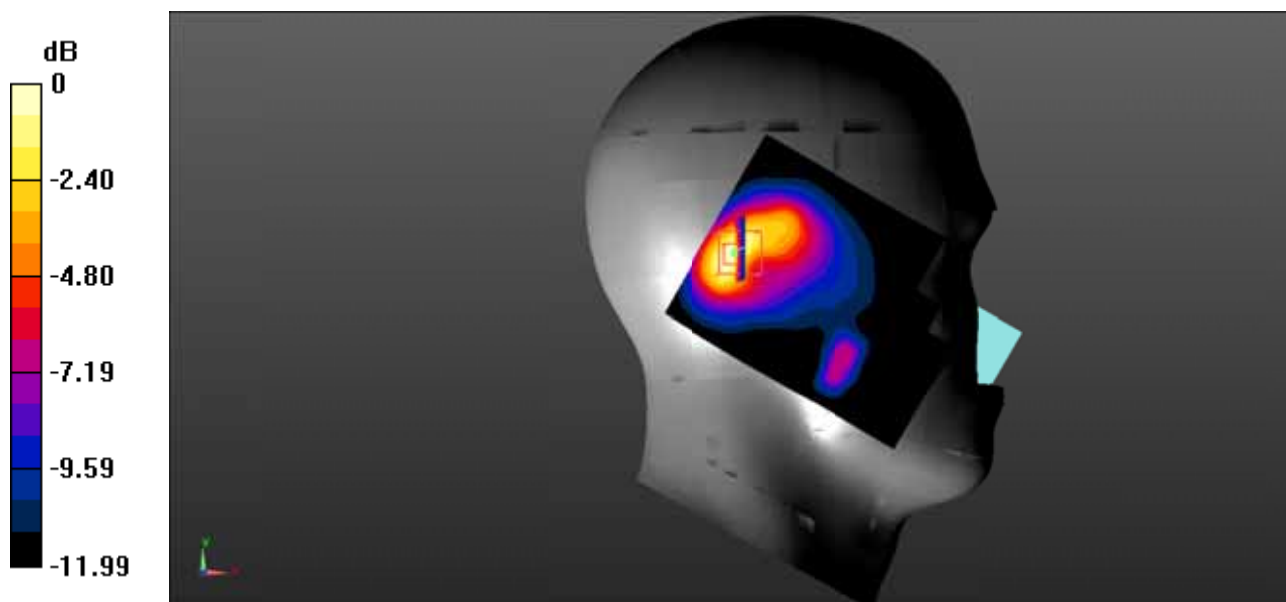

0 dB = $0.304 \text{ W/kg} = -5.17 \text{ dBW/kg}$

Test Plot 11#: PCS 1900_Head Right Cheek_Middle

DUT: Mobile Phone; Type: X688C; Serial: RSZ201102004-SA-S1;

Communication System: Generic GSM; Frequency: 1880 MHz; Duty Cycle: 1:8
 Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.39 \text{ S/m}$; $\epsilon_r = 39.856$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Right Section


DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.95, 7.95, 7.95)
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 3/3/2020
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x91x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.231 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 9.890 V/m ; Power Drift = 0.05 dB
 Peak SAR (extrapolated) = 0.488 W/kg

SAR(1 g) = 0.225 W/kg ; SAR(10 g) = 0.119 W/kg
 Maximum value of SAR (measured) = 0.278 W/kg

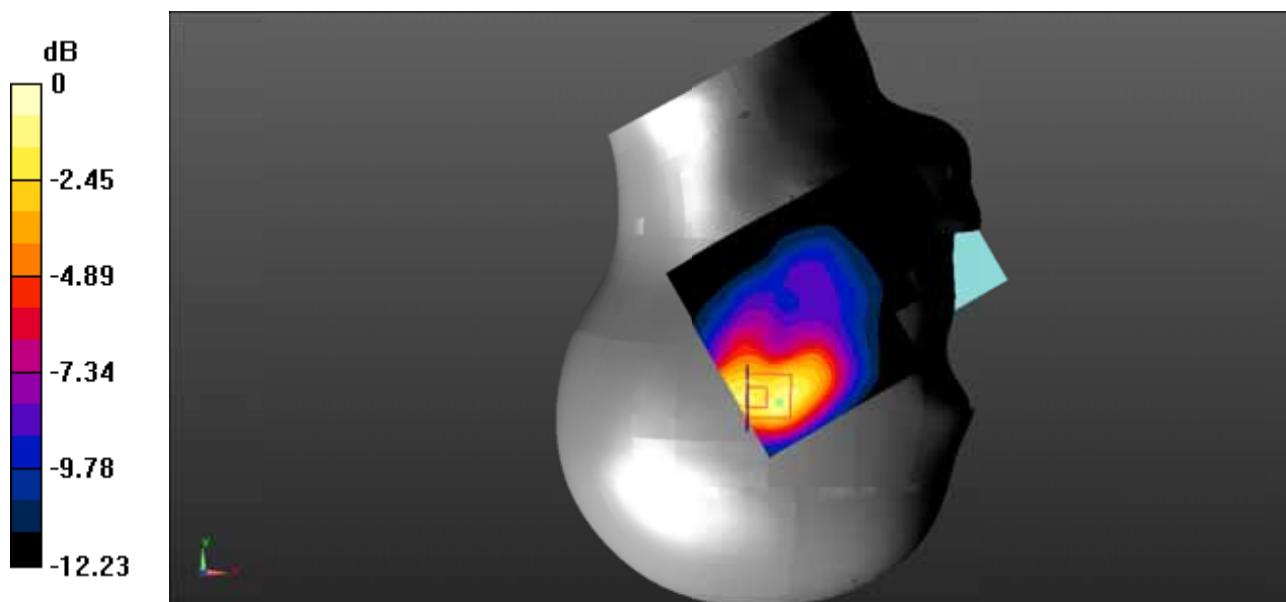

0 dB = $0.278 \text{ W/kg} = -5.56 \text{ dBW/kg}$

Test Plot 12#: PCS 1900_Head Right Tilt_Middle

DUT: Mobile Phone; Type: X688C; Serial: RSZ201102004-SA-S1;

Communication System: Generic GSM; Frequency: 1880 MHz; Duty Cycle: 1:8
 Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.39 \text{ S/m}$; $\epsilon_r = 39.856$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Right Section


DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.95, 7.95, 7.95)
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 3/3/2020
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x91x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.366 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 10.16 V/m ; Power Drift = -0.07 dB
 Peak SAR (extrapolated) = 0.647 W/kg

SAR(1 g) = 0.330 W/kg; SAR(10 g) = 0.157 W/kg
 Maximum value of SAR (measured) = 0.391 W/kg

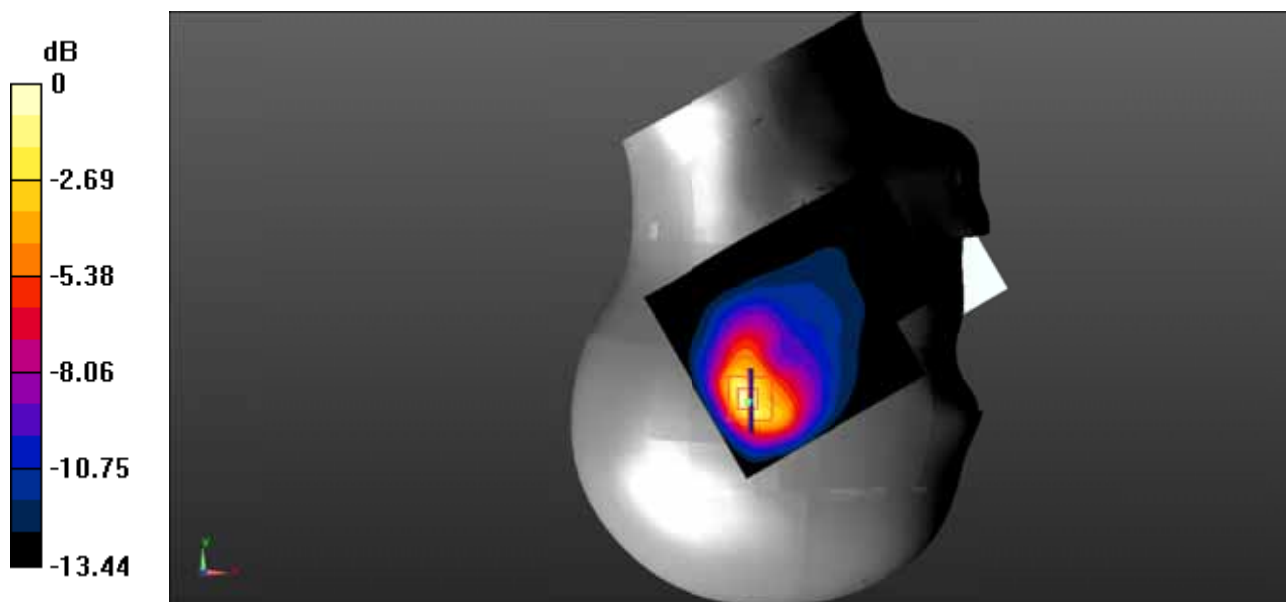

0 dB = $0.391 \text{ W/kg} = -4.08 \text{ dBW/kg}$

Test Plot 13#: PCS 1900_Body Worn Back_Middle

DUT: Mobile Phone; Type: X688C; Serial: RSZ201102004-SA-S1;

Communication System: Generic GSM; Frequency: 1880 MHz; Duty Cycle: 1:8
 Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.39 \text{ S/m}$; $\epsilon_r = 39.856$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Flat Section


DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.95, 7.95, 7.95)
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 3/3/2020
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x101x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.0755 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 4.525 V/m ; Power Drift = 0.16 dB
 Peak SAR (extrapolated) = 0.123 W/kg

SAR(1 g) = 0.072 W/kg; SAR(10 g) = 0.043 W/kg
 Maximum value of SAR (measured) = 0.0750 W/kg

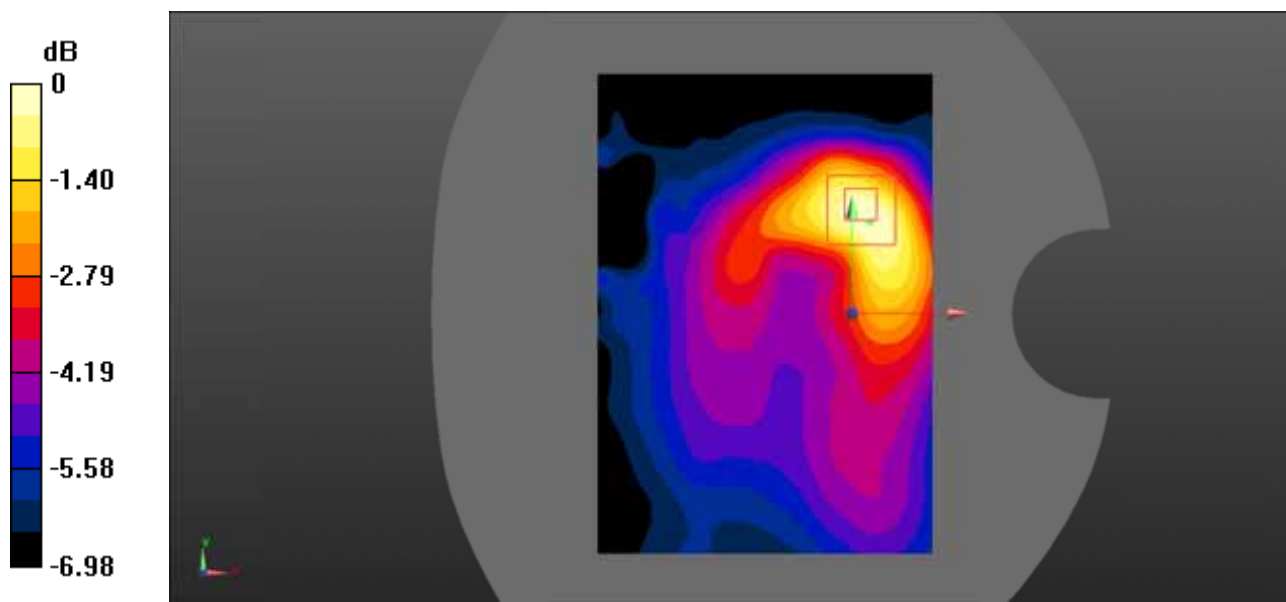

0 dB = $0.0750 \text{ W/kg} = -11.25 \text{ dBW/kg}$

Test Plot 14#: PCS 1900_Body Back_Middle

DUT: Mobile Phone; Type: X688C; Serial: RSZ201102004-SA-S1;

Communication System: Generic GPRS-2 slots; Frequency: 1880 MHz; Duty Cycle: 1:4
 Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.39 \text{ S/m}$; $\epsilon_r = 39.856$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Flat Section


DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.95, 7.95, 7.95)
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 3/3/2020
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x91x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.0521 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 3.165 V/m ; Power Drift = 0.09 dB
 Peak SAR (extrapolated) = 0.0490 W/kg

SAR(1 g) = 0.016 W/kg; SAR(10 g) = 0.012 W/kg
 Maximum value of SAR (measured) = 0.0160 W/kg

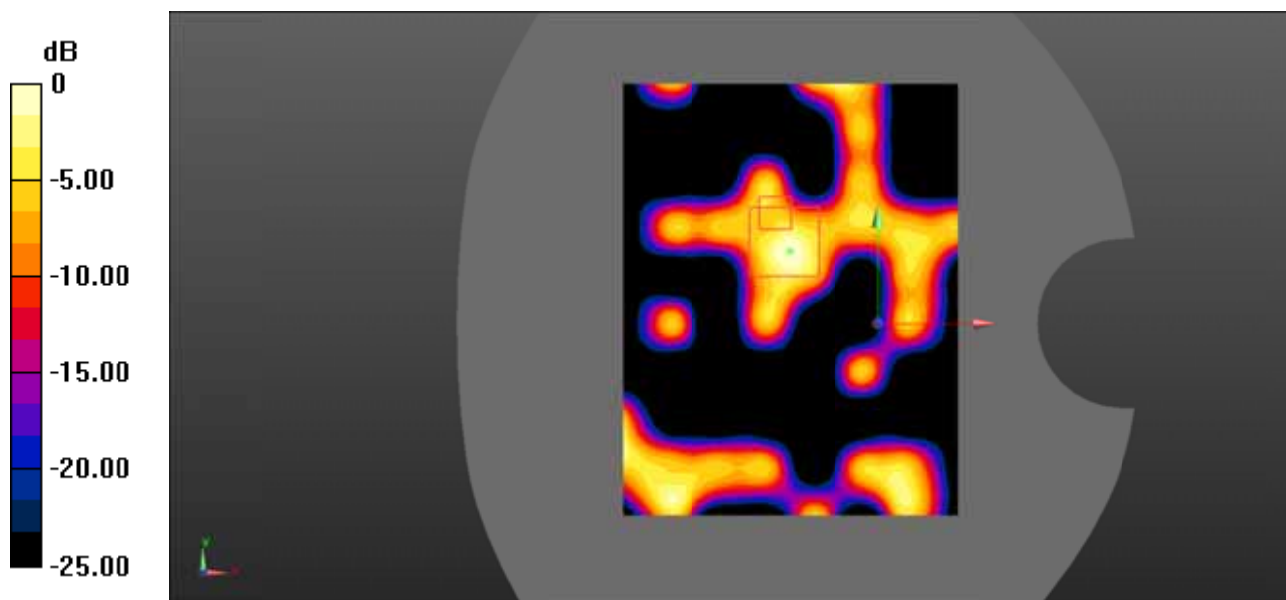

0 dB = $0.0160 \text{ W/kg} = -17.96 \text{ dBW/kg}$

Test Plot 15#: PCS 1900_Body Left_Middle

DUT: Mobile Phone; Type: X688C; Serial: RSZ201102004-SA-S1;

Communication System: Generic GPRS-2 slots; Frequency: 1880 MHz;Duty Cycle: 1:4
 Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.39 \text{ S/m}$; $\epsilon_r = 39.856$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.95, 7.95, 7.95)
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562;Calibrated: 3/3/2020
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;


Area Scan (71x111x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.0403 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 5.163 V/m ; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.0520 W/kg

SAR(1 g) = 0.039 W/kg ; SAR(10 g) = 0.030 W/kg

Maximum value of SAR (measured) = 0.0407 W/kg

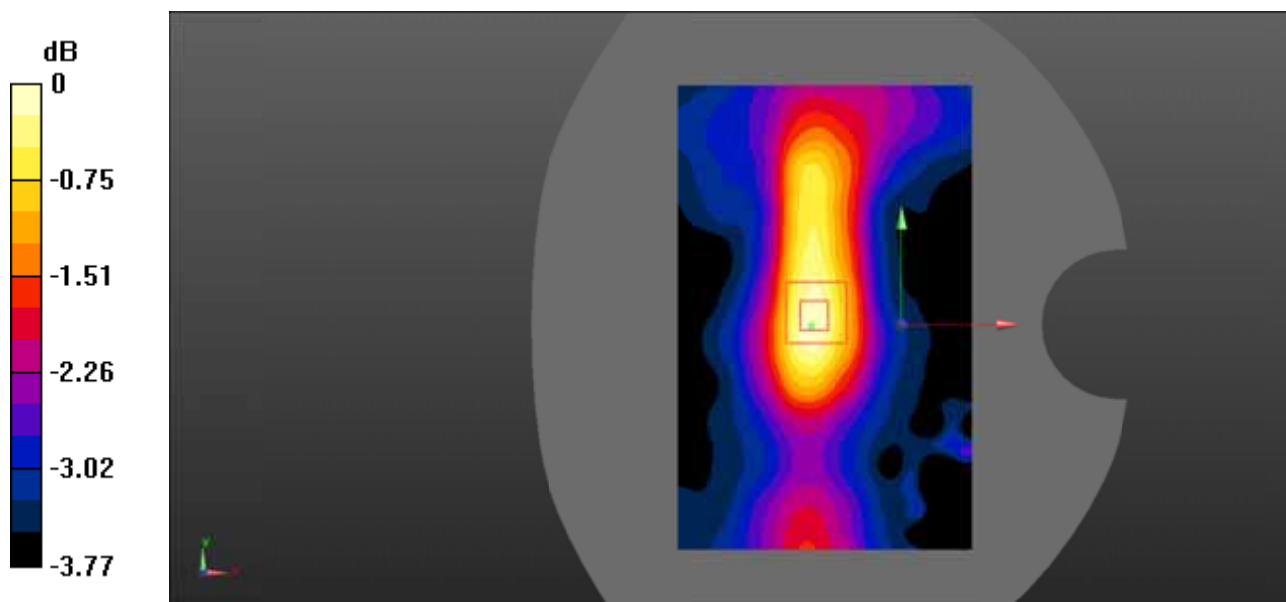

0 dB = 0.0407 W/kg = -13.90 dBW/kg

Test Plot 16#: PCS 1900_Body Top_Middle

DUT: Mobile Phone; Type: X688C; Serial: RSZ201102004-SA-S1;

Communication System: Generic GPRS-2 slots; Frequency: 1880 MHz; Duty Cycle: 1:4
 Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.39 \text{ S/m}$; $\epsilon_r = 39.856$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Flat Section


DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.95, 7.95, 7.95)
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 3/3/2020
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x91x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.103 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 8.769 V/m ; Power Drift = -0.07 dB
 Peak SAR (extrapolated) = 0.153 W/kg

SAR(1 g) = 0.094 W/kg; SAR(10 g) = 0.056 W/kg
 Maximum value of SAR (measured) = 0.107 W/kg

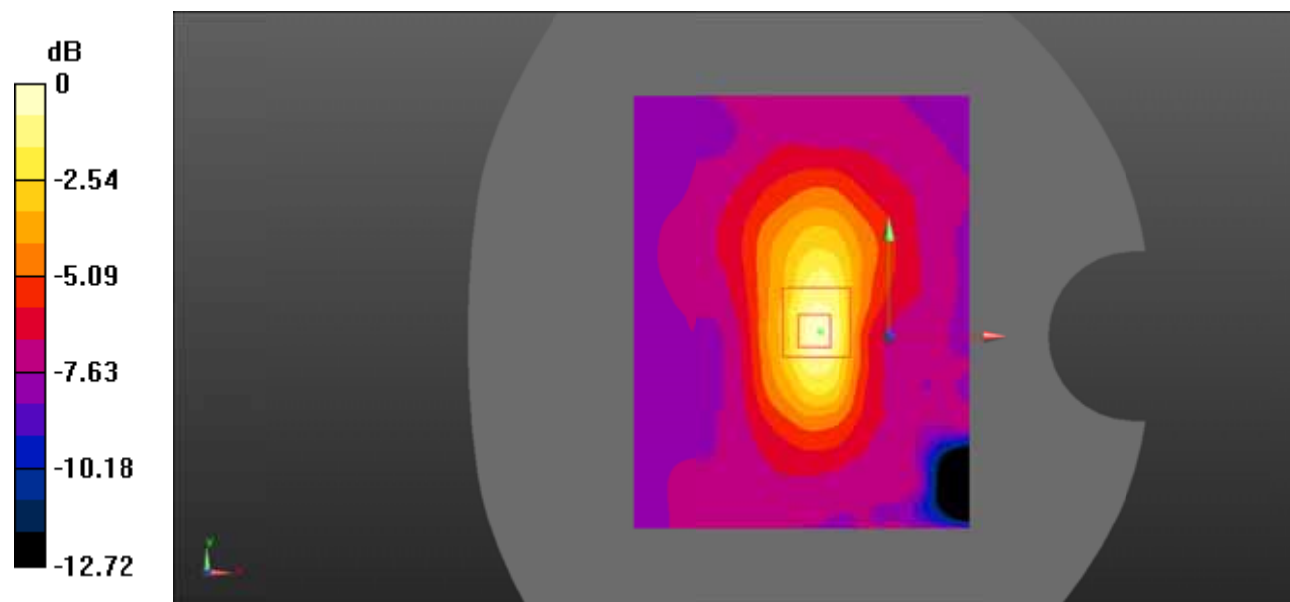

0 dB = $0.107 \text{ W/kg} = -9.71 \text{ dBW/kg}$

Test Plot 17#: WCDMA Band 2_Head Left Cheek_Middle**DUT: Mobile Phone; Type: X688C; Serial: RSZ201102004-SA-S1;**

Communication System: Communication System: UID 0, WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.39$ S/m; $\epsilon_r = 39.856$; $\rho = 1000$ kg/m³;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.95, 7.95, 7.95)
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 3/3/2020
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.459 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.33 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.751 W/kg

SAR(1 g) = 0.427 W/kg; SAR(10 g) = 0.228 W/kg

Maximum value of SAR (measured) = 0.468 W/kg

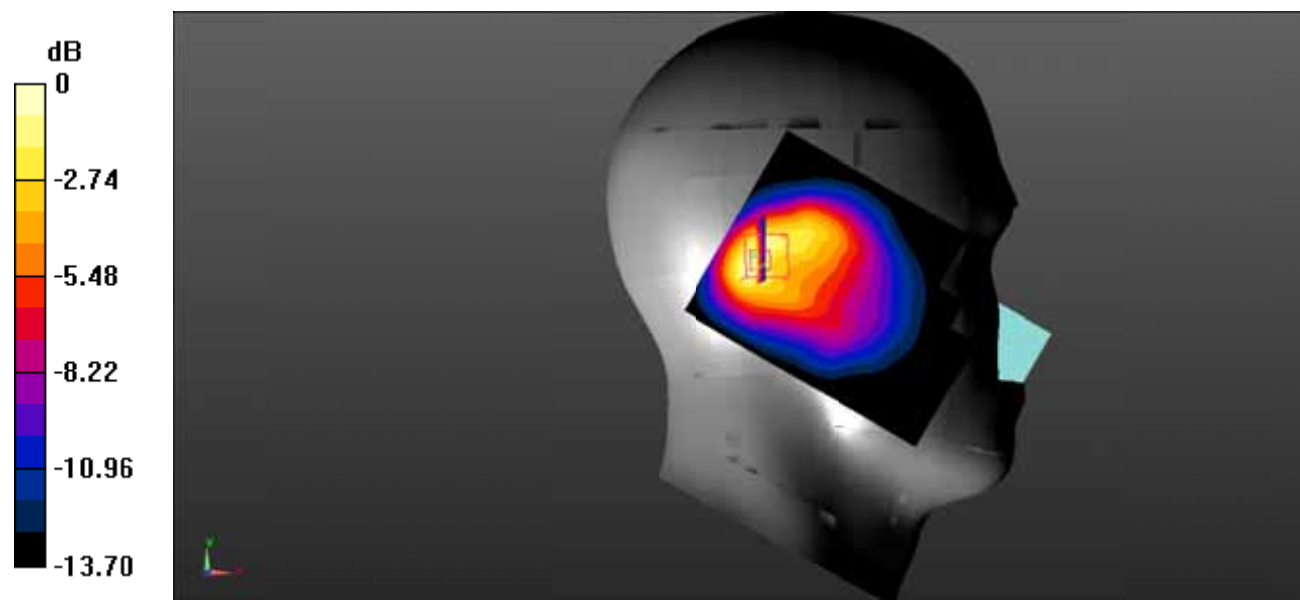

0 dB = 0.468 W/kg = -3.30 dBW/kg

Test Plot 18#: WCDMA Band 2_Head Left Tilt_Middle**DUT: Mobile Phone; Type: X688C; Serial: RSZ201102004-SA-S1;**

Communication System: Communication System: UID 0, WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.39$ S/m; $\epsilon_r = 39.856$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.95, 7.95, 7.95)
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 3/3/2020
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.546 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.05 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.839 W/kg

SAR(1 g) = 0.501 W/kg; SAR(10 g) = 0.260 W/kg

Maximum value of SAR (measured) = 0.548 W/kg

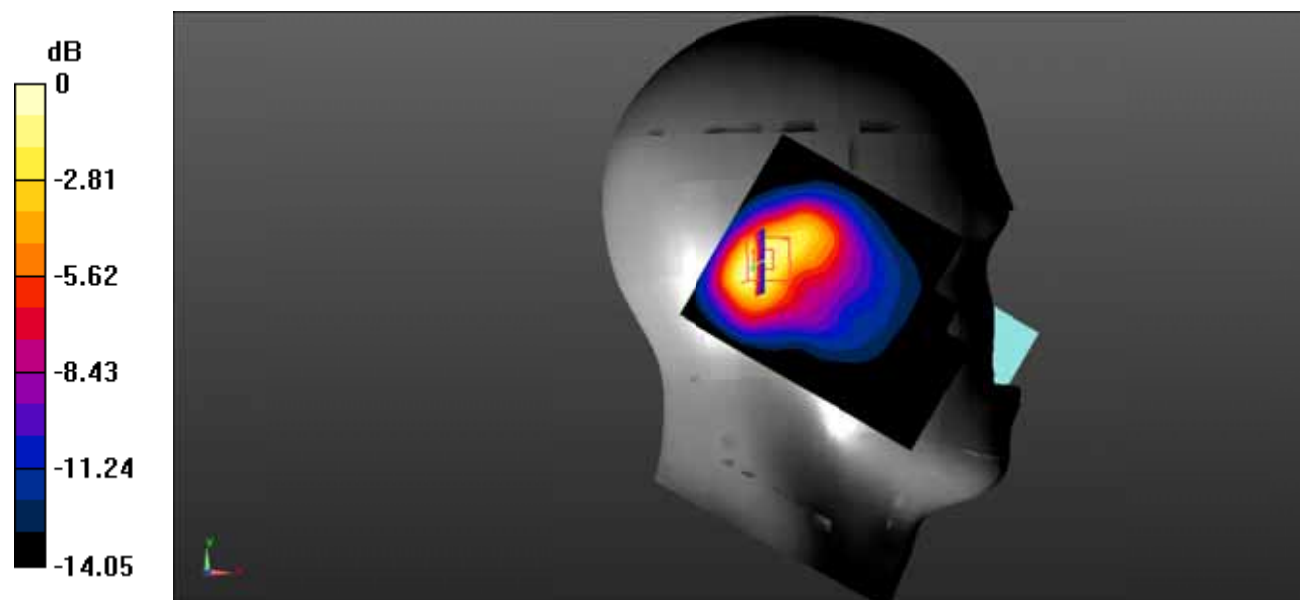

0 dB = 0.548 W/kg = -2.61 dBW/kg

Test Plot 19#: WCDMA Band 2_Head Right Cheek_Middle

DUT: Mobile Phone; Type: X688C; Serial: RSZ201102004-SA-S1;

Communication System: Communication System: UID 0, WCDMA; Frequency: 1880 MHz;Duty Cycle: 1:1
 Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.39 \text{ S/m}$; $\epsilon_r = 39.856$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Right Section


DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.95, 7.95, 7.95)
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562;Calibrated: 3/3/2020
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x91x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.631 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 9.804 V/m ; Power Drift = -0.16 dB
 Peak SAR (extrapolated) = 1.06 W/kg

SAR(1 g) = 0.539 W/kg; SAR(10 g) = 0.262 W/kg
 Maximum value of SAR (measured) = 0.633 W/kg

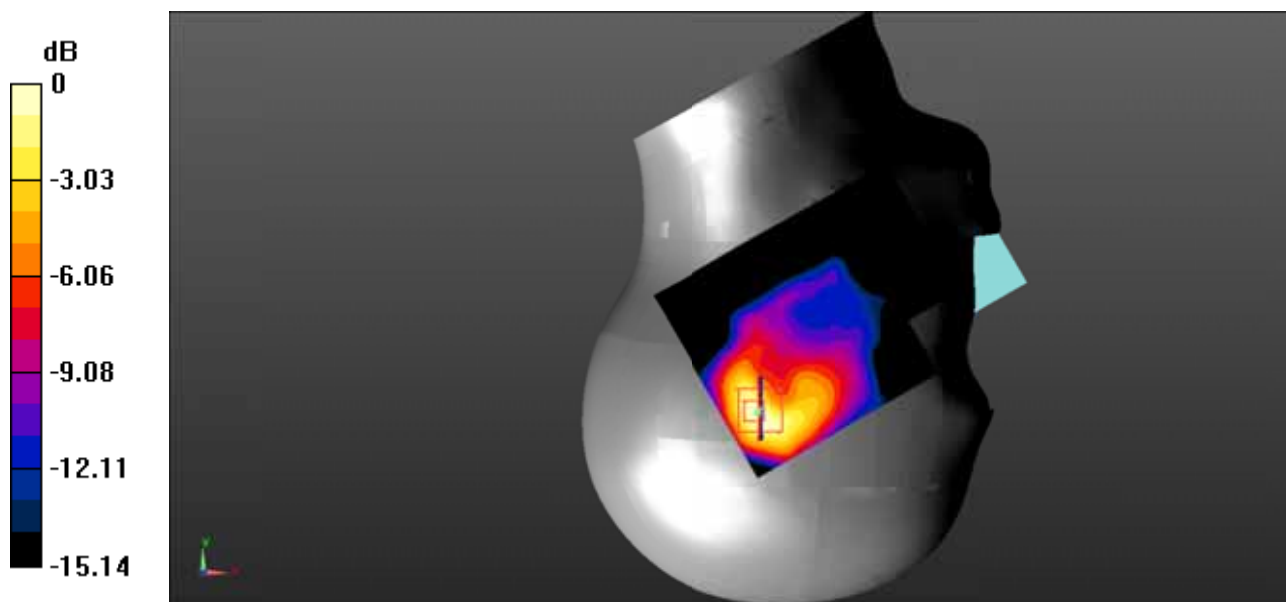

0 dB = $0.633 \text{ W/kg} = -1.99 \text{ dBW/kg}$

Test Plot 20#: WCDMA Band 2_Head Right Tilt_Middle

DUT: Mobile Phone; Type: X688C; Serial: RSZ201102004-SA-S1;

Communication System: Communication System: UID 0, WCDMA; Frequency: 1880 MHz;Duty Cycle: 1:1
 Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.39 \text{ S/m}$; $\epsilon_r = 39.856$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Right Section


DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.95, 7.95, 7.95)
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562;Calibrated: 3/3/2020
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x91x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.738 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 12.30 V/m ; Power Drift = 0.05 dB
 Peak SAR (extrapolated) = 1.27 W/kg

SAR(1 g) = 0.648 W/kg ; SAR(10 g) = 0.306 W/kg
 Maximum value of SAR (measured) = 0.784 W/kg

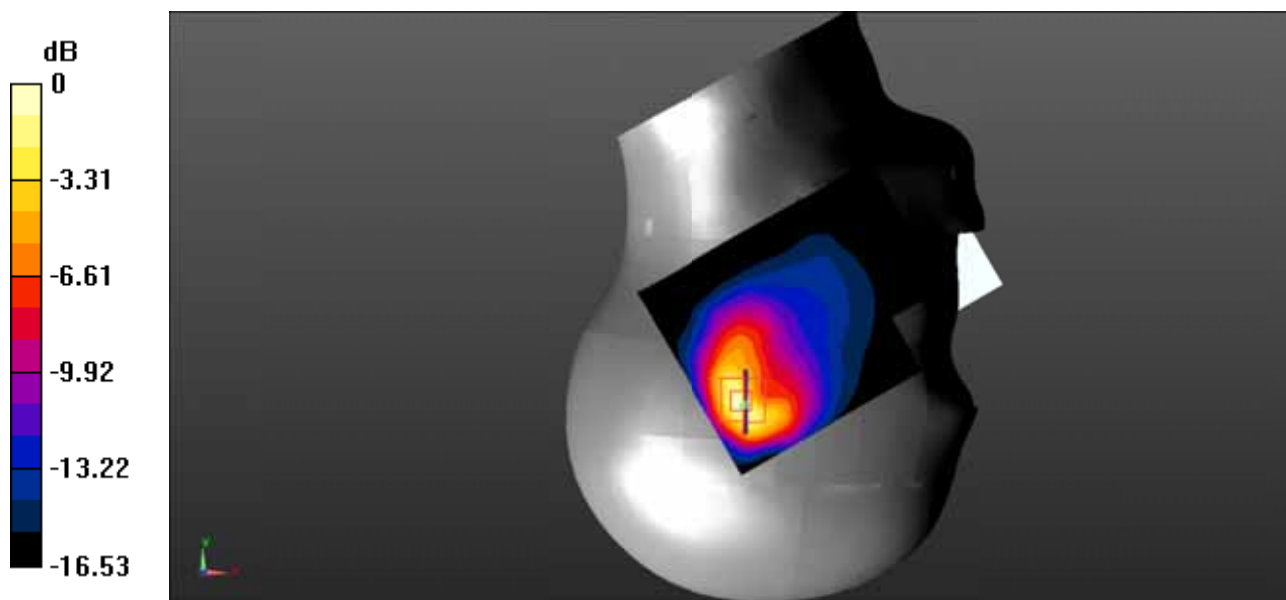

0 dB = $0.784 \text{ W/kg} = -1.06 \text{ dBW/kg}$

Test Plot 21#: WCDMA Band 2_Body Back_Middle

DUT: Mobile Phone; Type: X688C; Serial: RSZ201102004-SA-S1;

Communication System: Communication System: UID 0, WCDMA; Frequency: 1880 MHz;Duty Cycle: 1:1
 Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.39 \text{ S/m}$; $\epsilon_r = 39.856$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Flat Section


DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.95, 7.95, 7.95)
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562;Calibrated: 3/3/2020
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x91x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.112 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 5.865 V/m ; Power Drift = 0.11 dB
 Peak SAR (extrapolated) = 0.169 W/kg

SAR(1 g) = 0.103 W/kg; SAR(10 g) = 0.061 W/kg
 Maximum value of SAR (measured) = 0.112 W/kg

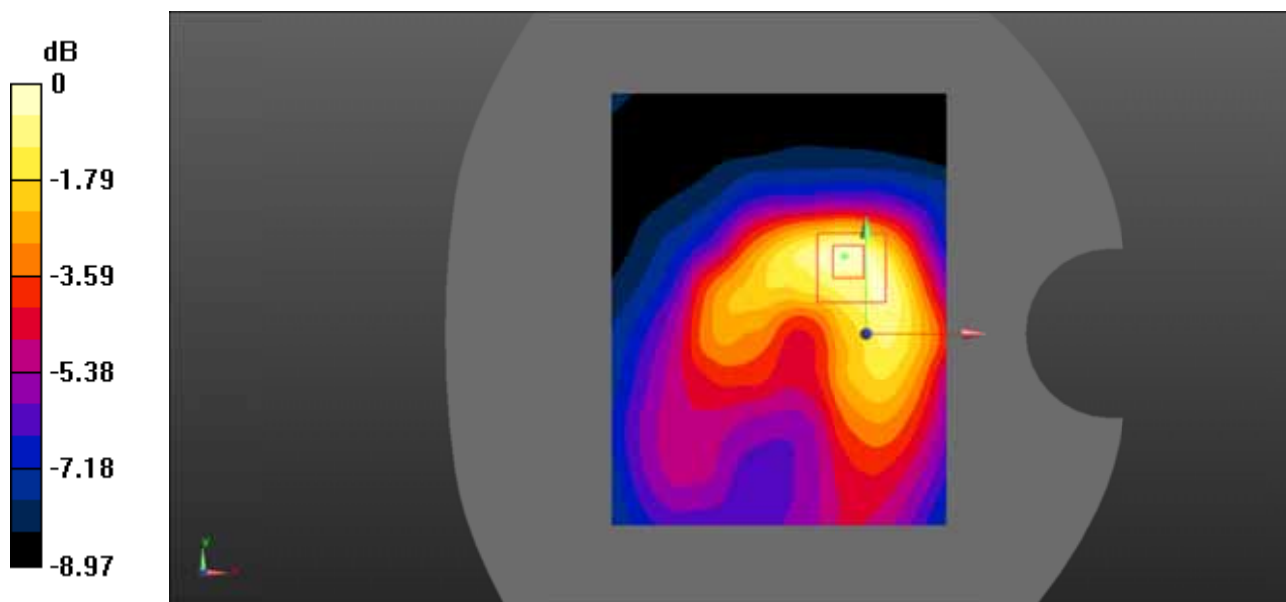

0 dB = $0.112 \text{ W/kg} = -9.51 \text{ dBW/kg}$

Test Plot 22#: WCDMA Band 2_Body Left_Middle

DUT: Mobile Phone; Type: X688C; Serial: RSZ201102004-SA-S1;

Communication System: Communication System: UID 0, WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.39 \text{ S/m}$; $\epsilon_r = 39.856$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Flat Section


DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.95, 7.95, 7.95)
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 3/3/2020
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x91x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.0820 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 6.365 V/m; Power Drift = 0.09 dB
 Peak SAR (extrapolated) = 0.0870 W/kg

SAR(1 g) = 0.061 W/kg; SAR(10 g) = 0.040 W/kg
 Maximum value of SAR (measured) = 0.0660 W/kg

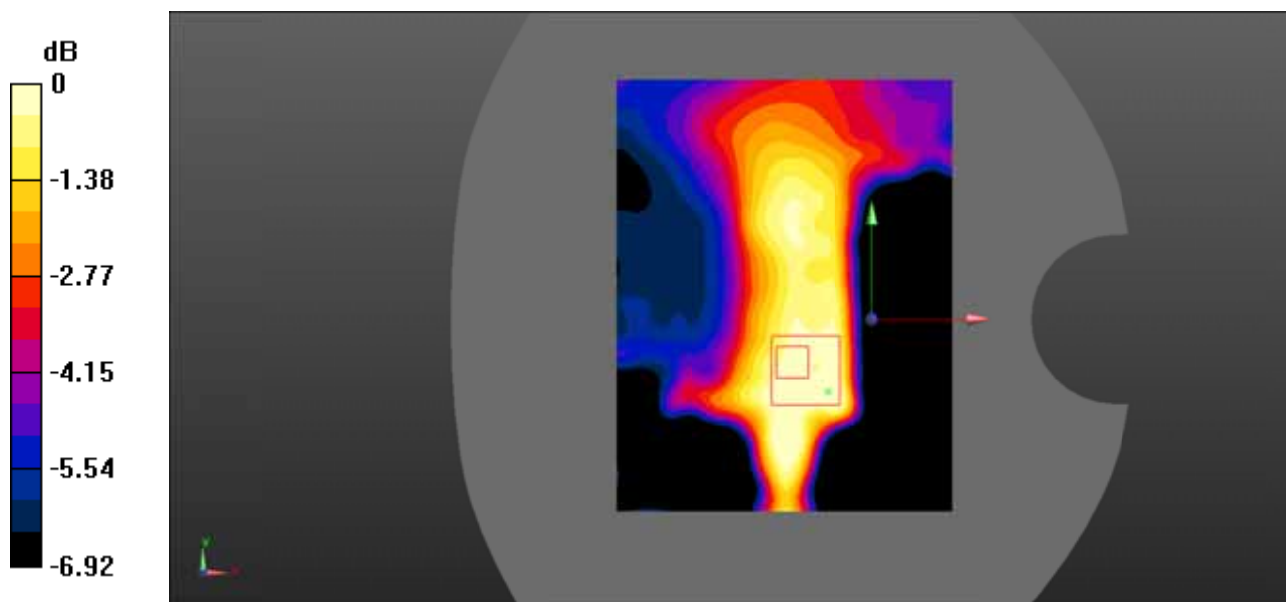

0 dB = 0.0660 W/kg = -11.80 dBW/kg

Test Plot 23#: WCDMA Band 2_Body Top_Middle

DUT: Mobile Phone; Type: X688C; Serial: RSZ201102004-SA-S1;

Communication System: Communication System: UID 0, WCDMA; Frequency: 1880 MHz;Duty Cycle: 1:1
 Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.39 \text{ S/m}$; $\epsilon_r = 39.856$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Flat Section


DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.95, 7.95, 7.95)
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562;Calibrated: 3/3/2020
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x91x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.204 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 10.60 V/m ; Power Drift = -0.02 dB
 Peak SAR (extrapolated) = 0.361 W/kg

SAR(1 g) = 0.199 W/kg; SAR(10 g) = 0.106 W/kg
 Maximum value of SAR (measured) = 0.224 W/kg

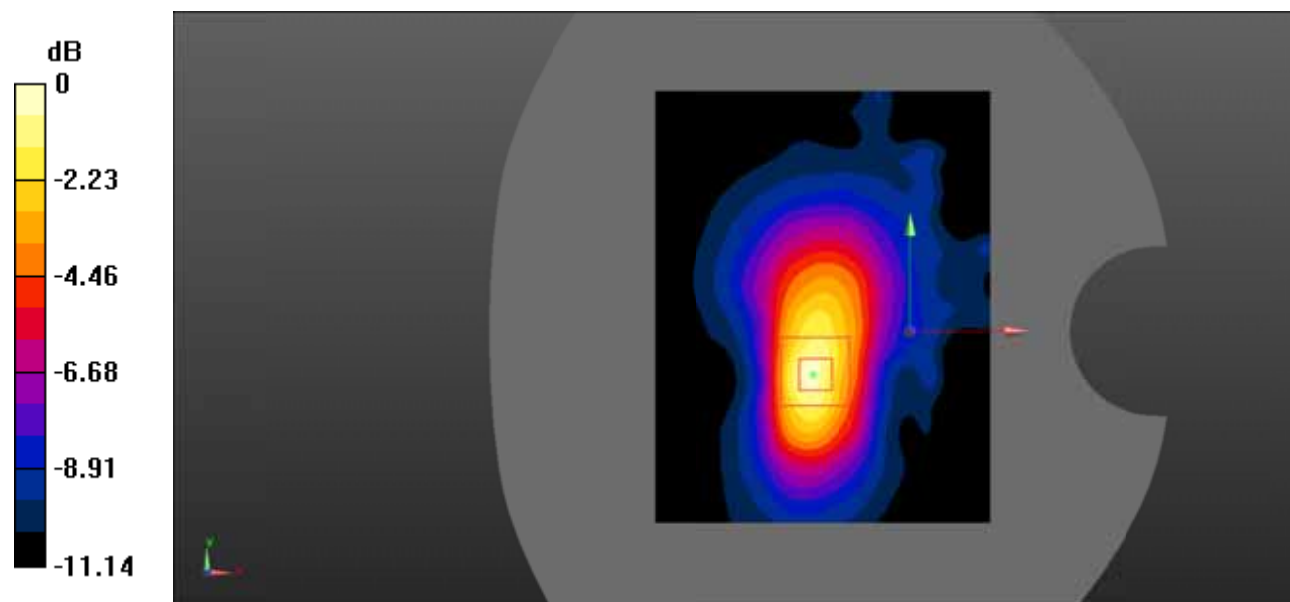

0 dB = $0.224 \text{ W/kg} = -6.50 \text{ dBW/kg}$

Test Plot 24#: WCDMA Band 4_Head Left Cheek_Middle

DUT: Mobile Phone; Type: X688C; Serial: RSZ201102004-SA-S1;

Communication System: Communication System: UID 0, WCDMA; Frequency: 1732.6 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1732.6 \text{ MHz}$; $\sigma = 1.377 \text{ S/m}$; $\epsilon_r = 40.548$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Left Section

DASY5 Configuration:


- Probe: EX3DV4 - SN7522; ConvF(8.21, 8.21, 8.21)
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 3/3/2020
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x91x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.668 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 17.38 V/m ; Power Drift = 0.12 dB
 Peak SAR (extrapolated) = 1.10 W/kg

SAR(1 g) = 0.650 W/kg; SAR(10 g) = 0.357 W/kg

Maximum value of SAR (measured) = 0.711 W/kg

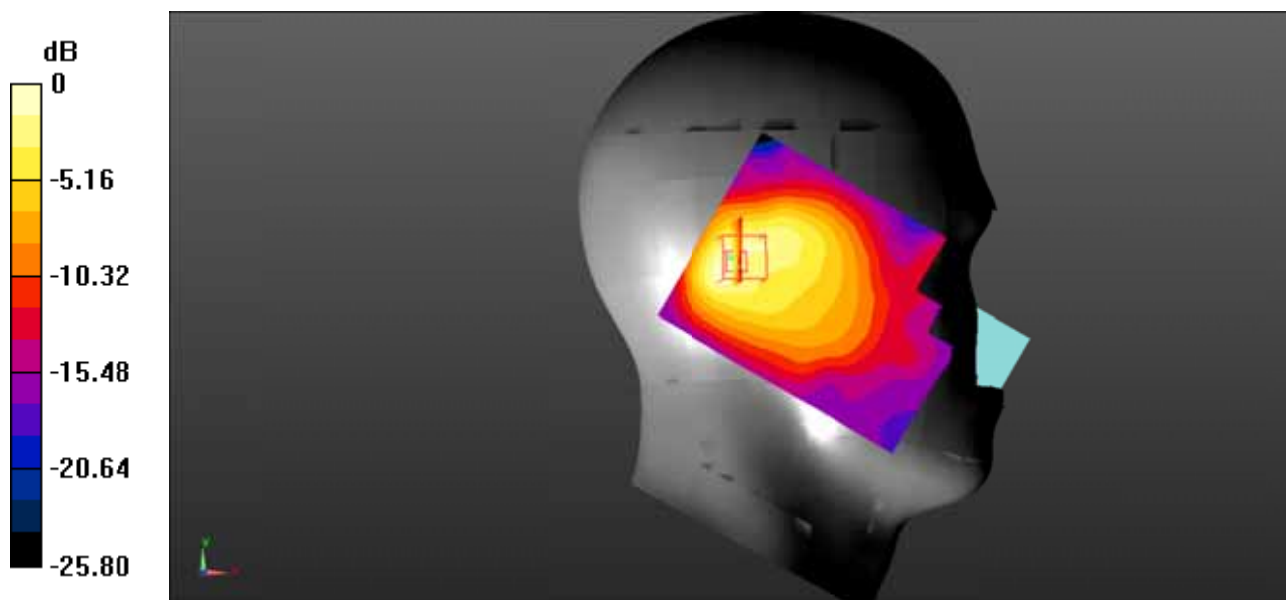

0 dB = $0.711 \text{ W/kg} = -1.48 \text{ dBW/kg}$

Test Plot 25#: WCDMA Band 4_Head Left Tilt_Low

DUT: Mobile Phone; Type: X688C; Serial: RSZ201102004-SA-S1;

Communication System: Communication System: UID 0, WCDMA; Frequency: 1712.4 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1712.4 \text{ MHz}$; $\sigma = 1.337 \text{ S/m}$; $\epsilon_r = 41.015$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Left Section


DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(8.21, 8.21, 8.21)
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 3/3/2020
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x91x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.863 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 23.39 V/m ; Power Drift = -0.06 dB
 Peak SAR (extrapolated) = 1.52 W/kg

SAR(1 g) = 0.905 W/kg; SAR(10 g) = 0.480 W/kg
 Maximum value of SAR (measured) = 0.942 W/kg

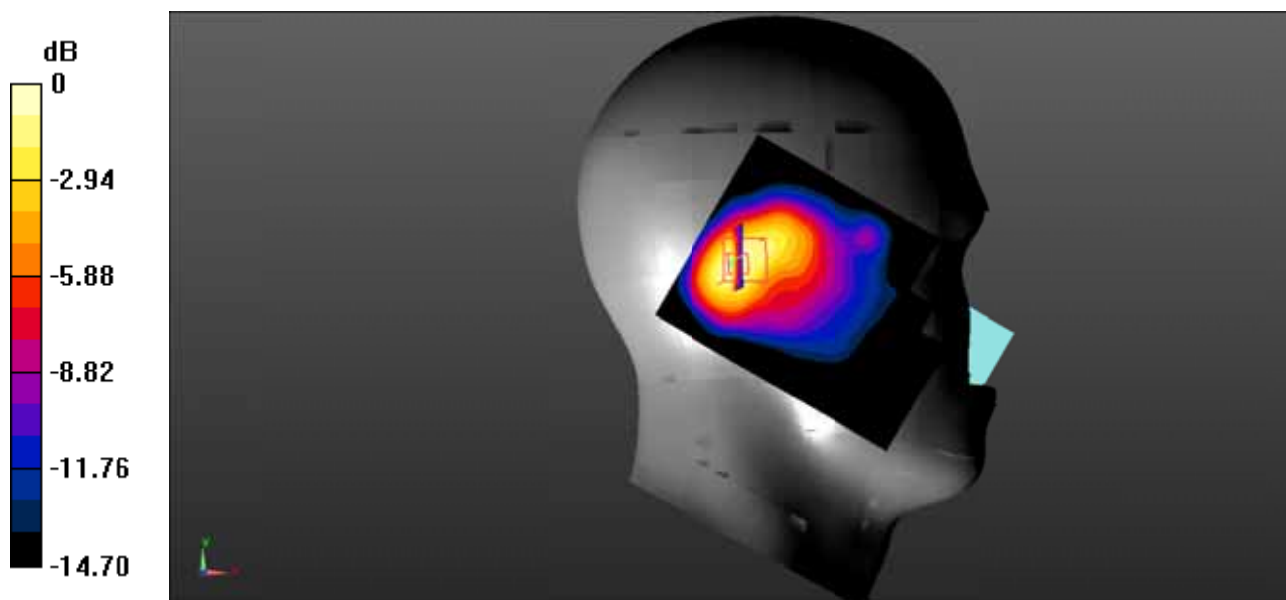

0 dB = $0.942 \text{ W/kg} = -0.26 \text{ dBW/kg}$

Test Plot 26#: WCDMA Band 4_Head Left Tilt_Middle

DUT: Mobile Phone; Type: X688C; Serial: RSZ201102004-SA-S1;

Communication System: Communication System: UID 0, WCDMA; Frequency: 1732.6 MHz;Duty Cycle: 1:1
 Medium parameters used: $f = 1732.6 \text{ MHz}$; $\sigma = 1.377 \text{ S/m}$; $\epsilon_r = 40.548$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Left Section


DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(8.21, 8.21, 8.21)
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562;Calibrated: 3/3/2020
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x91x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
 Maximum value of SAR (interpolated) = 1.06 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 22.92 V/m; Power Drift = -0.07 dB
 Peak SAR (extrapolated) = 1.45 W/kg

SAR(1 g) = 0.860 W/kg; SAR(10 g) = 0.455 W/kg
 Maximum value of SAR (measured) = 0.938 W/kg

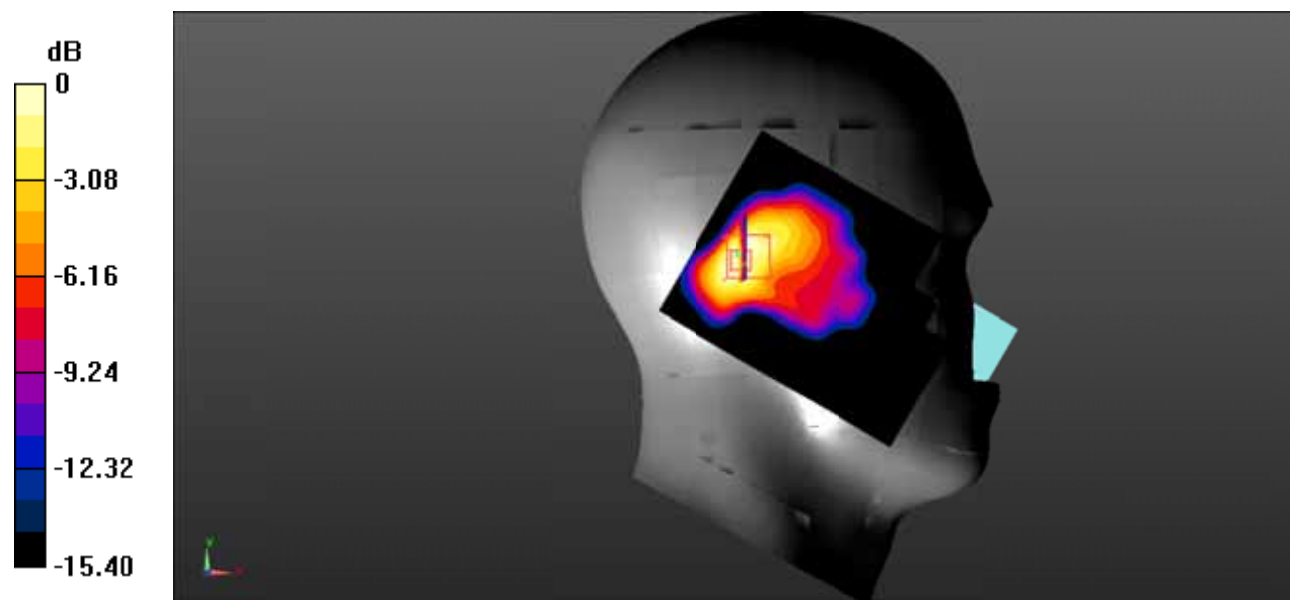

0 dB = 0.938 W/kg = -0.28 dBW/kg

Test Plot 27#: WCDMA Band 4_Head Left Tilt_High

DUT: Mobile Phone; Type: X688C; Serial: RSZ201102004-SA-S1;

Communication System: Communication System: UID 0, WCDMA; Frequency: 1752.6 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1752.6 \text{ MHz}$; $\sigma = 1.399 \text{ S/m}$; $\epsilon_r = 41.466$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Left Section


DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(8.21, 8.21, 8.21)
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 3/3/2020
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x91x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.808 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 21.69 V/m ; Power Drift = 0.03 dB
 Peak SAR (extrapolated) = 1.41 W/kg

SAR(1 g) = 0.827 W/kg ; SAR(10 g) = 0.436 W/kg
 Maximum value of SAR (measured) = 0.916 W/kg

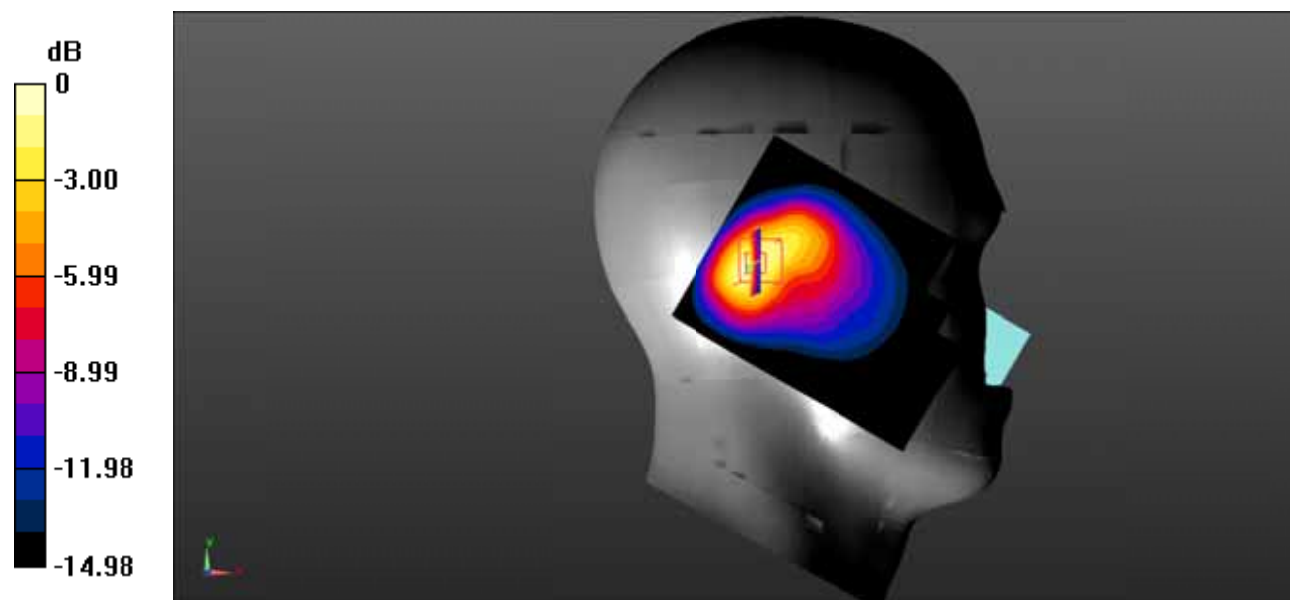

0 dB = $0.916 \text{ W/kg} = -0.38 \text{ dBW/kg}$

Test Plot 28#: WCDMA Band 4_Head Right Cheek_Low

DUT: Mobile Phone; Type: X688C; Serial: RSZ201102004-SA-S1;

Communication System: Communication System: UID 0, WCDMA; Frequency: 1712.4 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1712.4 \text{ MHz}$; $\sigma = 1.337 \text{ S/m}$; $\epsilon_r = 41.015$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Right Section

DASY5 Configuration:


- Probe: EX3DV4 - SN7522; ConvF(8.21, 8.21, 8.21)
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 3/3/2020
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x91x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
 Maximum value of SAR (interpolated) = 1.05 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 13.41 V/m; Power Drift = 0.06 dB
 Peak SAR (extrapolated) = 1.59 W/kg

SAR(1 g) = 0.866 W/kg; SAR(10 g) = 0.428 W/kg

Maximum value of SAR (measured) = 1.02 W/kg

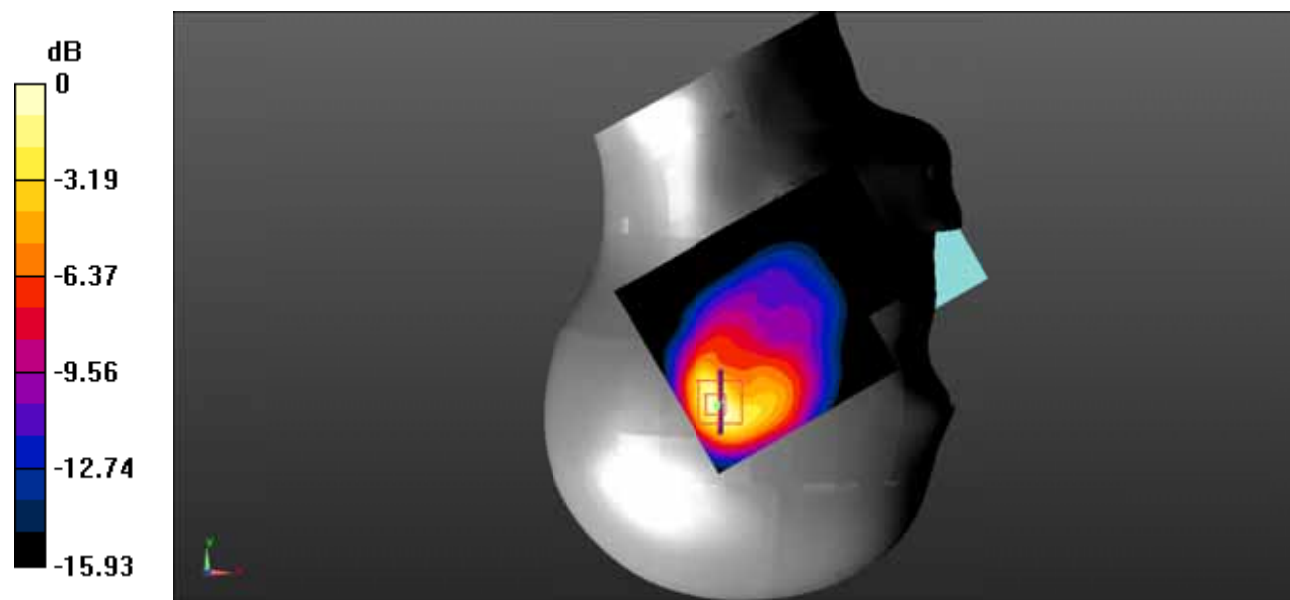

0 dB = 1.02 W/kg = 0.09 dBW/kg

Test Plot 29#: WCDMA Band 4_Head Right Cheek_Middle

DUT: Mobile Phone; Type: X688C; Serial: RSZ201102004-SA-S1;

Communication System: Communication System: UID 0, WCDMA; Frequency: 1732.6 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1732.6 \text{ MHz}$; $\sigma = 1.377 \text{ S/m}$; $\epsilon_r = 40.548$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Right Section


DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(8.21, 8.21, 8.21)
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 3/3/2020
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x91x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
 Maximum value of SAR (interpolated) = 1.02 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 13.09 V/m; Power Drift = -0.01 dB
 Peak SAR (extrapolated) = 1.58 W/kg

SAR(1 g) = 0.849 W/kg; SAR(10 g) = 0.414 W/kg
 Maximum value of SAR (measured) = 0.989 W/kg

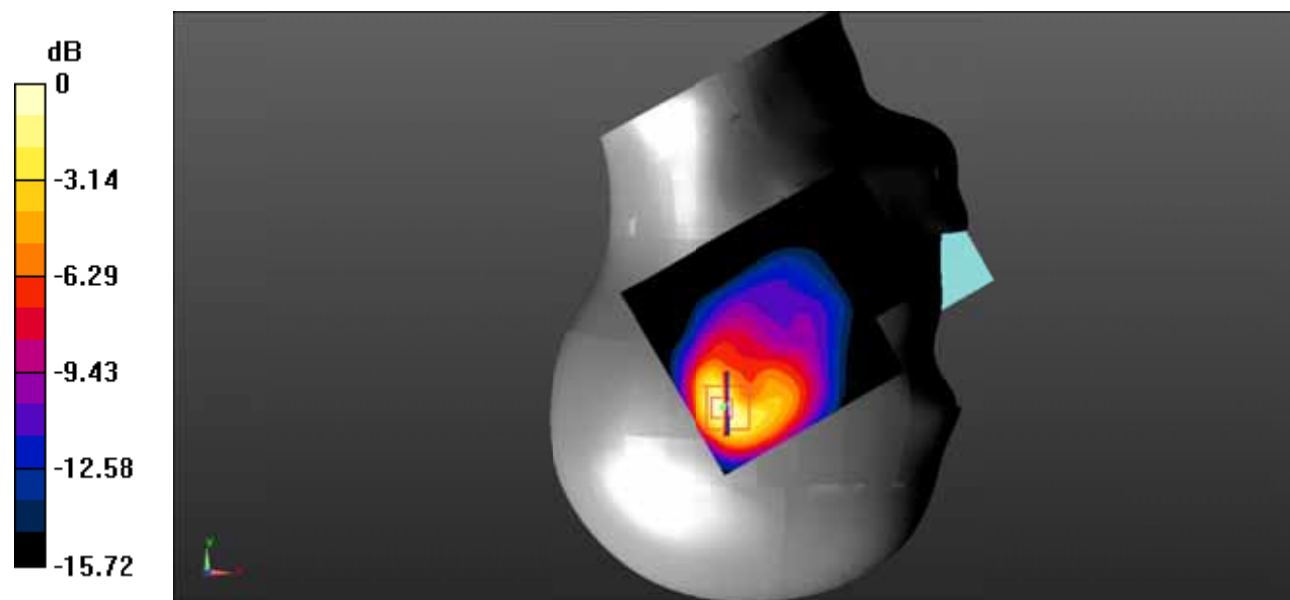

0 dB = 0.989 W/kg = -0.05 dBW/kg

Test Plot 30#: WCDMA Band 4_Head Right Cheek_High

DUT: Mobile Phone; Type: X688C; Serial: RSZ201102004-SA-S1;

Communication System: Communication System: UID 0, WCDMA; Frequency: 1752.6 MHz;Duty Cycle: 1:1
 Medium parameters used: $f = 1752.6 \text{ MHz}$; $\sigma = 1.399 \text{ S/m}$; $\epsilon_r = 41.466$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Right Section


DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(8.21, 8.21, 8.21)
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562;Calibrated: 3/3/2020
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x91x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.949 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 12.62 V/m ; Power Drift = 0.03 dB
 Peak SAR (extrapolated) = 1.46 W/kg

SAR(1 g) = 0.790 W/kg; SAR(10 g) = 0.389 W/kg
 Maximum value of SAR (measured) = 0.921 W/kg

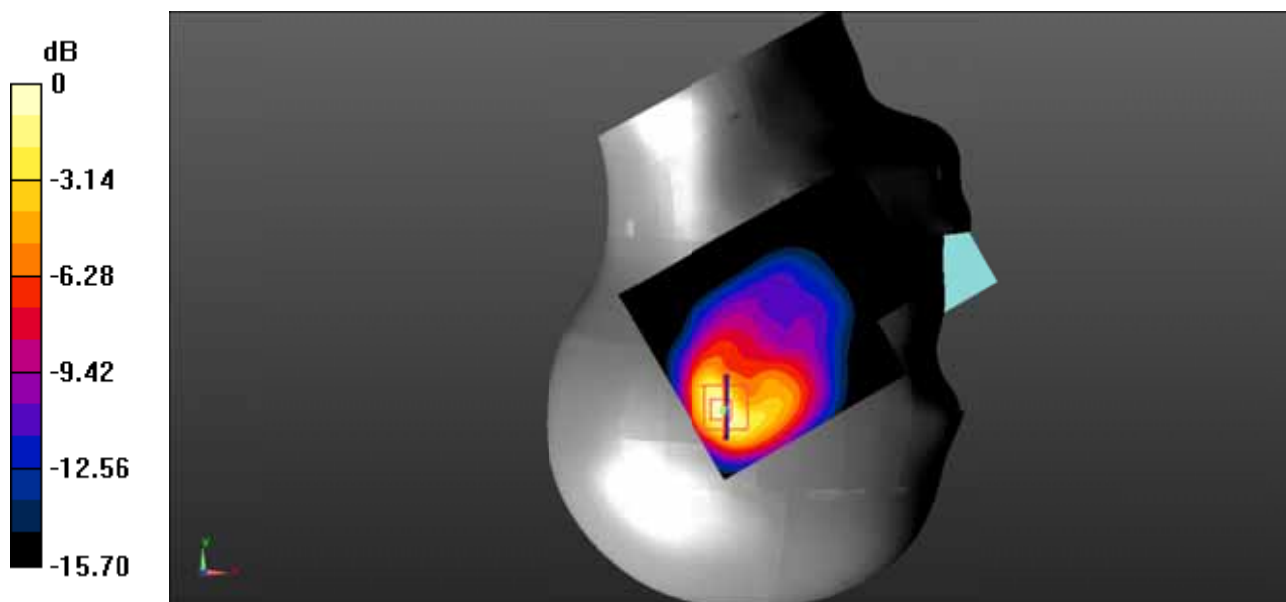

0 dB = 0.921 W/kg = -0.36 dBW/kg

Test Plot 31#: WCDMA Band 4_Head Right Tilt_Low

DUT: Mobile Phone; Type: X688C; Serial: RSZ201102004-SA-S1;

Communication System: Communication System: UID 0, WCDMA; Frequency: 1712.4 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1712.4 \text{ MHz}$; $\sigma = 1.337 \text{ S/m}$; $\epsilon_r = 41.015$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Right Section


DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(8.21, 8.21, 8.21)
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 3/3/2020
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x91x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
 Maximum value of SAR (interpolated) = 1.28 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 16.46 V/m; Power Drift = -0.17 dB
 Peak SAR (extrapolated) = 2.22 W/kg

SAR(1 g) = 1.16 W/kg; SAR(10 g) = 0.548 W/kg
 Maximum value of SAR (measured) = 1.35 W/kg

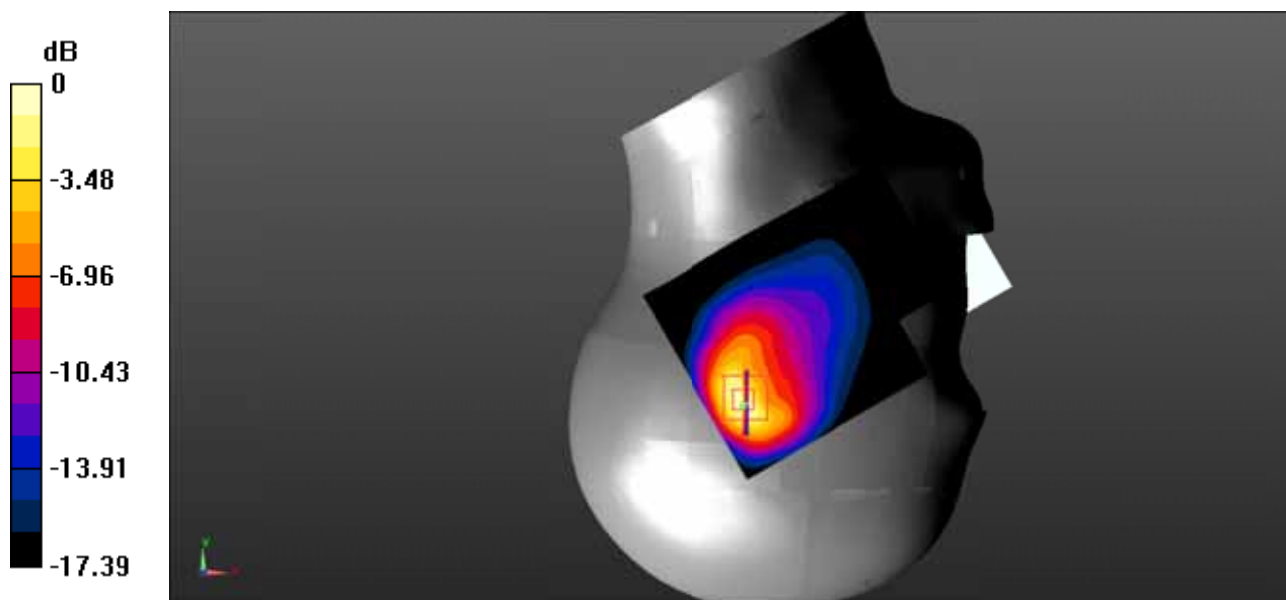

0 dB = 1.35 W/kg = 1.30 dBW/kg

Test Plot 32#: WCDMA Band 4_Head Right Tilt_Middle

DUT: Mobile Phone; Type: X688C; Serial: RSZ201102004-SA-S1;

Communication System: Communication System: UID 0, WCDMA; Frequency: 1732.6 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1732.6 \text{ MHz}$; $\sigma = 1.377 \text{ S/m}$; $\epsilon_r = 40.548$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Right Section


DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(8.21, 8.21, 8.21)
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 3/3/2020
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x91x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
 Maximum value of SAR (interpolated) = 1.35 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 19.38 V/m; Power Drift = -0.14 dB
 Peak SAR (extrapolated) = 2.25 W/kg

SAR(1 g) = 1.16 W/kg; SAR(10 g) = 0.547 W/kg
 Maximum value of SAR (measured) = 1.38 W/kg

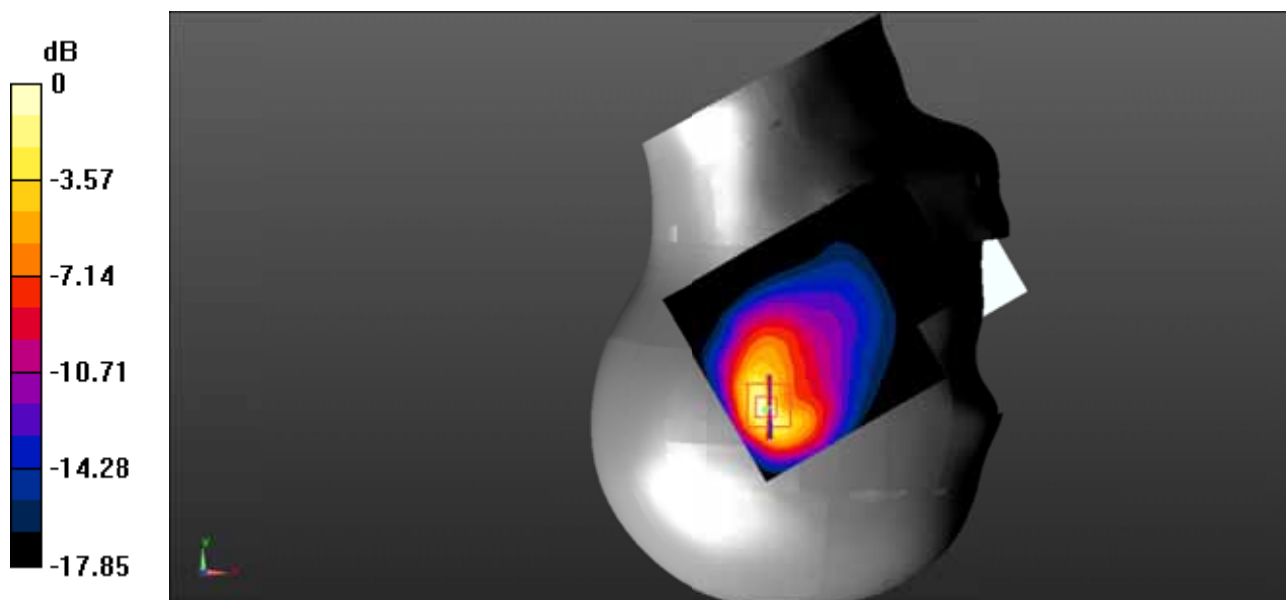

0 dB = 1.38 W/kg = 1.40 dBW/kg

Test Plot 33#: WCDMA Band 4_Head Right Tilt_High

DUT: Mobile Phone; Type: X688C; Serial: RSZ201102004-SA-S1;

Communication System: Communication System: UID 0, WCDMA; Frequency: 1752.6 MHz;Duty Cycle: 1:1
 Medium parameters used: $f = 1752.6 \text{ MHz}$; $\sigma = 1.399 \text{ S/m}$; $\epsilon_r = 41.466$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(8.21, 8.21, 8.21)
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562;Calibrated: 3/3/2020
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;


Area Scan (71x91x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
 Maximum value of SAR (interpolated) = 1.26 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 16.64 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 2.17 W/kg

SAR(1 g) = 1.13 W/kg; SAR(10 g) = 0.533 W/kg

Maximum value of SAR (measured) = 1.33 W/kg

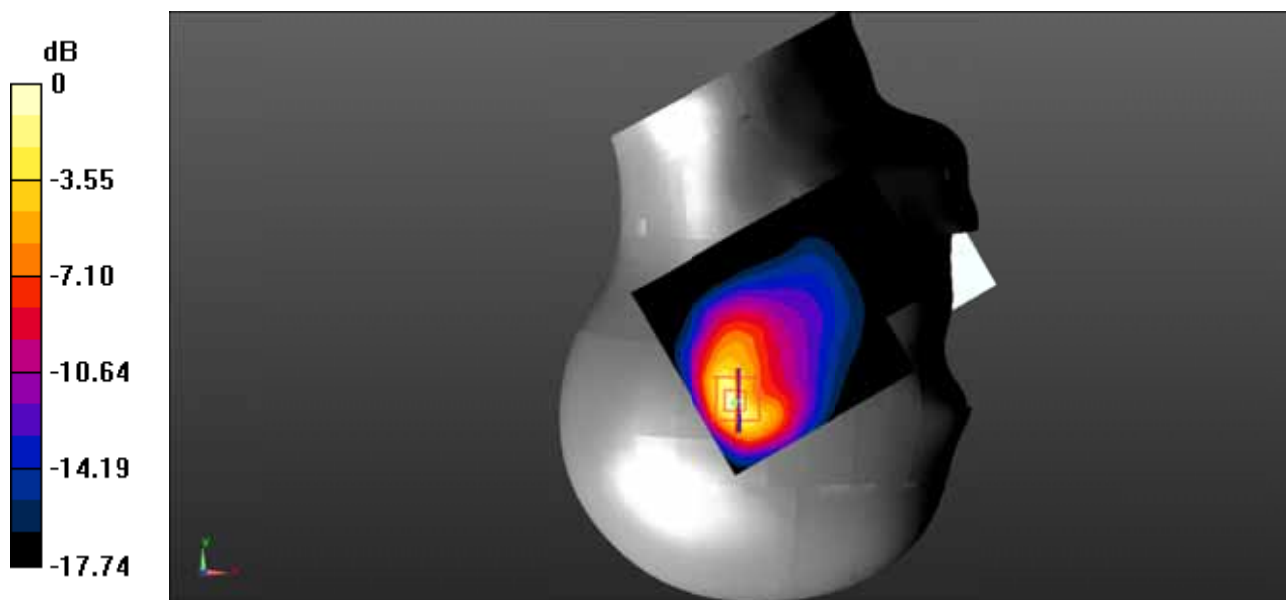

0 dB = 1.33 W/kg = 1.24 dBW/kg

Test Plot 34#: WCDMA Band 4_Body Back_Middle

DUT: Mobile Phone; Type: X688C; Serial: RSZ201102004-SA-S1;

Communication System: Communication System: UID 0, WCDMA; Frequency: 1732.6 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1732.6 \text{ MHz}$; $\sigma = 1.377 \text{ S/m}$; $\epsilon_r = 40.548$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Flat Section


DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(8.21, 8.21, 8.21)
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 3/3/2020
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x91x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.138 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 8.483 V/m ; Power Drift = -0.01 dB
 Peak SAR (extrapolated) = 0.253 W/kg

SAR(1 g) = 0.122 W/kg; SAR(10 g) = 0.076 W/kg
 Maximum value of SAR (measured) = 0.126 W/kg

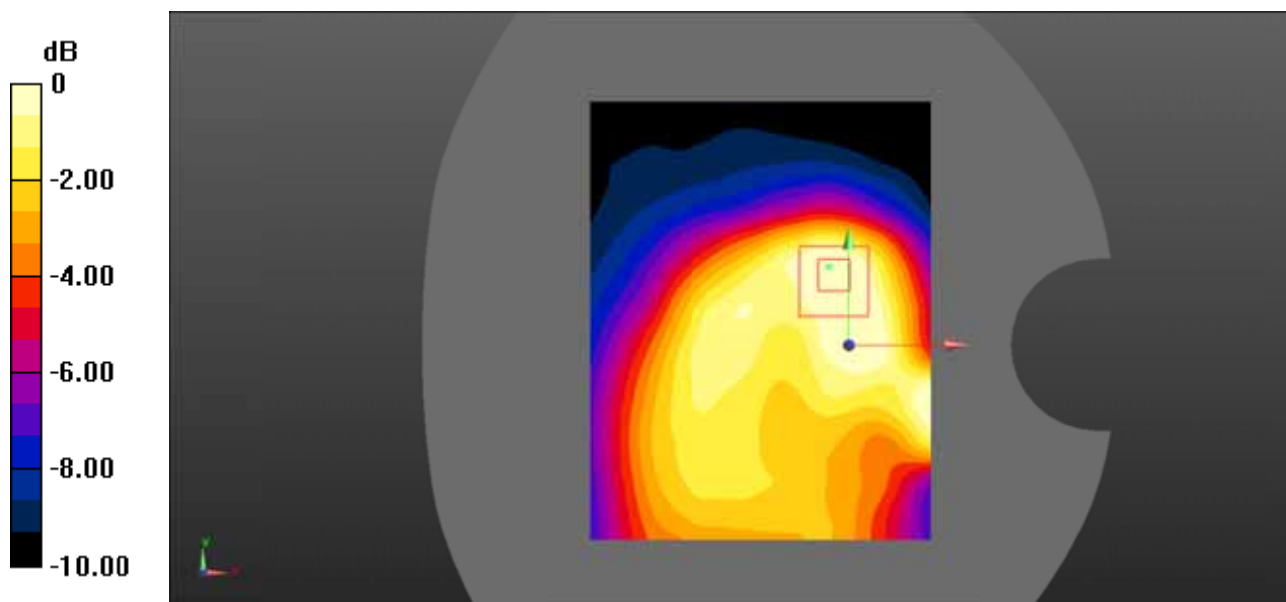

0 dB = 0.126 W/kg = -9.00 dBW/kg

Test Plot 35#: WCDMA Band 4_Body Left_Middle

DUT: Mobile Phone; Type: X688C; Serial: RSZ201102004-SA-S1;

Communication System: Communication System: UID 0, WCDMA; Frequency: 1732.6 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1732.6 \text{ MHz}$; $\sigma = 1.377 \text{ S/m}$; $\epsilon_r = 40.548$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Flat Section


DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(8.21, 8.21, 8.21)
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 3/3/2020
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x91x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.0802 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 7.689 V/m ; Power Drift = -0.10 dB
 Peak SAR (extrapolated) = 0.110 W/kg

SAR(1 g) = 0.074 W/kg; SAR(10 g) = 0.049 W/kg
 Maximum value of SAR (measured) = 0.0773 W/kg

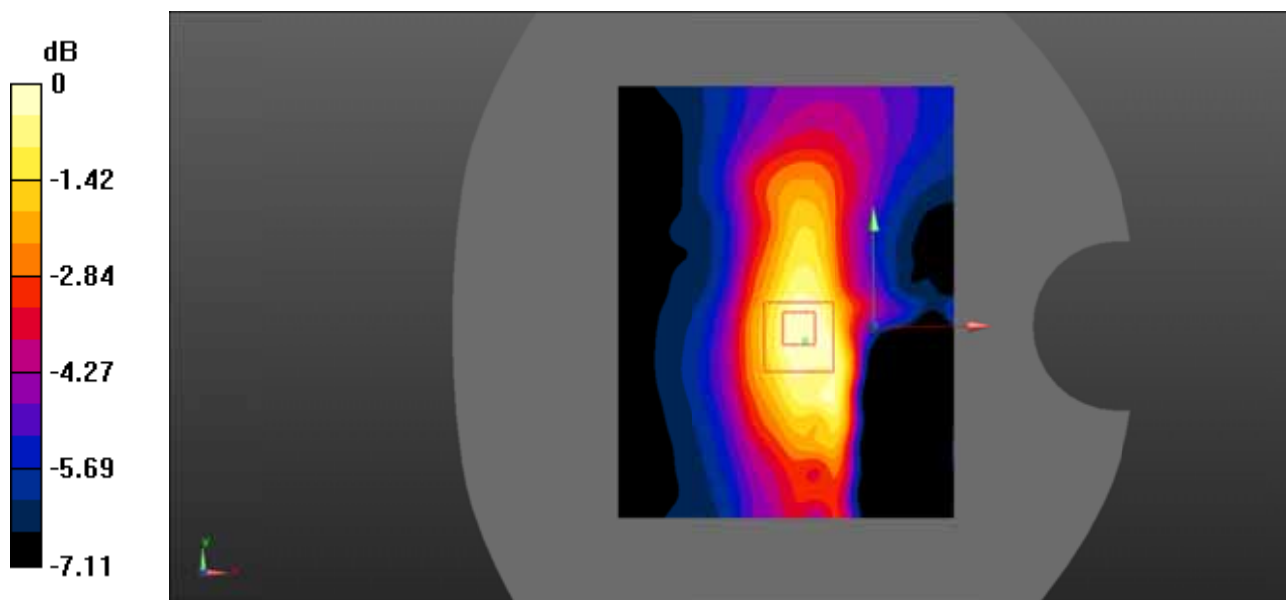

0 dB = 0.0773 W/kg = -11.12 dBW/kg

Test Plot 36#: WCDMA Band 4_Body Top_Middle

DUT: Mobile Phone; Type: X688C; Serial: RSZ201102004-SA-S1;

Communication System: Communication System: UID 0, WCDMA; Frequency: 1732.6 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1732.6 \text{ MHz}$; $\sigma = 1.377 \text{ S/m}$; $\epsilon_r = 40.548$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Flat Section


DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(8.21, 8.21, 8.21)
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 3/3/2020
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x91x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.497 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 16.13 V/m ; Power Drift = -0.01 dB
 Peak SAR (extrapolated) = 0.740 W/kg

SAR(1 g) = 0.421 W/kg; SAR(10 g) = 0.218 W/kg
 Maximum value of SAR (measured) = 0.461 W/kg

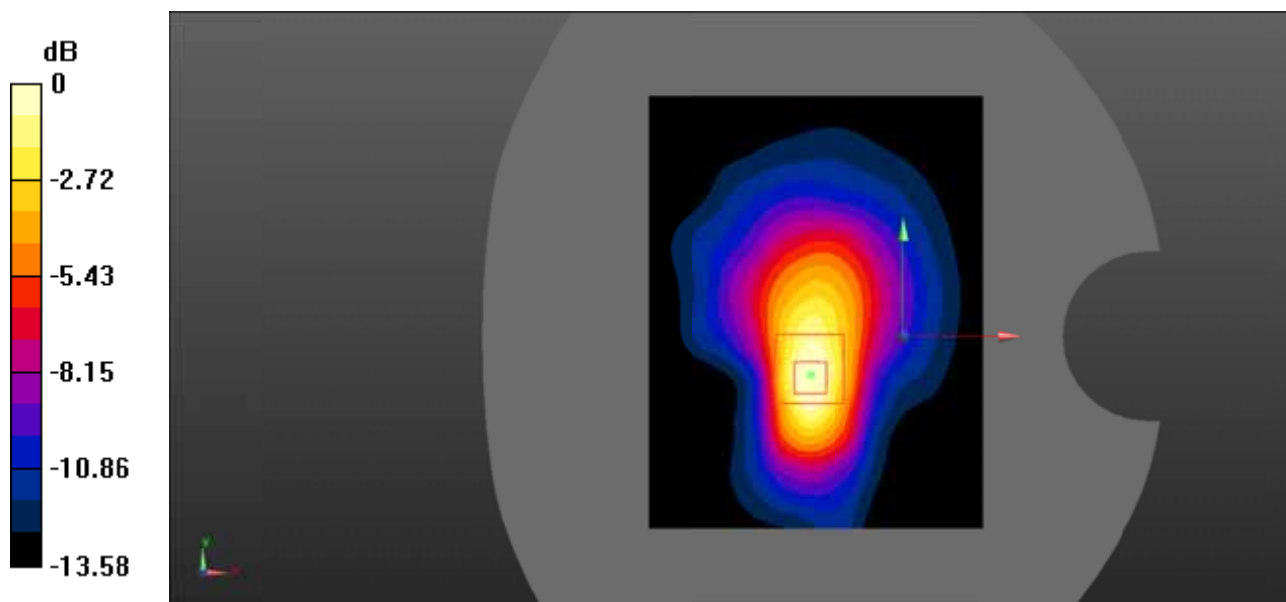

0 dB = $0.461 \text{ W/kg} = -3.36 \text{ dBW/kg}$

Test Plot 37#: WCDMA Band 5_Head Left Cheek_Middle**DUT: Mobile Phone; Type: X688C; Serial: RSZ201102004-SA-S1;**

Communication System: Communication System: UID 0, WCDMA; Frequency: 836.6 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.924$ S/m; $\epsilon_r = 42.026$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.92, 9.92, 9.92)
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 3/3/2020
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.216 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.52 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.282 W/kg

SAR(1 g) = 0.205 W/kg; SAR(10 g) = 0.144 W/kg

Maximum value of SAR (measured) = 0.214 W/kg

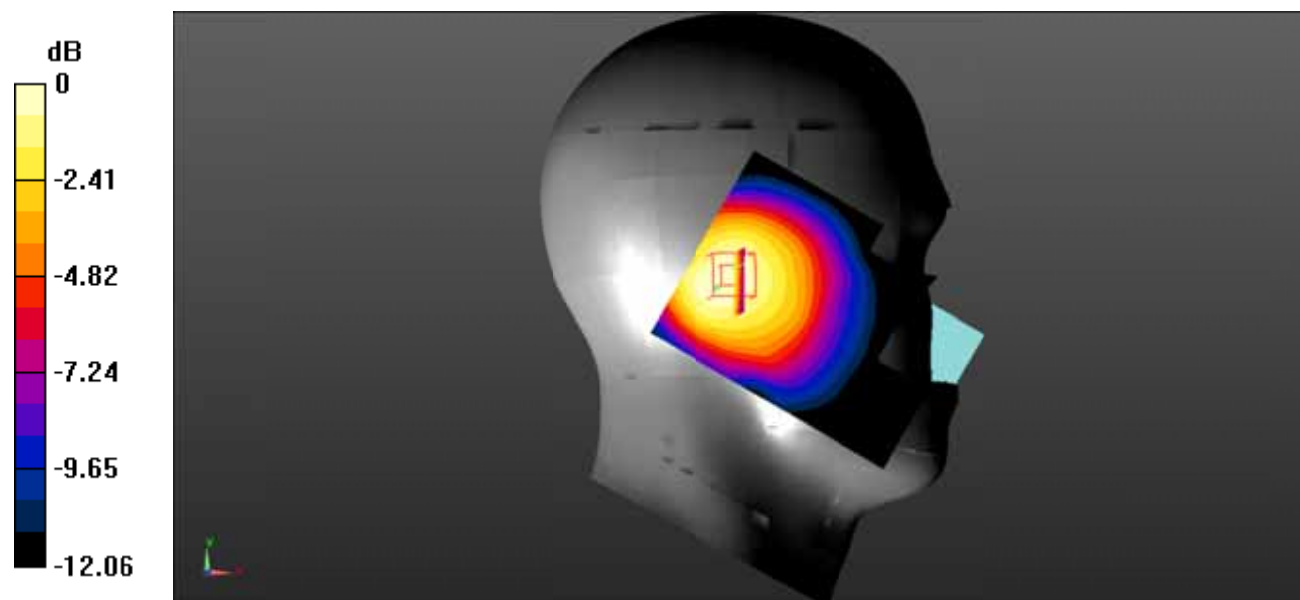

0 dB = 0.214 W/kg = -6.70 dBW/kg

Test Plot 38#: WCDMA Band 5_Head Left Tilt_Middle**DUT: Mobile Phone; Type: X688C; Serial: RSZ201102004-SA-S1;**

Communication System: Communication System: UID 0, WCDMA; Frequency: 836.6 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.924$ S/m; $\epsilon_r = 42.026$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.92, 9.92, 9.92)
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 3/3/2020
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.223 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.57 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.288 W/kg

SAR(1 g) = 0.192 W/kg; SAR(10 g) = 0.126 W/kg

Maximum value of SAR (measured) = 0.202 W/kg

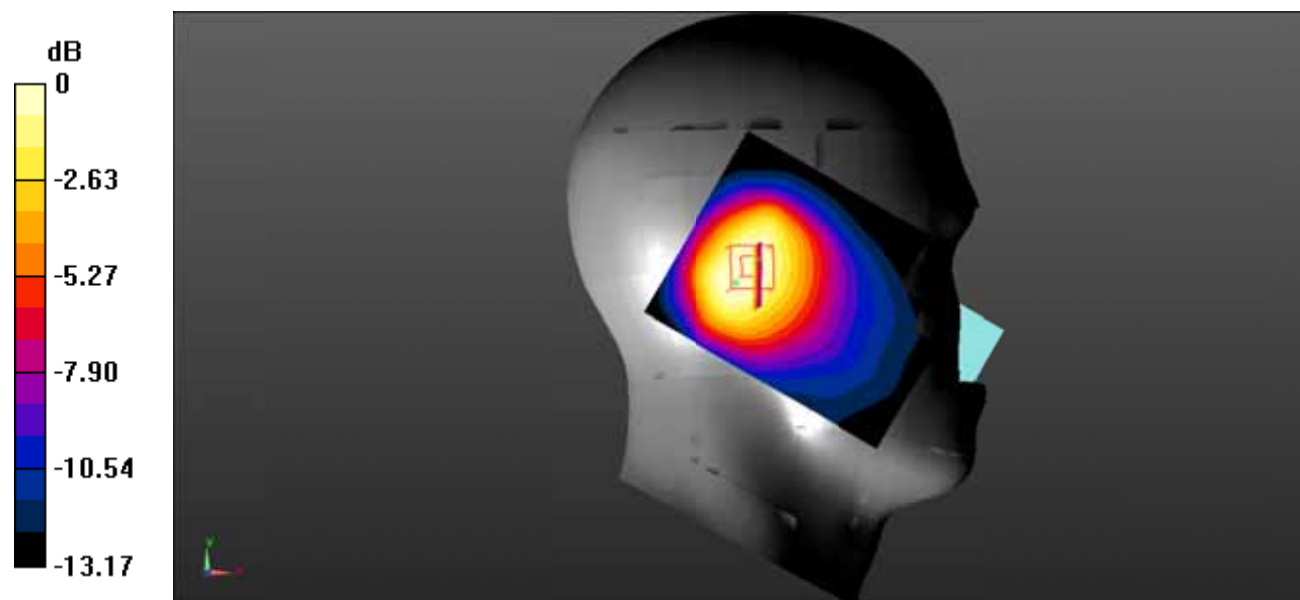

0 dB = 0.202 W/kg = -6.95 dBW/kg

Test Plot 39#: WCDMA Band 5_Head Right Cheek_Middle

DUT: Mobile Phone; Type: X688C; Serial: RSZ201102004-SA-S1;

Communication System: Communication System: UID 0, WCDMA; Frequency: 836.6 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 836.6 \text{ MHz}$; $\sigma = 0.924 \text{ S/m}$; $\epsilon_r = 42.026$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Right Section


DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.92, 9.92, 9.92)
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 3/3/2020
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x91x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.290 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 13.63 V/m ; Power Drift = -0.10 dB
 Peak SAR (extrapolated) = 0.403 W/kg

SAR(1 g) = 0.250 W/kg; SAR(10 g) = 0.166 W/kg
 Maximum value of SAR (measured) = 0.260 W/kg

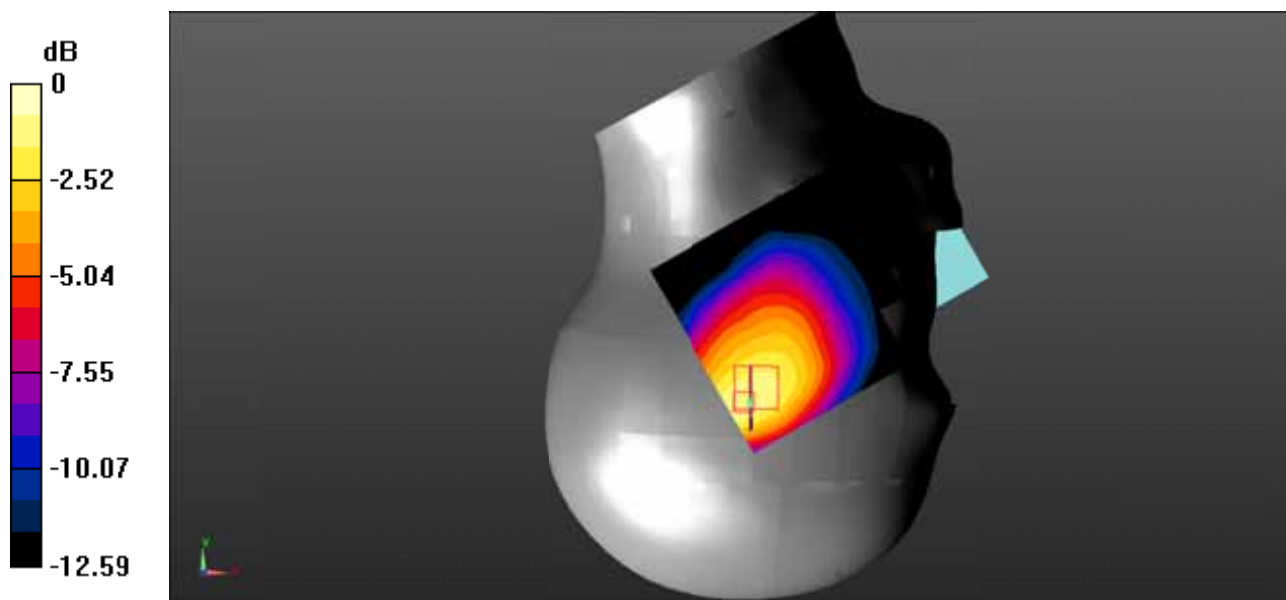

0 dB = $0.260 \text{ W/kg} = -5.85 \text{ dBW/kg}$

Test Plot 40#: WCDMA Band 5_Head Right Tilt_Middle

DUT: Mobile Phone; Type: X688C; Serial: RSZ201102004-SA-S1;

Communication System: Communication System: UID 0, WCDMA; Frequency: 836.6 MHz;Duty Cycle: 1:1
 Medium parameters used: $f = 836.6 \text{ MHz}$; $\sigma = 0.924 \text{ S/m}$; $\epsilon_r = 42.026$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Right Section


DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.92, 9.92, 9.92)
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562;Calibrated: 3/3/2020
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x91x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.283 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 14.19 V/m ; Power Drift = -0.07 dB
 Peak SAR (extrapolated) = 0.520 W/kg

SAR(1 g) = 0.251 W/kg; SAR(10 g) = 0.144 W/kg
 Maximum value of SAR (measured) = 0.258 W/kg

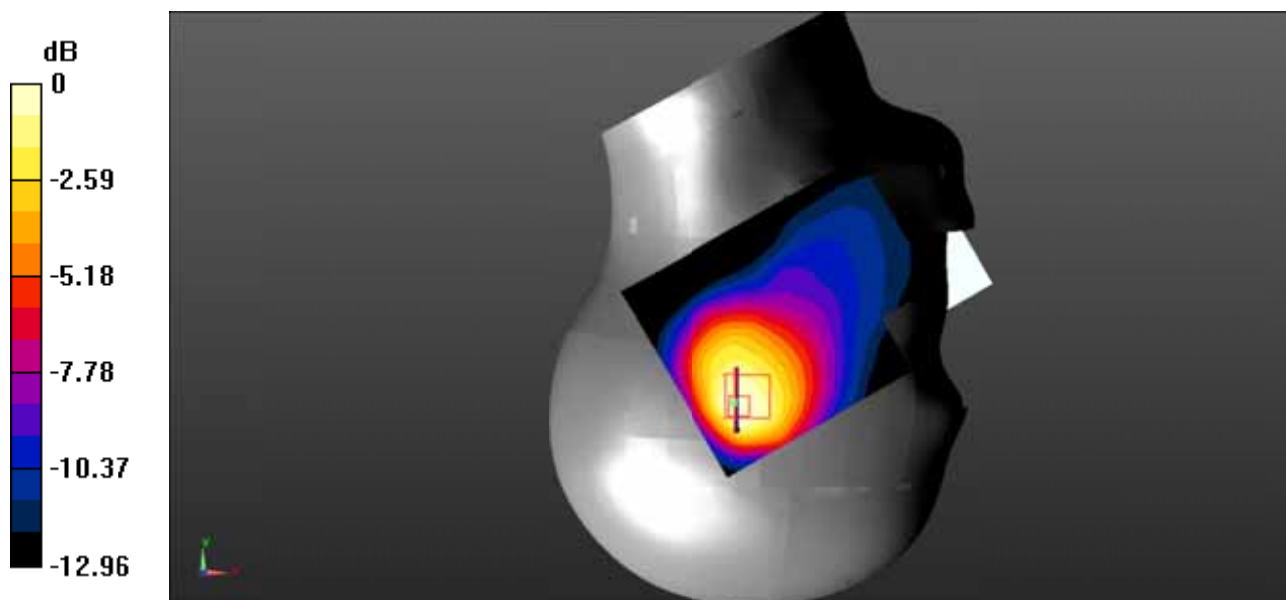

0 dB = $0.258 \text{ W/kg} = -5.88 \text{ dBW/kg}$

Test Plot 41#: WCDMA Band 5_Body Back_Middle

DUT: Mobile Phone; Type: X688C; Serial: RSZ201102004-SA-S1;

Communication System: Communication System: UID 0, WCDMA; Frequency: 836.6 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 836.6 \text{ MHz}$; $\sigma = 0.924 \text{ S/m}$; $\epsilon_r = 42.026$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Flat Section


DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.92, 9.92, 9.92)
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 3/3/2020
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x101x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.0994 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 7.622 V/m ; Power Drift = -0.13 dB
 Peak SAR (extrapolated) = 0.146 W/kg

SAR(1 g) = 0.094 W/kg; SAR(10 g) = 0.063 W/kg
 Maximum value of SAR (measured) = 0.0986 W/kg

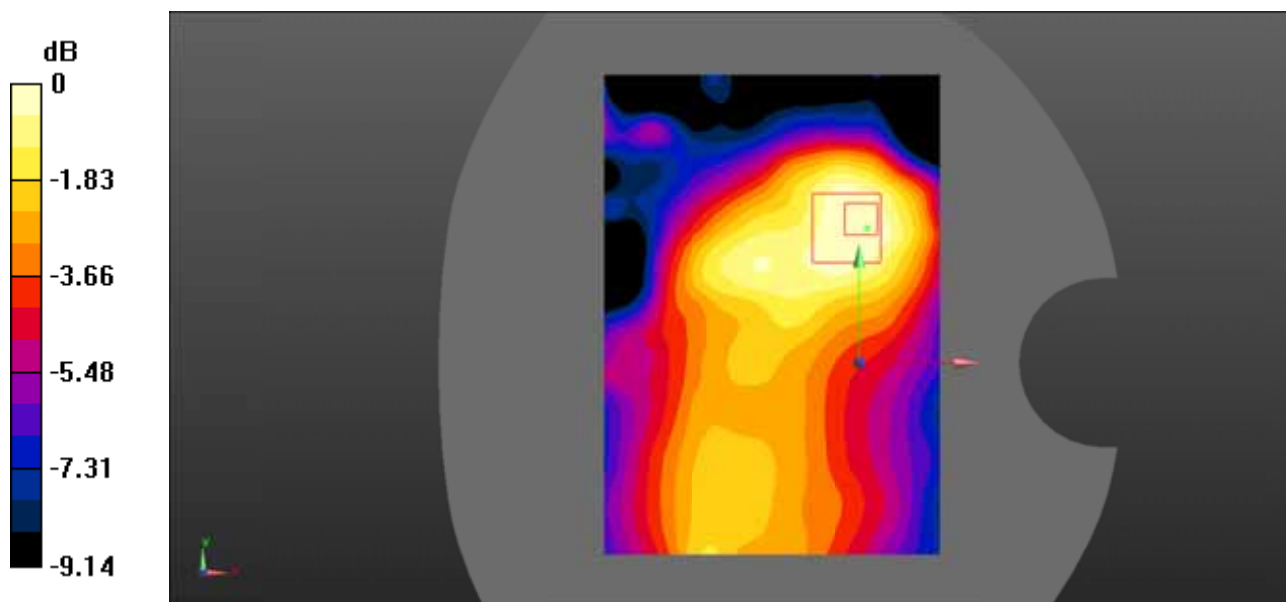

0 dB = $0.0986 \text{ W/kg} = -10.06 \text{ dBW/kg}$

Test Plot 42#: WCDMA Band 5_Body Left_Middle

DUT: Mobile Phone; Type: X688C; Serial: RSZ201102004-SA-S1;

Communication System: Communication System: UID 0, WCDMA; Frequency: 836.6 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 836.6 \text{ MHz}$; $\sigma = 0.924 \text{ S/m}$; $\epsilon_r = 42.026$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.92, 9.92, 9.92)
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 3/3/2020
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;


Area Scan (71x101x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.0580 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 6.110 V/m ; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.0590 W/kg

SAR(1 g) = 0.044 W/kg ; SAR(10 g) = 0.033 W/kg

Maximum value of SAR (measured) = 0.0460 W/kg

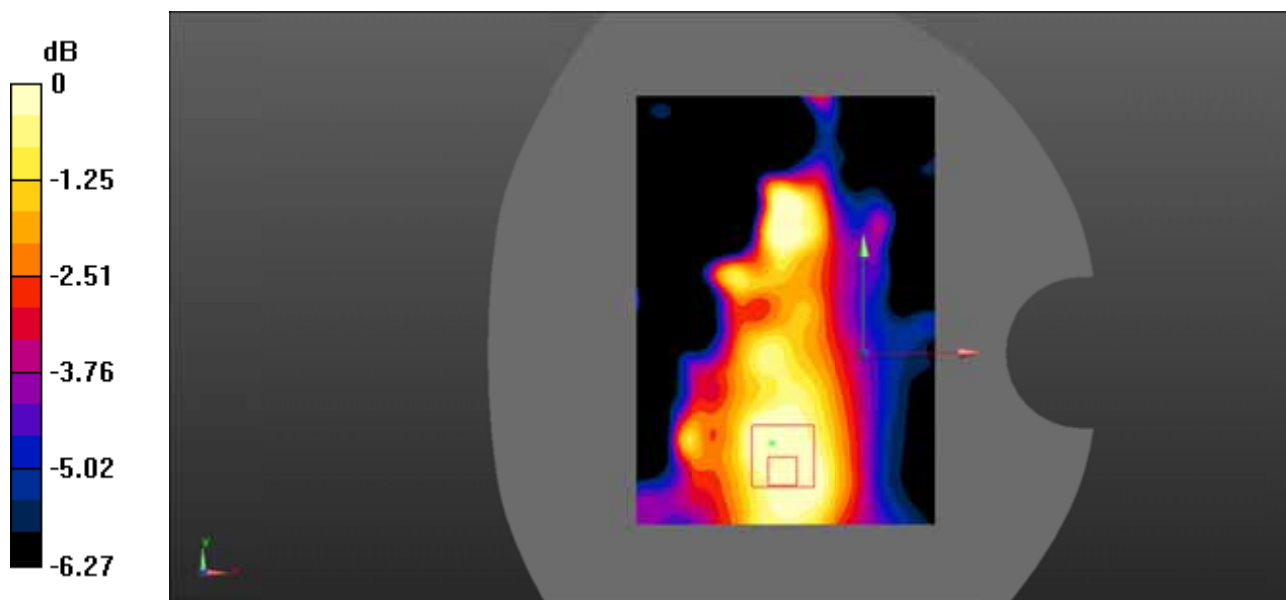

0 dB = $0.0460 \text{ W/kg} = -13.37 \text{ dBW/kg}$

Test Plot 43#: WCDMA Band 5_Body Top_Middle

DUT: Mobile Phone; Type: X688C; Serial: RSZ201102004-SA-S1;

Communication System: Communication System: UID 0, WCDMA; Frequency: 836.6 MHz;Duty Cycle: 1:1
 Medium parameters used: $f = 836.6 \text{ MHz}$; $\sigma = 0.924 \text{ S/m}$; $\epsilon_r = 42.026$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Flat Section


DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.92, 9.92, 9.92)
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562;Calibrated: 3/3/2020
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x91x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.0866 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 9.748 V/m ; Power Drift = 0.06 dB
 Peak SAR (extrapolated) = 0.132 W/kg

SAR(1 g) = 0.082 W/kg; SAR(10 g) = 0.053 W/kg
 Maximum value of SAR (measured) = 0.0876 W/kg

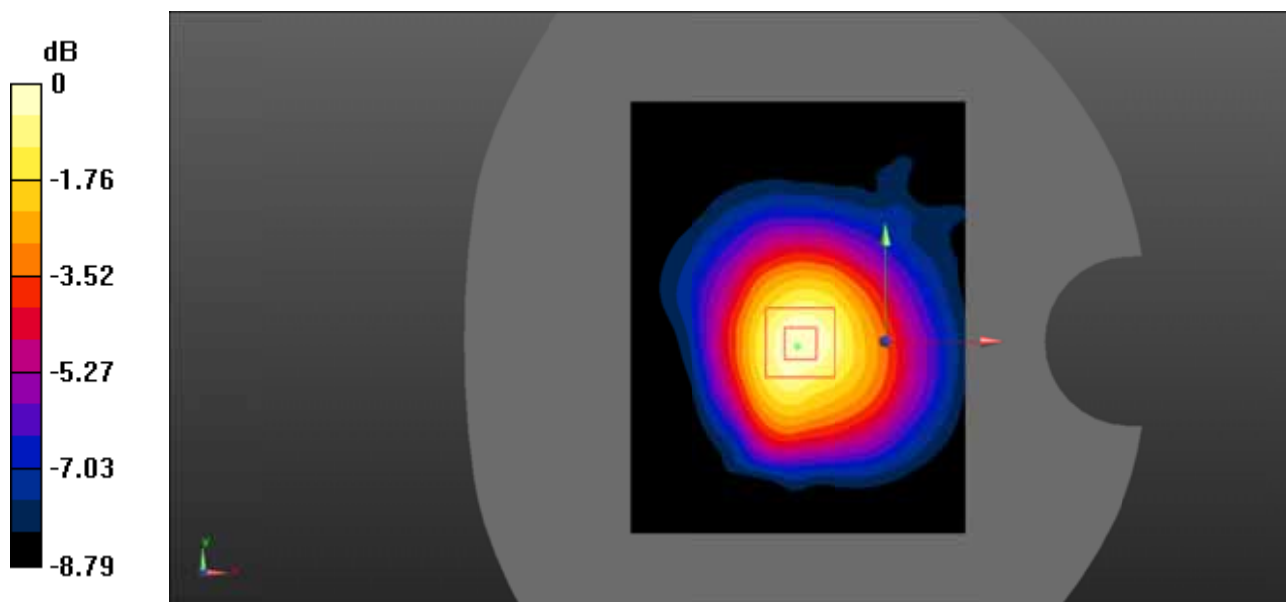

0 dB = $0.0876 \text{ W/kg} = -10.57 \text{ dBW/kg}$

Test Plot 44#: LTE Band 2_Head Left Cheek_1RB_Middle

DUT: Mobile Phone; Type: X688C; Serial: RSZ201102004-SA-S1;

Communication System: Generic FDD-LTE; Frequency: 1880 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.39 \text{ S/m}$; $\epsilon_r = 39.856$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Left Section


DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.95, 7.95, 7.95)
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 3/3/2020
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x91x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.334 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 8.465 V/m ; Power Drift = 0.15 dB
 Peak SAR (extrapolated) = 0.485 W/kg

SAR(1 g) = 0.310 W/kg; SAR(10 g) = 0.163 W/kg
 Maximum value of SAR (measured) = 0.332 W/kg

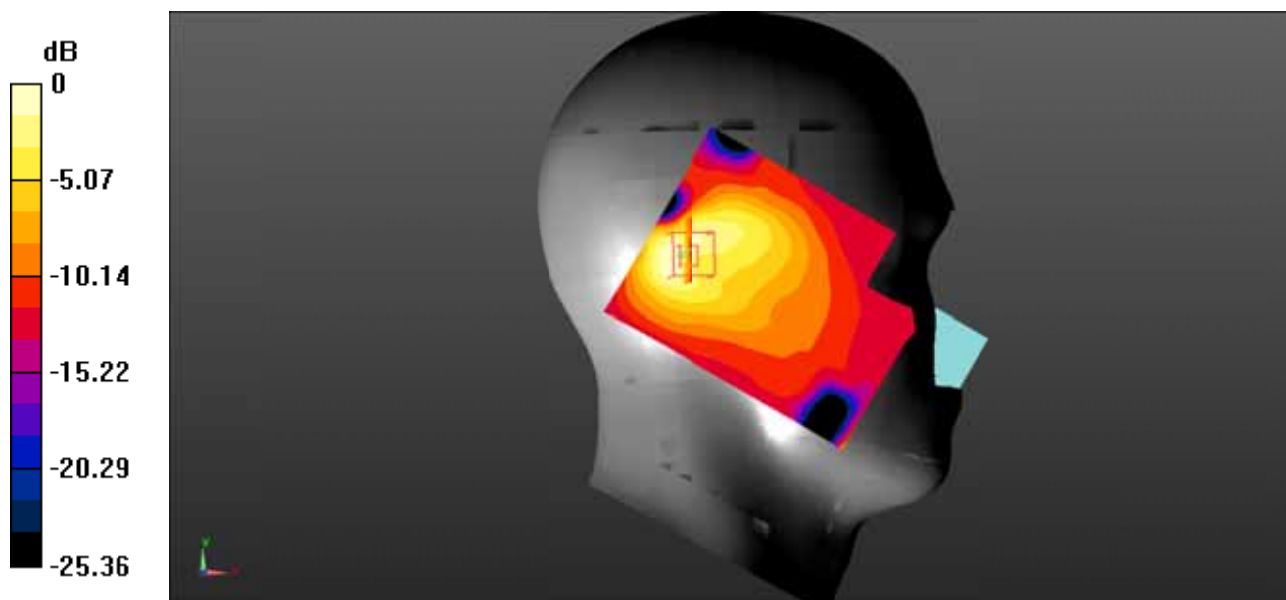

0 dB = $0.332 \text{ W/kg} = -4.79 \text{ dBW/kg}$

Test Plot 45#: LTE Band 2_Head Left Cheek_50%RB_Middle

DUT: Mobile Phone; Type: X688C; Serial: RSZ201102004-SA-S1;

Communication System: Generic FDD-LTE; Frequency: 1880 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.39 \text{ S/m}$; $\epsilon_r = 39.856$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Left Section


DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.95, 7.95, 7.95)
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 3/3/2020
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x91x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.414 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 7.771 V/m ; Power Drift = 0.03 dB
 Peak SAR (extrapolated) = 0.274 W/kg

SAR(1 g) = 0.113 W/kg; SAR(10 g) = 0.051 W/kg
 Maximum value of SAR (measured) = 0.170 W/kg

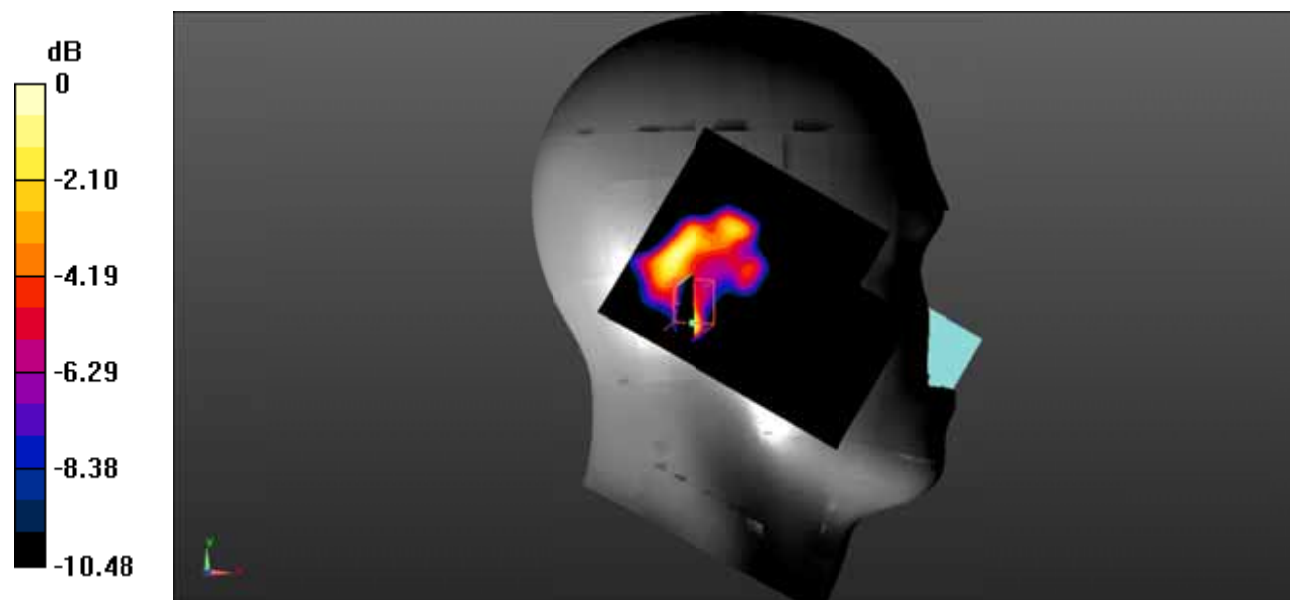

0 dB = $0.170 \text{ W/kg} = -7.70 \text{ dBW/kg}$

Test Plot 46#: LTE Band 2_Head Left Tilt_1RB_Middle

DUT: Mobile Phone; Type: X688C; Serial: RSZ201102004-SA-S1;

Communication System: Generic FDD-LTE; Frequency: 1880 MHz;Duty Cycle: 1:1
 Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.39 \text{ S/m}$; $\epsilon_r = 39.856$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Left Section


DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.95, 7.95, 7.95)
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562;Calibrated: 3/3/2020
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x91x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.392 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 11.77 V/m ; Power Drift = 0.17 dB
 Peak SAR (extrapolated) = 0.561 W/kg

SAR(1 g) = 0.344 W/kg; SAR(10 g) = 0.181 W/kg
 Maximum value of SAR (measured) = 0.381 W/kg

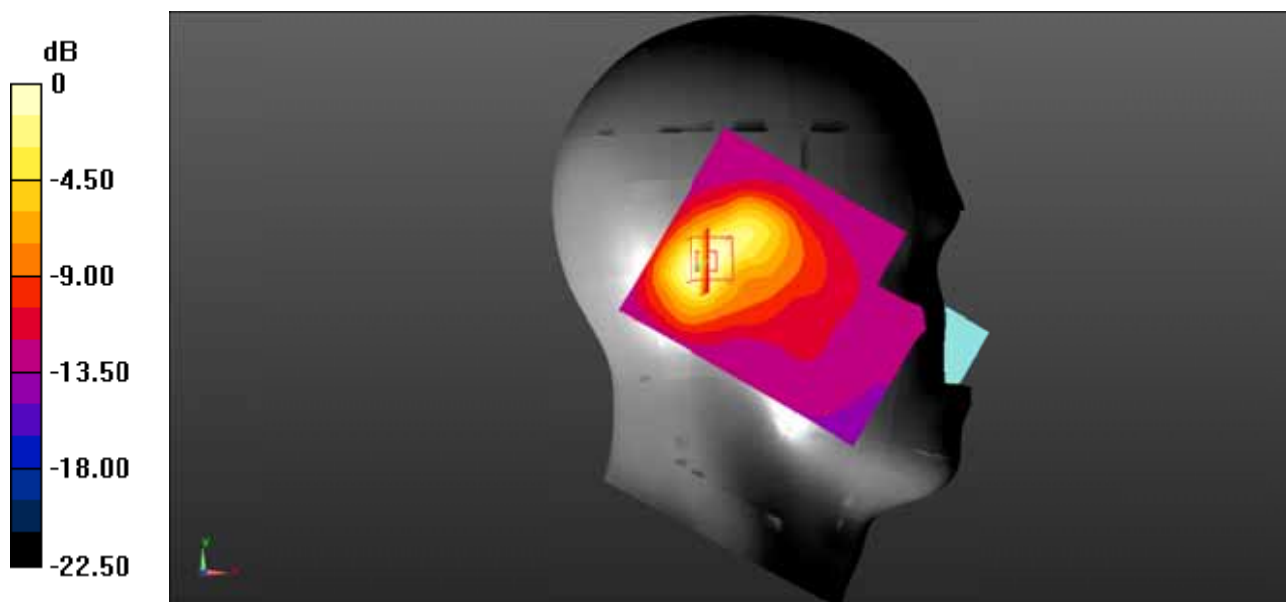

Test Plot 47#: LTE Band 2_Head Left Tilt_50%RB_Middle

DUT: Mobile Phone; Type: X688C; Serial: RSZ201102004-SA-S1;

Communication System: Generic FDD-LTE; Frequency: 1880 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.39 \text{ S/m}$; $\epsilon_r = 39.856$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Left Section


DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.95, 7.95, 7.95)
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 3/3/2020
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x91x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.456 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 12.45 V/m ; Power Drift = 0.10 dB
 Peak SAR (extrapolated) = 0.753 W/kg

SAR(1 g) = 0.419 W/kg; SAR(10 g) = 0.218 W/kg
 Maximum value of SAR (measured) = 0.435 W/kg

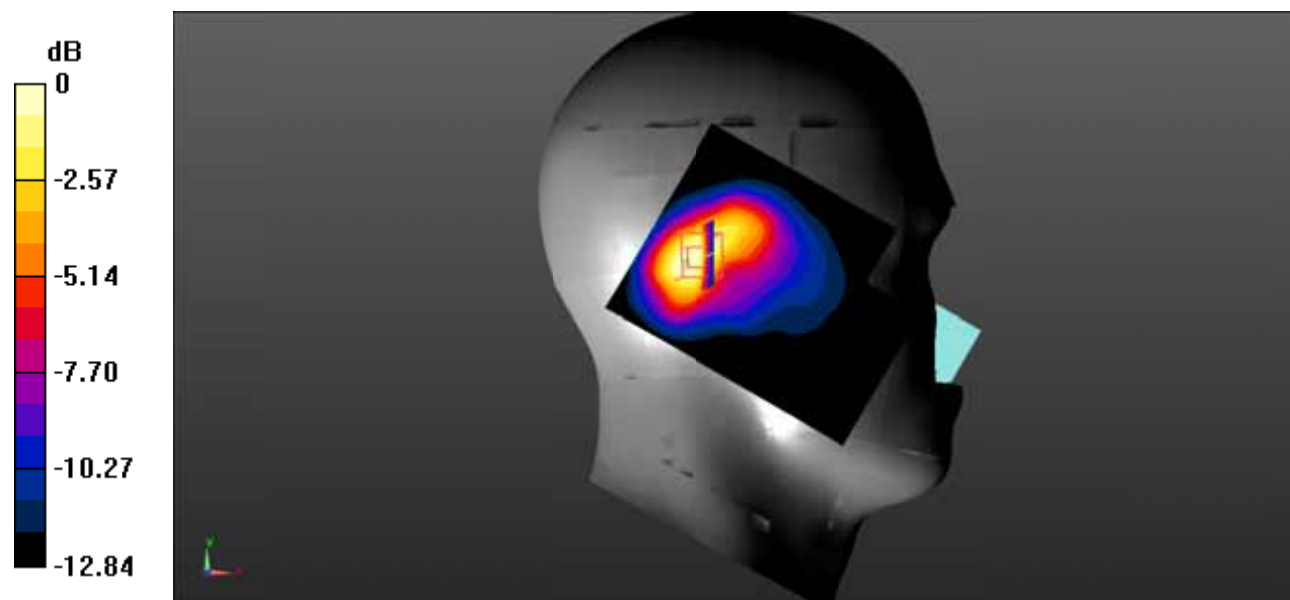

0 dB = $0.435 \text{ W/kg} = -3.62 \text{ dBW/kg}$

Test Plot 48#: LTE Band 2_Head Right Cheek_1RB_Middle

DUT: Mobile Phone; Type: X688C; Serial: RSZ201102004-SA-S1;

Communication System: Generic FDD-LTE; Frequency: 1880 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.39 \text{ S/m}$; $\epsilon_r = 39.856$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Right Section


DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.95, 7.95, 7.95)
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 3/3/2020
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x91x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.444 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 8.079 V/m ; Power Drift = -0.04 dB
 Peak SAR (extrapolated) = 0.773 W/kg

SAR(1 g) = 0.403 W/kg ; SAR(10 g) = 0.200 W/kg
 Maximum value of SAR (measured) = 0.475 W/kg

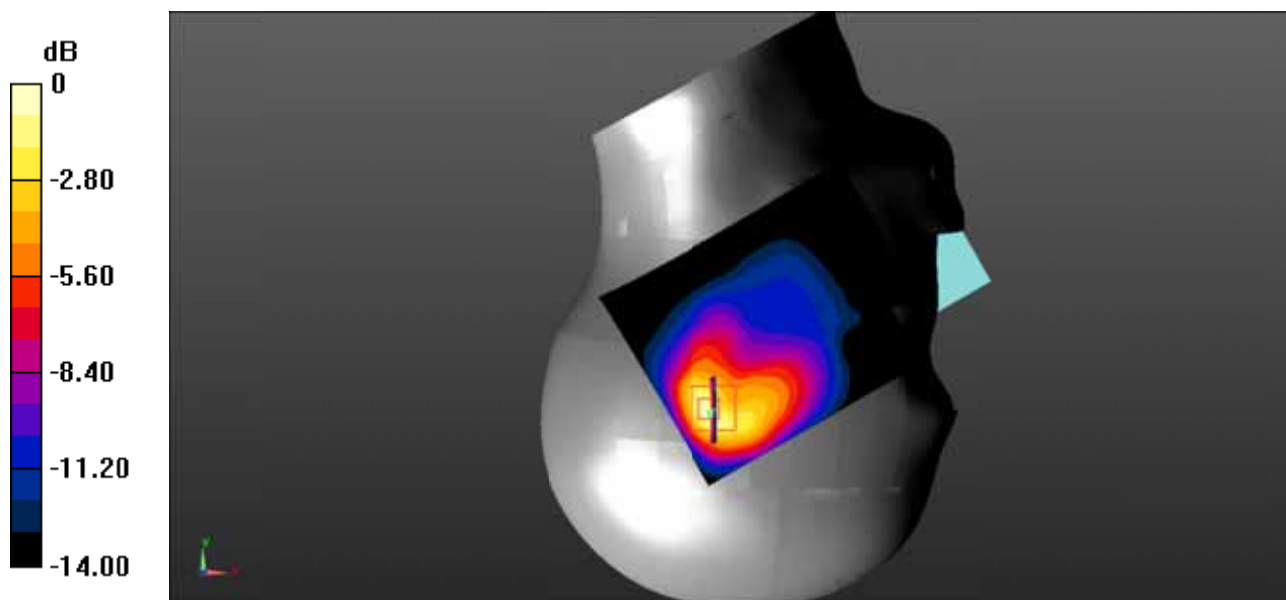

0 dB = $0.475 \text{ W/kg} = -3.23 \text{ dBW/kg}$

Test Plot 49#: LTE Band 2_Head Right Cheek_50%RB_Middle

DUT: Mobile Phone; Type: X688C; Serial: RSZ201102004-SA-S1;

Communication System: Generic FDD-LTE; Frequency: 1880 MHz;Duty Cycle: 1:1
 Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.39 \text{ S/m}$; $\epsilon_r = 39.856$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Right Section


DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.95, 7.95, 7.95)
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562;Calibrated: 3/3/2020
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x91x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.432 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 8.672 V/m ; Power Drift = -0.03 dB
 Peak SAR (extrapolated) = 0.581 W/kg

SAR(1 g) = 0.352 W/kg; SAR(10 g) = 0.178 W/kg
 Maximum value of SAR (measured) = 0.411 W/kg

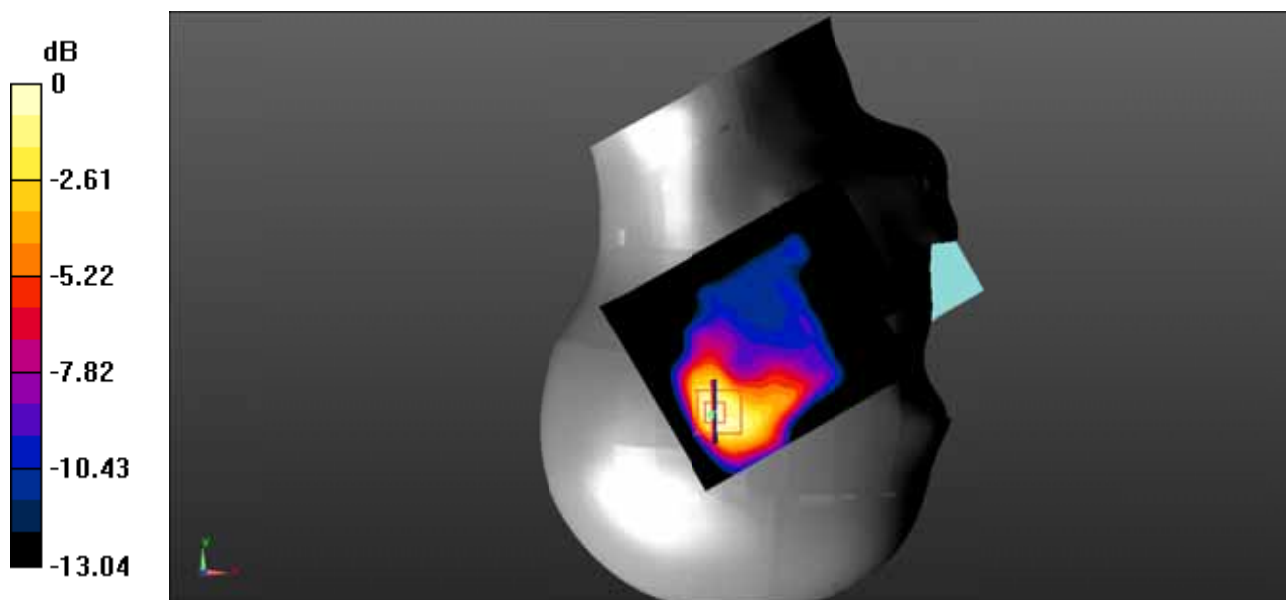

0 dB = $0.411 \text{ W/kg} = -3.86 \text{ dBW/kg}$

Test Plot 50#: LTE Band 2_Head Right Tilt_1RB_Middle

DUT: Mobile Phone; Type: X688C; Serial: RSZ201102004-SA-S1;

Communication System: Generic FDD-LTE; Frequency: 1880 MHz;Duty Cycle: 1:1
 Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.39 \text{ S/m}$; $\epsilon_r = 39.856$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Right Section


DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.95, 7.95, 7.95)
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562;Calibrated: 3/3/2020
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x91x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.653 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 10.00 V/m ; Power Drift = 0.17 dB
 Peak SAR (extrapolated) = 1.10 W/kg

SAR(1 g) = 0.564 W/kg ; SAR(10 g) = 0.266 W/kg
 Maximum value of SAR (measured) = 0.675 W/kg

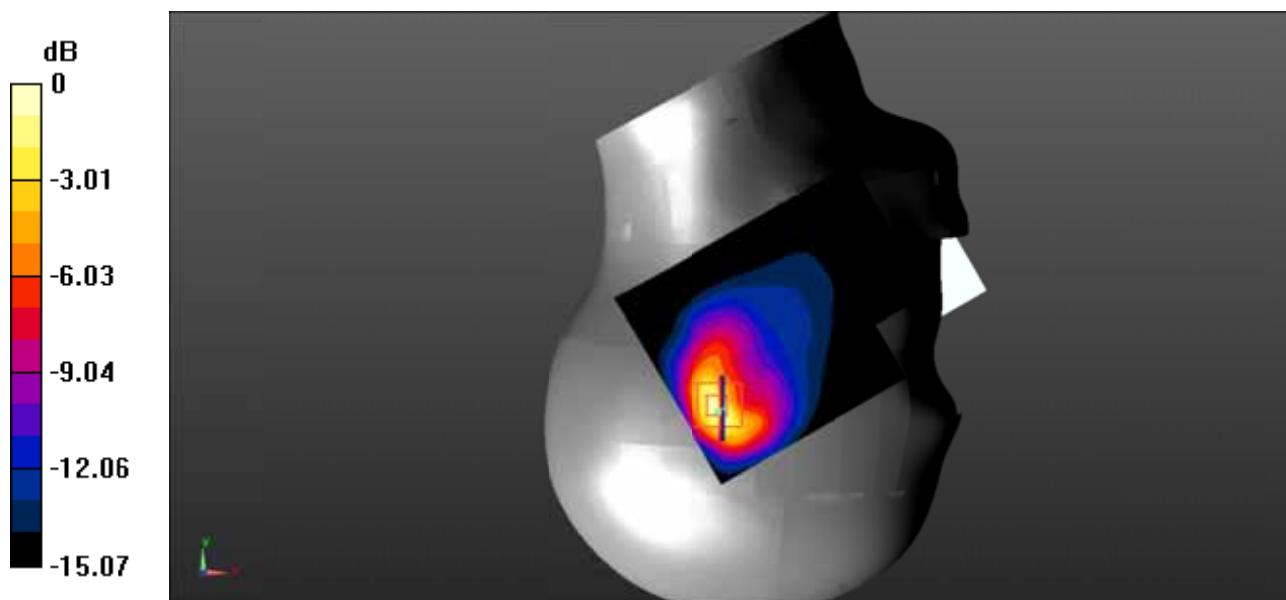

0 dB = $0.675 \text{ W/kg} = -1.71 \text{ dBW/kg}$

Test Plot 51#: LTE Band 2_Head Right Tilt_50%RB_Middle

DUT: Mobile Phone; Type: X688C; Serial: RSZ201102004-SA-S1;

Communication System: Generic FDD-LTE; Frequency: 1880 MHz;Duty Cycle: 1:1
 Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.39 \text{ S/m}$; $\epsilon_r = 39.856$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Right Section


DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.95, 7.95, 7.95)
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562;Calibrated: 3/3/2020
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x91x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.548 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 9.402 V/m ; Power Drift = 0.07 dB
 Peak SAR (extrapolated) = 0.915 W/kg

SAR(1 g) = 0.469 W/kg ; SAR(10 g) = 0.222 W/kg
 Maximum value of SAR (measured) = 0.561 W/kg

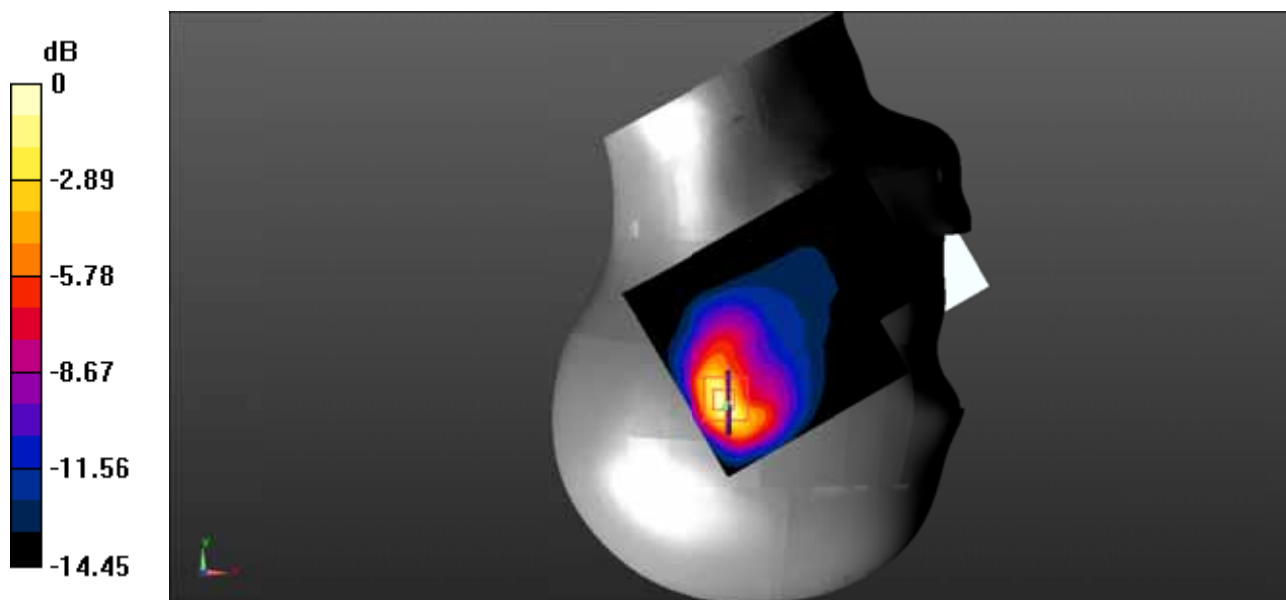

0 dB = $0.561 \text{ W/kg} = -2.51 \text{ dBW/kg}$

Test Plot 52#: LTE Band 2_Body Back_1RB_Middle

DUT: Mobile Phone; Type: X688C; Serial: RSZ201102004-SA-S1;

Communication System: Generic FDD-LTE; Frequency: 1880 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.39 \text{ S/m}$; $\epsilon_r = 39.856$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Flat Section


DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.95, 7.95, 7.95)
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 3/3/2020
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x91x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.0945 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 4.892 V/m ; Power Drift = 0.10 dB
 Peak SAR (extrapolated) = 0.155 W/kg

SAR(1 g) = 0.095 W/kg; SAR(10 g) = 0.055 W/kg
 Maximum value of SAR (measured) = 0.102 W/kg

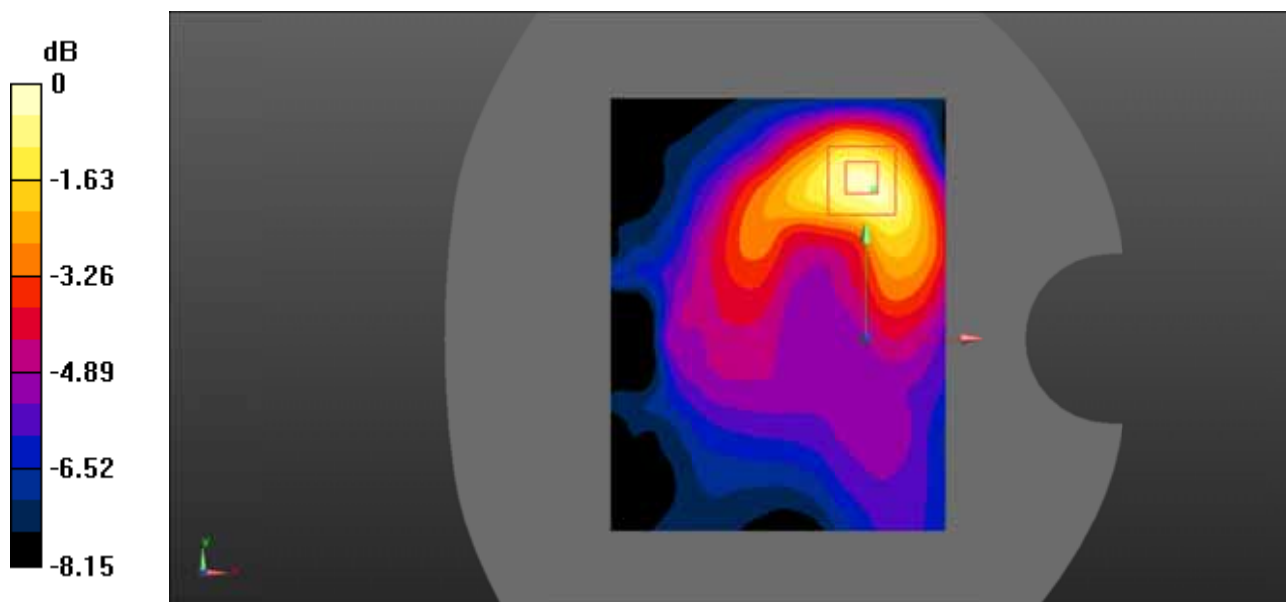

0 dB = $0.102 \text{ W/kg} = -9.91 \text{ dBW/kg}$

Test Plot 53#: LTE Band 2_Body Back_50%RB_Middle

DUT: Mobile Phone; Type: X688C; Serial: RSZ201102004-SA-S1;

Communication System: Generic FDD-LTE; Frequency: 1880 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.39 \text{ S/m}$; $\epsilon_r = 39.856$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Flat Section


DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.95, 7.95, 7.95)
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 3/3/2020
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x91x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.0882 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 4.422 V/m ; Power Drift = 0.13 dB
 Peak SAR (extrapolated) = 0.130 W/kg

SAR(1 g) = 0.081 W/kg; SAR(10 g) = 0.048 W/kg
 Maximum value of SAR (measured) = 0.0907 W/kg

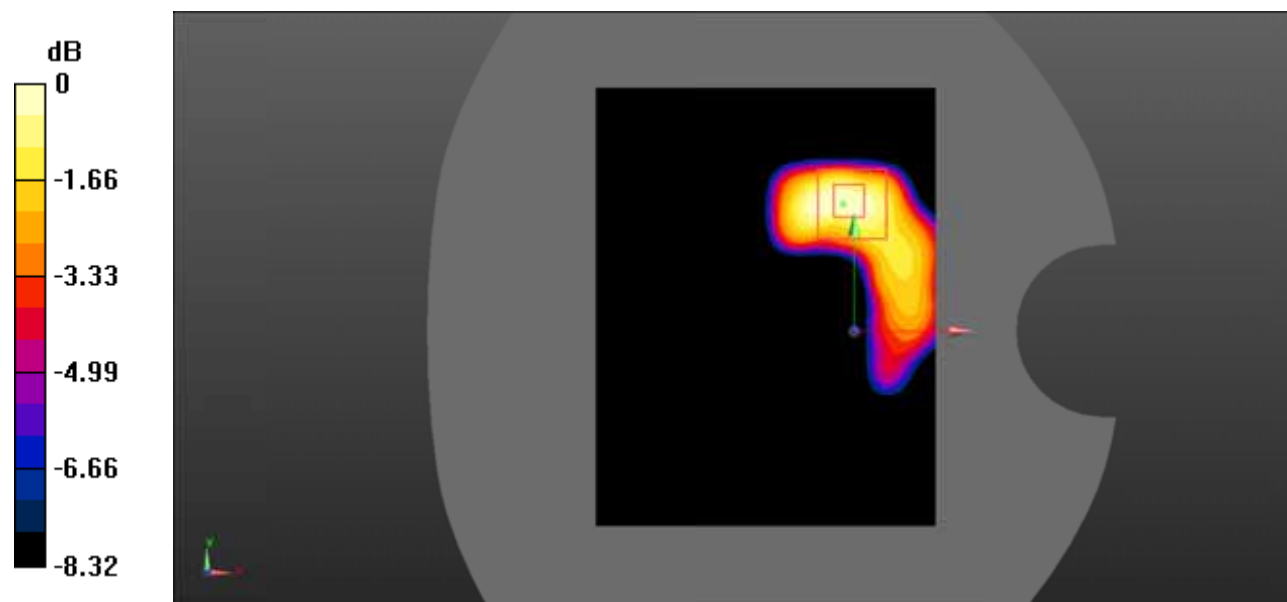

0 dB = $0.0907 \text{ W/kg} = -10.42 \text{ dBW/kg}$

Test Plot 54#: LTE Band 2_Body Left_1RB_Middle

DUT: Mobile Phone; Type: X688C; Serial: RSZ201102004-SA-S1;

Communication System: Generic FDD-LTE; Frequency: 1880 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.39 \text{ S/m}$; $\epsilon_r = 39.856$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.95, 7.95, 7.95)
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 3/3/2020
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;


Area Scan (71x91x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.0332 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 4.126 V/m ; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.0960 W/kg

SAR(1 g) = 0.029 W/kg ; SAR(10 g) = 0.015 W/kg

Maximum value of SAR (measured) = 0.0274 W/kg

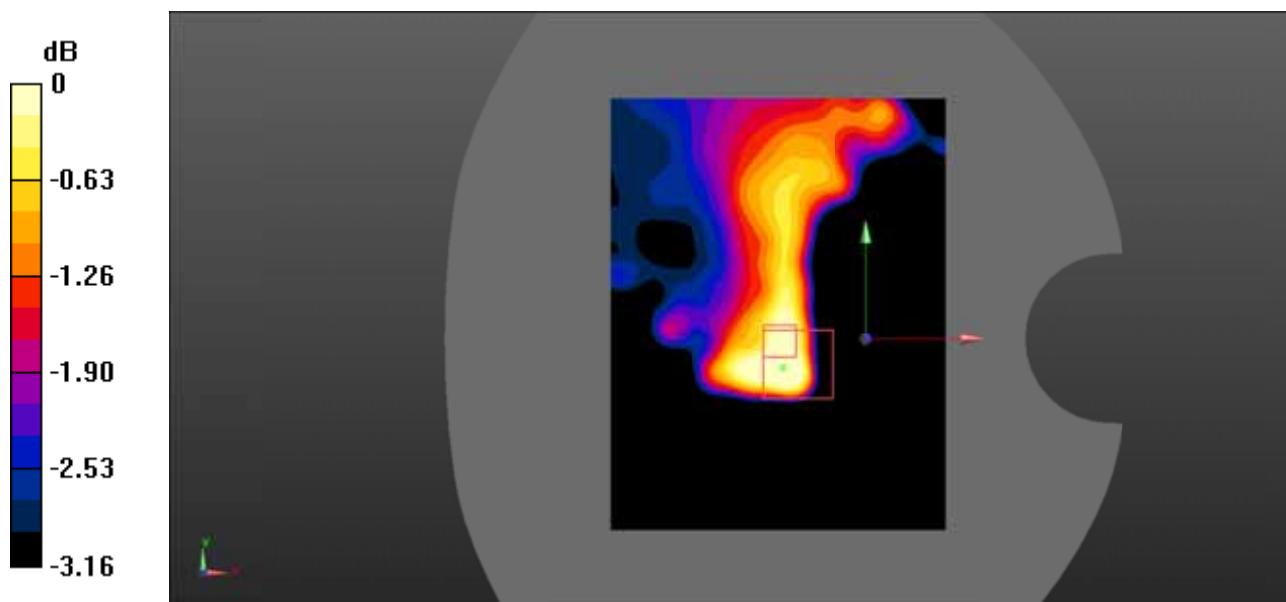

0 dB = $0.0274 \text{ W/kg} = -15.62 \text{ dBW/kg}$

Test Plot 55#: LTE Band 2_Body Left_50%RB_Middle

DUT: Mobile Phone; Type: X688C; Serial: RSZ201102004-SA-S1;

Communication System: Generic FDD-LTE; Frequency: 1880 MHz;Duty Cycle: 1:1
 Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.39 \text{ S/m}$; $\epsilon_r = 39.856$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.95, 7.95, 7.95)
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562;Calibrated: 3/3/2020
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x91x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.0330 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 4.168 V/m ; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.0550 W/kg

SAR(1 g) = 0.025 W/kg ; SAR(10 g) = 0.013 W/kg

Maximum value of SAR (measured) = 0.0245 W/kg

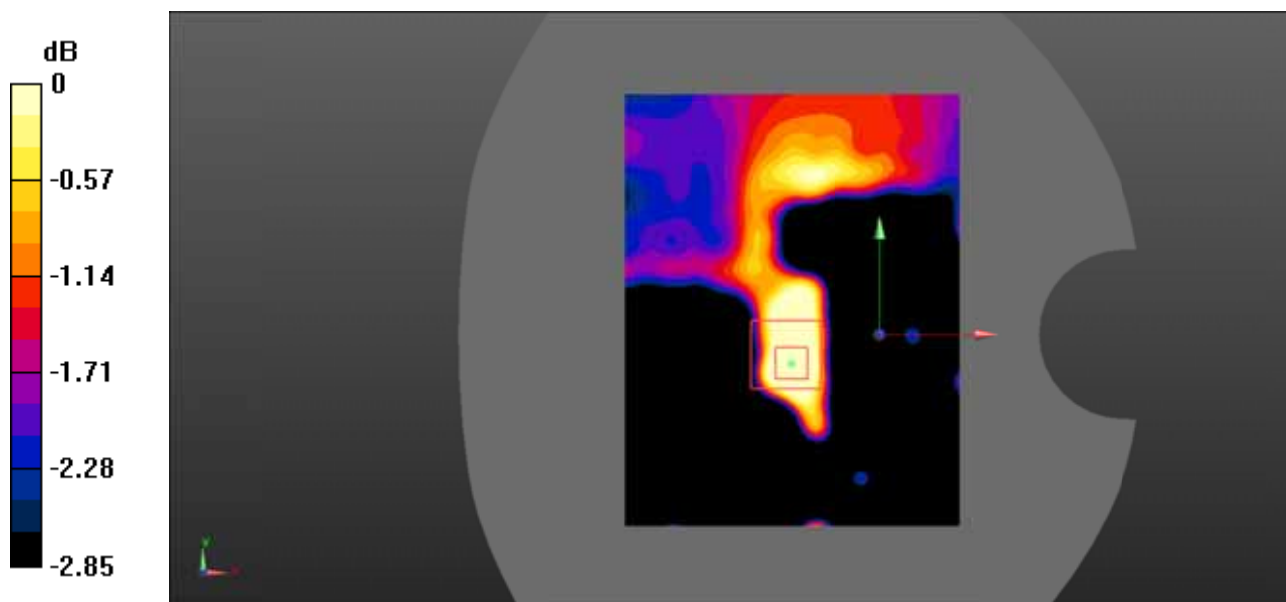

0 dB = 0.0245 W/kg = -16.11 dBW/kg

Test Plot 56#: LTE Band 2_Body Top_1RB_Middle

DUT: Mobile Phone; Type: X688C; Serial: RSZ201102004-SA-S1;

Communication System: Generic FDD-LTE; Frequency: 1880 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.39 \text{ S/m}$; $\epsilon_r = 39.856$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Flat Section


DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.95, 7.95, 7.95)
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 3/3/2020
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x91x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.209 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 9.369 V/m ; Power Drift = -0.17 dB
 Peak SAR (extrapolated) = 0.348 W/kg

SAR(1 g) = 0.194 W/kg; SAR(10 g) = 0.103 W/kg
 Maximum value of SAR (measured) = 0.213 W/kg

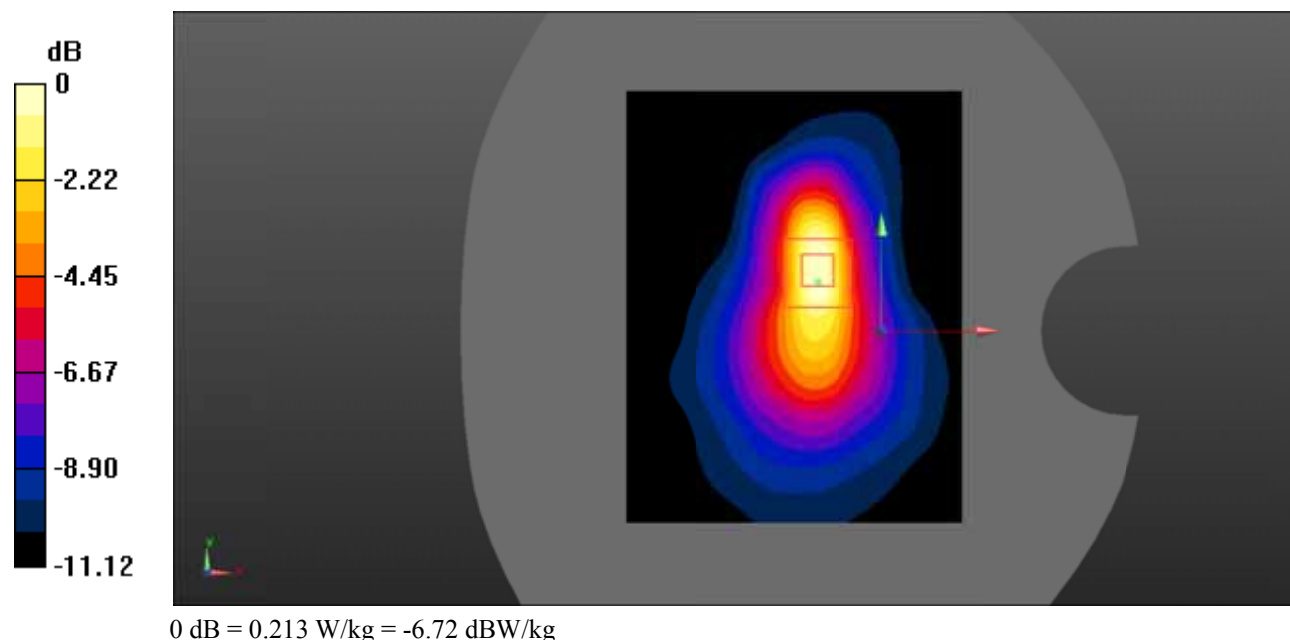

Test Plot 57#: LTE Band 2_Body Top_50%RB_Middle

DUT: Mobile Phone; Type: X688C; Serial: RSZ201102004-SA-S1;

Communication System: Generic FDD-LTE; Frequency: 1880 MHz;Duty Cycle: 1:1
 Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.39 \text{ S/m}$; $\epsilon_r = 39.856$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Flat Section


DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.95, 7.95, 7.95)
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562;Calibrated: 3/3/2020
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x91x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.177 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 8.669 V/m ; Power Drift = -0.07 dB
 Peak SAR (extrapolated) = 0.299 W/kg

SAR(1 g) = 0.165 W/kg; SAR(10 g) = 0.088 W/kg
 Maximum value of SAR (measured) = 0.179 W/kg

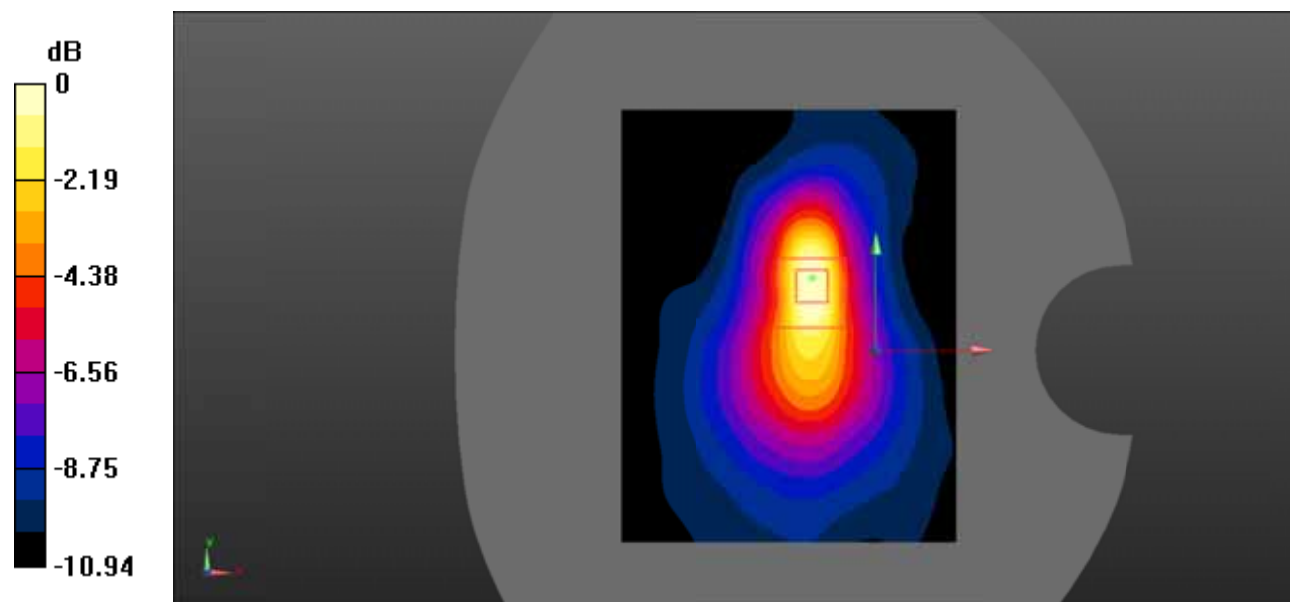

0 dB = $0.179 \text{ W/kg} = -7.47 \text{ dBW/kg}$

Test Plot 58#: LTE Band 4_Head Left Cheek_1RB_Middle

DUT: Mobile Phone; Type: X688C; Serial: RSZ201102004-SA-S1;

Communication System: Generic FDD-LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1732.5$ MHz; $\sigma = 1.373$ S/m; $\epsilon_r = 41.642$; $\rho = 1000$ kg/m³ ;
 Phantom section: Left Section


DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(8.21, 8.21, 8.21)
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 3/3/2020
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
 Maximum value of SAR (interpolated) = 0.392 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 11.74 V/m; Power Drift = -0.12 dB
 Peak SAR (extrapolated) = 0.631 W/kg

SAR(1 g) = 0.384 W/kg; SAR(10 g) = 0.211 W/kg
 Maximum value of SAR (measured) = 0.405 W/kg

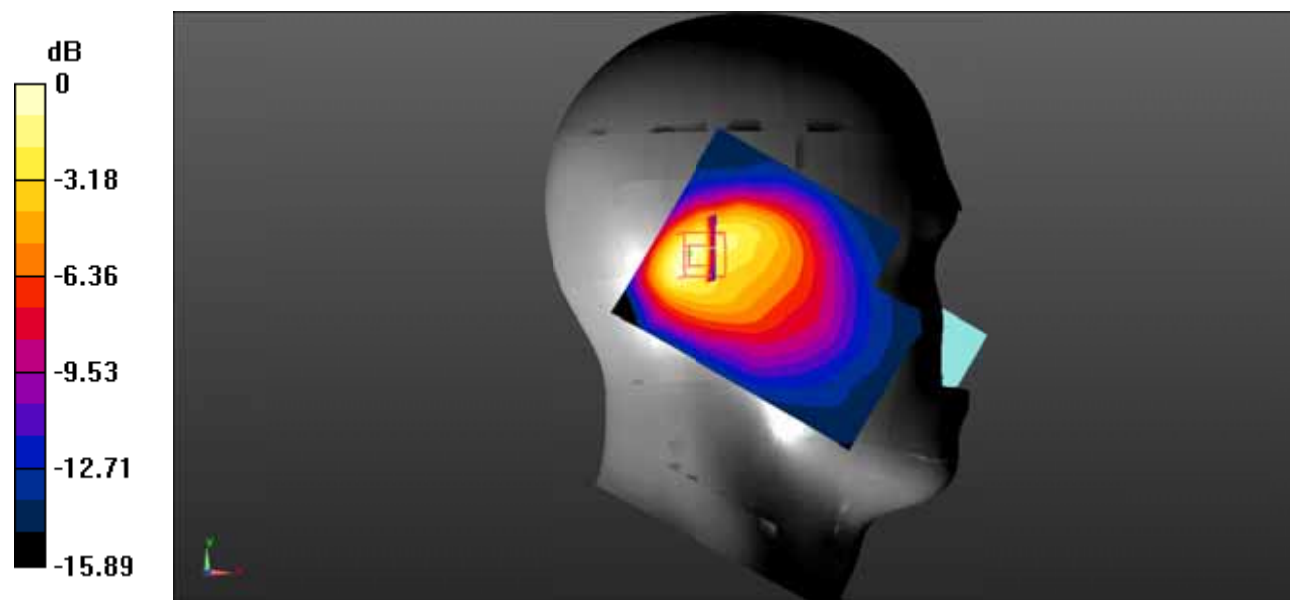

0 dB = 0.405 W/kg = -3.93 dBW/kg

Test Plot 59#: LTE Band 4_Head Left Cheek_50%RB_Middle

DUT: Mobile Phone; Type: X688C; Serial: RSZ201102004-SA-S1;

Communication System: Generic FDD-LTE; Frequency: 1732.5 MHz;Duty Cycle: 1:1
 Medium parameters used: $f = 1732.5$ MHz; $\sigma = 1.373$ S/m; $\epsilon_r = 41.642$; $\rho = 1000$ kg/m³ ;
 Phantom section: Left Section


DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(8.21, 8.21, 8.21)
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562;Calibrated: 3/3/2020
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
 Maximum value of SAR (interpolated) = 0.223 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 12.34 V/m; Power Drift = -0.05 dB
 Peak SAR (extrapolated) = 0.354 W/kg

SAR(1 g) = 0.218 W/kg; SAR(10 g) = 0.123 W/kg
 Maximum value of SAR (measured) = 0.232 W/kg

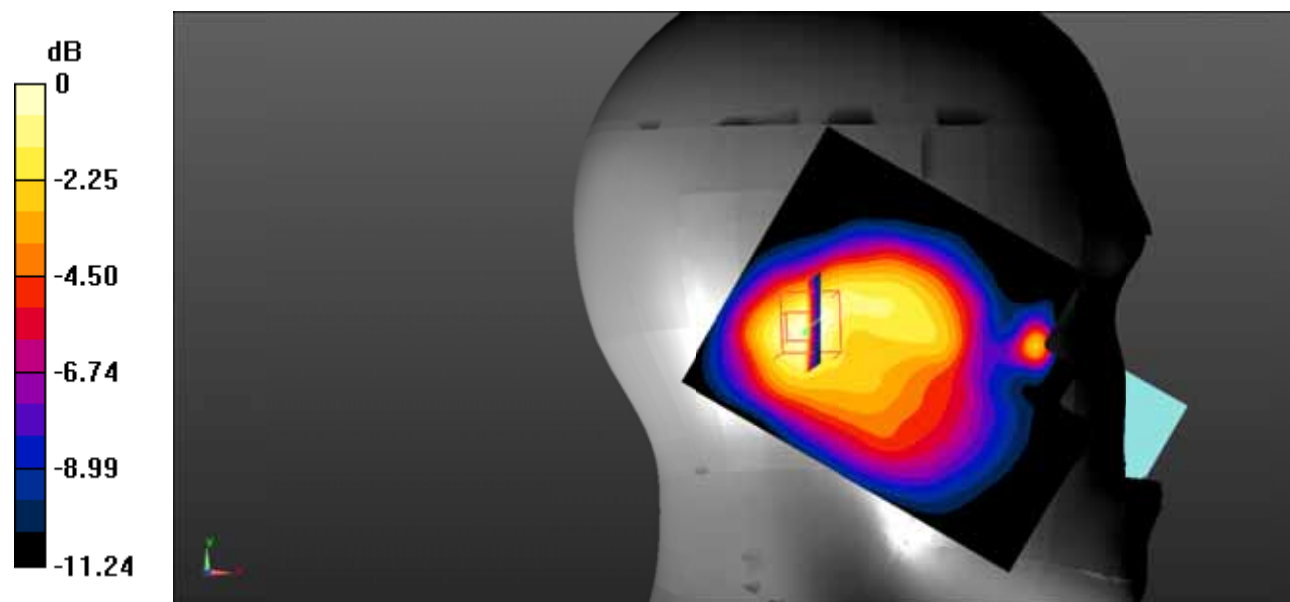

0 dB = 0.232 W/kg = -6.35 dBW/kg

Test Plot 60#: LTE Band 4_Head Left Tilt_1RB_Middle

DUT: Mobile Phone; Type: X688C; Serial: RSZ201102004-SA-S1;

Communication System: Generic FDD-LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1732.5$ MHz; $\sigma = 1.373$ S/m; $\epsilon_r = 41.642$; $\rho = 1000$ kg/m³ ;
 Phantom section: Left Section


DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(8.21, 8.21, 8.21)
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 3/3/2020
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
 Maximum value of SAR (interpolated) = 0.451 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 13.36 V/m; Power Drift = -0.06 dB
 Peak SAR (extrapolated) = 0.700 W/kg

SAR(1 g) = 0.407 W/kg; SAR(10 g) = 0.223 W/kg
 Maximum value of SAR (measured) = 0.456 W/kg

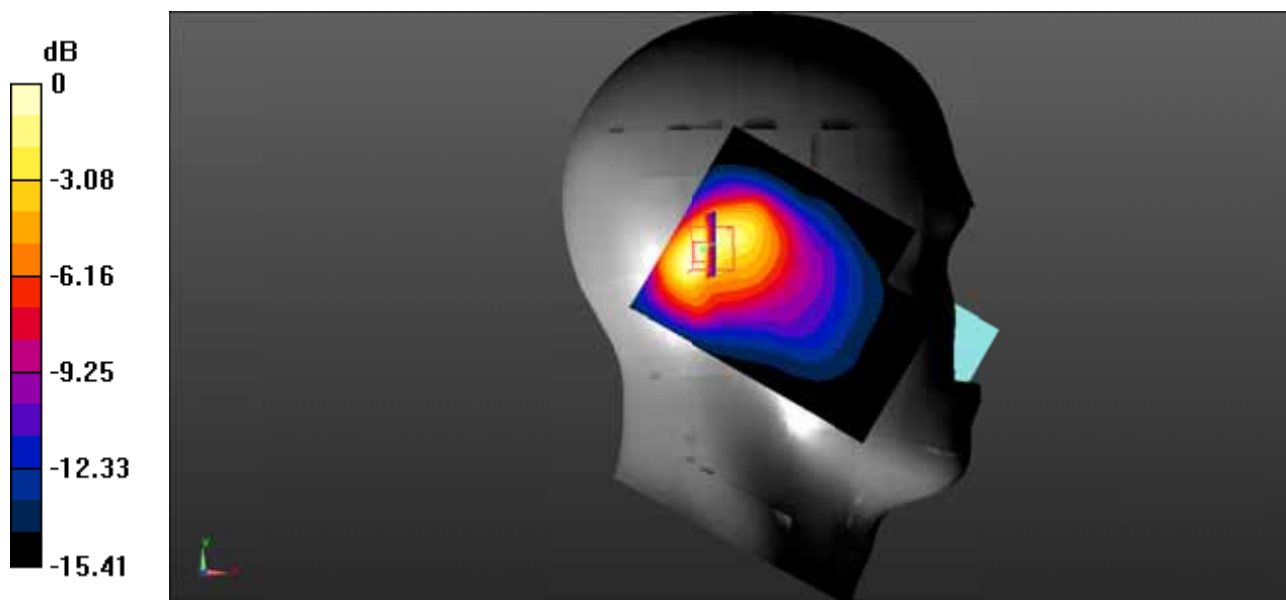

0 dB = 0.456 W/kg = -3.41 dBW/kg

Test Plot 61#: LTE Band 4_Head Left Tilt_50%RB_Middle

DUT: Mobile Phone; Type: X688C; Serial: RSZ201102004-SA-S1;

Communication System: Generic FDD-LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1732.5 \text{ MHz}$; $\sigma = 1.373 \text{ S/m}$; $\epsilon_r = 41.642$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Left Section


DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(8.21, 8.21, 8.21)
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 3/3/2020
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x91x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.407 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 12.43 V/m ; Power Drift = 0.06 dB
 Peak SAR (extrapolated) = 0.578 W/kg

SAR(1 g) = 0.347 W/kg ; SAR(10 g) = 0.191 W/kg
 Maximum value of SAR (measured) = 0.383 W/kg

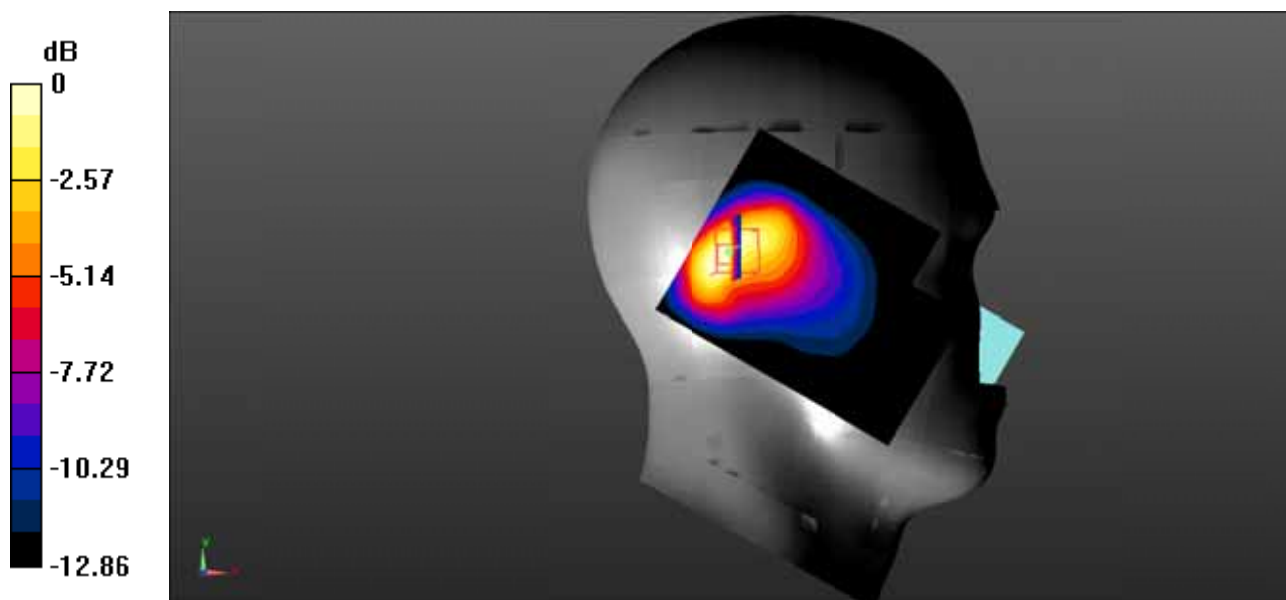

0 dB = $0.383 \text{ W/kg} = -4.17 \text{ dBW/kg}$

Test Plot 62#: LTE Band 4_Head Right Cheek_1RB_Middle

DUT: Mobile Phone; Type: X688C; Serial: RSZ201102004-SA-S1;

Communication System: Generic FDD-LTE; Frequency: 1732.5 MHz;Duty Cycle: 1:1
 Medium parameters used: $f = 1732.5$ MHz; $\sigma = 1.373$ S/m; $\epsilon_r = 41.642$; $\rho = 1000$ kg/m³ ;
 Phantom section: Right Section


DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(8.21, 8.21, 8.21)
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562;Calibrated: 3/3/2020
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
 Maximum value of SAR (interpolated) = 0.632 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 10.07 V/m; Power Drift = -0.11 dB
 Peak SAR (extrapolated) = 0.957 W/kg

SAR(1 g) = 0.532 W/kg; SAR(10 g) = 0.266 W/kg
 Maximum value of SAR (measured) = 0.619 W/kg

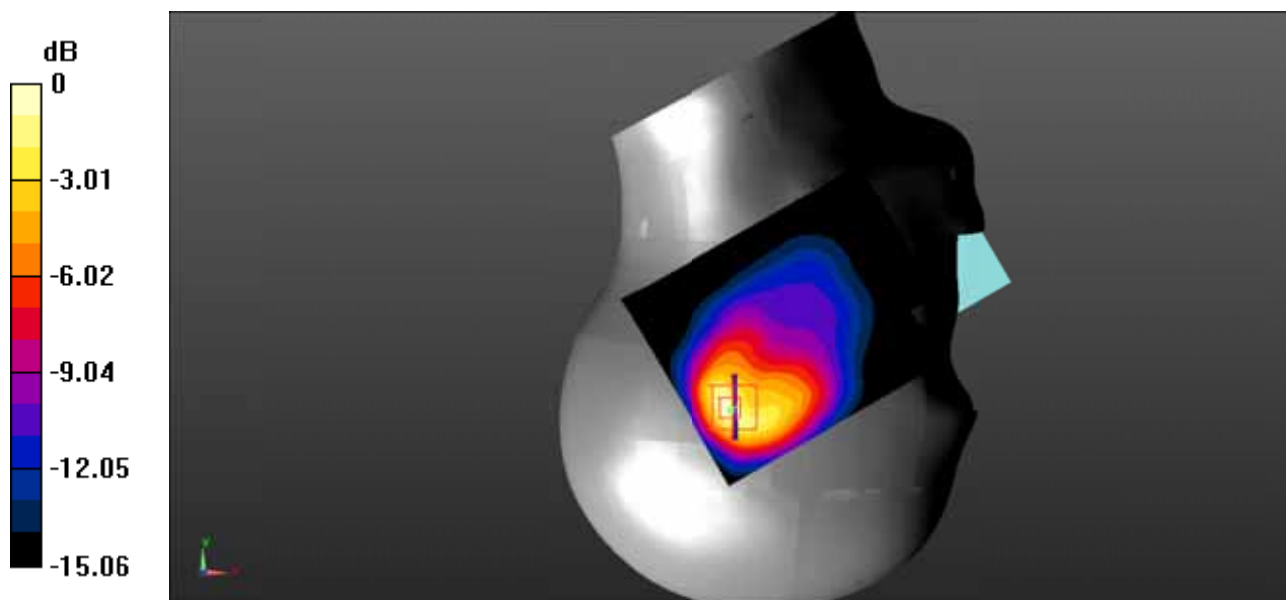

0 dB = 0.619 W/kg = -2.08 dBW/kg

Test Plot 63#: LTE Band 4_Head Right Cheek_50%RB_Middle

DUT: Mobile Phone; Type: X688C; Serial: RSZ201102004-SA-S1;

Communication System: Generic FDD-LTE; Frequency: 1732.5 MHz;Duty Cycle: 1:1
 Medium parameters used: $f = 1732.5 \text{ MHz}$; $\sigma = 1.373 \text{ S/m}$; $\epsilon_r = 41.642$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Right Section


DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(8.21, 8.21, 8.21)
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562;Calibrated: 3/3/2020
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x91x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.588 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 11.70 V/m ; Power Drift = -0.02 dB
 Peak SAR (extrapolated) = 0.977 W/kg

SAR(1 g) = 0.537 W/kg; SAR(10 g) = 0.263 W/kg
 Maximum value of SAR (measured) = 0.635 W/kg

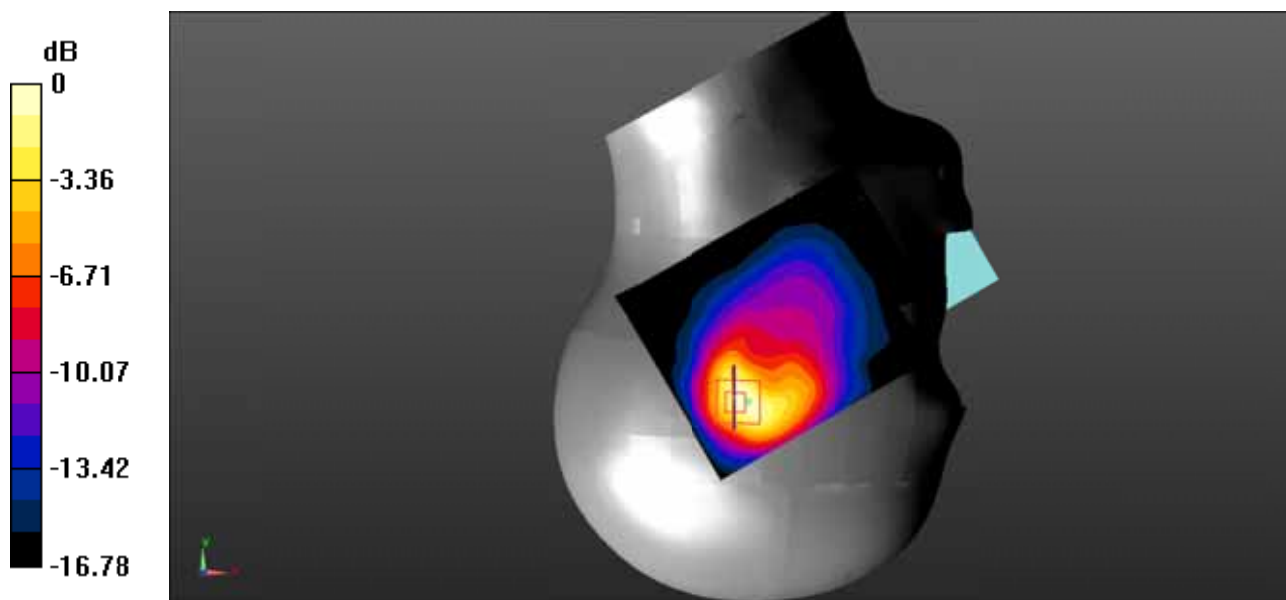

0 dB = 0.635 W/kg = -1.97 dBW/kg

Test Plot 64#: LTE Band 4_Head Right Tilt_1RB_Middle

DUT: Mobile Phone; Type: X688C; Serial: RSZ201102004-SA-S1;

Communication System: Generic FDD-LTE; Frequency: 1732.5 MHz;Duty Cycle: 1:1
 Medium parameters used: $f = 1732.5$ MHz; $\sigma = 1.373$ S/m; $\epsilon_r = 41.642$; $\rho = 1000$ kg/m³ ;
 Phantom section: Right Section


DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(8.21, 8.21, 8.21)
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562;Calibrated: 3/3/2020
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
 Maximum value of SAR (interpolated) = 0.727 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 16.60 V/m; Power Drift = -0.10 dB
 Peak SAR (extrapolated) = 1.39 W/kg

SAR(1 g) = 0.728 W/kg; SAR(10 g) = 0.348 W/kg
 Maximum value of SAR (measured) = 0.814 W/kg

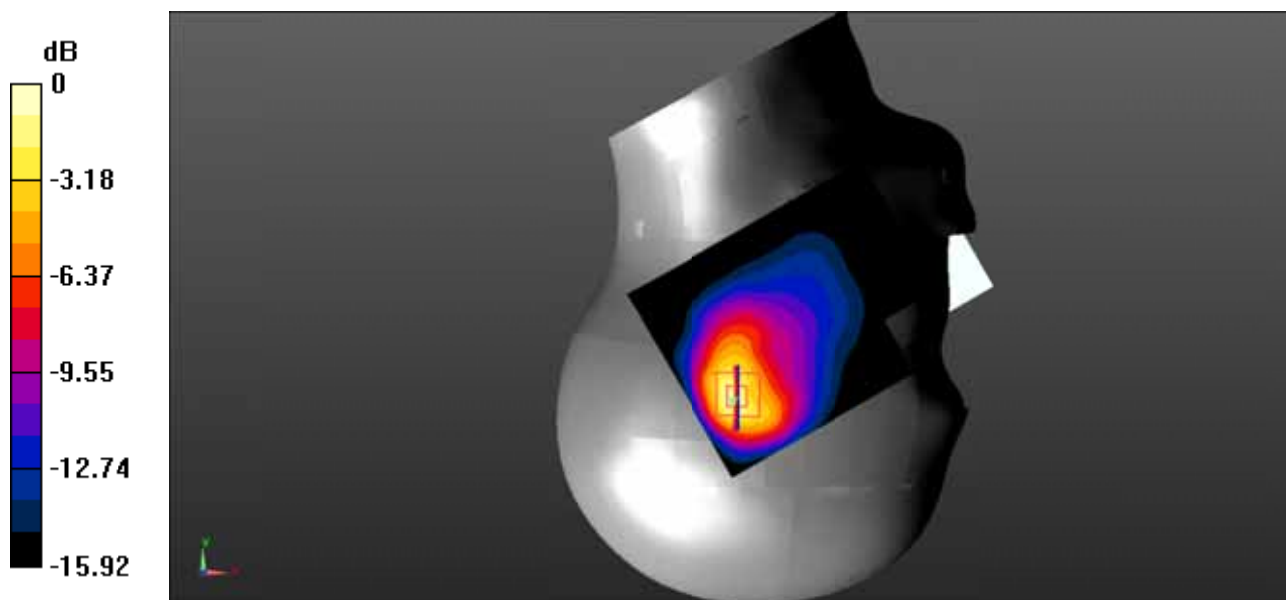

0 dB = 0.814 W/kg = -0.89 dBW/kg

Test Plot 65#: LTE Band 4_Head Right Tilt_50%RB_Middle

DUT: Mobile Phone; Type: X688C; Serial: RSZ201102004-SA-S1;

Communication System: Generic FDD-LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1732.5$ MHz; $\sigma = 1.373$ S/m; $\epsilon_r = 41.642$; $\rho = 1000$ kg/m³ ;
 Phantom section: Right Section


DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(8.21, 8.21, 8.21)
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 3/3/2020
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
 Maximum value of SAR (interpolated) = 0.571 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 14.58 V/m; Power Drift = 0.06 dB
 Peak SAR (extrapolated) = 1.20 W/kg

SAR(1 g) = 0.630 W/kg; SAR(10 g) = 0.301 W/kg
 Maximum value of SAR (measured) = 0.700 W/kg

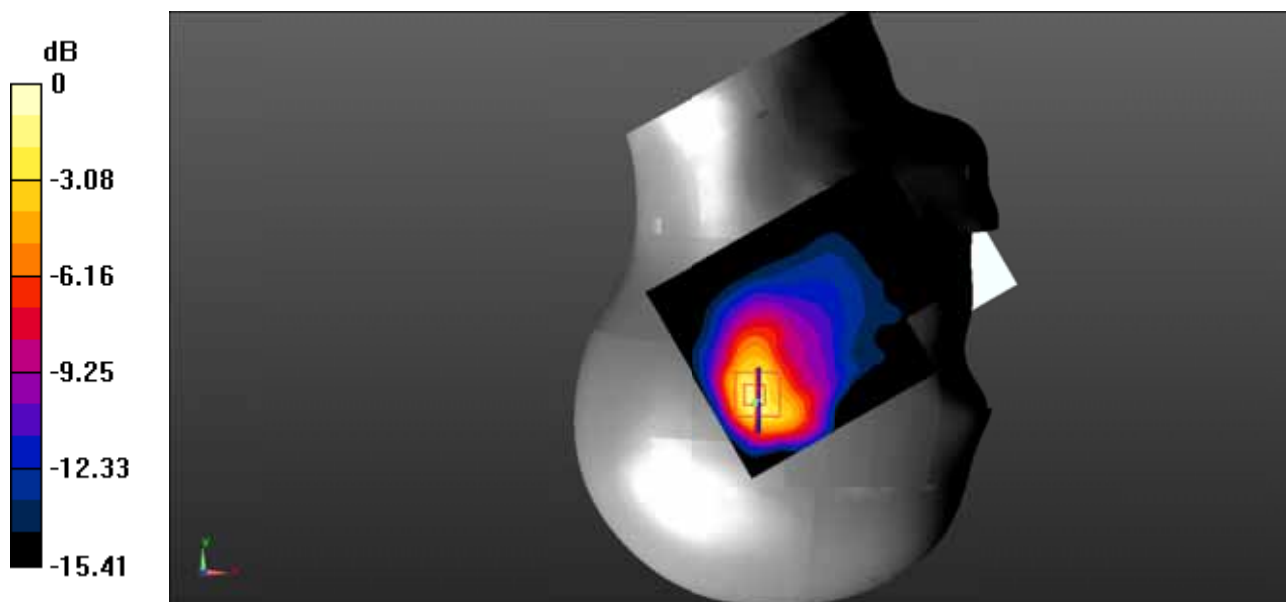

0 dB = 0.700 W/kg = -1.55 dBW/kg

Test Plot 66#: LTE Band 4_Body Back_1RB_Middle

DUT: Mobile Phone; Type: X688C; Serial: RSZ201102004-SA-S1;

Communication System: Generic FDD-LTE; Frequency: 1732.5 MHz;Duty Cycle: 1:1
 Medium parameters used: $f = 1732.5$ MHz; $\sigma = 1.373$ S/m; $\epsilon_r = 41.642$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section


DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(8.21, 8.21, 8.21)
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562;Calibrated: 3/3/2020
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
 Maximum value of SAR (interpolated) = 0.0919 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 6.818 V/m; Power Drift = 0.10 dB
 Peak SAR (extrapolated) = 0.136 W/kg

SAR(1 g) = 0.085 W/kg; SAR(10 g) = 0.054 W/kg
 Maximum value of SAR (measured) = 0.0925 W/kg

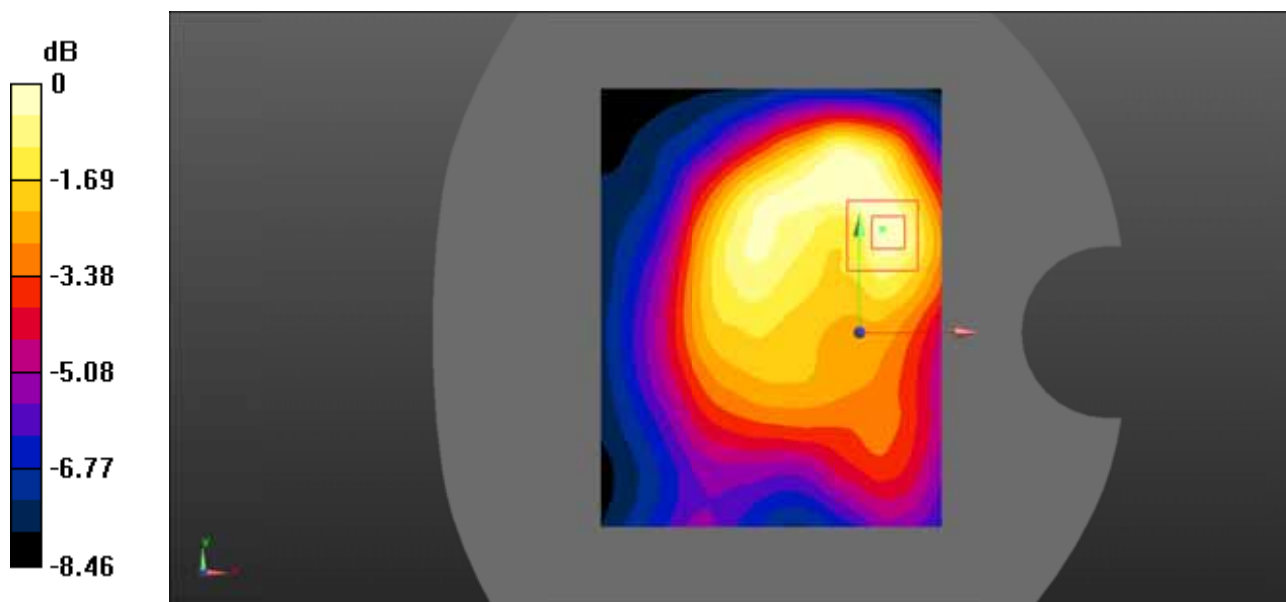

0 dB = 0.0925 W/kg = -10.34 dBW/kg

Test Plot 67#: LTE Band 4_Body Back_50%RB_Middle

DUT: Mobile Phone; Type: X688C; Serial: RSZ201102004-SA-S1;

Communication System: Generic FDD-LTE; Frequency: 1732.5 MHz;Duty Cycle: 1:1
 Medium parameters used: $f = 1732.5$ MHz; $\sigma = 1.373$ S/m; $\epsilon_r = 41.642$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section


DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(8.21, 8.21, 8.21)
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562;Calibrated: 3/3/2020
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
 Maximum value of SAR (interpolated) = 0.0803 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 6.329 V/m; Power Drift = 0.05 dB
 Peak SAR (extrapolated) = 0.119 W/kg

SAR(1 g) = 0.074 W/kg; SAR(10 g) = 0.048 W/kg
 Maximum value of SAR (measured) = 0.0796 W/kg

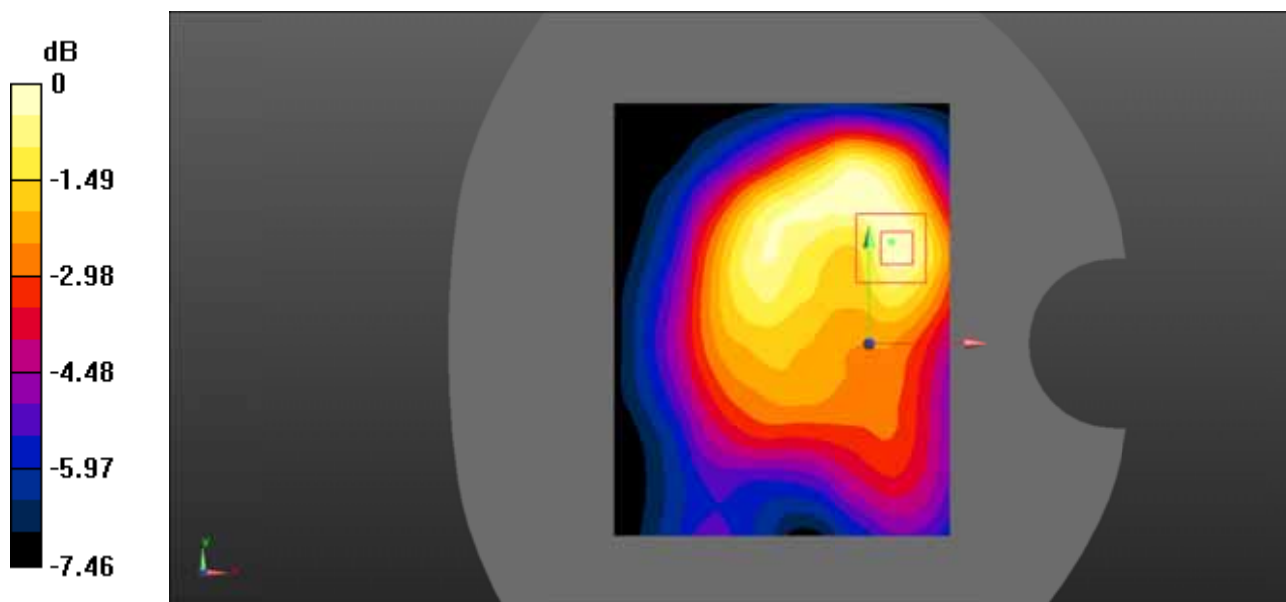

0 dB = 0.0796 W/kg = -10.99 dBW/kg

Test Plot 68#: LTE Band 4_Body Left_1RB_Middle

DUT: Mobile Phone; Type: X688C; Serial: RSZ201102004-SA-S1;

Communication System: Generic FDD-LTE; Frequency: 1732.5 MHz;Duty Cycle: 1:1
 Medium parameters used: $f = 1732.5$ MHz; $\sigma = 1.373$ S/m; $\epsilon_r = 41.642$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section


DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(8.21, 8.21, 8.21)
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562;Calibrated: 3/3/2020
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
 Maximum value of SAR (interpolated) = 0.0483 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 4.815 V/m; Power Drift = 0.17 dB
 Peak SAR (extrapolated) = 0.0500 W/kg

SAR(1 g) = 0.031 W/kg; SAR(10 g) = 0.022 W/kg
 Maximum value of SAR (measured) = 0.0498 W/kg

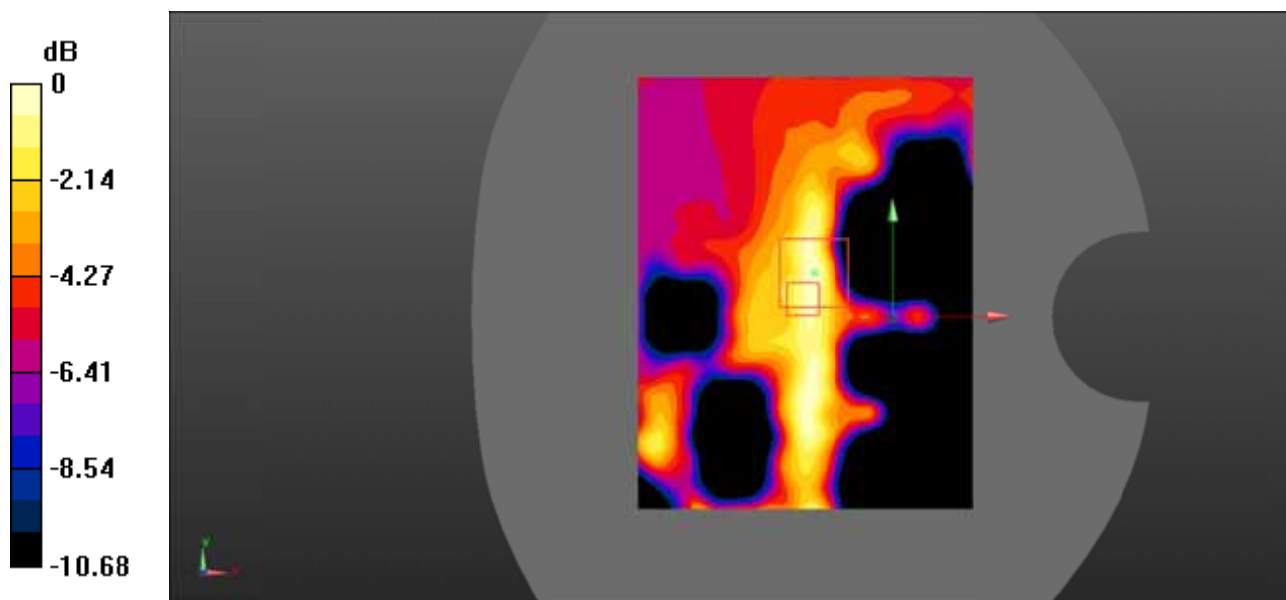

0 dB = 0.0498 W/kg = -13.03 dBW/kg

Test Plot 69#: LTE Band 4_Body Left_50%RB_Middle

DUT: Mobile Phone; Type: X688C; Serial: RSZ201102004-SA-S1;

Communication System: Generic FDD-LTE; Frequency: 1732.5 MHz;Duty Cycle: 1:1
 Medium parameters used: $f = 1732.5 \text{ MHz}$; $\sigma = 1.373 \text{ S/m}$; $\epsilon_r = 41.642$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Flat Section


DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(8.21, 8.21, 8.21)
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562;Calibrated: 3/3/2020
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x91x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.0500 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 4.581 V/m ; Power Drift = 0.18 dB
 Peak SAR (extrapolated) = 0.101 W/kg

SAR(1 g) = 0.025 W/kg; SAR(10 g) = 0.012 W/kg
 Maximum value of SAR (measured) = 0.0261 W/kg

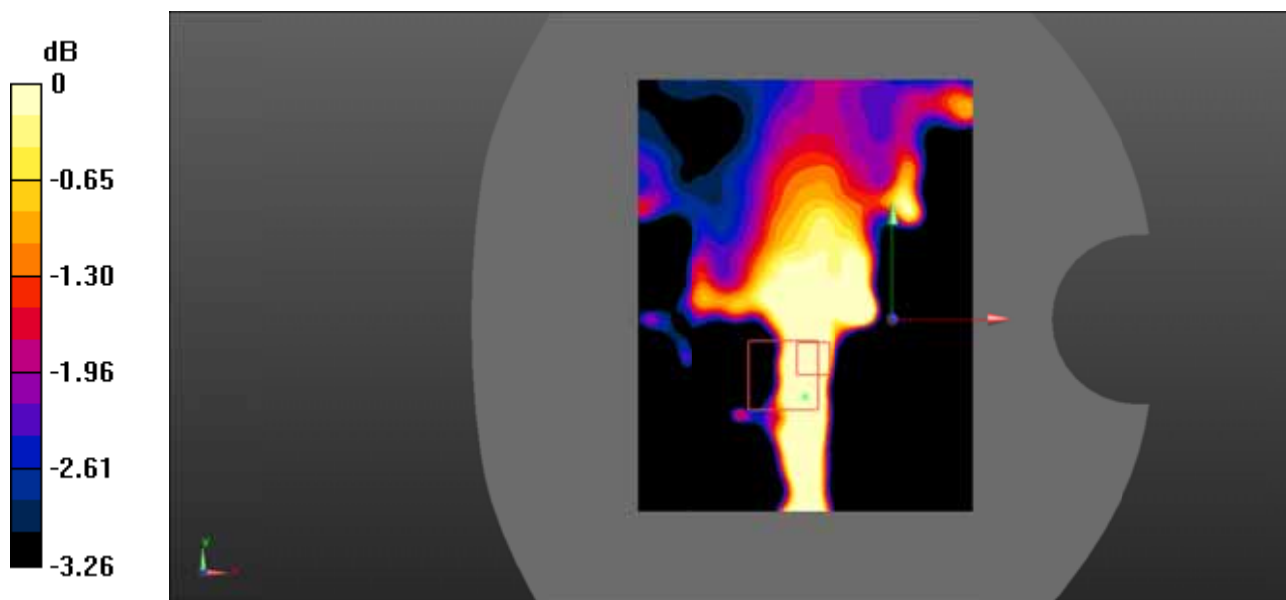

0 dB = $0.0261 \text{ W/kg} = -15.83 \text{ dBW/kg}$

Test Plot 70#: LTE Band 4_Body Top_1RB_Middle

DUT: Mobile Phone; Type: X688C; Serial: RSZ201102004-SA-S1;

Communication System: Generic FDD-LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1732.5$ MHz; $\sigma = 1.373$ S/m; $\epsilon_r = 41.642$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section


DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(8.21, 8.21, 8.21)
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 3/3/2020
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
 Maximum value of SAR (interpolated) = 0.224 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 10.52 V/m; Power Drift = -0.11 dB
 Peak SAR (extrapolated) = 0.353 W/kg

SAR(1 g) = 0.209 W/kg; SAR(10 g) = 0.114 W/kg
 Maximum value of SAR (measured) = 0.225 W/kg

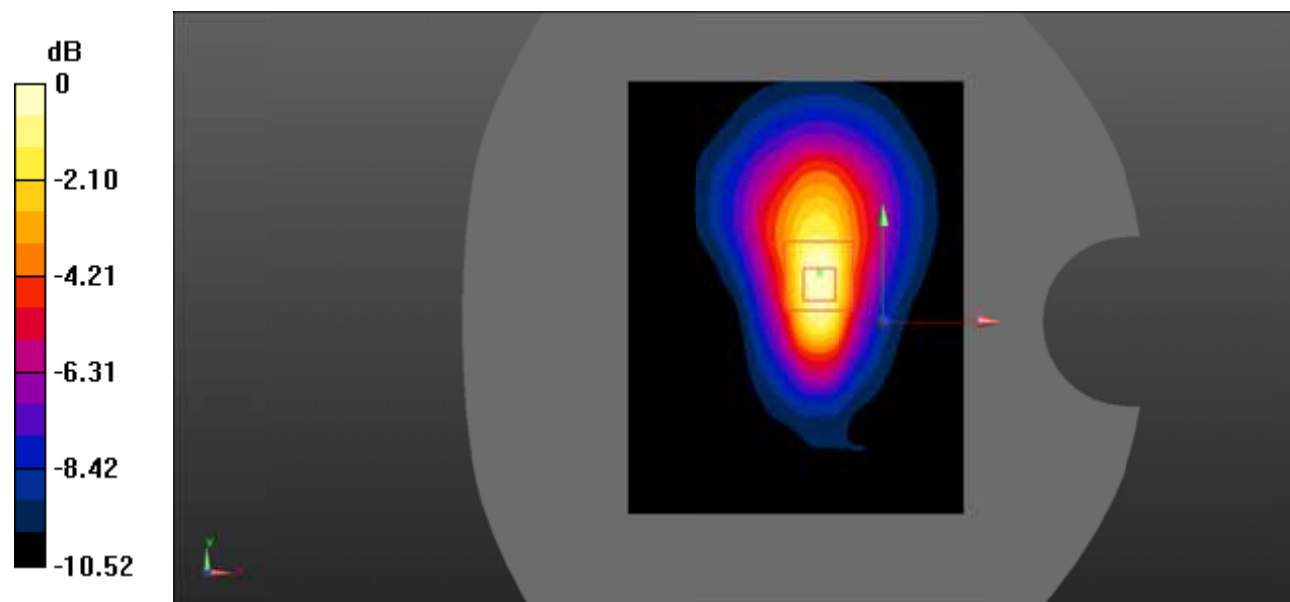

0 dB = 0.225 W/kg = -6.48 dBW/kg

Test Plot 71#: LTE Band 4_Body Top_50%RB_Middle

DUT: Mobile Phone; Type: X688C; Serial: RSZ201102004-SA-S1;

Communication System: Generic FDD-LTE; Frequency: 1732.5 MHz;Duty Cycle: 1:1
 Medium parameters used: $f = 1732.5$ MHz; $\sigma = 1.373$ S/m; $\epsilon_r = 41.642$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section


DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(8.21, 8.21, 8.21)
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562;Calibrated: 3/3/2020
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
 Maximum value of SAR (interpolated) = 0.190 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 9.647 V/m; Power Drift = 0.15 dB
 Peak SAR (extrapolated) = 0.291 W/kg

SAR(1 g) = 0.176 W/kg; SAR(10 g) = 0.098 W/kg
 Maximum value of SAR (measured) = 0.193 W/kg

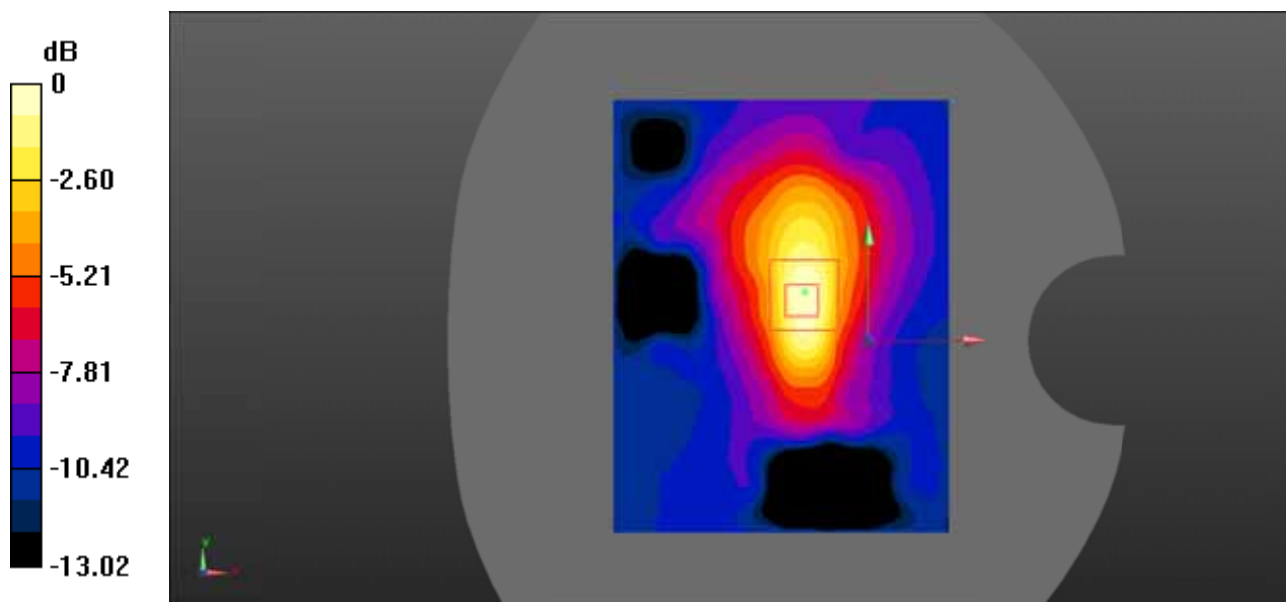

0 dB = 0.193 W/kg = -7.14 dBW/kg

Test Plot 72#: LTE Band 5_Head Left Cheek_1RB_Middle

DUT: Mobile Phone; Type: X688C; Serial: RSZ201102004-SA-S1;

Communication System: Generic FDD-LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 836.5 \text{ MHz}$; $\sigma = 0.923 \text{ S/m}$; $\epsilon_r = 41.437$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Left Section


DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.92, 9.92, 9.92)
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 3/3/2020
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x91x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.172 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 12.35 V/m ; Power Drift = -0.12 dB
 Peak SAR (extrapolated) = 0.209 W/kg

SAR(1 g) = 0.159 W/kg; SAR(10 g) = 0.116 W/kg
 Maximum value of SAR (measured) = 0.165 W/kg

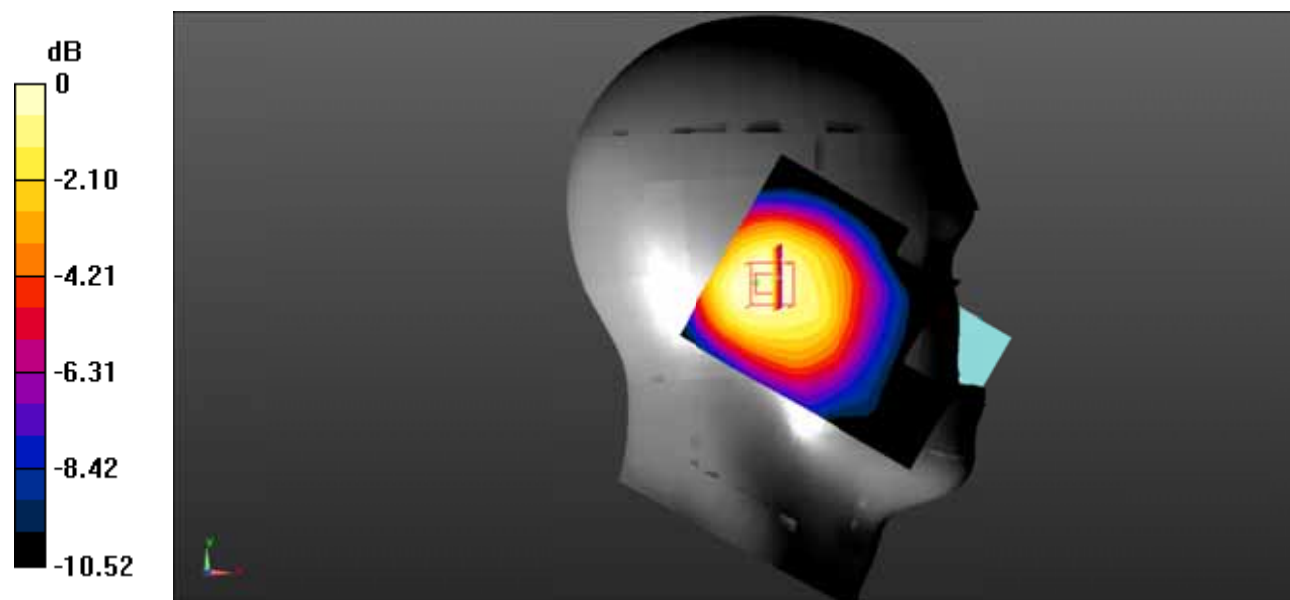

0 dB = $0.165 \text{ W/kg} = -7.83 \text{ dBW/kg}$

Test Plot 73#: LTE Band 5_Head Left Cheek_50%RB_Middle

DUT: Mobile Phone; Type: X688C; Serial: RSZ201102004-SA-S1;

Communication System: Generic FDD-LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 836.5 \text{ MHz}$; $\sigma = 0.923 \text{ S/m}$; $\epsilon_r = 41.437$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Left Section


DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.92, 9.92, 9.92)
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 3/3/2020
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x91x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.171 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 13.19 V/m ; Power Drift = -0.17 dB
 Peak SAR (extrapolated) = 0.208 W/kg

SAR(1 g) = 0.155 W/kg; SAR(10 g) = 0.110 W/kg
 Maximum value of SAR (measured) = 0.161 W/kg

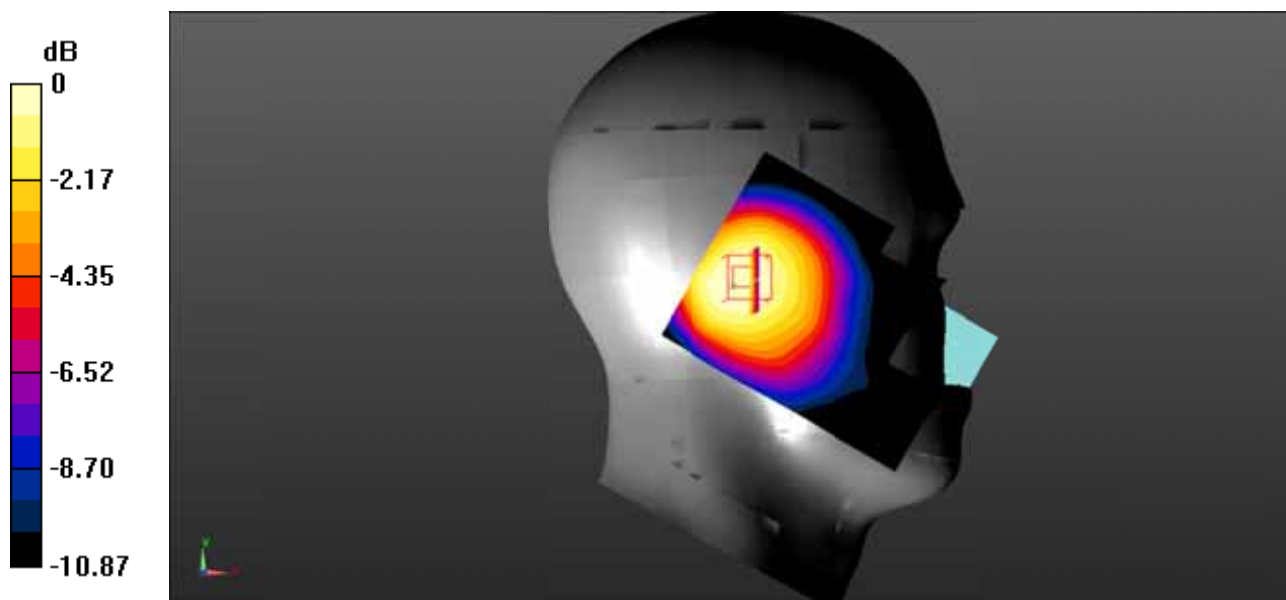

0 dB = $0.161 \text{ W/kg} = -7.93 \text{ dBW/kg}$

Test Plot 74#: LTE Band 5_Head Left Tilt_1RB_Middle

DUT: Mobile Phone; Type: X688C; Serial: RSZ201102004-SA-S1;

Communication System: Generic FDD-LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 836.5 \text{ MHz}$; $\sigma = 0.923 \text{ S/m}$; $\epsilon_r = 41.437$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Left Section


DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.92, 9.92, 9.92)
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 3/3/2020
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x91x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.205 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 14.67 V/m ; Power Drift = 0.02 dB
 Peak SAR (extrapolated) = 0.281 W/kg

SAR(1 g) = 0.185 W/kg; SAR(10 g) = 0.113 W/kg
 Maximum value of SAR (measured) = 0.192 W/kg

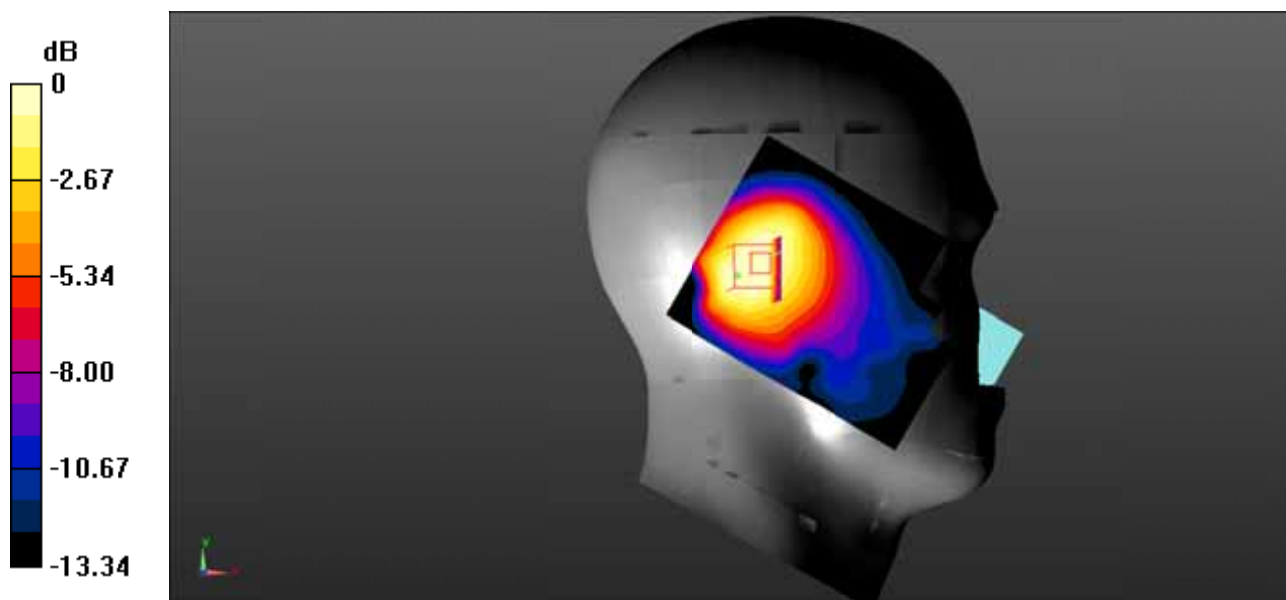

0 dB = $0.192 \text{ W/kg} = -7.17 \text{ dBW/kg}$

Test Plot 75#: LTE Band 5_Head Left Tilt_50%RB_Middle

DUT: Mobile Phone; Type: X688C; Serial: RSZ201102004-SA-S1;

Communication System: Generic FDD-LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 836.5 \text{ MHz}$; $\sigma = 0.923 \text{ S/m}$; $\epsilon_r = 41.437$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Left Section

DASY5 Configuration:


- Probe: EX3DV4 - SN7522; ConvF(9.92, 9.92, 9.92)
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 3/3/2020
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x91x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.158 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 13.19 V/m ; Power Drift = -0.05 dB
 Peak SAR (extrapolated) = 0.247 W/kg

SAR(1 g) = 0.146 W/kg; SAR(10 g) = 0.094 W/kg

Maximum value of SAR (measured) = 0.247 W/kg

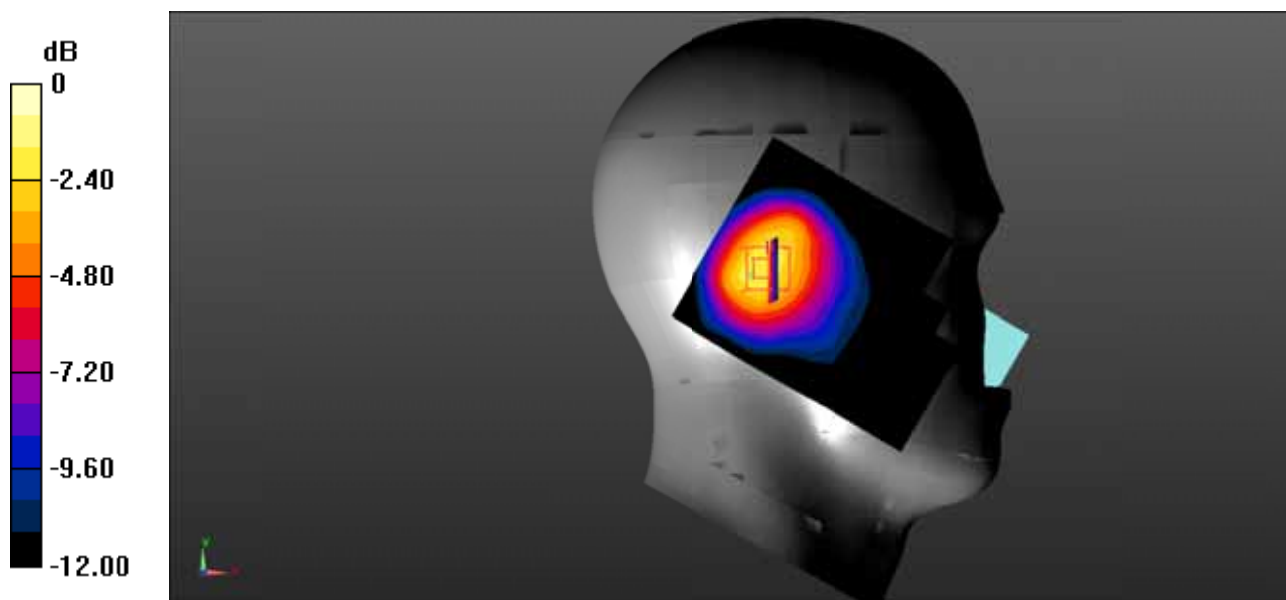

0 dB = $0.247 \text{ W/kg} = -6.07 \text{ dBW/kg}$

Test Plot 76#: LTE Band 5_Head Right Cheek_1RB_Middle

DUT: Mobile Phone; Type: X688C; Serial: RSZ201102004-SA-S1;

Communication System: Generic FDD-LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 836.5 \text{ MHz}$; $\sigma = 0.923 \text{ S/m}$; $\epsilon_r = 41.437$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Right Section


DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.92, 9.92, 9.92)
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 3/3/2020
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x91x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.342 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 13.50 V/m ; Power Drift = -0.09 dB
 Peak SAR (extrapolated) = 0.492 W/kg

SAR(1 g) = 0.272 W/kg; SAR(10 g) = 0.171 W/kg
 Maximum value of SAR (measured) = 0.277 W/kg

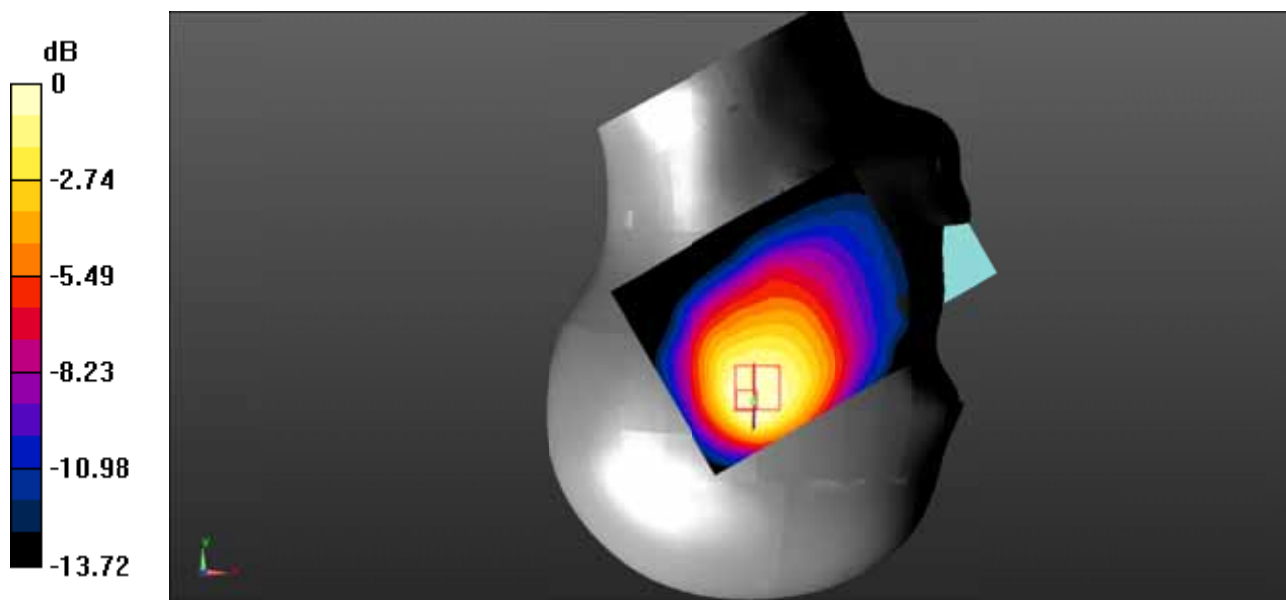

0 dB = $0.277 \text{ W/kg} = -5.58 \text{ dBW/kg}$

Test Plot 77#: LTE Band 5_Head Right Cheek_50%RB_Middle

DUT: Mobile Phone; Type: X688C; Serial: RSZ201102004-SA-S1;

Communication System: Generic FDD-LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 836.5 \text{ MHz}$; $\sigma = 0.923 \text{ S/m}$; $\epsilon_r = 41.437$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Right Section


DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.92, 9.92, 9.92)
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 3/3/2020
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x91x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.237 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 11.32 V/m ; Power Drift = 0.12 dB
 Peak SAR (extrapolated) = 0.389 W/kg

SAR(1 g) = 0.218 W/kg ; SAR(10 g) = 0.137 W/kg
 Maximum value of SAR (measured) = 0.225 W/kg

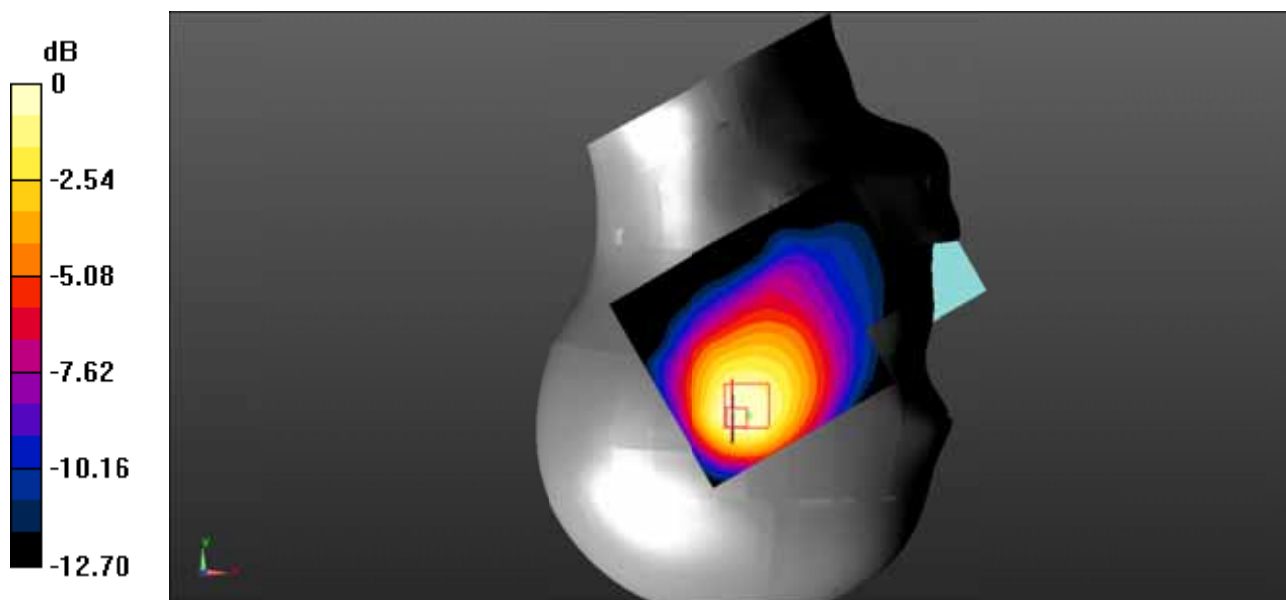

0 dB = $0.225 \text{ W/kg} = -6.48 \text{ dBW/kg}$

Test Plot 78#: LTE Band 5_Head Right Tilt_1RB_Middle

DUT: Mobile Phone; Type: X688C; Serial: RSZ201102004-SA-S1;

Communication System: Generic FDD-LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 836.5 \text{ MHz}$; $\sigma = 0.923 \text{ S/m}$; $\epsilon_r = 41.437$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Right Section


DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.92, 9.92, 9.92)
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 3/3/2020
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x91x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.278 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 13.40 V/m ; Power Drift = -0.09 dB
 Peak SAR (extrapolated) = 0.469 W/kg

SAR(1 g) = 0.231 W/kg; SAR(10 g) = 0.135 W/kg
 Maximum value of SAR (measured) = 0.248 W/kg

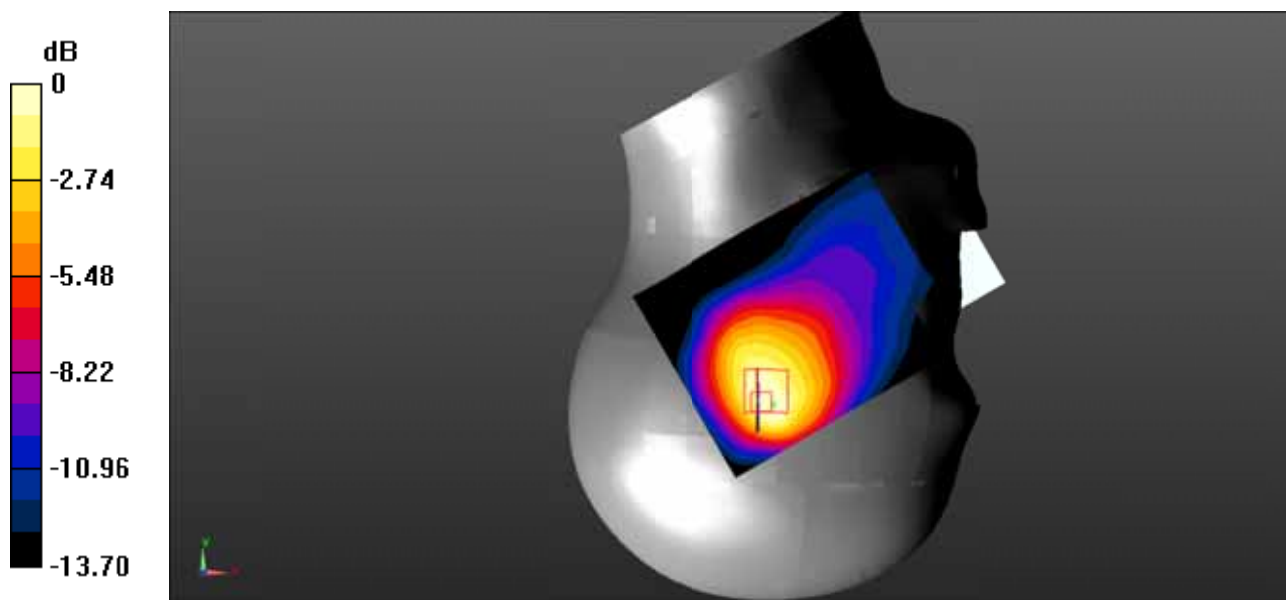

0 dB = $0.248 \text{ W/kg} = -6.06 \text{ dBW/kg}$

Test Plot 79#: LTE Band 5_Head Right Tilt_50%RB_Middle

DUT: Mobile Phone; Type: X688C; Serial: RSZ201102004-SA-S1;

Communication System: Generic FDD-LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.923$ S/m; $\epsilon_r = 41.437$; $\rho = 1000$ kg/m³ ;
 Phantom section: Right Section


DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.92, 9.92, 9.92)
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 3/3/2020
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
 Maximum value of SAR (interpolated) = 0.184 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 11.80 V/m; Power Drift = 0.02 dB
 Peak SAR (extrapolated) = 0.368 W/kg

SAR(1 g) = 0.183 W/kg; SAR(10 g) = 0.108 W/kg
 Maximum value of SAR (measured) = 0.183 W/kg

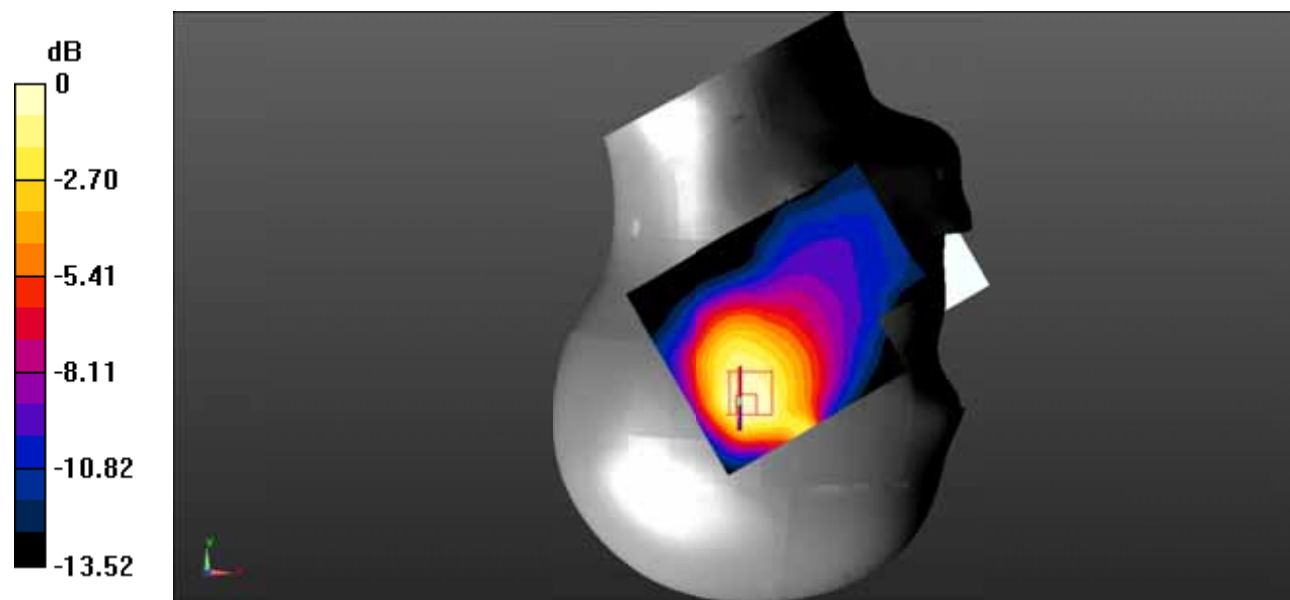

0 dB = 0.183 W/kg = -7.38 dBW/kg

Test Plot 80#: LTE Band 5_Body Back_1RB_Middle

DUT: Mobile Phone; Type: X688C; Serial: RSZ201102004-SA-S1;

Communication System: Generic FDD-LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 836.5 \text{ MHz}$; $\sigma = 0.923 \text{ S/m}$; $\epsilon_r = 41.437$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.92, 9.92, 9.92)
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 3/3/2020
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x91x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.0724 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 7.674 V/m ; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.0990 W/kg

SAR(1 g) = 0.067 W/kg ; SAR(10 g) = 0.045 W/kg

Maximum value of SAR (measured) = 0.0701 W/kg

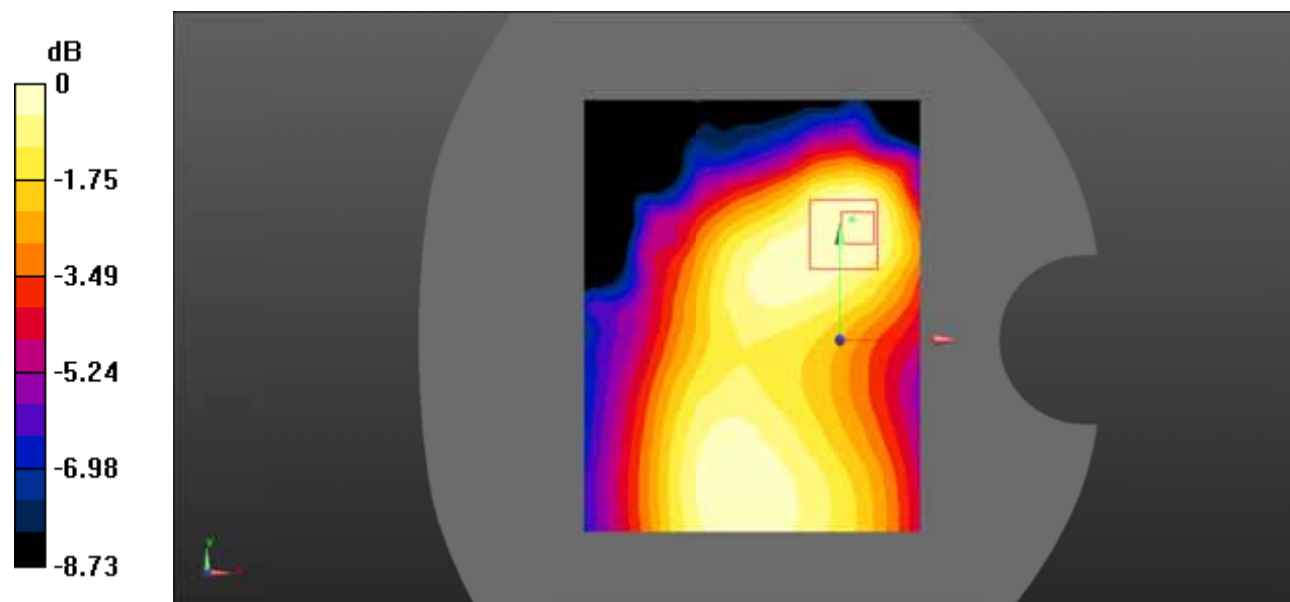

0 dB = 0.0701 W/kg = -11.54 dBW/kg

Test Plot 81#: LTE Band 5_Body Back_50%RB_Middle

DUT: Mobile Phone; Type: X688C; Serial: RSZ201102004-SA-S1;

Communication System: Generic FDD-LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 836.5 \text{ MHz}$; $\sigma = 0.923 \text{ S/m}$; $\epsilon_r = 41.437$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.92, 9.92, 9.92)
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 3/3/2020
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x91x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.0593 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 7.346 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.0860 W/kg

SAR(1 g) = 0.055 W/kg; SAR(10 g) = 0.037 W/kg

Maximum value of SAR (measured) = 0.0583 W/kg

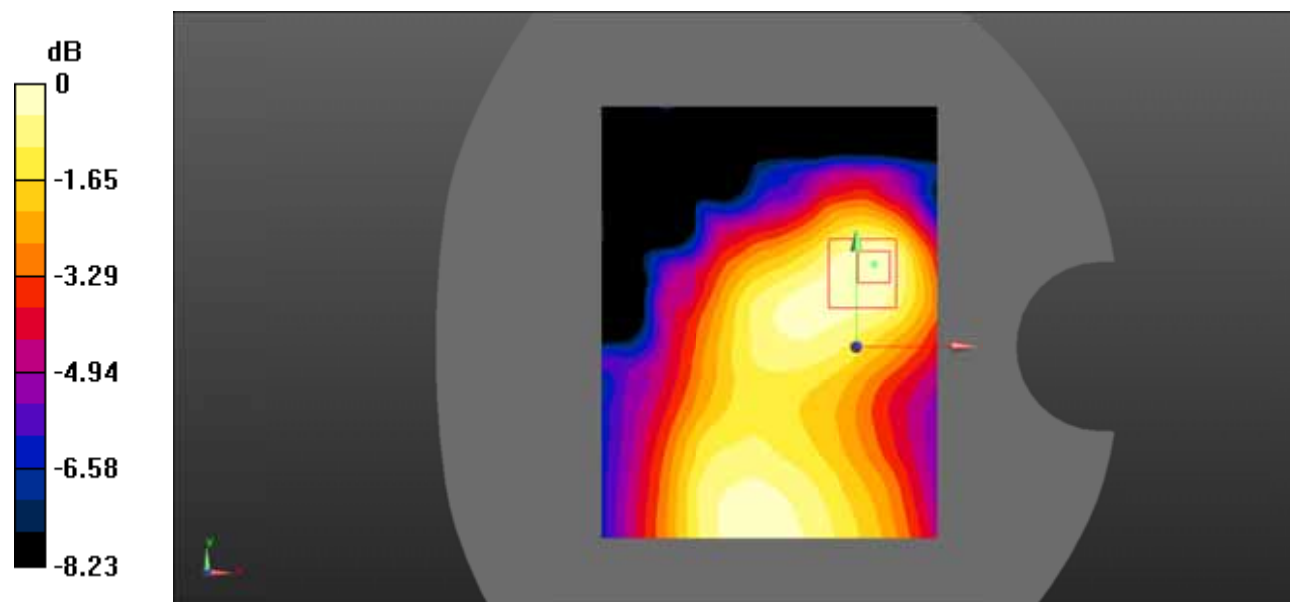

0 dB = 0.0583 W/kg = -12.34 dBW/kg

Test Plot 82#: LTE Band 5_Body Left_1RB_Middle

DUT: Mobile Phone; Type: X688C; Serial: RSZ201102004-SA-S1;

Communication System: Generic FDD-LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 836.5 \text{ MHz}$; $\sigma = 0.923 \text{ S/m}$; $\epsilon_r = 41.437$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.92, 9.92, 9.92)
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 3/3/2020
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x91x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.0977 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 5.813 V/m ; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.0440 W/kg

SAR(1 g) = 0.030 W/kg ; SAR(10 g) = 0.020 W/kg

Maximum value of SAR (measured) = 0.0354 W/kg

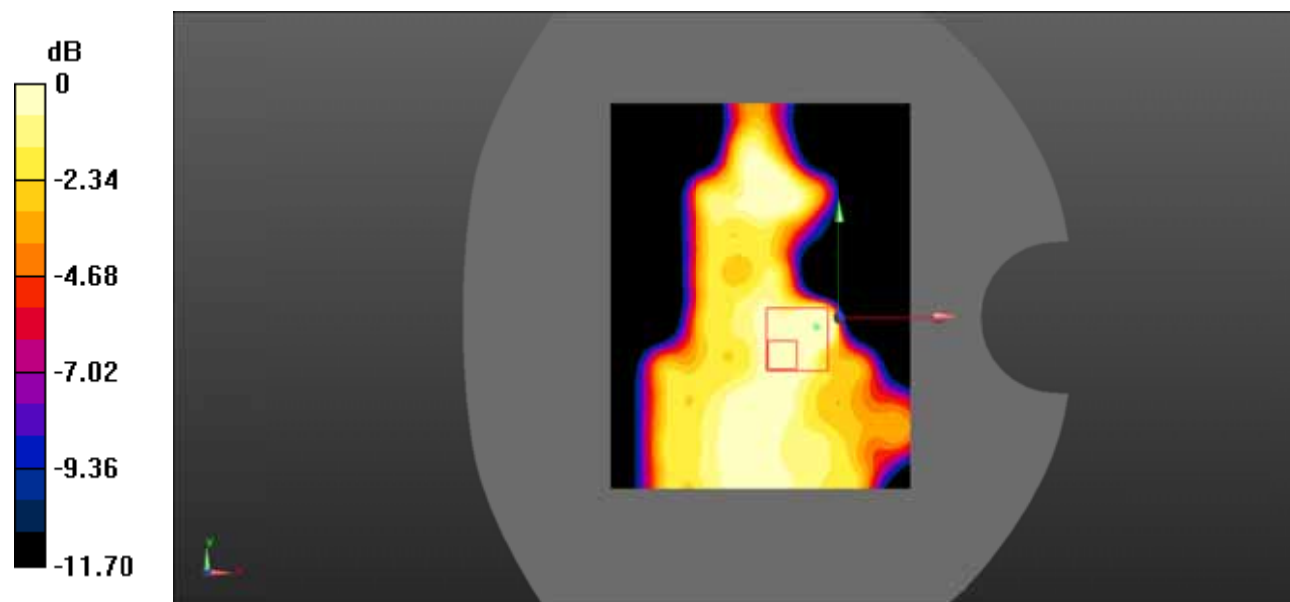

0 dB = $0.0354 \text{ W/kg} = -14.51 \text{ dBW/kg}$

Test Plot 83#: LTE Band 5_Body Left_50%RB_Middle

DUT: Mobile Phone; Type: X688C; Serial: RSZ201102004-SA-S1;

Communication System: Generic FDD-LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 836.5 \text{ MHz}$; $\sigma = 0.923 \text{ S/m}$; $\epsilon_r = 41.437$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.92, 9.92, 9.92)
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 3/3/2020
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x91x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.0347 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 5.059 V/m ; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.0390 W/kg

SAR(1 g) = 0.030 W/kg ; SAR(10 g) = 0.023 W/kg

Maximum value of SAR (measured) = 0.0316 W/kg

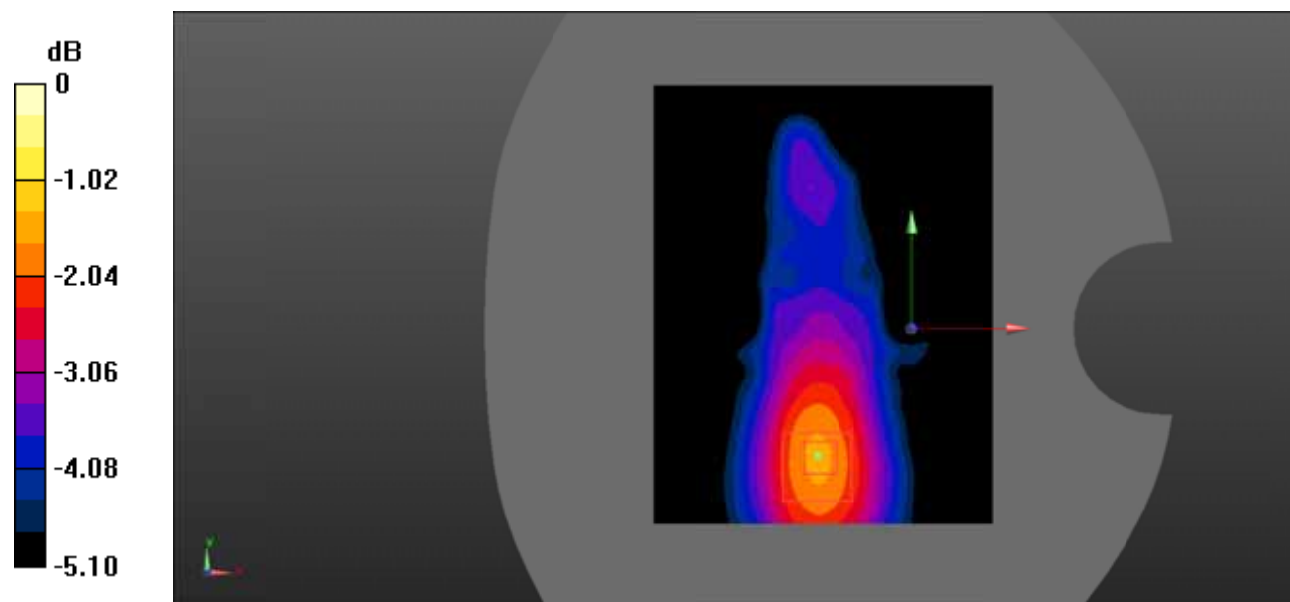

0 dB = 0.0316 W/kg = -15.00 dBW/kg

Test Plot 84#: LTE Band 5_Body Top_1RB_Middle

DUT: Mobile Phone; Type: X688C; Serial: RSZ201102004-SA-S1;

Communication System: Generic FDD-LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 836.5 \text{ MHz}$; $\sigma = 0.923 \text{ S/m}$; $\epsilon_r = 41.437$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Flat Section


DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.92, 9.92, 9.92)
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 3/3/2020
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x91x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.0748 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 8.975 V/m ; Power Drift = -0.06 dB
 Peak SAR (extrapolated) = 0.106 W/kg

SAR(1 g) = 0.070 W/kg; SAR(10 g) = 0.047 W/kg
 Maximum value of SAR (measured) = 0.0735 W/kg

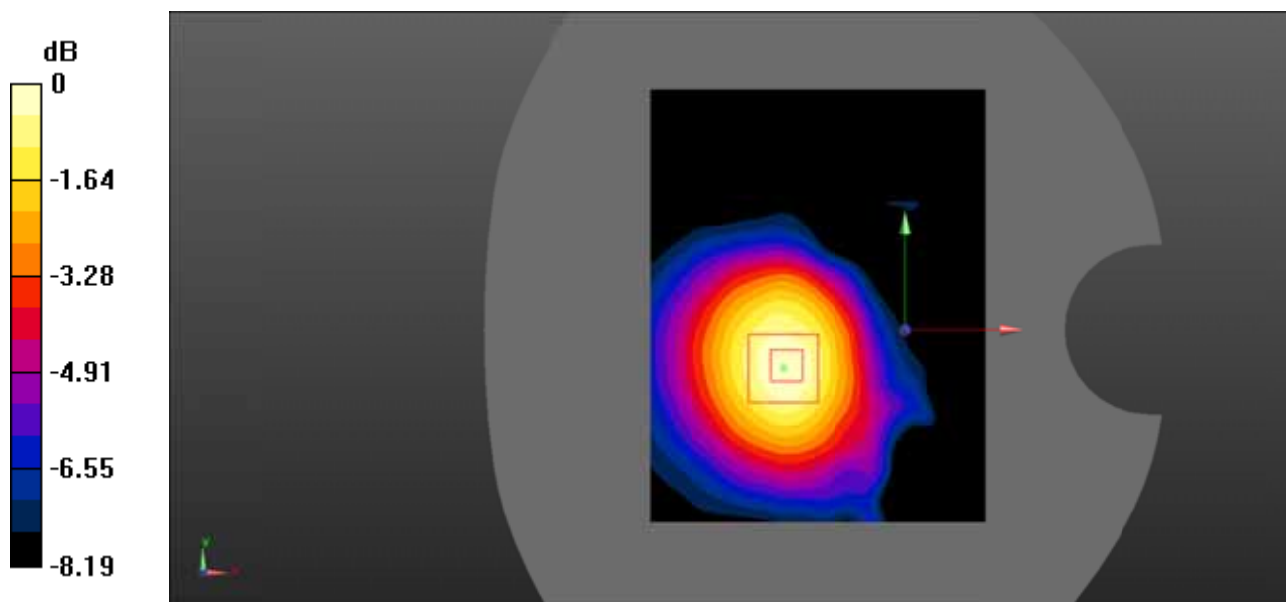

0 dB = $0.0735 \text{ W/kg} = -11.34 \text{ dBW/kg}$

Test Plot 85#: LTE Band 5_Body Top_50%RB_Middle

DUT: Mobile Phone; Type: X688C; Serial: RSZ201102004-SA-S1;

Communication System: Generic FDD-LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 836.5 \text{ MHz}$; $\sigma = 0.923 \text{ S/m}$; $\epsilon_r = 41.437$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.92, 9.92, 9.92)
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 3/3/2020
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (71x91x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.0623 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 6.893 V/m ; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.0860 W/kg

SAR(1 g) = 0.058 W/kg ; SAR(10 g) = 0.040 W/kg

Maximum value of SAR (measured) = 0.0612 W/kg

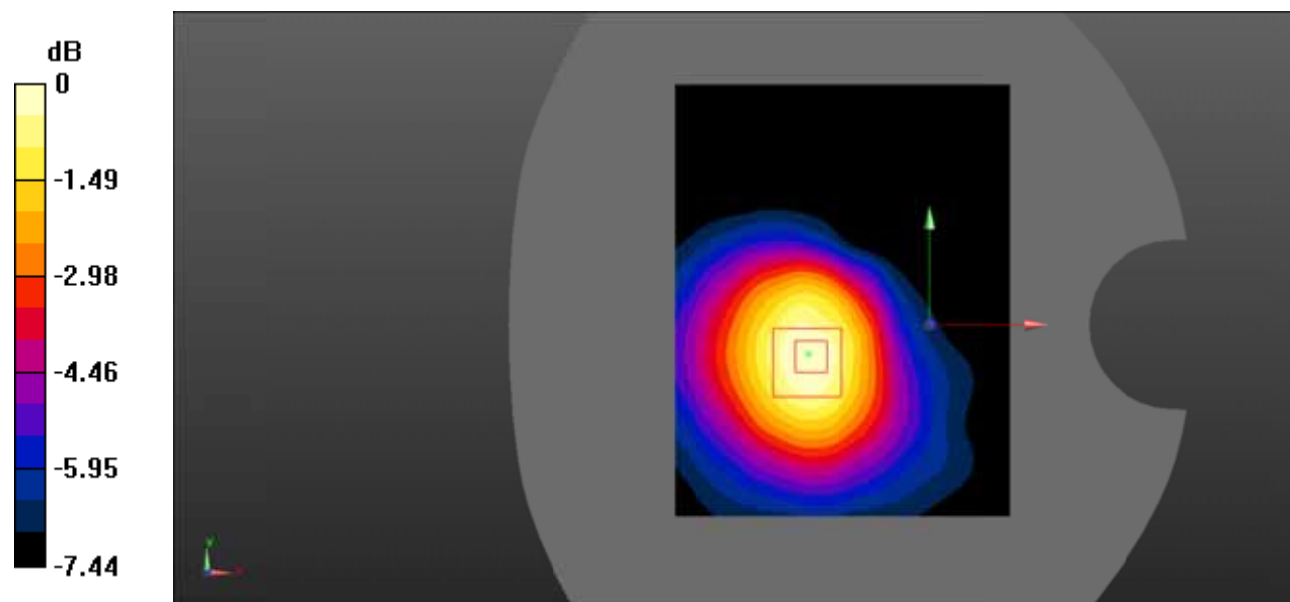

0 dB = 0.0612 W/kg = -12.13 dBW/kg

Test Plot 86#: LTE Band 7_Head Left Cheek_1RB_Middle

DUT: Mobile Phone; Type: X688C; Serial: RSZ201102004-SA-S1;

Communication System: Generic FDD-LTE; Frequency: 2535 MHz;Duty Cycle: 1:1
 Medium parameters used: $f = 2535 \text{ MHz}$; $\sigma = 1.93 \text{ S/m}$; $\epsilon_r = 38.161$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Left Section


DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.15, 7.15, 7.15)
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562;Calibrated: 3/3/2020
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (101x121x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.143 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
 Reference Value = 6.044 V/m; Power Drift = 0.14 dB
 Peak SAR (extrapolated) = 0.525 W/kg

SAR(1 g) = 0.139 W/kg; SAR(10 g) = 0.059 W/kg
 Maximum value of SAR (measured) = 0.442 W/kg

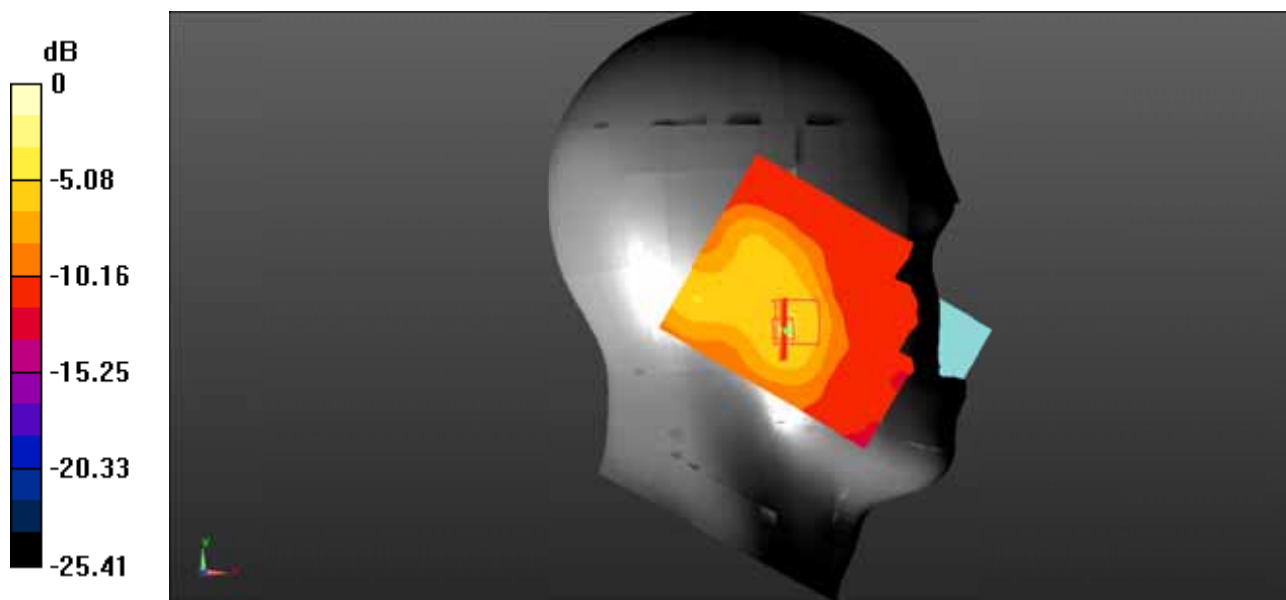

0 dB = 0.442 W/kg = -3.55 dBW/kg

Test Plot 87#: LTE Band 7_Head Left Cheek_50%RB_Middle

DUT: Mobile Phone; Type: X688C; Serial: RSZ201102004-SA-S1;

Communication System: Generic FDD-LTE; Frequency: 2535 MHz;Duty Cycle: 1:1
 Medium parameters used: $f = 2535 \text{ MHz}$; $\sigma = 1.93 \text{ S/m}$; $\epsilon_r = 38.161$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Left Section


DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.15, 7.15, 7.15)
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562;Calibrated: 3/3/2020
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (101x121x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.120 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
 Reference Value = 5.940 V/m ; Power Drift = 0.18 dB
 Peak SAR (extrapolated) = 0.197 W/kg

SAR(1 g) = 0.113 W/kg; SAR(10 g) = 0.076 W/kg
 Maximum value of SAR (measured) = 0.117 W/kg

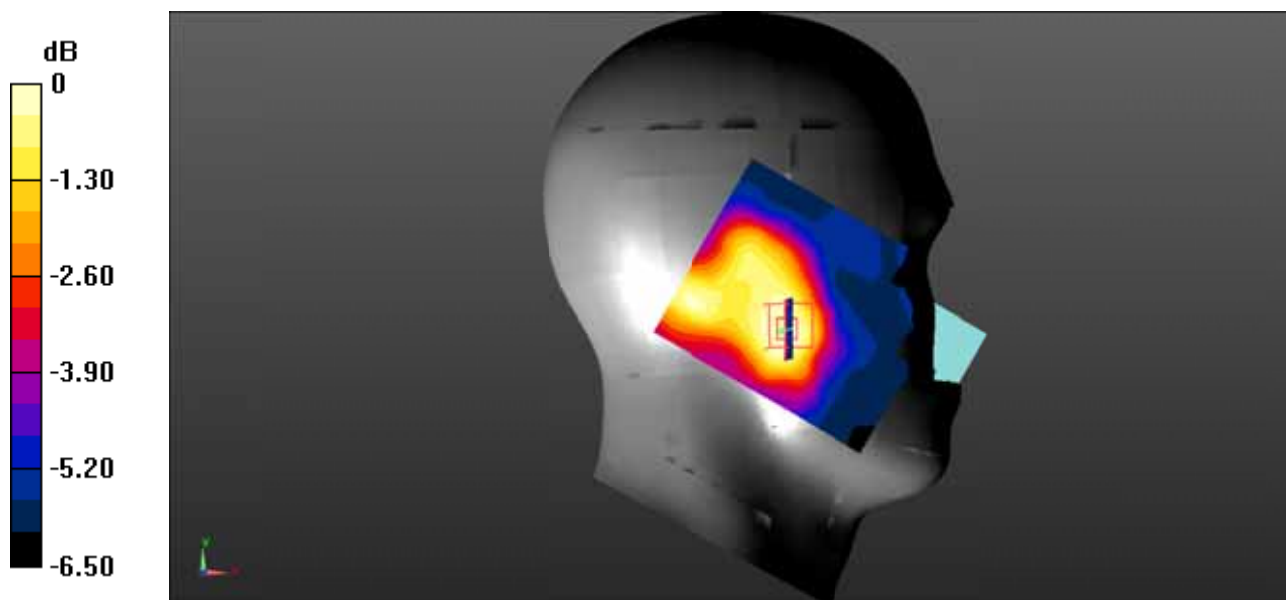

0 dB = 0.117 W/kg = -9.32 dBW/kg

Test Plot 88#: LTE Band 7_Head Left Tilt_1RB_Middle

DUT: Mobile Phone; Type: X688C; Serial: RSZ201102004-SA-S1;

Communication System: Generic FDD-LTE; Frequency: 2535 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2535 \text{ MHz}$; $\sigma = 1.93 \text{ S/m}$; $\epsilon_r = 38.161$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Left Section


DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.15, 7.15, 7.15)
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 3/3/2020
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (101x121x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.175 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
 Reference Value = 6.395 V/m ; Power Drift = 0.14 dB
 Peak SAR (extrapolated) = 0.302 W/kg

SAR(1 g) = 0.151 W/kg; SAR(10 g) = 0.090 W/kg
 Maximum value of SAR (measured) = 0.159 W/kg

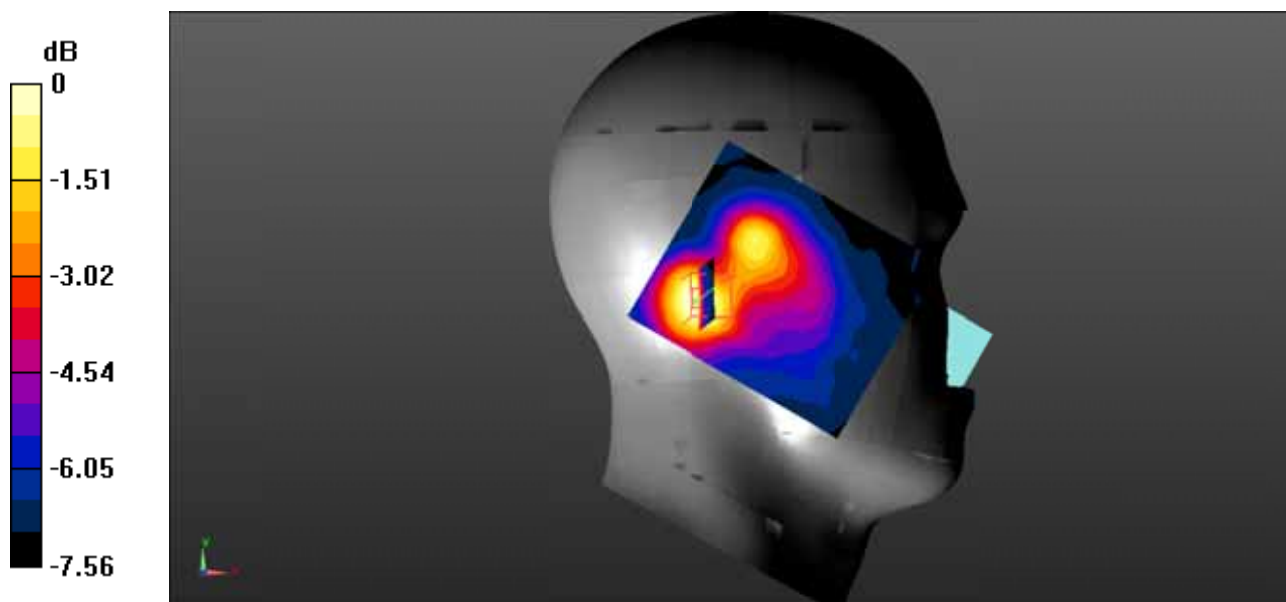

0 dB = $0.159 \text{ W/kg} = -7.99 \text{ dBW/kg}$

Test Plot 89#: LTE Band 7_Head Left Tilt_50%RB_Middle

DUT: Mobile Phone; Type: X688C; Serial: RSZ201102004-SA-S1;

Communication System: Generic FDD-LTE; Frequency: 2535 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2535 \text{ MHz}$; $\sigma = 1.93 \text{ S/m}$; $\epsilon_r = 38.161$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Left Section


DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.15, 7.15, 7.15)
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 3/3/2020
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (101x121x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.140 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
 Reference Value = 6.248 V/m ; Power Drift = -0.16 dB
 Peak SAR (extrapolated) = 0.301 W/kg

SAR(1 g) = 0.128 W/kg; SAR(10 g) = 0.078 W/kg
 Maximum value of SAR (measured) = 0.133 W/kg

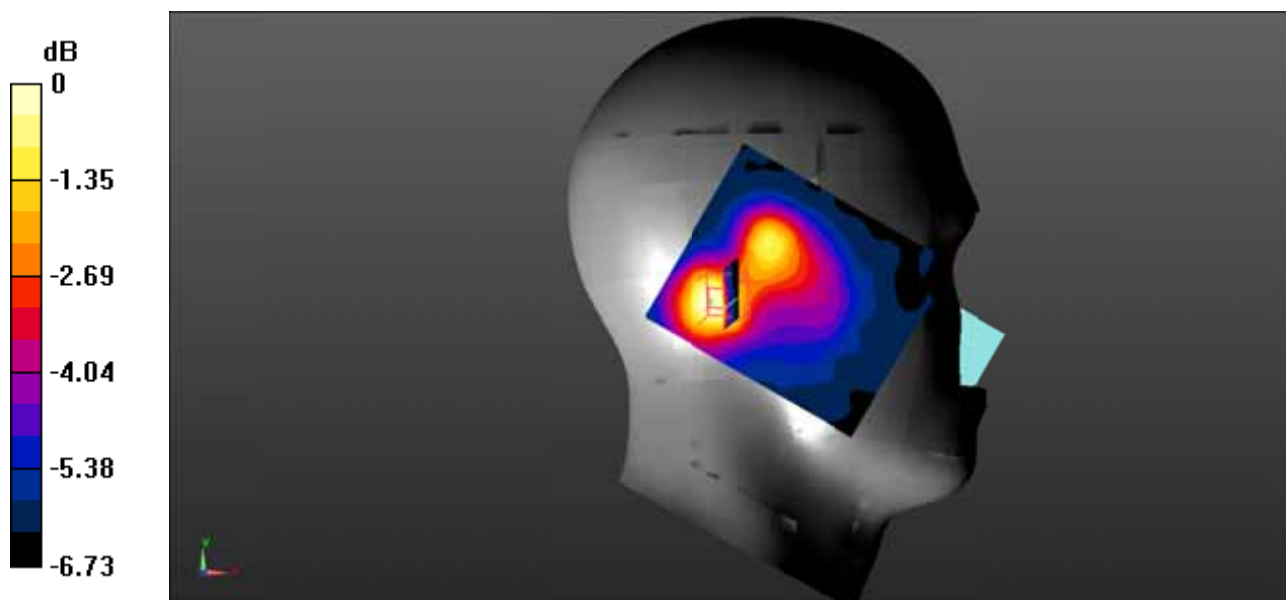

0 dB = $0.133 \text{ W/kg} = -8.76 \text{ dBW/kg}$

Test Plot 90#: LTE Band 7_Head Right Cheek_1RB_Middle

DUT: Mobile Phone; Type: X688C; Serial: RSZ201102004-SA-S1;

Communication System: Generic FDD-LTE; Frequency: 2535 MHz;Duty Cycle: 1:1
 Medium parameters used: $f = 2535 \text{ MHz}$; $\sigma = 1.93 \text{ S/m}$; $\epsilon_r = 38.161$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Right Section


DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.15, 7.15, 7.15)
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562;Calibrated: 3/3/2020
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (101x121x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.495 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
 Reference Value = 7.545 V/m ; Power Drift = 0.03 dB
 Peak SAR (extrapolated) = 0.824 W/kg

SAR(1 g) = 0.435 W/kg ; SAR(10 g) = 0.242 W/kg
 Maximum value of SAR (measured) = 0.479 W/kg

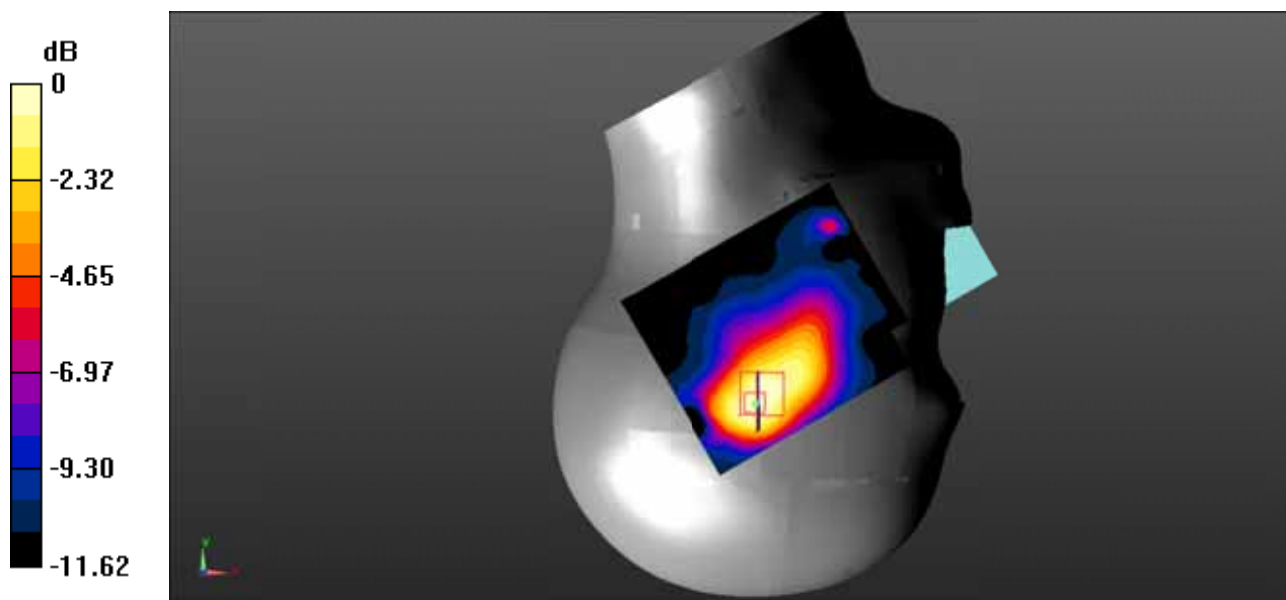

0 dB = $0.479 \text{ W/kg} = -3.20 \text{ dBW/kg}$

Test Plot 91#: LTE Band 7_Head Right Cheek_50%RB_Middle

DUT: Mobile Phone; Type: X688C; Serial: RSZ201102004-SA-S1;

Communication System: Generic FDD-LTE; Frequency: 2535 MHz;Duty Cycle: 1:1
 Medium parameters used: $f = 2535 \text{ MHz}$; $\sigma = 1.93 \text{ S/m}$; $\epsilon_r = 38.161$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Right Section


DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.15, 7.15, 7.15)
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562;Calibrated: 3/3/2020
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (101x121x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.400 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
 Reference Value = 6.934 V/m ; Power Drift = -0.15 dB
 Peak SAR (extrapolated) = 0.689 W/kg

SAR(1 g) = 0.365 W/kg; SAR(10 g) = 0.205 W/kg
 Maximum value of SAR (measured) = 0.398 W/kg

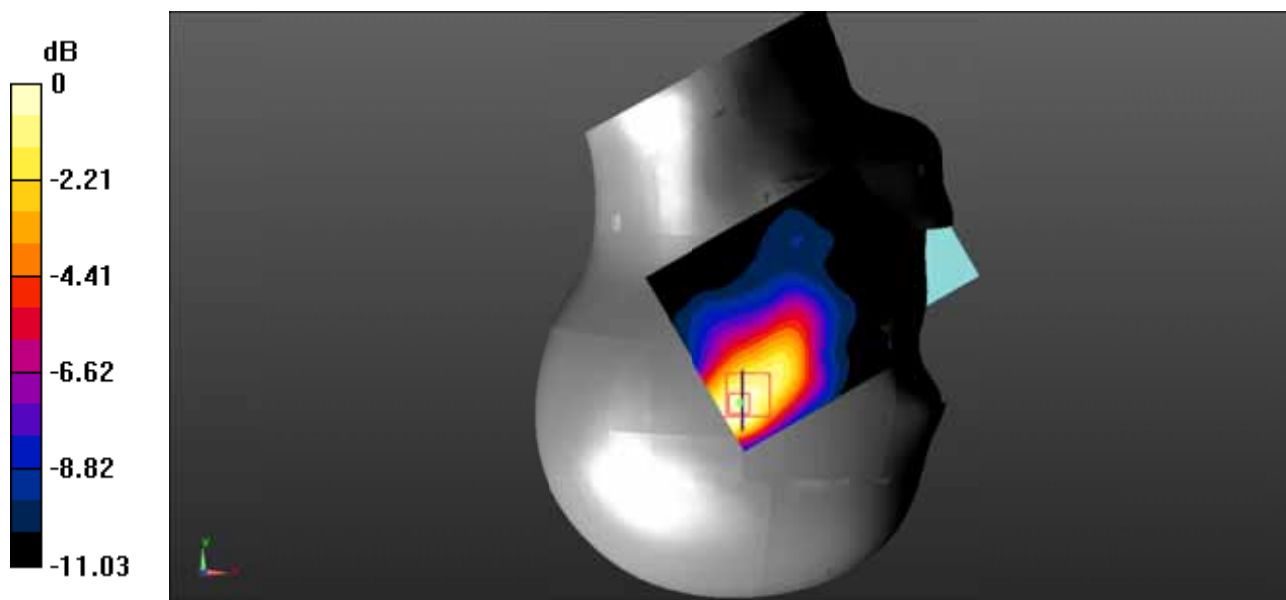

0 dB = 0.398 W/kg = -4.00 dBW/kg

Test Plot 92#: LTE Band 7_Head Right Tilt_1RB_Middle

DUT: Mobile Phone; Type: X688C; Serial: RSZ201102004-SA-S1;

Communication System: Generic FDD-LTE; Frequency: 2535 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2535 \text{ MHz}$; $\sigma = 1.93 \text{ S/m}$; $\epsilon_r = 38.161$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Right Section


DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.15, 7.15, 7.15)
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 3/3/2020
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (101x121x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.544 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
 Reference Value = 5.942 V/m ; Power Drift = 0.02 dB
 Peak SAR (extrapolated) = 0.990 W/kg

SAR(1 g) = 0.447 W/kg ; SAR(10 g) = 0.227 W/kg
 Maximum value of SAR (measured) = 0.480 W/kg

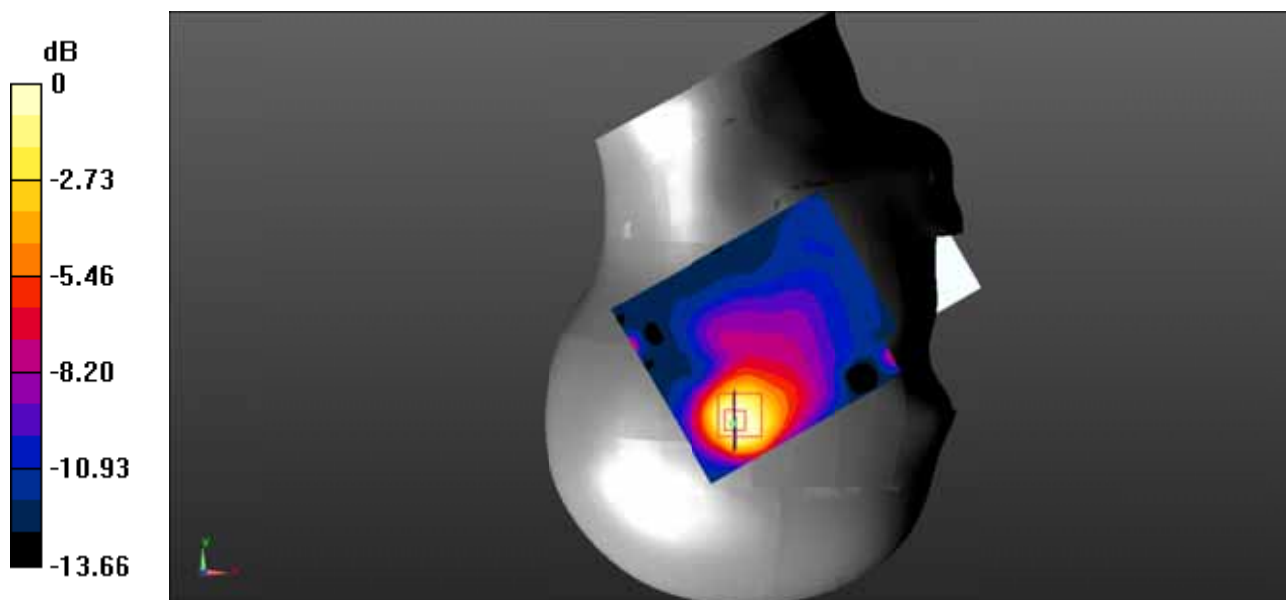

0 dB = $0.480 \text{ W/kg} = -3.19 \text{ dBW/kg}$

Test Plot 93#: LTE Band 7_Head Right Tilt_50%RB_Middle

DUT: Mobile Phone; Type: X688C; Serial: RSZ201102004-SA-S1;

Communication System: Generic FDD-LTE; Frequency: 2535 MHz;Duty Cycle: 1:1
 Medium parameters used: $f = 2535 \text{ MHz}$; $\sigma = 1.93 \text{ S/m}$; $\epsilon_r = 38.161$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Right Section

DASY5 Configuration:


- Probe: EX3DV4 - SN7522; ConvF(7.15, 7.15, 7.15)
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562;Calibrated: 3/3/2020
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (101x121x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.452 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
 Reference Value = 6.049 V/m ; Power Drift = 0.05 dB
 Peak SAR (extrapolated) = 0.815 W/kg

SAR(1 g) = 0.360 W/kg; SAR(10 g) = 0.184 W/kg

Maximum value of SAR (measured) = 0.388 W/kg

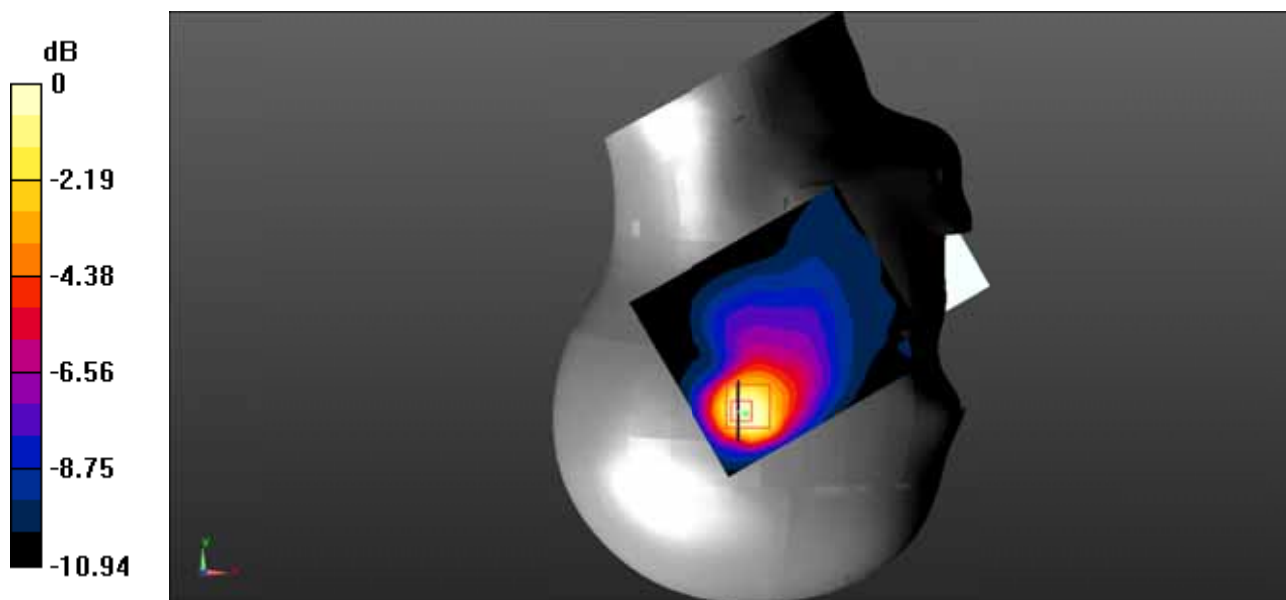

0 dB = $0.388 \text{ W/kg} = -4.11 \text{ dBW/kg}$

Test Plot 94#: LTE Band 7_Body Back_1RB_Middle

DUT: Mobile Phone; Type: X688C; Serial: RSZ201102004-SA-S1;

Communication System: Generic FDD-LTE; Frequency: 2535 MHz;Duty Cycle: 1:1
 Medium parameters used: $f = 2535 \text{ MHz}$; $\sigma = 1.93 \text{ S/m}$; $\epsilon_r = 38.161$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.15, 7.15, 7.15)
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562;Calibrated: 3/3/2020
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (101x121x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.269 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 9.381 V/m ; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.441 W/kg

SAR(1 g) = 0.232 W/kg ; SAR(10 g) = 0.121 W/kg

Maximum value of SAR (measured) = 0.263 W/kg

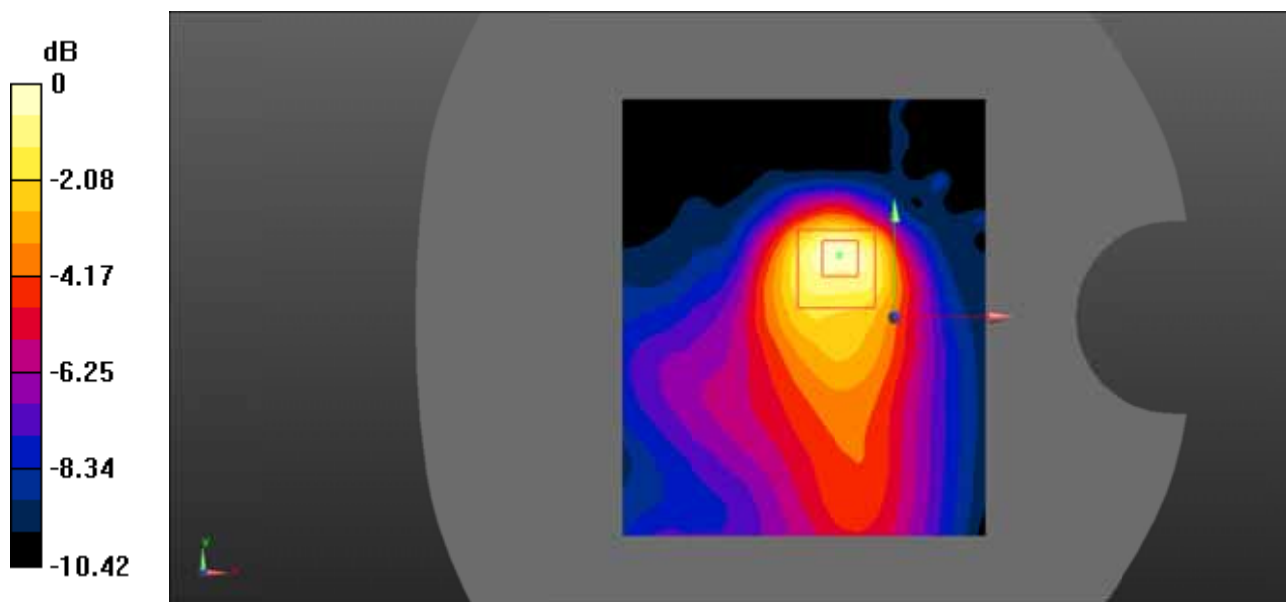

0 dB = $0.263 \text{ W/kg} = -5.80 \text{ dBW/kg}$

Test Plot 95#: LTE Band 7_Body Back_50%RB_Middle

DUT: Mobile Phone; Type: X688C; Serial: RSZ201102004-SA-S1;

Communication System: Generic FDD-LTE; Frequency: 2535 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2535 \text{ MHz}$; $\sigma = 1.93 \text{ S/m}$; $\epsilon_r = 38.161$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Flat Section


DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.15, 7.15, 7.15)
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 3/3/2020
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (101x121x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.227 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
 Reference Value = 8.416 V/m ; Power Drift = -0.18 dB
 Peak SAR (extrapolated) = 0.365 W/kg

SAR(1 g) = 0.191 W/kg; SAR(10 g) = 0.101 W/kg
 Maximum value of SAR (measured) = 0.216 W/kg

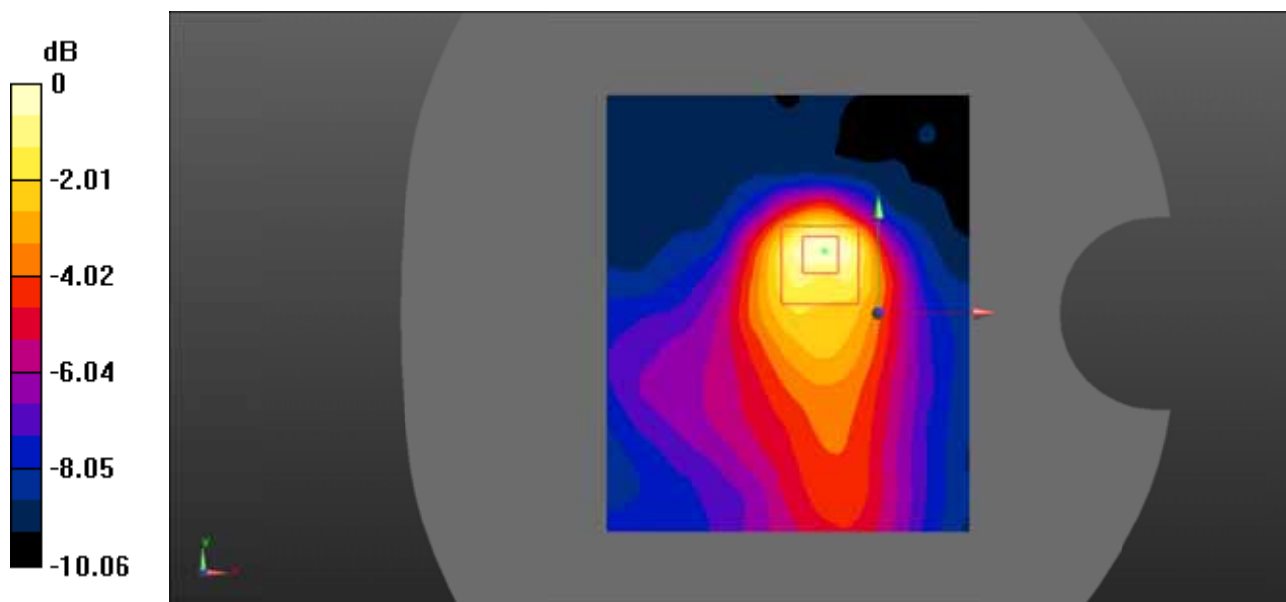

0 dB = $0.216 \text{ W/kg} = -6.66 \text{ dBW/kg}$

Test Plot 96#: LTE Band 7_Body Left_1RB_Middle

DUT: Mobile Phone; Type: X688C; Serial: RSZ201102004-SA-S1;

Communication System: Generic FDD-LTE; Frequency: 2535 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2535 \text{ MHz}$; $\sigma = 1.93 \text{ S/m}$; $\epsilon_r = 38.161$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Flat Section


DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.15, 7.15, 7.15)
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 3/3/2020
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (101x121x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.178 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
 Reference Value = 8.949 V/m ; Power Drift = 0.08 dB
 Peak SAR (extrapolated) = 0.305 W/kg

SAR(1 g) = 0.164 W/kg; SAR(10 g) = 0.098 W/kg
 Maximum value of SAR (measured) = 0.176 W/kg

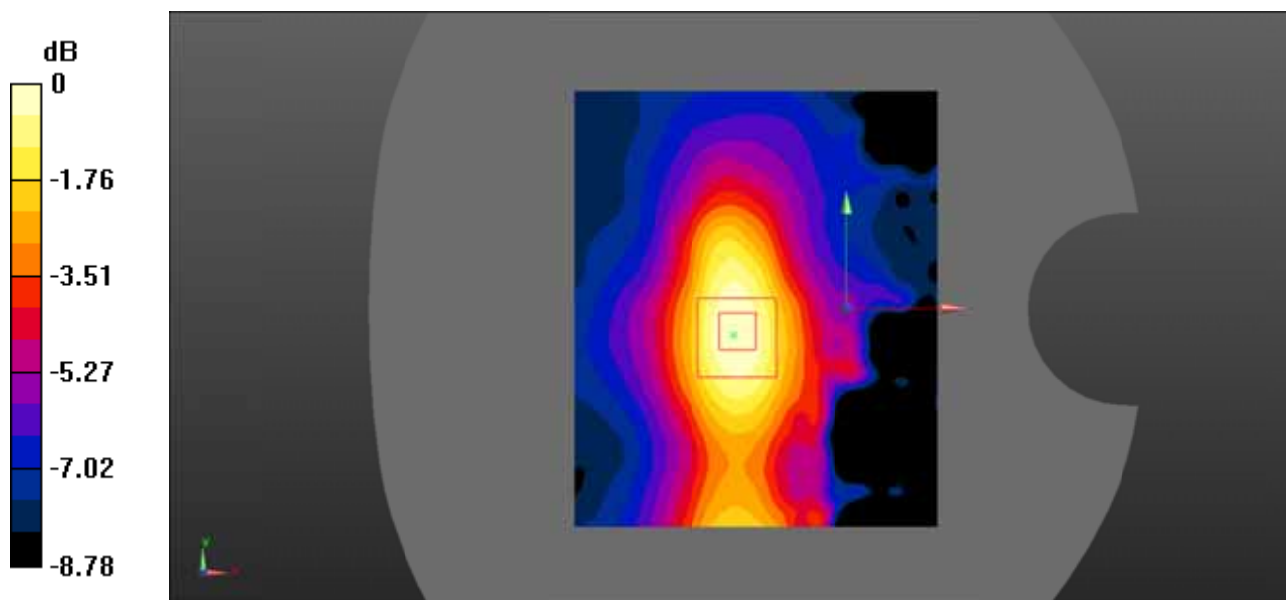

0 dB = $0.176 \text{ W/kg} = -7.54 \text{ dBW/kg}$

Test Plot 97#: LTE Band 7_Body Left_50%RB_Middle

DUT: Mobile Phone; Type: X688C; Serial: RSZ201102004-SA-S1;

Communication System: Generic FDD-LTE; Frequency: 2535 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2535 \text{ MHz}$; $\sigma = 1.93 \text{ S/m}$; $\epsilon_r = 38.161$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Flat Section


DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.15, 7.15, 7.15)
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 3/3/2020
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (101x121x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.146 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
 Reference Value = 8.037 V/m ; Power Drift = 0.10 dB
 Peak SAR (extrapolated) = 0.250 W/kg

SAR(1 g) = 0.136 W/kg ; SAR(10 g) = 0.083 W/kg
 Maximum value of SAR (measured) = 0.147 W/kg

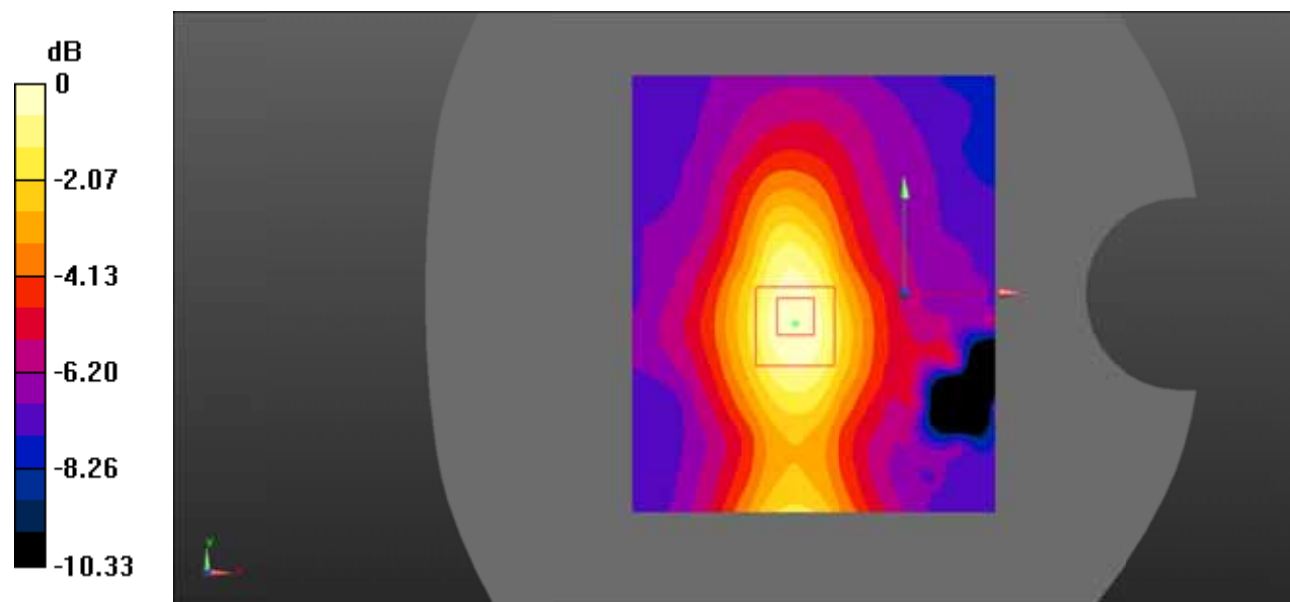

0 dB = 0.147 W/kg = -8.33 dBW/kg

Test Plot 98#: LTE Band 7_Body Top_1RB_Middle

DUT: Mobile Phone; Type: X688C; Serial: RSZ201102004-SA-S1;

Communication System: Generic FDD-LTE; Frequency: 2535 MHz;Duty Cycle: 1:1
 Medium parameters used: $f = 2535 \text{ MHz}$; $\sigma = 1.93 \text{ S/m}$; $\epsilon_r = 38.161$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Flat Section


DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.15, 7.15, 7.15)
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562;Calibrated: 3/3/2020
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (101x121x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.218 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
 Reference Value = 4.261 V/m ; Power Drift = 0.12 dB
 Peak SAR (extrapolated) = 1.13 W/kg

SAR(1 g) = 0.234 W/kg; SAR(10 g) = 0.069 W/kg
 Maximum value of SAR (measured) = 0.308 W/kg

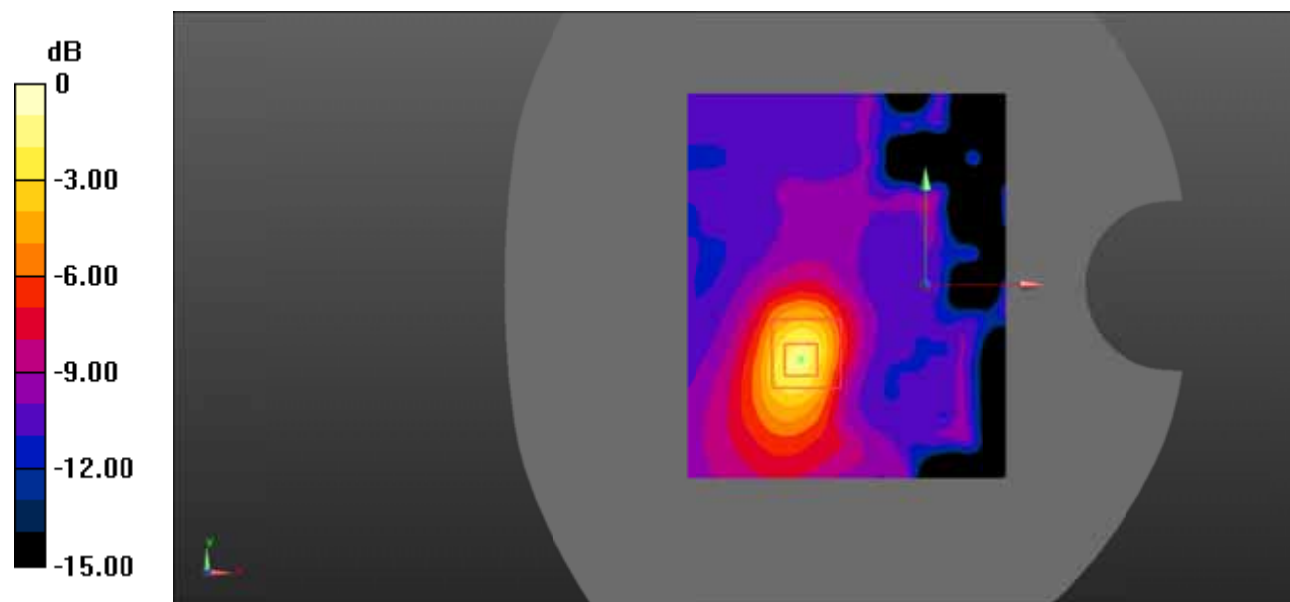

0 dB = $0.308 \text{ W/kg} = -5.11 \text{ dBW/kg}$

Test Plot 99#: LTE Band 7_Body Top_50%RB_Middle

DUT: Mobile Phone; Type: X688C; Serial: RSZ201102004-SA-S1;

Communication System: Generic FDD-LTE; Frequency: 2535 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2535 \text{ MHz}$; $\sigma = 1.93 \text{ S/m}$; $\epsilon_r = 38.161$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Flat Section


DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.15, 7.15, 7.15)
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 3/3/2020
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (101x121x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.177 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
 Reference Value = 4.031 V/m ; Power Drift = 0.08 dB
 Peak SAR (extrapolated) = 0.287 W/kg

SAR(1 g) = 0.154 W/kg; SAR(10 g) = 0.083 W/kg
 Maximum value of SAR (measured) = 0.173 W/kg

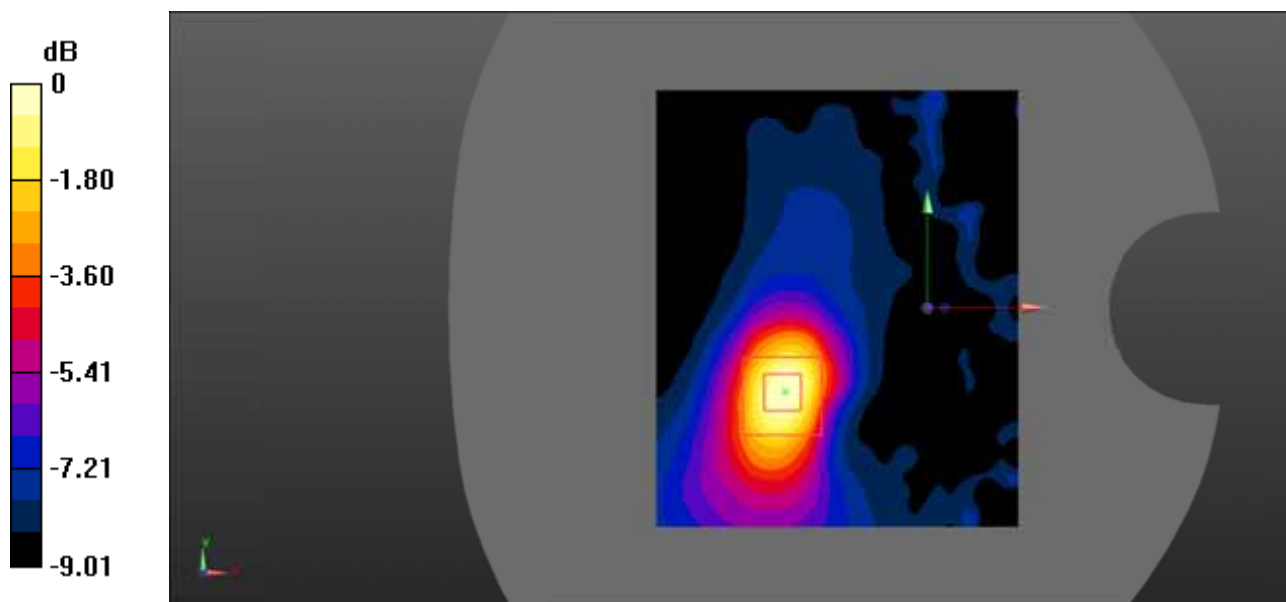

0 dB = $0.173 \text{ W/kg} = -7.62 \text{ dBW/kg}$

Test Plot 100#: LTE Band 38_Head Left Cheek_1RB_Middle

DUT: Mobile Phone; Type: X688C; Serial: RSZ201102004-SA-S1;

Communication System: Generic TDD-LTE; Frequency: 2595 MHz; Duty Cycle: 1:2
 Medium parameters used: $f = 2595$ MHz; $\sigma = 1.963$ S/m; $\epsilon_r = 38.229$; $\rho = 1000$ kg/m³ ;
 Phantom section: Left Section


DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(6.79, 6.79, 6.79)
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 3/3/2020
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (101x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
 Maximum value of SAR (interpolated) = 0.140 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 4.133 V/m; Power Drift = 0.13 dB
 Peak SAR (extrapolated) = 0.283 W/kg

SAR(1 g) = 0.137 W/kg; SAR(10 g) = 0.086 W/kg
 Maximum value of SAR (measured) = 0.147 W/kg

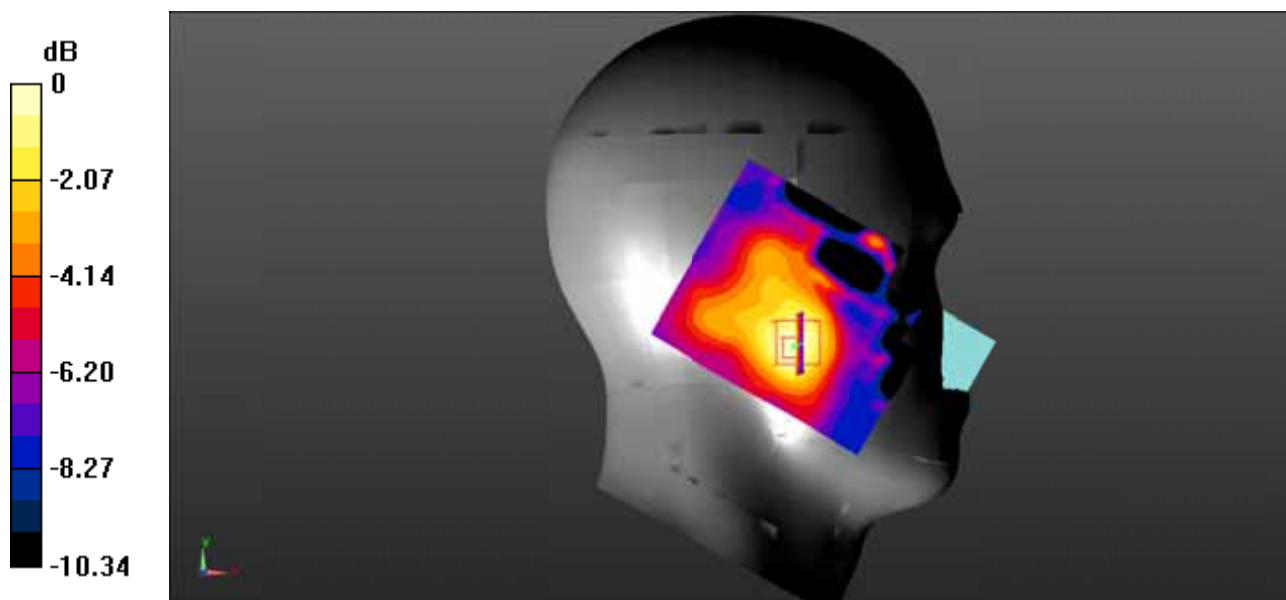

0 dB = 0.147 W/kg = -8.33 dBW/kg

Test Plot 101#: LTE Band 38_Head Left Cheek_50%RB_Middle

DUT: Mobile Phone; Type: X688C; Serial: RSZ201102004-SA-S1;

Communication System: Generic TDD-LTE; Frequency: 2595 MHz; Duty Cycle: 1:2
 Medium parameters used: $f = 2595 \text{ MHz}$; $\sigma = 1.963 \text{ S/m}$; $\epsilon_r = 38.229$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Left Section

DASY5 Configuration:


- Probe: EX3DV4 - SN7522; ConvF(6.79, 6.79, 6.79)
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 3/3/2020
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (101x121x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.447 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
 Reference Value = 3.710 V/m ; Power Drift = -0.05 dB
 Peak SAR (extrapolated) = 0.167 W/kg

SAR(1 g) = 0.090 W/kg; SAR(10 g) = 0.054 W/kg

Maximum value of SAR (measured) = 0.109 W/kg

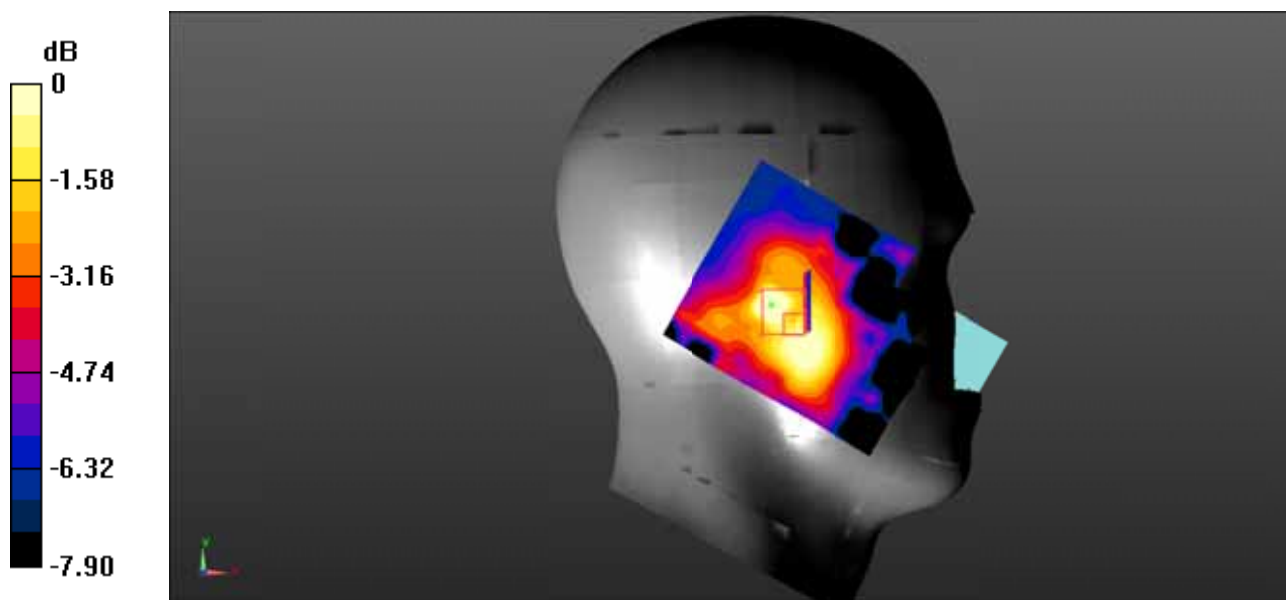

0 dB = $0.109 \text{ W/kg} = -9.63 \text{ dBW/kg}$

Test Plot 102#: LTE Band 38_Head Left Tilt_1RB_Middle

DUT: Mobile Phone; Type: X688C; Serial: RSZ201102004-SA-S1;

Communication System: Generic TDD-LTE; Frequency: 2595 MHz; Duty Cycle: 1:2
 Medium parameters used: $f = 2595$ MHz; $\sigma = 1.963$ S/m; $\epsilon_r = 38.229$; $\rho = 1000$ kg/m³ ;
 Phantom section: Left Section


DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(6.79, 6.79, 6.79)
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 3/3/2020
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (101x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
 Maximum value of SAR (interpolated) = 0.0960 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 5.379 V/m; Power Drift = 0.02 dB
 Peak SAR (extrapolated) = 0.173 W/kg

SAR(1 g) = 0.085 W/kg; SAR(10 g) = 0.054 W/kg
 Maximum value of SAR (measured) = 0.0944 W/kg

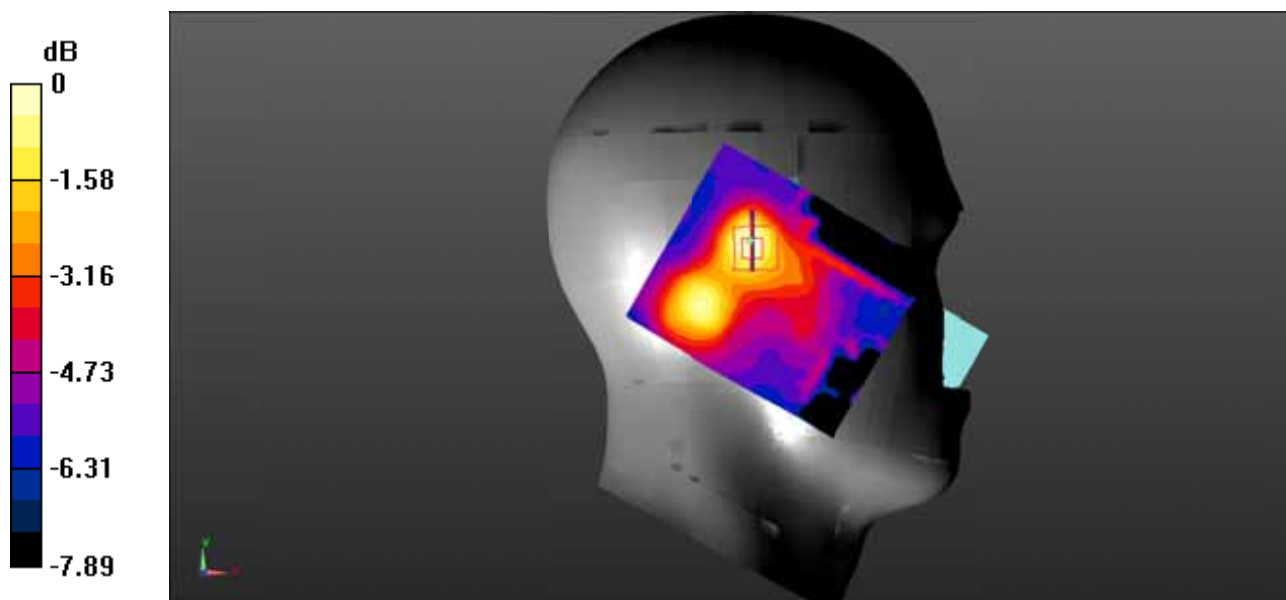

0 dB = 0.0944 W/kg = -10.25 dBW/kg

Test Plot 103#: LTE Band 38_Head Left Tilt_50%RB_Middle

DUT: Mobile Phone; Type: X688C; Serial: RSZ201102004-SA-S1;

Communication System: Generic TDD-LTE; Frequency: 2595 MHz; Duty Cycle: 1:2
 Medium parameters used: $f = 2595 \text{ MHz}$; $\sigma = 1.963 \text{ S/m}$; $\epsilon_r = 38.229$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Left Section


DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(6.79, 6.79, 6.79)
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 3/3/2020
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (101x121x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.0831 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
 Reference Value = 5.242 V/m; Power Drift = -0.13 dB
 Peak SAR (extrapolated) = 0.124 W/kg

SAR(1 g) = 0.074 W/kg; SAR(10 g) = 0.048 W/kg
 Maximum value of SAR (measured) = 0.0802 W/kg

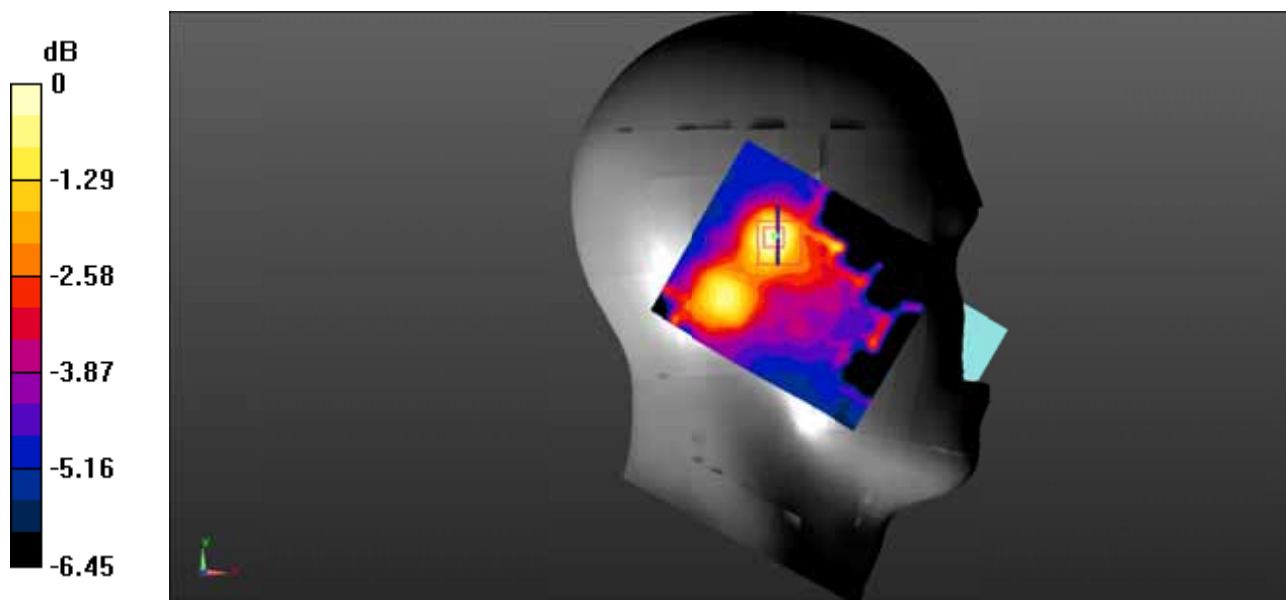

0 dB = 0.0802 W/kg = -10.96 dBW/kg

Test Plot 104#: LTE Band 38_Head Right Cheek_1RB_Middle**DUT: Mobile Phone; Type: X688C; Serial: RSZ201102004-SA-S1;**

Communication System: Generic TDD-LTE; Frequency: 2595 MHz; Duty Cycle: 1:2
Medium parameters used: $f = 2595$ MHz; $\sigma = 1.963$ S/m; $\epsilon_r = 38.229$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(6.79, 6.79, 6.79)
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 3/3/2020
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (101x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.237 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.678 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.403 W/kg

SAR(1 g) = 0.216 W/kg; SAR(10 g) = 0.127 W/kg

Maximum value of SAR (measured) = 0.230 W/kg

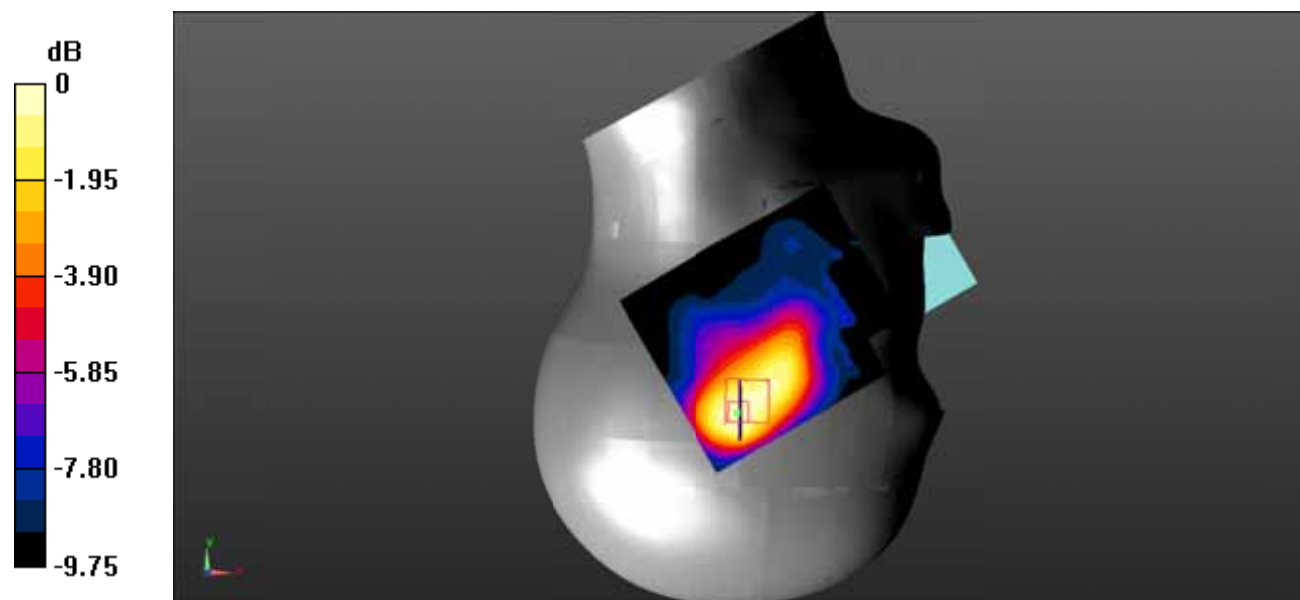

0 dB = 0.230 W/kg = -6.38 dBW/kg

Test Plot 105#: LTE Band 38_Head Right Cheek_50%RB_Middle

DUT: Mobile Phone; Type: X688C; Serial: RSZ201102004-SA-S1;

Communication System: Generic TDD-LTE; Frequency: 2595 MHz; Duty Cycle: 1:2
 Medium parameters used: $f = 2595 \text{ MHz}$; $\sigma = 1.963 \text{ S/m}$; $\epsilon_r = 38.229$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Right Section


DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(6.79, 6.79, 6.79)
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 3/3/2020
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (101x121x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.196 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
 Reference Value = 5.671 V/m ; Power Drift = -0.04 dB
 Peak SAR (extrapolated) = 0.342 W/kg

SAR(1 g) = 0.182 W/kg; SAR(10 g) = 0.109 W/kg
 Maximum value of SAR (measured) = 0.193 W/kg

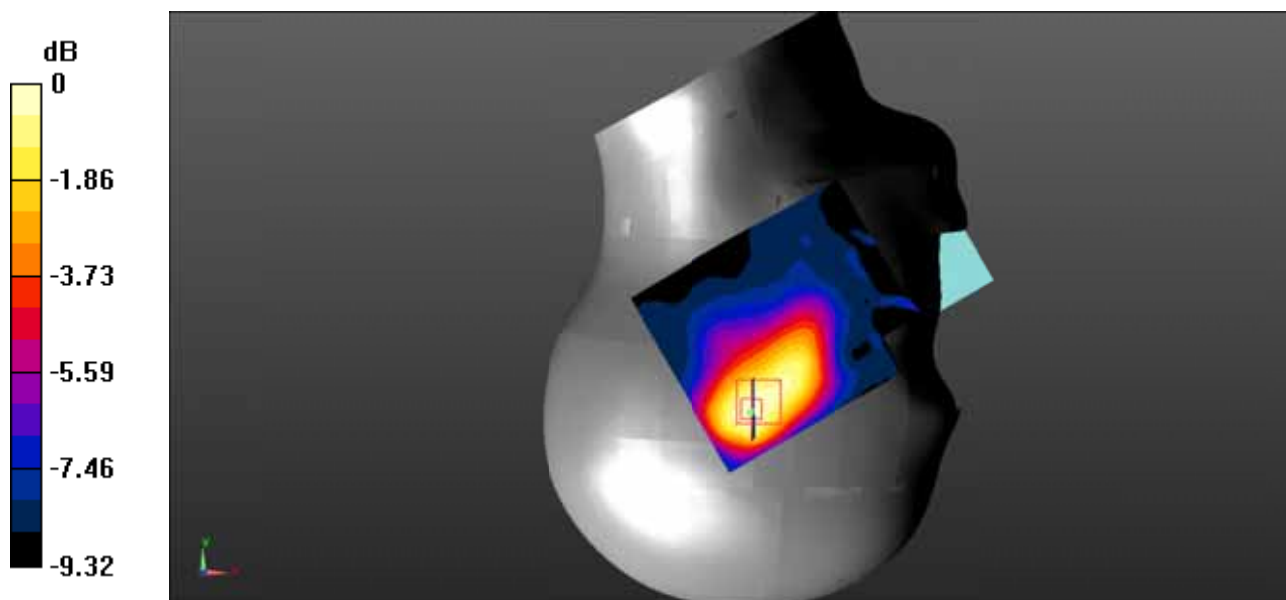

0 dB = $0.193 \text{ W/kg} = -7.14 \text{ dBW/kg}$

Test Plot 106#: LTE Band 38_Head Right Tilt_1RB_Middle

DUT: Mobile Phone; Type: X688C; Serial: RSZ201102004-SA-S1;

Communication System: Generic TDD-LTE; Frequency: 2595 MHz; Duty Cycle: 1:2
 Medium parameters used: $f = 2595 \text{ MHz}$; $\sigma = 1.963 \text{ S/m}$; $\epsilon_r = 38.229$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Right Section


DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(6.79, 6.79, 6.79)
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 3/3/2020
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (101x121x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.280 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
 Reference Value = 5.136 V/m ; Power Drift = 0.10 dB
 Peak SAR (extrapolated) = 0.489 W/kg

SAR(1 g) = 0.224 W/kg; SAR(10 g) = 0.120 W/kg
 Maximum value of SAR (measured) = 0.233 W/kg

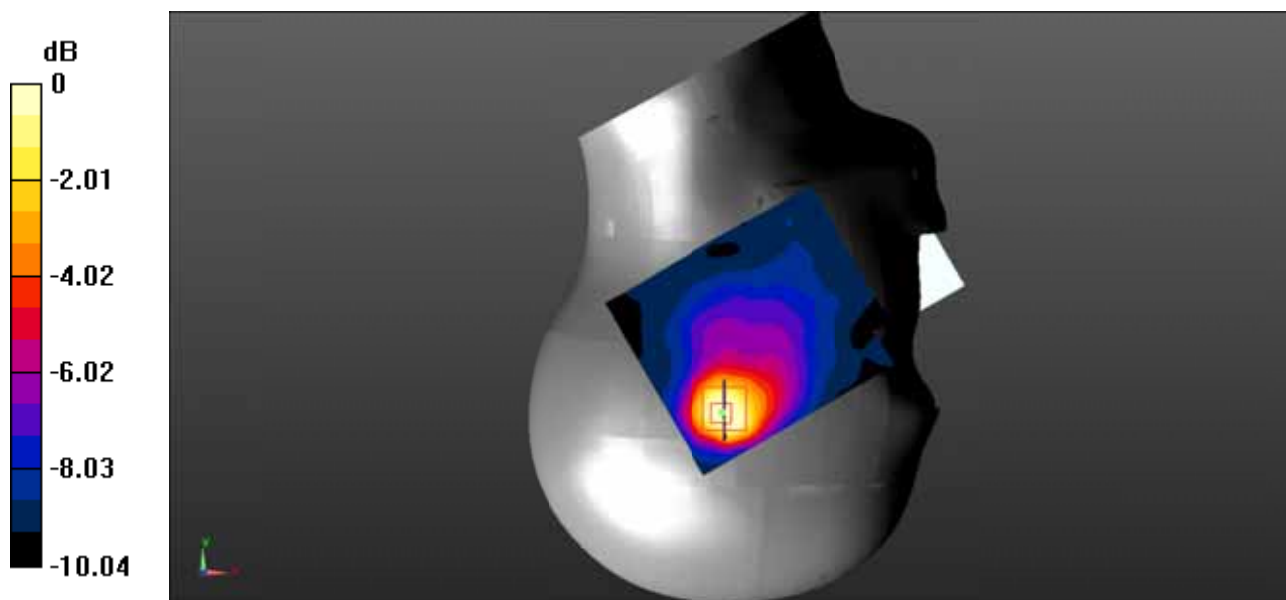

0 dB = $0.233 \text{ W/kg} = -6.33 \text{ dBW/kg}$

Test Plot 107#: LTE Band 38_Head Right Tilt_50%RB_Middle

DUT: Mobile Phone; Type: X688C; Serial: RSZ201102004-SA-S1;

Communication System: Generic TDD-LTE; Frequency: 2595 MHz; Duty Cycle: 1:2
 Medium parameters used: $f = 2595 \text{ MHz}$; $\sigma = 1.963 \text{ S/m}$; $\epsilon_r = 38.229$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Right Section


DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(6.79, 6.79, 6.79)
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 3/3/2020
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (101x121x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.219 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
 Reference Value = 5.088 V/m ; Power Drift = 0.13 dB
 Peak SAR (extrapolated) = 0.424 W/kg

SAR(1 g) = 0.185 W/kg; SAR(10 g) = 0.101 W/kg
 Maximum value of SAR (measured) = 0.191 W/kg

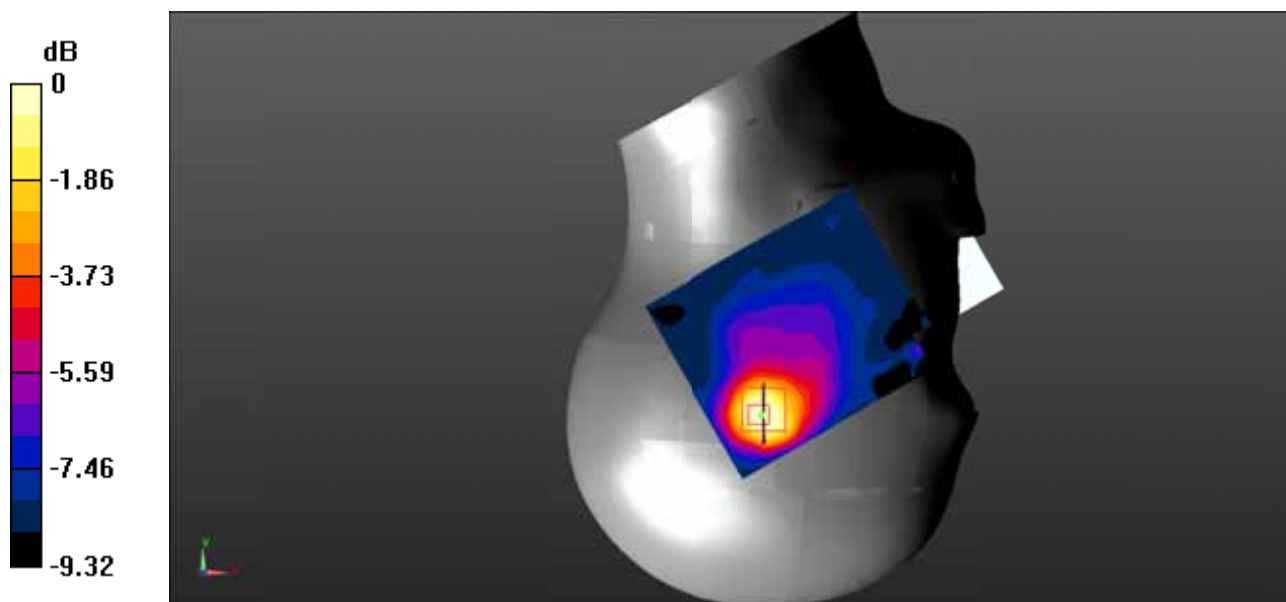

0 dB = $0.191 \text{ W/kg} = -7.19 \text{ dBW/kg}$

Test Plot 108#: LTE Band 38_Body Back_1RB_Middle

DUT: Mobile Phone; Type: X688C; Serial: RSZ201102004-SA-S1;

Communication System: Generic TDD-LTE; Frequency: 2595 MHz; Duty Cycle: 1:2
 Medium parameters used: $f = 2595 \text{ MHz}$; $\sigma = 1.963 \text{ S/m}$; $\epsilon_r = 38.229$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Flat Section

DASY5 Configuration:


- Probe: EX3DV4 - SN7522; ConvF(7.04, 7.04, 7.04)
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 3/3/2020
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (101x131x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.172 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
 Reference Value = 5.049 V/m ; Power Drift = -0.09 dB
 Peak SAR (extrapolated) = 0.406 W/kg

SAR(1 g) = 0.169 W/kg; SAR(10 g) = 0.087 W/kg

Maximum value of SAR (measured) = 0.187 W/kg

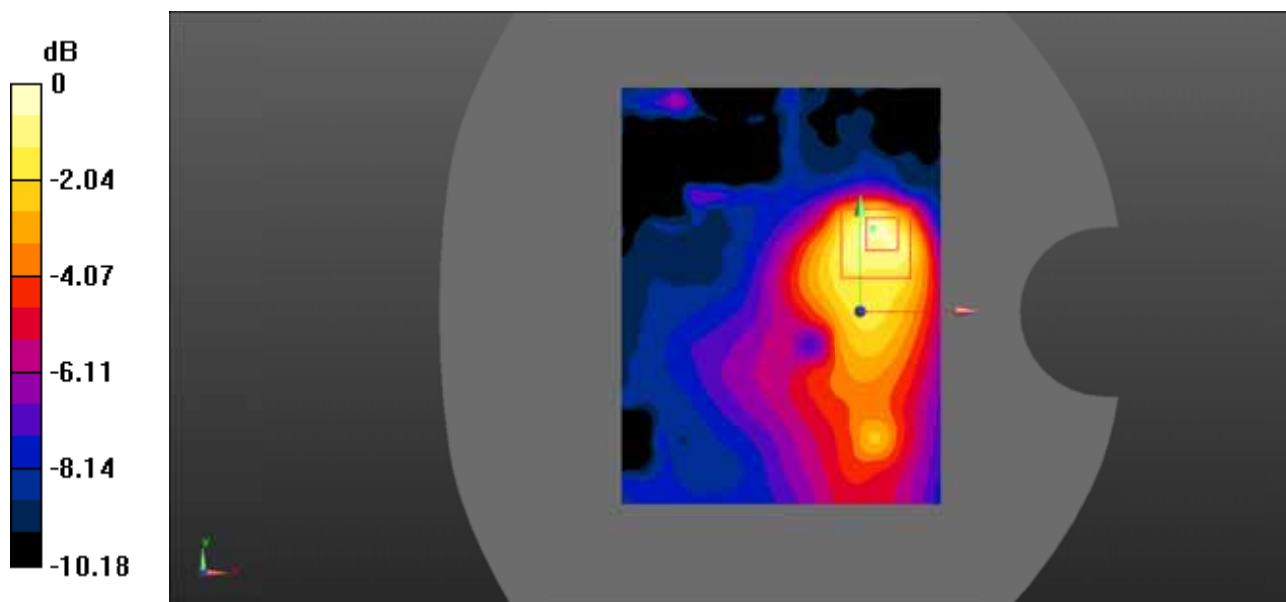

0 dB = $0.187 \text{ W/kg} = -7.28 \text{ dBW/kg}$

Test Plot 109#: LTE Band 38_Body Back_50%RB_Middle

DUT: Mobile Phone; Type: X688C; Serial: RSZ201102004-SA-S1;

Communication System: Generic TDD-LTE; Frequency: 2595 MHz; Duty Cycle: 1:2
 Medium parameters used: $f = 2595$ MHz; $\sigma = 1.963$ S/m; $\epsilon_r = 38.229$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section


DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.04, 7.04, 7.04)
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 3/3/2020
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (101x131x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
 Maximum value of SAR (interpolated) = 0.137 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 4.800 V/m; Power Drift = 0.02 dB
 Peak SAR (extrapolated) = 0.275 W/kg

SAR(1 g) = 0.135 W/kg; SAR(10 g) = 0.072 W/kg
 Maximum value of SAR (measured) = 0.148 W/kg

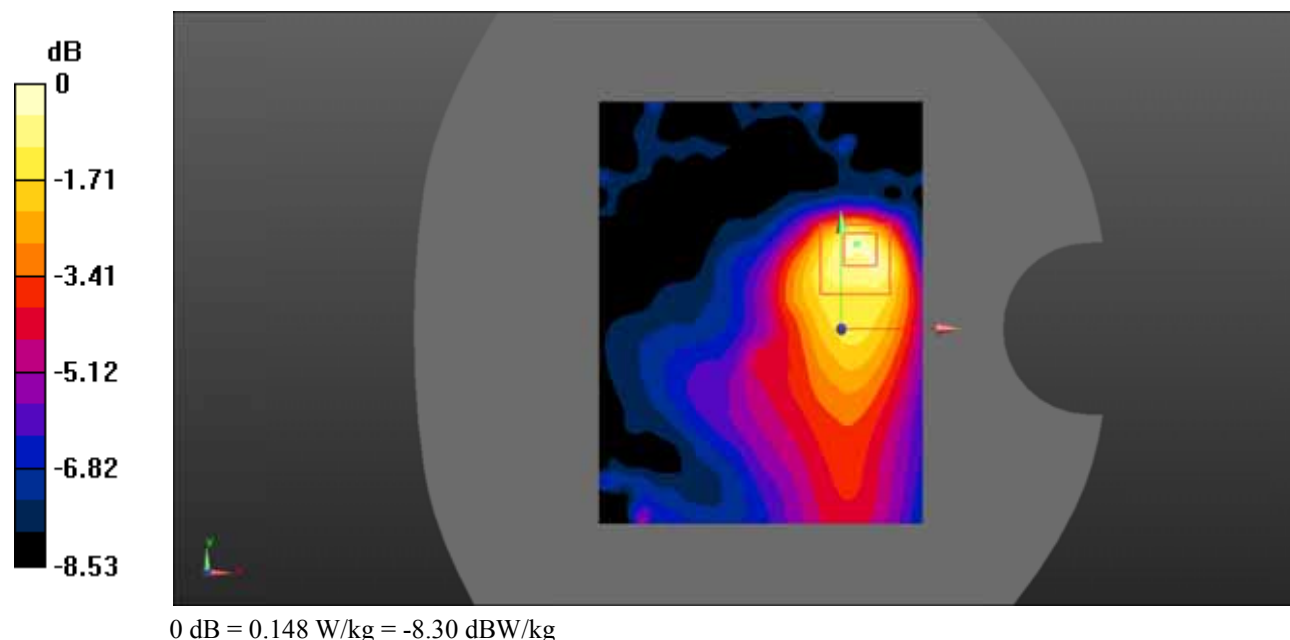

Test Plot 110#: LTE Band 38_Body Left_1RB_Middle

DUT: Mobile Phone; Type: X688C; Serial: RSZ201102004-SA-S1;

Communication System: Generic TDD-LTE; Frequency: 2595 MHz; Duty Cycle: 1:2
 Medium parameters used: $f = 2595 \text{ MHz}$; $\sigma = 1.963 \text{ S/m}$; $\epsilon_r = 38.229$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Flat Section


DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.04, 7.04, 7.04)
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 3/3/2020
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (101x131x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.115 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
 Reference Value = 7.094 V/m ; Power Drift = -0.06 dB
 Peak SAR (extrapolated) = 0.240 W/kg

SAR(1 g) = 0.109 W/kg; SAR(10 g) = 0.068 W/kg
 Maximum value of SAR (measured) = 0.117 W/kg

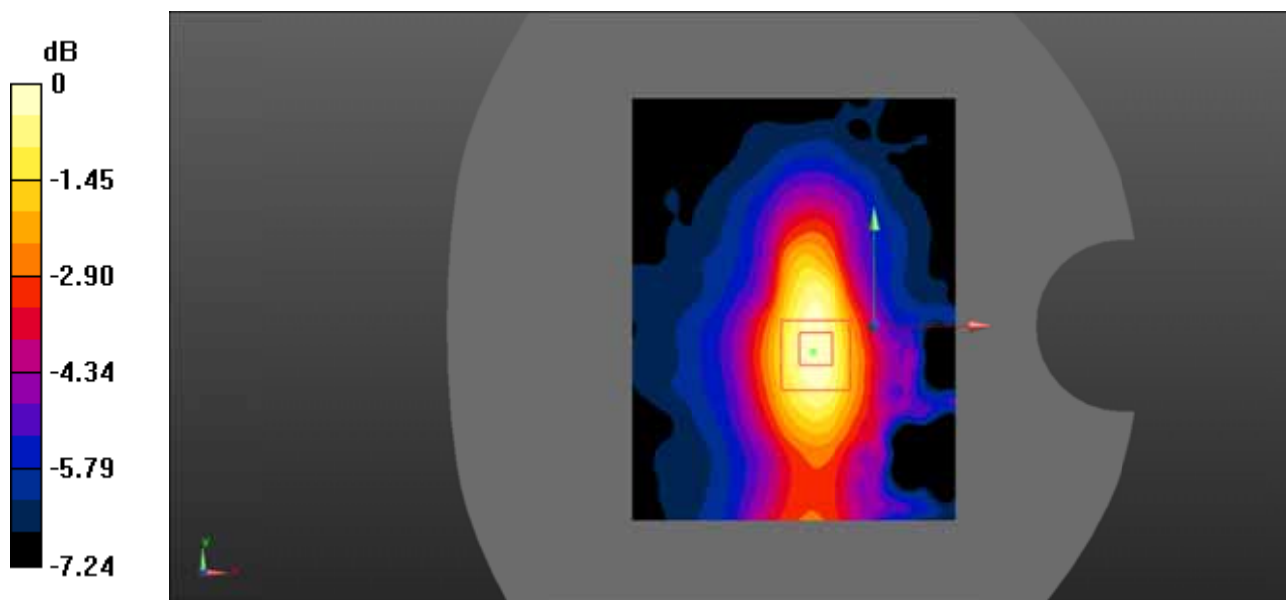

0 dB = $0.117 \text{ W/kg} = -9.32 \text{ dBW/kg}$

Test Plot 111#: LTE Band 38_Body Left_50%RB_Middle

DUT: Mobile Phone; Type: X688C; Serial: RSZ201102004-SA-S1;

Communication System: Generic TDD-LTE; Frequency: 2595 MHz; Duty Cycle: 1:2
 Medium parameters used: $f = 2595$ MHz; $\sigma = 1.963$ S/m; $\epsilon_r = 38.229$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section


DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.04, 7.04, 7.04)
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 3/3/2020
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (101x131x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
 Maximum value of SAR (interpolated) = 0.0984 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 6.620 V/m; Power Drift = -0.09 dB
 Peak SAR (extrapolated) = 0.161 W/kg

SAR(1 g) = 0.092 W/kg; SAR(10 g) = 0.059 W/kg
 Maximum value of SAR (measured) = 0.0986 W/kg

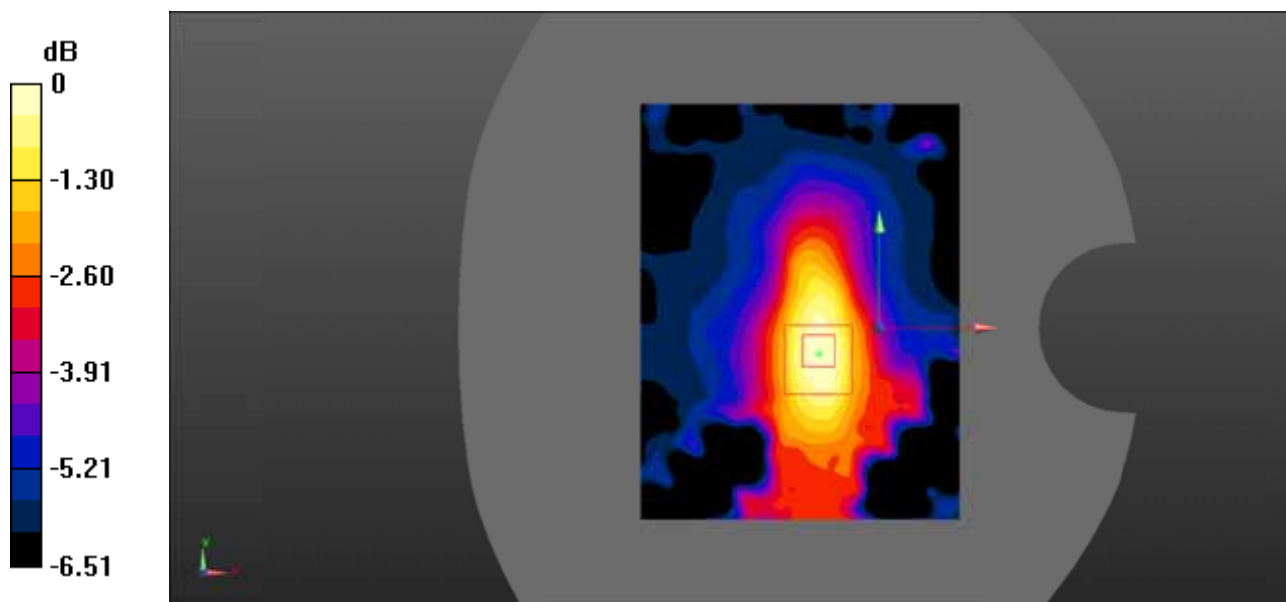

0 dB = 0.0986 W/kg = -10.06 dBW/kg

Test Plot 112#: LTE Band 38_Body Top_1RB_Middle

DUT: Mobile Phone; Type: X688C; Serial: RSZ201102004-SA-S1;

Communication System: Generic TDD-LTE; Frequency: 2595 MHz; Duty Cycle: 1:2
 Medium parameters used: $f = 2595$ MHz; $\sigma = 1.963$ S/m; $\epsilon_r = 38.229$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section


DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.04, 7.04, 7.04)
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 3/3/2020
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (101x131x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
 Maximum value of SAR (interpolated) = 0.0922 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 4.078 V/m; Power Drift = 0.08 dB
 Peak SAR (extrapolated) = 0.150 W/kg

SAR(1 g) = 0.085 W/kg; SAR(10 g) = 0.052 W/kg
 Maximum value of SAR (measured) = 0.0942 W/kg

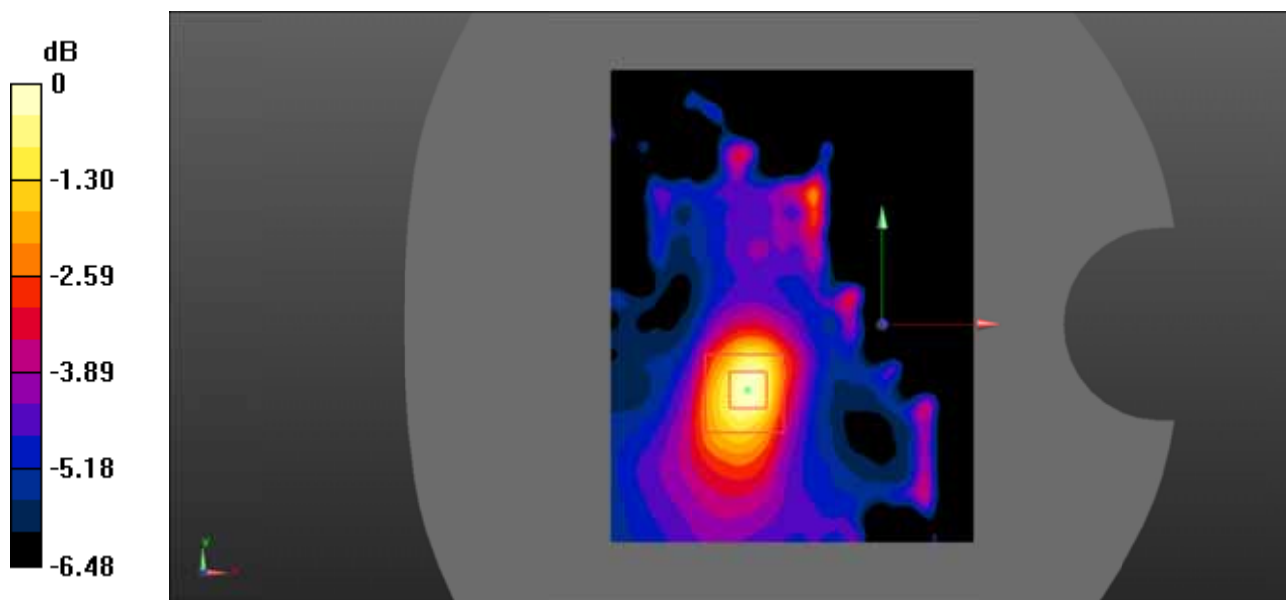

0 dB = 0.0942 W/kg = -10.26 dBW/kg

Test Plot 113#: LTE Band 38_Body Top_50%RB_Middle

DUT: Mobile Phone; Type: X688C; Serial: RSZ201102004-SA-S1;

Communication System: Generic TDD-LTE; Frequency: 2595 MHz; Duty Cycle: 1:2
 Medium parameters used: $f = 2595 \text{ MHz}$; $\sigma = 1.963 \text{ S/m}$; $\epsilon_r = 38.229$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Flat Section


DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.04, 7.04, 7.04)
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 3/3/2020
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (101x131x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.0841 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
 Reference Value = 3.594 V/m; Power Drift = 0.18 dB
 Peak SAR (extrapolated) = 0.143 W/kg

SAR(1 g) = 0.082 W/kg; SAR(10 g) = 0.050 W/kg
 Maximum value of SAR (measured) = 0.0906 W/kg

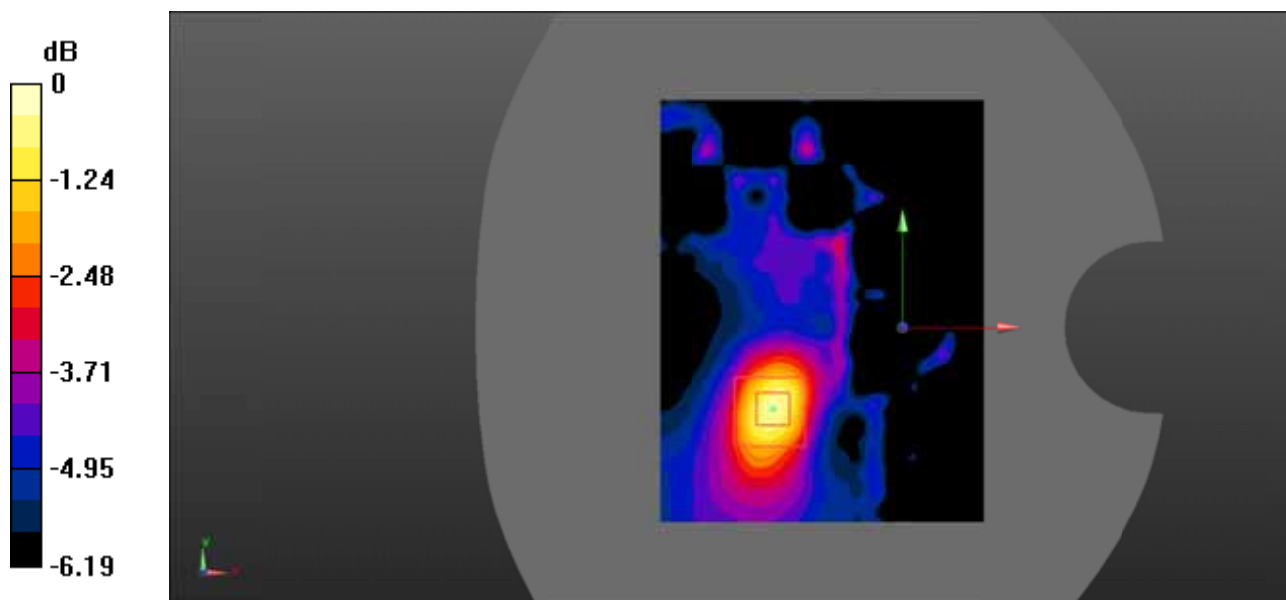

0 dB = 0.0906 W/kg = -10.43 dBW/kg

Test Plot 114#: LTE Band 41_Head Left Cheek_1RB_Middle

DUT: Mobile Phone; Type: X688C; Serial: RSZ201102004-SA-S1;

Communication System: Generic TDD-LTE; Frequency: 2593 MHz; Duty Cycle: 1:2
 Medium parameters used: $f = 2593 \text{ MHz}$; $\sigma = 1.944 \text{ S/m}$; $\epsilon_r = 38.224$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Left Section


DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(6.79, 6.79, 6.79)
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 3/3/2020
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (101x121x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.165 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
 Reference Value = 4.197 V/m ; Power Drift = 0.10 dB
 Peak SAR (extrapolated) = 0.219 W/kg

SAR(1 g) = 0.147 W/kg; SAR(10 g) = 0.090 W/kg
 Maximum value of SAR (measured) = 0.158 W/kg

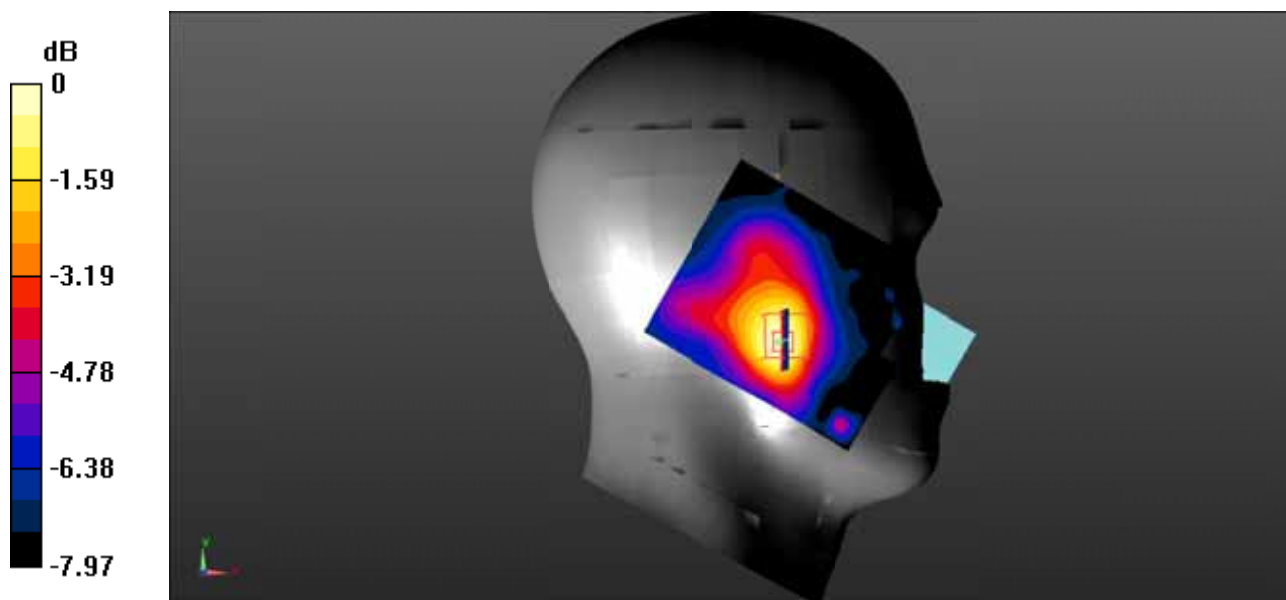

0 dB = $0.158 \text{ W/kg} = -8.01 \text{ dBW/kg}$

Test Plot 115#: LTE Band 41_Head Left Cheek_50%RB_Middle

DUT: Mobile Phone; Type: X688C; Serial: RSZ201102004-SA-S1;

Communication System: Generic TDD-LTE; Frequency: 2593 MHz; Duty Cycle: 1:2
 Medium parameters used: $f = 2593 \text{ MHz}$; $\sigma = 1.944 \text{ S/m}$; $\epsilon_r = 38.224$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Left Section


DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(6.79, 6.79, 6.79)
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 3/3/2020
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (101x121x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.131 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
 Reference Value = 4.233 V/m ; Power Drift = 0.14 dB
 Peak SAR (extrapolated) = 0.193 W/kg

SAR(1 g) = 0.123 W/kg; SAR(10 g) = 0.076 W/kg
 Maximum value of SAR (measured) = 0.132 W/kg

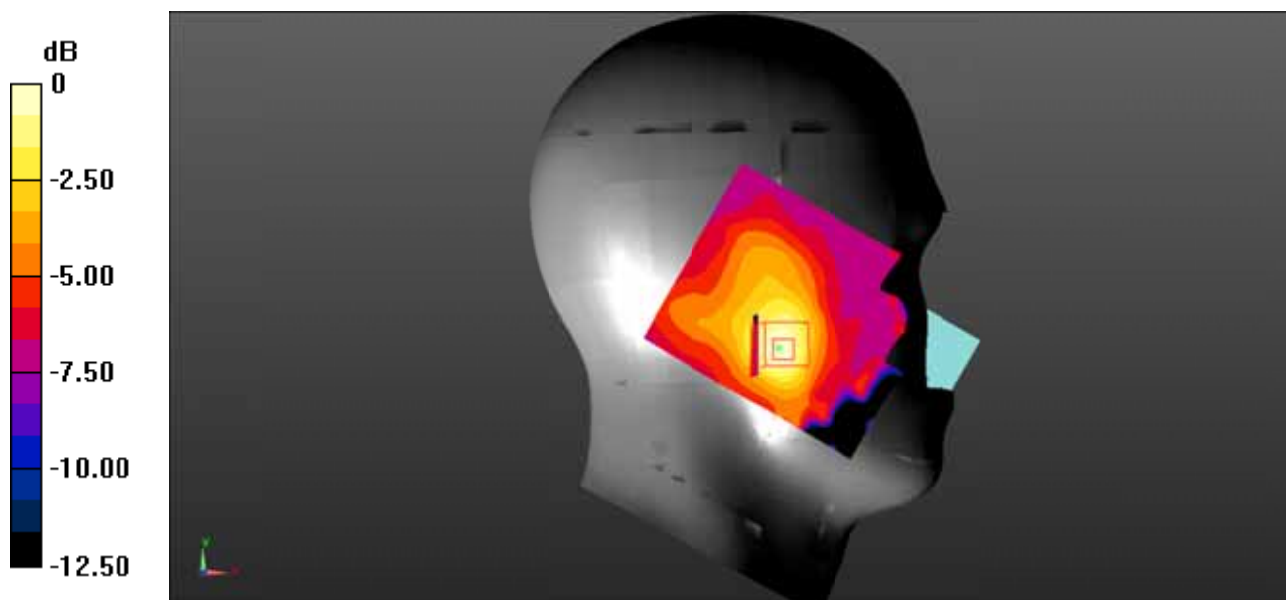

0 dB = 0.132 W/kg = -8.79 dBW/kg

Test Plot 116#: LTE Band 41_Head Left Tilt_1RB_Middle

DUT: Mobile Phone; Type: X688C; Serial: RSZ201102004-SA-S1;

Communication System: Generic TDD-LTE; Frequency: 2593 MHz; Duty Cycle: 1:2
 Medium parameters used: $f = 2593 \text{ MHz}$; $\sigma = 1.944 \text{ S/m}$; $\epsilon_r = 38.224$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Left Section


DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(6.79, 6.79, 6.79)
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 3/3/2020
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (101x121x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.110 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
 Reference Value = 5.676 V/m ; Power Drift = -0.02 dB
 Peak SAR (extrapolated) = 0.167 W/kg

SAR(1 g) = 0.099 W/kg; SAR(10 g) = 0.063 W/kg
 Maximum value of SAR (measured) = 0.105 W/kg

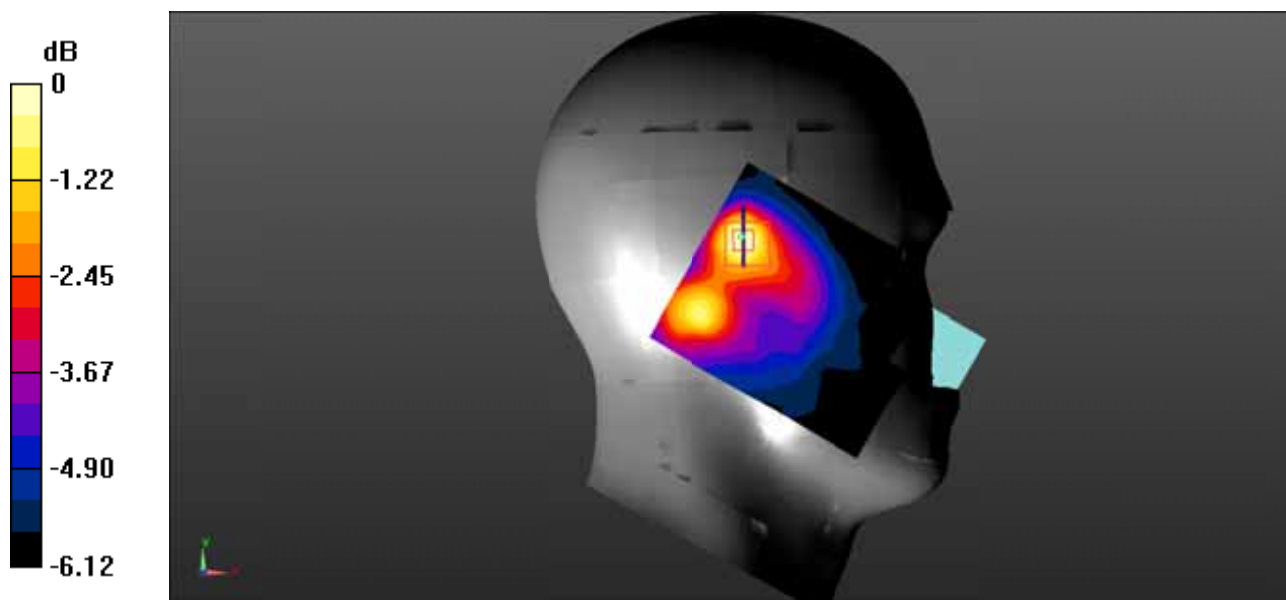

0 dB = $0.105 \text{ W/kg} = -9.79 \text{ dBW/kg}$

Test Plot 117#: LTE Band 41_Head Left Tilt_50%RB_Middle

DUT: Mobile Phone; Type: X688C; Serial: RSZ201102004-SA-S1;

Communication System: Generic TDD-LTE; Frequency: 2593 MHz; Duty Cycle: 1:2
 Medium parameters used: $f = 2593 \text{ MHz}$; $\sigma = 1.944 \text{ S/m}$; $\epsilon_r = 38.224$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Left Section


DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(6.79, 6.79, 6.79)
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 3/3/2020
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (101x121x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.0936 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
 Reference Value = 5.204 V/m ; Power Drift = 0.07 dB
 Peak SAR (extrapolated) = 0.139 W/kg

SAR(1 g) = 0.084 W/kg; SAR(10 g) = 0.055 W/kg
 Maximum value of SAR (measured) = 0.0905 W/kg

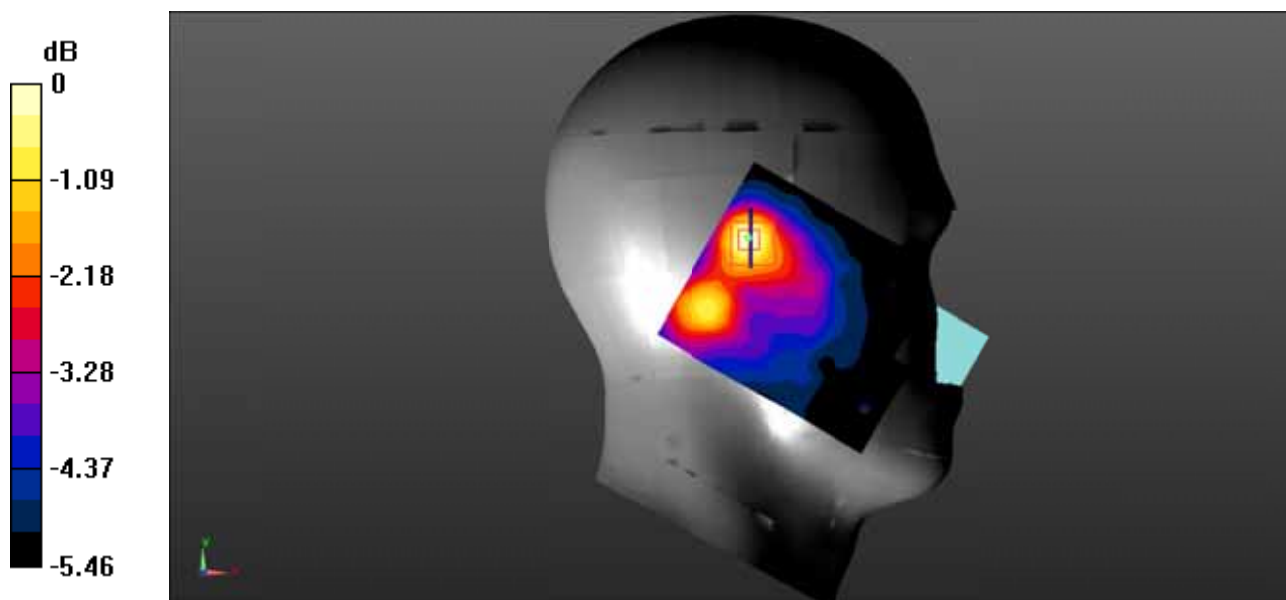

0 dB = 0.0905 W/kg = -10.43 dBW/kg

Test Plot 118#: LTE Band 41_Head Right Cheek_1RB_Middle

DUT: Mobile Phone; Type: X688C; Serial: RSZ201102004-SA-S1;

Communication System: Generic TDD-LTE; Frequency: 2593 MHz; Duty Cycle: 1:2
 Medium parameters used: $f = 2593 \text{ MHz}$; $\sigma = 1.944 \text{ S/m}$; $\epsilon_r = 38.224$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Right Section


DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(6.79, 6.79, 6.79)
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 3/3/2020
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (101x121x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.467 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
 Reference Value = 5.661 V/m ; Power Drift = 0.12 dB
 Peak SAR (extrapolated) = 0.816 W/kg

SAR(1 g) = 0.382 W/kg; SAR(10 g) = 0.202 W/kg
 Maximum value of SAR (measured) = 0.396 W/kg

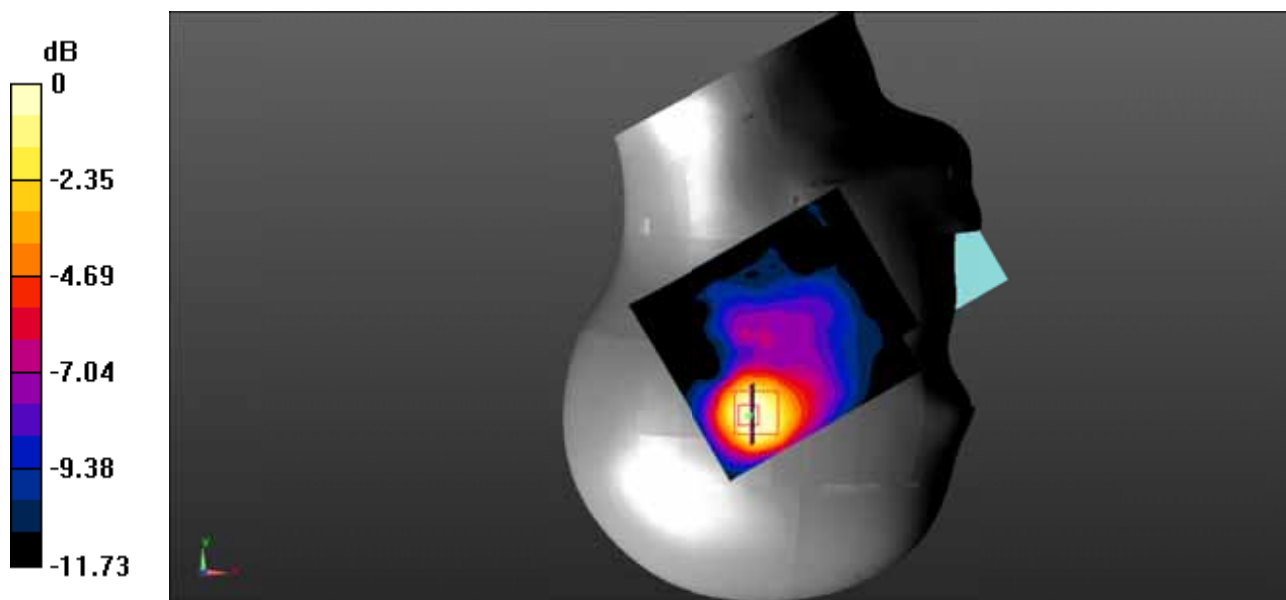

0 dB = $0.396 \text{ W/kg} = -4.02 \text{ dBW/kg}$

Test Plot 119#: LTE Band 41_Head Right Cheek_50%RB_Middle

DUT: Mobile Phone; Type: X688C; Serial: RSZ201102004-SA-S1;

Communication System: Generic TDD-LTE; Frequency: 2593 MHz; Duty Cycle: 1:2
 Medium parameters used: $f = 2593 \text{ MHz}$; $\sigma = 1.944 \text{ S/m}$; $\epsilon_r = 38.224$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Right Section


DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(6.79, 6.79, 6.79)
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 3/3/2020
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (101x121x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.207 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
 Reference Value = 4.483 V/m ; Power Drift = 0.11 dB
 Peak SAR (extrapolated) = 0.313 W/kg

SAR(1 g) = 0.192 W/kg; SAR(10 g) = 0.118 W/kg
 Maximum value of SAR (measured) = 0.204 W/kg

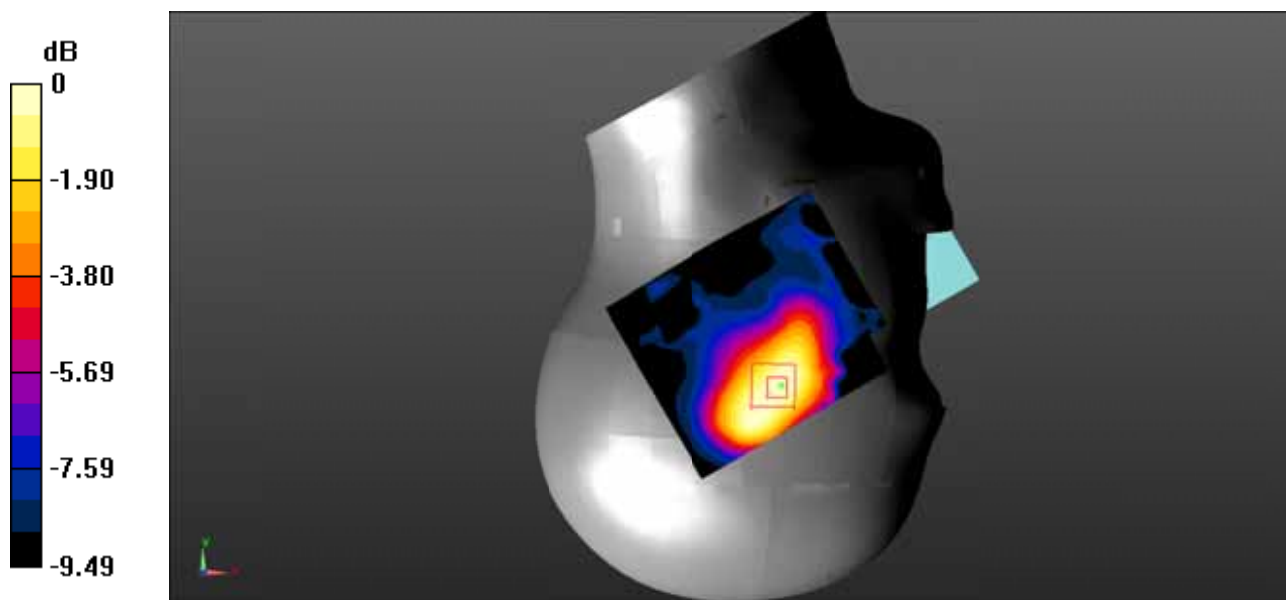

0 dB = $0.204 \text{ W/kg} = -6.90 \text{ dBW/kg}$

Test Plot 120#: LTE Band 41_Head Right Tilt_1RB_Middle

DUT: Mobile Phone; Type: X688C; Serial: RSZ201102004-SA-S1;

Communication System: Generic TDD-LTE; Frequency: 2593 MHz; Duty Cycle: 1:2
 Medium parameters used: $f = 2593 \text{ MHz}$; $\sigma = 1.944 \text{ S/m}$; $\epsilon_r = 38.224$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Right Section


DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(6.79, 6.79, 6.79)
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 3/3/2020
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (101x121x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.254 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
 Reference Value = 5.309 V/m ; Power Drift = 0.14 dB
 Peak SAR (extrapolated) = 0.503 W/kg

SAR(1 g) = 0.223 W/kg; SAR(10 g) = 0.120 W/kg
 Maximum value of SAR (measured) = 0.232 W/kg

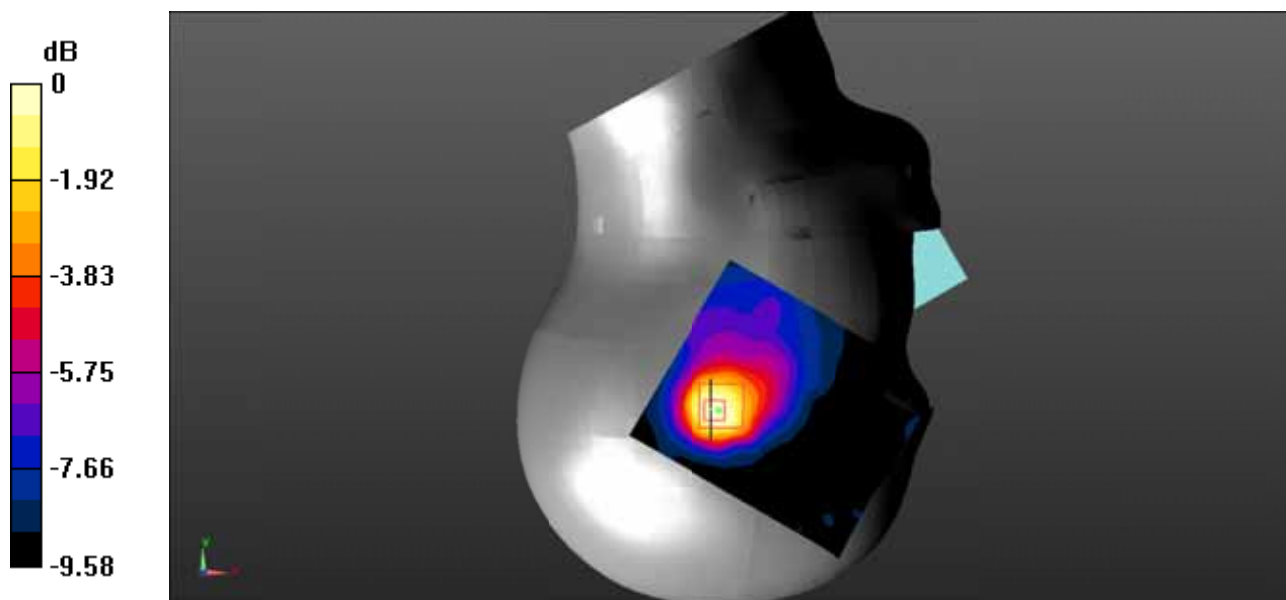

0 dB = $0.232 \text{ W/kg} = -6.35 \text{ dBW/kg}$

Test Plot 121#: LTE Band 41_Head Right Tilt_50%RB_Middle

DUT: Mobile Phone; Type: X688C; Serial: RSZ201102004-SA-S1;

Communication System: Generic TDD-LTE; Frequency: 2593 MHz; Duty Cycle: 1:2
 Medium parameters used: $f = 2593 \text{ MHz}$; $\sigma = 1.944 \text{ S/m}$; $\epsilon_r = 38.224$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Right Section

DASY5 Configuration:


- Probe: EX3DV4 - SN7522; ConvF(6.79, 6.79, 6.79)
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 3/3/2020
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (101x121x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.203 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
 Reference Value = 4.929 V/m ; Power Drift = 0.06 dB
 Peak SAR (extrapolated) = 0.420 W/kg

SAR(1 g) = 0.184 W/kg; SAR(10 g) = 0.102 W/kg

Maximum value of SAR (measured) = 0.190 W/kg

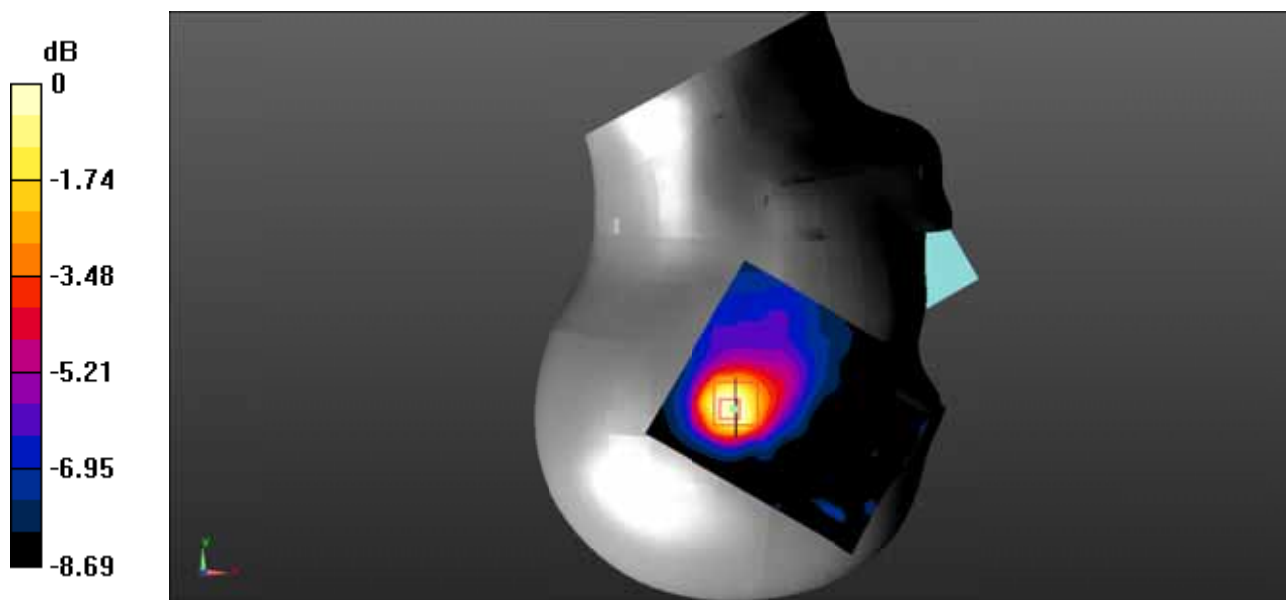

0 dB = $0.190 \text{ W/kg} = -7.21 \text{ dBW/kg}$

Test Plot 122#: LTE Band 41_Body Back_1RB_Middle

DUT: Mobile Phone; Type: X688C; Serial: RSZ201102004-SA-S1;

Communication System: Generic TDD-LTE; Frequency: 2593 MHz; Duty Cycle: 1:2
 Medium parameters used: $f = 2593 \text{ MHz}$; $\sigma = 1.944 \text{ S/m}$; $\epsilon_r = 38.224$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Flat Section


DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.04, 7.04, 7.04)
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 3/3/2020
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (101x131x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.281 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
 Reference Value = 4.573 V/m ; Power Drift = -0.08 dB
 Peak SAR (extrapolated) = 0.120 W/kg

SAR(1 g) = 0.068 W/kg; SAR(10 g) = 0.042 W/kg
 Maximum value of SAR (measured) = 0.0735 W/kg

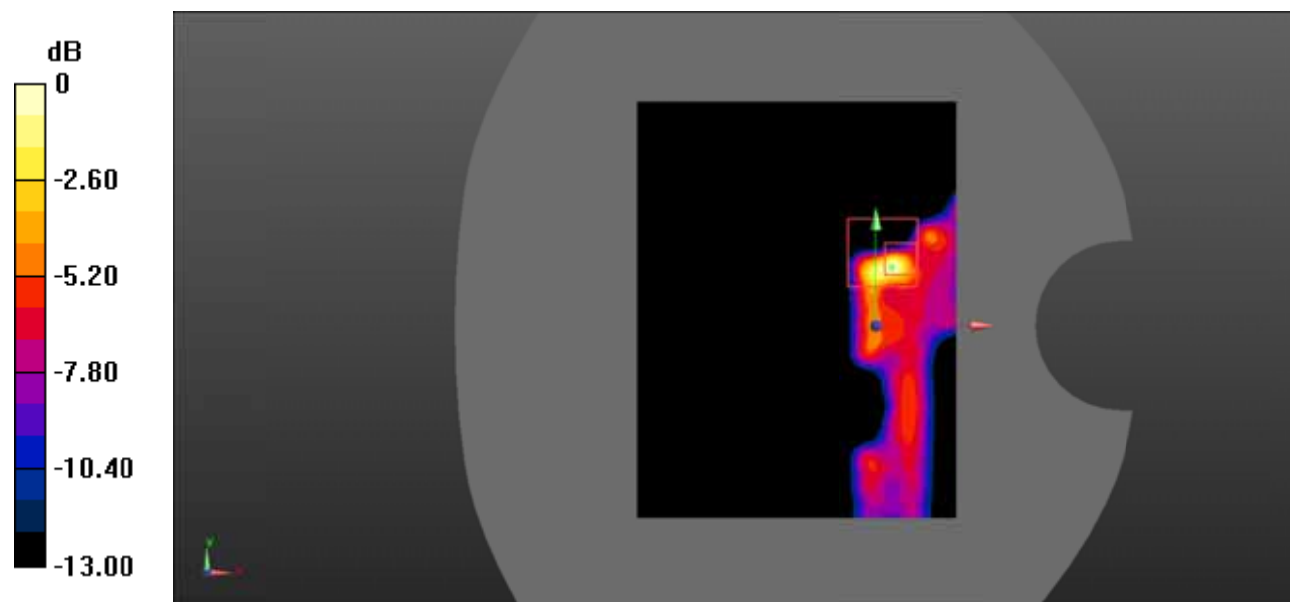

0 dB = $0.0735 \text{ W/kg} = -11.34 \text{ dBW/kg}$

Test Plot 123#: LTE Band 41_Body Back_50%RB_Middle

DUT: Mobile Phone; Type: X688C; Serial: RSZ201102004-SA-S1;

Communication System: Generic TDD-LTE; Frequency: 2593 MHz; Duty Cycle: 1:2
 Medium parameters used: $f = 2593$ MHz; $\sigma = 1.944$ S/m; $\epsilon_r = 38.224$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.04, 7.04, 7.04)
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 3/3/2020
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;


Area Scan (101x131x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
 Maximum value of SAR (interpolated) = 0.0669 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 4.080 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.0980 W/kg

SAR(1 g) = 0.058 W/kg; SAR(10 g) = 0.039 W/kg

Maximum value of SAR (measured) = 0.0689 W/kg

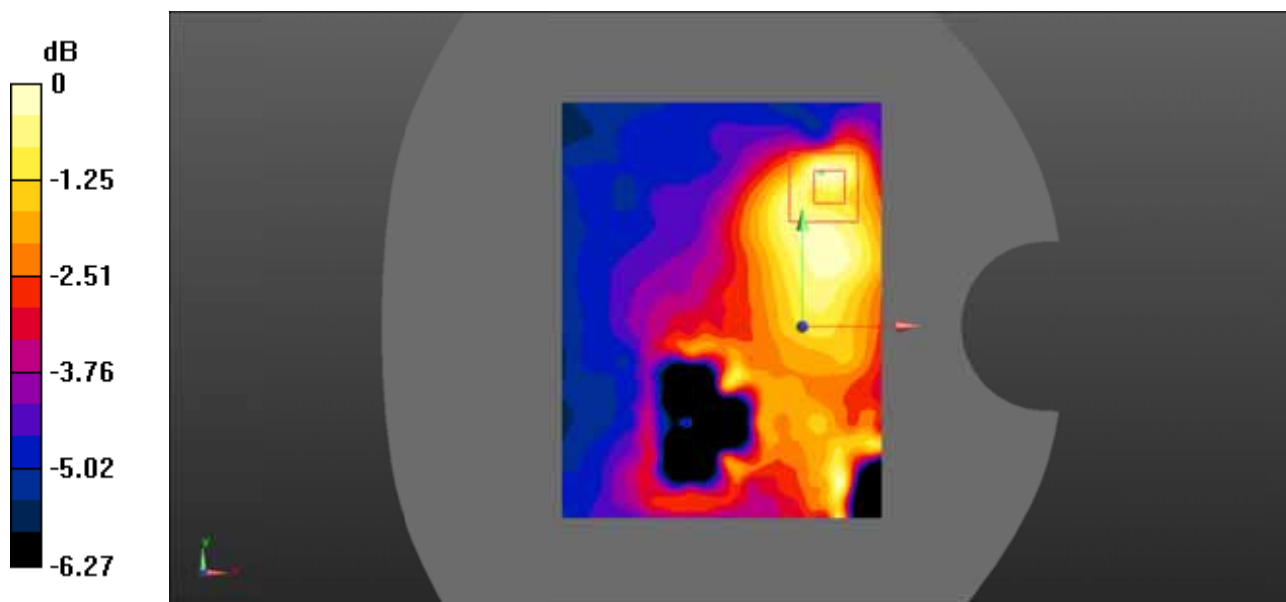

0 dB = 0.0689 W/kg = -11.62 dBW/kg

Test Plot 124#: LTE Band 41_Body Left_1RB_Middle

DUT: Mobile Phone; Type: X688C; Serial: RSZ201102004-SA-S1;

Communication System: Generic TDD-LTE; Frequency: 2593 MHz; Duty Cycle: 1:2
 Medium parameters used: $f = 2593 \text{ MHz}$; $\sigma = 1.944 \text{ S/m}$; $\epsilon_r = 38.224$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Flat Section


DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.04, 7.04, 7.04)
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 3/3/2020
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (101x131x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.116 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
 Reference Value = 7.433 V/m ; Power Drift = -0.11 dB
 Peak SAR (extrapolated) = 0.245 W/kg

SAR(1 g) = 0.110 W/kg; SAR(10 g) = 0.068 W/kg
 Maximum value of SAR (measured) = 0.117 W/kg

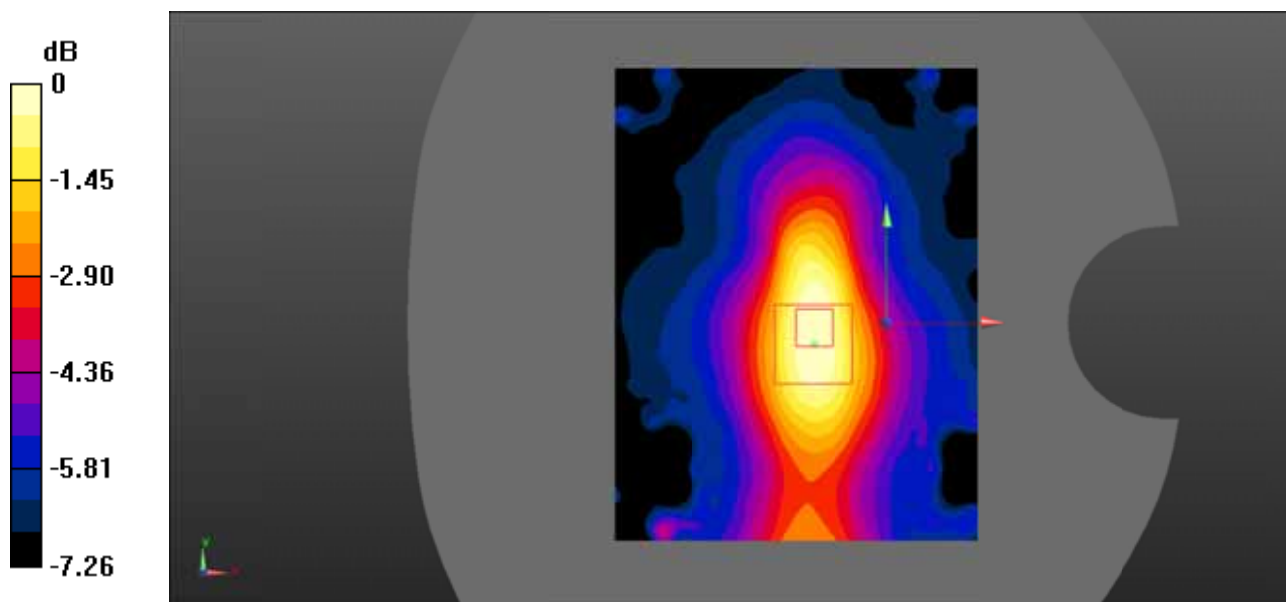

0 dB = $0.117 \text{ W/kg} = -9.32 \text{ dBW/kg}$

Test Plot 125#: LTE Band 41_Body Left_50%RB_Middle

DUT: Mobile Phone; Type: X688C; Serial: RSZ201102004-SA-S1;

Communication System: Generic TDD-LTE; Frequency: 2593 MHz; Duty Cycle: 1:2
 Medium parameters used: $f = 2593 \text{ MHz}$; $\sigma = 1.944 \text{ S/m}$; $\epsilon_r = 38.224$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Flat Section


DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.04, 7.04, 7.04)
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 3/3/2020
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (101x131x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.0955 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
 Reference Value = 6.756 V/m ; Power Drift = -0.03 dB
 Peak SAR (extrapolated) = 0.182 W/kg

SAR(1 g) = 0.091 W/kg; SAR(10 g) = 0.058 W/kg
 Maximum value of SAR (measured) = 0.0970 W/kg

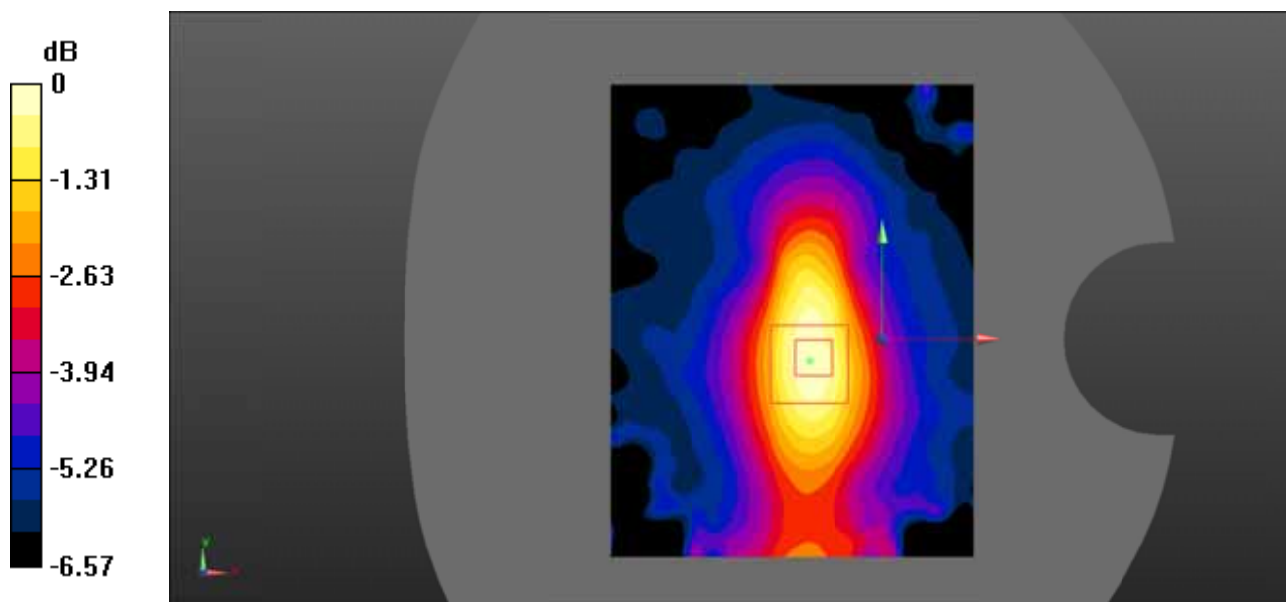

0 dB = $0.0970 \text{ W/kg} = -10.13 \text{ dBW/kg}$

Test Plot 126#: LTE Band 41_Body Top_1RB_Middle

DUT: Mobile Phone; Type: X688C; Serial: RSZ201102004-SA-S1;

Communication System: Generic TDD-LTE; Frequency: 2593 MHz; Duty Cycle: 1:2
 Medium parameters used: $f = 2593 \text{ MHz}$; $\sigma = 1.944 \text{ S/m}$; $\epsilon_r = 38.224$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Flat Section


DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.04, 7.04, 7.04)
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 3/3/2020
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (101x131x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.0973 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
 Reference Value = 4.032 V/m ; Power Drift = -0.16 dB
 Peak SAR (extrapolated) = 0.160 W/kg

SAR(1 g) = 0.089 W/kg; SAR(10 g) = 0.052 W/kg
 Maximum value of SAR (measured) = 0.0995 W/kg

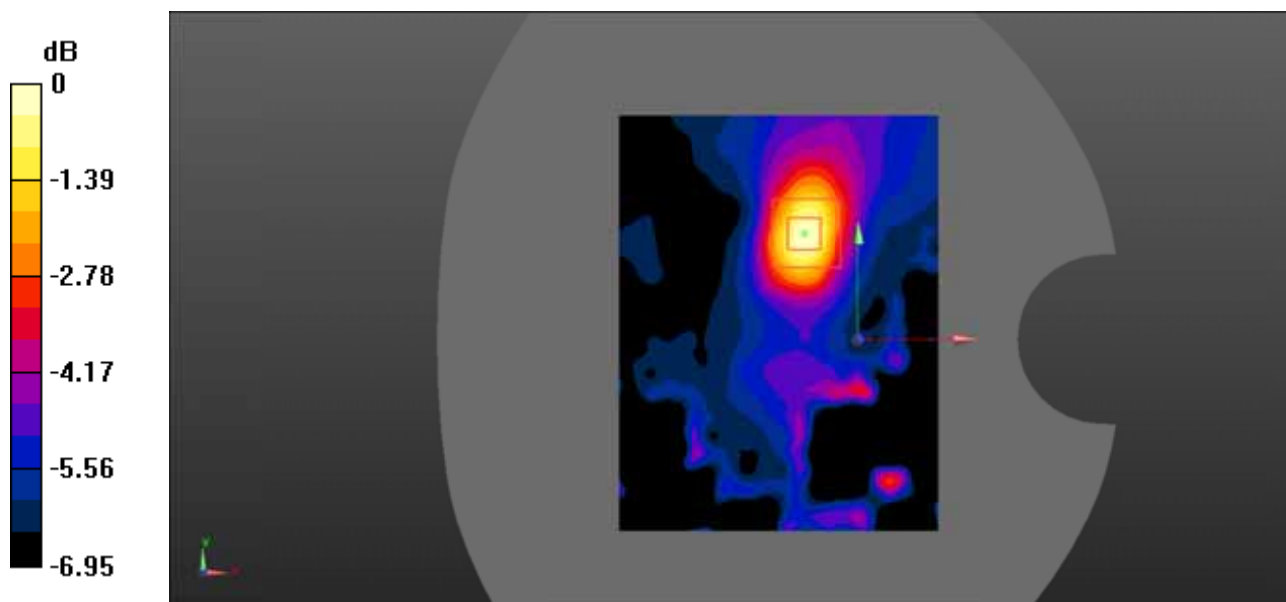

0 dB = $0.0995 \text{ W/kg} = -10.02 \text{ dBW/kg}$

Test Plot 127#: LTE Band 41_Body Top_50%RB_Middle

DUT: Mobile Phone; Type: X688C; Serial: RSZ201102004-SA-S1;

Communication System: Generic TDD-LTE; Frequency: 2593 MHz; Duty Cycle: 1:2
 Medium parameters used: $f = 2593 \text{ MHz}$; $\sigma = 1.944 \text{ S/m}$; $\epsilon_r = 38.224$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Flat Section


DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.04, 7.04, 7.04)
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 3/3/2020
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

Area Scan (101x131x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.0839 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
 Reference Value = 3.871 V/m ; Power Drift = -0.07 dB
 Peak SAR (extrapolated) = 0.134 W/kg

SAR(1 g) = 0.077 W/kg; SAR(10 g) = 0.046 W/kg
 Maximum value of SAR (measured) = 0.0844 W/kg

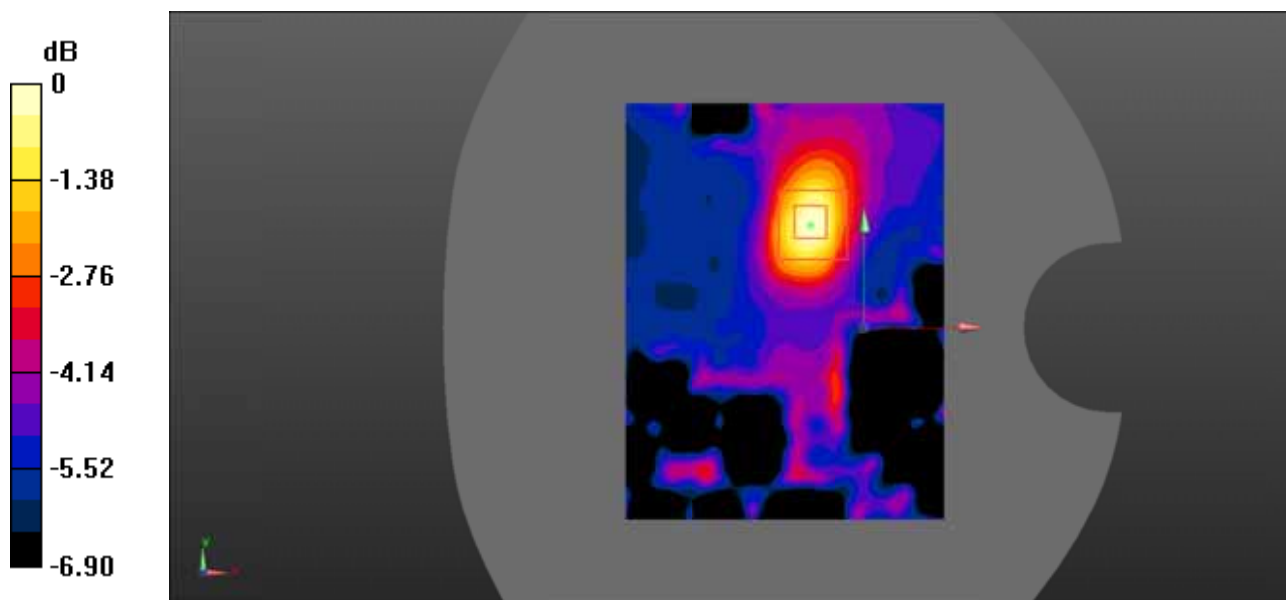

0 dB = $0.0844 \text{ W/kg} = -10.74 \text{ dBW/kg}$

Test Plot 128#: 2.4Gwifi_Head Left Cheek_High

DUT: Mobile Phone; Type: X688C; Serial: RSZ201102004-SA-S1;

Communication System: UID 0, 2.4G DTS (0); Frequency: 2472 MHz;Duty Cycle: 1:1
 Medium parameters used (interpolated): $f = 2472 \text{ MHz}$; $\sigma = 1.875 \text{ S/m}$; $\epsilon_r = 38.508$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.15, 7.15, 7.15) @ 2472 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 3/3/2020
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head Left Cheek/WLAN 802.11b High/Area Scan (101x101x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.590 W/kg


Head Left Cheek/WLAN 802.11b High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 11.46 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 1.15 W/kg

SAR(1 g) = 0.543 W/kg; SAR(10 g) = 0.310 W/kg

Maximum value of SAR (measured) = 0.594 W/kg

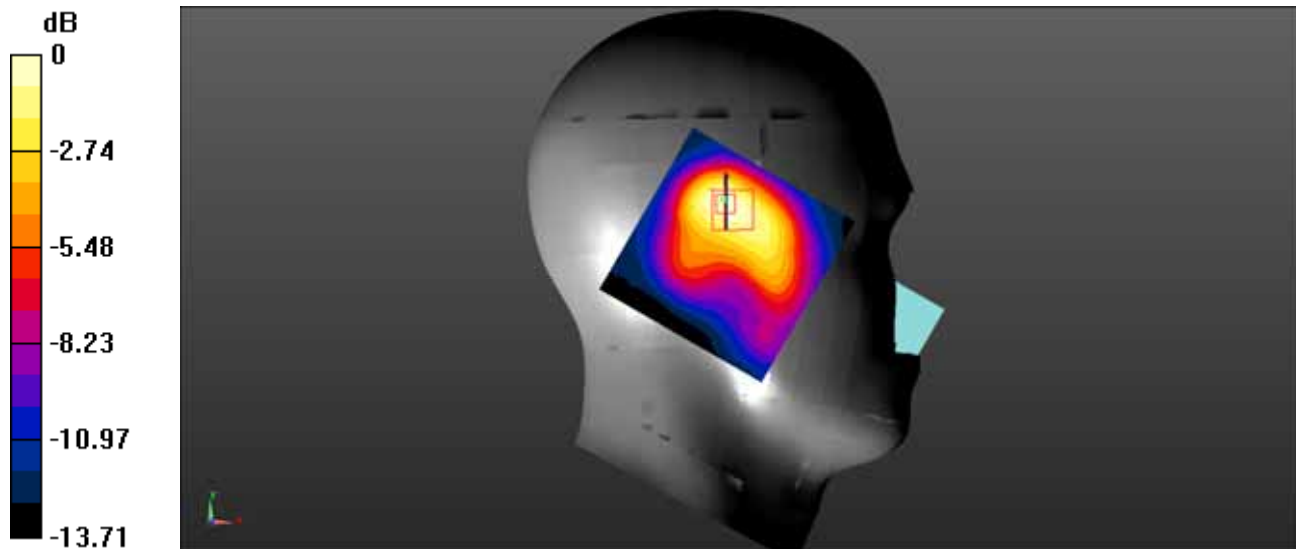

0 dB = 0.594 W/kg = -2.26 dBW/kg

Test Plot 129#: 2.4Gwifi_Head Left Tilt_High

DUT: Mobile Phone; Type: X688C; Serial: RSZ201102004-SA-S1;


Communication System: UID 0, 2.4G DTS (0); Frequency: 2472 MHz;Duty Cycle: 1:1
 Medium parameters used (interpolated): $f = 2472 \text{ MHz}$; $\sigma = 1.875 \text{ S/m}$; $\epsilon_r = 38.508$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.15, 7.15, 7.15) @ 2472 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 3/3/2020
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head Left Tilt/WLAN 802.11b High/Area Scan (101x101x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.638 W/kg

Head Left Tilt/WLAN 802.11b High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
 Reference Value = 10.95 V/m ; Power Drift = -0.02 dB
 Peak SAR (extrapolated) = 1.02 W/kg
SAR(1 g) = 0.551 W/kg ; SAR(10 g) = 0.311 W/kg
 Maximum value of SAR (measured) = 0.601 W/kg

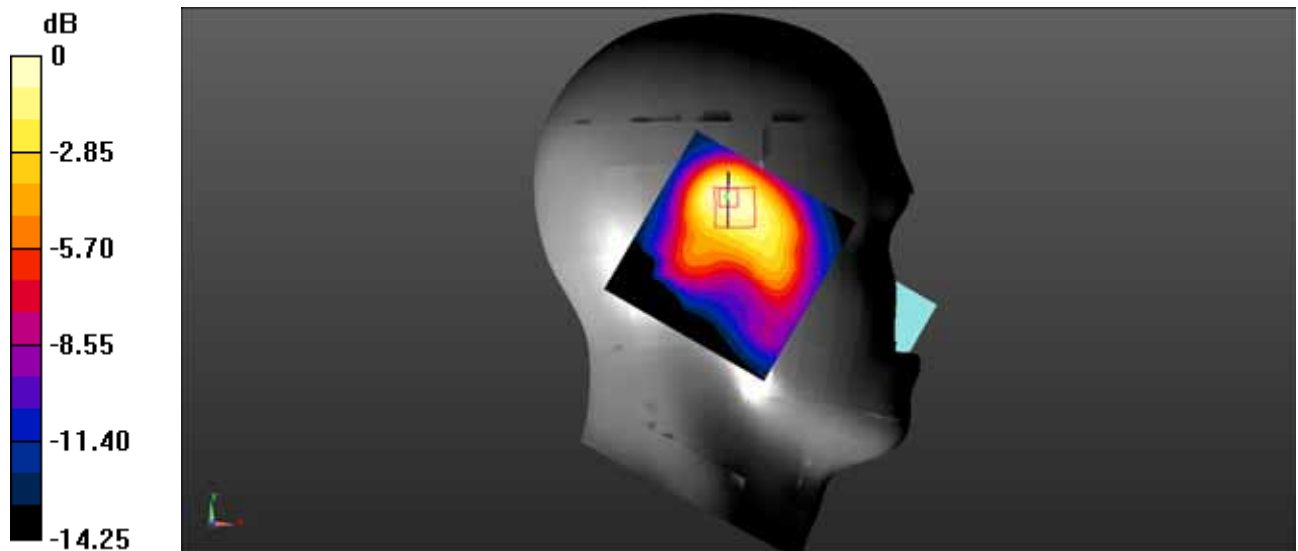

0 dB = 0.601 W/kg = -2.21 dBW/kg

Test Plot 130#: 2.4Gwifi_Head Right Cheek_High

DUT: Mobile Phone; Type: X688C; Serial: RSZ201102004-SA-S1;

Communication System: UID 0, 2.4G DTS (0); Frequency: 2472 MHz;Duty Cycle: 1:1
 Medium parameters used (interpolated): $f = 2472$ MHz; $\sigma = 1.875$ S/m; $\epsilon_r = 38.508$; $\rho = 1000$ kg/m³
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.15, 7.15, 7.15) @ 2472 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 3/3/2020
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head Right Cheek/WLAN 802.11b High/Area Scan (101x101x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm
 Maximum value of SAR (interpolated) = 0.312 W/kg


Head Right Cheek/WLAN 802.11b High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 11.82 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.453 W/kg

SAR(1 g) = 0.266 W/kg; SAR(10 g) = 0.166 W/kg

Maximum value of SAR (measured) = 0.284 W/kg

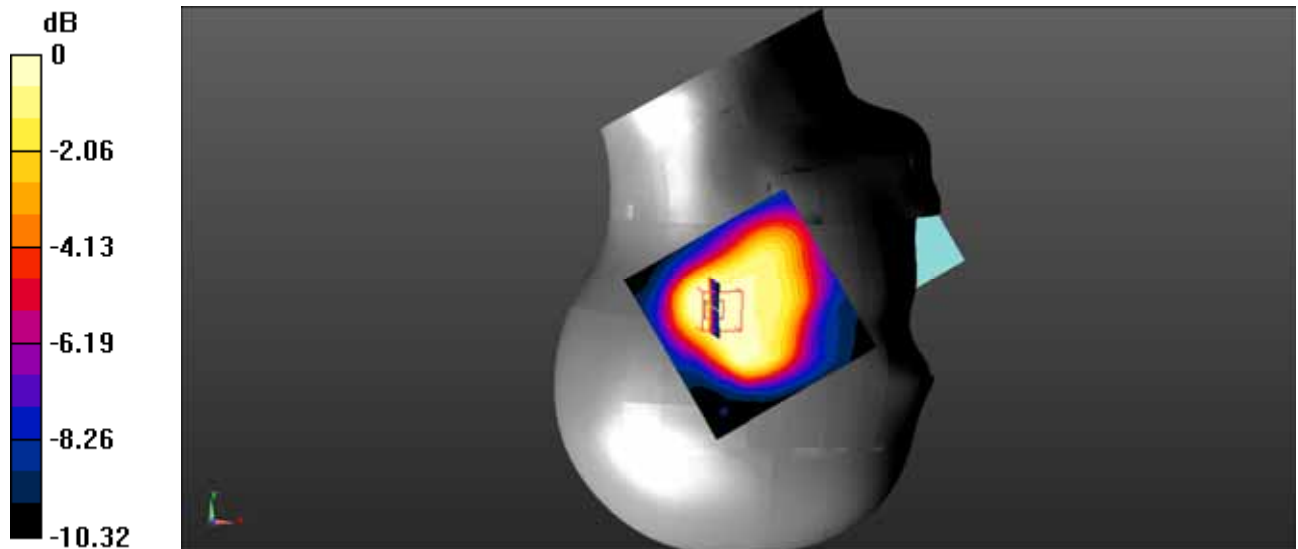

0 dB = 0.284 W/kg = -5.47 dBW/kg

Test Plot 131#: 2.4Gwifi_Head Right Tilt_High

DUT: Mobile Phone; Type: X688C; Serial: RSZ201102004-SA-S1;

Communication System: UID 0, 2.4G DTS (0); Frequency: 2472 MHz;Duty Cycle: 1:1
 Medium parameters used (interpolated): $f = 2472 \text{ MHz}$; $\sigma = 1.875 \text{ S/m}$; $\epsilon_r = 38.508$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.15, 7.15, 7.15) @ 2472 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 3/3/2020
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);


Head Right Tilt/WLAN 802.11b High/Area Scan (101x101x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.382 W/kg

Head Right Tilt/WLAN 802.11b High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
 Reference Value = 12.02 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.532 W/kg

SAR(1 g) = 0.313 W/kg; SAR(10 g) = 0.174 W/kg

Maximum value of SAR (measured) = 0.346 W/kg

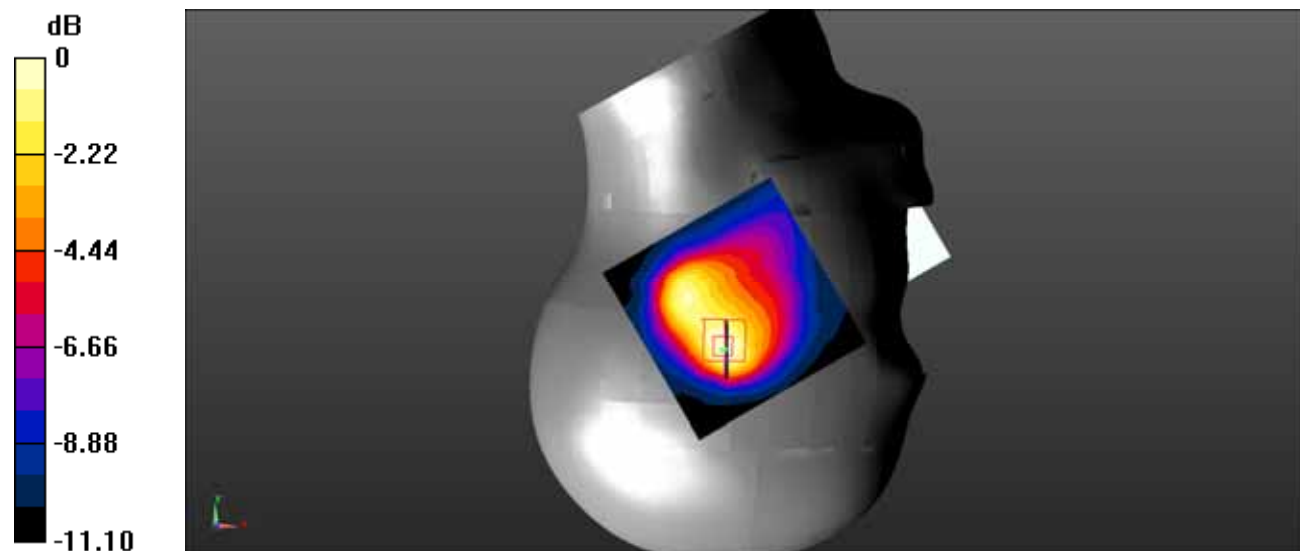

0 dB = 0.346 W/kg = -4.61 dBW/kg

Test Plot 132#: 2.4Gwifi_Body Back_High

DUT: Mobile Phone; Type: X688C; Serial: RSZ201102004-SA-S1;


Communication System: UID 0, 2.4G DTS (0); Frequency: 2472 MHz;Duty Cycle: 1:1
 Medium parameters used (interpolated): $f = 2472 \text{ MHz}$; $\sigma = 1.875 \text{ S/m}$; $\epsilon_r = 38.508$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.15, 7.15, 7.15) @ 2472 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 3/3/2020
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Body Back/WLAN 802.11b High/Area Scan (101x101x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.462 W/kg

Body Back/WLAN 802.11b High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
 Reference Value = 10.48 V/m; Power Drift = 0.07 dB
 Peak SAR (extrapolated) = 0.847 W/kg
SAR(1 g) = 0.414 W/kg; SAR(10 g) = 0.218 W/kg
 Maximum value of SAR (measured) = 0.451 W/kg

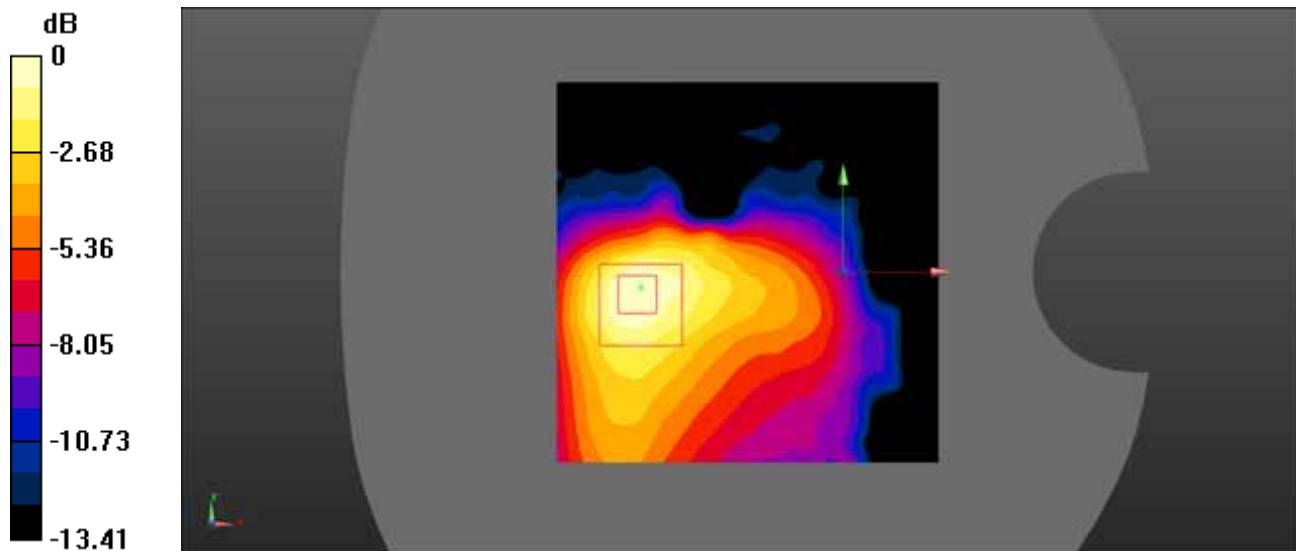

0 dB = 0.451 W/kg = -3.46 dBW/kg

Test Plot 133#: 2.4Gwifi_Body Right_High

DUT: Mobile Phone; Type: X688C; Serial: RSZ201102004-SA-S1;

Communication System: UID 0, 2.4G DTS (0); Frequency: 2472 MHz;Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2472 \text{ MHz}$; $\sigma = 1.875 \text{ S/m}$; $\epsilon_r = 38.508$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.15, 7.15, 7.15) @ 2472 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 3/3/2020
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Body Right/WLAN 802.11b High/Area Scan (101x101x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 0.167 W/kg


Body Right/WLAN 802.11b High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 7.970 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.262 W/kg

SAR(1 g) = 0.153 W/kg; SAR(10 g) = 0.093 W/kg

Maximum value of SAR (measured) = 0.164 W/kg

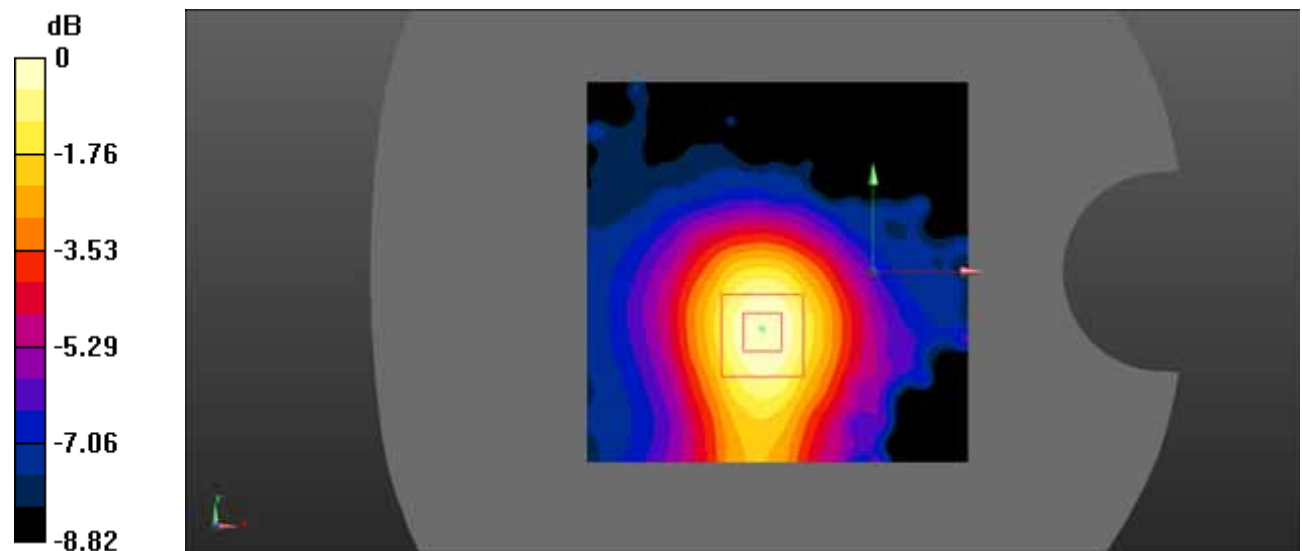

0 dB = 0.164 W/kg = -7.85 dBW/kg

Test Plot 134#: 2.4Gwifi_Body Top_High

DUT: Mobile Phone; Type: X688C; Serial: RSZ201102004-SA-S1;


Communication System: UID 0, 2.4G DTS (0); Frequency: 2472 MHz;Duty Cycle: 1:1
 Medium parameters used (interpolated): $f = 2472 \text{ MHz}$; $\sigma = 1.875 \text{ S/m}$; $\epsilon_r = 38.508$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.15, 7.15, 7.15) @ 2472 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 3/3/2020
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Body Top/WLAN 802.11b High/Area Scan (101x101x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.150 W/kg

Body Top/WLAN 802.11b High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
 Reference Value = 8.298 V/m ; Power Drift = -0.05 dB
 Peak SAR (extrapolated) = 0.241 W/kg
SAR(1 g) = 0.131 W/kg ; SAR(10 g) = 0.076 W/kg
 Maximum value of SAR (measured) = 0.141 W/kg

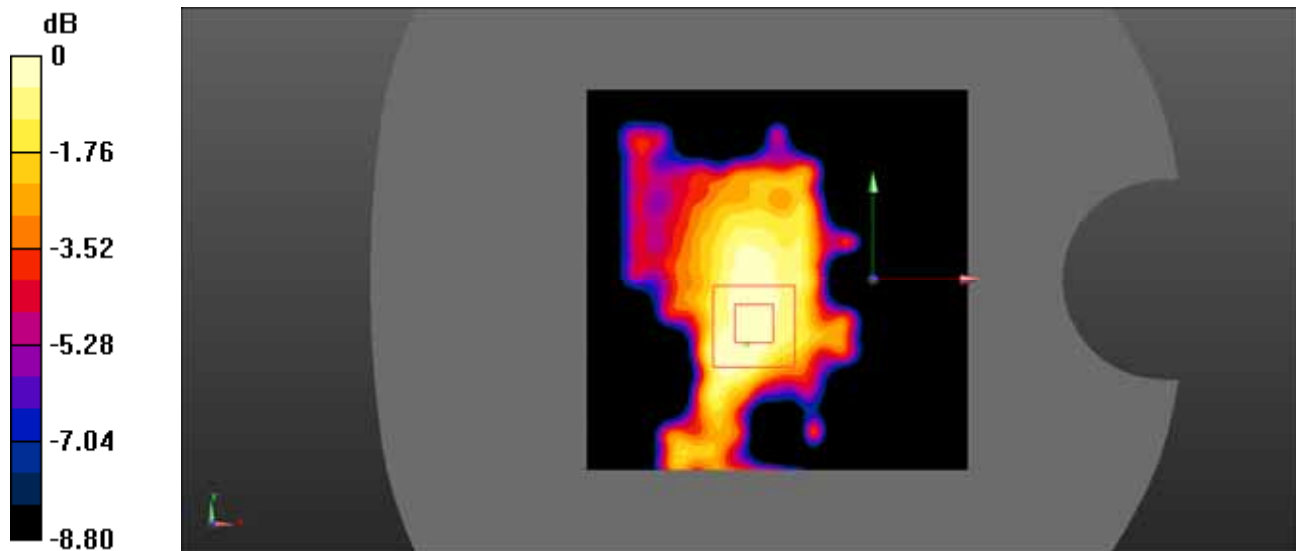

0 dB = 0.141 W/kg = -8.51 dBW/kg