



中认信通

CHINA CERTIFICATION ICT CO., LTD (DONGGUAN)



TEST REPORT

Applicant: INFINIX MOBILITY LIMITED

Address: FLAT N 16/F BLOCK B UNIVERSAL INDUSTRIAL CENTRE 19-25
SHAN MEI STREET FOTAN NT, Hong Kong

FCC ID: 2AIZN-YY5-X6850

Product Name: Mobile Phone

Standard(s): 47 CFR Part 15, Subpart C(15.247)
ANSI C63.10-2013
KDB 558074 D01 15.247 Meas Guidance v05r02

The above device has been tested and found compliant with the requirement of the relative standards by China Certification ICT Co., Ltd (Dongguan)

Report Number: CR231061288-00A

Date Of Issue: 2023/12/5

Reviewed By: Calvin Chen

Title: RF Engineer

Approved By: Sun Zhong

Title: Manager

Test Laboratory: China Certification ICT Co., Ltd (Dongguan)

No. 113, Pingkang Road, Dalang Town, Dongguan,
Guangdong, China
Tel: +86-769-82016888

Test Facility

The Test site used by China Certification ICT Co., Ltd (Dongguan) to collect test data is located on the No. 113, Pingkang Road, Dalang Town, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 442868, the FCC Designation No. : CN1314.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0123.

Declarations

China Certification ICT Co., Ltd (Dongguan) is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with a triangle symbol “▲”. Customer model name, addresses, names, trademarks etc. are not considered data.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

This report cannot be reproduced except in full, without prior written approval of the Company.

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report may contain data that are not covered by the accreditation scope and shall be marked with an asterisk “★”.

CONTENTS

DOCUMENT REVISION HISTORY	5
1. GENERAL INFORMATION	6
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	6
1.2 DESCRIPTION OF TEST CONFIGURATION.....	8
1.2.1 EUT Operation Condition:.....	8
1.2.2 Support Equipment List and Details	8
1.2.3 Support Cable List and Details	8
1.2.4 Block Diagram of Test Setup.....	9
1.3 MEASUREMENT UNCERTAINTY	10
2. SUMMARY OF TEST RESULTS	11
3. REQUIREMENTS AND TEST PROCEDURES	12
3.1 AC LINE CONDUCTED EMISSIONS.....	12
3.1.1 Applicable Standard.....	12
3.1.2 EUT Setup.....	13
3.1.3 EMI Test Receiver Setup	13
3.1.4 Test Procedure	14
3.1.5 Corrected Amplitude & Margin Calculation.....	14
3.2 RADIATION SPURIOUS EMISSIONS.....	15
3.2.1 Applicable Standard.....	15
3.2.2 EUT Setup.....	15
3.2.3 EMI Test Receiver & Spectrum Analyzer Setup	16
3.2.4 Test Procedure	17
3.2.5 Corrected Amplitude & Margin Calculation.....	17
3.3 MINIMUM 6 DB BANDWIDTH.....	18
3.3.1 Applicable Standard.....	18
3.3.2 EUT Setup.....	18
3.3.3 Test Procedure	18
3.4 MAXIMUM CONDUCTED OUTPUT POWER.....	19
3.4.1 Applicable Standard.....	19
3.4.2 EUT Setup.....	19
3.4.3 Test Procedure	19
3.5 MAXIMUM POWER SPECTRAL DENSITY.....	20
3.5.1 Applicable Standard.....	20
3.5.2 EUT Setup.....	20
3.5.3 Test Procedure	20
3.6 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE.....	21
3.6.1 Applicable Standard.....	21
3.6.2 EUT Setup.....	21
3.6.3 Test Procedure	21
3.7 DUTY CYCLE	22
3.7.1 EUT Setup.....	22
3.7.2 Test Procedure	22

3.8 ANTENNA REQUIREMENT.....23
 3.8.1 Applicable Standard.....23
 3.8.2 Judgment.....23

4. Test DATA AND RESULTS 24
 4.1 AC LINE CONDUCTED EMISSIONS.....24
 4.2 RADIATION SPURIOUS EMISSIONS27
 4.3 6 dB EMISSION BANDWIDTH50
 4.4 MAXIMUM CONDUCTED OUTPUT POWER.....55
 4.5 MAXIMUM POWER SPECTRAL DENSITY60
 4.6 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE.....65
 4.7 DUTY CYCLE 70

5. RF EXPOSURE EVALUATION 73
 5.1 APPLICABLE STANDARD.....73

6. EUT PHOTOGRAPHS 74

7. TEST SETUP PHOTOGRAPHS 75

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
1.0	CR231061288-00A	Original Report	2023/12/5

1. GENERAL INFORMATION

1.1 Product Description for Equipment under Test (EUT)

EUT Name:	Mobile Phone
Trade Name:	Infinix
EUT Model:	X6850
Operation Frequency:	2402-2480 MHz
Maximum Peak Output Power (Conducted):	Ant0: -3.56 dBm Ant1: -4.7 dBm
Modulation Type:	GFSK
Rated Input Voltage:	DC 3.91V from battery or DC 5V/5-10V/11V/4-20V from adapter
Serial Number:	CE&RE: 2CGM-2(Normal), 2CGM-6(Lighting) RF: 2CGM-1
EUT Received Date:	2023/10/24
EUT Received Status:	Good

Note: the EUT has two version, a normal version and a lighting version, the two version was electrical identical.

Operation Frequency Detail:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	20	2442
1	2404
...
...
..	...	38	2478
19	2440	39	2480

For BLE 2M, channel 0 and channel 39 was disabled.

Per section 15.31(m), the below frequencies were performed the test as below:

Test Channel	Frequency (MHz)
Lowest	2402(for BLE 1M)/2404(for BLE 2M)
Middle	2440
Highest	2480(for BLE 1M)/2478(for BLE 2M)

Antenna Information Detail▲:

Antenna	Antenna Type	input impedance (Ohm)	Frequency Range	Antenna Gain (dBi)
ANT 0	Integral	50	2.4~2.5GHz	-4.12
ANT 1	Integral	50	2.4~2.5GHz	-3.37

The Method of §15.203 Compliance:

- Antenna was permanently attached to the unit.
 Antenna use a unique type of connector to attach to the EUT.
 Unit was professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

Accessory Information:

Accessory Description	S/N	Model	Parameters
Adapter 1	KX070129253A13	U700XSA	Input: AC 100-240V~50/60Hz, 2.0A Output: DC 5.0V, 3.0A, 15.0W or 5.0-10.0V, 7.0A MAX or 11.0V, 6.4A Max or 4.0-20.0V, 3.5A, 70.0W MAX
Adapter 2	CY07019513916	U700XSA	Input: AC 100-240V~50/60Hz, 2.0A Output: DC 5.0V, 3.0A, 15.0W or 5.0-10.0V, 7.0A MAX or 11.0V, 6.4A Max or 4.0-20.0V, 3.5A, 70.0W MAX

1.2 Description of Test Configuration

1.2.1 EUT Operation Condition:

For BLE:

EUT Operation Mode:	<p>The system was configured for testing in Engineering Mode, which was provided by the manufacturer.</p> <p>Note: The EUT has two versions, the two version was electrical identical, the normal version was selected to test. The EUT supply with two adapters, the worst case adapter was selected to test for AC line conducted and radiated emission below 1GHz according to DSS report test result. The lighting version was evaluated in DSS report and compliance with the limit. For above 1GHz, the adapter 1 was used to test.</p>		
Equipment Modifications:	No		
EUT Exercise Software:	Engineer Mode		
The software was provided by manufacturer. The maximum power was configured as below, that was provided by the manufacturer▲:			
Test Modes	Power Level Setting		
	Lowest Channel	Middle Channel	Highest Channel
1Mbps	Default	Default	Default
2Mbps	Default	Default	Default
Note: According to the manufacturer, for BLE, the EUT has two antennas, which will be switched through SW circuit according to environmental conditions during actual operation. Only one antenna is working at any moment in time.			

1.2.2 Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
/	/	/	/

1.2.3 Support Cable List and Details


Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
USB Cable	No	No	1.0	Adapter	EUT

1.2.4 Block Diagram of Test Setup

AC Line Conducted Emissions:

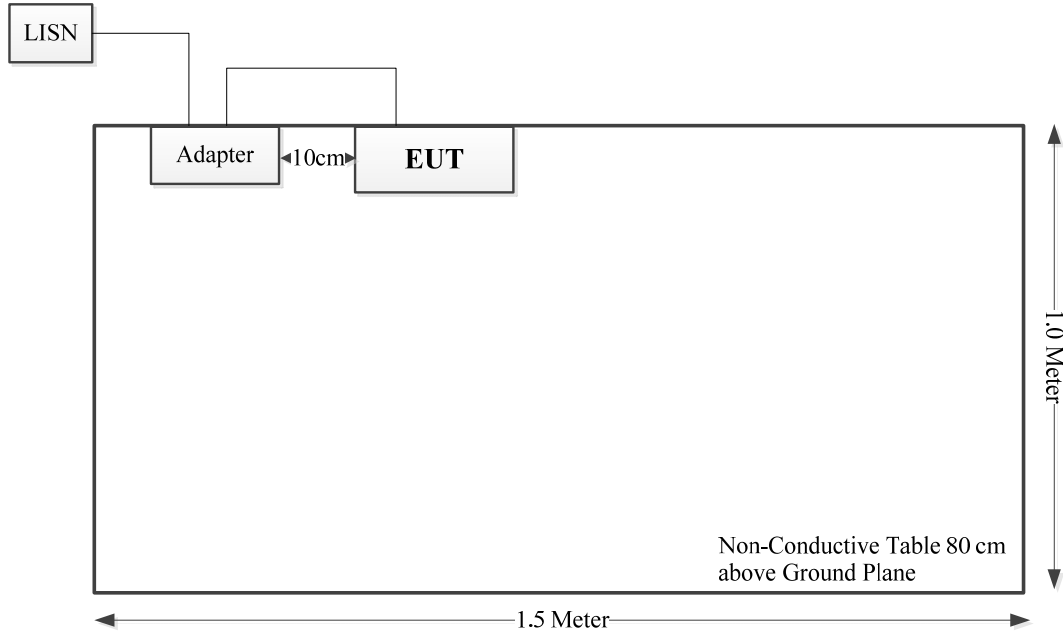

Spurious emissions:

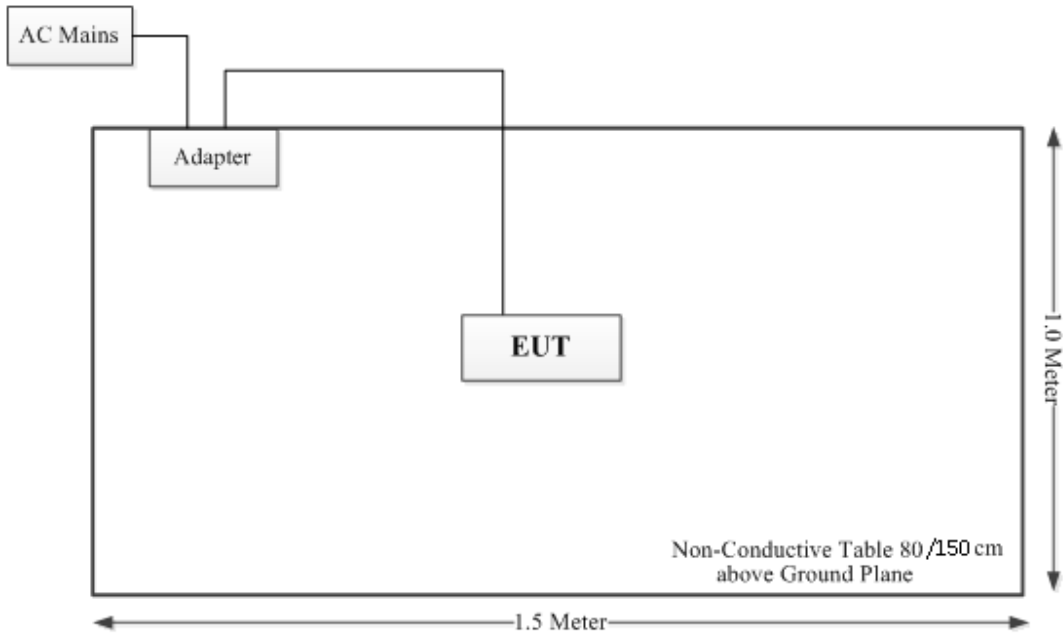

1.3 Measurement Uncertainty

Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±0.61dB
Power Spectral Density, conducted	±0.61 dB
Unwanted Emissions, radiated	9kHz~30MHz: 4.12dB,30M~200MHz: 4.15 dB,200M~1GHz: 5.61 dB,1G~6GHz: 5.14 dB, 6G~18GHz: 5.93 dB,18G~26.5G:5.47 dB,26.5G~40G:5.63 dB
Unwanted Emissions, conducted	±1.26 dB
Temperature	±1 °C
Humidity	±5%
DC and low frequency voltages	±0.4%
Duty Cycle	1%
AC Power Lines Conducted Emission	2.8 dB (150 kHz to 30 MHz)

2. SUMMARY OF TEST RESULTS

Standard(s) Section	Test Items	Result
§15.207(a)	AC line conducted emissions	Compliant
§15.205, §15.209, §15.247(d)	Radiated Spurious Emissions	Compliant
§15.247 (a)(2)	Minimum 6 dB Bandwidth	Compliant
§15.247(b)(3)	Maximum Conducted Output Power	Compliant
§15.247(e)	Power Spectral Density	Compliant
§15.247(d)	100 kHz Bandwidth of Frequency Band Edge	Compliant
§15.203	Antenna Requirement	Compliant
§15.247 (i) & §1.1310	RF Exposure Evaluation	Compliant

3. REQUIREMENTS AND TEST PROCEDURES

3.1 AC Line Conducted Emissions

3.1.1 Applicable Standard

FCC§15.207(a).

(a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

(b) The limit shown in paragraph (a) of this section shall not apply to carrier current systems operating as intentional radiators on frequencies below 30 MHz. In lieu thereof, these carrier current systems shall be subject to the following standards:


(1) For carrier current system containing their fundamental emission within the frequency band 535-1705 kHz and intended to be received using a standard AM broadcast receiver: no limit on conducted emissions.

(2) For all other carrier current systems: 1000 μ V within the frequency band 535-1705 kHz, as measured using a 50 μ H/50 ohms LISN.

(3) Carrier current systems operating below 30 MHz are also subject to the radiated emission limits in §15.205, §15.209, §15.221, §15.223, or §15.227, as appropriate.

(c) Measurements to demonstrate compliance with the conducted limits are not required for devices which only employ battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines. Devices that include, or make provisions for, the use of battery chargers which permit operating while charging, AC adapters or battery eliminators or that connect to the AC power lines indirectly, obtaining their power through another device which is connected to the AC power lines, shall be tested to demonstrate compliance with the conducted limits.

3.1.2 EUT Setup

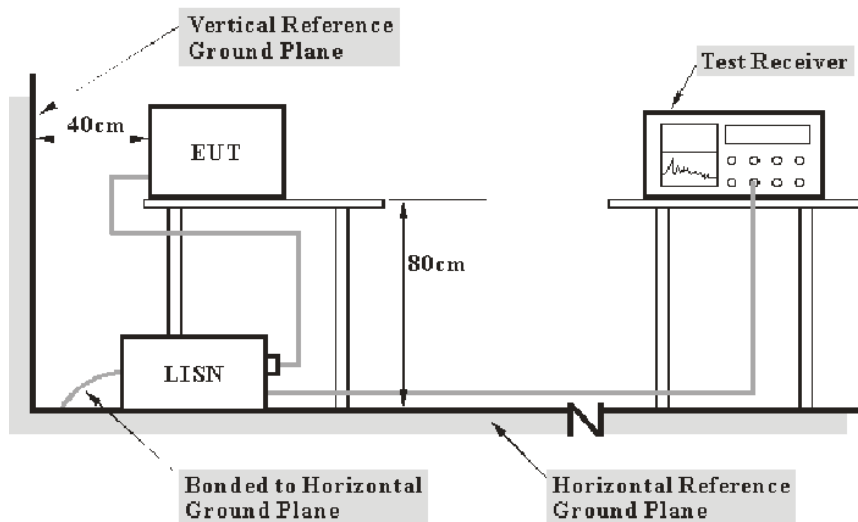

- Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

The adapter or EUT was connected to the main LISN with a 120 V/60 Hz AC power source.

3.1.3 EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

3.1.4 Test Procedure

The frequency and amplitude of the six highest ac power-line conducted emissions relative to the limit, measured over all the current-carrying conductors of the EUT power cords, and the operating frequency or frequency to which the EUT is tuned (if appropriate), should be reported, unless such emissions are more than 20 dB below the limit. AC power-line conducted emissions measurements are to be separately carried out only on each of the phase (“hot”) line(s) and (if used) on the neutral line(s), but not on the ground [protective earth] line(s). If less than six emission frequencies are within 20 dB of the limit, then the noise level of the measuring instrument at representative frequencies should be reported. The specific conductor of the power-line cord for each of the reported emissions should be identified. Measure the six highest emissions with respect to the limit on each current-carrying conductor of each power cord associated with the EUT (but not the power cords of associated or peripheral equipment that are part of the test configuration). Then, report the six highest emissions with respect to the limit from among all the measurements identifying the frequency and specific current-carrying conductor identified with the emission. The six highest emissions should be reported for each of the current-carrying conductors, or the six highest emissions may be reported over all the current-carrying conductors.

3.1.5 Corrected Amplitude & Margin Calculation

The basic equation is as follows:

Result = Reading + Factor

Factor = attenuation caused by cable loss + voltage division factor of AMN

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

Margin = Limit – Result

3.2 Radiation Spurious Emissions


3.2.1 Applicable Standard

FCC §15.247 (d);


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

3.2.2 EUT Setup


9 kHz-30MHz:

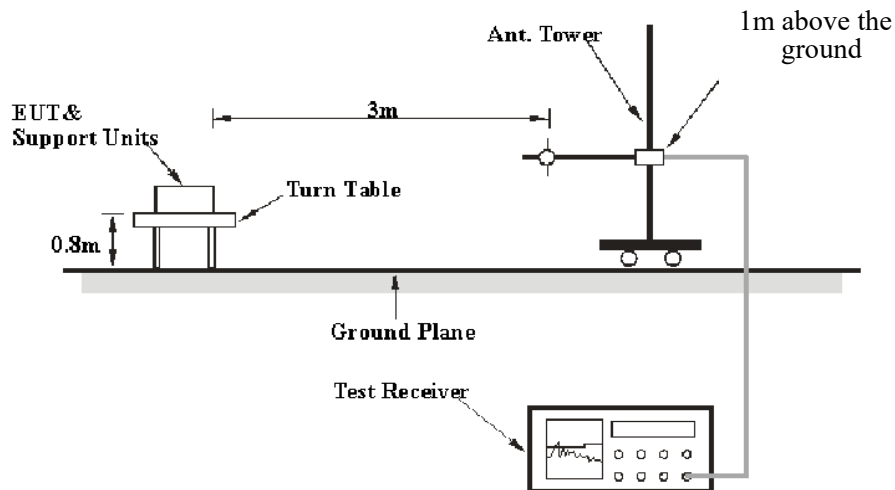

30MHz-1GHz:

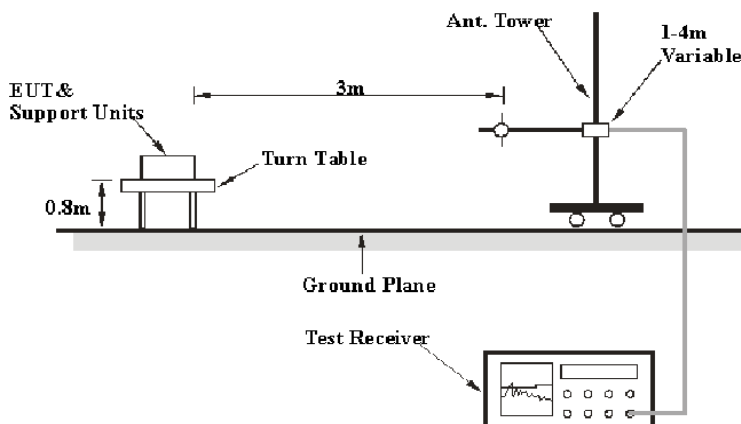

Above 1GHz:

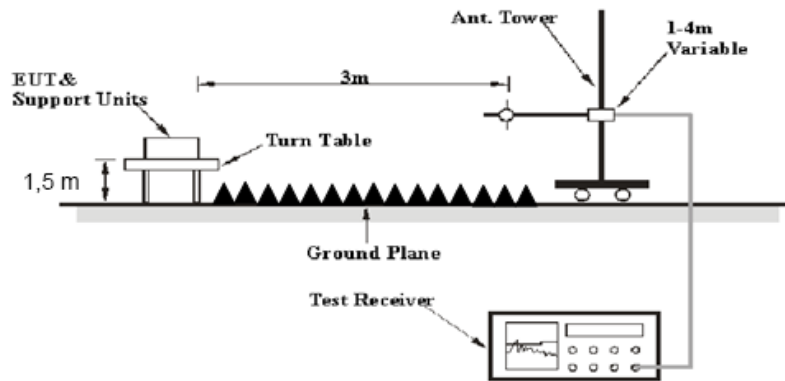

The radiated emissions were performed in the 3 meters distance, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

3.2.3 EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 9 kHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

9 kHz-30MHz:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
9 kHz – 150 kHz	300 Hz	1 kHz	200 Hz	QP
150 kHz – 30 MHz	10 kHz	30 kHz	9 kHz	QP

30-1000MHz:

Measurement	RBW	Video B/W	IF B/W
QP	100 kHz	300 kHz	120kHz

1GHz- 25GHz:

Measurement	Duty cycle	RBW	Video B/W
PK	Any	1MHz	3 MHz
Ave.	>98%	1MHz	10 Hz
	<98%	1MHz	≥1/T

Note: T is minimum transmission duration

If the maximized peak measured value complies with under the QP/Average limit more than 6dB, then it is unnecessary to perform an QP/Average measurement.

3.2.4 Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 9 kHz-1 GHz, peak and Average detection modes for frequencies above 1 GHz.

3.2.5 Corrected Amplitude & Margin Calculation

The basic equation is as follows:

Result = Reading + Factor

Factor = Antenna Factor + Cable Loss- Amplifier Gain

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

Margin = Limit – Result


3.3 Minimum 6 dB Bandwidth

3.3.1 Applicable Standard

FCC §15.247 (a)(2)

Systems using digital modulation techniques may operate in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

3.3.2 EUT Setup

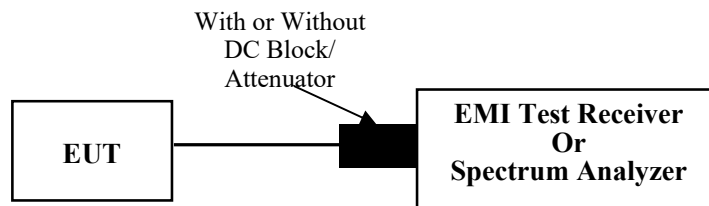

3.3.3 Test Procedure

According to ANSI C63.10-2013 Section 11.8

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.


3.4 Maximum Conducted Output Power

3.4.1 Applicable Standard

FCC §15.247 (b)(3)

For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

3.4.2 EUT Setup

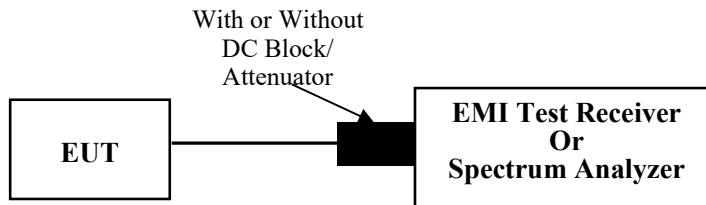

3.4.3 Test Procedure

According to ANSI C63.10-2013 Section 11.9.1.1

The following procedure shall be used when an instrument with a resolution bandwidth that is greater than the DTS bandwidth is available to perform the measurement:

- a) Set the RBW \geq DTS bandwidth.
- b) Set VBW $\geq [3 \times \text{RBW}]$.
- c) Set span $\geq [3 \times \text{RBW}]$.
- d) Sweep time = auto couple.
- e) Detector = peak.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use peak marker function to determine the peak amplitude level.


3.5 Maximum power spectral density

3.5.1 Applicable Standard

FCC §15.247 (e)

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

3.5.2 EUT Setup

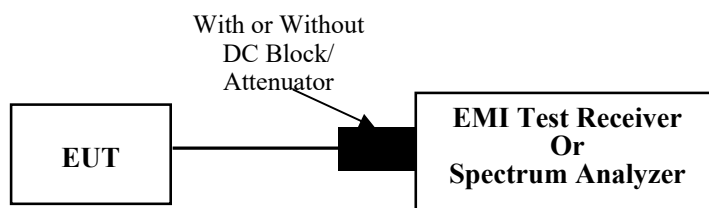

3.5.3 Test Procedure

According to ANSI C63.10-2013 Section 11.10.2

- a) Set analyzer center frequency to DTS channel center frequency.
- b) Set the span to 1.5 times the DTS bandwidth.
- c) Set the RBW to $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- d) Set the VBW $\geq [3 \times \text{RBW}]$.
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum amplitude level within the RBW.
- j) If measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat.


3.6 100 kHz Bandwidth of Frequency Band Edge

3.6.1 Applicable Standard

FCC §15.247 (d);

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

3.6.2 EUT Setup

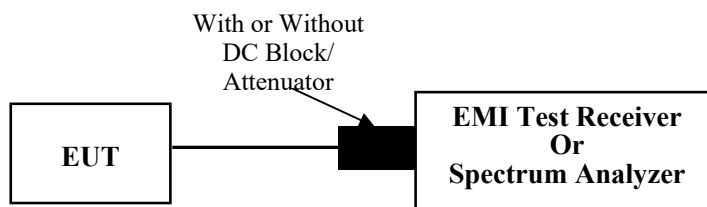

3.6.3 Test Procedure


According to ANSI C63.10-2013 Section 11.11

- a) Set the center frequency and span to encompass frequency range to be measured.
- b) Set the RBW = 100 kHz.
- c) Set the VBW $\geq [3 \times \text{RBW}]$.
- d) Detector = peak.
- e) Sweep time = auto couple.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use the peak marker function to determine the maximum amplitude level.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) is attenuated by at least the minimum requirements specified in 11.11. Report the three highest emissions relative to the limit.

3.7 Duty Cycle

3.7.1 EUT Setup

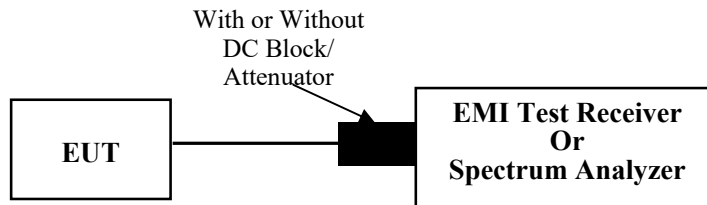

3.7.2 Test Procedure

According to ANSI C63.10-2013 Section 11.6

The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the ON and OFF times of the transmitted signal:

- 1) Set the center frequency of the instrument to the center frequency of the transmission.
- 2) Set $RBW \geq OBW$ if possible; otherwise, set RBW to the largest available value.
- 3) Set $VBW \geq RBW$. Set detector = peak or average.
- 4) The zero-span measurement method shall not be used unless both RBW and VBW are $> 50/T$ and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring the duty cycle shall not be used if $T \leq 16.7 \mu s$.)

3.8 Antenna Requirement

3.8.1 Applicable Standard

FCC §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §§15.211, 15.213, 15.217, 15.219, 15.221, or §15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

3.8.2 Judgment

Compliant. Please refer to the Antenna Information detail in Section 1.

4. Test DATA AND RESULTS

4.1 AC Line Conducted Emissions

Serial Number:	2CGM-2	Test Date:	2023/11/24
Test Site:	CE	Test Mode:	Transmitting(maximum output power mode BLE 2M high channel ANT 0)
Tester:	David Huang	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	26.2	Relative Humidity: (%)	52	ATM Pressure: (kPa)	101.1
----------------------	------	---------------------------	----	------------------------	-------


Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	LISN	ENV216	101134	2023/3/31	2024/3/30
R&S	EMI Test Receiver	ESR3	102726	2023/3/31	2024/3/30
MICRO-COAX	Coaxial Cable	UTIFLEX	C-0200-01	2023/8/6	2024/8/5
Audix	Test Software	E3	190306 (V9)	N/A	N/A

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:

Project No.: CR231061288-RF
 Tester: David Huang
 Port: Line
 Note: Transmitting(BLE)

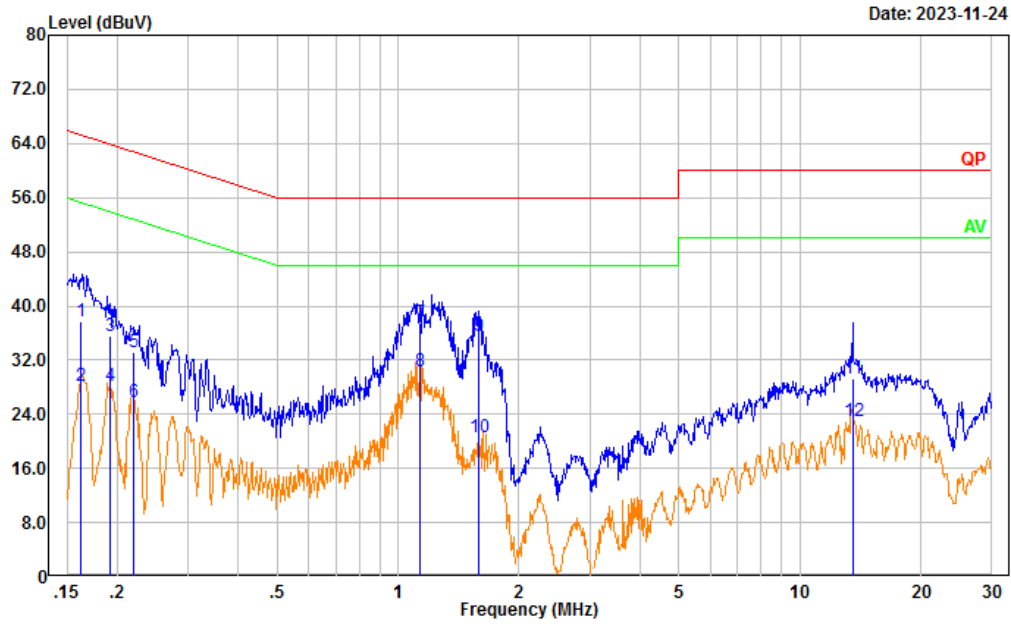


Date: 2023-11-24

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
1	0.162	28.21	9.61	37.82	65.34	27.52	QP
2	0.162	18.61	9.61	28.22	55.34	27.12	Average
3	0.192	26.00	9.61	35.61	63.95	28.34	QP
4	0.192	18.58	9.61	28.19	53.95	25.76	Average
5	0.220	23.60	9.61	33.21	62.80	29.59	QP
6	0.220	16.26	9.61	25.87	52.80	26.93	Average
7	1.132	27.99	9.62	37.61	56.00	18.39	QP
8	1.132	20.65	9.62	30.27	46.00	15.73	Average
9	1.588	26.01	9.63	35.64	56.00	20.36	QP
10	1.588	11.07	9.63	20.70	46.00	25.30	Average
11	13.532	19.59	9.68	29.27	60.00	30.73	QP
12	13.532	13.19	9.68	22.87	50.00	27.13	Average

Project No.: CR231061288-RF
 Tester: David Huang
 Port: neutral
 Note: Transmitting(BLE)

Date: 2023-11-24

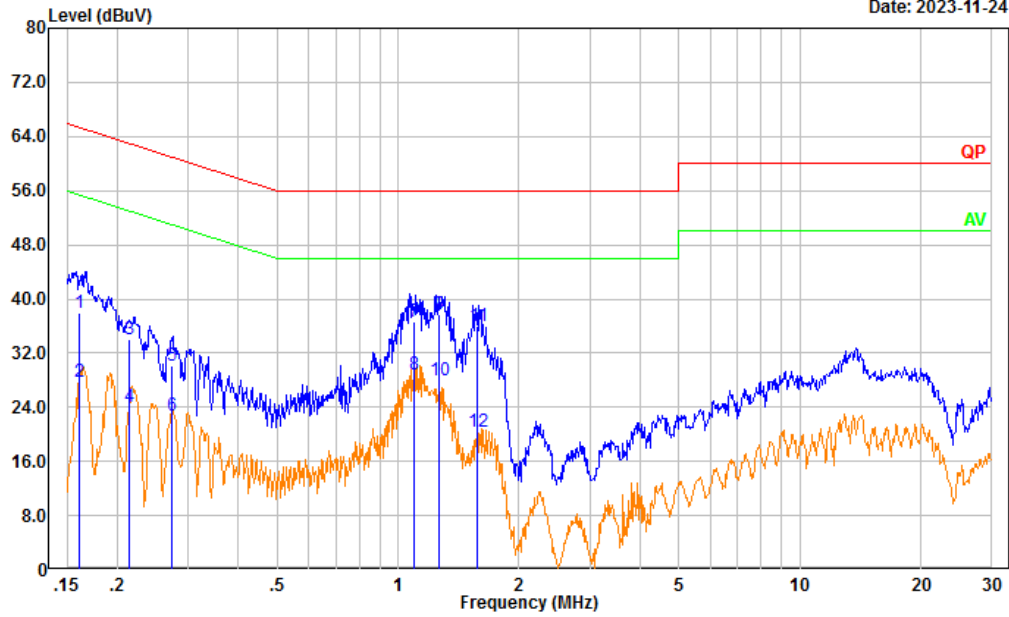

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
1	0.162	28.31	9.61	37.92	65.38	27.46	QP
2	0.162	18.05	9.61	27.66	55.38	27.72	Average
3	0.215	24.50	9.61	34.11	63.01	28.90	QP
4	0.215	14.48	9.61	24.09	53.01	28.92	Average
5	0.273	20.57	9.61	30.18	61.02	30.84	QP
6	0.273	13.11	9.61	22.72	51.02	28.30	Average
7	1.097	26.97	9.62	36.59	56.00	19.41	QP
8	1.097	19.22	9.62	28.84	46.00	17.16	Average
9	1.264	28.01	9.62	37.63	56.00	18.37	QP
10	1.264	18.33	9.62	27.95	46.00	18.05	Average
11	1.576	26.28	9.63	35.91	56.00	20.09	QP
12	1.576	10.72	9.63	20.35	46.00	25.65	Average

4.2 Radiation Spurious Emissions

Serial Number:	2CGM-2	Test Date:	2023/11/30
Test Site:	966-1, 966-2	Test Mode:	Transmitting
Tester:	Carl Xue, coco Tian	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	25.3	Relative Humidity: (%)	45~56	ATM Pressure: (kPa)	101.4
----------------------	------	---------------------------	-------	---------------------------	-------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Sunol Sciences	Antenna	JB6	A082520-6	2023/9/18	2026/9/17
BACL	Loop Antenna	1313-1P	3092721	2023/11/9	2026/11/8
R&S	EMI Test Receiver	ESR3	102724	2023/3/31	2024/3/30
TIMES MICROWAVE	Coaxial Cable	LMR-600- UltraFlex	C-0470-02	2023/7/16	2024/7/15
TIMES MICROWAVE	Coaxial Cable	LMR-600- UltraFlex	C-0780-01	2023/7/16	2024/7/15
Sonoma	Amplifier	310N	186165	2023/7/16	2024/7/15
Audix	Test Software	E3	201021 (V9)	N/A	N/A
AH	Double Ridge Guide Horn Antenna	SAS-571	1394	2023/2/22	2026/2/21
R&S	Spectrum Analyzer	FSV40	101591	2023/3/31	2024/3/30
MICRO-COAX	Coaxial Cable	UFA210A-1- 1200-70U300	217423-008	2023/8/6	2024/8/5
MICRO-COAX	Coaxial Cable	UFA210A-1- 2362-300300	235780-001	2023/8/6	2024/8/5
Mini	Pre-amplifier	ZVA-183-S+	5969001149	2023/11/8	2024/11/7
Audix	Test Software	E3	201021 (V9)	N/A	N/A
PASTERNAK	Horn Antenna	PE9852/2F-20	112002	2021/2/5	2024/2/4
Quinstar	Preamplifier	QLW-18405536- JO	15964001005	2023/9/15	2024/9/14
MICRO-COAX	Coaxial Cable	UFB142A-1-2362- 200200	235772-001	2023/8/6	2024/8/5
E-Microwave	Band Rejection Filter	2400-2483.5MHz	OE01902424	2023/8/6	2024/8/5
Mini Circuits	High Pass Filter	VHF-6010+	31119	2023/8/6	2024/8/5

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:


After pre-scan in the X, Y and Z axes of orientation, the worst case is below:

For 9kHz-30MHz, The amplitude of spurious emissions attenuated more than 20 dB below the limit was not be recorded

1) 30MHz-1GHz (Transmitting maximum output power mode BLE 2Mbps ANT 0)

Low Channel


Project No.: CR231061288-RF
 Tester: Carl Xue
 Polarization: horizontal
 Note: Transmitting(BLE 2CGM-2 KX070129253A13)

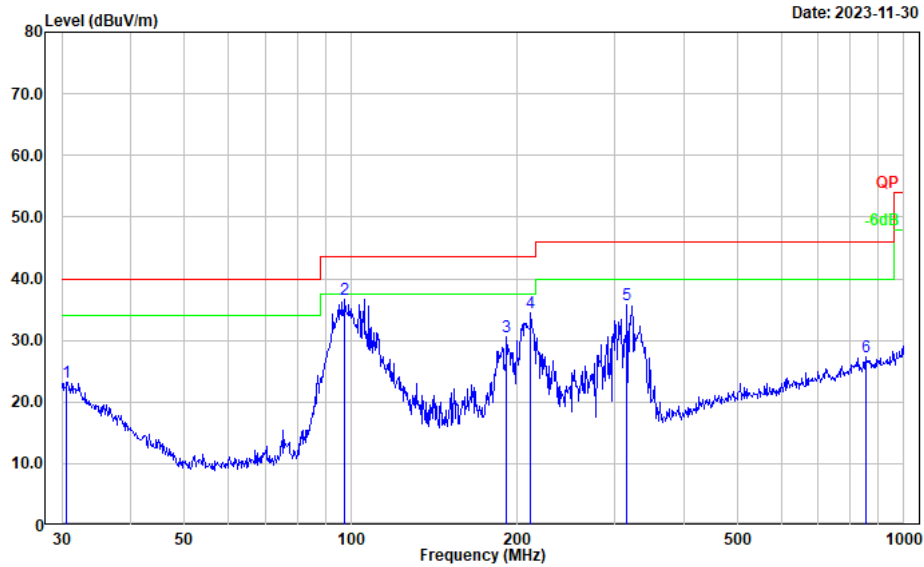

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.638	27.47	-4.28	23.19	40.00	16.81	Peak
2	97.456	51.68	-14.94	36.74	43.50	6.76	Peak
3	191.074	43.84	-13.30	30.54	43.50	12.96	Peak
4	211.527	46.92	-12.54	34.38	43.50	9.12	Peak
5	315.481	46.42	-10.59	35.83	46.00	10.17	Peak
6	854.025	28.71	-1.50	27.21	46.00	18.79	Peak

Project No.: CR231061288-RF
 Tester: Carl Xue
 Polarization: vertical
 Note: Transmitting(BLE 2CGM-2 KX070129253A13)


Date: 2023-11-30

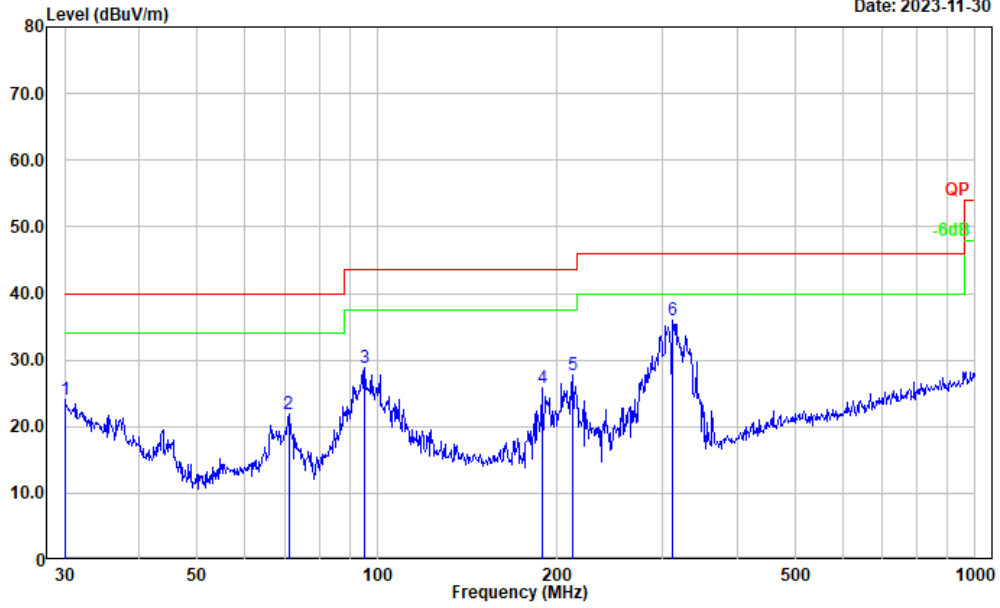

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.000	27.87	-3.80	24.07	40.00	15.93	Peak
2	71.080	38.51	-16.68	21.83	40.00	18.17	Peak
3	95.427	44.44	-15.50	28.94	43.50	14.56	Peak
4	188.413	39.22	-13.49	25.73	43.50	17.77	Peak
5	212.270	40.39	-12.57	27.82	43.50	15.68	Peak
6	312.179	46.53	-10.60	35.93	46.00	10.07	Peak

Middle Channel


Project No.: CR231061288-RF
 Tester: Carl Xue
 Polarization: horizontal
 Note: Transmitting(BLE 2CGM-2 KX070129253A13)

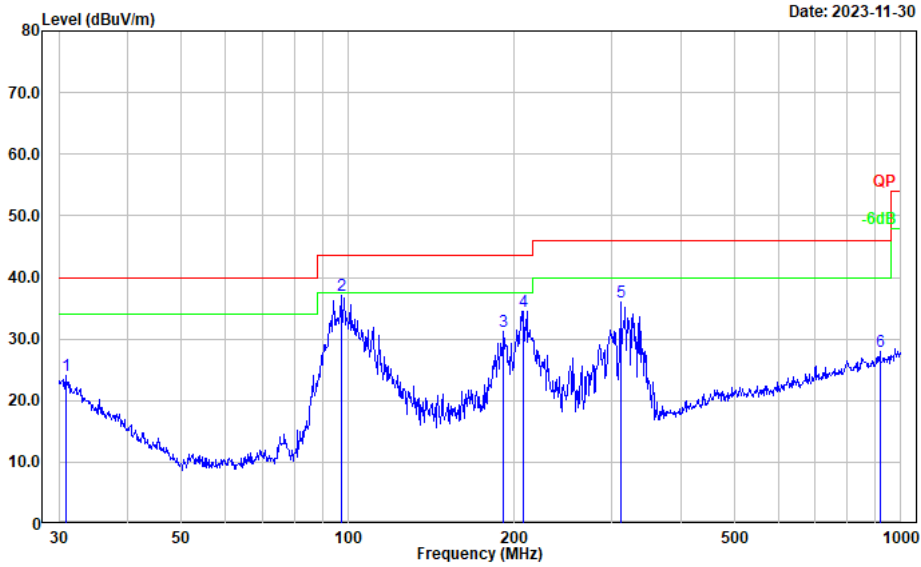

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.853	28.53	-4.45	24.08	40.00	15.92	Peak
2	97.115	52.18	-15.05	37.13	43.50	6.37	Peak
3	191.074	44.57	-13.30	31.27	43.50	12.23	Peak
4	207.850	46.99	-12.45	34.54	43.50	8.96	Peak
5	311.087	46.50	-10.60	35.90	46.00	10.10	Peak
6	916.069	28.62	-0.64	27.98	46.00	18.02	Peak

Project No.: CR231061288-RF
 Tester: Carl Xue
 Polarization: vertical
 Note: Transmitting(BLE 2CGM-2 KX070129253A13)


Date: 2023-11-30

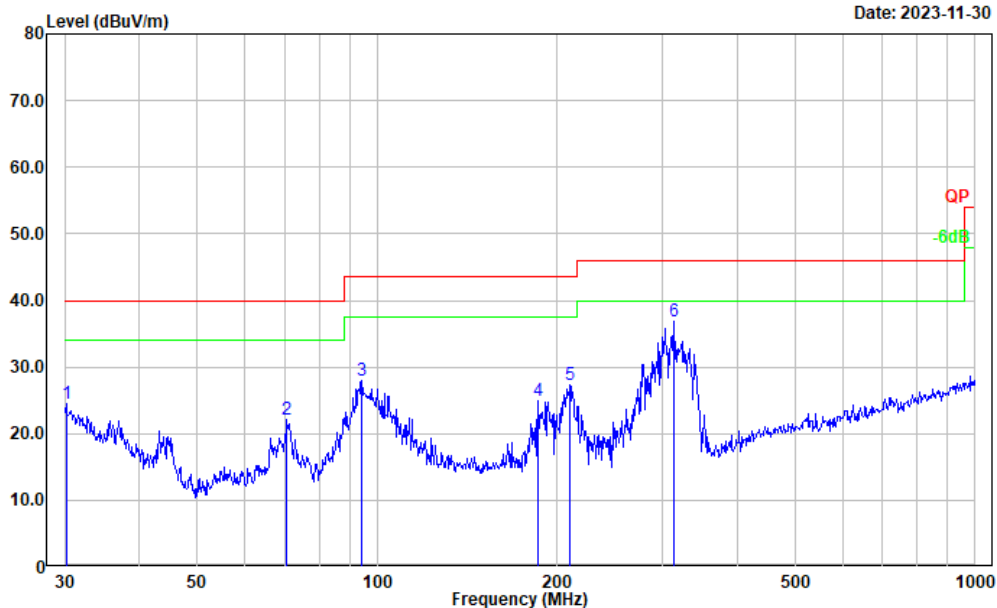

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.211	28.37	-3.96	24.41	40.00	15.59	Peak
2	70.584	38.71	-16.62	22.09	40.00	17.91	Peak
3	94.098	43.89	-15.90	27.99	43.50	15.51	Peak
4	185.788	38.45	-13.52	24.93	43.50	18.57	Peak
5	210.048	39.70	-12.49	27.21	43.50	16.29	Peak
6	313.276	47.50	-10.60	36.90	46.00	9.10	Peak


High Channel

Project No.: CR231061288-RF
 Tester: Carl Xue
 Polarization: horizontal
 Note: Transmitting(BLE 2CGM-2 KX070129253A13)

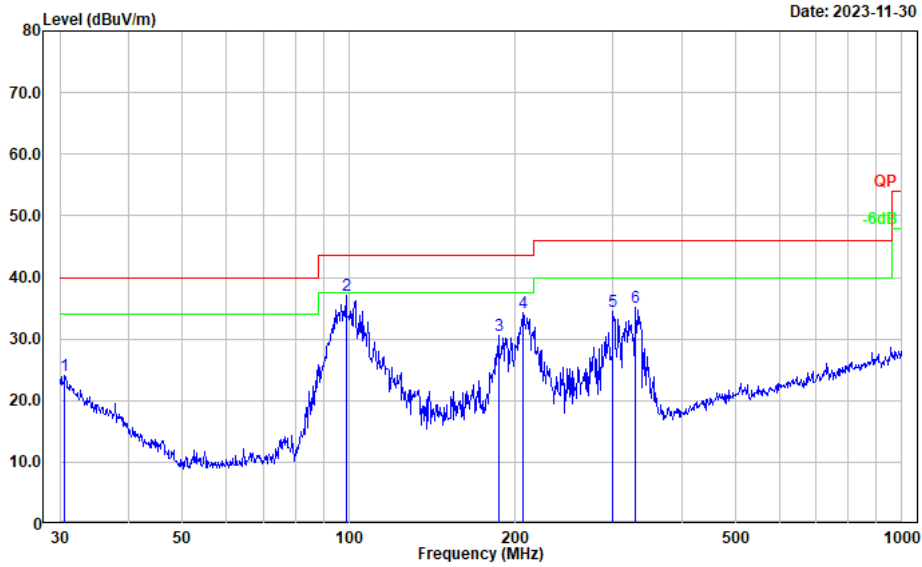

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.638	28.33	-4.28	24.05	40.00	15.95	Peak
2	98.833	51.55	-14.59	36.96	43.50	6.54	Peak
3	186.441	44.00	-13.53	30.47	43.50	13.03	Peak
4	206.398	46.62	-12.40	34.22	43.50	9.28	Peak
5	300.367	45.16	-10.63	34.53	46.00	11.47	Peak
6	330.195	45.25	-10.23	35.02	46.00	10.98	Peak

Project No.: CR231061288-RF
 Tester: Carl Xue
 Polarization: vertical
 Note: Transmitting(BLE 2CGM-2 KX070129253A13)

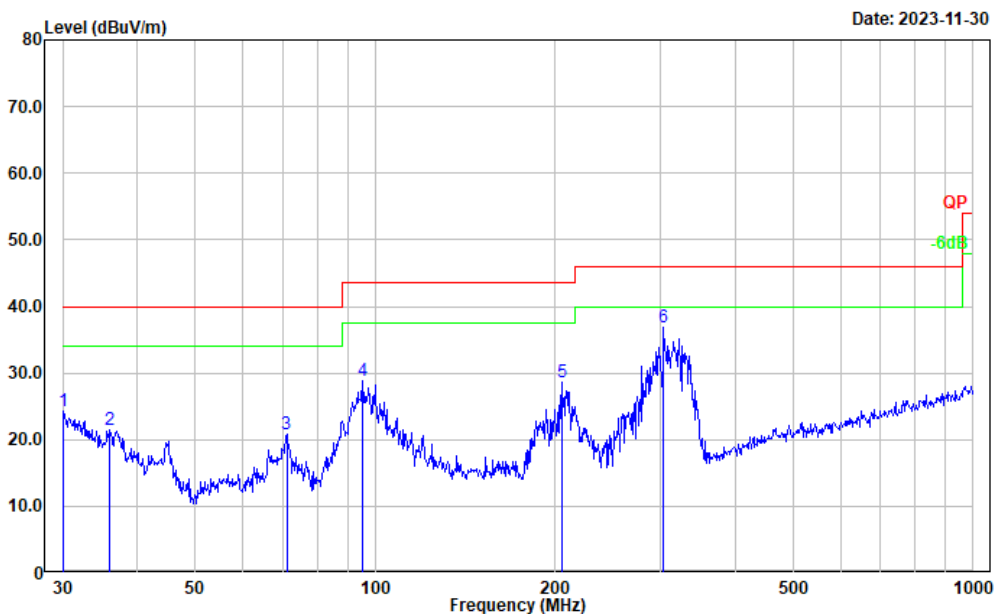

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.105	28.10	-3.88	24.22	40.00	15.78	Peak
2	36.001	29.91	-8.38	21.53	40.00	18.47	Peak
3	71.080	37.51	-16.68	20.83	40.00	19.17	Peak
4	95.427	44.32	-15.50	28.82	43.50	14.68	Peak
5	204.955	40.97	-12.37	28.60	43.50	14.90	Peak
6	303.544	47.53	-10.59	36.94	46.00	9.06	Peak

2) 1-25GHz:**BLE 1Mbps(ant0):**

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
	Reading (dB μ V)	Detector					
Low Channel: 2402 MHz							
2390.000	26.20	PK	H	31.71	57.91	74.00	16.09
2390.000	16.15	AV	H	31.71	47.86	54.00	6.14
2390.000	26.08	PK	V	31.71	57.79	74.00	16.21
2390.000	16.03	AV	V	31.71	47.74	54.00	6.26
4804.000	42.35	PK	H	11.19	53.54	74.00	20.46
4804.000	36.96	AV	H	11.19	48.15	54.00	5.85
4804.000	42.60	PK	V	11.19	53.79	74.00	20.21
4804.000	37.23	AV	V	11.19	48.42	54.00	5.58
Middle Channel: 2440 MHz							
4880.000	41.38	PK	H	11.48	52.86	74.00	21.14
4880.000	35.23	AV	H	11.48	46.71	54.00	7.29
4880.000	41.64	PK	V	11.48	53.12	74.00	20.88
4880.000	35.46	AV	V	11.48	46.94	54.00	7.06
High Channel: 2480 MHz							
2483.500	33.97	PK	H	32.19	66.16	74.00	7.84
2483.500	15.90	AV	H	32.19	48.09	54.00	5.91
2483.500	33.83	PK	V	32.19	66.02	74.00	7.98
2483.500	15.78	AV	V	32.19	47.97	54.00	6.03
4960.000	41.32	PK	H	11.77	53.09	74.00	20.91
4960.000	34.18	AV	H	11.77	45.95	54.00	8.05
4960.000	41.56	PK	V	11.77	53.33	74.00	20.67
4960.000	34.41	AV	V	11.77	46.18	54.00	7.82

BLE 2Mbps(ant0):

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
	Reading (dB μ V)	Detector					
Low Channel: 2404 MHz							
2390.000	26.94	PK	H	31.71	58.65	74.00	15.35
2390.000	16.32	AV	H	31.71	48.03	54.00	5.97
2390.000	26.81	PK	V	31.71	58.52	74.00	15.48
2390.000	16.19	AV	V	31.71	47.90	54.00	6.10
4808.000	42.42	PK	H	11.22	53.64	74.00	20.36
4808.000	32.93	AV	H	11.22	44.15	54.00	9.85
4808.000	42.65	PK	V	11.22	53.87	74.00	20.13
4808.000	33.16	AV	V	11.22	44.38	54.00	9.62
Middle Channel: 2440 MHz							
4880.000	41.54	PK	H	11.48	53.02	74.00	20.98
4880.000	31.15	AV	H	11.48	42.63	54.00	11.37
4880.000	41.67	PK	V	11.48	53.15	74.00	20.85
4880.000	31.39	AV	V	11.48	42.87	54.00	11.13
High Channel: 2478 MHz							
2483.500	30.74	PK	H	32.19	62.93	74.00	11.07
2483.500	15.85	AV	H	32.19	48.04	54.00	5.96
2483.500	30.62	PK	V	32.19	62.81	74.00	11.19
2483.500	15.73	AV	V	32.19	47.92	54.00	6.08
4956.000	41.41	PK	H	11.77	53.18	74.00	20.82
4956.000	30.35	AV	H	11.77	42.12	54.00	11.88
4956.000	41.64	PK	V	11.77	53.41	74.00	20.59
4956.000	30.57	AV	V	11.77	42.34	54.00	11.66


BLE 1Mbps(ant1):

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
	Reading (dB μ V)	Detector					
Low Channel: 2402 MHz							
2390.000	26.89	PK	H	31.71	58.60	74.00	15.40
2390.000	16.25	AV	H	31.71	47.96	54.00	6.04
2390.000	26.77	PK	V	31.71	58.48	74.00	15.52
2390.000	16.13	AV	V	31.71	47.84	54.00	6.16
4804.000	42.97	PK	H	11.19	54.16	74.00	19.84
4804.000	37.78	AV	H	11.19	48.97	54.00	5.03
4804.000	43.19	PK	V	11.19	54.38	74.00	19.62
4804.000	38.04	AV	V	11.19	49.23	54.00	4.77
Middle Channel: 2440 MHz							
4880.000	42.46	PK	H	11.48	53.94	74.00	20.06
4880.000	37.35	AV	H	11.48	48.83	54.00	5.17
4880.000	42.69	PK	V	11.48	54.17	74.00	19.83
4880.000	37.58	AV	V	11.48	49.06	54.00	4.94
High Channel: 2480 MHz							
2483.500	29.16	PK	H	32.19	61.35	74.00	12.65
2483.500	15.98	AV	H	32.19	48.17	54.00	5.83
2483.500	29.03	PK	V	32.19	61.22	74.00	12.78
2483.500	15.84	AV	V	32.19	48.03	54.00	5.97
4960.000	42.83	PK	H	11.77	54.60	74.00	19.40
4960.000	37.76	AV	H	11.77	49.53	54.00	4.47
4960.000	43.05	PK	V	11.77	54.82	74.00	19.18
4960.000	37.98	AV	V	11.77	49.75	54.00	4.25

BLE 2Mbps(ant1):

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
	Reading (dB μ V)	Detector					
Low Channel: 2404 MHz							
2390.000	26.25	PK	H	31.71	57.96	74.00	16.04
2390.000	16.74	AV	H	31.71	48.45	54.00	5.55
2390.000	26.12	PK	V	31.71	57.83	74.00	16.17
2390.000	16.63	AV	V	31.71	48.34	54.00	5.66
4808.000	43.01	PK	H	11.22	54.23	74.00	19.77
4808.000	33.15	AV	H	11.22	44.37	54.00	9.63
4808.000	43.22	PK	V	11.22	54.44	74.00	19.56
4808.000	33.36	AV	V	11.22	44.58	54.00	9.42
Middle Channel: 2440 MHz							
4880.000	42.49	PK	H	11.48	53.97	74.00	20.03
4880.000	32.67	AV	H	11.48	44.15	54.00	9.85
4880.000	42.72	PK	V	11.48	54.20	74.00	19.80
4880.000	32.88	AV	V	11.48	44.36	54.00	9.64
High Channel: 2478 MHz							
2483.500	26.58	PK	H	32.19	58.77	74.00	15.23
2483.500	16.26	AV	H	32.19	48.45	54.00	5.55
2483.500	26.44	PK	V	32.19	58.63	74.00	15.37
2483.500	16.12	AV	V	32.19	48.31	54.00	5.69
4956.000	42.89	PK	H	11.77	54.66	74.00	19.34
4956.000	33.05	AV	H	11.77	44.82	54.00	9.18
4956.000	43.12	PK	V	11.77	54.89	74.00	19.11
4956.000	33.27	AV	V	11.77	45.04	54.00	8.96


Listed with the worst harmonic margin test plot
 ANT 0-BLE 1M Low Channel

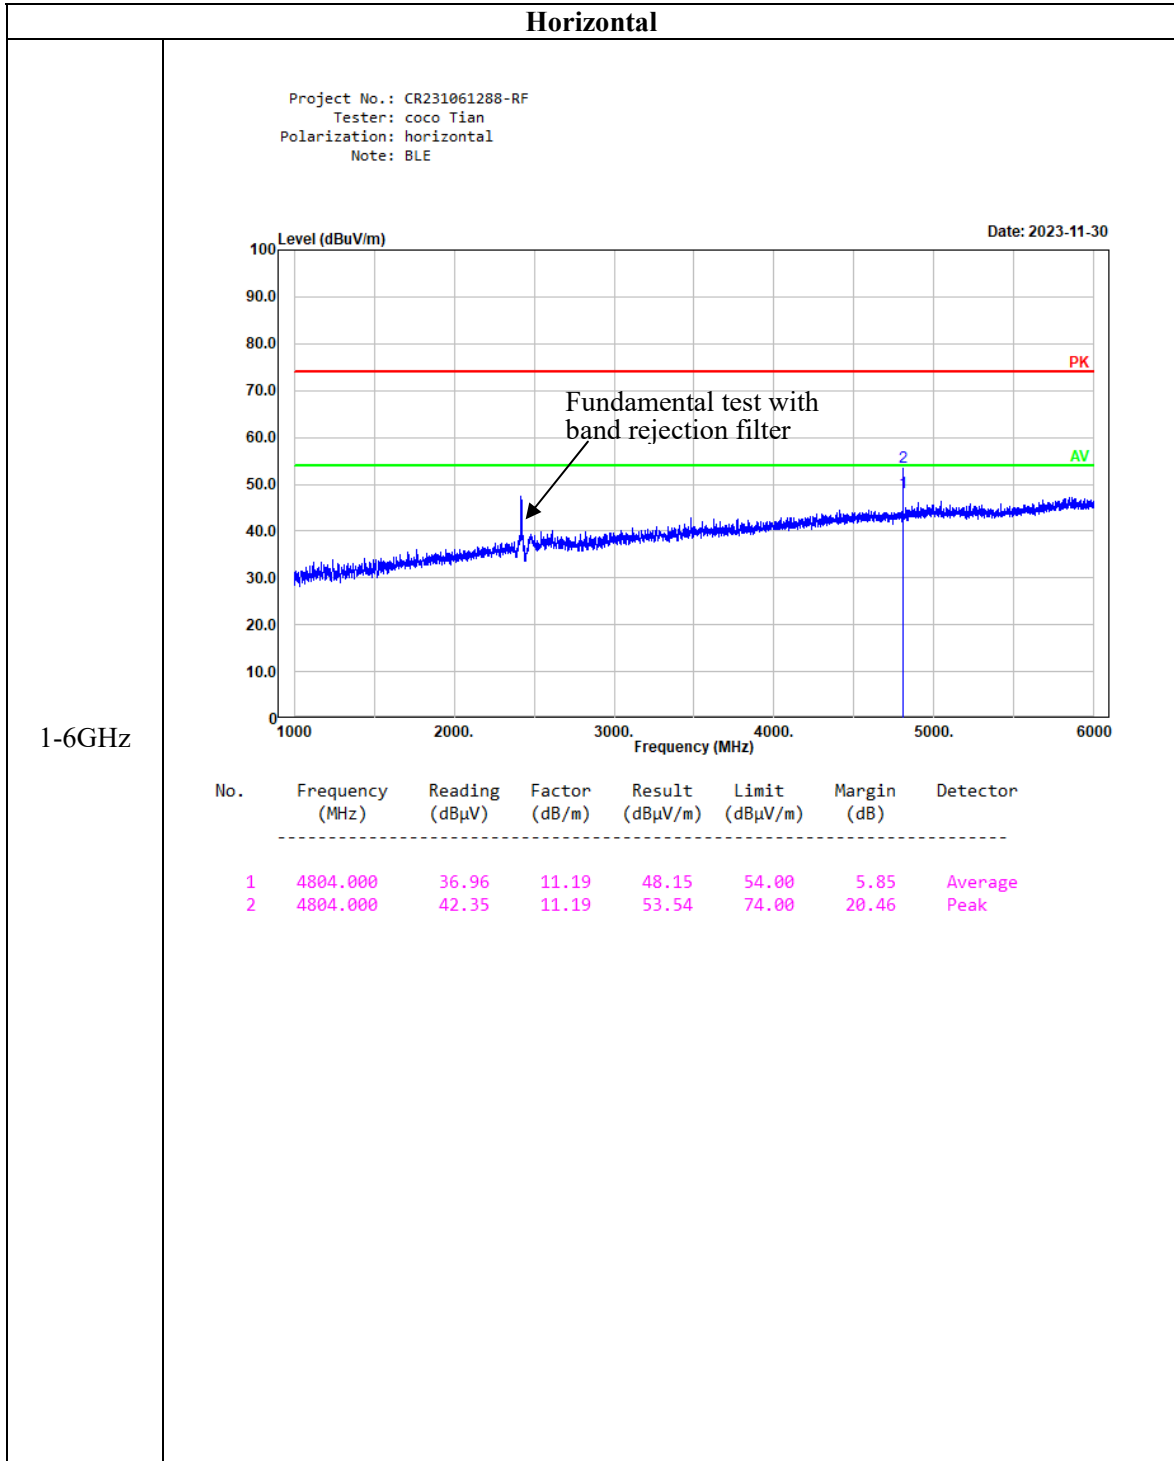

Horizontal

Project No.: CR231061288-RF
 Tester: coco Tian
 Polarization: horizontal
 Note: BLE

Date: 2023-11-30

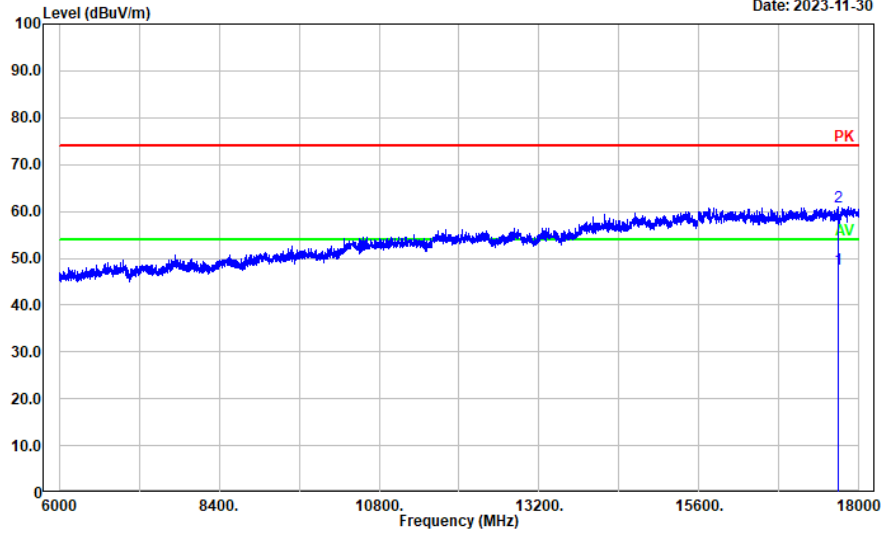


6-18GHz

No.	Frequency (MHz)	Reading (dB μ V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector
1	17692.740	16.45	31.20	47.65	54.00	6.35	Average
2	17692.740	29.67	31.20	60.87	74.00	13.13	Peak

Horizontal

Project No.: CR231061288-RF
 Tester: coco Tian
 Polarization: Horizontal
 Note: BLE

Date: 2023-11-30

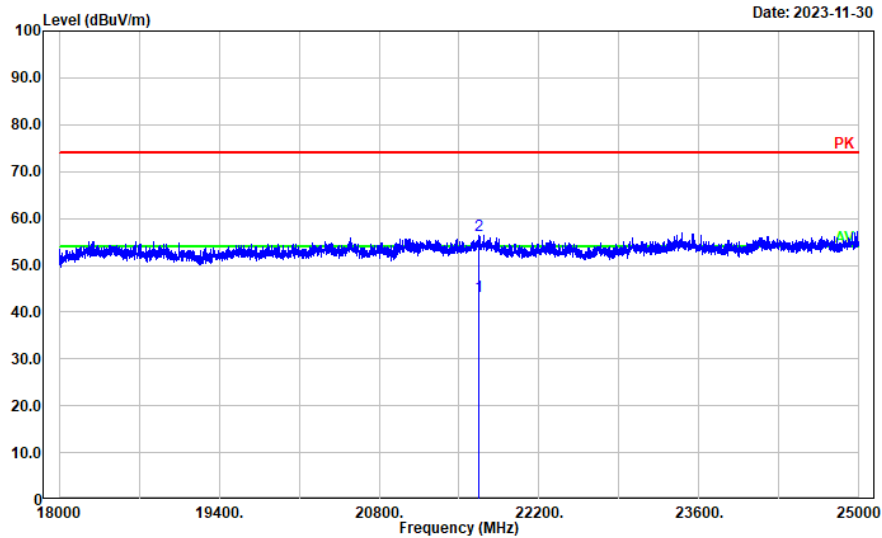


18-25GHz

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	21677.130	38.50	4.85	43.35	54.00	10.65	Average
2	21677.130	51.57	4.85	56.42	74.00	17.58	Peak

Vertical

Project No.: CR231061288-RF
 Tester: coco Tian
 Polarization: vertical
 Note: BLE

Date: 2023-11-30

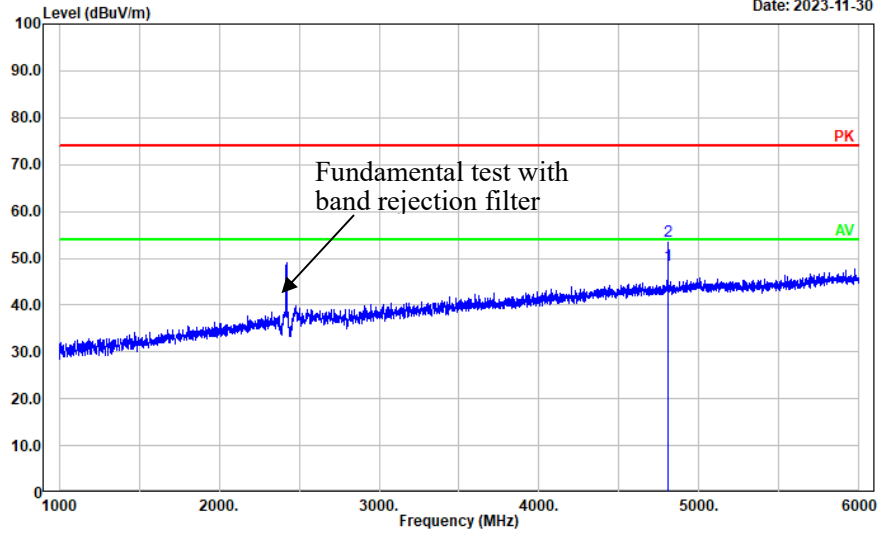


1-6GHz

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	4804.000	37.23	11.19	48.42	54.00	5.58	Average
2	4804.000	42.60	11.19	53.79	74.00	20.21	Peak

Vertical

Project No.: CR231061288-RF
 Tester: coco Tian
 Polarization: vertical
 Note: BLE

Date: 2023-11-30

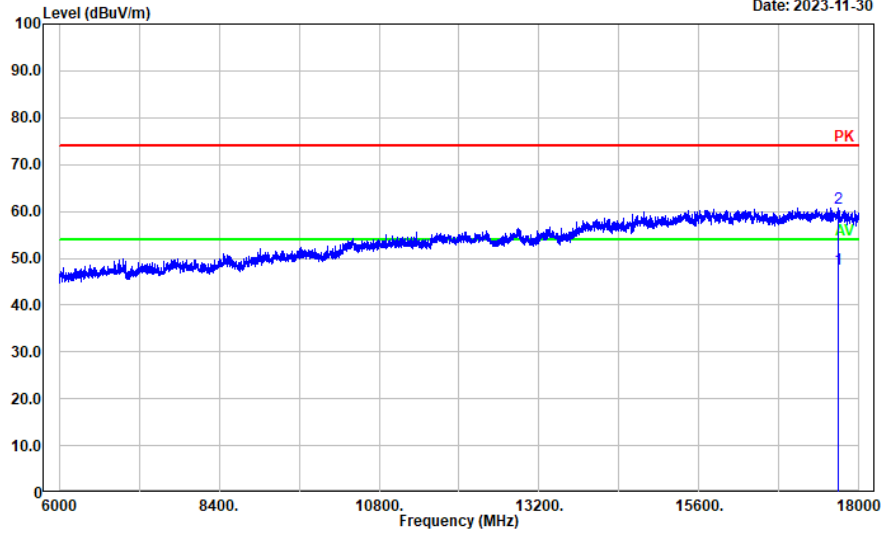


6-18GHz

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	17692.740	16.45	31.20	47.65	54.00	6.35	Average
2	17692.740	29.63	31.20	60.83	74.00	13.17	Peak

Vertical

Project No.: CR231061288-RF
 Tester: coco Tian
 Polarization: vertical
 Note: BLE

Date: 2023-11-30

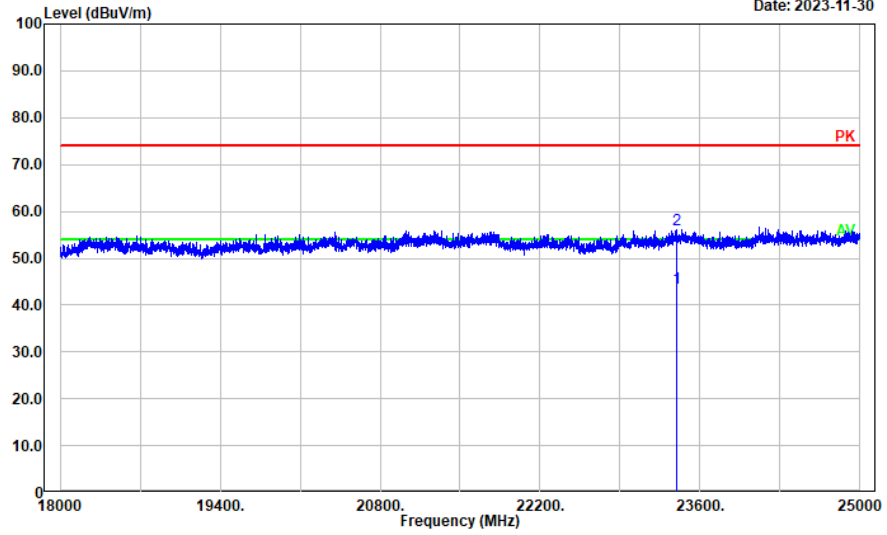

18-25GHz


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	23396.680	38.13	5.40	43.53	54.00	10.47	Average
2	23396.680	50.83	5.40	56.23	74.00	17.77	Peak

ANT 1-BLE 1M High Channel

Horizontal

Project No.: CR231061288-RF
 Tester: coco Tian
 Polarization: horizontal
 Note: BLE

Date: 2023-11-30

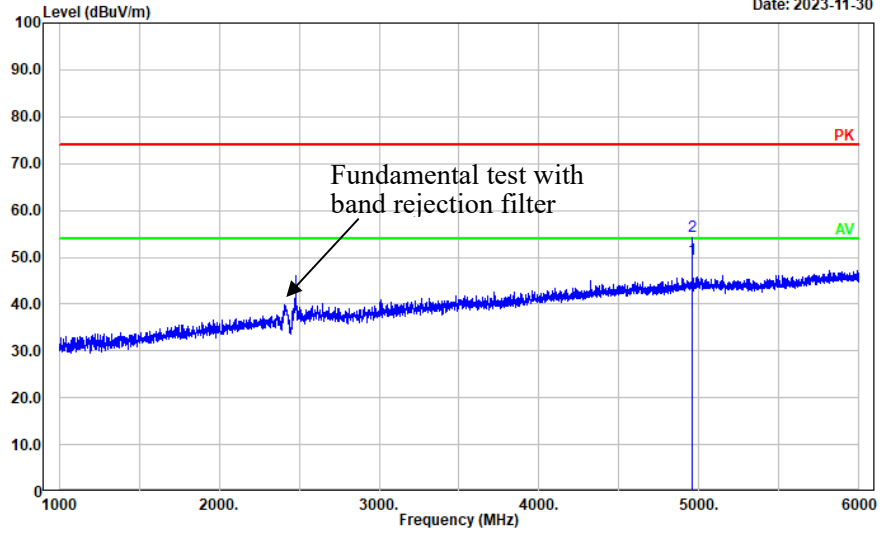


1-6GHz

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	4960.000	37.76	11.77	49.53	54.00	4.47	Average
2	4960.000	42.83	11.77	54.60	74.00	19.40	Peak

Horizontal

Project No.: CR231061288-RF
 Tester: coco Tian
 Polarization: horizontal
 Note: BLE

Date: 2023-11-30

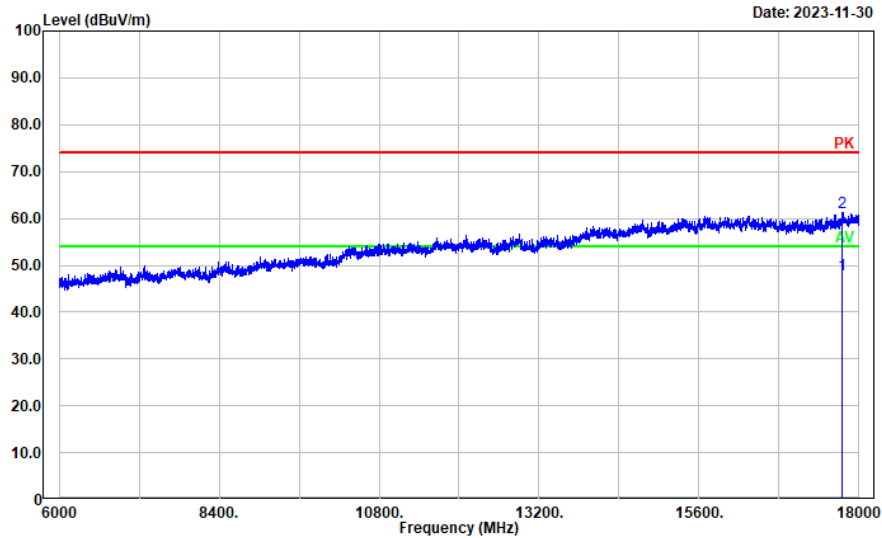


6-18GHz

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	17750.350	16.54	31.44	47.98	54.00	6.02	Average
2	17750.350	29.89	31.44	61.33	74.00	12.67	Peak

Horizontal

Project No.: CR231061288-RF
 Tester: coco Tian
 Polarization: Horizontal
 Note: BLE

Date: 2023-11-30

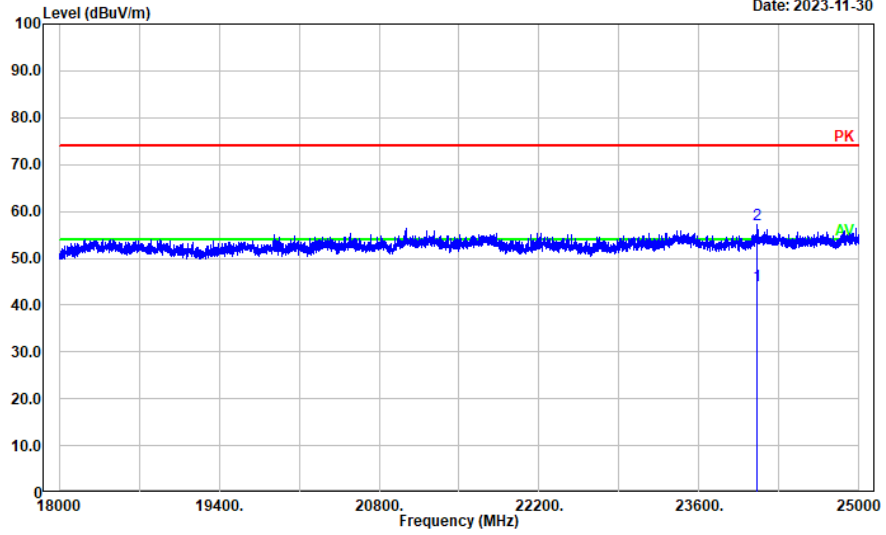


18-25GHz

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	24108.020	39.29	4.84	44.13	54.00	9.87	Average
2	24108.020	52.38	4.84	57.22	74.00	16.78	Peak

Vertical

Project No.: CR231061288-RF
 Tester: coco Tian
 Polarization: vertical
 Note: BLE

Date: 2023-11-30

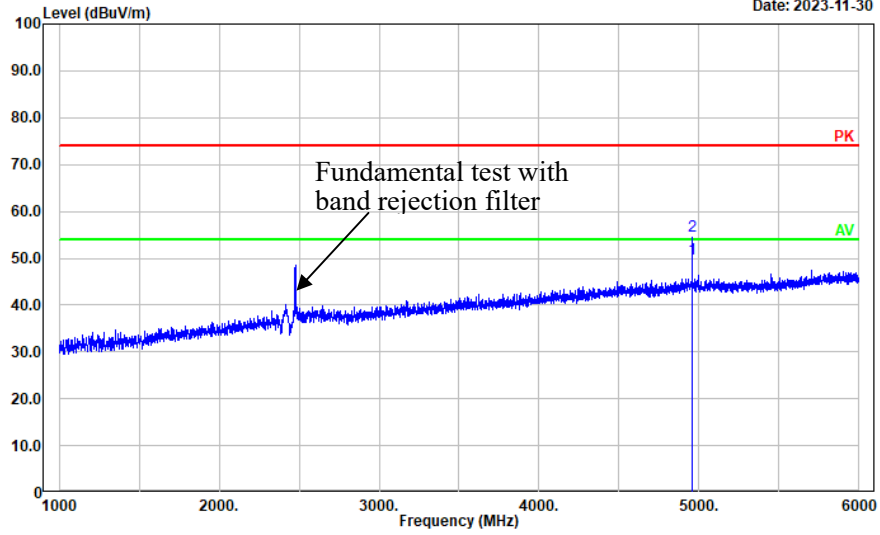


1-6GHz

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	4960.000	37.98	11.77	49.75	54.00	4.25	Average
2	4960.000	43.05	11.77	54.82	74.00	19.18	Peak

Vertical

Project No.: CR231061288-RF
 Tester: coco Tian
 Polarization: vertical
 Note: BLE

Date: 2023-11-30

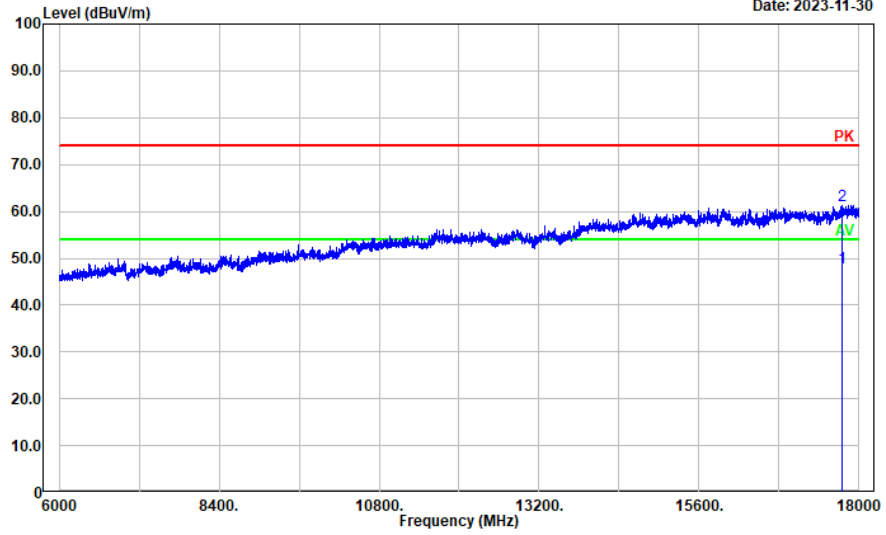


6-18GHz

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	17743.150	16.54	31.42	47.96	54.00	6.04	Average
2	17743.150	29.73	31.42	61.15	74.00	12.85	Peak

Vertical

Project No.: CR231061288-RF
 Tester: coco Tian
 Polarization: vertical
 Note: BLE

Date: 2023-11-30

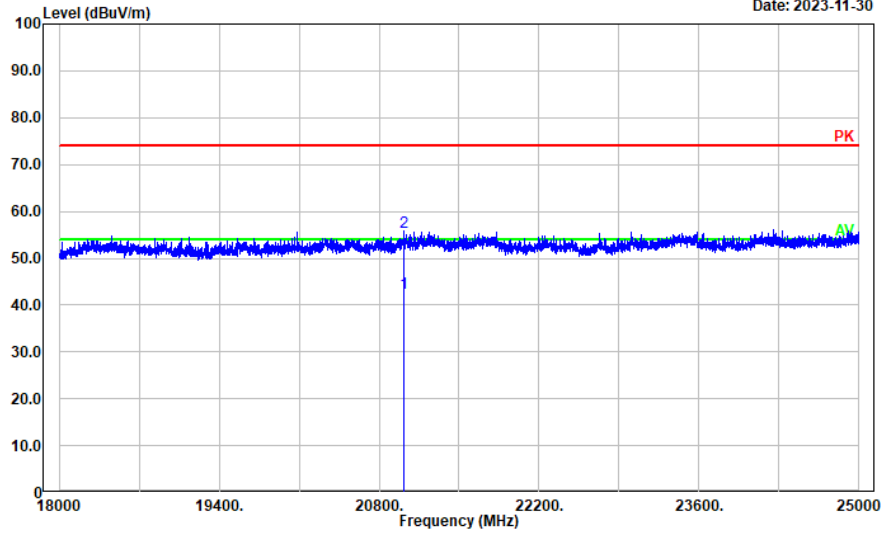

18-25GHz

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	21014.800	38.07	4.60	42.67	54.00	11.33	Average
2	21014.800	51.09	4.60	55.69	74.00	18.31	Peak

4.3 6 dB Emission Bandwidth

Serial Number:	2CGM-1	Test Date:	2023/11/22-2023/11/24
Test Site:	RF	Test Mode:	Transmitting
Tester:	Hale Li	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	25.4-26.5	Relative Humidity: (%)	51-56	ATM Pressure: (kPa)	101
----------------------	-----------	------------------------------	-------	------------------------	-----

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	200120	2023/4/18	2024/4/17
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A
eastsheep	Coaxial Attenuator	2W-SMA-JK-18G	21060301	Each time	N/A

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:**Ant0**

Test Modes	Test Frequency (MHz)	6 dB Bandwidth (MHz)	Limit (MHz)
BLE 1Mbps	2402	0.672	≥ 0.5
	2440	0.672	≥ 0.5
	2480	0.672	≥ 0.5
BLE 2Mbps	2404	1.172	≥ 0.5
	2440	1.176	≥ 0.5
	2478	1.180	≥ 0.5

Ant1

Test Modes	Test Frequency (MHz)	6 dB Bandwidth (MHz)	Limit (MHz)
BLE 1Mbps	2402	0.672	≥ 0.5
	2440	0.672	≥ 0.5
	2480	0.672	≥ 0.5
BLE 2Mbps	2404	1.176	≥ 0.5
	2440	1.176	≥ 0.5
	2478	1.180	≥ 0.5

Ant0

6dB Emission Bandwidth	
BLE 1Mbps Lowest Channel	<p>ProjectNo.:CR231061288 Tester:Hale Li Date: 22.NOV.2023 17:52:39</p>
BLE 1Mbps Middle Channel	<p>ProjectNo.:CR231061288 Tester:Hale Li Date: 22.NOV.2023 17:53:34</p>
BLE 1Mbps Highest Channel	<p>ProjectNo.:CR231061288 Tester:Hale Li Date: 22.NOV.2023 18:00:37</p>

6dB Emission Bandwidth	
BLE 2Mbps Lowest Channel	<p style="font-size: small;">ProjectNo.:CR231061288 Tester:Hale Li Date: 24.NOV.2023 00:15:31</p>
BLE 2Mbps Middle Channel	<p style="font-size: small;">ProjectNo.:CR231061288 Tester:Hale Li Date: 22.NOV.2023 18:36:21</p>
BLE 2Mbps Highest Channel	<p style="font-size: small;">ProjectNo.:CR231061288 Tester:Hale Li Date: 24.NOV.2023 00:19:34</p>

Ant1

6dB Emission Bandwidth	
BLE 1Mbps Lowest Channel	<p>ProjectNo.:CR231061288 Tester:Hale Li Date: 22.NOV.2023 18:06:10</p>
BLE 1Mbps Middle Channel	<p>ProjectNo.:CR231061288 Tester:Hale Li Date: 22.NOV.2023 18:11:16</p>
BLE 1Mbps Highest Channel	<p>ProjectNo.:CR231061288 Tester:Hale Li Date: 22.NOV.2023 18:14:14</p>

6dB Emission Bandwidth	
BLE 2Mbps Lowest Channel	<p>ProjectNo.:CR231061288 Tester:Hale Li Date: 24.NOV.2023 00:30:25</p>
BLE 2Mbps Middle Channel	<p>ProjectNo.:CR231061288 Tester:Hale Li Date: 22.NOV.2023 18:18:40</p>
BLE 2Mbps Highest Channel	<p>ProjectNo.:CR231061288 Tester:Hale Li Date: 24.NOV.2023 00:29:03</p>

4.4 Maximum Conducted Output Power

Serial Number:	2CGM-1	Test Date:	2023/11/22
Test Site:	RF	Test Mode:	Transmitting
Tester:	Hale Li	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	25.4	Relative Humidity: (%)	56	ATM Pressure: (kPa)	101
----------------------	------	------------------------------	----	------------------------	-----

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	200120	2023/4/18	2024/4/17
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A
eastsheep	Coaxial Attenuator	2W-SMA-JK-18G	21060301	Each time	N/A

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:

Ant0

Test Modes	Test Frequency (MHz)	Maximum Peak Conducted Output Power (dBm)	Limit (dBm)
BLE 1Mbps	2402	-5.53	≤30
	2440	-3.75	≤30
	2480	-3.95	≤30
BLE 2Mbps	2404	-5.13	≤30
	2440	-3.96	≤30
	2478	-3.56	≤30




Ant1

Test Modes	Test Frequency (MHz)	Maximum Peak Conducted Output Power (dBm)	Limit (dBm)
BLE 1Mbps	2402	-6.62	≤30
	2440	-4.70	≤30
	2480	-5.65	≤30
BLE 2Mbps	2404	-6.43	≤30
	2440	-4.72	≤30
	2478	-5.23	≤30

Ant0

Maximum Conducted Peak Output Power	
<p>BLE 1Mbps Lowest Channel</p>	<p>ProjectNo.:CR231061288 Tester:Hale Li Date: 22.NOV.2023 17:53:56</p>
<p>BLE 1Mbps Middle Channel</p>	<p>ProjectNo.:CR231061288 Tester:Hale Li Date: 22.NOV.2023 17:59:54</p>
<p>BLE 1Mbps Highest Channel</p>	<p>ProjectNo.:CR231061288 Tester:Hale Li Date: 22.NOV.2023 18:00:57</p>




Maximum Conducted Peak Output Power
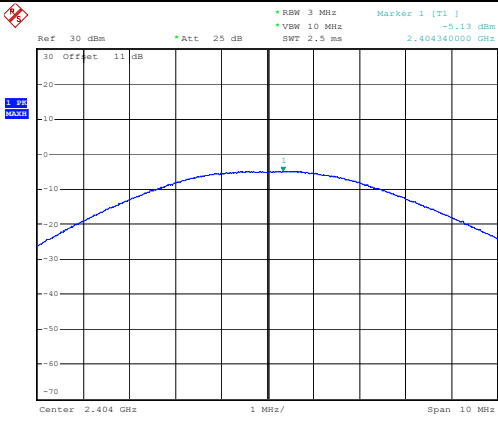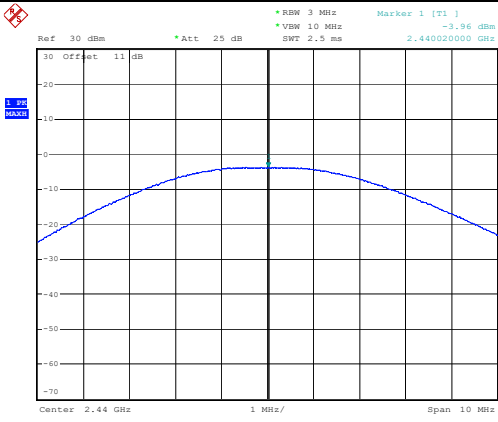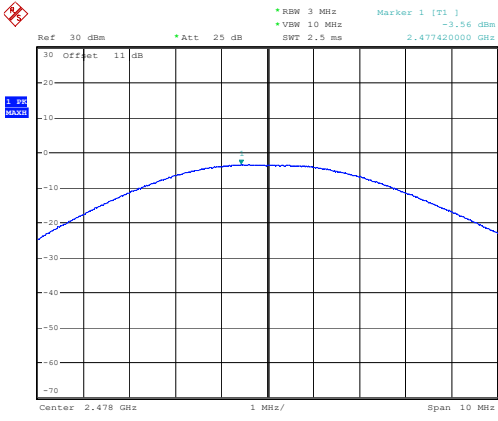
<p>BLE 2Mbps Lowest Channel</p>	 <p>ProjectNo.:CR231061288 Tester:Hale Li Date: 22.NOV.2023 18:40:33</p>
<p>BLE 2Mbps Middle Channel</p>	 <p>ProjectNo.:CR231061288 Tester:Hale Li Date: 22.NOV.2023 18:36:41</p>
<p>BLE 2Mbps Highest Channel</p>	 <p>ProjectNo.:CR231061288 Tester:Hale Li Date: 22.NOV.2023 18:41:23</p>

Ant1

Maximum Conducted Peak Output Power	
<p>BLE 1Mbps Lowest Channel</p>	<p>ProjectNo.:CR231061288 Tester:Hale Li Date: 22.NOV.2023 18:06:33</p>
<p>BLE 1Mbps Middle Channel</p>	<p>ProjectNo.:CR231061288 Tester:Hale Li Date: 22.NOV.2023 18:11:40</p>
<p>BLE 1Mbps Highest Channel</p>	<p>ProjectNo.:CR231061288 Tester:Hale Li Date: 22.NOV.2023 18:15:46</p>

Maximum Conducted Peak Output Power
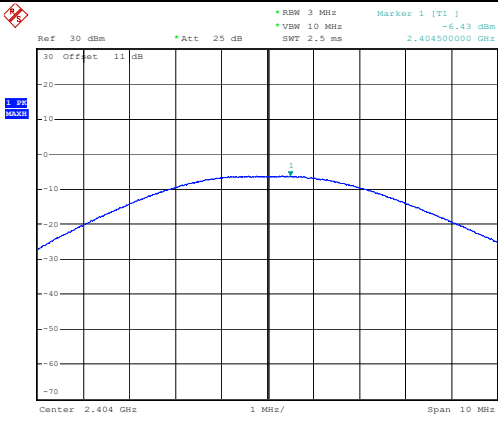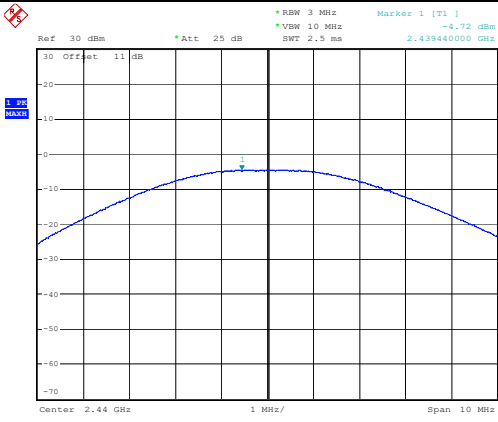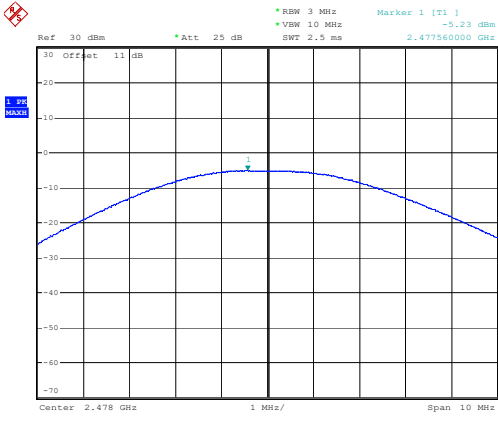
<p>BLE 2Mbps Lowest Channel</p>	 <p>ProjectNo.:CR231061288 Tester:Hale Li Date: 22.NOV.2023 18:23:59</p>
<p>BLE 2Mbps Middle Channel</p>	 <p>ProjectNo.:CR231061288 Tester:Hale Li Date: 22.NOV.2023 18:20:03</p>
<p>BLE 2Mbps Highest Channel</p>	 <p>ProjectNo.:CR231061288 Tester:Hale Li Date: 22.NOV.2023 18:31:12</p>

4.5 Maximum power spectral density

Serial Number:	2CGM-1	Test Date:	2023/11/22
Test Site:	RF	Test Mode:	Transmitting
Tester:	Hale Li	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	25.4	Relative Humidity: (%)	56	ATM Pressure: (kPa)	101
----------------------	------	---------------------------	----	------------------------	-----

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	200120	2023/4/18	2024/4/17
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A
eastsheep	Coaxial Attenuator	2W-SMA-JK-18G	21060301	Each time	N/A

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:

Ant0

Test Modes	Test Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)
BLE 1Mbps	2402	-22.50	≤8.00
	2440	-20.98	≤8.00
	2480	-21.30	≤8.00
BLE 2Mbps	2404	-25.10	≤8.00
	2440	-23.39	≤8.00
	2478	-23.36	≤8.00

Ant1

Test Modes	Test Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)
BLE 1Mbps	2402	-23.80	≤8.00
	2440	-21.76	≤8.00
	2480	-22.83	≤8.00
BLE 2Mbps	2404	-25.97	≤8.00
	2440	-24.07	≤8.00
	2478	-24.93	≤8.00

Ant0

Maximum power spectral density	
BLE 1Mbps Lowest Channel	<p>ProjectNo.:CR231061288 Tester:Hale Li Date: 22.NOV.2023 17:58:46</p>
BLE 1Mbps Middle Channel	<p>ProjectNo.:CR231061288 Tester:Hale Li Date: 22.NOV.2023 18:00:01</p>
BLE 1Mbps Highest Channel	<p>ProjectNo.:CR231061288 Tester:Hale Li Date: 22.NOV.2023 18:01:04</p>




Maximum power spectral density

<p>BLE 2Mbps Lowest Channel</p>	<p>ProjectNo.:CR231061288 Tester:Hale Li Date: 22.NOV.2023 18:42:47</p>
<p>BLE 2Mbps Middle Channel</p>	<p>ProjectNo.:CR231061288 Tester:Hale Li Date: 22.NOV.2023 18:36:59</p>
<p>BLE 2Mbps Highest Channel</p>	<p>ProjectNo.:CR231061288 Tester:Hale Li Date: 22.NOV.2023 18:42:03</p>

Ant1

Maximum power spectral density	
BLE 1Mbps Lowest Channel	<p>ProjectNo.:CR231061288 Tester:Hale Li Date: 22.NOV.2023 18:07:45</p>
BLE 1Mbps Middle Channel	<p>ProjectNo.:CR231061288 Tester:Hale Li Date: 22.NOV.2023 18:12:58</p>
BLE 1Mbps Highest Channel	<p>ProjectNo.:CR231061288 Tester:Hale Li Date: 22.NOV.2023 18:15:59</p>

Maximum power spectral density
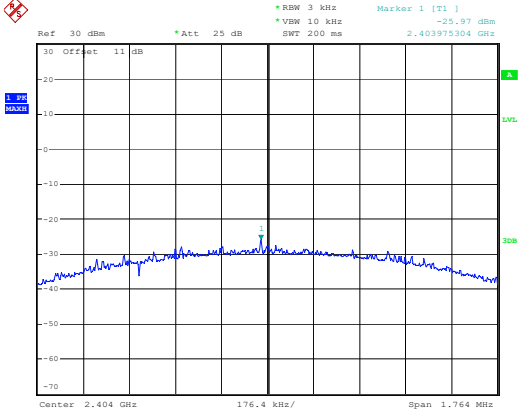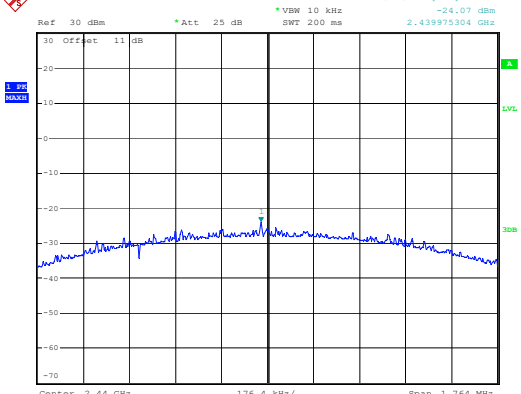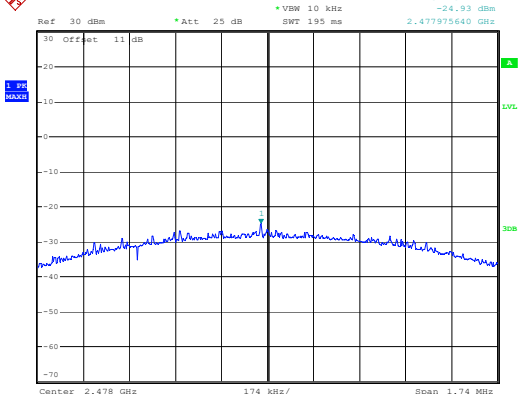
<p>BLE 2Mbps Lowest Channel</p>	 <p>ProjectNo.:CR231061288 Tester:Hale Li Date: 22.NOV.2023 18:25:33</p>
<p>BLE 2Mbps Middle Channel</p>	 <p>ProjectNo.:CR231061288 Tester:Hale Li Date: 22.NOV.2023 18:20:39</p>
<p>BLE 2Mbps Highest Channel</p>	 <p>ProjectNo.:CR231061288 Tester:Hale Li Date: 22.NOV.2023 18:31:41</p>

4.6 100 kHz Bandwidth of Frequency Band Edge

Serial Number:	2CGM-1	Test Date:	2023/11/22
Test Site:	RF	Test Mode:	Transmitting
Tester:	Hale Li	Test Result:	PASS

Environmental Conditions:

Temperature: (°C)	25.4	Relative Humidity: (%)	56	ATM Pressure: (kPa)	101
----------------------	------	------------------------------	----	------------------------	-----


Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	200120	2023/4/18	2024/4/17
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A
eastsheep	Coaxial Attenuator	2W-SMA-JK-18G	21060301	Each time	N/A

* *Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*


Test Data:

Ant0

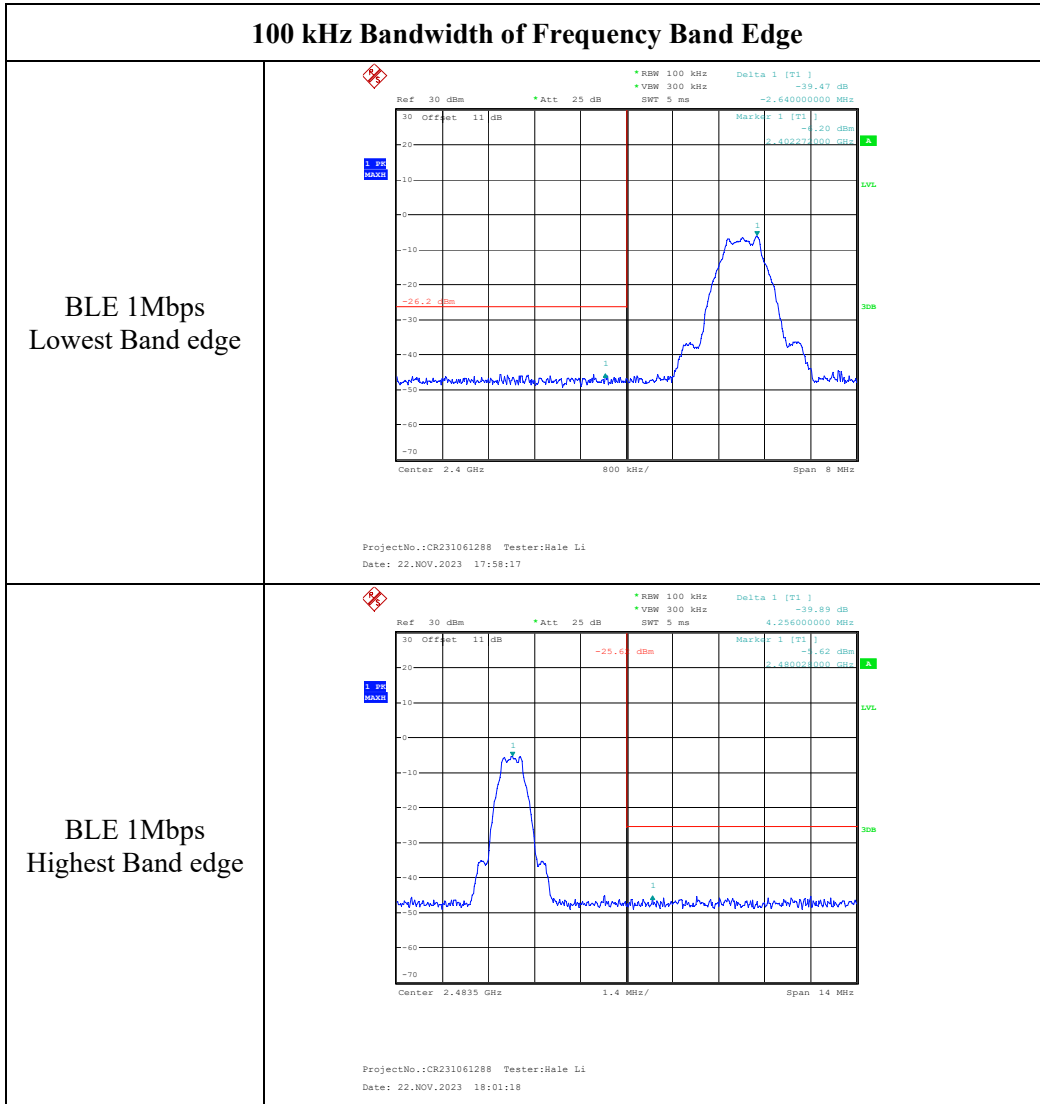


100 kHz Bandwidth of Frequency Band Edge

BLE 2Mbps
Lowest Band edge

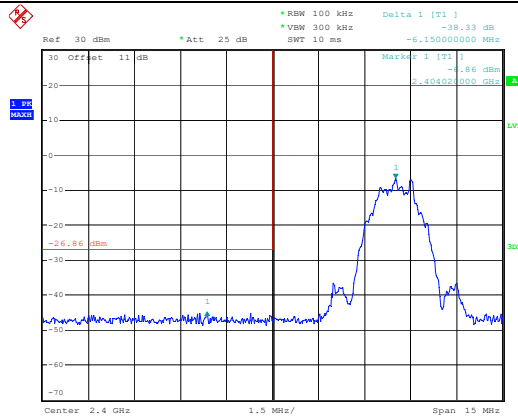


ProjectNo.:CR231061288 Tester:Hale Li
 Date: 22.NOV.2023 18:43:54

BLE 2Mbps
Highest Band edge

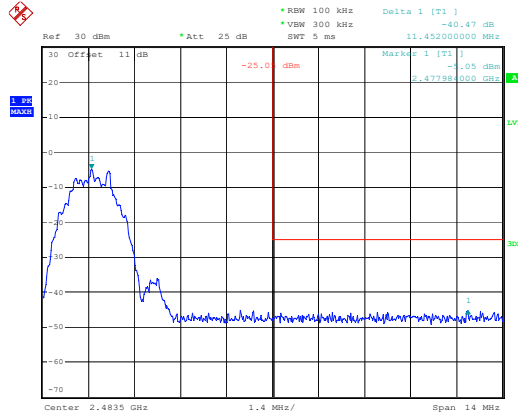


ProjectNo.:CR231061288 Tester:Hale Li
 Date: 22.NOV.2023 18:44:25

Ant1

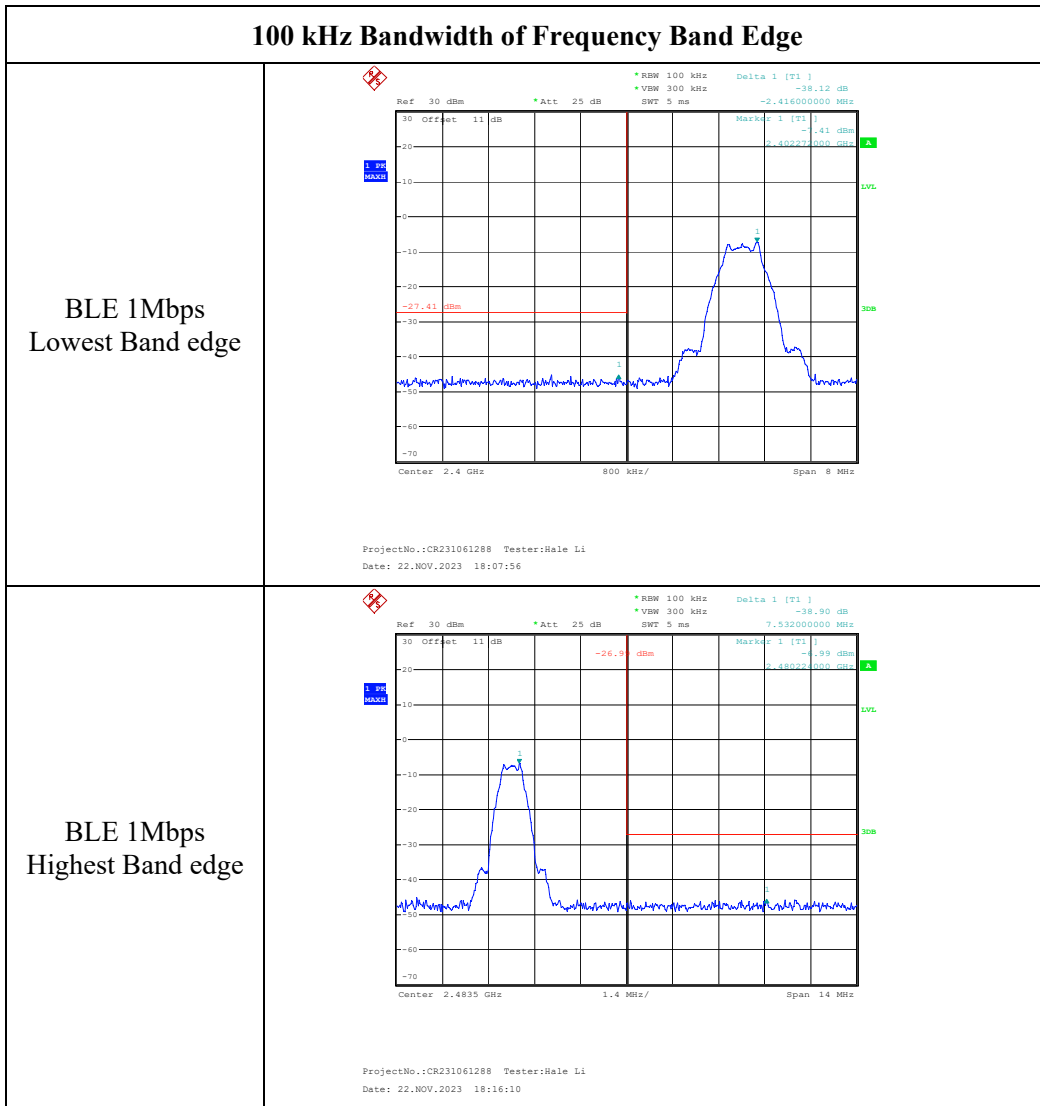


100 kHz Bandwidth of Frequency Band Edge

BLE 2Mbps
Lowest Band edge

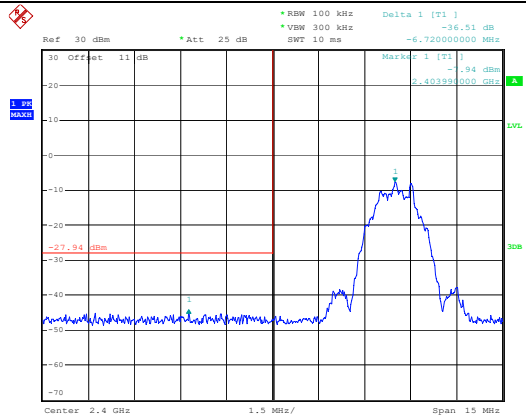

ProjectNo.:CR231061288 Tester:Hale Li
 Date: 22.NOV.2023 18:28:10

BLE 2Mbps
Highest Band edge

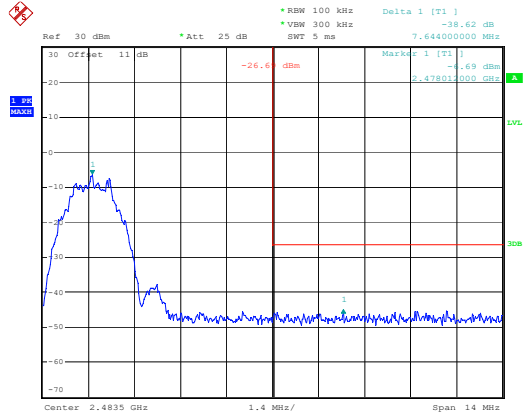

ProjectNo.:CR231061288 Tester:Hale Li
 Date: 22.NOV.2023 18:29:19

4.7 Duty Cycle

Serial Number:	2CGM-1	Test Date:	2023/11/24
Test Site:	RF	Test Mode:	Transmitting
Tester:	Hale Li	Test Result:	N/A

Environmental Conditions:

Temperature: (°C)	26.5	Relative Humidity: (%)	51	ATM Pressure: (kPa)	101
----------------------	------	------------------------------	----	------------------------	-----

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	200120	2023/4/18	2024/4/17
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A
eastsheep	Coaxial Attenuator	2W-SMA-JK-18G	21060301	Each time	N/A

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:


Ant0

Test Modes	Test Frequency (MHz)	Ton (ms)	Ton+off (ms)	Duty cycle (%)	1/T (Hz)	VBW Setting (Hz)
BLE 1Mbps	2440	2.13	2.51	84.86	469.48	1000
BLE 2Mbps	2440	1.07	1.89	56.61	934.58	1000


Ant1

Test Modes	Test Frequency (MHz)	Ton (ms)	Ton+off (ms)	Duty cycle (%)	1/T (Hz)	VBW Setting (Hz)
BLE 1Mbps	2440	2.13	2.51	84.86	469.48	1000
BLE 2Mbps	2440	1.07	1.88	56.91	934.58	1000

Ant0

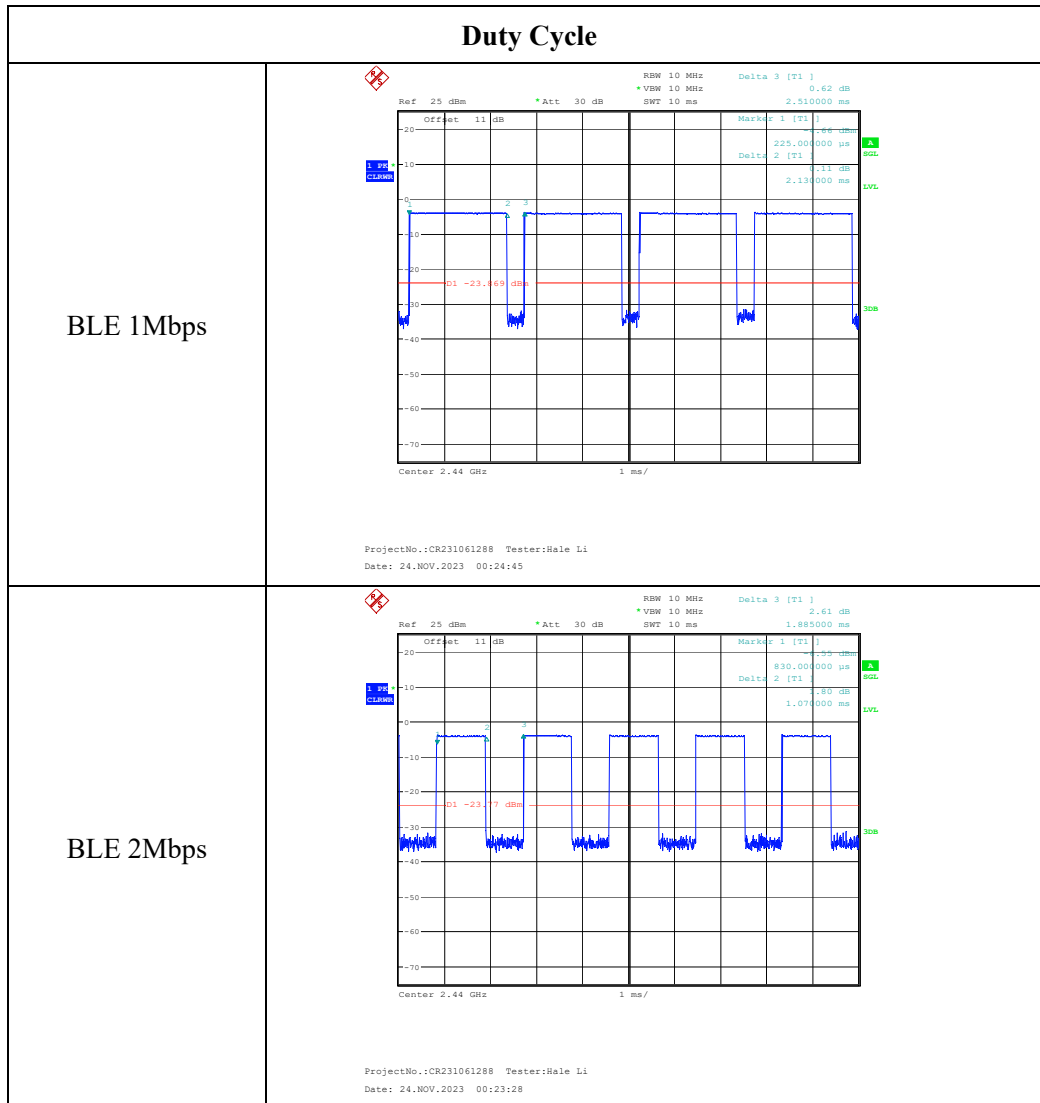

Ant1

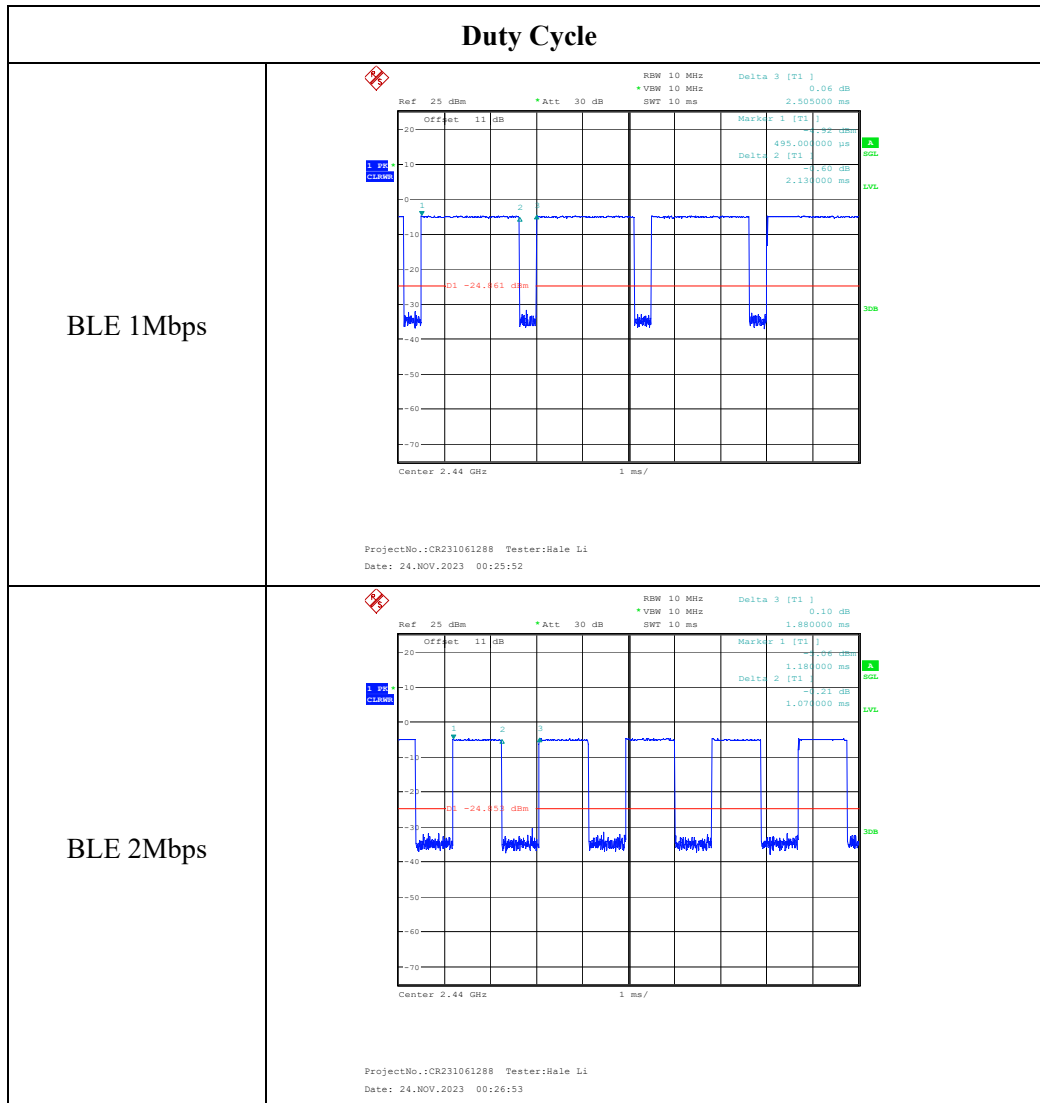

5. RF EXPOSURE EVALUATION

5.1 Applicable Standard

According to §15.247(i) and §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

According to KDB447498 D01 General RF Exposure Guidance v06:

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$ for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where

- $f(\text{GHz})$ is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison
- 3.0 and 7.5 are referred to as the numeric thresholds in the step 2 below

The test exclusions are applicable only when the minimum test separation distance is ≤ 50 mm and for transmission frequencies between 100 MHz and 6 GHz. When the minimum test separation distance is < 5 mm, a distance of 5 mm according to 5) in section 4.1 is applied to determine SAR test exclusion.

5.2 Measurement Result

The max conducted power including tune-up tolerance is -3.5dBm (0.45mW).

$[(\text{max. power of channel, mW})/(\text{min. test separation distance, mm})][\sqrt{f(\text{GHz})}]$
 $= 0.45/5 \cdot (\sqrt{2.480}) = 0.1 < 3.0$

Result: Compliant. The stand-alone SAR evaluation is not necessary.

6. EUT PHOTOGRAPHS

Please refer to the attachment CR231061288-EXP EUT EXTERNAL PHOTOGRAPHS and CR231061288-INP EUT INTERNAL PHOTOGRAPHS

7. TEST SETUP PHOTOGRAPHS

Please refer to the attachment CR231061288-00A-TSP TEST SETUP PHOTOGRAPHS.

===== END OF REPORT =====