

Test Laboratory: Shenzhen EMTEK Co.,Ltd.

Date: 2022/4/22

GSM850

DUT: M1

Communication System: GPRS12; Frequency: 836.4 MHz;Duty Cycle: 1:2.00032

Medium: H835 Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.919$ S/m; $\epsilon_r = 42.859$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.1 °C; Liquid Temperature : 21.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3970; ConvF(10.16, 10.16, 10.16); Calibrated: 2022/4/18;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1418; Calibrated: 2022/3/24
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1231
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

BACK/Area Scan (61x141x1): Interpolated grid: dx=2.000 mm, dy=2.000 mm

Maximum value of SAR (interpolated) = 0.596 W/kg


BACK/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.738 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 1.94 W/kg

SAR(1 g) = 0.532 W/kg; SAR(10 g) = 0.218 W/kg

Maximum value of SAR (measured) = 0.579 W/kg

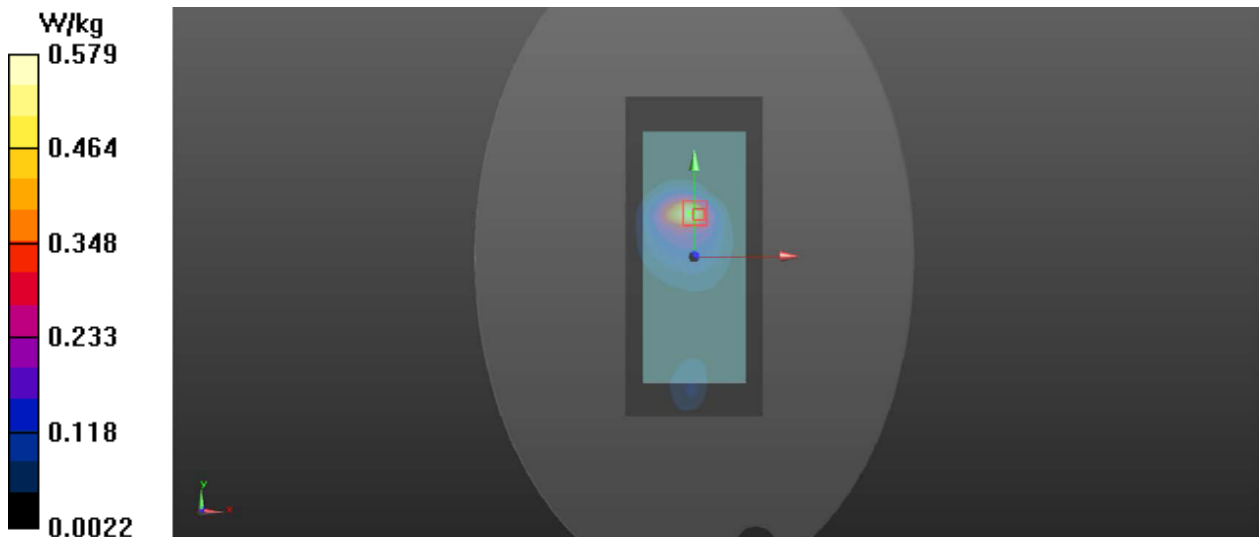

GSM1900

DUT: M1

Communication System: GPRS12; Frequency: 1880 MHz; Duty Cycle: 1:2.00032

Medium: HSL1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.45$ S/m; $\epsilon_r = 39.74$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.4 °C; Liquid Temperature : 22.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3970; ConvF(8.5, 8.5, 8.5); Calibrated: 2022/4/18;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1418; Calibrated: 2022/3/24
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1231
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

BACK/Area Scan (61x141x1): Interpolated grid: dx=2.000 mm, dy=2.000 mm

Maximum value of SAR (interpolated) = 0.878 W/kg


BACK/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 15.928 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 2.01 W/kg

SAR(1 g) = 0.708 W/kg; SAR(10 g) = 0.295 W/kg

Maximum value of SAR (measured) = 0.794 W/kg

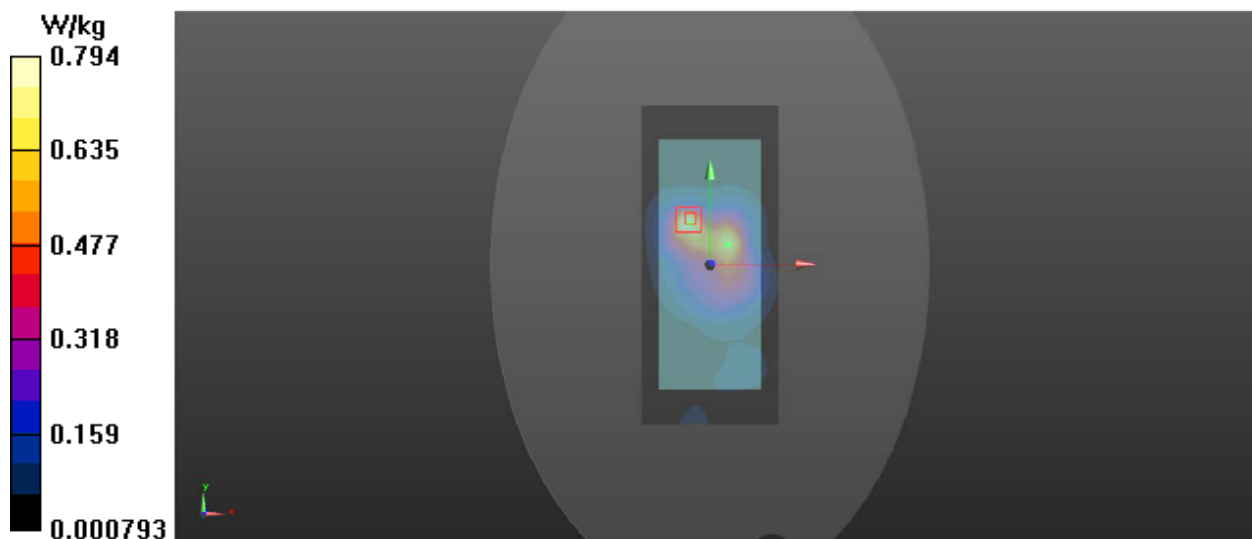

WCDMA850

DUT: M1

Communication System: WCDMA; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: H835 Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.919$ S/m; $\epsilon_r = 42.859$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.1 °C; Liquid Temperature : 21.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3970; ConvF(10.3, 10.3, 10.3); Calibrated: 2022/4/18;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1418; Calibrated: 2022/3/24
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1231
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

BACK/Area Scan (61x141x1): Interpolated grid: dx=2.000 mm, dy=2.000 mm

Maximum value of SAR (interpolated) = 0.444 W/kg


BACK/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.329 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 1.51 W/kg

SAR(1 g) = 0.415 W/kg; SAR(10 g) = 0.170 W/kg

Maximum value of SAR (measured) = 0.449 W/kg

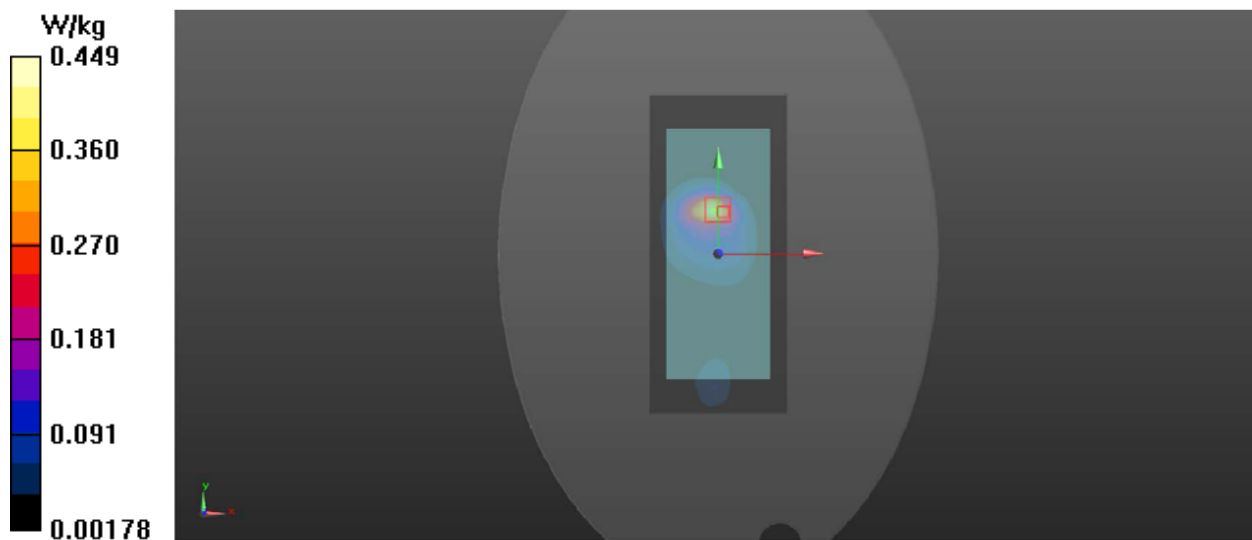

WCDMA1900

DUT: M1

Communication System: WCDMA; Frequency: 1880 MHz;Duty Cycle: 1:1

Medium: HSL1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.45$ S/m; $\epsilon_r = 39.74$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.4 °C; Liquid Temperature : 22.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3970; ConvF(8.5, 8.5, 8.5); Calibrated: 2022/4/18;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1418; Calibrated: 2022/3/24
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1231
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

BACK/Area Scan (61x141x1): Interpolated grid: dx=2.000 mm, dy=2.000 mm

Maximum value of SAR (interpolated) = 0.503 W/kg


BACK/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.646 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.968 W/kg

SAR(1 g) = 0.663 W/kg; SAR(10 g) = 0.264 W/kg

Maximum value of SAR (measured) = 0.518 W/kg

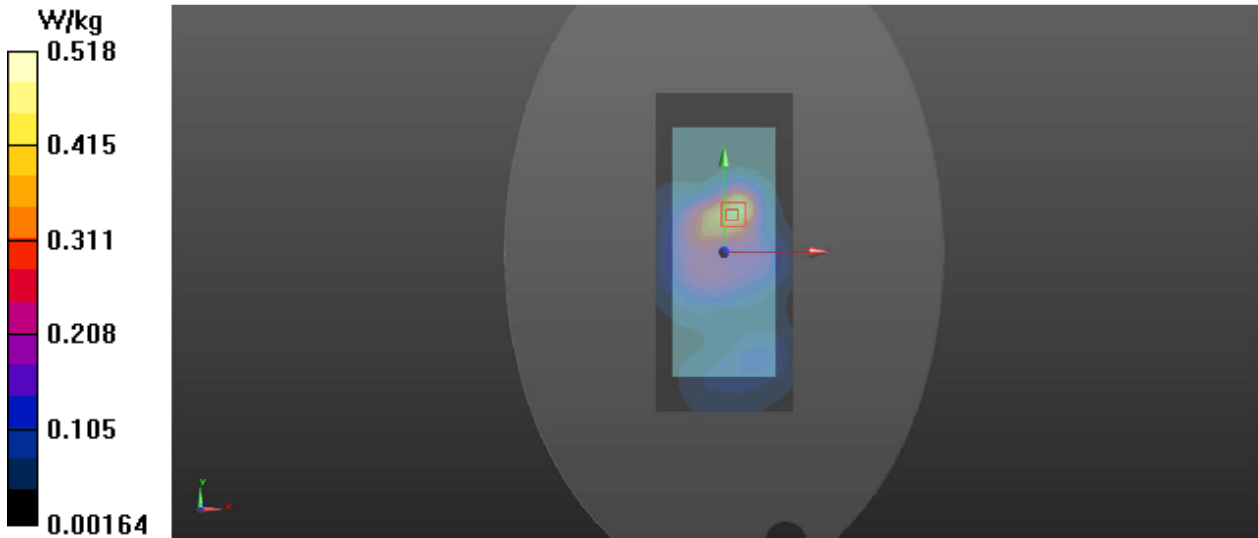

LTE BAND2

DUT: M1

Communication System: LTE; Frequency: 1880 MHz;Duty Cycle: 1:1

Medium: HSL1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.45$ S/m; $\epsilon_r = 39.74$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.4 °C; Liquid Temperature : 22.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3970; ConvF(8.5, 8.5, 8.5); Calibrated: 2022/4/18;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1418; Calibrated: 2022/3/24
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1231
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

BACK/Area Scan (61x141x1): Interpolated grid: dx=2.000 mm, dy=2.000 mm

Maximum value of SAR (interpolated) = 0.532 W/kg


BACK/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.370 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 1.12 W/kg

SAR(1 g) = 0.680 W/kg; SAR(10 g) = 0.269 W/kg

Maximum value of SAR (measured) = 0.555 W/kg

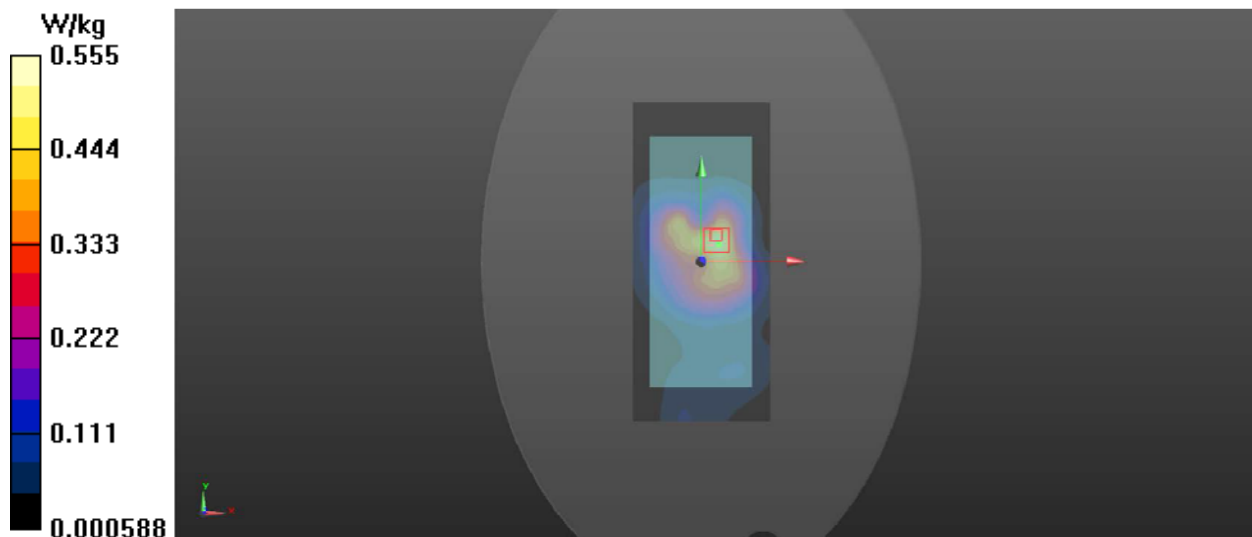

LTE BAND4

DUT: M1

Communication System: LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: HSL1750 Medium parameters used (interpolated): $f = 1732.5$ MHz; $\sigma = 1.363$ S/m; $\epsilon_r = 40.136$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3970; ConvF(8.8, 8.8, 8.8); Calibrated: 2022/4/18;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1418; Calibrated: 2022/3/24
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1231
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

BACK/Area Scan (61x141x1): Interpolated grid: dx=2.000 mm, dy=2.000 mm

Maximum value of SAR (interpolated) = 0.507 W/kg


BACK/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.556 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 1.19 W/kg

SAR(1 g) = 0.679 W/kg; SAR(10 g) = 0.296 W/kg

Maximum value of SAR (measured) = 0.630 W/kg

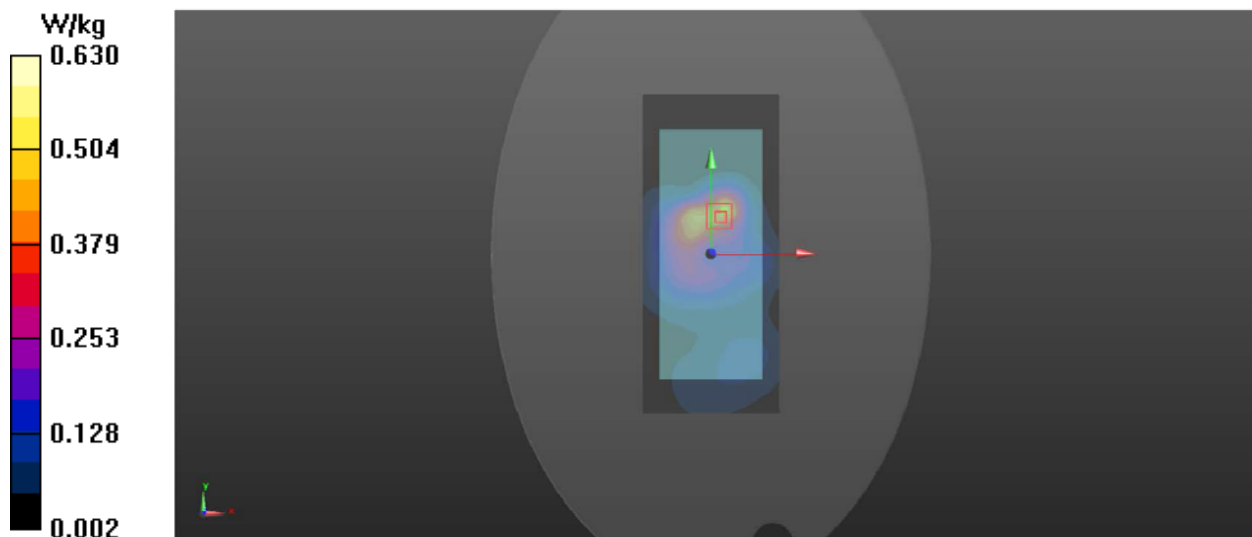

2.4G

DUT: M1

Communication System: 802.11b; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: H2450 Medium parameters used: $f = 2437 \text{ MHz}$; $\sigma = 1.784 \text{ S/m}$; $\epsilon_r = 40.407$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : $22.2 \text{ }^\circ\text{C}$; Liquid Temperature : $22.0 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN3970; ConvF(8.06, 8.06, 8.06); Calibrated: 2022/4/18;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1418; Calibrated: 2022/3/24
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1231
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

BACK/Area Scan (61x141x1): Interpolated grid: $dx=2.000 \text{ mm}$, $dy=2.000 \text{ mm}$

Maximum value of SAR (interpolated) = 0.0180 W/kg


BACK/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 1.616 V/m ; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.0390 W/kg

SAR(1 g) = 0.081 W/kg ; SAR(10 g) = 0.00436 W/kg

Maximum value of SAR (measured) = 0.0133 W/kg

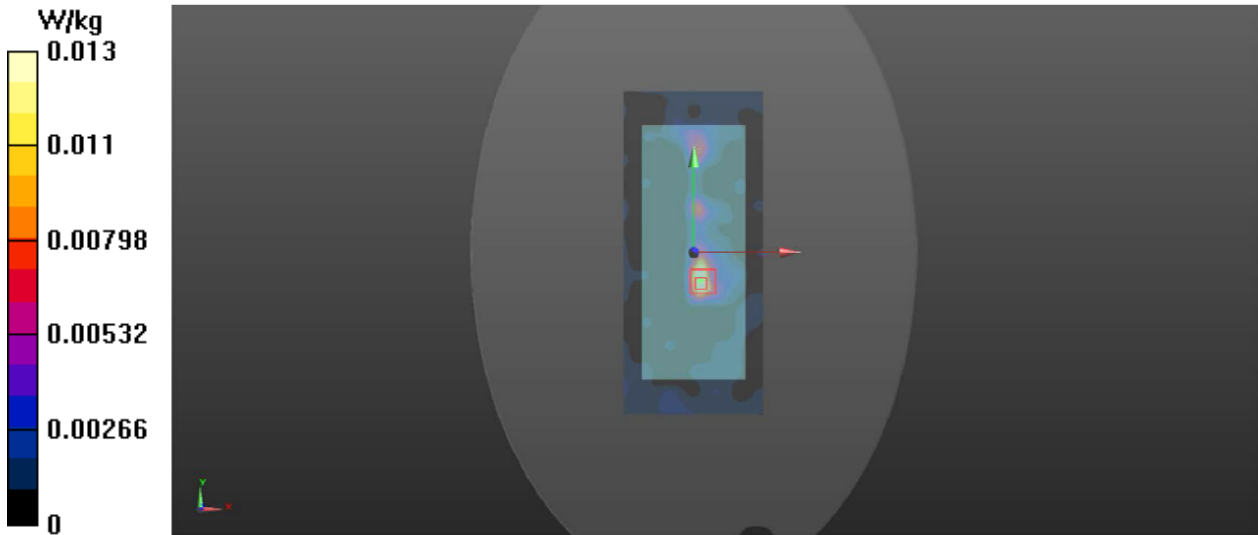

5.2G

DUT: M1

Communication System: 802.11a; Frequency: 5200 MHz; Duty Cycle: 1:1.2517

Medium: H5G Medium parameters used: $f = 5200$ MHz; $\sigma = 4.688$ S/m; $\epsilon_r = 36.999$; $\rho = 1000$ kg/m³

Ambient Temperature : 21.7 °C; Liquid Temperature : 21.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3970; ConvF(5.85, 5.85, 5.85); Calibrated: 2022/4/18;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1418; Calibrated: 2022/3/24
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1231
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

BACK/Area Scan (61x141x1): Interpolated grid: dx=2.000 mm, dy=2.000 mm

Maximum value of SAR (interpolated) = 0.448 W/kg


BACK/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.190 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.499 W/kg

SAR(1 g) = 0.103 W/kg; SAR(10 g) = 0.027 W/kg

Maximum value of SAR (measured) = 0.171 W/kg

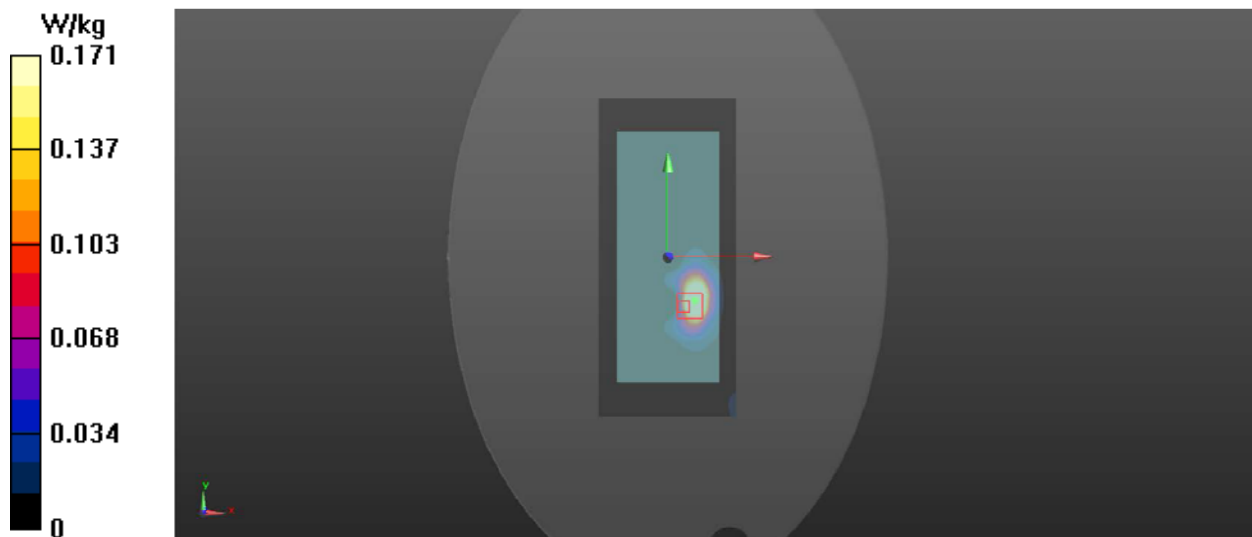

5.3G

DUT: M1

Communication System: 802.11a; Frequency: 5300 MHz; Duty Cycle: 1:1.2517

Medium: H5G Medium parameters used: $f = 5300$ MHz; $\sigma = 4.81$ S/m; $\epsilon_r = 36.791$; $\rho = 1000$ kg/m³

Ambient Temperature : 21.7 °C; Liquid Temperature : 21.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3970; ConvF(5.85, 5.85, 5.85); Calibrated: 2022/4/18;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1418; Calibrated: 2022/3/24
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1231
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

BACK/Area Scan (61x141x1): Interpolated grid: dx=2.000 mm, dy=2.000 mm

Maximum value of SAR (interpolated) = 0.658 W/kg


BACK/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.536 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 0.498 W/kg

SAR(1 g) = 0.152 W/kg; SAR(10 g) = 0.041 W/kg

Maximum value of SAR (measured) = 0.193 W/kg

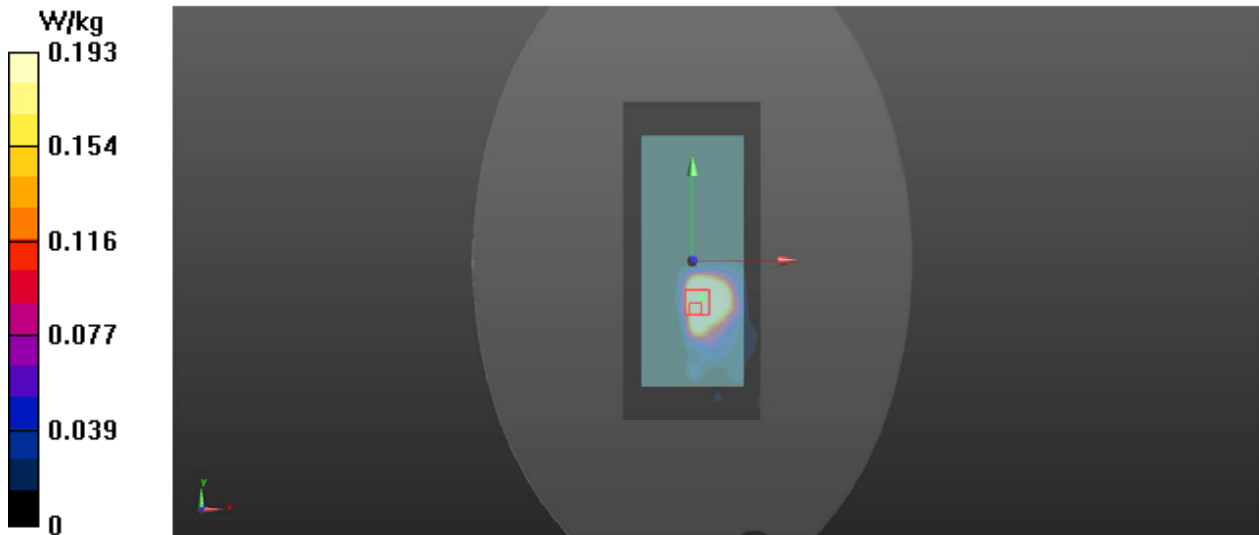

5.6G

DUT: M1

Communication System: 802.11a; Frequency: 5600 MHz; Duty Cycle: 1:1.2517

Medium: H5G Medium parameters used: $f = 5600$ MHz; $\sigma = 5.142$ S/m; $\epsilon_r = 35.67$; $\rho = 1000$ kg/m³

Ambient Temperature : 21.5 °C; Liquid Temperature : 21.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3970; ConvF(5.17, 5.17, 5.17); Calibrated: 2022/4/18;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1418; Calibrated: 2022/3/24
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1231
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

BACK/Area Scan (61x141x1): Interpolated grid: dx=2.000 mm, dy=2.000 mm

Maximum value of SAR (interpolated) = 0.225 W/kg


BACK/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.138 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.647 W/kg

SAR(1 g) = 0.192 W/kg; SAR(10 g) = 0.058 W/kg

Maximum value of SAR (measured) = 0.244 W/kg

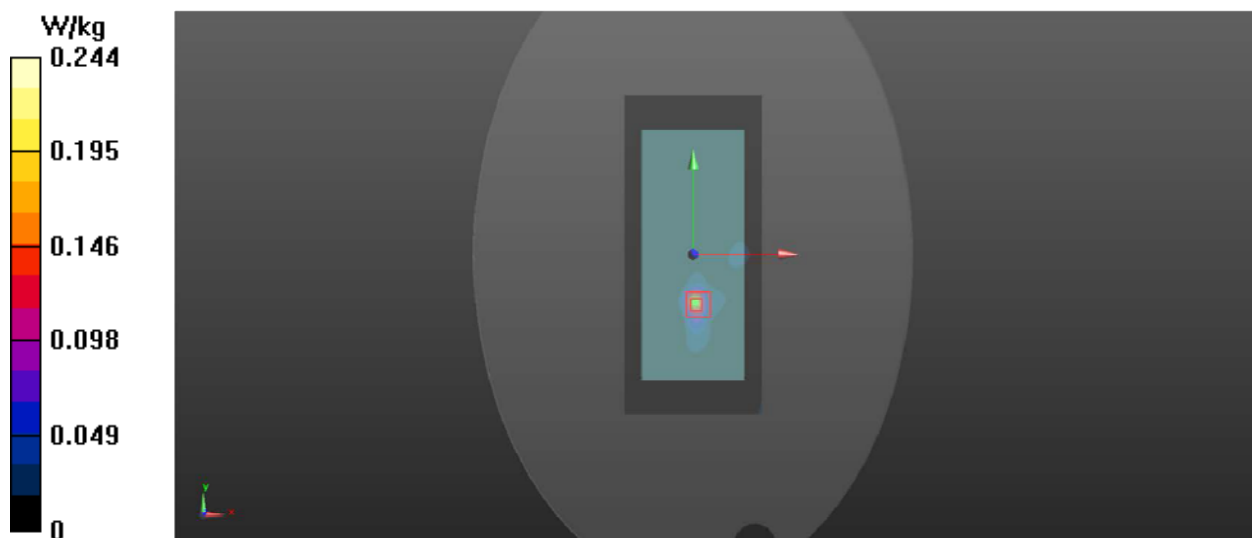

5.8G

DUT: M1

Communication System: 802.11a; Frequency: 5785 MHz; Duty Cycle: 1:1.2517

Medium: H5G Medium parameters used: $f = 5785 \text{ MHz}$; $\sigma = 5.396 \text{ S/m}$; $\epsilon_r = 35.742$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : $22.3 \text{ }^\circ\text{C}$; Liquid Temperature : $22.0 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN3970; ConvF(5.2, 5.2, 5.2); Calibrated: 2022/4/18;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1418; Calibrated: 2022/3/24
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1231
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

BACK/Area Scan (7x15x1): Measurement grid: $dx=20\text{mm}$, $dy=20\text{mm}$

Maximum value of SAR (measured) = 0.0742 W/kg


BACK/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 2.267 V/m ; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 0.613 W/kg

SAR(1 g) = 0.182 W/kg ; SAR(10 g) = 0.051 W/kg

Maximum value of SAR (measured) = 0.226 W/kg

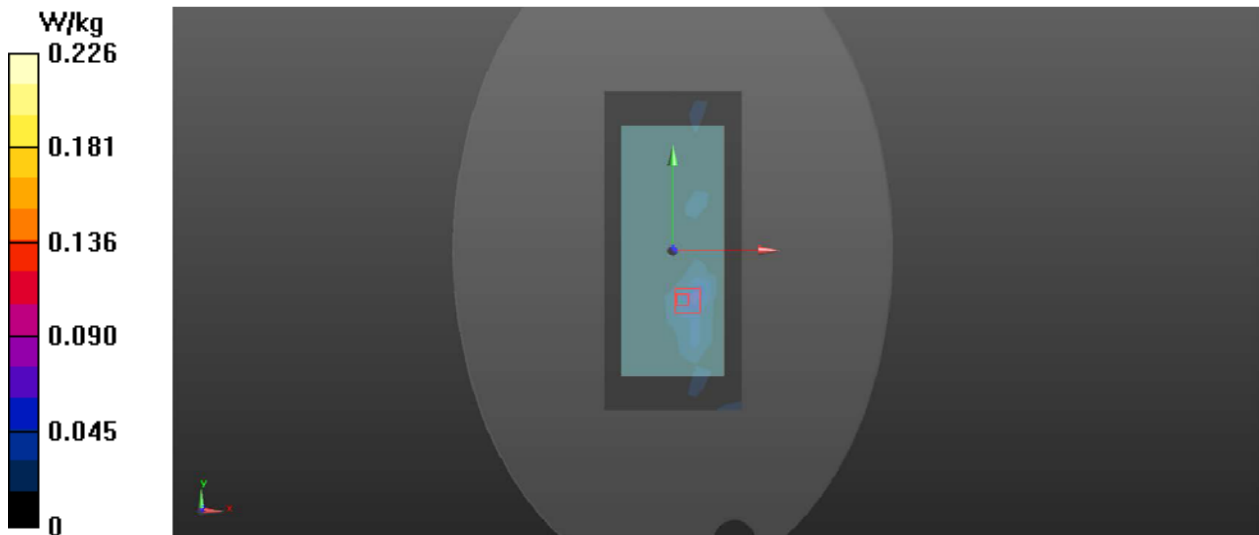

BT

DUT: M1

Communication System: BT; Frequency: 2441 MHz;Duty Cycle: 1:2.14042

Medium: H2450 Medium parameters used: $f = 2441$ MHz; $\sigma = 1.782$ S/m; $\epsilon_r = 40.41$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.2 °C; Liquid Temperature : 22.0 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3970; ConvF(8.06, 8.06, 8.06); Calibrated: 2022/4/18;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1418; Calibrated: 2022/3/24
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1231
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

BACK/Area Scan (61x141x1): Interpolated grid: dx=2.000 mm, dy=2.000 mm

Maximum value of SAR (interpolated) = 0.0111 W/kg

BACK/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.668 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.0290 W/kg

SAR(1 g) = 0.042 W/kg; SAR(10 g) = 0.0154 W/kg

Maximum value of SAR (measured) = 0.0132 W/kg

