



FCC REPORT

Report Reference No...... : **TRE1707006002** R/C.....: 40848

FCC ID..... : **2AJ2B-TPX820**

Applicant's name..... : **Telepower Communication Co., Ltd.**

Address..... : 5 Bld,Zone A,Hantian Technology Town, No.17 ShenHai RD, Nanhai District, Foshan,China

Manufacturer..... : Telepower Communication Co., Ltd.

Address..... : 5 Bld,Zone A,Hantian Technology Town, No.17 ShenHai RD, Nanhai District, Foshan,China

Test item description : **Wireless Router**

Trade Mark : Telpo

Model/Type reference..... : TPX820

Listed Model(s) : TPX820 (A)

Standard : **FCC Part 27: MISCELLANEOUS WIRELESS COMMUNICATIONS SERVICES**

Date of receipt of test sample..... : Jul.10, 2017

Date of testing..... : Jul.11, 2017- Aug.03, 2017

Date of issue..... : Aug.04, 2017

Result..... : **Pass**

Compiled by
(position+printedname+signature).... : File administrators Candy Liu

Supervised by
(position+printedname+signature)..... : Project Engineer Lion Cai

Approved by
(position+printedname+signature)..... : Manager Hans Hu

Testing Laboratory Name : **Shenzhen Huatongwei International Inspection Co., Ltd.**

Address..... : 1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road, Tianliao, Gongming, Shenzhen, China

Shenzhen Huatongwei International Inspection Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Huatongwei International Inspection Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen Huatongwei International Inspection Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Contents

1.	<u>TEST STANDARDS AND REPORT VERSION</u>	3
1.1.	Applicable Standards	3
1.2.	Report version	3
2.	<u>TEST DESCRIPTION</u>	4
3.	<u>SUMMARY</u>	5
3.1.	Client Information	5
3.2.	Product Description	5
3.3.	Operation state	6
3.4.	EUT operation mode	7
3.5.	EUT configuration	7
3.6.	Modifications	7
4.	<u>TEST ENVIRONMENT</u>	8
4.1.	Address of the test laboratory	8
4.2.	Test Facility	8
4.3.	Equipments Used during the Test	9
4.4.	Environmental conditions	10
4.5.	Statement of the measurement uncertainty	10
5.	<u>TEST CONDITIONS AND RESULTS</u>	11
5.1.	Conducted Output Power	11
5.2.	99% & -26 dB Occupied Bandwidth	17
5.3.	Conducted Spurious Emissions	30
5.4.	Band Edge	43
5.5.	ERP AND EIRP	68
5.6.	Radiated Spurious Emission	72
5.7.	Frequency stability V.S. Temperature measurement	77
5.8.	Frequency stability V.S. Voltage measurement	78
5.9.	Peak-Average Ratio	79
6.	<u>TEST SETUP PHOTOS OF THE EUT</u>	80
7.	<u>EXTERNAL AND INTERNAL PHOTOS OF THE EUT</u>	80

1. Test standards and Report version

1.1. Applicable Standards

The tests were performed according to following standards:

[FCC Part 27](#): MISCELLANEOUS WIRELESS COMMUNICATIONS SERVICES

[TIA/EIA 603 D June 2010](#): Land Mobile FM or PM Communications Equipment Measurement and Performance Standards.

[FCC Part 2](#): FREQUENCY ALLOCATIONS AND RADIO TREATY MATTERS; GENERAL RULES AND REGULATIONS

[971168 D01 Power Meas License Digital Systems v02r02](#): provides a methodology for fully characterizing the fundamental power of wideband (> 1 MHz) digitally modulated RF signals acceptable to the FCC for demonstrating compliance for licensed transmitters.

1.2. Report version

Version No.	Date of issue	Description
00	Aug.04, 2017	Original

2. Test Description

Test Item	Section in CFR 47	Result
RF Output Power	Part 2.1046 Part 27.50	Pass
99% & -26 dB Occupied Bandwidth	Part 2.1049 Part 27.53	Pass
Conducted Spurious Emissions	Part 2.1051 Part 27.53	Pass
Band Edge	Part 2.1051 Part 27.53	Pass
ERP	Part 27.50	Pass
Radiated Spurious Emissions	Part 2.1053 Part 27.53	Pass
Frequency stability vs. temperature	Part 2.1055(a)(1)(b) Part 27.54	Pass
Frequency stability vs. voltage	Part 2.1055(d)(1)(2) Part 27.54	Pass
Peak-Average Ratio	Part 27.50	Pass

Note: The measurement uncertainty is not included in the test result.

3. SUMMARY

3.1. Client Information

Applicant:	Telepower Communication Co., Ltd.
Address:	5 Bld,Zone A,Hantian Technology Town, No.17 ShenHai RD, Nanhai District, Foshan,China
Manufacturer:	Telepower Communication Co., Ltd.
Address:	5 Bld,Zone A,Hantian Technology Town, No.17 ShenHai RD, Nanhai District, Foshan,China

3.2. Product Description

Name of EUT:	Wireless Router
Trade Mark:	Telpo
Model No.:	TPX820
Listed Model(s):	TPX820 (A)
Power supply:	DC 12V From Adapter
Adapter information:	Input:100-240Va.c., 50-60Hz, 0.5A Output: 5.0Vd.c.,1A
Hardware version:	V1.1
Software version:	V50-62-T2-002-TPX-B10-D10
RF Technical Description	
<input checked="" type="checkbox"/> FDD Band 4	
Operation Frequency:	Uplink:1710.7 MHz – 1754.3 MHz Downlink: 2110.7 MHz – 2154.3 MHz
Channel bandwidth:	<input checked="" type="checkbox"/> 1.4MHz <input checked="" type="checkbox"/> 3MHz <input checked="" type="checkbox"/> 5MHz <input checked="" type="checkbox"/> 10MHz <input checked="" type="checkbox"/> 15MHz <input checked="" type="checkbox"/> 20MHz
Power Class:	<input type="checkbox"/> Class 1 <input type="checkbox"/> Class 2 <input checked="" type="checkbox"/> Class 3 <input type="checkbox"/> Class 4
Modulation type:	<input checked="" type="checkbox"/> QPSK <input checked="" type="checkbox"/> 16QAM <input type="checkbox"/> 64QAM
Antenna type:	Dedicated Antenna
Antenna gain:	Band 4: 2.0dBi,

3.3. Operation state

➤ Test frequency list

FDD Band 4					
Test Frequency ID	Bandwidth [MHz]	N _{UL}	Frequency of Uplink [MHz]	N _{DL}	Frequency of Downlink [MHz]
Low Range	1.4	19957	1710.7	1957	2110.7
	3	19965	1711.5	1965	2111.5
	5	19975	1712.5	1975	2112.5
	10	20000	1715	2000	2115
	15	20025	1717.5	2025	2117.5
20	20050	1720	2050	2120	
Mid Range	1.4/3/5/10/15/20	20175	1732.5	2175	2132.5
High Range	1.4	20393	1754.3	2393	2154.3
	3	20385	1753.5	2385	2153.5
	5	20375	1752.5	2375	2152.5
	10	20350	1750	2350	2150
	15	20325	1747.5	2325	2147.5
20	20300	1745	2300	2145	

3.4. EUT operation mode

For RF test items

The EUT has been tested under typical operating condition. The Applicant provides software to control the EUT for staying in continuous transmitting and receiving mode for testing.

Test Items	Band	Bandwidth (MHz)						Modulation		RB #			Test Channel		
		1.4	3	5	10	15	20	QPSK	16QAM	1	Half	Full	L	M	H
Max Output Power	4	v	v	v	v	v	v	v	v	v	v	v	v	v	v
26dB and 99% Bandwidth	4	v	v	v	v	v	v	v	v			v	v	v	v
Conducted Band Edge	4	v	v	v	v	v	v	v	v	v		v	v		v
Conducted Spurious Emission	4	v	v	v	v	v	v	v	v	v			v	v	v
E.R.P	4	v	v	v	v	v	v	v	v	v			v	v	v
Radiated Spurious Emission	4	v	v	v	v	v	v	v		v			v	v	v
Frequency Stability	4						v	v	v			v		v	
Peak-to-Average Ratio	4						v	v	v	v		v	v	v	v
Remark	1. The mark "v" means that this configuration is chosen for testing 2. The mark "-" means that this bandwidth is not supported. 3. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported.														

3.5. EUT configuration

The following peripheral devices and interface cables were connected during the measurement:

- - supplied by the manufacturer
- - supplied by the lab

	Length (m) :	/
	Shield :	/
	Detachable :	/
	Manufacturer :	/
	Model No. :	/

3.6. Modifications

No modifications were implemented to meet testing criteria.

4. TEST ENVIRONMENT

4.1. Address of the test laboratory

Laboratory: Shenzhen Huatongwei International Inspection Co., Ltd.

Address: 1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road, Tianliao, Gongming, Shenzhen, China

Phone: 86-755-26748019 Fax: 86-755-26748089

4.2. Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L1225

Shenzhen Huatongwei International Inspection Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2005 General Requirements) for the Competence of Testing and Calibration Laboratories.

A2LA-Lab Cert. No. 3902.01

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

FCC-Registration No.: 762235

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. Registration 762235

IC-Registration No.: 5377B

Two 3m Alternate Test Site of Shenzhen Huatongwei International Inspection Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements.

ACA

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory can also perform testing for the Australian C-Tick mark as a result of our A2LA accreditation.

4.3. Equipments Used during the Test

Output Power(Conducted) &Occupied Bandwidth&EmissionBandwidth&Band Edge Compliance&Conducted Spurious Emission					
No.	Equipment	Manufacturer	Model No.	SerialNo.	Last Cal.
1	UNIVERSAL RADIO COMMUNICATION	Rohde&Schwarz	CMU200	112012	2016/11/13
2	WIDEB.RADIO COMM.TESRER	Rohde&Schwarz	CMW500	1201.0002K50	2016/11/13
3	Spectrum Analyzer	Rohde&Schwarz	FSU26	201141	2016/11/13
4	Splitter	Mini-Circuit	ZAPD-4	400059	2016/11/13

Frequency Stability					
No.	Equipment	Manufacturer	Model No.	SerialNo.	Last Cal.
1	UNIVERSAL RADIO COMMUNICATION	Rohde&Schwarz	CMU200	112012	2016/11/13
2	WIDEB.RADIO COMM.TESRER	Rohde&Schwarz	CMW500	1201.0002K50	2016/11/13
3	Spectrum Analyzer	Rohde&Schwarz	FSU26	201141	2016/11/13
4	Climate Chamber	ESPEC	EL-10KA	05107008	2016/11/13
5	Splitter	Mini-Circuit	ZAPD-4	400059	2016/11/13

Output Power (Radiated) &Radiated Spurious Emission					
No.	Equipment	Manufacturer	Model No.	SerialNo.	Last Cal.
1	UNIVERSAL RADIO COMMUNICATION	Rohde&Schwarz	CMU200	112012	2016/11/13
2	Spectrum Analyzer	Rohde&Schwarz	FSU26	201141	2016/11/13
3	HORNANTENNA	ShwarzBeck	9120D	1012	2016/11/13
4	HORNANTENNA	ShwarzBeck	9120D	1011	2016/11/13
5	Ultra-Broadband Antenna	ShwarzBeck	VULB9163	538	2016/11/13
6	Ultra-Broadband Antenna	ShwarzBeck	VULB9163	539	2016/11/13
7	TURNTABLE	MATURO	TT2.0	----	2016/11/13
8	ANTENNA MAST	MATURO	TAM-4.0-P	----	N/A
9	EMI Test Software	Audix	E3	N/A	N/A
10	EMI Test Receiver	Rohde&Schwarz	ESIB 26	100009	2016/11/13
11	RF Test Panel	Rohde&Schwarz	TS / RSP	335015/ 0017	2016/11/13
12	High pass filter	Compliance Direction systems	BSU-6	34202	2016/11/13
13	Splitter	Mini-Circuit	ZAPD-4	400059	2016/11/13
14	Horn Antenna	SCHWARZBECK	BBHA9170	25841	2016/11/13
15	Horn Antenna	SCHWARZBECK	BBHA9170	25842	2016/11/13
16	Preamplifier	ShwarzBeck	BBV 9718	BBV 9718	2016/11/13
17	Broadband Preamplifier	ShwarzBeck	BBV743	9743-0079	2016/11/13
18	Signal Generator	Rohde&Schwarz	SMF100A	101932	2016/11/13
19	Amplifier	Compliance Direction systems	PAP1-4060	120	2016/11/13
20	TURNTABLE	ETS	2088	2149	2016/11/13
21	ANTENNA MAST	ETS	2075	2346	2016/11/13
22	HORNANTENNA	Rohde&Schwarz	HF906	100068	2016/11/13
23	HORNANTENNA	Rohde&Schwarz	HF906	100039	2016/11/13
24	WIDEB.RADIO COMM.TESRER	R&S	CMW500	1201.0002K50	2016/11/13

The calibration interval was one year.

4.4. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Normal Temperature/Tnor:	15~35°C
Relative Humidity	30~60 %
Air Pressure	950-1050 hPa

4.5. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to TR-100028-01 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 1" and TR-100028-02 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 2" and is documented in the Shenzhen Huatongwei International Inspection Co., Ltd quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Shenzhen Huatongwei laboratory is reported:

Test Items	Measurement Uncertainty	Notes
Frequency stability	25 Hz	(1)
Transmitter power conducted	0.57 dB	(1)
Transmitter power Radiated	2.20 dB	(1)
Conducted spurious emission 9KHz-12.75 GHz	1.60 dB	(1)
Conducted Emission 9KHz-30MHz	3.39 dB	(1)
Radiated Emission 30~1000MHz	4.24 dB	(1)
Radiated Emission 1~18GHz	5.16 dB	(1)
Radiated Emission 18-40GHz	5.54 dB	(1)
Occupied Bandwidth	-----	(1)
Emission Mask	-----	(1)
Modulation Characteristic	-----	(1)
Transmitter Frequency Behavior	-----	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=1.96$.


5. TEST CONDITIONS AND RESULTS

5.1. Conducted Output Power

LIMIT

N/A

TEST CONFIGURATION

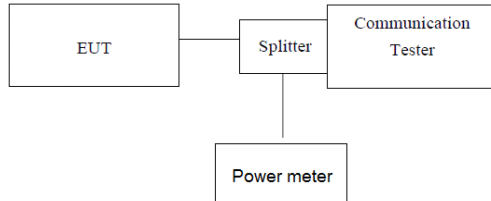

Note: Measurement setup for testing on Antenna connector

TEST PROCEDURE

1. The transmitter output port was connected to base station.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator, the path loss was compensated to the results for each measurement.
3. Set EUT at maximum power through base station.
4. Select lowest, middle, and highest channels for each band and different modulation.
5. Measure the maximum burst average power.

TEST MODE:

Please refer to the clause 3.3

TEST RESULTS

Passed **Not Applicable**

UL Channel	Bandwidth (MHz)	UL Modulation	UL RB Number	UL RB Position	Measured (dBm)	Verdict
Low	1.4	QPSK	1	LOW	24.19	Pass
		QPSK	1	MID	24.05	Pass
		QPSK	1	HIGH	24.12	Pass
		QPSK	3	LOW	24.17	Pass
		QPSK	3	MID	24.07	Pass
		QPSK	3	HIGH	24.07	Pass
		QPSK	6	LOW	23.28	Pass
		16QAM	1	LOW	22.99	Pass
		16QAM	1	MID	22.91	Pass
		16QAM	1	HIGH	23.01	Pass
		16QAM	3	LOW	23.15	Pass
		16QAM	3	MID	23.08	Pass
		16QAM	3	HIGH	23.15	Pass
16QAM		6	LOW	22.33	Pass	
Mid		QPSK	1	LOW	23.86	Pass
		QPSK	1	MID	23.77	Pass
		QPSK	1	HIGH	23.71	Pass
		QPSK	3	LOW	23.79	Pass
		QPSK	3	MID	23.78	Pass
		QPSK	3	HIGH	23.72	Pass
		QPSK	6	LOW	22.89	Pass
		16QAM	1	LOW	22.69	Pass
		16QAM	1	MID	22.65	Pass
		16QAM	1	HIGH	22.57	Pass
		16QAM	3	LOW	22.83	Pass
		16QAM	3	MID	22.75	Pass
		16QAM	3	HIGH	22.77	Pass
High		16QAM	6	LOW	21.90	Pass
		QPSK	1	LOW	23.80	Pass
		QPSK	1	MID	23.87	Pass
	QPSK	1	HIGH	23.85	Pass	
	QPSK	3	LOW	23.82	Pass	
	QPSK	3	MID	23.78	Pass	
	QPSK	3	HIGH	23.82	Pass	
	QPSK	6	LOW	22.87	Pass	
	16QAM	1	LOW	22.67	Pass	
	16QAM	1	MID	22.68	Pass	
	16QAM	1	HIGH	22.67	Pass	
	16QAM	3	LOW	22.8	Pass	
	16QAM	3	MID	22.78	Pass	
16QAM	3	HIGH	22.81	Pass		
Low	16QAM	6	LOW	21.89	Pass	
	QPSK	1	LOW	24.12	Pass	
	QPSK	1	MID	24.12	Pass	
	QPSK	1	HIGH	24.04	Pass	
	QPSK	8	LOW	23.18	Pass	
	QPSK	8	MID	23.19	Pass	
	QPSK	8	HIGH	23.24	Pass	
	QPSK	15	LOW	23.15	Pass	
	16QAM	1	LOW	22.76	Pass	
	16QAM	1	MID	22.72	Pass	
	16QAM	1	HIGH	22.75	Pass	
	16QAM	8	LOW	22.20	Pass	
	16QAM	8	MID	22.30	Pass	
16QAM	8	HIGH	22.26	Pass		
Mid	16QAM	15	LOW	22.20	Pass	
	QPSK	1	LOW	23.70	Pass	
	QPSK	1	MID	23.72	Pass	
		QPSK	1	HIGH	23.78	Pass

UL Channel	Bandwidth (MHz)	UL Modulation	UL RB Number	UL RB Position	Measured (dBm)	Verdict
		QPSK	8	LOW	22.78	Pass
		QPSK	8	MID	22.74	Pass
		QPSK	8	HIGH	22.67	Pass
		QPSK	15	LOW	22.74	Pass
		16QAM	1	LOW	22.86	Pass
		16QAM	1	MID	22.85	Pass
		16QAM	1	HIGH	22.92	Pass
		16QAM	8	LOW	21.70	Pass
		16QAM	8	MID	21.66	Pass
		16QAM	8	HIGH	21.58	Pass
High		16QAM	15	LOW	21.69	Pass
		QPSK	1	LOW	23.67	Pass
		QPSK	1	MID	23.74	Pass
		QPSK	1	HIGH	23.67	Pass
		QPSK	8	LOW	22.84	Pass
		QPSK	8	MID	22.77	Pass
		QPSK	8	HIGH	22.75	Pass
		QPSK	15	LOW	22.78	Pass
		16QAM	1	LOW	22.34	Pass
		16QAM	1	MID	22.27	Pass
Low		16QAM	1	HIGH	22.21	Pass
		16QAM	8	LOW	21.81	Pass
		16QAM	8	MID	21.73	Pass
		16QAM	8	HIGH	21.73	Pass
		16QAM	15	LOW	21.63	Pass
		QPSK	1	LOW	24.27	Pass
		QPSK	1	MID	24.22	Pass
		QPSK	1	HIGH	24.14	Pass
		QPSK	12	LOW	23.17	Pass
		QPSK	12	MID	23.10	Pass
Mid	5	QPSK	12	HIGH	23.12	Pass
		QPSK	25	LOW	23.02	Pass
		16QAM	1	LOW	23.04	Pass
		16QAM	1	MID	22.95	Pass
		16QAM	1	HIGH	22.91	Pass
		16QAM	12	LOW	22.11	Pass
		16QAM	12	MID	22.11	Pass
		16QAM	12	HIGH	22.16	Pass
		16QAM	25	LOW	22.00	Pass
		QPSK	1	LOW	23.77	Pass
High		QPSK	1	MID	23.70	Pass
		QPSK	1	HIGH	23.71	Pass
		QPSK	12	LOW	22.66	Pass
		QPSK	12	MID	22.71	Pass
		QPSK	12	HIGH	22.69	Pass
		QPSK	25	LOW	22.56	Pass
		16QAM	1	LOW	22.86	Pass
		16QAM	1	MID	22.77	Pass
		16QAM	1	HIGH	22.76	Pass
		16QAM	12	LOW	21.75	Pass
		16QAM	12	MID	21.77	Pass
		16QAM	12	HIGH	21.79	Pass
		16QAM	25	LOW	21.63	Pass
		QPSK	1	LOW	23.96	Pass
		QPSK	1	MID	23.96	Pass
		QPSK	1	HIGH	23.86	Pass
		QPSK	12	LOW	22.82	Pass
		QPSK	12	MID	22.86	Pass
		QPSK	12	HIGH	22.88	Pass

UL Channel	Bandwidth (MHz)	UL Modulation	UL RB Number	UL RB Position	Measured (dBm)	Verdict
		QPSK	25	LOW	22.72	Pass
		16QAM	1	LOW	22.80	Pass
		16QAM	1	MID	22.81	Pass
		16QAM	1	HIGH	22.69	Pass
		16QAM	12	LOW	21.84	Pass
		16QAM	12	MID	21.87	Pass
		16QAM	12	HIGH	21.78	Pass
Low	10	16QAM	25	LOW	21.76	Pass
		QPSK	1	LOW	24.12	Pass
		QPSK	1	MID	24.03	Pass
		QPSK	1	HIGH	24.00	Pass
		QPSK	25	LOW	23.07	Pass
		QPSK	25	MID	22.98	Pass
		QPSK	25	HIGH	22.99	Pass
		QPSK	50	LOW	22.88	Pass
		16QAM	1	LOW	22.75	Pass
		16QAM	1	MID	22.65	Pass
		16QAM	1	HIGH	22.60	Pass
		16QAM	25	LOW	22.04	Pass
		16QAM	25	MID	21.96	Pass
		16QAM	25	HIGH	22.00	Pass
Mid	10	16QAM	50	LOW	21.85	Pass
		QPSK	1	LOW	23.81	Pass
		QPSK	1	MID	23.66	Pass
		QPSK	1	HIGH	23.64	Pass
		QPSK	25	LOW	22.67	Pass
		QPSK	25	MID	22.58	Pass
		QPSK	25	HIGH	22.66	Pass
		QPSK	50	LOW	22.47	Pass
		16QAM	1	LOW	22.43	Pass
		16QAM	1	MID	22.28	Pass
		16QAM	1	HIGH	22.20	Pass
		16QAM	25	LOW	21.78	Pass
		16QAM	25	MID	21.60	Pass
		16QAM	25	HIGH	21.79	Pass
High	10	16QAM	50	LOW	21.59	Pass
		QPSK	1	LOW	23.77	Pass
		QPSK	1	MID	23.85	Pass
		QPSK	1	HIGH	23.80	Pass
		QPSK	25	LOW	22.79	Pass
		QPSK	25	MID	22.67	Pass
		QPSK	25	HIGH	22.72	Pass
		QPSK	50	LOW	22.61	Pass
		16QAM	1	LOW	22.91	Pass
		16QAM	1	MID	23.00	Pass
		16QAM	1	HIGH	22.96	Pass
		16QAM	25	LOW	21.76	Pass
		16QAM	25	MID	21.77	Pass
		16QAM	25	HIGH	21.81	Pass
Low	15	16QAM	50	LOW	21.58	Pass
		QPSK	1	LOW	24.14	Pass
		QPSK	1	MID	24.10	Pass
		QPSK	1	HIGH	23.76	Pass
		QPSK	36	LOW	22.92	Pass
		QPSK	36	MID	22.91	Pass
		QPSK	36	HIGH	22.88	Pass
		QPSK	75	LOW	22.87	Pass
		Q16	1	LOW	22.73	Pass
		Q16	1	MID	22.71	Pass

UL Channel	Bandwidth (MHz)	UL Modulation	UL RB Number	UL RB Position	Measured (dBm)	Verdict
		16QAM	1	HIGH	22.42	Pass
		16QAM	36	LOW	21.92	Pass
		16QAM	36	MID	21.95	Pass
		16QAM	36	HIGH	21.83	Pass
		16QAM	75	LOW	21.80	Pass
Mid		QPSK	1	LOW	23.89	Pass
		QPSK	1	MID	23.67	Pass
		QPSK	1	HIGH	23.64	Pass
		QPSK	36	LOW	22.70	Pass
		QPSK	36	MID	22.57	Pass
		QPSK	36	HIGH	22.54	Pass
		QPSK	75	LOW	22.47	Pass
		16QAM	1	LOW	23.09	Pass
		16QAM	1	MID	22.86	Pass
		16QAM	1	HIGH	22.78	Pass
		16QAM	36	LOW	21.71	Pass
		16QAM	36	MID	21.57	Pass
		16QAM	36	HIGH	21.53	Pass
		16QAM	75	LOW	21.46	Pass
		High		QPSK	1	LOW
QPSK	1			MID	23.71	Pass
QPSK	1			HIGH	23.67	Pass
QPSK	36			LOW	22.46	Pass
QPSK	36			MID	22.63	Pass
QPSK	36			HIGH	22.53	Pass
QPSK	75			LOW	22.52	Pass
16QAM	1			LOW	22.68	Pass
16QAM	1			MID	22.77	Pass
16QAM	1			HIGH	22.82	Pass
16QAM	36			LOW	21.41	Pass
16QAM	36			MID	21.57	Pass
16QAM	36			HIGH	21.48	Pass
16QAM	75			LOW	21.49	Pass
Low	20			QPSK	1	LOW
		QPSK	1	MID	24.11	Pass
		QPSK	1	HIGH	23.85	Pass
		QPSK	50	LOW	22.9	Pass
		QPSK	50	MID	22.79	Pass
		QPSK	50	HIGH	22.77	Pass
		QPSK	100	LOW	22.88	Pass
		16QAM	1	LOW	23.29	Pass
		16QAM	1	MID	23.15	Pass
		16QAM	1	HIGH	22.94	Pass
		16QAM	50	LOW	21.95	Pass
		16QAM	50	MID	21.85	Pass
		16QAM	50	HIGH	21.76	Pass
		16QAM	100	LOW	21.86	Pass
		Mid		QPSK	1	LOW
QPSK	1			MID	23.68	Pass
QPSK	1			HIGH	23.69	Pass
QPSK	50			LOW	22.60	Pass
QPSK	50			MID	22.57	Pass
QPSK	50			HIGH	22.48	Pass
QPSK	100			LOW	22.56	Pass
16QAM	1			LOW	23.14	Pass
16QAM	1			MID	22.90	Pass
16QAM	1			HIGH	22.80	Pass
16QAM	50			LOW	21.64	Pass
16QAM	50			MID	21.47	Pass


UL Channel	Bandwidth (MHz)	UL Modulation	UL RB Number	UL RB Position	Measured (dBm)	Verdict
		16QAM	50	HIGH	21.49	Pass
		16QAM	100	LOW	21.51	Pass
High		QPSK	1	LOW	23.63	Pass
		QPSK	1	MID	23.71	Pass
		QPSK	1	HIGH	23.77	Pass
		QPSK	50	LOW	22.45	Pass
		QPSK	50	MID	22.45	Pass
		QPSK	50	HIGH	22.48	Pass
		QPSK	100	LOW	22.52	Pass
		16QAM	1	LOW	22.79	Pass
		16QAM	1	MID	22.84	Pass
		16QAM	1	HIGH	22.47	Pass
		16QAM	50	LOW	21.39	Pass
		16QAM	50	MID	21.50	Pass
		16QAM	50	HIGH	21.50	Pass
		16QAM	100	LOW	21.50	Pass

5.2. 99% & -26 dB Occupied Bandwidth

LIMIT

N/A

TEST CONFIGURATION

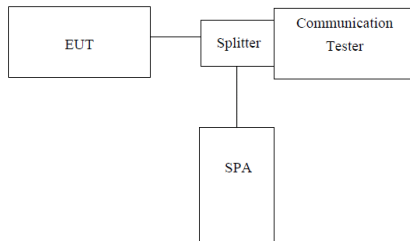

Note: Measurement setup for testing on Antenna connector

TEST PROCEDURE

1. The EUT’s output RF connector was connected with a short cable to the spectrum analyzer
2. RBW was set to about 1% of emission BW, VBW= 3 times RBW.
3. -26dBc display line was placed on the screen (or 99% bandwidth), the occupied bandwidth is the delta frequency between the two points where the display line intersects the signal trace.

TEST MODE:

Please refer to the clause 3.3


TEST RESULTS

Passed **Not Applicable**


LTE Band 4					
Bandwidth	Channel	99% Occupy bandwidth (MHz)		-26dB bandwidth (MHz)	
		QPSK	16QAM	QPSK	16QAM
1.4MHz	Low	1.077	1.076	1.221	1.244
	Mid	1.077	1.075	1.248	1.235
	High	1.079	1.076	1.246	1.272
3MHz	Low	2.678	2.676	2.918	2.890
	Mid	2.678	2.681	2.905	2.911
	High	2.682	2.677	2.920	2.937
5MHz	Low	4.464	4.462	4.781	4.767
	Mid	4.459	4.464	4.769	4.757
	High	4.457	4.463	4.770	4.806
10MHz	Low	8.922	8.914	9.348	9.364
	Mid	8.910	8.915	9.316	9.304
	High	8.923	8.922	9.317	9.346
15MHz	Low	13.371	13.372	13.960	13.910
	Mid	13.372	13.362	13.920	13.940
	High	13.367	13.370	13.970	13.930
20MHz	Low	17.841	17.839	18.550	18.560
	Mid	17.811	17.814	18.540	18.530
	High	17.819	17.822	18.540	18.540

LTE Band 4-1.4MHz


QPSK

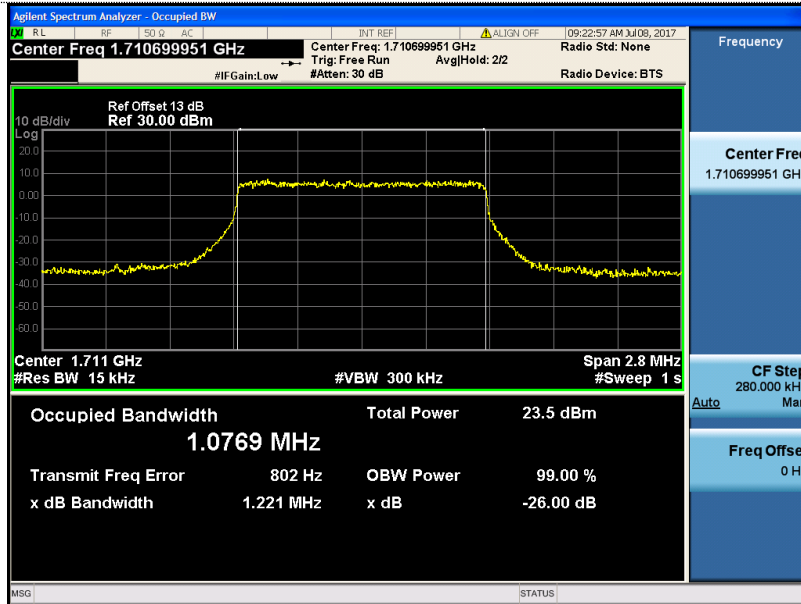

Channel Low

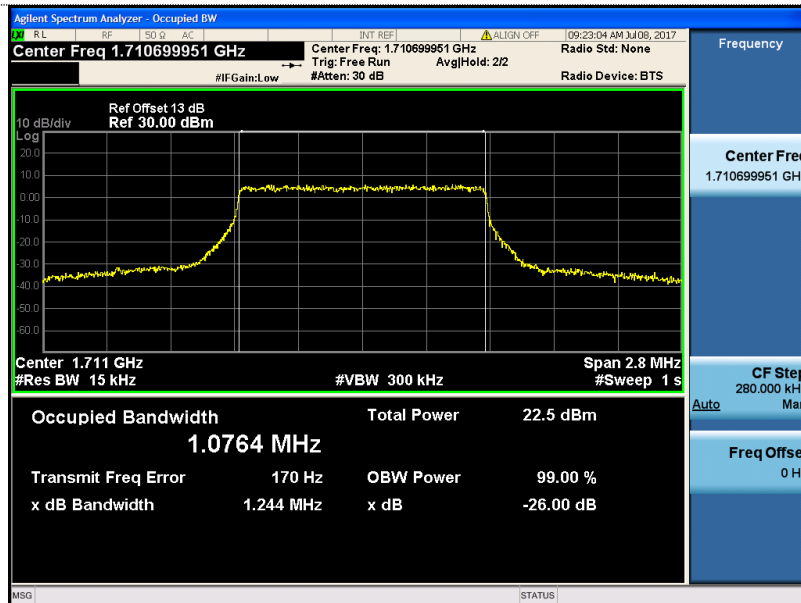


Channel Mid

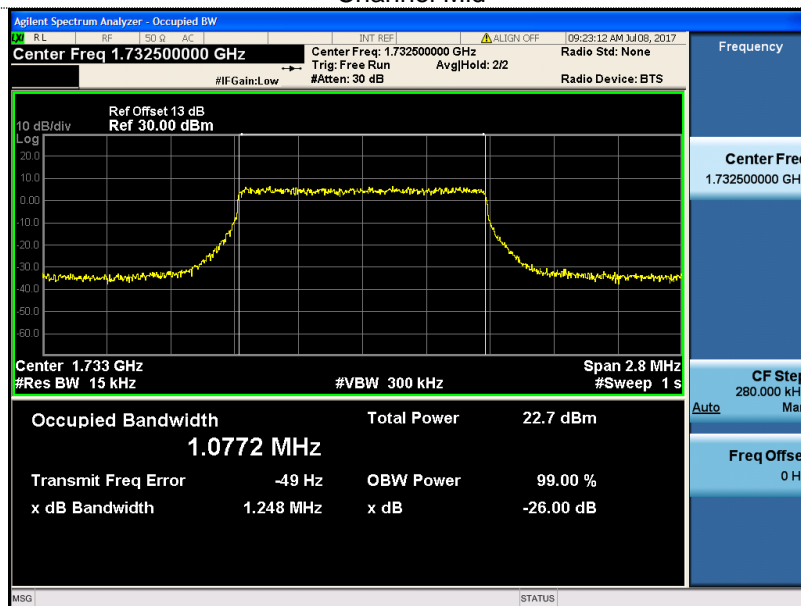

Channel High

LTE Band 4-1.4MHz


16QAM

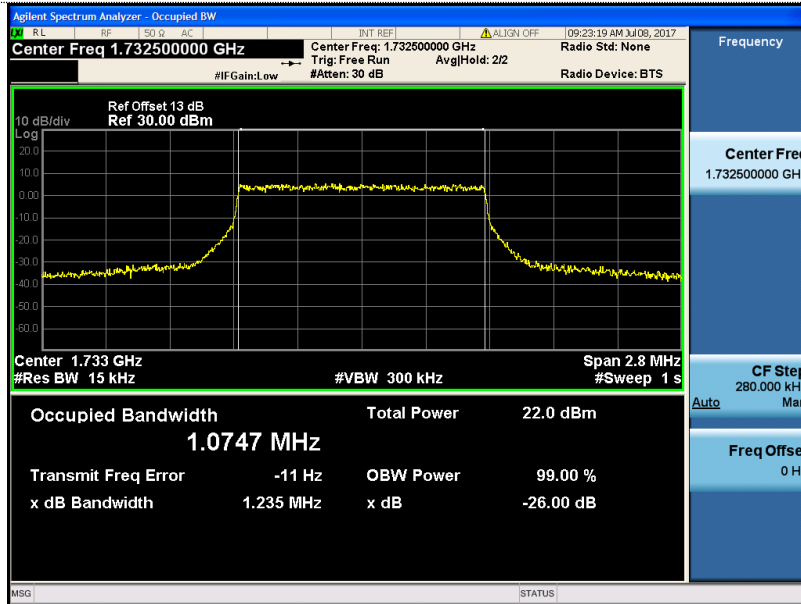

Channel Low




Channel Mid

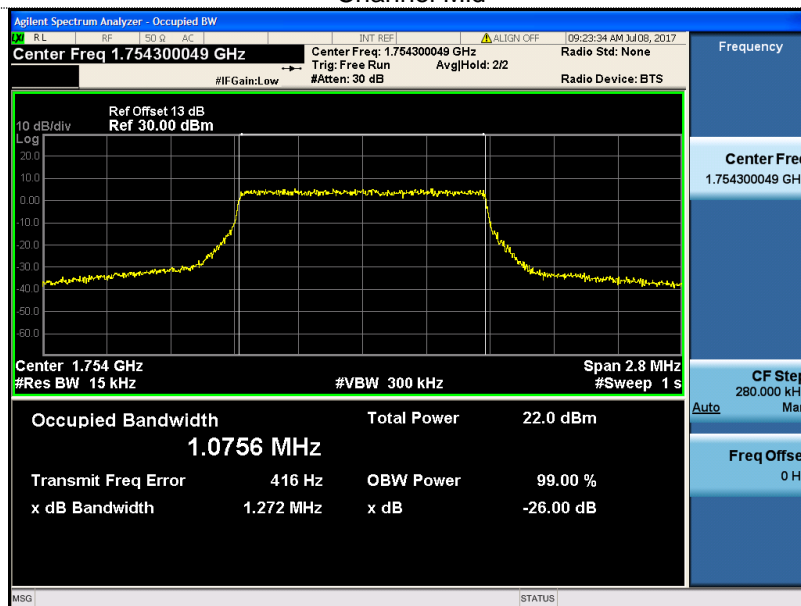


Channel High

LTE Band 4-3MHz


QPSK

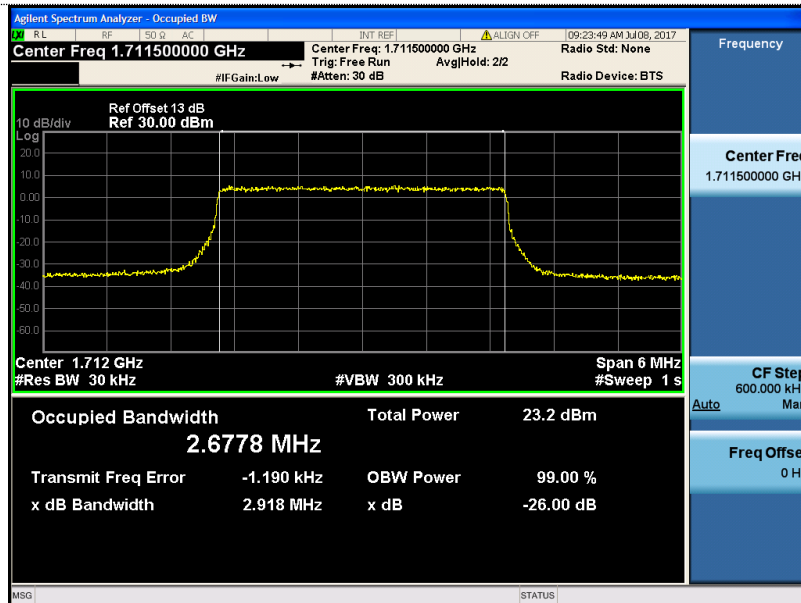

Channel Low

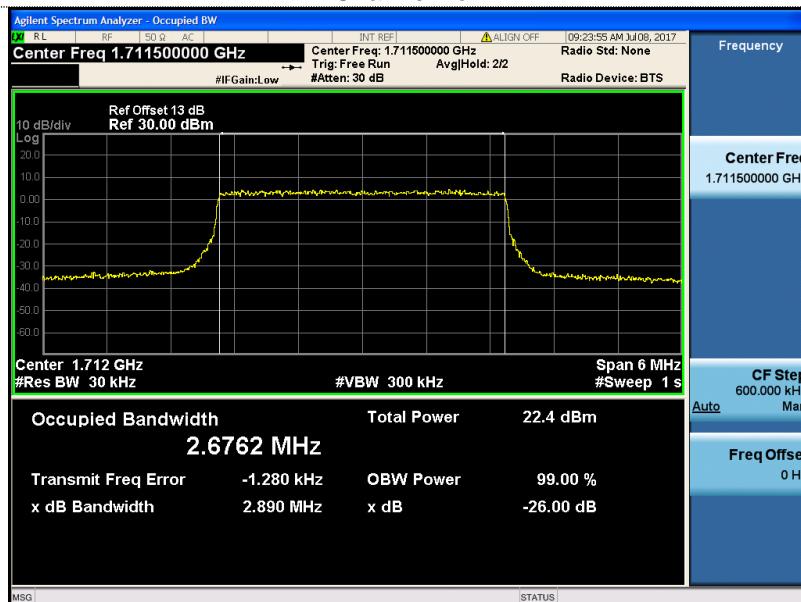


Channel Mid

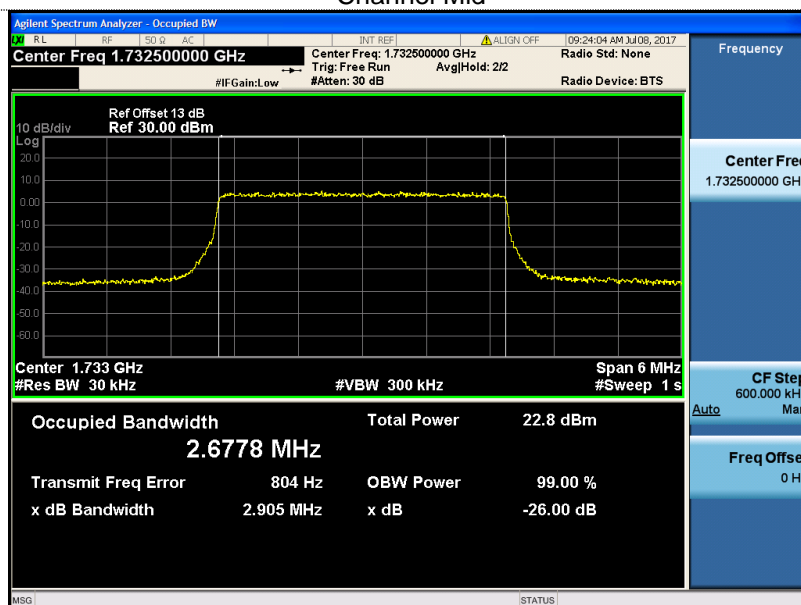


Channel High


LTE Band 4-3MHz
16QAM

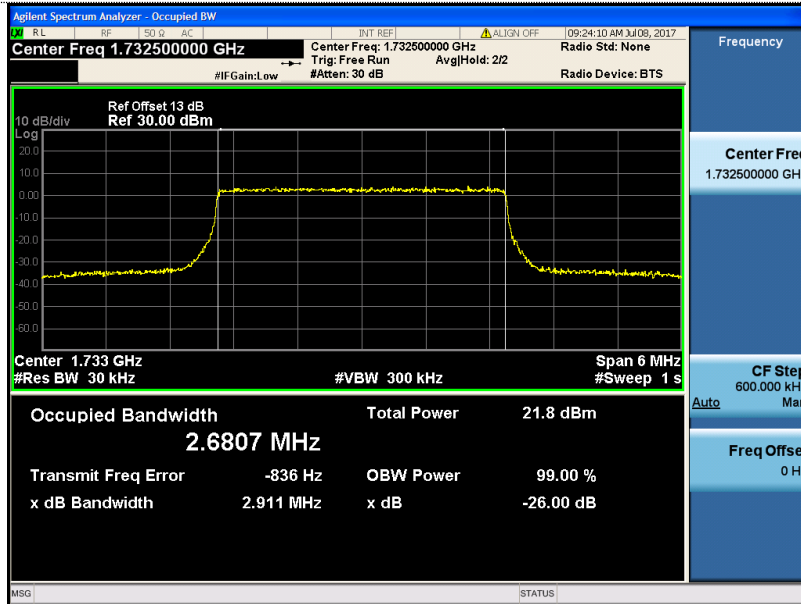

Channel Low

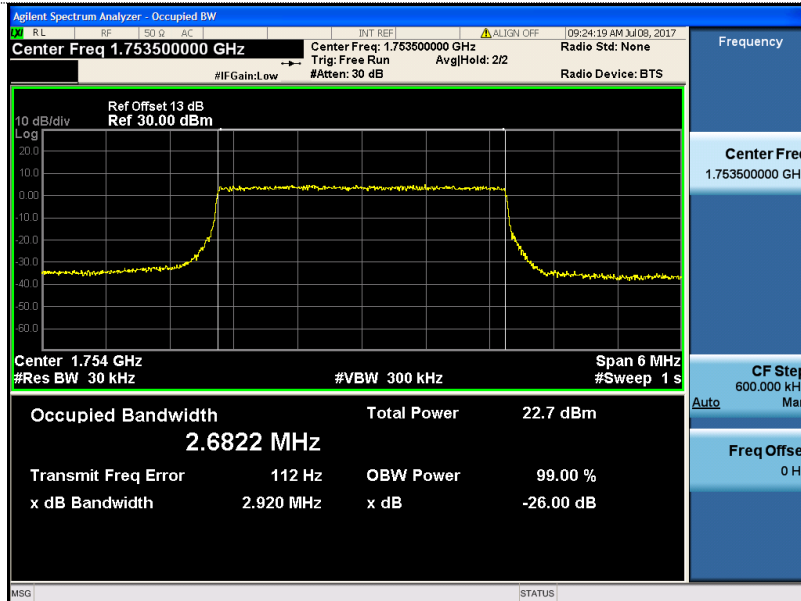


Channel Mid

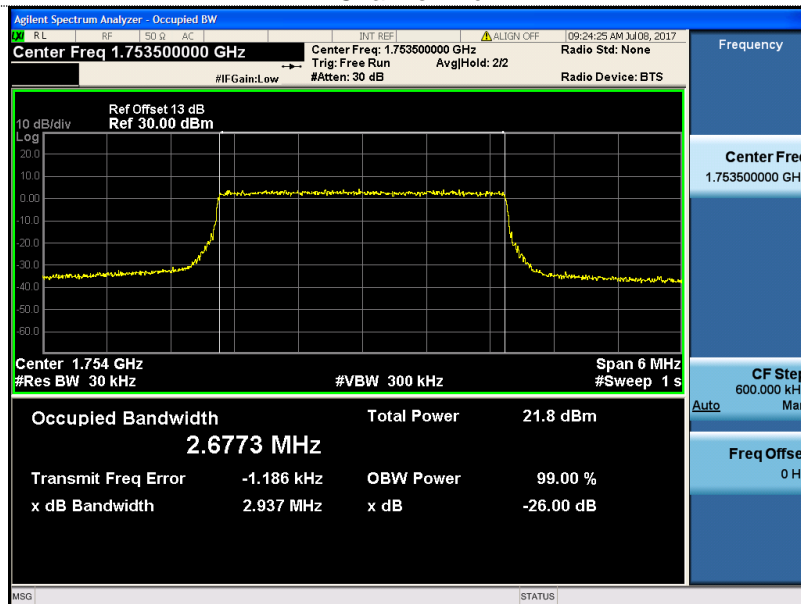


Channel High

LTE Band 4-5MHz


QPSK

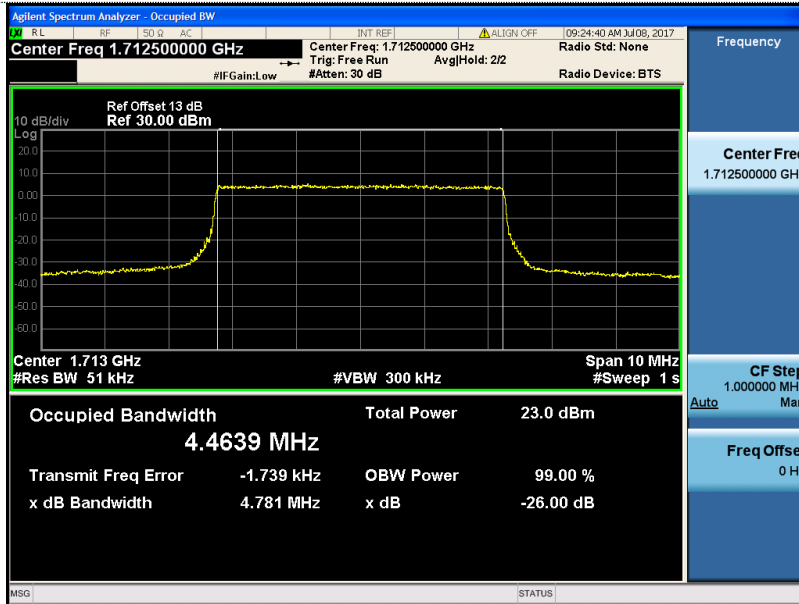

Channel Low

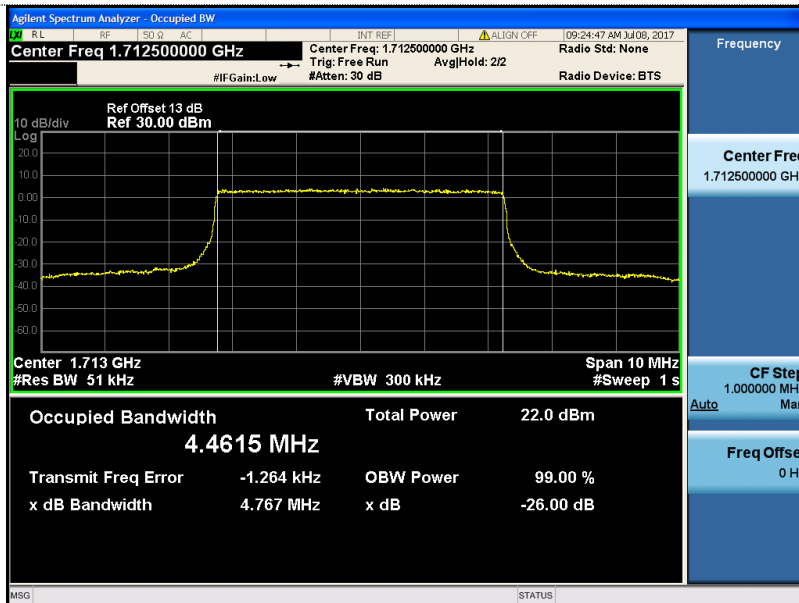

Channel Mid

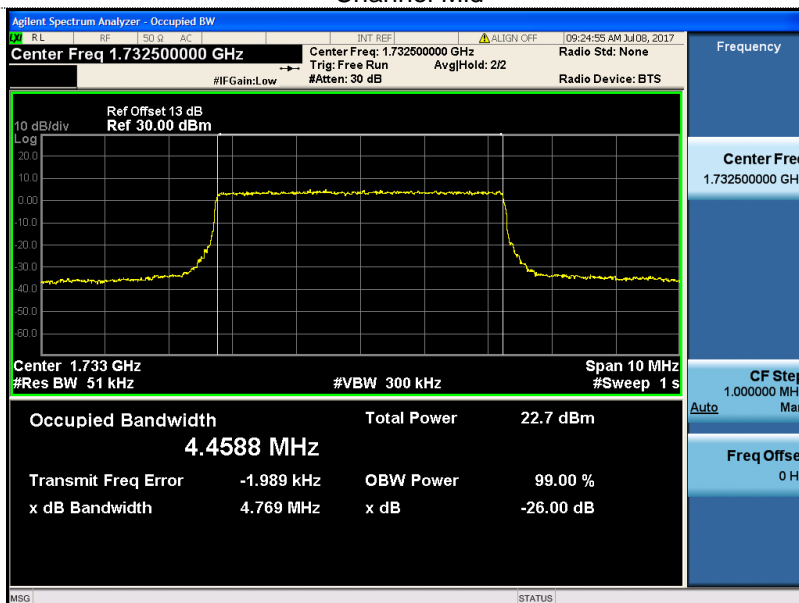


Channel High


LTE Band 4-5MHz
16QAM



Channel Low

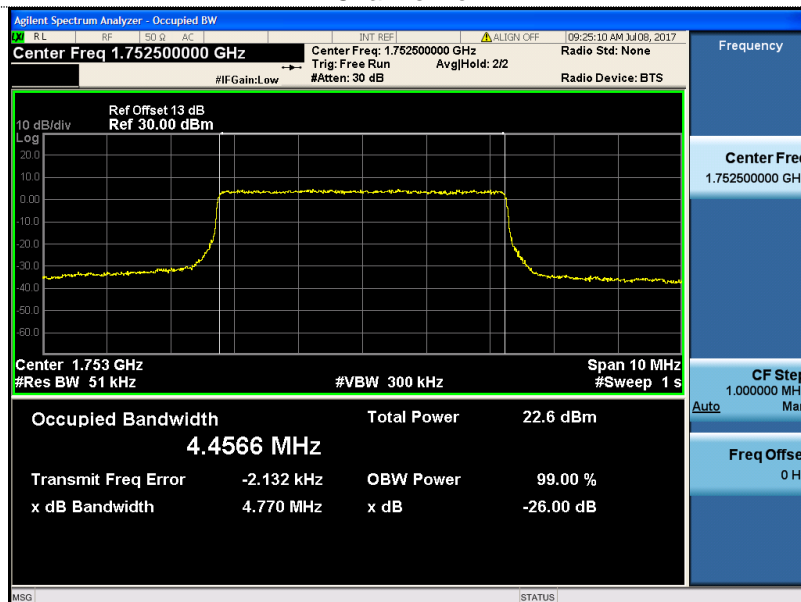


Channel Mid

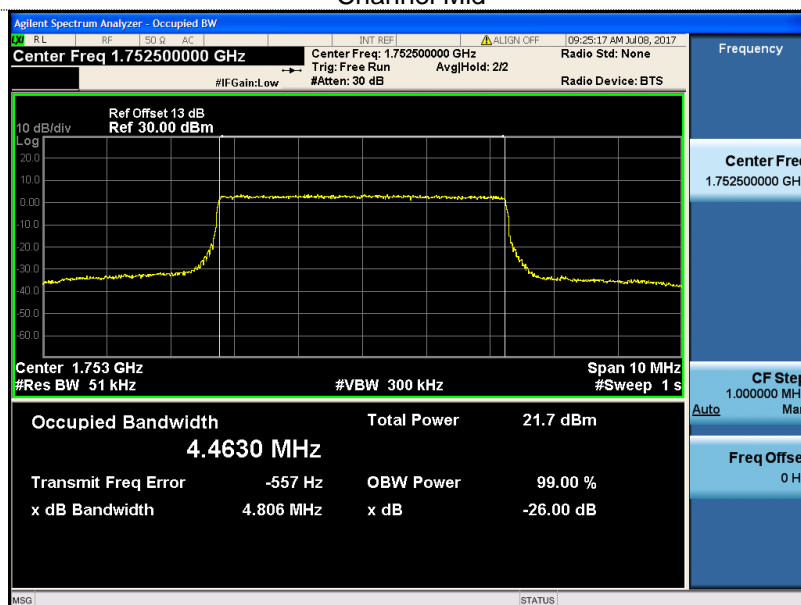


Channel High

LTE Band 4-10MHz


QPSK

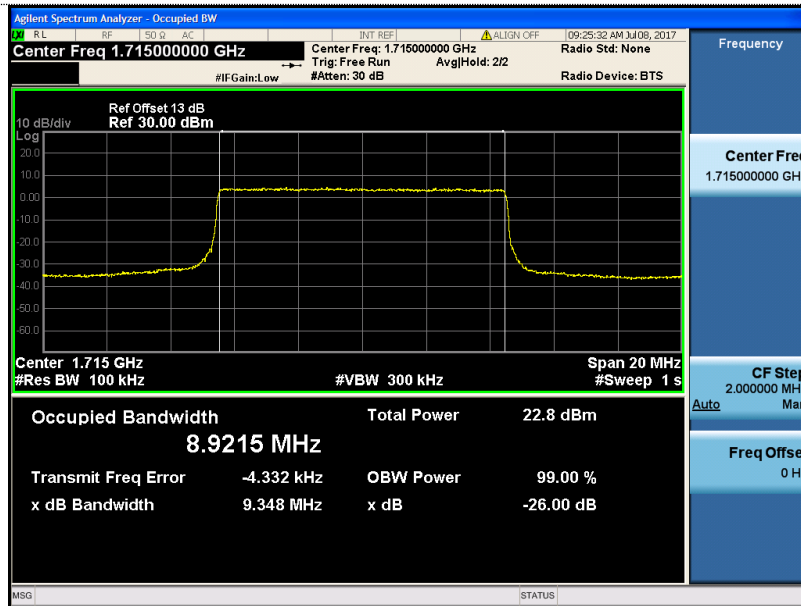

Channel Low

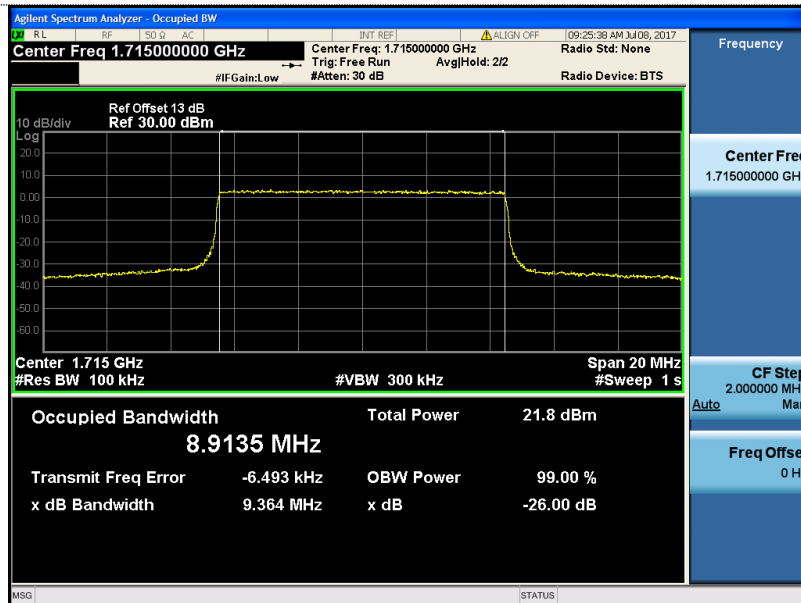


Channel Mid

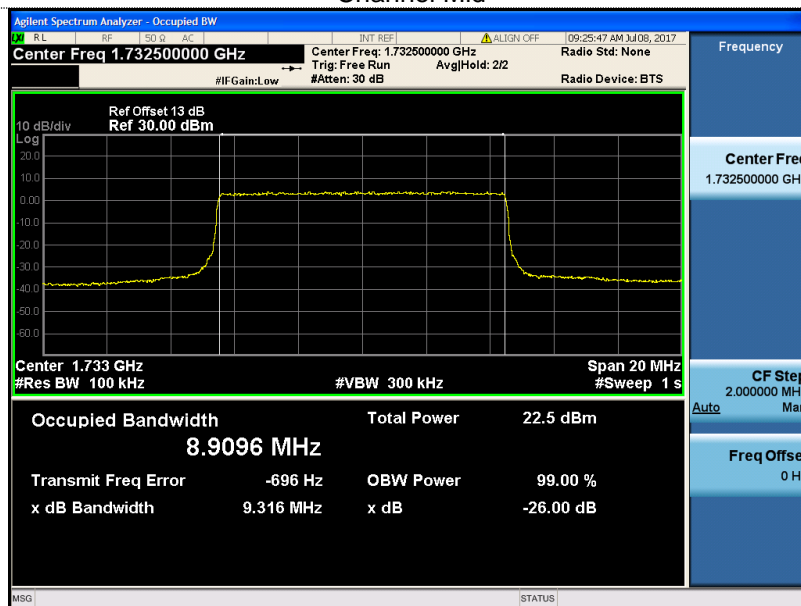


Channel High

LTE Band 4-10MHz


16QAM

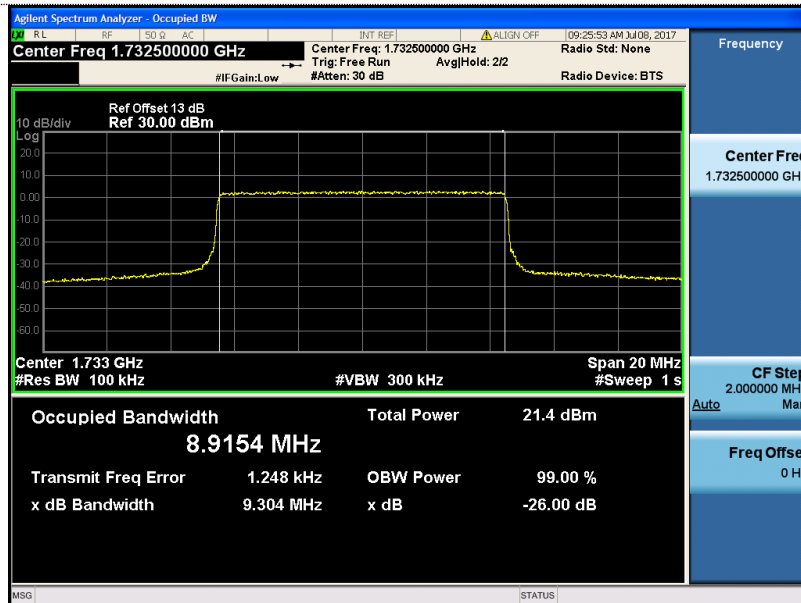

Channel Low

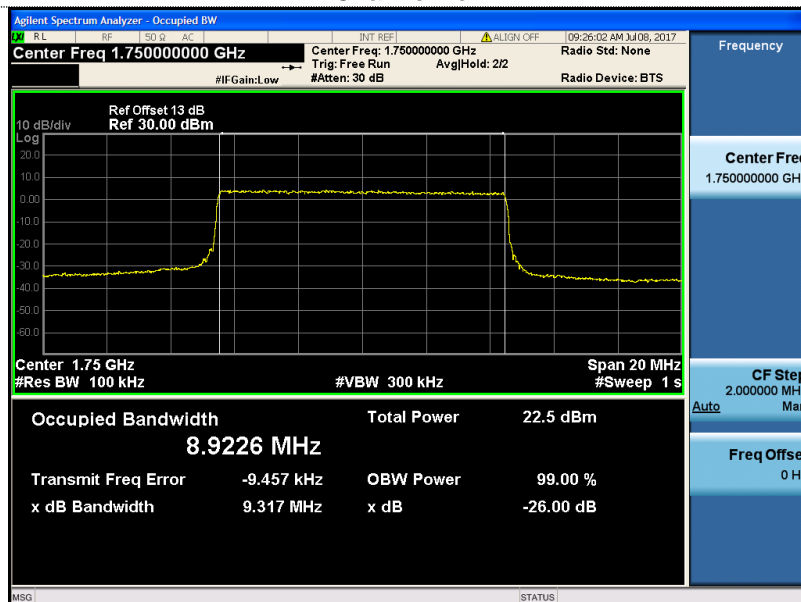


Channel Mid

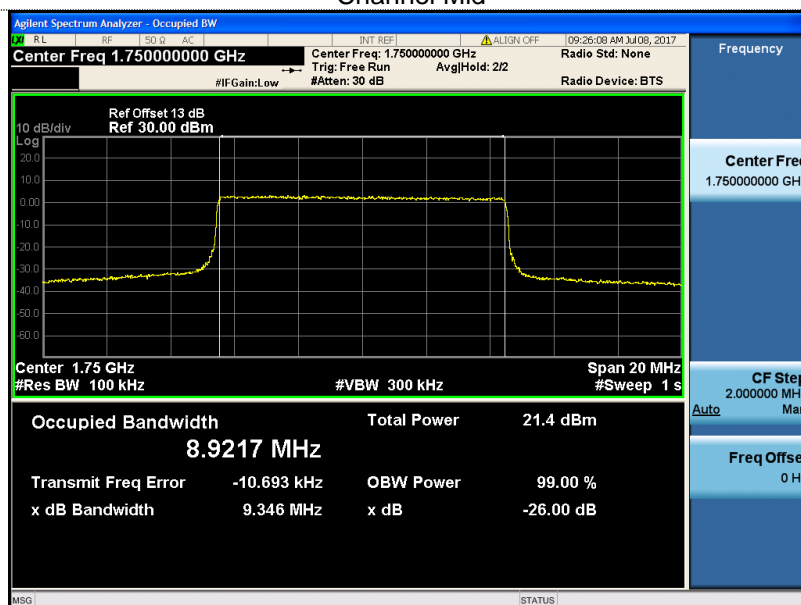


Channel High

LTE Band 4-15MHz


QPSK

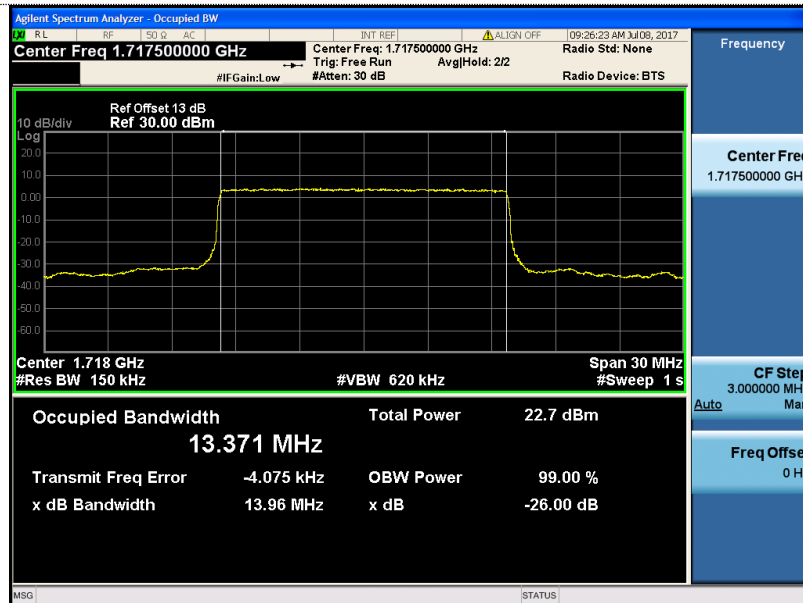

Channel Low

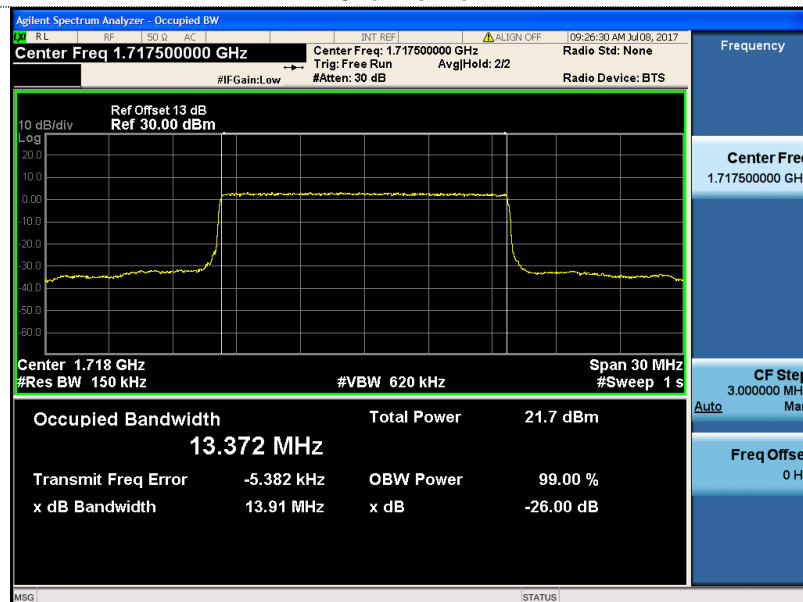


Channel Mid

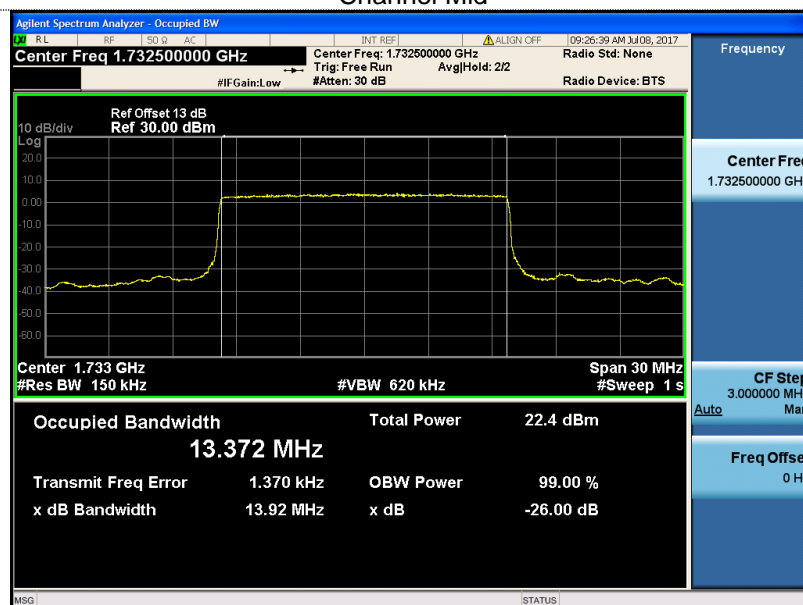


Channel High

LTE Band 4-15MHz


16QAM

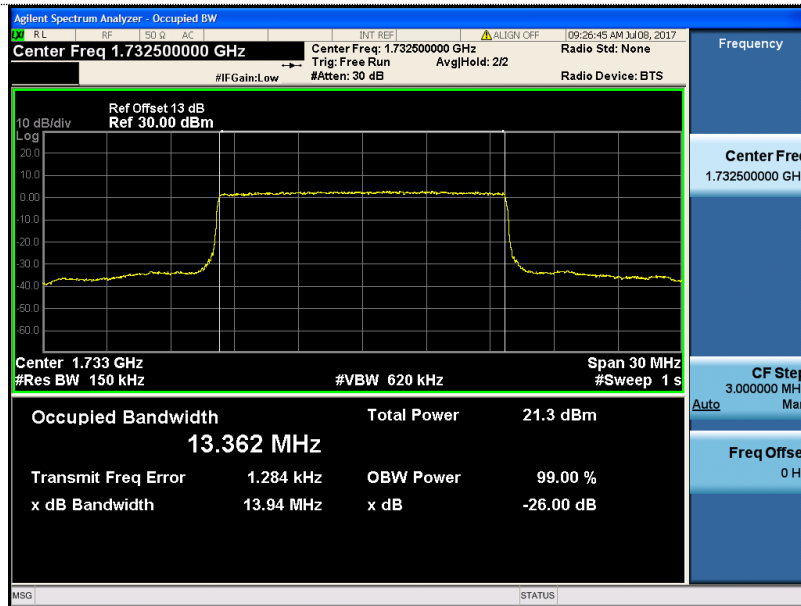

Channel Low

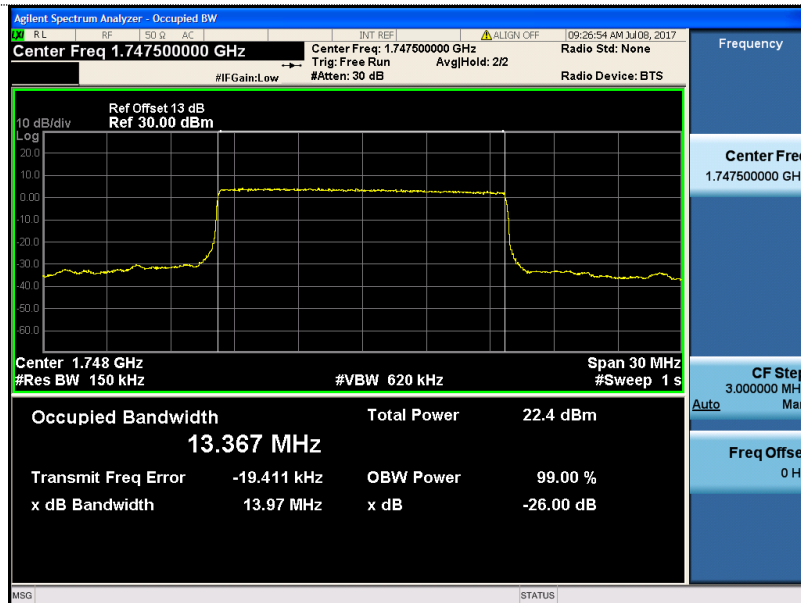

Channel Mid

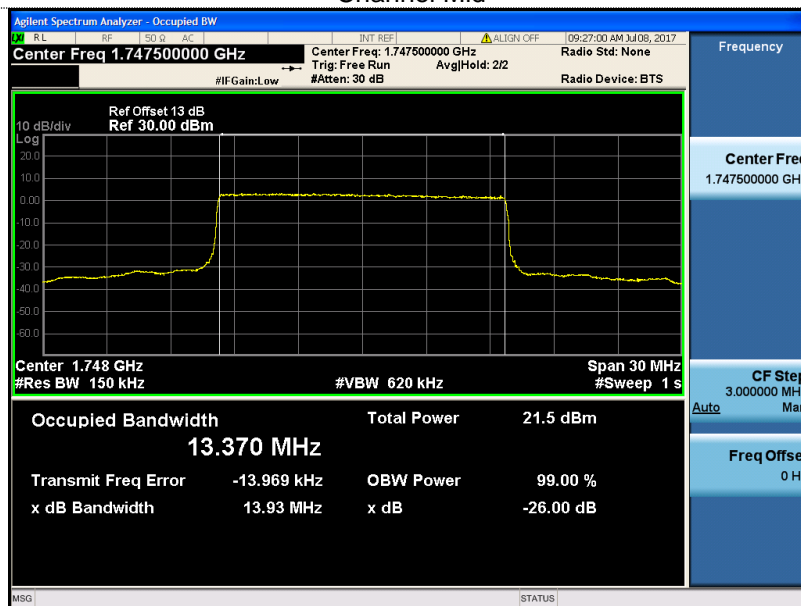


Channel High

LTE Band 4-20MHz


QPSK



Channel Low

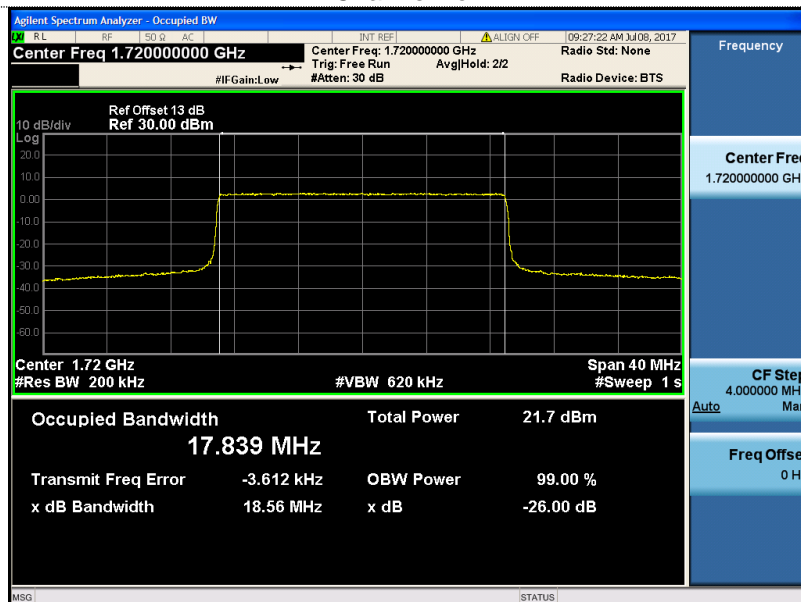


Channel Mid

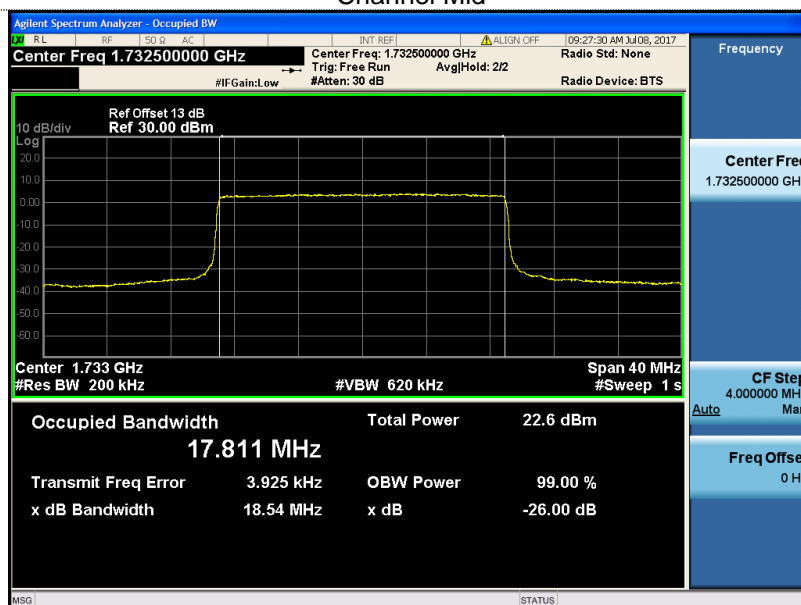


Channel High

LTE Band 4-20MHz


16QAM

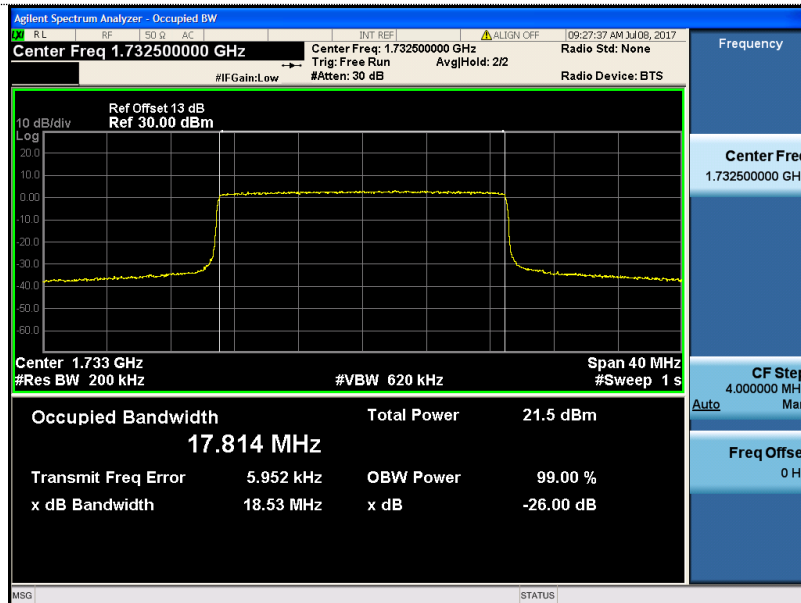

Channel Low

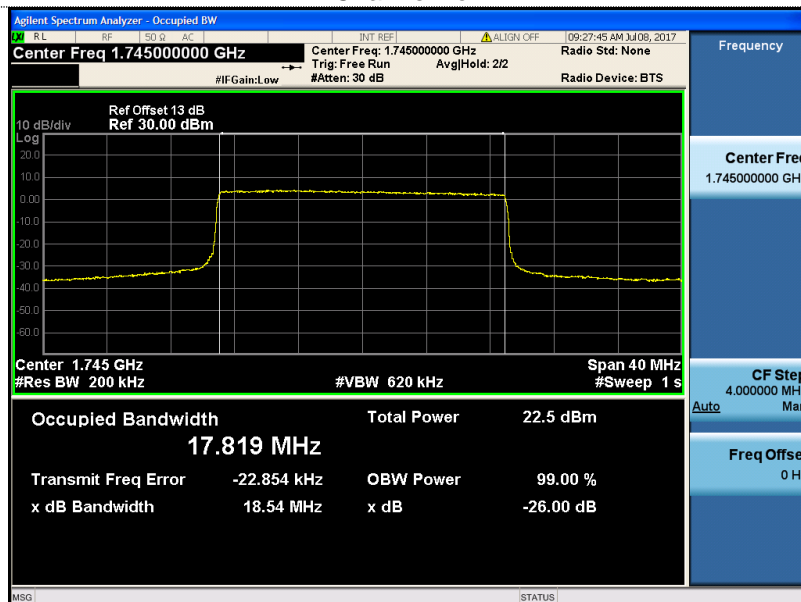

Channel Mid

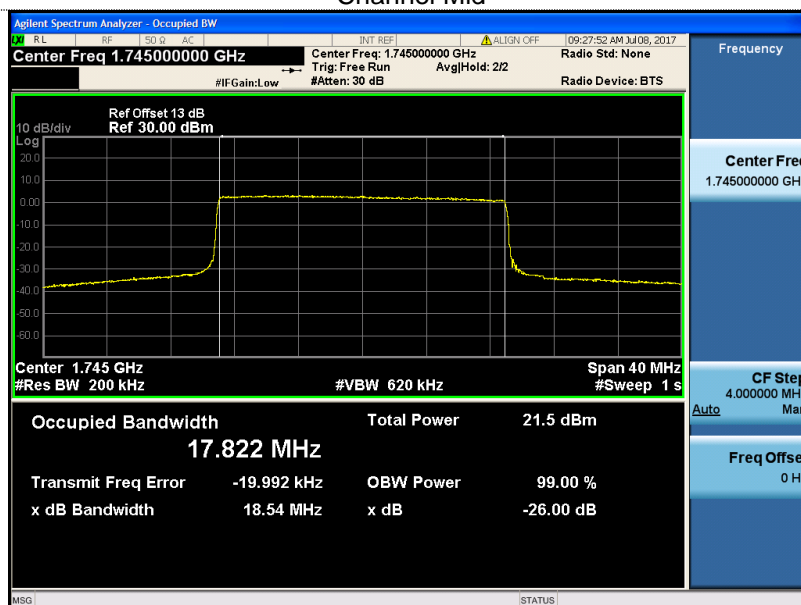

Channel High


5.3. Conducted Spurious Emissions

LIMIT

Part 27.53 h(1) specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

The specification that emissions shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

TEST CONFIGURATION

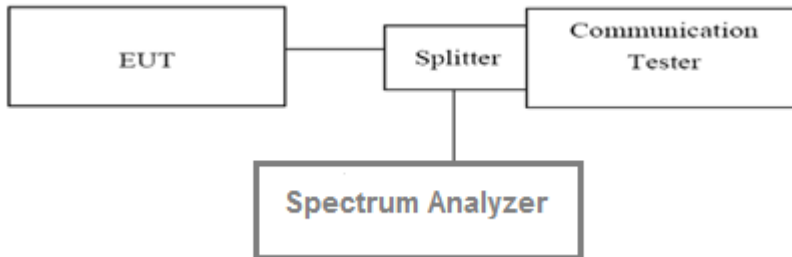

TEST PROCEDURE


1. The RF output of the transceiver was connected to a spectrum analyzer through appropriate attenuation.
2. The resolution bandwidth of the spectrum analyzer was set at 1MHz, sufficient scans were taken to show the out of band Emissions if any up to 10th harmonic.
3. For the out of band: Set the RBW= 1MHz, VBW = 3MHz, Start=30MHz, Stop= 10th harmonic.

TEST MODE:


Please refer to the clause 3.3

TEST RESULTS


Passed **Not Applicable**

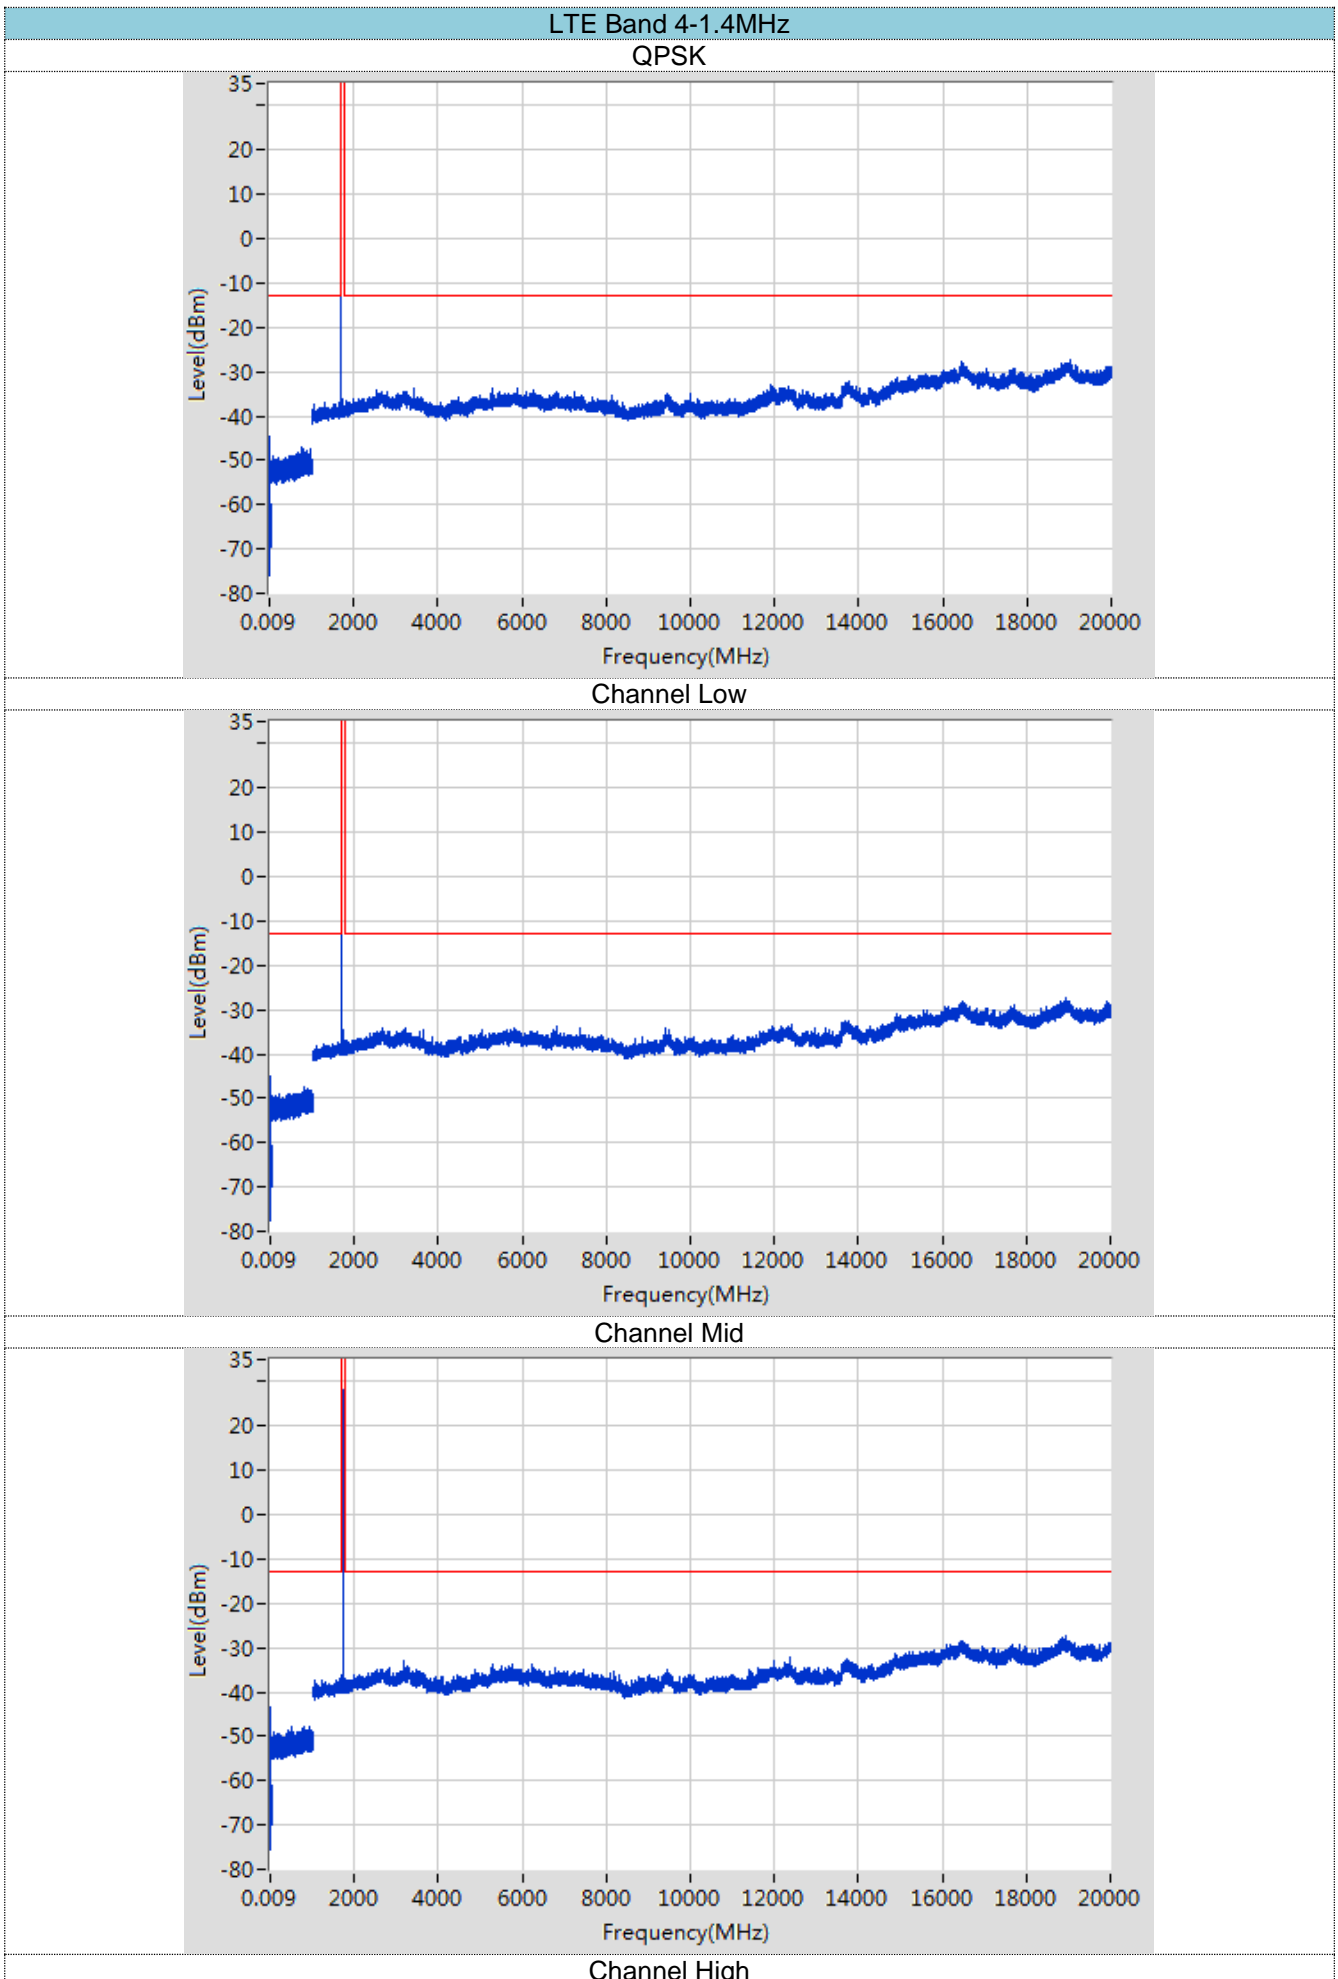


LTE Band 4-1.4MHz
16QAM

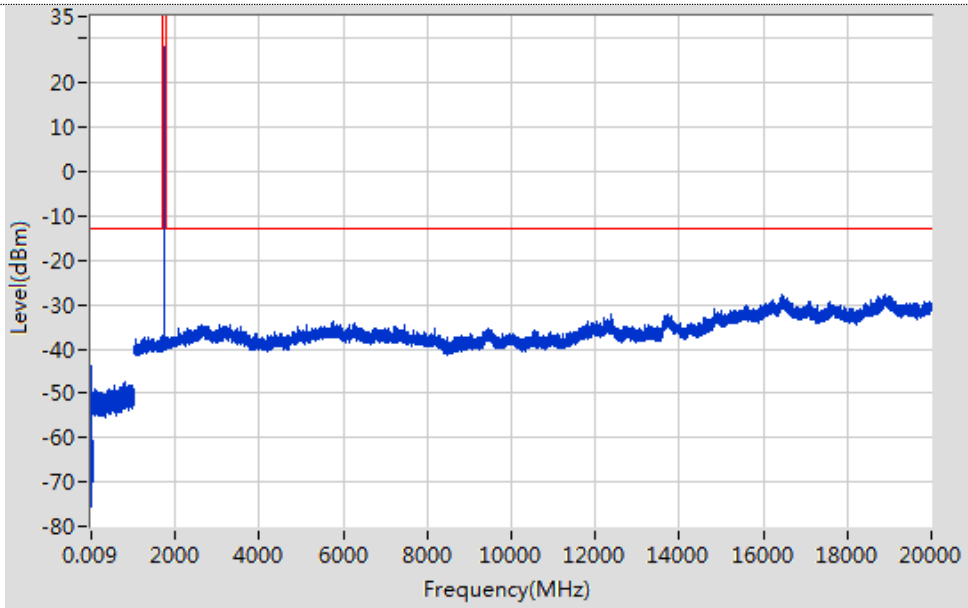

Channel Low

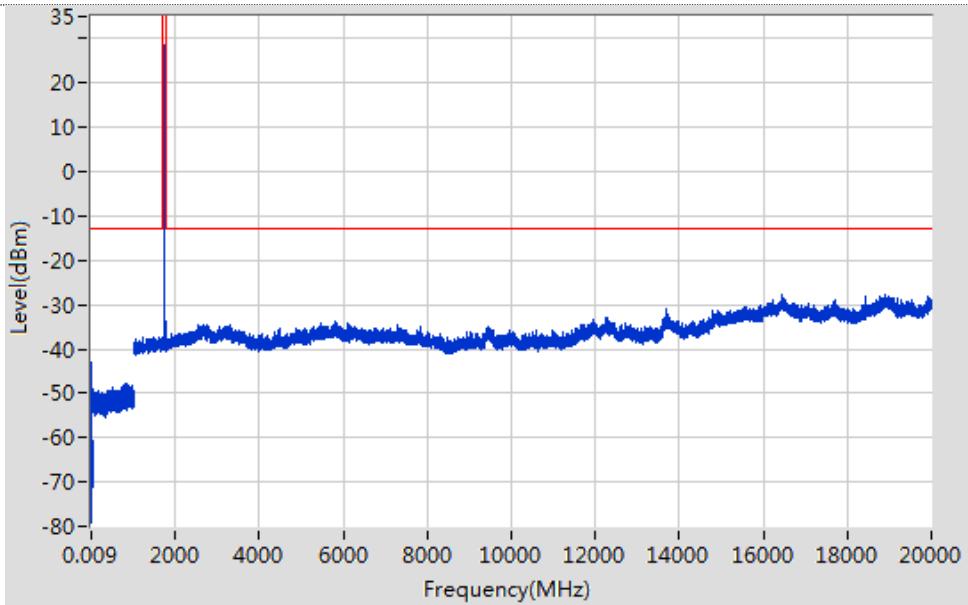


Channel Mid

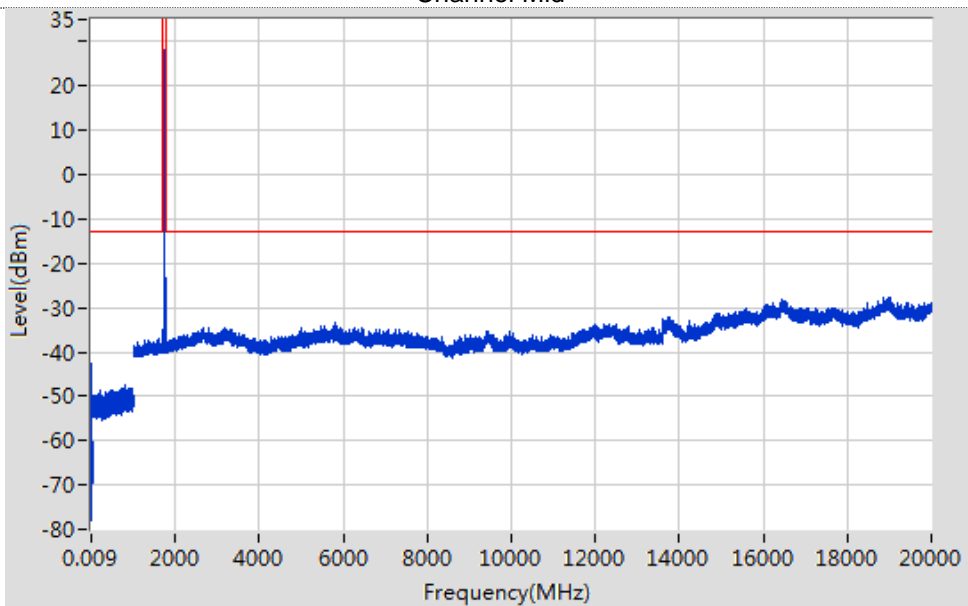


Channel High

LTE Band 4-3MHz


QPSK

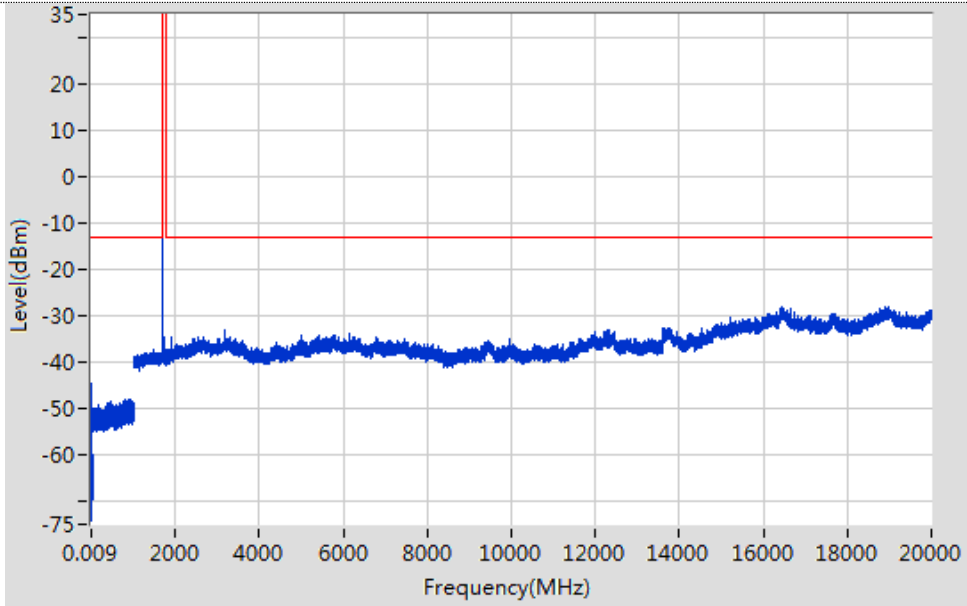

Channel Low

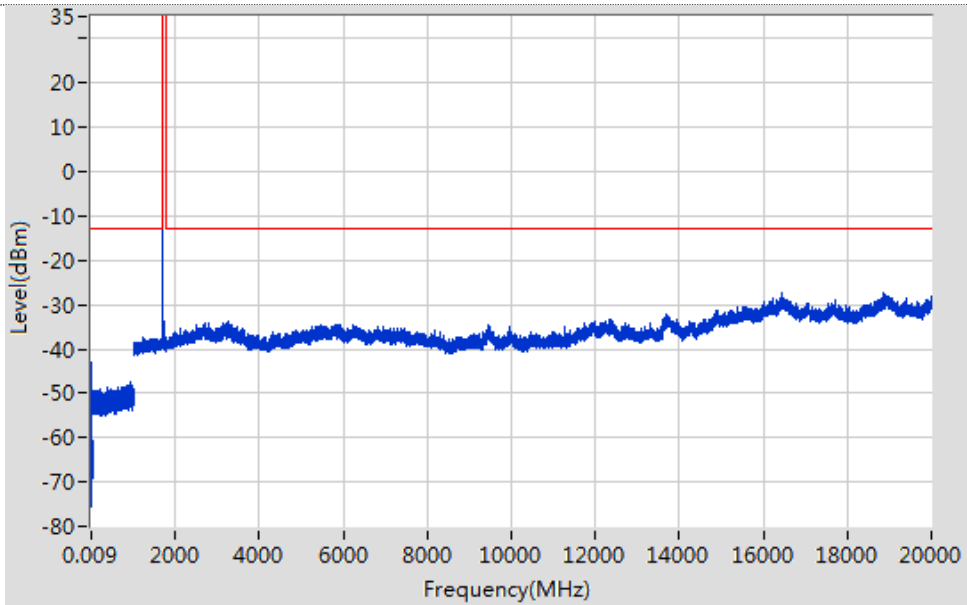


Channel Mid

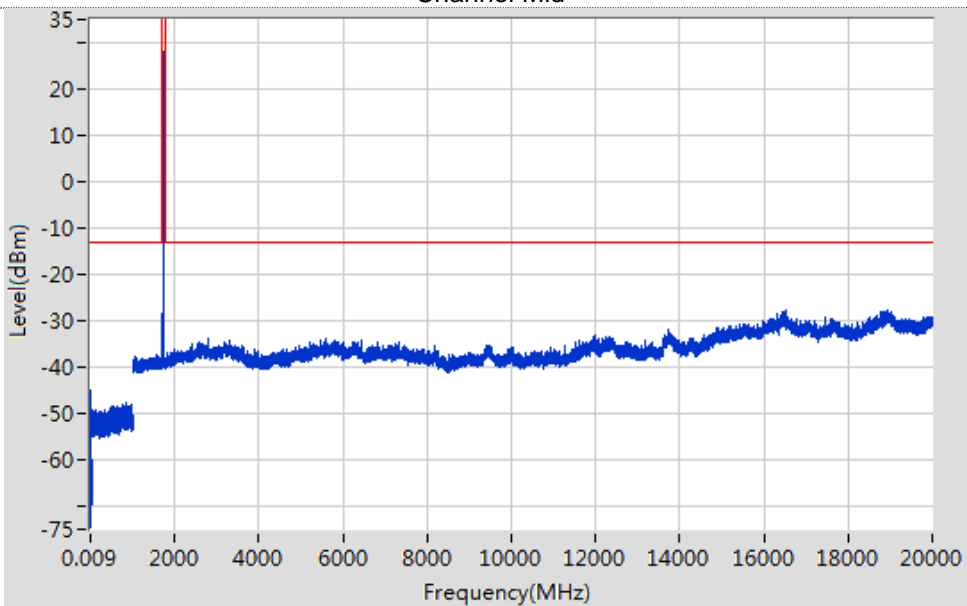


Channel High

LTE Band 4-3MHz


16QAM

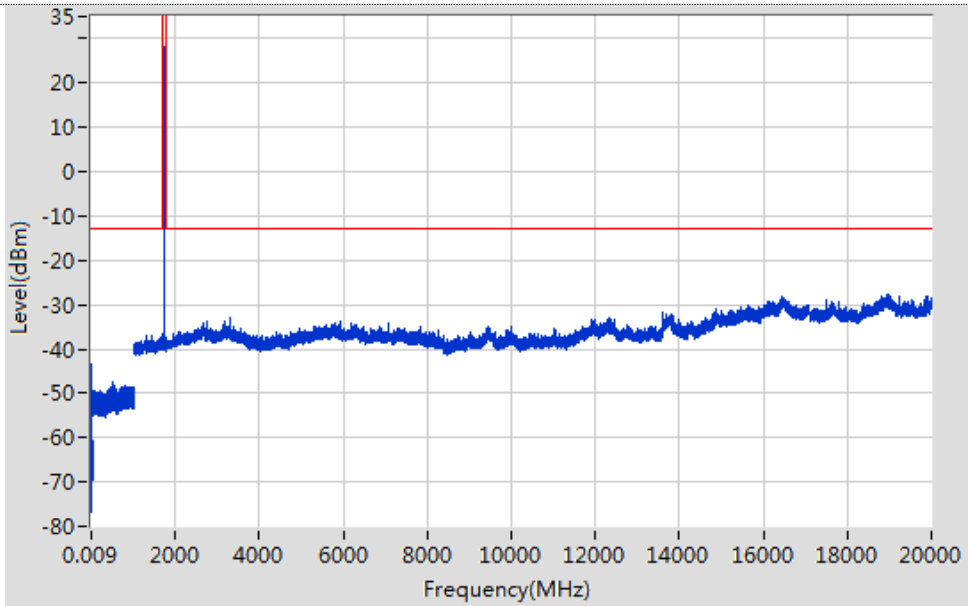

Channel Low

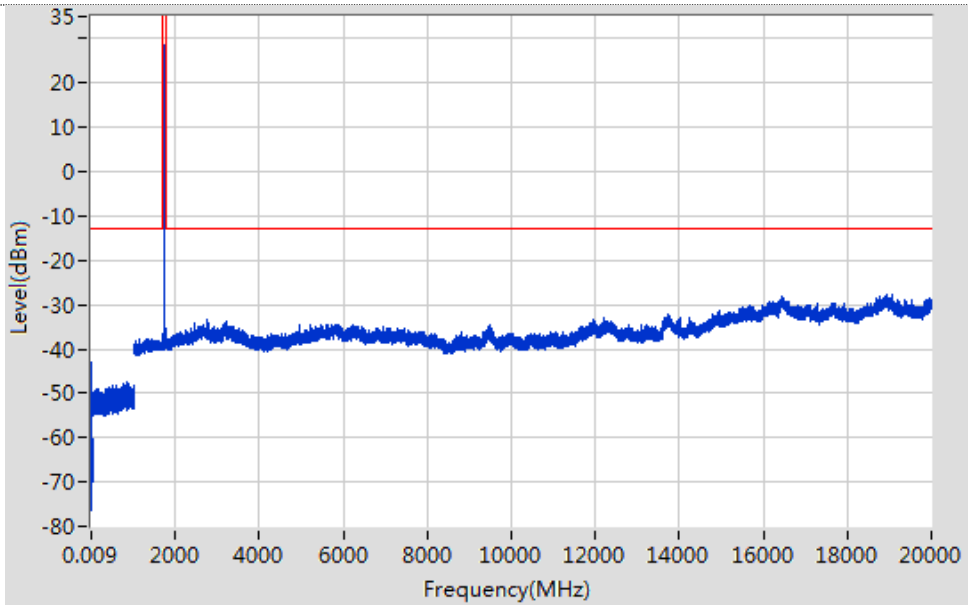


Channel Mid

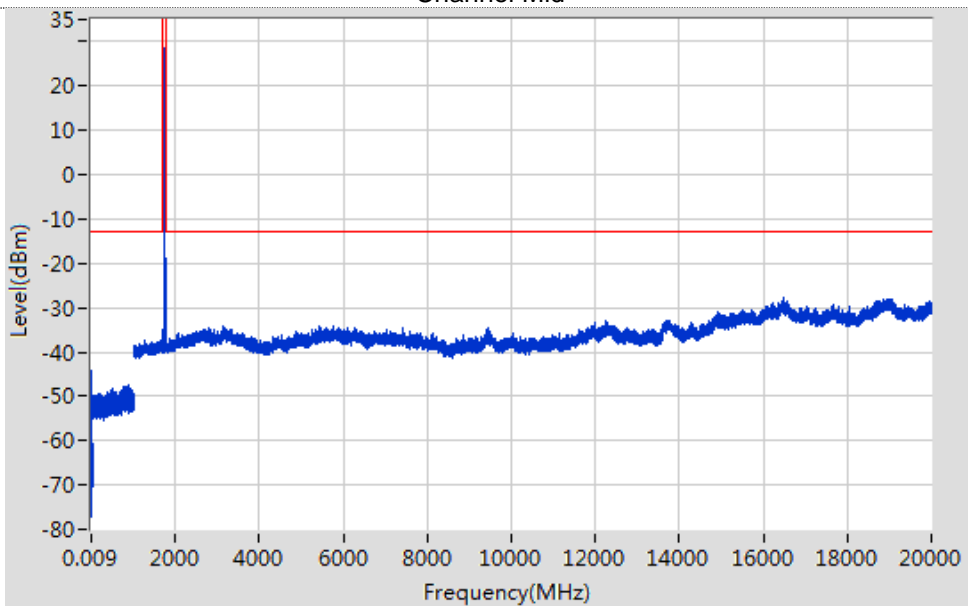


Channel High

LTE Band 4-5MHz


QPSK

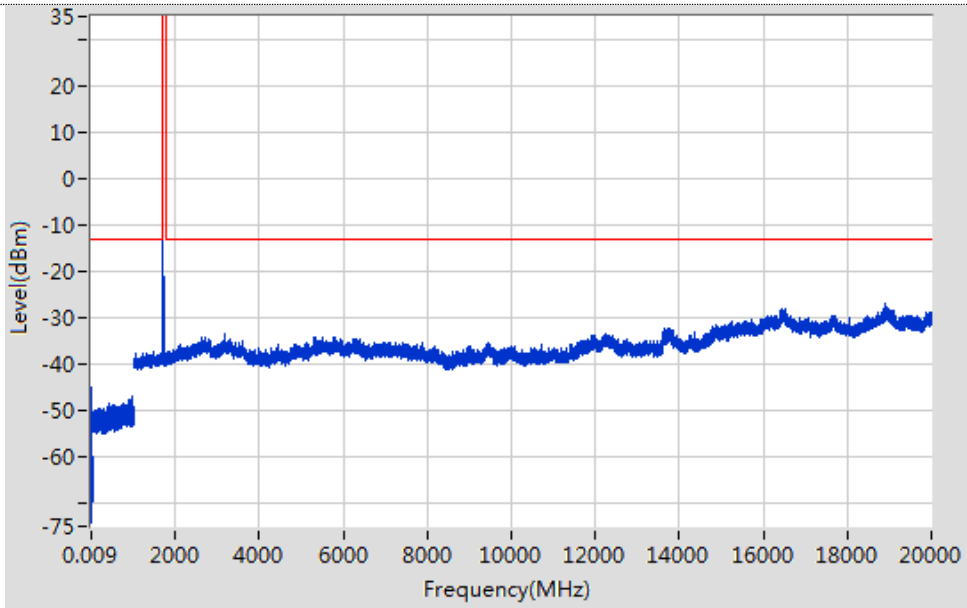

Channel Low

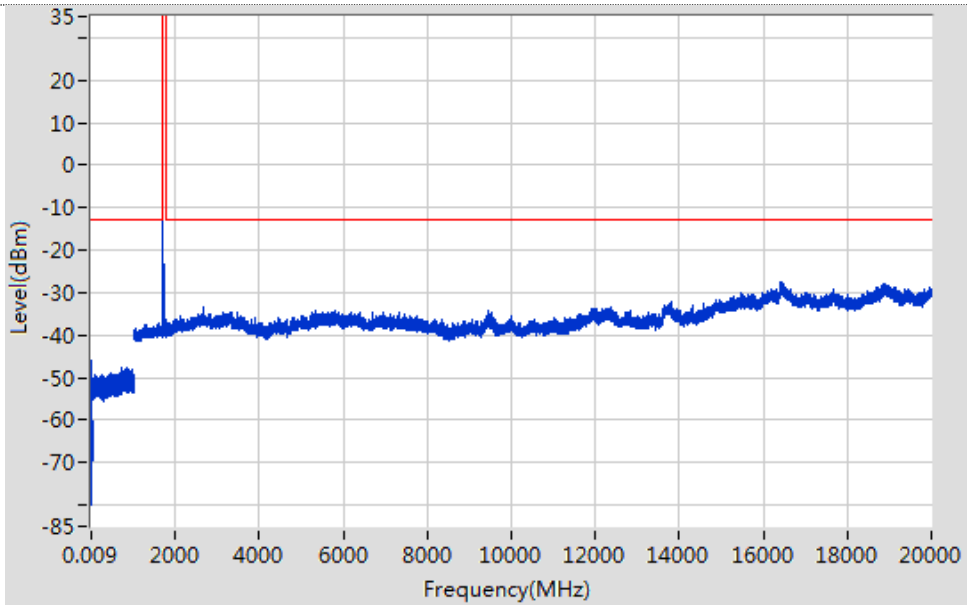


Channel Mid

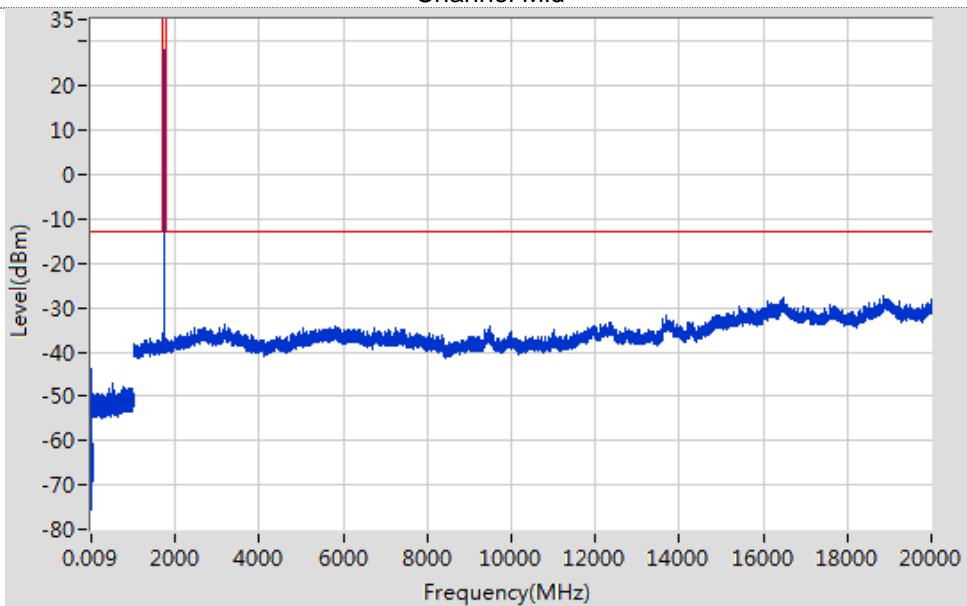


Channel High

LTE Band 4-5MHz


16QAM

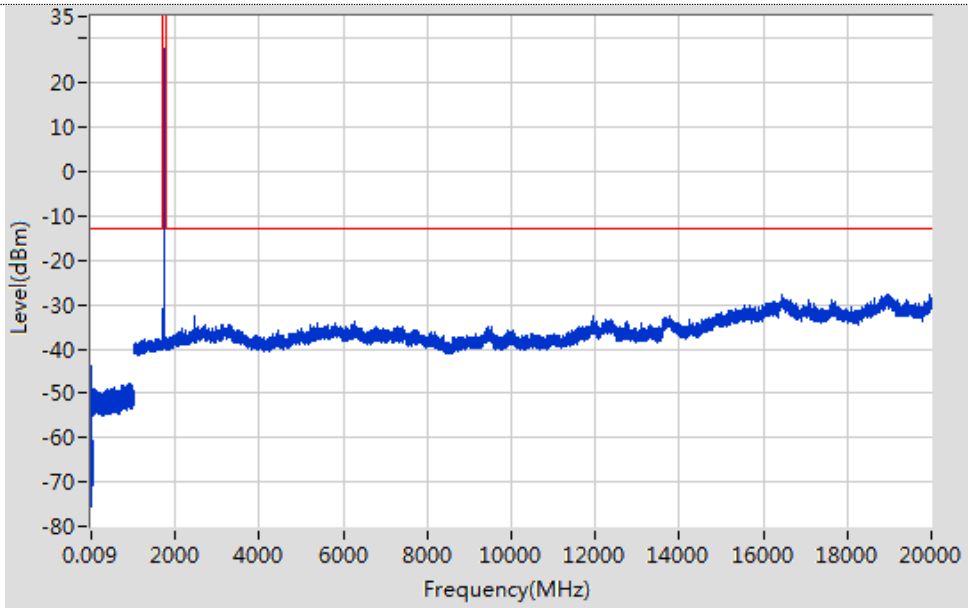

Channel Low

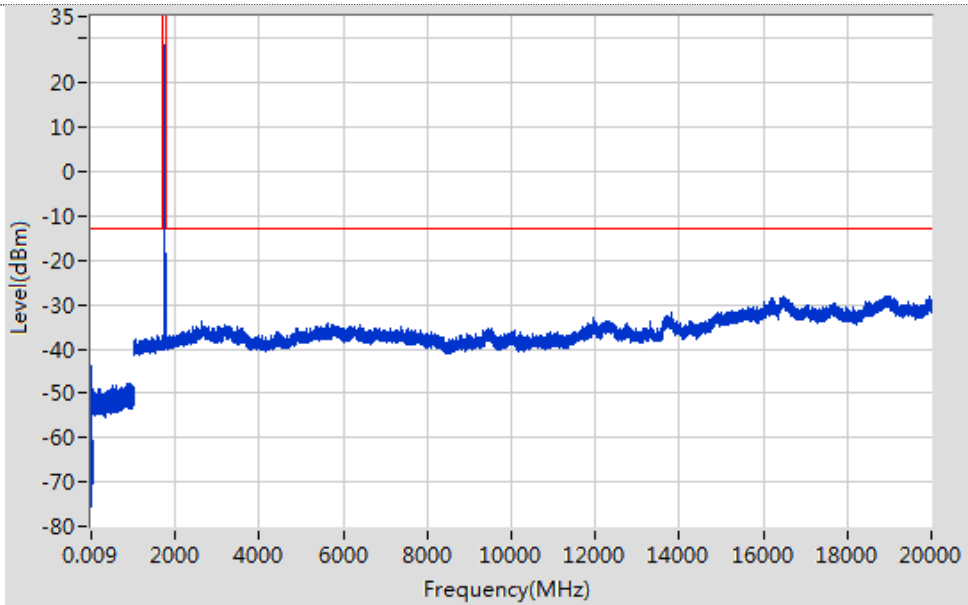


Channel Mid

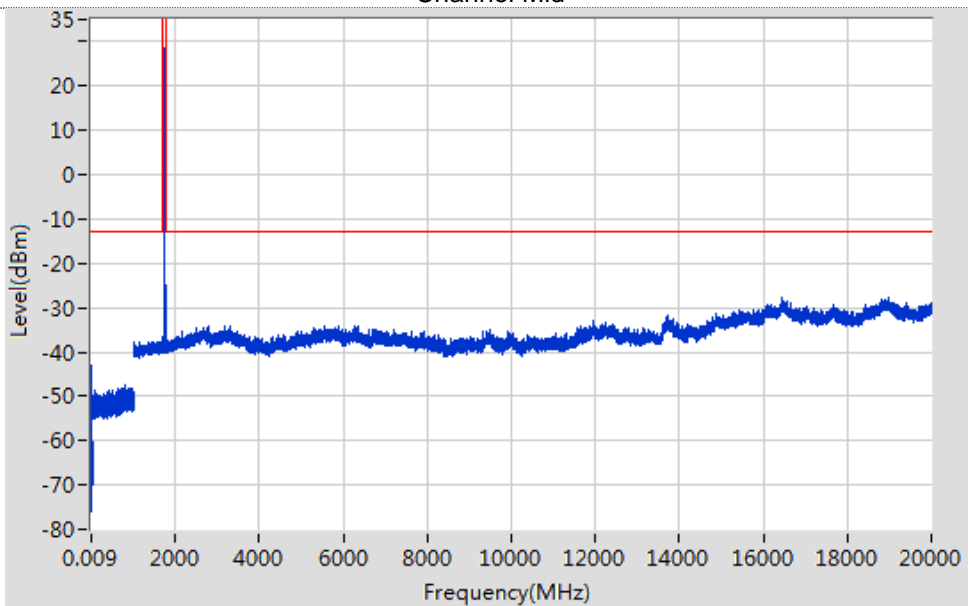


Channel High

LTE Band 4-10MHz


QPSK

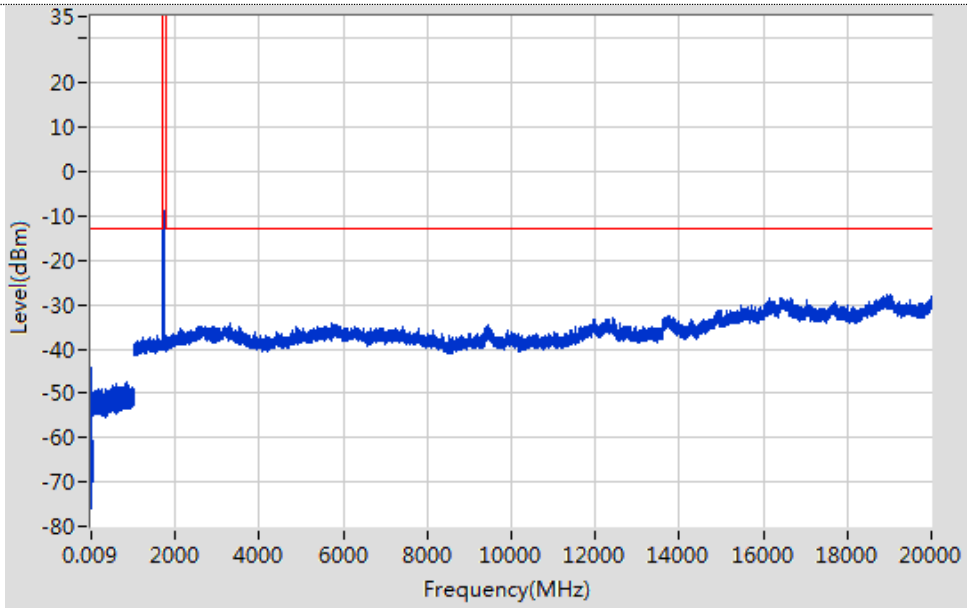

Channel Low

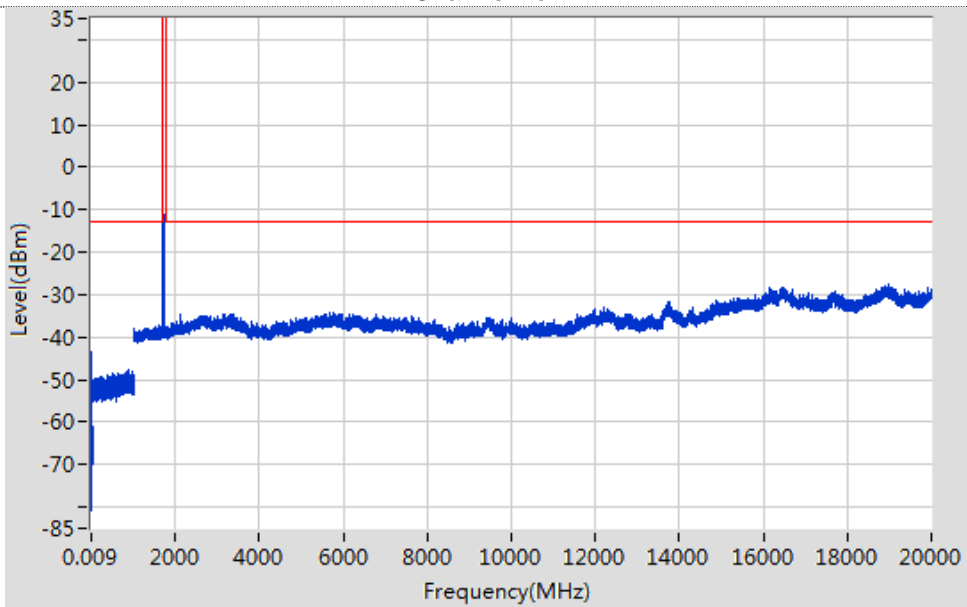


Channel Mid

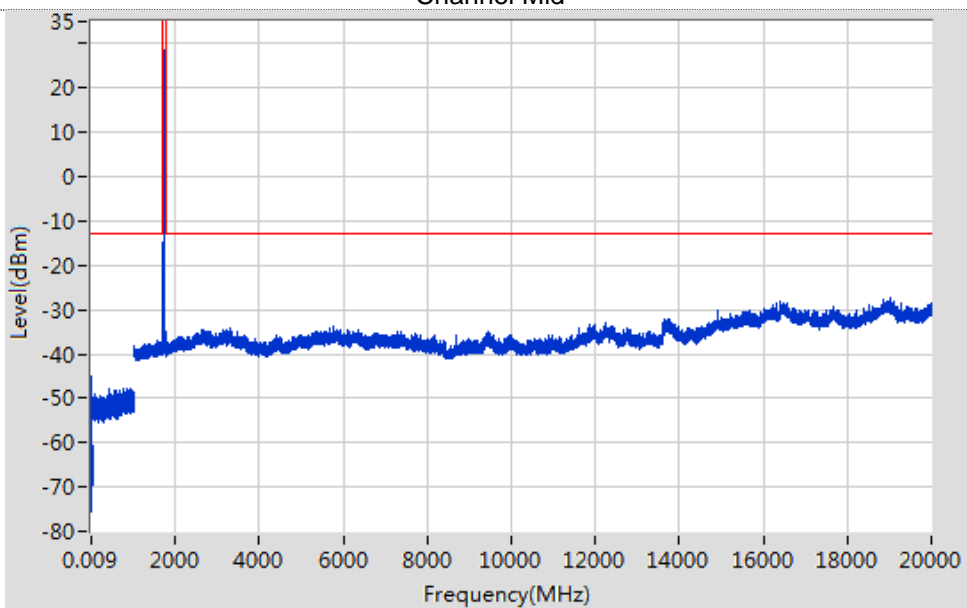


Channel High


LTE Band 4-10MHz
16QAM

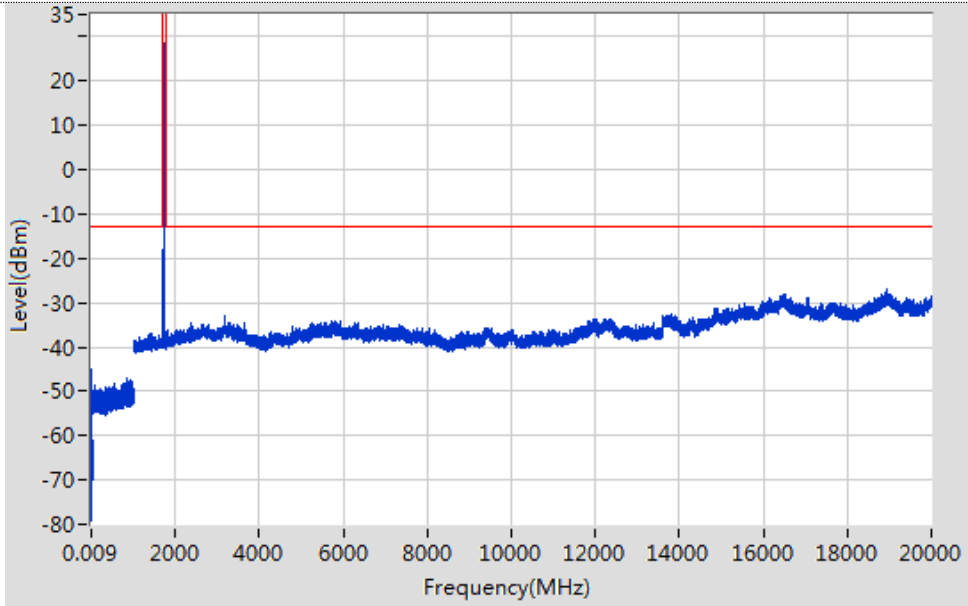

Channel Low

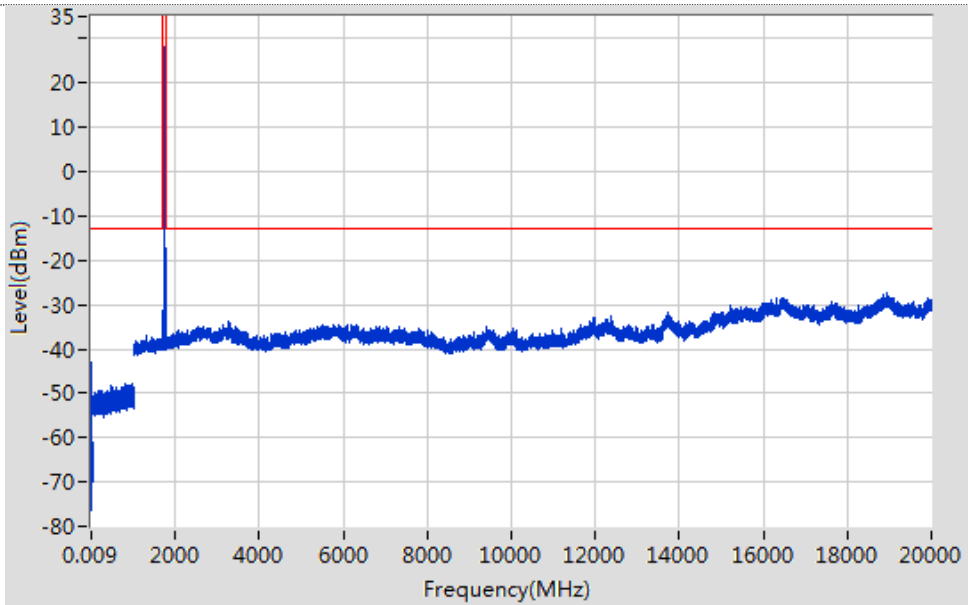


Channel Mid

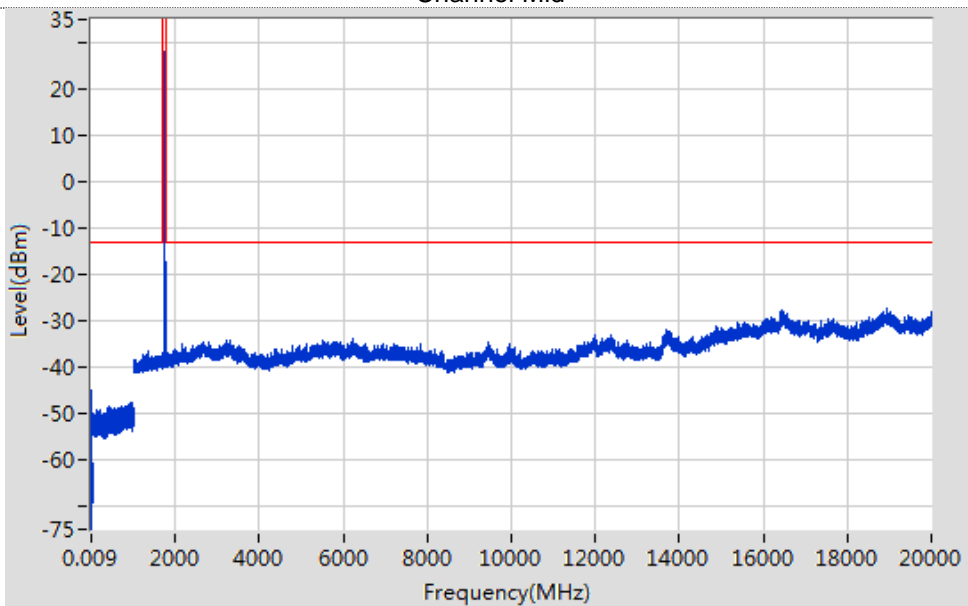


Channel High

LTE Band 4-15MHz


QPSK

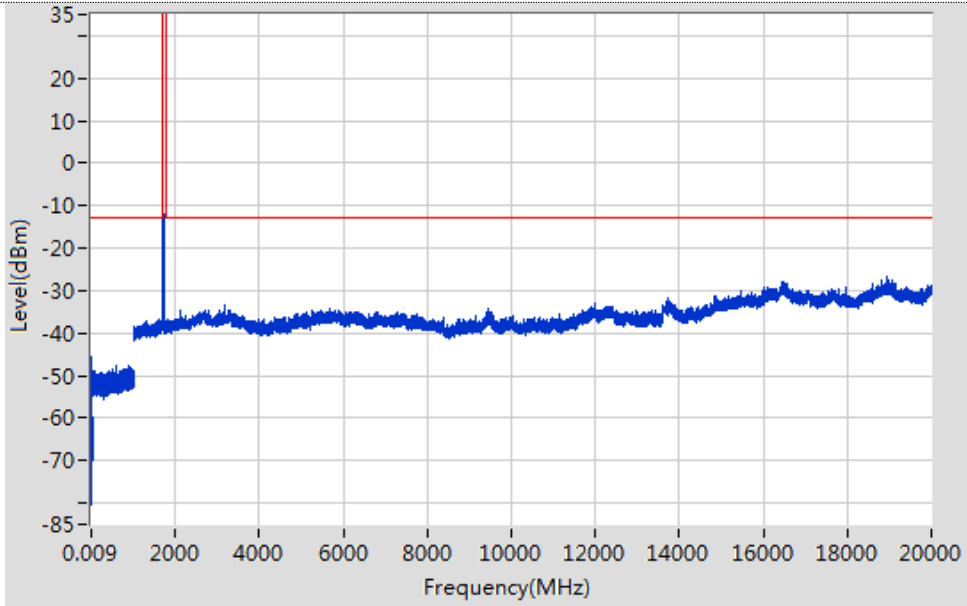

Channel Low

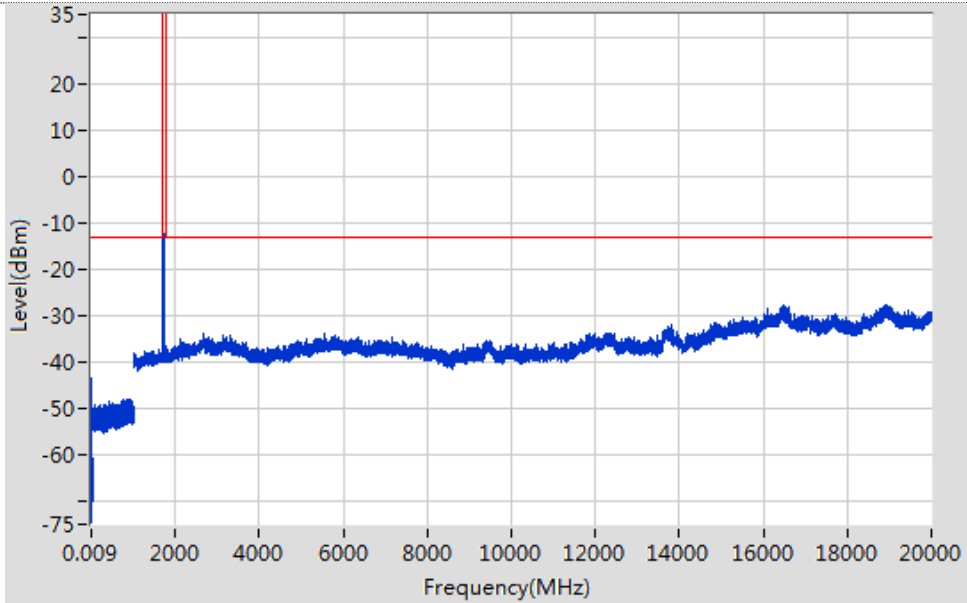


Channel Mid

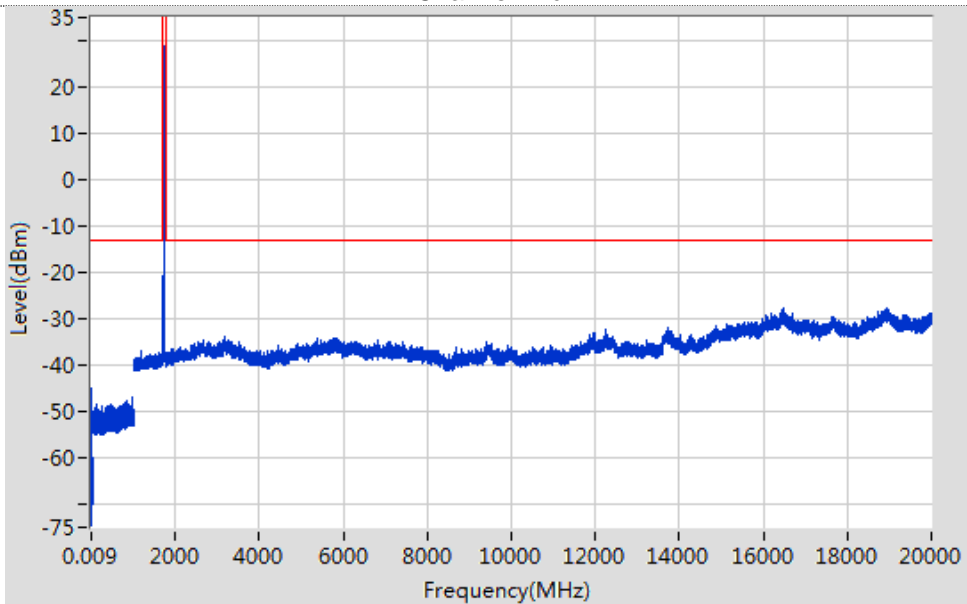


Channel High


LTE Band 4-15MHz
16QAM

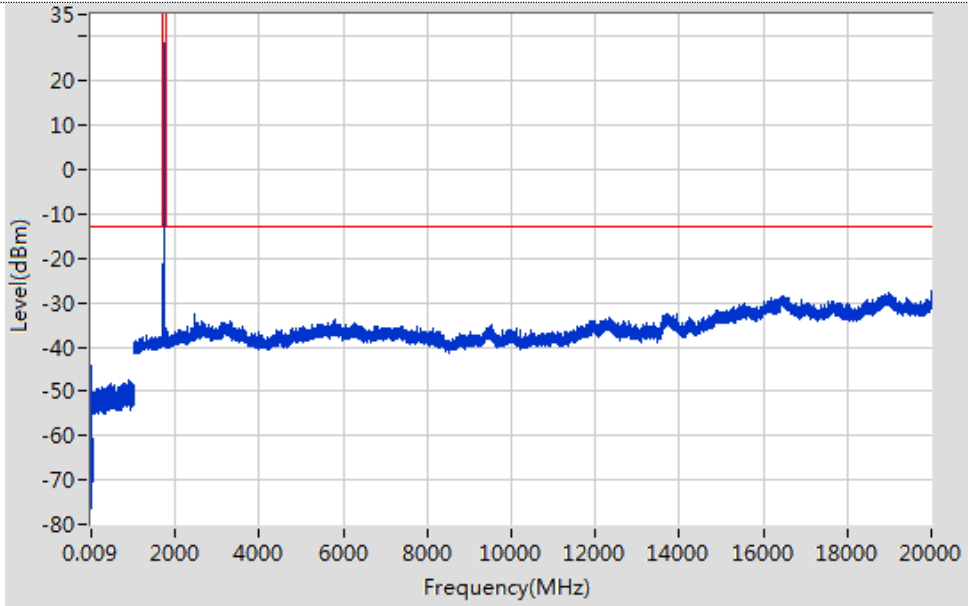

Channel Low

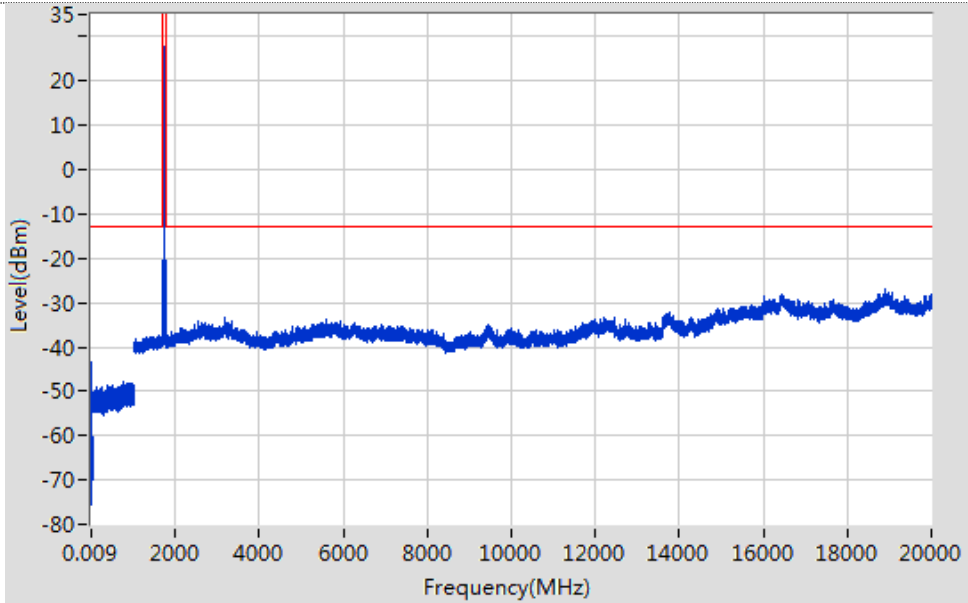


Channel Mid

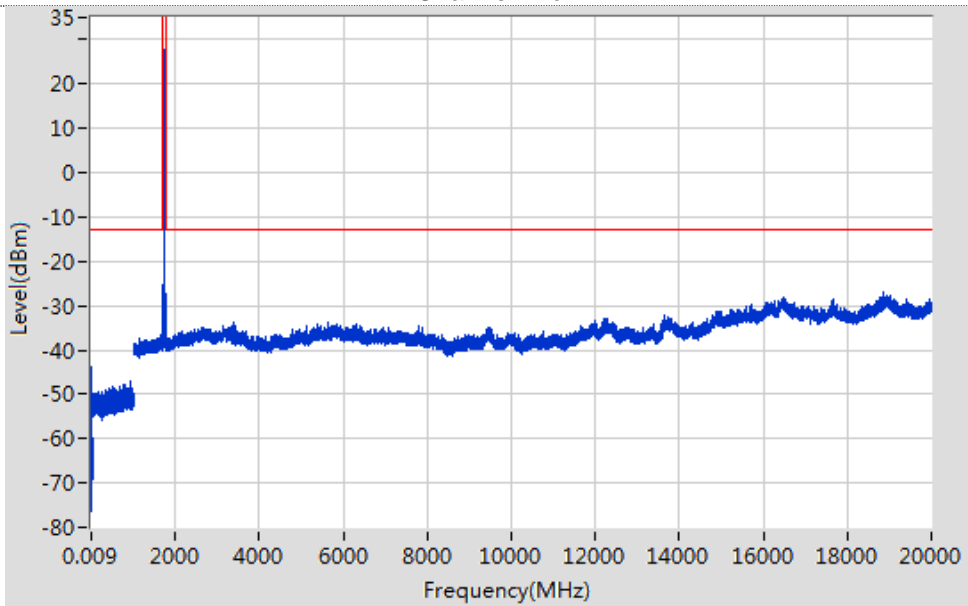


Channel High

LTE Band 4-20MHz


QPSK

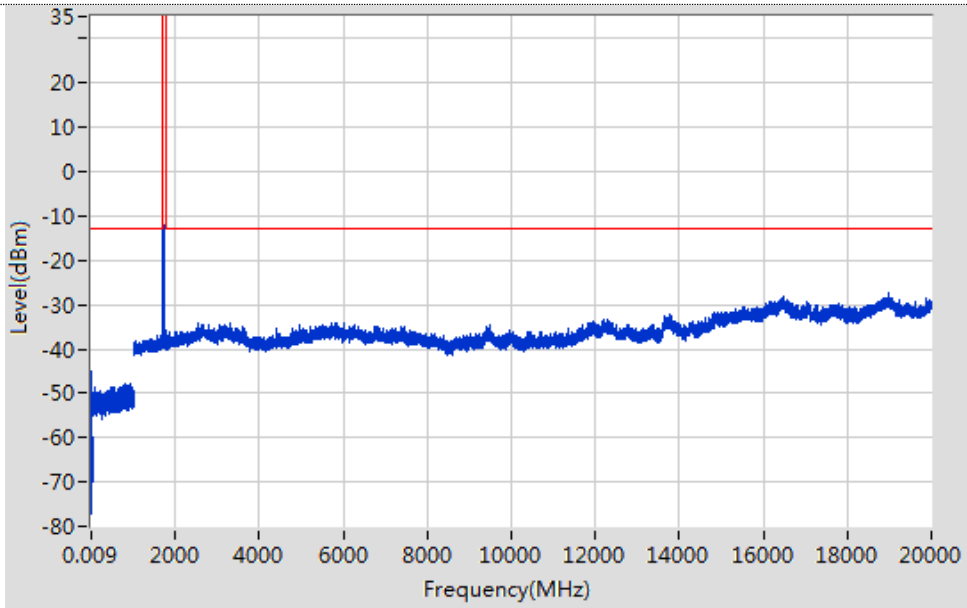

Channel Low

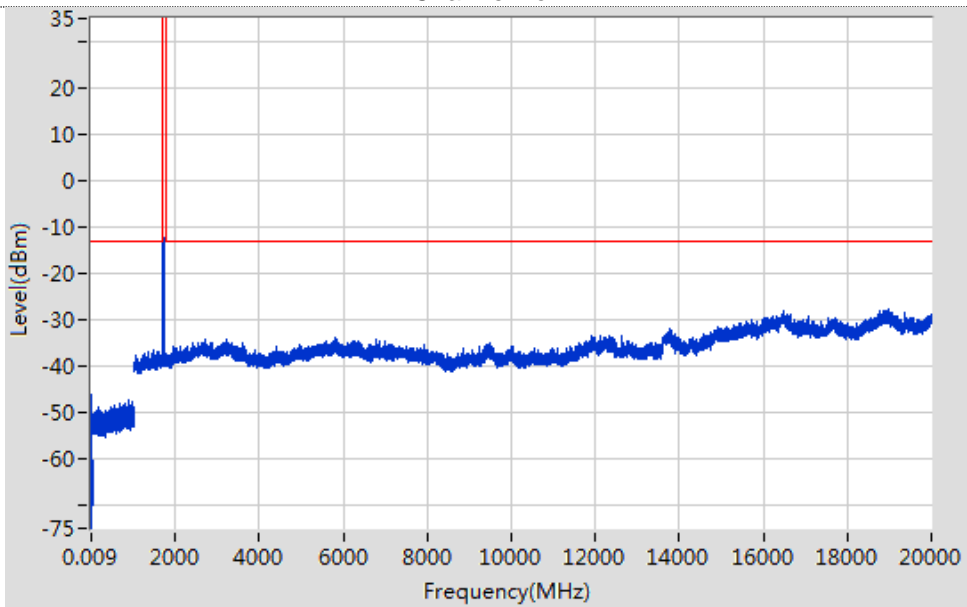


Channel Mid

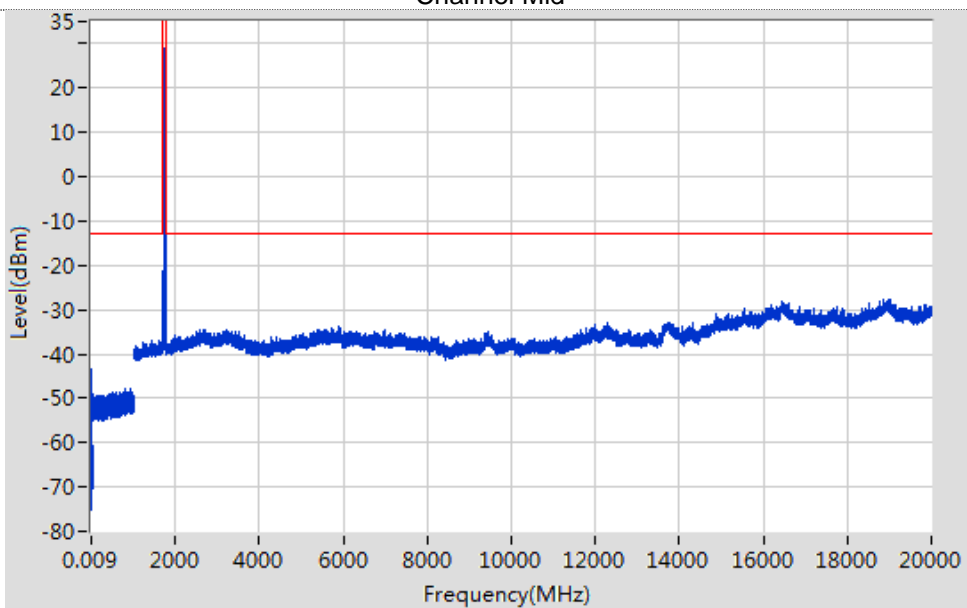


Channel High


LTE Band 4-20MHz
16QAM

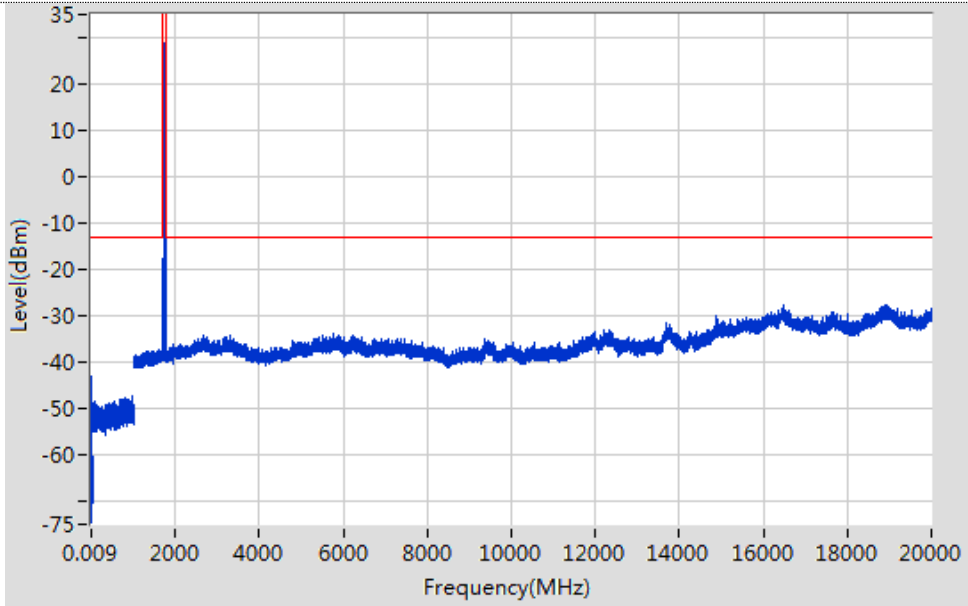

Channel Low

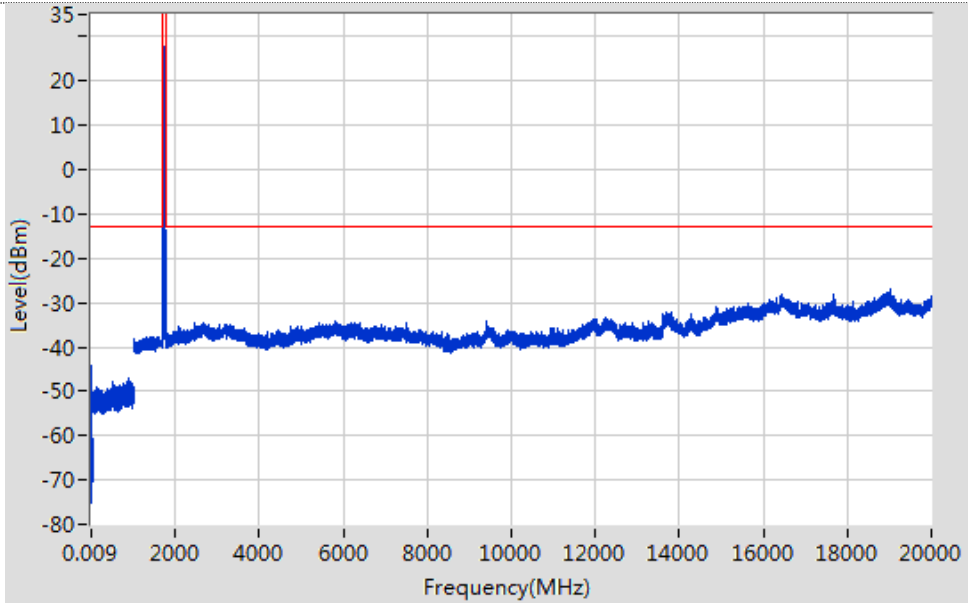

Channel Mid

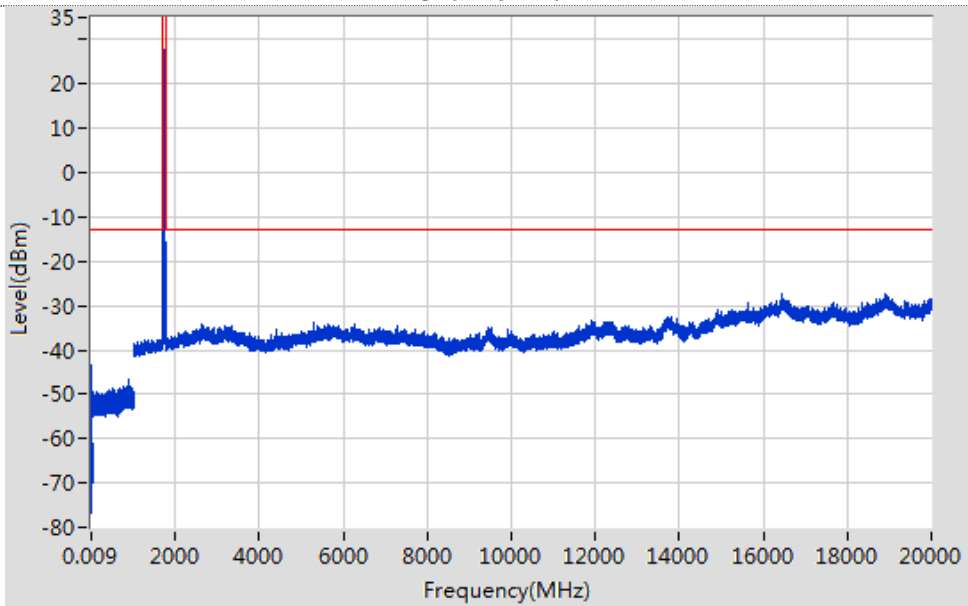

Channel High


5.4. Band Edge

LIMIT

Part 27.53h(1) specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

The specification that emissions shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

TEST CONFIGURATION

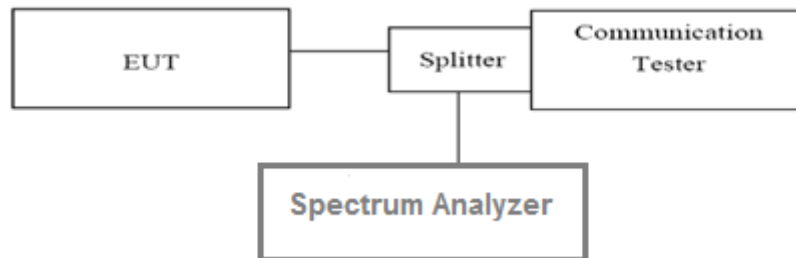

TEST PROCEDURE

1. The RF output of the transceiver was connected to a spectrum analyzer through appropriate attenuation.
2. The band edges of low and high channels for the highest RF powers were measured. Set RBW \geq 1% EBW in the 1MHz band immediately outside and adjacent to the band edge.
3. Set spectrum analyzer with RMS detector.


TEST MODE:

Please refer to the clause 3.3


TEST RESULTS

Passed **Not Applicable**

LTE Band 4-1.4MHz-QPSK

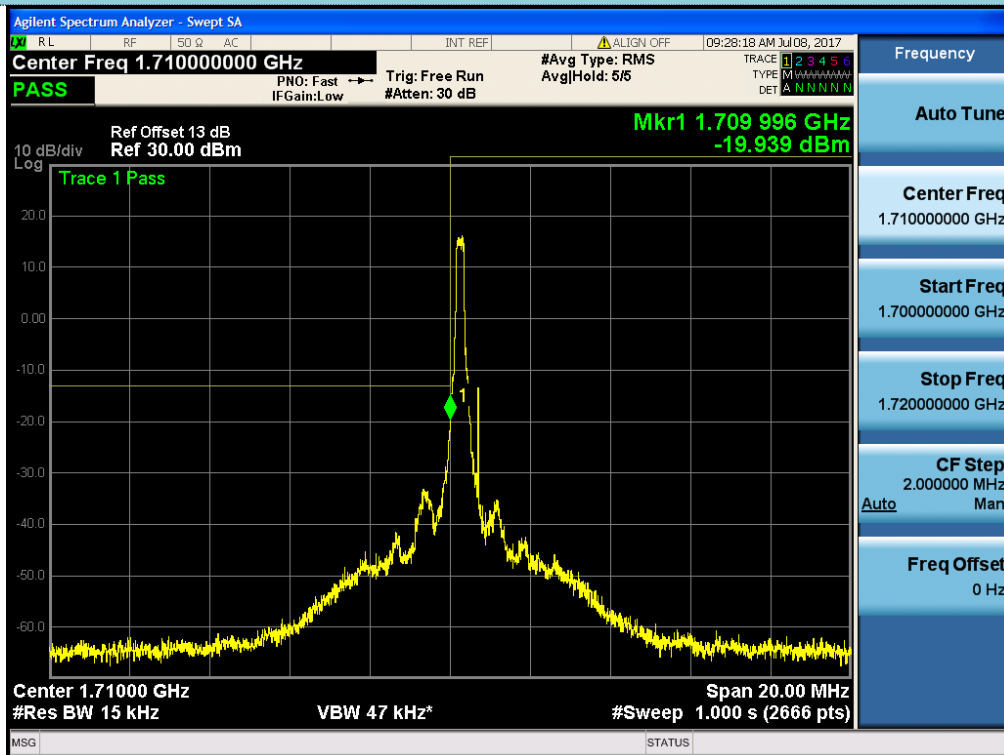


Channel Low-1RB#

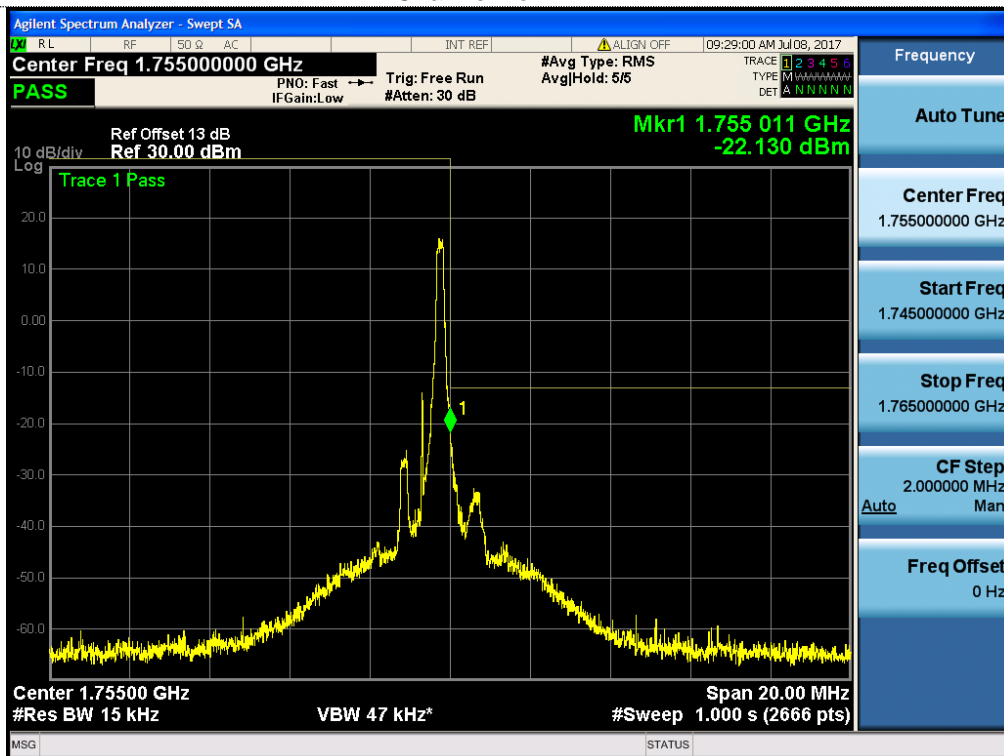


Channel High-1RB#

LTE Band 4-1.4MHz-QPSK

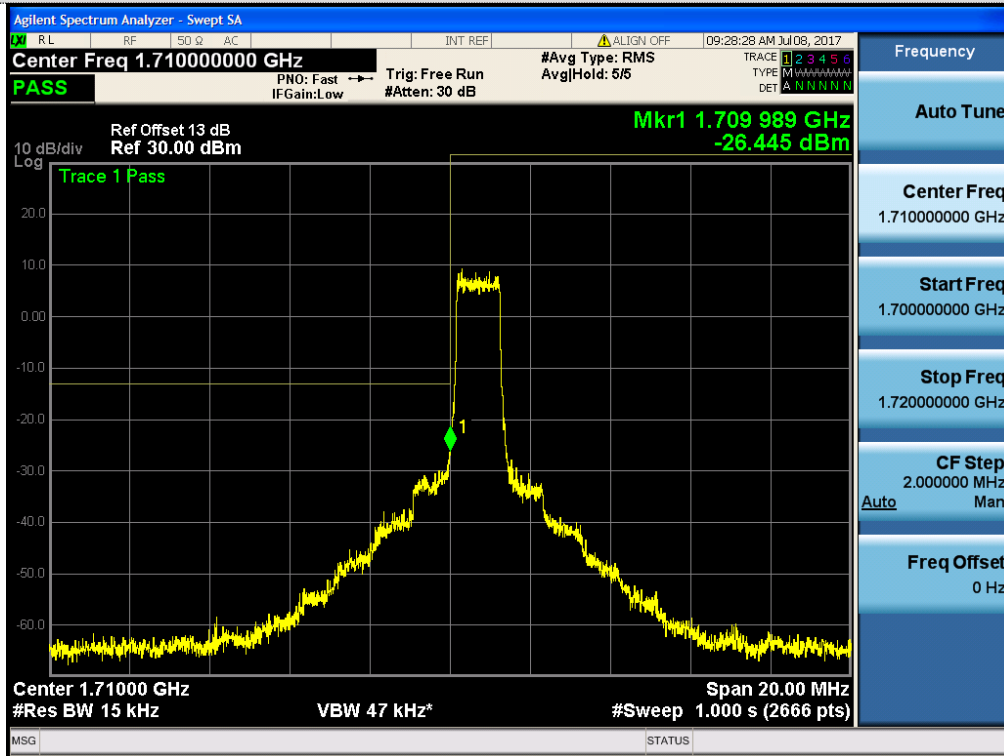


Channel Low-Full RB#

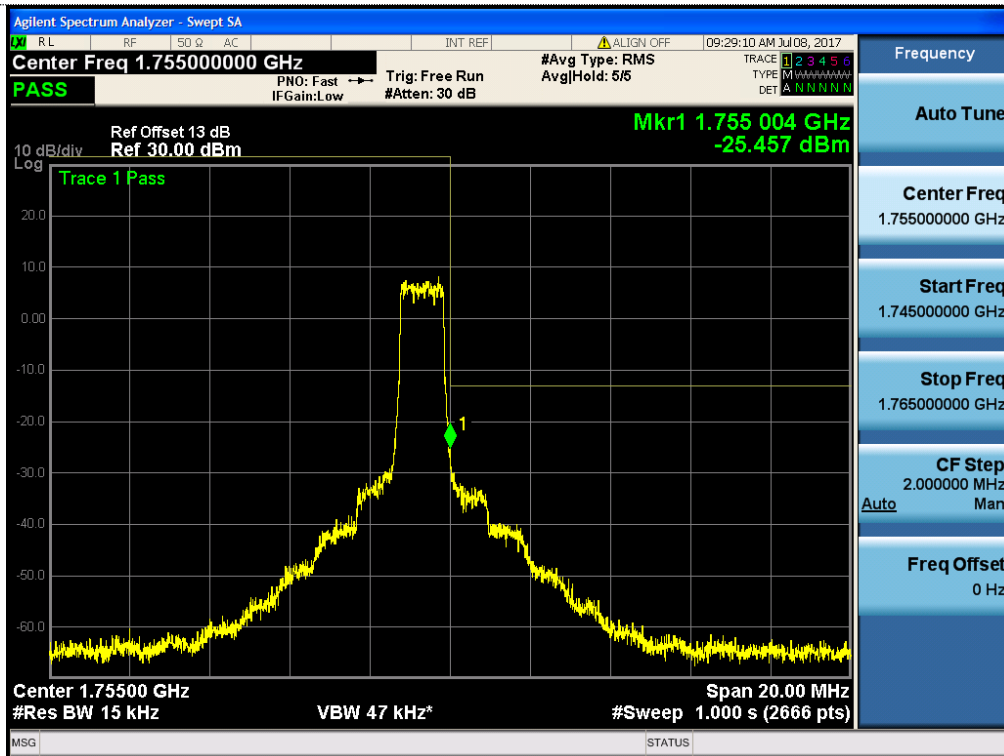


Channel High-Full RB#

LTE Band 4-1.4MHz-16QAM

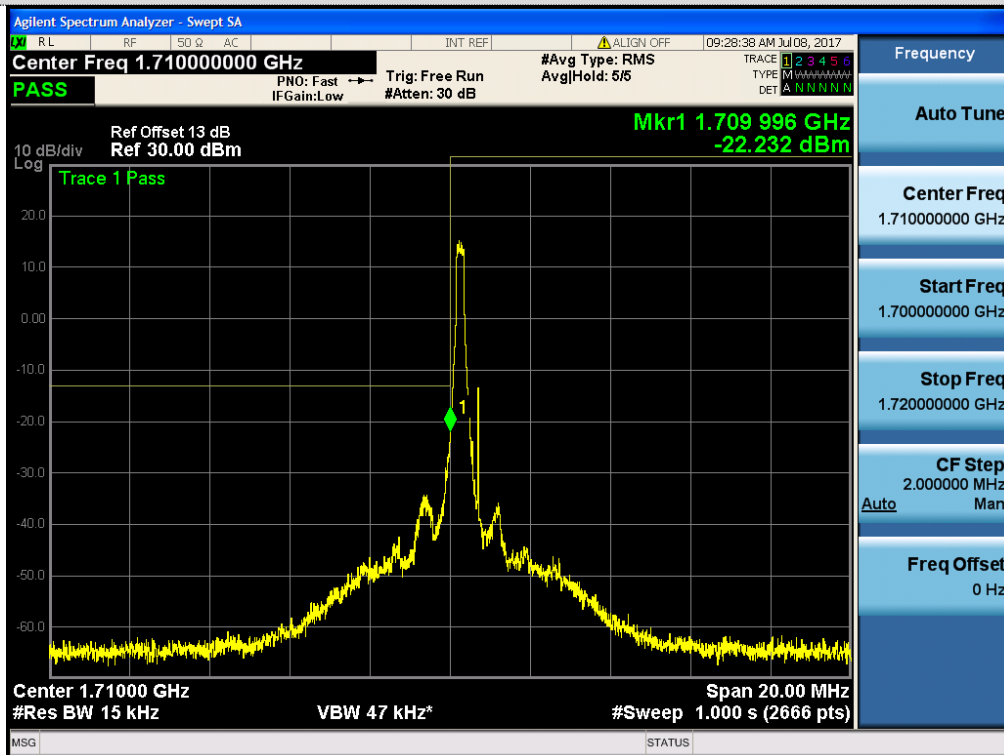


Channel Low-1RB#

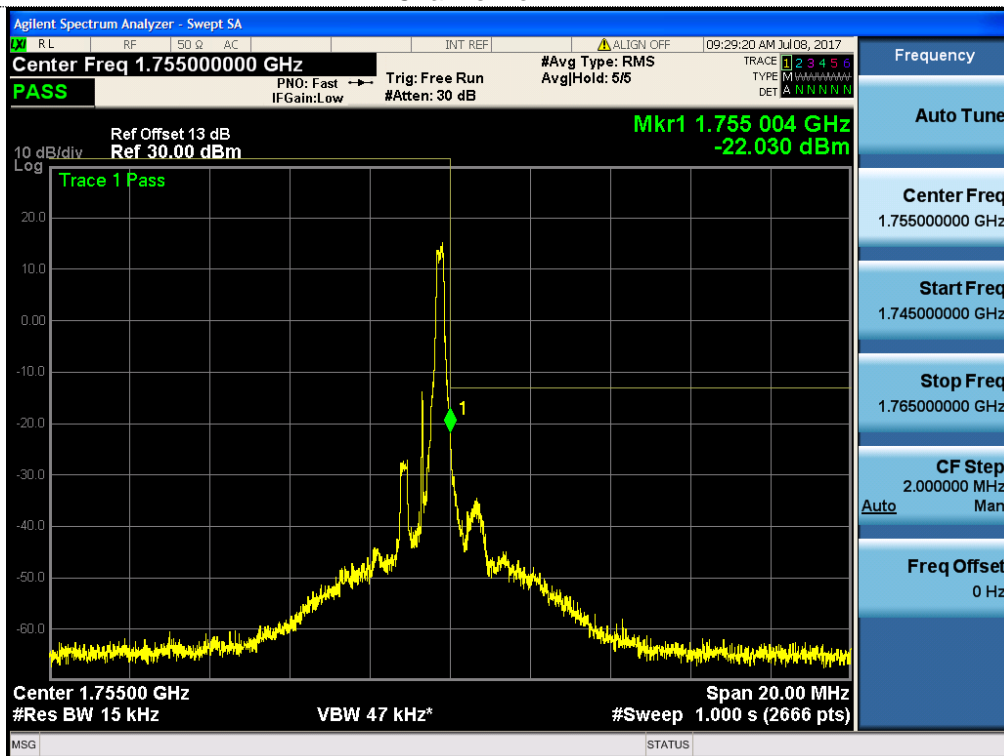


Channel High-1RB#

LTE Band 4-1.4MHz-16QAM

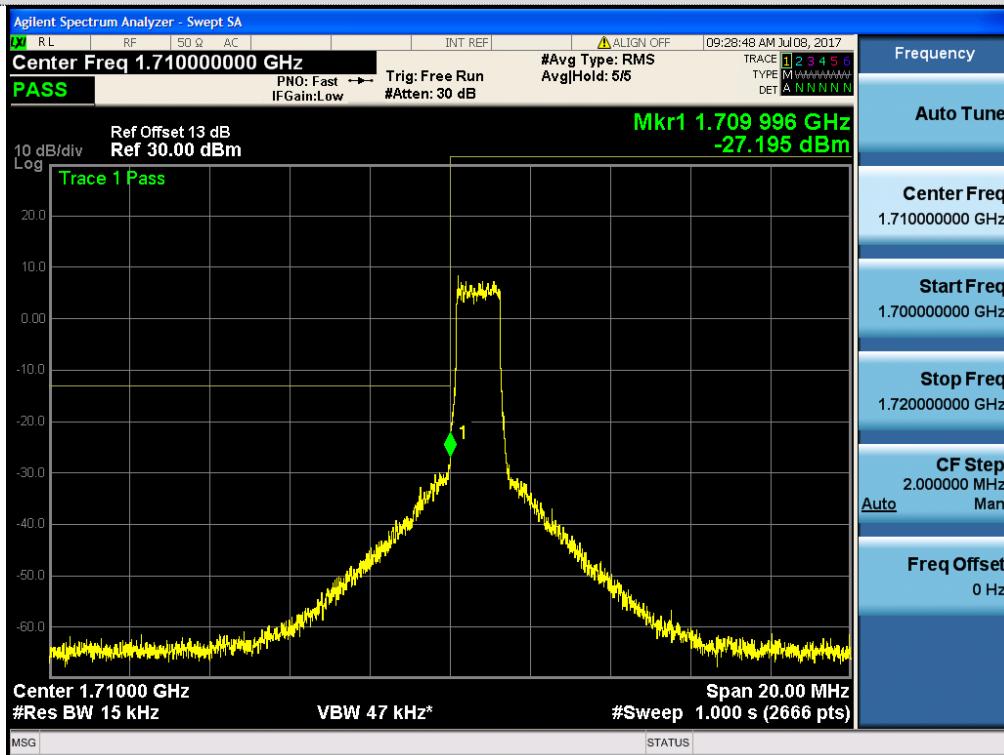

Frequency
Auto Tune
Center Freq 1.710000000 GHz
Start Freq 1.700000000 GHz
Stop Freq 1.720000000 GHz
CF Step 2.000000 MHz Auto Man
Freq Offset 0 Hz


Channel Low-Full RB#

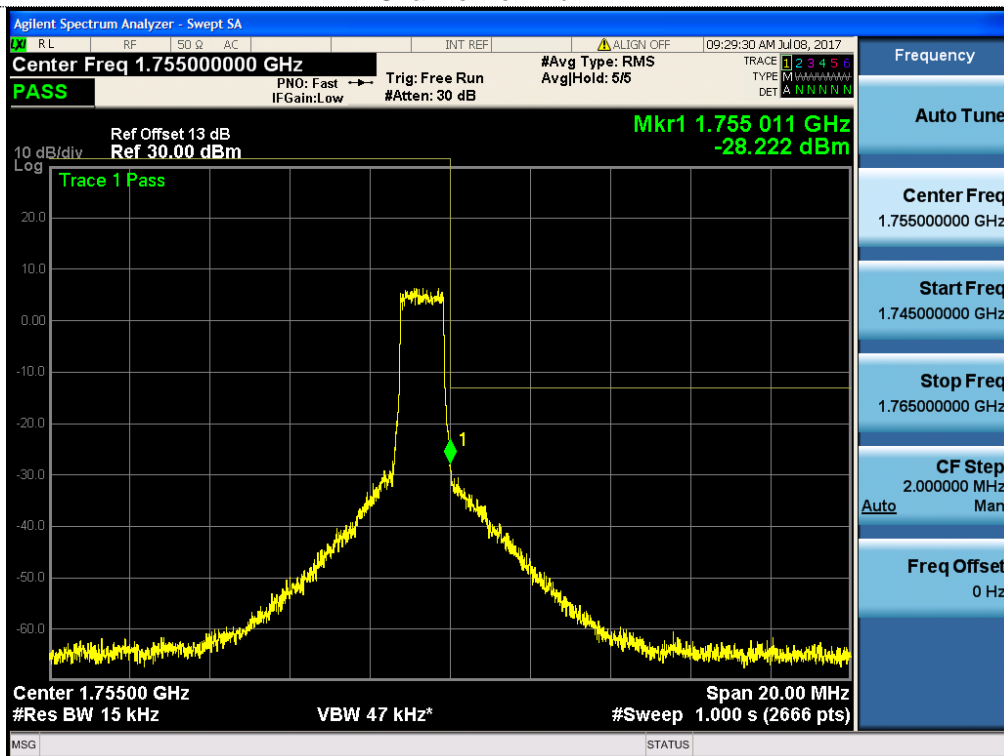


Frequency
Auto Tune
Center Freq 1.755000000 GHz
Start Freq 1.745000000 GHz
Stop Freq 1.765000000 GHz
CF Step 2.000000 MHz Auto Man
Freq Offset 0 Hz

Channel High-Full RB#

LTE Band 4-3MHz-QPSK

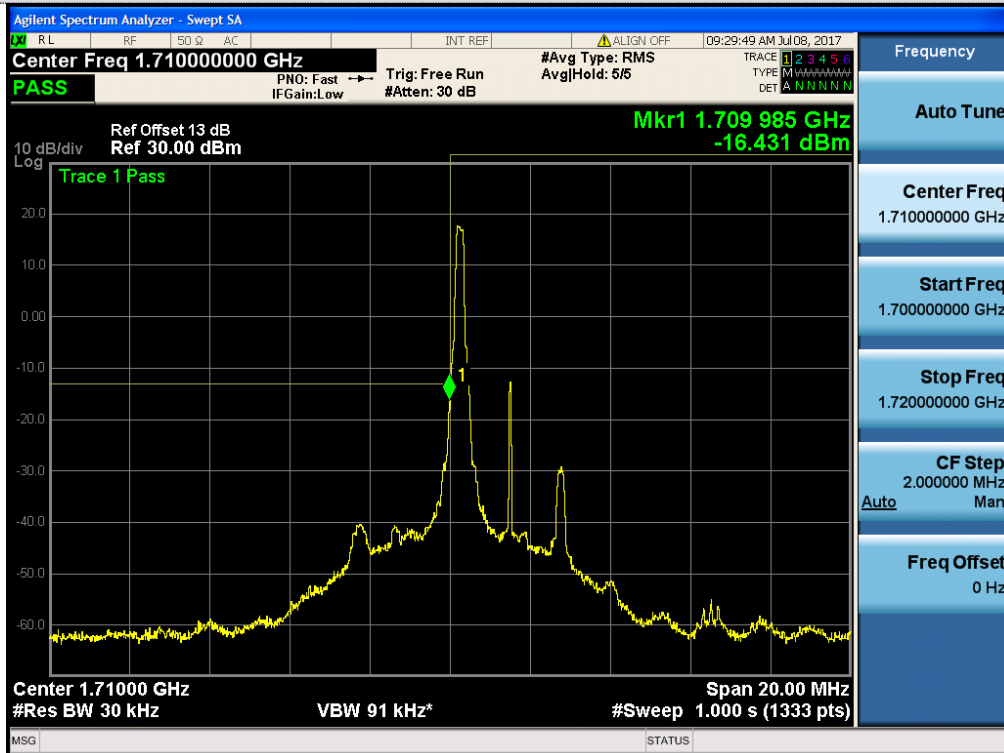


Channel Low-1RB#

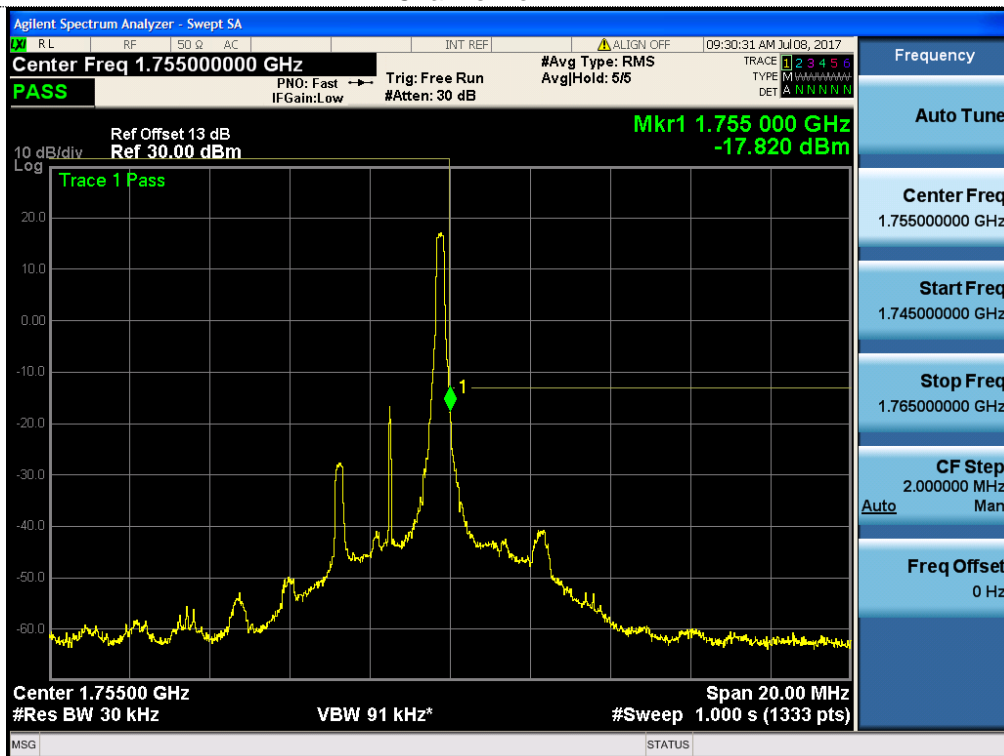

Channel High-1RB#

LTE Band 4-3MHz-QPSK

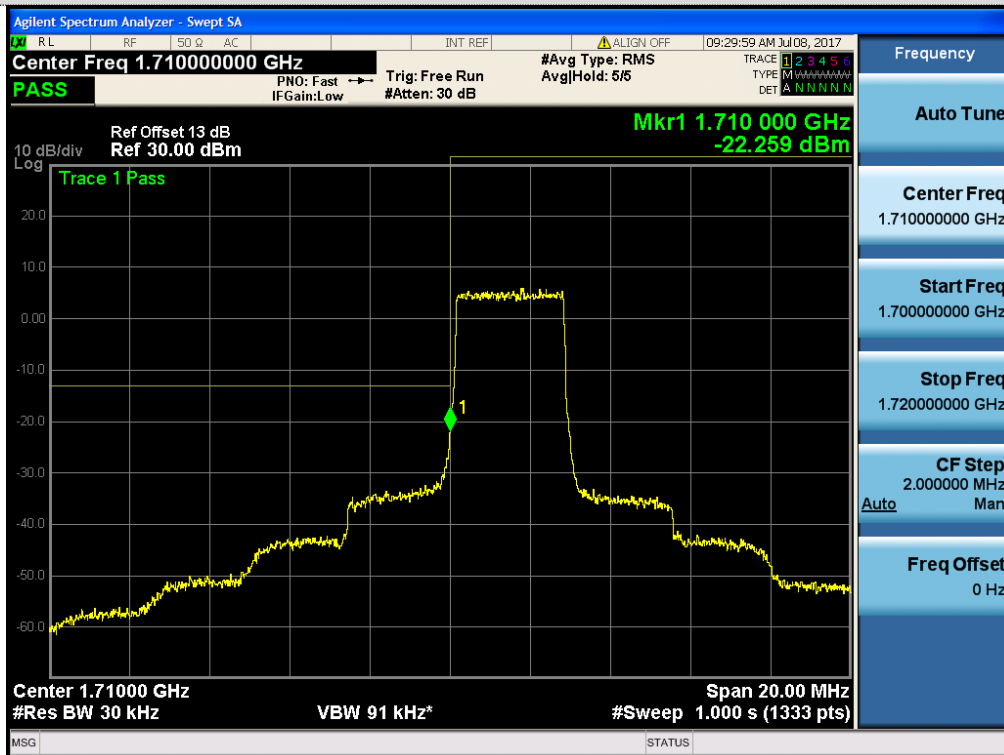


Channel Low-Full RB#




Channel High-Full RB#

LTE Band 4-3MHz-16QAM

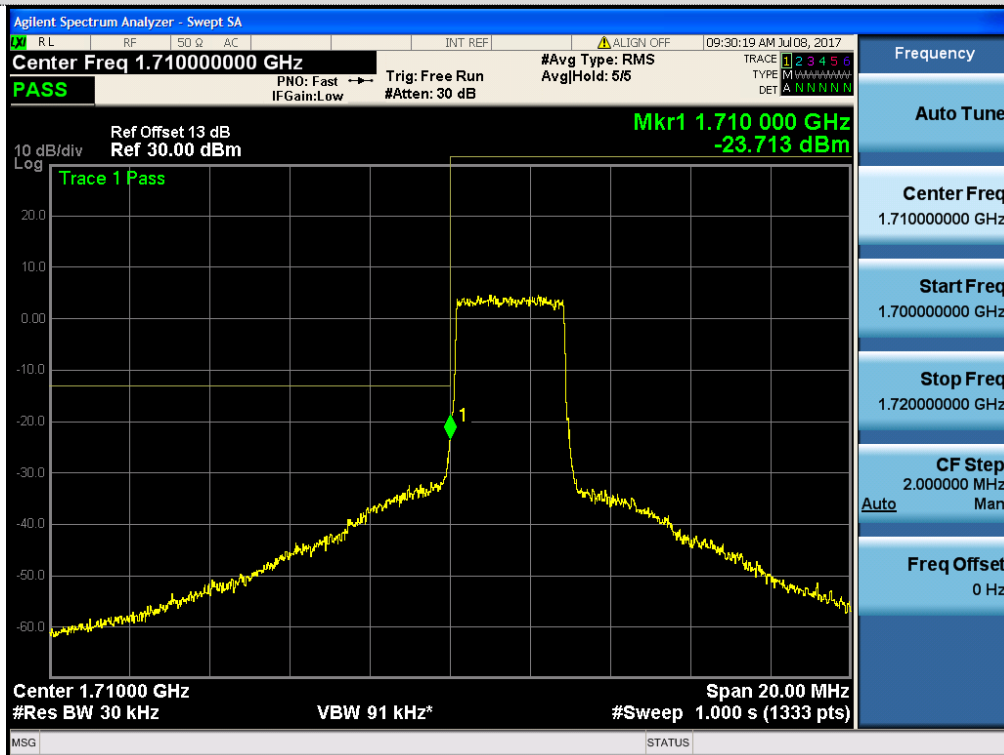


Channel Low-Full RB#

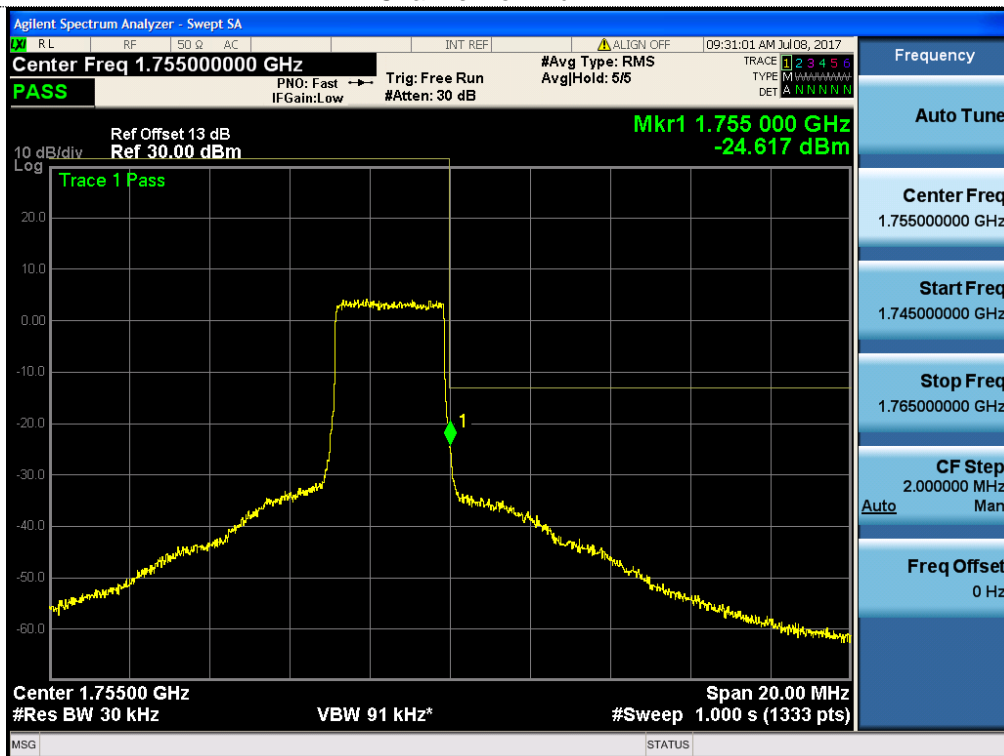


Channel High-Full RB#

LTE Band 4-5MHz-QPSK

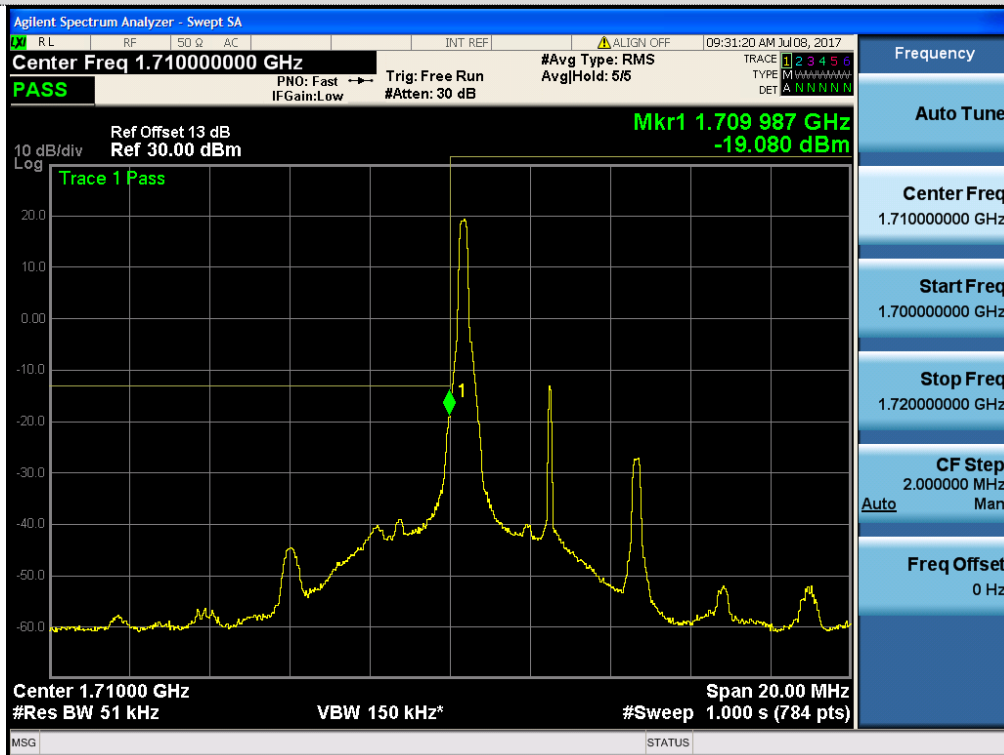


Channel Low-1RB#

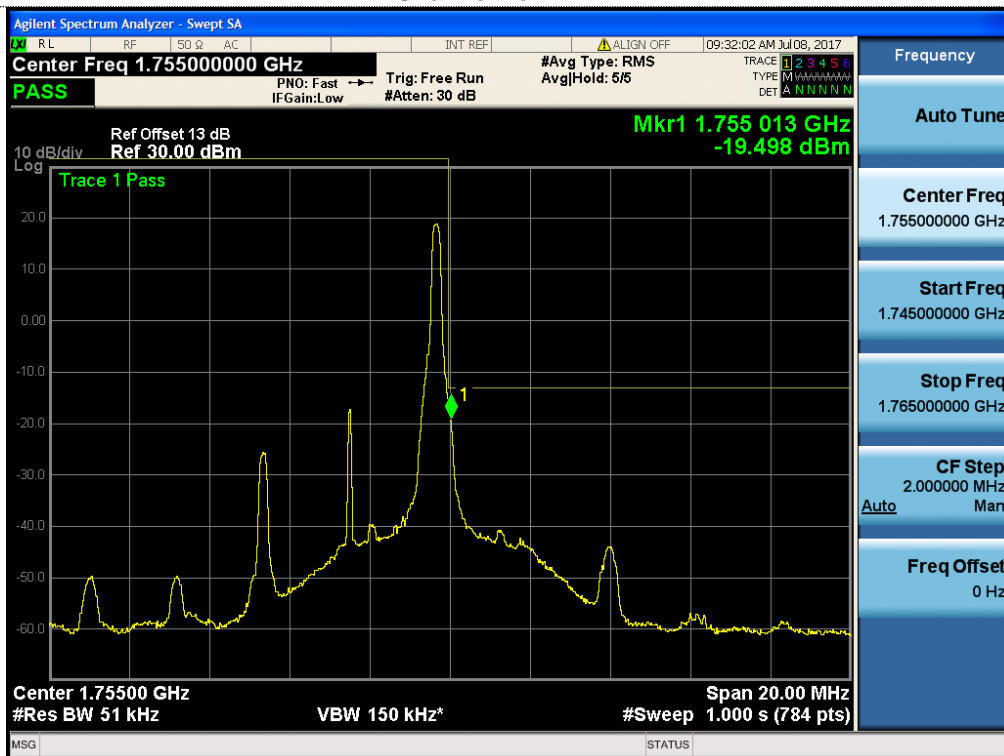

Channel High-1RB#

LTE Band 4-5MHz-QPSK

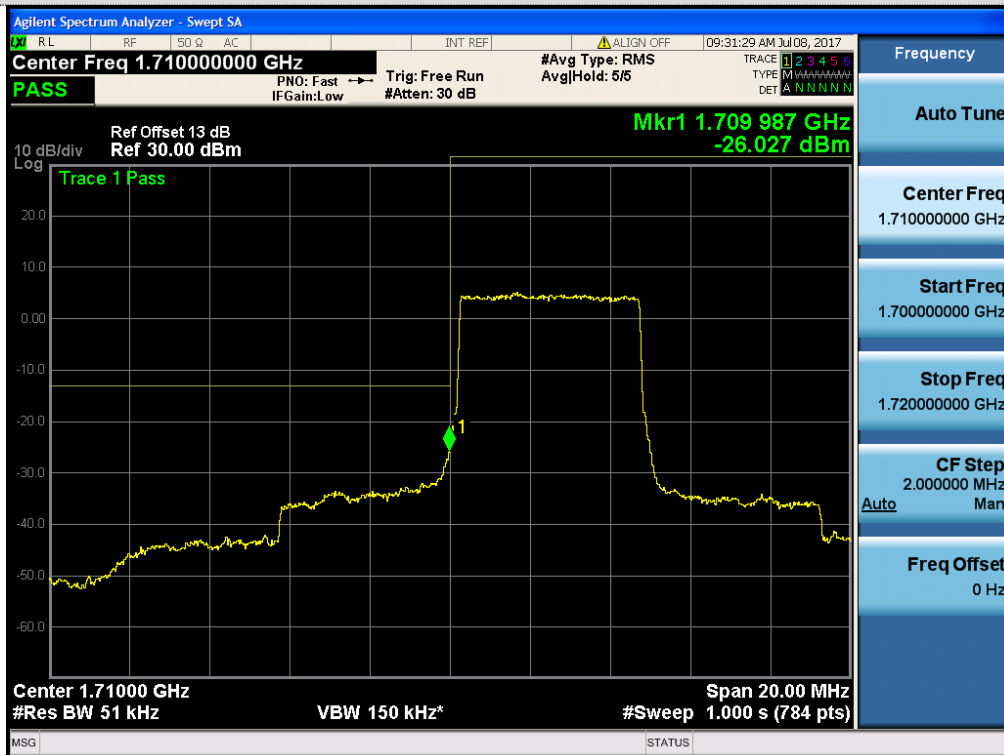


Channel Low-Full RB#




Channel High-Full RB#

LTE Band 4-5MHz-16QAM

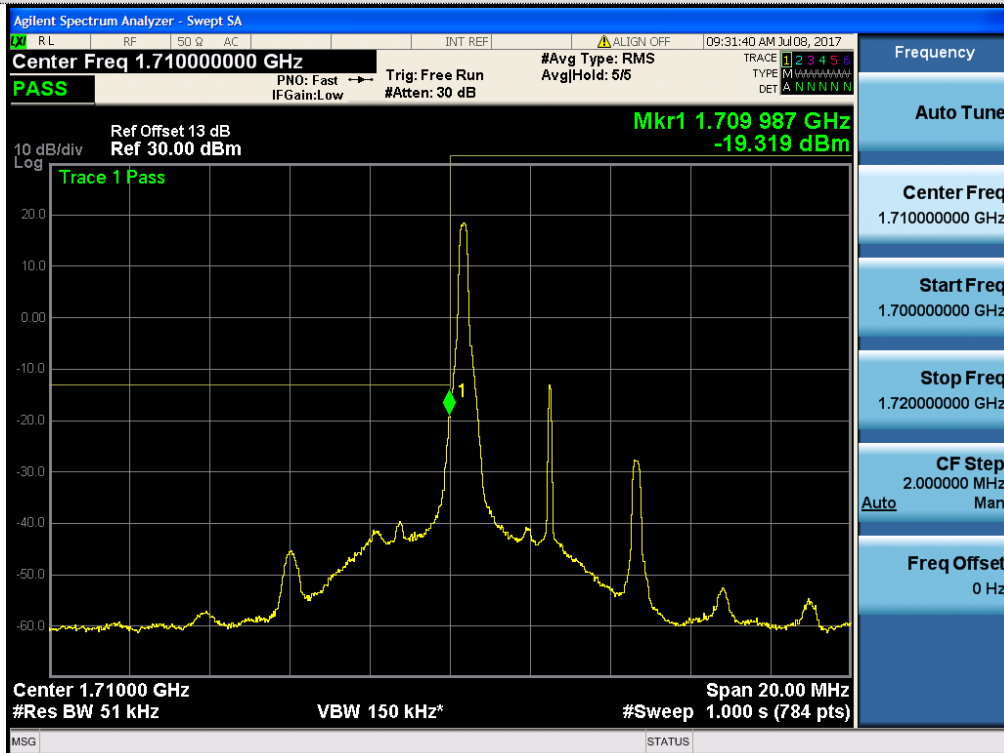


Channel Low-1RB#

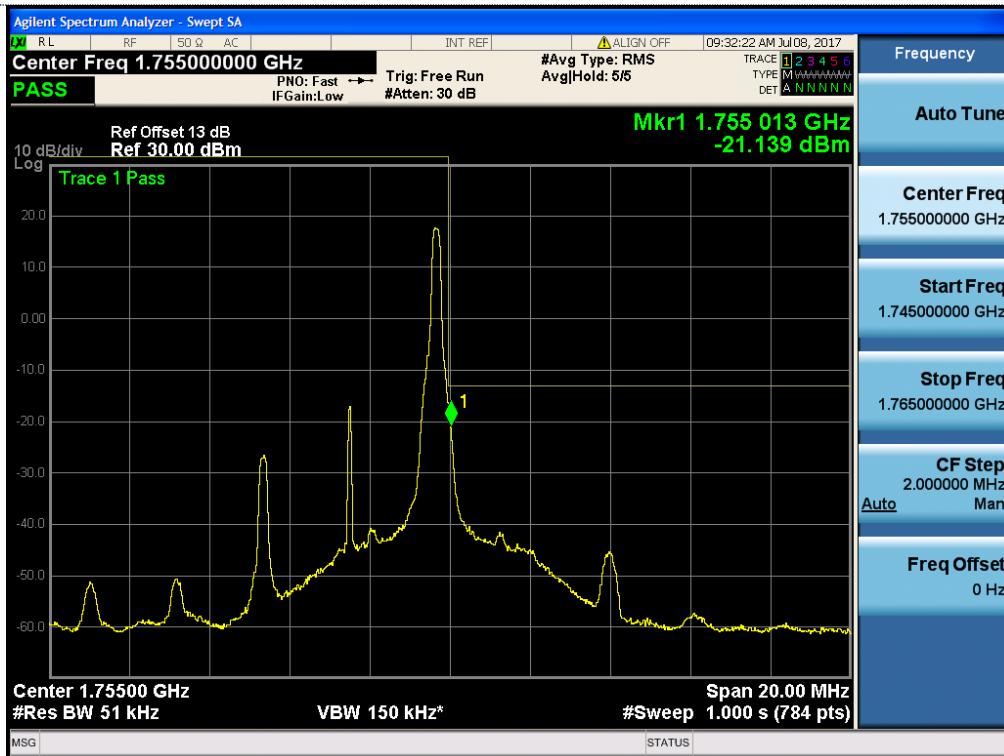

Channel High-1RB#

LTE Band 4-5MHz-16QAM

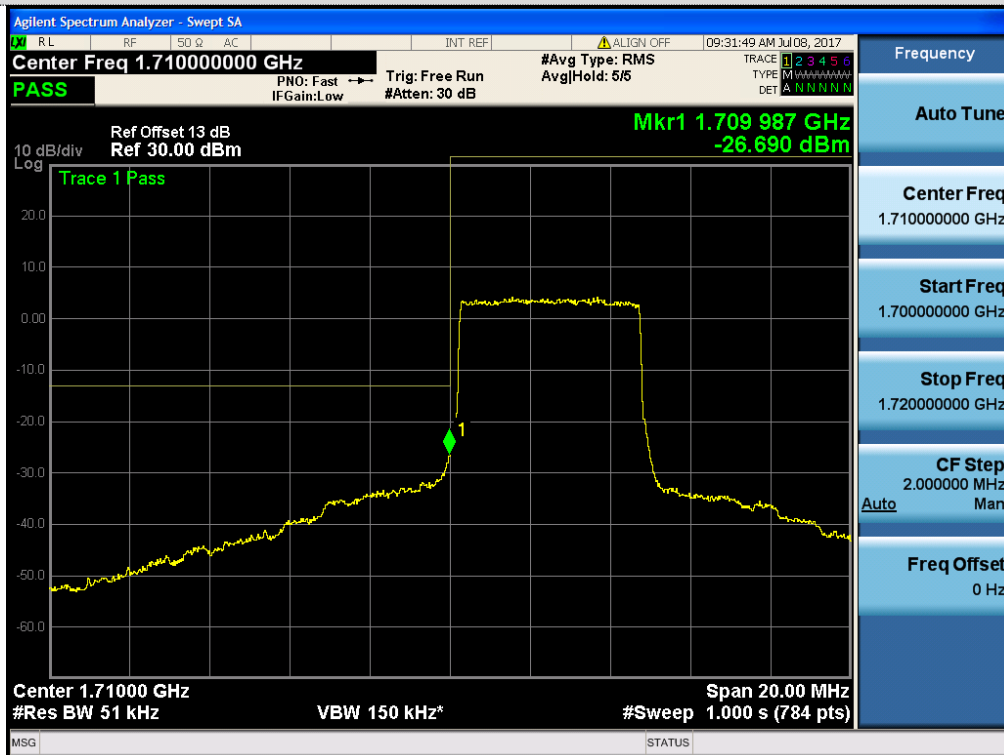


Channel Low-Full RB#




Channel High-Full RB#

LTE Band 4-10MHz-QPSK

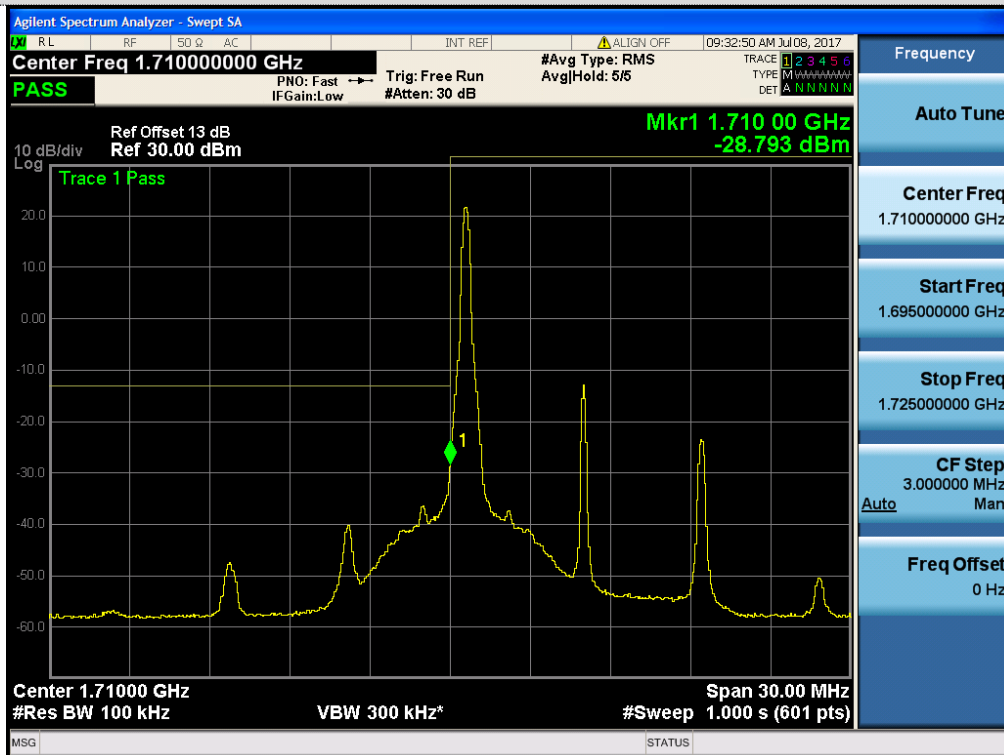


Channel Low-1RB#

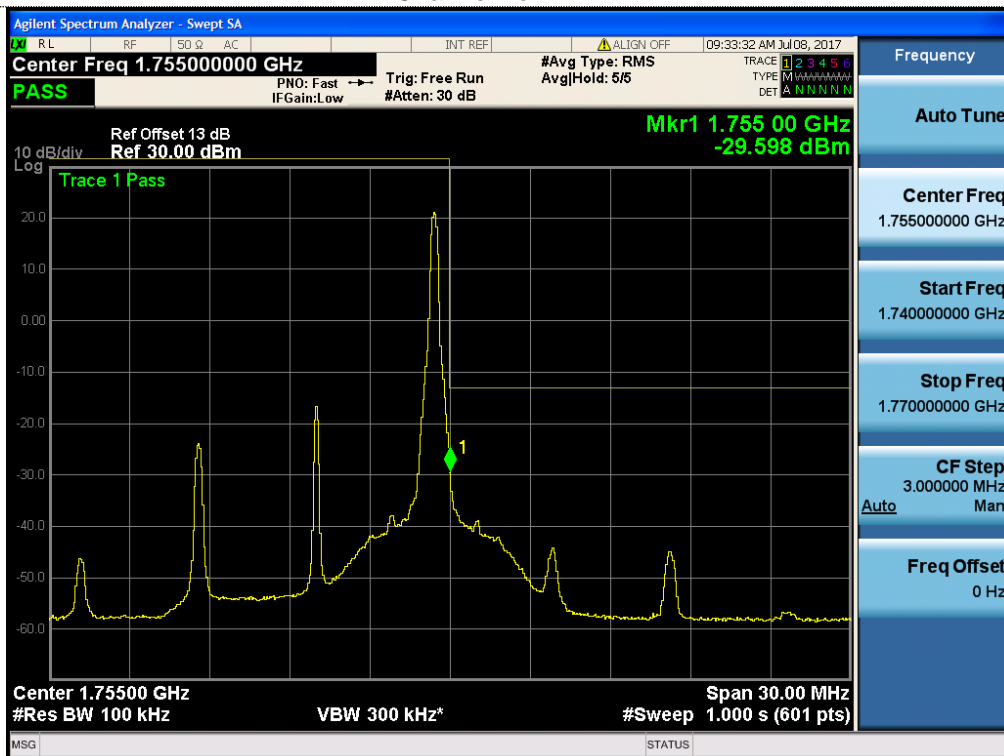


Channel High-1RB#

LTE Band 4-10MHz-QPSK

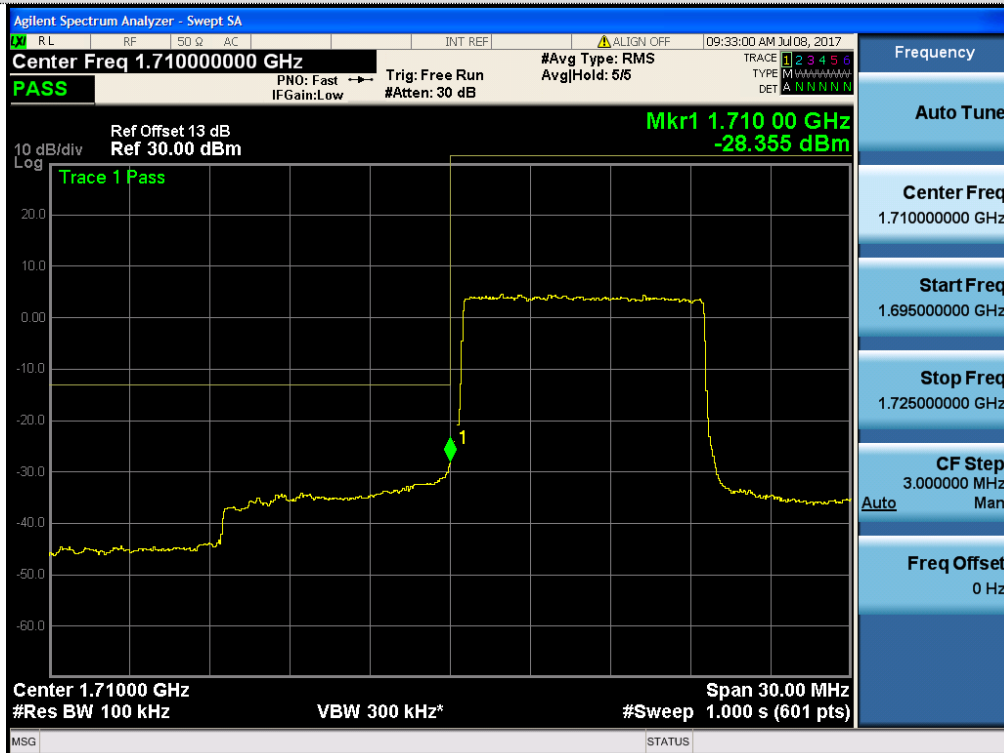


Channel Low-Full RB#

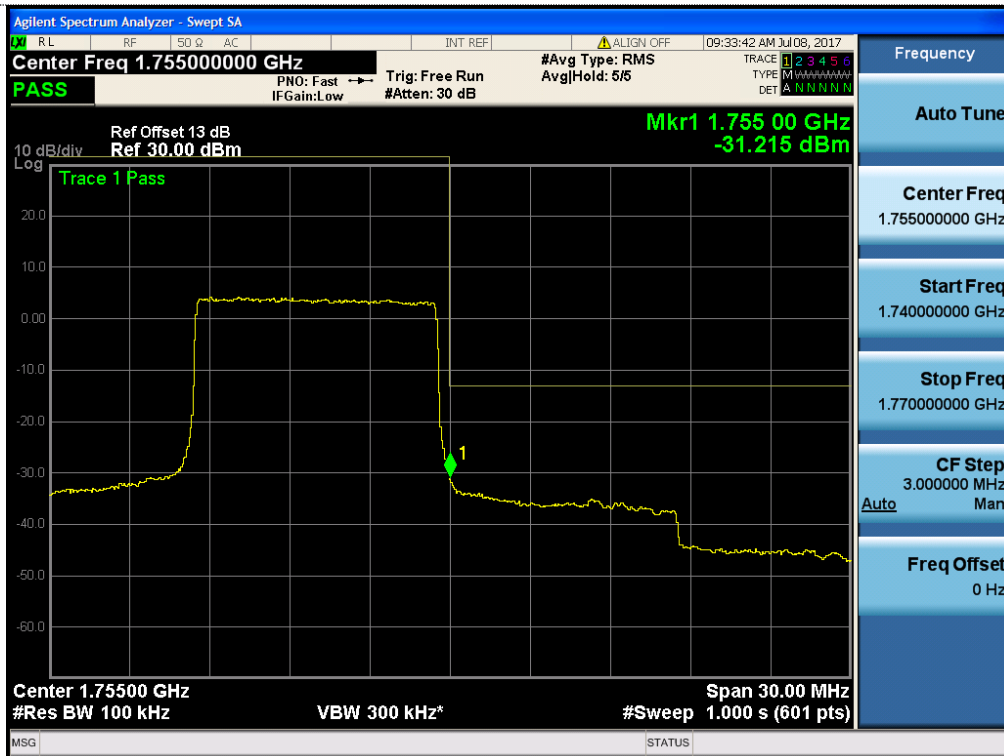


Channel High-Full RB#

LTE Band 4-10MHz-16QAM

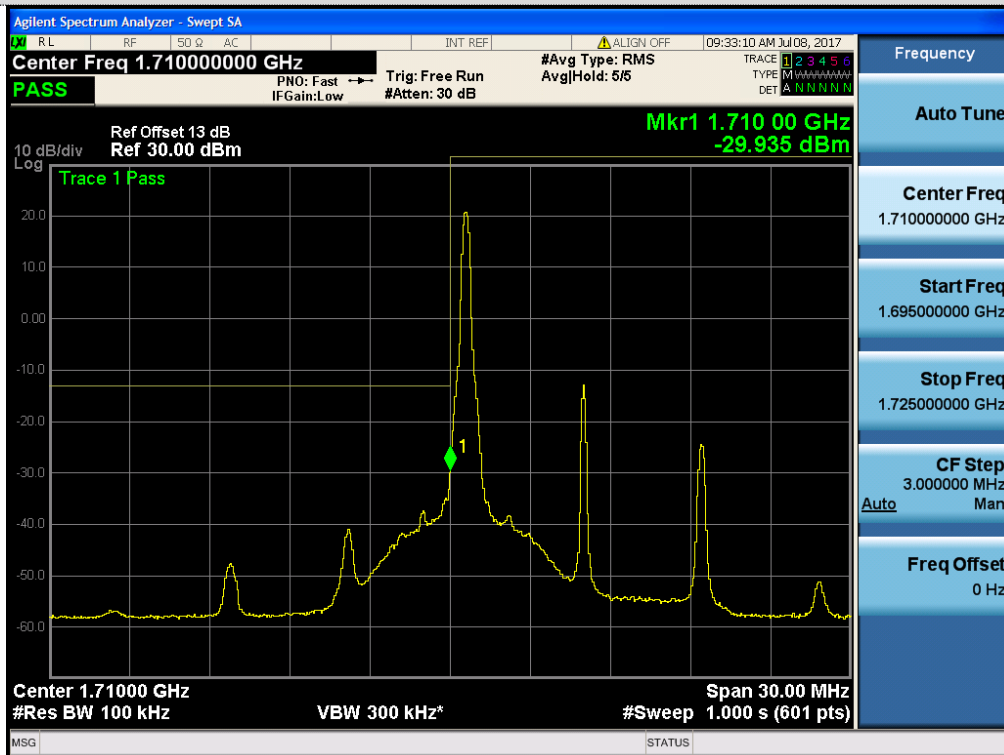

Frequency
Auto Tune
Center Freq 1.710000000 GHz
Start Freq 1.695000000 GHz
Stop Freq 1.725000000 GHz
CF Step 3.000000 MHz Auto Man
Freq Offset 0 Hz


Channel Low-1RB#

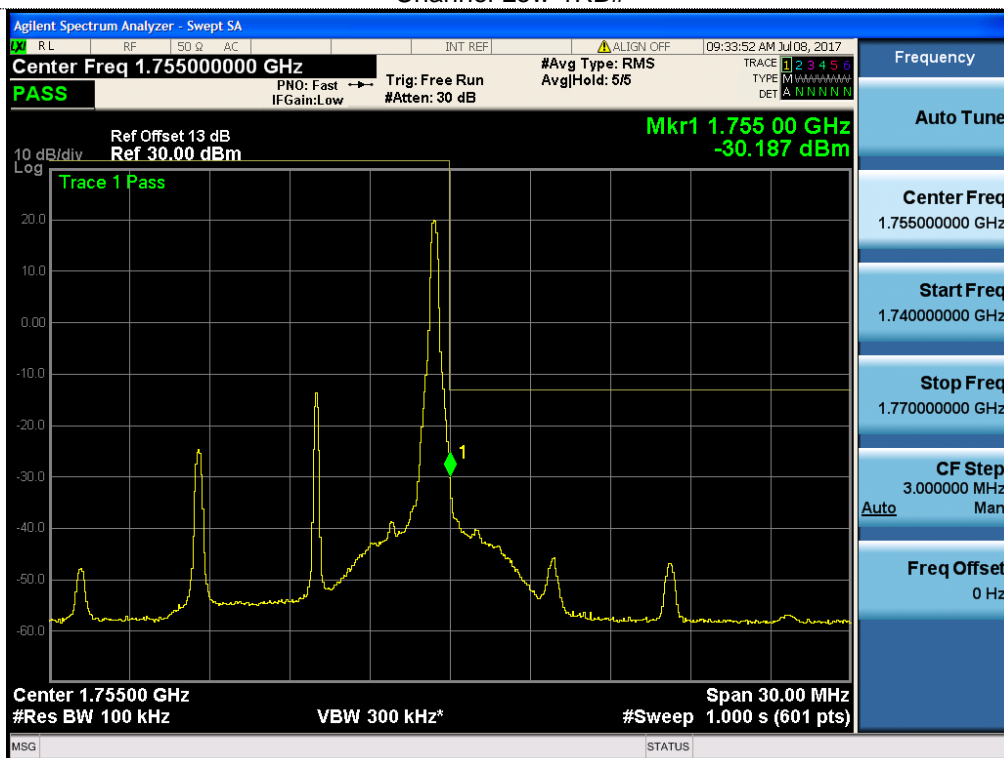

Frequency
Auto Tune
Center Freq 1.755000000 GHz
Start Freq 1.740000000 GHz
Stop Freq 1.770000000 GHz
CF Step 3.000000 MHz Auto Man
Freq Offset 0 Hz

Channel High-1RB#

LTE Band 4-10MHz-16QAM

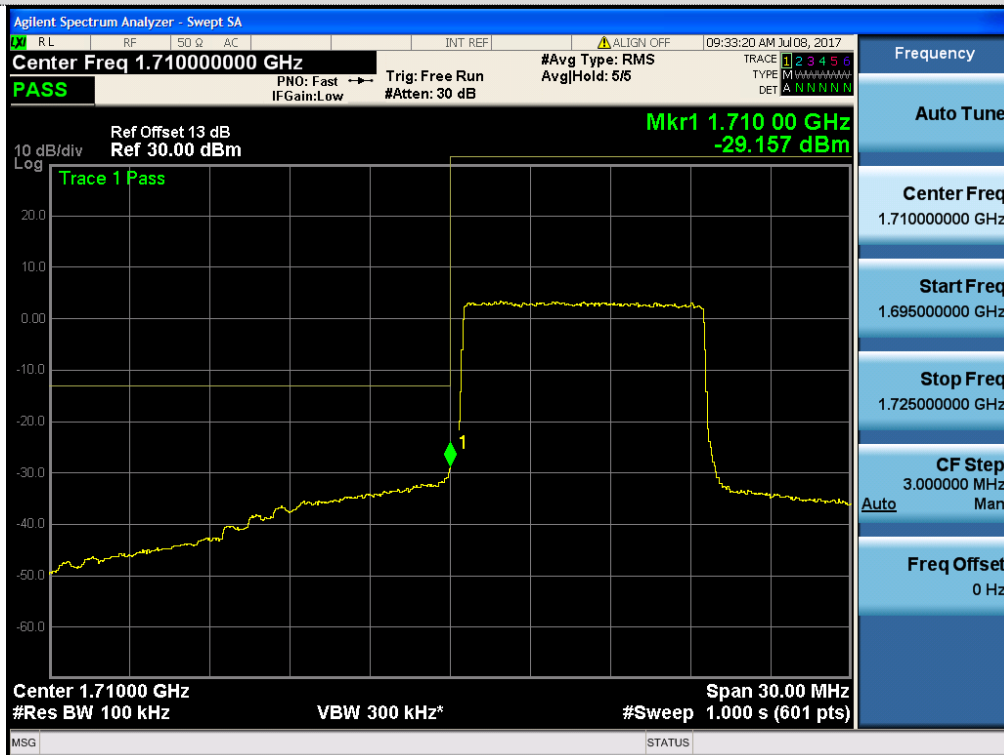


Channel Low-Full RB#




Channel High-Full RB#

LTE Band 4-15MHz-QPSK

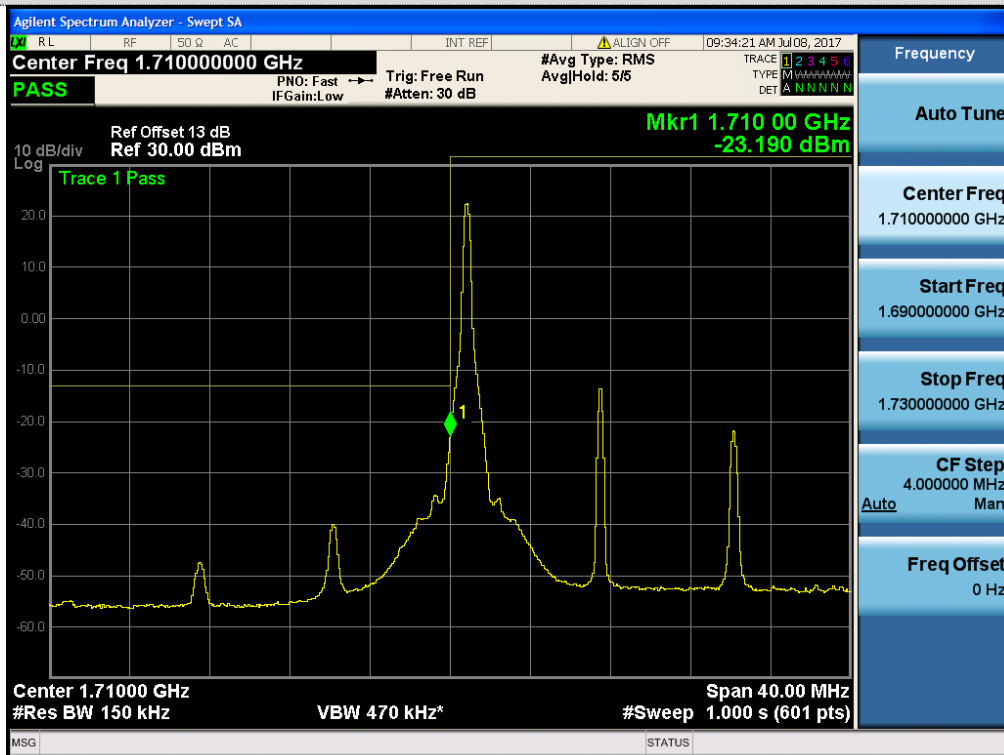


Channel Low-1RB#

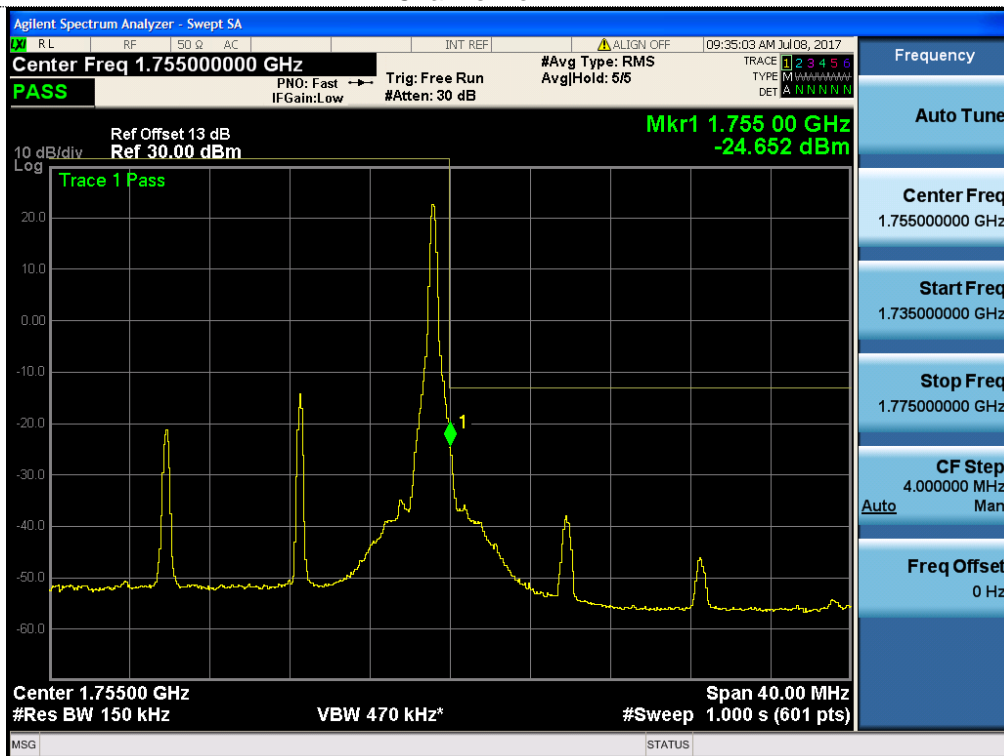

Channel High-1RB#

LTE Band 4-15MHz-QPSK

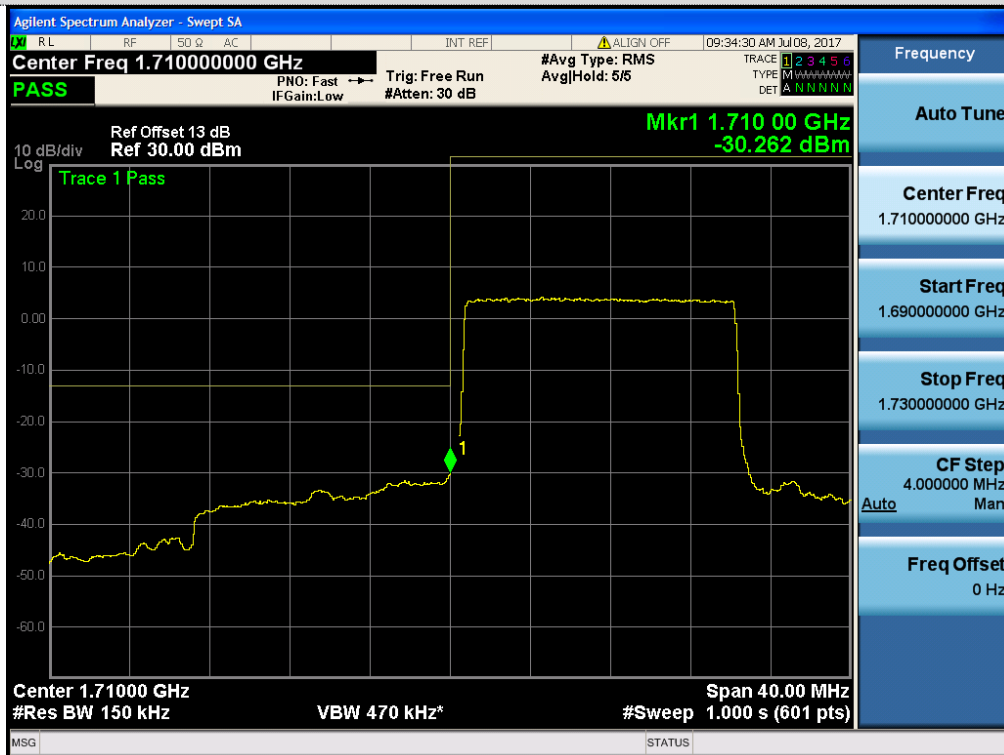


Channel Low-Full RB#




Channel High-Full RB#

LTE Band 4-15MHz-16QAM

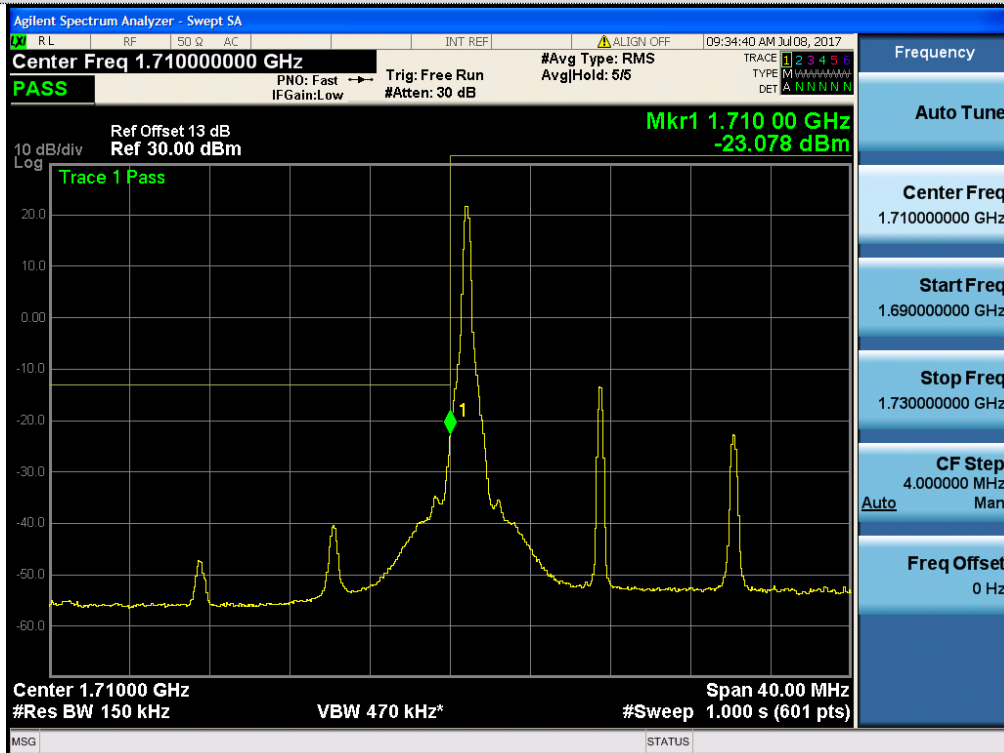


Channel Low-1RB#

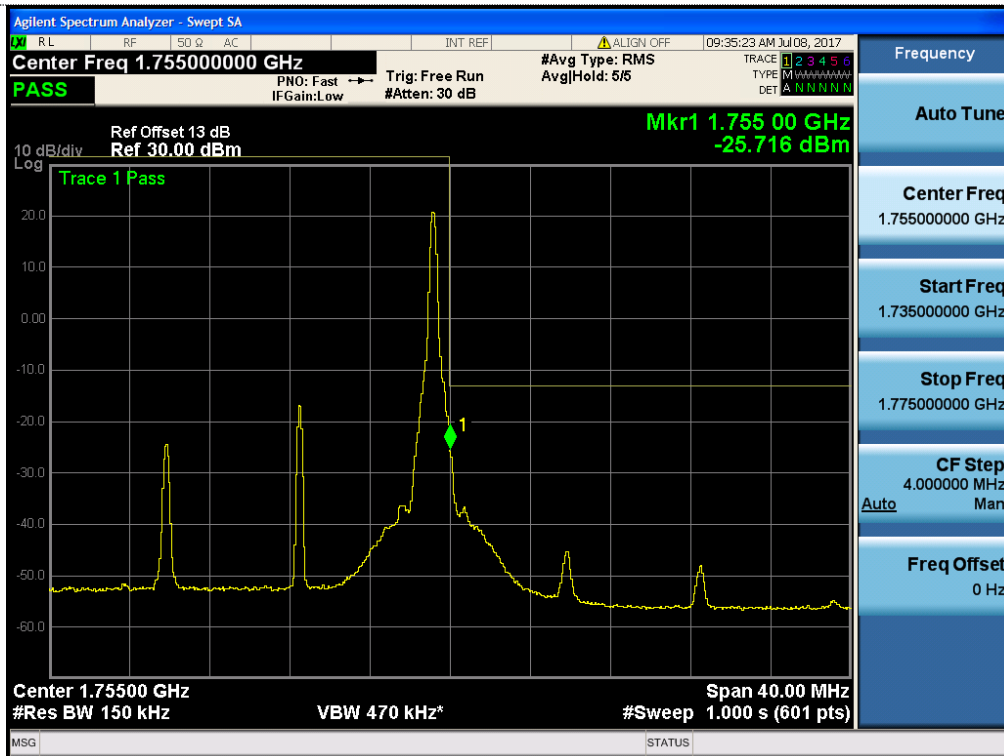


Channel High-1RB#

LTE Band 4-15MHz-16QAM

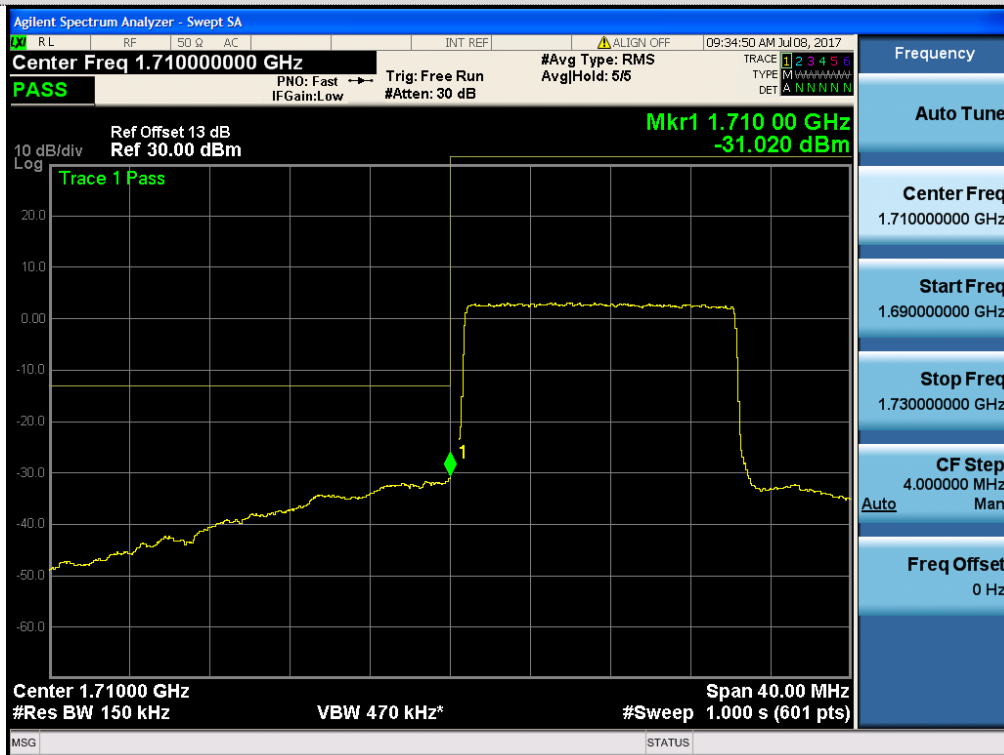


Channel Low-Full RB#

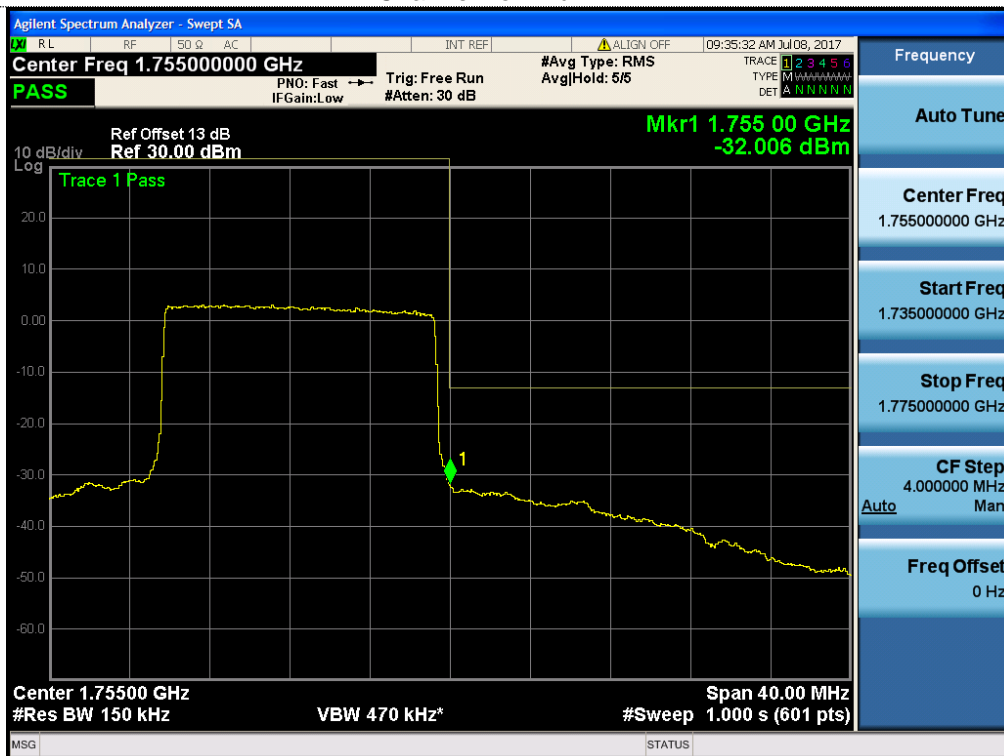


Channel High-Full RB#

LTE Band 4-20MHz-QPSK

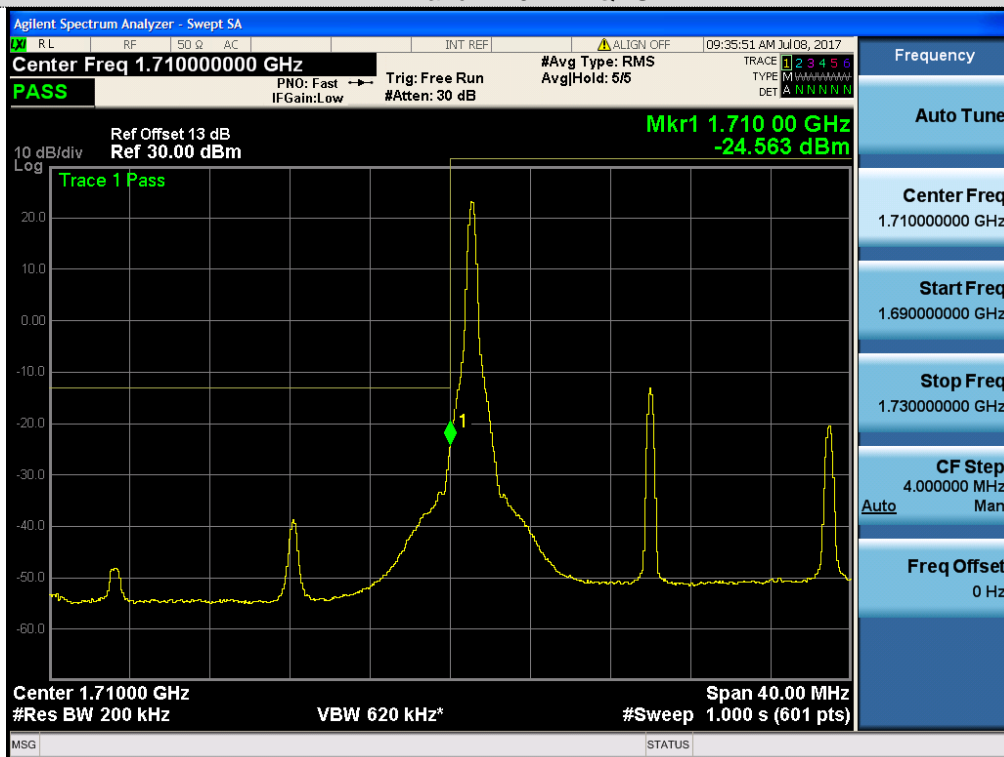


Channel Low-1RB#

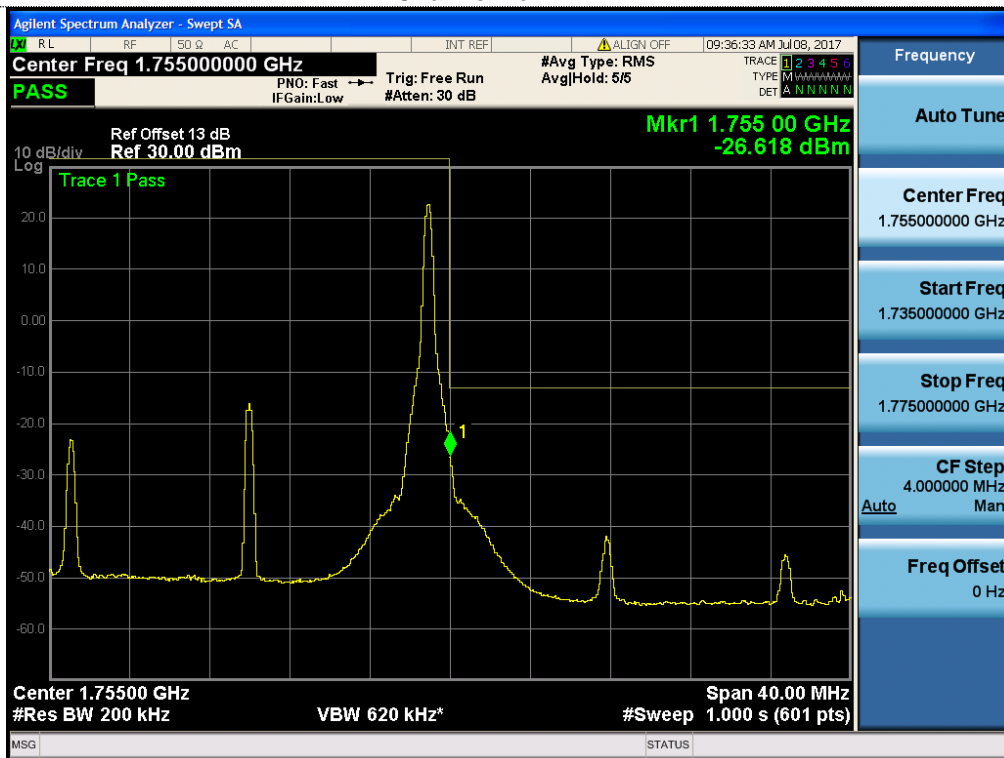

Channel High-1RB#

LTE Band 4-20MHz-QPSK

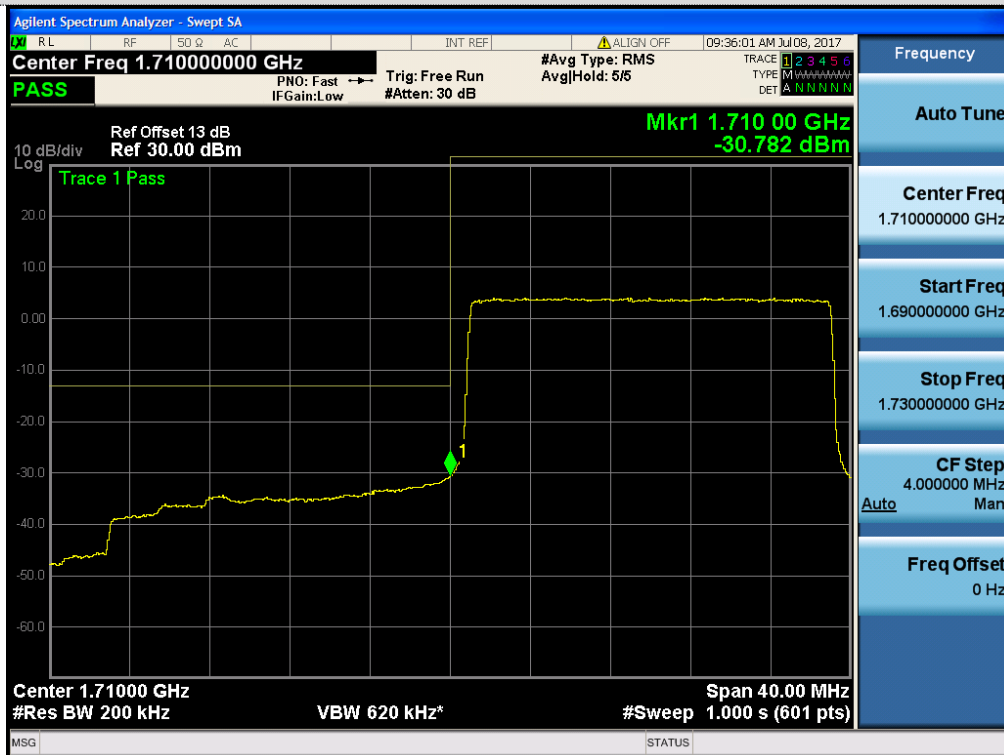


Channel Low-Full RB#




Channel High-Full RB#

LTE Band 4-20MHz-16QAM

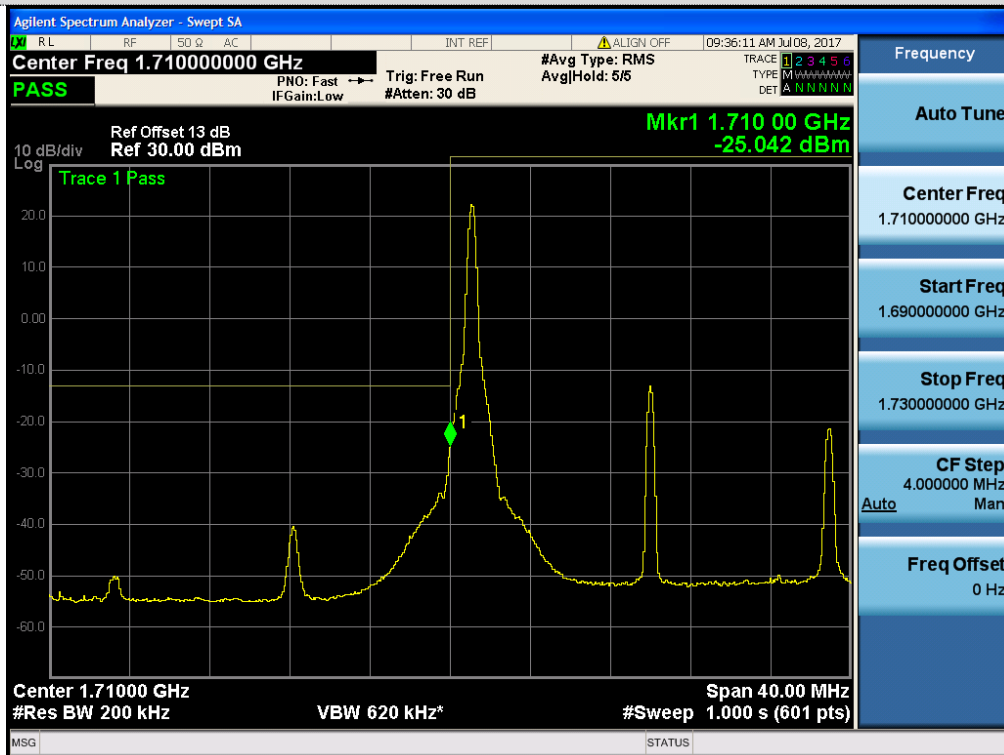


Channel Low-1RB#

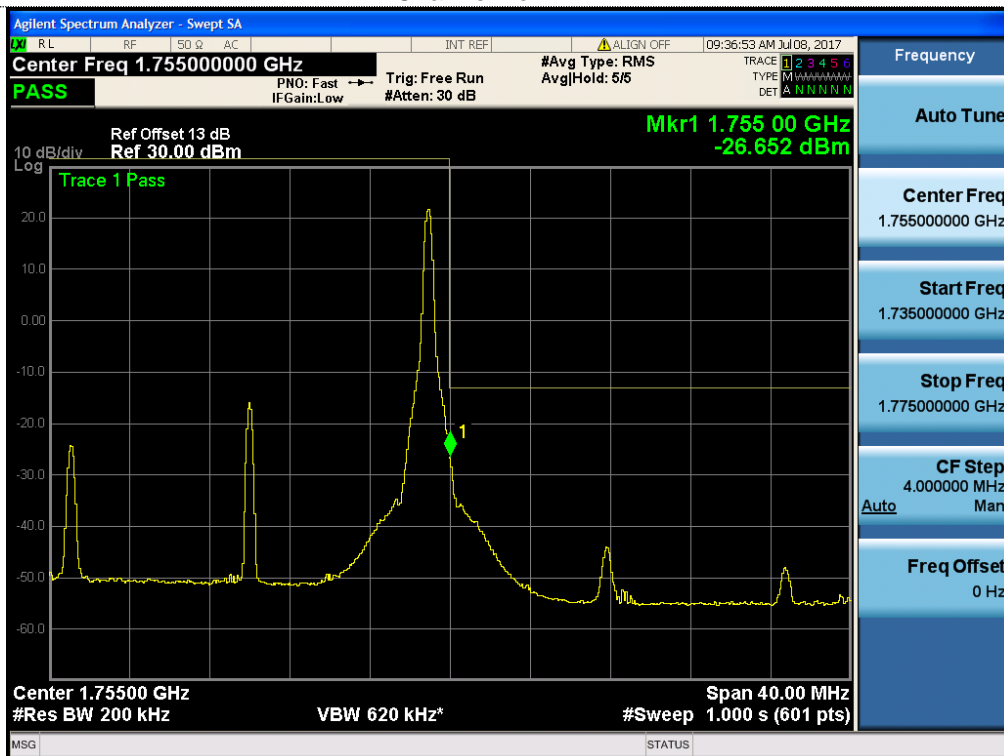

Channel High-1RB#

LTE Band 4-20MHz-16QAM

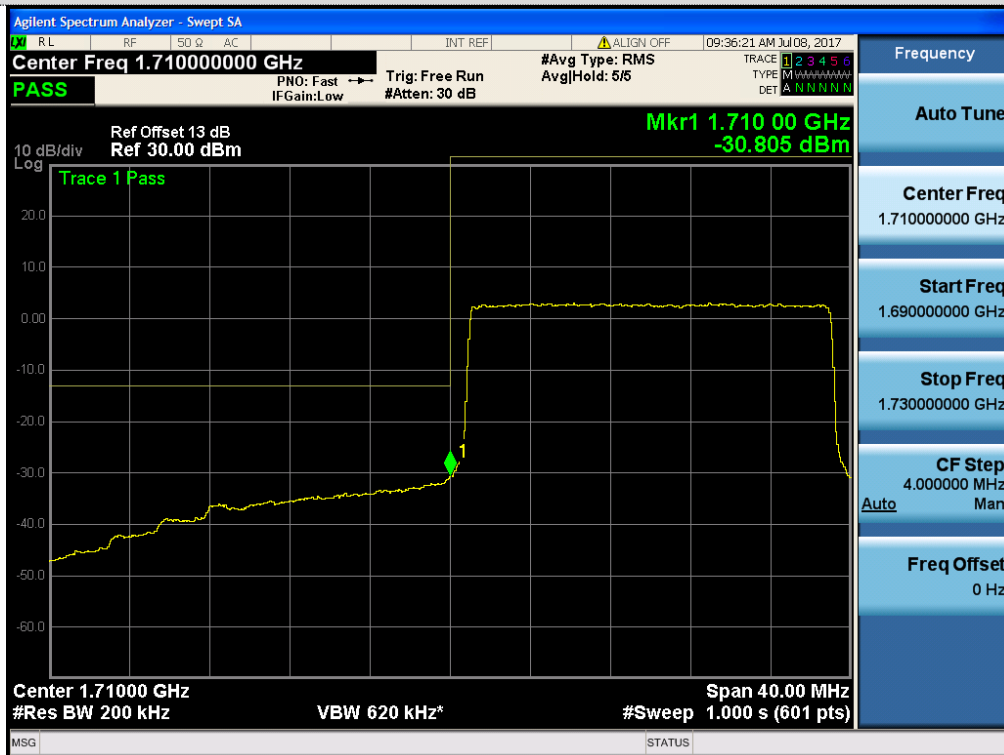

Channel Low-Full RB#




Channel High-Full RB#

5.5. ERP AND EIRP

LIMIT

LTE Band 4: EIRP < 1W,

TEST CONFIGURATION

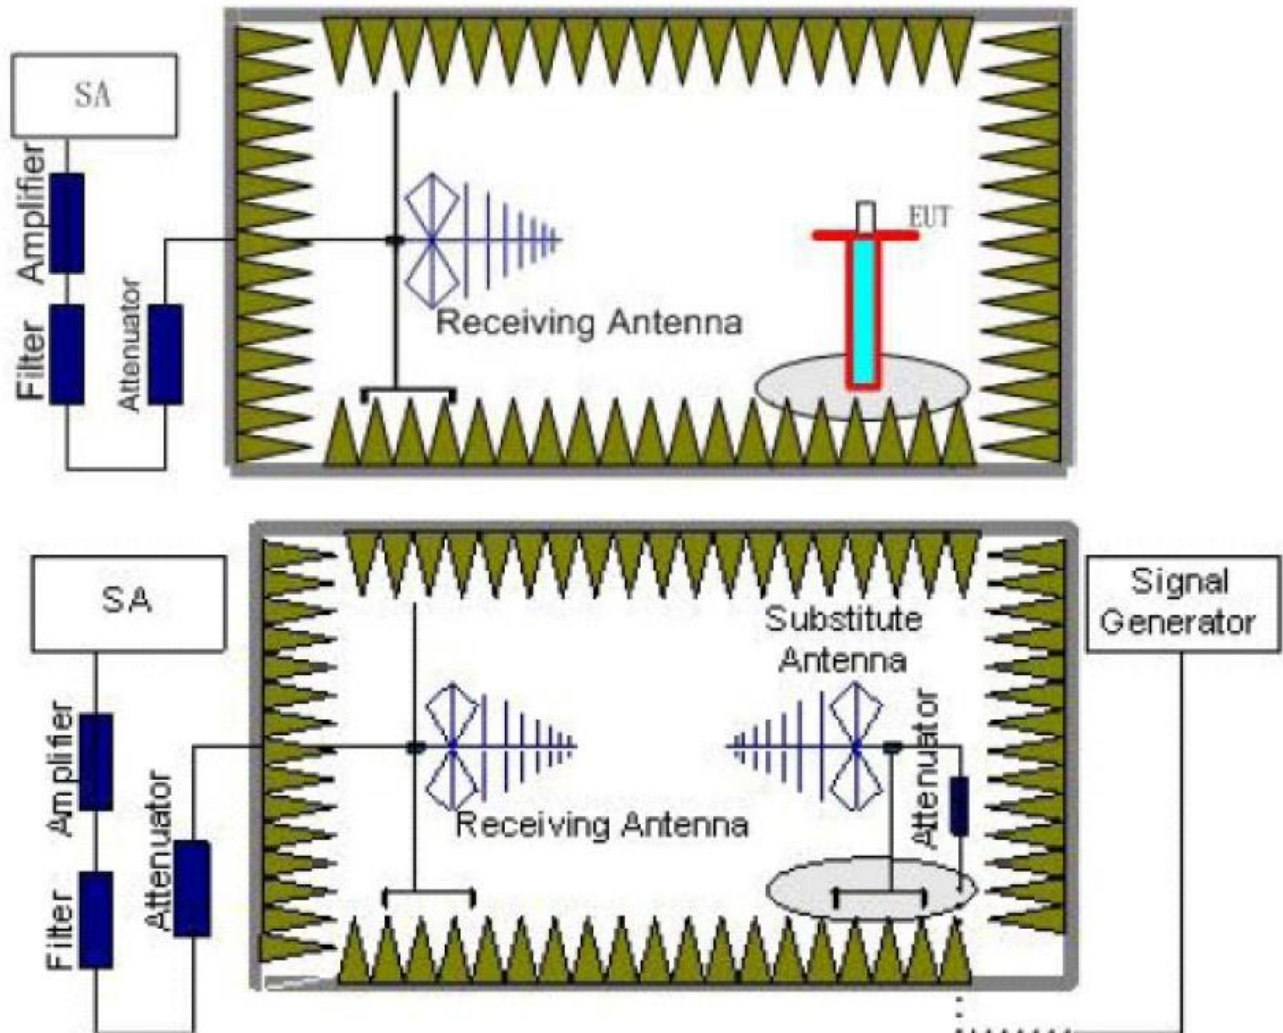

TEST PROCEDURE

1. EUT was placed on a 0.8 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna shall be moved from 1m to 4m. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with peak detector.
2. A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
3. The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=1MHz, VBW=3MHz for above 1GHz and RBW=100kHz, VBW=300kHz for 30MHz to 1GHz,, And the maximum value of the receiver should be recorded as (Pr).
4. The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (PMea) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver

reach the previously recorded (Pr). The power of signal source (PMea) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

5. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (Pcl) ,the Substitution Antenna Gain (Ga) and the Amplifier Gain (PAg) should be recorded after test.
6. The measurement results are obtained as described below:
Power(EIRP)=PMea- PAg - Pcl + Ga
We used SMF100A micowave signal generator which signal level can up to 33dBm,so we not used power Amplifier for substitution test; The measurement results are amend as described below:
Power(EIRP)=PMea- Pcl + Ga
7. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.
ERP can be calculated from EIRP by subtracting the gain of the dipole, ERP = EIRP-2.15dBi.

TEST MODE:

Please refer to the clause 3.3

TEST RESULTS

Passed **Not Applicable**

LTE Band 4-1.4MHz					
Modulation	Channel	EIRP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	21.74	19.38	30.00	PASS
	Mid	21.52	19.52		
	High	21.66	19.60		
16QAM	Low	21.24	19.44		PASS
	Mid	21.25	19.46		
	High	21.50	19.54		

LTE Band 4-3MHz					
Modulation	Channel	EIRP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	21.88	19.46	30.00	PASS
	Mid	21.52	19.39		
	High	21.73	19.42		
16QAM	Low	21.62	19.40		PASS
	Mid	21.13	19.29		
	High	21.75	19.42		

LTE Band 4-5MHz					
Modulation	Channel	EIRP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	20.52	18.55	30.00	PASS
	Mid	20.44	18.62		
	High	20.55	18.74		
16QAM	Low	20.12	18.46		PASS
	Mid	20.84	18.69		
	High	20.23	18.67		

LTE Band 4-10MHz					
Modulation	Channel	EIRP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	20.21	18.15	30.00	PASS
	Mid	20.15	18.06		
	High	20.35	18.31		
16QAM	Low	20.12	18.16		PASS
	Mid	20.14	18.05		
	High	20.15	18.30		

LTE Band 4-15MHz						
Modulation	Channel	EIRP (dBm)		Limit (dBm)	Result	
		Vertical	Horizontal			
QPSK	Low	20.22	18.14	30.00	PASS	
	Mid	20.43	18.52			
	High	20.09	18.03			
16QAM	Low	19.63	18.14		30.00	PASS
	Mid	20.43	18.52			
	High	19.94	18.03			


LTE Band 4-20MHz						
Modulation	Channel	EIRP (dBm)		Limit (dBm)	Result	
		Vertical	Horizontal			
QPSK	Low	20.22	18.33	30.00	PASS	
	Mid	20.47	18.41			
	High	20.52	18.45			
16QAM	Low	19.67	18.22		30.00	PASS
	Mid	19.65	18.20			
	High	21.30	18.62			

5.6. Radiated Spurious Emission

LIMIT

LTE Band 4 <-13dBm;

TEST CONFIGURATION

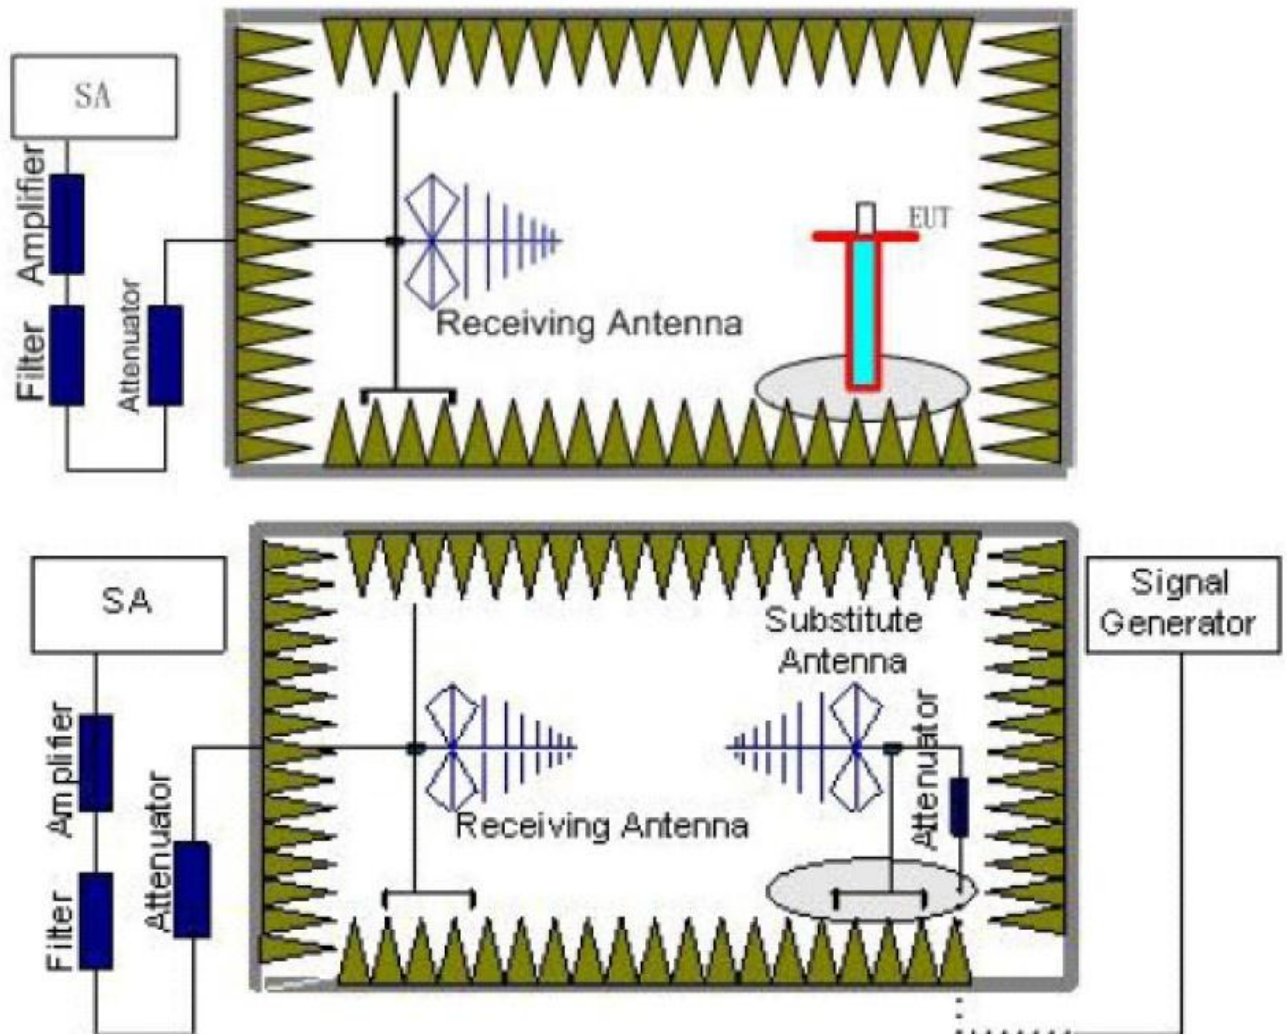

TEST RESULTS

1. EUT was placed on a 0.8 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna shall be moved from 1m to 4m. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with peak detector.
2. A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
3. The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=1MHz, VBW=3MHz for above 1GHz and RBW=100kHz, VBW=300kHz for 30MHz to 1GHz, And the maximum value of the receiver should be recorded as (Pr).
4. The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (P_{Mea}) is applied to the input of the

substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (Pr). The power of signal source (PMea) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

5. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (Pcl) ,the Substitution Antenna Gain (Ga) and the Amplifier Gain (PAg) should be recorded after test.
6. The measurement results are obtained as described below:
Power(EIRP)=PMea- PAg - Pcl + Ga
We used SMF100A micowave signal generator which signal level can up to 33dBm,so we not used power Amplifier for substitution test; The measurement results are amend as described below:
Power(EIRP)=PMea- Pcl + Ga
7. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.
ERP can be calculated from EIRP by subtracting the gain of the dipole, ERP = EIRP-2.15dBi.

TEST MODE:

Please refer to the clause 3.3

TEST RESULTS

Passed **Not Applicable**

LTE Band 4-1.4MHz					
Channel	Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
		Polarization	Level (dBm)		
Low	3421.4	Vertical	-28.36	-13.00	Pass
	5132.1	V	-34.58		
	6842.8	V	---		
	3421.4	Horizontal	-30.66		
	5132.1	H	-38.75		
	6842.8	H	---		
Mid	3465	Vertical	-28.25	-13.00	Pass
	5197.5	V	-34.68		
	6930	V	---		
	3465	Horizontal	-30.79		
	5197.5	H	-38.86		
	6930	H	---		
High	3508.6	Vertical	-28.08	-13.00	Pass
	5262.9	V	-34.51		
	7017.2	V	---		
	3508.6	Horizontal	-30.81		
	5262.9	H	-38.87		
	7017.2	H	---		

Remark:

1. Remark"---" means that the emission level is too low to be measured
2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

LTE Band 4-3MHz					
Channel	Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
		Polarization	Level (dBm)		
Low	3423	Vertical	-27.90	-13.00	Pass
	5134.5	V	-34.75		
	6846	V	---		
	3423	Horizontal	-30.96		
	5134.5	H	-38.91		
	6846	H	---		
Mid	3465	Vertical	-27.77	-13.00	Pass
	5197.5	V	-34.63		
	6930	V	---		
	3465	Horizontal	-30.76		
	5197.5	H	-39.07		
	6930	H	---		
High	3507	Vertical	-28.06	-13.00	Pass
	5260.5	V	-34.37		
	7014	V	---		
	3423	Horizontal	-30.81		
	5134.5	H	-39.02		
	6846	H	---		

Remark:

1. Remark"---" means that the emission level is too low to be measured
2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

LTE Band 4-5MHz					
Channel	Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
		Polarization	Level (dBm)		
Low	3425	Vertical	-27.36	-13.00	Pass
	5137.5	V	-34.92		
	6850	V	---		
	3425	Horizontal	-30.99	-13.00	Pass
	5137.5	H	-39.18		
	6850	H	---		
Mid	3465	Vertical	-27.23	-13.00	Pass
	5197.5	V	-34.80		
	6930	V	-		
	3465	Horizontal	-30.83	-13.00	Pass
	5197.5	H	-39.06		
	6930	H	---		
High	3505	Vertical	-27.44	-13.00	Pass
	5257.5	V	-34.99		
	7010	V	-		
	3505	Horizontal	-30.96	-13.00	Pass
	5257.5	H	-39.17		
	7010	H	---		

Remark:

1. Remark"---" means that the emission level is too low to be measured
2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

LTE Band 4-10MHz					
Channel	Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
		Polarization	Level (dBm)		
Low	3430	Vertical	-26.81	-13.00	Pass
	5145	V	-35.22		
	6860	V	---		
	3430	Horizontal	-30.54	-13.00	Pass
	5145	H	-38.82		
	6860	H	---		
Mid	3465	Vertical	-27.03	-13.00	Pass
	5197.5	V	-35.43		
	6930	V	---		
	3465	Horizontal	-30.42	-13.00	Pass
	5197.5	H	-38.73		
	6930	H	-		
High	3500	Vertical	-27.19	-13.00	Pass
	5250	V	-35.57		
	7000	V	-		
	3500	Horizontal	-30.26	-13.00	Pass
	5250	H	-38.57		
	7000	H	---		

Remark:

1. Remark"---" means that the emission level is too low to be measured
2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

LTE Band 4-15MHz					
Channel	Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
		Polarization	Level (dBm)		
Low	3435	Vertical	-25.85	-13.00	Pass
	5152.5	V	-35.61		
	6870	V	---		
	3435	Horizontal	-30.65		
	5152.5	H	-38.20		
	6870	H	---		
Mid	3465	Vertical	-26.15	-13.00	Pass
	5197.5	V	-35.89		
	6930	V	---		
	3465	Horizontal	-30.50		
	5197.5	H	-38.09		
	6930	H	---		
High	3490	Vertical	-26.35	-13.00	Pass
	5235	V	-36.07		
	6980	V	---		
	3490	Horizontal	-30.45		
	5235	H	-38.03		
	6980	H	---		

Remark:

1. Remark"---" means that the emission level is too low to be measured
2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

LTE Band 4-20MHz					
Channel	Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
		Polarization	Level (dBm)		
Low	3440	Vertical	-24.60	-13.00	Pass
	5160	V	-36.51		
	6880	V	---		
	3440	Horizontal	-30.03		
	5160	H	-38.39		
	6880	H	---		
Mid	3465	Vertical	-24.28	-13.00	Pass
	5197.5	V	-36.68		
	6930	V	---		
	3465	Horizontal	-30.20		
	5197.5	H	-38.25		
	6930	H	---		
High	3490	Vertical	-24.05	-13.00	Pass
	5235	V	-38.17		
	6980	V	---		
	3490	Horizontal	-29.72		
	5235	H	-38.09		
	6980	H	---		

Remark:


1. Remark"---" means that the emission level is too low to be measured
2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

5.7. Frequency stability V.S. Temperature measurement

LIMIT

2.5ppm

TEST CONFIGURATION

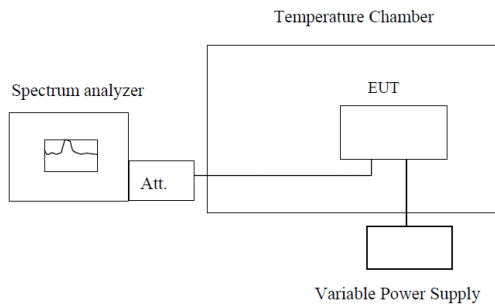

Note : Measurement setup for testing on Antenna connector

TEST PROCEDURE

1. The equipment under test was connected to an external DC power supply and input rated voltage.
2. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators.
3. The EUT was placed inside the temperature chamber.
4. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 25°C operating frequency as reference frequency.
5. Turn EUT off and set the chamber temperature to -30°C. After the temperature stabilized for approximately 30 minutes recorded the frequency.
6. Repeat step measure with 10°C increased per stage until the highest temperature of +50°C reached.

TEST MODE:

Please refer to the clause 3.3

TEST RESULTS

Passed **Not Applicable**


Reference Frequency: LTE Band 4 Middle channel=1732.5MHz,20MHz Bandwidth							
Power supplied (Vdc)	Temperature (°C)	Frequency error				Limit (ppm)	Result
		QPSK		16QAM			
		Hz	ppm	Hz	ppm		
12.0	-30	4	0.0023	6	0.0035	2.50	Pass
	-20	5	0.0029	5	0.0029		
	-10	4	0.0023	4	0.0023		
	0	5	0.0029	7	0.0040		
	10	4	0.0023	5	0.0029		
	20	6	0.0035	6	0.0035		
	30	5	0.0029	4	0.0023		
	40	4	0.0023	7	0.0040		
	50	8	0.0046	5	0.0029		

5.8. Frequency stability V.S. Voltagemasurement

LIMIT

2.5ppm

TEST CONFIGURATION

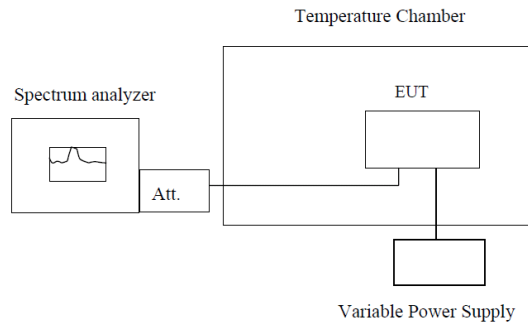

Note : Measurement setup for testing on Antenna connector

TEST PROCEDURE

1. Set chamber temperature to 25°C. Use a variable DC power source to power the EUT and set the voltage to rated voltage.
2. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency.
3. Reduce the input voltage to specified extreme voltage variation (+/- 15%) and endpoint, record the maximum frequency change.

TEST MODE:

Please refer to the clause 3.3

TEST RESULTS

Passed **Not Applicable**


Reference Frequency: LTE Band 4 Middle channel=1732.5MHz,20MHz Bandwidth							
Temperature (°C)	Power supplied (Vdc)	Frequency error				Limit (ppm)	Result
		QPSK		16QAM			
		Hz	ppm	Hz	ppm		
25	13.2	5	0.0029	4	0.0023	2.50	Pass
	12.0	4	0.0023	7	0.0040		
	10.8	7	0.0040	8	0.0046		

5.9. Peak-Average Ratio

LIMIT

13dB

TEST CONFIGURATION

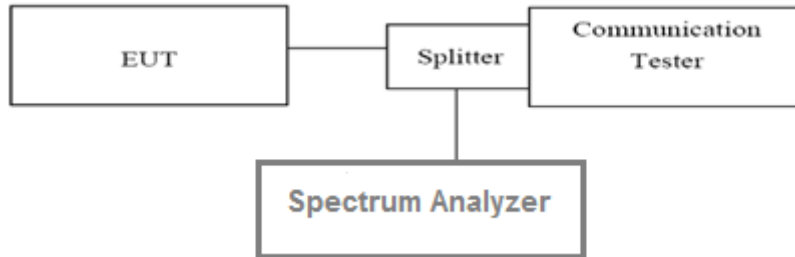

TEST PROCEDURE

According with KDB 971168

1. The signal analyzer' s CCDF measurement profile is enabled
2. Frequency = carrier center frequency
3. Measurement BW > Emission bandwidth of signal
4. The signal analyzer was set to collect one million samples to generate the CCDF curve
5. The measurement interval was set depending on the type of signal analyzed. For continuous signals (>98% duty cycle), the measurement interval was set to 1ms. For burst transmissions, the spectrum analyzer is set to use an internal " RF Burst" trigger that is synced with an incoming pulse and the measurement interval is set to less than the duration of the " on time" of one burst to ensure that energy is only captured during a time in which the transmitter is operating at maximum power

TEST MODE:

Please refer to the clause 3.3



TEST RESULTS

Passed **Not Applicable**

LTE Band 4-20MHz						
Modulation	QPSK		16QAM		Limit(dB)	Result
Channel	1RB#	Full RB#	1RB#	Full RB#		
Low	5.21	5.70	5.79	6.48	13.00	Pass
Mid	5.47	5.52	6.28	6.31	13.00	Pass
High	4.32	5.56	5.19	6.34	13.00	Pass

6. Test Setup Photos of the EUT

Radiated emission:

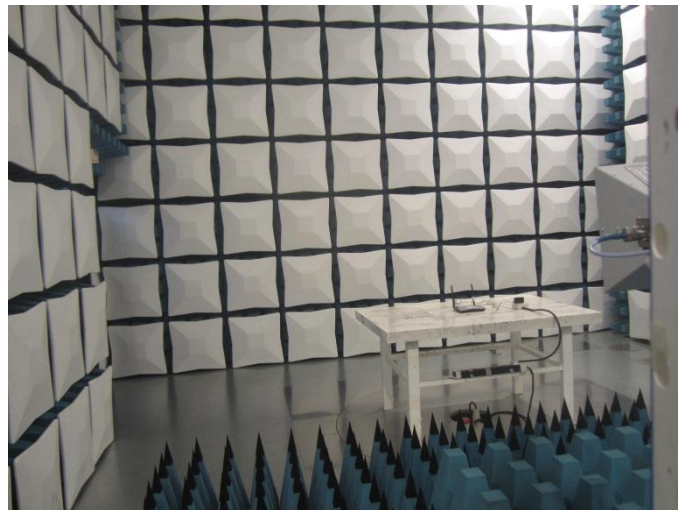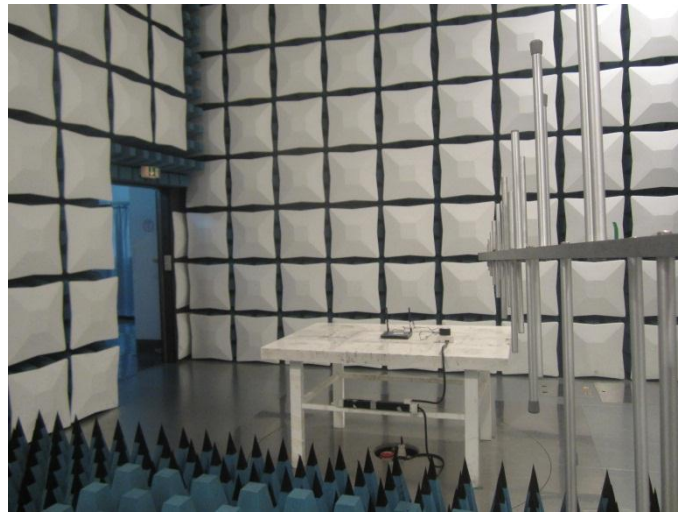

7. External and Internal Photos of the EUT

Reference to the test report No.: TRE1707006001.

.....End of Report.....