

TEST REPORT

Reference No..... : WTS16S0962160E
FCC ID : 2AJ2C-ITCKS503
Applicant..... : ITOMA (HONG KONG) Co., Ltd.
Address..... : Flat A, 14/F, Fully Industrial Building, No.6, Tsun Yip Lane, Kwun
Tong, Kowloon, HongKong, China
Manufacturer : The same as above
Address..... : The same as above
Product Name..... : Alarm Clock Radio Bluetooth
Model No..... : CKS503BT, CKS503, CKS15030, CKS1503BT, 1503, 503, 503BT,
CKS507BT, CKS2708BT, CKS1512BT, M21, CKS1515BT,
CKS515BT, CKS503-1, CKS503BT-1, 503-1BT, 503-2BT, 503A,
503B, 503C, 503D, 503E, 503F, 503G, 503H, 503I, 503J, 503K, 503L,
503M, 503N, 503O, 503P, 503Q, 503R, 503S, 503T, 503U, 503V,
503W, 503X, 503Y, 503Z
Brand Name : iTOMA
Standards..... : FCC CFR47 Part 15 Section 15.247:2016
Date of Receipt sample : Sep. 30, 2016
Date of Test : Oct. 19 - 31, 2016
Date of Issue..... : Nov. 14, 2016
Test Result..... : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

Prepared By:

Waltek Services (Shenzhen) Co., Ltd.

Address: 1/F., Fukangtai Building, West Baima Road, Songgang Street, Baoan District, Shenzhen,
Guangdong, China

Tel :+86-755-83551033

Fax:+86-755-83552400

Tested by:



Zero Zhou / Test Engineer

Approved by:



Philo Zhong / Manager

2 Contents

	Page
1 COVER PAGE.....	1
2 CONTENTS	2
3 REPORT REVISION HISTORY.....	4
4 GENERAL INFORMATION.....	5
4.1 GENERAL DESCRIPTION OF E.U.T.	5
4.2 DETAILS OF E.U.T.	5
4.3 CHANNEL LIST	5
4.4 TEST MODE	6
4.5 TEST FACILITY.....	6
5 EQUIPMENT USED DURING TEST	7
5.1 EQUIPMENTS LIST	7
5.2 MEASUREMENT UNCERTAINTY	8
5.3 TEST EQUIPMENT CALIBRATION	8
6 TEST SUMMARY	9
7 CONDUCTED EMISSION	10
7.1 E.U.T. OPERATION	10
7.2 EUT SETUP.....	10
7.3 MEASUREMENT DESCRIPTION	10
7.4 CONDUCTED EMISSION TEST RESULT	11
8 RADIATED SPURIOUS EMISSIONS.....	13
8.1 EUT OPERATION.....	13
8.2 TEST SETUP	14
8.3 SPECTRUM ANALYZER SETUP	15
8.4 TEST PROCEDURE	16
8.5 SUMMARY OF TEST RESULTS	17
9 BAND EDGE MEASUREMENT	20
9.1 TEST PROCEDURE	20
9.2 TEST RESULT	21
10 BANDWIDTH MEASUREMENT.....	27
10.1 TEST PROCEDURE.....	27
10.2 TEST RESULT	27
11 MAXIMUM PEAK OUTPUT POWER.....	33
11.1 TEST PROCEDURE.....	33
11.2 TEST RESULT	33
12 HOPPING CHANNEL SEPARATION	39
12.1 TEST PROCEDURE.....	39
12.2 TEST RESULT	39
13 NUMBER OF HOPPING FREQUENCY.....	45
13.1 TEST PROCEDURE.....	45
13.2 TEST RESULT	45
14 DWELL TIME	47
14.1 TEST PROCEDURE.....	47
14.2 TEST RESULT	47

15	ANTENNA REQUIREMENT	53
16	RF EXPOSURE.....	54
16.1	REQUIREMENTS.....	54
16.2	THE PROCEDURES / LIMIT.....	54
16.3	MPE CALCULATION METHOD	55
17	PHOTOGRAPHS – MODEL CKS503BT TEST SETUP	56
17.1	PHOTOGRAPH – CONDUCTED EMISSION TEST SETUP AT TEST SITE 1#	56
17.2	PHOTOGRAPH – RADIATION SPURIOUS EMISSION TEST SETUP.....	56
18	PHOTOGRAPHS - CONSTRUCTIONAL DETAILS	60
18.1	MODEL CKS503BT -EXTERNAL PHOTOS	60
18.2	MODEL CKS503BT -INTERNAL PHOTOS	65

3 Report Revision History

Test report No.	Date of Receipt sample	Date of Test	Date of Issue	Purpose	Comment	Approved
WTS16S0962160E	Sep. 30, 2016	Oct. 19 – 31, 2016	Nov. 14, 2016	original	-	Valid

4 General Information

4.1 General Description of E.U.T.

Product Name:	Alarm Clock Radio Bluetooth
Model No.:	CKS503BT, CKS503, CKS15030, CKS1503BT, 1503, 503, 503BT, CKS507BT, CKS2708BT, CKS1512BT, M21, CKS1515BT, CKS515BT, CKS503-1, CKS503BT-1, 503-1BT, 503-2BT, 503A, 503B, 503C, 503D, 503E, 503F, 503G, 503H, 503I, 503J, 503K, 503L, 503M, 503N, 503O, 503P, 503Q, 503R, 503S, 503T, 503U, 503V, 503W, 503X, 503Y, 503Z
Model Description:	Only the model names are different.
Operation Frequency:	2402MHz ~ 2480MHz, 79 channels in total
Type of Modulation:	GFSK, Pi/4DQPSK, 8DPSK
The lowest oscillator:	32.768KHz
Antenna installation:	PCB printed antenna
Antenna Gain:	0 dBi

4.2 Details of E.U.T.

Technical Data:	DC 5V, 1.2A by Adapter (Adapter: Model DZ006HL050120U INPUT AC 100-240~50/60Hz, 0.15A) DC 3V by CR2032(Clock Back Up)
-----------------	---

4.3 Channel List

Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
0	2402	1	2403	2	2404	3	2405
4	2406	5	2407	6	2408	7	2409
8	2410	9	2411	10	2412	11	2413
12	2414	13	2415	14	2416	15	2417
16	2418	17	2419	18	2420	19	2421
20	2422	21	2423	22	2424	23	2425
24	2426	25	2427	26	2428	27	2429
28	2430	29	2431	30	2432	31	2433
32	2434	33	2435	34	2436	35	2437
36	2438	37	2439	38	2440	39	2441
40	2442	41	2443	42	2444	43	2445
44	2446	45	2447	46	2448	47	2449
48	2450	49	2451	50	2452	51	2453
52	2454	53	2455	54	2456	55	2457
56	2458	57	2459	58	2460	59	2461
60	2462	61	2463	62	2464	63	2465
64	2466	65	2467	66	2468	67	2469
68	2470	69	2471	70	2472	71	2473
72	2474	73	2475	74	2476	75	2477
76	2478	77	2479	78	2480	-	-

4.4 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

Test mode	Low channel	Middle channel	High channel
Transmitting	2402MHz	2441MHz	2480MHz

4.5 Test Facility

The test facility has a test site registered with the following organizations:

- **IC – Registration No.: 7760A-1**

Waltek Services(Shenzhen) Co., Ltd. has been registered and fully described in a report filed with the Industry Canada. The acceptance letter from the Industry Canada is maintained in our files. Registration 7760A-1, October 15, 2015

- **FCC Test Site 1#– Registration No.: 880581**

Waltek Services(Shenzhen) Co., Ltd. EMC Laboratory `has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 880581, April 29, 2014.

- **FCC Test Site 2#– Registration No.: 328995**

Waltek Services(Shenzhen) Co., Ltd. EMC Laboratory `has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 328995, December 3, 2014.

5 Equipment Used during Test

5.1 Equipments List

Conducted Emissions Test Site 1#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMI Test Receiver	R&S	ESCI	100947	Sep.12, 2016	Sep.11, 2017
2.	LISN	R&S	ENV216	101215	Sep.12, 2016	Sep.11, 2017
3.	Cable	Top	TYPE16(3.5M)	-	Sep.12, 2016	Sep.11, 2017
Conducted Emissions Test Site 2#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMI Test Receiver	R&S	ESCI	101155	Sep.12, 2016	Sep.11, 2017
2.	LISN	SCHWARZBECK	NSLK 8128	8128-289	Sep.12, 2016	Sep.11, 2017
3.	Limiter	York	MTS-IMP-136	261115-001-0024	Sep.12, 2016	Sep.11, 2017
4.	Cable	LARGE	RF300	-	Sep.12, 2016	Sep.11, 2017
3m Semi-anechoic Chamber for Radiation Emissions Test site 1#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1	EMC Analyzer	Agilent	E7405A	MY45114943	Sep.15,2016	Sep.14,2017
2	Active Loop Antenna	Beijing Dazhi	ZN30900A	-	Oct.17, 2016	Oct.16, 2017
3	Trilog Broadband Antenna	SCHWARZBECK	VULB9163	336	Apr.09, 2016	Apr.08, 2017
4	Coaxial Cable (below 1GHz)	Top	TYPE16(13M)	-	Sep.12, 2016	Sep.11, 2017
5	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9120 D	667	Apr.09, 2016	Apr.08, 2017
6	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9170	335	Apr.09, 2016	Apr.08, 2017
7	Broadband Preamplifier	COMPLIANCE DIRECTION	PAP-1G18	2004	Apr.13, 2016	Apr.12, 2017
8	Coaxial Cable (above 1GHz)	Top	1GHz-25GHz	EW02014-7	Apr.13, 2016	Apr.12, 2017
3m Semi-anechoic Chamber for Radiation Emissions Test site 2#						
Item	Equipment	Manufacturer	Model No.	Serial No	Last Calibration Date	Calibration Due Date
1	Test Receiver	R&S	ESCI	101296	Apr.13, 2016	Apr.12, 2017
2	Trilog Broadband Antenna	SCHWARZBECK	VULB9160	9160-3325	Apr.09, 2016	Apr.08, 2017
3	Amplifier	Compliance pirection systems inc	PAP-0203	22024	Apr.13, 2016	Apr.12, 2017
4	Cable	HUBER+SUHNER	CBL2	525178	Apr.13, 2016	Apr.12, 2017

RF Conducted Testing						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMC Analyzer (9k~26.5GHz)	Agilent	E7405A	MY45114943	Sep.15,2016	Sep.14,2017
2.	Spectrum Analyzer (9k-6GHz)	R&S	FSL6	100959	Sep.15,2016	Sep.14,2017
3.	Signal Analyzer (9k~26.5GHz)	Agilent	N9010A	MY50520207	Sep.15,2016	Sep.14,2017

5.2 Measurement Uncertainty

Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-6}$
RF Power	± 1.0 dB
RF Power Density	± 2.2 dB
Radiated Spurious Emissions test	± 5.03 dB (Bilog antenna 30M~1000MHz)
	± 5.47 dB (Horn antenna 1000M~25000MHz)
Conducted Spurious Emissions test	± 3.64 dB (AC mains 150KHz~30MHz)

5.3 Test Equipment Calibration

All the test equipments used are valid and calibrated by CEPREI Certification Body that address is No.110 Dongguan Zhuang RD. Guangzhou, P.R.China.

6 Test Summary

Test Items	Test Requirement	Result
Radiated Spurious Emissions	15.205(a) 15.209 15.247(d)	C
Band edge	15.247(d) 15.205(a)	C
Conduct Emission	15.207	C
Bandwidth	15.247(a)(1)	C
Maximum Peak Output Power	15.247(b)(1)	C
Frequency Separation	15.247(a)(1)	C
Number of Hopping Frequency	15.247(a)(1)(iii)	C
Dwell time	15.247(a)(1)(iii)	C
Maximum Permissible Exposure (Exposure of Humans to RF Fields)	1.1307(b)(1)	C
Antenna Requirement	15.203	C
Note: C=Compliance; NC=Not Compliance; NT=Not Tested; N/A=Not Applicable		

7 Conducted Emission

Test Requirement:	FCC CFR 47 Part 15 Section 15.207
Test Method:	ANSI C63.10:2013&ANSI C63.4:2014
Test Result:	PASS
Frequency Range:	150kHz to 30MHz
Class/Severity:	Class B
Limit:	66-56 dB μ V between 0.15MHz & 0.5MHz 56 dB μ V between 0.5MHz & 5MHz 60 dB μ V between 5MHz & 30MHz
Detector:	Peak for pre-scan (9kHz Resolution Bandwidth)

7.1 E.U.T. Operation

Operating Environment :


Temperature:	25.5 °C
Humidity:	51 % RH
Atmospheric Pressure:	101.2kPa

EUT Operation :

The test was performed in transmitting mode, the test data were shown in the report.

7.2 EUT Setup

The conducted emission tests were performed using the setup accordance with the ANSI C63.10:2013.

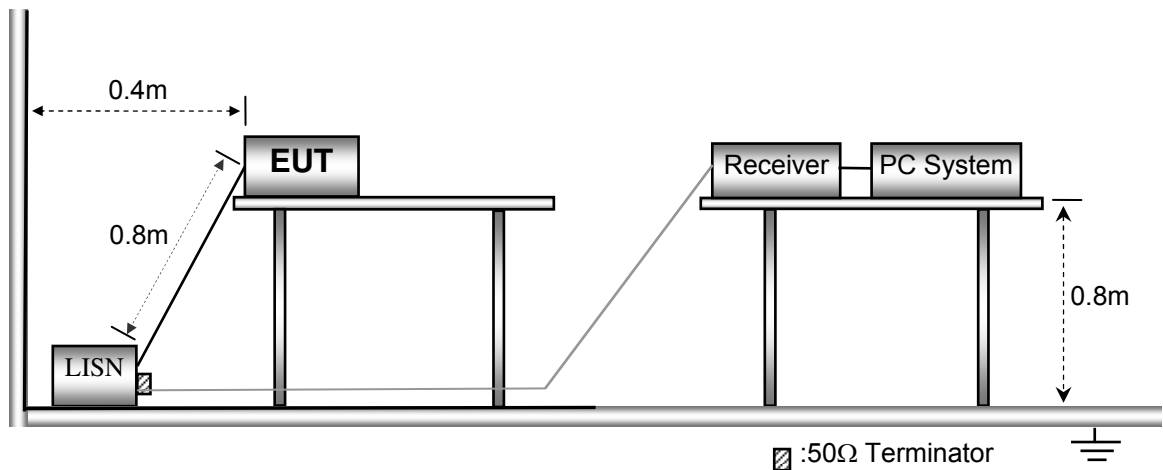


7.3 Measurement Description

The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.


7.4 Conducted Emission Test Result

Live line:

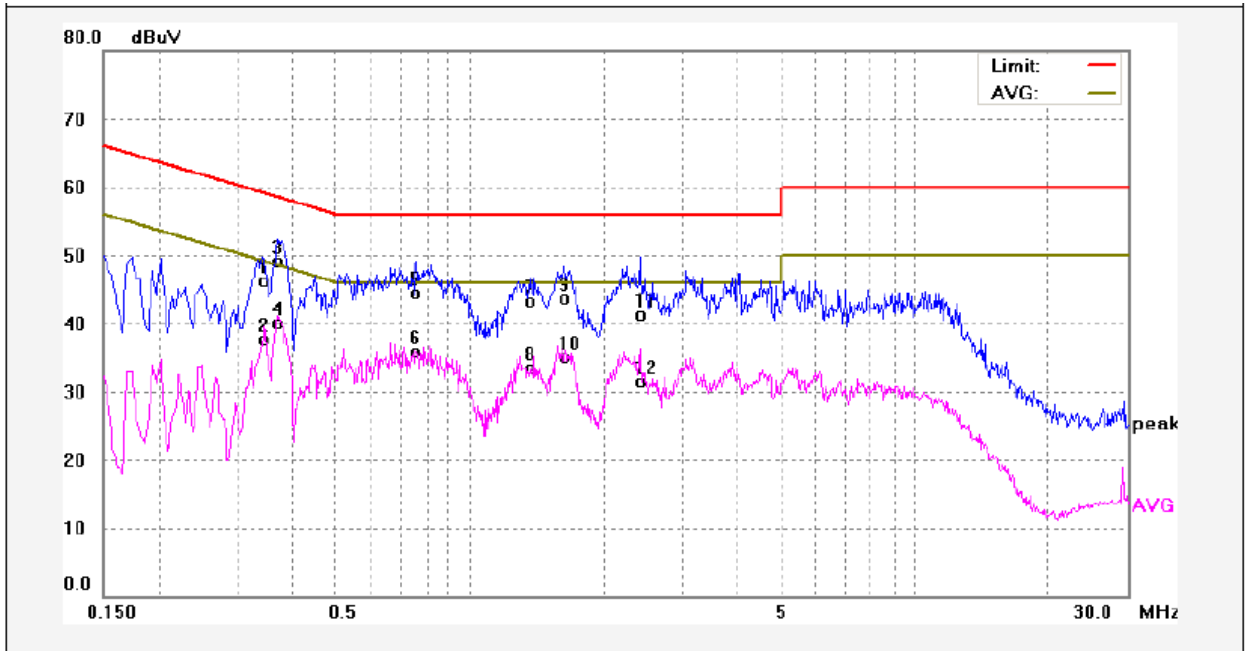

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.3420	36.63	9.75	46.38	59.15	-12.77	QP	
2	0.3420	27.89	9.75	37.64	49.15	-11.51	AVG	
3	0.3700	39.41	9.75	49.16	58.50	-9.34	QP	
4	0.3700	30.30	9.75	40.05	48.50	-8.45	AVG	
5	0.7620	34.73	9.78	44.51	56.00	-11.49	QP	
6	0.7620	26.14	9.78	35.92	46.00	-10.08	AVG	
7	1.3660	33.41	9.83	43.24	56.00	-12.76	QP	
8	1.3660	23.72	9.83	33.55	46.00	-12.45	AVG	
9	1.6340	33.95	9.85	43.80	56.00	-12.20	QP	
10	1.6340	25.28	9.85	35.13	46.00	-10.87	AVG	
11	2.4140	31.48	9.91	41.39	56.00	-14.61	QP	
12	2.4140	21.62	9.91	31.53	46.00	-14.47	AVG	

Neutral line:

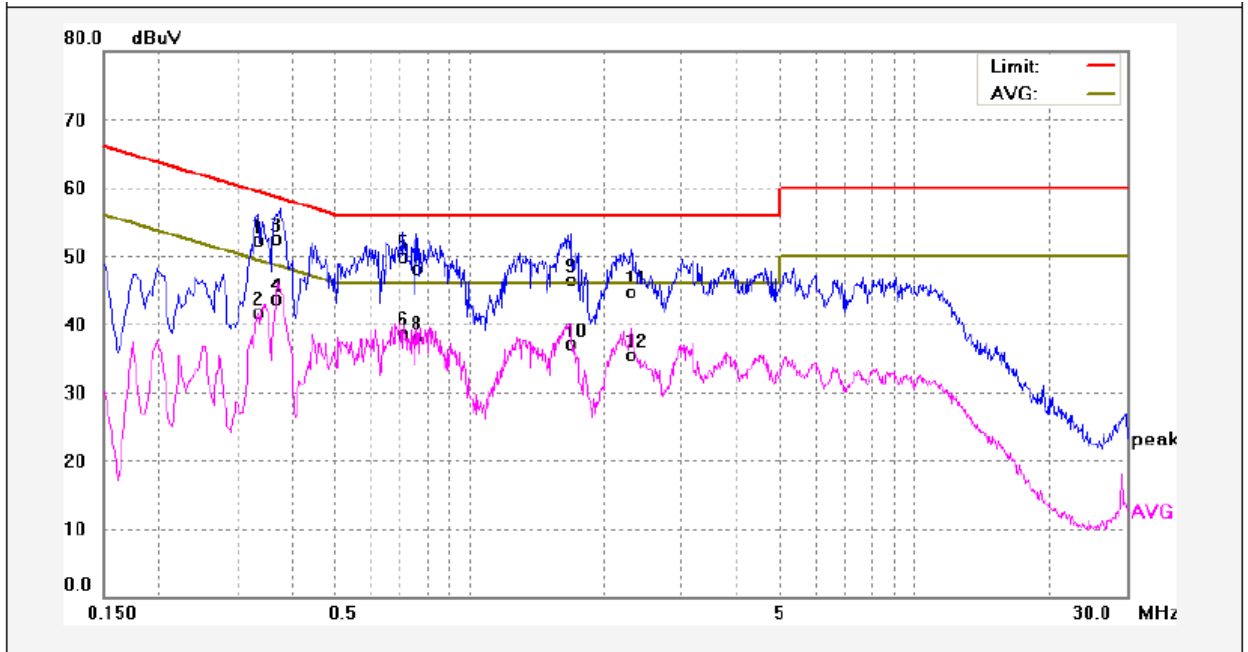

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.3339	42.59	9.75	52.34	59.35	-7.01	QP	
2	0.3339	31.94	9.75	41.69	49.35	-7.66	AVG	
3	0.3740	42.73	9.75	52.48	58.41	-5.93	QP	
4	0.3740	34.05	9.75	43.80	48.41	-4.61	AVG	
5	0.7100	40.10	9.77	49.87	56.00	-6.13	QP	
6	0.7100	28.93	9.77	38.70	46.00	-7.30	AVG	
7	0.7620	38.41	9.78	48.19	56.00	-7.81	QP	
8	0.7620	28.32	9.78	38.10	46.00	-7.90	AVG	
9	1.6820	36.56	9.85	46.41	56.00	-9.59	QP	
10	1.6820	27.33	9.85	37.18	46.00	-8.82	AVG	
11	2.3020	34.75	9.90	44.65	56.00	-11.35	QP	
12	2.3020	25.64	9.90	35.54	46.00	-10.46	AVG	

8 Radiated Spurious Emissions

Test Requirement: FCC CFR47 Part 15 Section 15.209 & 15.247

Test Method: ANSI C63.10:2013&ANSI C63.4:2014

Test Result: PASS

Measurement Distance: 3m

Limit:

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Distance	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	2400/F(kHz)	300	10000 * 2400/F(kHz)	$20\log^{(2400/F(kHz))} + 80$
0.490 ~ 1.705	24000/F(kHz)	30	100 * 24000/F(kHz)	$20\log^{(24000/F(kHz))} + 40$
1.705 ~ 30	30	30	100 * 30	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

8.1 EUT Operation

Operating Environment :

Temperature: 23.5 °C

Humidity: 51.1 % RH

Atmospheric Pressure: 101.2kPa


EUT Operation :

The test was performed in transmitting mode, the test data were shown in the report.


8.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.10:2013.


The test setup for emission measurement below 30MHz.

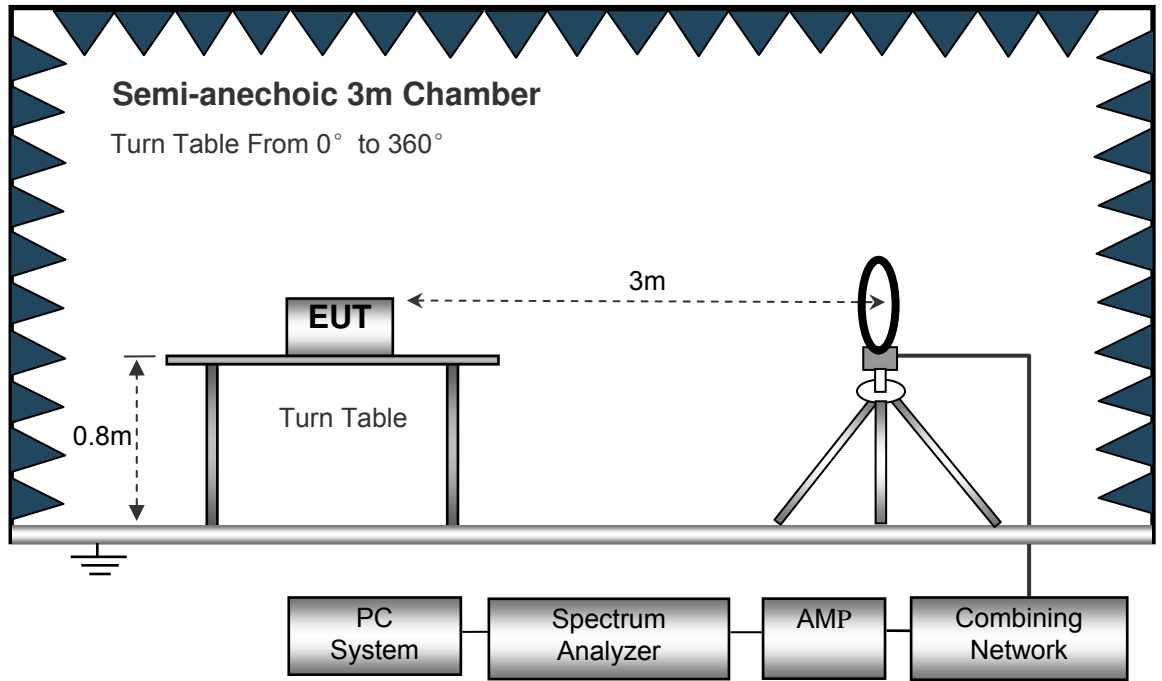

The test setup for emission measurement from 30 MHz to 1 GHz.

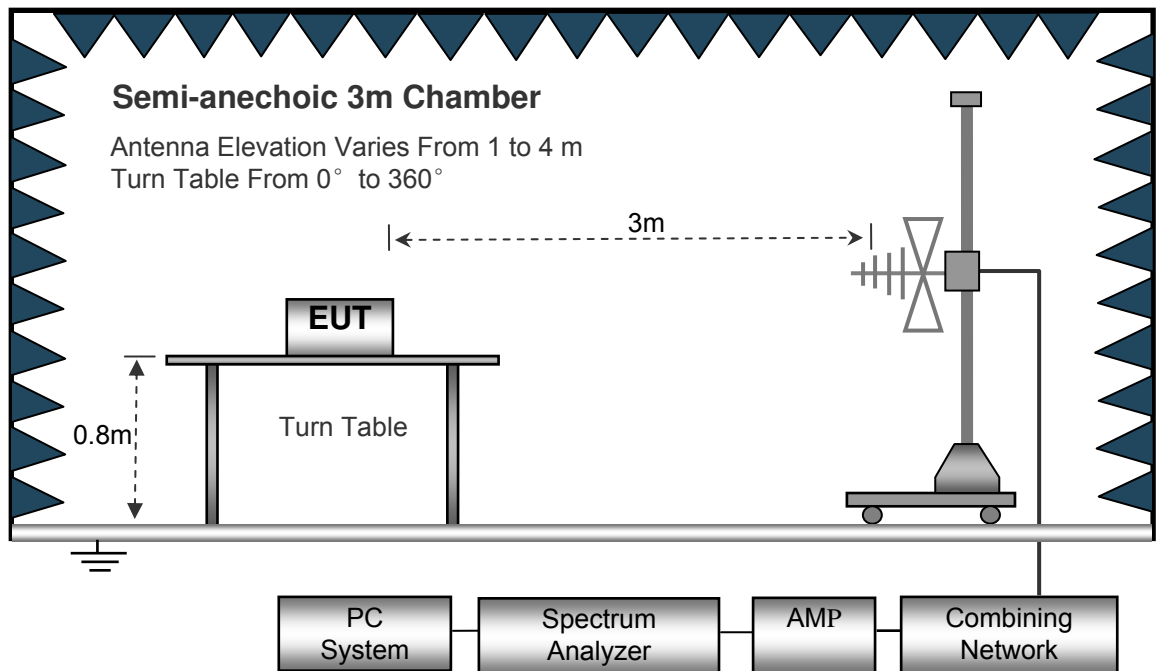

The test setup for emission measurement above 1 GHz.

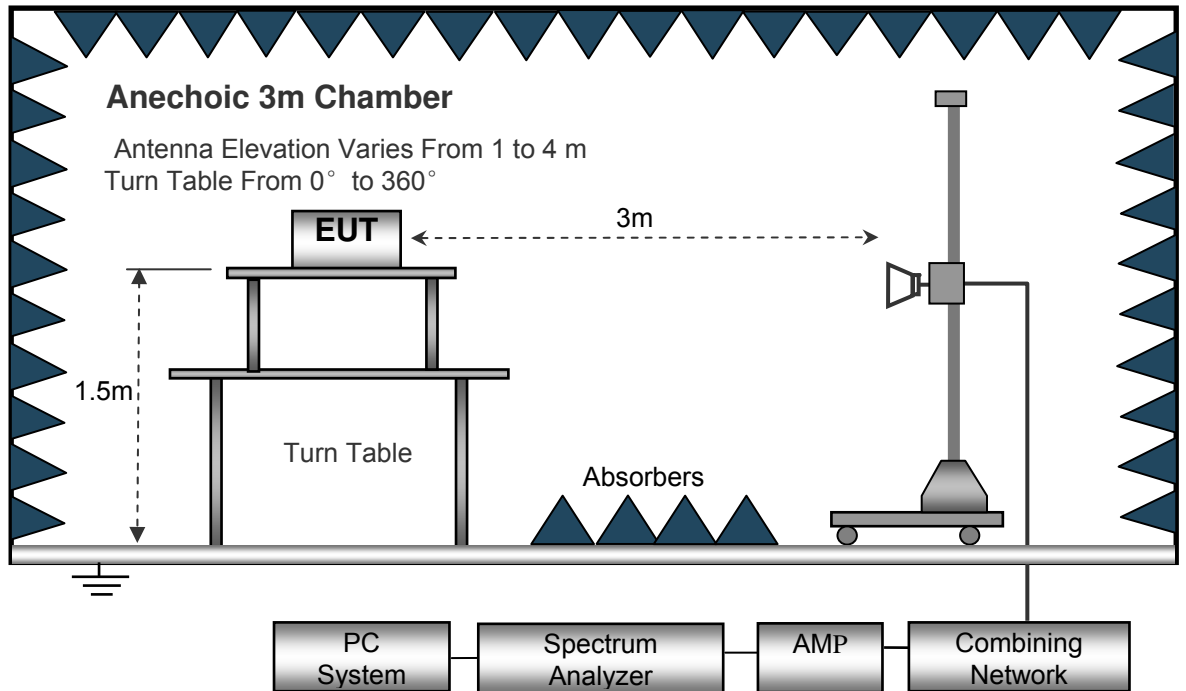

8.3 Spectrum Analyzer Setup

Below 30MHz

Sweep Speed Auto
 IF Bandwidth..... 10kHz
 Video Bandwidth..... 10kHz
 Resolution Bandwidth..... 10kHz

30MHz ~ 1GHz

Sweep Speed Auto
 Detector PK
 Resolution Bandwidth..... 100kHz
 Video Bandwidth..... 300kHz

Above 1GHz

Sweep Speed Auto
 Detector PK
 Resolution Bandwidth..... 1MHz
 Video Bandwidth..... 3MHz
 Detector Ave.
 Resolution Bandwidth..... 1MHz
 Video Bandwidth..... 10Hz

8.4 Test Procedure

1. The EUT is placed on a turntable, which is above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions. The spectrum was investigated from the lowest radio frequency signal generated in the device, without going below 9 kHz, up to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are tested under 3-axes(X,Y,Z) position(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand), After pre-test, It was found that the worse radiation emission was get at the X position. So the data shown was the X position only.

8.5 Summary of Test Results

Test Frequency: 32.768KHz ~ 30MHz

The measurements were more than 20 dB below the limit and not reported.

Test Frequency: 30MHz ~ 18GHz

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
GFSK Low Channel									
263.25	20.68	QP	31	1.9	H	10.58	31.26	46.00	-14.74
263.25	19.24	QP	115	1.1	V	10.58	29.82	46.00	-16.18
4804.00	51.17	PK	179	1.8	V	-1.07	50.10	74.00	-23.90
4804.00	42.37	Ave	179	1.8	V	-1.07	41.30	54.00	-12.70
7206.00	50.01	PK	282	1.9	H	1.33	51.34	74.00	-22.66
7206.00	41.78	Ave	282	1.9	H	1.33	43.11	54.00	-10.89
2328.91	46.17	PK	141	1.9	V	-13.15	33.02	74.00	-40.98
2328.91	39.69	Ave	141	1.9	V	-13.15	26.54	54.00	-27.46
2376.71	43.06	PK	96	1.8	H	-13.18	29.88	74.00	-44.12
2376.71	38.29	Ave	96	1.8	H	-13.18	25.11	54.00	-28.89
2494.21	42.94	PK	359	1.3	V	-13.22	29.72	74.00	-44.28
2494.21	36.91	Ave	359	1.3	V	-13.22	23.69	54.00	-30.31

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
GFSK Middle Channel									
263.25	20.16	QP	134	2.0	H	10.58	30.74	46.00	-15.26
263.25	18.19	QP	25	1.7	V	10.58	28.77	46.00	-17.23
4882.00	52.69	PK	8	1.9	V	-0.63	52.06	74.00	-21.94
4882.00	41.93	Ave	8	1.9	V	-0.63	41.30	54.00	-12.70
7323.00	54.50	PK	329	2.0	H	2.24	56.74	74.00	-17.26
7323.00	44.05	Ave	329	2.0	H	2.24	46.29	54.00	-7.71
2341.19	45.59	PK	350	1.7	V	-13.21	32.38	74.00	-41.62
2341.19	39.41	Ave	350	1.7	V	-13.21	26.20	54.00	-27.80
2371.68	43.78	PK	243	1.2	H	-13.16	30.62	74.00	-43.38
2371.68	37.16	Ave	243	1.2	H	-13.16	24.00	54.00	-30.00
2495.10	42.34	PK	134	1.9	V	-13.11	29.23	74.00	-44.77
2495.10	38.48	Ave	134	1.9	V	-13.11	25.37	54.00	-28.63

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
GFSK High Channel									
263.25	20.56	QP	358	1.4	H	10.58	31.14	46.00	-14.86
263.25	19.46	QP	42	1.4	V	10.58	30.04	46.00	-15.96
4960.00	53.88	PK	293	1.9	V	-0.25	53.63	74.00	-20.37
4960.00	42.34	Ave	293	1.9	V	-0.25	42.09	54.00	-11.91
7440.00	54.30	PK	257	1.7	H	2.86	57.16	74.00	-16.84
7440.00	42.38	Ave	257	1.7	H	2.86	45.24	54.00	-8.76
2319.55	46.64	PK	141	1.9	V	-13.21	33.43	74.00	-40.57
2319.55	37.34	Ave	141	1.9	V	-13.21	24.13	54.00	-29.87
2378.74	44.41	PK	2	1.2	H	-13.13	31.28	74.00	-42.72
2378.74	36.11	Ave	2	1.2	H	-13.13	22.98	54.00	-31.02
2487.83	42.03	PK	248	1.7	V	-13.09	28.94	74.00	-45.06
2487.83	37.04	Ave	248	1.7	V	-13.09	23.95	54.00	-30.05

Remark: only the worst data(GFSK modulation mode) were reported.

Test Frequency :Above 18GHz

The measurements were more than 20 dB below the limit and not reported

9 Band Edge Measurement

Test Requirement:	Section 15.247(d) In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).
Test Method:	ANSI C63.10:2013
Test Limit:	Regulation 15.247 (d), In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
Test Mode:	Transmitting and Hopping


9.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz, Sweep = auto
Detector function = peak, Trace = max hold


9.2 Test Result

Test plots


GFSK Transmitting Band edge-left side

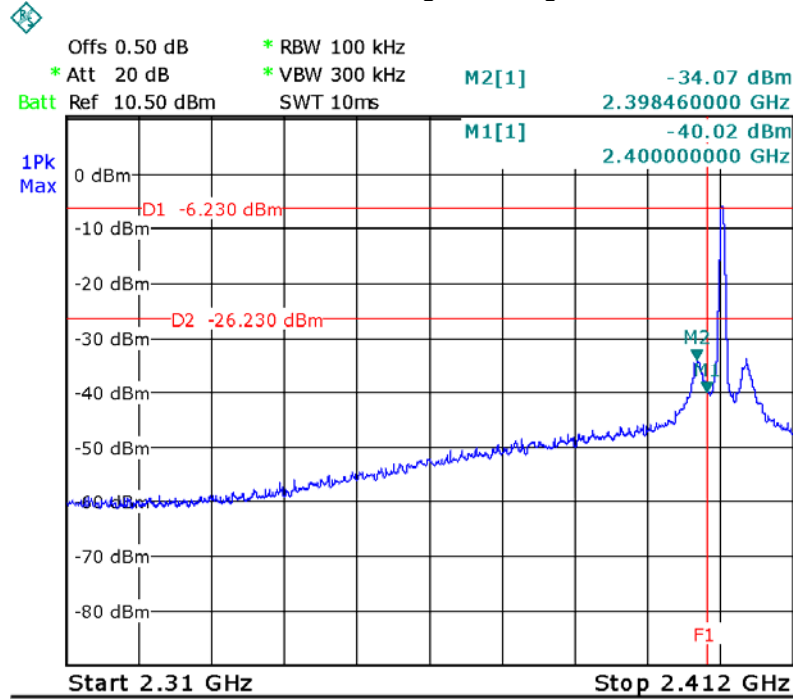


GFSK Hopping Band edge-left side

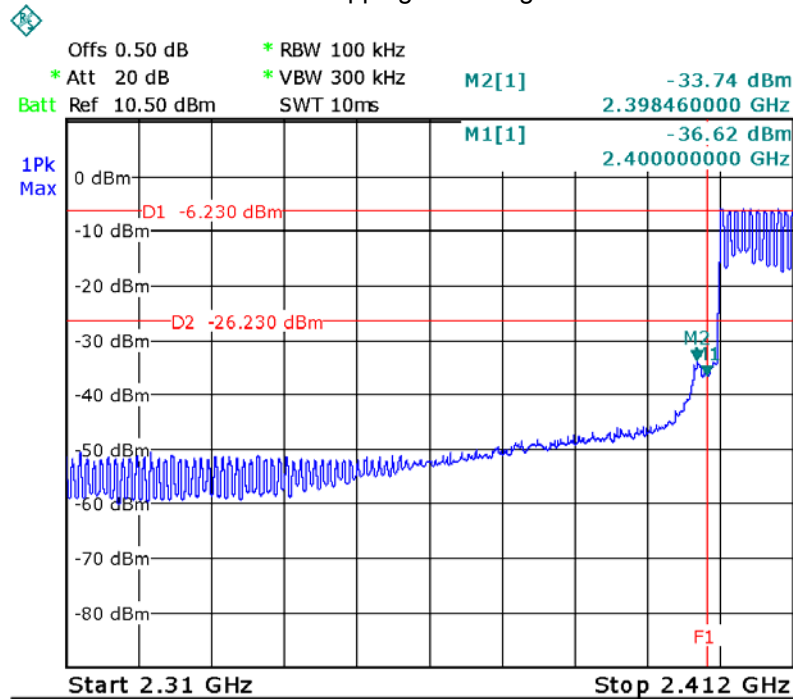


GFSK Transmitting Band edge-right side

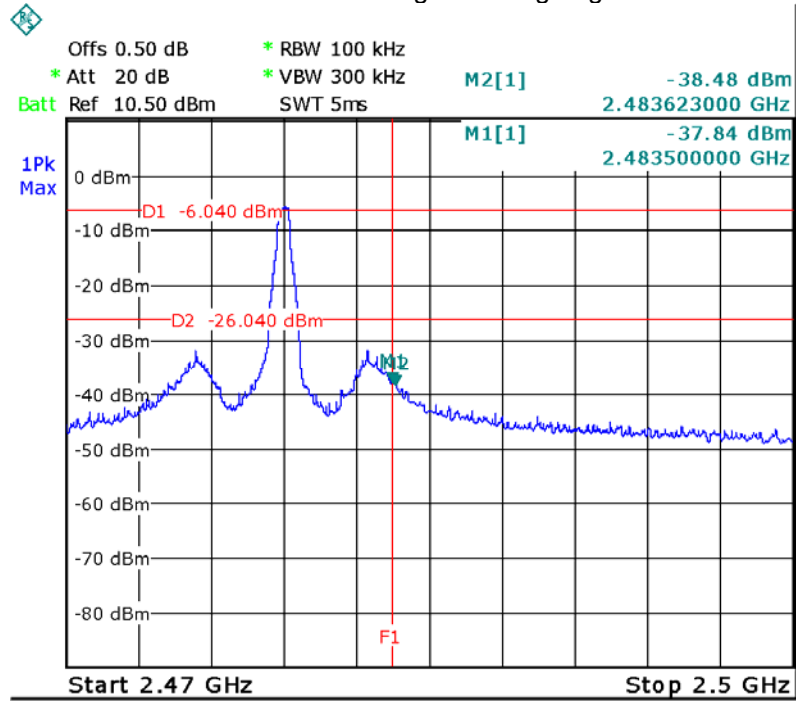


GFSK Hopping Band edge-right side

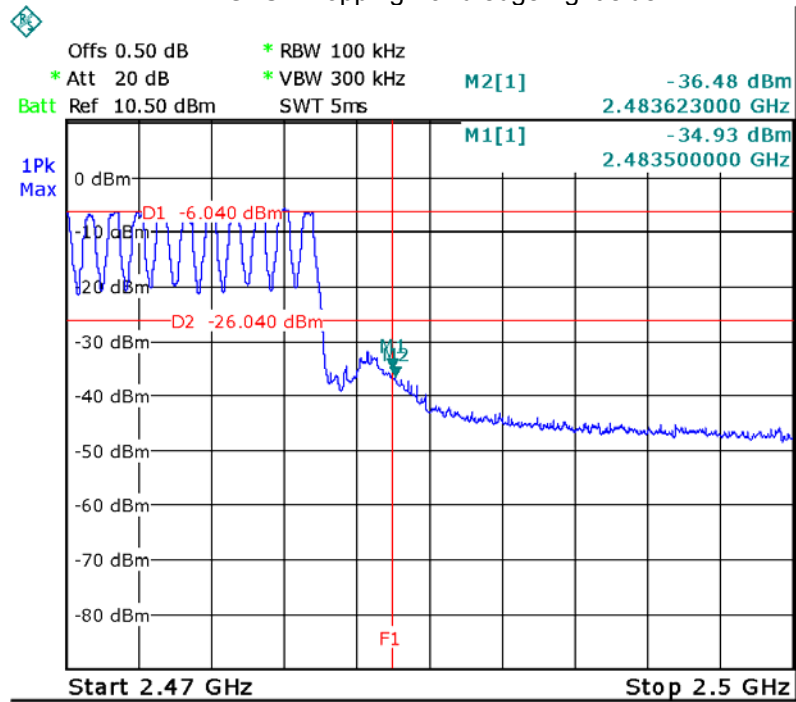


Pi/4 DQPSK Transmitting Band edge-left side

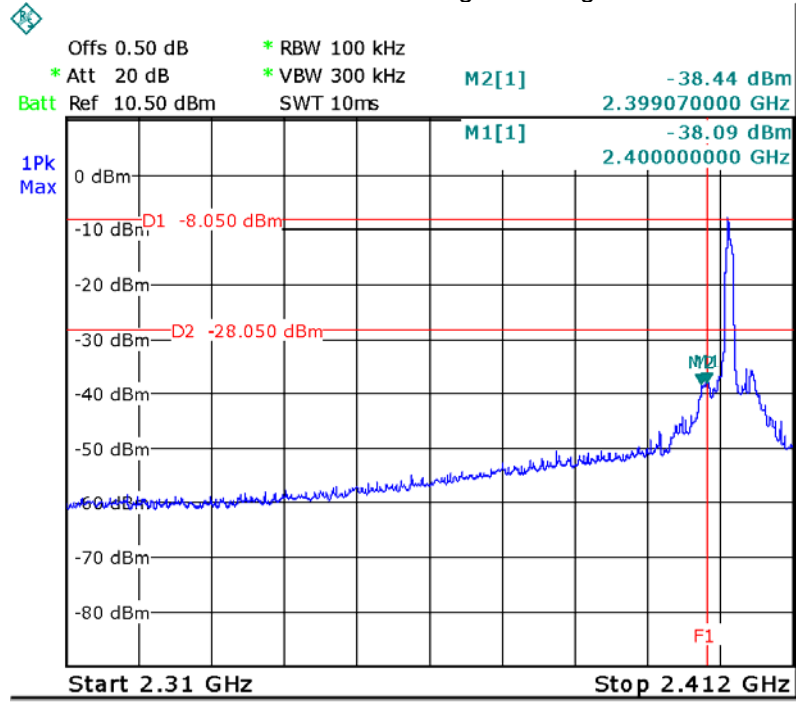


Pi/4 DQPSK Hopping Band edge-left side


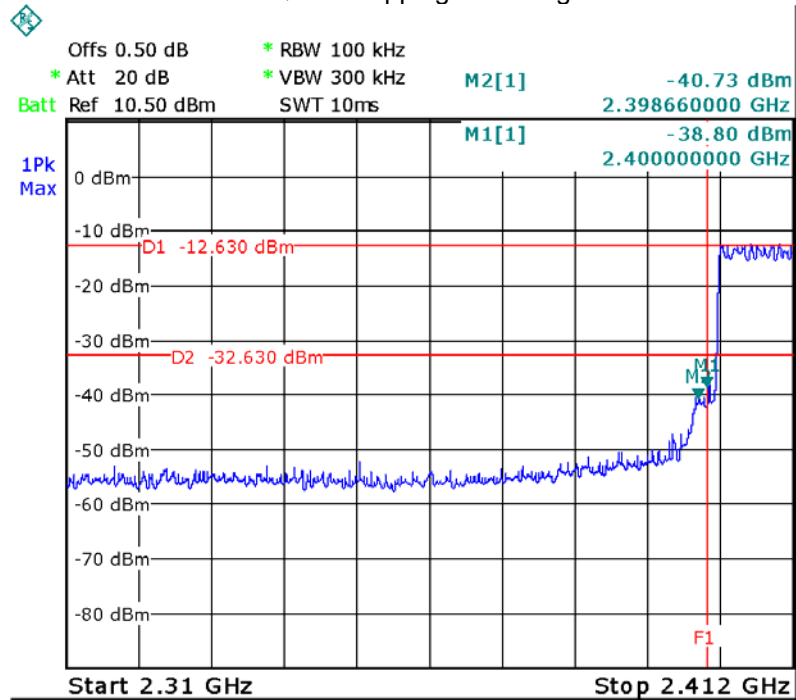




Pi/4 DQPSK Transmitting Band edge-right side

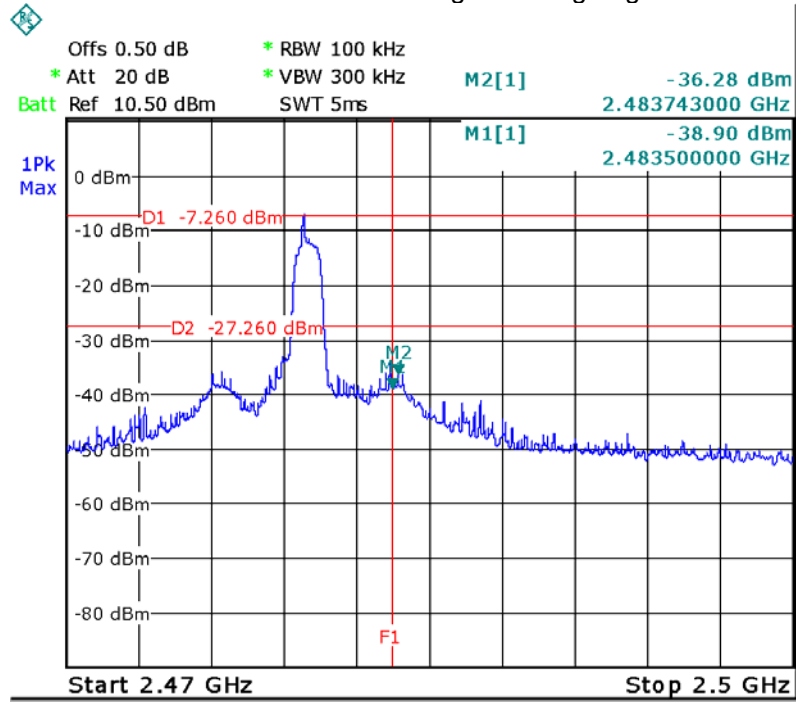

Pi/4 DQPSK Hopping Band edge-right side

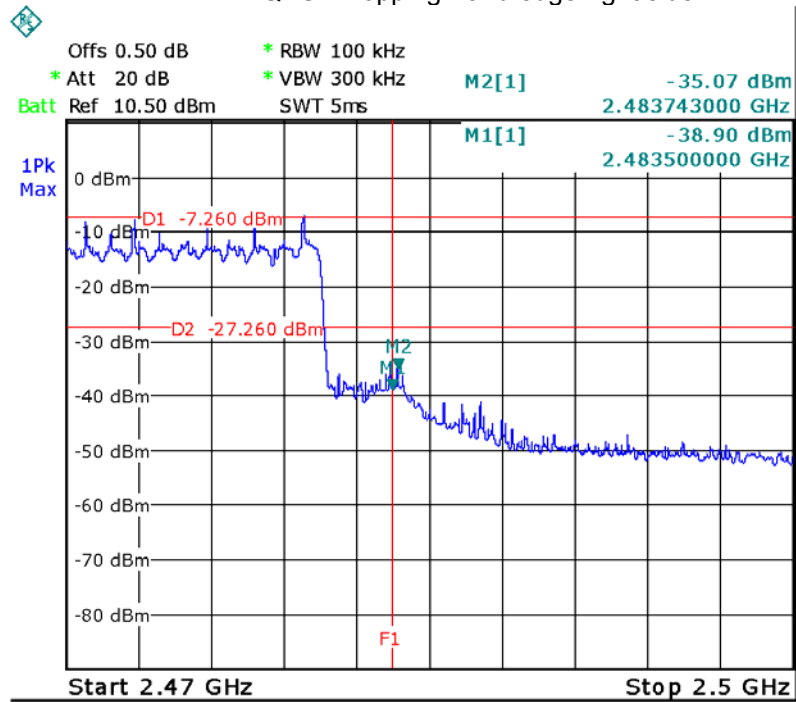

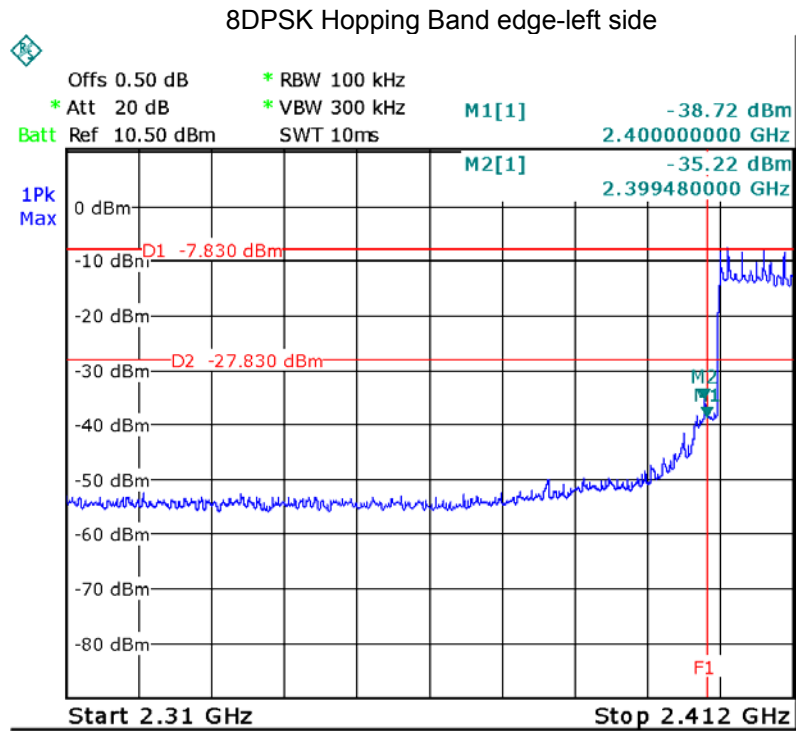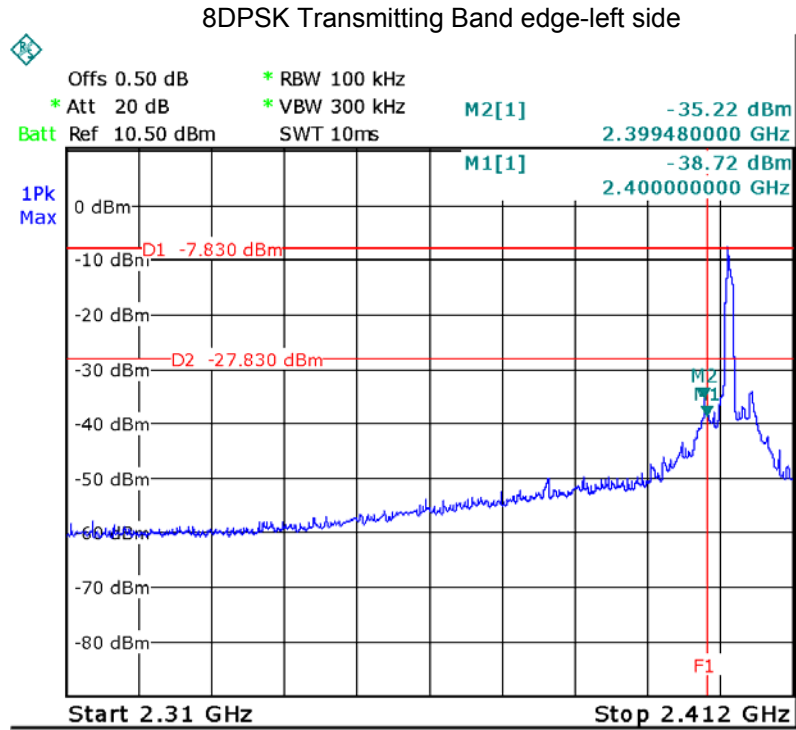

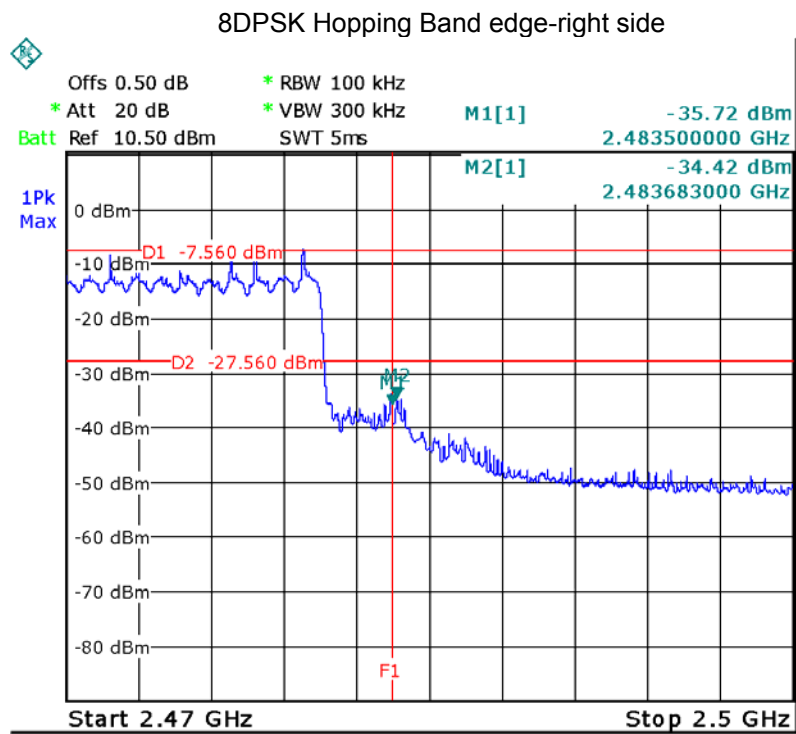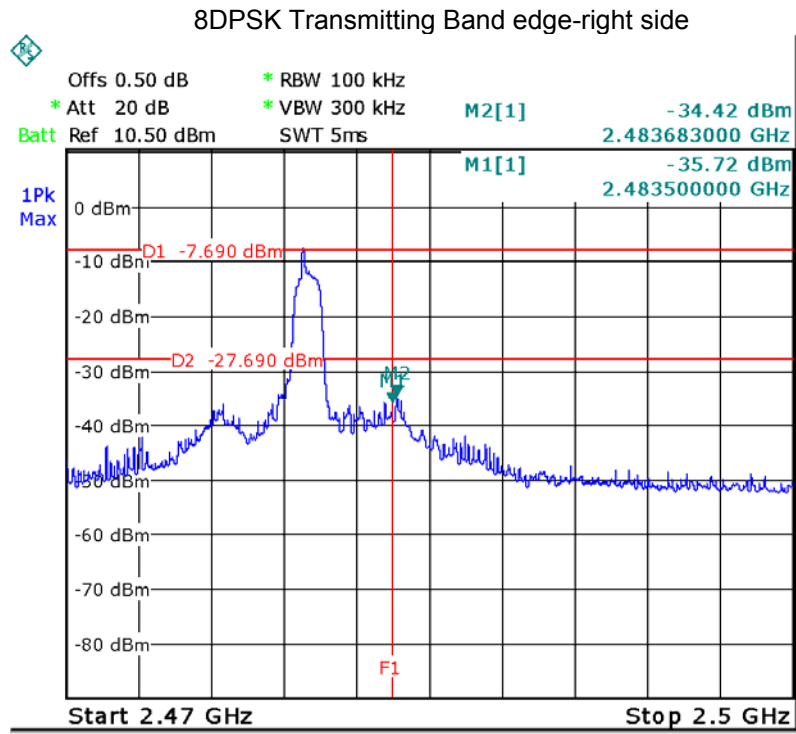

10 Bandwidth Measurement

Test Requirement:	FCC CFR47 Part 15 Section 15.247
Test Method:	ANSI C63.10:2013
Test Mode:	Test in fixing operating frequency at low, Middle, high channel.

10.1 Test Procedure


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 30kHz, VBW = 100kHz

10.2 Test Result


Modulation	Test Channel	20 dB Bandwidth	99% Bandwidth
GFSK	Low	1.102MHz	0.958MHz
GFSK	Middle	1.102MHz	0.958MHz
GFSK	High	1.102MHz	0.958MHz
Pi/4 DQPSK	Low	1.335MHz	1.240MHz
Pi/4 DQPSK	Middle	1.335MHz	1.240MHz
Pi/4 DQPSK	High	1.335MHz	1.240MHz
8DPSK	Low	1.341 MHz	1.240MHz
8DPSK	Middle	1.341 MHz	1.240MHz
8DPSK	High	1.341 MHz	1.240MHz

Test plots


GFSK Low Channel

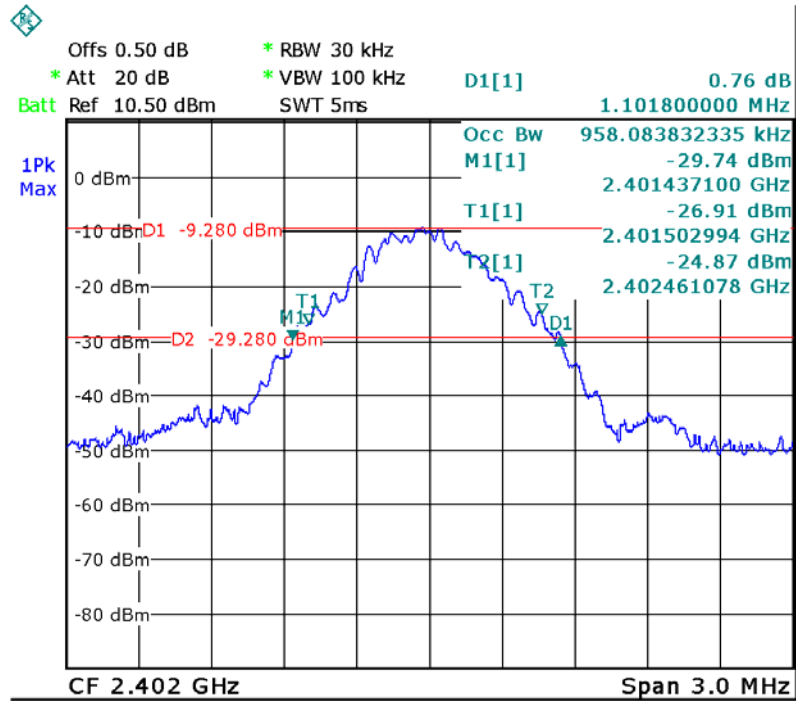


GFSK Middle Channel


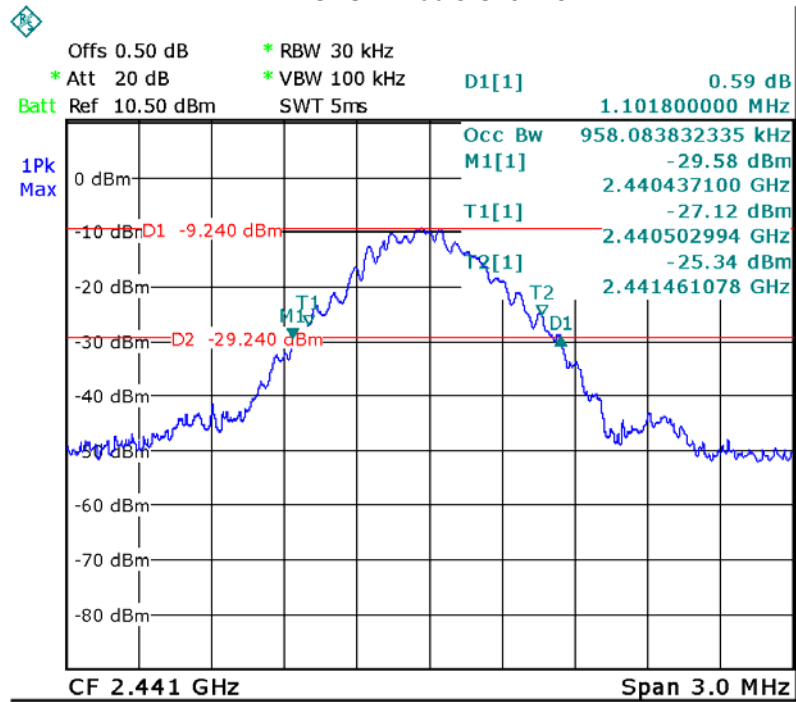


GFSK High Channel

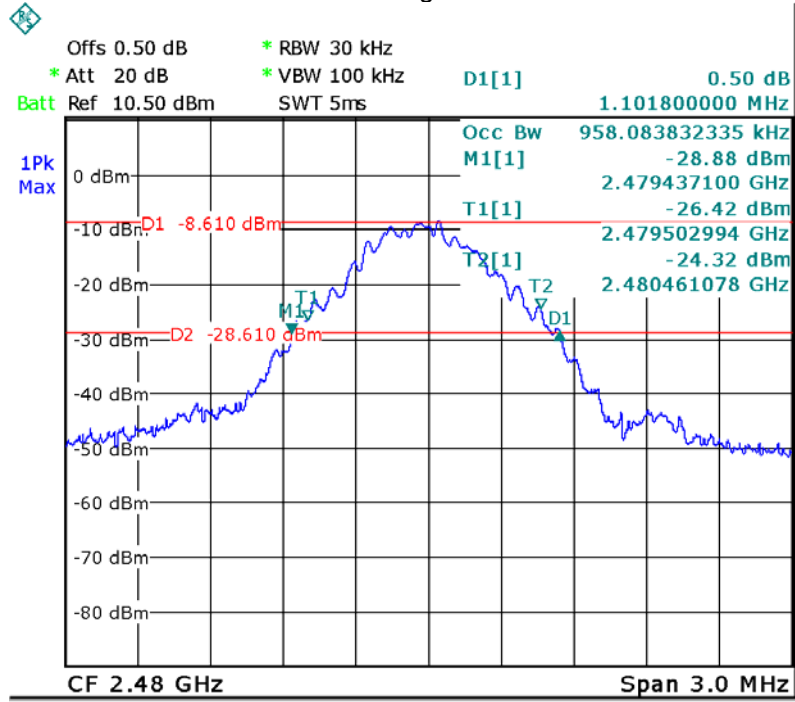


Pi/4 DQPSK Low Channel

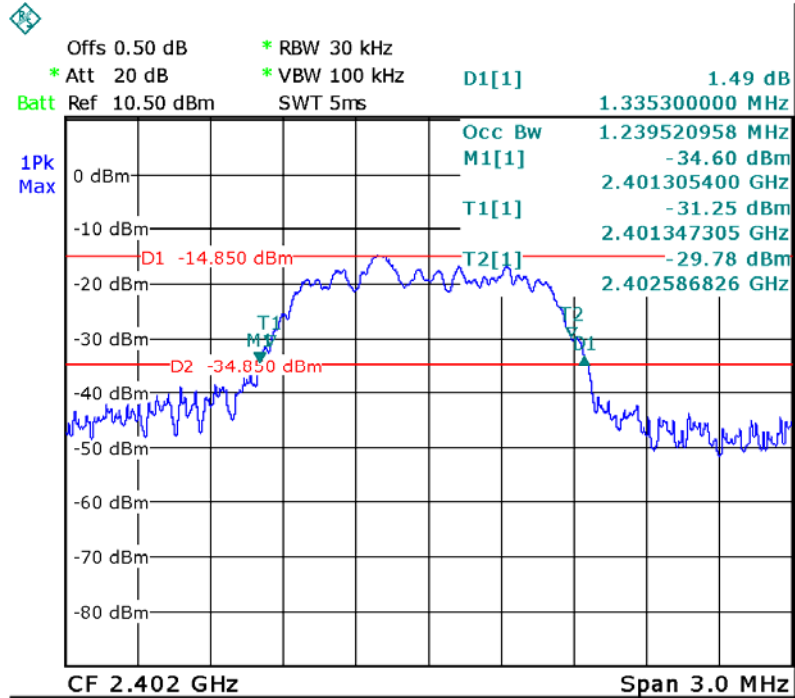


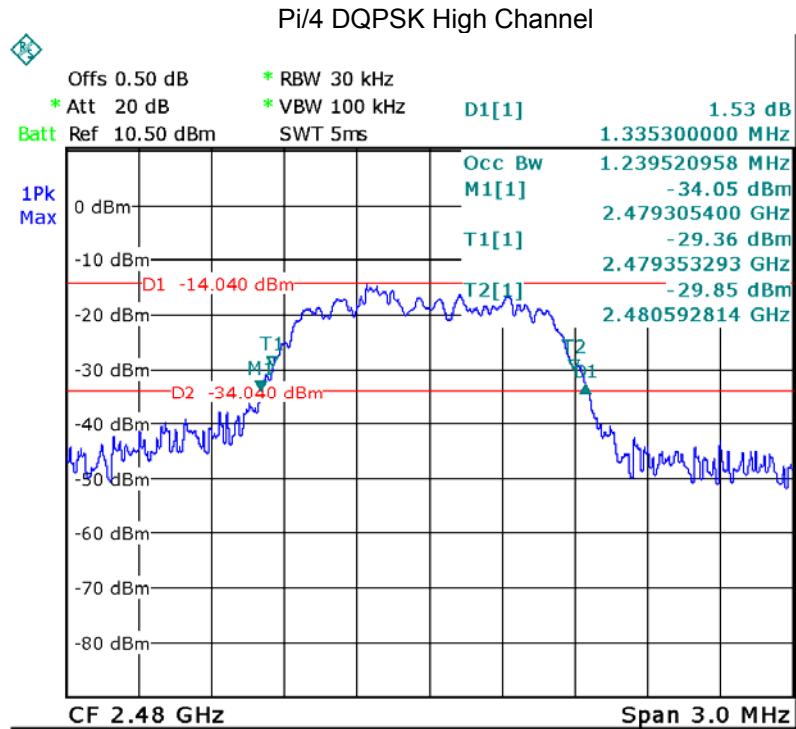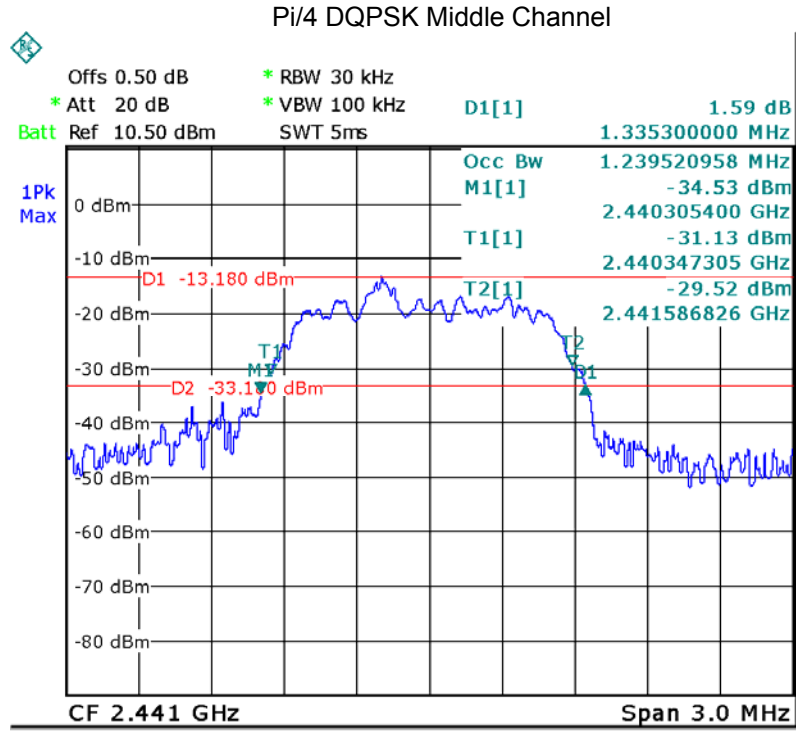


8DPSK Low Channel

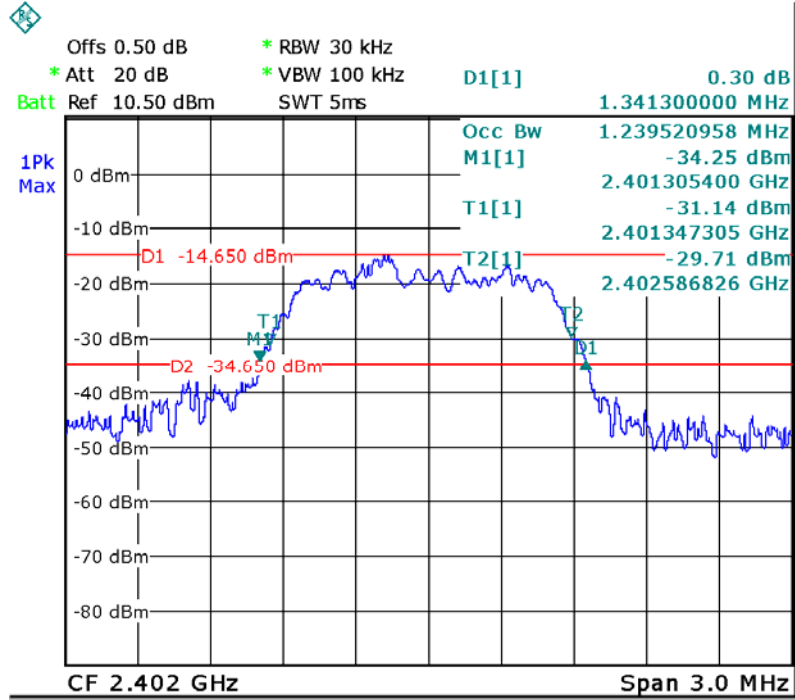

8DPSK Middle Channel

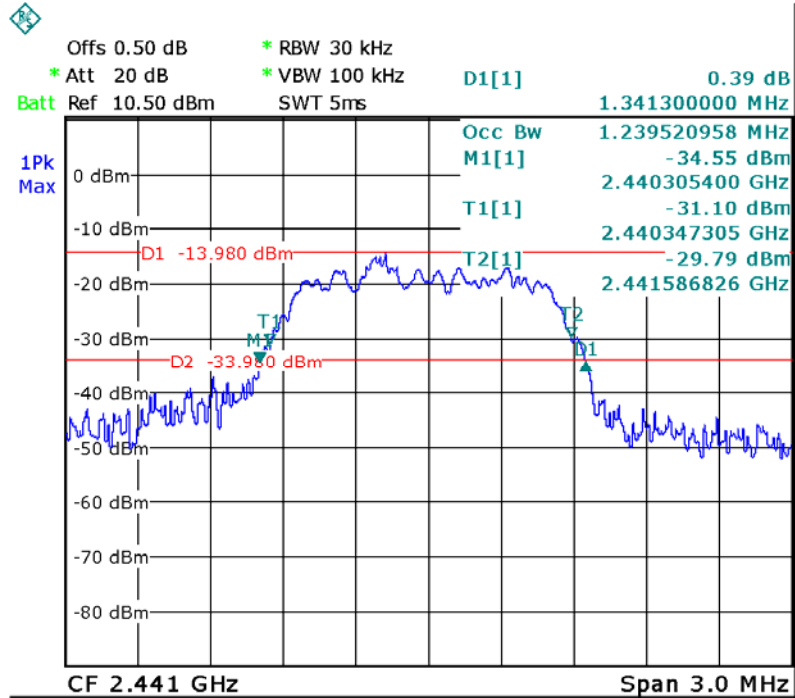

8DPSK High Channel

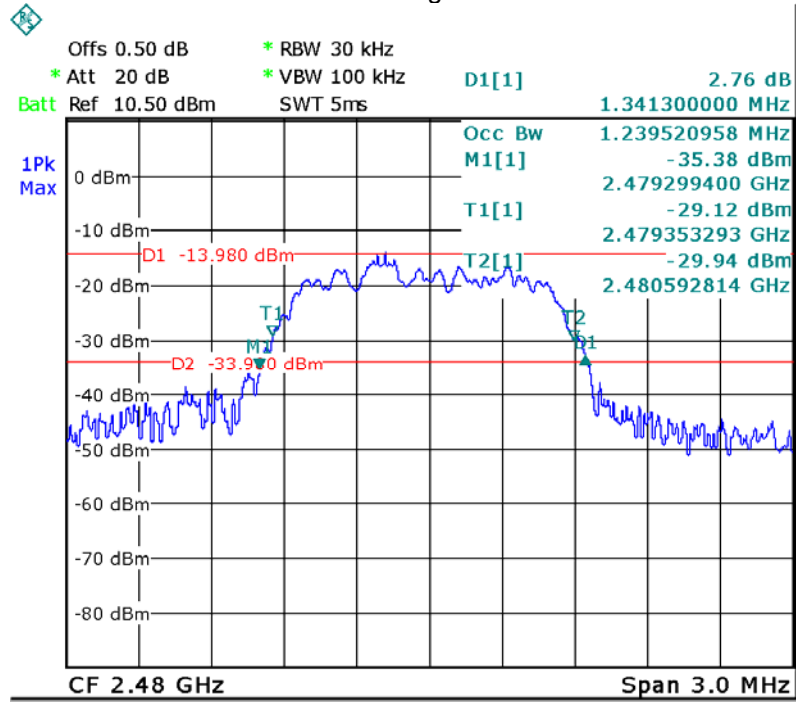

11 Maximum Peak Output Power

Test Requirement:	FCC CFR47 Part 15 Section 15.247
Test Method:	ANSI C63.10:2013
Test Limit:	Regulation 15.247 (b)(1), For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts. Refer to the result "Number of Hopping Frequency" of this document. The 0.125watts (20.97 dBm) limit applies.
Test mode:	Test in fixing frequency transmitting mode.


11.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 3 MHz. VBW =3 MHz. Sweep = auto; Detector Function = Peak.
3. Keep the EUT in transmitting at lowest, medium and highest channel individually. Record the max value.


11.2 Test Result

Test Mode	Data Rate	Peak Power(dBm)			Limit (dBm)
		CH00	CH39	CH78	
GFSK	1Mbps	-5.71	-5.89	-5.31	20.97
4*π4DQPSK	2Mbps	-6.16	-6.27	-5.61	20.97
8DPSK	3Mbps	-6.11	-6.31	-5.73	20.97


Test plots GFSK Low Channel

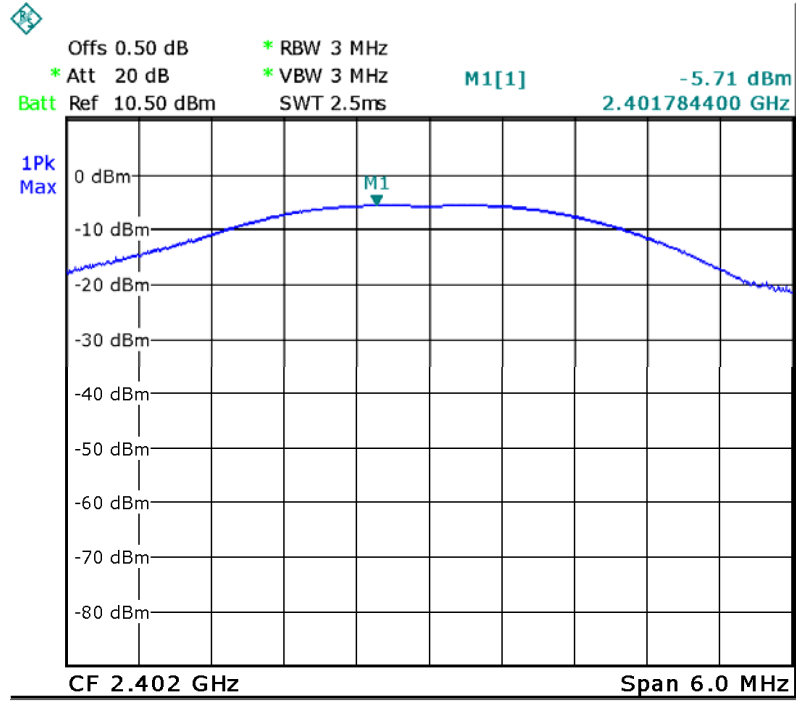


GFSK Middle Channel

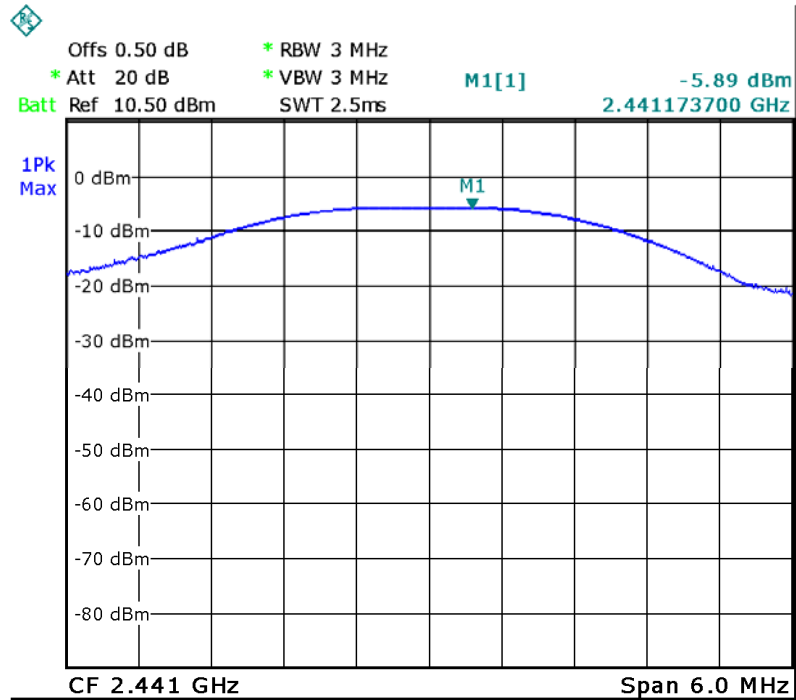


GFSK High Channel

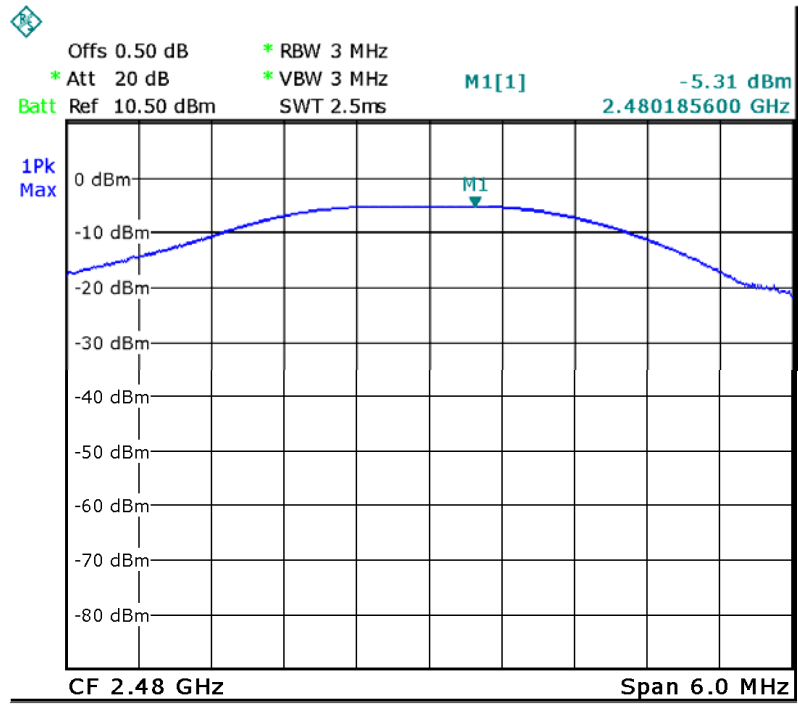


Pi/4 DQPSK Low Channel

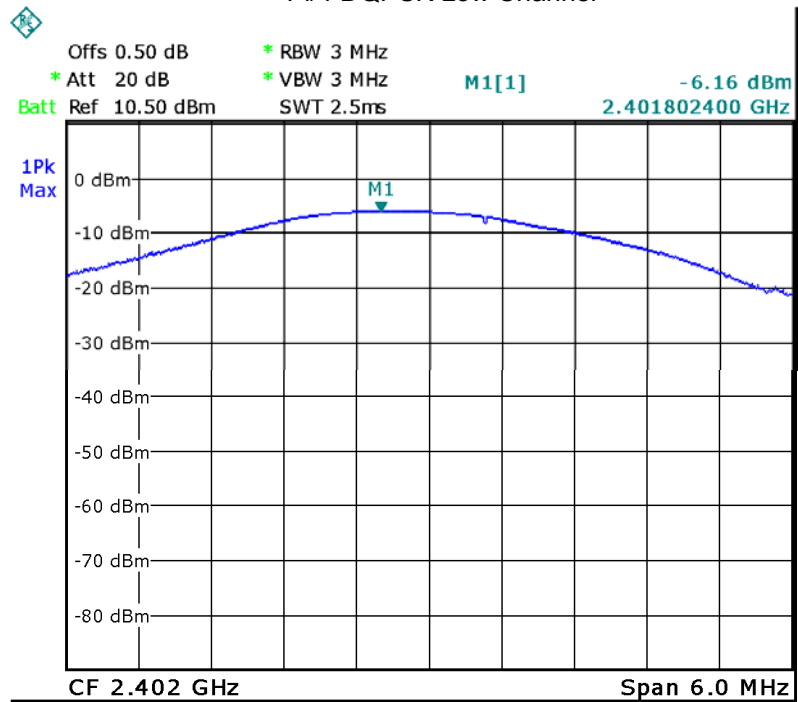


Pi/4 DQPSK Middle Channel

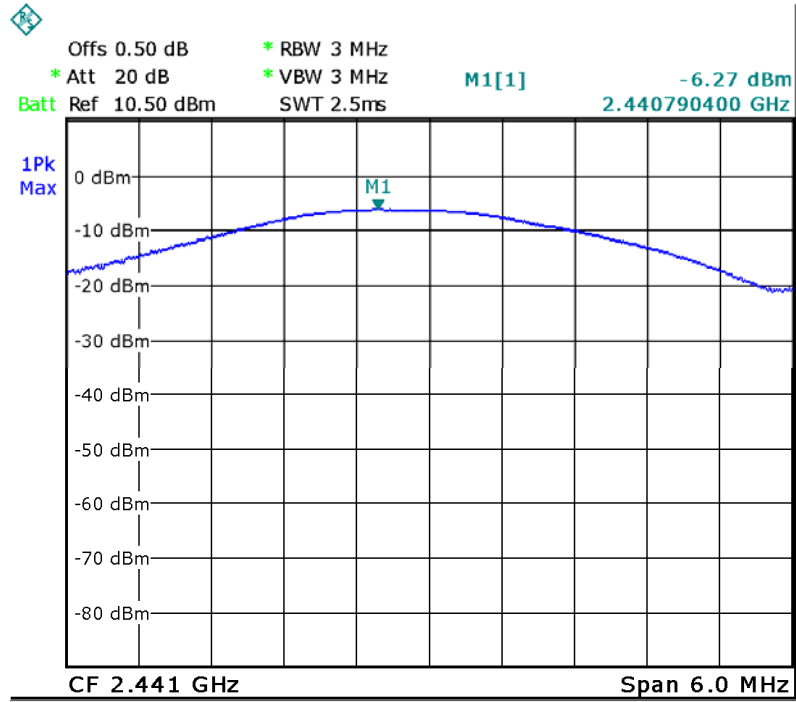


Pi/4 DQPSK High Channel

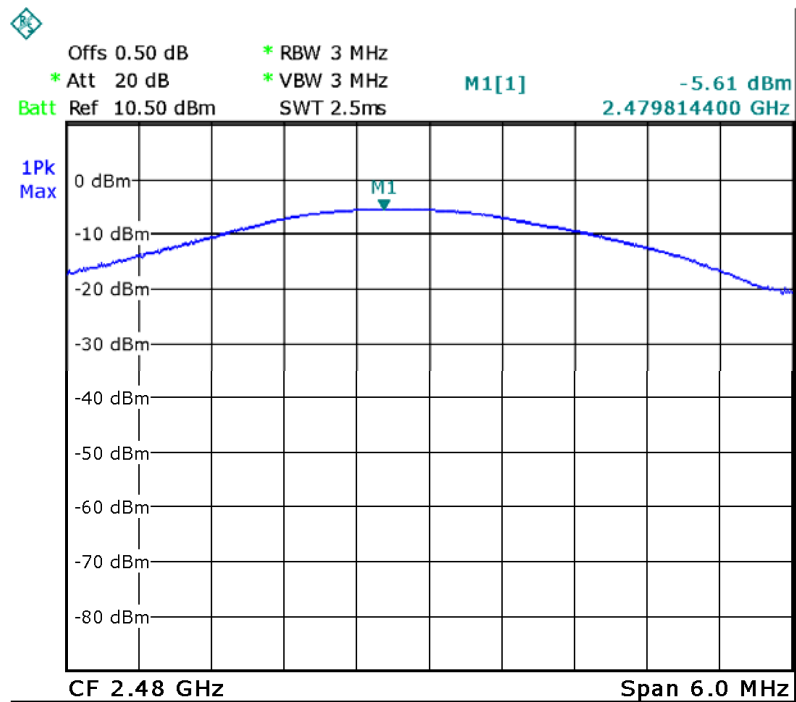


8DPSK Low Channel

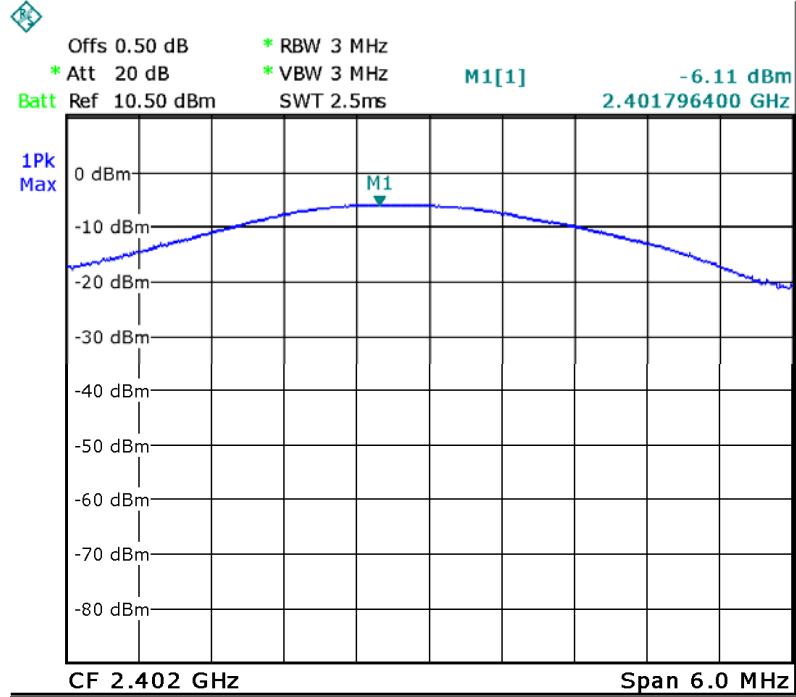

8DPSK Middle Channel

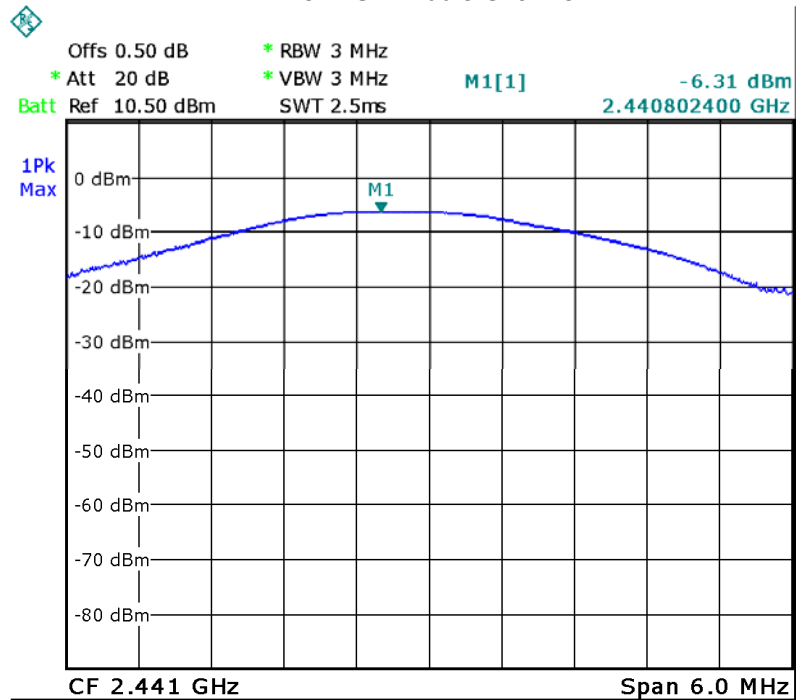

8DPSK High Channel

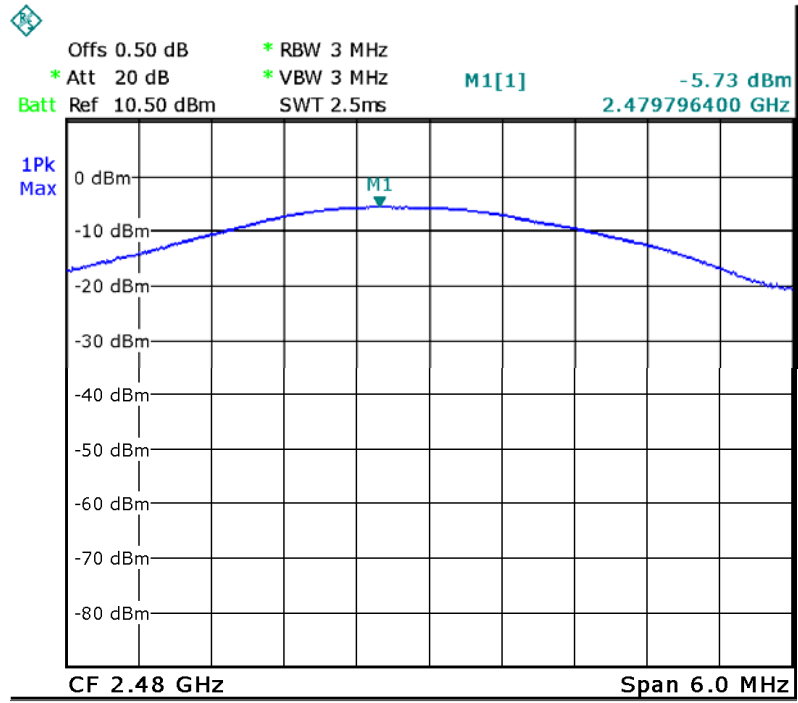

12 Hopping Channel Separation

Test Requirement:	FCC CFR47 Part 15 Section 15.247
Test Method:	ANSI C63.10:2013
Test Limit:	Regulation 15.247(a)(1) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 1W.
Test Mode:	Test in hopping transmitting operating mode.

12.1 Test Procedure


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 30KHz. VBW = 100KHz , Span = 3MHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section Submit this plot.

12.2 Test Result


Modulation	Test Channel	Separation (MHz)	Result
GFSK	Low	1 MHz	PASS
GFSK	Middle	1 MHz	PASS
GFSK	High	1 MHz	PASS
Pi/4 DQPSK	Low	1 MHz	PASS
Pi/4 DQPSK	Middle	1 MHz	PASS
Pi/4 DQPSK	High	1 MHz	PASS
8DPSK	Low	1 MHz	PASS
8DPSK	Middle	1 MHz	PASS
8DPSK	High	1 MHz	PASS

Test plots


GFSK Low Channel

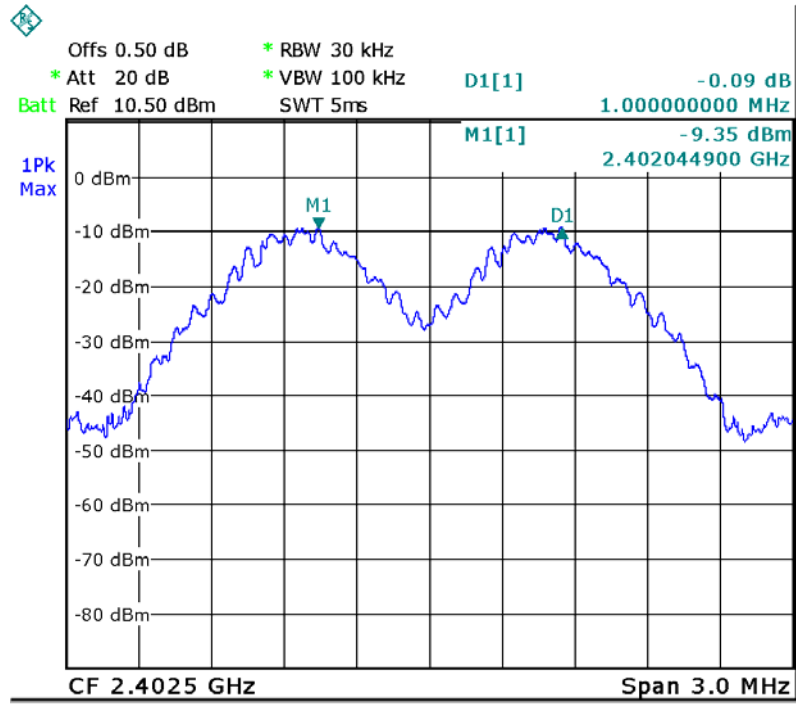


GFSK Middle Channel

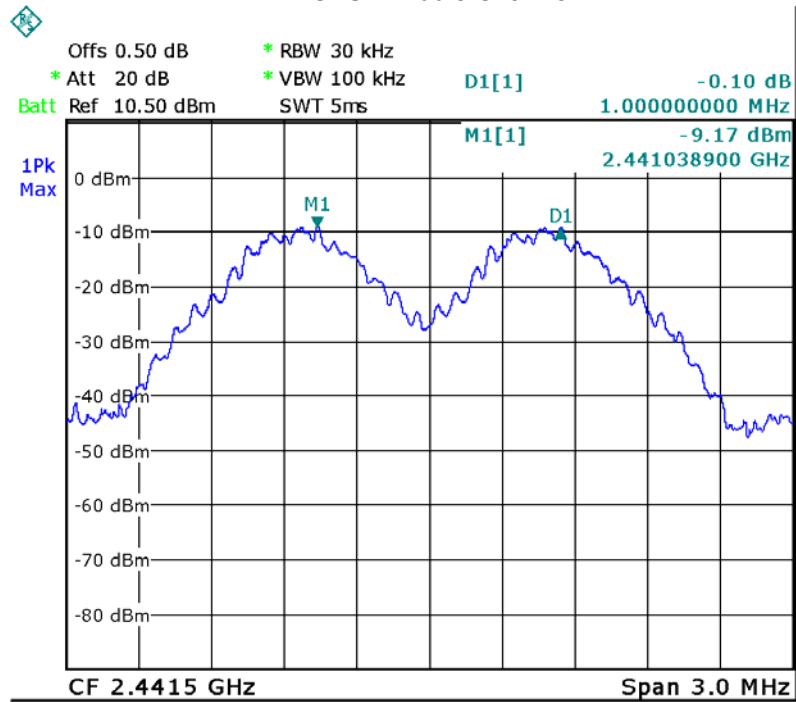


GFSK High Channel

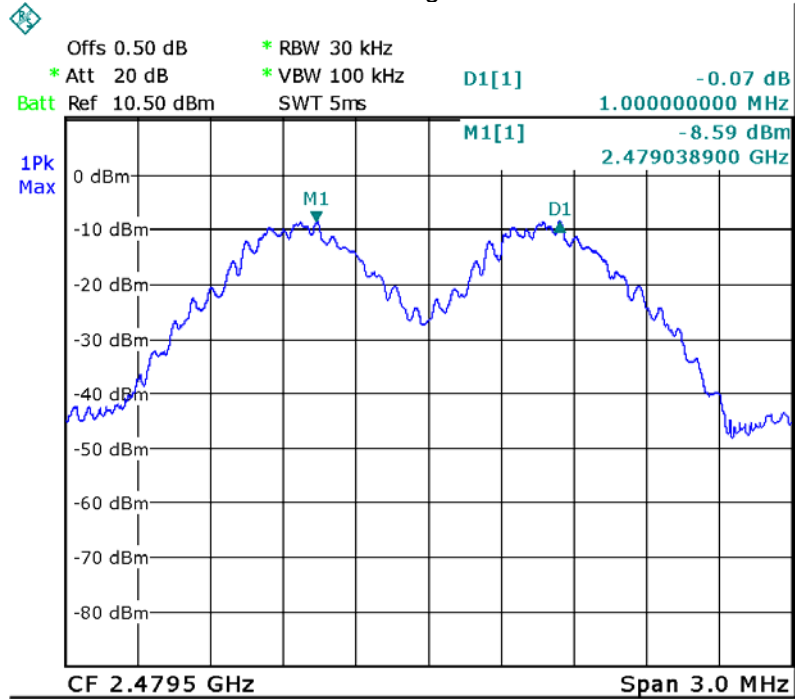


Pi/4 DQPSK Low Channel

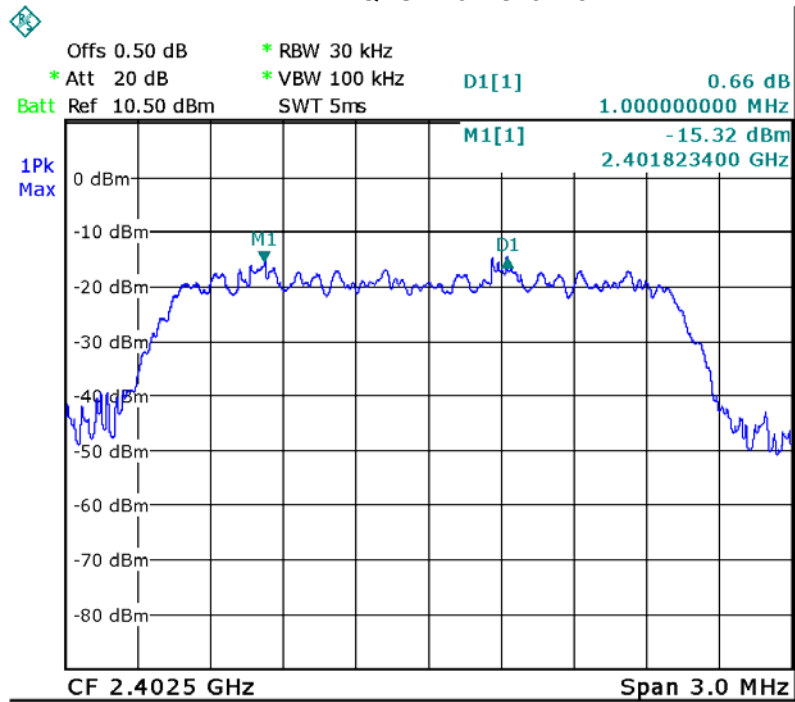


Pi/4 DQPSK Middle Channel

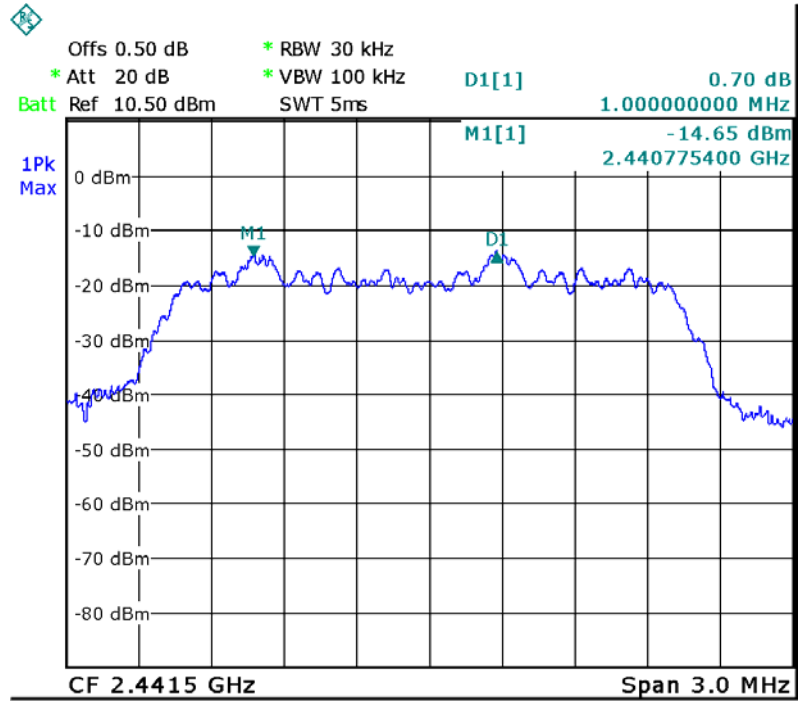


Pi/4 DQPSK High Channel

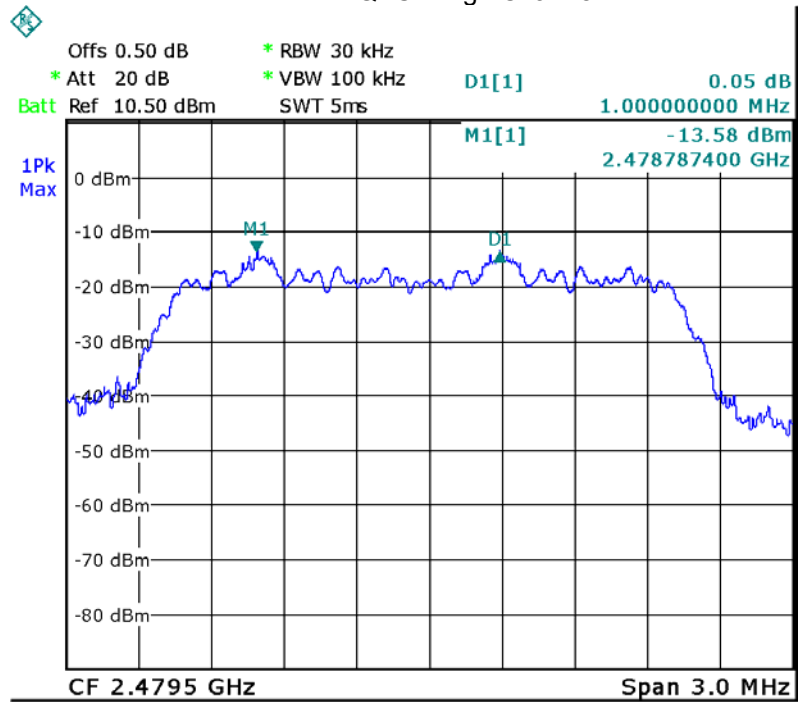


8DPSK Low Channel

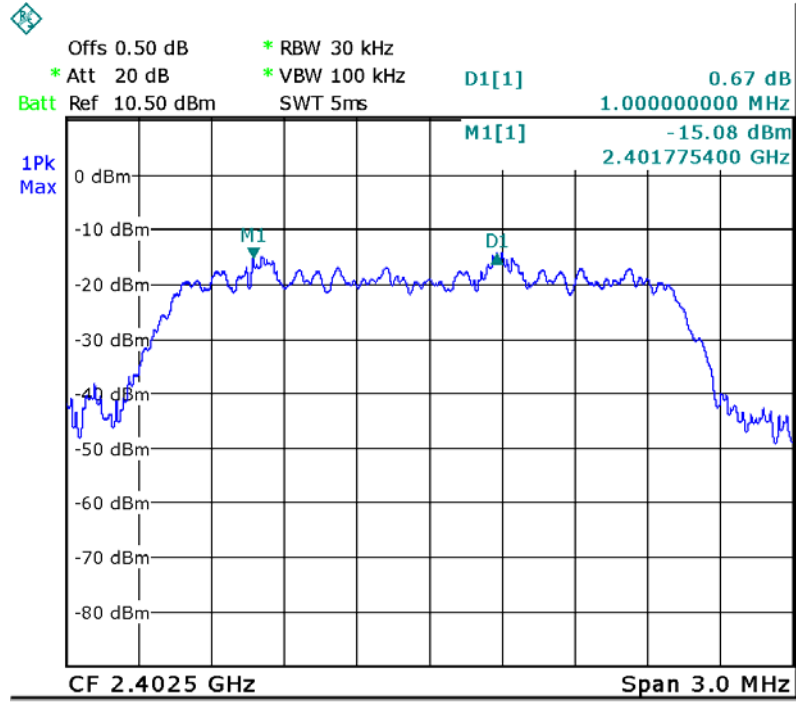

8DPSK Middle Channel

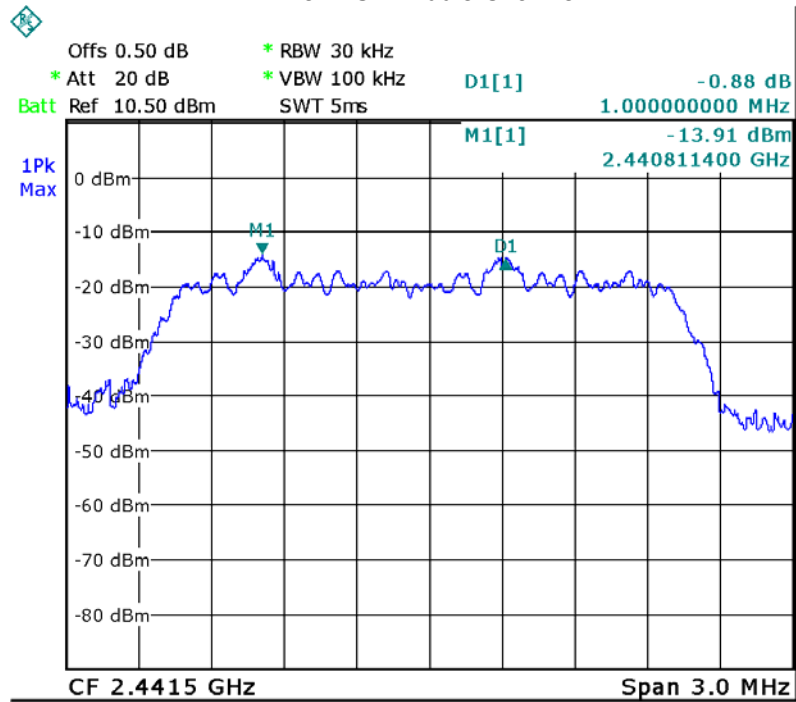

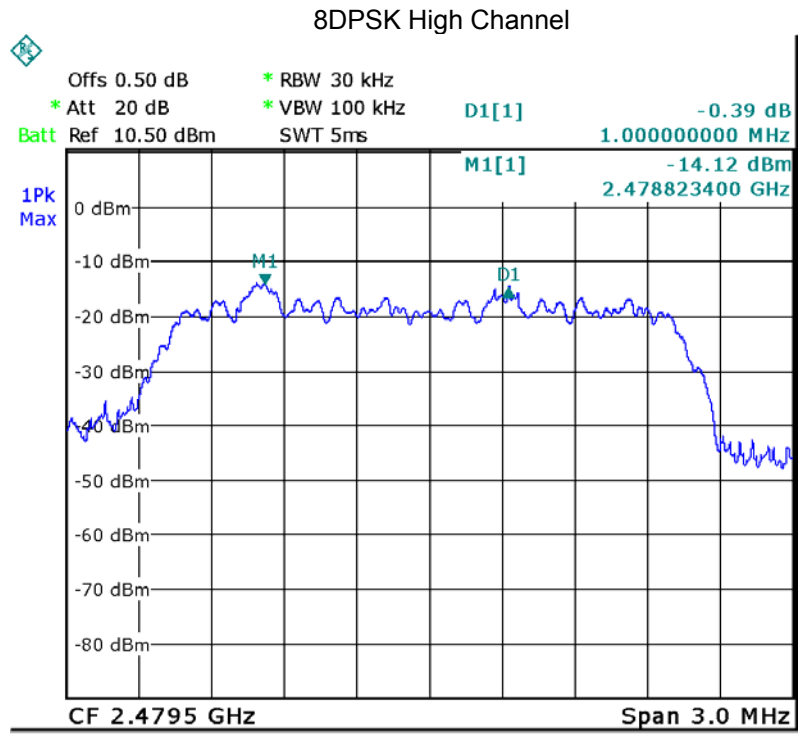

13 Number of Hopping Frequency


Test Requirement:	FCC CFR47 Part 15 Section 15.247
Test Method:	ANSI C63.10:2013
Test Limit:	Regulation 15.247 (a)(1)(iii) Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.
Test Mode:	Test in hopping transmitting operating mode.

13.1 Test Procedure


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 1MHz. VBW = 1MHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. It may prove necessary to break the span up to sections. in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section.
4. Set the spectrum analyzer: Start Frequency = 2.4GHz, Stop Frequency = 2.483GHz. Sweep=auto;

13.2 Test Result


Test Plots: 79 Channels in total

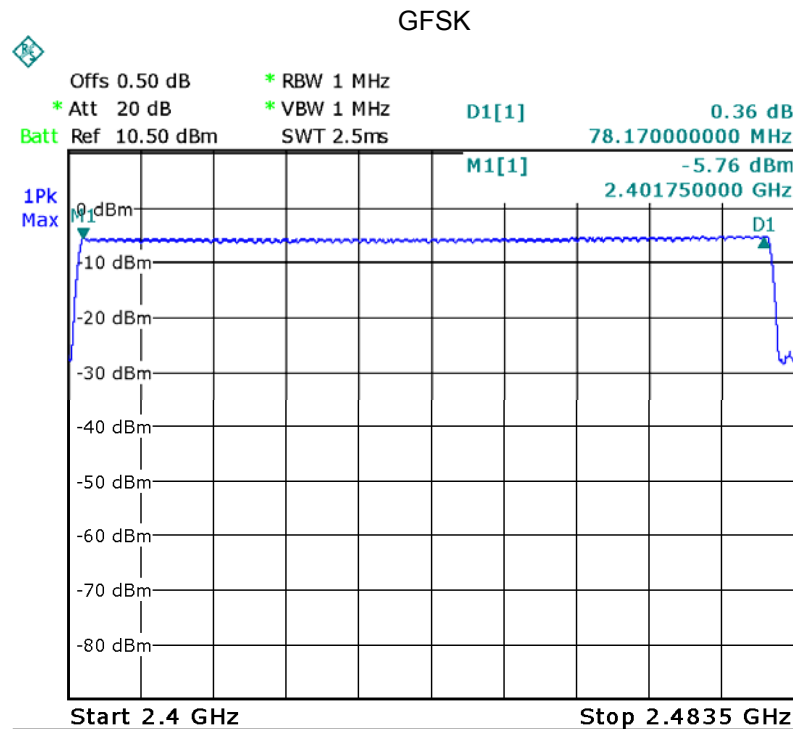

Pi/4 DQPSK

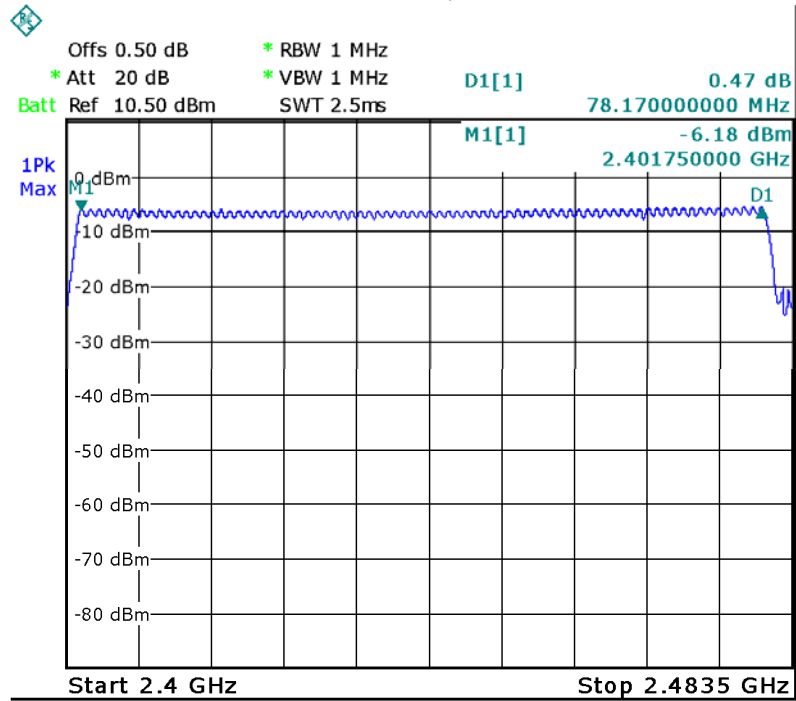

8DPSK

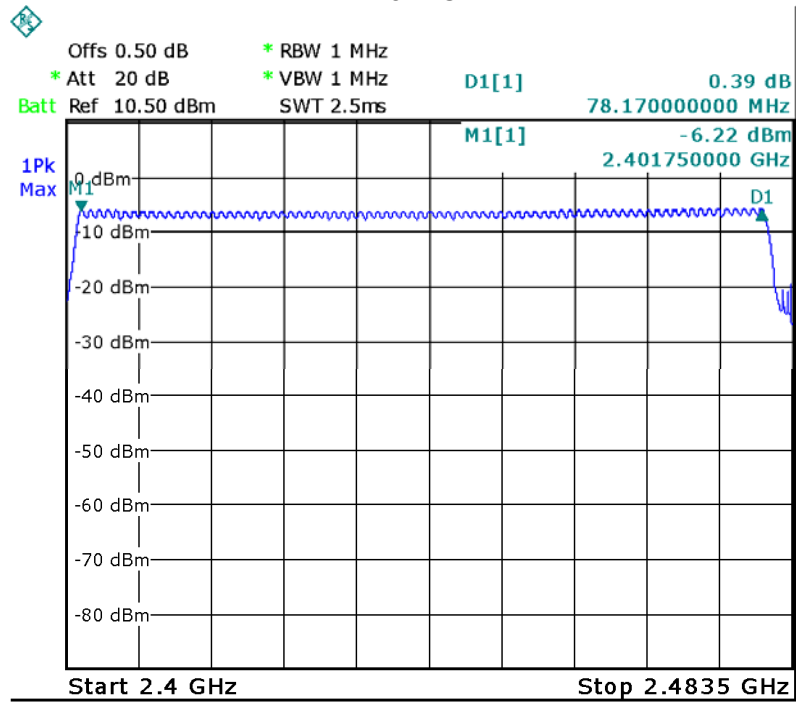

14 Dwell Time

Test Requirement:	FCC CFR47 Part 15 Section 15.247
Test Method:	ANSI C63.10:2013
Test Limit:	Regulation 15.247(a)(1)(iii) Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.
Test Mode:	Test in hopping transmitting operating mode.

14.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set spectrum analyzer span = 0. Centred on a hopping channel;
3. Set RBW = 1MHz and VBW = 3MHz. Sweep = as necessary to capture the entire dwell time per hopping channel. Set the EUT for DH5, DH3 and DH1 packet transmitting.
4. Use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (e.g.. data rate. modulation format. etc.). repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).

14.2 Test Result

DH5 Packet permit maximum $1600 / 79 / 6$ hops per second in each channel (5 time slots RX, 1 time slot TX).


DH3 Packet permit maximum $1600 / 79 / 4$ hops per second in each channel (3 time slots RX, 1 time slot TX).

DH1 Packet permit maximum $1600 / 79 / 2$ hops per second in each channel (1 time slot RX, 1 time slot TX). So, the Dwell Time can be calculated as follows:


Data Packet	Dwell Time(s)
DH5	$1600/79/6*0.4*79*(MkrDelta)/1000$
DH3	$1600/79/4*0.4*79*(MkrDelta)/1000$
DH1	$1600/79/2*0.4*79*(MkrDelta)/1000$
Remark: Mkr Delta is once pulse time. Only the worst data(DH5) were show as follow.	

Modulation	Data Packet	Channel	pulse time(ms)	Dwell Time(s)	Limits(s)
GFSK	DH5	Low	2.944	0.314	0.4
		middle	2.944	0.314	0.4
		High	2.944	0.314	0.4
Pi/4DQPSK	DH5	Low	2.944	0.314	0.4
		middle	2.944	0.314	0.4
		High	2.944	0.314	0.4
8DPSK	DH5	Low	2.944	0.314	0.4
		middle	2.944	0.314	0.4
		High	2.944	0.314	0.4


Test Plots
GFSK DH5 Low Channel

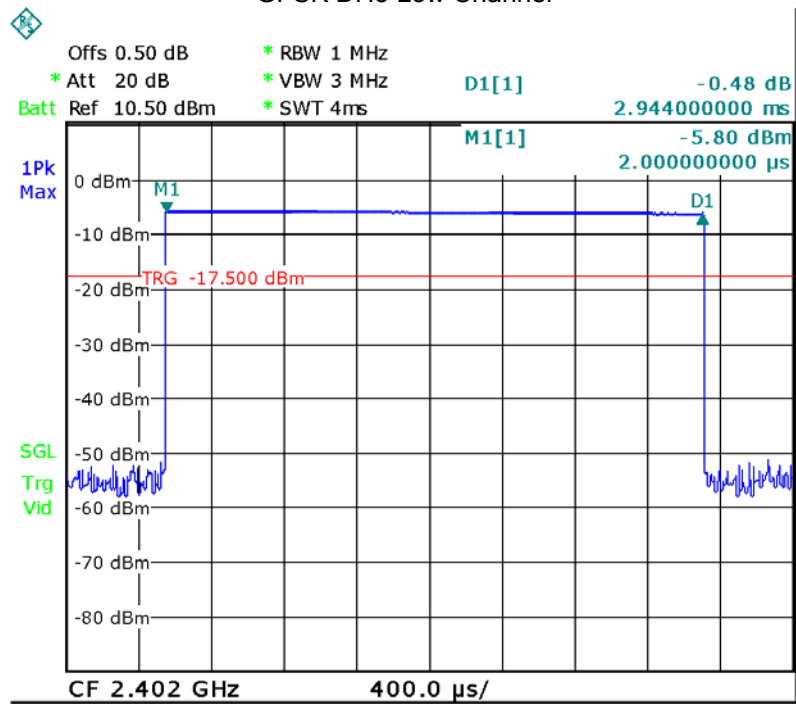


GFSK DH5 Middle Channel

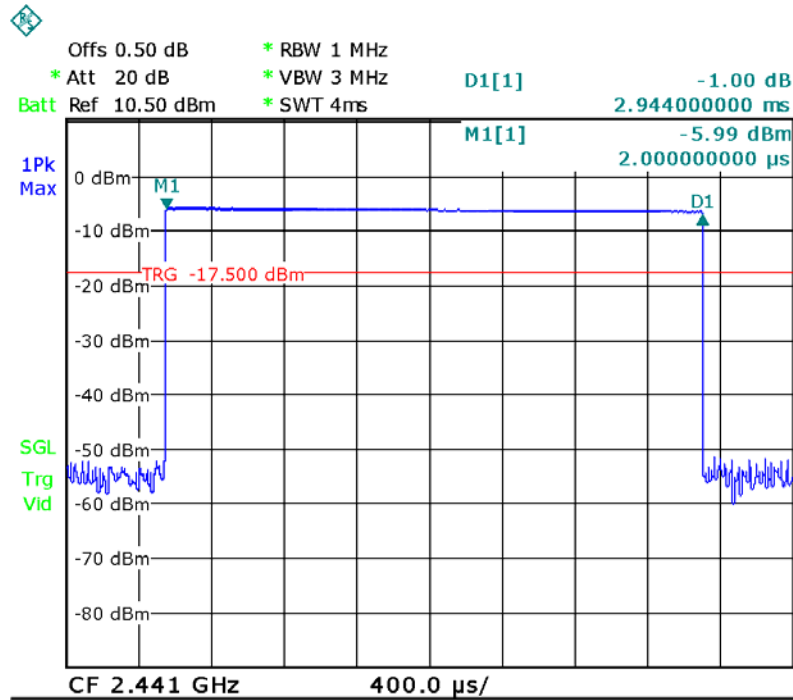


GFSK DH5 High Channel


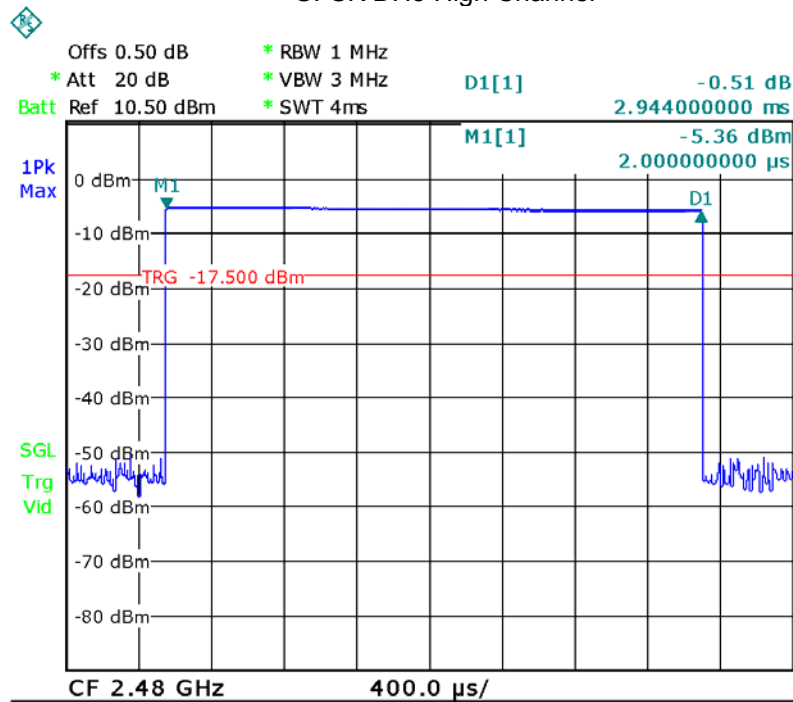


Pi/4DQPSK DH5 Low Channel

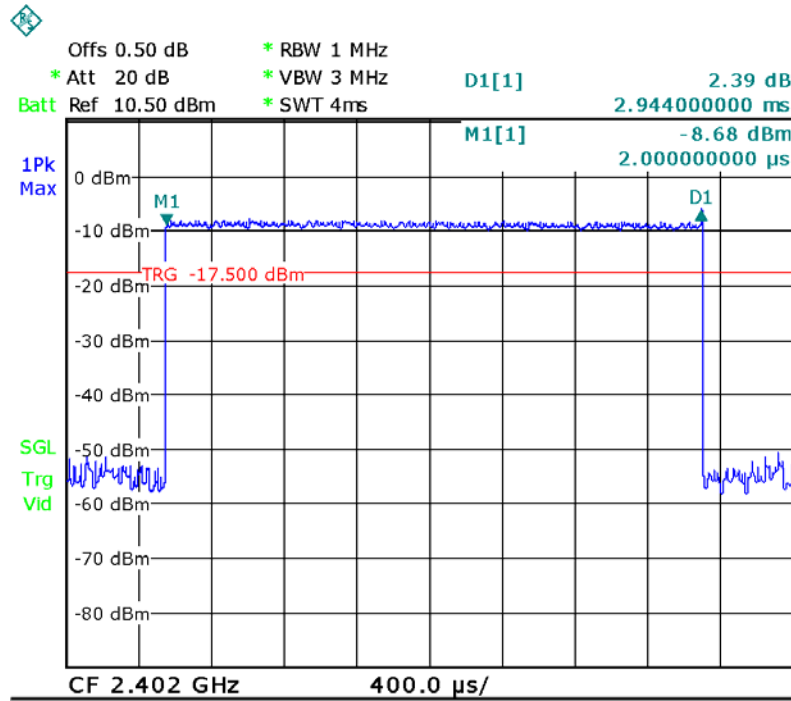


Pi/4DQPSK DH5 Middle Channel

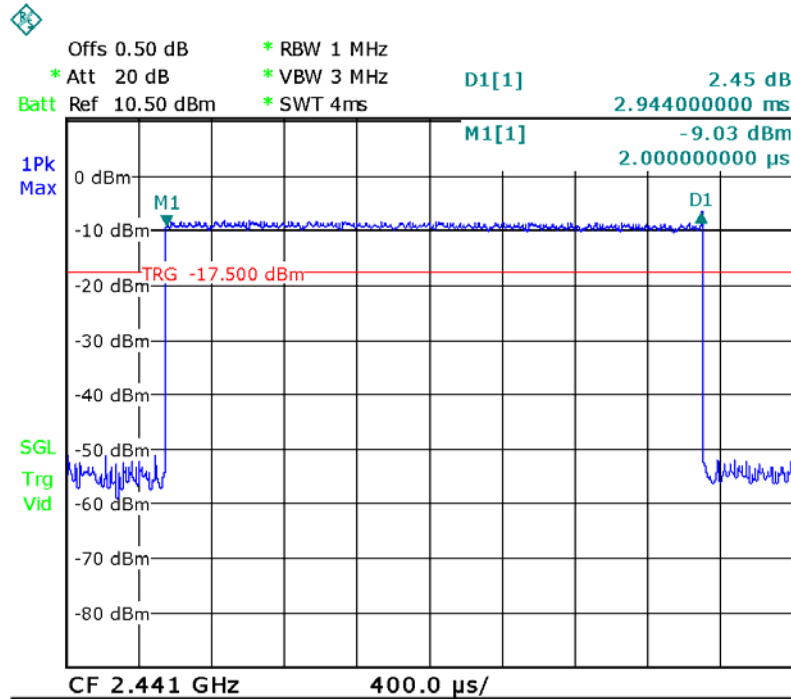


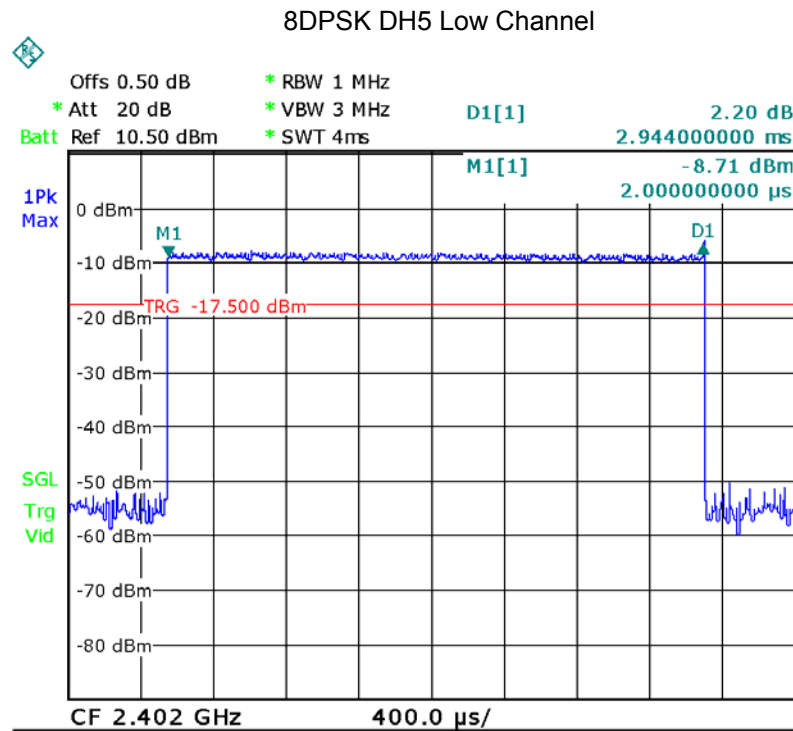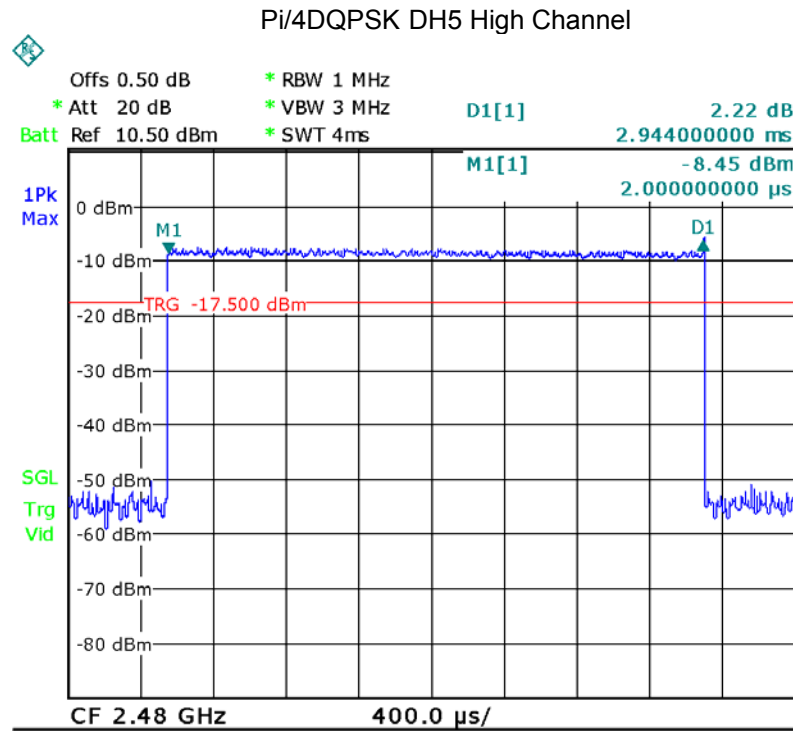

8DPSK DH5 Middle Channel

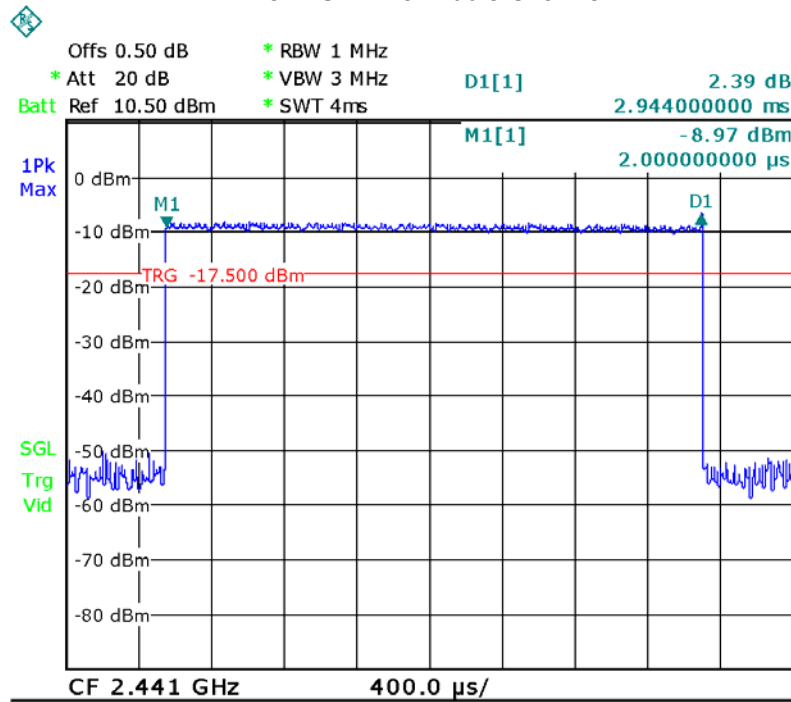

8DPSK DH5 High Channel

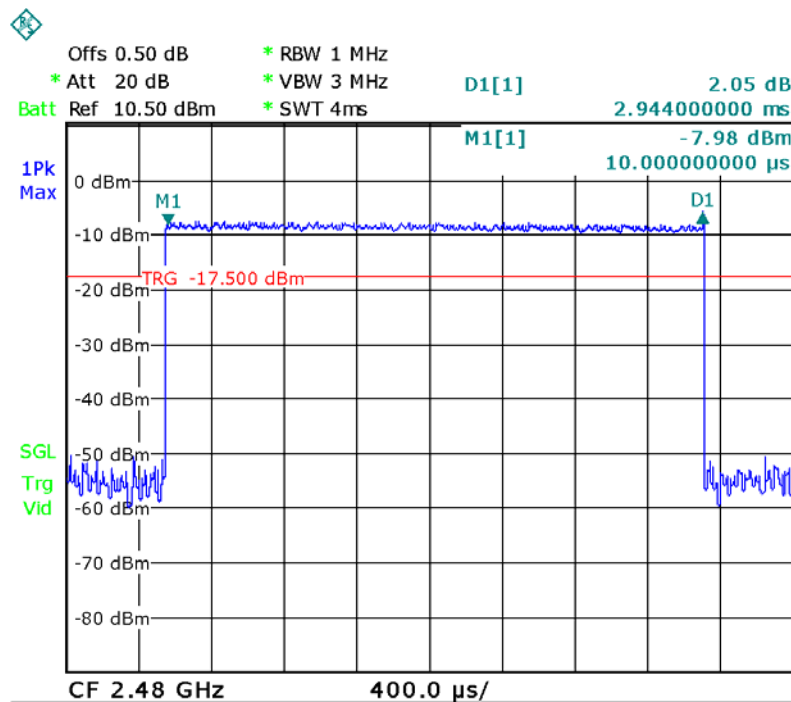


15 Antenna Requirement

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Result:

The EUT has one PCB Printed Antenna, the gain is 0 dBi. meets the requirements of FCC 15.203.

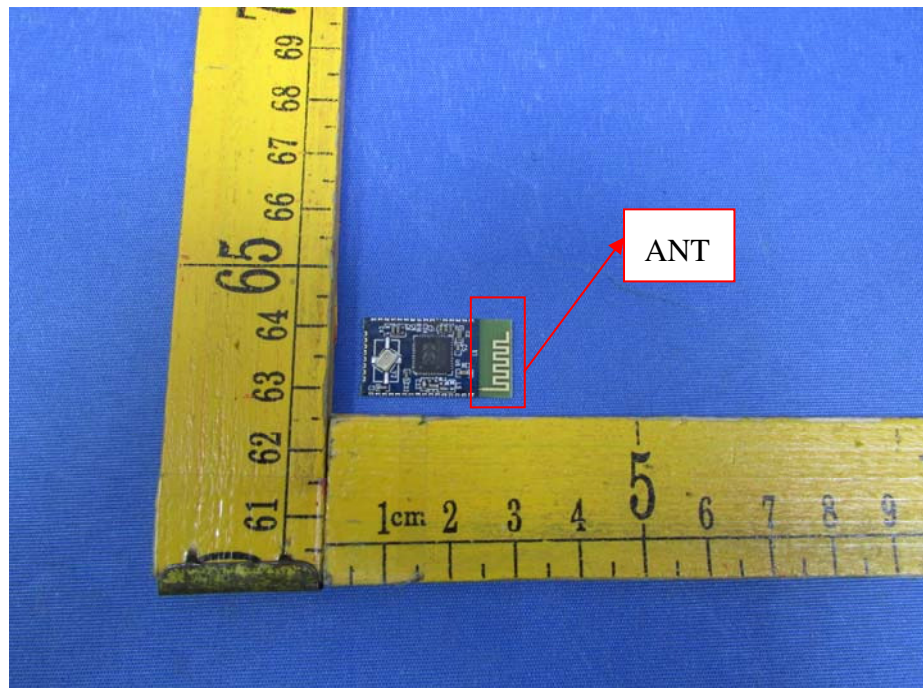

16 RF Exposure

Test Requirement: FCC Part 1.1307

Evaluation Method: FCC Part 2.1091 & KDB 447498 D01 General RF Exposure Guidance v06

16.1 Requirements

Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess limit for maximum permissible exposure. In accordance with 47 CFR FCC Part 2 Subpart J, section 2.1091 this device has been defined as a mobile device whereby a distance of 0.2 m normally can be maintained between the user and the device.

16.2 The procedures / limit

(A) Limits for Occupational / Controlled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-3.0	614	1.63	(100)*	6
3.0-30	1842 / f	4.89 / f	(900 / f)*	6
30-300	61.4	0.163	1.0	6
300-1500			F/300	6
1500-100,000			5	6

(B) Limits for General Population / Uncontrolled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-1.34	614	1.63	(100)*	30
1.34-30	824/f	2.19/f	(180/f)*	30
30-300	27.5	0.073	0.2	30
300-1500			F/1500	30
1500-100,000			1.0	30

Note: f = frequency in MHz ; *Plane-wave equivalent power density

16.3 MPE Calculation Method

$$S = \frac{P \times G}{4 \times \pi \times R^2}$$

S = power density (in appropriate units, e.g. mW/cm²)

P = output power to the antenna (in appropriate units, e.g., mW).

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain.

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm)

From the peak EUT RF output power, the minimum mobile separation distance, R=20cm, as well as the gain of the used antenna, the RF power density can be obtained

Antenna Gain (dBi)	Antenna Gain (numeric)	Max. Peak Output Power (dBm)	Peak Output Power (mW)	Power Density (mW/cm ²)	Limit of Power Density (mW/cm ²)	Result
0.00	1.000	-5.31	0.294	0.0000585	1	Compliance


17 Photographs – Model CKS503BT Test Setup

17.1 Photograph – Conducted Emission Test Setup at Test Site 1#





17.2 Photograph – Radiation Spurious Emission Test Setup


32.768KHz to 30MHz at Test Site 2#

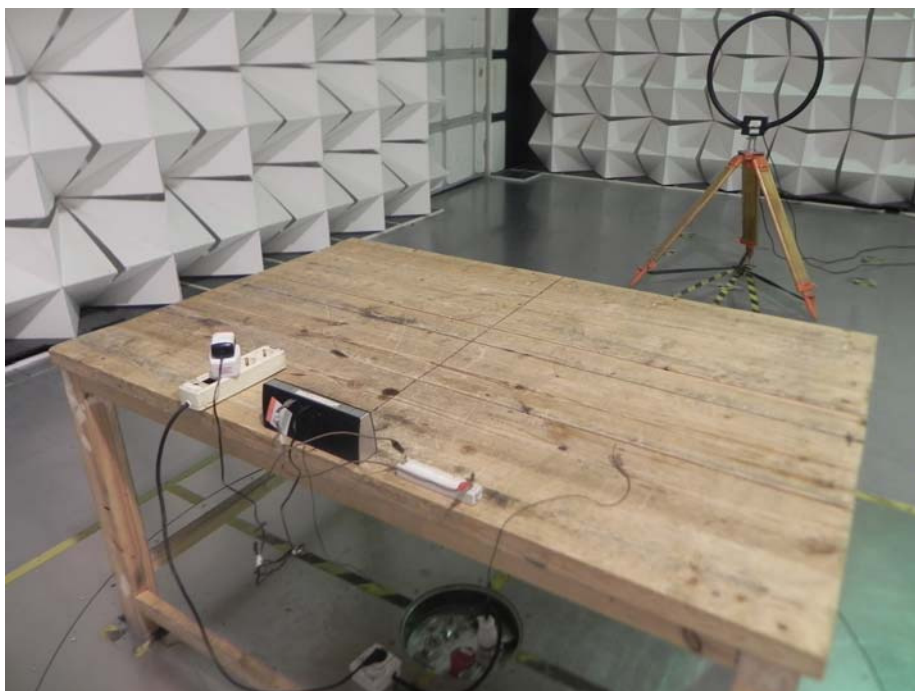

30MHz-1GHz at Test Site 2#

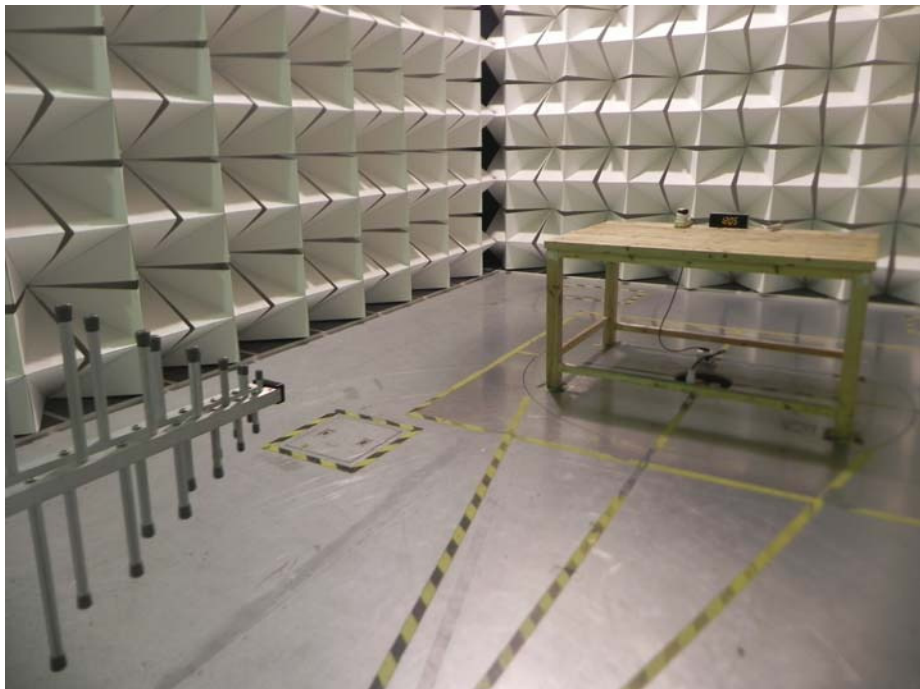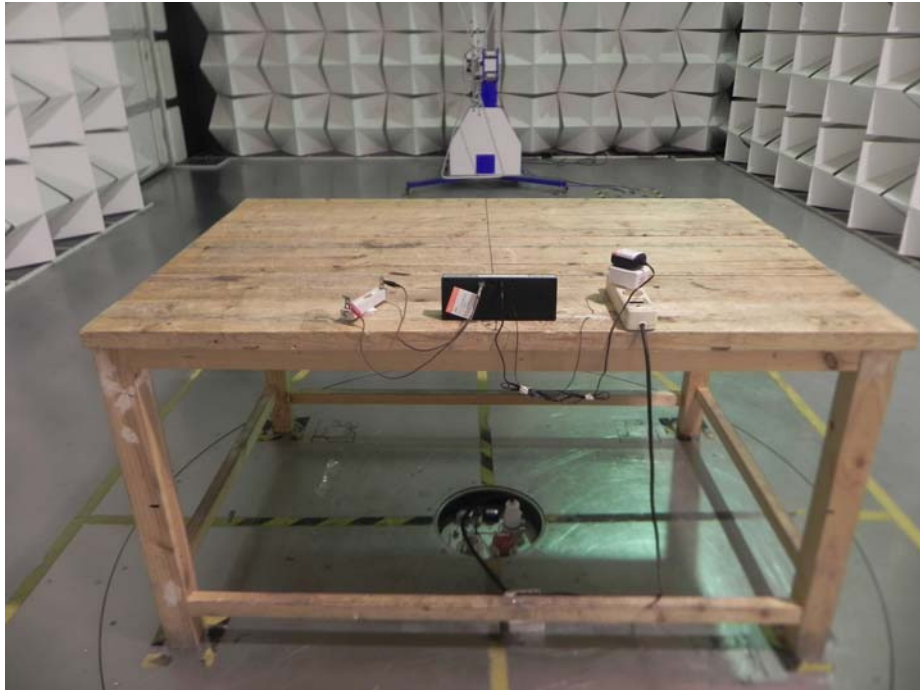

Above 1GHz at Test Site 1#

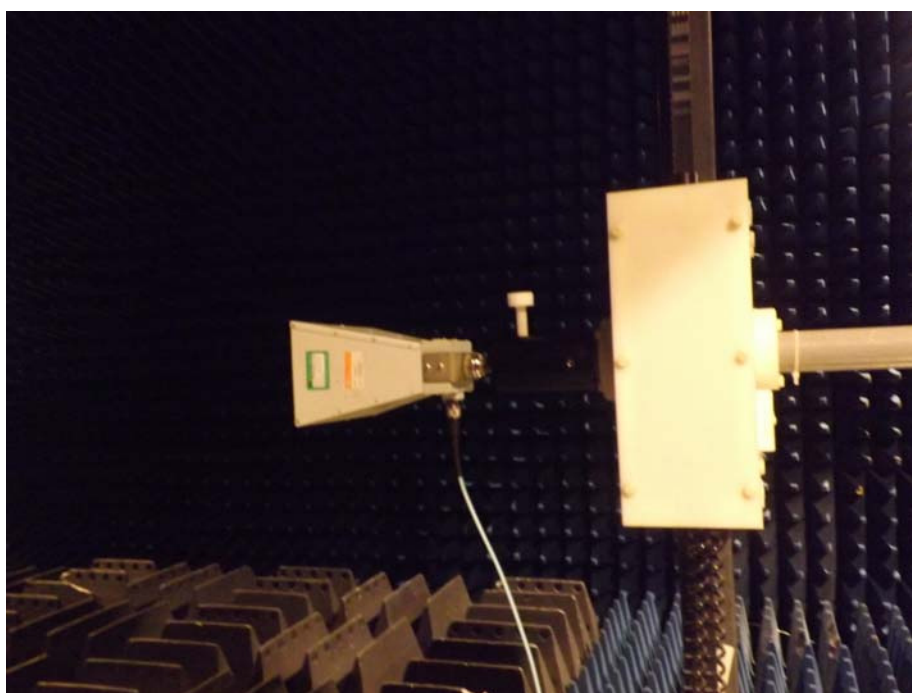




18 Photographs - Constructional Details

18.1 Model CKS503BT -External Photos





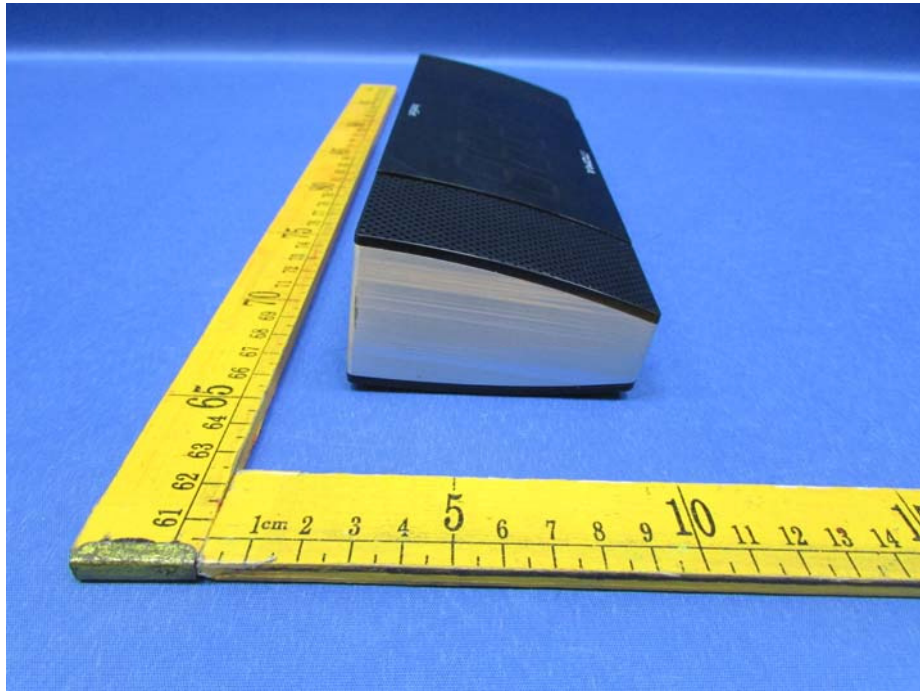





18.2 Model CKS503BT -Internal Photos

