

# PINGHU WELLYE ELECTRICAL CO., LTD.

# RF TEST REPORT

**Report Type:**

FCC Part 15.249 & ISED RSS-210 RF report

**Model:**

TX10, TX11, TX12, TX20

**REPORT NUMBER:**

200703411SHA-001

**ISSUE DATE:**

Sep 22, 2020

**DOCUMENT CONTROL NUMBER:**

TTRF15.249\_V1 © 2018 Intertek



**Applicant:** PINGHU WELLYE ELECTRICAL CO., LTD.  
NO.8 Jinhui Road, Xingcang Town, Pinghu City, Zhejiang, China.

**Manufacturer:** PINGHU WELLYE ELECTRICAL CO., LTD.  
NO.8 Jinhui Road, Xingcang Town, Pinghu City, Zhejiang, China.

**Manufacturing site:** PINGHU WELLYE ELECTRICAL CO., LTD.  
NO.8 Jinhui Road, Xingcang Town, Pinghu City, Zhejiang, China.

**FCC ID:** 2AJ2H-TX101120

### SUMMARY:

The equipment complies with the requirements according to the following standard(s) or Specification:

**47CFR Part 15 (2019):** Radio Frequency Devices (Subpart C)

**ANSI C63.10 (2013):** American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices

### PREPARED BY:



---

Project Engineer  
Teddy Yin

### REVIEWED BY:



---

Reviewer  
Daniel Zhao

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

# TEST REPORT

## Content

- REVISION HISTORY..... 4**
- MEASUREMENT RESULT SUMMARY ..... 5**
- 1 GENERAL INFORMATION ..... 6**
  - 1.1 DESCRIPTION OF EQUIPMENT UNDER TEST (EUT) ..... 6
  - 1.2 TECHNICAL SPECIFICATION ..... 6
  - 1.3 DESCRIPTION OF TEST FACILITY ..... 7
- 2 TEST SPECIFICATIONS..... 8**
  - 2.1 STANDARDS OR SPECIFICATION ..... 8
  - 2.2 MODE OF OPERATION DURING THE TEST..... 8
  - 2.3 TEST SOFTWARE LIST ..... 9
  - 2.4 TEST PERIPHERALS LIST ..... 9
  - 2.5 TEST ENVIRONMENT CONDITION:..... 9
  - 2.6 INSTRUMENT LIST ..... 10
  - 2.7 MEASUREMENT UNCERTAINTY ..... 11
- 3 RADIATED EMISSION ..... 12**
  - 3.1 LIMIT ..... 12
  - 3.2 MEASUREMENT PROCEDURE ..... 12
  - 3.3 TEST CONFIGURATION ..... 14
  - 3.4 TEST RESULTS OF RADIATED EMISSIONS ..... 16
- 4 POWER LINE CONDUCTED EMISSION..... 21**
  - 4.1 LIMIT ..... 21
  - 4.2 TEST CONFIGURATION ..... 21
  - 4.3 MEASUREMENT PROCEDURE ..... 22
  - 4.4 TEST RESULTS OF POWER LINE CONDUCTED EMISSION..... 23
- 5 ASSIGNED BANDWIDTH (20DB BANDWIDTH) ..... 24**
  - 5.1 LIMIT ..... 24
  - 5.2 MEASUREMENT PROCEDURE ..... 24
  - 5.3 TEST CONFIGURATION ..... 24
  - 5.4 THE RESULTS..... 25
- 6 ANTENNA REQUIREMENT ..... 26**

## Revision History

Report No.	Version	Description	Issued Date
200703411SHA-001	Rev. 01	Initial issue of report	Sep 22, 2020

## Measurement result summary

TEST ITEM	FCC REFERANCE	IC REFERANCE	RESULT
Radiated emission	15.249 & 15.209	RSS-210 Issue 9 Clause B.10	Pass
Power line conducted emission	15.207	RSS-Gen Issue 5 Clause 8.8	NA
Assigned bandwidth (20dB bandwidth)	15.215(c)	RSS-Gen Issue 5 Clause 6.7	Pass
Antenna requirement	15.203	-	Pass

Notes: 1: NA =Not Applicable

2: Determination of the test conclusion is based on IEC Guide 115 in consideration of measurement uncertainty.

3: Additions, Deviations and Exclusions from Standards: None.

## 1 GENERAL INFORMATION

### 1.1 Description of Equipment Under Test (EUT)

Product name:	Remote control
Type/Model:	TX10, TX11, TX12, TX20
Description of EUT:	<p>The EUT is a 2.4G remote control. All models have the same PCB and RF circuit.</p> <p>The difference is</p> <ol style="list-style-type: none"> <li>1) TX10 and TX20 use 7 buttons, TX12 uses 6 buttons, TX11 uses 4 buttons.</li> <li>2) the appearance.</li> </ol> <p>TX 20 was tested as representative, and the worst data is listed in the report.</p>
Rating:	DC 3V
Category of EUT:	Class B
EUT type:	<input checked="" type="checkbox"/> Table top <input type="checkbox"/> Floor standing
Software Version:	/
Hardware Version:	/
Sample received date:	Aug 5, 2020
Date of test:	Aug 5~Sep 15, 2020

### 1.2 Technical Specification

Frequency Range:	2405MHz ~ 2479MHz
Support Standards:	/
Type of Modulation:	GFSK
Channel Number:	75
Data Rate:	/
Channel Separation:	1 MHz
Antenna Information:	PCB antenna, OdBi

### 1.3 Description of Test Facility

Name:	Intertek Testing Services Shanghai
Address:	Building 86, No. 1198 Qinzhou Road(North), Shanghai 200233, P.R. China
Telephone:	86 21 61278200
Telefax:	86 21 54262353

The test facility is recognized, certified, or accredited by these organizations:	CNAS Accreditation Lab Registration No. CNAS L0139
	FCC Accredited Lab Designation Number: CN1175
	IC Registration Lab CAB identifier.: CN0051
	VCCI Registration Lab Registration No.: R-14243, G-10845, C-14723, T-12252
	A2LA Accreditation Lab Certificate Number: 3309.02

**TEST REPORT**

## 2 TEST SPECIFICATIONS

### 2.1 Standards or specification

47CFR Part 15 (2019)

ANSI C63.10 (2013)

### 2.2 Mode of operation during the test

The EUT is a handheld device, so three axes (X, Y, Z) were observed while the test receiver worked as “max hold” continuously and the highest reading among the whole test procedure was recorded.

X axis is the worst case.

The lowest, middle and highest channel were tested as representatives.

Frequency Band (MHz)				2402 ~ 2449			
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
<b>0</b>	<b>2405</b>	20	2425	40	2445	60	2465
1	2406	21	2426	41	2446	61	2466
2	2407	22	2427	42	2447	62	2467
3	2408	23	2428	43	2448	63	2468
4	2409	24	2429	44	2449	64	2469
5	2410	25	2430	45	2450	65	2470
6	2411	26	2431	46	2451	66	2471
7	2412	27	2432	47	2452	67	2472
8	2413	28	2433	48	2453	68	2473
9	2414	29	2434	49	2454	69	2474
10	2415	30	2435	50	2455	70	2475
11	2416	31	2436	51	2456	71	2476
12	2417	32	2437	52	2457	72	2477
13	2418	33	2438	53	2458	73	2478
14	2419	34	2439	54	2459	<b>74</b>	<b>2479</b>
15	2420	<b>35</b>	<b>2440</b>	55	2460		
16	2421	36	2441	56	2461		
17	2422	37	2442	57	2462		
18	2423	38	2443	58	2463		
19	2424	39	2444	59	2464		

While testing transmitting mode of EUT, the internal modulation and continuously transmission was applied.

- 1) Radiated test mode: EUT transmitted signal with internal antenna;



### 2.3 Test software list

Test Items	Software	Manufacturer	Version
Conducted emission	ESxS-K1	R&S	V2.1.0
Radiated emission	ES-K1	R&S	V1.71

### 2.4 Test peripherals list

Item No.	Name	Band and Model	Description
1	/	/	/
/	/	/	/
/	/	/	/

### 2.5 Test environment condition:

Test items	Temperature	Humidity
Radiated emission	25°C	54% RH
Assigned bandwidth (20dB bandwidth)	25°C	54% RH
Power line conducted emission	/	/

## 2.6 Instrument list

Radiated Emission					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
<input checked="" type="checkbox"/>	Test Receiver	R&S	ESIB 26	EC 3045	2020-09-16
<input checked="" type="checkbox"/>	Bilog Antenna	TESEQ	CBL 6112D	EC 4206	2020-09-24
<input checked="" type="checkbox"/>	Pre-amplifier	R&S	AFS42-00101800-25-S-42	EC5262	2021-06-11
<input checked="" type="checkbox"/>	Horn antenna	R&S	HF 906	EC 3049	2021-01-17
<input checked="" type="checkbox"/>	Semi-anechoic chamber	Albatross	-	EC 3048	2021-07-31
RF test					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
<input checked="" type="checkbox"/>	PXA Signal Analyzer	Keysight	N9030A	EC 5338	2021-03-16
Additional instrument					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
<input checked="" type="checkbox"/>	Therom-Hygrograph	ZJ1-2A	S.M.I.F.	EC 3481	2021-01-05
<input checked="" type="checkbox"/>	Therom-Hygrograph	ZJ1-2A	S.M.I.F.	EC 3442	2021-01-05

## 2.7 Measurement uncertainty

The measurement uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Test item	Measurement uncertainty
Maximum peak output power	$\pm 0.74\text{dB}$
Radiated Emissions in restricted frequency bands below 1GHz	$\pm 4.90\text{dB}$
Radiated Emissions in restricted frequency bands above 1GHz	$\pm 5.02\text{dB}$
Emission outside the frequency band	$\pm 2.89\text{dB}$
Power line conducted emission	$\pm 3.19\text{dB}$

**TEST REPORT**

### 3 Radiated emission

Test result: Pass

#### 3.1 Limit

Fundamental Frequency (MHz)	Fundamental limit (dBuV/m)	Harmonic limit (dBuV/m)
<input type="checkbox"/> 902 - 928	94	54
<input checked="" type="checkbox"/> 2400 - 2483.5	94	54
<input type="checkbox"/> 5725 - 5875	94	54
<input type="checkbox"/> 24000 - 24250	108	68

The radiated emissions which fall in the restricted bands, must also comply with the radiated emission limits:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

#### 3.2 Measurement Procedure

**For Radiated emission below 30MHz:**

- The EUT was placed on the top of a rotating table 0.8 meters(0.1 meters for floor-standing device) above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- Both X and Y axes of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

**NOTE:**

- The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

**TEST REPORT****For Radiated emission above 30MHz:**


- a) The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) or 0.1 meters (for floor-standing device) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b) The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c) The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d) For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e) The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f) The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

**Note:**


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is  $\geq 1/T$  (Duty cycle < 98%) or 3 x RBW (Duty cycle  $\geq 98\%$ ) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported

### 3.3 Test Configuration


For Radiated emission below 30MHz:

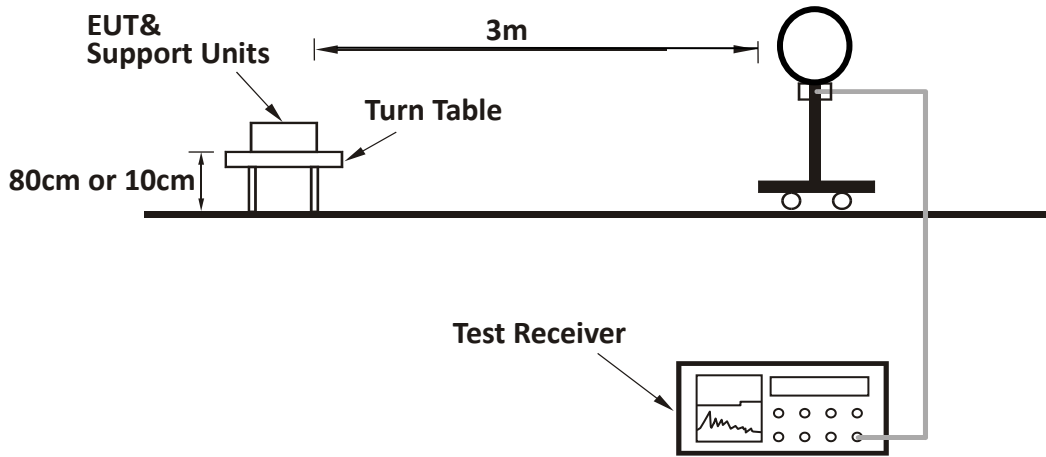

For Radiated emission 30MHz to 1GHz:

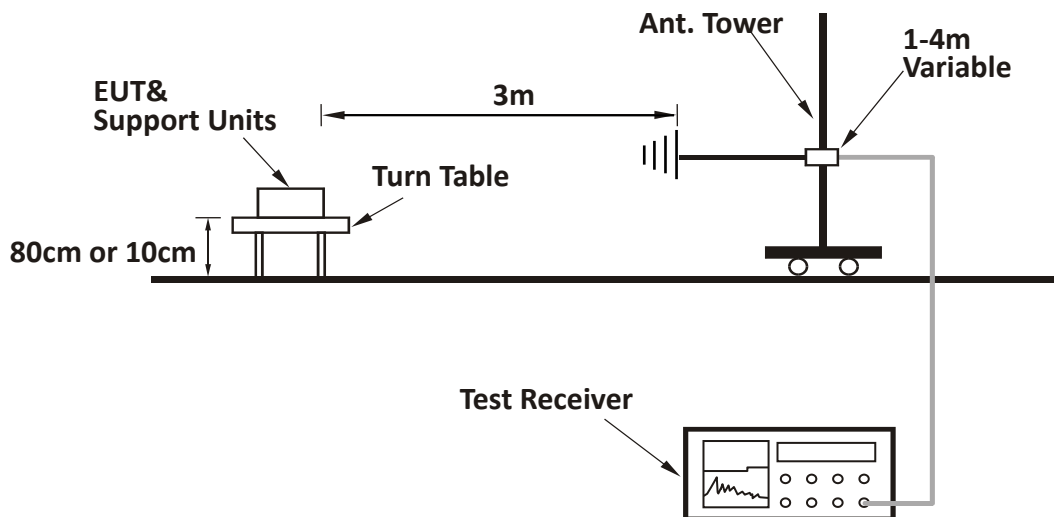

**For Radiated emission above 1GHz:**

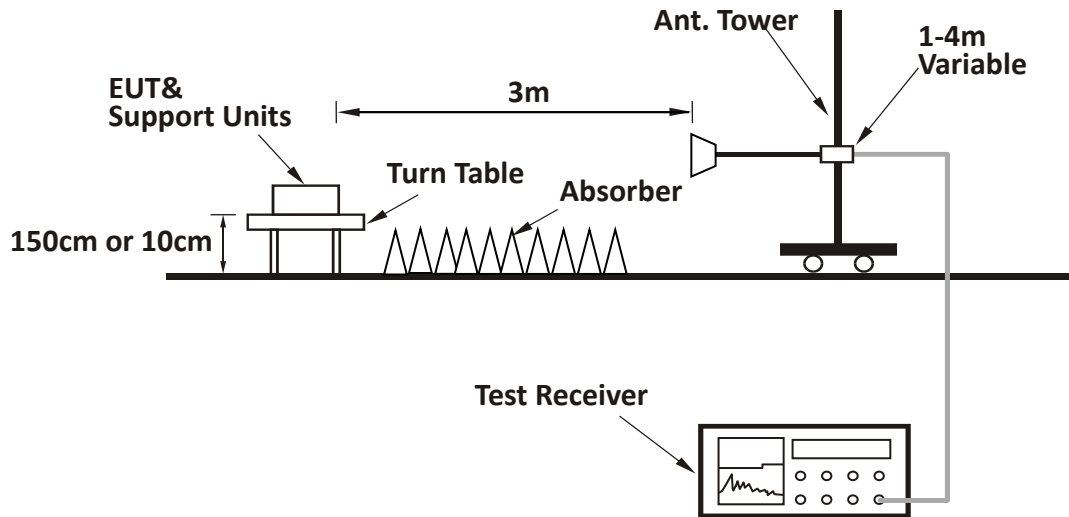


**TEST REPORT**

**3.4 Test Results of Radiated Emissions**


The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

The worst waveform from 30MHz to 1000MHz is listed as below:

Horizontal

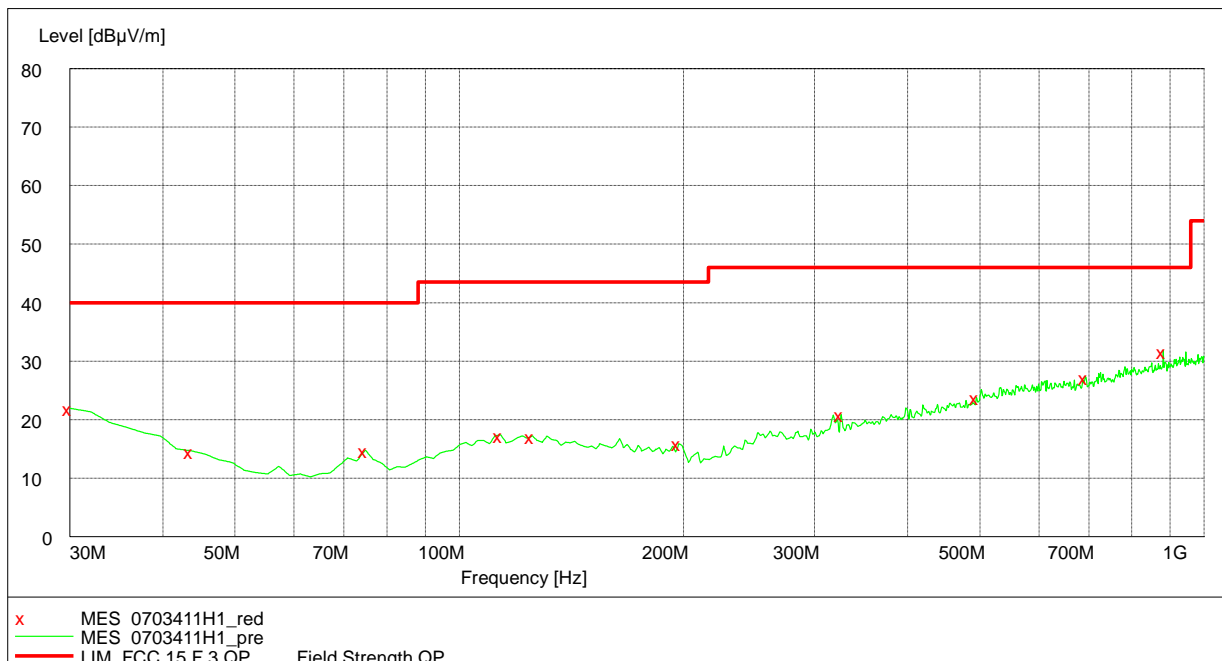

Vertical

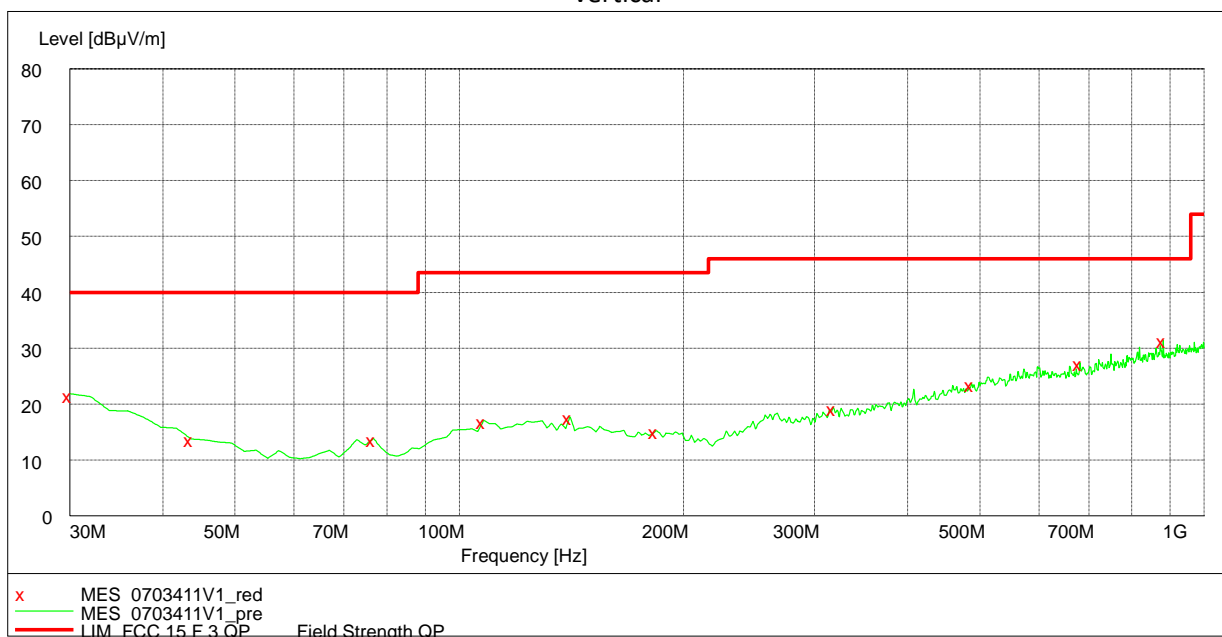



**TEST REPORT**

**Test data below 1GHz**

Antenna	Frequency (MHz)	Corrected Reading (dBuV/m)	Correct Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector
H	30.00	21.90	19.40	40.00	18.10	PK
H	43.61	14.70	11.90	40.00	25.30	PK
H	74.71	14.80	7.80	40.00	25.20	PK
H	494.59	23.80	19.50	46.00	22.20	PK
H	692.87	27.30	21.50	46.00	18.70	PK
H	881.42	31.80	23.50	46.00	14.20	PK
V	30.00	21.80	19.40	40.00	18.20	PK
V	43.61	13.80	11.90	40.00	26.20	PK
V	140.80	17.70	12.50	43.50	25.80	PK
V	486.81	23.70	19.30	46.00	22.30	PK
V	681.20	27.40	21.40	46.00	18.60	PK
V	881.42	31.50	23.50	46.00	14.50	PK

**Test result above 1GHz:**

CH	Antenna	Frequency (MHz)	Corrected Reading (dBuV/m)	Correct Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector
L	H	2405.00	91.90	32.60	114.00	22.10	PK
	V	2405.00	74.30	32.60	114.00	39.70	PK
	H	2400.00	51.17	34.70	74.00	22.83	PK
	V	2400.00	50.48	34.70	74.00	23.52	PK
	H	4810.00	59.70	2.70	74.00	14.30	PK
	V	4810.00	52.80	2.70	74.00	21.20	PK
M	H	2440.00	93.20	32.70	114.00	20.80	PK
	V	2440.00	76.30	32.70	114.00	37.70	PK
	H	4880.00	60.60	2.60	74.00	13.40	PK
	V	4880.00	51.10	2.60	74.00	22.90	PK
H	H	2479.00	91.70	32.70	114.00	22.30	PK
	V	2479.00	76.10	32.70	114.00	37.90	PK
	H	2483.50	52.06	34.60	74.00	21.94	PK

**TEST REPORT**

	V	2483.50	50.85	34.60	74.00	23.15	PK
	H	4958.00	60.50	2.90	74.00	13.50	PK
	V	4958.00	51.60	2.90	74.00	22.40	PK

- Remark: 1. Correct Factor = Antenna Factor + Cable Loss (- Amplifier, for higher than 1GHz), the value was added to Original Receiver Reading by the software automatically.  
 2. Corrected Reading = Original Receiver Reading + Correct Factor  
 3. Margin = Limit - Corrected Reading  
 4. If the PK Corrected Reading is lower than AV limit, the AV test can be elided.



Example: Assuming Antenna Factor = 30.20dB/m, Cable Loss = 2.00dB,  
 Gain of Preamplifier = 32.00dB, Original Receiver Reading = 10.00dBuV,  
 Limit = 40.00dBuV/m.  
 Then Correct Factor = 30.20 + 2.00 – 32.00 = 0.20dB/m;  
 Corrected Reading = 10dBuV + 0.20dB/m = 10.20dBuV/m;  
 Margin = 40.00dBuV/m - 10.20dBuV/m = 29.80dB.

## TEST REPORT

### Duty Cycle:

The test data with maximum duty cycle was listed below.

The worst Duty cycle =  $0.8533 / 7.993 = 0.1068$

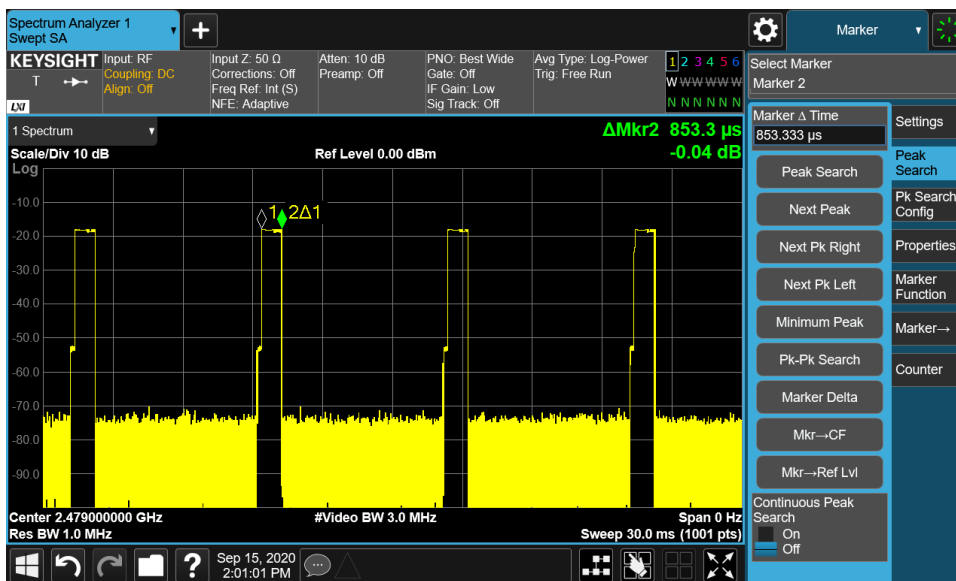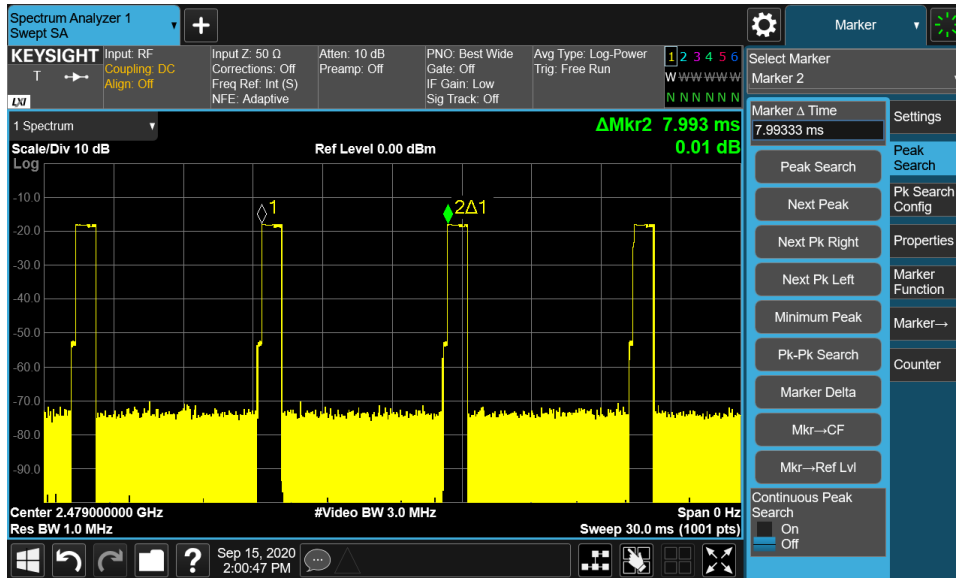

**TEST REPORT**

Calculating the AV value according to the duty cycle

Antenna	Frequency (MHz)	PK Reading (dBuV/m)	Correct Factor (dB)	AV Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)
H	2405.00	91.90	<b>-19.43</b>	72.47	94.00	21.53
V	2405.00	74.30		54.87	94.00	39.13
H	4810.00	59.70		40.27	54.00	13.73
V	4810.00	52.80		33.37	54.00	20.63
H	2440.00	93.20		73.77	94.00	20.23
V	2440.00	76.30		56.87	94.00	37.13
H	4880.00	60.60		41.17	54.00	12.83
V	4880.00	51.10		31.67	54.00	22.33
H	2479.00	91.70		72.27	94.00	21.73
V	2479.00	76.10		56.67	94.00	37.33
H	4958.00	60.50		41.07	54.00	12.93
V	4958.00	51.60		32.17	54.00	21.83

Remark:

1. Correct Factor =  $20\lg(\text{duty cycle}) = 20\lg(0.1068) = -19.43$ ;
2. AV Reading = PK Reading + Correct Factor;
3. Margin = limit - AV Reading.

## 4 Power line conducted emission


Test result: NA

### 4.1 Limit

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	QP	AV
0.15-0.5	66 to 56*	56 to 46 *
0.5-5	56	46
5-30	60	50

\* Decreases with the logarithm of the frequency.

### 4.2 Test Configuration

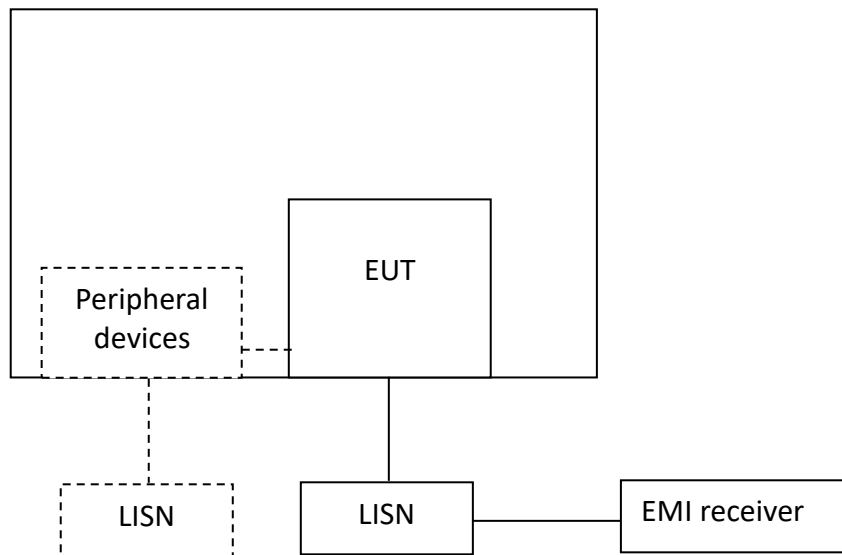

**TEST REPORT****4.3 Measurement Procedure**

Measured levels of ac power-line conducted emission shall be the emission voltages from the voltage probe, where permitted, or across the 50  $\Omega$  LISN port (to which the EUT is connected), where permitted, terminated into a 50  $\Omega$  measuring instrument. All emission voltage and current measurements shall be made on each current-carrying conductor at the plug end of the EUT power cord by the use of mating plugs and receptacles on the LISN, if used. Equipment shall be tested with power cords that are normally supplied or recommended by the manufacturer and that have electrical and shielding characteristics that are the same as those cords normally supplied or recommended by the manufacturer. For those measurements using a LISN, the 50  $\Omega$  measuring port is terminated by a measuring instrument having 50  $\Omega$  input impedance. All other ports are terminated in 50  $\Omega$  loads.

Tabletop devices shall be placed on a platform of nominal size 1 m by 1.5 m, raised 80 cm above the reference ground plane. The vertical conducting plane or wall of an RF-shielded (screened) room shall be located 40 cm to the rear of the EUT. Floor-standing devices shall be placed either directly on the reference ground-plane or on insulating material as described in ANSI C63.4. All other surfaces of tabletop or floor-standing EUTs shall be at least 80 cm from any other grounded conducting surface, including the case or cases of one or more LISNs.

The bandwidth of the test receiver is set at 9 kHz.

#### 4.4 Test Results of Power line conducted emission

Test Curve:

L Line

Test Data:

Frequency (MHz)	Quasi-peak			Average		
	level dB(μV)	Limit dB(μV)	Margin (dB)	level dB(μV)	limit dB(μV)	Margin (dB)
0.162	-	65.34	-	-	55.34	-
0.250	-	61.76	-	-	51.76	-
0.481	-	56.32	-	-	46.32	-
0.684	-	56.00	-	-	46.00	-
1.052	-	56.00	-	-	46.00	-
27.126	-	60.00	-	-	50.00	-

Test Curve:

N Line

Test Data:

Frequency (MHz)	Quasi-peak			Average		
	level dB(μV)	Limit dB(μV)	Margin (dB)	level dB(μV)	limit dB(μV)	Margin (dB)
0.250	-	61.76	-	-	51.76	-
0.485	-	56.25	-	-	46.25	-
1.044	-	56.00	-	-	46.00	-
1.870	-	56.00	-	-	46.00	-
2.348	-	56.00	-	-	46.00	-
25.857	-	60.00	-	-	50.00	-

Remark: 1. Correct Factor = LISN Factor + Cable Loss, the value was added to Original Receiver Reading by the software automatically.

2. Corrected Reading = Original Receiver Reading + Correct Factor

3. Margin = Limit - Corrected Reading

4. If the PK Corrected Reading is lower than AV limit, the AV test can be elided.

## 5 Assigned bandwidth (20dB bandwidth)

**Test result:** Pass


### 5.1 Limit

Intentional radiators must be designed to ensure that the 20 dB bandwidth of the emission is contained within the allocated frequency band.

### 5.2 Measurement Procedure

The 20dB Bandwidth is measured using the Spectrum Analyzer.  
Set Span = 2 to 3 times the 20 dB bandwidth, RBW = approximately 1% of the 20 dB bandwidth, VBW>RBW, Sweep = auto, Detector = peak, Trace = max hold.  
The test was performed at 2 channels (lowest and highest channel).

### 5.3 Test Configuration

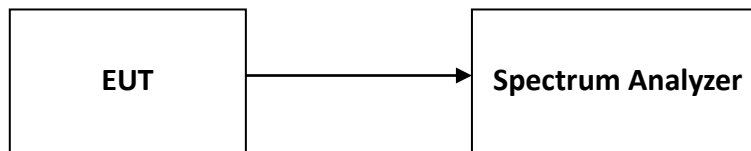





## 5.4 The results

Test Mode	Frequency (MHz)	20dB Bandwidth (MHz)	99% Bandwidth (MHz)	F <sub>L</sub> at 20dB BW (MHz)	F <sub>H</sub> at 20dB BW (MHz)
/	2405	1.556	1.5504	>2400	/
	2479	0.540	0.5005	/	<2483.5
<b>Limit</b>		N/A	N/A	F <sub>L</sub> >2400	F <sub>H</sub> <2483.5
<b>Result</b>		<b>Complied</b>			

Channel L

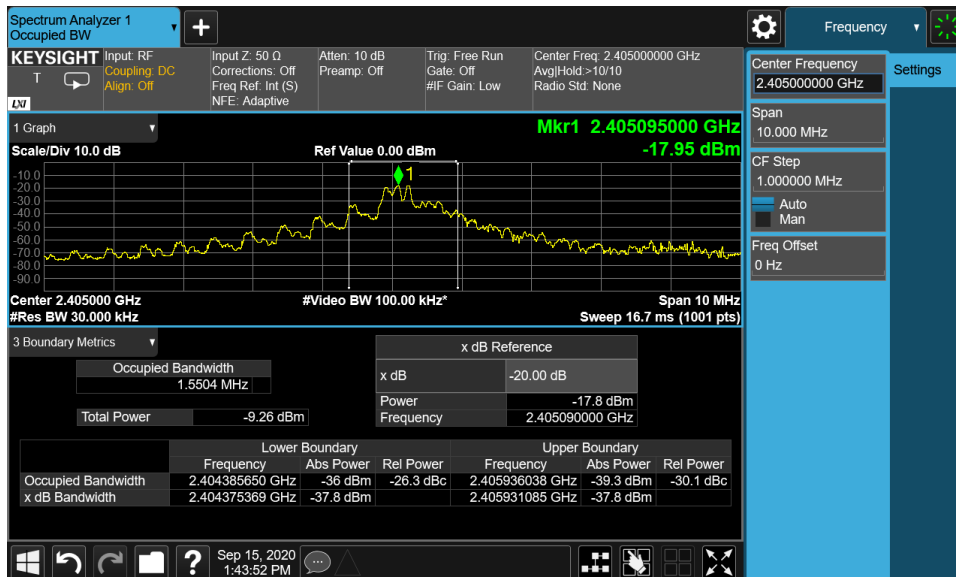

Channel H

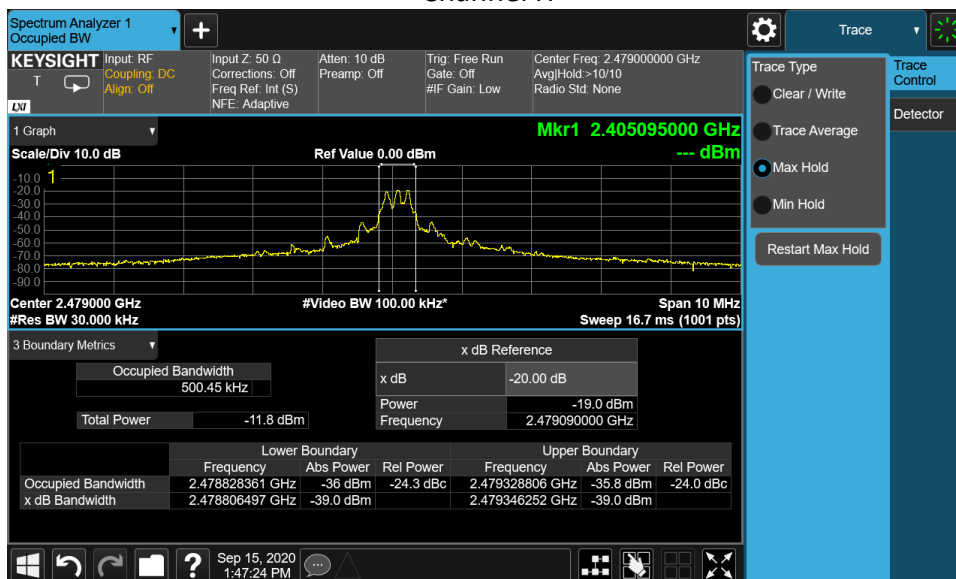

## 6 Antenna requirement

**Requirement:**

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

**Result:**

EUT uses PCB antenna to the intentional radiator, so it can comply with the provisions of this section.

\*\*\*\*\* END \*\*\*\*\*