



**SGS-CSTC Standards Technical Services Co., Ltd.
Guangzhou Branch**

198 Kezhu Road, Sciencetech Park, Guangzhou Economic & Technological
Development District, Guangzhou, China 510663

Telephone: +86 (0) 20 82155555
Fax: +86 (0) 20 82075059
Email: ee.guangzhou@sgs.com

Report No.: GZEM180400204801
Page: 1 of 47
FCC ID: 2AJ3G-RS-CH226SX

TEST REPORT

Application No.: GZEM1804002048CR
Applicant: Zhuhai RaySharp Technology Co., Ltd.
Address of Applicant: No. 100 of Technology Road 6, National Hi-Tech Zone, Zhuhai, Guangdong, P.R. China
Manufacturer: The same of Applicant
Address of Manufacturer: The same of Applicant
Factory: The same of Applicant
Address of Factory: The same of Applicant
Equipment Under Test (EUT):
EUT Name: Wireless Camera
FCC ID: 2AJ3G-RS-CH226SX
Model No.: RS-CH226SX-RF-28W, RS-CH226SCF-RF-28B-LR, RS-CH226SCF-RF-28W-LR, RS-CH226SD-RF-36W, RS-CH226SE-RF-36W, RS-CH226SG-RF-36W, RS-CH226SH-RF-36W, RS-CH226SI-RF-36WRS-CHxxxxyz-zz-xxzz-zzz (x= 0-9; y=A-Z; z= A-Z or blank) □
 □ Please refer to section 2 of this report which indicates which model was actually tested and which were electrically identical.
Standard(s) : 47 CFR Part 15, Subpart C 15.247
Date of Receipt: 2018-04-23
Date of Test: 2018-05-02
Date of Issue: 2018-09-30

Test Result:	Pass*
---------------------	--------------

* In the configuration tested, the EUT complied with the standards specified above.



Kobe Jian

EMC Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



SGS-CSTC Standards Technical Services Co., Ltd.
Guangzhou Branch

Report No.: GZEM180400204801
Page: 2 of 47

Revision Record				
Version	Chapter	Date	Modifier	Remark
01		2018-09-30		Original

Authorized for issue by:			
Tested By			
	Jackson_Yuan /Project Engineer	2018-05-02	Date
Checked By			
	Ricky_Liu /Reviewer	2018-05-09	Date



2 Test Summary

Radio Spectrum Technical Requirement				
Item	Standard	Method	Requirement	Result
Antenna Requirement	47 CFR Part 15, Subpart C 15.247	N/A	47 CFR Part 15, Subpart C 15.203 & 15.247(c)	Pass

Radio Spectrum Matter Part				
Item	Standard	Method	Requirement	Result
Conducted Emissions at AC Power Line (150kHz-30MHz)	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.2	47 CFR Part 15, Subpart C 15.207	Pass
Minimum 6dB Bandwidth	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 11.8.1	47 CFR Part 15, Subpart C 15.247a(2)	Pass
Conducted Peak Output Power	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 11.9.1	47 CFR Part 15, Subpart C 15.247(b)(3)	Pass
Power Spectrum Density	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 11.10.2	47 CFR Part 15, Subpart C 15.247(e)	Pass
Conducted Band Edges Measurement	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 11.13.3.2	47 CFR Part 15, Subpart C 15.247(d)	Pass
Conducted Spurious Emissions	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 11.11	47 CFR Part 15, Subpart C 15.247(d)	Pass
Radiated Emissions which fall in the restricted bands	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.10.5	47 CFR Part 15, Subpart C 15.205 & 15.209	Pass
Radiated Spurious Emissions	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.4,6.5,6.6	47 CFR Part 15, Subpart C 15.205 & 15.209	Pass

✧ Declaration of EUT Family Grouping:

Model No.: RS-CH226SX-RF-28W, RS-CH226SCF-RF-28B-LR, RS-CH226SCF-RF-28W-LR, RS-CH226SD-RF-36W, RS-CH226SE-RF-36W, RS-CH226SG-RF-36W, RS-CH226SH-RF-36W, RS-CH226SI-RF-36WRS-CHxxxxyz-zz-xxzz-zzz;(x= 0-9; y=A-Z; z= A-Z or blank)

According to the declaration from the applicant, the electrical circuit design, layout, components used and internal wiring were identical for all models, but different in model number, outer decoration and color.

Therefore only one model **RS-CH226SX-RF-28W** was tested in this report.



3 Contents

	Page
1 Cover Page	1
2 Test Summary	3
3 Contents	4
4 General Information	6
4.1 Details of E.U.T.....	6
4.2 Description of Support Units	6
4.3 Measurement Uncertainty.....	6
4.4 Test Location	7
4.5 Test Facility.....	8
4.6 Deviation from Standards	9
4.7 Abnormalities from Standard Conditions	9
5 Equipment List	10
6 Radio Spectrum Technical Requirement	13
6.1 Antenna Requirement.....	13
6.1.1 Test Requirement:.....	13
6.1.2 Conclusion.....	13
7 Radio Spectrum Matter Test Results	14
7.1 Conducted Emissions at AC Power Line (150kHz-30MHz).....	14
7.1.1 E.U.T. Operation.....	14
7.1.2 Test Setup Diagram.....	14
7.1.3 Measurement Procedure and Data	15
7.2 Minimum 6dB Bandwidth	18
7.2.1 E.U.T. Operation.....	18
7.2.2 Test Setup Diagram.....	18
7.2.3 Measurement Procedure and Data	18
7.3 Conducted Peak Output Power	19
7.3.1 E.U.T. Operation.....	19
7.3.2 Test Setup Diagram.....	19
7.3.3 Measurement Procedure and Data	19
7.4 Power Spectrum Density	20
7.4.1 E.U.T. Operation.....	20
7.4.2 Test Setup Diagram.....	20
7.4.3 Measurement Procedure and Data	20
7.5 Conducted Band Edges Measurement.....	21
7.5.1 E.U.T. Operation.....	21
7.5.2 Test Setup Diagram.....	21
7.5.3 Measurement Procedure and Data	21
7.6 Conducted Spurious Emissions.....	22
7.6.1 E.U.T. Operation.....	22
7.6.2 Test Setup Diagram.....	22
7.6.3 Measurement Procedure and Data	22
7.7 Radiated Emissions which fall in the restricted bands.....	23
7.7.1 E.U.T. Operation.....	23



7.7.2	Test Setup Diagram.....	24
7.7.3	Measurement Procedure and Data	25
7.8	Radiated Spurious Emissions.....	28
7.8.1	E.U.T. Operation.....	28
7.8.2	Test Setup Diagram.....	29
7.8.3	Measurement Procedure and Data	30
8	Appendix	35
8.1	Appendix 15.247	35



4 General Information

4.1 Details of E.U.T.

Power Supply:	Built-in battery and DC 5 V recharged by AC/DC adapter according to Micro USB ports
Test Voltage:	AC 120V, 60Hz with AC/DC adapter
Cable:	DC input ports (unshielded, <3m)
Number of Antenna	1
Antenna Gain	1.5 dBi
Antenna Type	Integra Antenna
Software Version	SecureCRT Portable V7.0.0.326
Modulation Type	GFSK
Number of Channels	3
Operation Frequency	2415MHz, 2446MHz and 2470MHz

4.2 Description of Support Units

Description	Manufacturer	Model No.	Serial No.
Laptop	Lenovo	T430u	REF. No.SEA1800
AC/DC adapter	SGS	DC 5V	REF. No.SEA0500
Monitor	MITSUBISHI ELECTRIC	MDL23ICV	1X201244AC
Mouse	SGS	SGS	None
Keyboard	SGS	SGS	None
DVR	Offered by client	RS-H2104AN-N-LR	None

4.3 Measurement Uncertainty

No.	Item	Measurement Uncertainty
1	Radio Frequency	$\pm 7.25 \times 10^{-8}$
2	Timeout	$\pm 2s$
3	Duty cycle	$\pm 0.37\%$
4	Occupied Bandwidth	$\pm 3\%$
5	RF Conducted power	$\pm 0.75dB$
6	RF Power Density	$\pm 2.84dB$
7	Conducted Spurious Emissions	$\pm 0.75dB$
8	RF Radiated Power	$\pm 4.5dB$ (below 1GHz)
		$\pm 4.8dB$ (above 1GHz)
9	Radiated Spurious Emission Test	$\pm 4.5dB$ (30MHz-1GHz)
		$\pm 4.8dB$ (1GHz-18GHz)
10	Temperature	$\pm 0.4^{\circ}C$
11	Humidity	$\pm 1.3\%$
12	Supply Voltages	$\pm 1.5\%$
13	Time	$\pm 3\%$



4.4 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Guangzhou Branch EMC Laboratory,
198 Kezhu Road, Sciencetech Park, Guangzhou Economic & Technology Development District,
Guangzhou, China 510663

Tel: +86 20 82155555 Fax: +86 20 82075059

No tests were sub-contracted.



4.5 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

● **NVLAP (Lab Code: 200611-0)**

SGS-CSTC Standards Technical Services Co., Ltd., Guangzhou EMC Laboratory is accredited by the National Voluntary Laboratory Accreditation Program (NVLAP/NIST). NVLAP Code: 200611-0.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

● **ACMA**

SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory can also perform testing for the Australian C-Tick mark as a result of our NVLAP accreditation.

● **SGS UK(Certificate No.: 32), SGS-TUV SAARLAND and SGS-FIMKO**

Have approved SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory as a supplier of EMC TESTING SERVICES and SAFETY TESTING SERVICES.

● **CNAS (Lab Code: L0167)**

SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory has been assessed and in compliance with CNAS-CL01:2006 accreditation criteria for testing laboratories (identical to

ISO/IEC 17025:2005 General Requirements) for the Competence of Testing Laboratories.

● **FCC Recognized 2.948 Listed Test Firm(Registration No.: 282399)**

SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 282399, May 31, 2002.

● **FCC Recognized Accredited Test Firm(Registration No.: 486818)**

SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory has been accredited and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Designation Number: CN5016, Test Firm Registration Number: 486818, Jul 13, 2017.

● **Industry Canada (Registration No.: 4620B-1)**

The 3m/10m Alternate Semi-anechoic chamber of SGS-CSTC Standards Technical Services Co., Ltd., has been registered by Certification and Engineering of Industry Canada for radio equipment testing with Registration No. 4620B-1.

● **VCCI (Registration No.: R-2460, C-2584, G-449 and T-1179)**

The 10m Semi-anechoic chamber and Shielded Room of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-2460, C-2584, G-449 and T-1179 respectively.

● **CBTL (Lab Code: TL129)**

SGS-CSTC Standards Technical Services Co., Ltd., E&E Laboratory has been assessed and fully comply with the requirements of ISO/IEC 17025:2005, the Basic Rules, IECEE 01 and Rules of procedure IECEE 02, and the relevant IECEE CB-Scheme Operational documents.



4.6 Deviation from Standards

None

4.7 Abnormalities from Standard Conditions

None



5 Equipment List

Minimum 6dB Bandwidth					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
EXA Signal Analyzer	AgilentTechnologies	N9010A	EMC2138	2017-11-15	2018-11-14
6dB Attenuator	HP	8491A	EMC2062	2018-04-04	2020-04-03
Test Software JS1120-3	HangTianXing	V2.6	GZE100-69	N/A	N/A

Conducted Peak Output Power					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
EXA Signal Analyzer	AgilentTechnologies	N9010A	EMC2138	2017-11-15	2018-11-14
6dB Attenuator	HP	8491A	EMC2062	2018-04-04	2020-04-03
Test Software JS1120-3	HangTianXing	V2.6	GZE100-69	N/A	N/A

Power Spectrum Density					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
EXA Signal Analyzer	AgilentTechnologies	N9010A	EMC2138	2017-11-15	2018-11-14
6dB Attenuator	HP	8491A	EMC2062	2018-04-04	2020-04-03
Test Software JS1120-3	HangTianXing	V2.6	GZE100-69	N/A	N/A

Conducted Band Edges Measurement					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
MXA Signal Analyzer	AgilentTechnologies	N9020A	SEM004-10	2018-03-10	2019-03-09
ESG Vector Signal Generator	Keysight	E4438C	SEM006-03	2018-04-10	2019-04-10
EXG Analog Signal Generator	AgilentTechnologies	N5171B	SEM006-04	2017-07-26	2020-07-25
Power Meter	AgilentTechnologies	U2021XA_C h2	SEM009-02	2017-09-19	2018-09-18
Power Meter	AgilentTechnologies	U2021XA_C h3	SEM009-03	2017-09-19	2018-09-18
EXA Signal Analyzer	AgilentTechnologies	N9010A	EMC2138	2017-11-15	2018-11-14
6dB Attenuator	HP	8491A	EMC2062	2018-04-04	2020-04-03
Test Software JS1120-3	HangTianXing	V2.6	GZE100-69	N/A	N/A



SGS-CSTC Standards Technical Services Co., Ltd.
Guangzhou Branch

Report No.: GZEM180400204801
Page: 11 of 47

Conducted Spurious Emissions					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
EXA Signal Analyzer	AgilentTechnologies	N9010A	EMC2138	2017-11-15	2018-11-14
6dB Attenuator	HP	8491A	EMC2062	2018-04-04	2020-04-03
Test Software JS1120-3	HangTianXing	V2.6	GZE100-69	N/A	N/A

Radiated Emissions which fall in the restricted bands					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
EMI Test Receiver	Rohde & Schwarz	ESIB26	EMC0522	2018-01-19	2019-01-18
EMI Test Receiver	Rohde & Schwarz	ESCI	EMC0056	2018-01-19	2019-01-18
chamber cable	HangTianXing	N/A	EMC0542	2017-06-30	2019-06-30
Trilog Broadband Antenna 30MHz-1GHz	SCHWARZBECKME SS-ELEKTRONIK	VULB 9160	EMC2025	2016-09-08	2019-09-07
Bi-log Type Antenna	Schaffner -Chase	CBL6112B	EMC0524	2016-09-08	2019-09-07
Bi-log Type Antenna	Schaffner -Chase	CBL6143	EMC0519	2017-05-04	2020-05-03
Horn Antenna 1GHz-18GHz	SCHWARZBECK MESS-ELEKTRONIK	BBHA 9120D	EMC2026	2016-09-09	2019-09-08
1GHz-26.5 GHz Pre-Amplifier	Agilent	8449B	EMC0521	2018-01-08	2019-01-07
Amplifier	HP	8447F	EMC2065	2017-06-19	2018-06-18
Pre-Amplifier MH648A	ANRITSU CORP	MH648A	EMC2086	2017-11-20	2018-11-19
Active Loop Antenna	EMCO	6502	EMC0523	2018-02-24	2019-02-23
High Pass Filter(915MHz)	FSY MICROWAVE	HM1465-9SS	EMC2079	2018-01-19	2019-01-18
2.4GHz Filter	Micro-Tronics	BRM 50702	EMC2069	2018-01-08	2019-01-07
10m Semi-Anechoic Chamber	ETS	N/A	EMC0530	2017-06-18	2019-06-18
966 Anechoic Chamber	C.R.T	9m x 6m x 6m	EMC2142	2017-11-29	2018-11-28
MXE EMI Receiver	Keysight	N9038A	EMC2139	2017-11-15	2018-11-14
EXA Signal Analyzer	Keysight	N9010A	EMC2138	2017-11-15	2018-11-14

Radiated Spurious Emissions					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
EMI Test Receiver	Rohde & Schwarz	ESIB26	EMC0522	2018-01-19	2019-01-18
EMI Test Receiver	Rohde & Schwarz	ESCI	EMC0056	2018-01-19	2019-01-18
chamber cable	HangTianXing	N/A	EMC0542	2017-06-30	2019-06-30
Trilog Broadband Antenna 30MHz-1GHz	SCHWARZBECKME SS-ELEKTRONIK	VULB 9160	EMC2025	2016-09-08	2019-09-07
Bi-log Type Antenna	Schaffner -Chase	CBL6112B	EMC0524	2016-09-08	2019-09-07
Bi-log Type Antenna	Schaffner -Chase	CBL6143	EMC0519	2017-05-04	2020-05-03
Horn Antenna 1GHz-18GHz	SCHWARZBECK MESS-ELEKTRONIK	BBHA 9120D	EMC2026	2016-09-09	2019-09-08
1GHz-26.5 GHz Pre-Amplifier	Agilent	8449B	EMC0521	2018-01-08	2019-01-07
Amplifier	HP	8447F	EMC2065	2017-06-19	2018-06-18
Pre-Amplifier MH648A	ANRITSU CORP	MH648A	EMC2086	2017-11-20	2018-11-19
Active Loop Antenna	EMCO	6502	EMC0523	2018-02-24	2019-02-23
High Pass Filter(915MHz)	FSY MICROWAVE	HM1465-9SS	EMC2079	2018-01-19	2019-01-18
2.4GHz Filter	Micro-Tronics	BRM 50702	EMC2069	2018-01-08	2019-01-07
10m Semi-Anechoic Chamber	ETS	N/A	EMC0530	2017-06-18	2019-06-18
966 Anechoic Chamber	C.R.T	9m x 6m x 6m	EMC2142	2017-11-29	2018-11-28
MXE EMI Receiver	Keysight	N9038A	EMC2139	2017-11-15	2018-11-14
EXA Signal Analyzer	Keysight	N9010A	EMC2138	2017-11-15	2018-11-14

General used equipment					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
DMM	Fluke	73	EMC0006	2017-07-26	2018-07-25
DMM	Fluke	73	EMC0007	2017-07-26	2018-07-25

6 Radio Spectrum Technical Requirement

6.1 Antenna Requirement

6.1.1 Test Requirement:

47 CFR Part 15, Subpart C 15.203 & 15.247(c)

6.1.2 Conclusion

Standard Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 1.5 dBi.



Test result: The unit does meet the FCC requirements.




7.1.3 Measurement Procedure and Data

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50ohm/50μH + 5ohm linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.
- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.


Remark: LISN=Read Level+ Cable Loss+ LISN Factor

Mode:b; Line:Live Line

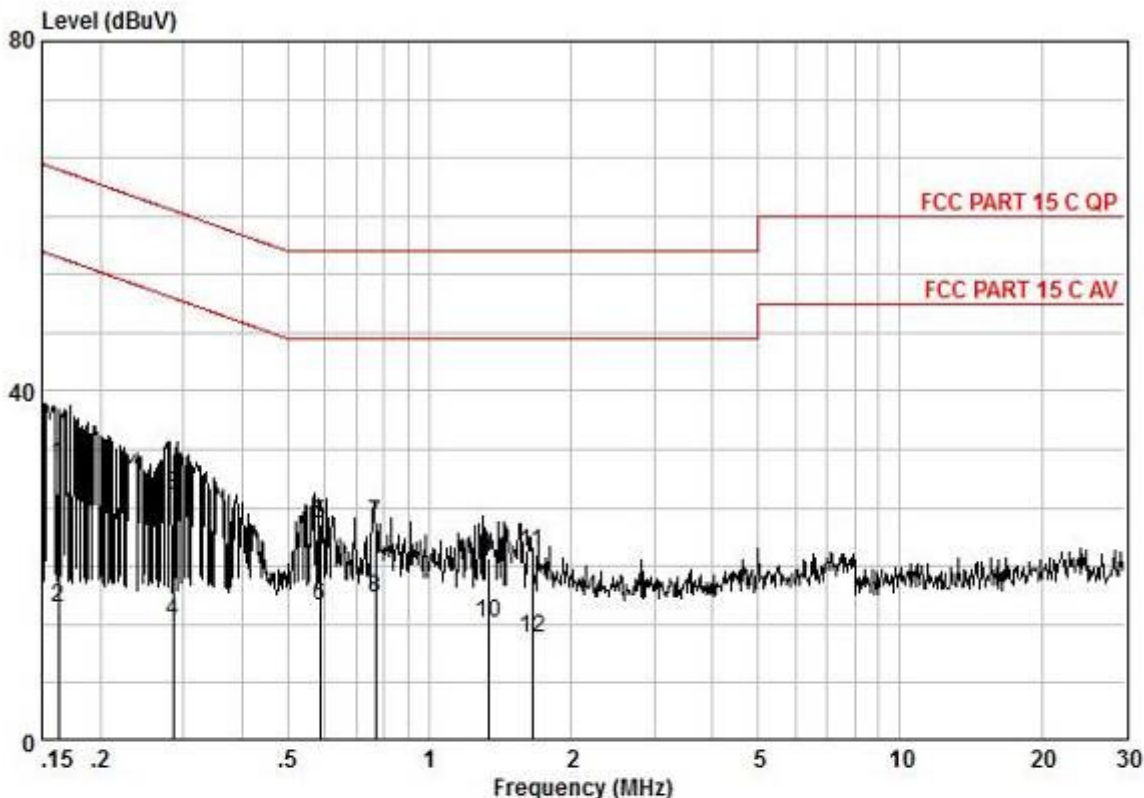

Frequency MHz	read level dBuV	Cable Loss dB	LISN Factor dB	Measured level dBuV	Limit Line dBuV	Over limit dB	Remark
0,16	21,90	0,10	9,65	31,65	65,34	-33,69	QP
0,16	5,48	0,10	9,65	15,23	55,34	-40,11	AVERAGE
0,28	18,37	0,14	9,64	28,15	60,68	-32,53	QP
0,28	3,90	0,14	9,64	13,68	50,68	-37,00	AVERAGE
0,59	14,92	0,22	9,64	24,79	56,00	-31,21	QP
0,59	5,64	0,22	9,64	15,51	46,00	-30,49	AVERAGE
0,77	15,02	0,26	9,65	24,93	56,00	-31,07	QP
0,77	6,47	0,26	9,65	16,38	46,00	-29,62	AVERAGE
1,33	10,99	0,30	9,66	20,95	56,00	-35,05	QP
1,33	3,48	0,30	9,66	13,44	46,00	-32,56	AVERAGE
1,65	11,64	0,33	9,66	21,64	56,00	-34,36	QP
1,65	1,85	0,33	9,66	11,85	46,00	-34,15	AVERAGE

Mode:b; Line:Neutral Line

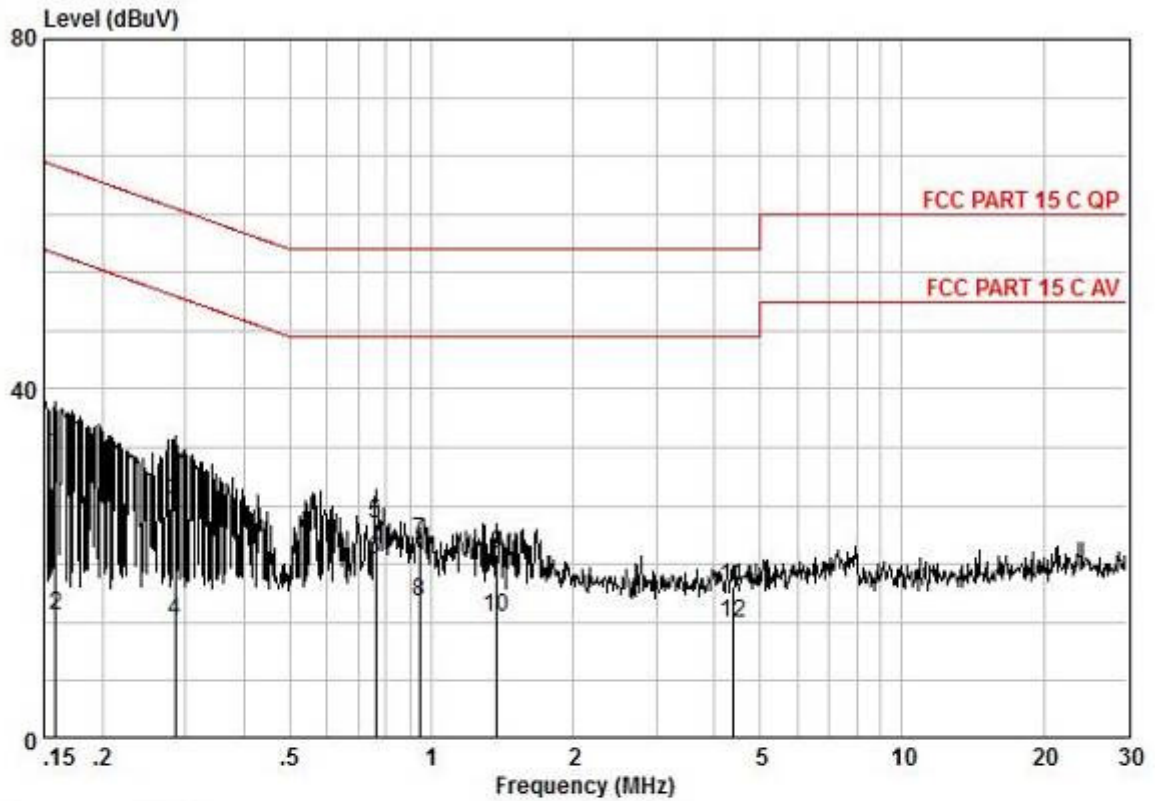

Pol : NEUTRAL
No :
Model :

Frequency MHz	read level dBuV	Cable Loss dB	LISN Factor dB	Measured level dBuV	Limit Line dBuV	Over limit dB	Remark
0,16	22,91	0,10	9,67	32,68	65,52	-32,84	QP
0,16	4,37	0,10	9,67	14,14	55,52	-41,38	AVERAGE
0,28	17,52	0,14	9,66	27,32	60,68	-33,36	QP
0,28	3,80	0,14	9,66	13,60	50,68	-37,08	AVERAGE
0,76	14,75	0,26	9,67	24,68	56,00	-31,32	QP
0,76	10,57	0,26	9,67	20,50	46,00	-25,50	AVERAGE
0,94	12,68	0,29	9,67	22,65	56,00	-33,35	QP
0,94	5,82	0,29	9,67	15,79	46,00	-30,21	AVERAGE
1,37	11,21	0,30	9,68	21,19	56,00	-34,81	QP
1,37	3,95	0,30	9,68	13,93	46,00	-32,07	AVERAGE
4,36	7,03	0,65	9,72	17,40	56,00	-38,60	QP
4,36	2,83	0,65	9,72	13,20	46,00	-32,80	AVERAGE

7.2 Minimum 6dB Bandwidth

Test Requirement: 47 CFR Part 15, Subpart C 15.247a(2)
 Test Method: ANSI C63.10 (2013) Section 11.8.1
 Limit: ≥ 500 kHz


7.2.1 E.U.T. Operation

Operating Environment:

Temperature: 26.4 °C Humidity: 60.6 % RH Atmospheric Pressure: 1020 mbar

Test Mode: b: Charge + TX mode_Keep the EUT in charging and continuously transmitting mode with GFSK modulation.

7.2.2 Test Setup Diagram

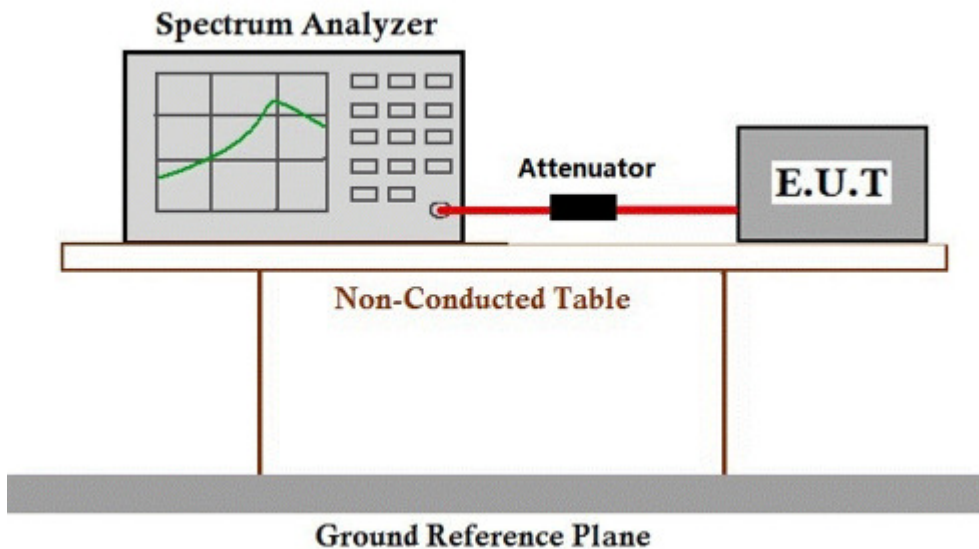

7.2.3 Measurement Procedure and Data

The detailed test data see: Appendix 15.247

7.3 Conducted Peak Output Power

Test Requirement 47 CFR Part 15, Subpart C 15.247(b)(3)

Test Method: ANSI C63.10 (2013) Section 11.9.1

Limit:

Frequency range (MHz)	Output power of the intentional radiator(watt)
902-928	1 for ≥ 50 hopping channels
	0.25 for $25 \leq$ hopping channels < 50
	1 for digital modulation
2400-2483.5	1 for ≥ 75 non-overlapping hopping channels
	0.125 for all other frequency hopping systems
	1 for digital modulation
5725-5850	1 for frequency hopping systems and digital modulation


7.3.1 E.U.T. Operation

Operating Environment:

Temperature: 26.4 °C Humidity: 60.6 % RH Atmospheric Pressure: 1020 mbar

Test Mode: b: Charge + TX mode_Keep the EUT in charging and continuously transmitting mode with GFSK modulation.

7.3.2 Test Setup Diagram

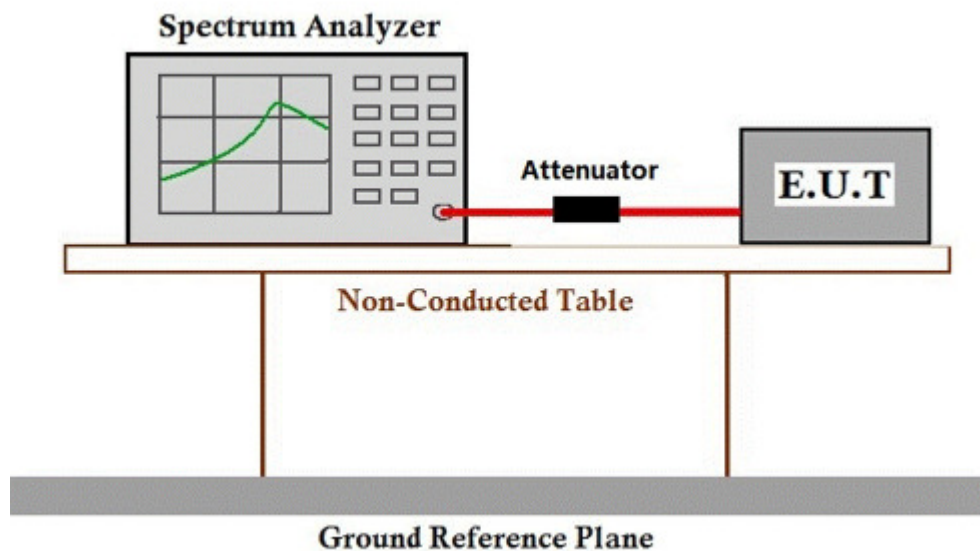

7.3.3 Measurement Procedure and Data

The detailed test data see: Appendix 15.247


7.4 Power Spectrum Density

Test Requirement: 47 CFR Part 15, Subpart C 15.247(e)
 Test Method: ANSI C63.10 (2013) Section 11.10.2
 Limit: ≤8dBm in any 3 kHz band during any time interval of continuous transmission

7.4.1 E.U.T. Operation

Operating Environment:
 Temperature: 26.4 °C Humidity: 60.6 % RH Atmospheric Pressure: 1020 mbar
 Test Mode: b: Charge + TX mode_Keep the EUT in charging and continuously transmitting mode with GFSK modulation.

7.4.2 Test Setup Diagram

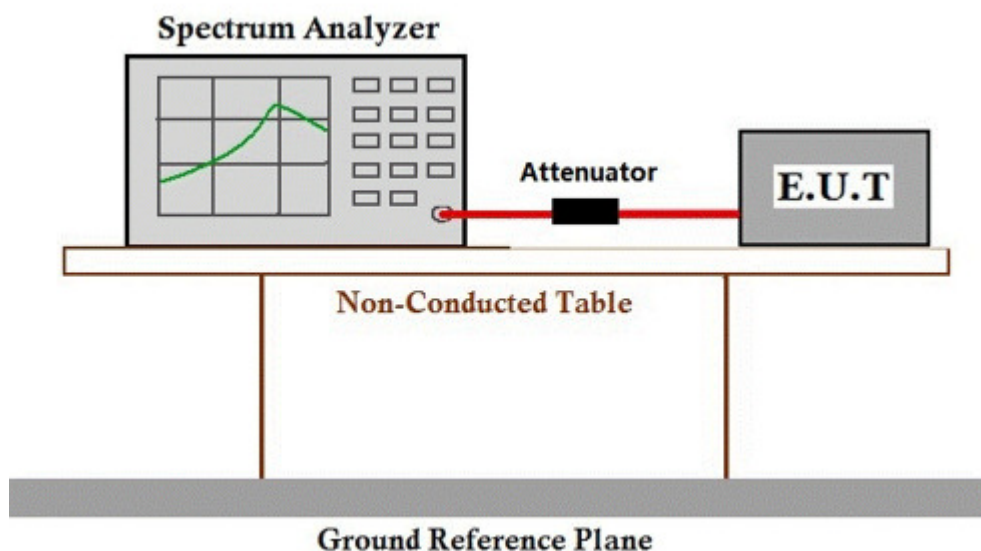

7.4.3 Measurement Procedure and Data

The detailed test data see: Appendix 15.247


7.5 Conducted Band Edges Measurement

Test Requirement	47 CFR Part 15, Subpart C 15.247(d)
Test Method:	ANSI C63.10 (2013) Section 11.13.3.2
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c))

7.5.1 E.U.T. Operation

Operating Environment:			
Temperature:	26.4 °C	Humidity:	60.5 % RH
		Atmospheric Pressure:	1020 mbar
Test Mode:	b: Charge + TX mode_Keep the EUT in charging and continuously transmitting mode with GFSK modulation.		

7.5.2 Test Setup Diagram

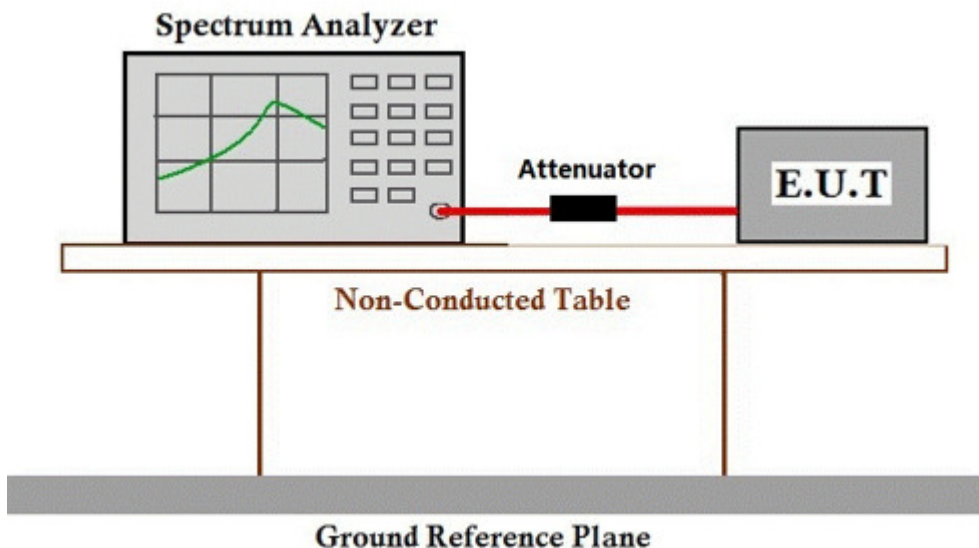

7.5.3 Measurement Procedure and Data

The detailed test data see: Appendix 15.247


7.6 Conducted Spurious Emissions

Test Requirement	47 CFR Part 15, Subpart C 15.247(d)
Test Method:	ANSI C63.10 (2013) Section 11.11
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c))

7.6.1 E.U.T. Operation

Operating Environment:			
Temperature:	26.4 °C	Humidity:	60.6 % RH Atmospheric Pressure: 1020 mbar
Test Mode:	b: Charge + TX mode_Keep the EUT in charging and continuously transmitting mode with GFSK modulation.		

7.6.2 Test Setup Diagram

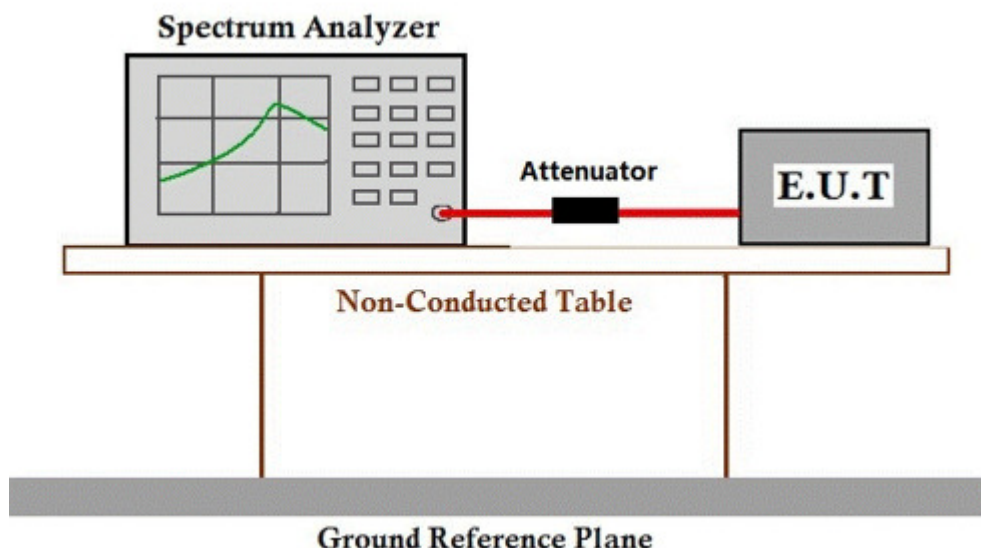

7.6.3 Measurement Procedure and Data

The detailed test data see: Appendix 15.247



7.7 Radiated Emissions which fall in the restricted bands

Test Requirement: 47 CFR Part 15, Subpart C 15.205 & 15.209
Test Method: ANSI C63.10 (2013) Section 6.10.5
Measurement Distance: 3m
Limit:




Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

7.7.1 E.U.T. Operation

Operating Environment:
Temperature: 26 °C Humidity: 68.8 % RH Atmospheric Pressure: 1020 mbar
Test Mode: b: Charge + TX mode_Keep the EUT in charging and continuously transmitting mode with GFSK modulation.

7.7.2 Test Setup Diagram

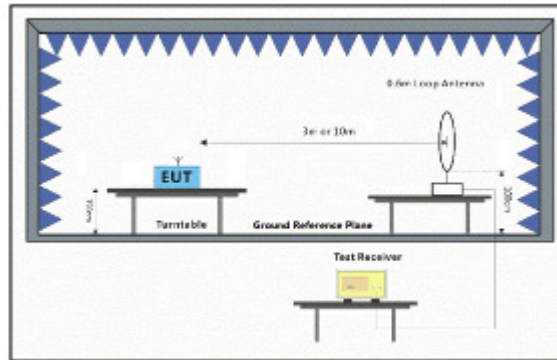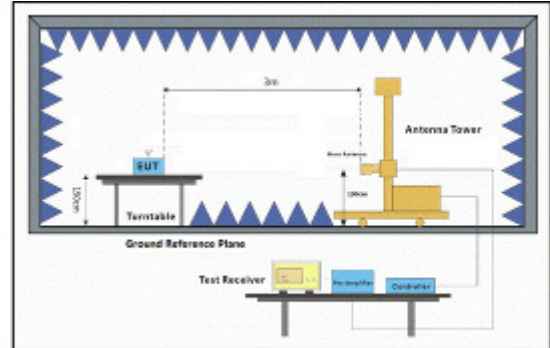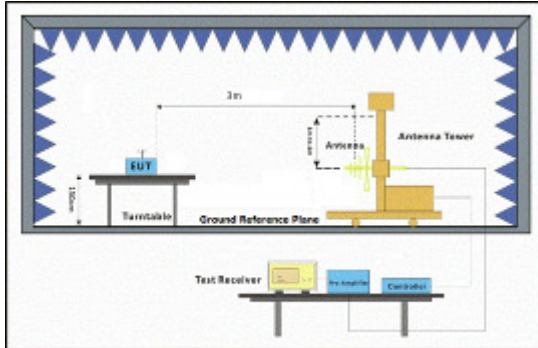



7.7.3 Measurement Procedure and Data

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.

Remark 1: $\text{Level} = \text{Read Level} + \text{Cable Loss} + \text{Antenna Factor} - \text{Preamp Factor}$

Remark 2: For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.



SGS-CSTC Standards Technical Services Co., Ltd.
Guangzhou Branch

Report No.: GZEM180400204801
Page: 26 of 47

Mode:b; Polarization:Horizontal; Modulation:GFSK; Channel:Low

	Freq	ReadAntenna	Cable	Preamp	Level	Limit	Over	Pol/Phase
	MHz	dBuV	dB/m	Loss	Factor	dB	dB	
				dB	dB	dBuV/m	dBuV/m	dB
1	2310.000	43.14	26.25	5.03	37.44	36.98	54.00	-17.02 HORIZONTAL
2	2310.000	47.14	26.25	5.03	37.44	40.98	74.00	-33.02 HORIZONTAL
3	2390.000	43.49	26.43	4.88	37.42	37.38	54.00	-16.62 HORIZONTAL
4	2390.000	48.38	26.43	4.88	37.42	42.27	74.00	-31.73 HORIZONTAL
5	2483.500	43.57	26.58	5.23	37.40	37.98	54.00	-16.02 HORIZONTAL
6	2483.500	48.11	26.58	5.23	37.40	42.52	74.00	-31.48 HORIZONTAL
7	2500.000	42.65	26.60	4.95	37.39	36.81	54.00	-17.19 HORIZONTAL
8	2500.000	47.62	26.60	4.95	37.39	41.78	74.00	-32.22 HORIZONTAL

Mode:b; Polarization:Vertical; Modulation:GFSK; Channel:Low

	Freq	ReadAntenna	Cable	Preamp	Level	Limit	Over	Pol/Phase
	MHz	dBuV	dB/m	Loss	Factor	dB	dB	
				dB	dB	dBuV/m	dBuV/m	dB
1	2310.000	42.69	26.25	5.03	37.44	36.53	54.00	-17.47 VERTICAL
2	2310.000	48.01	26.25	5.03	37.44	41.85	74.00	-32.15 VERTICAL
3	2390.000	42.67	26.43	4.88	37.42	36.56	54.00	-17.44 VERTICAL
4	2390.000	47.83	26.43	4.88	37.42	41.72	74.00	-32.28 VERTICAL
5	2483.500	42.65	26.58	5.23	37.40	37.06	54.00	-16.94 VERTICAL
6	2483.500	47.69	26.58	5.23	37.40	42.10	74.00	-31.90 VERTICAL
7	2500.000	41.19	26.60	4.95	37.39	35.35	54.00	-18.65 VERTICAL
8	2500.000	47.40	26.60	4.95	37.39	41.56	74.00	-32.44 VERTICAL



SGS-CSTC Standards Technical Services Co., Ltd.
Guangzhou Branch

Report No.: GZEM180400204801
Page: 27 of 47

Mode:b; Polarization:Horizontal; Modulation:GFSK; Channel:High

	Freq	ReadAntenna Level	Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Pol/Phase
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2310.000	43.08	26.25	5.03	37.44	36.92	54.00	-17.08	HORIZONTAL
2	2310.000	47.02	26.25	5.03	37.44	40.86	74.00	-33.14	HORIZONTAL
3	2390.000	43.30	26.43	4.88	37.42	37.19	54.00	-16.81	HORIZONTAL
4	2390.000	47.87	26.43	4.88	37.42	41.76	74.00	-32.24	HORIZONTAL
5	2483.500	43.30	26.58	5.23	37.40	37.71	54.00	-16.29	HORIZONTAL
6	2483.500	47.28	26.58	5.23	37.40	41.69	74.00	-32.31	HORIZONTAL
7	2500.000	45.00	26.60	4.95	37.39	39.16	54.00	-14.84	HORIZONTAL
8	2500.000	49.11	26.60	4.95	37.39	43.27	74.00	-30.73	HORIZONTAL

Mode:b; Polarization:Vertical; Modulation:GFSK; Channel:High

	Freq	ReadAntenna Level	Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Pol/Phase
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2310.000	40.98	26.25	5.03	37.44	34.82	54.00	-19.18	VERTICAL
2	2310.000	46.98	26.25	5.03	37.44	40.82	74.00	-33.18	VERTICAL
3	2390.000	40.36	26.43	4.88	37.42	34.25	54.00	-19.75	VERTICAL
4	2390.000	46.30	26.43	4.88	37.42	40.19	74.00	-33.81	VERTICAL
5	2483.500	44.00	26.58	5.23	37.40	38.41	54.00	-15.59	VERTICAL
6	2483.500	48.61	26.58	5.23	37.40	43.02	74.00	-30.98	VERTICAL
7	2500.000	43.91	26.60	4.95	37.39	38.07	54.00	-15.93	VERTICAL
8	2500.000	46.84	26.60	4.95	37.39	41.00	74.00	-33.00	VERTICAL



7.8 Radiated Spurious Emissions

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209

Test Method: ANSI C63.10 (2013) Section 6.4,6.5,6.6

Measurement Distance: 3m

Limit:

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.




7.8.1 E.U.T. Operation

Operating Environment:

Temperature: 26 °C Humidity: 68.8 % RH Atmospheric Pressure: 1020 mbar

Test Mode: b: Charge + TX mode_Keep the EUT in charging and continuously transmitting mode with GFSK modulation.

7.8.2 Test Setup Diagram

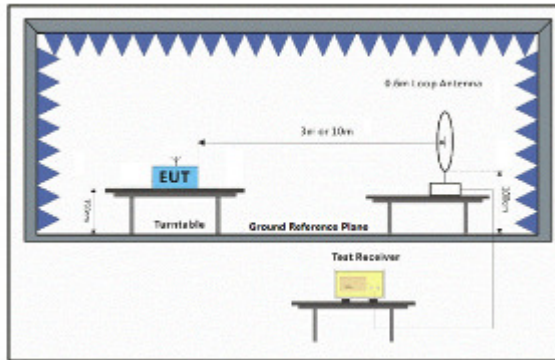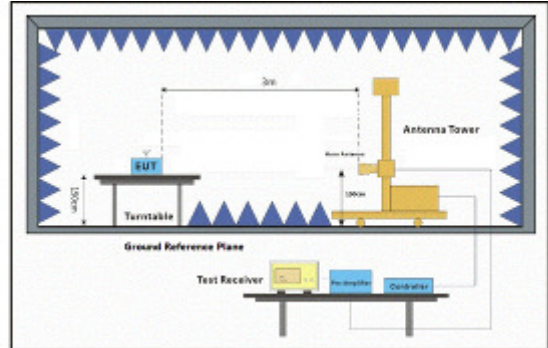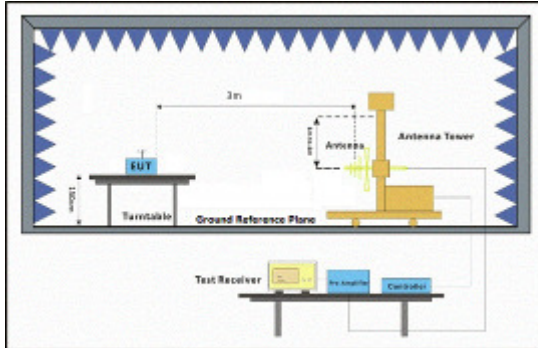



7.8.3 Measurement Procedure and Data

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.

Remark:

- 1) For emission below 1GHz, through pre-scan found the worst case is the lowest channel. Only the worst case is recorded in the report.
- 2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor
- 3) Scan from 9kHz to 25GHz, the disturbance above 18GHz and below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
- 4) For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown

Mode:b; Polarization:Horizontal; Modulation:GFSK; Channel:Low

	Freq	ReadAntenna Level	Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	96.099	45.00	8.97	0.85	27.01	27.81	43.50	-15.69	HORIZONTAL	QP
2	158.112	31.03	13.38	1.25	28.10	17.56	43.50	-25.94	HORIZONTAL	QP
3	287.990	35.01	13.75	1.76	28.97	21.55	46.00	-24.45	HORIZONTAL	QP
4	399.030	40.16	16.39	2.24	29.82	28.97	46.00	-17.03	HORIZONTAL	QP
5	501.179	39.59	18.23	2.18	29.63	30.37	46.00	-15.63	HORIZONTAL	QP
6	793.396	35.40	22.66	2.78	28.72	32.12	46.00	-13.88	HORIZONTAL	QP

Mode:b; Polarization:Horizontal; Modulation:GFSK; Channel:Low

	Freq	ReadAntenna Level	Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	3790.361	34.29	28.97	7.83	36.92	34.17	54.00	-19.83	HORIZONTAL	Average
2	3790.361	45.00	28.97	7.83	36.92	44.88	74.00	-29.12	HORIZONTAL	Peak
3	4830.000	52.16	30.85	6.15	36.94	52.22	54.00	-1.78	HORIZONTAL	Average
4	4830.000	55.20	30.85	6.15	36.94	55.26	74.00	-18.74	HORIZONTAL	Peak
5	6414.167	36.13	34.03	7.01	36.99	40.18	54.00	-13.82	HORIZONTAL	Average
6	6414.167	44.37	34.03	7.01	36.99	48.42	74.00	-25.58	HORIZONTAL	Peak
7	7245.584	36.16	35.55	7.35	36.92	42.14	54.00	-11.86	HORIZONTAL	Average
8	7245.584	43.66	35.55	7.35	36.92	49.64	74.00	-24.36	HORIZONTAL	Peak
9	9660.710	34.86	37.58	8.21	37.08	43.57	54.00	-10.43	HORIZONTAL	Average
10	9660.710	42.27	37.58	8.21	37.08	50.98	74.00	-23.02	HORIZONTAL	Peak
11	12075.390	30.52	39.42	10.76	37.15	43.55	54.00	-10.45	HORIZONTAL	Average
12	12079.390	38.35	39.42	10.76	37.15	51.38	74.00	-22.62	HORIZONTAL	Peak



SGS-CSTC Standards Technical Services Co., Ltd.
Guangzhou Branch

Report No.: GZEM180400204801
 Page: 32 of 47

Mode:b; Polarization:Vertical; Modulation:GFSK; Channel:Low

	Freq	ReadAntenna Level	Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	50.057	24.24	13.00	0.60	24.87	12.97	40.00	-27.03	VERTICAL	QP
2	96.099	33.03	8.97	0.85	27.01	15.84	43.50	-27.66	VERTICAL	QP
3	208.580	35.86	11.33	1.07	28.59	19.67	43.50	-23.83	VERTICAL	QP
4	287.990	43.77	13.75	1.76	28.97	30.31	46.00	-15.69	VERTICAL	QP
5	396.242	44.46	16.36	2.23	29.81	33.24	46.00	-12.76	VERTICAL	QP
6	851.035	33.08	23.41	2.93	28.46	30.96	46.00	-15.04	VERTICAL	QP

Mode:b; Polarization:Vertical; Modulation:GFSK; Channel:Low

	Freq	ReadAntenna Level	Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	3567.138	34.51	28.06	6.28	36.94	31.91	54.00	-22.09	VERTICAL	Average
2	3567.138	45.05	28.06	6.28	36.94	42.45	74.00	-31.55	VERTICAL	Peak
3	4830.100	50.33	30.85	6.15	36.94	50.39	54.00	-3.61	VERTICAL	Average
4	4830.100	54.19	30.85	6.15	36.94	54.25	74.00	-19.75	VERTICAL	Peak
5	5519.072	31.05	31.91	7.80	36.99	33.77	54.00	-20.23	VERTICAL	Average
6	5519.072	43.12	31.91	7.80	36.99	45.84	74.00	-28.16	VERTICAL	Peak
7	7245.778	32.34	35.55	7.35	36.92	38.32	54.00	-15.68	VERTICAL	Average
8	7245.778	42.64	35.55	7.35	36.92	48.62	74.00	-25.38	VERTICAL	Peak
9	9660.221	33.53	37.58	8.21	37.08	42.24	54.00	-11.76	VERTICAL	Average
10	9660.221	45.18	37.58	8.21	37.08	53.89	74.00	-20.11	VERTICAL	Peak
11	12075.390	29.97	39.42	10.76	37.15	43.00	54.00	-11.00	VERTICAL	Average
12	12075.390	38.64	39.42	10.76	37.15	51.67	74.00	-22.33	VERTICAL	Peak



SGS-CSTC Standards Technical Services Co., Ltd.
Guangzhou Branch

Report No.: GZEM180400204801
 Page: 33 of 47

Mode:b; Polarization:Horizontal; Modulation:GFSK; Channel:middle

	Freq	ReadAntenna Level Factor	Cable Preamp Loss Factor	Level	Limit	Over	Pol/Phase	Remark	
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	3867.831	34.02	29.22	7.69	36.91	34.02	54.00	-19.98	HORIZONTAL Average
2	3867.831	44.21	29.22	7.69	36.91	44.21	74.00	-29.79	HORIZONTAL Peak
3	4892.000	50.11	30.95	6.86	36.95	50.97	54.00	-3.03	HORIZONTAL Average
4	4892.000	53.01	30.95	6.86	36.95	53.87	74.00	-20.13	HORIZONTAL Peak
5	5797.032	35.26	32.16	7.47	37.00	37.89	54.00	-16.11	HORIZONTAL Average
6	5797.032	44.29	32.16	7.47	37.00	46.92	74.00	-27.08	HORIZONTAL Peak
7	7335.254	34.54	35.74	7.39	36.92	40.75	54.00	-13.25	HORIZONTAL Average
8	7335.254	45.01	35.74	7.39	36.92	51.22	74.00	-22.78	HORIZONTAL Peak
9	9780.018	32.34	37.74	8.37	37.09	41.36	54.00	-12.64	HORIZONTAL Average
10	9780.018	44.05	37.74	8.37	37.09	53.07	74.00	-20.93	HORIZONTAL Peak
11	12225.210	32.32	39.21	10.98	37.06	45.45	54.00	-8.55	HORIZONTAL Average
12	12225.210	40.80	39.21	10.98	37.06	53.93	74.00	-20.07	HORIZONTAL Peak

Mode:b; Polarization:Vertical; Modulation:GFSK; Channel:middle

	Freq	ReadAntenna Level Factor	Cable Preamp Loss Factor	Level	Limit	Over	Pol/Phase	Remark	
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	3619.064	33.99	28.20	6.52	36.94	31.77	54.00	-22.23	VERTICAL Average
2	3619.064	45.76	28.20	6.52	36.94	43.54	74.00	-30.46	VERTICAL Peak
3	4888.151	49.24	30.95	6.86	36.95	50.10	54.00	-3.90	VERTICAL Average
4	4888.151	51.73	30.95	6.86	36.95	52.59	74.00	-21.41	VERTICAL Peak
5	5746.982	32.46	32.10	7.05	36.99	34.62	54.00	-19.38	VERTICAL Average
6	5746.982	45.22	32.10	7.05	36.99	47.38	74.00	-26.62	VERTICAL Peak
7	7335.741	32.70	35.74	7.39	36.92	38.91	54.00	-15.09	VERTICAL Average
8	7335.741	43.26	35.74	7.39	36.92	49.47	74.00	-24.53	VERTICAL Peak
9	9780.689	35.01	37.74	8.37	37.09	44.03	54.00	-9.97	VERTICAL Average
10	9780.689	44.24	37.74	8.37	37.09	53.26	74.00	-20.74	VERTICAL Peak
11	12225.330	29.22	39.21	10.98	37.06	42.35	54.00	-11.65	VERTICAL Average
12	12225.330	39.03	39.21	10.98	37.06	52.16	74.00	-21.84	VERTICAL Peak



SGS-CSTC Standards Technical Services Co., Ltd.
Guangzhou Branch

Report No.: GZEM180400204801
 Page: 34 of 47

Mode:b; Polarization:Horizontal; Modulation:GFSK; Channel:High

	Freq	ReadAntenna Level Factor	Cable Preamp Loss Factor	Level	Limit	Over	Pol/Phase	Remark	
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	3856.668	35.17	29.19	7.73	36.91	35.18	54.00	-18.82	HORIZONTAL Average
2	3856.668	44.00	29.19	7.73	36.91	44.01	74.00	-29.99	HORIZONTAL Peak
3	4940.369	41.14	31.03	7.67	36.95	42.89	54.00	-11.11	HORIZONTAL Average
4	4940.369	48.36	31.03	7.67	36.95	50.11	74.00	-23.89	HORIZONTAL Peak
5	6053.894	36.11	32.45	7.06	37.00	38.62	54.00	-15.38	HORIZONTAL Average
6	6053.894	45.07	32.45	7.06	37.00	47.58	74.00	-26.42	HORIZONTAL Peak
7	7410.015	32.95	35.89	7.42	36.92	39.34	54.00	-14.66	HORIZONTAL Average
8	7410.015	43.20	35.89	7.42	36.92	49.59	74.00	-24.41	HORIZONTAL Peak
9	9880.957	33.21	37.86	8.52	37.09	42.50	54.00	-11.50	HORIZONTAL Average
10	9880.957	43.81	37.86	8.52	37.09	53.10	74.00	-20.90	HORIZONTAL Peak
11	12350.250	30.60	38.98	11.13	36.93	43.78	54.00	-10.22	HORIZONTAL Average
12	12350.250	39.52	38.98	11.13	36.93	52.70	74.00	-21.30	HORIZONTAL Peak

Mode:b; Polarization:Vertical; Modulation:GFSK; Channel:High

	Freq	ReadAntenna Level Factor	Cable Preamp Loss Factor	Level	Limit	Over	Pol/Phase	Remark	
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	3105.037	38.93	27.90	5.37	37.03	35.17	54.00	-18.83	VERTICAL Average
2	3105.037	47.33	27.90	5.37	37.03	43.57	74.00	-30.43	VERTICAL Peak
3	3823.371	32.06	29.08	7.83	36.91	32.06	54.00	-21.94	VERTICAL Average
4	3823.371	44.76	29.08	7.83	36.91	44.76	74.00	-29.24	VERTICAL Peak
5	4940.993	38.62	31.03	7.67	36.95	40.37	54.00	-13.63	VERTICAL Average
6	4940.993	47.49	31.03	7.67	36.95	49.24	74.00	-24.76	VERTICAL Peak
7	7410.823	34.49	35.89	7.42	36.92	40.88	54.00	-13.12	VERTICAL Average
8	7410.823	43.50	35.89	7.42	36.92	49.89	74.00	-24.11	VERTICAL Peak
9	9880.540	34.75	37.86	8.52	37.09	44.04	54.00	-9.96	VERTICAL Average
10	9880.540	43.20	37.86	8.52	37.09	52.49	74.00	-21.51	VERTICAL Peak
11	12350.710	29.30	38.98	11.13	36.93	42.48	54.00	-11.52	VERTICAL Average
12	12350.710	37.80	38.98	11.13	36.93	50.98	74.00	-23.02	VERTICAL Peak




8 Appendix

8.1 Appendix 15.247

1.6dB Bandwidth

Test Channel	Ant	6dB BW[MHz]	Limit[MHz]	Verdict
2415	Ant1	1.202	0.5	PASS
2446	Ant1	1.199	0.5	PASS
2470	Ant1	1.173	0.5	PASS

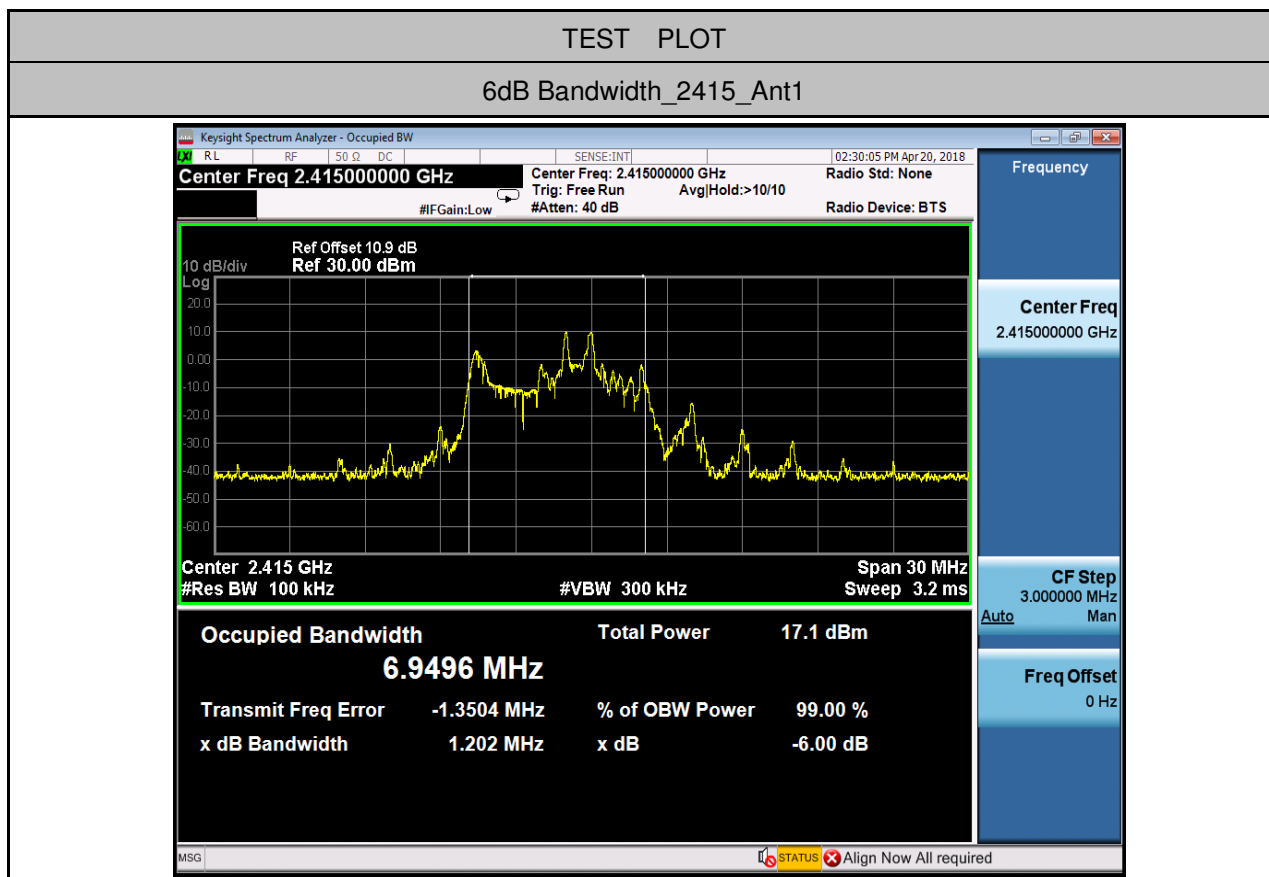

6dB Bandwidth_2446_Ant1




6dB Bandwidth_2470_Ant1




2. Maximum peak conducted output power


Test Channel	Ant	Power[dBm]	Limit[dBm]	Verdict
2415	Ant1	10.945	30	PASS
2446	Ant1	10.820	30	PASS
2470	Ant1	10.849	30	PASS

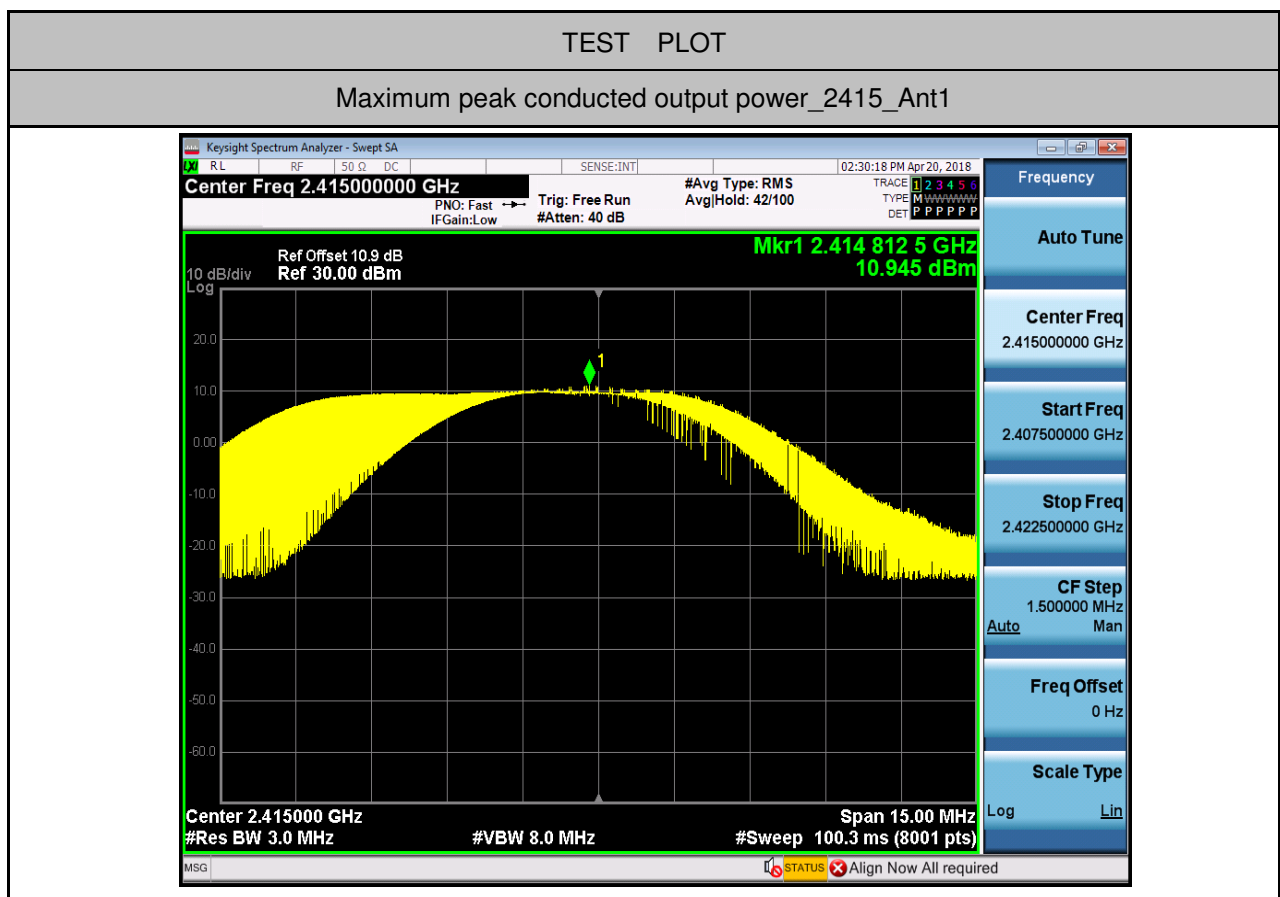

Maximum peak conducted output power_2446_Ant1

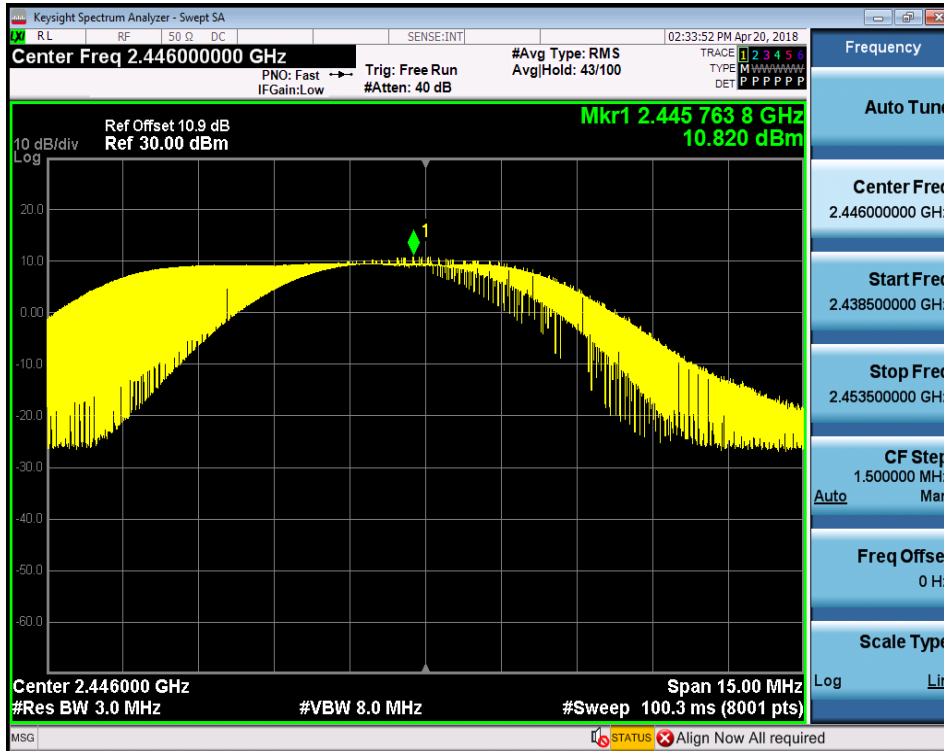


Maximum peak conducted output power_2470_Ant1

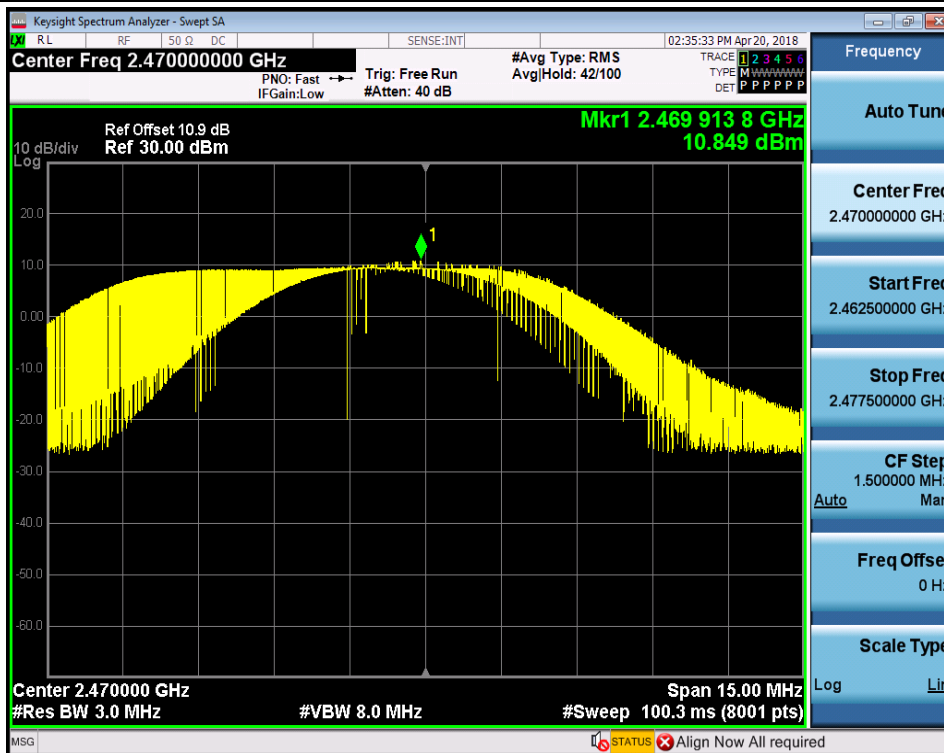

3.Maximum Peak power spectral density

Test Channel	Ant	Result[dBm/3kHz]	Limit[dBm/3kHz]	Verdict
2415	Ant1	-3.777	8.00	PASS
2446	Ant1	-3.555	8.00	PASS
2470	Ant1	-4.466	8.00	PASS

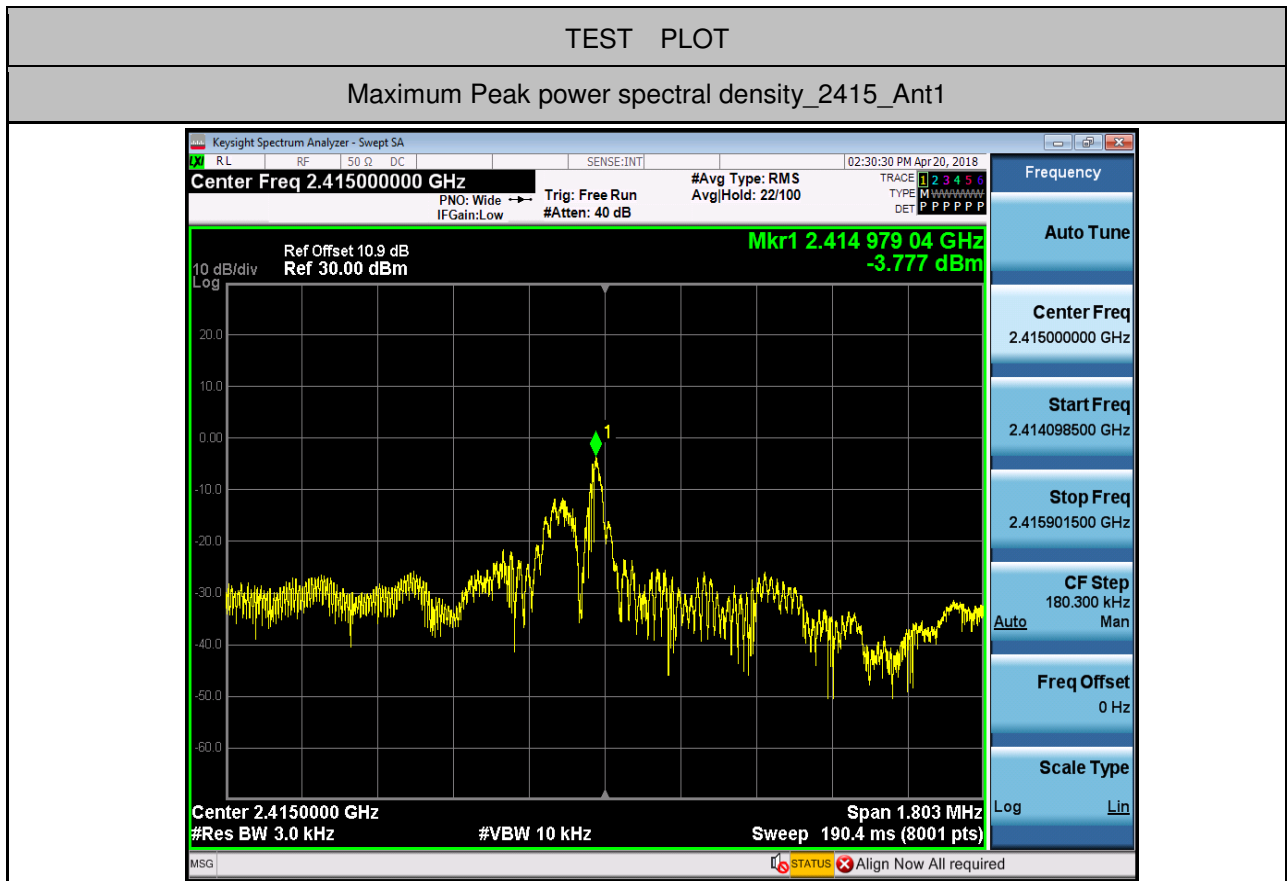

Maximum Peak power spectral density_2446_Ant1




Maximum Peak power spectral density_2470_Ant1




4. Band-edge for RF Conducted Emissions

Test Channel	Ant	Carrier Power[dBm]	Max. Spurious Level [dBm]	Limit [dBm]	Verdict
2415	Ant1	9.853	-38.825	-10.15	PASS
2470	Ant1	9.949	-39.489	-10.05	PASS

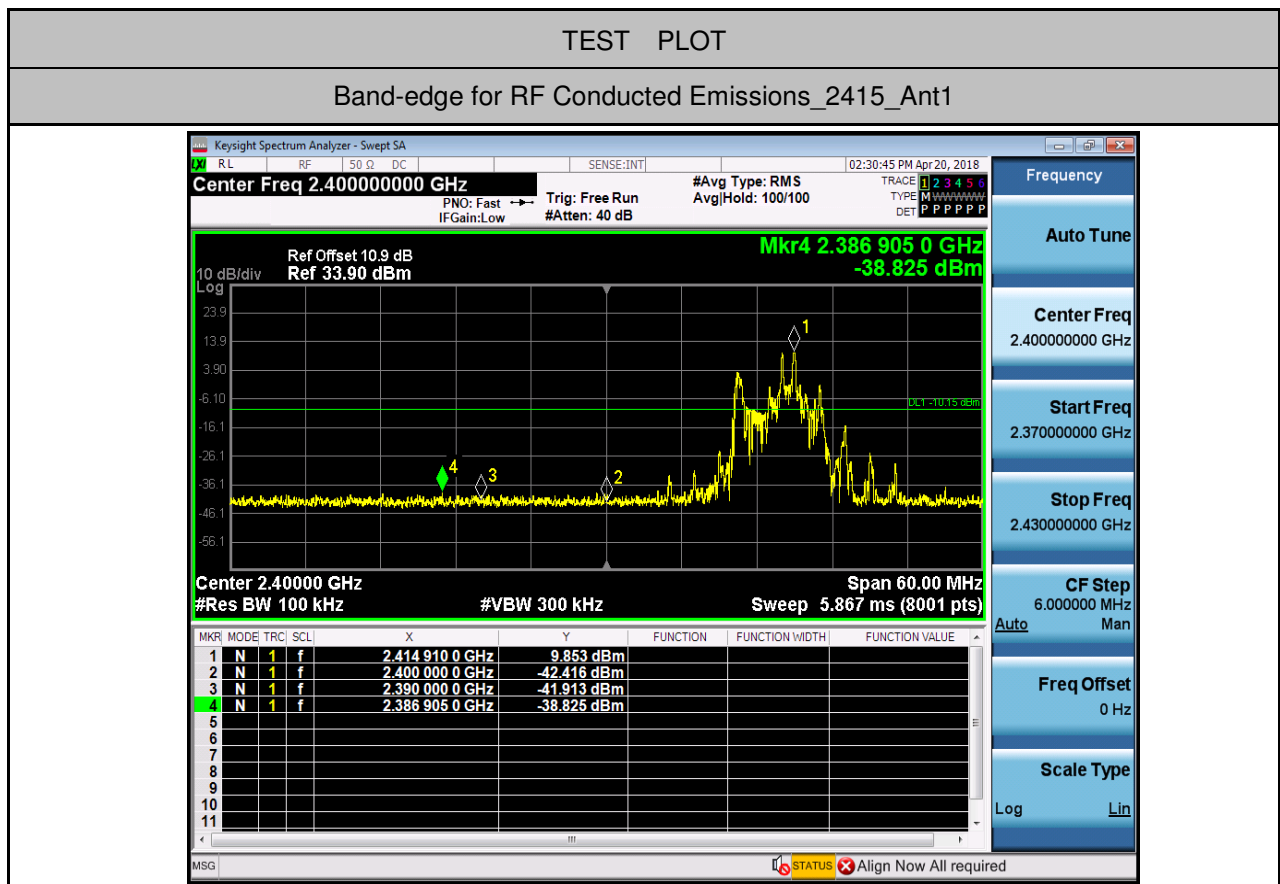


Band-edge for RF Conducted Emissions_2470_Ant1

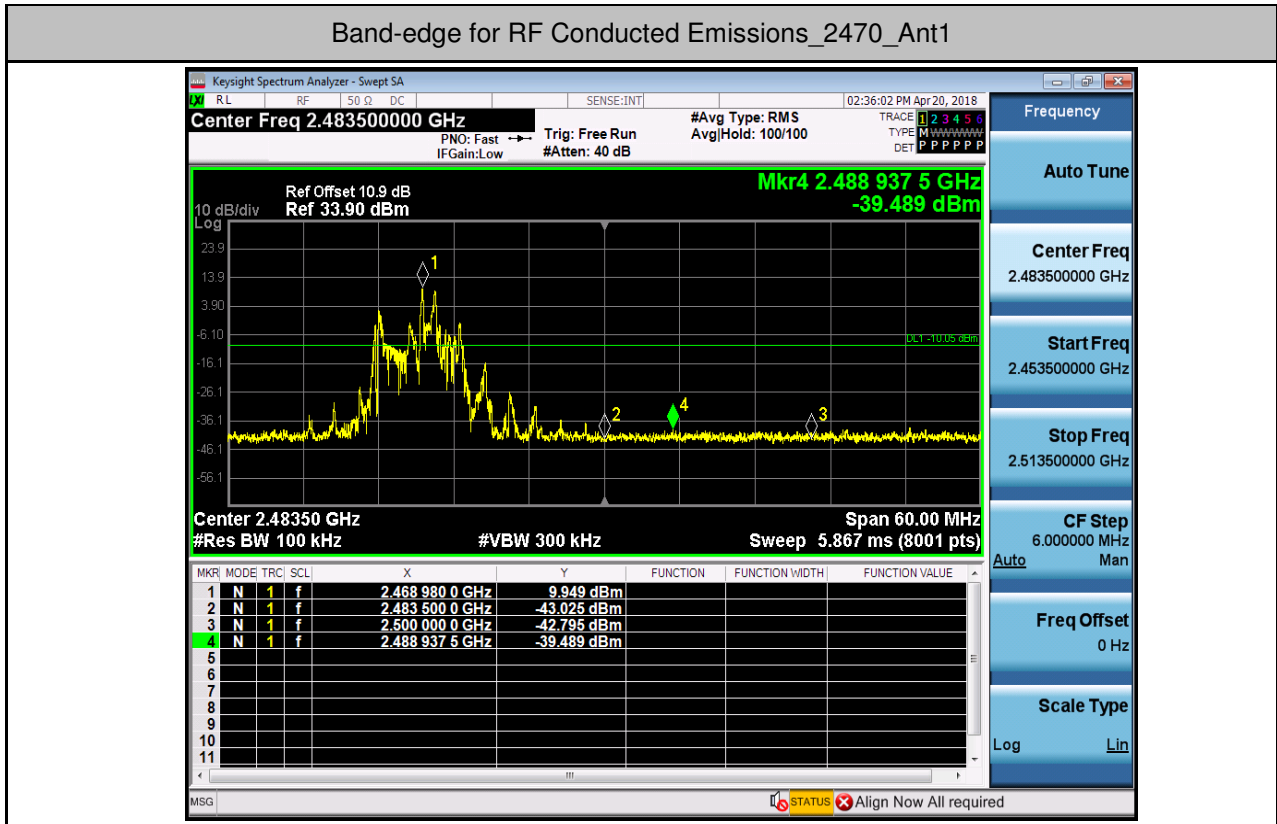




5.RF Conducted Spurious Emissions

Test Channel	Ant	StartFre [MHz]	StopFre [MHz]	RBW [kHz]	VBW [kHz]	Pref[dBm]	Max. Level [dBm]	Limit [dBm]	Verdict
2415	Ant1	30	10000	100	300	10.628	-44.321	<-9.372	PASS
2415	Ant1	10000	26000	100	300	10.628	-41.955	<-9.372	PASS
2446	Ant1	30	10000	100	300	9.505	-44.513	<-10.495	PASS
2446	Ant1	10000	26000	100	300	9.505	-42.401	<-10.495	PASS
2470	Ant1	30	10000	100	300	10.244	-44.542	<-9.756	PASS
2470	Ant1	10000	26000	100	300	10.244	-41.612	<-9.756	PASS

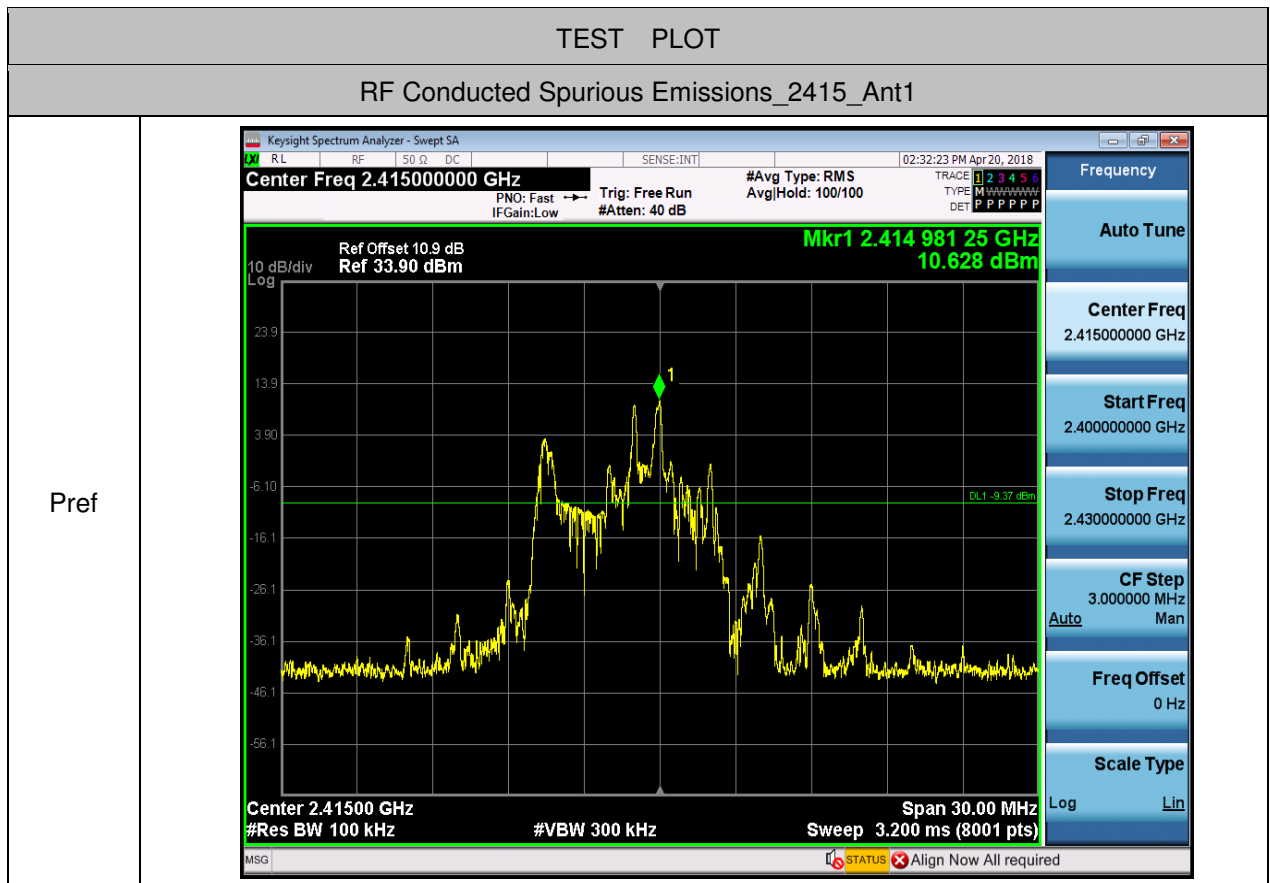

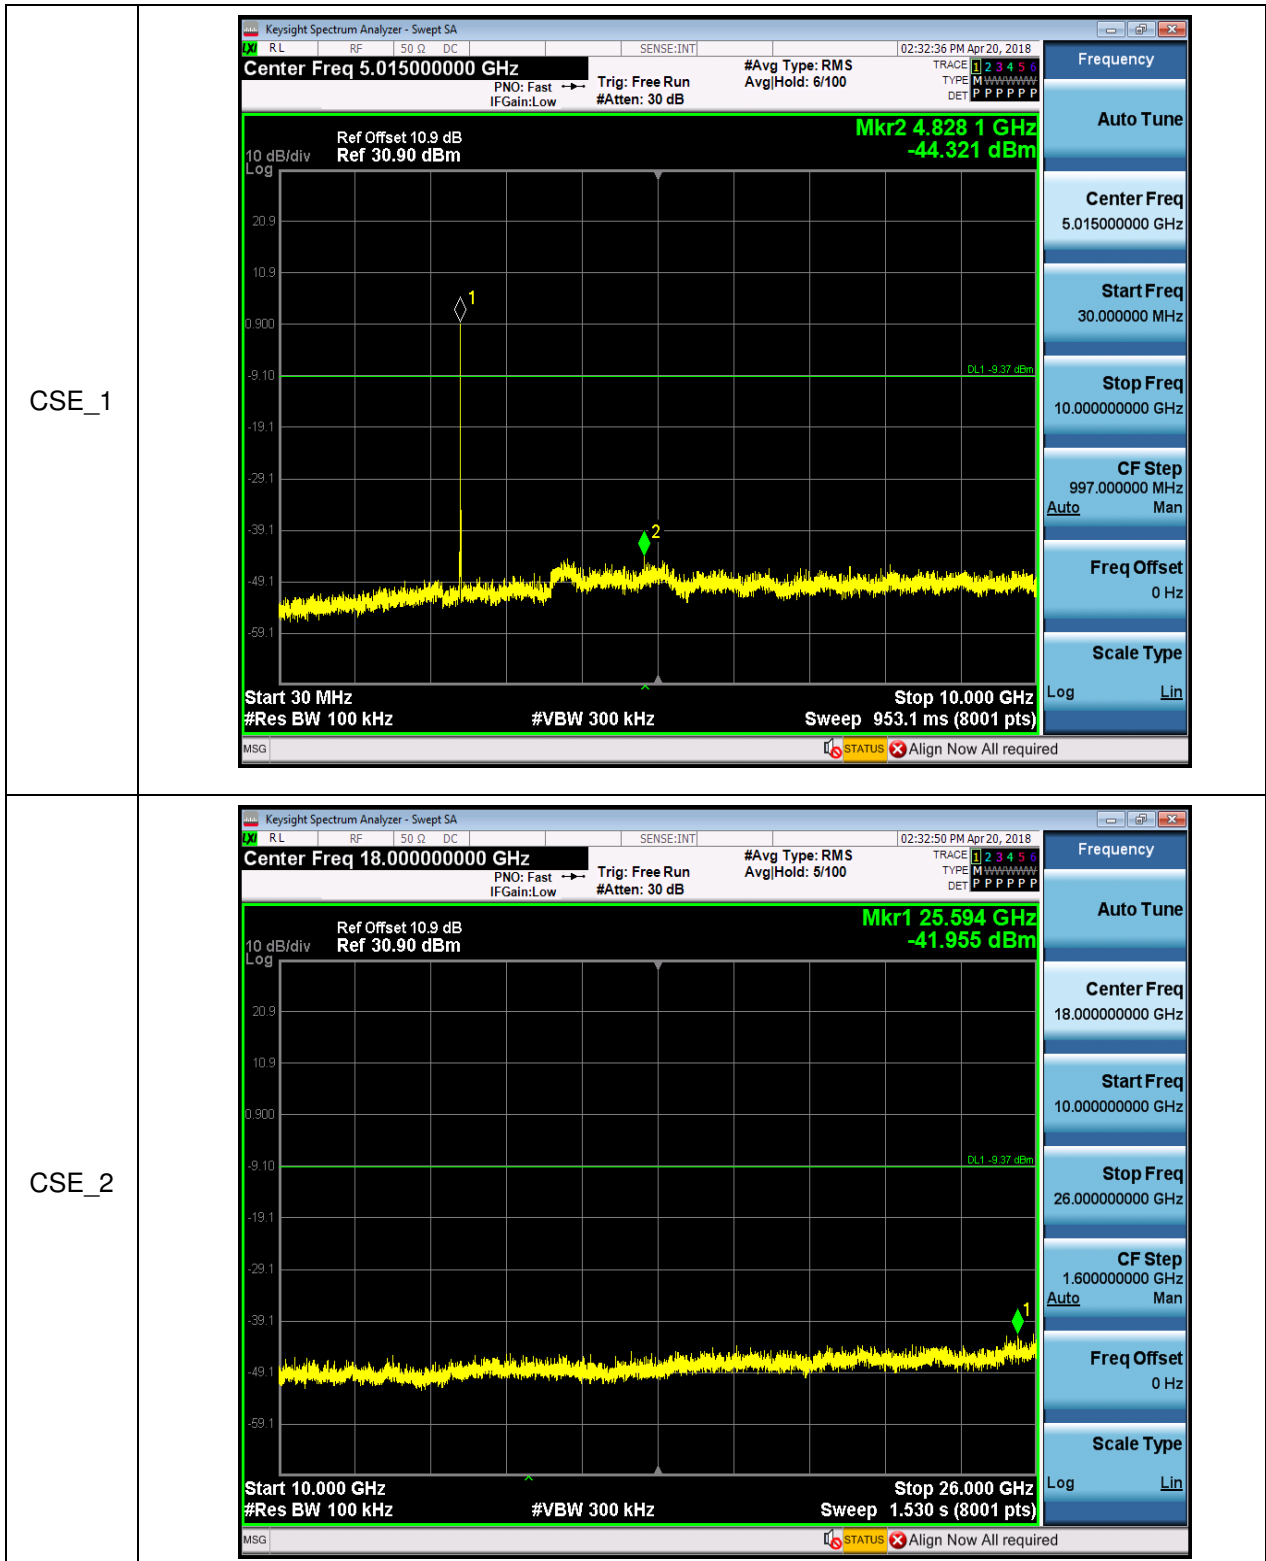



RF Conducted Spurious Emissions_2446_Ant1

Pref




CSE_1

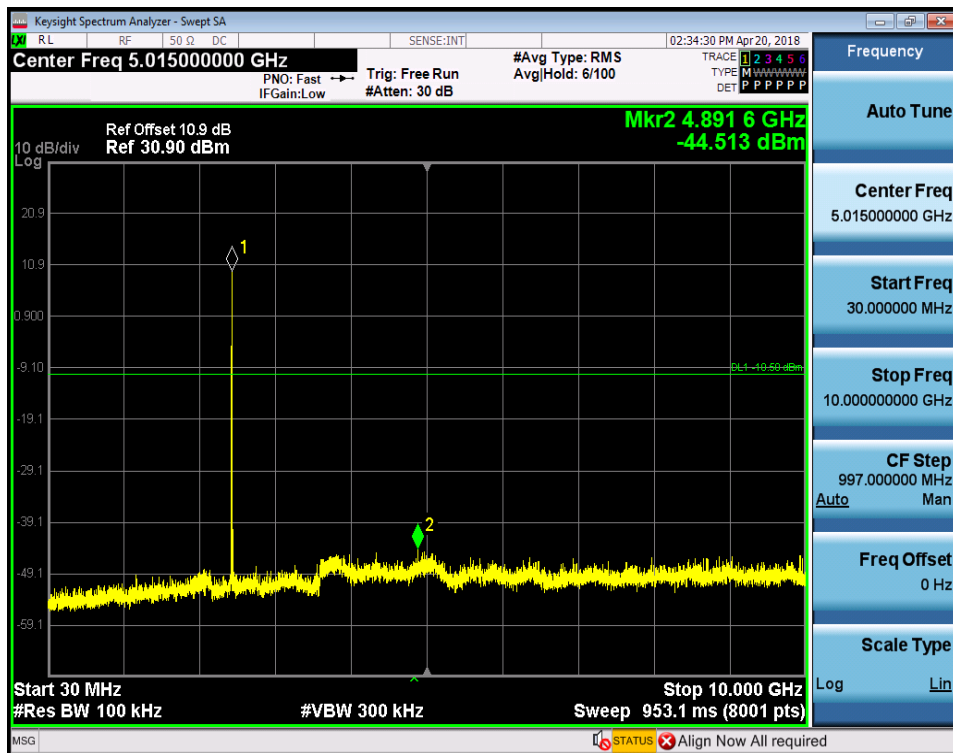

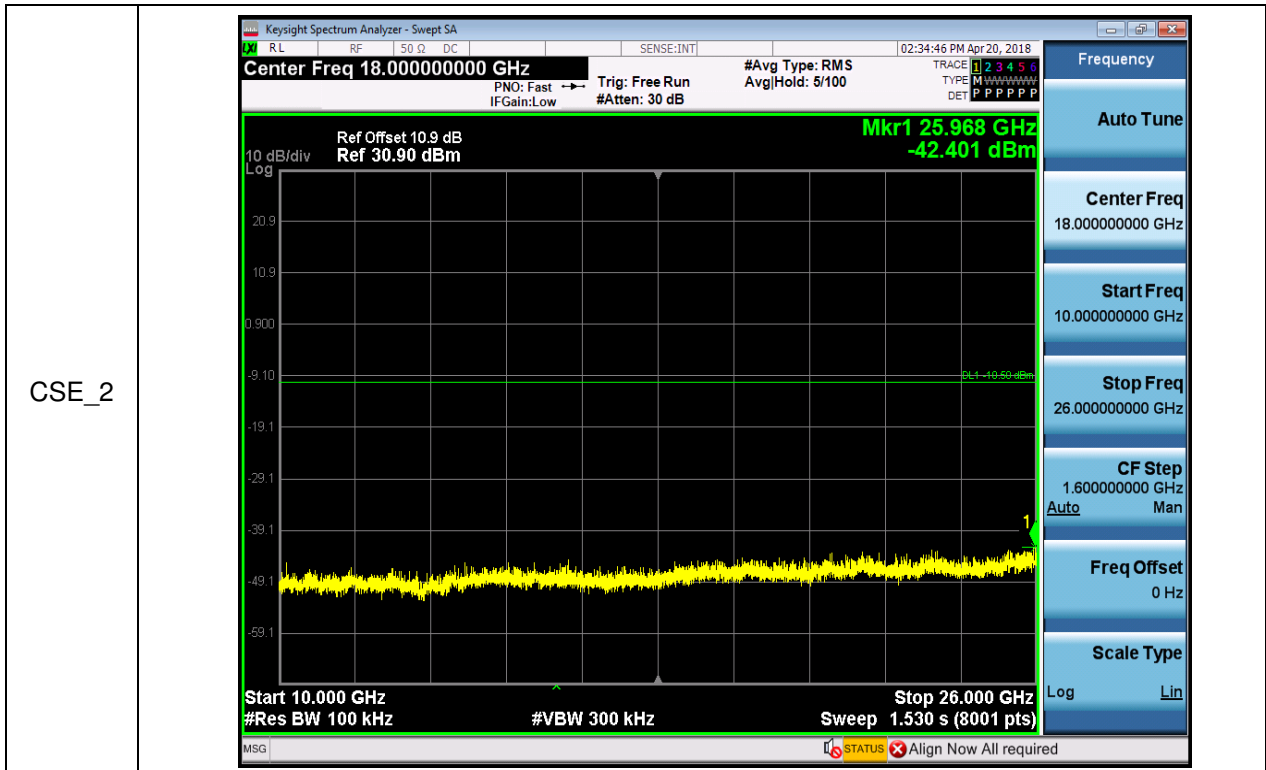

RF Conducted Spurious Emissions_2470_Ant1



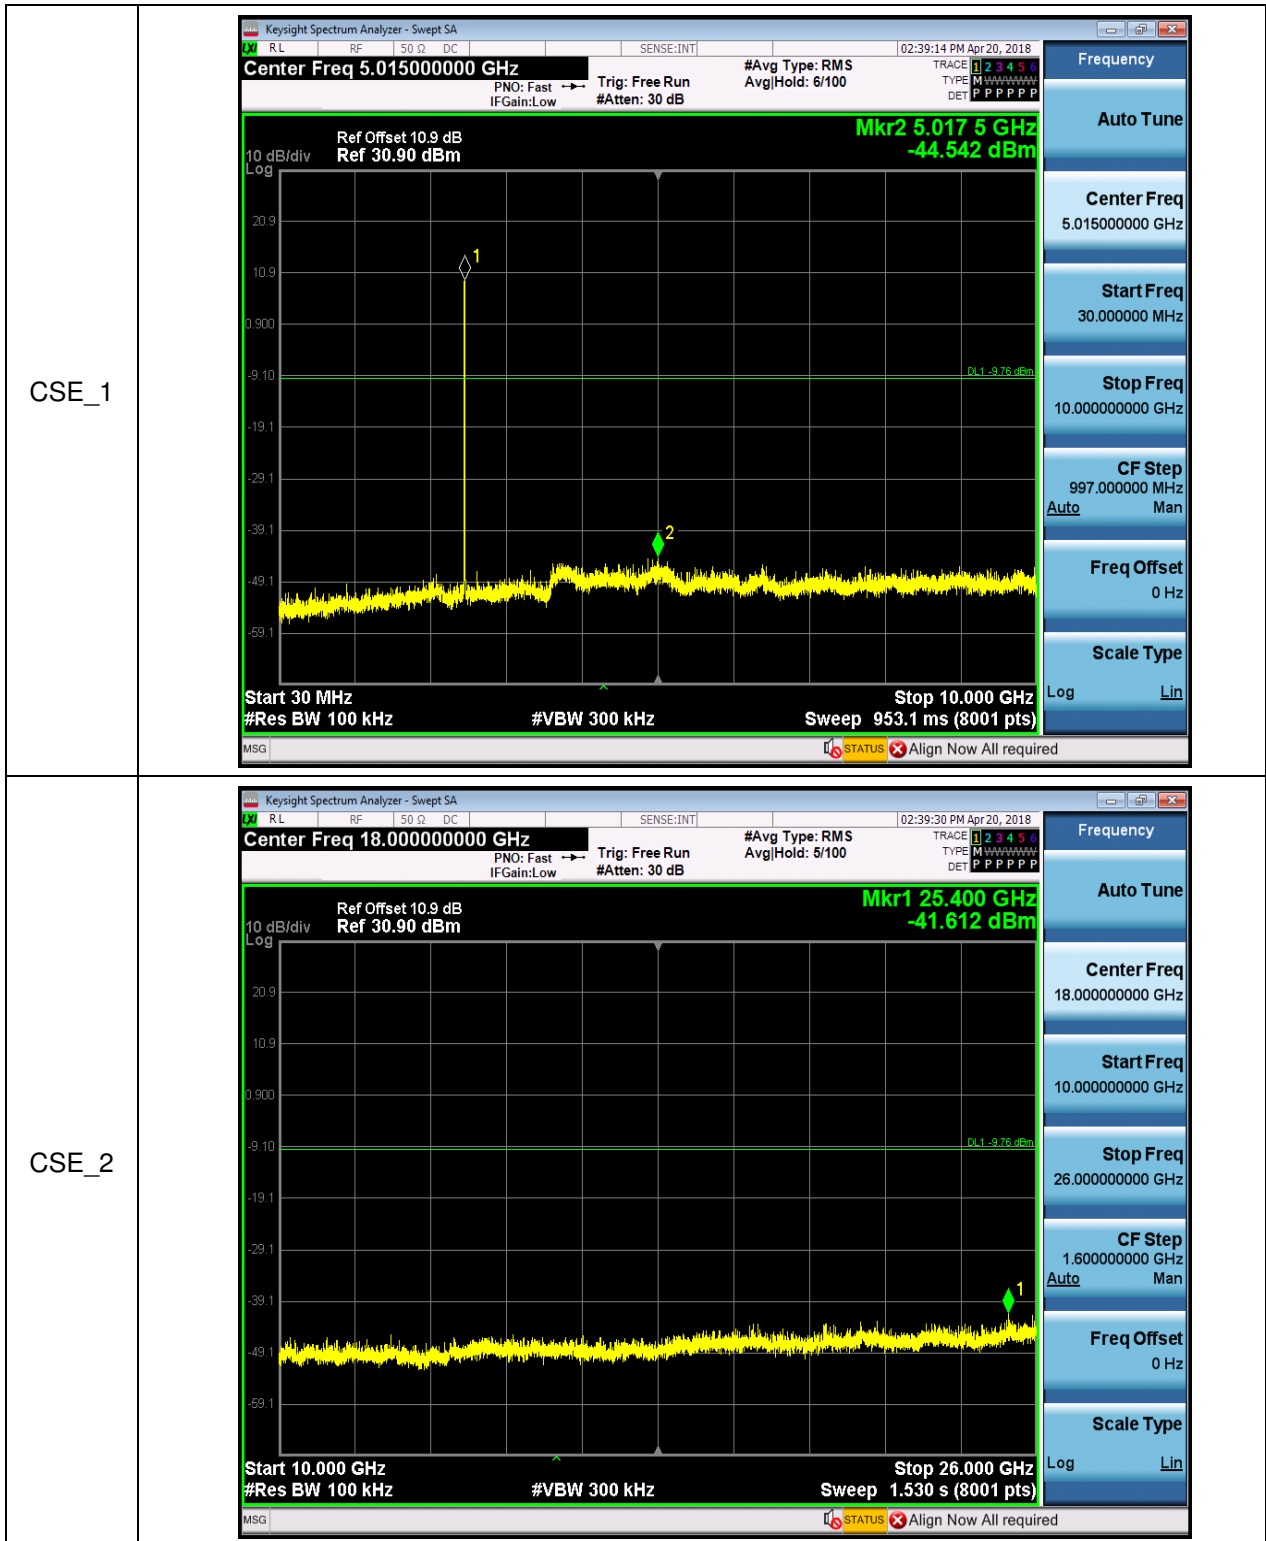

--End of Report--