



**EUROFINS ELECTRICAL TESTING SERVICE (SHENZHEN) Co., LTD.**

# **RADIO TEST - REPORT**

**FCC/IC Compliance Test Report for**

**Product name: BEACON 2.0**

**Model name: BEACON 2.0**

**FCC ID: 2AJ3LA-BEACON2**

**IC: 23471-BEACON2**

**Test Report Number: EFGX19090040-IE-01-E01**

Test Report No.: EFGX19090040-IE-01-E01

Eurofins Electrical Testing Service (Shenzhen) Co., Ltd.

1st Floor, Building 2, Chungu, Meisheng Huigu Science and Technology Park, No. 83 Dabao Road, Bao'an District, Shenzhen.  
P.R.China. Telephone: +86-755-82911867, Fax : +86-755-82910749

## Content

<b>1</b>	<b>General Information</b>	<b>3</b>
1.1	Notes	3
1.2	Testing laboratory	4
1.3	Details of approval holder	4
1.4	Application details	4
1.5	Test item	4
1.6	Test standards	5
<b>2</b>	<b>Technical test</b>	<b>6</b>
2.1	Summary of test results	6
2.2	Test environment	6
2.3	Measurement uncertainty	6
2.4	Test mode	6
2.5	Test equipment utilized	7
2.6	Auxiliary Equipment Used during Test:	7
2.7	Test software information:	7
2.8	Customized Configurations	7
2.9	Test Environments	7
2.10	Test results	8
<b>3</b>	<b>Technical Requirement</b>	<b>9</b>
3.1	Conducted Emission	9
3.2	Conducted Peak output power	10
3.3	6dB bandwidth	11
3.4	99% bandwidth	12
3.5	Power spectral density	13
3.6	Spurious RF conducted emissions	14
3.7	Band edge	15
3.8	Spurious radiated emissions for transmitter	16



## 1 General Information

### 1.1 Notes

The results of this test report relate exclusively to the item tested as specified in chapter "Description of test item" and are not transferable to any other test items.

Eurofins Electrical Testing Service (Shenzhen) Co., Ltd. is not responsible for any generalisations and conclusions drawn from this report. Any modification of the test item can lead to invalidity of test results and this test report may therefore be not applicable to the modified test item.

The test report may only be reproduced or published in full. Reproducing or publishing extracts of the report requires the prior written approval of the Eurofins Electrical Testing Service (Shenzhen) Co., Ltd.

This document is subject to the General Terms and Conditions and the Testing and Certification System of Eurofins Electrical Testing Service (Shenzhen) Co., Ltd., available on request or accessible at [www.eurofins.com](http://www.eurofins.com).

#### Operator:

2019-10-15

Bruce Zheng / Project Engineer

A handwritten signature in black ink that reads "Bruce Zheng".

---

Date

Eurofins-Lab.

Name / Title

Signature

#### Technical responsibility for area of testing:

2019-10-15

Oliver Lai / RF Supervisor

A handwritten signature in black ink that reads "Oliver Lai".

---

Date

Eurofins

Name / Title

Signature



## 1.2 Testing laboratory

Eurofins Electrical Testing Service (Shenzhen) Co., Ltd.

1st Floor, Building 2, Chungu, Meisheng Huigu Science and Technology Park, No. 83 Dabao Road, Bao'an District, Shenzhen. P.R.China.

Telephone : +86-755-82911867

Fax : +86-755-82910749

The Laboratory has passed the Accreditation by the American Association for Laboratory Accreditation (A2LA). The Accreditation number is 5376.01

The Laboratory has been listed by industry Canada to perform electromagnetic emission measurements, The CAB identifier is CN0088

## 1.3 Details of approval holder

Name	:	UBER
Address	:	1455 MARKET STREET #400 SAN FRANCISCO CA 94103 United States
Telephone	:	+18665761039
Fax	:	N/A

## 1.4 Application details

Date of receipt of application	:	August 16, 2019
Date of receipt of test item	:	August 16, 2019
Date of test	:	August 19, 2019 – September 12, 2019
Date of issue	:	October 15, 2019

## 1.5 Test item

Product type	:	BEACON 2.0
Model name	:	BEACON 2.0
Brand	:	UBER
Serial number	:	N/A
Ratings	:	5.0Vdc supplied by an external car charger
Test voltage	:	5.0Vdc
FCC ID	:	2AJ3LA-BEACON2
IC	:	23471-BEACON2
PMN	:	BEACON 2.0
HVIN	:	BEACON 2.0
Additional information	:	N/A

### RadioTechnical data

Frequency range	:	2402MHz – 2480MHz
Radio Tech.	:	Bluetooth Low Energy
Frequency channel	:	39 Channels
Modulation	:	GFSK
Antenna type	:	Chip antenna
Antenna gain	:	1.5dBi

### Radio module

Type	:	Bluetooth 5
Model	:	nRF52832
Manufacturer	:	Nordic

## 1.6 Test standards

Test Standards	
FCC Part 15 Subpart C 10-1-2018 Edition	PART 15 - RADIO FREQUENCY DEVICES Subpart C - Intentional Radiators
RSS-247 Issue 2 February 2017	RSS-247 — Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices
RSS-GEN Issue 5 March 2019	RSS-Gen — General Requirements for Compliance of Radio Apparatus

### Test Method

1: ANSI C63.4-2014, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.

2: ANSI C63.10-2013, American National Standard for Testing Unlicensed Wireless Devices.

3: KDB558074 D01 15.247 Meas Guidance v05r02

## 2 Technical test

### 2.1 Summary of test results

No deviations from the technical specification(s) were ascertained in the course of the tests performed.

or

The deviations as specified were ascertained in the course of the tests performed.

### 2.2 Test environment

Temperature	:	20	...	25°C
Relative humidity content	:	30	...	60%
Air pressure	:	100	...	101kPa

### 2.3 Measurement uncertainty

The uncertainty is calculated using the methods suggested in the "Guide to the Expression of Uncertainty in Measurement" (GUM) published by ISO.

System Measurement Uncertainty	
Test Items	Extended Uncertainty
Uncertainty for Conducted RF test	RF Power Conducted: 1.16dB Frequency test involved: 1.05×10-7 or 1%
Uncertainty for Radiated Spurious Emission 25MHz-3000MHz	Horizontal: 4.46dB; Vertical: 4.54dB;
Uncertainty for Radiated Spurious Emission 3000MHz-18000MHz	Horizontal: 4.42dB; Vertical: 4.41dB;
Uncertainty for Radiated Spurious Emission 18000MHz-40000MHz	Horizontal: 4.63dB; Vertical: 4.62dB;

### 2.4 Test mode

The EUT was set at continuously transmitting and receiving mode (CH0, CH19, CH39) during the test.

## 2.5 Test equipment utilized

EQUIPMENT ID	EQUIPMENT NAME	MODEL NO.	CAL. DUE DATE
23-2-13-12	Signal Analyzer	N9010B-544	2020-04-14
23-2-13-13	BT/WLAN Tester	CMW270	2020-04-14
23-2-13-14	Signal Generator	N5183B-520	2020-05-05
23-2-13-15	Vector Signal Generator	N5182B-506	2020-04-14
23-2-10-43	Switch and Control Unit	ERIT-E-JS0806-2	2020-04-14
23-2-10-44	DC power supply	E3642A	2020-04-14
23-2-10-45	temperature test chamber	SG-80-CC-2	2020-05-05
23-2-13-01	EMI Test Receiver	ESR7	2020-04-04
23-2-13-02	Signal Analyzer	N9020B-544	2020-05-05
23-2-12-01	Active Loop Antenna	FMZB 1519B	2020-04-20
23-2-12-02	TRILOG Broadband Antenna	VULB9168	2020-04-13
23-2-12-03	Horn Antenna	3117	2020-04-13
23-2-12-04	Horn Antenna	BBHA 9170	2020-04-17
23-2-12-05	Universal Antenna Stand	CLSA0110	2020-04-13
23-2-10-01	Preamplifier	BBV9745	2020-04-15
23-2-10-02	Preamplifier	EMC001330	2020-04-15
23-2-10-03	Preamplifier	EMC051845SE	2020-05-06
23-2-10-14	Switch and Control Unit	ERIT-E-JS0806-SF1	N/A

## 2.6 Auxiliary Equipment Used during Test:

DESCRIPTION	MANUFACTURER	MODEL NO.	S/N
Laptop	LENOVO	TP00096A	PF-1QH0LV
V2 CarCharger	/	D021BD0500420	IP: 12-24VDC, 3.0A OP: 5VDC, 4.2A

## 2.7 Test software information:

Test Software Version	Putty Configuration		
Modulation	Setting TX Power	TX Pattern	Packet Type
GFSK	Pos4dBm	Data_rate_ble-1Mbit	Duty cycle_modulated_tx 99

## 2.8 Customized Configurations

EUT Conf.	Signal Description	Operating Frequency	Duty Cycle
TM1_Ch0	GFSK	Ch No. 0 / 2402 MHz	49.90%
TM1_Ch19	GFSK	Ch No. 19 / 2440 MHz	49.90%
TM1_Ch39	GFSK	Ch No. 39 / 2480 MHz	49.90%

## 2.9 Test Environments

Enviroment Parameter	Temperature	Voltage	Relative Humidity
101.7Kpa	26.5	5.0Vdc	68.3%

## 2.10 Test results

 1<sup>st</sup> test

 test after modification

 production test

Technical Requirements					
FCC Part 15 Subpart C/RSS-247 Issue 2/RSS-Gen Issue 5			Test Result	Verdict	Test Site
Test Condition					
§15.207	RSS-GEN 8.8	Conducted emission AC power port	--	N/A	--
§15.247(b)(1)	RSS-247 Clause 5.4(b)	Conducted output power for FHSS	--	N/A	--
§15.247(b)(3)	RSS-247 Clause 5.4(d)	Conducted output power for DTS	Appendix D	Pass	Site 1
§15.247(e)	RSS-247 Clause 5.2(b)	Power spectral density	Appendix E	Pass	Site 1
§15.247(a)(2)	RSS-247 Clause 5.2(a)	6dB bandwidth	Appendix B	Pass	Site 1
§15.247(a)(1)	RSS-247 Clause 5.1(a)	20dB Occupied bandwidth	--	N/A	--
--	RSS-GEN 6.7	99% Occupied Bandwidth	Appendix C	Pass	Site 1
§15.247(a)(1)	RSS-247 Clause 5.1(b)	Carrier frequency separation	--	N/A	--
§15.247(a)(1)(ii i)	RSS-247 Clause 5.1(d)	Number of hopping frequencies	--	N/A	--
§15.247(a)(1)(ii i)	RSS-247 Clause 5.1(d)	Dwell Time	--	N/A	--
§15.247(d) §15.205	RSS-247 Clause 5.5 RSS-GEN 8.10	Spurious RF conducted emissions	Appendix H Appendix G	Pass	Site 1
§15.247(d)	RSS-247 Clause 5.5	Band edge	Appendix F	Pass	Site 1
§15.247(d) & §15.209 & §15.205	RSS-247 Clause 5.5 & RSS-GEN 6.13 RSS-GEN 8.9 RSS-GEN 8.10	Spurious radiated emissions for transmitter	See page 19	Pass	Site 1
§15.203	RSS-GEN 6.8	Antenna requirement	See note 1	Pass	--

Remark 1: N/A – Not Applicable.

Note 1: The EUT uses an chip antenna, the gain: 1.50dBi. According to §15.203/ RSS-GEN 6.8, it is considered sufficiently to comply with the provisions of this section.

### 3 Technical Requirement

### 3.1 Conducted Emission

## Test Method:


The test method was referred to the subclause 5.2 of ANSI C63.4-2014.

1. The EUT was placed on a table, which is 0.8m above ground plane
2. The power line of the EUT is connected to the AC mains through a Artificial Mains Network (A.M.N.).
3. Maximum procedure was performed to ensure EUT compliance
4. A EMI test receiver is used to test the emissions from both sides of AC line

## Test Setup:

The mains cable of the EUT (per AC/DC Adapter) must be connected to LISN. The LISN shall be placed 0.8 m from the boundary of EUT and bonded to a ground reference plane for LISN mounted on top of the ground reference plane. This distance is between the closest points of the LISN and the EUT. All other units of the EUT and associated equipment shall be at least 0.8m from the LISN.

Ground connections, where required for safety purposes, shall be connected to the reference ground point of the LISN and, where not otherwise provided or specified by the manufacturer, shall be of same length as the mains cable and run parallel to the mains connection at a separation distance of not more than 0.1 m.

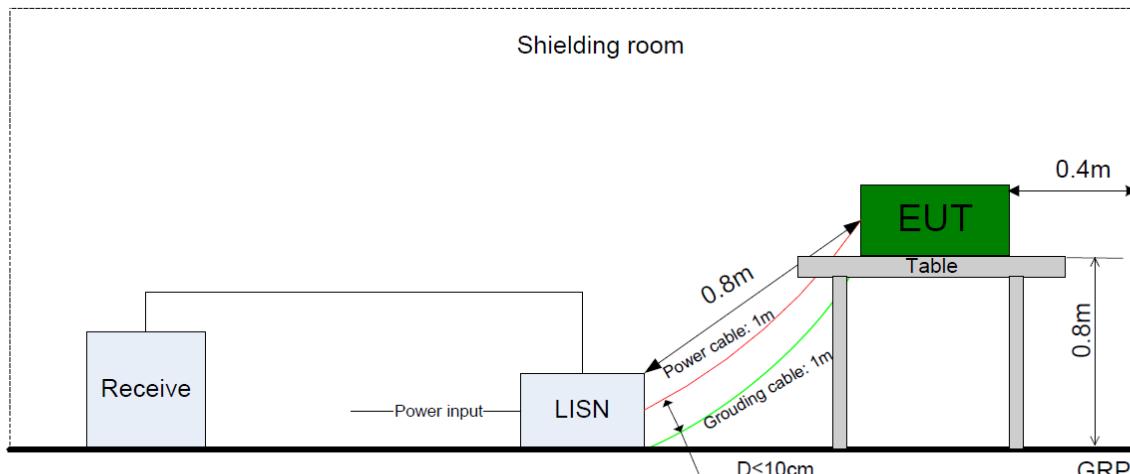

## Limit-

Frequency MHz	QP Limit dB $\mu$ V	AV Limit dB $\mu$ V
0.150-0.500	66-56*	56-46*
0.500-5	56	46
5-30	60	50

### Decreasing linear.

## Test Result:

Not Applicable, the EUT was supplied by a car charger which connected to 12VDC or 24Vdc battery.

### 3.2 Conducted Peak output power


#### Test Method

The test method was referred to the subclause 11.9.1.1 of ANSI C63.10-2013.

1. Connect EUT test port to spectrum analyzer.
2. Set the EUT to transmit maximum output power at 2.4GHz.
3. Then set the EUT to transmit at high, middle and low frequency and measure the conducted output power separately.
4. RBW=2MHz, VBW $\geq$ 3RBW, Sweep = auto, Detector function = peak, Trace = max hold
5. Repeat above procedures until all frequencies measured were complete.

#### Test Setup:

The Bluetooth component's antenna port(s) of the EUT are connected to the measurement instrument per an appropriate attenuator. The EUT is controlled by PC/software to emit the specified signals for the purpose of measurements.

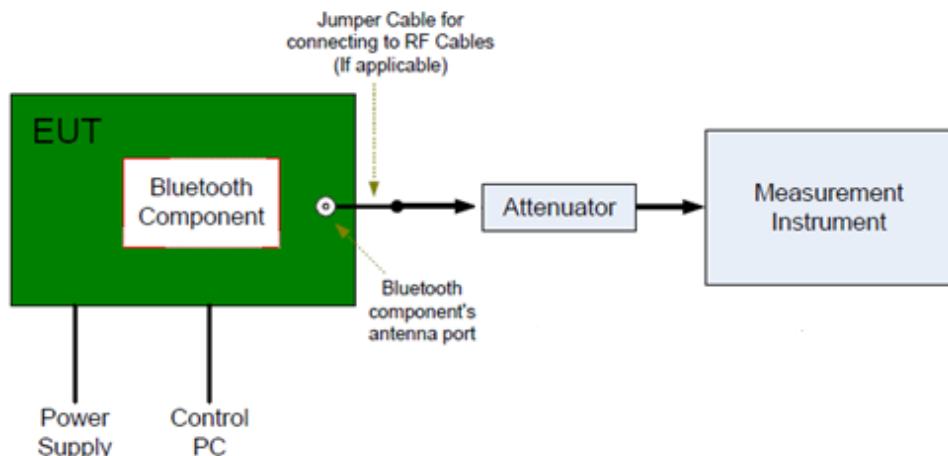

#### Limits:

According to §15.247 (b) (3), conducted output power limit as below:

Frequency Range MHz	Limit W	Limit dBm
2400-2483.5	$\leq 1$	$\leq 30$

According to RSS-247 5.4 (d), e.i.r.p limit as below:

Frequency Range MHz	Limit W	Limit dBm
2400-2483.5	$\leq 4$	$\leq 36$

**Test Result: Pass**

### 3.3 6dB bandwidth


#### Test Method:

The test method was referred to the subclause 11.8 of ANSI C63.10-2013.

1. Connect EUT test port to spectrum analyzer.
2. Set the EUT to transmit maximum output power at 2.4GHz.
3. Then set the EUT to transmit at high, middle and low frequency and measure the conducted output power separately.
4. RBW=100K, VBW $\geq$ 3RBW, Sweep = auto, Detector function = peak, Trace = max hold
5. Use the automatic bandwidth measurement capability of an instrument, may be employed using the X dB bandwidth mode with X set to 6 dB, care shall be taken so that the bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that might be  $\geq$  6 dB.
6. Allow the trace to stabilize, record the X dB Bandwidth value.

#### Test Setup:

The Bluetooth component's antenna port(s) of the EUT are connected to the measurement instrument per an appropriate attenuator. The EUT is controlled by PC/software to emit the specified signals for the purpose of measurements.

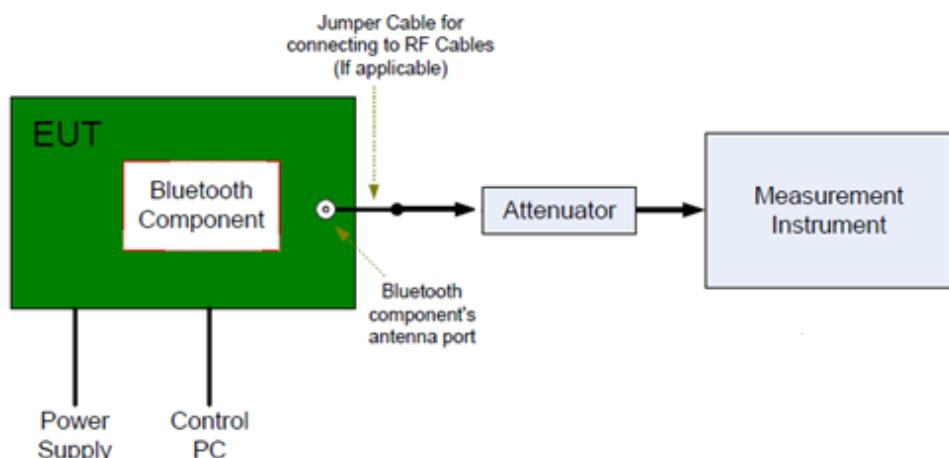

#### Limit:

According to §15.247(a)(2)/RSS-247 5.2 (a), 6dB bandwidth limit as below:

#### Limit [kHz]

$\geq 500$

#### Test Result: Pass

### 3.4 99% bandwidth


#### Test Method:

The test method was referred to the subclause 6.9.3 of ANSI C63.10-2013.

1. Connect EUT test port to spectrum analyzer.
2. Set the EUT to transmit maximum output power at 2.4GHz.
3. Then set the EUT to transmit at high, middle and low frequency separately.
4. Set Span = approximately 1.5 to 5 times the 99% bandwidth.
5. Set RBW  $\geq$  1% to 5% of the 99% bandwidth, VBW  $\geq$  RBW.
6. Set Sweep = auto.
7. Set Detector function = peak.
8. Allow the trace to stabilize.
9. Repeat above procedures until all frequencies measured were complete.

#### Test Setup:

The Bluetooth component's antenna port(s) of the EUT are connected to the measurement instrument per an appropriate attenuator. The EUT is controlled by PC/software to emit the specified signals for the purpose of measurements.

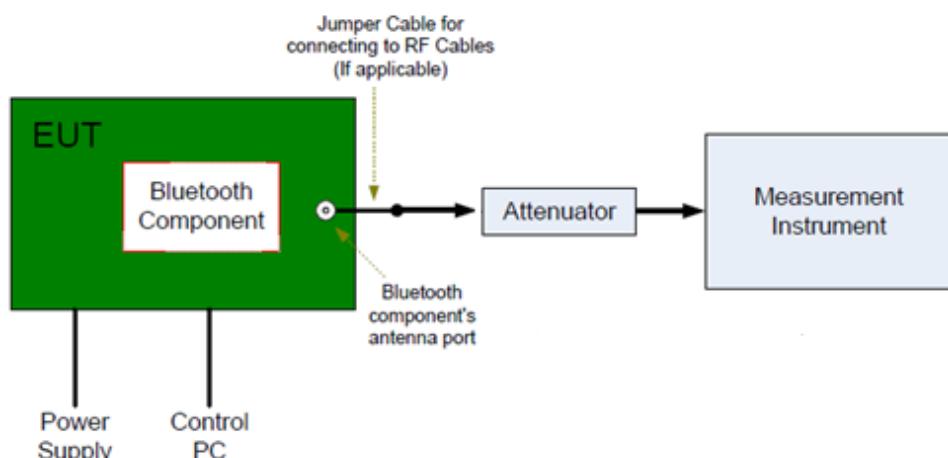

#### Limit:

According to RSS-GEN 6.7, no limit for 99% bandwidth:

Limit [kHz]

--

**Test Result: Pass**

### 3.5 Power spectral density


#### Test Method:

The test method was referred to the subclause 11.10 of ANSI C63.10-2013.

1. Connect EUT test port to spectrum analyzer.
2. Set the EUT to transmit maximum output power at 2.4GHz.
3. Then set the EUT to transmit at high, middle and low frequency separately.
4. Set analyzer center frequency to DTS channel center frequency.
5. Set the span to 1.5DTS bandwidth, set the RBW to:  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ , set the VBW  $\geq 3\text{RBW}$ .
6. Detector = peak.
7. Sweep time = auto couple.
8. Trace mode = max hold.
9. Allow trace to fully stabilize.
10. Use the peak marker function to determine the maximum amplitude level within the RBW.
11. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

#### Test Setup:

The Bluetooth component's antenna port(s) of the EUT are connected to the measurement instrument per an appropriate attenuator. The EUT is controlled by PC/software to emit the specified signals for the purpose of measurements.

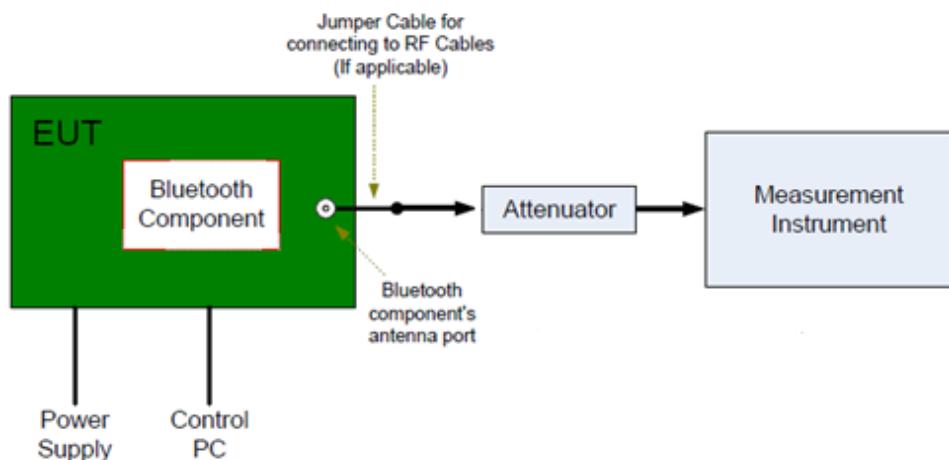

#### Limit:

According to §15.247(e)/RSS-247 5.2 (b), Power spectral density limit as below:

Limit [dBm]

$\leq 8$

**Test Result: Pass**

### 3.6 Spurious RF conducted emissions


#### Test Method:

The test method was referred to the subclause 11.11/11.12 of ANSI C63.10-2013.

1. Connect EUT test port to spectrum analyzer.
2. Set the EUT to transmit maximum output power at 2.4GHz.
3. Then set the EUT to transmit at high, middle and low frequency separately.
4. Set Span = wide enough to capture the peak level of the emission operating on the channel closest to the band edge, as well as any modulation products which fall outside of the authorized band of operation.
5. Set RBW = 100 kHz, VBW  $\geq$  RBW.
6. Set Sweep = auto.
7. Set Detector function = peak.
8. Allow the trace to stabilize.
9. Repeat above procedures until all frequencies measured were complete.

#### Test Setup:

The Bluetooth component's antenna port(s) of the EUT are connected to the measurement instrument per an appropriate attenuator. The EUT is controlled by PC/software to emit the specified signals for the purpose of measurements.

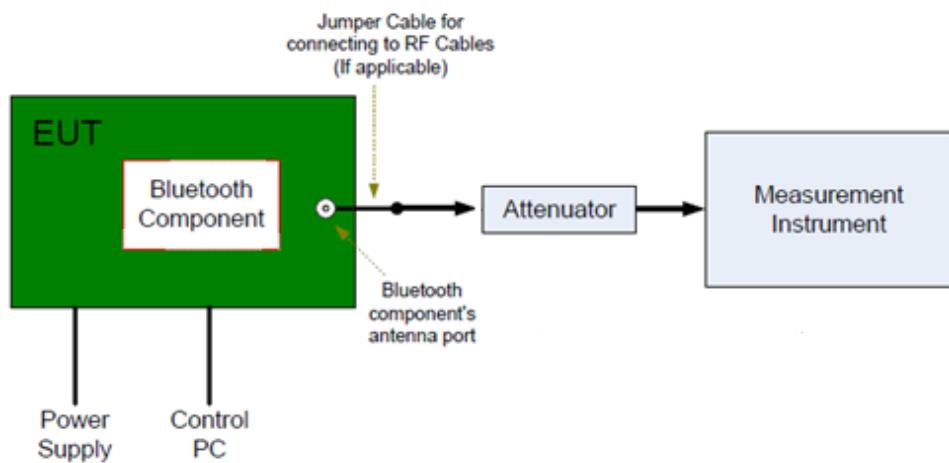

#### Limit:

According to §15.247(d) & §15.209 & §15.205, RSS-247 Clause 5.5 & RSS-GEN 6.13, RSS-GEN 8.9, RSS-GEN 8.10, Spurious RF conducted emissions limit as below:

Frequency Range MHz	L edimit (dBc)
30-25000	-20

**Test Result: Pass**

### 3.7 Band edge


#### Test Method:

The test method was referred to the subclause 11.13.3.4 of ANSI C63.10-2013.

1. Connect EUT test port to spectrum analyzer.
2. Set the EUT to transmit maximum output power at 2.4GHz.
3. Then set the EUT to transmit at high, middle and low frequency separately.
4. Set Span = wide enough to capture the peak level of the emission operating on the channel closest to the band edge, as well as any modulation products which fall outside of the authorized band of operation.
5. Set RBW  $\geq$  1% of the span, VBW  $\geq$  RBW.
6. Set Sweep = auto.
7. Set Detector function = peak.
8. Allow the trace to stabilize.
9. Repeat above procedures until all frequencies measured were complete.

#### Test Setup:

The Bluetooth component's antenna port(s) of the EUT are connected to the measurement instrument per an appropriate attenuator. The EUT is controlled by PC/software to emit the specified signals for the purpose of measurements.

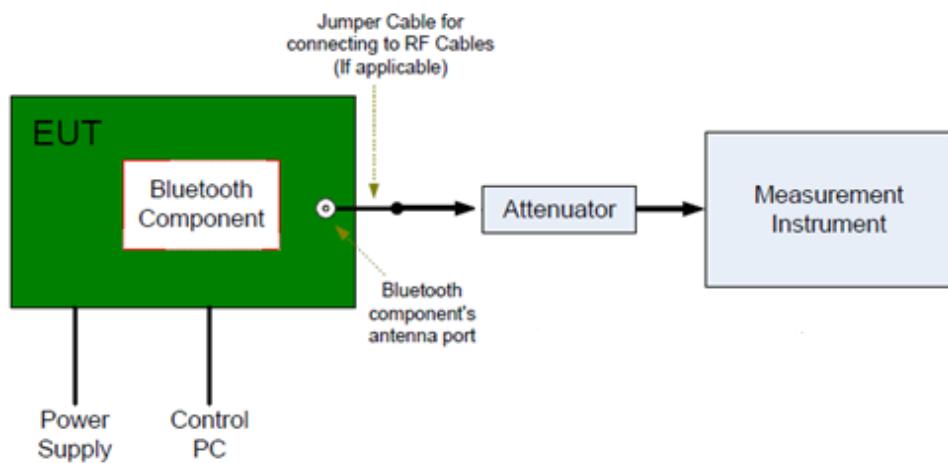

#### Limit:

According to RSS-247 5.5, In any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits.

**Test Result: Pass**

### 3.8 Spurious radiated emissions for transmitter

#### Test Method:

The test method was referred to the subclause 11.11/11.12 of ANSI C63.10-2013.

- 1: The EUT was placed on a turn table which is 1.5m above ground plane for above 1GHz and 0.8m above ground for below 1GHz at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- 2: The EUT was set 3 meters away from the interference – receiving antenna, which was mounted on the top of a variable – height antenna tower.
- 3: The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- 4: For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- 5: Use the following spectrum analyzer settings According to C63.10:

For Above 1GHz

Span = wide enough to capture the peak level of the in-band emission and all spurious  
RBW = 1MHz, VBW $\geq$ RBW for peak measurement and VBW = 10Hz for average measurement, Sweep = auto, Detector function = peak, Trace = max hold.

For Below 1GHz

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious  
RBW = 100 KHz, VBW $\geq$ RBW for peak measurement, Sweep = auto, Detector function = peak, Trace = max hold.

For Below 30MHz

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious  
RBW = 200 Hz, VBW $\geq$ RBW from 9KHz to 0.15MHz, RBW 9KHz VBW $\geq$ RBW from 0.15MHz to 30MHz for peak measurement, Sweep = auto, Detector function = peak, Trace = max hold.


#### Note:

- 1: The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 KHz for Quasi-peak detection (QP) at frequency below 1GHz.
- 2: The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 3MHz for peak detection (PK) at frequency above 1GHz.
- 3: The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 3MHz for RMS Average ((duty cycle < 98%) for Average detection (AV) at frequency above 1GHz, then the measurement results was added to a correction factor (20log(1/duty cycle)).
- 4: The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz (duty cycle > 98%) for Average detection (AV) at frequency above 1GHz.
- 5: When duty cycle <98%, The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is VBW  $\geq$  1 / T, the T is transmission duration (T).

#### Test Setup:


##### Test Setup 1: Radiated Emission test below 30MHz

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB according to the standards: ANSI C63.4. The test distance is 3m. The setup is according to ANSI C63.4.

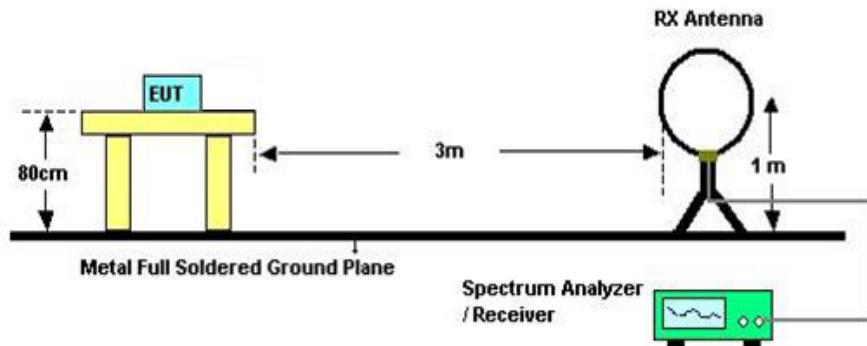


### Test Setup 2: Radiated Emission test below 1GHz

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB according to the standards: ANSI C63.4. The test distance is 3m. The setup is according to ANSI C63.4.

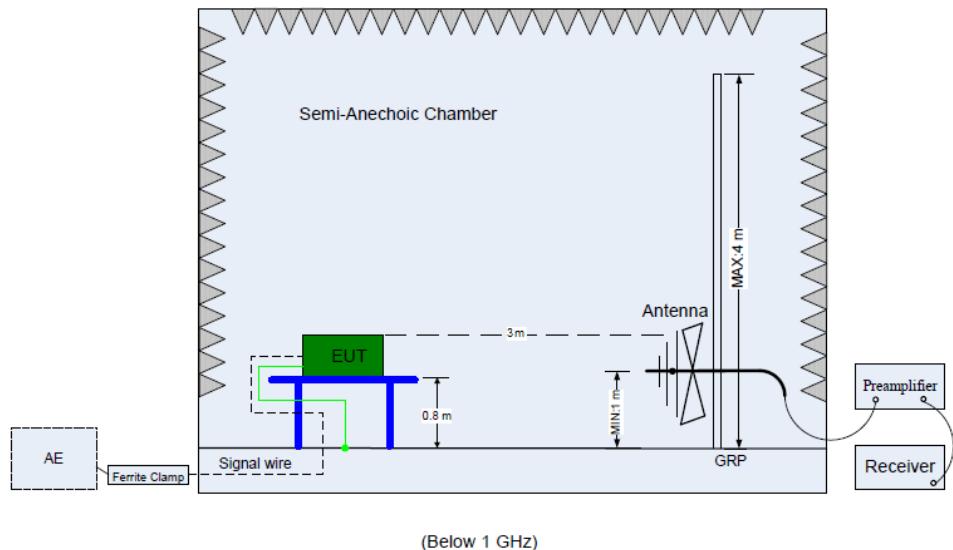

### Test Setup 3: Radiated Emission test above 1GHz

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB according to the standards: ANSI C63.4. The test distance is 3m. The setup is according to ANSI C63.4.

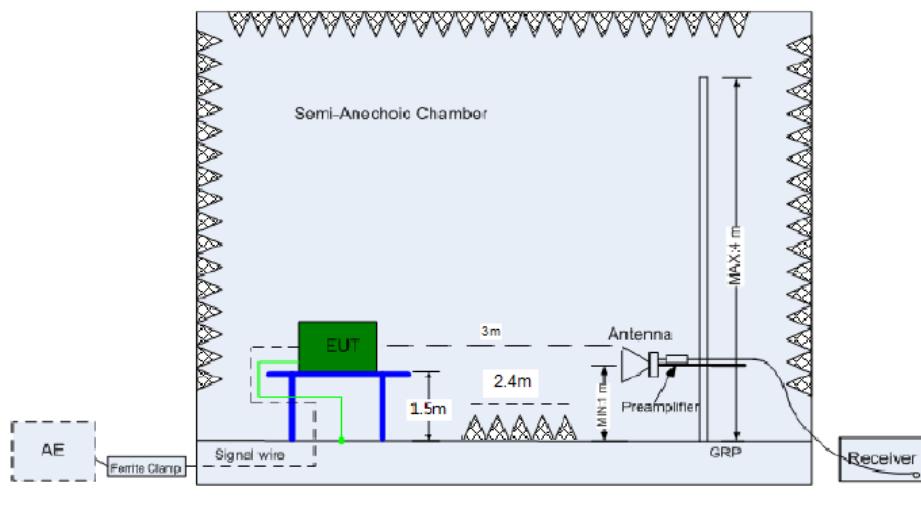

(Above 1 GHz)

#### Limit:

Radiated emissions which fall in the restricted bands, as defined in section 15.205, must comply with the radiated emission limits specified in section 15.209.

#### § 15.209/ RSS-GEN 8.9

Frequency MHz	Field Strength uV/m	Field Strength dB $\mu$ V/m	Detector
30-88	100	40	QP
88-216	150	43.5	QP
216-960	200	46	QP
960-1000	500	54	QP
Above 1000	500	54	AV
Above 1000	5000	74	PK

**§15.205 Restricted bands of operation**

<b>MHz</b>	<b>MHz</b>	<b>MHz</b>	<b>GHz</b>
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
10.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	( <sup>2</sup> )
13.36-13.41			

**RSS-GEN 8.10**


<b>MHz</b>	<b>MHz</b>	<b>MHz</b>	<b>GHz</b>
0.090 - 0.110	16.42 - 16.423	1660 - 1710	9.0 - 9.2
0.495 - 0.505	16.69475 - 16.69525	1718.8 - 1722.2	9.3 - 9.5
2.1735 - 2.1905	25.5 - 25.67	2200 - 2300	10.6 - 12.7
3.020 - 3.026	37.5 - 38.25	2310 - 2390	13.25 - 13.4
4.125 - 4.128	73 - 74.6	2483.5 - 2500	14.47 - 14.5
4.17725 - 4.17775	74.8 - 75.2	2655 - 2900	15.35 - 16.2
.20725 - 4.20775	108 - 138	3260 - 3267	17.7 - 21.4
5.677 - 5.683	149.9 - 150.05	3332 - 3339	22.01 - 23.12
6.215 - 6.218	156.52475 - 156.52525	3345.8 - 3358	23.6 - 24.0
6.26775 - 6.26825	156.7 - 156.9	3500 - 4400	31.2 - 31.8
6.31175 - 6.31225	162.0125 - 167.17	4500 - 5150	36.43 - 36.5
8.291 - 8.294	167.72 - 173.2	5350 - 5460	Above 38.6
8.362 - 8.366	240 - 285	7250 - 7750	
8.37625 - 8.38675	322 - 335.4	8025 - 8500	
8.41425 - 8.41475	399.9 - 410		
12.29 - 12.293	608 - 614		
12.51975 - 12.52025	960 - 1427		
12.57675 - 12.57725	1435 - 1626.5		
13.36 - 13.41	1645.5 - 1646.5		

**Test Result: Pass**


### Spurious radiated emissions (Radiated)

According to C63.10, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement, so AV emission value did not show in below table if the peak value complies with average limit.

### GFSK Modulation 2402MHz Test Result

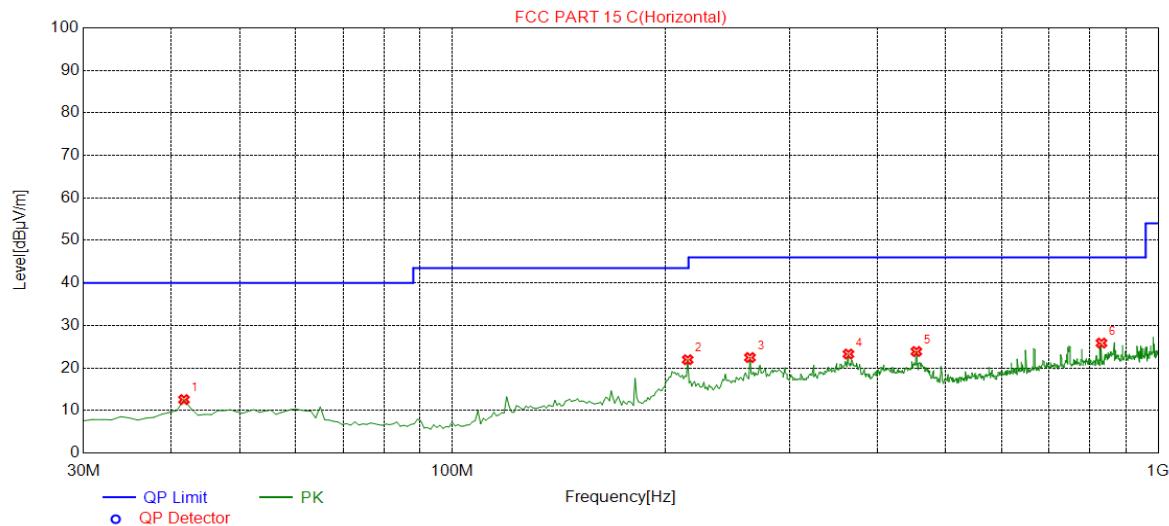


Freq. [MHz]	Level [dB $\mu$ V/m]	Factor [dB]	Limit [dB $\mu$ V/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
41.6517	12.57	-16.34	40.00	27.43	100	33	Horizontal
215.455	21.95	-18.04	43.50	21.55	100	110	Horizontal
264.004	22.46	-16.75	46.00	23.54	100	219	Horizontal
364.014	23.28	-14.71	46.00	22.72	100	341	Horizontal
454.314	23.88	-12.59	46.00	22.12	100	91	Horizontal
831.051	25.86	-6.46	46.00	20.14	100	144	Horizontal

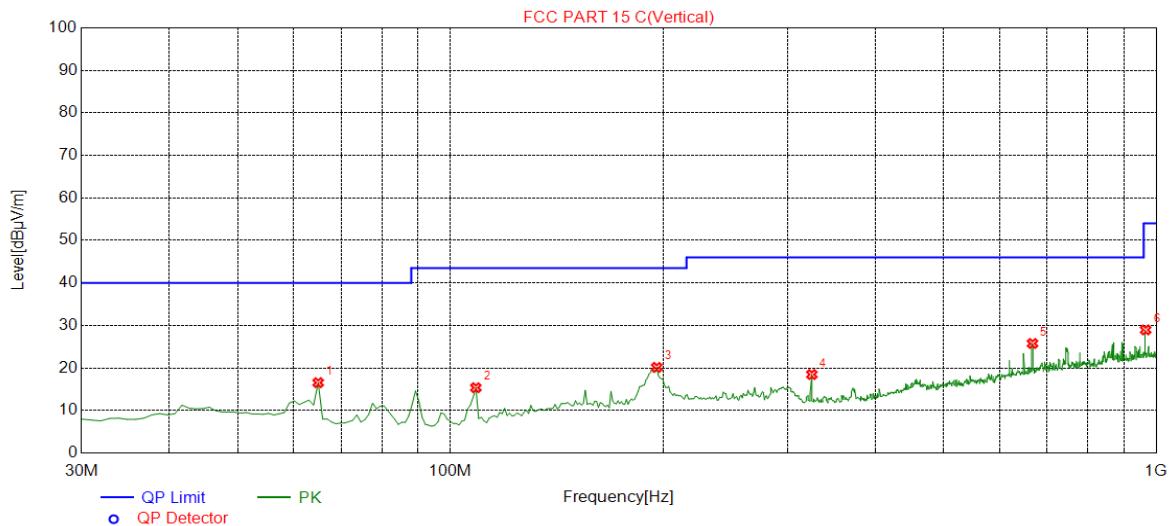


Freq. [MHz]	Level [dB $\mu$ V/m]	Factor [dB]	Limit [dB $\mu$ V/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
64.9550	16.55	-17.74	40.00	23.45	100	163	Vertical
108.648	15.37	-19.54	43.50	28.13	100	50	Vertical
196.036	20.14	-18.00	43.50	23.36	100	236	Vertical
325.175	18.47	-15.08	46.00	27.53	100	192	Vertical
667.927	25.76	-8.53	46.00	20.24	100	32	Vertical
966.016	28.96	-4.92	54.00	25.04	100	79	Vertical

Frequency Band	Frequency	Emission Level	Polarization	Limit	Detector	Margin	Corr.	Result
	MHz	dB $\mu$ V/m		dB $\mu$ V/m		dB	(dB)	
1000-25000MHz	4800.9005	51.86	H	74.00	PK	22.14	-14.79	Pass
	4800.9005	41.10	H	54.00	AV	12.90	-14.79	Pass
	4800.9005	50.11	V	74.00	PK	23.89	-14.79	Pass
	--	--	V	--	AV	--	--	Pass

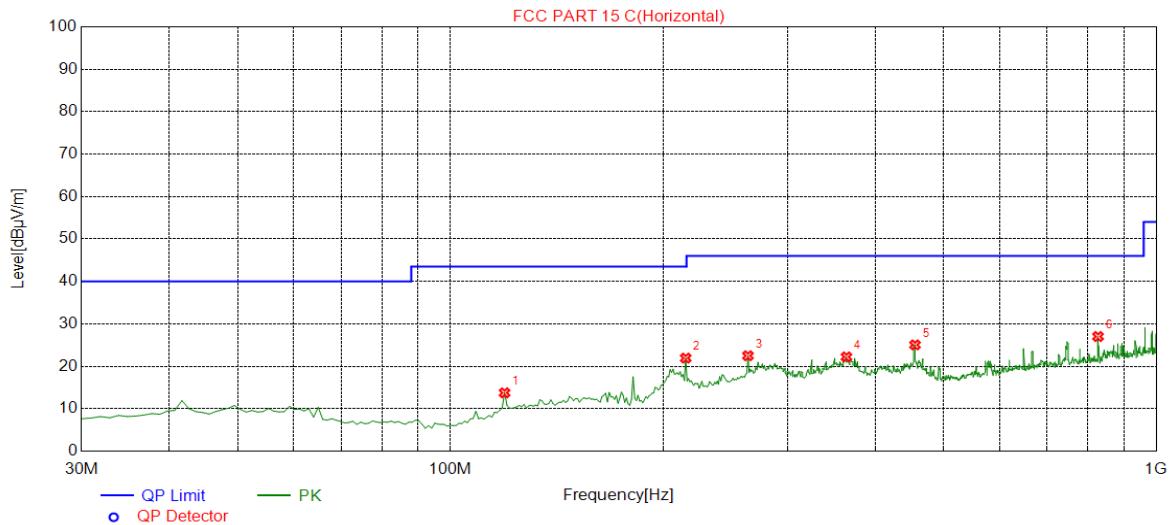
**GFSK Modulation 2440MHz Test Result**


Freq. [MHz]	Level [dB $\mu$ V/m]	Factor [dB]	Limit [dB $\mu$ V/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
119.329	13.75	-18.33	43.50	29.75	100	121	Horizontal
215.455	21.94	-18.04	43.50	21.56	100	118	Horizontal
264.004	22.49	-16.75	46.00	23.51	100	260	Horizontal
364.014	22.22	-14.71	46.00	23.78	100	166	Horizontal
455.285	25.05	-12.58	46.00	20.95	100	82	Horizontal
827.167	27.02	-6.47	46.00	18.98	100	260	Horizontal

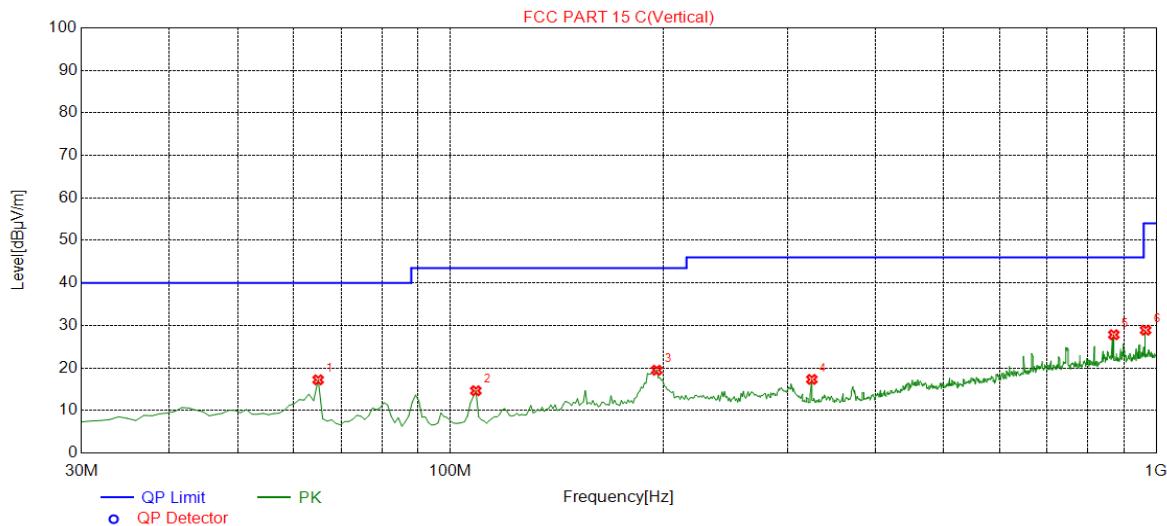


Freq. [MHz]	Level [dB $\mu$ V/m]	Factor [dB]	Limit [dB $\mu$ V/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
64.9550	17.22	-17.74	40.00	22.78	100	288	Vertical
108.648	14.65	-19.54	43.50	28.85	100	218	Vertical
196.036	19.47	-18.00	43.50	24.03	100	221	Vertical
325.175	17.32	-15.08	46.00	28.68	100	308	Vertical
870.860	27.82	-6.02	46.00	18.18	100	349	Vertical
966.016	28.89	-4.92	54.00	25.11	100	176	Vertical

Frequency Band	Frequency	Emission Level	Polarization	Limit	Detector	Margin	Corr.	Result
	MHz	dB $\mu$ V/m		dB $\mu$ V/m		dB	(dB)	
1000-25000MHz	8717.8589	50.13	H	74.00	PK	23.87	-11.01	Pass
	--	--	H	--	AV	--	--	Pass
	9475.7379	52.77	V	74.00	PK	21.23	-9.13	Pass
	--	--	V	--	AV	--	--	Pass

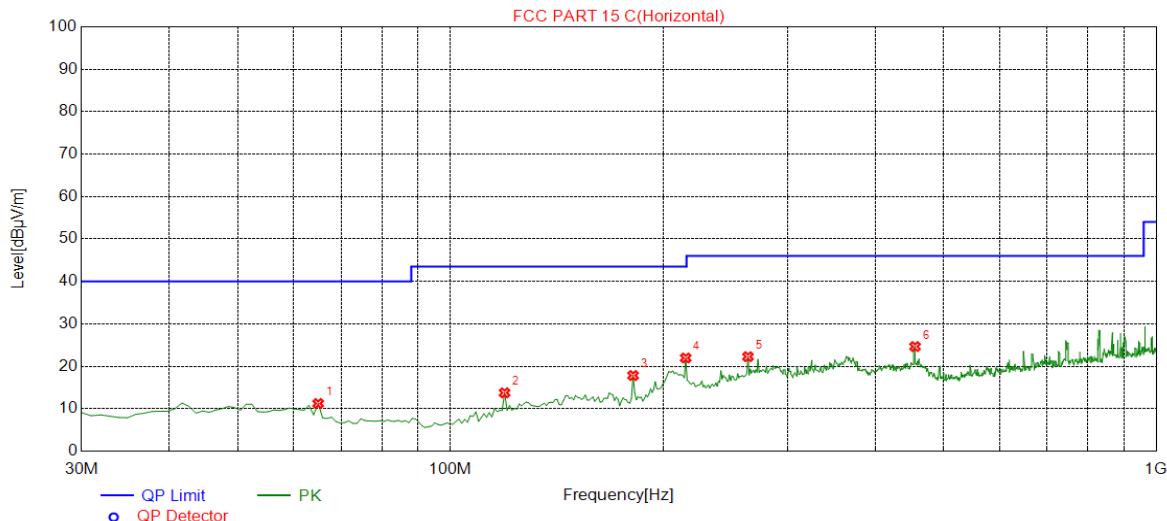**GFSK Modulation 2480MHz Test Result**


Freq. [MHz]	Level [dB $\mu$ V/m]	Factor [dB]	Limit [dB $\mu$ V/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
64.9550	11.23	-17.74	40.00	28.77	100	122	Horizontal
119.329	13.75	-18.33	43.50	29.75	100	129	Horizontal
181.471	17.83	-16.78	43.50	25.67	100	74	Horizontal
215.455	21.97	-18.04	43.50	21.53	100	124	Horizontal
264.004	22.27	-16.75	46.00	23.73	100	256	Horizontal
455.285	24.65	-12.58	46.00	21.35	100	120	Horizontal

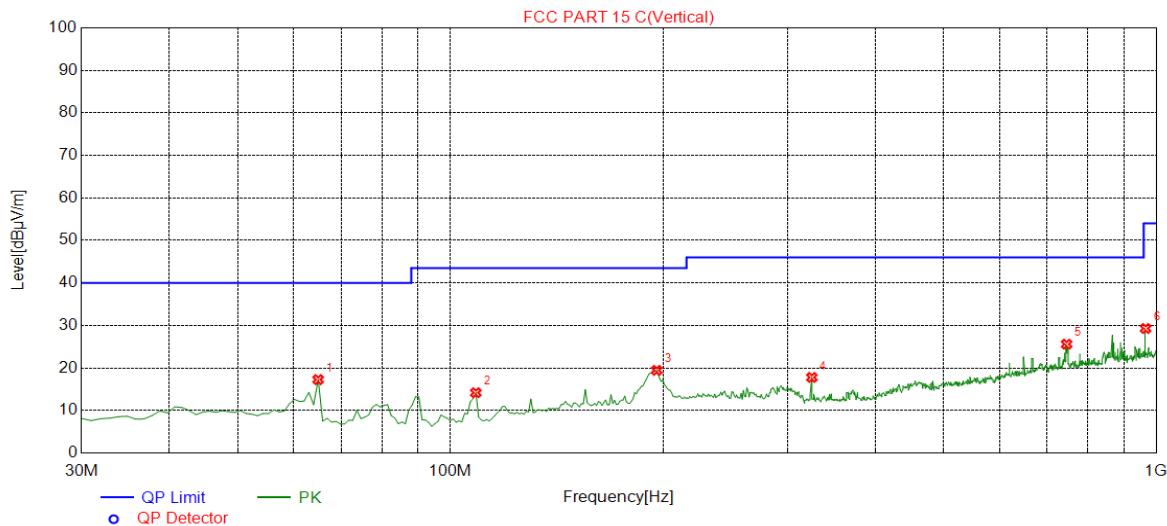

Freq. [MHz]	Level [dB $\mu$ V/m]	Factor [dB]	Limit [dB $\mu$ V/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
64.9550	17.27	-17.74	40.00	22.73	100	83	Vertical
108.648	14.18	-19.54	43.50	29.32	100	299	Vertical
196.036	19.45	-18.00	43.50	24.05	100	186	Vertical
325.175	17.78	-15.08	46.00	28.22	100	76	Vertical
746.576	25.60	-7.58	46.00	20.40	100	272	Vertical
966.016	29.29	-4.92	54.00	24.71	100	234	Vertical


Frequency Band	Frequency	Emission Level	Polarization	Limit	Detector	Margin	Corr.	Result
	MHz	dB $\mu$ V/m		dB $\mu$ V/m		dB	(dB)	
30-1000MHz	455.285	24.65	H	46.00	QP	21.35	-12.58	Pass
	746.5766	25.60	V	46.00	QP	20.40	-7.58	Pass
1000-25000MHz	4958.4792	50.74	H	74.00	PK	23.26	-14.58	Pass
	--	--	H	--	AV	--	--	Pass
	4958.4792	50.53	V	74.00	PK	23.47	-14.58	Pass
	--	--	V	--	AV	--	--	Pass

Remark:

- (1) "\*" means the emission(s) appear within the restrict bands shall follow the requirement of section 15.205.
- (2) Data of measurement within this frequency range shown "--" in the table above means the reading of emissions are the noise floor or attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Above 1GHz: Corrector factor = Antenna Factor + Cable Loss - Amplifier Gain.
- (4) Below 1GHz: Corrector factor = Antenna Factor + Cable Loss - Amplifier Gain.
- (5) Note: The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.


### Band Edge (Radiated)

#### GFSK Modulation 2402MHz Test Result

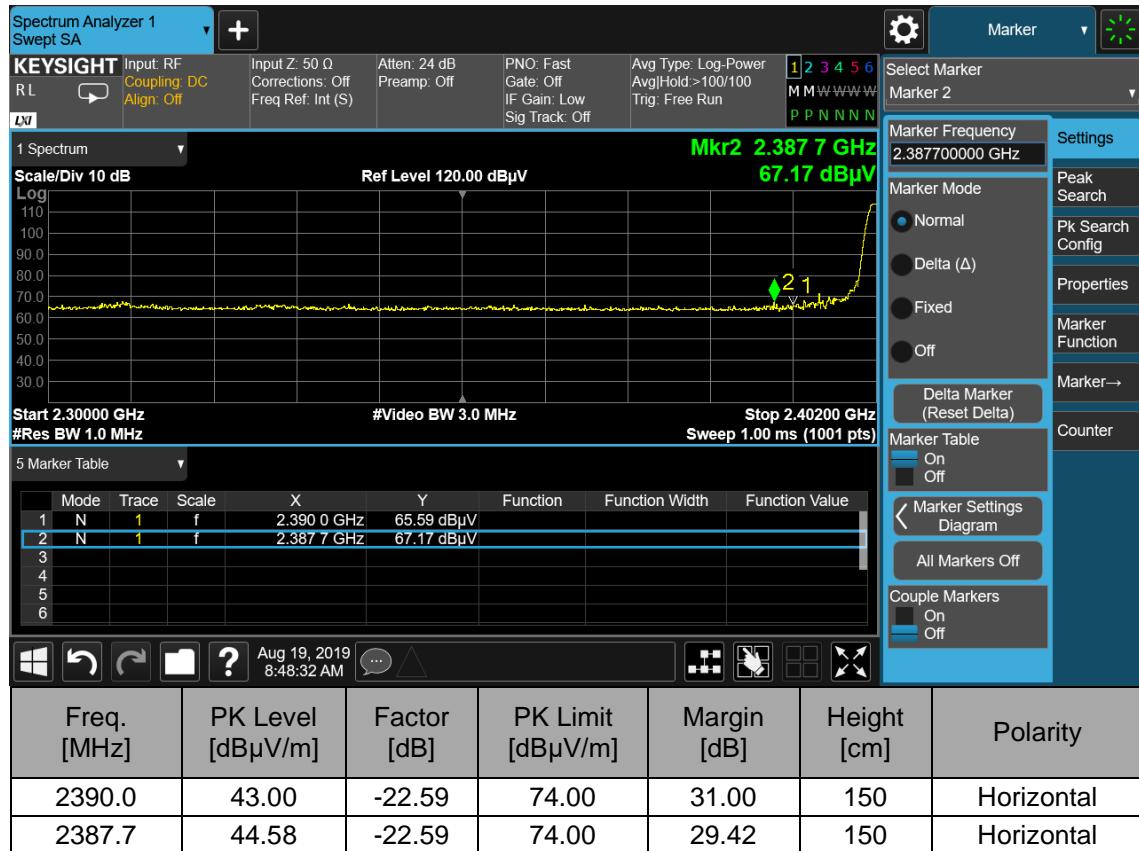


PK level= Read level + Factor

Factor= Antenna Factor + Cable loss – Preamp Factor

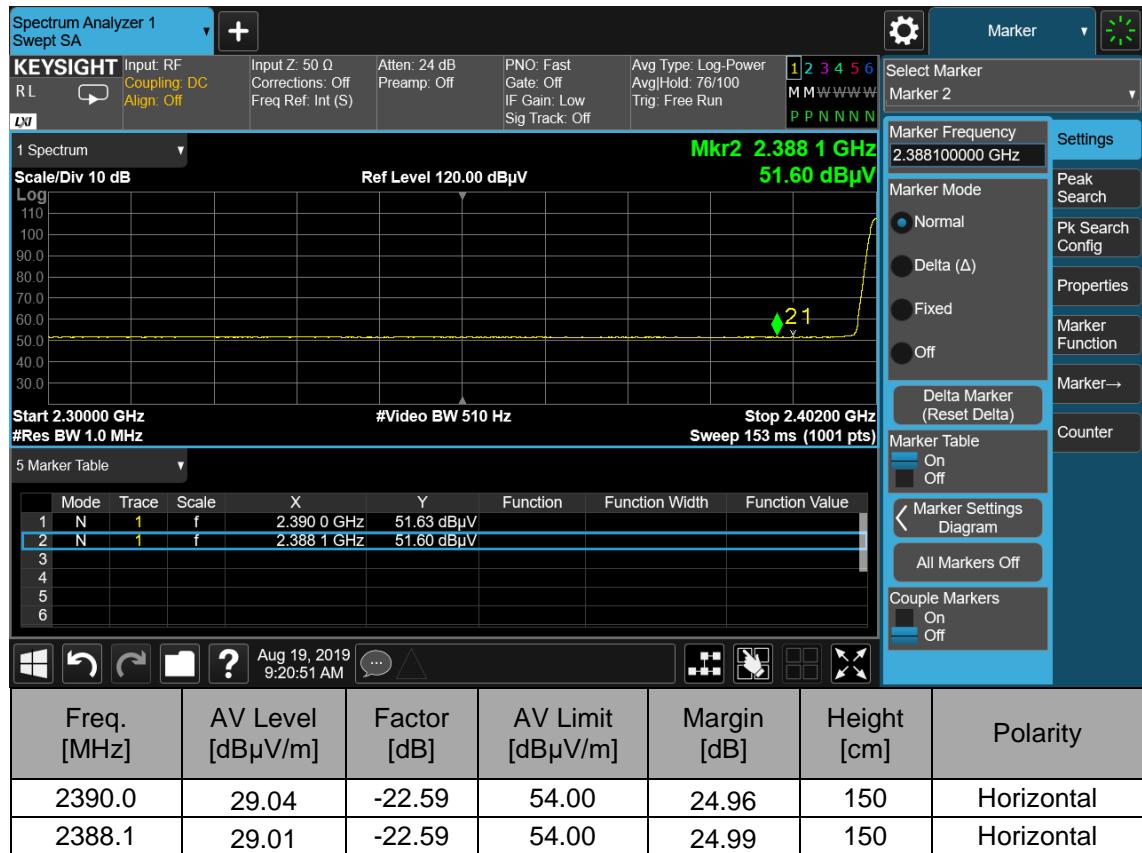

AV level= Read level + Factor

Factor= Antenna Factor + Cable loss – Preamp Factor

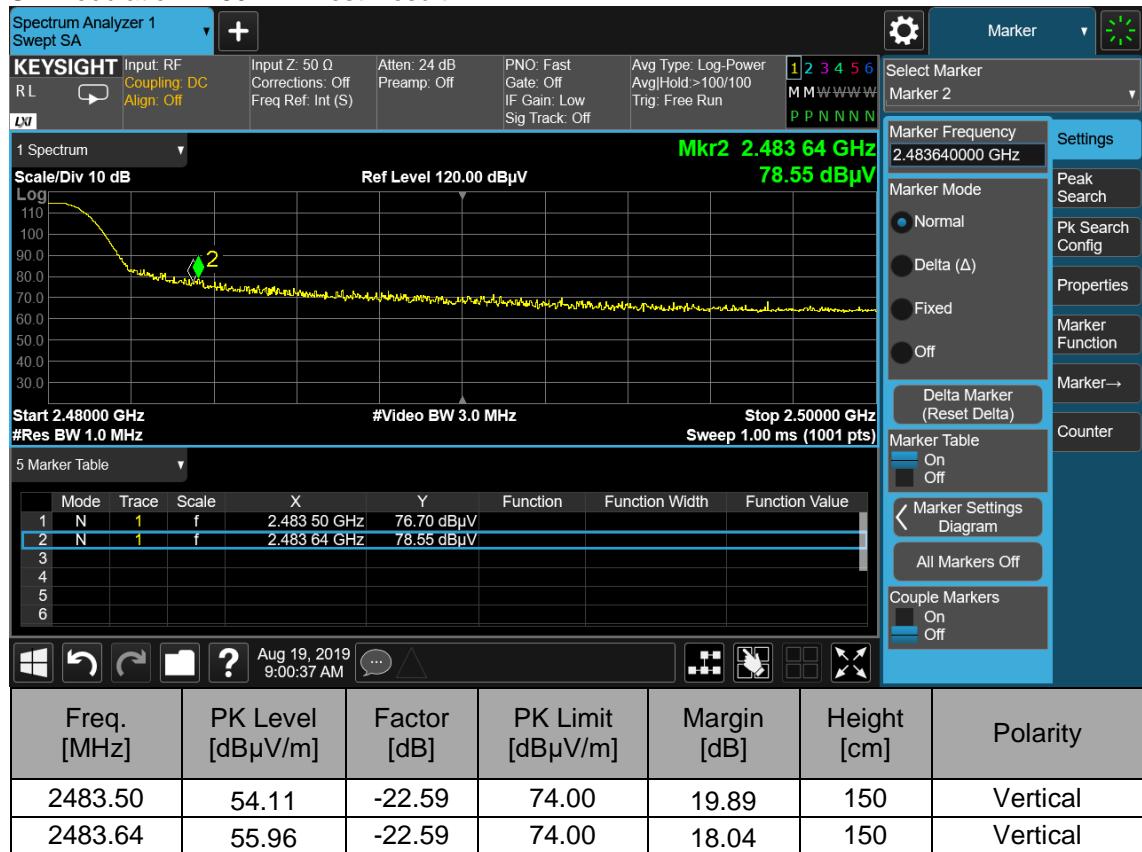**GFSK Modulation 2480MHz Test Result**


PK level= Read level + Factor

Factor= Antenna Factor + Cable loss – Preamp Factor



AV level= Read level + Factor

Factor= Antenna Factor + Cable loss – Preamp Factor