



MRT Technology(Suzhou) Co., Ltd  
Phone: +86-512-66308358  
Fax: +86-512-66308368  
Web: www.mrt-cert.com

Report No.: 1702RSU00101  
Report Version: V01  
Issue Date: 02-20-2017

## MEASUREMENT REPORT

### FCC PART 15.247 802.11b/g/n

**FCC ID:** 2AJ3WEBEQPZ04

**APPLICANT:** Hangzhou Ebaylamp Electronics Co.,Ltd.

**Application Type:** Certification

**Product:** SMART LED LAMP

**Model No.:** EBE-QPZ04

**FCC Classification:** Digital Transmission System (DTS)

**FCC Rule Part(s):** Part 15.247

**Test Procedure(s):** ANSI C63.10-2013, KDB 558074 D01v03r05

**Test Date:** February 3 ~ 20, 2017

Reviewed By : Robin Wu  
Manager

( Robin Wu )

Approved By : Marlin Chen  
CEO

( Marlin Chen )



The test results relate only to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in KDB 558074 D01v03r05. Test results reported herein relate only to the item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Suzhou) Co., Ltd.

## Revision History

Report No.	Version	Description	Issue Date	Note
17021RSU00101	Rev. 01	Initial report	02-20-2017	Valid

## CONTENTS

Description	Page
<b>§2.1033 General Information .....</b>	<b>5</b>
<b>1. INTRODUCTION .....</b>	<b>6</b>
1.1. Scope .....	6
1.2. MRT Test Location .....	6
<b>2. PRODUCT INFORMATION .....</b>	<b>7</b>
2.1. Equipment Description.....	7
2.2. Operation Frequency / Channel List .....	7
2.3. Test Mode .....	8
2.4. Test Software .....	8
2.5. Device Capabilities .....	9
2.6. Test Configuration .....	10
2.7. EMI Suppression Device(s)/Modifications.....	10
2.8. Labeling Requirements.....	10
<b>3. DESCRIPTION OF TEST .....</b>	<b>11</b>
3.1. Evaluation Procedure .....	11
3.2. AC Line Conducted Emissions .....	11
3.3. Radiated Emissions.....	12
<b>4. ANTENNA REQUIREMENTS.....</b>	<b>13</b>
<b>5. TEST EQUIPMENT CALIBRATION DATE .....</b>	<b>14</b>
<b>6. MEASUREMENT UNCERTAINTY.....</b>	<b>15</b>
<b>7. TEST RESULT .....</b>	<b>16</b>
7.1. Summary .....	16
7.2. 6dB Bandwidth Measurement.....	17
7.2.1. Test Limit .....	17
7.2.2. Test Procedure used.....	17
7.2.3. Test Setting.....	17
7.2.4. Test Setup.....	17
7.2.5. Test Result.....	18
7.3. Output Power Measurement.....	22
7.3.1. Test Limit .....	22
7.3.2. Test Procedure Used .....	22
7.3.3. Test Setting.....	22

---

7.3.4.	Test Setup.....	22
7.3.5.	Test Result of Output Power .....	23
7.3.6.	Test Result of Average Output Power (Reporting Only).....	26
7.4.	Power Spectral Density Measurement .....	27
7.4.1.	Test Limit .....	27
7.4.2.	Test Procedure Used .....	27
7.4.3.	Test Setting.....	27
7.4.4.	Test Setup.....	27
7.4.5.	Test Result.....	28
7.5.	Conducted Band Edge and Out-of-Band Emissions.....	32
7.5.1.	Test Limit .....	32
7.5.2.	Test Procedure Used .....	32
7.5.3.	Test Settinng .....	32
7.5.4.	Test Setup.....	33
7.5.5.	Test Result.....	34
7.6.	Radiated Spurious Emission Measurement .....	40
7.6.1.	Test Limit .....	40
7.6.2.	Test Procedure Used .....	40
7.6.3.	Test Setting.....	40
7.6.4.	Test Setup.....	42
7.6.5.	Test Result.....	44
7.7.	Radiated Restricted Band Edge Measurement .....	55
7.7.1.	Test Result.....	55
7.8.	AC Conducted Emissions Measurement.....	79
7.8.1.	Test Limit .....	79
7.8.2.	Test Setup.....	79
7.8.3.	Test Result.....	80
<b>8.</b>	<b>CONCLUSION.....</b>	<b>82</b>

## §2.1033 General Information

<b>Applicant:</b>	Hangzhou Eboylamp Electronics Co.,Ltd.
<b>Applicant Address:</b>	No.326Liangyun Street,Yuhang District,Hangzhou,Zhejiang
<b>Manufacturer:</b>	Hangzhou Eboylamp Electronics Co.,Ltd.
<b>Manufacturer Address:</b>	No.326Liangyun Street,Yuhang District,Hangzhou,Zhejiang
<b>Test Site:</b>	MRT Technology (Suzhou) Co., Ltd
<b>Test Site Address:</b>	D8 Building, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China
<b>MRT Registration No.:</b>	809388
<b>FCC Rule Part(s):</b>	Part 15.247
<b>FCC ID:</b>	2AJ3WEBEQPZ04
<b>Test Device Serial No.:</b>	N/A <input type="checkbox"/> Production <input checked="" type="checkbox"/> Pre-Production <input type="checkbox"/> Engineering
<b>FCC Classification:</b>	Digital Transmission System (DTS)

### Test Facility / Accreditations

Measurements were performed at MRT Laboratory located in Tian'edang Rd., Suzhou, China.

- MRT facility is a FCC registered (MRT Reg. No. 809388) test facility with the site description report on file and has met all the requirements specified in Section 2.948 of the FCC Rules.
- MRT facility is an IC registered (MRT Reg. No. 11384A-1) test laboratory with the site description on file at Industry Canada.
- MRT facility is a VCCI registered (R-4179, G-814, C-4664, T-2206) test laboratory with the site description on file at VCCI Council.
- MRT Lab is accredited to ISO 17025 by the American Association for Laboratory Accreditation (A2LA) under the American Association for Laboratory Accreditation Program (A2LA Cert. No. 3628.01) in EMC, Telecommunications and Radio testing for FCC, Industry Canada, EU and TELEC Rules.



## 1. INTRODUCTION

## 1.1. Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Industry Canada Certification and Engineering Bureau.

## **1.2. MRT Test Location**

The map below shows the location of the MRT LABORATORY, its proximity to the Taihu Lake. These measurement tests were conducted at the MRT Technology (Suzhou) Co., Ltd. Facility located at D8 Building, Youxin Industrial Park, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China. The detailed description of the measurement facility was found to be in compliance with the requirements of § 2.948 according to ANSI C63.4-2009 on September 30, 2013.



## 2. PRODUCT INFORMATION

### 2.1. Equipment Description

Product Name	SMART LED LAMP
Model No.	EBC-QPZ04
WLAN Specification	
Frequency Range	802.11b/g/n-HT20: 2412 ~ 2462 MHz
Maximum Peak Output Power	802.11b: 7.37dBm 802.11g: 18.77dBm 802.11n-HT20: 18.54dBm
Type of Modulation	802.11b: DSSS 802.11g/n: OFDM
Antenna Gain	3.0dBi

### 2.2. Operation Frequency / Channel List

802.11b/g/n-HT20

Channel	Frequency	Channel	Frequency	Channel	Frequency
01	2412 MHz	02	2417 MHz	03	2422 MHz
04	2427 MHz	05	2432 MHz	06	2437 MHz
07	2442 MHz	08	2447 MHz	09	2452 MHz
10	2457 MHz	11	2462 MHz	--	--

### 2.3. Test Mode

Test Mode	Mode 1: Transmit by 802.11b
	Mode 2: Transmit by 802.11g
	Mode 3: Transmit by 802.11n-HT20

### 2.4. Test Software

The test utility software used during testing was “SecureCRT”.


## 2.5. Device Capabilities

This device contains the following capabilities:

### 2.4GHz WLAN (DTS)

**Note:** 2.4GHz WLAN (DTS) operation is possible in 20MHz channel bandwidths. The maximum achievable duty cycle was determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

Test Mode	Duty Cycle
802.11b	88.6%
802.11g	57.0%
802.11n-HT20	55.6%

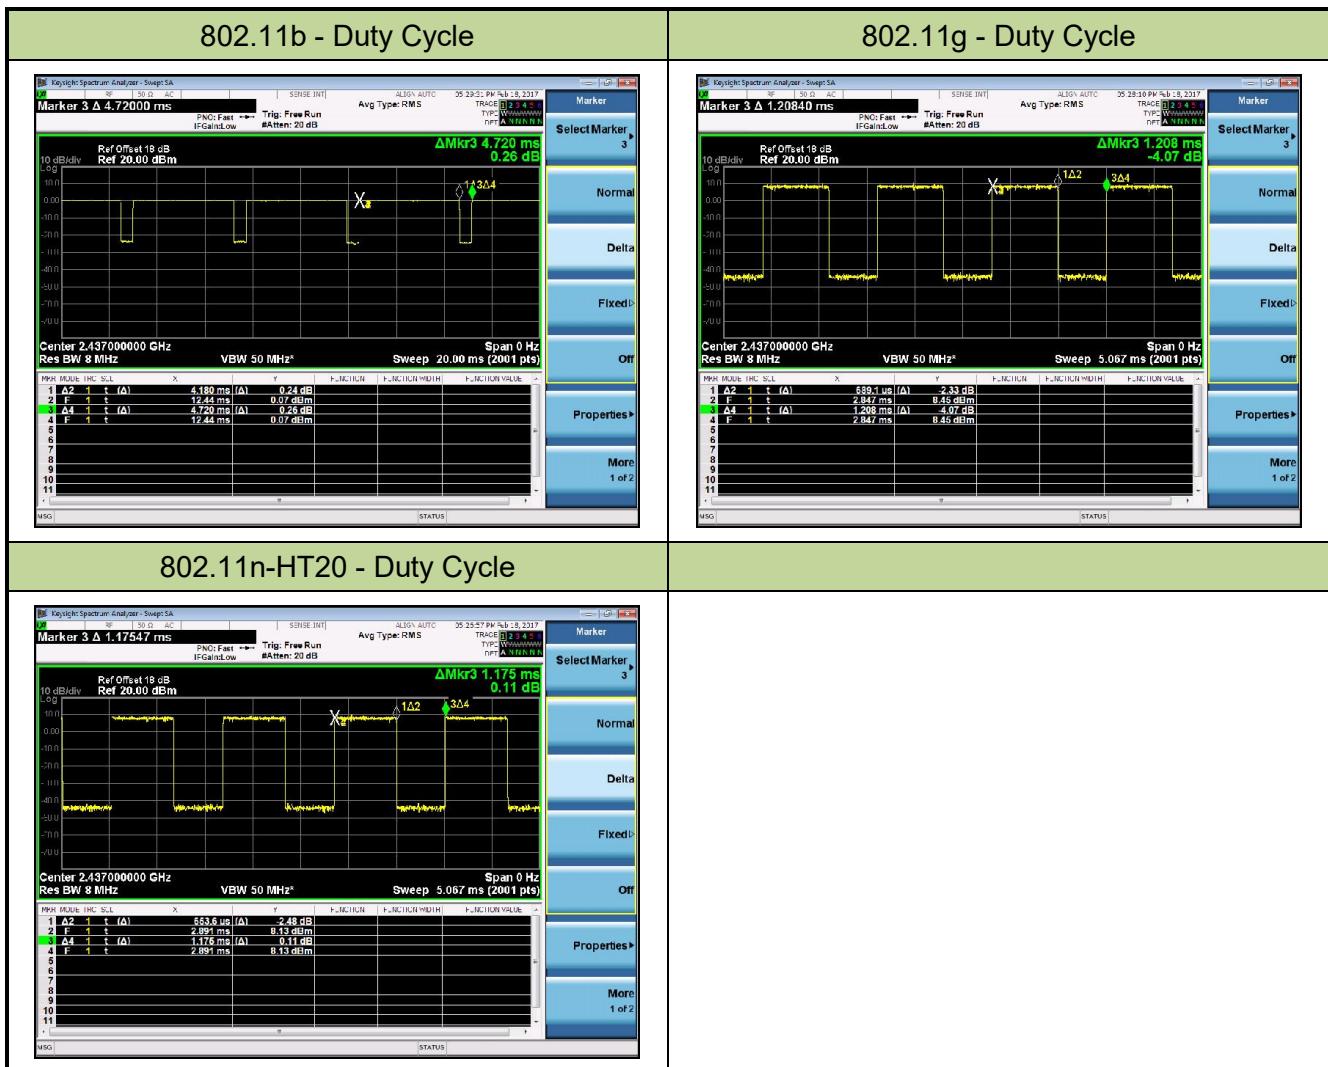

## 2.6. Test Configuration

The **SMART LED LAMP** was tested per the guidance of KDB 558074 D01v03r05. ANSI C63.10-2013 was used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing.

## 2.7. EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

## 2.8. Labeling Requirements

Per 2.1074 & 15.19; Docket 95-19

The label shall be permanently affixed at a conspicuous location on the device; instruction manual or pamphlet supplied to the user and be readily visible to the purchaser at the time of purchase. However, when the device is so small wherein placement of the label with specified statement is not practical, only the FCC ID must be displayed on the device per Section 15.19(a)(5). Please see attachment for FCC ID label and label location.

### 3. DESCRIPTION OF TEST

#### 3.1. Evaluation Procedure

The measurement procedures described in the American National Standard for Testing Unlicensed Wireless Devices (ANSI C63.10-2013), and the guidance provided in KDB 558074 D01v03r05 were used in the measurement of the **SMART LED LAMP**.

**Deviation from measurement procedure.....None**

#### 3.2. AC Line Conducted Emissions

The line-conducted facility is located inside an 8'x4'x4' shielded enclosure. A 1m x 2m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50uH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference ground-plane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the receiver and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The receiver was scanned from 150kHz to 30MHz. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 9kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Each emission was also maximized by varying: power lines, the mode of operation or data exchange speed, or support equipment whichever determined the worst-case emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions are used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

An extension cord was used to connect to a single LISN which powered by EUT. The extension cord was calibrated with LISN, the impedance and insertion loss are compliance with the requirements as stated in ANSI C63.10-2013.

Line conducted emissions test results are shown in Section 7.8.

### 3.3. Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. For measurements above 1GHz absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1GHz, the absorbers are removed. A MF Model 210SS turntable is used for radiated measurement. It is a continuously rotatable, remote controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm high PVC support structure is placed on top of the turntable.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33(b)(1) depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up for frequencies below 1GHz was placed on top of the 0.8 meter high, 1 x 1.5 meter table; and test set-up for frequencies 1-25GHz was placed on top of the 1.5 meter high, 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, clock speed, mode of operation or video resolution, if applicable, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions. According to 3dB Beam-Width of horn antenna, the horn antenna should be always directed to the EUT when rising height.

## 4. ANTENNA REQUIREMENTS

### Excerpt from §15.203 of the FCC Rules/Regulations:

"An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section."

- The antenna of the **SMART LED LAMP** is **permanently attached**.
- There are no provisions for connection to an external antenna.

### **Conclusion:**

The **SMART LED LAMP** FCC ID: **2AJ3WEBEQPZ04** unit complies with the requirement of §15.203.

## 5. TEST EQUIPMENT CALIBRATION DATE

Conducted Emissions - SR2

Instrument	Manufacturer	Type No.	Serial No.	Cali. Interval	Cali. Due Date
EMI Test Receiver	R&S	ESR7	101209	1 year	2017/06/21
Two-Line V-Network	R&S	ENV216	101683	1 year	2017/06/21
Two-Line V-Network	R&S	ENV216	101684	1 year	2017/06/21
Temperature/Humidity Meter	Yuhuaze	N/A	N/A	1 year	2017/12/20
Shielding Anechoic Chamber	MIX-BEP	Chamber-SR2	N/A	1 year	2017/05/10

Radiated Emission - AC1

Instrument	Manufacturer	Type No.	Serial No.	Cali. Interval	Cali. Due Date
EXA Signal Analyzer	Agilent	N9010A	MY56070124	1 year	2017/06/23
EMI Test Receiver	R&S	ESR7	101209	1 year	2017/06/21
Preamplifier	Agilent	83017A	MY52090106	1 year	2017/03/28
Broadband Coaxial Preamplifier	Schwarzbeck	BBV 9718	302	N/A	N/A
Loop Antenna	Schwarzbeck	FMZB1519	1519-041	1 year	2017/11/21
TRILOG Antenna	Schwarzbeck	VULB9162	9162-047	1 year	2017/10/22
Broad-Band Horn Antenna	Schwarzbeck	BBHA9120D	9120D-1167	1 year	2017/10/22
Broadband Horn Antenna	Schwarzbeck	BBHA9170	BBHA9170549	1 year	2017/01/04
Digital Thermometer & Hygrometer	Minggao	N/A	N/A	1 year	2017/12/14
Anechoic Chamber	RIKEN	Chamber-AC2	N/A	1 year	2017/05/10

Conducted Test Equipment - TR3

Instrument	Manufacturer	Type No.	Serial No.	Cali. Interval	Cali. Due Date
Spectrum Analyzer	Agilent	N9020A	MY52090106	1 year	2017/05/08
USB Wideband Power Sensor	Boonton	55006	8911	1 year	2017/05/08
Temperature/Humidity Meter	Yuhuaze	N/A	N/A	1 year	2017/12/20

Software	Version	Function
e3	V8.3.5	EMI Test Software

## 6. MEASUREMENT UNCERTAINTY

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k = 2$ .

AC Conducted Emission Measurement - SR2
Measuring Uncertainty for a Level of Confidence of 95% ( $U=2U_{c(y)}$ ): 150kHz~30MHz: 3.46dB
Radiated Emission Measurement – AC1
Measuring Uncertainty for a Level of Confidence of 95% ( $U=2U_{c(y)}$ ): 9kHz ~ 1GHz: 4.18dB 1GHz ~ 25GHz: 4.76dB
Spurious Emissions, Conducted - TR3
Measuring Uncertainty for a Level of Confidence of 95% ( $U=2U_{c(y)}$ ): 0.78dB
Output Power - TR3
Measuring Uncertainty for a Level of Confidence of 95% ( $U=2U_{c(y)}$ ): 1.13dB
Power Spectrum Density - TR3
Measuring Uncertainty for a Level of Confidence of 95% ( $U=2U_{c(y)}$ ): 1.15dB
Occupied Bandwidth - TR3
Measuring Uncertainty for a Level of Confidence of 95% ( $U=2U_{c(y)}$ ): 0.28%

## 7. TEST RESULT

### 7.1. Summary

**Company Name:** Hangzhou Ebolamp Electronics Co.,Ltd.  
**FCC ID:** 2AJ3WEBEQPZ04  
**FCC Classification:** Digital Transmission System (DTS)  
**Data Rate(s) Tested:** 1Mbps ~ 11Mbps (b); 6Mbps ~ 54Mbps (g);  
6.5/7.2Mbps ~ 65.0/72.2Mbps (n-HT20);

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
15.247(a)(2)	6dB Bandwidth	≥ 500kHz	Conducted	Pass	Section 7.2
15.247(b)(3)	Output Power	≤ 30dBm		Pass	Section 7.3
15.247(e)	Power Spectral Density	≤ 8dBm/3kHz		Pass	Section 7.4
15.247(d)	Band Edge / Out-of-Band Emissions	≥ 20dBc		Pass	Section 7.5
15.205 15.209	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet the radiated limits detailed in 15.209	Radiated	Pass	Section 7.6 & 7.7
15.207	AC Conducted Emissions 150kHz - 30MHz	< FCC 15.207 limits	Line Conducted	Pass	Section 7.8

#### Notes:

- 1) All modes of operation and data rates were investigated. For radiated emission test, every axis (X, Y, Z) was also verified. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables and attenuators.

## 7.2. 6dB Bandwidth Measurement

### 7.2.1. Test Limit

The minimum 6dB bandwidth shall be at least 500 kHz.


### 7.2.2. Test Procedure used

KDB 558074 D01v03r05 – Section 8.2 Option 2

### 7.2.3. Test Setting


1. The Spectrum's automatic bandwidth measurement capability was used to perform the 6dB bandwidth measurement. The "X" dB bandwidth parameter was set to X = 6. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. Set RBW = 100 kHz
3. VBW  $\geq 3 \times$  RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. Allow the trace was allowed to stabilize


### 7.2.4. Test Setup

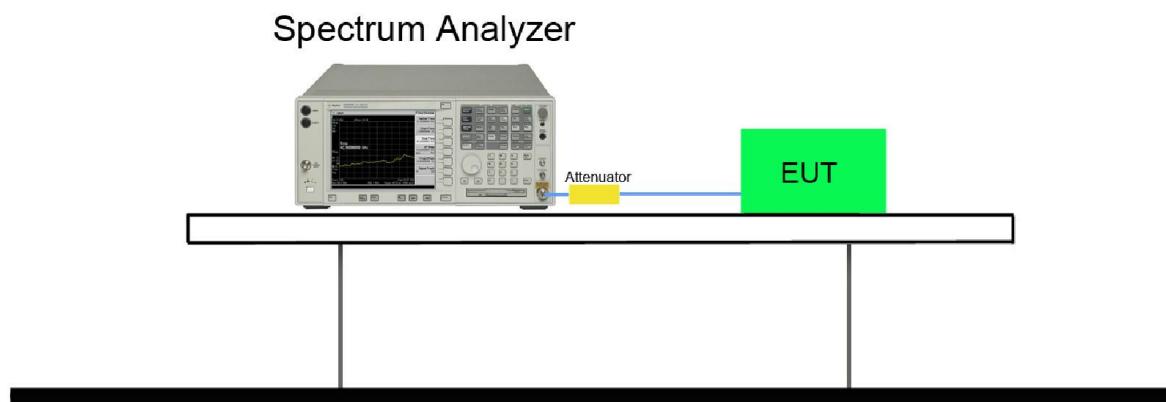


### 7.2.5. Test Result

Test Mode	Data Rate (Mbps)	Channel No.	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)	Result
802.11b	1	01	2412	8.14	≥0.5	Pass
802.11b	1	06	2437	8.13	≥0.5	Pass
802.11b	1	11	2462	8.14	≥0.5	Pass
802.11g	6	01	2412	16.39	≥0.5	Pass
802.11g	6	06	2437	14.40	≥0.5	Pass
802.11g	6	11	2462	16.38	≥0.5	Pass
802.11n-HT20	6.5	01	2412	17.62	≥0.5	Pass
802.11n-HT20	6.5	06	2437	17.62	≥0.5	Pass
802.11n-HT20	6.5	11	2462	17.64	≥0.5	Pass

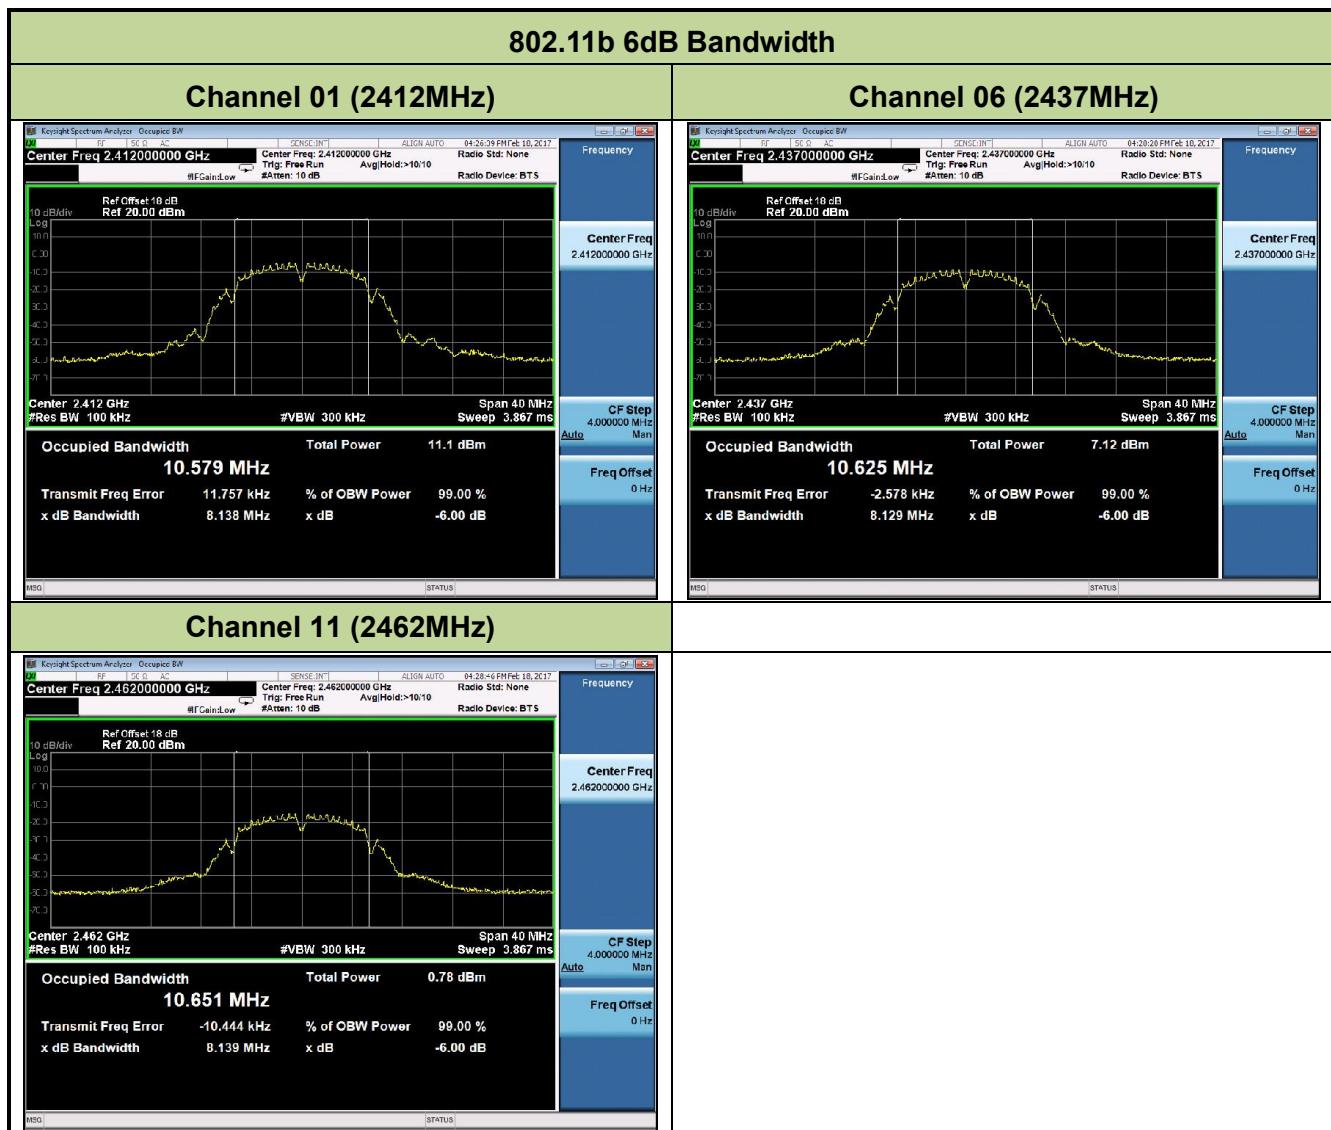

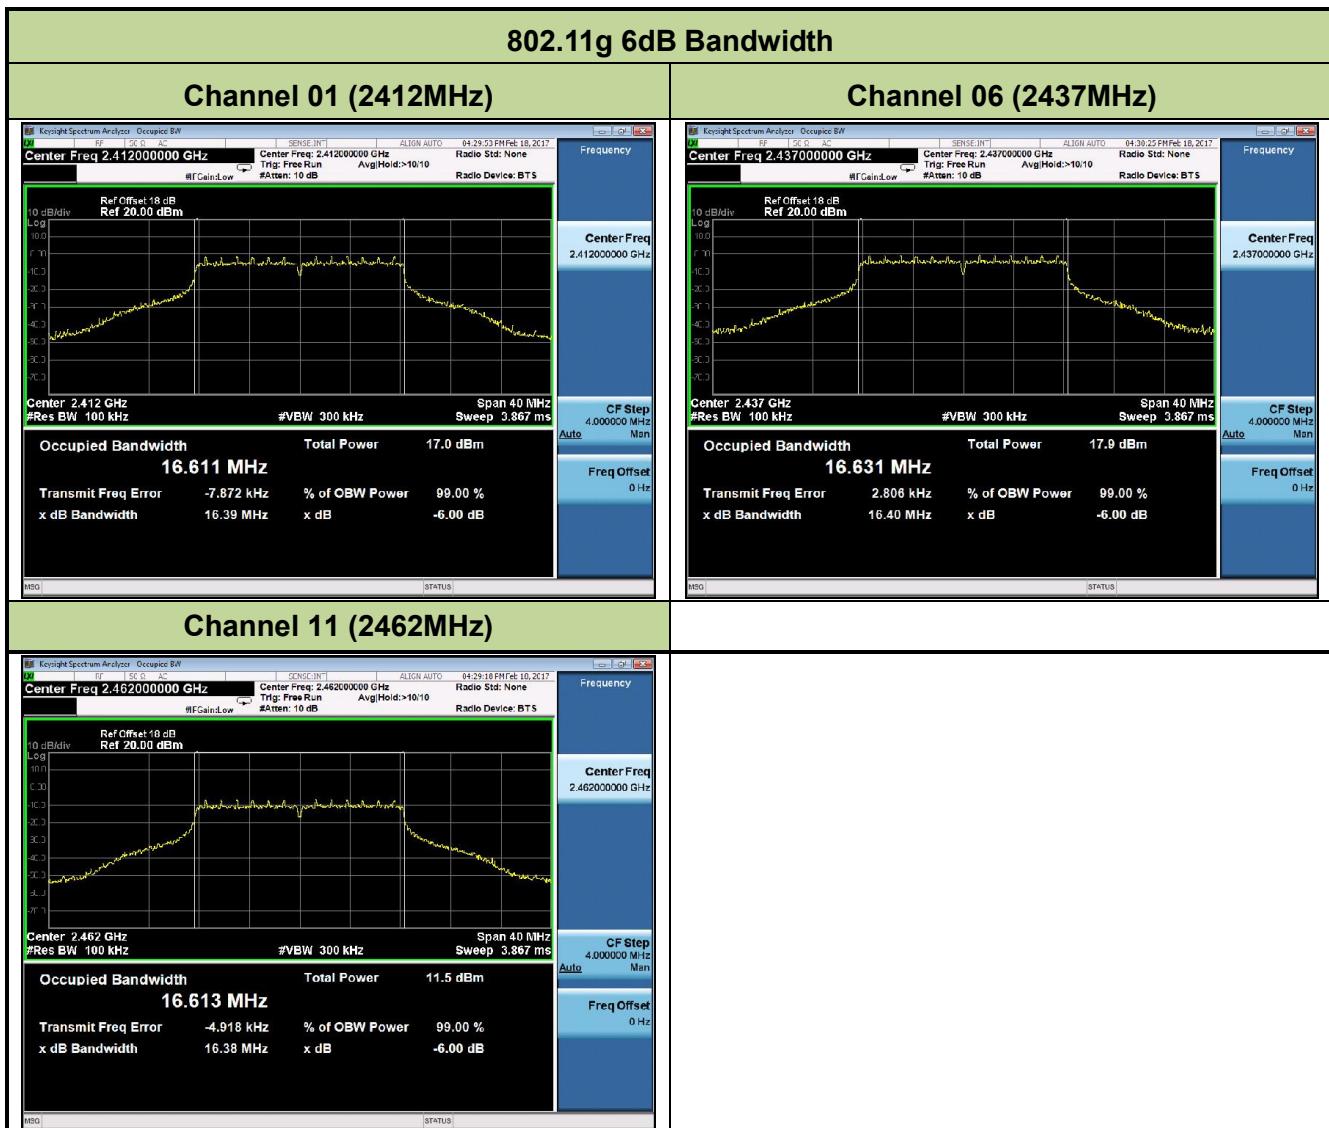

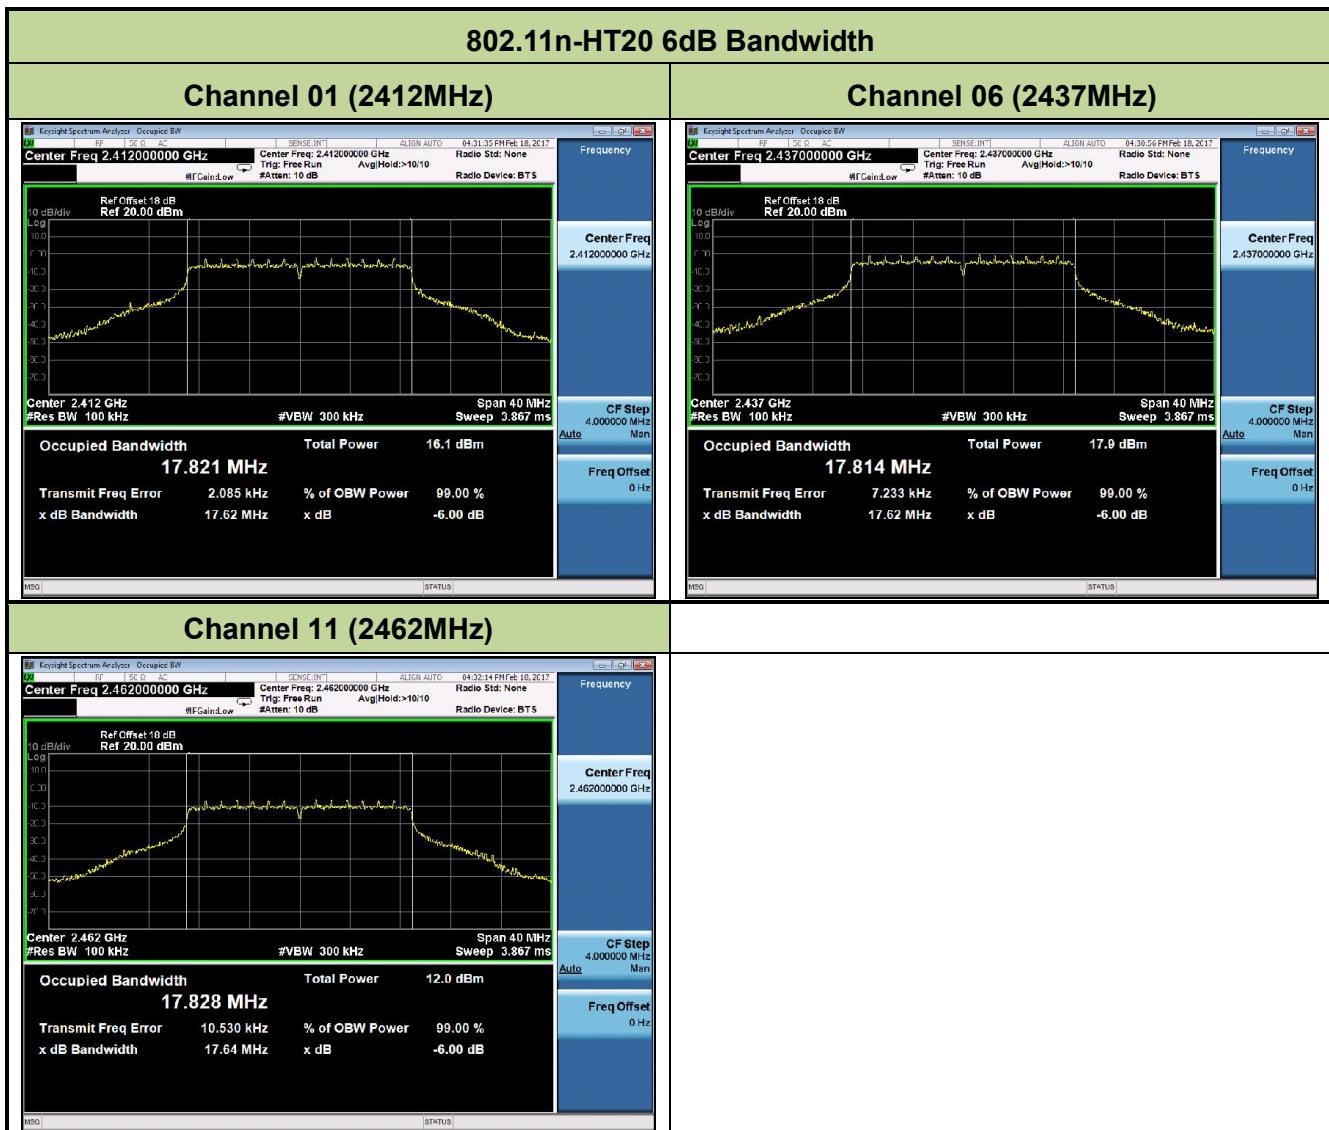

## 7.3. Output Power Measurement

### 7.3.1. Test Limit

The maximum output power shall be less 1 Watt (30dBm).

### 7.3.2. Test Procedure Used


KDB 558074 D01v03r05 - Section 9.1.2 PKPM1 Peak Power Method (for signals with BW  $\leq$  50MHz)

### 7.3.3. Test Setting

#### **Method PKPM1 (Peak Power Measurement of Signals with DTS BW $\leq$ 50MHz)**

Peak power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The pulse sensor employs a VBW = 50MHz so this method was only used for signals whose DTS bandwidth was less than or equal to 50MHz.

### 7.3.4. Test Setup

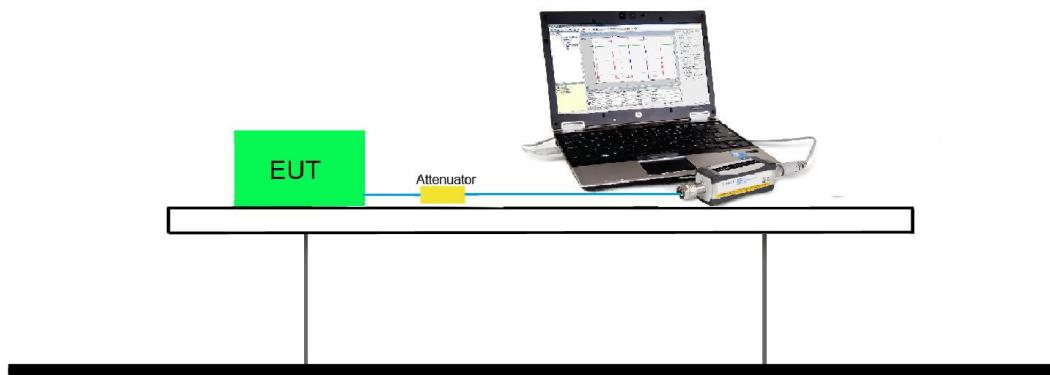

### 7.3.5. Test Result of Output Power

Power output test was verified over all data rates of each mode shown as below, and then choose the maximum power output (yellow marker) for final test of each channel.

MCS Index for 802.11n	N <sub>TX</sub>	Data Rate (Mbps)					
		802.11b	802.11g	20MHz Bandwidth		40MHz Bandwidth	
				800ns GI	400ns GI	800ns GI	400ns GI
0	1	1	6	6.5	7.2	13.5	15.0
1	1	2	9	13.0	14.4	27.0	30.0
2	1	5.5	12	19.5	21.7	40.5	45.0
3	1	11	18	26.0	28.9	54.0	60.0
4	1	--	24	39.0	43.3	81.0	90.0
5	1	--	36	52.0	57.8	108.0	120.0
6	1	--	48	58.5	65.0	121.5	135.0
7	1	--	54	65.0	72.2	135.0	150.0

**Output power at various data rates:**

Test Mode	Bandwidth (MHz)	Channel No.	Frequency (MHz)	Data Rate (Mbps)	Average Power (dBm)
802.11b	20	6	2437	1	-0.42
				5.5	-0.47
				11	-0.51
802.11g	20	6	2437	6	10.17
				24	9.98
				54	9.80
802.11n	20	6	2437	6.5	10.19
				7.2	10.12
				26.0	10.15
				28.9	10.08
				65.0	10.10
				72.2	10.05

**Test Result of Peak Output Power**

Test Mode	Data Rate (Mbps)	Channel No.	Freq. (MHz)	Peak Power (dBm)	Limit (dBm)	Result
11b	1	1	2412	7.37	≤30	Pass
11b	1	6	2437	3.63	≤30	Pass
11b	1	11	2462	-2.06	≤30	Pass
11g	6	1	2412	16.72	≤30	Pass
11g	6	6	2437	18.77	≤30	Pass
11g	6	11	2462	13.98	≤30	Pass
11n-HT20	6.5	1	2412	17.73	≤30	Pass
11n-HT20	6.5	6	2437	18.54	≤30	Pass
11n-HT20	6.5	11	2462	13.77	≤30	Pass

**7.3.6. Test Result of Average Output Power (Reporting Only)**

Test Mode	Data Rate (Mbps)	Channel No.	Freq. (MHz)	Average Power (dBm)	Limit (dBm)	Result
11b	1	1	2412	3.65	≤30	Pass
11b	1	6	2437	-0.42	≤30	Pass
11b	1	11	2462	-6.23	≤30	Pass
11g	6	1	2412	7.58	≤30	Pass
11g	6	6	2437	10.17	≤30	Pass
11g	6	11	2462	4.55	≤30	Pass
11n-HT20	6.5	1	2412	8.42	≤30	Pass
11n-HT20	6.5	6	2437	10.19	≤30	Pass
11n-HT20	6.5	11	2462	4.21	≤30	Pass

## 7.4. Power Spectral Density Measurement

### 7.4.1. Test Limit

The maximum permissible power spectral density is 8dBm in any 3 kHz band.

### 7.4.2. Test Procedure Used


KDB 558074 D01v03r05 - Section 10.2 Method PKPSD

### 7.4.3. Test Setting

1. Analyzer was set to the center frequency of the DTS channel under investigation
2. Span = 1.5 times the DTS channel bandwidth
3. RBW = 3kHz
4. VBW = 10kHz
5. Detector = peak
6. Sweep time = auto couple
7. Trace mode = max hold
8. Trace was allowed to stabilize


### 7.4.4. Test Setup

Spectrum Analyzer

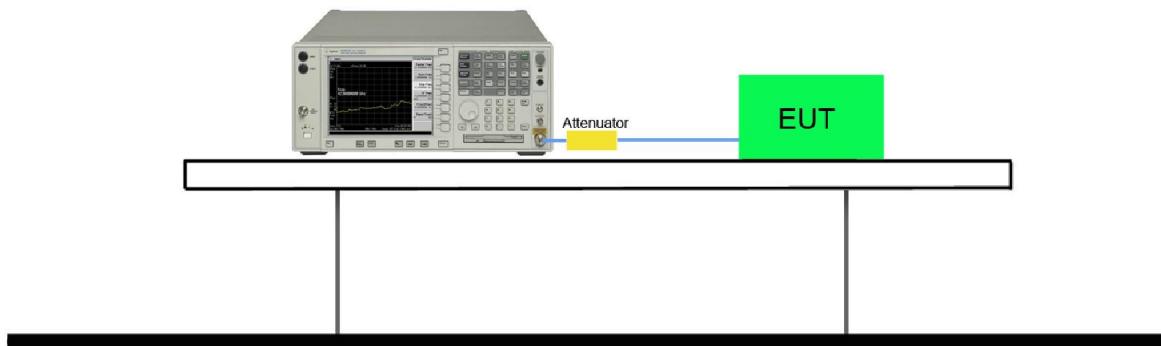


#### 7.4.5. Test Result

Test Mode	Data Rate (Mbps)	Channel No.	Frequency (MHz)	PSD (dBm / 3kHz)	Limit (dBm / 3kHz)	Result
11b	1	1	2412	-17.44	≤8.0	Pass
11b	1	6	2437	-20.71	≤8.0	Pass
11b	1	11	2462	-26.97	≤8.0	Pass
11g	6	1	2412	-15.46	≤8.0	Pass
11g	6	6	2437	-14.17	≤8.0	Pass
11g	6	11	2462	-20.38	≤8.0	Pass
11n-HT20	6.5	1	2412	-16.69	≤8.0	Pass
11n-HT20	6.5	6	2437	-14.82	≤8.0	Pass
11n-HT20	6.5	11	2462	-21.09	≤8.0	Pass

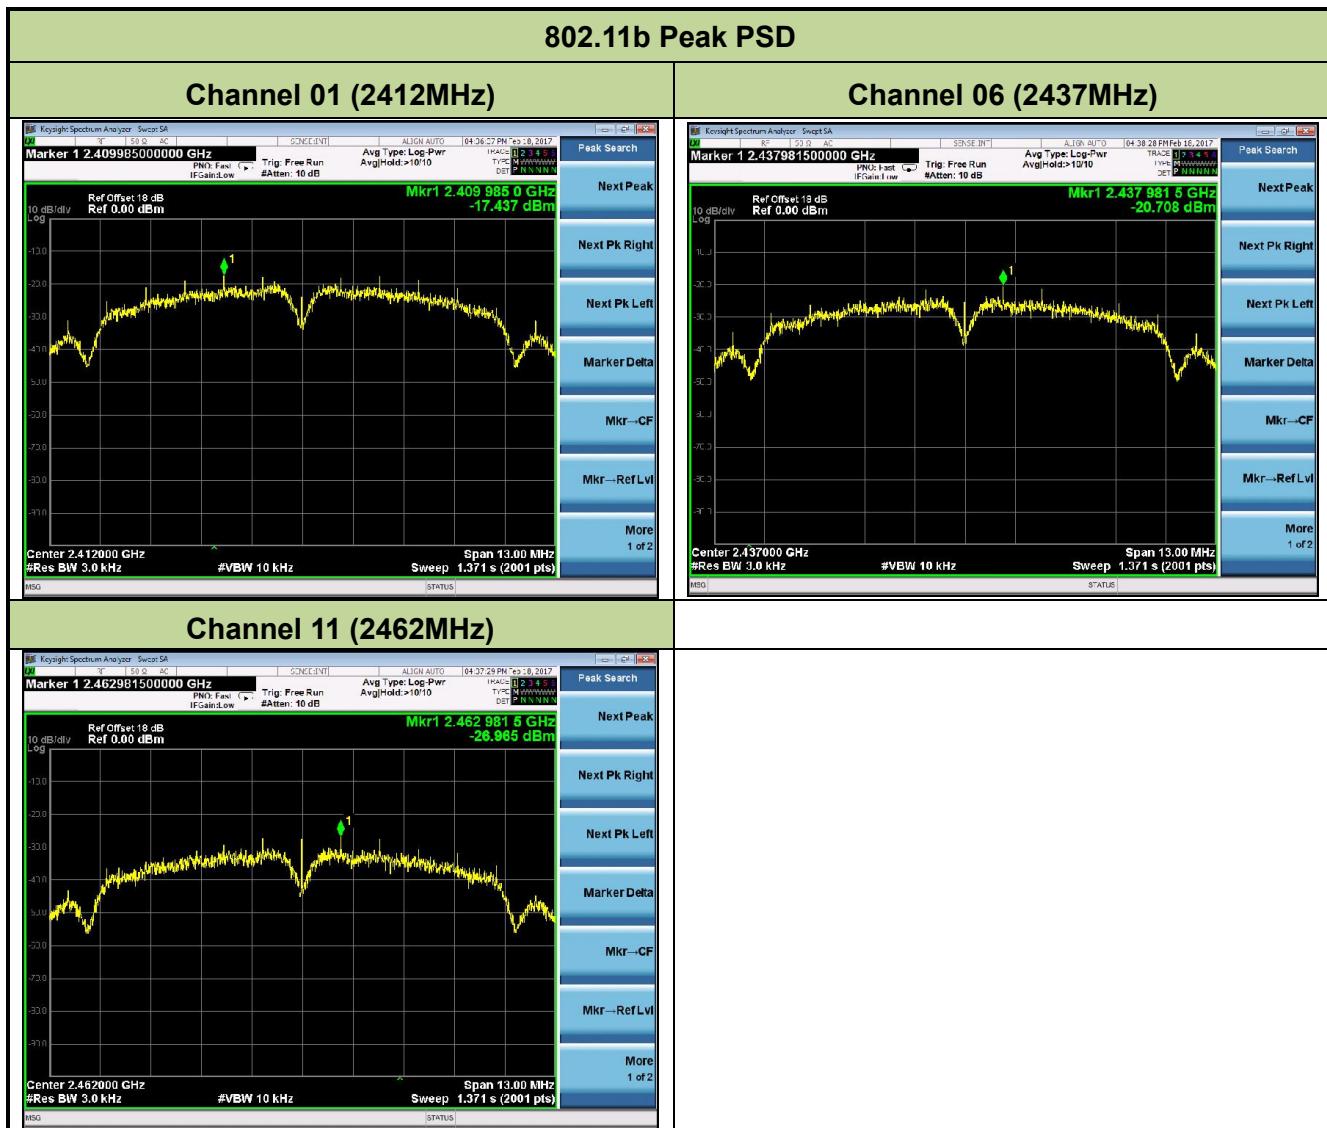



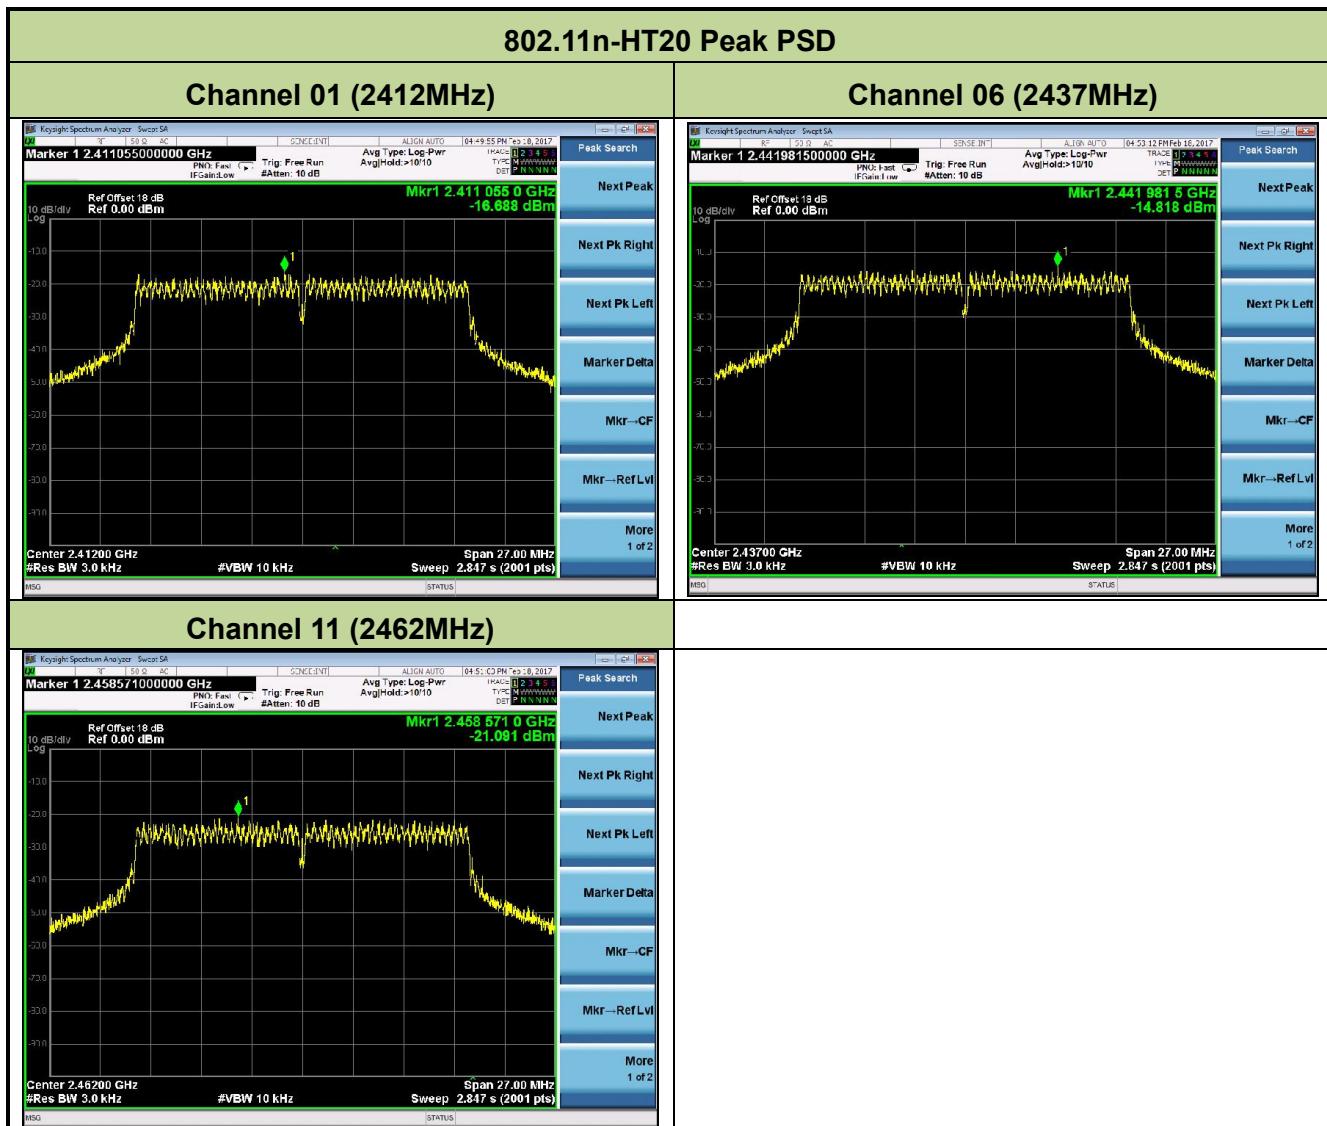

## 7.5. Conducted Band Edge and Out-of-Band Emissions

### 7.5.1. Test Limit

The limit for out-of-band spurious emissions at the band edge is 20dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100 kHz bandwidth per the PSD procedure.

### 7.5.2. Test Procedure Used

KDB 558074 D01v03r05 - Section 11.2 & Section 11.3

### 7.5.3. Test Setting


#### 1. Reference level measurement

- (a) Set instrument center frequency to DTS channel center frequency
- (b) Set the span to  $\geq$  1.5 times the DTS bandwidth
- (c) Set the RBW = 100 kHz
- (d) Set the VBW  $\geq$  3 x RBW
- (e) Detector = peak
- (f) Sweep time = auto couple
- (g) Trace mode = max hold
- (h) Allow trace to fully stabilize

#### 2. Emission level measurement


- (a) Set the center frequency and span to encompass frequency range to be measured
- (b) RBW = 100kHz
- (c) VBW = 300kHz
- (d) Detector = Peak
- (e) Trace mode = max hold
- (f) Sweep time = auto couple
- (g) The trace was allowed to stabilize


#### 7.5.4. Test Setup

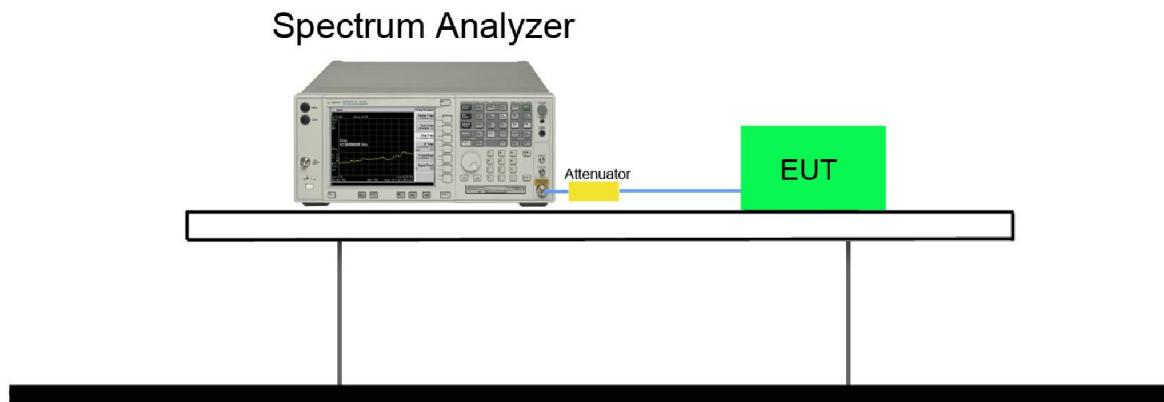


### 7.5.5. Test Result


Test Mode	Data Rate (Mbps)	Channel No.	Frequency (MHz)	Limit	Result
802.11b	1	01	2412	20dBc	Pass
802.11b	1	06	2437	20dBc	Pass
802.11b	1	11	2462	20dBc	Pass
802.11g	6	01	2412	20dBc	Pass
802.11g	6	06	2437	20dBc	Pass
802.11g	6	11	2462	20dBc	Pass
802.11n-HT20	6.5	01	2412	20dBc	Pass
802.11n-HT20	6.5	06	2437	20dBc	Pass
802.11n-HT20	6.5	11	2462	20dBc	Pass

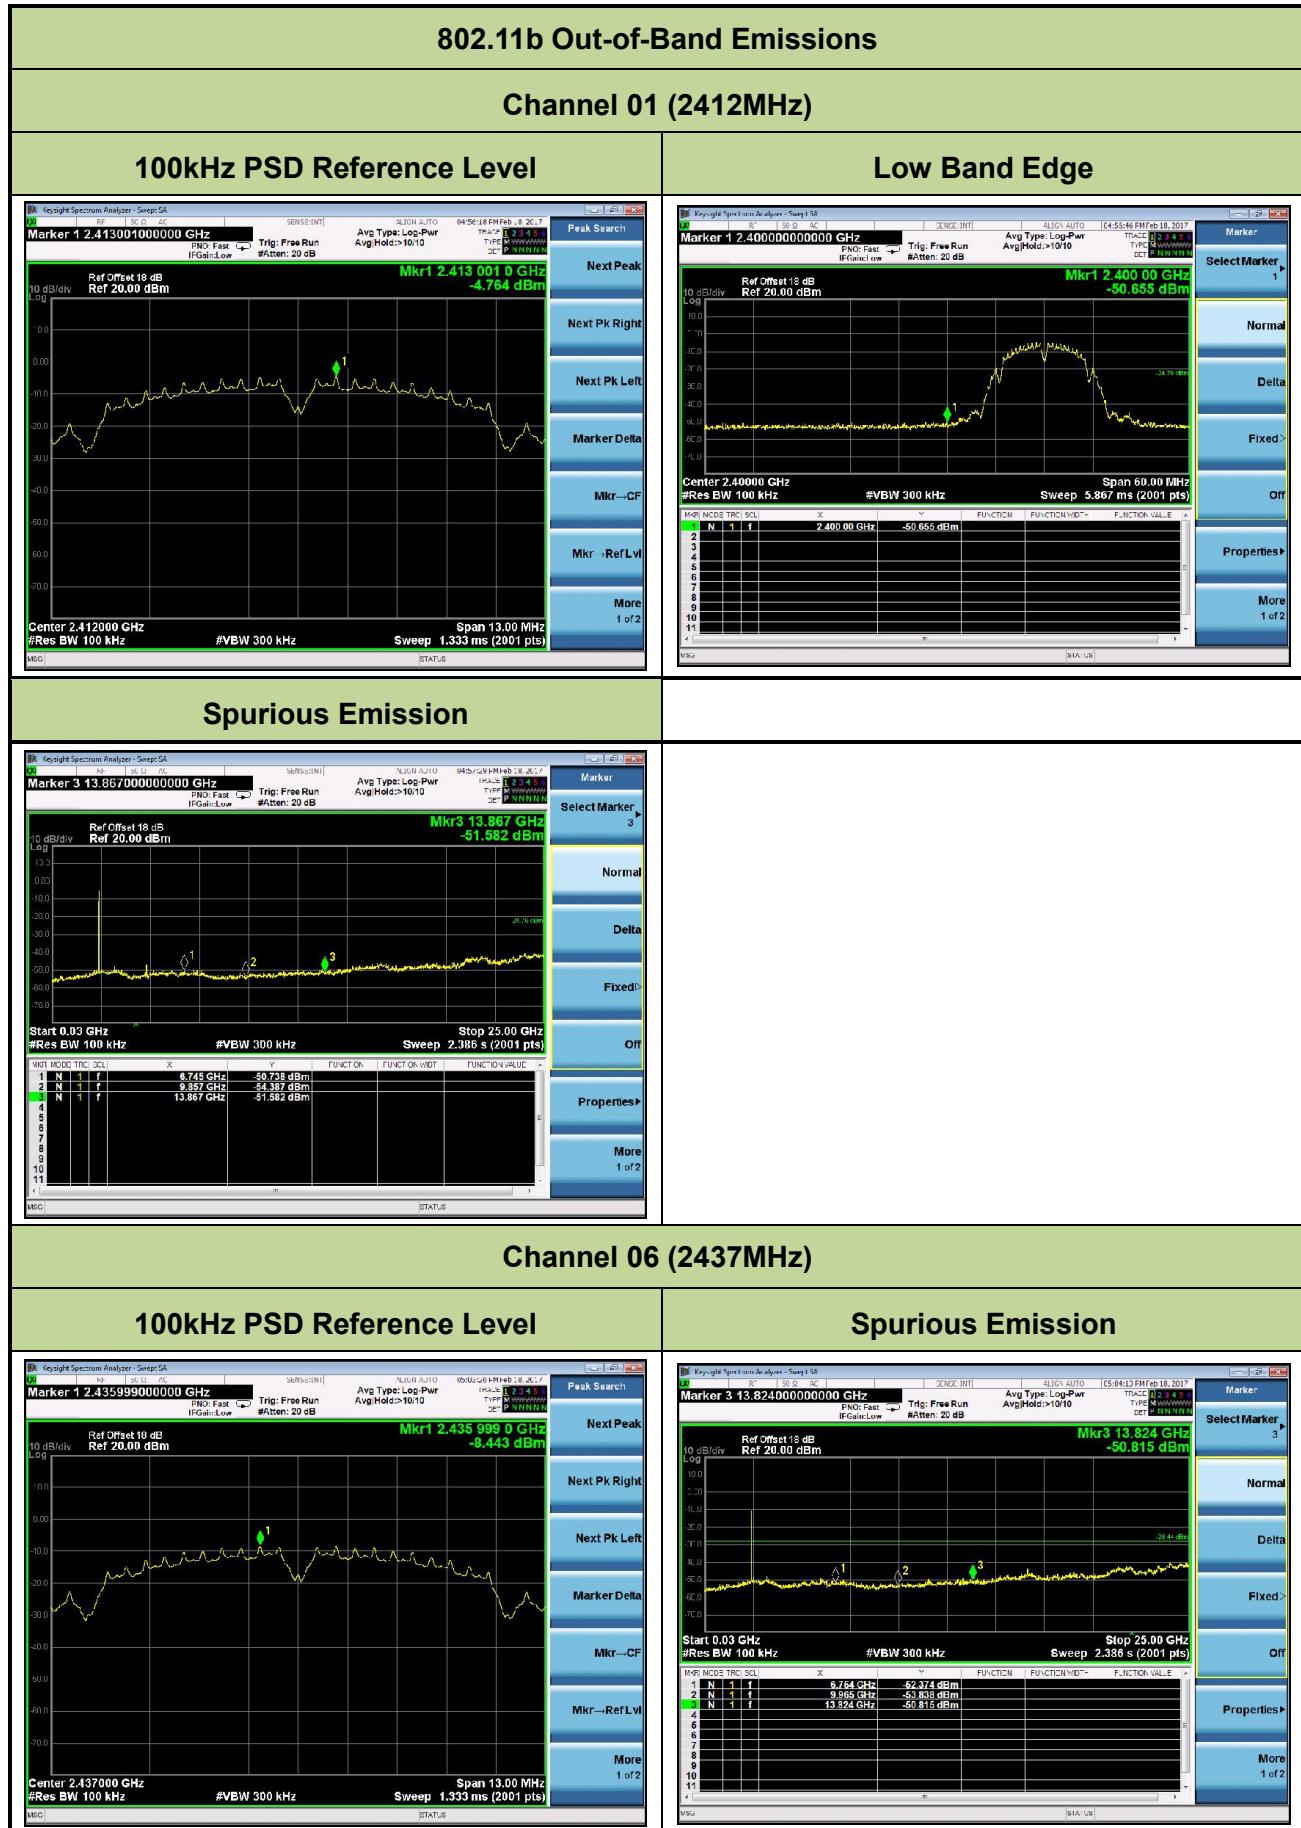

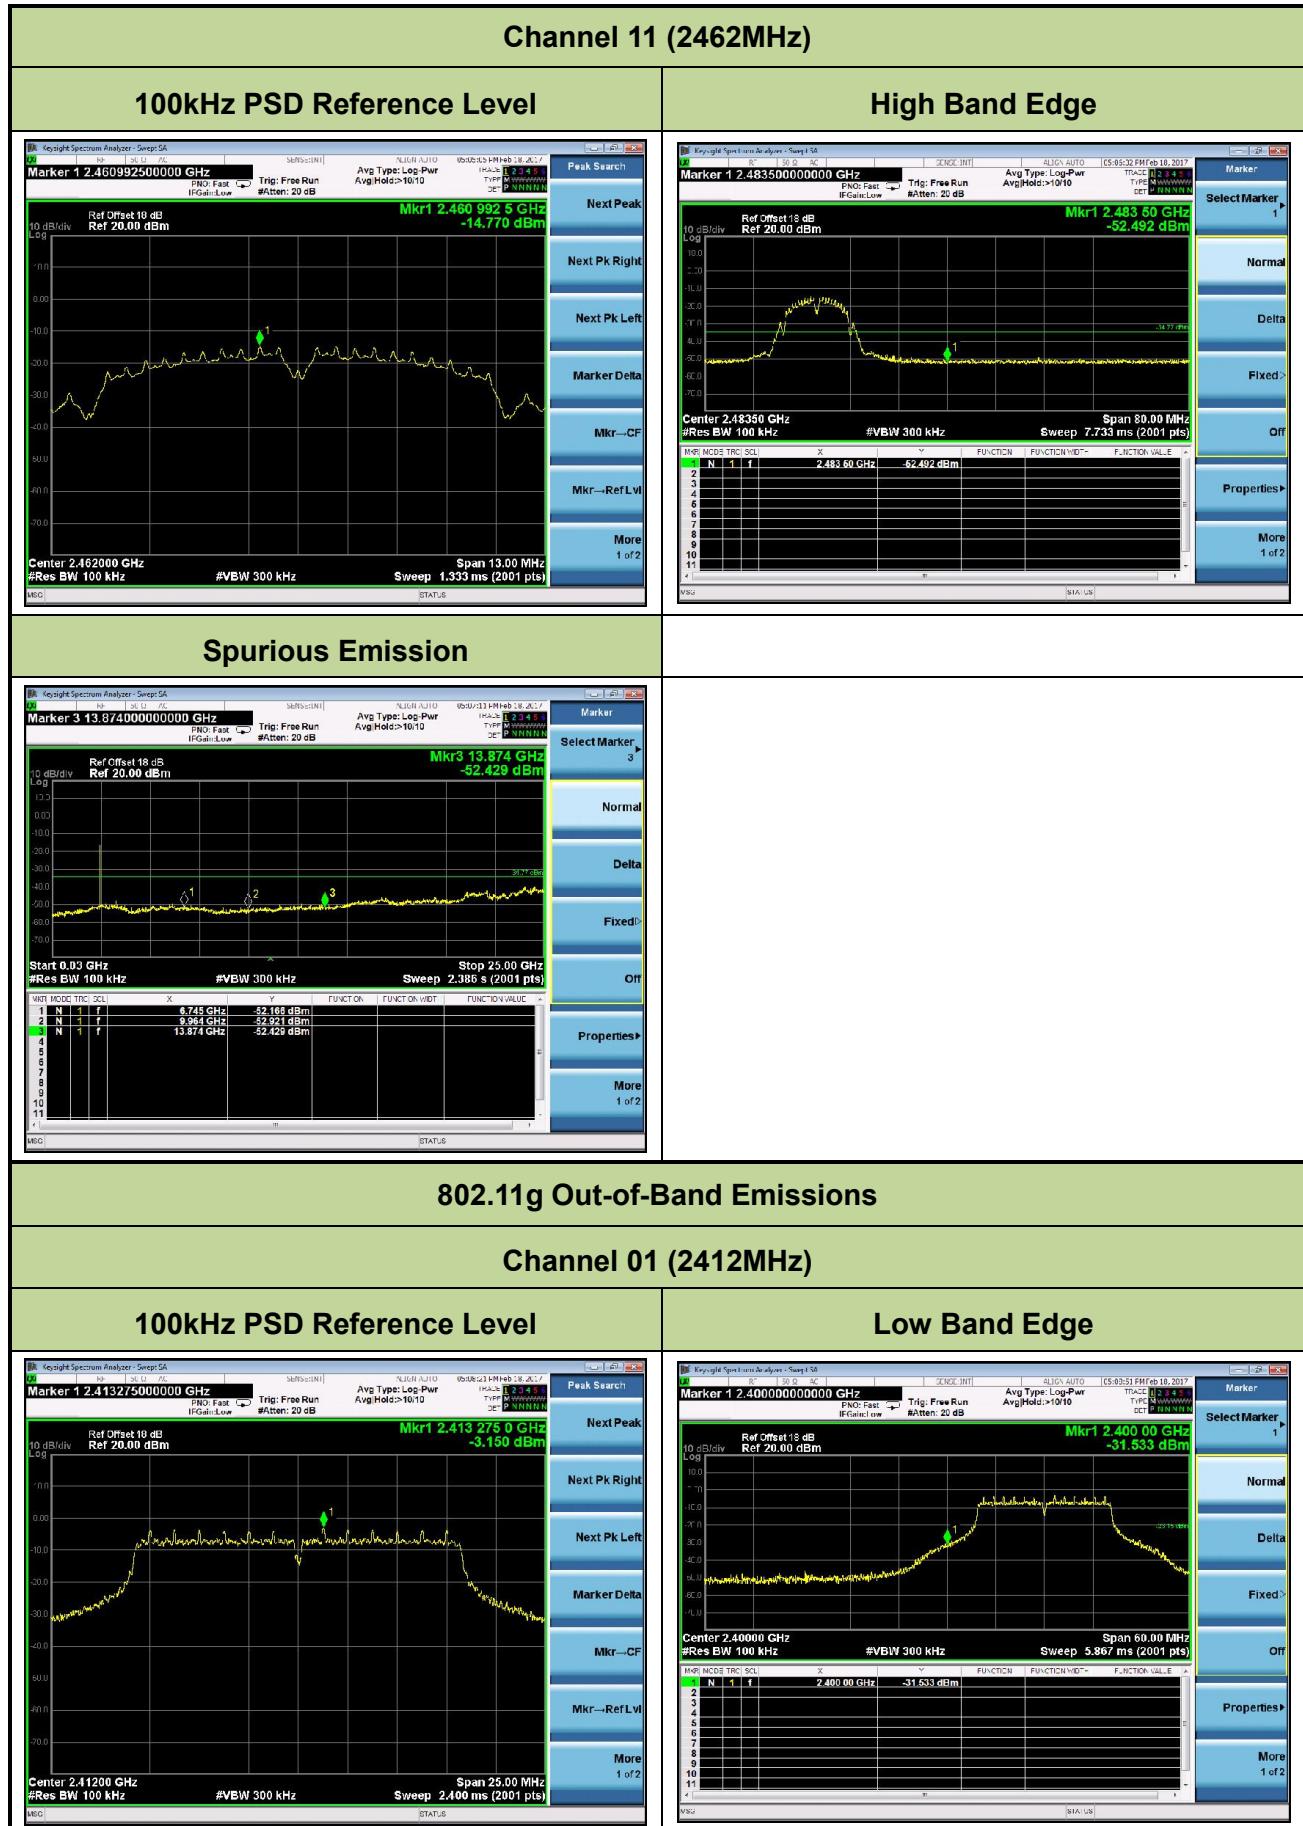

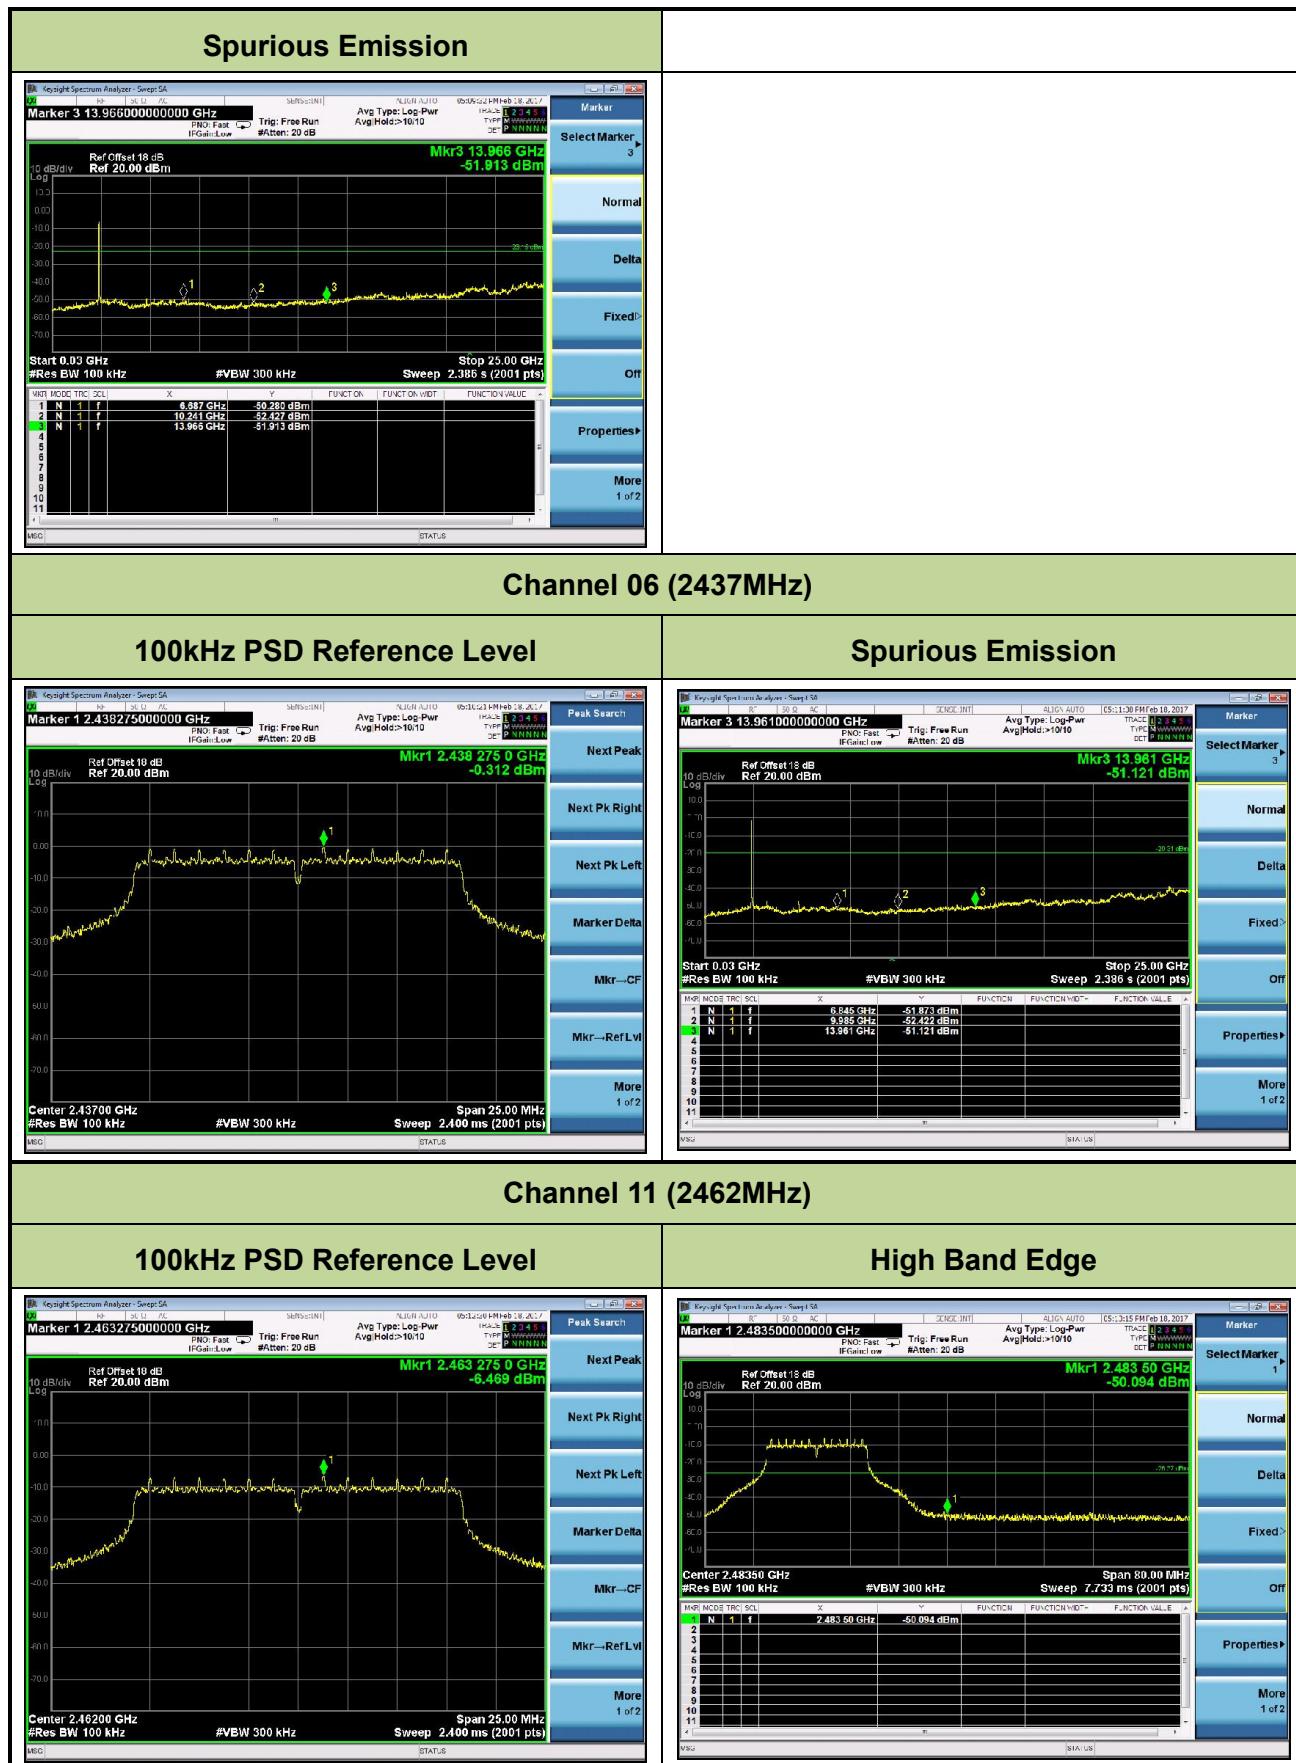



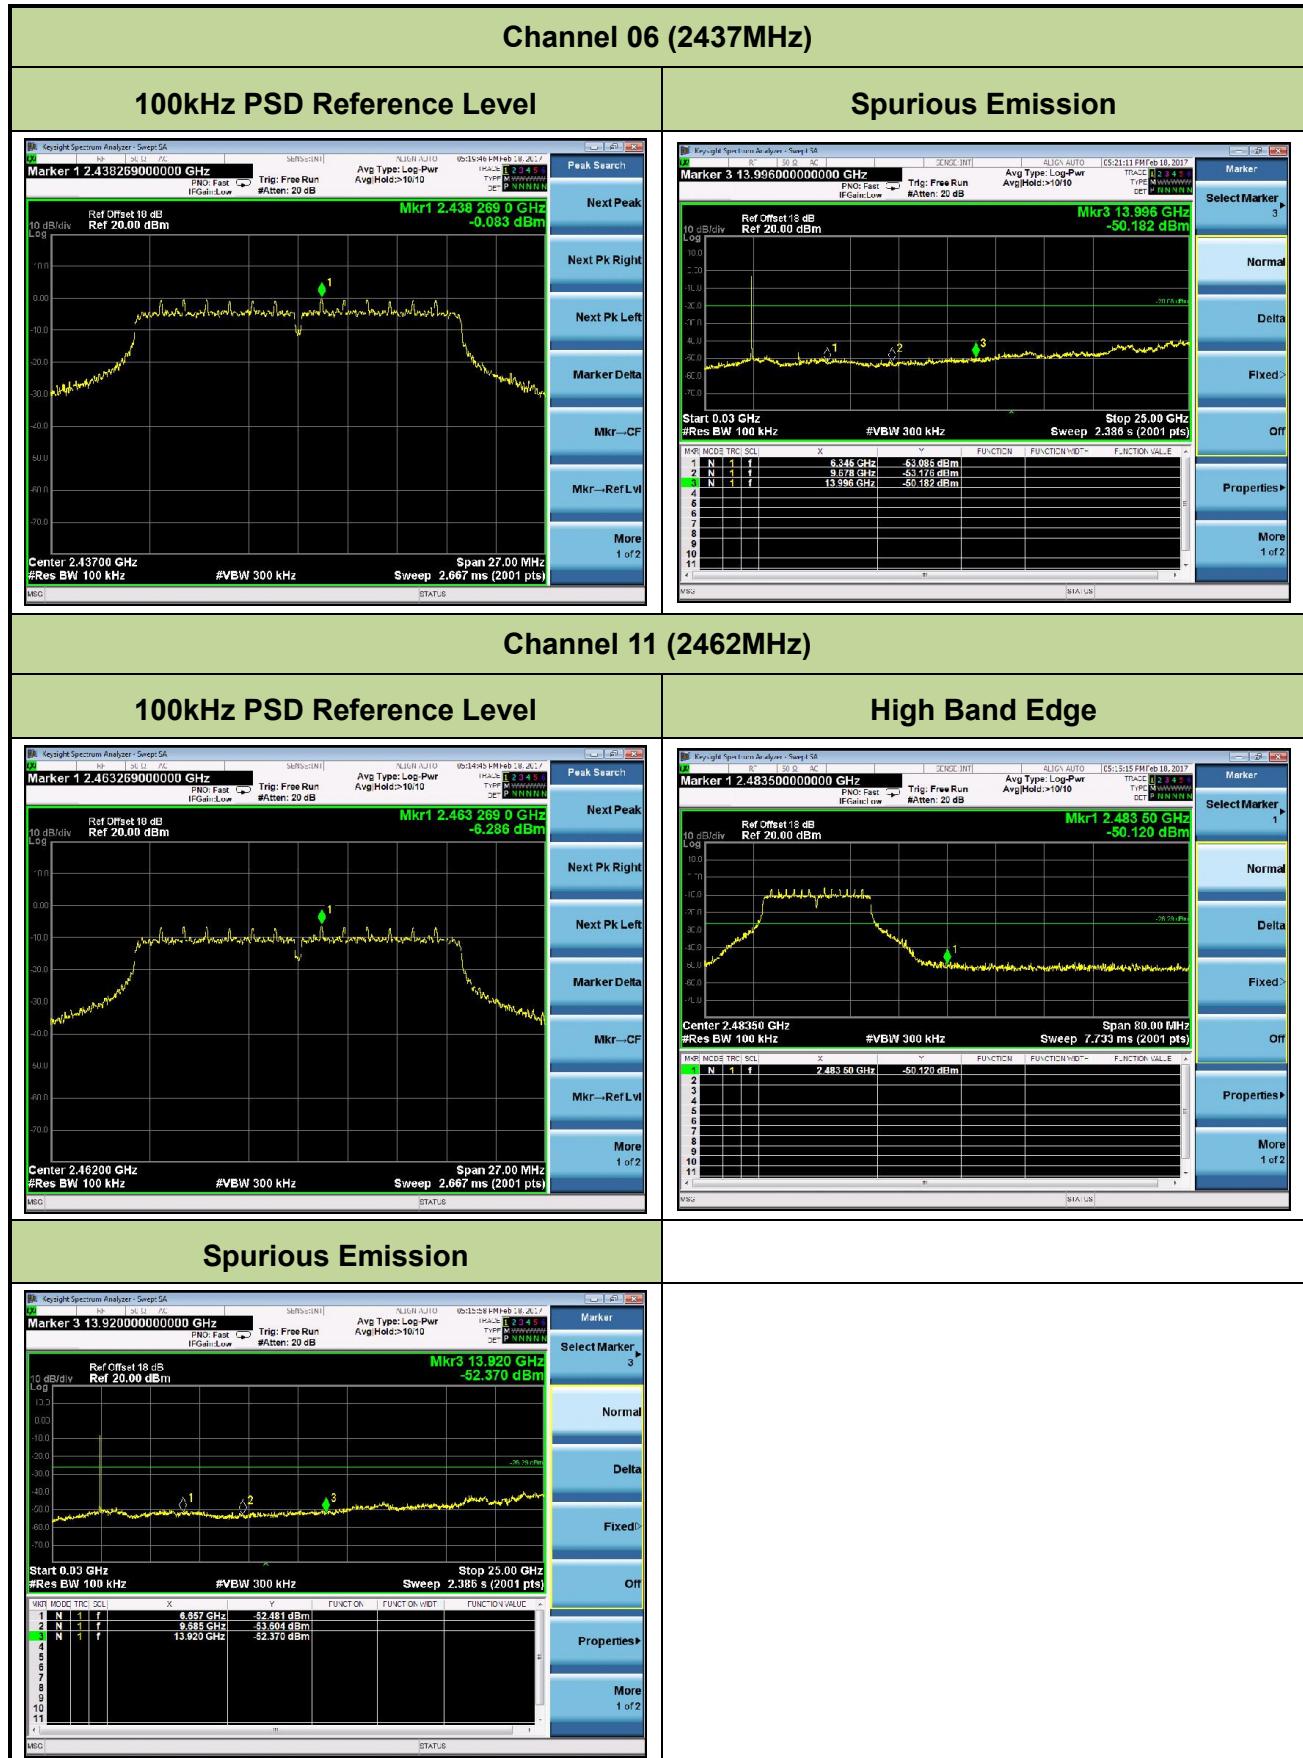

## 7.6. Radiated Spurious Emission Measurement

### 7.6.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 – 0.490	2400/F (kHz)	300
0.490 – 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

### 7.6.2. Test Procedure Used

KDB 558074 D01v03r05 – Section 12.2.3 (quasi-peak measurements)

KDB 558074 D01v03r05 – Section 12.2.4 (peak power measurements)

KDB 558074 D01v03r05 – Section 12.2.5 (average power measurements)

### 7.6.3. Test Setting

#### Peak Field Strength Measurements per Section 12.2.4 of KDB 558074 D01v03r05

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = as specified in Table 1
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple

6. Trace mode = max hold
7. Trace was allowed to stabilize

**Table 1 - RBW as a function of frequency**


Frequency	RBW
9 ~ 150 kHz	200 ~ 300 Hz
0.15 ~ 30 MHz	9 ~ 10 kHz
30 ~ 1000 MHz	100 ~ 120 kHz
> 1000 MHz	1 MHz

**Average Field Strength Measurements per Section 12.2.5.3 of KDB 558074 D01v03r05**


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW  $\geq 1/T$
4. De As an alternative, the instrument may be set to linear detector mode. Ensure that video filtering is applied in linear voltage domain (rather than in a log or dB domain). Some instruments require linear display mode in order to accomplish this. Others have a setting for Average-VBW Type, which can be set to "Voltage" regardless of the display mode
5. Detector = Peak
6. Sweep time = auto
7. Trace mode = max hold
8. Allow max hold to run for at least 50 times (1/duty cycle) traces


#### 7.6.4. Test Setup

##### 9kHz ~ 30MHz Test Setup:

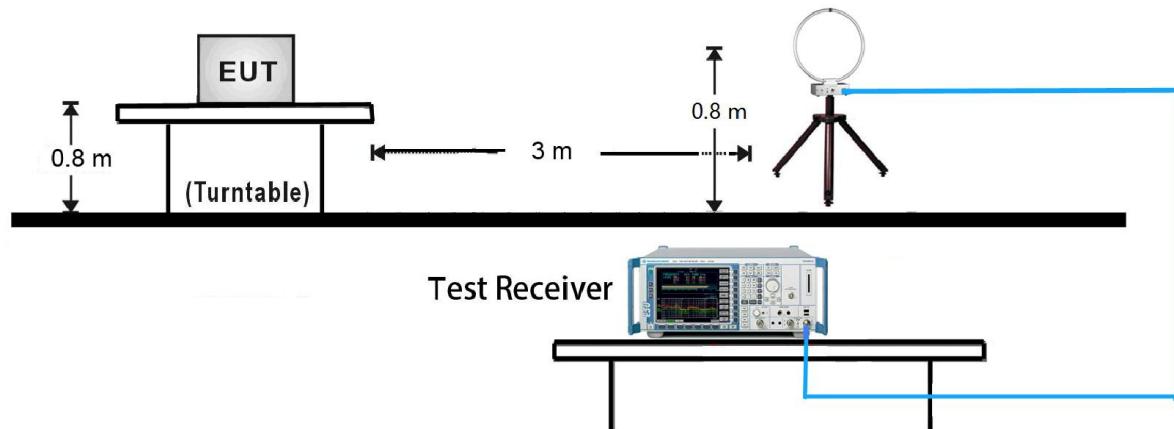

##### 30MHz ~ 1GHz Test Setup:

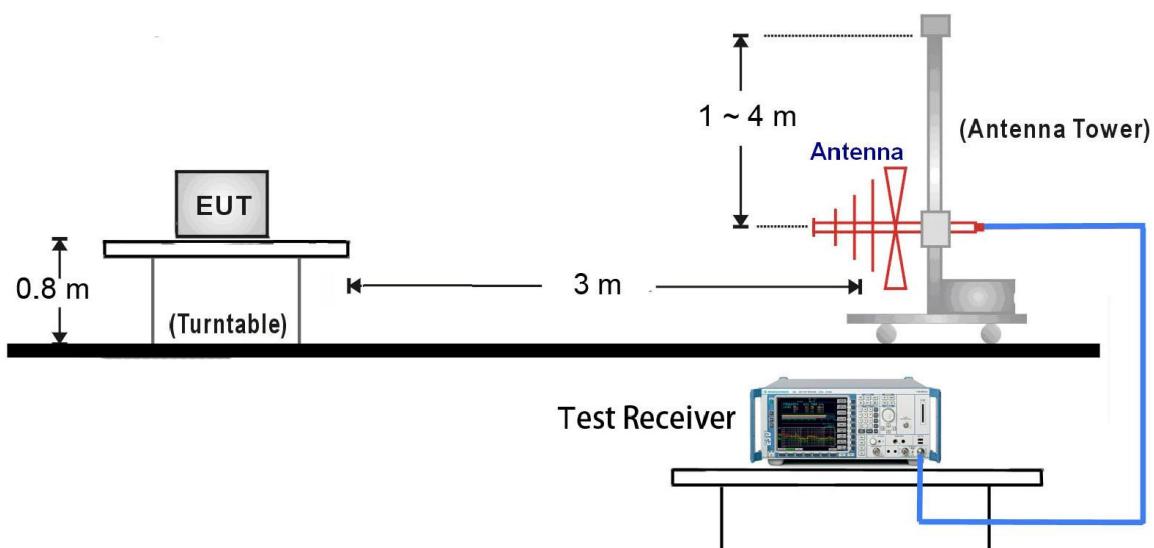

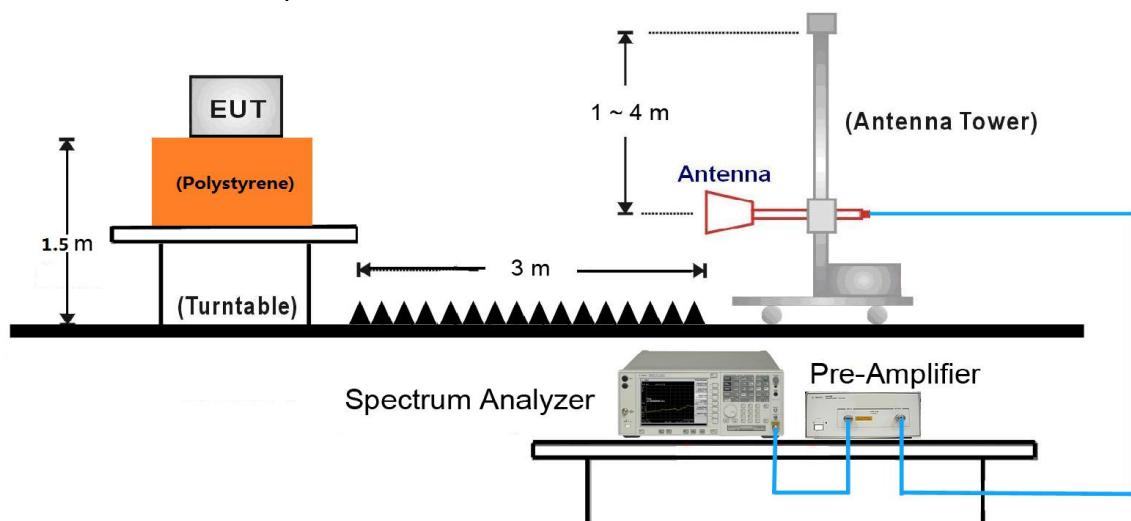1GHz ~ 25GHz Test Setup:

### 7.6.5. Test Result

Test Mode:	802.11b	Test Site:	AC1
Test Channel:	01	Test Engineer:	Jone Zhang
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. 3. Testing is carried out with frequency rang 9 kHz to the tenth harmonics. There are the ambient noise within frequency range 9 kHz ~ 30 MHz and 18GHz ~ 25GHz, the permissible value is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
	4824.0	50.2	2.7	52.9	54	-1.1	Average	Horizontal
	4825.0	53.4	2.7	56.1	74	-17.9	Peak	Horizontal
	7358.0	36.0	8.0	44.0	74	-30.0	Peak	Horizontal
*	8837.0	38.6	9.1	47.7	74	-26.3	Peak	Horizontal
*	10120.5	36.7	11.6	48.3	74	-25.7	Peak	Horizontal
	4825.0	46.0	2.7	48.7	74	-25.3	Peak	Vertical
	7613.0	37.5	8.1	45.5	74	-28.5	Peak	Vertical
*	8650.0	38.0	8.8	46.8	74	-27.2	Peak	Vertical
*	10197.0	35.9	11.8	47.6	74	-26.4	Peak	Vertical

Note 1: “\*\*” is not in restricted band, its limit is 20dBc of the fundamental emission level (105.8dB $\mu$ V/m) or 15.209 which is higher.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Test Mode:	802.11b	Test Site:	AC1
Test Channel:	06	Test Engineer:	Jone Zhang
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. 3. Testing is carried out with frequency rang 9 kHz to the tenth harmonics. There are the ambient noise within frequency range 9 kHz ~ 30 MHz and 18GHz ~ 25GHz, the permissible value is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
	4874.0	49.6	2.7	52.2	54	-1.8	Average	Horizontal
	4876.0	53.8	2.7	56.5	74	-17.5	Peak	Horizontal
	7681.0	37.4	8.0	45.4	74	-28.6	Peak	Horizontal
*	8650.0	37.3	8.8	46.1	74	-27.9	Peak	Horizontal
*	10112.0	36.6	11.6	48.2	74	-25.9	Peak	Horizontal
	4876.0	46.0	2.7	48.6	74	-25.4	Peak	Vertical
	7604.5	36.9	8.1	45.0	74	-29.0	Peak	Vertical
*	8624.5	37.1	8.8	45.9	74	-28.1	Peak	Vertical
*	10180.0	36.4	11.7	48.1	74	-25.9	Peak	Vertical
Note 1: “**” is not in restricted band, its limit is 20dBc of the fundamental emission level (105.7dB $\mu$ V/m) or 15.209 which is higher.								
Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB) Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Test Mode:	802.11b	Test Site:	AC1
Test Channel:	11	Test Engineer:	Jone Zhang
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. 3. Testing is carried out with frequency rang 9 kHz to the tenth harmonics. There are the ambient noise within frequency range 9 kHz ~ 30 MHz and 18GHz ~ 25GHz, the permissible value is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
	4924.0	49.8	2.8	52.6	54	-1.4	Average	Horizontal
	4927.0	53.7	2.8	56.4	74	-17.6	Peak	Horizontal
	7485.5	36.2	8.2	44.4	74	-29.6	Peak	Horizontal
*	8650.0	36.7	8.8	45.5	74	-28.5	Peak	Horizontal
*	10222.5	36.4	11.8	48.2	74	-25.8	Peak	Horizontal
	4927.0	45.0	2.8	47.7	74	-26.3	Peak	Vertical
	7383.5	37.6	7.9	45.5	74	-28.5	Peak	Vertical
*	8633.0	38.0	8.8	46.8	74	-27.2	Peak	Vertical
*	10265.0	36.1	12.0	48.0	74	-26.0	Peak	Vertical
Note 1: “**” is not in restricted band, its limit is 20dBc of the fundamental emission level (104.9dB $\mu$ V/m) or 15.209 which is higher.								
Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB) Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Test Mode:	802.11g	Test Site:	AC1
Test Channel:	01	Test Engineer:	Jone Zhang
Remark:	<p>1. Average measurement was not performed if peak level lower than average limit.</p> <p>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.</p> <p>3. Testing is carried out with frequency rang 9 kHz to the tenth harmonics. There are the ambient noise within frequency range 9 kHz ~ 30 MHz and 18GHz ~ 25GHz, the permissible value is not show in the report.</p>		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
	4824.3	36.6	2.7	39.3	54	-14.7	Average	Horizontal
	4825.0	59.3	2.7	62.0	74	-12.0	Peak	Horizontal
	7230.5	41.6	7.8	49.4	74	-24.6	Peak	Horizontal
*	8650.0	37.3	8.8	46.1	74	-27.9	Peak	Horizontal
*	10112.0	36.3	11.6	47.8	74	-26.2	Peak	Horizontal
	4825.0	49.0	2.7	51.7	74	-22.3	Peak	Vertical
	7239.0	44.0	7.8	51.9	74	-22.1	Peak	Vertical
*	8633.0	37.3	8.8	46.1	74	-27.9	Peak	Vertical
*	10333.0	35.7	12.2	47.9	74	-26.1	Peak	Vertical
<p>Note 1: “**” is not in restricted band, its limit is 20dBc of the fundamental emission level (106.1dB<math>\mu</math>V/m) or 15.209 which is higher.</p> <p>Note 2: Measure Level (dB<math>\mu</math>V/m) = Reading Level (dB<math>\mu</math>V) + Factor (dB)</p> <p>Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)</p>								

Test Mode:	802.11g	Test Site:	AC1
Test Channel:	06	Test Engineer:	Jone Zhang
Remark:	<ol style="list-style-type: none"> <li>1. Average measurement was not performed if peak level lower than average limit.</li> <li>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.</li> <li>3. Testing is carried out with frequency rang 9 kHz to the tenth harmonics. There are the ambient noise within frequency range 9 kHz ~ 30 MHz and 18GHz ~ 25GHz, the permissible value is not show in the report.</li> </ol>		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
	4867.5	58.4	2.7	61.1	74	-12.9	Peak	Horizontal
	4874.8	36.2	2.7	38.9	54	-15.1	Average	Horizontal
	7307.0	45.0	8.0	53.0	74	-21.0	Peak	Horizontal
*	8667.0	36.9	8.9	45.8	74	-28.2	Peak	Horizontal
*	10299.0	37.4	12.0	49.4	74	-24.6	Peak	Horizontal
	4874.9	32.3	2.7	35.0	54	-19.0	Average	Vertical
	4884.5	51.5	2.7	54.2	74	-19.8	Peak	Vertical
	7313.5	29.3	8.0	37.3	54	-16.7	Average	Vertical
	7315.5	47.6	8.0	55.6	74	-18.4	Peak	Vertical
*	8735.0	37.0	8.9	45.9	74	-28.1	Peak	Vertical
*	10112.0	36.9	11.6	48.5	74	-25.5	Peak	Vertical

Note 1: “\*\*” is not in restricted band, its limit is 20dBc of the fundamental emission level (106.9dB $\mu$ V/m) or 15.209 which is higher.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Test Mode:	802.11g	Test Site:	AC1
Test Channel:	11	Test Engineer:	Jone Zhang
Remark:	<ol style="list-style-type: none"> <li>1. Average measurement was not performed if peak level lower than average limit.</li> <li>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.</li> <li>3. Testing is carried out with frequency rang 9 kHz to the tenth harmonics. There are the ambient noise within frequency range 9 kHz ~ 30 MHz and 18GHz ~ 25GHz, the permissible value is not show in the report.</li> </ol>		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
	4918.5	57.9	2.8	60.7	74	-13.3	Peak	Horizontal
	4925.6	36.3	2.8	39.1	54	-14.9	Average	Horizontal
	7392.0	44.1	7.9	52.1	74	-21.9	Peak	Horizontal
*	8871.0	36.8	9.1	46.0	74	-28.0	Peak	Horizontal
*	9865.5	36.0	11.6	47.6	74	-26.4	Peak	Horizontal
	4910.0	51.4	2.7	54.2	74	-19.8	Peak	Vertical
	4923.3	33.0	2.8	35.7	54	-18.3	Average	Vertical
	7383.5	46.2	7.9	54.1	74	-19.9	Peak	Vertical
	7388.8	28.5	7.9	36.4	54	-17.6	Average	Vertical
*	8573.5	37.2	8.7	45.9	74	-28.1	Peak	Vertical
*	9857.0	36.8	11.6	48.3	74	-25.7	Peak	Vertical

Note 1: “\*\*” is not in restricted band, its limit is 20dBc of the fundamental emission level (104.1dB $\mu$ V/m) or 15.209 which is higher.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Test Mode:	802.11n-HT20	Test Site:	AC1
Test Channel:	01	Test Engineer:	Jone Zhang
Remark:	<ol style="list-style-type: none"> <li>Average measurement was not performed if peak level lower than average limit.</li> <li>Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.</li> <li>Testing is carried out with frequency rang 9 kHz to the tenth harmonics. There are the ambient noise within frequency range 9 kHz ~ 30 MHz and 18GHz ~ 25GHz, the permissible value is not show in the report.</li> </ol>		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
	4824.2	35.4	2.7	38.1	54	-15.9	Average	Horizontal
	4825.0	55.9	2.7	58.6	74	-15.4	Peak	Horizontal
	7230.5	39.6	7.8	47.4	74	-26.6	Peak	Horizontal
*	8658.5	36.9	8.8	45.7	74	-28.3	Peak	Horizontal
*	9814.5	34.2	11.6	45.8	74	-28.2	Peak	Horizontal
	4825.0	49.0	2.7	51.7	74	-22.3	Peak	Vertical
	7230.5	42.9	7.8	50.7	74	-23.3	Peak	Vertical
*	8684.0	36.4	9.0	45.4	74	-28.6	Peak	Vertical
*	10095.0	36.0	11.6	47.6	74	-26.4	Peak	Vertical
<p>Note 1: “**” is not in restricted band, its limit is 20dBc of the fundamental emission level (102.4dB<math>\mu</math>V/m) or 15.209 which is higher.</p> <p>Note 2: Measure Level (dB<math>\mu</math>V/m) = Reading Level (dB<math>\mu</math>V) + Factor (dB)</p> <p>Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)</p>								

Test Mode:	802.11n-HT20	Test Site:	AC1
Test Channel:	06	Test Engineer:	Jone Zhang
Remark:	<ol style="list-style-type: none"> <li>Average measurement was not performed if peak level lower than average limit.</li> <li>Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.</li> <li>Testing is carried out with frequency rang 9 kHz to the tenth harmonics. There are the ambient noise within frequency range 9 kHz ~ 30 MHz and 18GHz ~ 25GHz, the permissible value is not show in the report.</li> </ol>		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
	4867.5	58.4	2.7	61.1	74	-12.9	Peak	Horizontal
	4875.4	35.5	2.7	38.2	54	-15.8	Average	Horizontal
	7315.5	45.4	8.0	53.5	74	-20.5	Peak	Horizontal
*	8633.0	37.4	8.8	46.2	74	-27.8	Peak	Horizontal
*	10392.5	35.0	12.3	47.3	74	-26.7	Peak	Horizontal
	4867.5	50.9	2.7	53.6	74	-20.4	Peak	Vertical
	4875.5	29.9	2.7	32.6	54	-21.4	Average	Vertical
	7313.7	29.7	8.0	37.7	54	-16.3	Average	Vertical
	7324.0	46.9	8.0	54.9	74	-19.1	Peak	Vertical
*	8692.5	36.8	9.0	45.8	74	-28.2	Peak	Vertical
*	10333.0	36.5	12.2	48.6	74	-25.4	Peak	Vertical

Note 1: “\*\*” is not in restricted band, its limit is 20dBc of the fundamental emission level (101.4dB $\mu$ V/m) or 15.209 which is higher.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Test Mode:	802.11n-HT20	Test Site:	AC1
Test Channel:	11	Test Engineer:	Jone Zhang
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. 3. Testing is carried out with frequency rang 9 kHz to the tenth harmonics. There are the ambient noise within frequency range 9 kHz ~ 30 MHz and 18GHz ~ 25GHz, the permissible value is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
	4918.5	58.5	2.8	61.2	74	-12.8	Peak	Horizontal
	4922.8	36.1	2.8	38.8	54	-15.2	Average	Horizontal
	7392.0	45.0	7.9	52.9	74	-21.1	Peak	Horizontal
*	8811.5	35.6	9.0	44.6	74	-29.4	Peak	Horizontal
*	10188.5	36.5	11.8	48.3	74	-25.7	Peak	Horizontal
	4918.5	50.6	2.8	53.4	74	-20.6	Peak	Vertical
	4925.2	31.0	2.8	33.8	54	-20.2	Average	Vertical
	7392.0	45.2	7.9	53.1	74	-20.9	Peak	Vertical
*	8599.0	37.3	8.7	46.0	74	-28.0	Peak	Vertical
*	10052.5	36.0	11.5	47.5	74	-26.5	Peak	Vertical


Note 1: “\*\*” is not in restricted band, its limit is 20dBc of the fundamental emission level (104.9dB $\mu$ V/m) or 15.209 which is higher.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

### The worst case of Radiated Emission below 1GHz:

Site: AC1	Time: 2017/02/05 - 11:53
Limit: FCC_Part15.109_RE(3m)_ClassB	Engineer: Alex Ma
Probe: VULB 9168 _20-2000MHz	Polarity: Horizontal
EUT:SMART LED LAMP	Power: AC 120V/60Hz
<b>Worse Case Mode:</b> Test Mode:Transmit by 802.11g at channel 2412MHz	

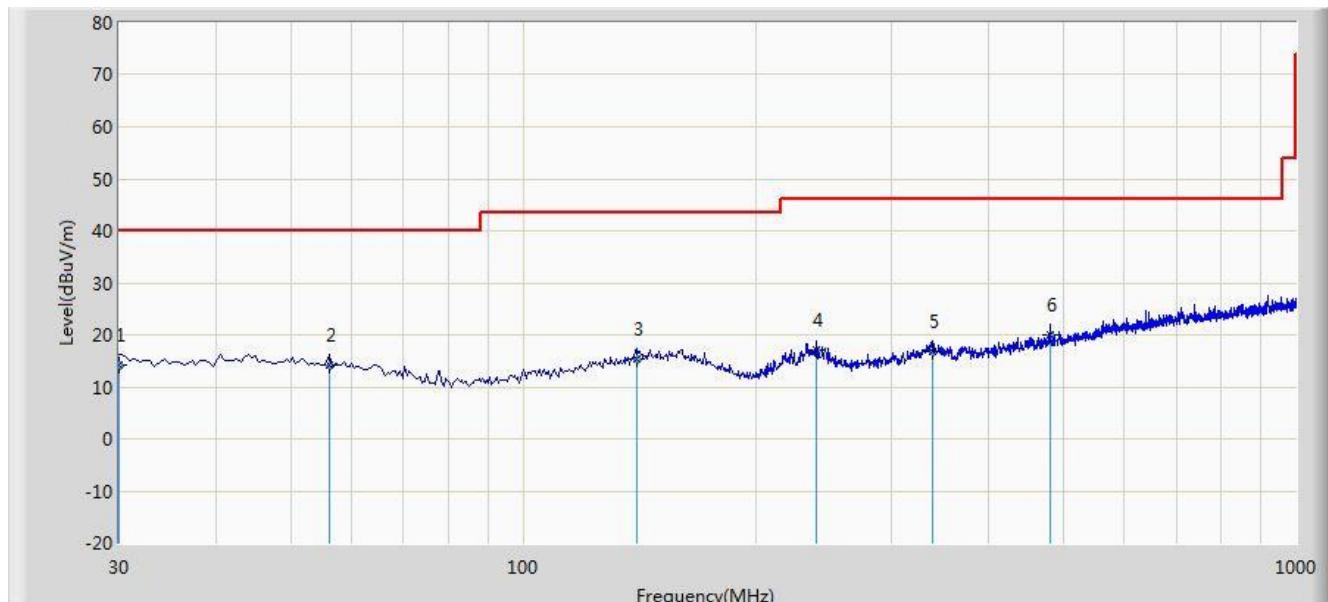


No	Flag	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			30.000	14.109	0.501	-25.891	40.000	13.608	QP
2			56.190	14.198	0.565	-25.802	40.000	13.633	QP
3			140.580	15.374	0.841	-28.126	43.500	14.533	QP
4			240.005	16.978	4.216	-29.022	46.000	12.762	QP
5			337.975	16.824	1.604	-29.176	46.000	15.220	QP
6			480.080	19.922	1.729	-26.078	46.000	18.193	QP

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2017/02/05 - 12:02
Limit: FCC_Part15.109_RE(3m)_ClassB	Engineer: Alex Ma
Probe: VULB 9168 _20-2000MHz	Polarity: Vertical
EUT:SMART LED LAMP	Power: AC 120V/60Hz
<b>Worse Case Mode:</b> Test Mode:Transmit by 802.11g at channel 2412MHz	

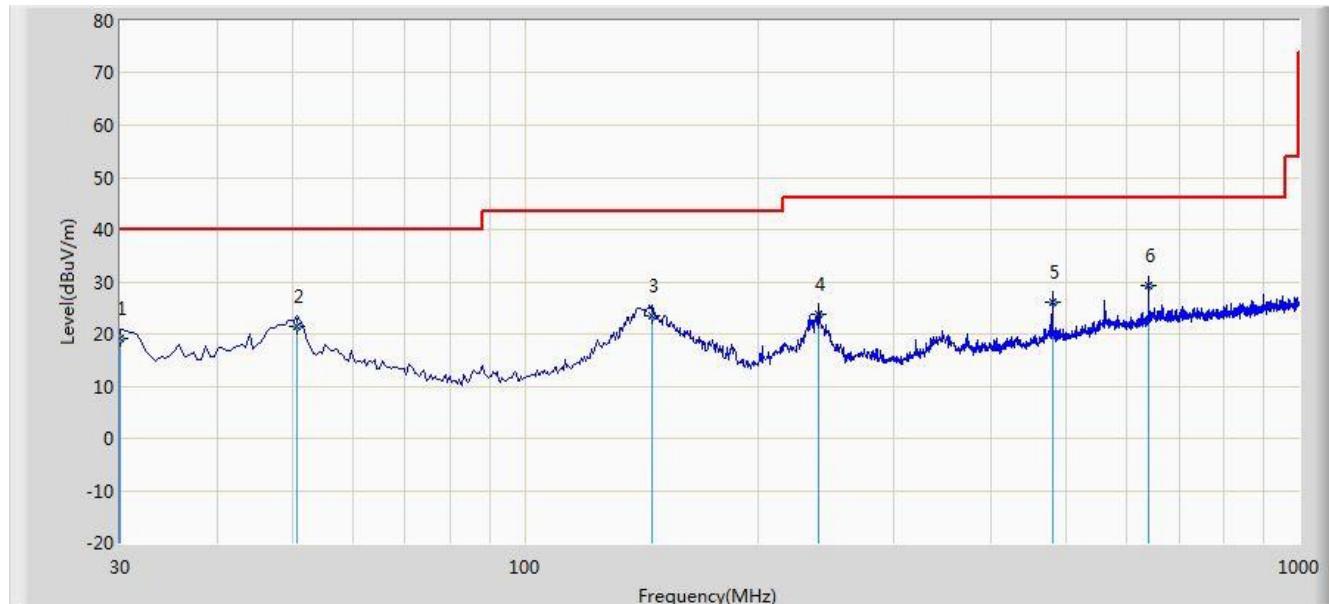

No	Flag	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Over Limit (dB)	Limit (dB $\mu$ V/m)	Factor (dB)	Type
1			30.000	19.004	5.396	-20.996	40.000	13.608	QP
2			50.855	21.391	7.403	-18.609	40.000	13.987	QP
3			145.915	23.364	8.459	-20.136	43.500	14.905	QP
4			240.005	23.840	11.078	-22.160	46.000	12.762	QP
5			480.080	26.123	7.930	-19.877	46.000	18.193	QP
6			640.130	29.152	7.920	-16.848	46.000	21.232	QP


Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

## 7.7. Radiated Restricted Band Edge Measurement

### 7.7.1. Test Result

Site: AC1	Time: 2017/02/17 - 16:35
Limit: FCC_Part15.209_RE(3m)	Engineer: Alex Ma
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT:SMART LED LAMP	Power: AC 120V/60Hz
Test Mode:Transmit by 802.11b at channel 2412MHz	

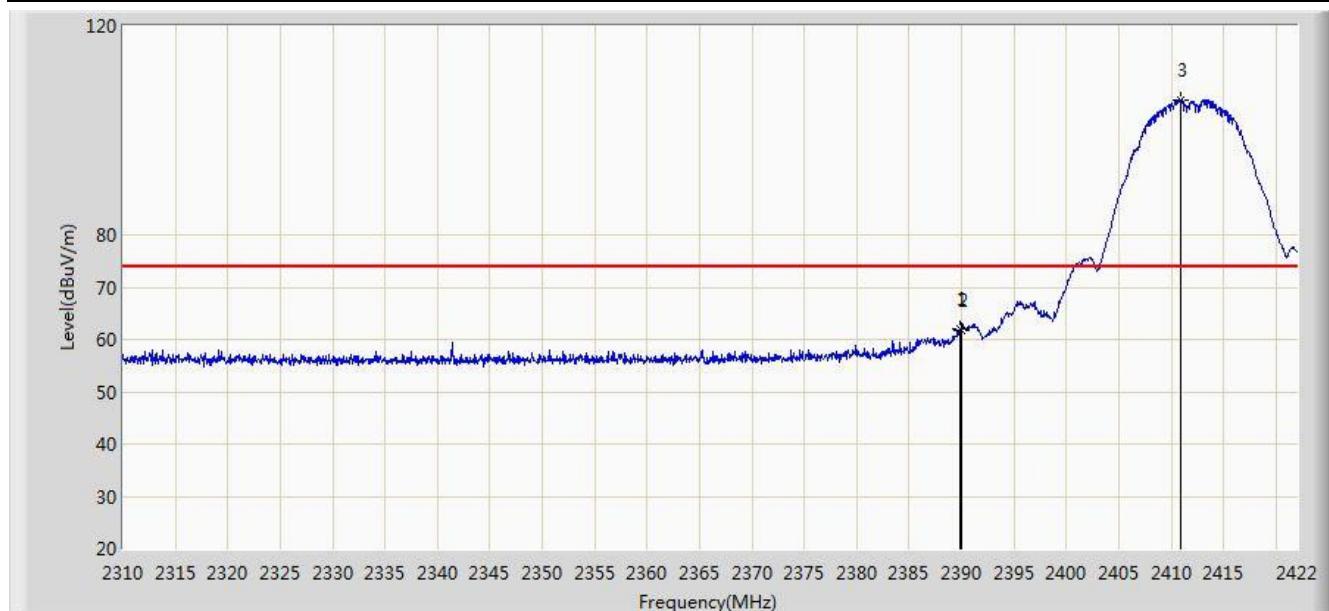

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.912	62.051	30.848	-11.949	74.000	31.203	PK
2			2390.000	61.848	30.645	-12.152	74.000	31.203	PK
3			2410.856	105.782	74.611	N/A	N/A	31.172	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2017/02/17 - 16:28
Limit: FCC_Part15.209_RE(3m)	Engineer: Alex Ma
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT:SMART LED LAMP	Power: AC 120V/60Hz
Test Mode:Transmit by 802.11b at channel 2412MHz	




No	Flag	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Over Limit (dB)	Limit (dB $\mu$ V/m)	Factor (dB)	Type
1			2390.000	52.006	20.803	-1.994	54.000	31.203	AV
2			2411.192	96.936	65.765	N/A	N/A	31.171	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2017/02/17 - 16:36
Limit: FCC_Part15.209_RE(3m)	Engineer: Alex Ma
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT:SMART LED LAMP	Power: AC 120V/60Hz
Test Mode:Transmit by 802.11b at channel 2412MHz	

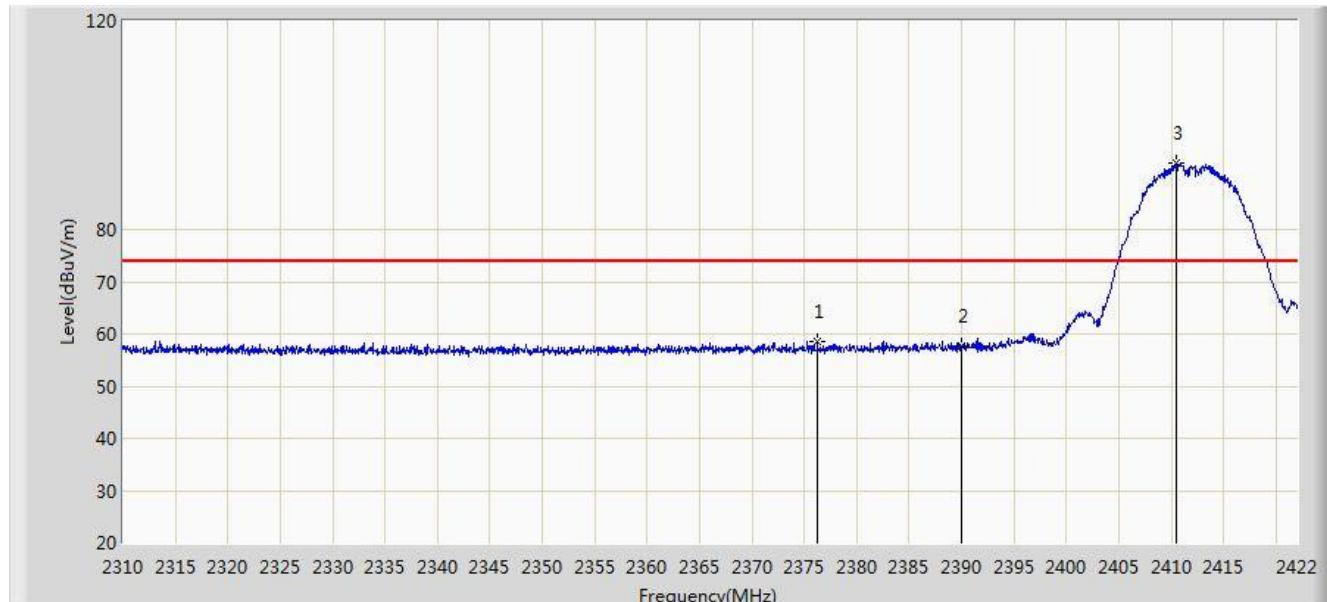


No	Flag	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Over Limit (dB)	Limit (dB $\mu$ V/m)	Factor (dB)	Type
1			2376.248	58.642	27.414	-15.358	74.000	31.228	PK
2			2390.000	57.593	26.390	-16.407	74.000	31.203	PK
3			2410.464	92.656	61.484	N/A	N/A	31.172	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2017/02/17 - 16:39
Limit: FCC_Part15.209_RE(3m)	Engineer: Alex Ma
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT:SMART LED LAMP	Power: AC 120V/60Hz
Test Mode:Transmit by 802.11b at channel 2412MHz	

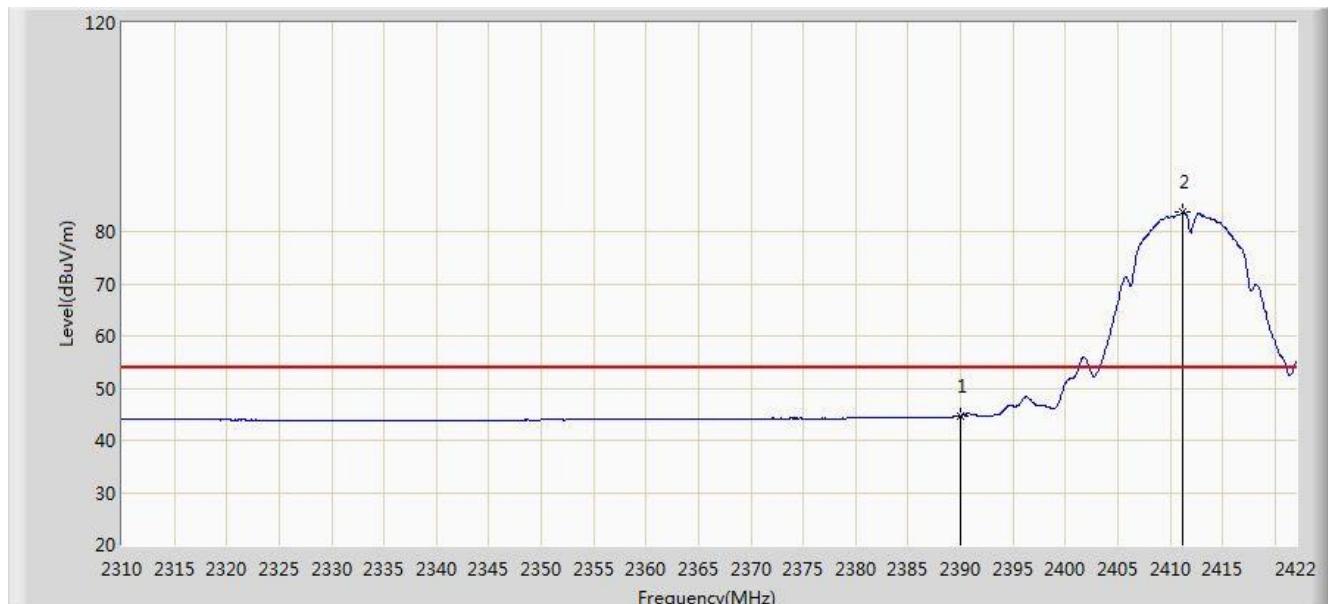


No	Flag	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Over Limit (dB)	Limit (dB $\mu$ V/m)	Factor (dB)	Type
1			2390.000	44.704	13.501	-9.296	54.000	31.203	AV
2			2411.248	83.814	52.643	N/A	N/A	31.171	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2017/02/17 - 16:54
Limit: FCC_Part15.209_RE(3m)	Engineer: Alex Ma
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT:SMART LED LAMP	Power: AC 120V/60Hz
Test Mode:Transmit by 802.11b at channel 2462MHz	

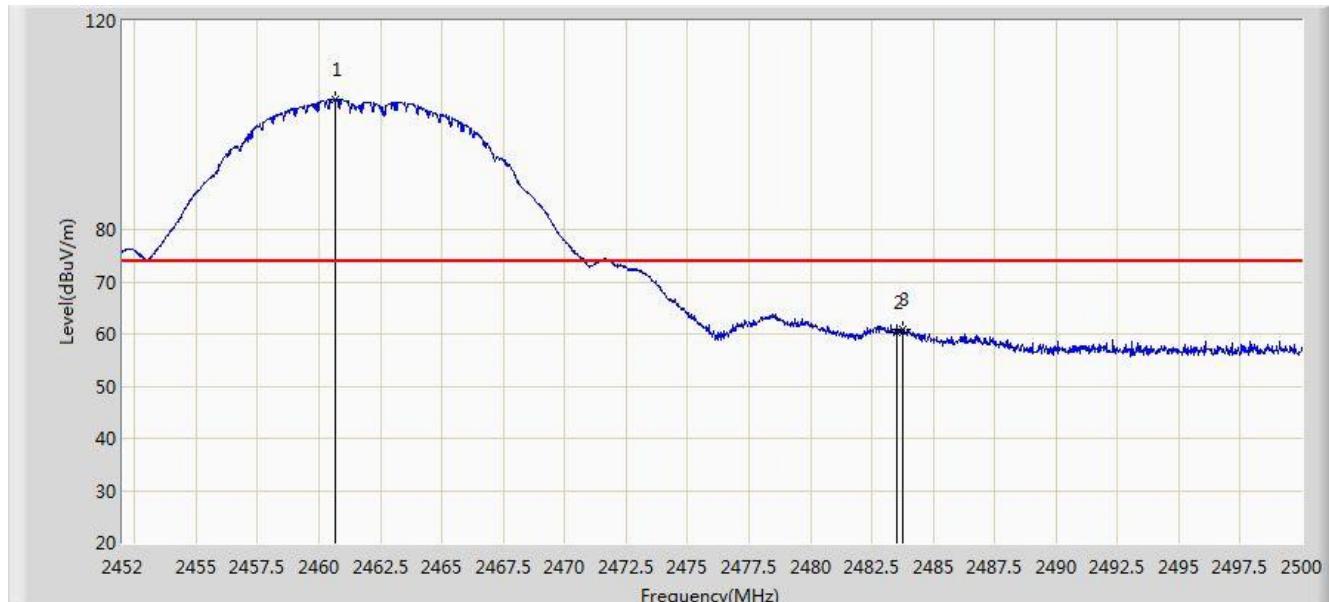

No	Flag	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Over Limit (dB)	Limit (dB $\mu$ V/m)	Factor (dB)	Type
1			2460.664	104.939	73.806	N/A	N/A	31.133	PK
2			2483.500	60.334	29.141	-13.666	74.000	31.194	PK
3			2483.776	60.975	29.781	-13.025	74.000	31.194	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2017/02/17 - 16:49
Limit: FCC_Part15.209_RE(3m)	Engineer: Alex Ma
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT:SMART LED LAMP	Power: AC 120V/60Hz
Test Mode:Transmit by 802.11b at channel 2462MHz	




No	Flag	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Over Limit (dB)	Limit (dB $\mu$ V/m)	Factor (dB)	Type
1			2461.360	95.855	64.721	N/A	N/A	31.134	AV
2			2483.500	52.211	21.018	-1.789	54.000	31.194	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2017/02/17 - 16:55
Limit: FCC_Part15.209_RE(3m)	Engineer: Alex Ma
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT:SMART LED LAMP	Power: AC 120V/60Hz
Test Mode:Transmit by 802.11b at channel 2462MHz	

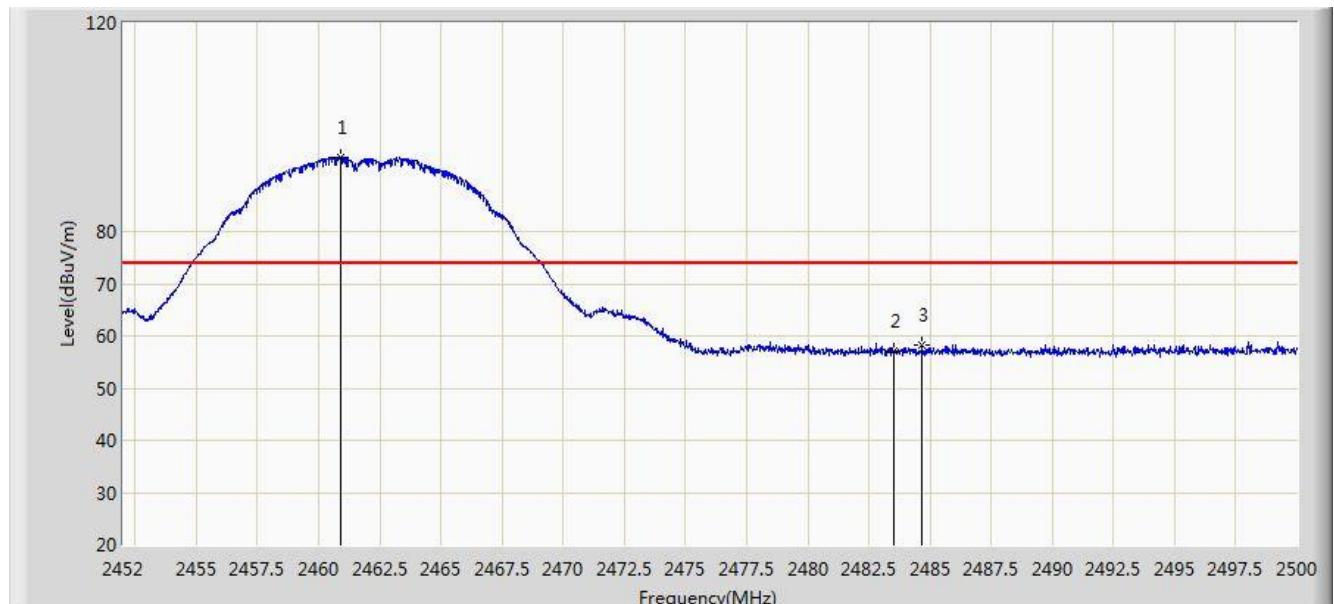

No	Flag	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Over Limit (dB)	Limit (dB $\mu$ V/m)	Factor (dB)	Type
1			2460.904	94.260	63.127	N/A	N/A	31.133	PK
2			2483.500	57.027	25.834	-16.973	74.000	31.194	PK
3			2484.688	58.335	27.139	-15.665	74.000	31.197	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2017/02/17 - 16:58
Limit: FCC_Part15.209_RE(3m)	Engineer: Alex Ma
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT:SMART LED LAMP	Power: AC 120V/60Hz
Test Mode:Transmit by 802.11b at channel 2462MHz	




No	Flag	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Over Limit (dB)	Limit (dB $\mu$ V/m)	Factor (dB)	Type
1			2461.240	85.496	54.362	N/A	N/A	31.134	AV
2			2483.500	44.571	13.378	-9.429	54.000	31.194	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2017/02/17 - 18:47
Limit: FCC_Part15.209_RE(3m)	Engineer: Alex Ma
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT:SMART LED LAMP	Power: AC 120V/60Hz
Test Mode:Transmit by 802.11g at channel 2412MHz	

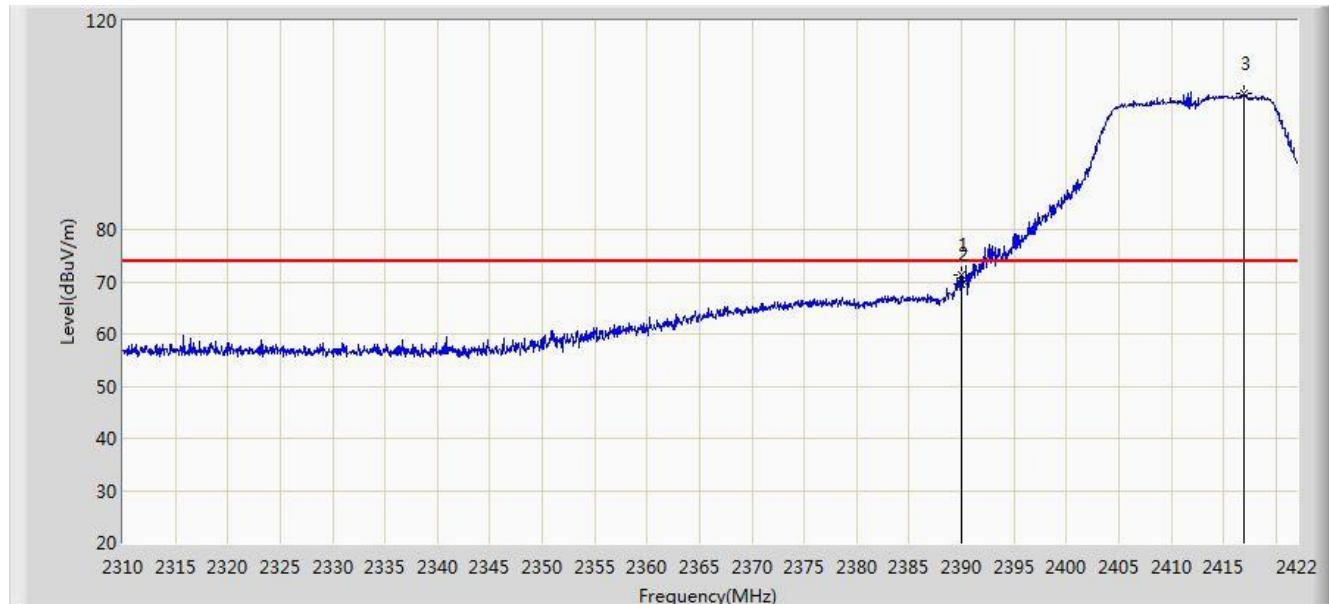


No	Flag	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Over Limit (dB)	Limit (dB $\mu$ V/m)	Factor (dB)	Type
1			2389.968	71.186	39.983	-2.814	74.000	31.203	PK
2			2390.000	69.629	38.426	-4.371	74.000	31.203	PK
3			2416.904	106.116	74.955	N/A	N/A	31.161	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2017/02/17 - 18:49
Limit: FCC_Part15.209_RE(3m)	Engineer: Alex Ma
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT:SMART LED LAMP	Power: AC 120V/60Hz
Test Mode:Transmit by 802.11g at channel 2412MHz	

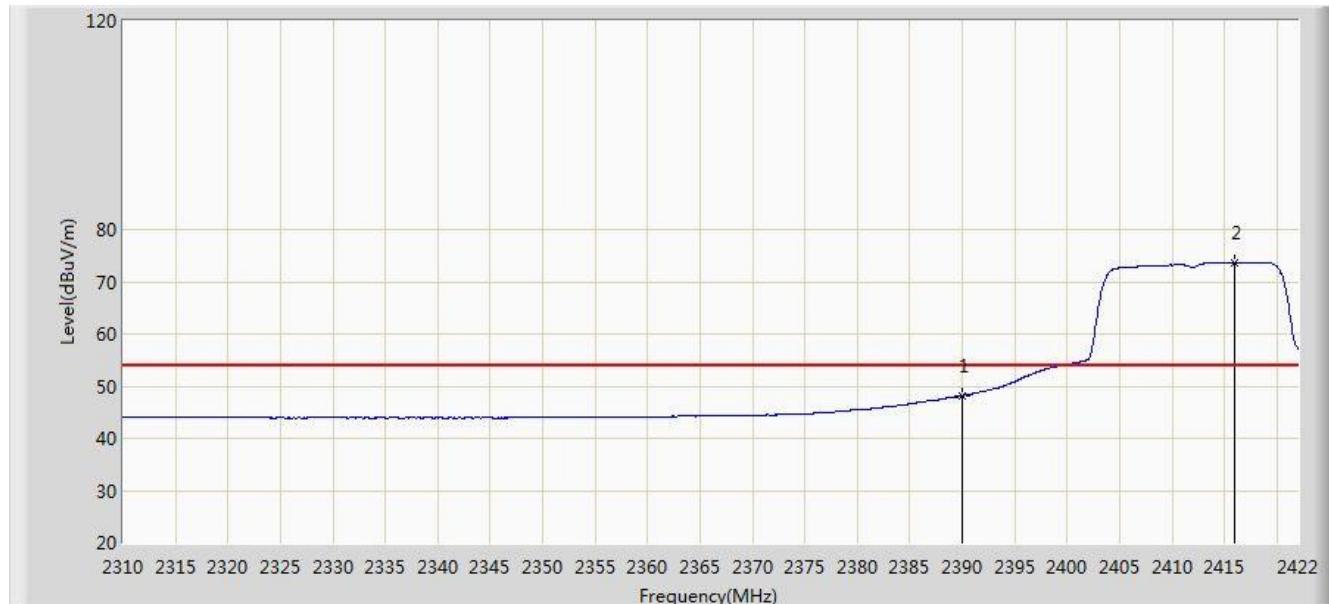


No	Flag	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Over Limit (dB)	Limit (dB $\mu$ V/m)	Factor (dB)	Type
1			2390.000	48.179	16.976	-5.821	54.000	31.203	AV
2			2415.896	73.720	42.557	N/A	N/A	31.163	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2017/02/17 - 18:49
Limit: FCC_Part15.209_RE(3m)	Engineer: Alex Ma
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT:SMART LED LAMP	Power: AC 120V/60Hz
Test Mode:Transmit by 802.11g at channel 2412MHz	

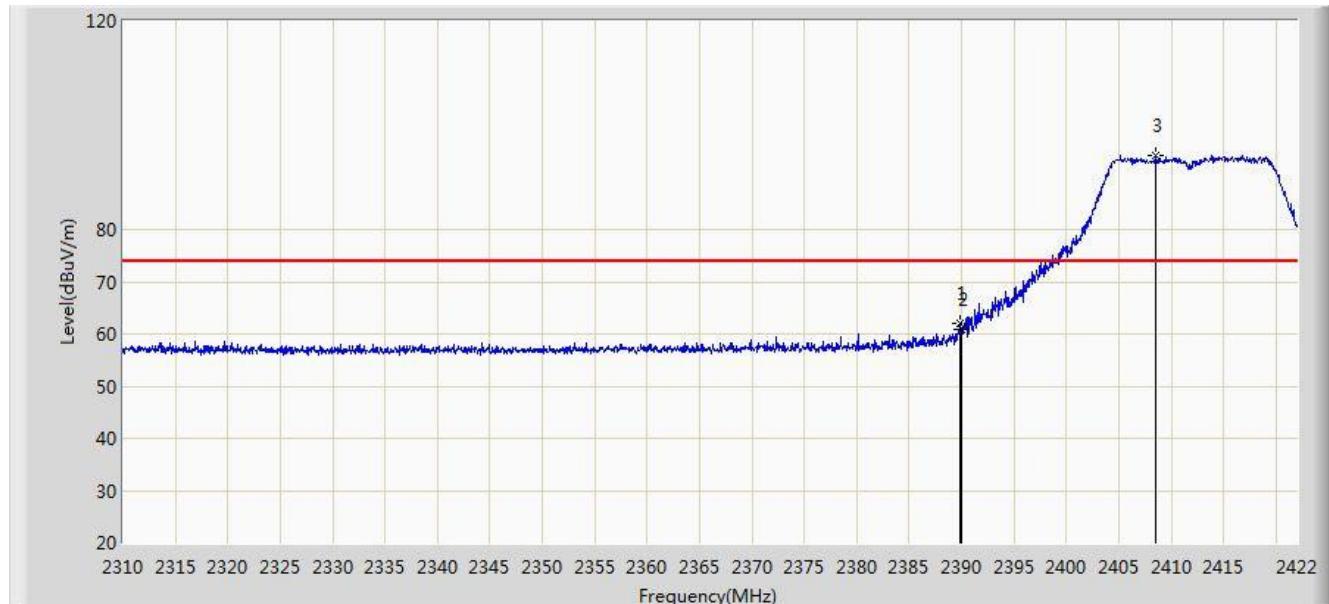


No	Flag	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Over Limit (dB)	Limit (dB $\mu$ V/m)	Factor (dB)	Type
1			2389.912	62.026	30.823	-11.974	74.000	31.203	PK
2			2390.000	60.931	29.728	-13.069	74.000	31.203	PK
3			2408.504	94.237	63.062	N/A	N/A	31.174	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2017/02/17 - 18:52
Limit: FCC_Part15.209_RE(3m)	Engineer: Alex Ma
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT:SMART LED LAMP	Power: AC 120V/60Hz
Test Mode:Transmit by 802.11g at channel 2412MHz	

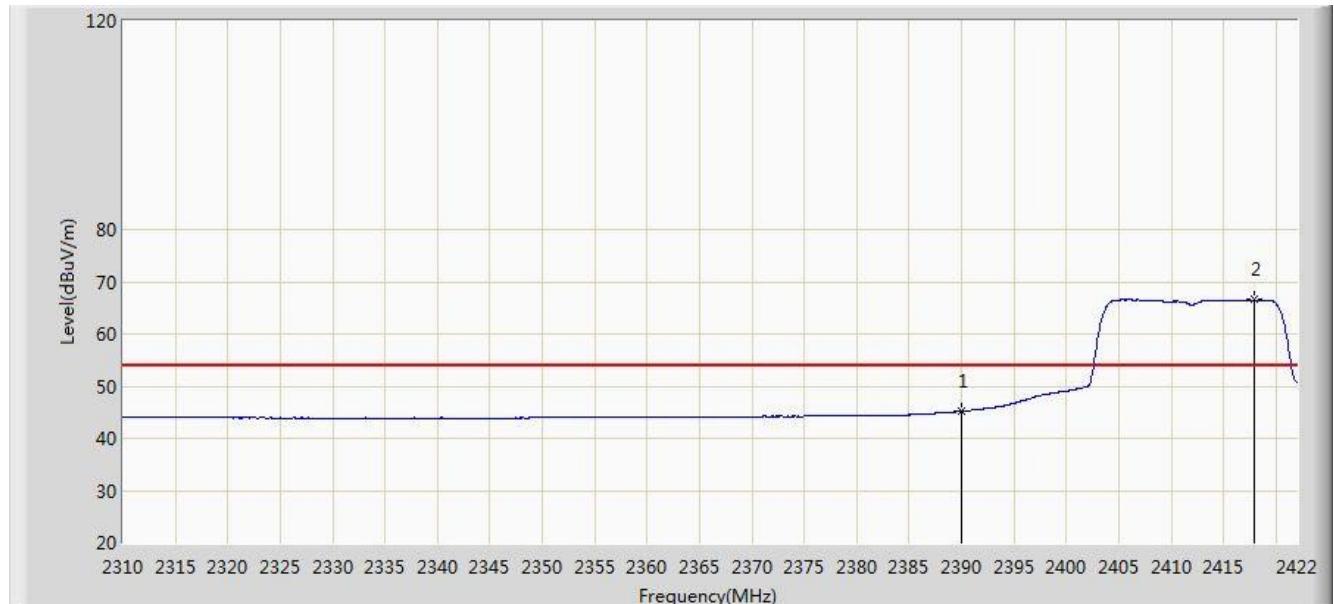


No	Flag	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Over Limit (dB)	Limit (dB $\mu$ V/m)	Factor (dB)	Type
1			2390.000	45.124	13.921	-8.876	54.000	31.203	AV
2			2417.912	66.524	35.365	N/A	N/A	31.159	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2017/02/17 - 19:02
Limit: FCC_Part15.209_RE(3m)	Engineer: Alex Ma
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT:SMART LED LAMP	Power: AC 120V/60Hz
Test Mode:Transmit by 802.11g at channel 2462MHz	

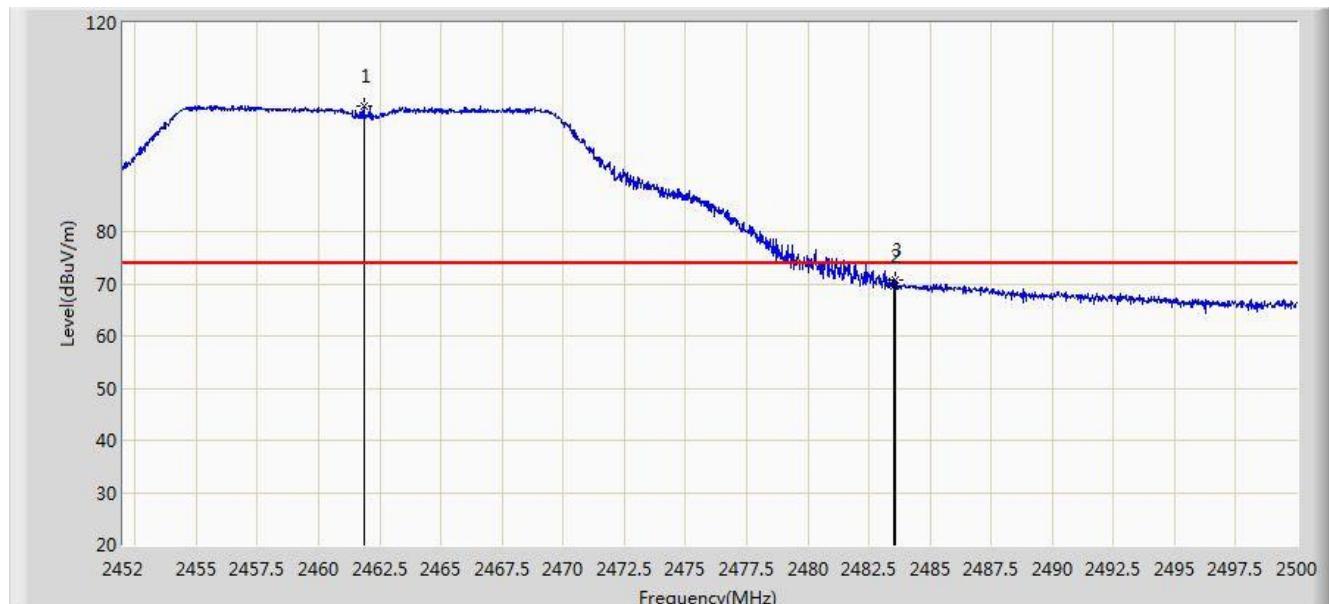


No	Flag	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Over Limit (dB)	Limit (dB $\mu$ V/m)	Factor (dB)	Type
1			2461.840	104.118	72.983	N/A	N/A	31.135	PK
2			2483.500	69.509	38.316	-4.491	74.000	31.194	PK
3			2483.560	70.613	39.420	-3.387	74.000	31.194	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2017/02/17 - 19:03
Limit: FCC_Part15.209_RE(3m)	Engineer: Alex Ma
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT:SMART LED LAMP	Power: AC 120V/60Hz
Test Mode:Transmit by 802.11g at channel 2462MHz	

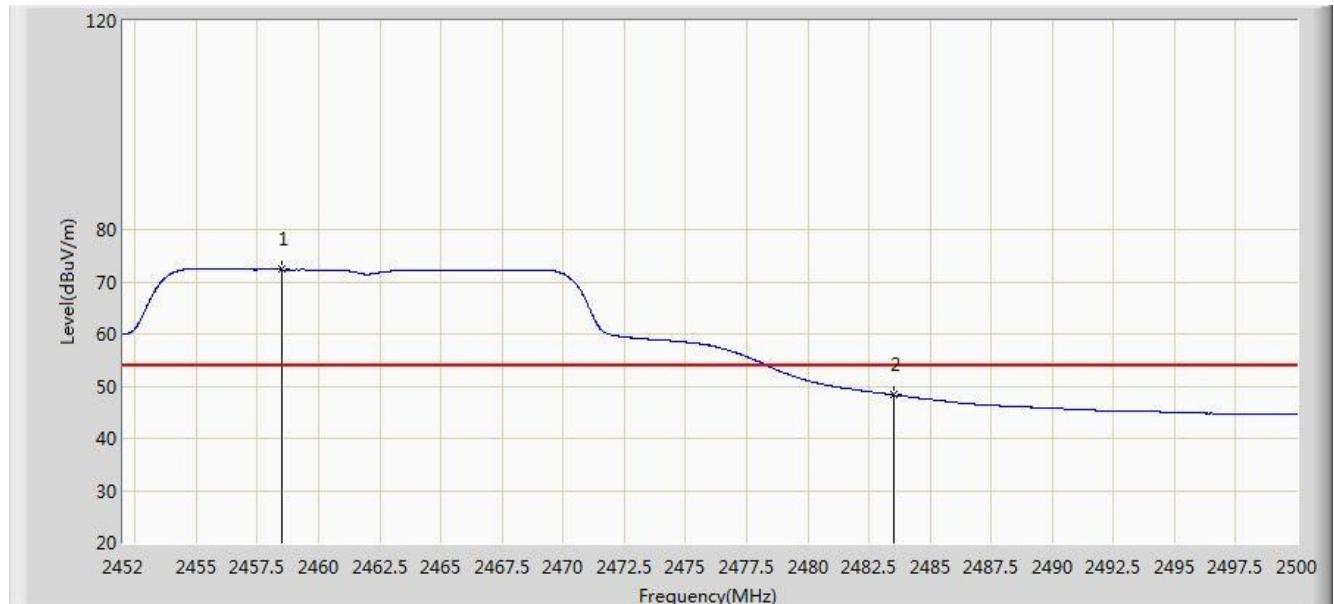


No	Flag	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Over Limit (dB)	Limit (dB $\mu$ V/m)	Factor (dB)	Type
1			2458.480	72.334	41.205	N/A	N/A	31.129	AV
2			2483.500	48.280	17.087	-5.720	54.000	31.194	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2017/02/17 - 19:04
Limit: FCC_Part15.209_RE(3m)	Engineer: Alex Ma
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT:SMART LED LAMP	Power: AC 120V/60Hz
Test Mode:Transmit by 802.11g at channel 2462MHz	

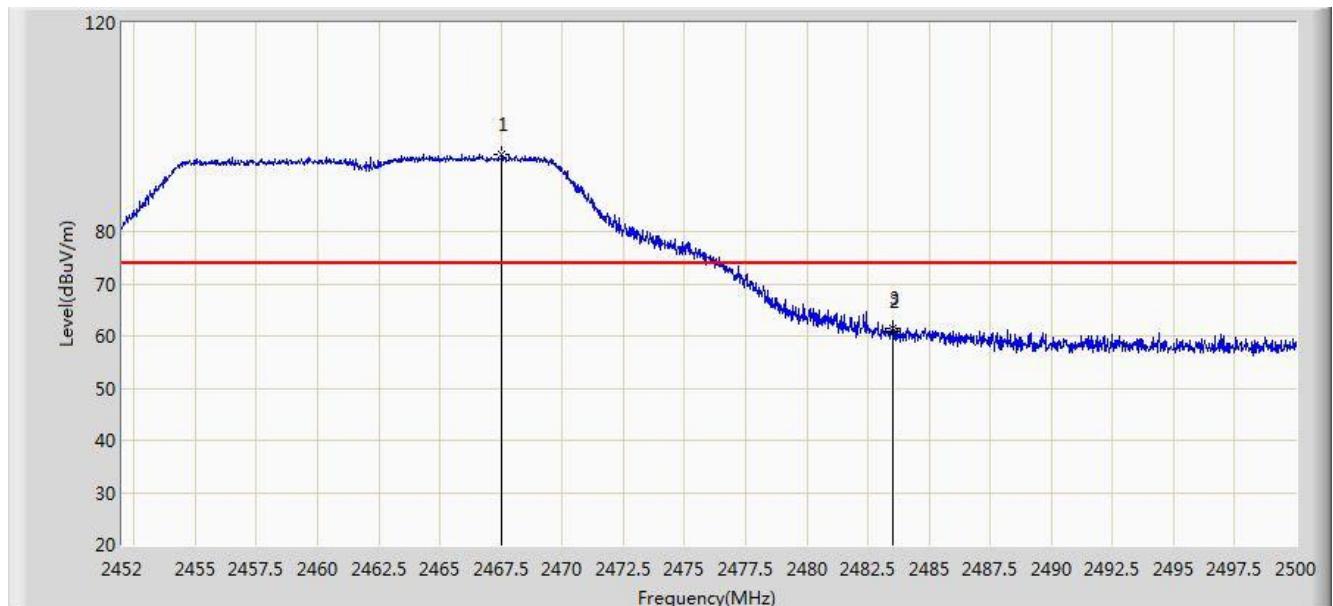


No	Flag	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Over Limit (dB)	Limit (dB $\mu$ V/m)	Factor (dB)	Type
1			2467.528	94.908	63.759	N/A	N/A	31.150	PK
2			2483.500	60.842	29.649	-13.158	74.000	31.194	PK
3			2483.536	61.586	30.393	-12.414	74.000	31.194	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2017/02/17 - 19:07
Limit: FCC_Part15.209_RE(3m)	Engineer: Alex Ma
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT:SMART LED LAMP	Power: AC 120V/60Hz
Test Mode:Transmit by 802.11g at channel 2462MHz	

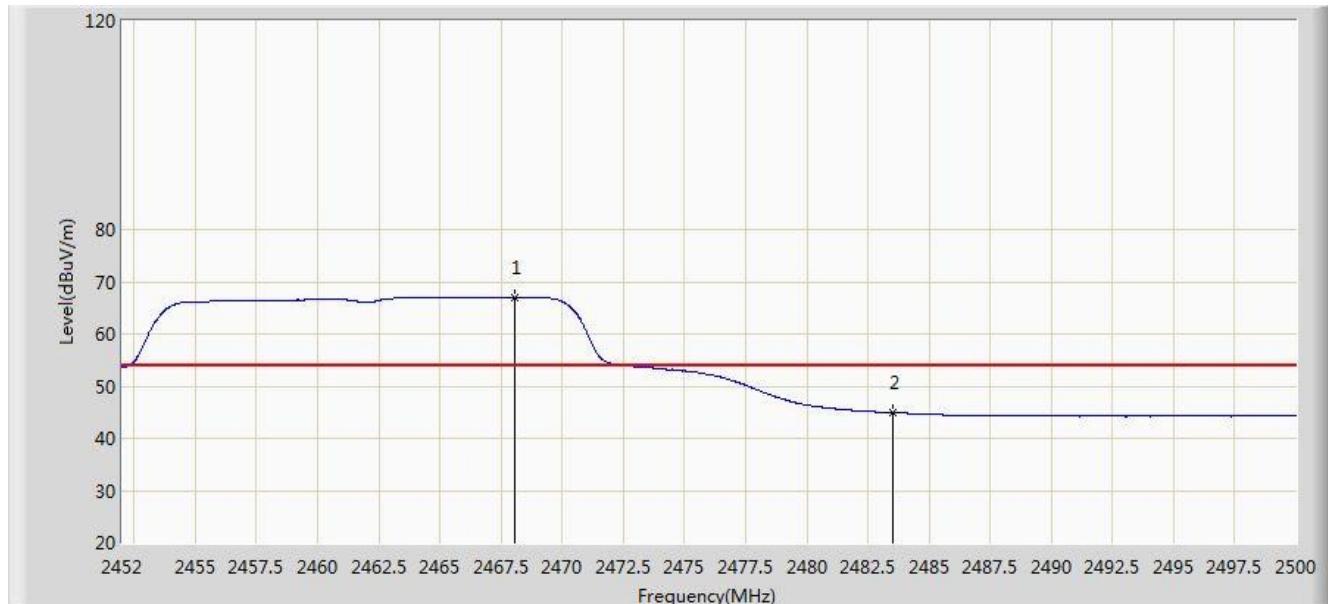


No	Flag	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Over Limit (dB)	Limit (dB $\mu$ V/m)	Factor (dB)	Type
1			2468.056	67.019	35.868	N/A	N/A	31.151	AV
2			2483.500	44.928	13.735	-9.072	54.000	31.194	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2017/02/17 - 19:15
Limit: FCC_Part15.209_RE(3m)	Engineer: Alex Ma
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT:SMART LED LAMP	Power: AC 120V/60Hz
Test Mode:Transmit by 802.11n-HT20 at channel 2412MHz	

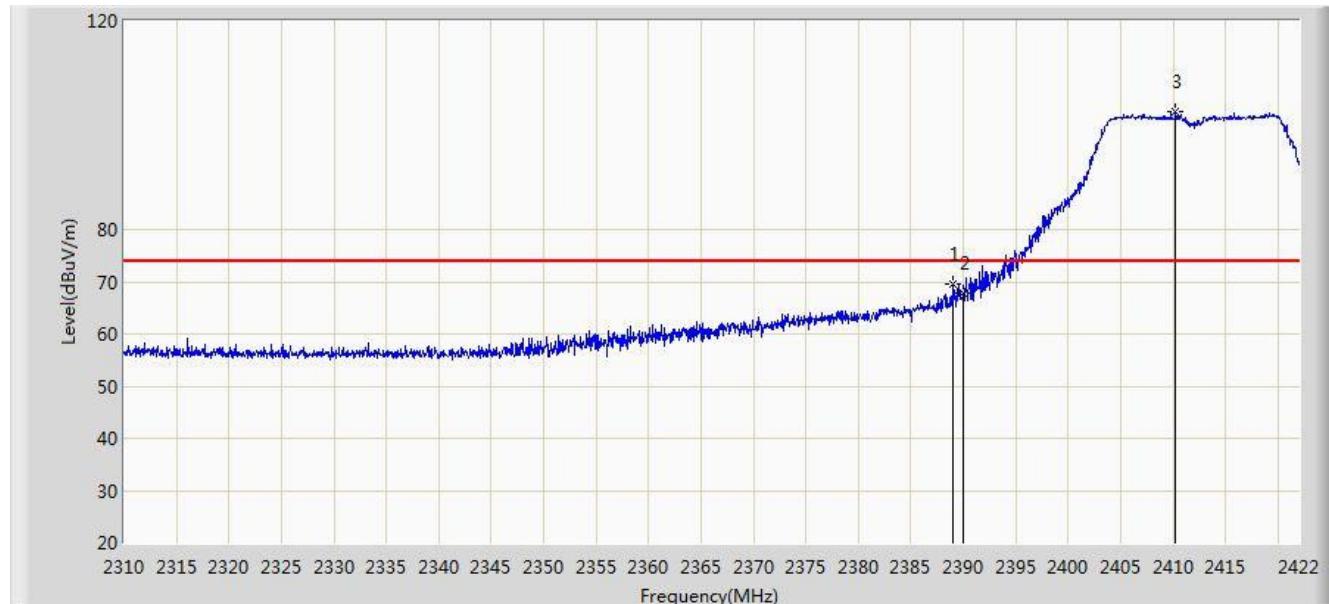


No	Flag	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Over Limit (dB)	Limit (dB $\mu$ V/m)	Factor (dB)	Type
1			2389.072	69.438	38.234	-4.562	74.000	31.204	PK
2			2390.000	67.752	36.549	-6.248	74.000	31.203	PK
3			2410.240	102.478	71.306	N/A	N/A	31.172	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2017/02/17 - 19:17
Limit: FCC_Part15.209_RE(3m)	Engineer: Alex Ma
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT:SMART LED LAMP	Power: AC 120V/60Hz
Test Mode:Transmit by 802.11n-HT20 at channel 2412MHz	

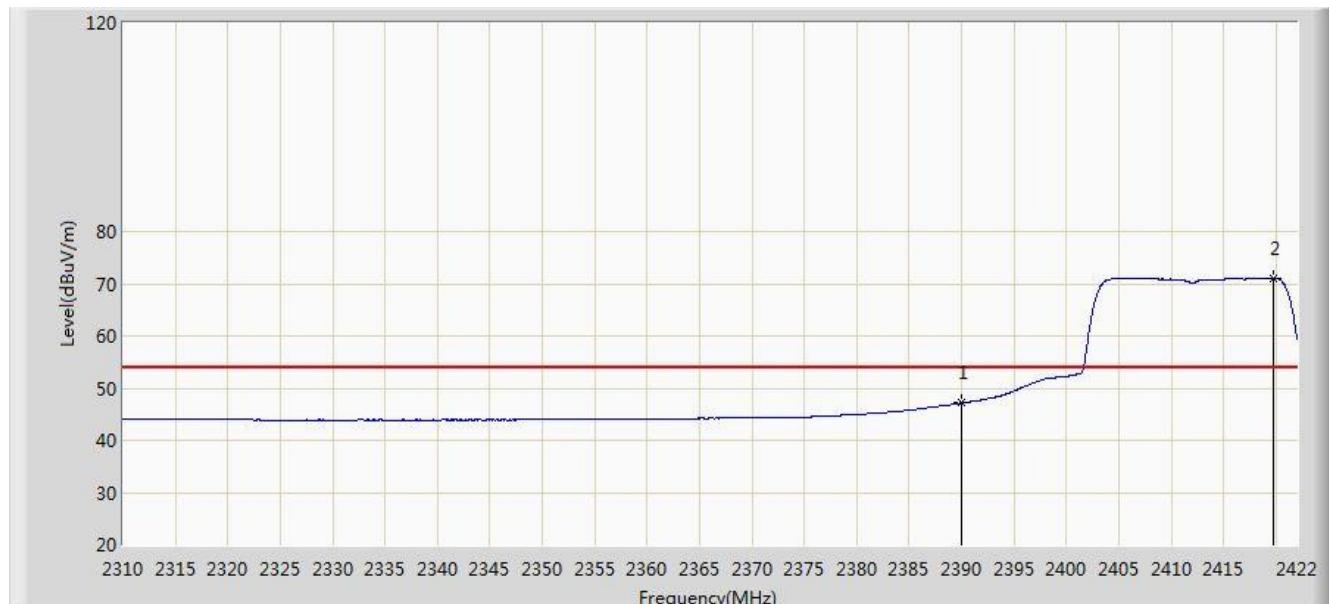


No	Flag	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Over Limit (dB)	Limit (dB $\mu$ V/m)	Factor (dB)	Type
1			2390.000	47.146	15.943	-6.854	54.000	31.203	AV
2			2419.760	71.068	39.912	N/A	N/A	31.157	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2017/02/17 - 19:18
Limit: FCC_Part15.209_RE(3m)	Engineer: Alex Ma
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT:SMART LED LAMP	Power: AC 120V/60Hz
Test Mode:Transmit by 802.11n-HT20 at channel 2412MHz	

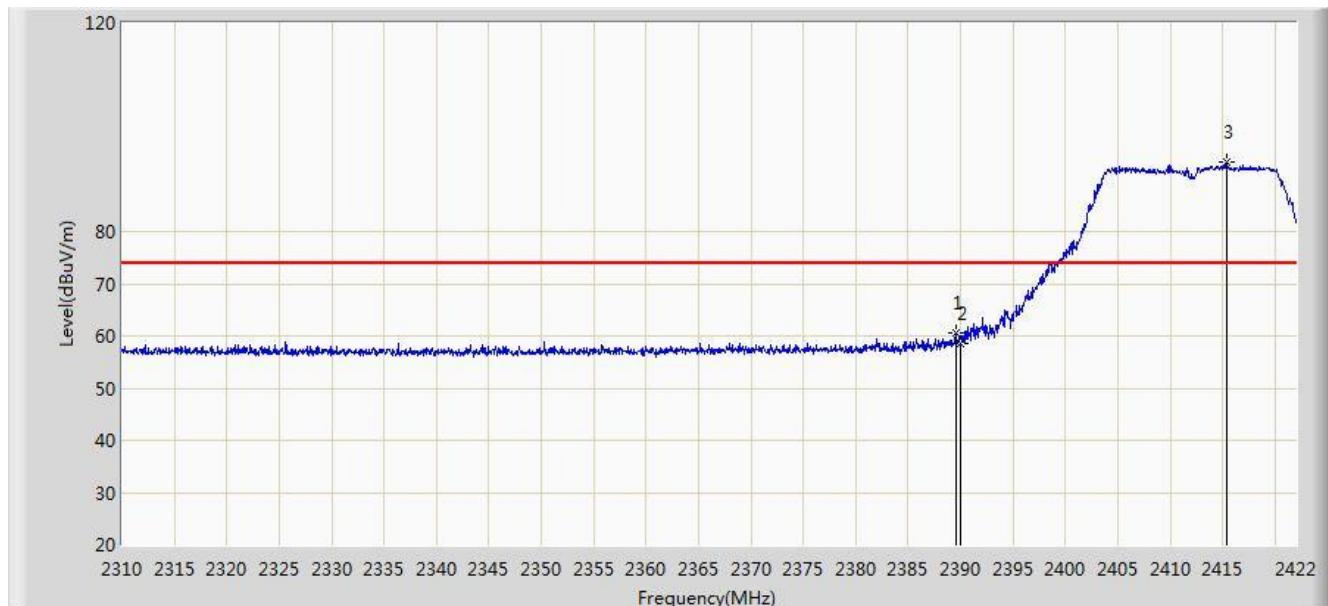


No	Flag	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Over Limit (dB)	Limit (dB $\mu$ V/m)	Factor (dB)	Type
1			2389.576	60.565	29.361	-13.435	74.000	31.204	PK
2			2390.000	58.449	27.246	-15.551	74.000	31.203	PK
3			2415.392	93.331	62.167	N/A	N/A	31.164	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2017/02/17 - 19:21
Limit: FCC_Part15.209_RE(3m)	Engineer: Alex Ma
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT:SMART LED LAMP	Power: AC 120V/60Hz
Test Mode:Transmit by 802.11n-HT20 at channel 2412MHz	

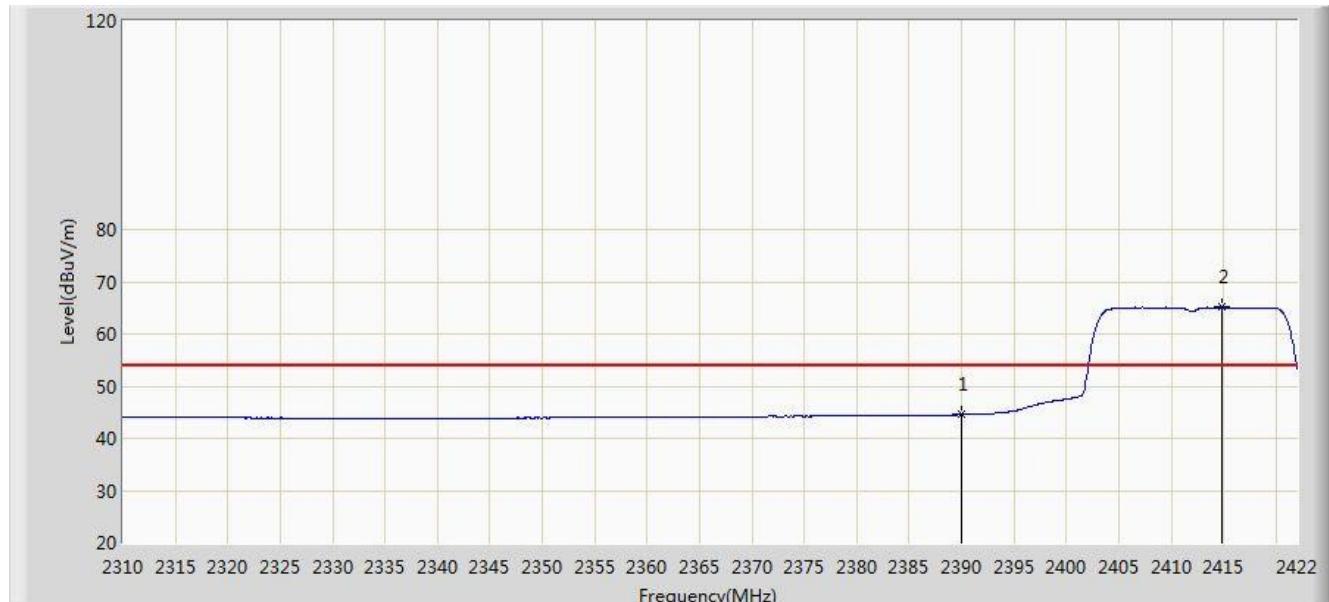


No	Flag	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Over Limit (dB)	Limit (dB $\mu$ V/m)	Factor (dB)	Type
1			2390.000	44.516	13.313	-9.484	54.000	31.203	AV
2			2414.888	65.082	33.917	N/A	N/A	31.165	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2017/02/17 - 19:27
Limit: FCC_Part15.209_RE(3m)	Engineer: Alex Ma
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT:SMART LED LAMP	Power: AC 120V/60Hz
Test Mode:Transmit by 802.11n-HT20 at channel 2462MHz	

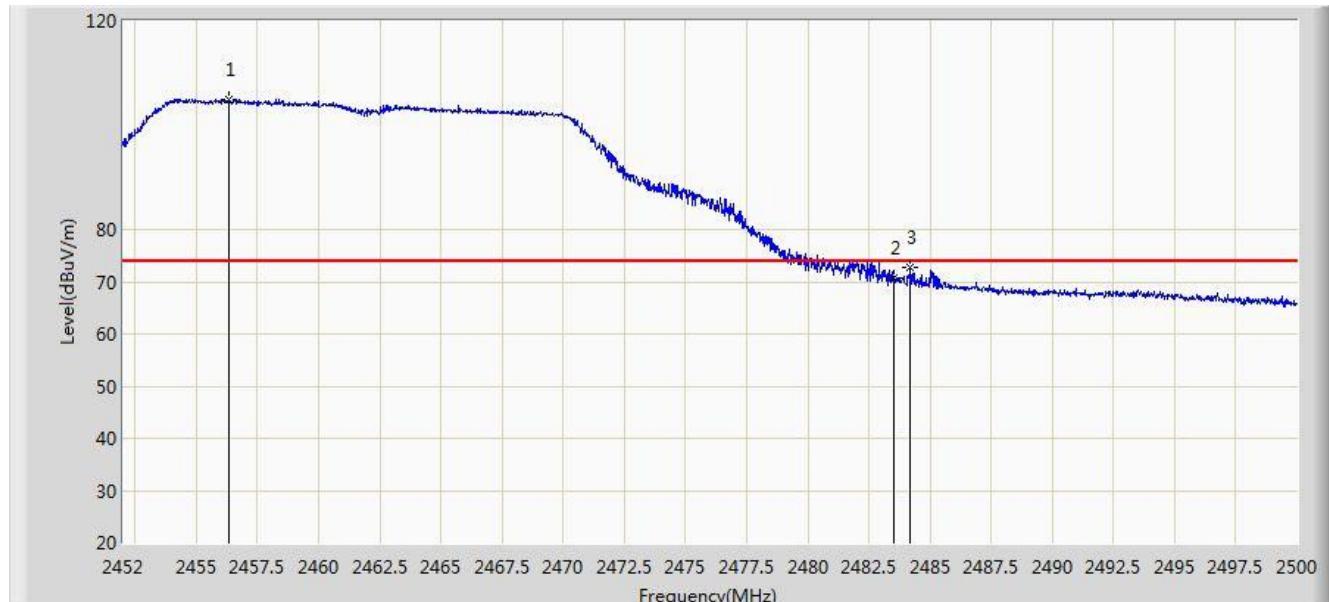


No	Flag	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Over Limit (dB)	Limit (dB $\mu$ V/m)	Factor (dB)	Type
1			2456.320	104.938	73.813	N/A	N/A	31.125	PK
2			2483.500	70.678	39.485	-3.322	74.000	31.194	PK
3			2484.208	72.738	41.543	-1.262	74.000	31.195	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2017/02/17 - 19:29
Limit: FCC_Part15.209_RE(3m)	Engineer: Alex Ma
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT:SMART LED LAMP	Power: AC 120V/60Hz
Test Mode:Transmit by 802.11n-HT20 at channel 2462MHz	

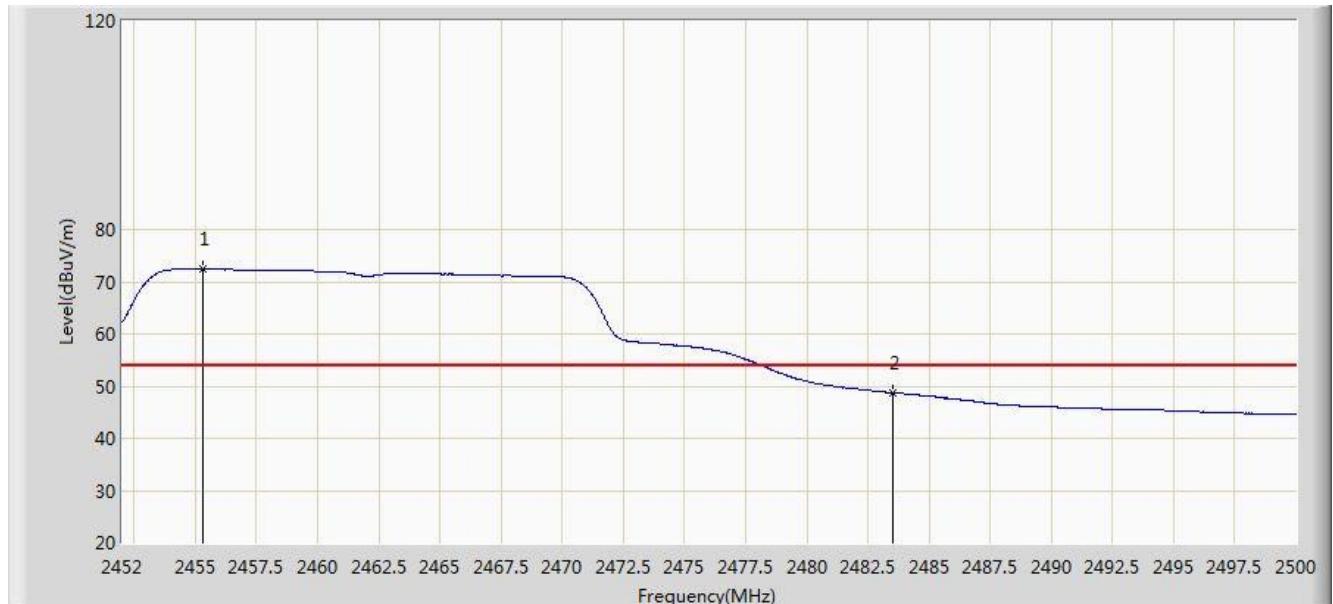


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2455.336	72.443	41.320	N/A	N/A	31.123	AV
2			2483.500	48.769	17.576	-5.231	54.000	31.194	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2017/02/17 - 19:30
Limit: FCC_Part15.209_RE(3m)	Engineer: Alex Ma
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT:SMART LED LAMP	Power: AC 120V/60Hz
Test Mode:Transmit by 802.11n-HT20 at channel 2462MHz	

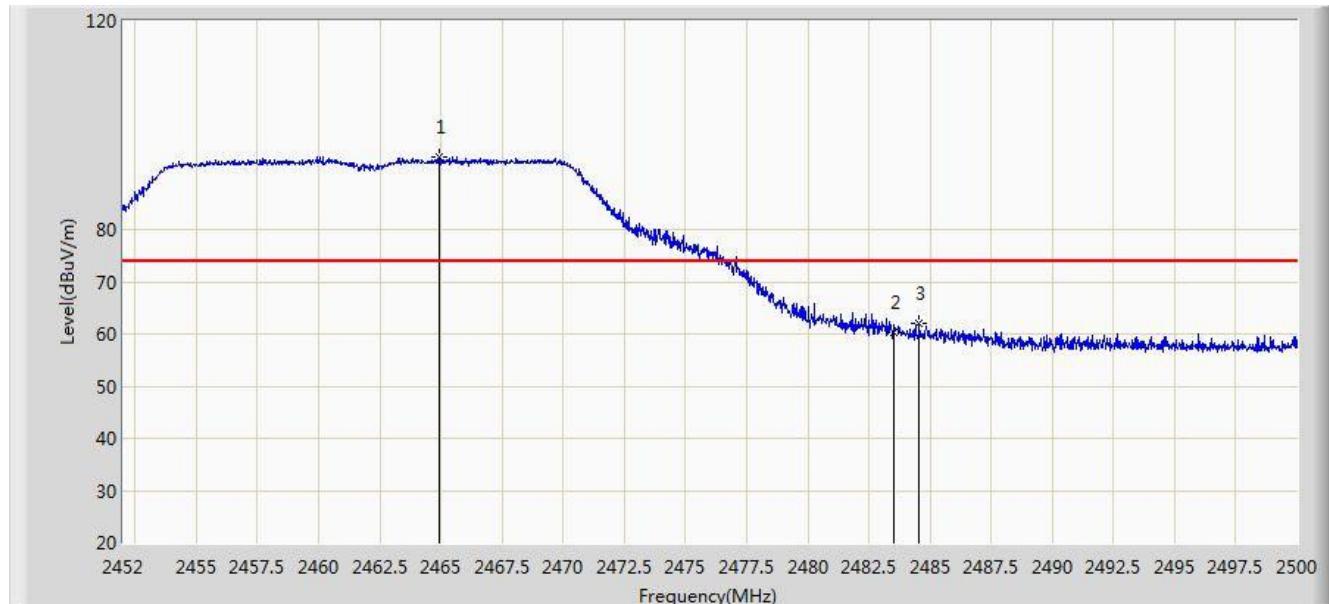


No	Flag	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Over Limit (dB)	Limit (dB $\mu$ V/m)	Factor (dB)	Type
1			2464.912	93.876	62.734	N/A	N/A	31.142	PK
2			2483.500	60.386	29.193	-13.614	74.000	31.194	PK
3			2484.568	61.904	30.708	-12.096	74.000	31.197	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2017/02/17 - 19:33
Limit: FCC_Part15.209_RE(3m)	Engineer: Alex Ma
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT:SMART LED LAMP	Power: AC 120V/60Hz
Test Mode:Transmit by 802.11n-HT20 at channel 2462MHz	

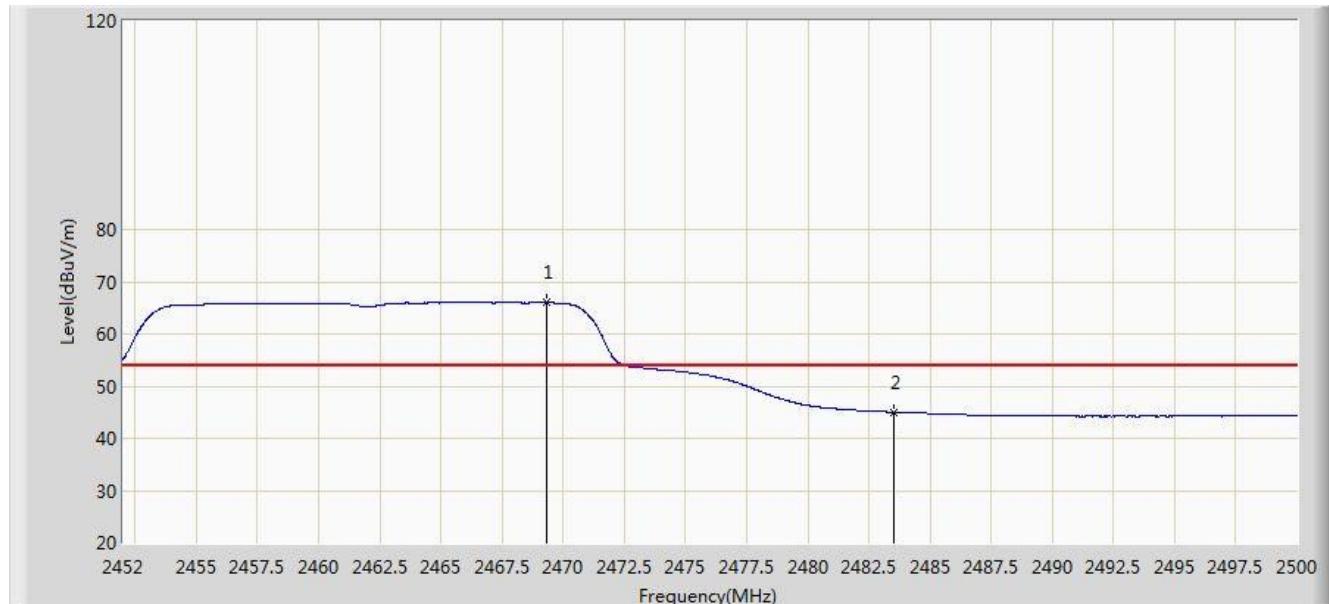

No	Flag	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Over Limit (dB)	Limit (dB $\mu$ V/m)	Factor (dB)	Type
1			2469.328	65.994	34.840	N/A	N/A	31.154	AV
2			2483.500	45.011	13.818	-8.989	54.000	31.194	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

## 7.8. AC Conducted Emissions Measurement


### 7.8.1. Test Limit

FCC Part 15 Subpart C Paragraph 15.207 Limits		
Frequency (MHz)	QP (dBuV)	AV (dBuV)
0.15 - 0.50	66 - 56	56 – 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.


Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

### 7.8.2. Test Setup

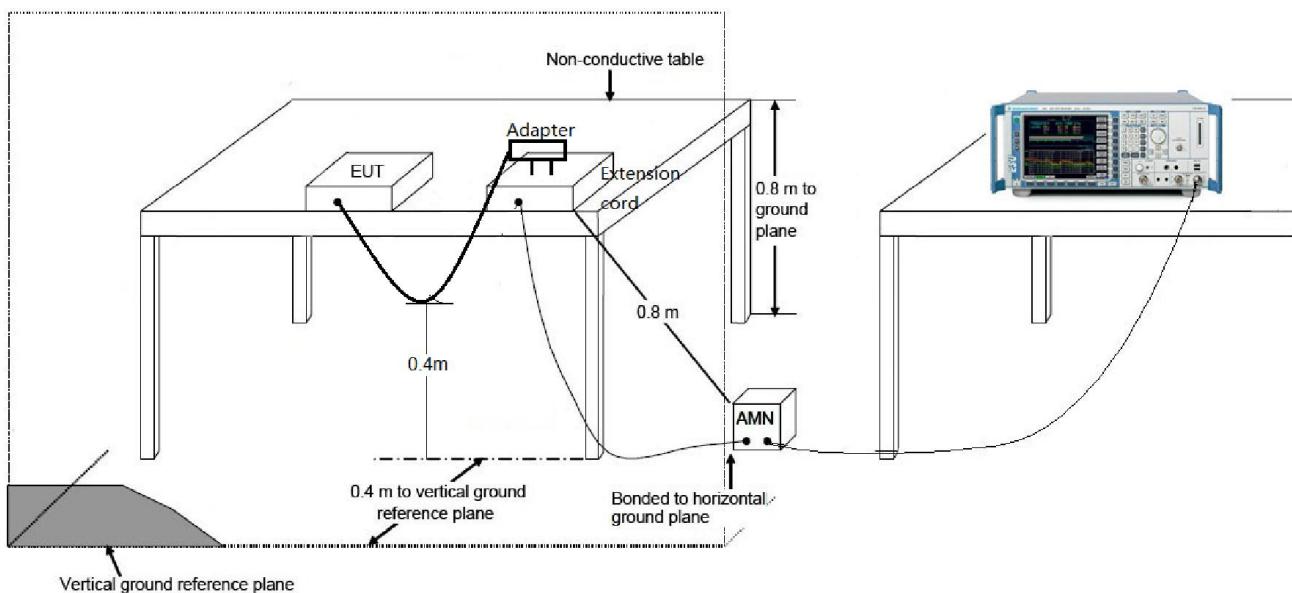

### 7.8.3. Test Result

Site: SR2	Time: 2017/02/07 - 21:27
Limit: FCC_Part15.107_CE_AC Power_ClassB	Engineer: Will Yan
Probe: ENV216_101683_Filter On	Polarity: Line
EUT: EBE-QPZ04	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at channel 2412MHz	

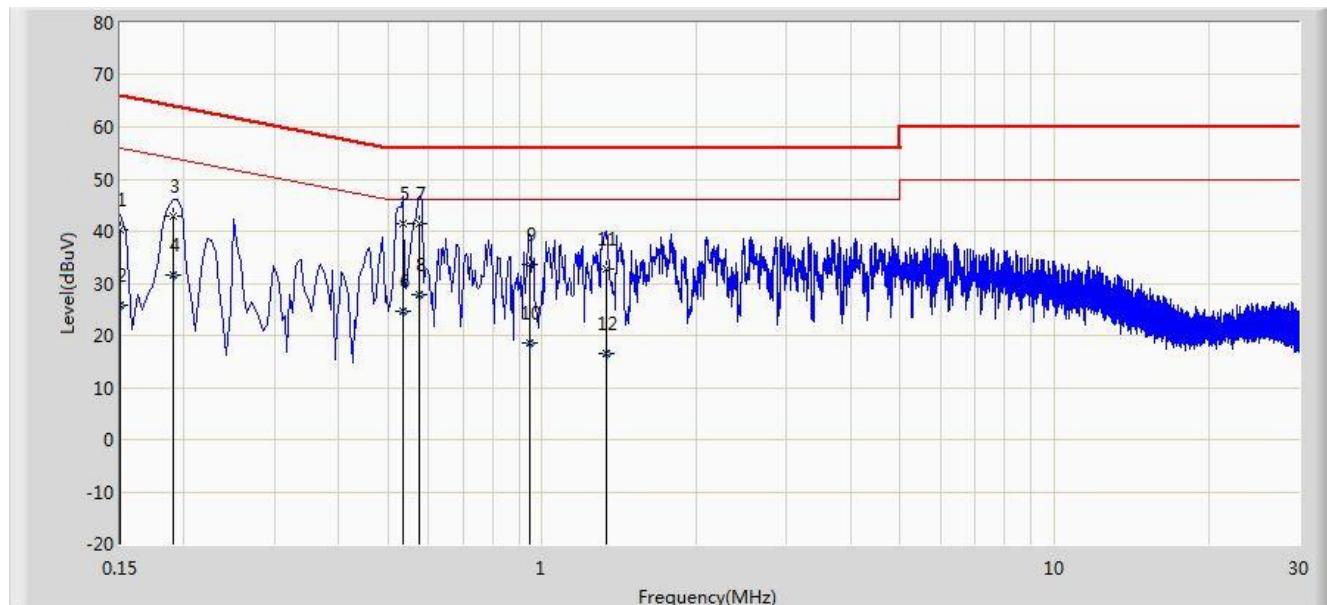


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV)	Factor (dB)	Type
1			0.150	40.222	29.054	-25.778	66.000	11.168	QP
2			0.150	25.918	14.749	-30.082	56.000	11.168	AV
3			0.190	42.904	32.875	-21.133	64.037	10.029	QP
4			0.190	31.700	21.671	-22.337	54.037	10.029	AV
5			0.534	41.476	31.327	-14.524	56.000	10.149	QP
6			0.534	24.514	14.365	-21.486	46.000	10.149	AV
7	*		0.574	41.593	31.464	-14.407	56.000	10.128	QP
8			0.574	27.762	17.634	-18.238	46.000	10.128	AV
9			0.946	33.635	23.699	-22.365	56.000	9.936	QP
10			0.946	18.623	8.687	-27.377	46.000	9.936	AV
11			1.330	32.837	22.941	-23.163	56.000	9.896	QP
12			1.330	16.625	6.729	-29.375	46.000	9.896	AV

Note: Measure Level (dB $\mu$ V) = Reading Level (dB $\mu$ V) + Factor (dB).

Factor (dB) = Cable Loss (dB) + LISN Factor (dB).

Site: SR2	Time: 2017/02/07 - 21:32
Limit: FCC_Part15.107_CE_AC Power_ClassB	Engineer: Will Yan
Probe: ENV216_101683_Filter On	Polarity: Neutral
EUT: EBE-QPZ04	Power: AC 120V/60Hz
Test Mode:Transmit by 802.11g at channel 2412MHz	

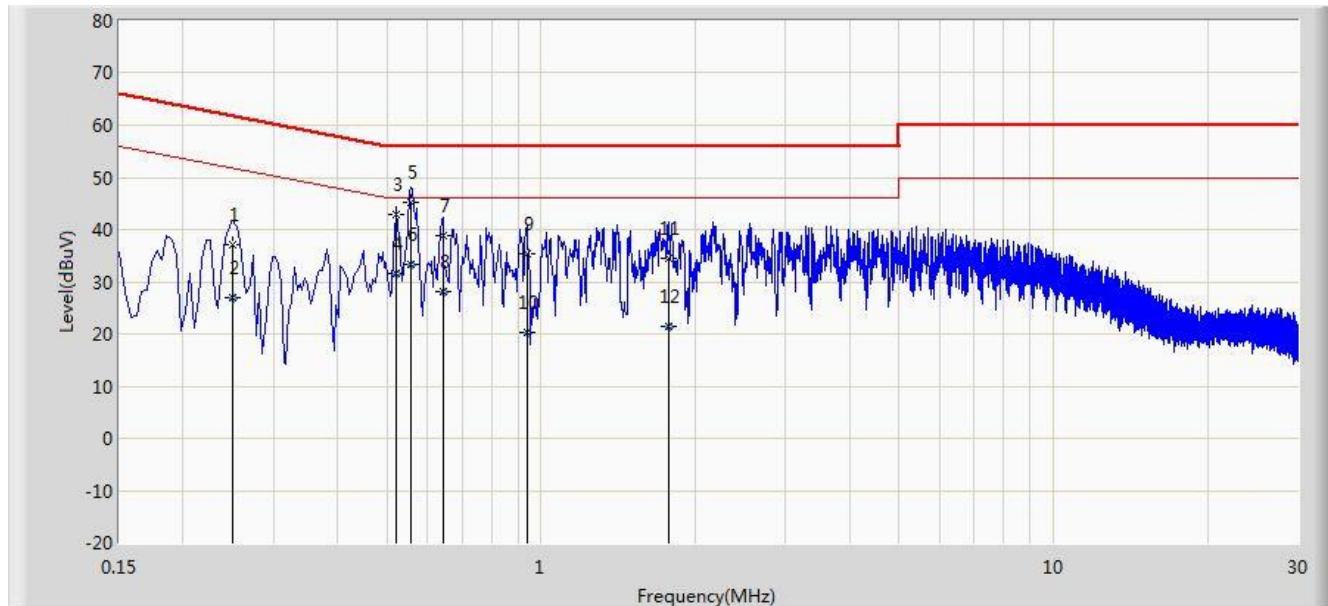

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV)	Factor (dB)	Type
1			0.250	37.120	27.119	-24.637	61.757	10.001	QP
2			0.250	26.919	16.918	-24.838	51.757	10.001	AV
3			0.522	43.009	32.835	-12.991	56.000	10.174	QP
4			0.522	31.560	21.386	-14.440	46.000	10.174	AV
5	*		0.558	45.353	35.198	-10.647	56.000	10.154	QP
6			0.558	33.264	23.110	-12.736	46.000	10.154	AV
7			0.642	38.909	28.801	-17.091	56.000	10.108	QP
8			0.642	28.163	18.055	-17.837	46.000	10.108	AV
9			0.938	35.401	25.458	-20.599	56.000	9.943	QP
10			0.938	20.319	10.376	-25.681	46.000	9.943	AV
11			1.778	34.357	24.476	-21.643	56.000	9.881	QP
12			1.778	21.310	11.429	-24.690	46.000	9.881	AV

Note: Measure Level (dB $\mu$ V) = Reading Level (dB $\mu$ V) + Factor (dB).

Factor (dB) = Cable Loss (dB) + LISN Factor (dB).

## 8. CONCLUSION

The data collected relate only the item(s) tested and show that the **SMART LED LAMP FCC ID:**

**2AJ3WEBEQPZ04** is in compliance with Part 15C of the FCC Rules.

---

The End

---