



**SGS-CSTC Standards Technical Services Co., Ltd.  
Shenzhen Branch**

No. 1 Workshop, M-10, Middle section, Science & Technology Park,  
Shenzhen, Guangdong, China 518057

Telephone: +86 (0) 755 2601 2053  
Fax: +86 (0) 755 2671 0594  
Email: ee.shenzhen@sgs.com

Report No.: SZEM180700671002  
Page: 1 of 44

# TEST REPORT

**Application No.:** SZEM1807006710CR  
**Applicant:** Xiamen Huoshiquan Import & Export CO., LTD  
**Address of Applicant:** Room 703, No. 813-2 Xiahe Road, Siming District, XIAMEN China  
**Equipment Under Test (EUT):**  
**EUT Name:** RC quadcopter  
**Model No.:** HS700, HS700D, HS700G, HS710, HS165, HS165G, HS165G, HS120D, HS120G, HS130D, HS130G, HS500, HS600, HS800, HS900, HS510, HS610, HS810, HS910, HS550, HS650, HS760, HS770, HS880, HS660, HS9001, CD200D, CD600, HS500G, HS600G, HS800G, HS900G, HS510G, HS550G, HS610G, HS650G, HS660G, HS760G, HS770G, HS880G, HS910G, HS500D, HS600D, HS800D, HS900D, HS510D, HS610D, HS810D, HS910D, HS650D, HS660D, HS760D, HS770D, HS880D, HS410, HS510, HS175, HS176, HS320, HS330 ♣

♣ Please refer to section 2 of this report which indicates which model was actually tested and which were electrically identical.

**FCC ID:** 2AJ55HOLYSTONEMJ  
**Standard(s) :** 47 CFR Part 15, Subpart C 15.249  
**Date of Receipt:** 2018-07-26  
**Date of Test:** 2018-07-26 to 2018-09-04  
**Date of Issue:** 2018-09-12

<b>Test Result:</b>	<b>Pass*</b>
---------------------	--------------

\* In the configuration tested, the EUT complied with the standards specified above.



Keny Xu  
EMC Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



<i>Revision Record</i>				
<i>Version</i>	<i>Chapter</i>	<i>Date</i>	<i>Modifier</i>	<i>Remark</i>
01		2018-09-12		Original

Authorized for issue by:				
				
		<hr/>		
		Bill Chen /Project Engineer		
				
		<hr/>		
		Eric Fu /Reviewer		

## 2 Test Summary

Radio Spectrum Technical Requirement				
Item	Standard	Method	Requirement	Result
Antenna Requirement	47 CFR Part 15, Subpart C 15.249	N/A	47 CFR Part 15, Subpart C 15.203	Pass

Radio Spectrum Matter Part				
Item	Standard	Method	Requirement	Result
20dB Bandwidth	47 CFR Part 15, Subpart C 15.249	ANSI C63.10 (2013) Section 6.9	47 CFR Part 15, Subpart C 15.215	Pass
Field Strength of the Fundamental Signal (15.249(a))	47 CFR Part 15, Subpart C 15.249	ANSI C63.10 (2013) Section 6.5&6.6	47 CFR Part 15, Subpart C 15.249(a)	Pass
Restricted Band Around Fundamental Frequency	47 CFR Part 15, Subpart C 15.249	ANSI C63.10 (2013) Section 6.4&6.5&6.6	47 CFR Part 15, Subpart C 15.205 & 15.249(d) & 15.209	Pass
Radiated Emissions	47 CFR Part 15, Subpart C 15.249	ANSI C63.10 (2013) Section 6.4&6.5&6.6	47 CFR Part 15, Subpart C 15.209 & 15.249 (a),(d)	Pass

### Declaration of EUT Family Grouping:

Model No.: HS700, HS700D, HS700G, HS710, HS165, HS165G, HS165G, HS120D, HS120G, HS130D, HS130G, HS500, HS600, HS800, HS900, HS510, HS610, HS810, HS910, HS550, HS650, HS760, HS770, HS880, HS660, HS9001, CD200D, CD600, HS500G, HS600G, HS800G, HS900G, HS510G, HS550G, HS610G, HS650G, HS660G, HS760G, HS770G, HS880G, HS910G, HS500D, HS600D, HS800D, HS900D, HS510D, HS610D, HS810D, HS910D, HS650D, HS660D, HS760D, HS770D, HS880D, HS410, HS510, HS175, HS176, HS320, HS330

Only the model HS700 was tested, since the electrical circuit design, layout, components used, internal wiring and functions were identical for the above models, with only the colour, appearance, package and assort is different.



### 3 Contents

	Page
<b>1 COVER PAGE</b> .....	<b>1</b>
<b>2 TEST SUMMARY</b> .....	<b>3</b>
<b>3 CONTENTS</b> .....	<b>4</b>
<b>4 GENERAL INFORMATION</b> .....	<b>5</b>
4.1 DETAILS OF E.U.T. ....	5
4.2 DESCRIPTION OF SUPPORT UNITS .....	5
4.3 MEASUREMENT UNCERTAINTY .....	6
4.4 TEST LOCATION.....	7
4.5 TEST FACILITY.....	7
4.6 DEVIATION FROM STANDARDS.....	7
4.7 ABNORMALITIES FROM STANDARD CONDITIONS .....	7
<b>5 EQUIPMENT LIST</b> .....	<b>8</b>
<b>6 RADIO SPECTRUM TECHNICAL REQUIREMENT</b> .....	<b>11</b>
6.1 ANTENNA REQUIREMENT .....	11
6.1.1 <i>Test Requirement:</i> .....	11
6.1.2 <i>Conclusion</i> .....	11
<b>7 RADIO SPECTRUM MATTER TEST RESULTS</b> .....	<b>12</b>
7.1 20DB BANDWIDTH .....	12
7.1.1 <i>E.U.T. Operation</i> .....	12
7.1.2 <i>Test Setup Diagram</i> .....	12
7.1.3 <i>Measurement Procedure and Data</i> .....	12
7.2 FIELD STRENGTH OF THE FUNDAMENTAL SIGNAL (15.249(A)).....	15
7.2.1 <i>E.U.T. Operation</i> .....	16
7.2.2 <i>Test Setup Diagram</i> .....	16
7.2.3 <i>Measurement Procedure and Data</i> .....	16
7.3 RESTRICTED BAND AROUND FUNDAMENTAL FREQUENCY .....	24
7.3.1 <i>E.U.T. Operation</i> .....	25
7.3.2 <i>Test Setup Diagram</i> .....	25
7.3.3 <i>Measurement Procedure and Data</i> .....	25
7.4 RADIATED EMISSIONS .....	32
7.4.1 <i>E.U.T. Operation</i> .....	33
7.4.2 <i>Test Setup Diagram</i> .....	33
7.4.3 <i>Measurement Procedure and Data</i> .....	33
<b>8 PHOTOGRAPHS</b> .....	<b>44</b>
8.1 TEST SETUP .....	44
8.2 EUT CONSTRUCTIONAL DETAILS (EUT PHOTOS).....	44

## 4 General Information

### 4.1 Details of E.U.T.

Power supply:	RX: Rechargeable battery 7.4V 2800mAh (Charge by USB)
Operation Frequency	2417MHz to 2466MHz
Modulation Type:	GFSK
Number of Channels:	50
Channel Spacing	1MHz
Antenna Type	Monopole
Antenna Gain	Antenna 1: 2dBi Antenna 2: 2dBi Two antennas can not simultaneous transmission.

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2417MHz	14	2430MHz	28	2443MHz	40	2456MHz
2	2418MHz	15	2431MHz	29	2444MHz	41	2457MHz
3	2419MHz	16	2432MHz	30	2445MHz	42	2458MHz
4	2420MHz	17	2433MHz	31	2446MHz	43	2459MHz
5	2421MHz	19	2434MHz	32	2447MHz	44	2460MHz
6	2422MHz	20	2435MHz	33	2448MHz	45	2461MHz
7	2423MHz	21	2436MHz	34	2449MHz	46	2462MHz
8	2424MHz	22	2437MHz	35	2450MHz	47	2463MHz
9	2425MHz	23	2438MHz	36	2451MHz	48	2464MHz
10	2426MHz	24	2439MHz	37	2452MHz	49	2465MHz
11	2427MHz	25	2440MHz	38	2453MHz	50	2466MHz
12	2428MHz	26	2441MHz	39	2454MHz		
13	2429MHz	27	2442MHz	37	2455MHz		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The Lowest channel(CH1)	2417MHz
The Middle channel(CH27)	2442MHz
The Highest channel(CH50)	2466MHz

### 4.2 Description of Support Units

The EUT has been tested as an independent unit.

### 4.3 Measurement Uncertainty

No.	Item	Measurement Uncertainty
1	Radio Frequency	$\pm 7.25 \times 10^{-8}$
2	Duty cycle	$\pm 0.37\%$
3	Occupied Bandwidth	$\pm 3\%$
4	RF conducted power	$\pm 0.75\text{dB}$
5	RF power density	$\pm 2.84\text{dB}$
6	Conducted Spurious emissions	$\pm 0.75\text{dB}$
7	RF Radiated power	$\pm 4.5\text{dB}$ (below 1GHz)
		$\pm 4.8\text{dB}$ (above 1GHz)
8	Radiated Spurious emission test	$\pm 4.5\text{dB}$ (Below 1GHz)
		$\pm 4.8\text{dB}$ (Above 1GHz)
9	Temperature test	$\pm 1^\circ\text{C}$
10	Humidity test	$\pm 3\%$
11	Supply voltages	$\pm 1.5\%$
12	Time	$\pm 3\%$



#### **4.4 Test Location**

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch

No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, Guangdong, China.  
518057.

Tel: +86 755 2601 2053 Fax: +86 755 2671 0594

No tests were sub-contracted.

#### **4.5 Test Facility**

The test facility is recognized, certified, or accredited by the following organizations:

- **CNAS (No. CNAS L2929)**

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

- **A2LA (Certificate No. 3816.01)**

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 3816.01.

- **VCCI**

The 3m Fully-anechoic chamber for above 1GHz, 10m Semi-anechoic chamber for below 1GHz, Shielded Room for Mains Port Conducted Interference Measurement and Telecommunication Port Conducted Interference Measurement of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-20026, R-14188, C-12383 and T-11153 respectively.

- **FCC –Designation Number: CN1178**

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been recognized as an accredited testing laboratory.

Designation Number: CN1178. Test Firm Registration Number: 406779.

- **Industry Canada (IC)**

Two 3m Semi-anechoic chambers and the 10m Semi-anechoic chamber of SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab have been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 4620C-1, 4620C-2, 4620C-3.

#### **4.6 Deviation from Standards**

None

#### **4.7 Abnormalities from Standard Conditions**

None



## 5 Equipment List

<b>20dB Bandwidth</b>					
<b>Equipment</b>	<b>Manufacturer</b>	<b>Model No</b>	<b>Inventory No</b>	<b>Cal Date</b>	<b>Cal Due Date</b>
DC Power Supply	ZhaoXin	RXN-305D	SEM011-02	2017-09-27	2018-09-26
Spectrum Analyzer	Rohde & Schwarz	FSP	SEM004-06	2017-09-27	2018-09-26
Measurement Software	JS Tonscend	JS1120-2 BT/WIFI V2.	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM031-02	2018-07-12	2019-07-11
Attenuator	Weinschel Associates	WA41	SEM021-09	N/A	N/A
Signal Generator	KEYSIGHT	N5173B	SEM006-05	2017-09-27	2018-09-26
Power Meter	Rohde & Schwarz	NRVS	SEM014-02	2017-09-27	2018-09-26

<b>Field Strength of the Fundamental Signal (15.249(a))</b>					
<b>Equipment</b>	<b>Manufacturer</b>	<b>Model No</b>	<b>Inventory No</b>	<b>Cal Date</b>	<b>Cal Due Date</b>
3m Semi-Anechoic Chamber	AUDIX	N/A	SEM001-02	2018-03-13	2021-03-12
Measurement Software	AUDIX	e3 V8.2014-6-27	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM026-01	2018-07-12	2019-07-11
Spectrum Analyzer	Rohde & Schwarz	FSU43	SEM004-08	2018-04-02	2019-04-01
BiConiLog Antenna (26-3000MHz)	ETS-Lindgren	3142C	SEM003-01	2017-06-27	2020-06-26
Horn Antenna (1-18GHz)	Rohde & Schwarz	HF907	SEM003-07	2018-04-13	2021-04-12
Horn Antenna (15GHz-40GHz)	Schwarzbeck	BBHA 9170	SEM003-15	2017-10-17	2020-10-16
Pre-amplifier (0.1-1300MHz)	HP	8447D	SEM005-02	2017-09-27	2018-09-26
Low Noise Amplifier (100MHz-18GHz)	Black Diamond Series	BDLNA-0118-352810	SEM005-05	2017-09-27	2018-09-27
Pre-amplifier (18-26GHz)	Rohde & Schwarz	CH14-H052	SEM005-17	2018-04-02	2019-04-01
Pre-amplifier (26GHz-40GHz)	Compliance Directions Systems Inc.	PAP-2640-50	SEM005-08	2018-04-02	2019-04-01
DC Power Supply	Zhao Xin	RXN-305D	SEM011-02	2017-09-27	2018-09-26
Active Loop Antenna	ETS-Lindgren	6502	SEM003-08	2017-08-22	2020-08-21
Band filter	N/A	N/A	SEM023-01	N/A	N/A





Restricted Band Around Fundamental Frequency					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
3m Semi-Anechoic Chamber	AUDIX	N/A	SEM001-02	2018-03-13	2021-03-12
Measurement Software	AUDIX	e3 V8.2014-6-27	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM026-01	2018-07-12	2019-07-11
Spectrum Analyzer	Rohde & Schwarz	FSU43	SEM004-08	2018-04-02	2019-04-01
BiConiLog Antenna (26-3000MHz)	ETS-Lindgren	3142C	SEM003-01	2017-06-27	2020-06-26
Horn Antenna (1-18GHz)	Rohde & Schwarz	HF907	SEM003-07	2018-04-13	2021-04-12
Horn Antenna (15GHz-40GHz)	Schwarzbeck	BBHA 9170	SEM003-15	2017-10-17	2020-10-16
Pre-amplifier (0.1-1300MHz)	HP	8447D	SEM005-02	2017-09-27	2018-09-26
Low Noise Amplifier (100MHz-18GHz)	Black Diamond Series	BDLNA-0118-352810	SEM005-05	2017-09-27	2018-09-27
Pre-amplifier (18-26GHz)	Rohde & Schwarz	CH14-H052	SEM005-17	2018-04-02	2019-04-01
Pre-amplifier (26GHz-40GHz)	Compliance Directions Systems Inc.	PAP-2640-50	SEM005-08	2018-04-02	2019-04-01
DC Power Supply	Zhao Xin	RXN-305D	SEM011-02	2017-09-27	2018-09-26
Active Loop Antenna	ETS-Lindgren	6502	SEM003-08	2017-08-22	2020-08-21
Band filter	N/A	N/A	SEM023-01	N/A	N/A

Radiated Emissions					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
3m Semi-Anechoic Chamber	AUDIX	N/A	SEM001-02	2018-03-13	2021-03-12
Measurement Software	AUDIX	e3 V8.2014-6-27	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM026-01	2018-07-12	2019-07-11
Spectrum Analyzer	Rohde & Schwarz	FSU43	SEM004-08	2018-04-02	2019-04-01
BiConiLog Antenna (26-3000MHz)	ETS-Lindgren	3142C	SEM003-01	2017-06-27	2020-06-26
Horn Antenna (1-18GHz)	Rohde & Schwarz	HF907	SEM003-07	2018-04-13	2021-04-12
Horn Antenna (15GHz-40GHz)	Schwarzbeck	BBHA 9170	SEM003-15	2017-10-17	2020-10-16
Pre-amplifier (0.1-1300MHz)	HP	8447D	SEM005-02	2017-09-27	2018-09-26



**SGS-CSTC Standards Technical Services Co., Ltd.  
Shenzhen Branch**

Report No.: SZEM180700671002

Page: 10 of 44

Low Noise Amplifier (100MHz-18GHz)	Black Diamond Series	BDLNA-0118- 352810	SEM005-05	2017-09-27	2018-09-27
Pre-amplifier (18-26GHz)	Rohde & Schwarz	CH14-H052	SEM005-17	2018-04-02	2019-04-01
Pre-amplifier (26GHz-40GHz)	Compliance Directions Systems Inc.	PAP-2640-50	SEM005-08	2018-04-02	2019-04-01
DC Power Supply	Zhao Xin	RXN-305D	SEM011-02	2017-09-27	2018-09-26
Active Loop Antenna	ETS-Lindgren	6502	SEM003-08	2017-08-22	2020-08-21
Band filter	N/A	N/A	SEM023-01	N/A	N/A

<b>General used equipment</b>					
<b>Equipment</b>	<b>Manufacturer</b>	<b>Model No</b>	<b>Inventory No</b>	<b>Cal Date</b>	<b>Cal Due Date</b>
Humidity/ Temperature Indicator	Shanghai Meteorological Industry Factory	ZJ1-2B	SEM002-03	2017-09-29	2018-09-28
Humidity/ Temperature Indicator	Shanghai Meteorological Industry Factory	ZJ1-2B	SEM002-04	2017-09-29	2018-09-28
Humidity/ Temperature Indicator	Mingle	N/A	SEM002-08	2017-09-29	2018-09-28
Barometer	Changchun Meteorological Industry Factory	DYM3	SEM002-01	2018-04-08	2019-04-07

## 6 Radio Spectrum Technical Requirement

### 6.1 Antenna Requirement

#### 6.1.1 Test Requirement:

47 CFR Part 15, Subpart C 15.203

Limit:

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

#### 6.1.2 Conclusion

Standard Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

EUT Antenna:



The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna 1 is 2dBi and antenna 2 is 2dBi.

## 7 Radio Spectrum Matter Test Results


### 7.1 20dB Bandwidth

Test Requirement 47 CFR Part 15, Subpart C 15.215  
 Test Method: ANSI C63.10 (2013) Section 6.9  
 Limit: N/A

#### 7.1.1 E.U.T. Operation

Operating Environment:  
 Temperature: 24.5 °C Humidity: 44 % RH Atmospheric Pressure: 1010 mbar  
 Test mode: d:TX mode(2.4GHz airplane)\_Keep the EUT in transmitting with modulation mode.

#### 7.1.2 Test Setup Diagram

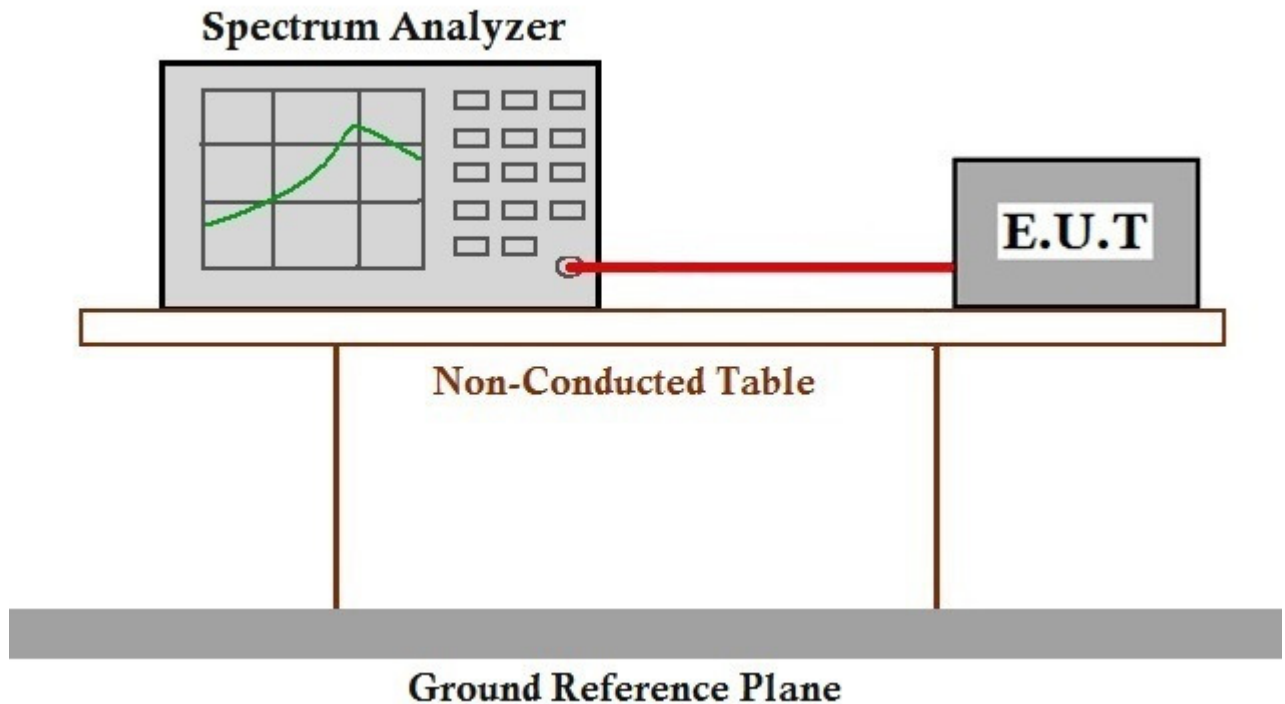

#### 7.1.3 Measurement Procedure and Data


Pretest the EUT at antenna 1 and antenna 2 and found the antenna 2 which is worst case, So, Only the antenna 1 test data is recorded in the report.

Test channel	20dB bandwidth (MHz)	Results
Lowest	2.350	Pass
Middle	1.420	Pass
Highest	2.230	Pass

2417M




2442M

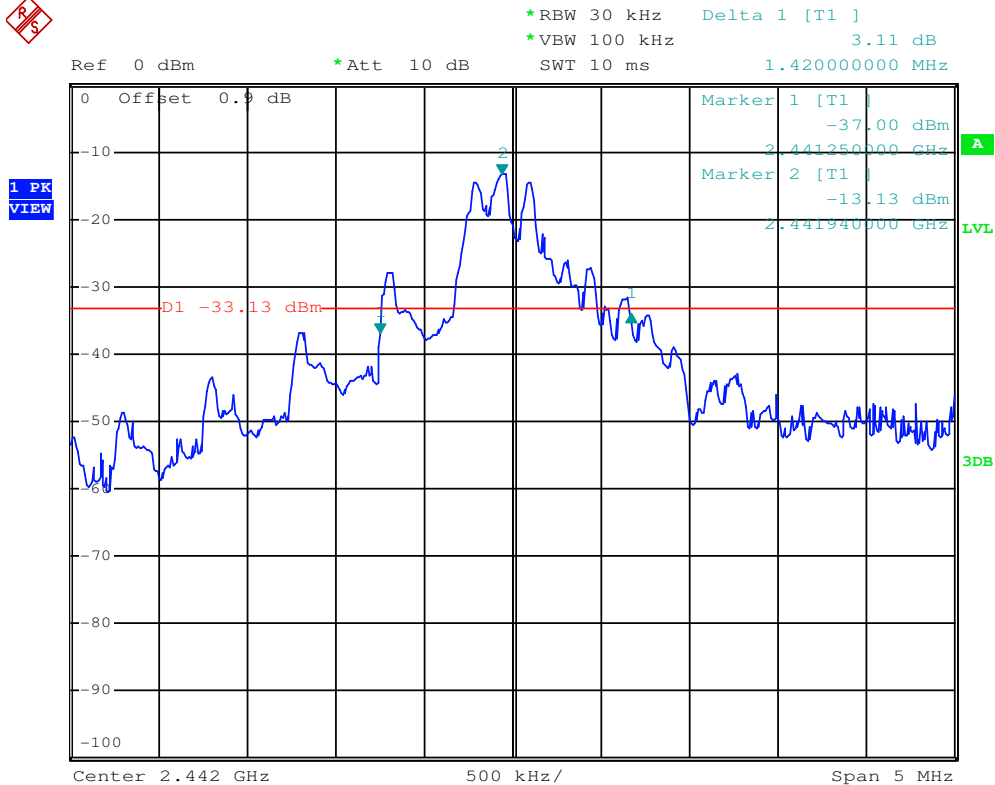

2466M



1 PR  
VIEW

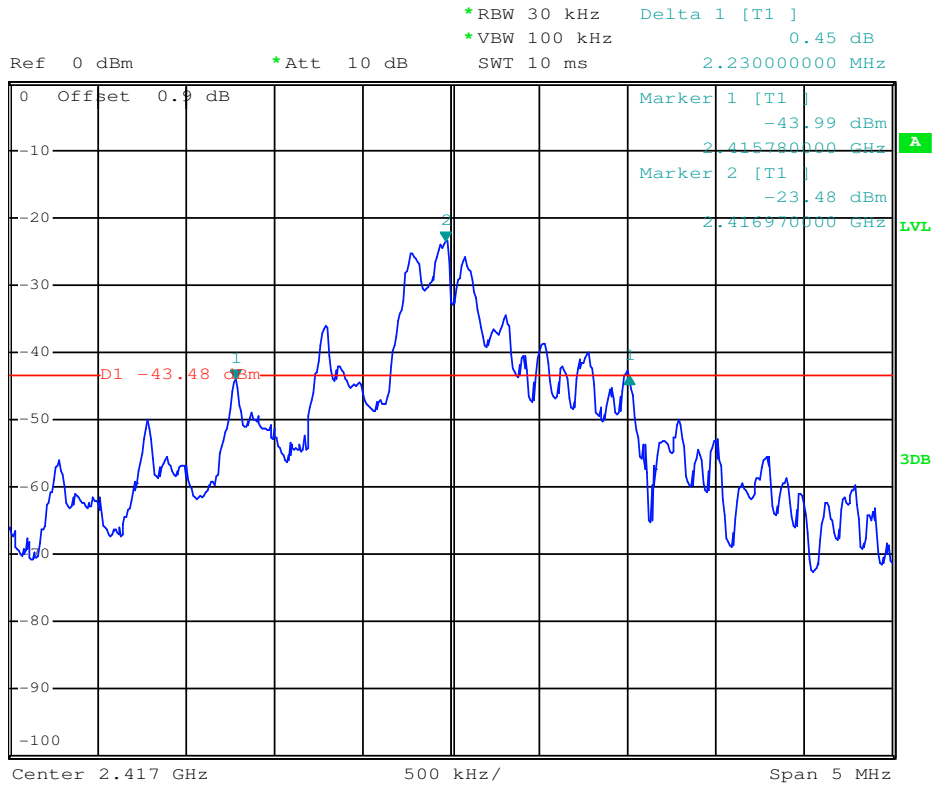



## 7.2 Field Strength of the Fundamental Signal (15.249(a))

Test Requirement 47 CFR Part 15, Subpart C 15.249(a)

Test Method: ANSI C63.10 (2013) Section 6.5&6.6

Measurement Distance: 3m

Limit:

Frequency	Limit (dBuV/m @3m)	Remark
2400MHz-2483.5MHz	94.0	Average Value
	114.0	Peak Value


### 7.2.1 E.U.T. Operation

Operating Environment:

Temperature: 23.5 °C Humidity: 55.8 % RH Atmospheric Pressure: 1000 mbar

Test mode: d:TX mode(2.4GHz airplane)\_Keep the EUT in transmitting with modulation mode.

### 7.2.2 Test Setup Diagram

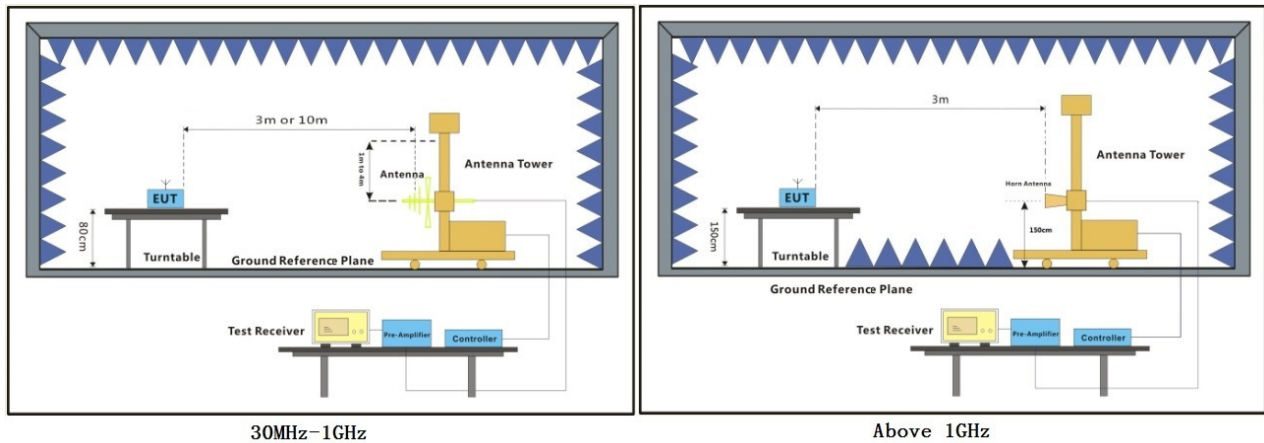

### 7.2.3 Measurement Procedure and Data

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
  - b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
  - c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
  - d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
  - e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
  - f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
  - g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
  - h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
  - i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
  - j. Repeat above procedures until all frequencies measured was complete.
- Remark: Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor




Pretest the EUT at antenna 1 and antenna 2 and found the antenna 2 which is worst case, So, Only the antenna 1 test data is recorded in the report.

Average value:


Calculate Formula:	Average value=Peak value + PDCF
	PDCF=20 log(Duty cycle)
	Duty cycle= T on time / T period
Test data:	Ton time =12.536ms
	T period =100ms
	PDCF value= -18.04dB

Duty cycle test plots:

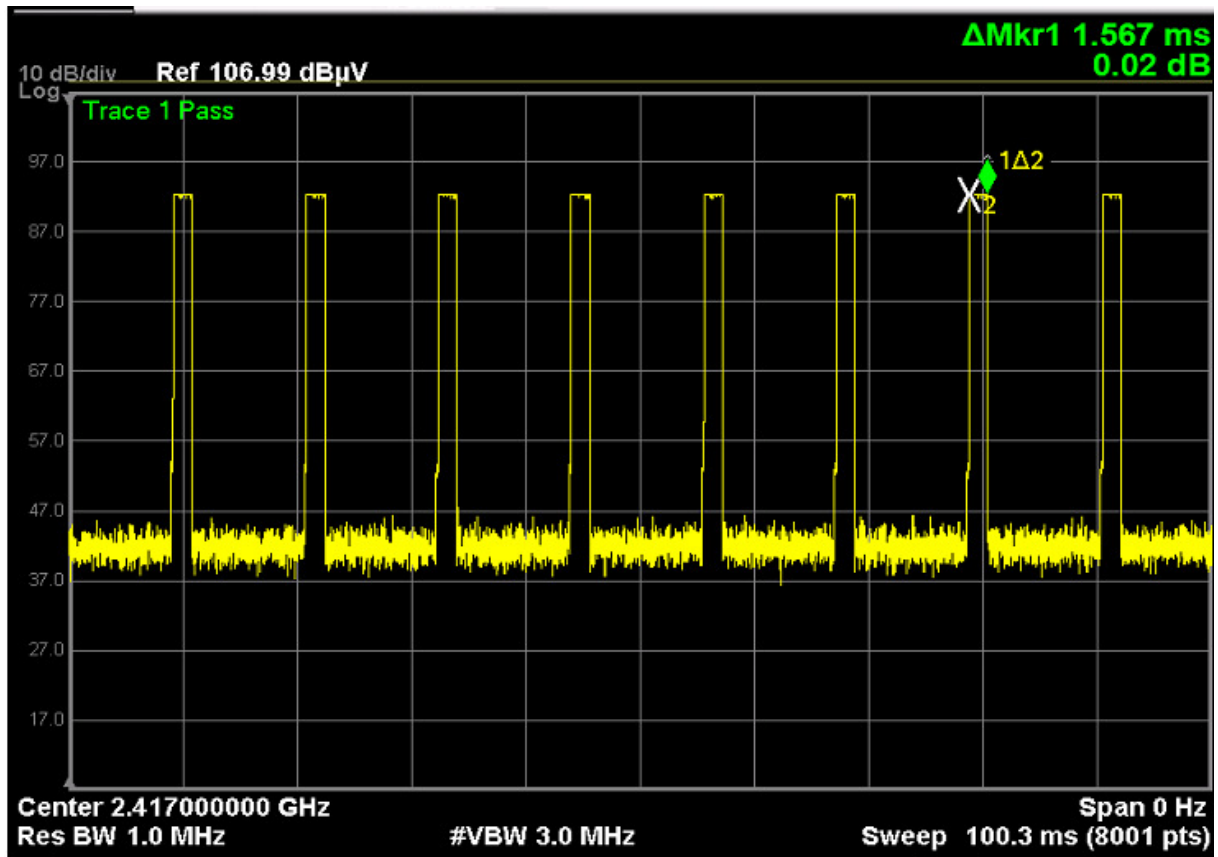



Mode:d; Polarization:Horizontal; Modulation:GFSK; ; Channel:Low

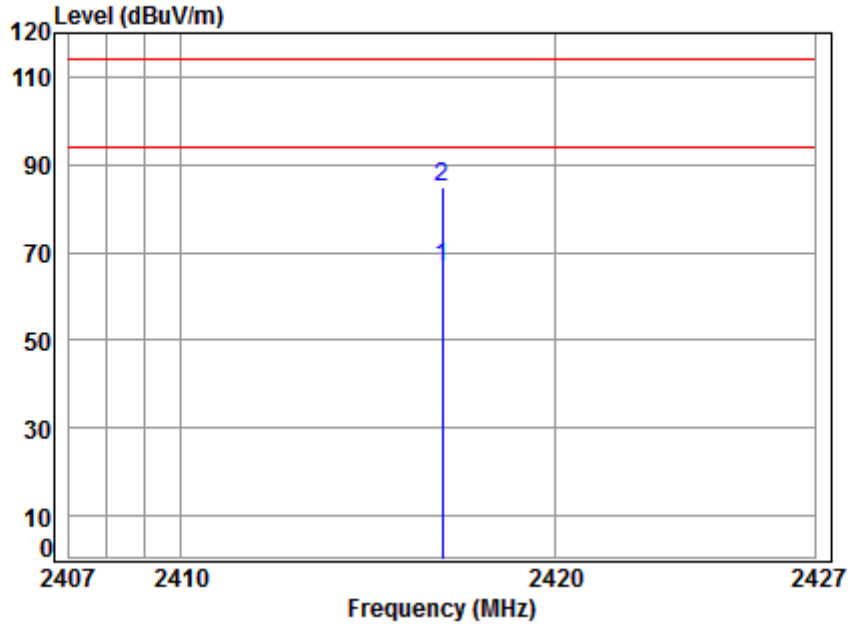


Site : chamber  
Condition: 3m HORIZONTAL  
Job No : 06710CR  
Mode : 2417 Field Strength  
Note : Plane

	Cable	Ant	Preamp	Read	Limit	Over		
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp 2417.000	5.51	28.56	41.88	74.57	66.76	94.00	-27.24	Average
2 pk 2417.000	5.51	28.56	41.88	92.61	84.80	114.00	-29.20	peak



Mode:d; Polarization:Vertical; Modulation:GFSK; ; Channel:Low

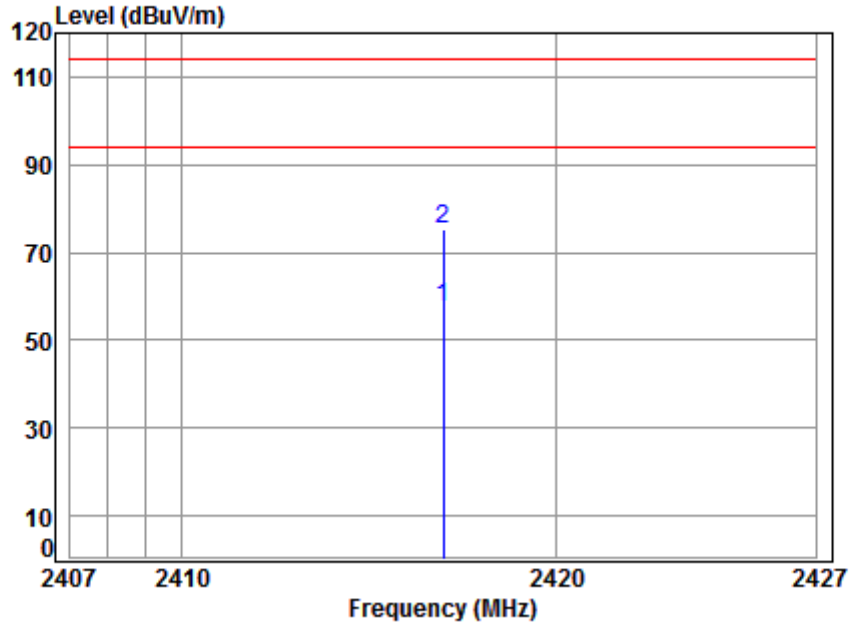


Site : chamber  
Condition: 3m VERTICAL  
Job No : 06710CR  
Mode : 2147 Field Strength  
Note : Plane

	Cable	Ant	Preamp	Read	Limit	Over		
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp 2417.000	5.51	28.56	41.88	65.24	57.43	94.00	-36.57	Average
2 pk 2417.000	5.51	28.56	41.88	83.28	75.47	114.00	-38.53	peak



Mode:d; Polarization:Horizontal; Modulation:GFSK; ; Channel:middle

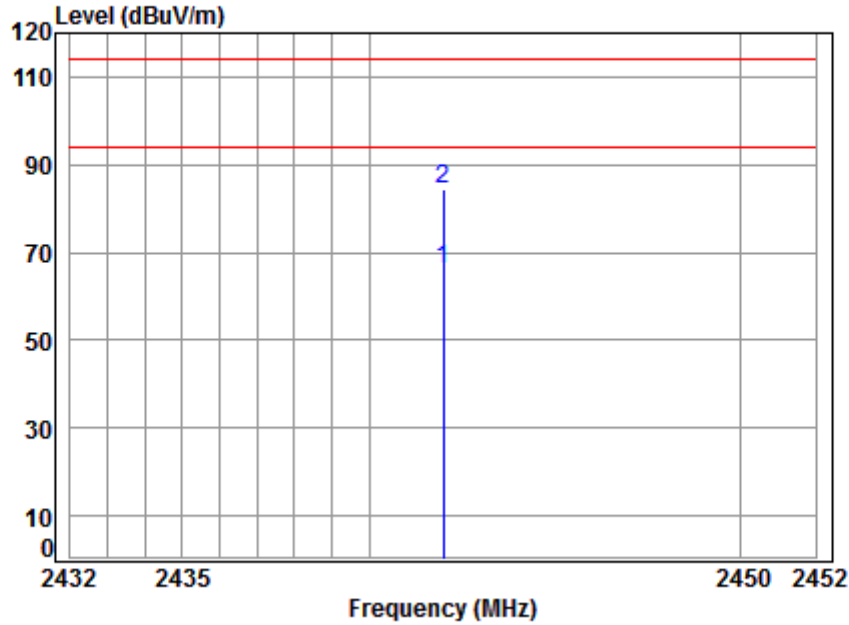


Site : chamber  
Condition: 3m HORIZONTAL  
Job No : 06710CR  
Mode : 2442 Field Strength  
Note : Plane

	Cable	Ant	Preamp	Read	Limit	Over		
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp 2442.000	5.54	28.61	41.89	73.99	66.25	94.00	-27.75	Average
2 pk 2442.000	5.54	28.61	41.89	92.03	84.29	114.00	-29.71	Peak



Mode:d; Polarization:Vertical; Modulation:GFSK; ; Channel:middle

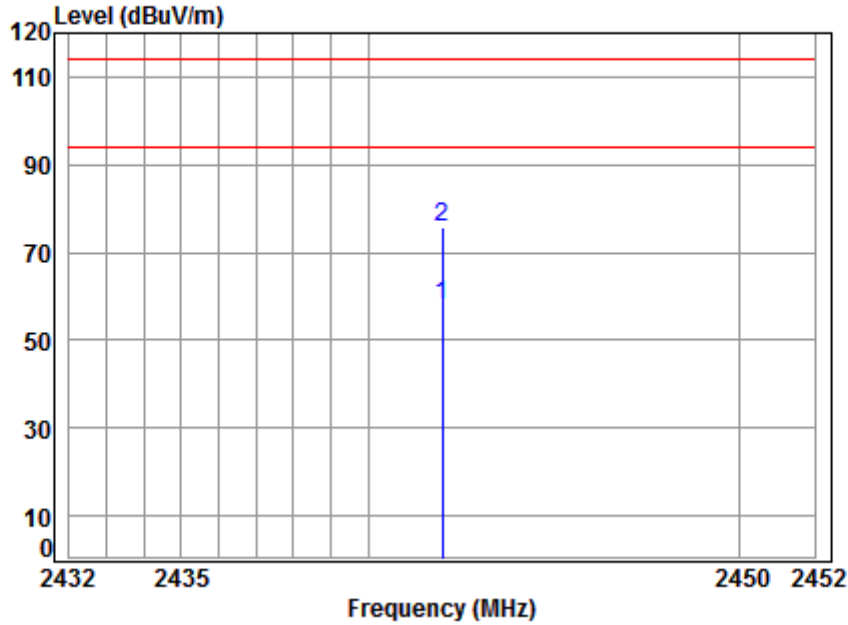


Site : chamber  
Condition: 3m VERTICAL  
Job No : 06710CR  
Mode : 2442 Field Strength  
Note : Plane

	Cable	Ant	Preamp	Read	Limit	Over		
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp 2442.000	5.54	28.60	41.89	65.53	57.78	94.00	-36.22	Average
2 pk 2442.000	5.54	28.60	41.89	83.57	75.82	114.00	-38.18	Peak



Mode:d; Polarization:Horizontal; Modulation:GFSK; ; Channel:High

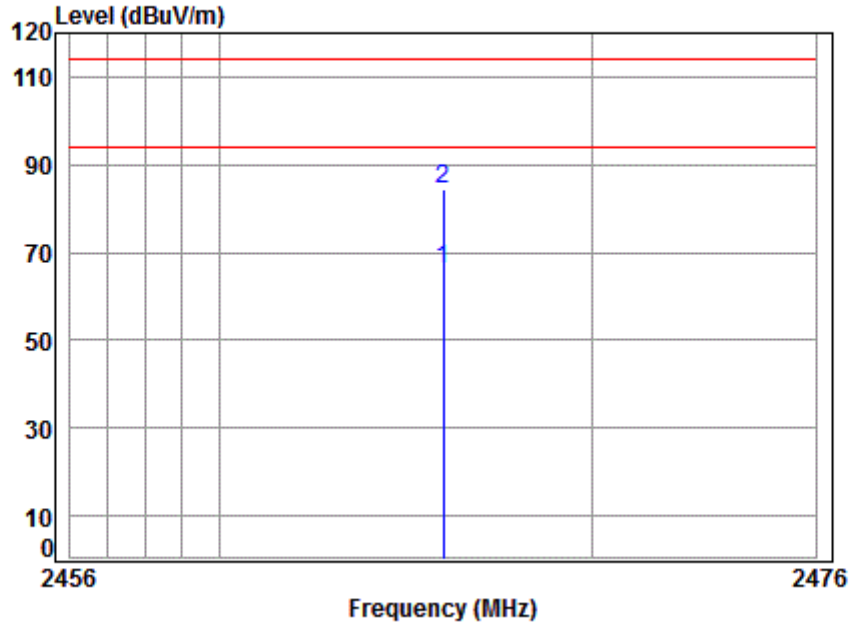


Site : chamber  
Condition: 3m HORIZONTAL  
Job No : 06710CR  
Mode : 2466 Field Strength  
Note : Plane

	Cable	Ant	Preamp	Read	Limit	Over		
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp 2466.000	5.58	28.65	41.90	74.03	66.36	94.00	-27.64	Average
2 pk 2466.000	5.58	28.65	41.90	92.07	84.40	114.00	-29.60	peak



Mode:d; Polarization:Vertical; Modulation:GFSK; ; Channel:High

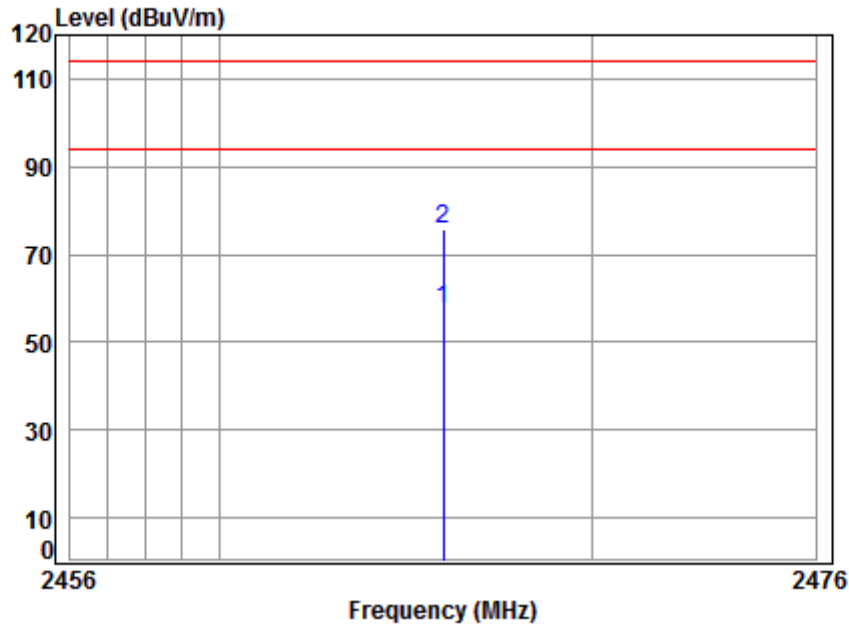

Site : chamber  
 Condition: 3m VERTICAL  
 Job No : 06710CR  
 Mode : 2466 Field Strength  
 Note : Plane

	Cable	Ant	Preamp	Read	Limit	Over		
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp 2466.000	5.58	28.64	41.90	65.24	57.56	94.00	-36.44	Average
2 pk 2466.000	5.58	28.64	41.90	83.28	75.60	114.00	-38.40	peak



### 7.3 Restricted Band Around Fundamental Frequency

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.249(d) & 15.209

Test Method: ANSI C63.10 (2013) Section 6.4&6.5&6.6

Measurement Distance: 3m

Limit:

Frequency	Limit (dBuV/m @3m)	Remark
30MHz-88MHz	40.0	Quasi-peak Value
88MHz-216MHz	43.5	Quasi-peak Value
216MHz-960MHz	46.0	Quasi-peak Value
960MHz-1GHz	54.0	Quasi-peak Value
Above 1GHz	54.0	Average Value
Above 1GHz	74.0	Peak Value

Emission radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.




### 7.3.1 E.U.T. Operation

Operating Environment:

Temperature: 23.5 °C Humidity: 55.8 % RH Atmospheric Pressure: 1000 mbar

Test mode: d:TX mode(2.4GHz airplane)\_Keep the EUT in transmitting with modulation mode.

### 7.3.2 Test Setup Diagram

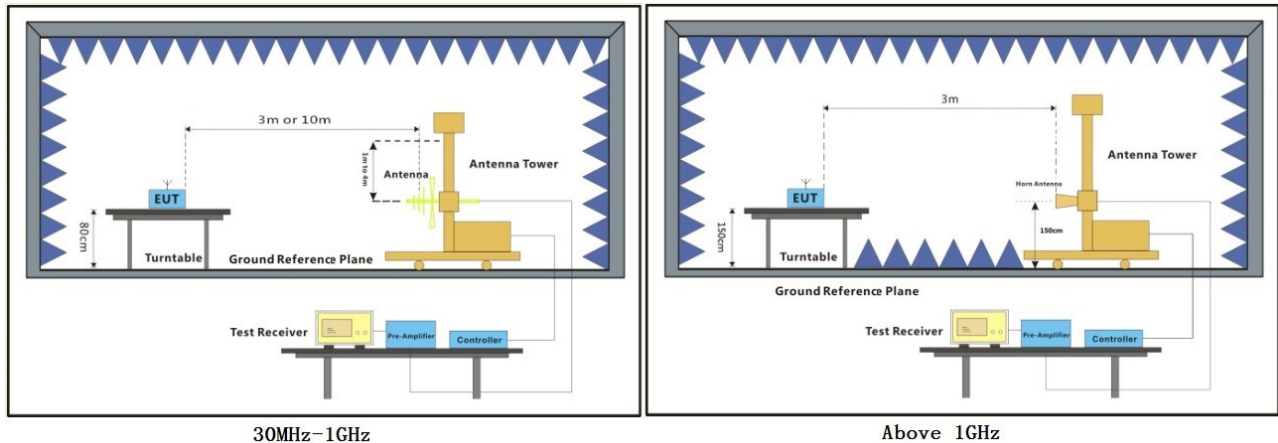

### 7.3.3 Measurement Procedure and Data

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.


Remark: Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor

Pretest the EUT at antenna 1 and antenna 2 and found the antenna 2 which is worst case, So, Only the antenna 1 test data is recorded in the report.

Average value:


Calculate Formula:	Average value=Peak value + PDCF
	PDCF=20 log(Duty cycle)
	Duty cycle= T on time / T period
Test data:	Ton time =12.536ms
	T period =100ms
	PDCF value= -18.04dB

Duty cycle test plots:

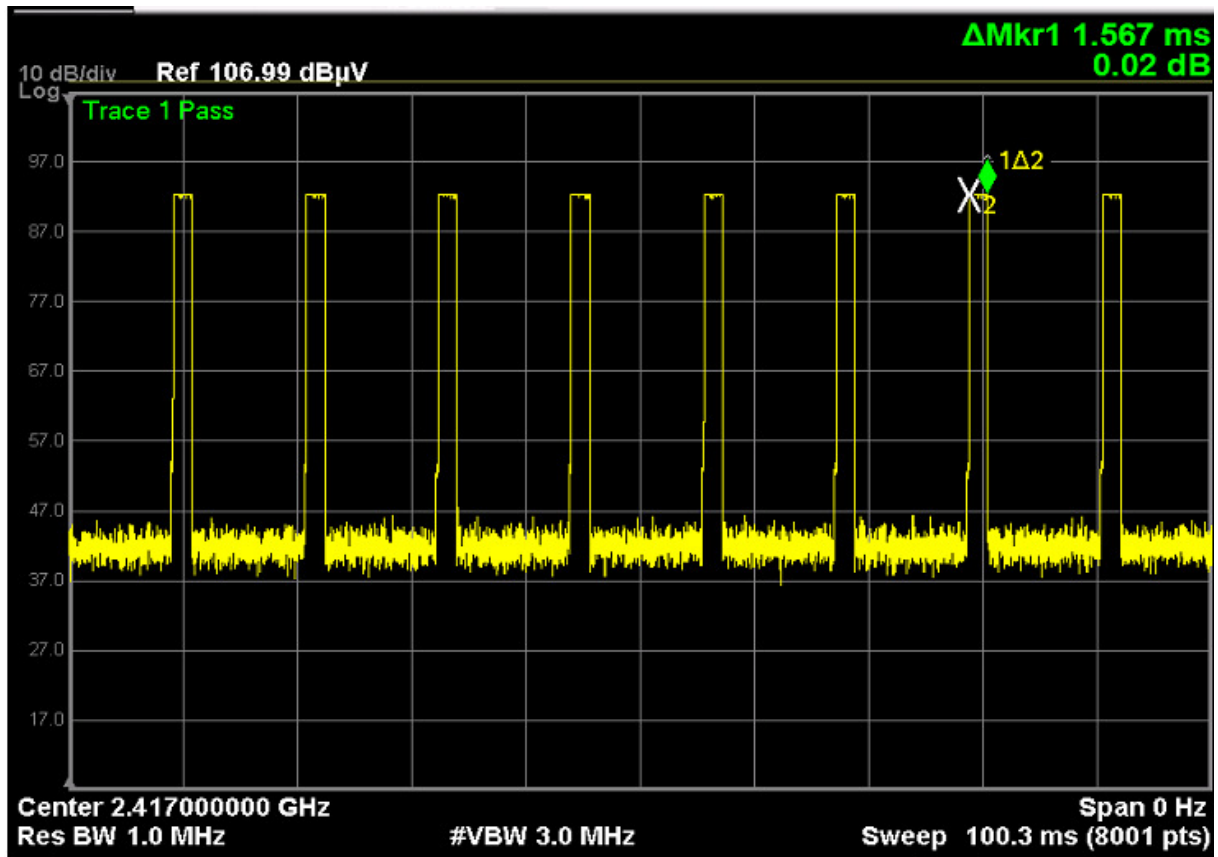



Mode:d; Polarization:Horizontal; Modulation:GFSK; ; Channel:Low

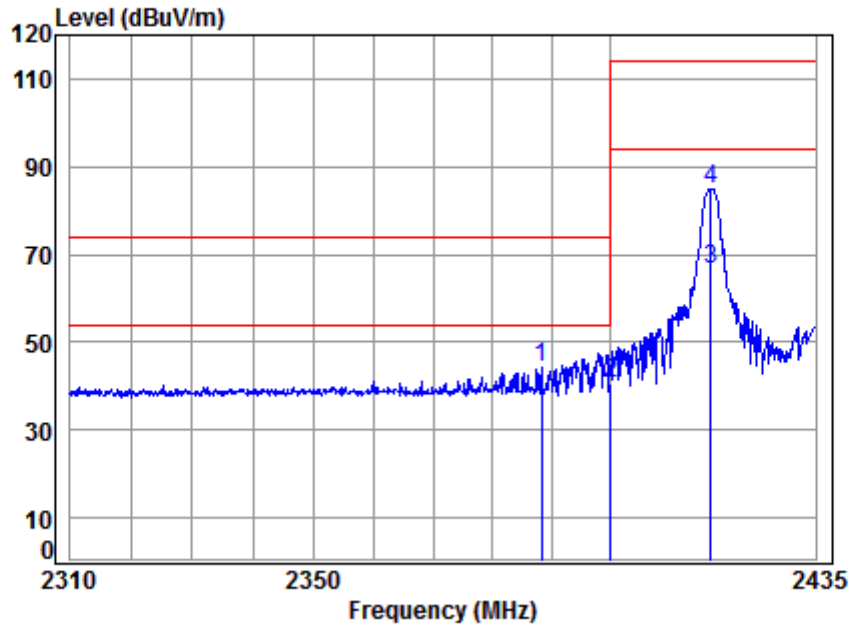


Site : chamber  
Condition: 3m HORIZONTAL  
Job No : 06710CR  
Mode : 2417 Band edge  
Note : Plane

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	2388.358	5.47	28.52	41.87	52.29	44.41	74.00	-29.59 peak
2	2400.000	5.47	28.52	41.87	48.38	40.50	74.00	-33.50 peak
3 pp	2417.000	5.51	28.56	41.88	74.57	66.76	94.00	-27.24 Average
4 pk	2417.000	5.51	28.56	41.88	92.61	84.80	114.00	-29.20 peak



Mode:d; Polarization:Vertical; Modulation:GFSK; ; Channel:Low

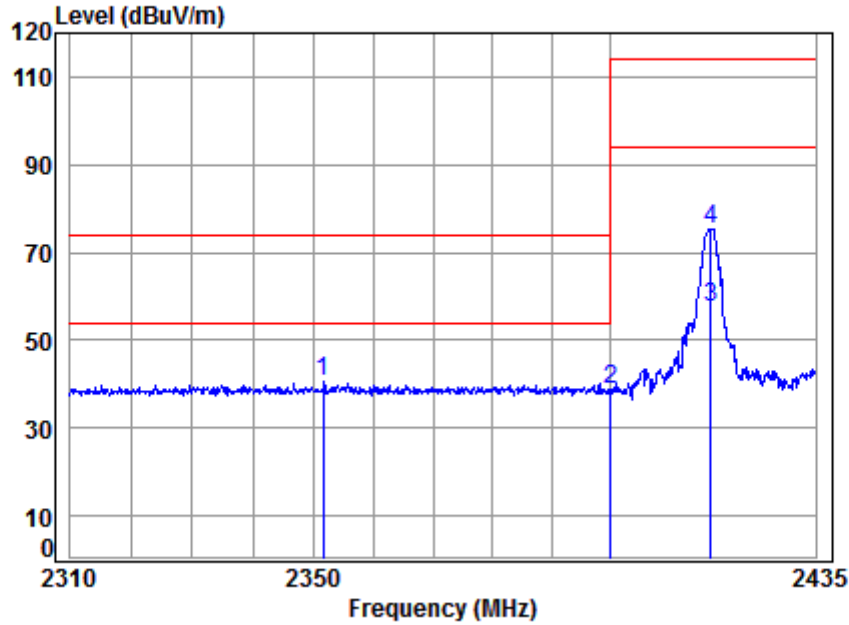


Site : chamber  
 Condition: 3m VERTICAL  
 Job No : 06710CR  
 Mode : 2147 Band edge  
 Note : Plane

		Cable	Ant	Preamp	Read	Limit	Over		
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	pp 2351.763	5.42	28.45	41.86	48.64	40.65	74.00	-33.35	peak
2	2400.000	5.47	28.52	41.87	46.47	38.59	74.00	-35.41	peak
3	av 2417.000	5.51	28.56	41.88	65.24	57.43	94.00	-36.57	Average
4	2417.000	5.51	28.56	41.88	83.28	75.47	114.00	-38.53	peak




Mode:d; Polarization:Horizontal; Modulation:GFSK; ; Channel:High

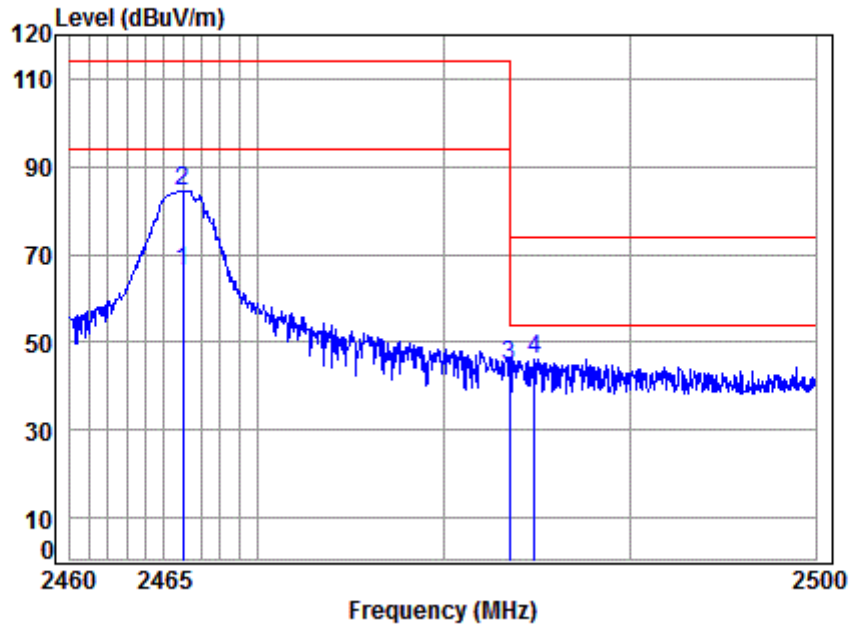

Site : chamber  
Condition: 3m HORIZONTAL  
Job No : 06710CR  
Mode : 2466 Band edge  
Note : Plane

		Cable	Ant	Preamp	Read	Limit	Over		
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	2466.000	5.58	28.65	41.90	74.03	66.36	94.00	-27.64	Average
2	2466.000	5.58	28.65	41.90	92.07	84.40	114.00	-29.60	peak
3	2483.500	5.60	28.67	41.91	52.35	44.71	74.00	-29.29	peak
4 pk	2484.844	5.60	28.68	41.91	53.85	46.22	74.00	-27.78	peak

Mode:d; Polarization:Vertical; Modulation:GFSK; ; Channel:High

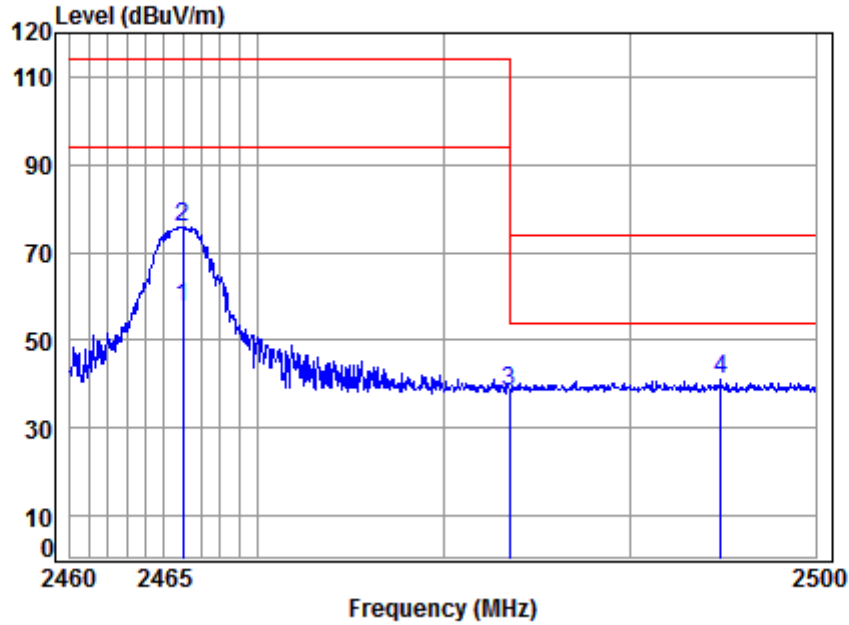

Site : chamber  
 Condition: 3m VERTICAL  
 Job No : 06710CR  
 Mode : 2466 Band edge  
 Note : Plane

		Cable	Ant	Preamp	Read	Limit	Over		
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	av 2466.000	5.58	28.64	41.90	65.24	57.56	94.00	-36.44	Average
2	2466.000	5.58	28.64	41.90	83.28	75.60	114.00	-38.40	peak
3	2483.500	5.60	28.67	41.91	46.17	38.53	74.00	-35.47	peak
4	pp 2494.884	5.61	28.69	41.92	48.54	40.92	74.00	-33.08	peak

Remark:

1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic



equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor

- 2) The peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the above measurement data were shown in the report.



#### 7.4 Radiated Emissions

Test Requirement 47 CFR Part 15, Subpart C 15.209 & 15.249 (a),(d)

Test Method: ANSI C63.10 (2013) Section 6.4&6.5&6.6

Limit:

Frequency(MHz)	Field strength (microvolts/meter)	Limit (dBuV/m)	Detector	Measurement Distance (meters)
0.009-0.490	2400/F(kHz)	-	-	300
0.490-1.705	24000/F(kHz)	-	-	30
1.705-30	30	-	-	30
30-88	100	40.0	QP	3
88-216	150	43.5	QP	3
216-960	200	46.0	QP	3
960-1000	500	54.0	QP	3
Above 1000	500	54.0	AV	3




**7.4.1 E.U.T. Operation**

Operating Environment:

Temperature: 23.5 °C Humidity: 55.8 % RH Atmospheric Pressure: 1000 mbar

Test mode: d:TX mode(2.4GHz airplane)\_Keep the EUT in transmitting with modulation mode.

**7.4.2 Test Setup Diagram**

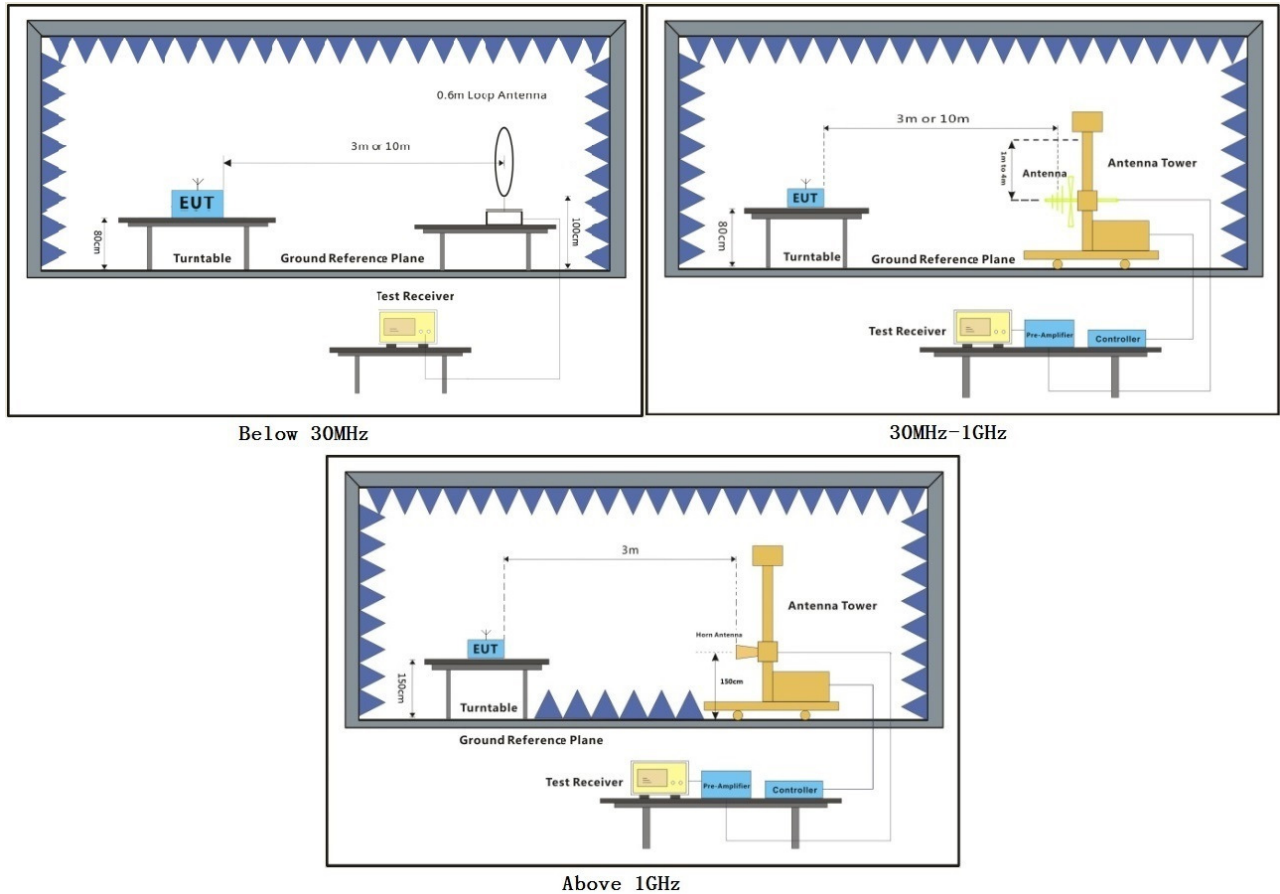

**7.4.3 Measurement Procedure and Data**


For testing performed with the loop antenna, the center of the loop was positioned 1 m above the ground and positioned with its plane vertical at the specified distance from the EUT. During testing the loop was rotated about its vertical axis for maximum response at each azimuth and also investigated with the loop positioned in the horizontal plane. Only the worst position of vertical was shown in the report.

Pretest the EUT at antenna 1 and antenna 2 and found the antenna 2 which is worst case, So, Only the antenna 1 test data is recorded in the report.

Average value:

Calculate Formula:	Average value=Peak value + PDCF
	PDCF=20 log(Duty cycle)
	Duty cycle= T on time / T period
Test data:	Ton time =12.536ms
	T period =100ms
	PDCF value= -18.04dB

Duty cycle test plots:

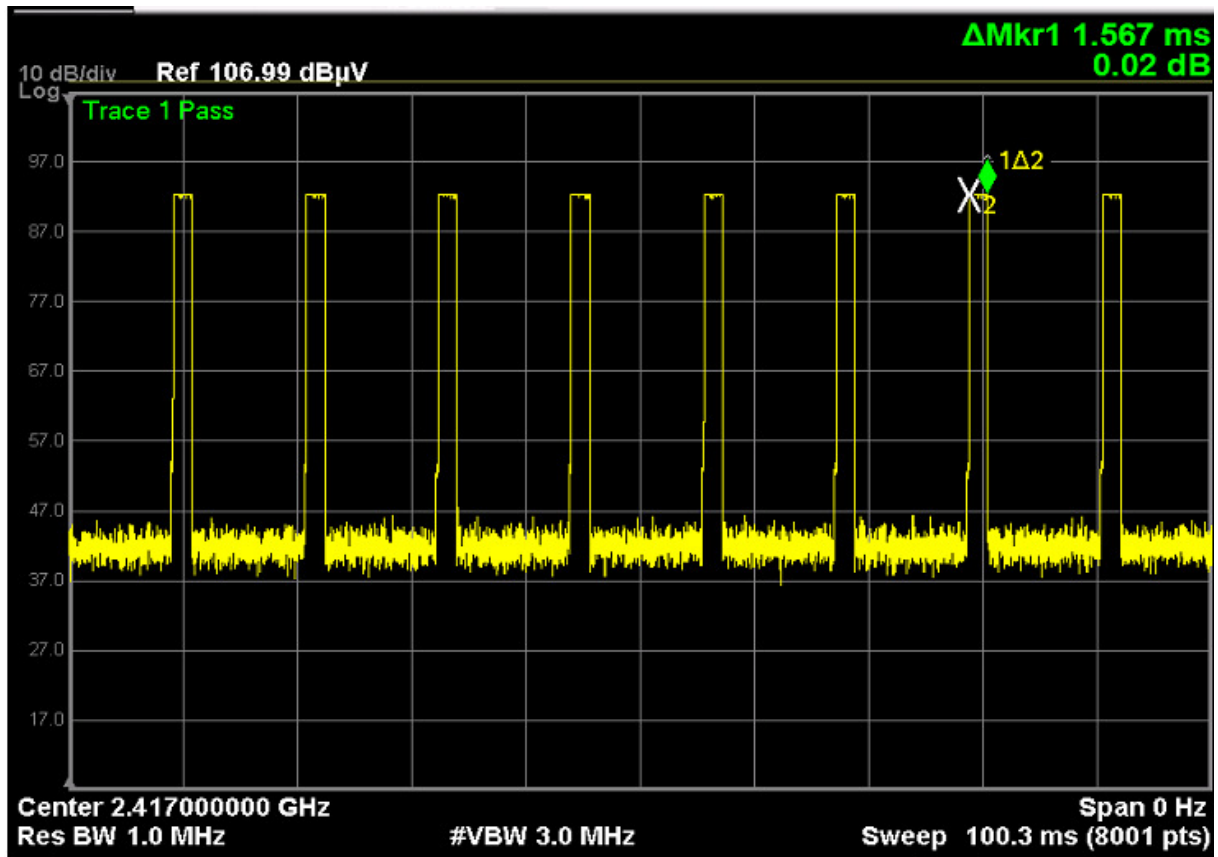




Below 1GHz

Detector:QP

Mode: d; Polarization: Horizontal

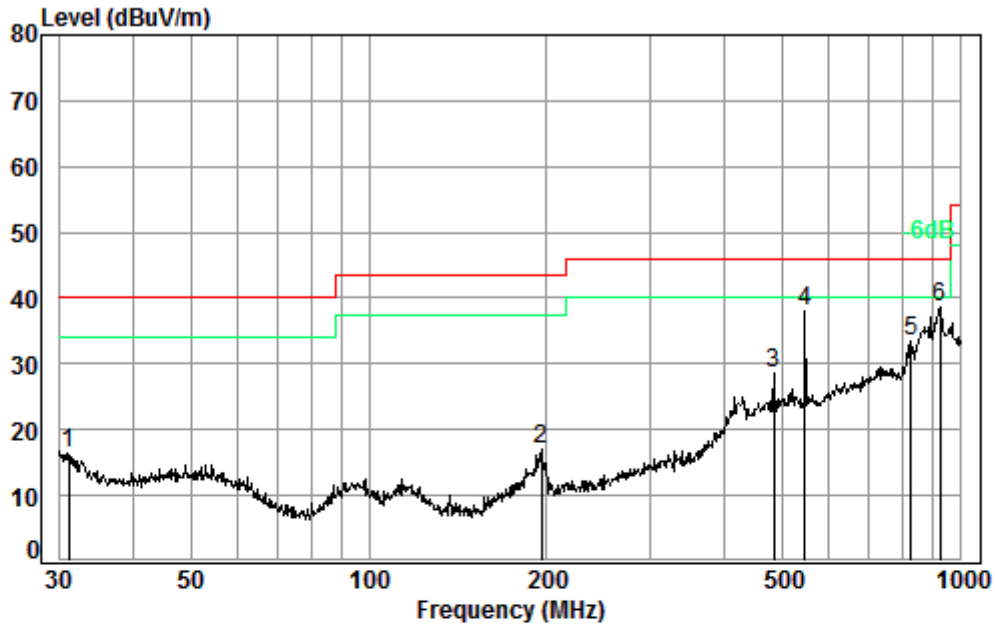


Condition: 3m HORIZONTAL

Job No. : 06710CR

Mode : d

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Over Line	Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	31.07	0.60	21.89	27.67	21.51	16.33	40.00	-23.67
2	195.82	1.39	16.38	27.53	26.72	16.96	43.50	-26.54
3	483.91	2.54	24.28	27.86	29.56	28.52	46.00	-17.48
4	545.18	2.65	25.55	27.80	37.51	37.91	46.00	-8.09
5	824.60	3.31	28.83	27.33	28.80	33.61	46.00	-12.39
6 pp	922.52	3.62	29.92	27.00	32.00	38.54	46.00	-7.46

Mode: d; Polarization: Vertical

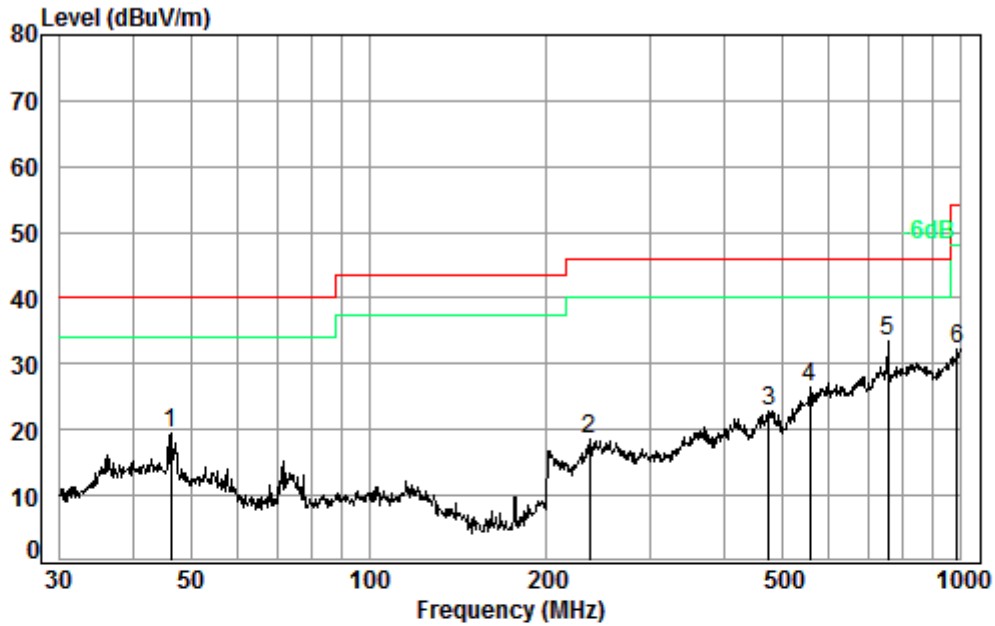


Condition: 3m VERTICAL  
 Job No. : 06710CR  
 Mode : d

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	46.34	0.73	15.32	27.61	30.90	19.34	40.00	-20.66
2	235.82	1.60	18.48	27.53	26.01	18.56	46.00	-27.44
3	473.83	2.50	24.07	27.84	24.20	22.93	46.00	-23.07
4	556.77	2.66	25.78	27.77	25.94	26.61	46.00	-19.39
5 pp	755.39	3.07	28.24	27.48	29.59	33.42	46.00	-12.58
6	986.07	3.69	30.23	26.81	25.09	32.20	54.00	-21.80



Above 1GHz

Mode:d; Polarization:Horizontal; Channel:High

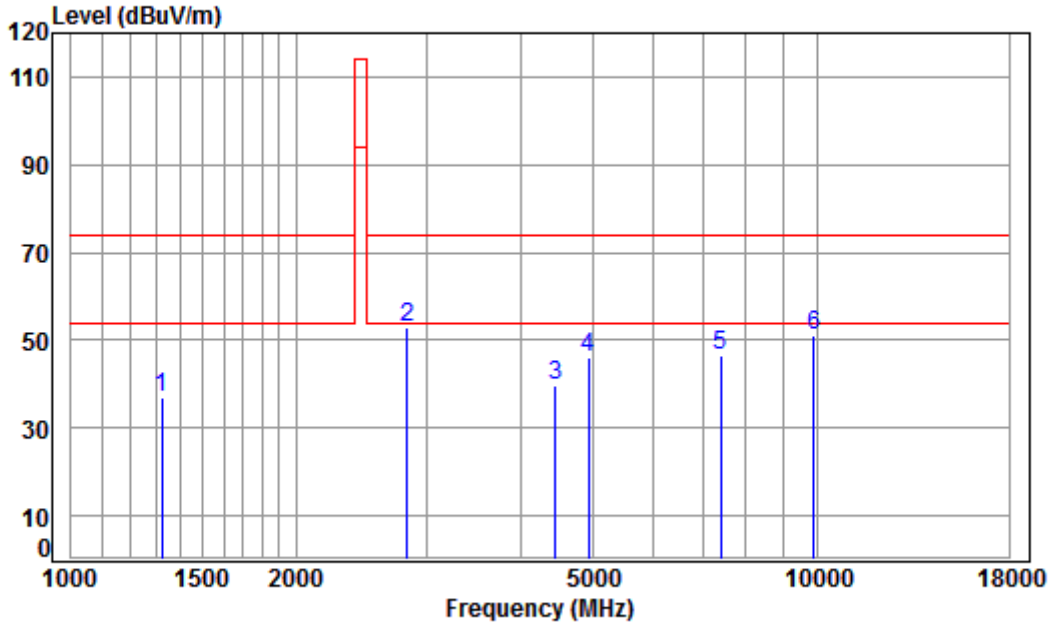

Condition: 3m HORIZONTAL

Job No : 06710CR


Mode : 2466 TX RSE

Note : Plane

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1323.614	4.88	25.06	41.28	43.42	37.17	74.00	-36.83	peak
2	pp 2822.558	5.86	30.66	42.04	59.58	52.97	74.00	-21.03	Peak
3	4456.315	7.51	33.60	42.41	35.96	39.79	74.00	-34.21	peak
4	4932.000	8.02	34.38	42.49	41.92	46.25	74.00	-27.75	peak
5	7398.000	10.03	36.34	40.58	35.72	46.51	74.00	-27.49	peak
6	9864.000	10.87	37.57	37.38	36.86	50.92	74.00	-23.08	peak



Mode:d; Polarization:Vertical; Channel:High

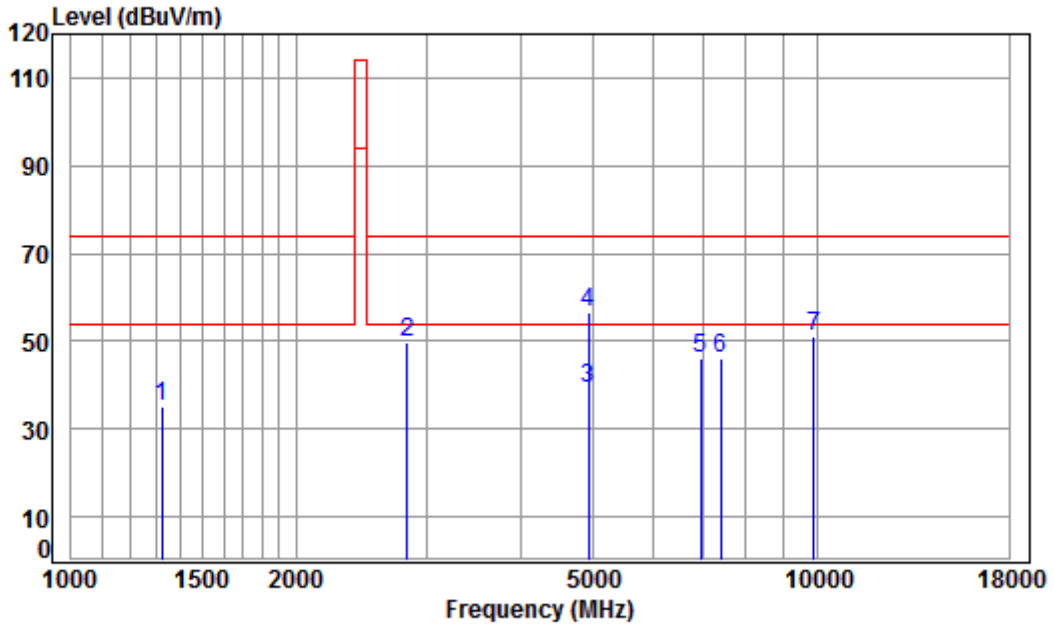


Condition: 3m VERTICAL  
 Job No : 06710CR  
 Mode : 2466 TX RSE  
 Note : Plane

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1323.614	4.88	25.06	41.28	42.61	34.92	74.00	-39.08	peak
2	2822.558	5.86	30.66	42.04	54.20	49.95	74.00	-24.05	Peak
3 pp	4932.000	8.02	34.38	42.49	28.48	38.39	54.00	-15.61	Average
4 pk	4932.000	8.02	34.38	42.49	46.52	56.43	74.00	-17.57	peak
5	6954.852	10.25	36.38	40.89	36.05	45.96	74.00	-28.04	peak
6	7398.000	10.03	36.34	40.58	35.51	46.30	74.00	-27.70	peak
7	9864.000	10.87	37.57	37.38	36.95	51.01	74.00	-22.99	peak



Mode:d; Polarization:Horizontal; Channel:Low

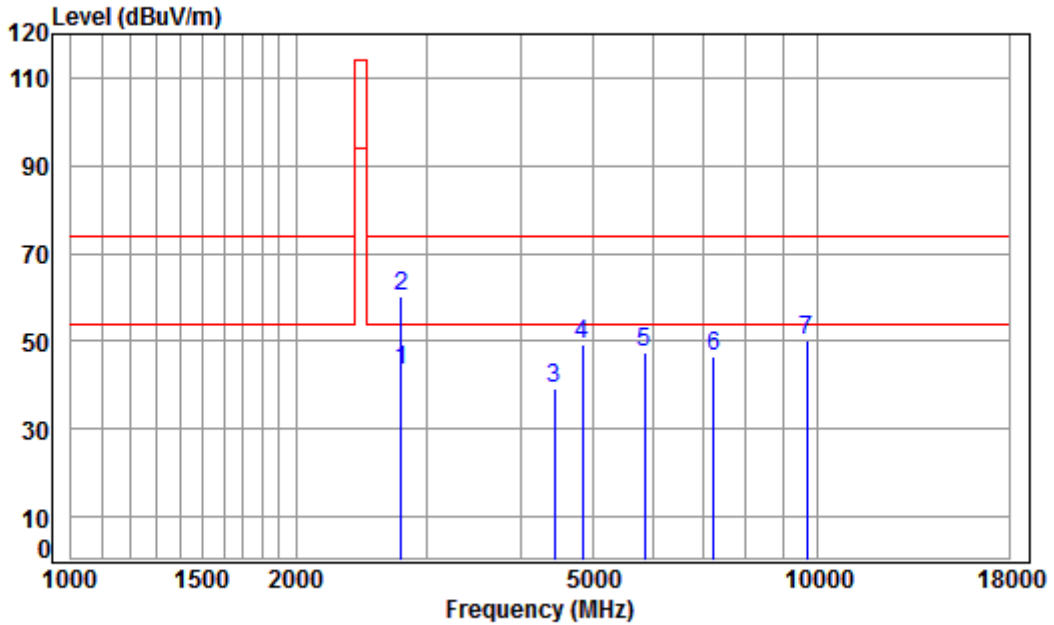


Condition: 3m HORIZONTAL  
Job No : 06710CR  
Mode : 2417 TX RSE  
Note : Plane

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	pp 2766.024	5.82	30.45	42.02	47.63	42.41	54.00	-11.59	Average
2	pk 2766.024	5.82	30.45	42.02	65.67	60.45	74.00	-13.55	Peak
3	4443.453	7.50	33.60	42.41	35.18	39.15	74.00	-34.85	peak
4	4834.000	7.92	34.21	42.47	40.64	49.30	74.00	-24.70	peak
5	5864.443	10.12	34.62	41.72	37.72	47.63	74.00	-26.37	peak
6	7251.000	10.06	36.40	40.68	35.91	46.69	74.00	-27.31	peak
7	9668.000	10.78	37.53	37.65	36.55	50.21	74.00	-23.79	peak



Mode:d; Polarization:Vertical; Channel:Low

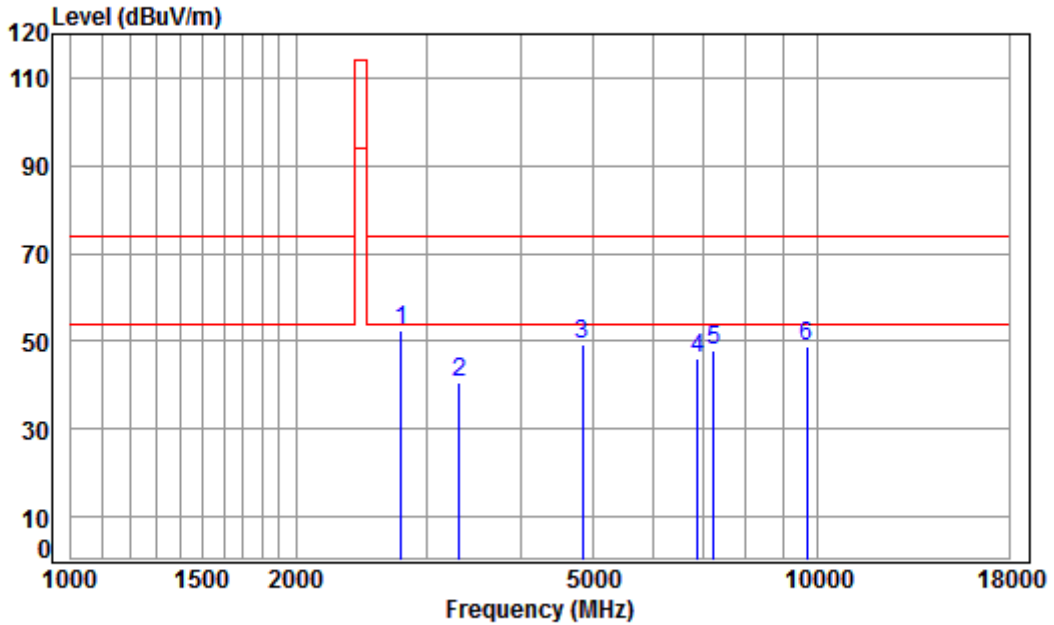


Condition: 3m VERTICAL  
Job No : 06710CR  
Mode : 2417 TX RSE  
Note : Plane

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	2766.024	5.82	30.45	42.02	57.72	52.57	74.00	-21.43	Peak
2	3308.894	6.29	31.87	42.18	42.07	40.47	74.00	-33.53	peak
3	4834.000	7.92	34.21	42.47	40.58	49.24	74.00	-24.76	peak
4	6894.806	10.42	36.21	40.93	36.60	46.26	74.00	-27.74	peak
5	7251.000	10.06	36.40	40.68	37.27	48.05	74.00	-25.95	peak
6	9668.000	10.78	37.53	37.65	35.30	48.96	74.00	-25.04	peak





Mode:d; Polarization:Horizontal; Channel:middle

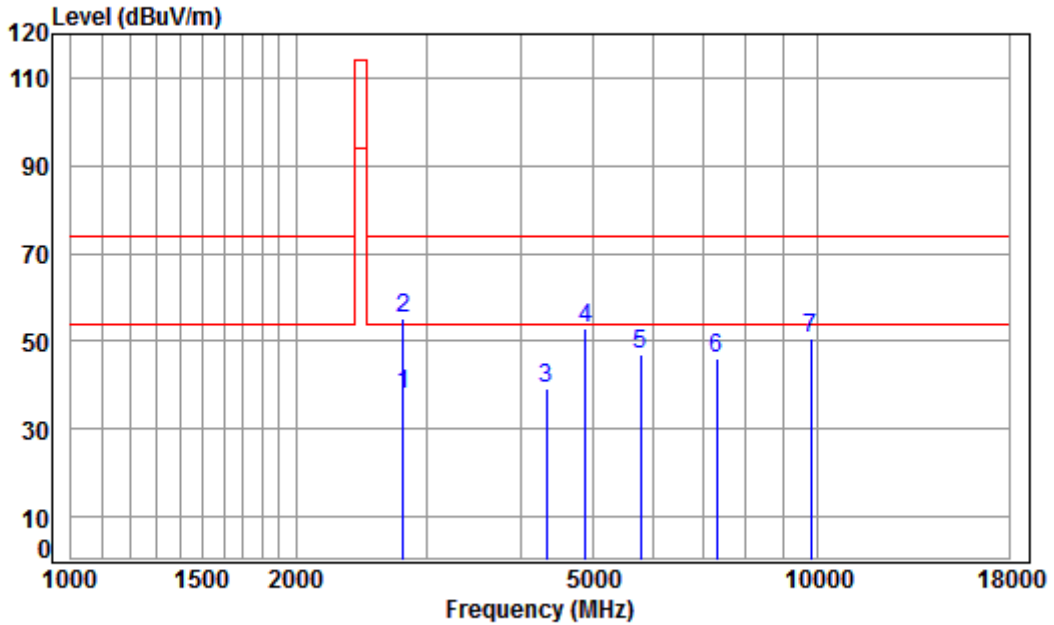


Condition: 3m HORIZONTAL  
Job No : 06710CR  
Mode : 2442 TX RSE  
Note : Plane

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	pp 2782.060	5.83	30.51	42.02	42.99	37.01	54.00	-16.99 Average
2	pk 2782.060	5.83	30.51	42.02	61.03	55.05	74.00	-18.95 Peak
3	4329.354	7.37	33.60	42.39	35.69	39.07	74.00	-34.93 peak
4	4884.000	7.97	34.30	42.48	43.75	52.97	74.00	-21.03 peak
5	5780.300	9.83	34.57	41.79	37.99	47.14	74.00	-26.86 peak
6	7326.000	10.04	36.37	40.63	35.19	45.97	74.00	-28.03 peak
7	9768.000	10.83	37.55	37.52	36.64	50.50	74.00	-23.50 peak



Mode:d; Polarization:Vertical; Channel:middle

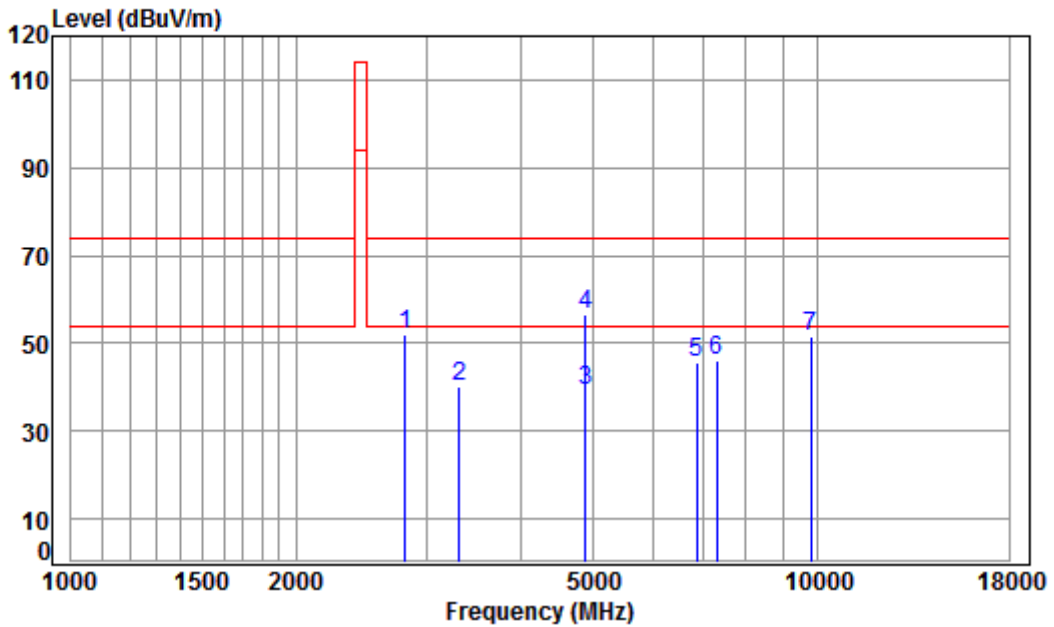

Condition: 3m VERTICAL  
Job No : 06710CR  
Mode : 2442 TX RSE  
Note : Plane

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2798.189	5.84	30.57	42.03	56.76	52.22	74.00	-21.78	Peak
2	3308.894	6.29	31.87	42.18	41.83	40.23	74.00	-33.77	peak
3 pp	4884.000	7.97	34.30	42.48	28.68	38.47	54.00	-15.53	Average
4 pk	4884.000	7.97	34.30	42.48	46.72	56.51	74.00	-17.49	peak
5	6874.906	10.47	36.16	40.94	35.93	45.51	74.00	-28.49	peak
6	7326.000	10.04	36.37	40.63	35.28	46.06	74.00	-27.94	peak
7	9768.000	10.83	37.55	37.52	37.66	51.52	74.00	-22.48	peak



Remark:

1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor

2) Scan from 9kHz to 25GHz, the disturbance above 18GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.



## **8 Photographs**

### **8.1 Test Setup**

Refer to Setup Photos.

### **8.2 EUT Constructional Details (EUT Photos)**

Refer to EUT external and internal photos.

- End of the Report -