

FCC SAR Measurement and Test Report

For

Shenzhen Reachfar Technology Co.,Ltd.

501, Building A, No. 86 of Longsheng Village, Longfeng Rd1,

Longhua District, Shenzhen City.

FCC ID: 2AJ5OV45

Test Standards:	FCC Part 2.1093 ANSI / IEEE C95.1 : 2005+A1:2010 ANSI / IEEE C95.3 : 2002(R2008) <u>IEEE 1528 :2013</u>
Product Description:	<u>4G GPS tracking</u>
Tested Model:	<u>V45</u>
Report No.:	<u>WTX20X04021385W-5</u>
Sample Received Date:	<u>2020-04-22</u>
Tested Date:	<u>2020-04-25 to 2020-05-20</u>
Issued Date:	<u>2020-05-20</u>
Tested By:	<u>Jack Sun / Engineer</u> <i>Jack Sun</i>
Reviewed By:	<u>Lion Cai / RF Manager</u> <i>Lion Cai</i>
Approved & Authorized By:	<u>Silin Chen / Manager</u> <i>Silin Chen</i>
Prepared By:	

Waltek Testing Group (Shenzhen) Co., Ltd.

1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road,
Block 70 Bao'an District, Shenzhen, Guangdong, China

Tel.: +86-755-33663308 Fax.: +86-755-33663309 Website: www.semtest.com.cn

Note: This test report is limited to the above client company and the product model only. It may not be duplicated without prior permitted by Waltek Testing Group (Shenzhen) Co., Ltd.



TABLE OF CONTENTS

1. General Information3

1.1 Product Description for Equipment Under Test (EUT)3

1.2 Test Standards6

1.3 Test Methodology6

1.4 Test Facility6

2. Summary of Test Results7

3. Specific Absorption Rate (SAR).....8

3.1 Introduction.....8

3.2 SAR Definition8

4. SAR Measurement System9

4.1 The Measurement System9

4.2 Probe9

4.3 Probe Calibration Process11

4.4 Phantom12

4.5 Device Holder12

4.6 Test Equipment List13

5. Tissue Simulating Liquids14

5.1 Composition of Tissue Simulating Liquid14

5.2 Tissue Dielectric Parameters for Head and Body Phantoms15

5.3 Tissue Calibration Result16

6. SAR Measurement Evaluation17

6.1 Purpose of System Performance Check17

6.2 System Setup17

6.3 Validation Results18

7. EUT Testing Position19

7.1 Wrist-worn device19

7.2 EUT Antenna Position19

8. SAR Measurement Procedures20

8.1 Measurement Procedures20

8.2 Spatial Peak SAR Evaluation20

8.3 Area & Zoom Scan Procedures21

8.4 Volume Scan Procedures21

8.5 SAR Averaged Methods21

8.6 Power Drift Monitoring21

9. SAR Test Result22

9.1 Conducted RF Output Power22

9.2 Test Results for Standalone SAR Test52

9.3 Simultaneous Multi-band Transmission SAR Analysis56

10. Measurement Uncertainty57

10.1 Uncertainty for EUT SAR Test57

10.2 Uncertainty for System Performance Check58

Annex A. Plots of System Performance Check60

Annex B. Plots of SAR Measurement70

Annex C. EUT Photos93

Annex D. Test Setup Photos95

Annex E. Calibration Certificate98

1. General Information

1.1 Product Description for Equipment Under Test (EUT)

Client Information

Applicant: Shenzhen Reachfar Technology Co.,Ltd.
 Address of applicant: 501, Building A, No. 86 of Longsheng Village, Longfeng Rd1, Longhua District, Shenzhen City.

Manufacturer: Shenzhen Reachfar Technology Co.,Ltd.
 Address of manufacturer: 501, Building A, No. 86 of Longsheng Village, Longfeng Rd1, Longhua District, Shenzhen City.

General Description of EUT:	
Product Name:	4G GPS tracking
Brand Name:	REACHFAR
Model No.:	V45
Adding Model(s):	V44,V43,V46,V47,V48,V34,V30,V8,V16,V20,V26,V28,V36,V38,V40,V42
Rated Voltage:	3.7V
Battery:	600mAh
Device Category:	Portable Device
<p><i>The test data is gathered from a production sample provided by the manufacturer. The appearance of others models listed in the report is different from main-test model V45, but the circuit and the electronic construction do not change, declared by the manufacturer.</i></p>	

Technical Characteristics of EUT:	
2G	
Support Networks:	GSM, GPRS, EDGE
Support Band:	GSM850/PCS1900
Uplink Frequency:	GSM/GPRS/EDGE 850: 824~849MHz GSM/GPRS/EDGE 1900: 1850~1910MHz
Downlink Frequency:	GSM/GPRS/EDGE 850: 869~894MHz GSM/GPRS/EDGE 1900: 1930~1990MHz
Max RF Output Power:	GSM850: 32.74dBm, GSM1900: 28.73dBm EDGE850: 30.73dBm, EDGE1900: 25.56dBm
Type of Modulation:	GMSK, 8PSK
Type of Antenna:	Integral Antenna
Antenna Gain:	GSM850: -5.2dBi; GSM1900: 0.33dBi
GPRS/EDGE Class:	Class 12
3G	
Support Networks:	WCDMA, HSDPA, HSUPA
Support Band:	WCDMA Band 2, WCDMA Band 5
Uplink Frequency:	WCDMA Band 2: 1850~1910MHz WCDMA Band 5: 824~849MHz
Downlink Frequency:	WCDMA Band 2: 1930~1990MHz WCDMA Band 5: 869~894MHz
RF Output Power:	WCDMA Band 2: 21.75 dBm, WCDMA Band 5: 22.36 dBm
Type of Modulation:	BPSK,
Antenna Type:	Integral Antenna
Antenna Gain:	WCDMA Band 2: 0.33dBi, WCDMA Band 5: -5.2dBi
4G	
Support Networks:	FDD-LTE
Support Band:	FDD-LTE Band 2, 4, 5, 7, 17
Uplink Frequency:	FDD-LTE Band 2: Tx: 1850-1910MHz, FDD-LTE Band 4: Tx: 1710-1755MHz, FDD-LTE Band 5: Tx: 824-849MHz, FDD-LTE Band 7: Tx: 2500-2570MHz, FDD-LTE Band 12: Tx: 699-719MHz
Downlink Frequency:	FDD-LTE Band 2: Rx: 1930-1990MHz, FDD-LTE Band 4: Rx: 2110-2155MHz, FDD-LTE Band 5: Tx: 869-894MHz, FDD-LTE Band 7: Tx: 2620-2690MHz, FDD-LTE Band 12: Tx: 729-749MHz
RF Output Power:	FDD-LTE Band 2: 22.73dBm, FDD-LTE Band 4: 24.53dBm, FDD-LTE Band 5: 23.29dBm,



	FDD-LTE Band 7: 23.32dBm, FDD-LTE Band 12: 22.60dBm,
Type of Modulation:	QPSK, 16QAM
Antenna Type:	Integral Antenna
Antenna Gain:	FDD-LTE Band 2: 0.33dBi, FDD-LTE Band 4: 0dBi, FDD-LTE Band 5: -5.2dBi, FDD-LTE Band 7: 0.41dBi, FDD-LTE Band 12: -7.4dBi,
WIFI	
Support Standards:	802.11b, 802.11g, 802.11n
Frequency Range:	2412-2462MHz for 11b/g/n(HT20)
RF Output Power:	8.96dBm (Conducted)
Type of Modulation:	CCK, OFDM, QPSK, BPSK, 16QAM, 64QAM
Data Rate:	1-11Mbps, 6-54Mbps, up to 150Mbps
Quantity of Channels:	11
Channel Separation:	5MHz
Antenna Type:	Integral Antenna
Antenna Gain:	1.2dBi

1.2 Test Standards

The following report is prepared on behalf of the Shenzhen Reachfar Technology Co.,Ltd. in accordance with FCC 47 CFR Part 2.1093, ANSI/IEEE C95.1-2005, ANSI / IEEE C95.3 :2002, IEEE 1528-2013, KDB 447498 D01 v06, KDB 248227 D01 v02r02, KDB 941225 D01 v03r01, KDB 941225 D05 v02r05 , and KDB 865664 D01 v01r04 and KDB 865664 D02 v01r02.

The objective is to determine compliance with FCC Part 2.1093 of the Federal Communication Commissions rules.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with KDB 865664 D01 v01r04 and KDB 865664 D02 v01r02. The public notice KDB 447498 D01 v06 for Mobile and Portable Devices RF Exposure Procedure also.

1.4 Test Facility

Address of the test laboratory

Laboratory: Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road, Block 70 Bao'an District, Shenzhen, Guangdong, China

FCC – Registration No.: 125990

Waltek Testing Group (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. The Designation Number is CN5010. Test Firm Registration Number is 125990.

Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Waltek Testing Group (Shenzhen) Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.



2. Summary of Test Results

The maximum results of Specific Absorption Rate (SAR) have found during testing are as follows:

Body SAR(0mm Gap)

Frequency Band	Maximum SAR _{1g} (W/kg)	SAR _{1g} Limit (W/kg)
GSM	0.827	1.6
WCDMA	0.560	1.6
FDD-LTE	0.862	1.6
Simultaneous Transmission	1.232	1.6

Remark:

*The highest reported SAR values for Body and simultaneous transmission conditions are **0.862W/kg** and **1.232W/kg** respectively.*

The device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg) specified in FCC 47 CFR Part 2.1093 and ANSI/IEEE C95.1-2005, and had been tested in accordance with the measurement methods and procedure specified in IEEE 1528-2013 and KDB 865664 D01 v01r04 and KDB 865664 D02 v01r02

3. Specific Absorption Rate (SAR)

3.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

3.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$\text{SAR} = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

SAR measurement can be either related to the temperature elevation in tissue by

$$\text{SAR} = C \left(\frac{\delta T}{\delta t} \right)$$

Where: C is the specific heat capacity, δT is the temperature rise and δt is the exposure duration, or related to the electrical field in the tissue by

$$\text{SAR} = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

However for evaluating SAR of low power transmitter, electrical field measurement is typically applied.

4. SAR Measurement System

4.1 The Measurement System

Comosar is a system that is able to determine the SAR distribution inside a phantom of human being according to different standards. The Comosar system consists of the following items:

- Main computer to control all the system
- 6 axis robot
- Data acquisition system
- Miniature E-field probe
- Phone holder
- Head simulating tissue

The following figure shows the system.



The EUT under test operating at the maximum power level is placed in the phone holder, under the phantom, which is filled with head simulating liquid. The E-Field probe measures the electric field inside the phantom. The OpenSAR software computes the results to give a SAR value in a 1g or 10g mass.


4.2 Probe

For the measurements the Specific Dosimetric E-Field Probe SSE2 SN 45/15 EPGO280 with following specifications is used

- Dynamic range: 0.01-100 W/kg
- Probe Length: 330 mm
- Length of Individual Dipoles: 4.5 mm
- Maximum external diameter: 8 mm
- Probe Tip External Diameter : 5 mm
- Distance between dipoles / probe extremity: 2.7mm

- Probe linearity: <0.25 dB
 - Axial Isotropy: <0.25 dB
 - Spherical Isotropy: <0.50 dB
 - Calibration range: 700 to 3000MHz for head & body simulating liquid.
- Angle between probe axis (evaluation axis) and surface normal line: less than 30°

Probe calibration is realized, in compliance with EN 62209-1 and IEEE 1528 STD, with CALISAR, Antenna proprietary calibration system. The calibration is performed with the EN 62209-1 annexe technique using reference guide at the five frequencies.

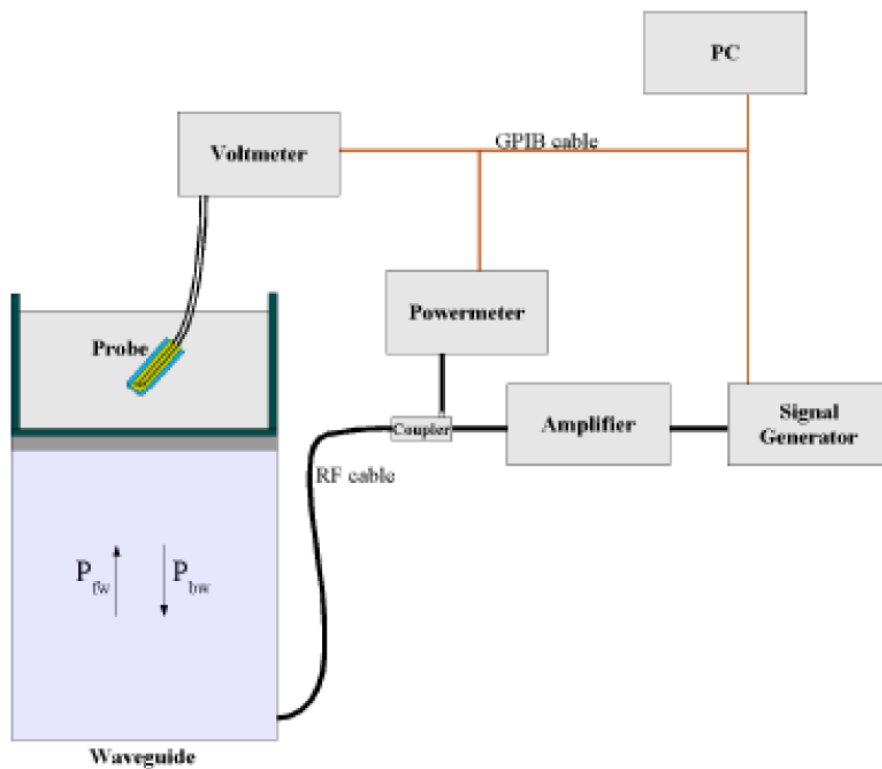

$$SAR = \frac{4(P_{fw} - P_{bw})}{ab\delta} \cos^2\left(\pi \frac{y}{a}\right) e^{-2z/\delta}$$

Where :

P_{fw} = Forward Power

P_{bw} = Backward Power

a and b = Waveguide dimensions

l = Skin depth

Keithley configuration:

Rate = Medium; Filter = ON; RDGS = 10; Filter type = Moving Average; Range auto after each calibration, a SAR measurement is performed on a validation dipole and compared with a NPL calibrated probe, to verify it.

The calibration factors, CF(N), for the 3 sensors corresponding to dipole 1, dipole 2 and dipole 3 are:

$$CF(N)=SAR(N)/V_{lin}(N) \quad (N=1,2,3)$$

The linearised output voltage $V_{lin}(N)$ is obtained from the displayed output voltage $V(N)$ using

$$V_{lin}(N)=V(N)*(1+V(N)/DCP(N)) \quad (N=1,2,3)$$

where DCP is the diode compression point in mV.

4.3 Probe Calibration Process

Dosimetric Assessment Procedure

Each E-Probe/Probe Amplifier combination has unique calibration parameters. SATIMO Probe calibration procedure is conducted to determine the proper amplifier settings to enter in the probe parameters. The amplifier settings are determined for a given frequency by subjecting the probe to a known E-field density (1 mW/cm²) using an with CALISAR, Antenna proprietary calibration system.

Free Space Assessment Procedure

The free space E-field from amplified probe outputs is determined in a test chamber. This calibration can be performed in a TEM cell if the frequency is below 1 GHz and in a waveguide or other methodologies above 1 GHz for free space. For the free space calibration, the probe is placed in the volumetric center of the cavity and at the proper orientation with the field. The probe is rotated 360 degrees until the three channels show the maximum reading. The power density readings equates to 1mW/cm².

Temperature Assessment Procedure

E-field temperature correlation calibration is performed in a flat phantom filled with the appropriate simulated head tissue. The E-field in the medium correlates with the temperature rise in the dielectric medium. For temperature correlation calibration a RF transparent thermistor-based temperature probe is used in conjunction with the E-field probe.

Where:

$$SAR = C \frac{\Delta T}{\Delta t}$$

Δt = exposure time (30 seconds),

C = heat capacity of tissue (brain or muscle),

ΔT = temperature increase due to RF exposure.

SAR is proportional to $\Delta T / \Delta t$, the initial rate of tissue heating, before thermal diffusion takes place. The electric field in the simulated tissue can be used to estimate SAR by equating the thermally derived SAR to that with the E- field component.

$$SAR = \frac{|E|^2 \cdot \sigma}{\rho}$$

Where:

σ = simulated tissue conductivity,


ρ = Tissue density (1.25 g/cm³ for brain tissue)

4.4 Phantom

For the measurements the Specific Anthropomorphic Mannequin (SAM) defined by the IEEE SCC-34/SC2 group is used. The phantom is a polyurethane shell integrated in a wooden table. The thickness of the phantom amounts to 2mm +/- 0.2mm. It enables the dosimetric evaluation of left and right phone usage and includes an additional flat phantom part for the simplified performance check. The phantom set-up includes a cover, which prevents the evaporation of the liquid.

4.5 Device Holder

The positioning system allows obtaining cheek and tilting position with a very good accuracy. In compliance with CENELEC, the tilt angle uncertainty is lower than 1 °.

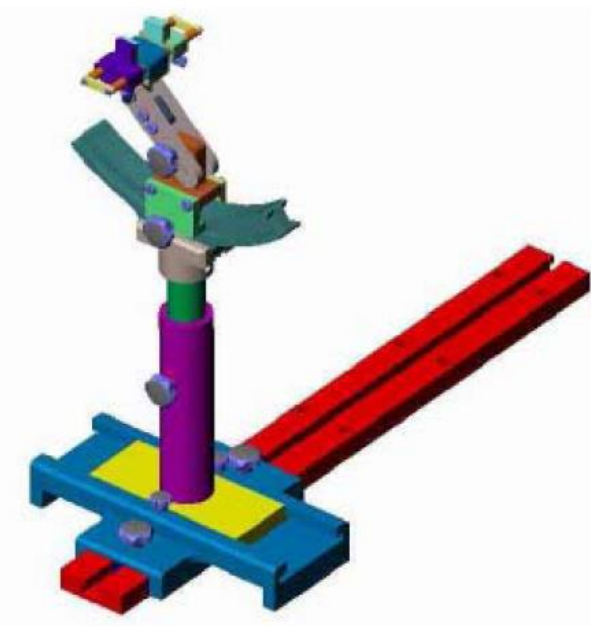

System Material	Permittivity	Loss Tangent
Delrin	3.7	0.005




4.6 Test Equipment List

Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
E-Field Probe	MVG	SSE2	SN 45/15 EPGO280	2019-07-08	2020-07-07
750MHz Dipole	MVG	SID750	SN 47/12 DIP 0G750-203	2020-03-11	2021-03-10
835MHz Dipole	MVG	SID835	SN 47/12 DIP 0G835-204	2020-03-11	2021-03-10
1800MHz Dipole	MVG	SID1800	SN 47/12 DIP 1G800-206	2020-03-11	2021-03-10
1900MHz Dipole	MVG	SID1900	SN 47/12 DIP 1G900-207	2020-03-11	2021-03-10
2450MHz Dipole	MVG	SID2450	SN 13/15 DIP 2G450-364	2020-03-11	2021-03-10
2600MHz Dipole	MVG	SID2600	SN 13/15 DIP 2G600-365	2020-03-11	2021-03-10
Dielectric Probe Kit	SATIMO	SCLMP	SN 47/12 OCPG49	2020-03-11	2021-03-10
SAM Phantom	SATIMO	SAM	SN/ 47/12 SAM95	N/A	N/A
MULTIMETER	KEITHLEY	Keithley 2000	4006367	2020-03-11	2021-03-10
Signal Generator	Agilent	N5182A	MY47070282	2020-03-11	2021-03-10
Universal Tester	Rohde & Schwarz	CMU200	112315	2020-03-11	2021-03-10
Communications Tester	Rohde & Schwarz	CMW500	148650	2020-03-11	2021-03-10
Network Analyzer	HP	8753C	SEMT-1064	2020-03-11	2021-03-10
Directional Couplers	Agilent	778D	SEMT-1198	2020-03-11	2021-03-10


5. Tissue Simulating Liquids

5.1 Composition of Tissue Simulating Liquid

For the measurement of the field distribution inside the SAM phantom with SMTIMO, the phantom must be filled with around 25 liters of homogeneous body tissue simulating liquid. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm. Please see the following photos for the liquid height.

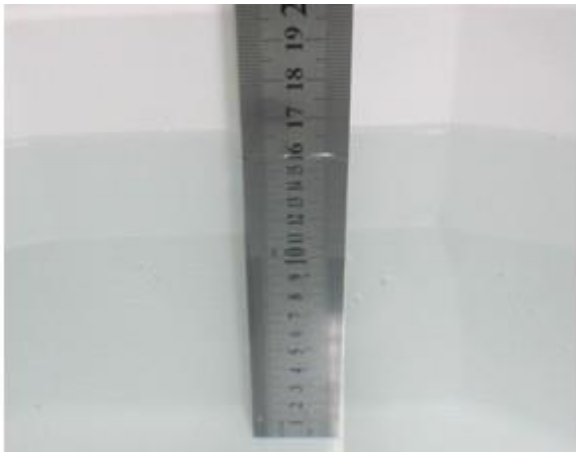

Liquid Height for Head SAR

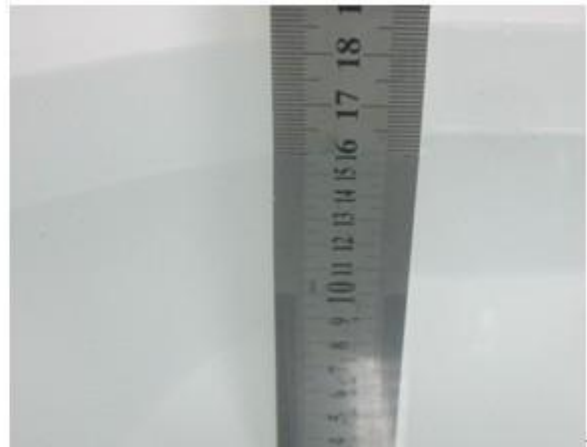

Liquid Height for Body SAR

The Composition of Tissue Simulating Liquid

Frequency (MHz)	Water (%)	Salt (%)	Sugar (%)	HEC (%)	Preventol (%)	DGBE (%)
Head						
750	41.1	1.4	57.0	0.2	0.3	0
835	40.3	1.4	57.9	0.2	0.2	0
1800-1900	55.2	0.3	0	0	0	44.5
2600	54.9	0.1	0	0	0	45.0
Body						
750	50.0	0.8	48.8	0.2	0.2	0
835	50.8	0.9	48.1	0.1	0.1	0
1800-1900	70.2	0.4	0	0	0	29.4
2600	68.2	0.1	0	0	0	31.7

5.2 Tissue Dielectric Parameters for Head and Body Phantoms

The head tissue dielectric parameters recommended by the IEEE SCC-34/SC-2 in P1528 have been incorporated in the following table. These head parameters are derived from planar layer models simulating the highest expected SAR for the dielectric properties and tissue thickness variations in a human head. Other head and body tissue parameters that have not been specified in P1528 are derived from the tissue dielectric parameters computed from the 4-Cole-Cole equations described in Reference [12] and extrapolated according to the head parameters specified in P1528.

Target Frequency (MHz)	Head		Body	
	Conductivity (σ)	Permittivity (ϵ_r)	Conductivity (σ)	Permittivity (ϵ_r)
150	0.76	52.3	0.80	61.9
300	0.87	45.3	0.92	58.2
450	0.87	43.5	0.94	56.7
750	0.89	41.9	0.96	55.5
835	0.90	41.5	0.97	55.2
900	0.97	41.5	1.05	55.0
915	0.98	41.5	1.06	55.0
1450	1.20	40.5	1.30	54.0
1610	1.29	40.3	1.40	53.8
1750	1.37	40.1	1.49	53.4
1800-2000	1.40	40.0	1.52	53.3
2450	1.80	39.2	1.95	52.7
3000	2.40	38.5	2.73	52.0
5800	5.27	35.3	6.00	48.2



5.3 Tissue Calibration Result

The dielectric parameters of the liquids were verified prior to the SAR evaluation using COMOSAR Dielectric Probe Kit and an Agilent Network Analyzer.

Calibration Result for Dielectric Parameters of Tissue Simulating Liquid

Body Tissue Simulating Liquid									
Freq. MHz.	Temp. (°C)	Conductivity			Permittivity			Limit (%)	Date
		Reading (σ)	Target (σ)	Delta (%)	Reading (ϵ_r)	Target (ϵ_r)	Delta (%)		
750	21.2	0.93	0.96	-3.12	54.96	55.50	-0.97	±5	2020-04-28
835	21.2	0.95	0.97	-2.06	54.85	55.20	-0.63	±5	2020-05-08
1750	21.3	1.46	1.49	-2.01	51.22	53.40	-4.08	±5	2020-05-12
1800	21.3	1.46	1.52	-3.95	51.22	53.30	-3.90	±5	2020-05-18
1900	21.3	1.50	1.52	-1.32	52.42	53.30	-1.65	±5	2020-05-18
2600	21.3	1.93	1.96	-1.53	38.63	39.0	-0.95	±5	2020-05-19


6. SAR Measurement Evaluation

6.1 Purpose of System Performance Check

The system performance check verifies that the system operates within its specifications. System and operator errors can be detected and corrected. It is recommended that the system performance check be performed prior to any usage of the system in order to guarantee reproducible results. The system performance check uses normal SAR measurements in a simplified setup with a well characterized source. This setup was selected to give a high sensitivity to all parameters that might fail or vary over time. The system check does not intend to replace the calibration of the components, but indicates situations where the system uncertainty is exceeded due to drift or failure.

6.2 System Setup

In the simplified setup for system evaluation, the EUT is replaced by a calibrated dipole and the power source is replaced by a continuous wave which comes from a signal generator at frequency 835 MHz and 1900MHz. The calibrated dipole must be placed beneath the flat phantom section of the SAM twin phantom with the correct distance holder. The distance holder should touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom.

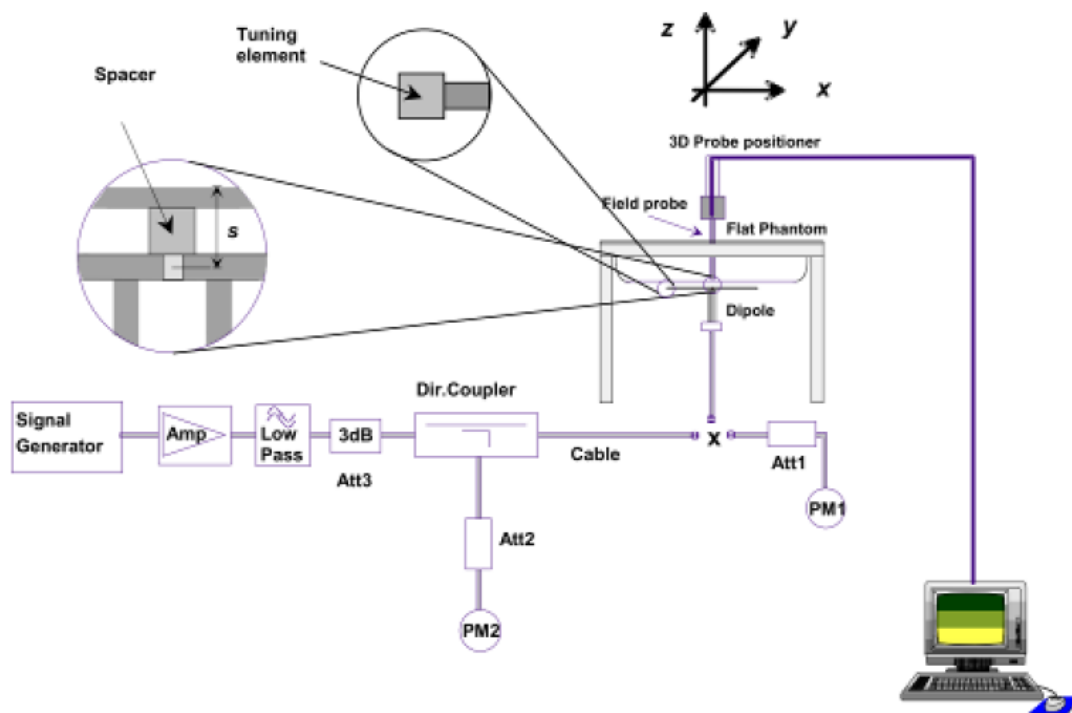

System Verification Setup Block Diagram



Setup Photo of Dipole Antenna

The output power on dipole port must be calibrated to 24 dBm(250 mW) before dipole is connected.

6.3 Validation Results

Comparing to the original SAR value provided by SATIMO, the validation data should be within its specification of 10 %. Table 6.1 shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion.

Frequency MHz	Targeted SAR _{1g} (W/kg)	Measured SAR _{1g} (W/kg)	Normalized SAR _{1g} (W/kg)	Tolerance (%)
Head				
750	8.40	2.16	8.64	2.86
835	9.67	2.41	9.64	-0.31
1800	38.51	9.61	38.44	-0.18
1900	39.58	9.91	39.64	0.15
2450	53.69	13.45	53.8	0.20
2600	55.13	13.67	54.68	-0.82

Remark: Referring to IEEE 1528-2013, Section 8.2, The system check shall be performed at a test frequency that is within $\pm 10\%$ or ± 100 MHz of the compliance test mid-band frequency, so the 1750 MHz system verification is made of 1800MHz Dipole.

Targeted and Measurement SAR

Please refer to Annex A for the plots of system performance check.

7. EUT Testing Position

7.1 Wrist-worn device

(a) Transmitters that are built-in within a wrist watch or similar wrist-worn devices typically operate in speaker mode for voice communication, with the device worn on the wrist and positioned next to the mouth. Next to the mouth exposure requires 1-g SAR, and the wrist-worn condition requires 10-g extremity SAR.


(b) The 10-g extremity and 1-g SAR test exclusions may be applied to the wrist and face exposure conditions. When SAR evaluation is required, next to the mouth use is evaluated with the front of the device positioned at 10 mm from a flat phantom filled with head tissue-equivalent medium.

(c) For wrist-worn condition, 10g SAR value should be measured for the inner wrist band at a separation of 0mm. The design of the hard wrist band prevents opening it to a flat shape to be placed under the flat phantom.

(d) Next to the mouth use is evaluated with the front of the device positioned at 10 mm from a flat phantom filled with head tissue-equivalent medium. SAR for wrist exposure is evaluated with the back of the devices positioned in direct contact against a flat phantom fill with body tissue-equivalent medium.

7.2 EUT Antenna Position

Block Diagram for EUT Antenna Position

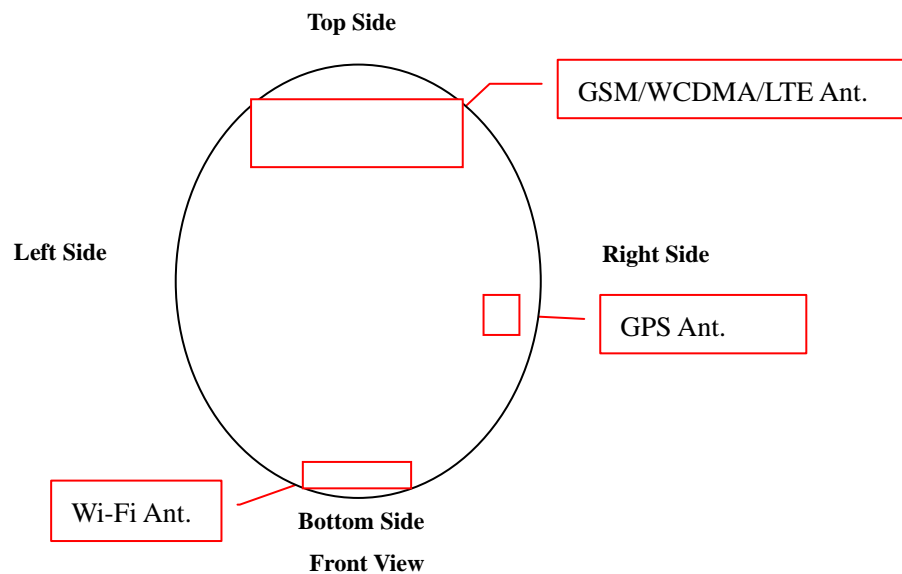

Body SAR tests, Test distance: 0mm						
Antennas	Front	Back	Right Side	Left Side	Top Side	Bottom
WWAN	Yes	Yes	Yes	Yes	Yes	Yes

8. SAR Measurement Procedures

8.1 Measurement Procedures

The measurement procedures are as follows:

- (a) Use base station simulator (if applicable) or engineering software to transmit RF power continuously (continuous Tx) in the highest power channel.
- (b) Keep EUT to radiate maximum output power or 100% factor (if applicable)
- (c) Measure output power through RF cable and power meter.
- (d) Place the EUT in the positions as Annex D demonstrates.
- (e) Set scan area, grid size and other setting on the SATIMO software.
- (f) Measure SAR results for the highest power channel on each testing position.
- (g) Find out the largest SAR result on these testing positions of each band
- (h) Measure SAR results for other channels in worst SAR testing position if the SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

8.2 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The SATIMO software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine. The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

8.3 Area & Zoom Scan Procedures

First Area Scan is used to locate the approximate location(s) of the local peak SAR value(s). The measurement grid within an Area Scan is defined by the grid extent, grid step size and grid offset. Next, in order to determine the EM field distribution in a three-dimensional spatial extension, Zoom Scan is required. The Zoom Scan measures 5x5x7 points with step size 8, 8 and 5 mm for 300 MHz to 3 GHz, and 8x8x8 points with step size 4, 4 and 2.5 mm for 3 GHz to 6 GHz. The Zoom Scan is performed around the highest E-field value to determine the averaged SAR-distribution over 10 g.

8.4 Volume Scan Procedures

The volume scan is used for assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing (step-size is 4, 4 and 2.5 mm). When all volume scan were completed, the software can combine and subsequently superpose these measurement data to calculating the multiband SAR.

8.5 SAR Averaged Methods

The local SAR inside the phantom is measured using small dipole sensing elements inside a probe body. The probe tip must not be in contact with the phantom surface in order to minimize measurements errors, but the highest local SAR will occur at the surface of the phantom.

An extrapolation is using to determinate this highest local SAR values. The extrapolation is based on a fourth-order least-square polynomial fit of measured data. The local SAR value is then extrapolated from the liquid surface with a 1mm step.

The measurements have to be performed over a limited time (due to the duration of the battery) so the step of measurement is high. It could vary between 5 and 8 mm. To obtain an accurate assessment of the maximum SAR averaged over 10g and 1 g requires a very fine resolution in the three dimensional scanned data array.

8.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In SATIMO measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drift more than 5%, the SAR will be retested.

9. SAR Test Result

9.1 Conducted RF Output Power

GSM - Burst Average Power (dBm)								
Band	GSM850			Tune-up power (dBm)	PCS1900			Tune-up power (dBm)
Channel	128	190	251		512	661	810	
Frequency (MHz)	824.2	836.6	848.8		1850.2	1880	1909.8	
GSM	32.50	32.69	32.74	33.0	31.10	31.39	31.51	32.0
GPRS (1 slot)	32.52	32.71	32.74	33.0	29.46	29.69	29.54	30.0
GPRS (2 slots)	30.55	30.67	30.73	31.0	27.07	27.12	26.75	27.5
GPRS (3 slots)	28.73	28.85	28.91	29.0	25.53	25.56	25.22	26.0
GPRS (4 slots)	26.75	26.92	26.97	27.0	23.48	23.49	23.17	23.5
EDGE (1 slot)	24.95	24.94	24.80	25.0	25.96	25.37	25.63	26.0
EDGE (2 slots)	24.72	24.75	24.56	25.0	25.41	24.85	25.08	25.5
EDGE (3 slots)	23.52	23.57	23.27	24.0	24.32	24.71	25.36	25.5
EDGE (4 slots)	20.89	20.89	20.59	21.0	22.77	23.01	23.08	23.5

GSM - Source-Based Time-Average Power (dBm)								
Band	GSM850			Tune-up power (dBm)	PCS1900			Tune-up power (dBm)
Channel	128	190	251		512	661	810	
Frequency (MHz)	824.2	836.6	848.8		1850.2	1880	1909.8	
GSM	23.50	23.69	23.74	24.0	22.10	22.39	22.51	23.0
GPRS (1 slot)	23.52	23.71	23.74	24.0	20.46	20.69	20.54	21.0
GPRS (2 slots)	24.55	24.67	24.73	25.0	21.07	21.12	20.75	21.5
GPRS (3 slots)	24.48	24.60	24.66	25.0	21.28	21.31	20.97	21.5
GPRS (4 slots)	23.75	23.92	23.97	24.0	20.48	20.49	20.17	20.5
EDGE (1 slot)	15.95	15.94	15.80	16.0	16.96	16.37	16.63	17.0
EDGE (2 slots)	18.72	18.75	18.56	19.0	19.41	18.85	19.08	19.5
EDGE (3 slots)	19.27	19.32	19.02	19.5	20.07	20.46	21.11	21.5
EDGE (4 slots)	17.89	17.89	17.59	18.0	19.77	20.01	20.08	20.5

Note: The source-based time-averaged power is linearly scaled the maximum burst averaged power based on time slots. The calculated method are shown as below:

Source based time-average power = Burst averaged power - Duty cycle factor in dB

Duty cycle factor = 9 dB for 1 Tx slot, 6 dB for 2 Tx slots, 4.25 dB for 3 Tx slots, 3 dB for 4 Tx slots

Remark:

1. For Near to Mouth SAR testing, GSM should be evaluated, therefore the EUT was set in GSM due to its highest source-based time-average power.
2. For Wrist-worn SAR testing, GPRS should be evaluated, therefore the EUT was set in GPRS (4TX slots) for GSM850 and GSM1900 due to its highest source-based time-average power.



3. Per KDB 447498 D01 v06, the maximum output power channel is used for SAR testing and for further SAR test reduction.
4. The DUT do not support DTM function.

WCDMA - Average Power (dBm)								
Band	WCDMA Band II				WCDMA Band V			
Channel	9262	9400	9538	Tune-up	4132	4182	4233	Tune-up
Frequency (MHz)	1852.4	1880.0	1907.6	power (dBm)	826.4	836.6	846.6	power (dBm)
RMC 12.2k	21.69	21.67	21.75	22.0	22.36	22.34	22.34	22.5
HSDPA Subtest-1	21.56	21.00	21.19	22.0	21.83	21.85	21.56	22.0
HSDPA Subtest-2	21.52	20.95	21.16	22.0	21.80	21.82	21.55	22.0
HSDPA Subtest-3	21.55	20.94	21.15	22.0	21.82	21.83	21.53	22.0
HSDPA Subtest-4	21.54	20.96	21.17	22.0	21.81	21.84	21.54	22.0
HSUPA Subtest-1	21.65	20.98	20.86	22.0	21.91	21.82	21.58	22.0
HSUPA Subtest-2	21.63	20.96	20.85	22.0	21.87	21.79	21.53	22.0
HSUPA Subtest-3	21.64	20.94	20.81	22.0	21.87	21.78	21.56	22.0
HSUPA Subtest-4	21.62	20.95	20.81	22.0	21.86	21.80	21.57	22.0
HSUPA Subtest-5	21.63	20.96	20.83	22.0	21.88	21.81	21.57	22.0

Remark:

1. Per KDB 941225 D01 v03, The 12.2kbps RMC mode was selected for SAR testing(the primary mode).
2. When the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq 1/4$ dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the secondary mode



FDD-LTE Band 2:

Channel Bandwidth: 1.4 MHz					
Modulation	Channel	RB Configuration		Average Power [dBm]	MPR (dB)
		Size	Offset		
QPSK	LCH	1	0	22.40	0
		1	3	22.37	0
		1	5	22.38	0
		3	0	22.36	0
		3	2	22.38	0
		3	3	22.45	0
		6	0	21.32	1
	MCH	1	0	22.11	0
		1	3	22.03	0
		1	5	22.05	0
		3	0	22.14	0
		3	2	22.18	0
		3	3	22.10	0
		6	0	21.07	1
	HCH	1	0	21.99	0
		1	3	21.99	0
		1	5	21.99	0
		3	0	21.99	0
		3	2	21.99	0
		3	3	22.00	0
		6	0	21.03	1
16QAM	LCH	1	0	22.00	1
		1	3	21.89	1
		1	5	21.97	1
		3	0	21.62	1
		3	2	21.59	1
		3	3	21.59	1
		6	0	20.75	2
	MCH	1	0	21.31	1
		1	3	21.30	1
		1	5	21.33	1
		3	0	21.13	1
		3	2	21.14	1
		3	3	21.12	1
		6	0	20.57	2
HCH	1	0	21.25	1	
	1	3	21.27	1	



		1	5	21.24	1
		3	0	20.99	1
		3	2	21.00	1
		3	3	21.02	1
		6	0	20.73	2

Channel Bandwidth: 3 MHz					
Modulation	Channel	RB Configuration		Average Power [dBm]	MPR (dB)
		Size	Offset		
QPSK	LCH	1	0	22.32	0
		1	7	22.43	0
		1	14	22.43	0
		8	0	21.35	1
		8	4	21.43	1
		8	7	21.42	1
		15	0	21.40	1
	MCH	1	0	22.15	0
		1	7	22.12	0
		1	14	22.12	0
		8	0	21.23	1
		8	4	21.14	1
		8	7	21.08	1
		15	0	21.16	1
	HCH	1	0	21.76	0
		1	7	21.81	0
		1	14	21.96	0
		8	0	20.97	1
		8	4	20.70	1
		8	7	20.92	1
		15	0	20.98	1
16QAM	LCH	1	0	21.04	1
		1	7	21.12	1
		1	14	21.23	1
		8	0	20.47	2
		8	4	20.45	2
		8	7	20.44	2
		15	0	20.61	2
	MCH	1	0	21.58	1
		1	7	21.61	1
		1	14	21.55	1
		8	0	20.56	2
		8	4	20.61	2
		8	7	20.58	2



	HCH	15	0	20.60	2
		1	0	20.45	1
		1	7	20.41	1
		1	14	20.70	1
		8	0	20.63	2
		8	4	20.76	2
		8	7	20.68	2
		15	0	20.77	2

Channel Bandwidth: 5 MHz					
Modulation	Channel	RB Configuration		Average Power [dBm]	MPR (dB)
		Size	Offset		
QPSK	LCH	1	0	21.24	0
		1	12	22.40	0
		1	24	22.43	0
		12	0	21.40	1
		12	6	21.52	1
		12	13	21.44	1
		25	0	21.41	1
	MCH	1	0	22.12	0
		1	12	22.14	0
		1	24	22.12	0
		12	0	21.25	1
		12	6	21.20	1
		12	13	21.21	1
		25	0	21.20	1
	HCH	1	0	22.23	0
		1	12	22.22	0
		1	24	22.23	0
		12	0	21.08	1
		12	6	21.11	1
		12	13	21.13	1
		25	0	21.03	1
16QAM	LCH	1	0	21.55	1
		1	12	21.61	1
		1	24	21.62	1
		12	0	20.58	2
		12	6	20.55	2
		12	13	20.52	2
		25	0	20.75	2
	MCH	1	0	21.90	1
		1	12	21.86	1
		1	24	21.78	1



		12	0	20.39	2
		12	6	20.37	2
		12	13	20.39	2
		25	0	20.48	2
	HCH	1	0	20.84	1
		1	12	20.77	1
		1	24	20.82	1
		12	0	20.89	2
		12	6	20.77	2
		12	13	20.66	2
		25	0	20.55	2

Channel Bandwidth: 10 MHz					
Modulation	Channel	RB Configuration		Average Power [dBm]	MPR (dB)
		Size	Offset		
QPSK	LCH	1	0	22.50	0
		1	24	22.53	0
		1	49	22.52	0
		25	0	21.42	1
		25	12	21.60	1
		25	25	21.60	1
		50	0	21.57	1
	MCH	1	0	22.45	0
		1	24	22.34	0
		1	49	22.22	0
		25	0	21.27	1
		25	12	21.17	1
		25	25	21.12	1
		50	0	21.12	1
	HCH	1	0	22.23	0
		1	24	22.16	0
		1	49	22.16	0
		25	0	21.10	1
		25	12	21.14	1
		25	25	21.09	1
		50	0	21.09	1
16QAM	LCH	1	0	21.55	1
		1	24	21.63	1
		1	49	21.6	1
		25	0	20.57	2
		25	12	20.59	2
		25	25	20.73	2
		50	0	20.74	2



	MCH	1	0	21.98	1
		1	24	21.87	1
		1	49	21.85	1
		25	0	20.46	2
		25	12	20.42	2
		25	25	20.43	2
		50	0	20.42	2
	HCH	1	0	21.36	1
		1	24	21.39	1
		1	49	21.28	1
		25	0	20.74	2
		25	12	20.64	2
		25	25	20.89	2
		50	0	20.76	2

Channel Bandwidth: 15 MHz					
Modulation	Channel	RB Configuration		Average Power [dBm]	MPR (dB)
		Size	Offset		
QPSK	LCH	1	0	22.48	0
		1	37	22.54	0
		1	74	22.50	0
		37	0	21.44	1
		37	18	21.56	1
		37	38	21.59	1
		75	0	21.53	1
	MCH	1	0	22.52	0
		1	37	22.29	0
		1	74	22.18	0
		37	0	21.28	1
		37	18	21.22	1
		37	38	21.24	1
		75	0	21.28	1
	HCH	1	0	22.28	0
		1	37	22.20	0
		1	74	22.14	0
		37	0	21.25	1
		37	18	21.23	1
		37	38	21.06	1
		75	0	21.08	1
16QAM	LCH	1	0	21.61	1
		1	37	21.57	1
		1	74	21.42	1
		37	0	20.60	2



		37	18	20.62	2
		37	38	20.63	2
		75	0	20.75	2
	MCH	1	0	21.56	1
		1	37	21.46	1
		1	74	21.29	1
		37	0	20.73	2
		37	18	20.87	2
		37	38	20.90	2
		75	0	20.87	2
	HCH	1	0	21.46	1
		1	37	21.41	1
		1	74	21.27	1
		37	0	20.58	2
		37	18	20.44	2
		37	38	20.64	2
75		0	20.76	2	

Channel Bandwidth: 20 MHz					
Modulation	Channel	RB Configuration		Average Power [dBm]	MPR (dB)
		Size	Offset		
QPSK	LCH	1	0	22.67	0
		1	49	22.72	0
		1	99	22.61	0
		50	0	21.64	1
		50	25	21.56	1
		50	50	21.52	1
		100	0	21.58	1
	MCH	1	0	22.73	0
		1	49	22.46	0
		1	99	22.33	0
		50	0	21.41	1
		50	25	21.23	1
		50	50	21.10	1
		100	0	21.32	1
	HCH	1	0	22.00	0
		1	49	21.98	0
		1	99	22.00	0
		50	0	21.11	1
		50	25	21.17	1
		50	50	21.00	1
		100	0	21.13	1
16QAM	LCH	1	0	21.23	1



		1	49	21.35	1
		1	99	21.15	1
		50	0	20.70	2
		50	25	20.69	2
		50	50	20.67	2
		100	0	20.65	2
	MCH	1	0	21.21	1
		1	49	20.94	1
		1	99	21.20	1
		50	0	20.52	2
		50	25	20.51	2
		50	50	20.67	2
	HCH	100	0	20.88	2
		1	0	20.93	1
		1	49	20.94	1
		1	99	20.88	1
		50	0	20.66	2
		50	25	20.70	2
		50	50	20.86	2
	100	0	20.95	2	

FDD-LTE Band 4:

Channel Bandwidth: 1.4 MHz					
Modulation	Channel	RB Configuration		Average Power [dBm]	MPR (dB)
		Size	Offset		
QPSK	LCH	1	0	24.44	0
		1	3	24.49	0
		1	5	24.43	0
		3	0	24.47	0
		3	2	24.47	0
		3	3	24.39	0
		6	0	23.36	1
	MCH	1	0	23.25	0
		1	3	23.32	0
		1	5	23.33	0
		3	0	23.30	0
		3	2	23.32	0
		3	3	23.23	0
		6	0	22.27	1
	HCH	1	0	23.50	0
		1	3	23.47	0
		1	5	23.46	0



16QAM		3	0	23.65	0
		3	2	23.59	0
		3	3	23.64	0
		6	0	22.65	1
	LCH	1	0	23.54	1
		1	3	23.51	1
		1	5	23.48	1
		3	0	23.66	1
		3	2	23.64	1
		3	3	23.63	1
		6	0	22.37	2
	MCH	1	0	22.93	1
		1	3	22.90	1
		1	5	22.86	1
		3	0	22.17	1
		3	2	22.12	1
		3	3	22.15	1
		6	0	21.20	2
	HCH	1	0	22.74	1
		1	3	22.68	1
		1	5	22.80	1
3		0	22.11	1	
3		2	22.08	1	
3		3	22.14	1	
6		0	21.76	2	

Channel Bandwidth: 3 MHz					
Modulation	Channel	RB Configuration		Average Power [dBm]	MPR (dB)
		Size	Offset		
QPSK	LCH	1	0	24.28	0
		1	7	24.26	0
		1	14	24.32	0
		8	0	23.35	1
		8	4	23.40	1
		8	7	23.41	1
		15	0	23.36	1
	MCH	1	0	23.28	0
		1	7	23.33	0
		1	14	23.26	0
		8	0	22.49	1
		8	4	22.77	1
		8	7	22.81	1
		15	0	22.65	1



	HCH	1	0	23.46	0
		1	7	23.48	0
		1	14	23.56	0
		8	0	22.44	1
		8	4	22.36	1
		8	7	22.53	1
		15	0	22.52	1
16QAM	LCH	1	0	23.45	1
		1	7	23.36	1
		1	14	23.36	1
		8	0	22.40	2
		8	4	22.35	2
		8	7	22.39	2
		15	0	22.53	2
	MCH	1	0	23.97	1
		1	7	23.86	1
		1	14	23.77	1
		8	0	21.20	2
		8	4	21.31	2
		8	7	21.66	2
		15	0	21.72	2
	HCH	1	0	22.35	1
		1	7	22.28	1
		1	14	22.33	1
		8	0	21.54	2
		8	4	21.64	2
		8	7	21.43	2
		15	0	21.42	2

Channel Bandwidth: 5 MHz					
Modulation	Channel	RB Configuration		Average Power [dBm]	MPR (dB)
		Size	Offset		
QPSK	LCH	1	0	23.36	0
		1	12	23.35	0
		1	24	23.21	0
		12	0	23.28	1
		12	6	23.41	1
		12	13	23.33	1
		25	0	23.34	1
	MCH	1	0	23.28	0
		1	12	23.11	0
		1	24	23.11	0
		12	0	23.33	1



		12	6	23.18	1
		12	13	23.20	1
		25	0	22.15	1
	HCH	1	0	23.60	0
		1	12	23.64	0
		1	24	23.69	0
		12	0	23.53	1
		12	6	23.50	1
		12	13	23.57	1
		25	0	22.53	1
16QAM	LCH	1	0	22.19	1
		1	12	22.22	1
		1	24	22.39	1
		12	0	22.44	2
		12	6	22.43	2
		12	13	22.43	2
		25	0	22.52	2
	MCH	1	0	23.05	1
		1	12	22.88	1
		1	24	22.82	1
		12	0	22.43	2
		12	6	22.35	2
		12	13	22.43	2
		25	0	21.50	2
	HCH	1	0	22.19	1
		1	12	22.26	1
		1	24	22.30	1
		12	0	22.45	2
		12	6	22.56	2
		12	13	22.55	2
		25	0	21.70	2



Channel Bandwidth: 10 MHz					
Modulation	Channel	RB Configuration		Average Power [dBm]	MPR (dB)
		Size	Offset		
QPSK	LCH	1	0	24.31	0
		1	24	24.19	0
		1	49	24.00	0
		25	0	22.33	1
		25	12	22.18	1
		25	25	22.03	1
		50	0	22.17	1
	MCH	1	0	23.31	0
		1	24	23.10	0
		1	49	23.10	0
		25	0	22.84	1
		25	12	22.64	1
		25	25	22.65	1
		50	0	22.63	1
	HCH	1	0	23.14	0
		1	24	23.33	0
		1	49	23.46	0
		25	0	22.39	1
		25	12	22.41	1
		25	25	22.47	1
		50	0	22.44	1
16QAM	LCH	1	0	22.42	1
		1	24	22.24	1
		1	49	22.08	1
		25	0	21.90	2
		25	12	21.93	2
		25	25	21.91	2
		50	0	21.93	2
	MCH	1	0	22.48	1
		1	24	22.30	1
		1	49	22.13	1
		25	0	21.82	2
		25	12	21.69	2
		25	25	21.77	2
		50	0	21.74	2
	HCH	1	0	22.24	1
		1	24	22.45	1
		1	49	22.63	1
		25	0	21.42	2



		25	12	21.47	2
		25	25	21.59	2
		50	0	21.63	2

Channel Bandwidth: 15 MHz					
Modulation	Channel	RB Configuration		Average Power [dBm]	MPR (dB)
		Size	Offset		
QPSK	LCH	1	0	24.33	0
		1	37	24.04	0
		1	74	23.60	0
		37	0	23.23	1
		37	18	23.18	1
		37	38	22.84	1
		75	0	23.04	1
	MCH	1	0	23.55	0
		1	37	23.19	0
		1	74	23.12	0
		37	0	22.37	1
		37	18	22.24	1
		37	38	22.13	1
		75	0	22.25	1
	HCH	1	0	23.15	0
		1	37	23.26	0
		1	74	23.53	0
		37	0	22.46	1
		37	18	22.49	1
		37	38	22.45	1
		75	0	22.49	1
16QAM	LCH	1	0	23.44	1
		1	37	23.96	1
		1	74	23.75	1
		37	0	22.35	2
		37	18	22.15	2
		37	38	21.90	2
		75	0	22.27	2
	MCH	1	0	23.56	1
		1	37	23.19	1
		1	74	23.11	1
		37	0	21.63	2
		37	18	21.41	2
		37	38	21.31	2
		75	0	21.35	2
HCH	1	0	22.51	1	



		1	37	22.50	1
		1	74	22.56	1
		37	0	21.70	2
		37	18	21.73	2
		37	38	21.63	2
		75	0	21.70	2

Channel Bandwidth: 20 MHz					
Modulation	Channel	RB Configuration		Average Power [dBm]	MPR (dB)
		Size	Offset		
QPSK	LCH	1	0	23.48	0
		1	49	23.04	0
		1	99	23.47	0
		50	0	22.23	1
		50	25	22.85	1
		50	50	22.61	1
		100	0	22.97	1
	MCH	1	0	24.53	0
		1	49	23.52	0
		1	99	23.35	0
		50	0	22.56	1
		50	25	22.30	1
		50	50	22.12	1
		100	0	22.24	1
	HCH	1	0	23.01	0
		1	49	23.01	0
		1	99	23.48	0
		50	0	22.21	1
		50	25	22.31	1
		50	50	22.36	1
		100	0	22.28	1
16QAM	LCH	1	0	22.06	1
		1	49	22.58	1
		1	99	22.56	1
		50	0	21.90	2
		50	25	21.60	2
		50	50	21.49	2
		100	0	22.06	2
	MCH	1	0	22.82	1
		1	49	22.34	1
		1	99	22.32	1
		50	0	21.70	2
		50	25	21.52	2



		50	50	21.30	2
		100	0	21.48	2
	HCH	1	0	22.79	1
		1	49	22.68	1
		1	99	23.10	1
		50	0	21.37	2
		50	25	21.44	2
		50	50	21.58	2
		100	0	21.42	2

FDD-LTE Band 5:

Channel Bandwidth: 1.4 MHz					
Modulation	Channel	RB Configuration		Average Power [dBm]	MPR (dB)
		Size	Offset		
QPSK	LCH	1	0	22.44	0
		1	3	22.71	0
		1	5	22.51	0
		3	0	22.59	0
		3	2	22.70	0
		3	3	22.63	0
		6	0	21.80	1
	MCH	1	0	22.95	0
		1	3	23.12	0
		1	5	22.84	0
		3	0	23.09	0
		3	2	23.12	0
		3	3	23.02	0
		6	0	22.19	1
	HCH	1	0	22.38	0
		1	3	22.77	0
		1	5	22.65	0
		3	0	22.53	0
		3	2	22.72	0
		3	3	22.70	0
		6	0	21.78	1
16QAM	LCH	1	0	21.91	1
		1	3	22.20	1
		1	5	22.00	1
		3	0	21.93	1
		3	2	22.03	1
		3	3	21.97	1
		6	0	20.92	2



	MCH	1	0	22.52	1
		1	3	22.69	1
		1	5	22.41	1
		3	0	22.24	1
		3	2	22.28	1
		3	3	22.18	1
		6	0	21.30	2
	HCH	1	0	21.83	1
		1	3	22.24	1
		1	5	22.12	1
		3	0	21.78	1
		3	2	21.98	1
		3	3	21.96	1
		6	0	21.01	2

Channel Bandwidth: 3 MHz					
Modulation	Channel	RB Configuration		Average Power [dBm]	MPR (dB)
		Size	Offset		
QPSK	LCH	1	0	22.52	0
		1	7	22.87	0
		1	14	22.75	0
		8	0	21.90	1
		8	4	22.02	1
		8	7	22.02	1
		15	0	21.97	1
	MCH	1	0	22.17	0
		1	7	23.21	0
		1	14	22.71	0
		8	0	22.36	1
		8	4	22.30	1
		8	7	22.16	1
		15	0	22.25	1
	HCH	1	0	22.23	0
		1	7	22.61	0
		1	14	22.73	0
		8	0	21.55	1
		8	4	21.71	1
		8	7	21.79	1
		15	0	21.67	1
16QAM	LCH	1	0	22.02	1
		1	7	22.37	1
		1	14	22.25	1
		8	0	21.10	2



		8	4	21.23	2
		8	7	21.23	2
		15	0	21.09	2
	MCH	1	0	22.73	1
		1	7	22.77	1
		1	14	22.29	1
		8	0	21.48	2
		8	4	21.42	2
		8	7	21.28	2
		15	0	21.39	2
	HCH	1	0	21.70	1
		1	7	22.09	1
		1	14	22.19	1
		8	0	20.60	2
		8	4	20.77	2
8		7	20.85	2	
15		0	20.78	2	

Channel Bandwidth: 5 MHz					
Modulation	Channel	RB Configuration		Average Power [dBm]	MPR (dB)
		Size	Offset		
QPSK	LCH	1	0	22.25	0
		1	12	23.06	0
		1	24	22.57	0
		12	0	22.05	1
		12	6	22.13	1
		12	13	22.02	1
		25	0	21.97	1
	MCH	1	0	22.00	0
		1	12	22.30	0
		1	24	22.21	0
		12	0	22.34	1
		12	6	22.36	1
		12	13	22.03	1
		25	0	22.16	1
	HCH	1	0	22.03	0
		1	12	22.55	0
		1	24	22.40	0
		12	0	22.29	1
		12	6	22.57	1
		12	13	22.59	1
		25	0	21.45	1
16QAM	LCH	1	0	21.72	1



		1	12	22.53	1
		1	24	22.04	1
		12	0	22.04	2
		12	6	21.32	2
		12	13	21.21	2
		25	0	21.09	2
	MCH	1	0	22.41	1
		1	12	22.70	1
		1	24	21.64	1
		12	0	21.58	2
		12	6	21.60	2
		12	13	21.18	2
	HCH	25	0	21.32	2
		1	0	21.16	1
		1	12	21.91	1
		1	24	21.75	1
		12	0	21.38	2
		12	6	21.66	2
		12	13	21.68	2
	25	0	20.58	2	

Channel Bandwidth: 10 MHz					
Modulation	Channel	RB Configuration		Average Power [dBm]	MPR (dB)
		Size	Offset		
QPSK	LCH	1	0	22.09	0
		1	24	22.86	0
		1	49	22.83	0
		25	0	21.77	1
		25	12	22.07	1
		25	25	22.26	1
		50	0	22.02	1
	MCH	1	0	23.16	0
		1	24	23.29	0
		1	49	22.21	0
		25	0	22.52	1
		25	12	22.38	1
		25	25	22.00	1
		50	0	22.26	1
	HCH	1	0	22.46	0
		1	24	22.26	0
		1	49	22.77	0
		25	0	21.52	1
		25	12	21.46	1



		25	25	21.62	1
		50	0	21.56	1
16QAM	LCH	1	0	21.49	1
		1	24	21.34	1
		1	49	21.34	1
		25	0	21.86	2
		25	12	21.18	2
		25	25	21.35	2
		50	0	21.11	2
		MCH	1	0	22.75
	1		24	22.78	1
	1		49	21.82	1
	25		0	21.67	2
	25		12	21.53	2
	25		25	21.14	2
	50		0	21.41	2
	HCH	1	0	21.85	1
		1	24	21.75	1
		1	49	22.16	1
		25	0	20.64	2
		25	12	20.57	2
		25	25	20.74	2
		50	0	20.70	2

FDD-LTE Band 7:

Channel Bandwidth: 5 MHz					
Modulation	Channel	RB Configuration		Average Power [dBm]	MPR (dB)
		Size	Offset		
QPSK	LCH	1	0	22.45	0
		1	12	22.43	0
		1	24	22.52	0
		12	0	21.53	0
		12	6	21.64	0
		12	13	21.73	0
		25	0	21.41	1
	MCH	1	0	22.42	0
		1	12	22.35	0
		1	24	22.35	0
		12	0	21.62	0
		12	6	21.61	0
		12	13	21.59	0
		25	0	20.65	1



	HCH	1	0	22.7	0
		1	12	22.74	0
		1	24	22.65	0
		12	0	21.56	0
		12	6	21.67	0
		12	13	21.7	0
		25	0	20.61	1
16QAM	LCH	1	0	21.46	1
		1	12	21.58	1
		1	24	21.66	1
		12	0	20.75	1
		12	6	20.79	1
		12	13	20.91	1
		25	0	20.67	2
	MCH	1	0	22.34	1
		1	12	21.88	1
		1	24	21.82	1
		12	0	20.86	1
		12	6	20.83	1
		12	13	20.77	1
		25	0	20.9	2
	HCH	1	0	21.34	1
		1	12	21.33	1
		1	24	21.33	1
		12	0	20.71	1
		12	6	20.73	1
		12	13	20.69	1
		25	0	20.93	2

Channel Bandwidth:10 MHz					
Modulation	Channel	RB Configuration		Average Power [dBm]	MPR (dB)
		Size	Offset		
QPSK	LCH	1	0	22.45	0
		1	24	22.59	0
		1	49	22.74	0
		25	0	20.59	1
		25	12	20.52	1
		25	25	20.64	1
		50	0	20.67	1
	MCH	1	0	22.98	0
		1	24	22.8	0
		1	49	22.7	0
		25	0	20.71	1



		25	12	20.76	1
		25	25	20.54	1
		50	0	20.6	1
	HCH	1	0	21.6	0
		1	24	21.58	0
		1	49	21.59	0
		25	0	20.5	1
		25	12	20.52	1
		25	25	20.57	1
		50	0	20.65	1
16QAM	LCH	1	0	22.06	1
		1	24	22.31	1
		1	49	22.41	1
		25	0	20.74	2
		25	12	20.76	2
		25	25	20.9	2
		50	0	20.81	2
	MCH	1	0	22.22	1
		1	24	22.03	1
		1	49	22.17	1
		25	0	20.5	2
		25	12	20.49	2
		25	25	20.39	2
		50	0	20.56	2
	HCH	1	0	20.88	1
		1	24	20.87	1
		1	49	20.95	1
		25	0	20.4	2
		25	12	20.43	2
		25	25	20.47	2
		50	0	20.45	2

Channel Bandwidth: 15 MHz					
Modulation	Channel	RB Configuration		Average Power [dBm]	MPR (dB)
		Size	Offset		
QPSK	LCH	1	0	21.51	0
		1	37	21.64	0
		1	74	21.75	0
		37	0	21.49	1
		37	18	21.45	1
		37	38	21.49	1
		75	0	21.42	1
	MCH	1	0	22.54	0



		1	37	22.65	0	
		1	74	22.48	0	
		37	0	20.52	1	
		37	18	20.57	1	
		37	38	20.63	1	
		75	0	20.77	1	
	HCH	1	0	21.58	0	
		1	37	21.62	0	
		1	74	21.87	0	
		37	0	20.6	1	
		37	18	21.05	1	
		37	38	21.01	1	
	16QAM	LCH	1	0	21.18	1
			1	37	21.13	1
1			74	21.46	1	
37			0	20.52	2	
37			18	20.66	2	
37			38	20.48	2	
75			0	20.56	2	
MCH		1	0	22.23	1	
		1	37	22.32	1	
		1	74	22.16	1	
		37	0	20.78	2	
		37	18	20.77	2	
		37	38	20.74	2	
		75	0	20.71	2	
HCH		1	0	20.66	1	
		1	37	20.57	1	
		1	74	20.57	1	
		37	0	20.45	2	
		37	18	20.53	2	
		37	38	20.59	2	
		75	0	20.41	2	

Channel Bandwidth: 20 MHz					
Modulation	Channel	RB Configuration		Average Power [dBm]	MPR (dB)
		Size	Offset		
QPSK	LCH	1	0	21.51	0
		1	49	21.54	0
		1	99	21.99	0
		50	0	20.55	1
		50	25	20.57	1



		50	50	20.62	1
		100	0	20.52	1
	MCH	1	0	22.83	0
		1	49	23.32	0
		1	99	22.94	0
		50	0	20.52	1
		50	25	20.54	1
		50	50	20.57	1
		100	0	20.53	1
		HCH	1	0	21.73
	1		49	21.89	0
	1		99	22.02	0
	50		0	20.52	1
	50		25	20.57	1
	50		50	20.5	1
	100		0	20.72	1
16QAM	LCH	1	0	20.5	1
		1	49	20.51	1
		1	99	20.54	1
		50	0	20.61	2
		50	25	20.62	2
		50	50	20.78	2
		100	0	20.53	2
	MCH	1	0	21.56	1
		1	49	21.72	1
		1	99	21.47	1
		50	0	20.65	2
		50	25	20.7	2
		50	50	20.73	2
		100	0	20.61	2
	HCH	1	0	21.33	1
		1	49	20.62	1
		1	99	20.51	1
		50	0	20.76	2
		50	25	20.44	2
		50	50	20.49	2
		100	0	20.69	2



FDD-LTE Band 12:

Channel Bandwidth: 1.4 MHz					
Modulation	Channel	RB Configuration		Average Power [dBm]	MPR (dB)
		Size	Offset		
QPSK	LCH	1	0	21.18	0
		1	3	21.15	0
		1	5	21.06	0
		3	0	21.19	0
		3	2	21.13	0
		3	3	21.06	0
		6	0	21.08	1
	MCH	1	0	22.26	0
		1	3	22.33	0
		1	5	22.36	0
		3	0	22.29	0
		3	2	22.29	0
		3	3	22.26	0
		6	0	21.30	1
	HCH	1	0	22.30	0
		1	3	22.39	0
		1	5	22.41	0
		3	0	22.29	0
		3	2	22.47	0
		3	3	22.19	0
		6	0	21.43	1
16QAM	LCH	1	0	20.49	1
		1	3	20.71	1
		1	5	20.52	1
		3	0	20.55	1
		3	2	20.59	1
		3	3	21.30	1
		6	0	20.59	2
	MCH	1	0	21.94	1
		1	3	21.98	1
		1	5	21.97	1
		3	0	20.98	1
		3	2	21.10	1
		3	3	21.07	1
		6	0	20.55	2
	HCH	1	0	21.63	1
		1	3	21.58	1
		1	5	21.59	1



		3	0	21.00	1
		3	2	21.14	1
		3	3	21.15	1
		6	0	20.49	2

Channel Bandwidth: 3 MHz					
Modulation	Channel	RB Configuration		Average Power [dBm]	MPR (dB)
		Size	Offset		
QPSK	LCH	1	0	22.06	0
		1	7	22.14	0
		1	14	22.23	0
		8	0	21.03	1
		8	4	20.99	1
		8	7	21.19	1
		15	0	20.99	1
	MCH	1	0	21.63	0
		1	7	21.55	0
		1	14	21.60	0
		8	0	20.63	1
		8	4	20.50	1
		8	7	20.73	1
		15	0	20.83	1
	HCH	1	0	21.36	0
		1	7	21.16	0
		1	14	21.27	0
		8	0	20.44	1
		8	4	21.42	1
		8	7	21.45	1
		15	0	21.40	1
16QAM	LCH	1	0	21.79	1
		1	7	21.91	1
		1	14	21.97	1
		8	0	20.69	2
		8	4	20.55	2
		8	7	20.99	2
		15	0	20.40	2
	MCH	1	0	20.91	1
		1	7	20.84	1
		1	14	20.92	1
		8	0	20.67	2
		8	4	20.61	2
		8	7	20.46	2
		15	0	20.90	2



	HCH	1	0	21.65	1
		1	7	21.55	1
		1	14	21.52	1
		8	0	20.51	2
		8	4	20.46	2
		8	7	20.63	2
		15	0	20.67	2

Channel Bandwidth: 5 MHz					
Modulation	Channel	RB Configuration		Average Power [dBm]	MPR (dB)
		Size	Offset		
QPSK	LCH	1	0	21.97	0
		1	12	22.08	0
		1	24	22.27	0
		12	0	21.08	1
		12	6	21.17	1
		12	13	21.20	1
		25	0	21.24	1
	MCH	1	0	22.09	0
		1	12	22.16	0
		1	24	22.55	0
		12	0	21.65	1
		12	6	21.54	1
		12	13	21.44	1
		25	0	21.36	1
	HCH	1	0	22.47	0
		1	12	22.59	0
		1	24	22.56	0
		12	0	21.42	1
		12	6	21.54	1
		12	13	21.48	1
		25	0	21.43	1
16QAM	LCH	1	0	20.93	1
		1	12	21.14	1
		1	24	21.13	1
		12	0	20.67	2
		12	6	20.60	2
		12	13	20.99	2
		25	0	20.55	2
	MCH	1	0	21.84	1
		1	12	20.57	1
		1	24	21.95	1
		12	0	20.68	2



		12	6	20.75	2
		12	13	20.33	2
		25	0	20.60	2
	HCH	1	0	20.90	1
		1	12	21.03	1
		1	24	20.94	1
		12	0	20.63	2
		12	6	20.45	2
		12	13	20.42	2
		25	0	20.63	2

Channel Bandwidth: 10 MHz					
Modulation	Channel	RB Configuration		Average Power [dBm]	MPR (dB)
		Size	Offset		
QPSK	LCH	1	0	21.97	0
		1	24	22.35	0
		1	49	22.20	0
		25	0	21.20	1
		25	12	21.28	1
		25	25	21.30	1
		50	0	20.66	1
	MCH	1	0	21.23	0
		1	24	22.60	0
		1	49	22.41	0
		25	0	21.36	1
		25	12	21.45	1
		25	25	21.57	1
		50	0	20.55	1
	HCH	1	0	21.57	0
		1	24	21.69	0
		1	49	22.45	0
		25	0	21.40	1
		25	12	21.43	1
		25	25	21.42	1
		50	0	21.34	1
16QAM	LCH	1	0	21.87	1
		1	24	21.95	1
		1	49	21.98	1
		25	0	20.92	2
		25	12	20.59	2
		25	25	20.85	2
		50	0	20.61	2



	MCH	1	0	21.62	1
		1	24	21.63	1
		1	49	22.00	1
		25	0	20.53	2
		25	12	20.60	2
		25	25	20.40	2
		50	0	20.40	2
	HCH	1	0	21.93	1
		1	24	21.97	1
		1	49	21.82	1
		25	0	20.49	2
		25	12	20.46	2
		25	25	20.73	2
		50	0	20.49	2

Remark:

- Per KDB941225 D05 v02r05, Start with the largest channel bandwidth then measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power among RB offsets at the upper edge, middle, and lower edge of each required test channel. When the reported SAR is ≤ 0.8 W/kg, testing of the remaining RB offset configurations and required test channels is not required for 1 RB allocation; otherwise, SAR is required for the remaining required test channels and only for the RB offset configuration with the highest output power for that channel. 6 When the reported SAR of a required test channel is > 1.45 W/kg, SAR is required for all three RB offset configurations for that required test channel.
- Per KDB941225 D05 v02r05, The procedures required for 1 RB allocation in 5.2.1 are applied to measure the SAR for QPSK with 50% RB allocation.
- Per KDB941225 D05 v02r05, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations, and the highest reported SAR for 1 RB and 50% RB allocation in 5.2.1 and 5.2.2 are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
- Per KDB941225 D05 v02r05, For each modulation besides QPSK; e.g., 16-QAM, 64-QAM, apply the QPSK procedures in 5.2.1, 5.2.2, and 5.2.3 to determine the QAM configurations that may need SAR measurement. For each configuration identified as required for testing, SAR is required only when the highest maximum output power for the configuration in the higher order modulation is $> \frac{1}{2}$ dB higher than the same configuration in QPSK or when the reported SAR for the QPSK configuration is > 1.45 W/kg.



WLAN - Maximum Average Power					
Test Mode	Data Rate	Channel	Frequency (MHz)	Average Power (dBm)	Tune-up power (dBm)
802.11b	1Mbps	CH 01	2412	8.96	9.5
		CH 06	2437	9.34	9.5
		CH 11	2462	8.41	9.5
802.11g	6Mbps	CH 01	2412	7.37	9.0
		CH 06	2437	8.57	9.0
		CH 11	2462	6.46	9.0
802.11n (20MHz)	MCS0	CH 01	2412	7.29	8.0
		CH 06	2437	7.83	8.0
		CH 11	2462	6.09	8.0

Remark:

WIFI maximum output power is 9.34dBm *respectively*, and Maximum Tune-Up output power is 9.5dBm *respectively*.. Per KDB 447498 D01 V06, the 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$ for 1-g SAR and ≤ 7.5 for 10-g extremity SAR,16 where

- f(GHz) is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation¹⁷
- The result is rounded to one decimal place for comparison

WIFI

Tune-Up Power (dBm)	Max. Power (mW)	Distance (mm)	Frequency (GHz)	Result	Limit
9.5	8.91	5	2.437	2.78	3

The exclusion thresholds is 2.78 < 3, therefore, the RF exposure evaluation is not required.

9.2 Test Results for Standalone SAR Test

Body SAR

GSM850 – Body SAR Test (Gap: 0mm)									
Plot No.	Mode	Test Position Body	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
1.	GSM	Back Side	251	848.8	32.74	33.0	1.062	0.368	0.391
2.	GSM	Front Side	251	848.8	32.74	33.0	1.062	0.325	0.345
3.	GSM	Right side	251	848.8	32.74	33.0	1.062	0.168	0.178
4.	GSM	Left side	251	848.8	32.74	33.0	1.062	0.152	0.161
5.	GSM	Bottom side	251	848.8	32.74	33.0	1.062	0.245	0.260
6.	GSM	Top side	251	848.8	32.74	33.0	1.062	0.36	0.382

GSM1900 – Body SAR Test (Gap: 0mm)									
Plot No.	Mode	Test Position Body	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
7.	GSM	Back Side	810	1909.8	31.51	32.0	1.119	0.377	0.422
8.	GSM	Front Side	810	1909.8	31.51	32.0	1.119	0.215	0.241
9.	GSM	Right side	810	1909.8	31.51	32.0	1.119	0.143	0.160
10.	GSM	Left side	810	1909.8	31.51	32.0	1.119	0.152	0.170
11.	GSM	Bottom side	810	1909.8	31.51	32.0	1.119	0.243	0.272
12.	GSM	Top side	810	1909.8	31.51	32.0	1.119	0.272	0.304

GSM850 – Body SAR Test (Gap: 0mm)									
Plot No.	Mode	Test Position Body	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
13.	GPRS_2TX	Back Side	251	848.8	30.73	31.0	1.064	0.511	0.544
14.	GPRS_2TX	Front Side	251	848.8	30.73	31.0	1.064	0.497	0.529
15.	GPRS_2TX	Right side	251	848.8	30.73	31.0	1.064	0.423	0.450
16.	GPRS_2TX	Left side	251	848.8	30.73	31.0	1.064	0.422	0.449
17.	GPRS_2TX	Bottom side	251	848.8	30.73	31.0	1.064	0.392	0.417
18.	GPRS_2TX	Top side	251	848.8	30.73	31.0	1.064	0.434	0.462

GSM1900 – Body SAR Test (Gap: 0mm)									
Plot No.	Mode	Test Position Body	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
19.	GPRS_3TX	Back Side	661	1880.0	25.56	26.0	1.107	0.747	0.827
20.	GPRS_3TX	Front Side	661	1880.0	25.56	26.0	1.107	0.687	0.760
21.	GPRS_3TX	Right side	661	1880.0	25.56	26.0	1.107	0.617	0.683
22.	GPRS_3TX	Left side	661	1880.0	25.56	26.0	1.107	0.587	0.650
23.	GPRS_3TX	Bottom side	661	1880.0	25.56	26.0	1.107	0.576	0.637
24.	GPRS_3TX	Top side	661	1880.0	25.56	26.0	1.107	0.610	0.675

WCDMA Band 2 – Body SAR Test (Gap: 0mm)									
Plot No.	Mode	Test Position Body	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
25.	RMC 12.2k	Back Side	9262	1852.4	21.69	22.0	1.074	0.521	0.560
26.	RMC 12.2k	Front Side	9262	1852.4	21.69	22.0	1.074	0.452	0.485
27.	RMC 12.2k	Right side	9262	1852.4	21.69	22.0	1.074	0.381	0.409
28.	RMC 12.2k	Left side	9262	1852.4	21.69	22.0	1.074	0.411	0.441
29.	RMC 12.2k	Bottom side	9262	1852.4	21.69	22.0	1.074	0.319	0.343
30.	RMC 12.2k	Top side	9262	1852.4	21.69	22.0	1.074	0.447	0.480

WCDMA Band 5 – Body SAR Test (Gap: 0mm)									
Plot No.	Mode	Test Position Body	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
31.	RMC 12.2k	Back Side	4132	826.4	22.36	22.5	1.033	0.255	0.263
32.	RMC 12.2k	Front Side	4132	826.4	22.36	22.5	1.033	0.248	0.256
33.	RMC 12.2k	Right side	4132	826.4	22.36	22.5	1.033	0.187	0.193
34.	RMC 12.2k	Left side	4132	826.4	22.36	22.5	1.033	0.178	0.184
35.	RMC 12.2k	Bottom side	4132	826.4	22.36	22.5	1.033	0.197	0.203
36.	RMC 12.2k	Top side	4132	826.4	22.36	22.5	1.033	0.214	0.221



LTE Band 2–Body SAR Test (Gap: 0mm)								
Plot No.	Mode	Test Position Body	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Bandwidth, RB		MHz					
37.	QPSK 20MHz 1RB	Back Side	1880.0	22.73	23.0	1.064	0.466	0.496
38.	QPSK 20MHz 1RB	Front Side	1880.0	22.73	23.0	1.064	0.384	0.409
39.	QPSK 20MHz 1RB	Right side	1880.0	22.73	23.0	1.064	0.316	0.336
40.	QPSK 20MHz 1RB	Left side	1880.0	22.73	23.0	1.064	0.367	0.391
41.	QPSK 20MHz 1RB	Bottom side	1880.0	22.73	23.0	1.064	0.313	0.333
42.	QPSK 20MHz 1RB	Top side	1880.0	22.73	23.0	1.064	0.384	0.409
43.	QPSK 20MHz 50%RB	Back Side	1880.0	21.41	22.0	1.146	0.242	0.277

LTE Band 4–Body SAR Test (Gap: 0mm)								
Plot No.	Mode	Test Position Body	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Bandwidth, RB		MHz					
44.	QPSK 20MHz 1RB	Back Side	1732.5	24.53	25.0	1.114	0.648	0.755
45.	QPSK 20MHz 1RB	Front Side	1732.5	24.53	25.0	1.114	0.606	0.675
46.	QPSK 20MHz 1RB	Right side	1732.5	24.53	25.0	1.114	0.573	0.638
47.	QPSK 20MHz 1RB	Left side	1732.5	24.53	25.0	1.114	0.582	0.649
48.	QPSK 20MHz 1RB	Bottom side	1732.5	24.53	25.0	1.114	0.531	0.592
49.	QPSK 20MHz 1RB	Top side	1732.5	24.53	25.0	1.114	0.576	0.642
50.	QPSK 20MHz 50%RB	Back Side	1732.5	22.56	24.0	1.393	0.321	0.447
51.	QPSK 20MHz 50%RB	Front Side	1732.5	22.56	24.0	1.393	0.282	0.393
52.	QPSK 20MHz 50%RB	Right side	1732.5	22.56	24.0	1.393	0.257	0.358
53.	QPSK 20MHz 50%RB	Left side	1732.5	22.56	24.0	1.393	0.274	0.382
54.	QPSK 20MHz 50%RB	Bottom side	1732.5	22.56	24.0	1.393	0.217	0.302
55.	QPSK 20MHz 50%RB	Top side	1732.5	22.56	24.0	1.393	0.224	0.312

LTE Band 5–Body SAR Test (Gap: 0mm)								
Plot No.	Mode	Test Position Body	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Bandwidth, RB		MHz					
56.	QPSK 10MHz 1RB	Back Side	836.5	23.29	24.0	1.178	0.732	0.862
57.	QPSK 10MHz 1RB	Front Side	836.5	23.29	24.0	1.178	0.468	0.551
58.	QPSK 10MHz 1RB	Right side	836.5	23.29	24.0	1.178	0.541	0.637
59.	QPSK 10MHz 1RB	Left side	836.5	23.29	24.0	1.178	0.453	0.534
60.	QPSK 10MHz 1RB	Bottom side	836.5	23.29	24.0	1.178	0.436	0.514
61.	QPSK 10MHz 1RB	Top side	836.5	23.29	24.0	1.178	0.347	0.409
62.	QPSK 10MHz 50%RB	Back Side	836.5	22.26	23.0	1.186	0.332	0.391
63.	QPSK 10MHz 50%RB	Front Side	836.5	22.26	23.0	1.186	0.268	0.316

64.	QPSK 10MHz 50%RB	Right side	836.5	22.26	23.0	1.186	0.441	0.519
65.	QPSK 10MHz 50%RB	Left side	836.5	22.26	23.0	1.186	0.353	0.416
66.	QPSK 10MHz 50%RB	Bottom side	836.5	22.26	23.0	1.186	0.236	0.278
67.	QPSK 10MHz 50%RB	Top side	836.5	22.26	23.0	1.186	0.345	0.406

LTE Band 7–Body SAR Test (Gap: 0mm)								
Plot No.	Mode	Test Position Body	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Bandwidth, RB		MHz					
68.	QPSK 20MHz 1RB	Back Side	2535	23.32	23.5	1.042	0.732	0.763
69.	QPSK 20MHz 1RB	Front Side	2535	23.32	23.5	1.042	0.667	0.695
70.	QPSK 20MHz 1RB	Right side	2535	23.32	23.5	1.042	0.681	0.710
71.	QPSK 20MHz 1RB	Left side	2535	23.32	23.5	1.042	0.568	0.592
72.	QPSK 20MHz 1RB	Bottom side	2535	23.32	23.5	1.042	0.520	0.542
73.	QPSK 20MHz 1RB	Top side	2535	23.32	23.5	1.042	0.575	0.599
74.	QPSK 20MHz 50%RB	Back Side	2535	20.54	22.5	1.570	0.269	0.422
75.	QPSK 20MHz 50%RB	Front Side	2535	20.54	22.5	1.570	0.247	0.388
76.	QPSK 20MHz 50%RB	Right side	2535	20.54	22.5	1.570	0.214	0.336
77.	QPSK 20MHz 50%RB	Left side	2535	20.54	22.5	1.570	0.278	0.437
78.	QPSK 20MHz 50%RB	Bottom side	2535	20.54	22.5	1.570	0.197	0.309
79.	QPSK 20MHz 50%RB	Top side	2535	20.54	22.5	1.570	0.236	0.371

LTE Band 12–Body SAR Test (Gap: 0mm)								
Plot No.	Mode	Test Position Body	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Bandwidth, RB		MHz					
80.	QPSK 10MHz 1RB	Back Side	707.5	22.60	23.0	1.096	0.106	0.116
81.	QPSK 10MHz 1RB	Front Side	707.5	22.60	23.0	1.096	0.097	0.106
82.	QPSK 10MHz 1RB	Right side	707.5	22.60	23.0	1.096	0.081	0.089
83.	QPSK 10MHz 1RB	Left side	707.5	22.60	23.0	1.096	0.078	0.086
84.	QPSK 10MHz 1RB	Bottom side	707.5	22.60	23.0	1.096	0.067	0.073
85.	QPSK 10MHz 1RB	Top side	707.5	22.60	23.0	1.096	0.079	0.087

Repeated SAR

Remark:

- 1) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is \geq 0.80 W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is \geq 1.45 W/kg (~ 10% from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is \geq 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20.



9.3 Simultaneous Multi-band Transmission SAR Analysis

List of Mode for Simultaneous Multi-band Transmission

No.	Configurations	Near to Mouth SAR	Wrist-worn SAR
1	GSM(Voice/Data) + WLAN(Data)	Yes	Yes
2	WCDMA (Voice/Data)+ WLAN(Data)	Yes	Yes
3	LTE(Data) + WLAN(Data)	Yes	Yes

Remark:

1. GSM ,WCDMA share the same antenna, and cannot transmit simultaneously.

2. According to the KDB 447498 D01 v06, when standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

(max. power of channel, including tune-up tolerance, mW)/(min. test separation distance, mm)]·[√f(GHz)/x] W/kg for test separation distances ≤ 50 mm;

where x = 7.5 for 1-g SAR, and x = 18.75 for 10-g SAR.

For simultaneous transmission analysis, WLAN SAR is estimated per KDB 447498 D01 v06 as below:

WIFI:

Tune-Up Power (dBm)	Max. Power (mW)	Distance (mm)	Frequency (GHz)	X	SAR(1g) 5mm	SAR(10g) 10mm
9.5	8.91	5/10	2.437	7.5	0.370	0.185

Body SAR

WWAN and WLAN

Position	WWAN		WLAN	Summed SAR (W/kg)
	Band	Scaled SAR (W/kg)	Scaled SAR (W/kg)	
Back	GSM850	0.391	0.370	0.761
Back	GSM1900	0.422	0.370	0.792
Back	GSM850	0.747	0.370	1.117
Back	GSM1900	0.827	0.370	1.197
Back	WCDMA Band 2	0.560	0.370	0.93
Back	WCDMA Band 5	0.263	0.370	0.633
Back	LTE Band 2	0.496	0.370	0.866
Back	LTE Band 4	0.755	0.370	1.125
Back	LTE Band 5	0.862	0.370	1.232
Back	LTE Band 7	0.763	0.370	1.133
Back	LTE Band 12	0.116	0.370	0.486



10. Measurement Uncertainty

10.1 Uncertainty for EUT SAR Test

a	b	c	d	e= f(d,k)	f	g	h= c*f/e	i= c*g/e	k
Uncertainty Component	Sec.	Tol (+- %)	Prob. Dist.	Div.	Ci (1g)	Ci (10g)	1g Ui (+-%)	10g Ui (+-%)	Vi
Measurement System									
Probe calibration	E.2.1	7.0	N	1	1	1	7.00	7.00	∞
Axial Isotropy	E.2.2	2.5	R	√3	(1_Cp)^1/2	(1_Cp)^1/2	1.02	1.02	∞
Hemispherical Isotropy	E.2.2	4.0	R	√3	(Cp)^1/2	(Cp)^1/2	1.63	1.63	∞
Boundary effect	E.2.3	1.0	R	√3	1	1	0.58	0.58	∞
Linearity	E.2.4	5.0	R	√3	1	1	2.89	2.89	∞
System detection limits	E.2.5	1.0	R	√3	1	1	0.58	0.58	∞
Readout Electronics	E.2.6	0.02	N	1	1	1	0.02	0.02	∞
Reponse Time	E.2.7	3.0	R	√3	1	1	1.73	1.73	∞
Integration Time	E.2.8	2.0	R	√3	1	1	1.15	1.15	∞
RF ambient Conditions – Noise	E.6.1	3.0	R	√3	1	1	1.73	1.73	∞
RF ambient Conditions - Reflections	E.6.1	3.0	R	√3	1	1	1.73	1.73	∞
Probe positioner Mechanical Tolerance	E.6.2	2.0	R	√3	1	1	1.15	1.15	∞
Probe positioning with respect to Phantom Shell	E.6.3	0.05	R	√3	1	1	0.03	0.03	∞
Extrapolation, interpolation and integration Algorithms for Max. SAR Evaluation	E.5	5.0	R	√3	1	1	2.89	2.89	∞
Test Sample Related									
Test sample positioning	E.4.2	0.03	N	1	1	1	0.03	0.03	N-1
Device Holder Uncertainty	E.4.1	5.00	N	1	1	1	5.00	5.00	
Output power Variation - SAR drift measurement	E.2.9	12.02	R	√3	1	1	6.94	6.94	∞
SAR scaling	E6.5	0.0	R	√3	1	1	0.0	0.0	∞
Phantom and Tissue Parameters									
Phantom Uncertainty (Shape and thickness tolerances)	E.3.1	0.05	R	√3	1	1	0.03	0.03	∞
Uncertainty in SAR correction for deviations in permittivity and conductivity	E3.2	1.9	R	√3	1	0.84	1.10	0.90	∞
Liquid conductivity - deviation	E.3.2	5.00	R	√3	0.64	0.43	1.85	1.24	∞



from target value										
Liquid conductivity measurement uncertainty	E.3.3	5.00	N	1	0.64	0.43	3.20	2.15	∞	
Liquid permittivity - deviation from target value	E.3.2	0.37	R	$\sqrt{3}$	0.6	0.49	0.13	0.10	∞	
Liquid permittivity measurement uncertainty	E.3.3	10.00	N	1	0.6	0.49	6.00	4.90	∞	
Combined Standard Uncertainty			RSS				12.98	12.53		
Expanded Uncertainty (95% Confidence interval)			K=2				25.32	24.43		

10.2 Uncertainty for System Performance Check

a	b	c	d	e= f(d,k)	f	g	h= c*f/e	i= c*g/e	k
Uncertainty Component	Sec.	Tol (+- %)	Prob. Dist.	Div.	Ci (1g)	Ci (10g)	1g Ui (+-%)	10g Ui (+-%)	Vi
Measurement System									
Probe calibration	E.2.1	7.0	N	1	1	1	7.00	7.00	∞
Axial Isotropy	E.2.2	2.5	R	$\sqrt{3}$	$(1_{Cp})^{1/2}$	$(1_{Cp})^{1/2}$	1.02	1.02	∞
Hemispherical Isotropy	E.2.2	4.0	R	$\sqrt{3}$	$(Cp)^{1/2}$	$(Cp)^{1/2}$	1.63	1.63	∞
Boundary effect	E.2.3	1.0	R	$\sqrt{3}$	1	1	0.58	0.58	∞
Linearity	E.2.4	5.0	R	$\sqrt{3}$	1	1	2.89	2.89	∞
System detection limits	E.2.5	1.0	R	$\sqrt{3}$	1	1	0.58	0.58	∞
Modulation response	E.2.5	0	R	$\sqrt{3}$	0	0	0.0	0.0	∞
Readout Electronics	E.2.6	0.02	N	1	1	1	0.02	0.02	∞
Reponse Time	E.2.7	3.0	R	$\sqrt{3}$	1	1	1.73	1.73	∞
Integration Time	E.2.8	2.0	R	$\sqrt{3}$	1	1	1.15	1.15	∞
RF ambient Conditions – Noise	E.6.1	3.0	R	$\sqrt{3}$	1	1	1.73	1.73	∞
RF ambient Conditions - Reflections	E.6.1	3.0	R	$\sqrt{3}$	1	1	1.73	1.73	∞
Probe positioner Mechanical Tolerance	E.6.2	2.0	R	$\sqrt{3}$	1	1	1.15	1.15	∞
Probe positioning with respect to Phantom Shell	E.6.3	0.05	R	$\sqrt{3}$	1	1	0.03	0.03	∞
Extrapolation, interpolation and integration Algorithms for Max. SAR Evaluation	E.5.2	5.0	R	$\sqrt{3}$	1	1	2.89	2.89	∞
Dipole									
Dipole axis to liquid Distance	8,E.4.2	1.00	N	$\sqrt{3}$	1	1	0.58	0.58	N-1
Input power and SAR drift measurement	8,6.6.2	12.02	R	$\sqrt{3}$	1	1	6.94	6.94	∞



Deviation of experimental dipole from numerical dipole	E.6.4	5.5	R	$\sqrt{3}$	1	1	3.20	3.20	∞
Phantom and Tissue Parameters									
Phantom Uncertainty (Shape and thickness tolerances)	E.3.1	0.05	R	$\sqrt{3}$	1	1	0.03	0.03	∞
Uncertainty in SAR correction for deviations in permittivity and conductivity	E3.2	2.0	R	$\sqrt{3}$	1	0.84	1.10	1.10	∞
Liquid conductivity - deviation from target value	E.3.2	5.00	R	$\sqrt{3}$	0.64	0.43	1.85	1.24	
Liquid conductivity - measurement uncertainty	E.3.3	5.00	N	1	0.64	0.43	3.20	2.15	
Liquid permittivity - deviation from target value	E.3.2	0.37	R	$\sqrt{3}$	0.6	0.49	0.13	0.10	
Liquid permittivity - measurement uncertainty	E.3.3	10.00	N	1	0.6	0.49	6.00	4.90	M
Combined Standard Uncertainty			RSS				12.00	11.50	
Expanded Uncertainty (95% Confidence interval)			K=2				23.39	22.43	

Annex A. Plots of System Performance Check

MEASUREMENT 1

For Body Liquid

Type: Validation measurement (Fast, 75.00 %)

Measurement duration: 12 minutes 21 seconds


E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Reference to the Calibration Certificate; Calibrated: 2019/07/08

A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Zoom Scan	dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Dipole
Band	CW750
Signal	Duty Cycle 1:1

B. SAR Measurement Results

Frequency (MHz)	750.000000
Relative Permittivity (real part)	54.964739
Conductivity (S/m)	0.931048
Power Variation (%)	0.034745
Ambient Temperature	21.1
Liquid Temperature	21.3

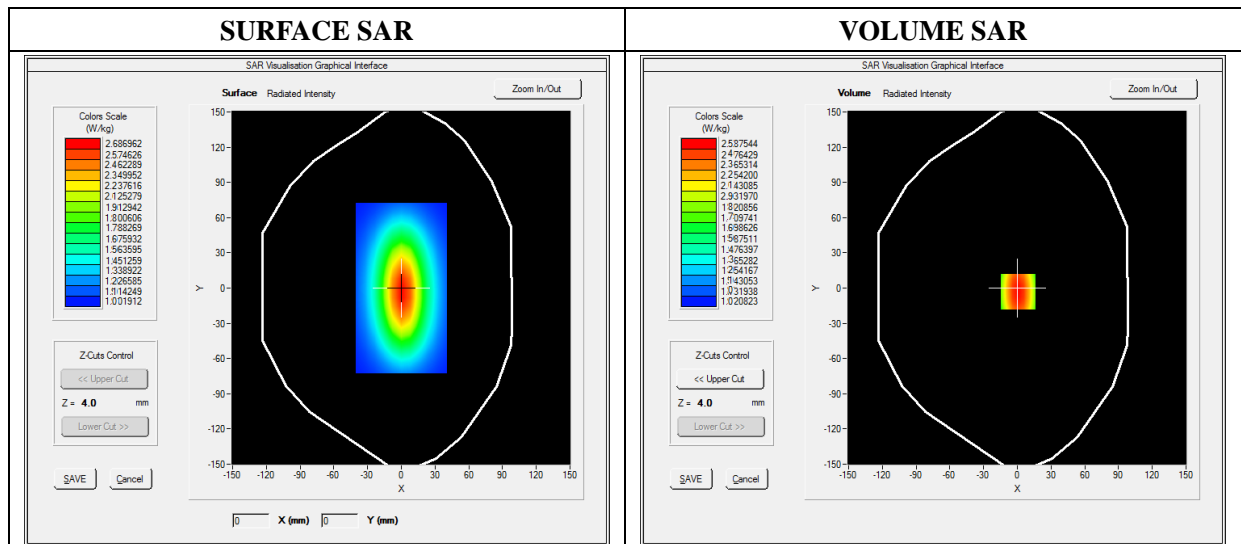




Maximum location: X=0.00, Y=0.00

SAR 10g (W/Kg)	1.300865
SAR 1g (W/Kg)	2.124211

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	2.5132	1.1087	0.8214	0.5160	0.4875	0.4864

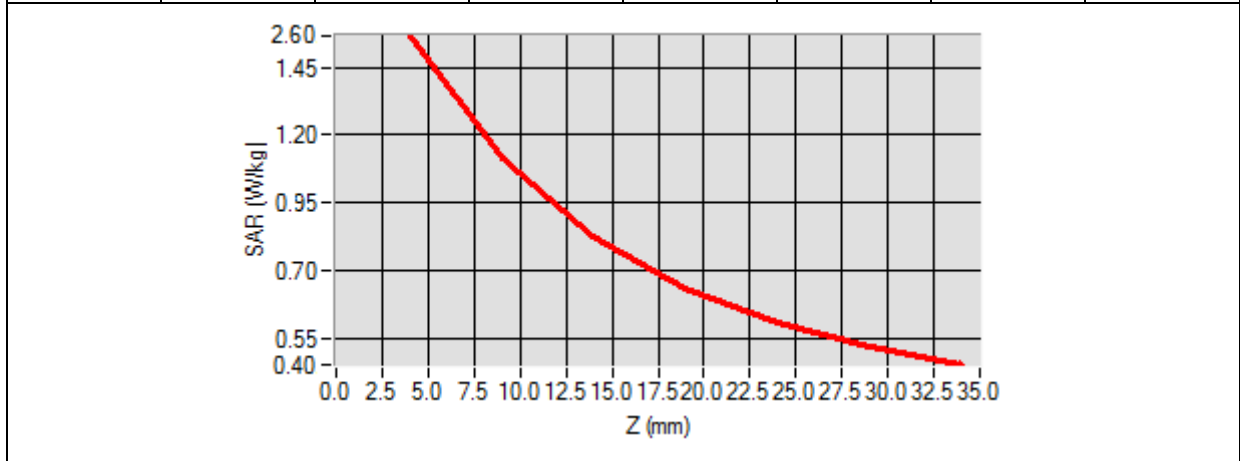

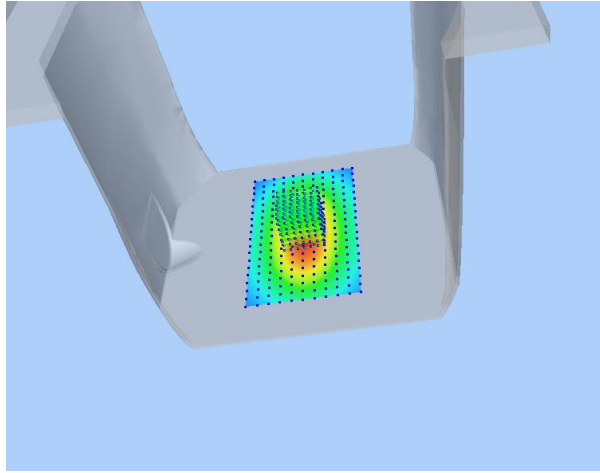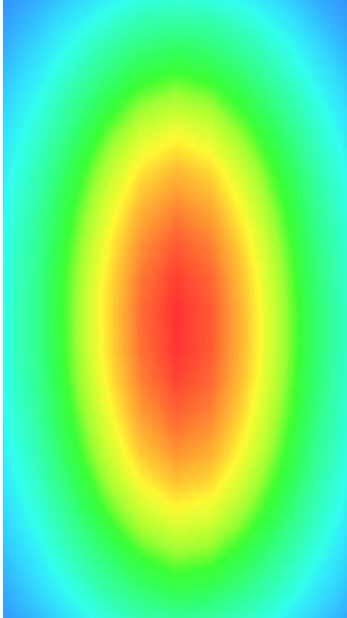3D screen shot	Hot spot position
	

MEASUREMENT 2

For Body Liquid

Type: Validation measurement (Fast, 75.00 %)

Measurement duration: 12 minutes 21 seconds


E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Reference to the Calibration Certificate; Calibrated: 2019/07/08

A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Zoom Scan	dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Dipole
Band	CW835
Signal	Duty Cycle 1:1

B. SAR Measurement Results

Frequency (MHz)	835.000000
Relative Permittivity (real part)	54.851214
Conductivity (S/m)	0.951454
Power Variation (%)	0.901472
Ambient Temperature	21.1
Liquid Temperature	21.3

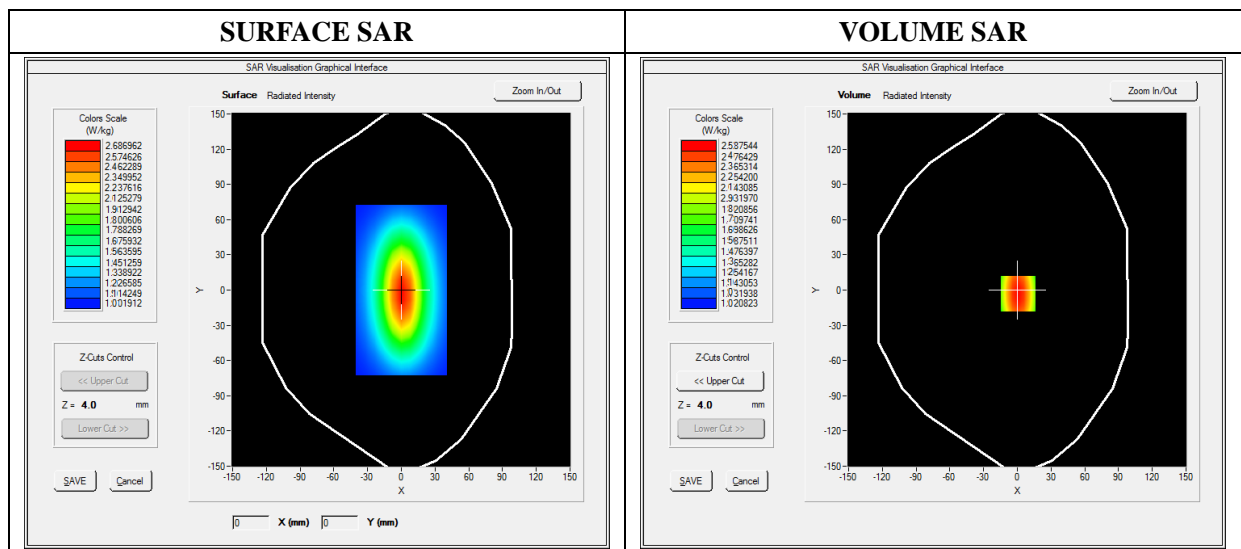




Maximum location: X=0.00, Y=0.00

SAR 10g (W/Kg)	1.528956
SAR 1g (W/Kg)	2.354211

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	2.5789	1.1300	0.8795	0.5940	0.5011	0.5100

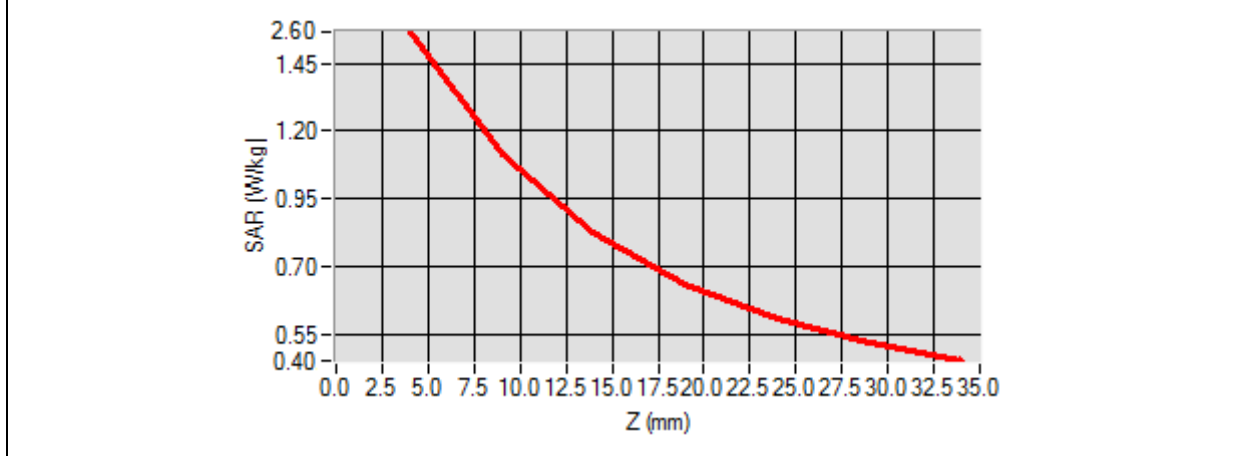

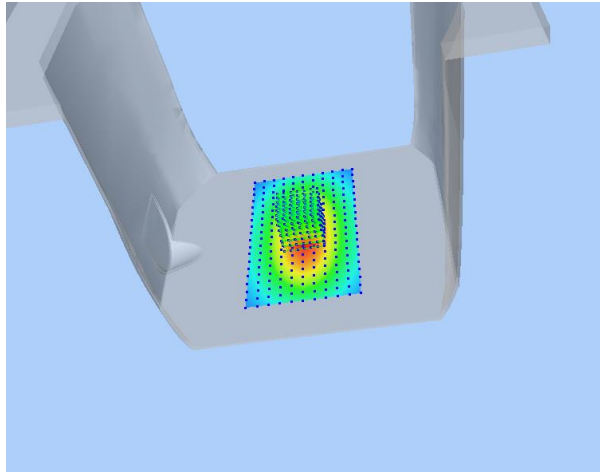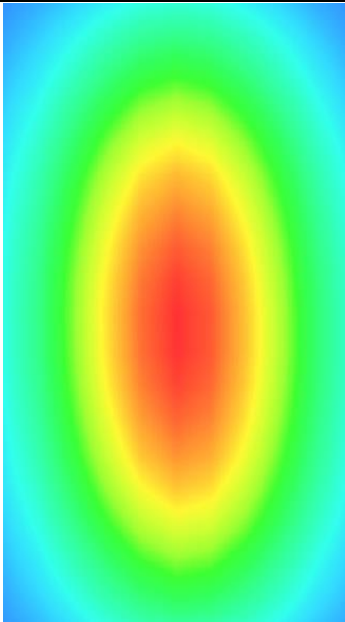3D screen shot	Hot spot position
	

MEASUREMENT 3

For Body Liquid

Type: Validation measurement (Fast, 75.00 %)

Measurement duration: 12 minutes 21 seconds


E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Reference to the Calibration Certificate; Calibrated: 2019/07/08

A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Zoom Scan	dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Dipole
Band	CW1800
Signal	CW (Crest factor: 1.0)

B. SAR Measurement Results

Frequency (MHz)	1800.000000
Relative Permittivity (real part)	51.224510
Conductivity (S/m)	1.461261
Power Variation (%)	0.845690
Ambient Temperature	21.1
Liquid Temperature	21.2

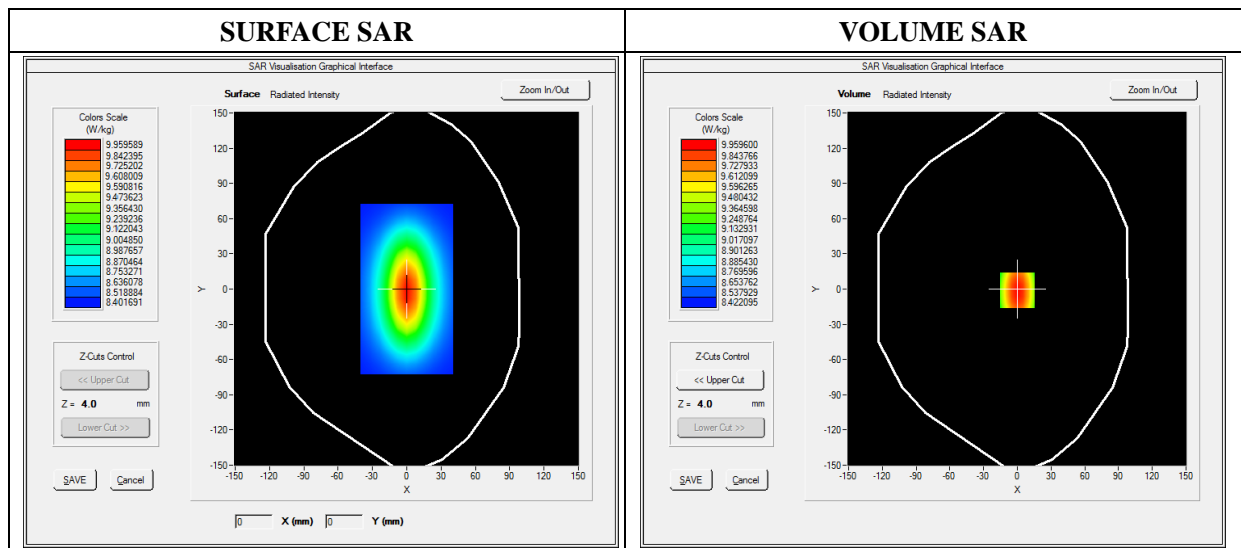




Maximum location: X=0.00, Y=0.00

SAR 10g (W/Kg)	5.221202
SAR 1g (W/Kg)	9.582560

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	11.2425	9.4123	8.0345	6.9125	6.3092	3.9460

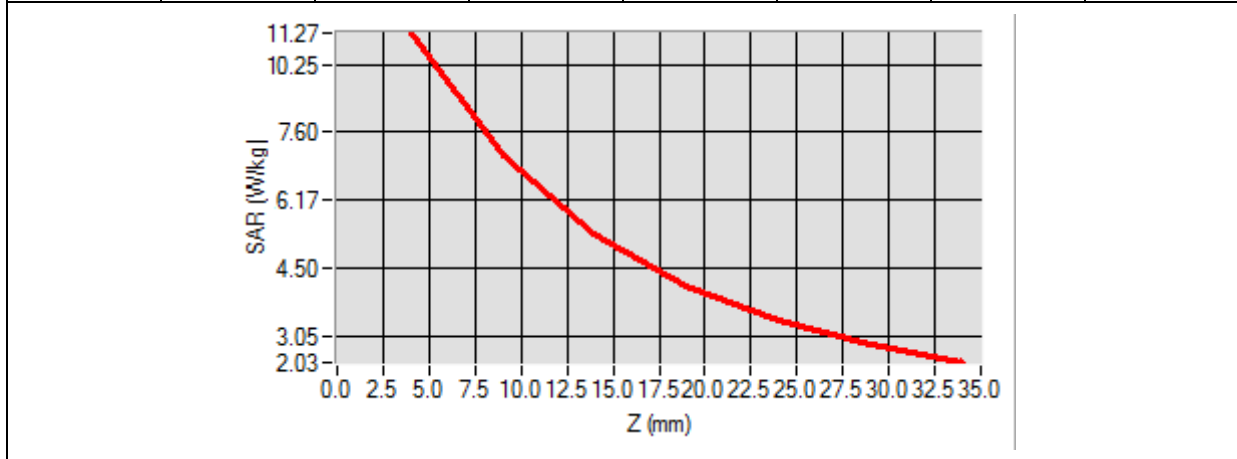

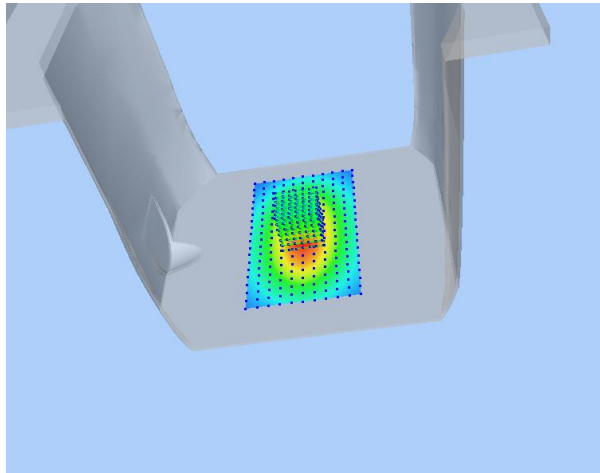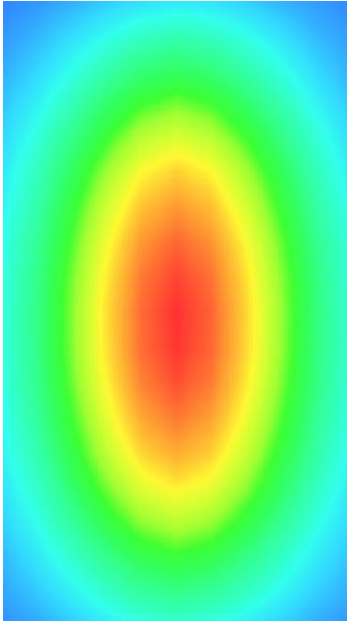3D screen shot	Hot spot position
	

MEASUREMENT 4

For Body Liquid

Type: Validation measurement (Fast, 75.00 %)

Measurement duration: 12 minutes 21 seconds


E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Reference to the Calibration Certificate; Calibrated: 2019/07/08

A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Zoom Scan	dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Dipole
Band	CW1900
Signal	Duty Cycle 1:1

B. SAR Measurement Results

Frequency (MHz)	1900.000000
Relative Permittivity (real part)	52.420415
Conductivity (S/m)	1.501966
Power Variation (%)	0.541872
Ambient Temperature	21.1
Liquid Temperature	21.3

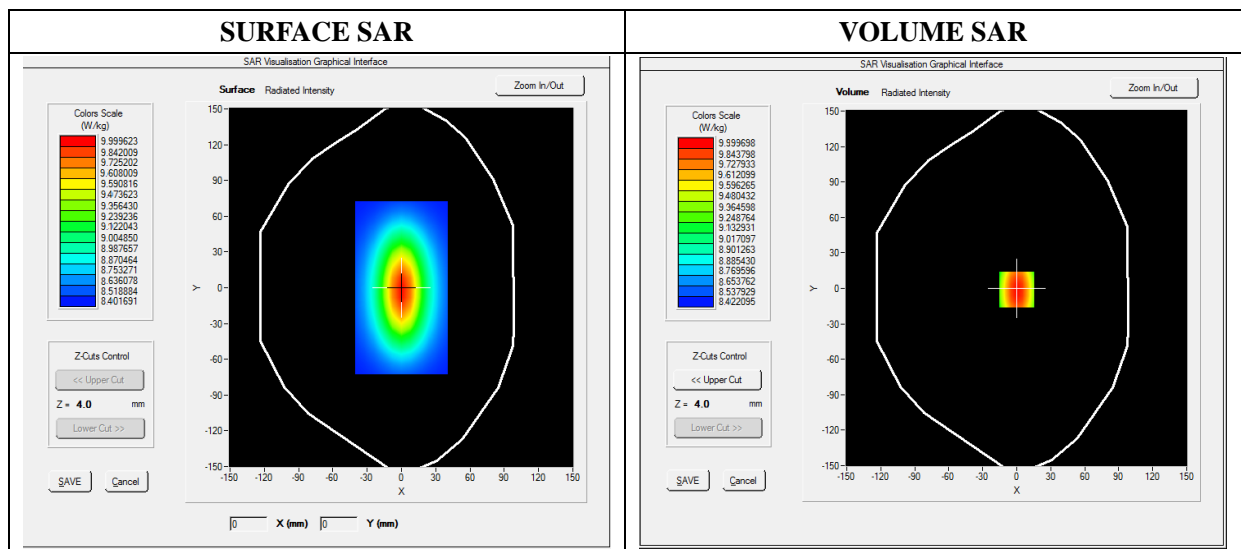




Maximum location: X=0.00, Y=0.00

SAR 10g (W/Kg)	5.134651
SAR 1g (W/Kg)	9.781550

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	10.2031	6.43001	4.9011	4.5325	3.1201	2.5024

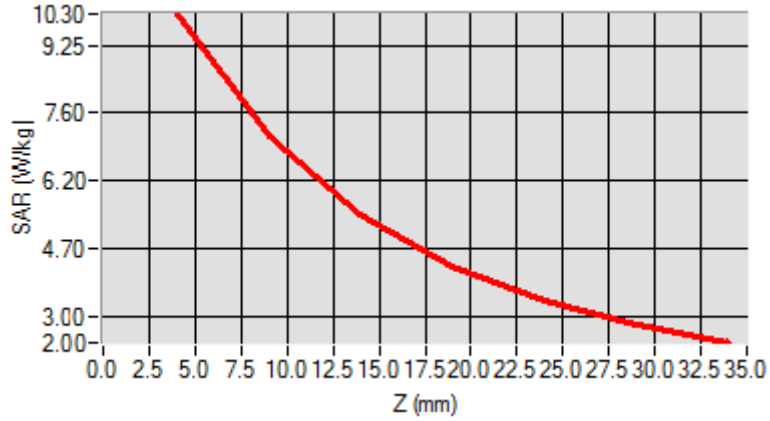

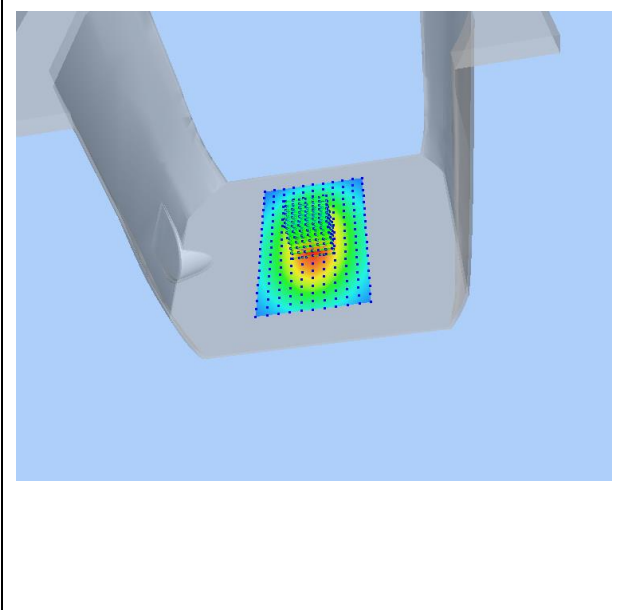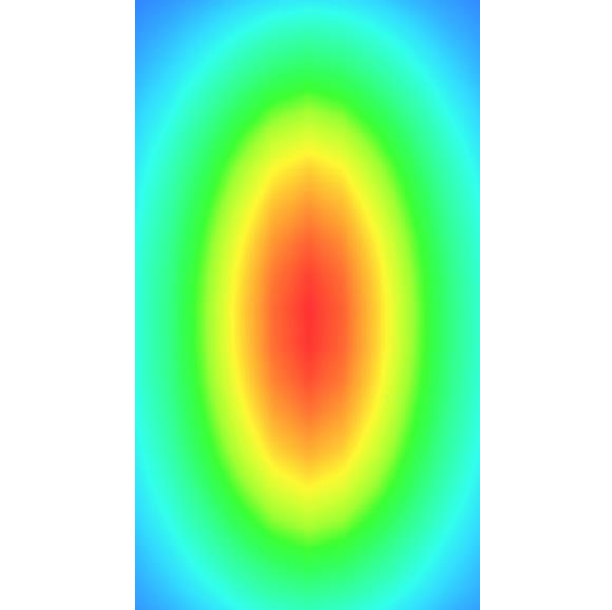3D screen shot	Hot spot position
	

MEASUREMENT 5

For Body Liquid

Type: Validation measurement (Fast, 75.00 %)

Measurement duration: 12 minutes 21 seconds


E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Reference to the Calibration Certificate; Calibrated: 2019/07/08

A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Phantom	Validation plane
Device Position	Dipole
Band	CW2600
Signal	Duty Cycle 1:1

B. SAR Measurement Results

Frequency (MHz)	2600.000000
Relative Permittivity (real part)	52.241202
Conductivity (S/m)	2.120943
Power Variation (%)	1.038832
Ambient Temperature	21.1
Liquid Temperature	21.2

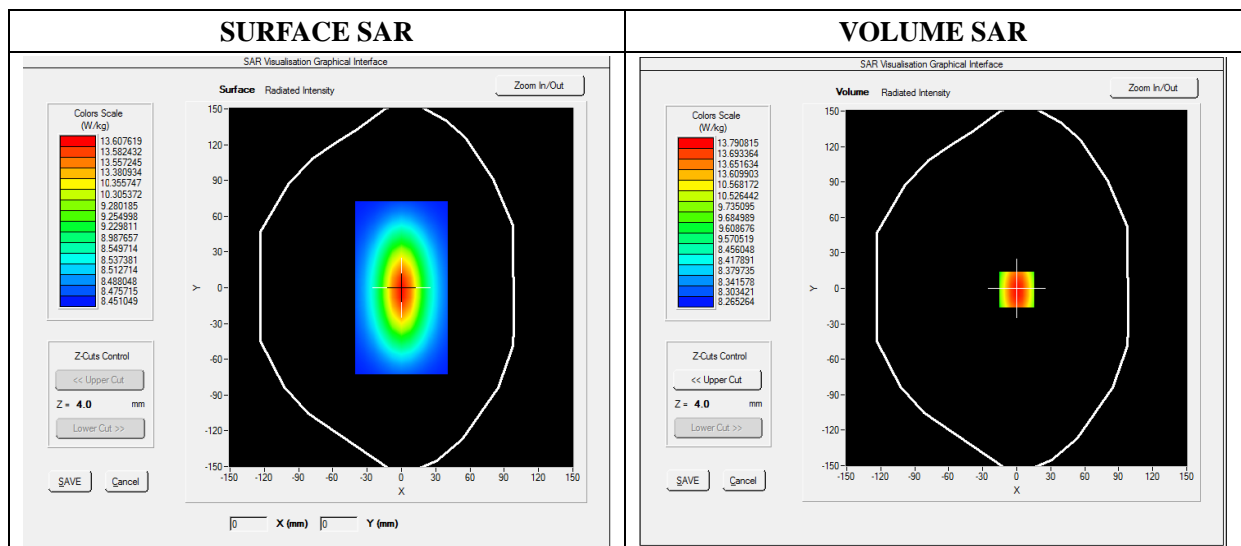




Maximum location: X=0.00, Y=0.00

SAR 10g (W/Kg)	6.083781
SAR 1g (W/Kg)	13.430481

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	13.6473	11.8441	9.3627	8.5782	6.4357	4.6342

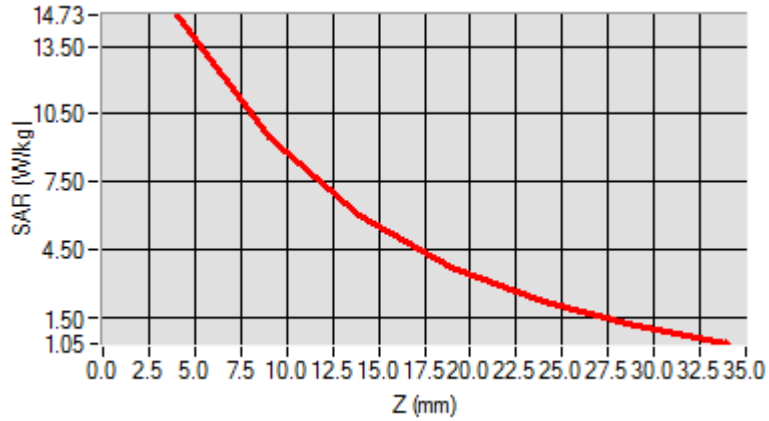

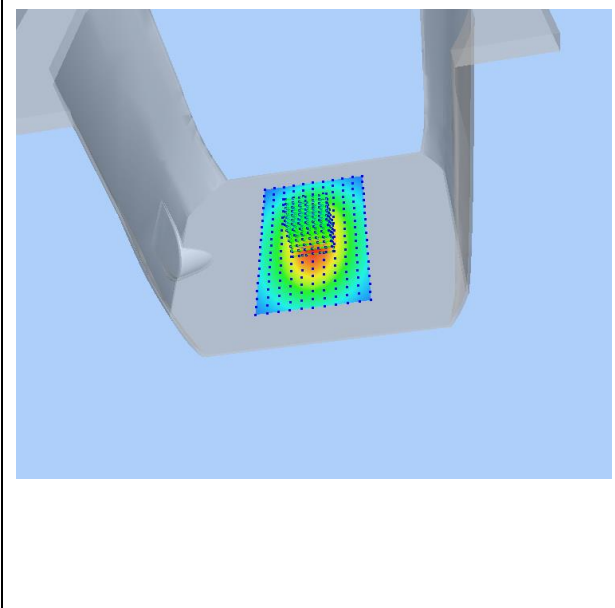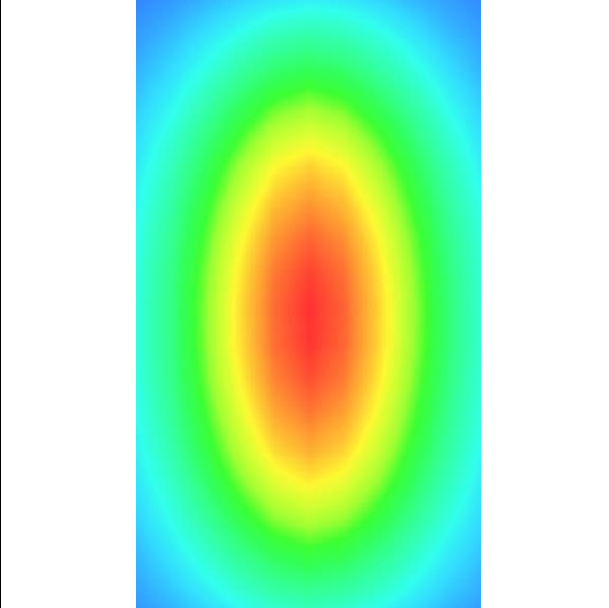3D screen shot	Hot spot position
	

Annex B. Plots of SAR Measurement

<u>TYPE</u>	<u>BAND</u>	<u>PARAMETERS</u>
Tracker	GSM850	<u>Measurement 1</u> : Flat Plane with Back device position on High Channel in GSM mode
Tracker	GSM1900	<u>Measurement 7</u> : Flat Plane with Back device position on High Channel in GSM mode
Tracker	GPRS850_2TX	<u>Measurement 13</u> : Flat Plane with Back device position on High Channel in GPRS mode
Tracker	GPRS1900_3TX	<u>Measurement 19</u> : Flat Plane with Back device position on Middle Channel in GPRS mode
Tracker	WCDMA1900	<u>Measurement 25</u> : Flat Plane with Back side device position on Low Channel in WCDMA mode
Tracker	WCDMA850	<u>Measurement 31</u> : Flat Plane with Back device position on Low Channel in WCDMA mode
Tracker	LTE Band 2	<u>Measurement 37</u> : Flat Plane with Back device position on Middle Channel in LTE mode
Tracker	LTE Band 4	<u>Measurement 44</u> : Flat Plane with Back device position on Middle Channel in LTE mode
Tracker	LTE Band 5	<u>Measurement 56</u> : Flat Plane with Back device position on Middle Channel in LTE mode
Tracker	LTE Band 7	<u>Measurement 68</u> : Flat Plane with Back device position on Middle Channel in LTE mode
Tracker	LTE Band 12	<u>Measurement 80</u> : Flat Plane with Back device position on Middle Channel in LTE mode
<p><i>Remark: SAR plot is showed the highest measured SAR in each exposure configuration, wireless mode and frequency band combination.</i></p>		

MEASUREMENT 1

Type: Phone measurement (Complete)

Date of measurement: 2020-05-08

Measurement duration: 11 minutes 48 seconds


E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Reference to the Calibration Certificate; Calibrated: 2019/07/08

A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Zoom Scan	dx=8mm dy=8mm dz=5mm
Phantom	Flat Plane
Device Position	Back Side
Band	GSM850
Channels	High
Signal	TDMA (Crest factor: 8.0)

B. SAR Measurement Results

Frequency (MHz)	848.800000
Relative Permittivity (real part)	41.110245
Conductivity (S/m)	0.871245
Power Variation (%)	1.144536
Ambient Temperature	21.1
Liquid Temperature	21.3

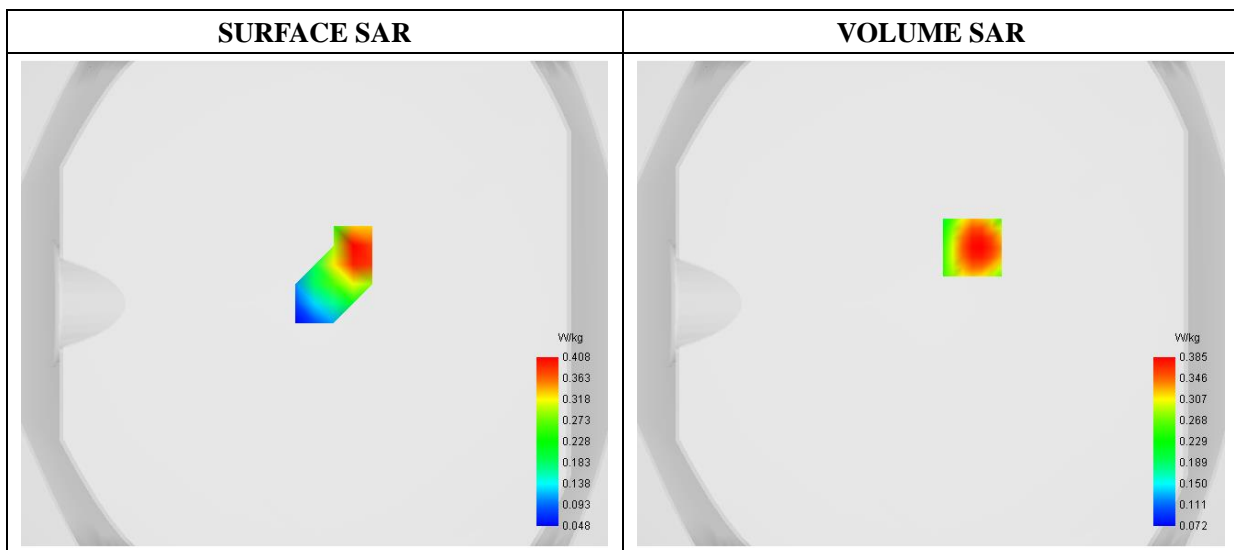


Maximum location: X=17.00, Y=23.00

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.225606
SAR 1g (W/Kg)	0.368330

E. Z Axis Scan

Z (mm)	0.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00	18.00
SAR (W/Kg)	0.6775	0.3854	0.3003	0.2554	0.2220	0.1812	0.1663	0.1378	0.1242

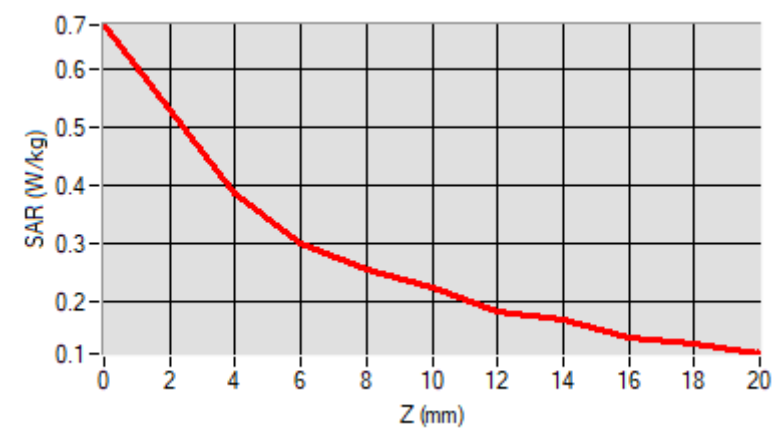

F. 3D Image

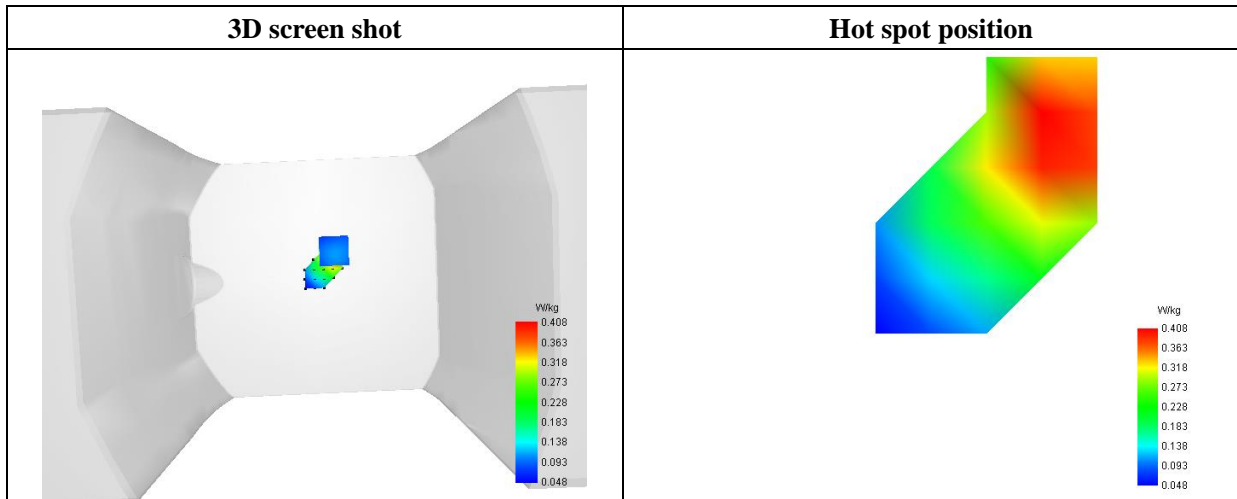

MEASUREMENT 7

Type: Phone measurement (Complete)

Date of measurement: 2020-05-18

Measurement duration: 11 minutes 48 seconds


E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Reference to the Calibration Certificate; Calibrated: 2019/07/08

A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Zoom Scan	dx=8mm dy=8mm dz=5mm
Phantom	Flat Plane
Device Position	Back Side
Band	GSM1900
Channels	High
Signal	TDMA (Crest factor: 8.0)

B. SAR Measurement Results

Frequency (MHz)	1909.800000
Relative Permittivity (real part)	38.560124
Conductivity (S/m)	1.380369
Power Variation (%)	1.442440
Ambient Temperature	21.1
Liquid Temperature	21.3

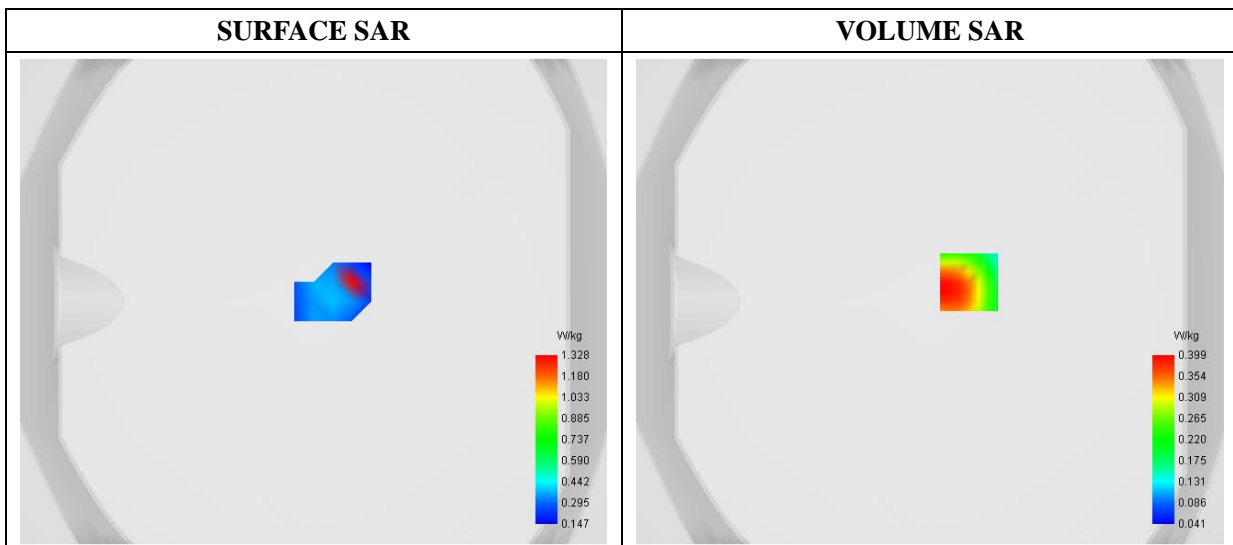


Maximum location: X=16.00, Y=8.00

D. SAR 1g & 10g

SAR 10g (W/Kg)	0.209970
SAR 1g (W/Kg)	0.377296

E. Z Axis Scan

Z (mm)	0.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00	18.00
SAR (W/Kg)	1.2950	0.3986	0.1477	0.2940	0.1112	0.2041	0.0848	0.1300	0.0665

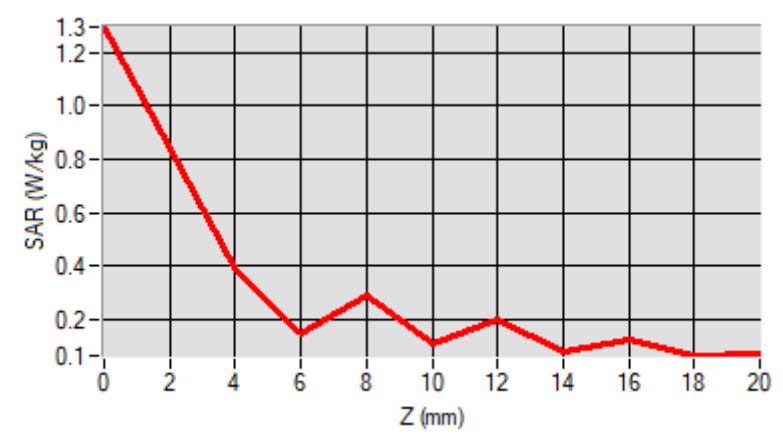

F. 3D Image

3D screen shot	Hot spot position

MEASUREMENT 13

Type: Phone measurement (Complete)

Date of measurement: 2020-05-08

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Reference to the Calibration Certificate; Calibrated: 2019/07/08

A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Zoom Scan	dx=8mm dy=8mm dz=5mm
Phantom	Flat Plane
Device Position	Back
Band	GPRS850_2TX
Channels	High
Signal	Duty Cycle: 1:4

B. SAR Measurement Results

Frequency (MHz)	848.800000
Relative Permittivity (real part)	54.851214
Conductivity (S/m)	0.951454
Power Variation (%)	0.901472
Ambient Temperature	21.1
Liquid Temperature	21.3

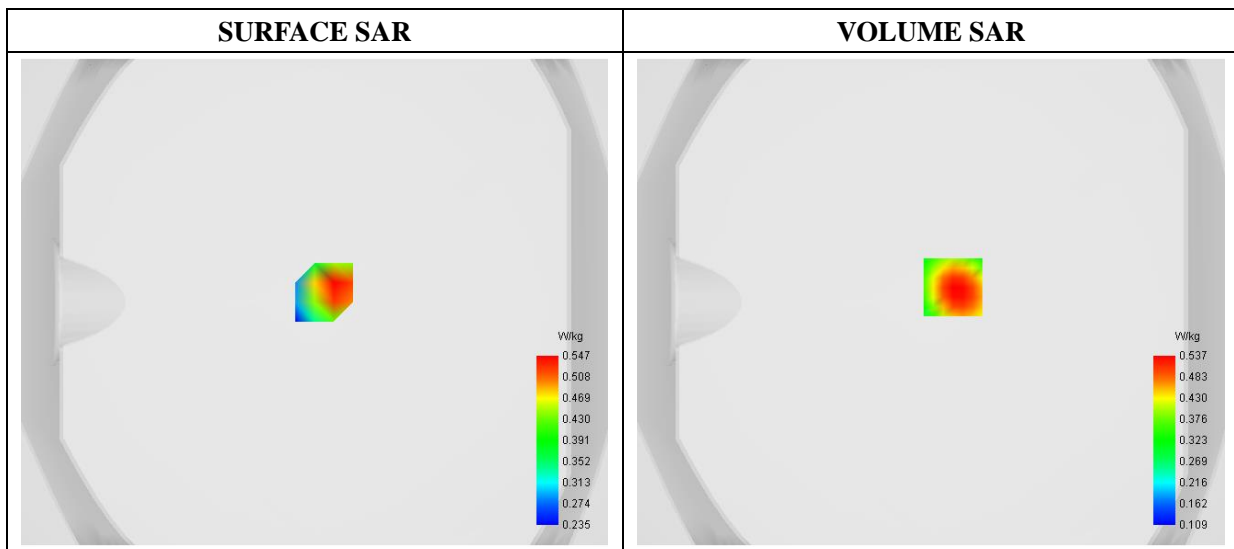


Maximum location: X=9.00, Y=6.00

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.314172
SAR 1g (W/Kg)	0.511008

E. Z Axis Scan

Z (mm)	0.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00	18.00
SAR (W/Kg)	0.8365	0.5365	0.4351	0.3569	0.2986	0.2549	0.2217	0.1958	0.1746

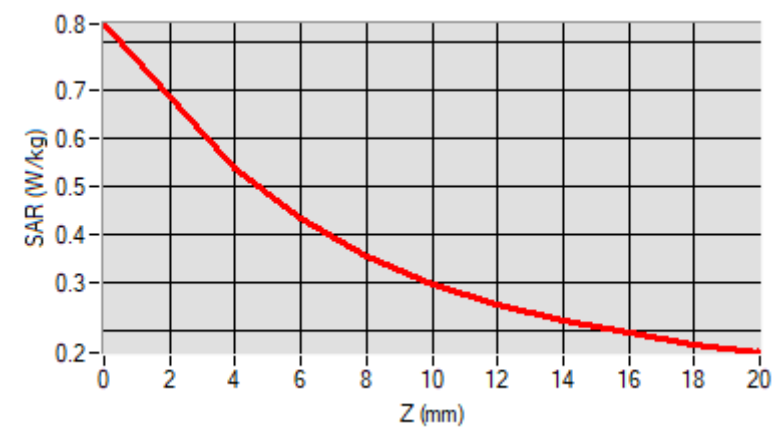

F. 3D Image

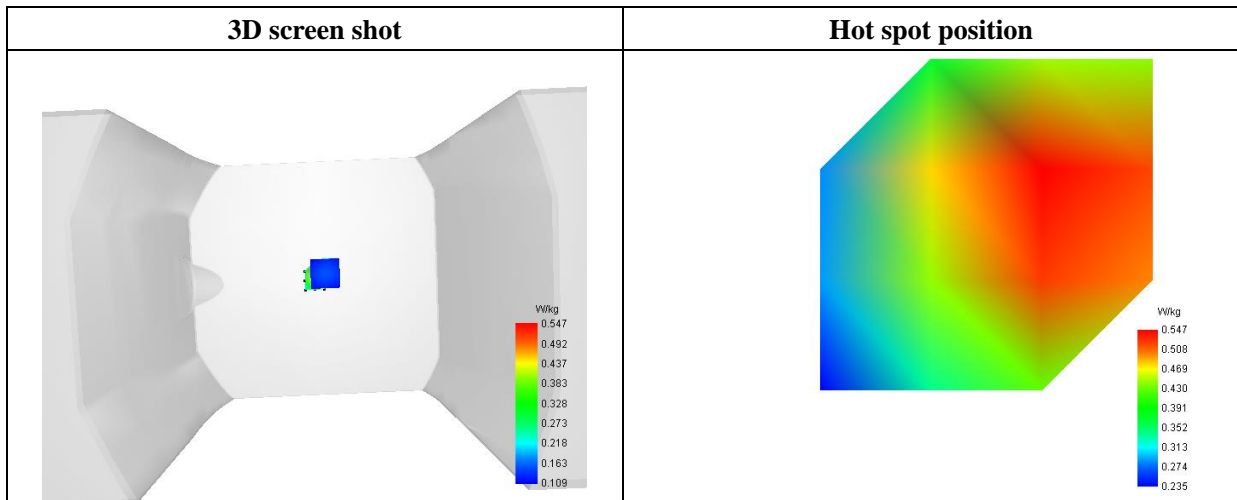

MEASUREMENT 19

Type: Phone measurement (Complete)

Date of measurement: 2020-05-18

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Reference to the Calibration Certificate; Calibrated: 2019/07/08

A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Zoom Scan	dx=8mm dy=8mm dz=5mm
Phantom	Flat Plane
Device Position	Back
Band	GPRS1900_3TX
Channels	Middle
Signal	Duty Cycle: 1:2.66

B. SAR Measurement Results

Frequency (MHz)	1880.000000
Relative Permittivity (real part)	52.420415
Conductivity (S/m)	1.501966
Power Variation (%)	1.474622
Ambient Temperature	21.1
Liquid Temperature	21.3

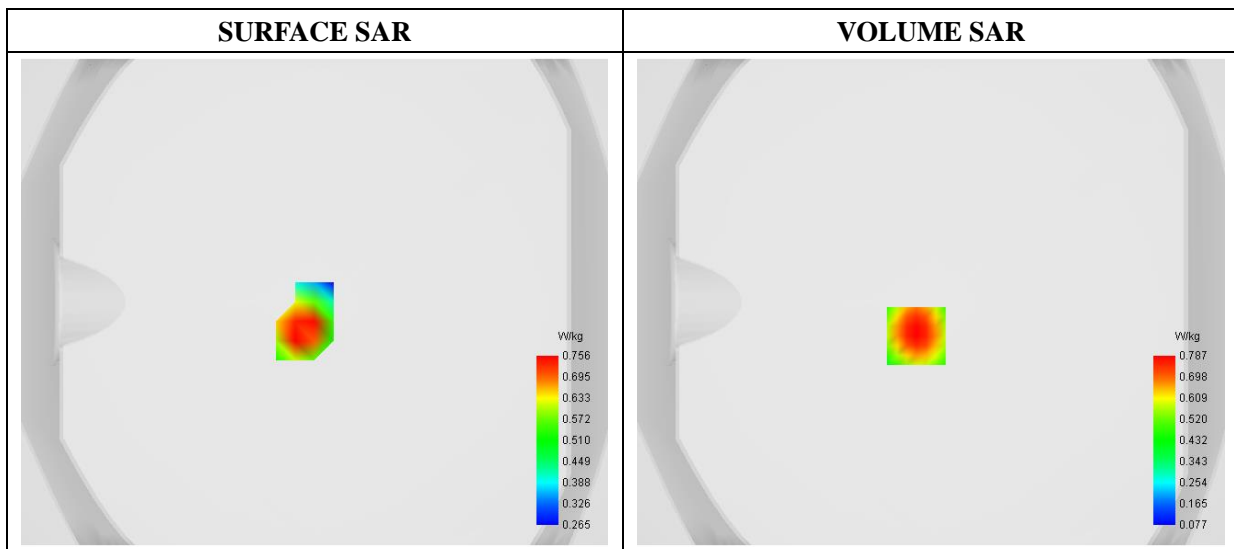


Maximum location: X=-6.00, Y=-14.00

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.421200
SAR 1g (W/Kg)	0.747432

E. Z Axis Scan

Z (mm)	0.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00	18.00
SAR (W/Kg)	1.2013	0.7868	0.6377	0.5170	0.4213	0.3447	0.2824	0.2309	0.1874

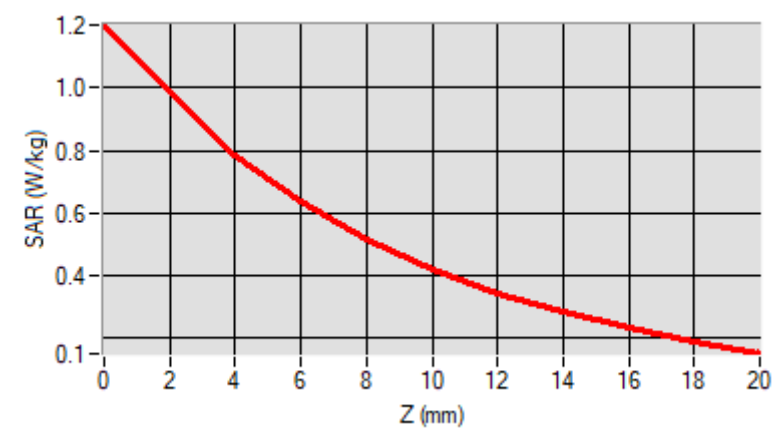

F. 3D Image

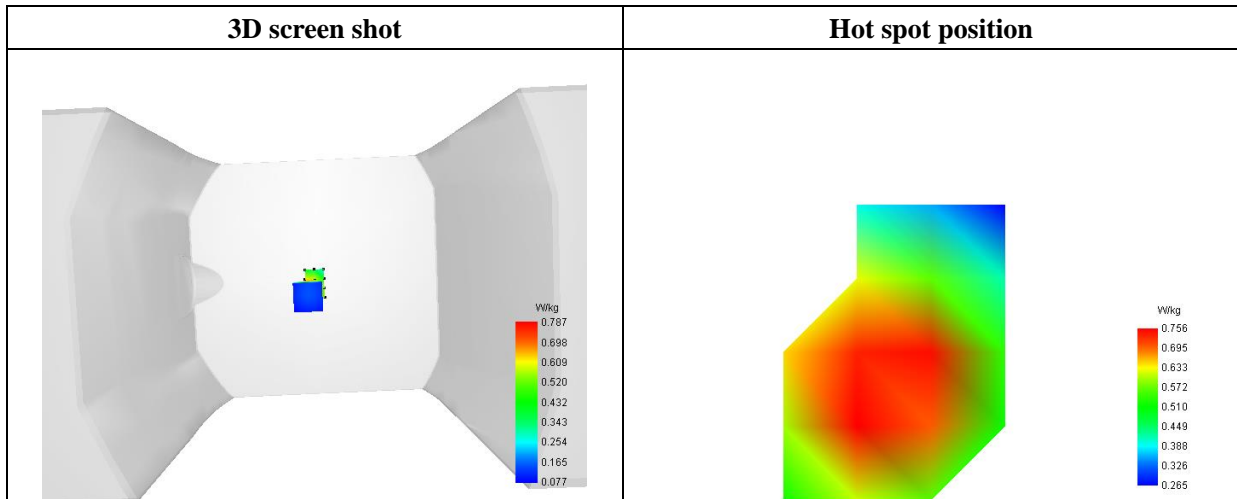

MEASUREMENT 25

Type: Phone measurement (Complete)

Date of measurement: 2020-05-18

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Reference to the Calibration Certificate; Calibrated: 2019/07/08

A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Zoom Scan	dx=8mm dy=8mm dz=5mm
Phantom	Flat Plane
Device Position	Back
Band	WCDMA1900_RMC
Channels	Low
Signal	Duty Cycle 1:1

B. SAR Measurement Results

Frequency (MHz)	1852.400000
Relative Permittivity (real part)	52.420415
Conductivity (S/m)	1.501966
Power Variation (%)	1.789272
Ambient Temperature	21.1
Liquid Temperature	21.3

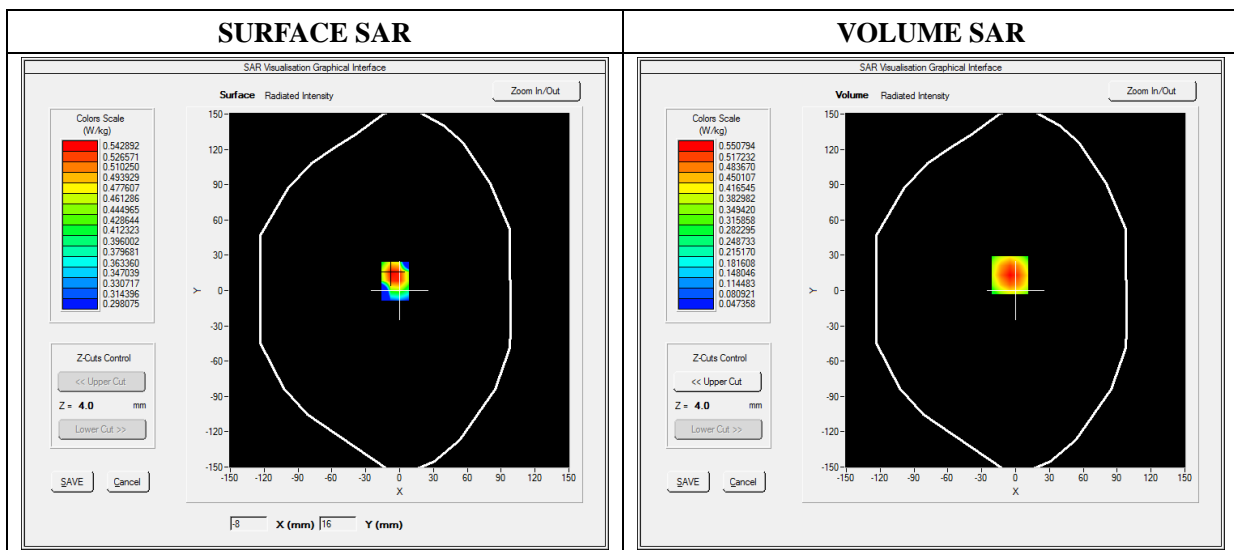


Maximum location: X=-5.00, Y=13.00

D. SAR 1g & 10g



SAR 10g (W/Kg)	0.316286
SAR 1g (W/Kg)	0.521421

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.7923	0.5508	0.3454	0.2181	0.1408

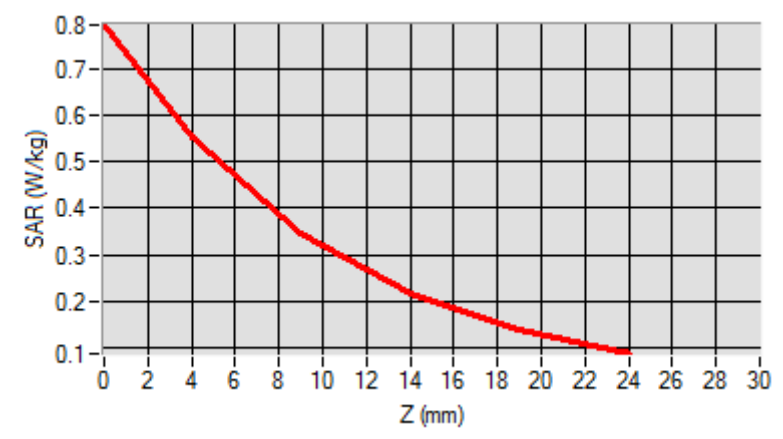

F. 3D Image

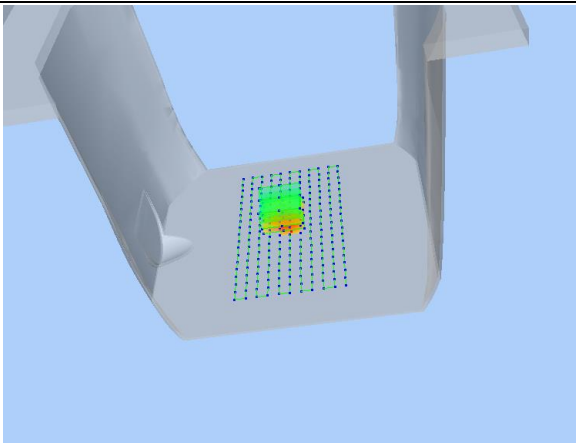3D screen shot	Hot spot position
	

MEASUREMENT 31

Type: Phone measurement (Complete)

Date of measurement: 2020-05-08

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Reference to the Calibration Certificate; Calibrated: 2019/07/08

A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Zoom Scan	dx=8mm dy=8mm dz=5mm
Phantom	Flat Plane
Device Position	Back
Band	WCDMA850_RMC
Channels	Low
Signal	Duty Cycle 1:1

B. SAR Measurement Results

Frequency (MHz)	826.400000
Relative Permittivity (real part)	54.851214
Conductivity (S/m)	0.951454
Power Variation (%)	2.341234
Ambient Temperature	21.1
Liquid Temperature	21.3

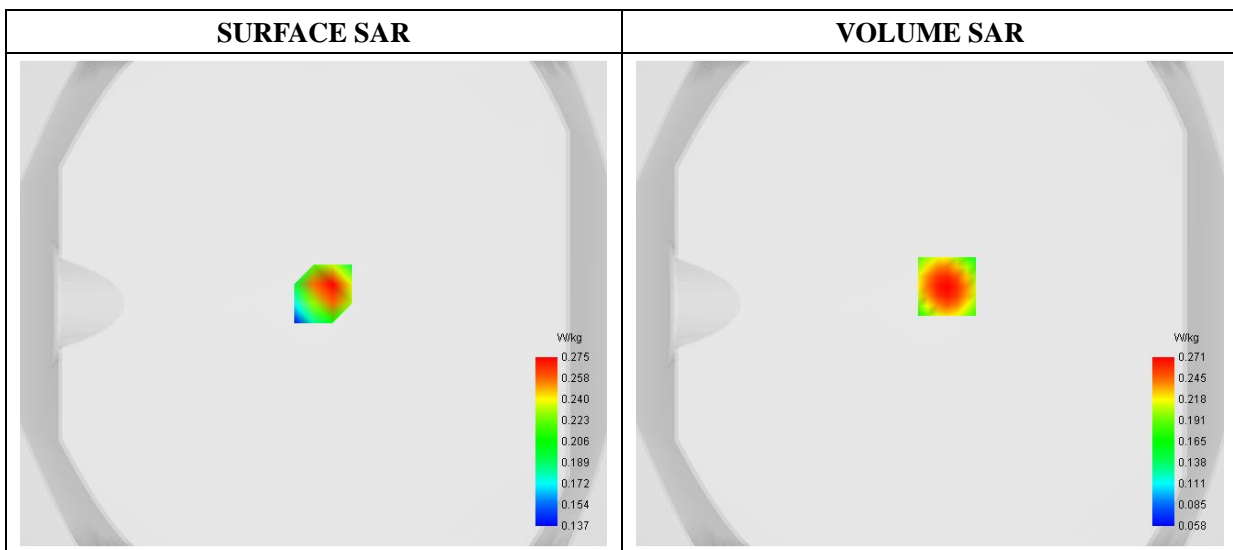


Maximum location: X=7.00, Y=7.00

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.163979
SAR 1g (W/Kg)	0.255499

E. Z Axis Scan

Z (mm)	0.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00	18.00	20.00
SAR (W/Kg)	0.3609	0.2713	0.2354	0.2041	0.1771	0.1535	0.1329	0.1146	0.0981	0.0812

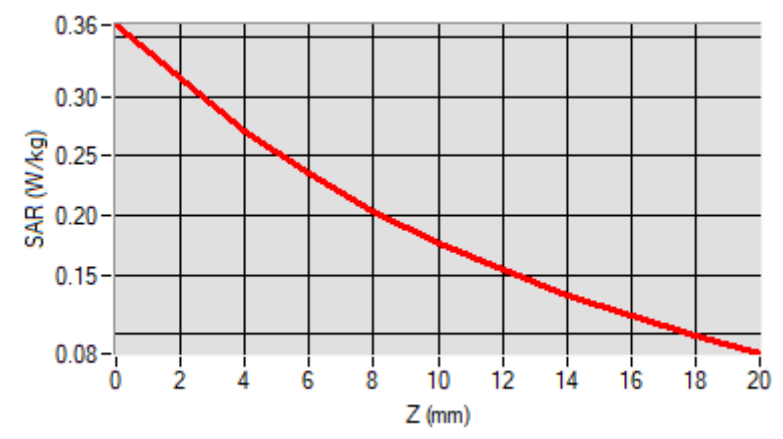

F. 3D Image

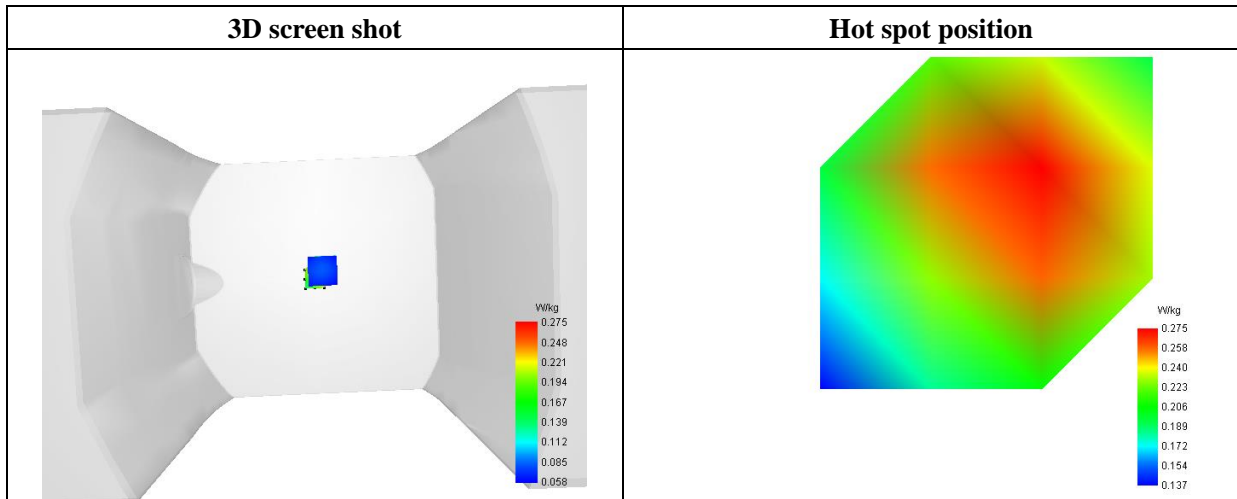

MEASUREMENT 37

Type: Phone measurement (Complete)

Date of measurement: 2020-05-18

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Reference to the Calibration Certificate; Calibrated: 2019/07/08

A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Zoom Scan	dx=8mm dy=8mm dz=5mm
Phantom	Flat Plane
Device Position	Back
Band	LTE Band 2
Channels	QPSK, 20MHz, 1RB,Middle
Signal	Duty Cycle 1:1

B. SAR Measurement Results

Frequency (MHz)	1880.000000
Relative Permittivity (real part)	52.420415
Conductivity (S/m)	1.501966
Power Variation (%)	1.523573
Ambient Temperature	21.1
Liquid Temperature	21.3

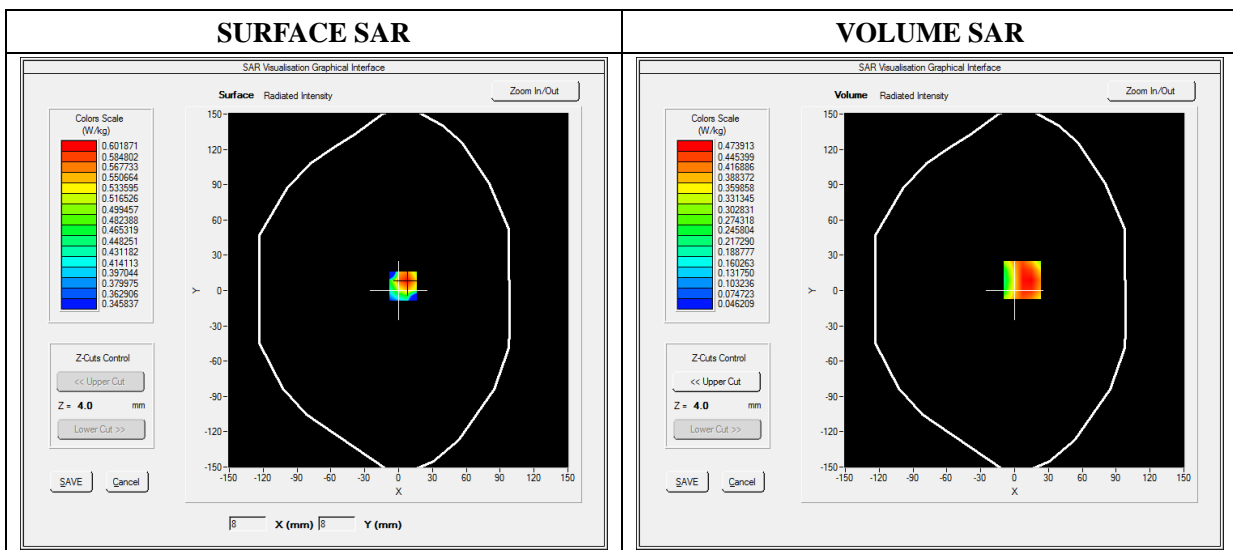


Maximum location: X=7.00, Y=9.00

D. SAR 1g & 10g



SAR 10g (W/Kg)	0.321733
SAR 1g (W/Kg)	0.465772

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.4197	0.4739	0.3539	0.2378	0.1881

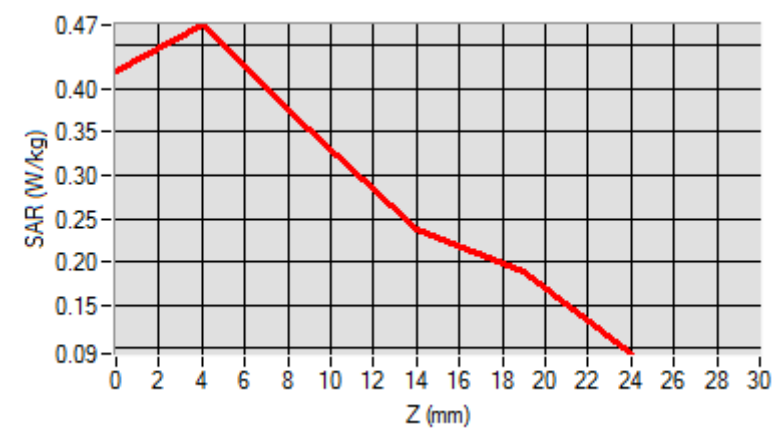

F. 3D Image

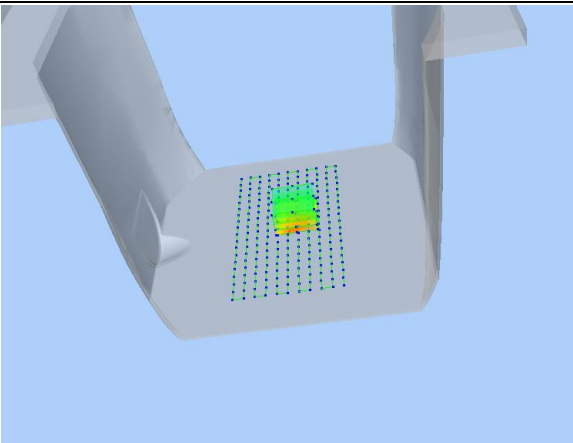3D screen shot	Hot spot position
	

MEASUREMENT 44

Type: Phone measurement (Complete)

Date of measurement: 2020-05-12

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Reference to the Calibration Certificate; Calibrated: 2019/07/08

A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Zoom Scan	dx=8mm dy=8mm dz=5mm
Phantom	Flat Plane
Device Position	Back
Band	LTE Band 4
Channels	QPSK, 20MHz, 1RB, Middle
Signal	Duty Cycle 1:1

B. SAR Measurement Results

Frequency (MHz)	1732.500000
Relative Permittivity (real part)	51.220432
Conductivity (S/m)	1.460124
Power Variation (%)	0.858383
Ambient Temperature	21.1
Liquid Temperature	21.2

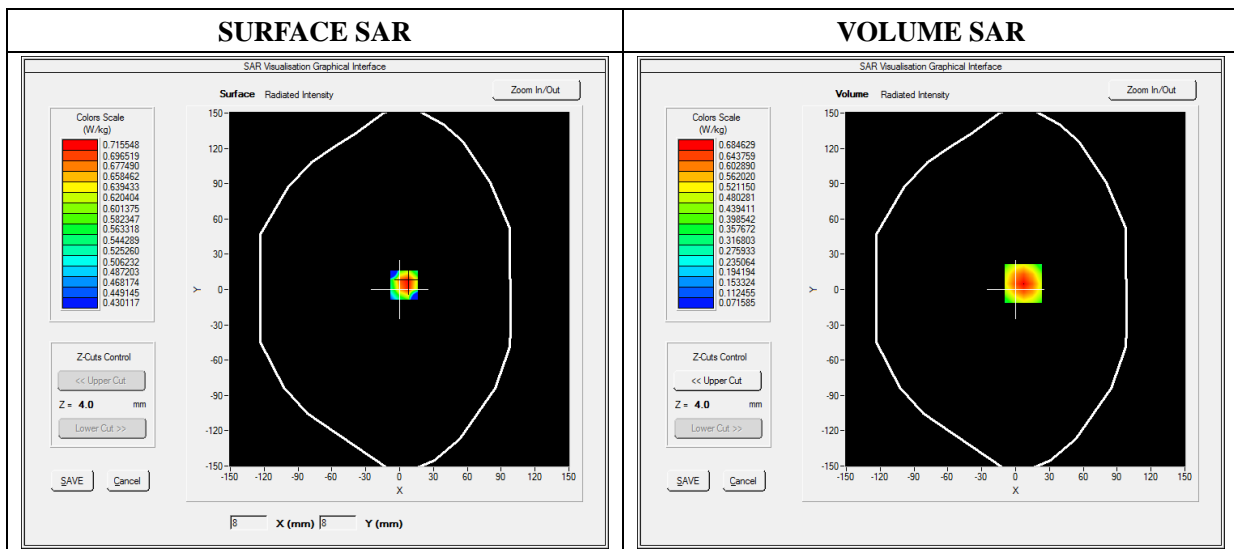


Maximum location: X=7.00, Y=5.00

D. SAR 1g & 10g



SAR 10g (W/Kg)	0.402521
SAR 1g (W/Kg)	0.647897

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.9560	0.6846	0.4463	0.2918	0.1931

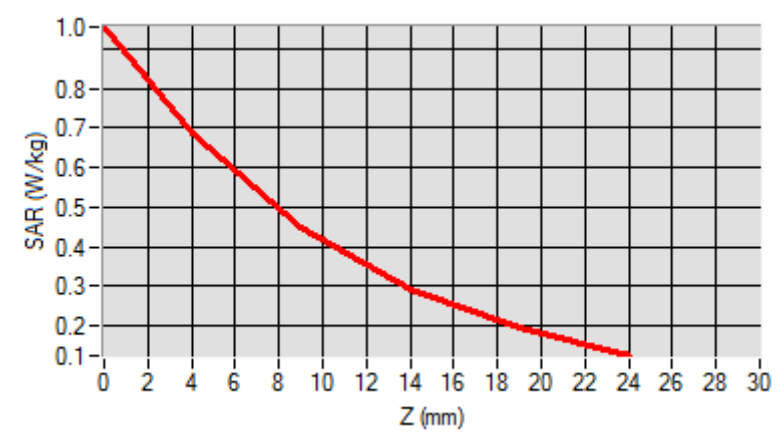

F. 3D Image

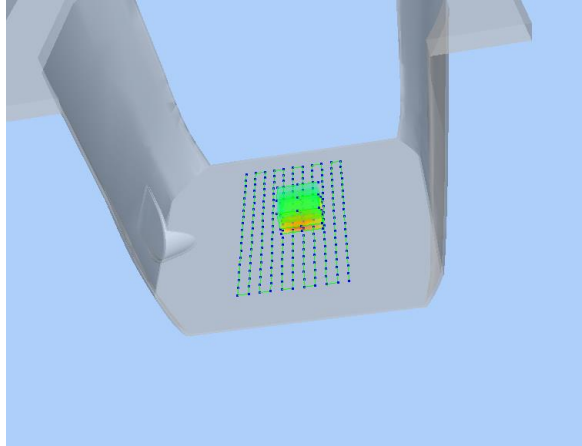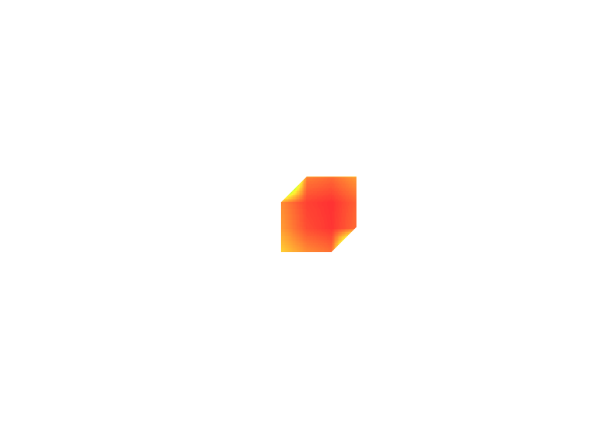3D screen shot	Hot spot position
	

MEASUREMENT 56

Type: Phone measurement (Complete)

Date of measurement: 2020-05-08

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Reference to the Calibration Certificate; Calibrated: 2019/07/08

A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Zoom Scan	dx=8mm dy=8mm dz=5mm
Phantom	Flat Plane
Device Position	Back
Band	LTE Band 5_RMC
Channels	QPSK, 10MHz, 1RB, Middle
Signal	Duty Cycle 1:1

B. SAR Measurement Results

Frequency (MHz)	836.500000
Relative Permittivity (real part)	54.851214
Conductivity (S/m)	0.951454
Power Variation (%)	1.037332
Ambient Temperature	21.1
Liquid Temperature	21.2

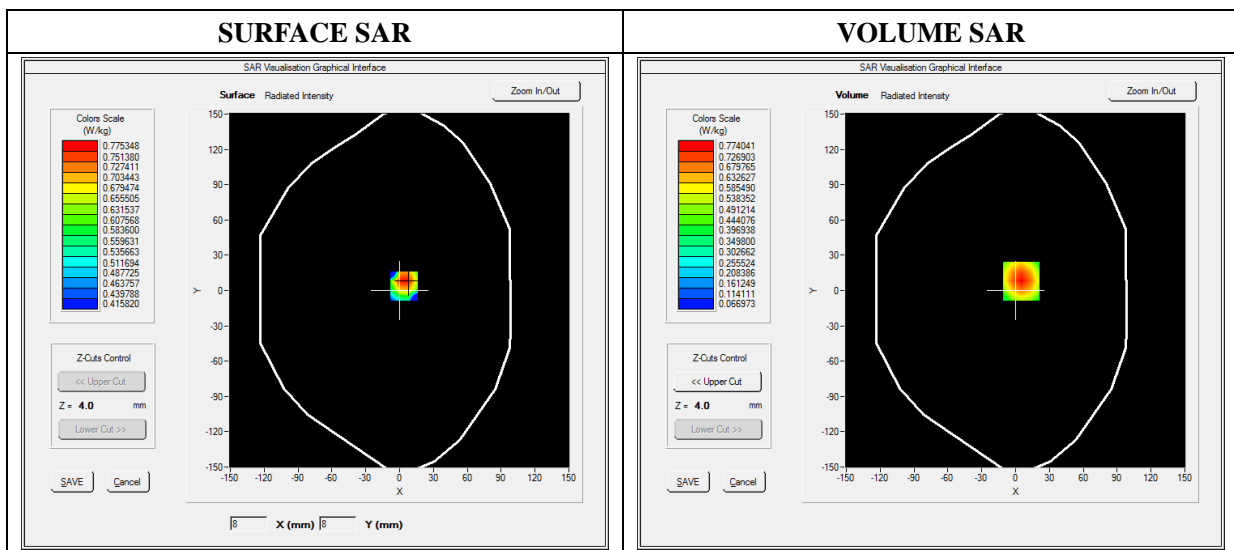


Maximum location: X=5.00, Y=8.00

D. SAR 1g & 10g



SAR 10g (W/Kg)	0.440437
SAR 1g (W/Kg)	0.732174

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	1.1243	0.7740	0.4797	0.3002	0.1934

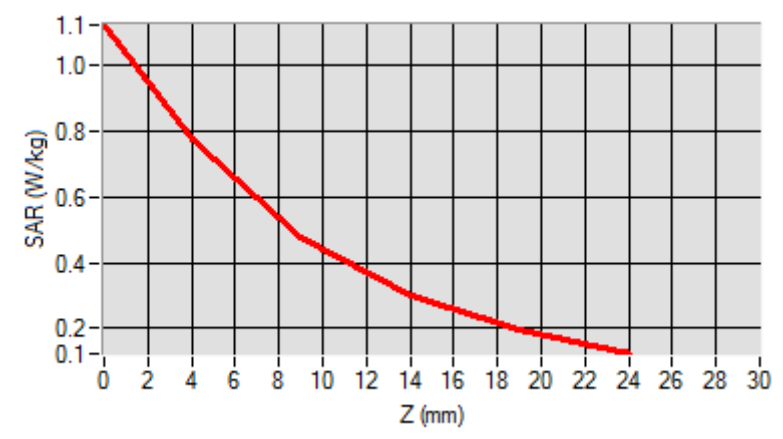

F. 3D Image

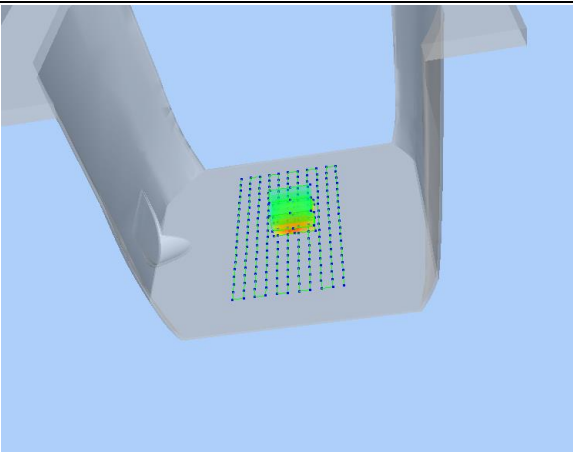3D screen shot	Hot spot position
	

MEASUREMENT 68

Type: Phone measurement (Complete)

Date of measurement: 2020-05-19

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Reference to the Calibration Certificate; Calibrated: 2019/07/08

A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Zoom Scan	dx=8mm dy=8mm dz=5mm
Phantom	Flat Plane
Device Position	Back
Band	LTE Band 7_RMC
Channels	QPSK, 20MHz, 1RB, Middle
Signal	Duty Cycle 1:1

B. SAR Measurement Results

Frequency (MHz)	2535.000000
Relative Permittivity (real part)	52.241202
Conductivity (S/m)	2.120943
Power Variation (%)	3.672346
Ambient Temperature	21.1
Liquid Temperature	21.2

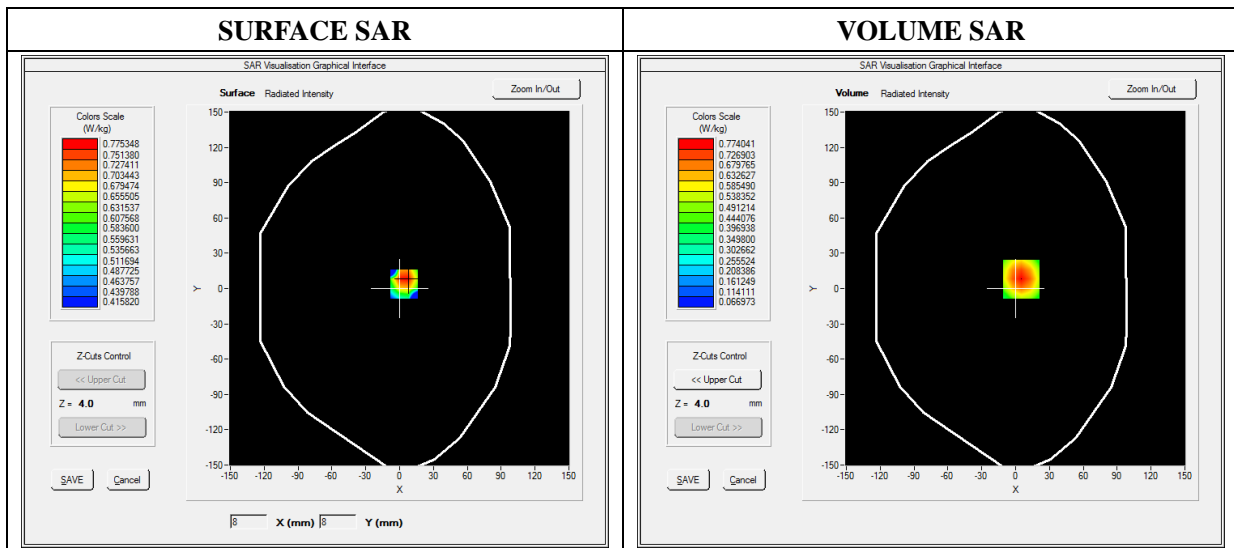


Maximum location: X=5.00, Y=8.00

D. SAR 1g & 10g



SAR 10g (W/Kg)	0.440437
SAR 1g (W/Kg)	0.732174

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	1.1243	0.7740	0.4797	0.3002	0.1934

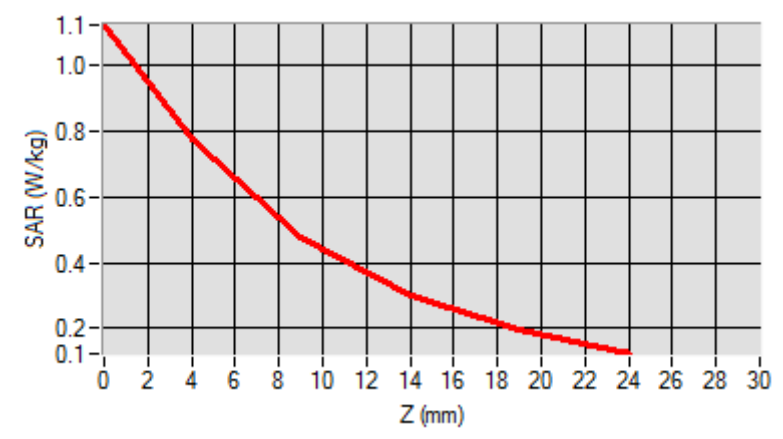

F. 3D Image

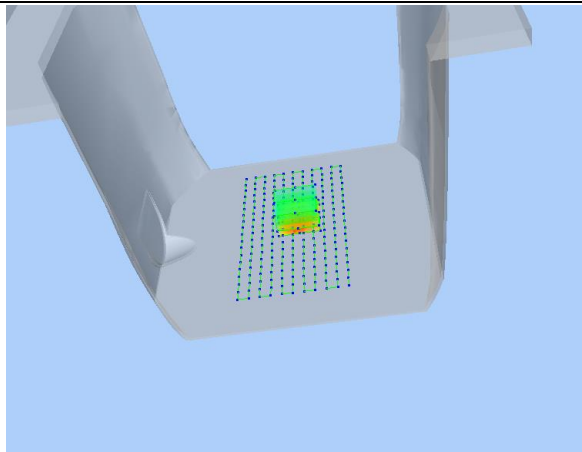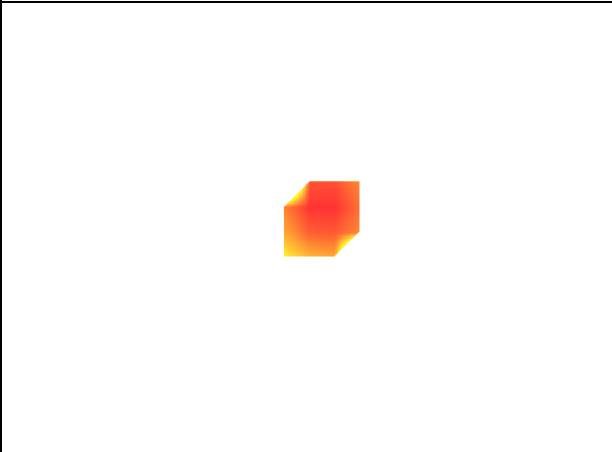3D screen shot	Hot spot position
	

MEASUREMENT 80

Type: Phone measurement (Complete)

Date of measurement: 2020-04-28

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Reference to the Calibration Certificate; Calibrated: 2019/07/08

A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Zoom Scan	dx=8mm dy=8mm dz=5mm
Phantom	Flat Plane
Device Position	Back
Band	LTE Band 12
Channels	QPSK, 10MHz, 1RB, Middle
Signal	Duty Cycle 1:1

B. SAR Measurement Results

Frequency (MHz)	707.500000
Relative Permittivity (real part)	54.964739
Conductivity (S/m)	0.931048
Power Variation (%)	3.672346
Ambient Temperature	21.1
Liquid Temperature	21.2

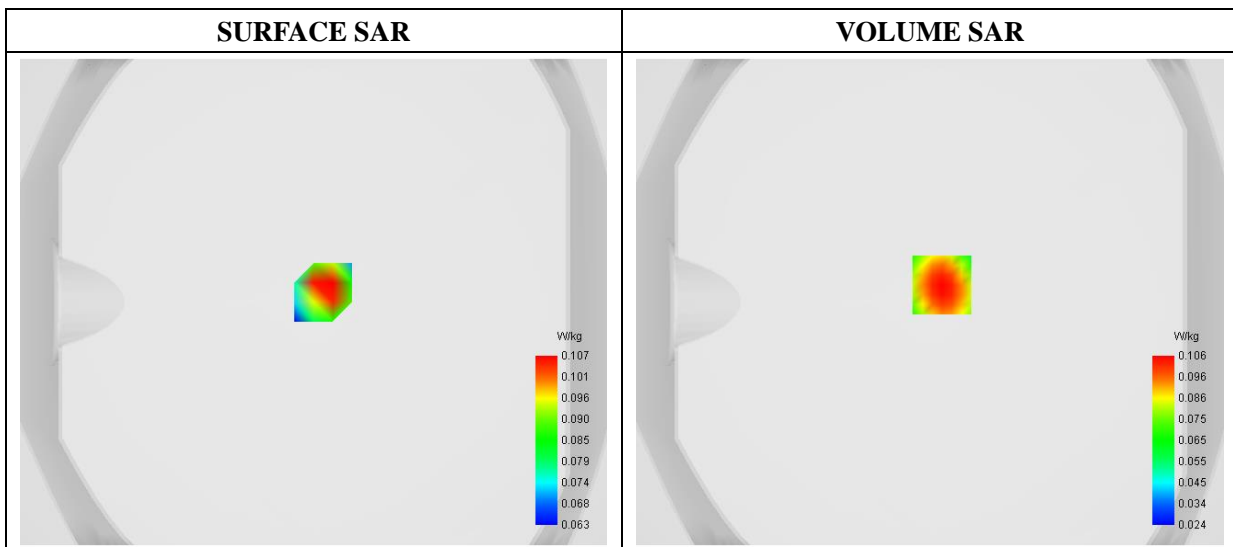


Maximum location: X=5.00, Y=7.00

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.068839
SAR 1g (W/Kg)	0.105657

E. Z Axis Scan

Z (mm)	0.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00	18.00
SAR (W/Kg)	0.1371	0.1062	0.0934	0.0821	0.0720	0.0631	0.0551	0.0479	0.0414

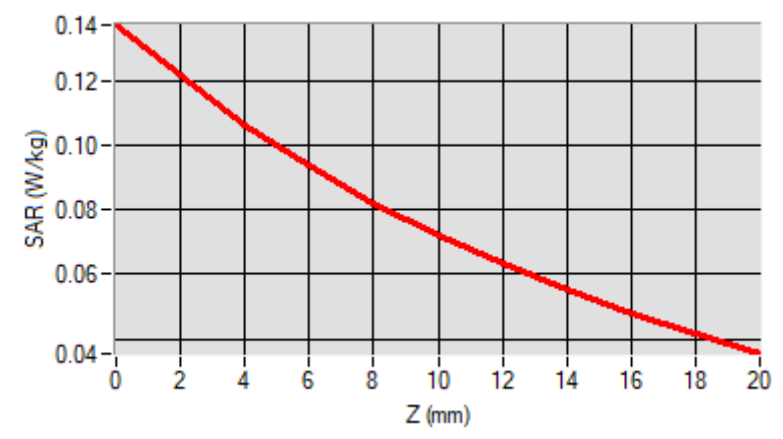

F. 3D Image

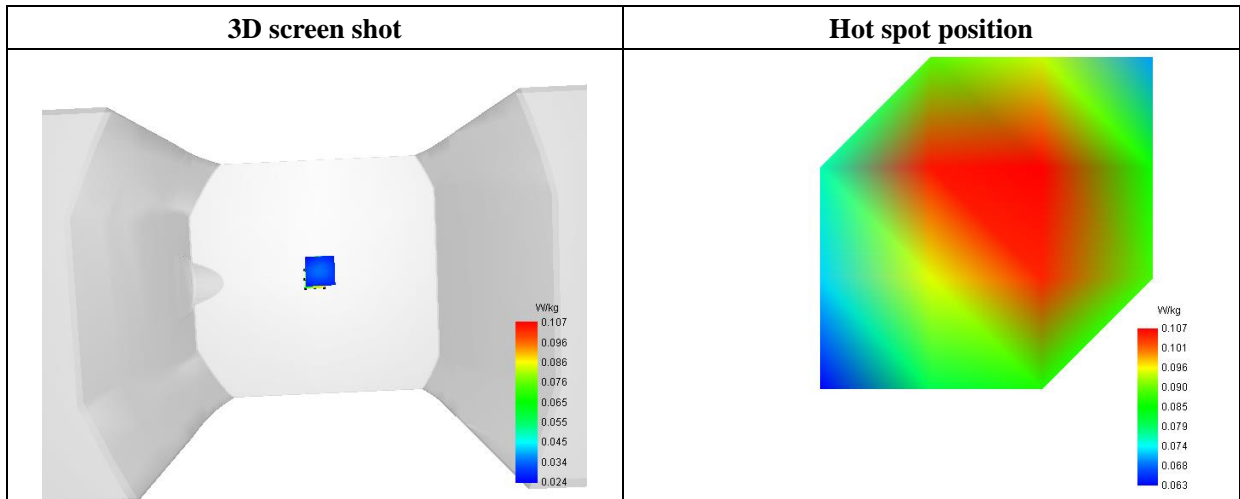

Annex C. EUT Photos


EUT View Front



EUT View Back




Antenna View

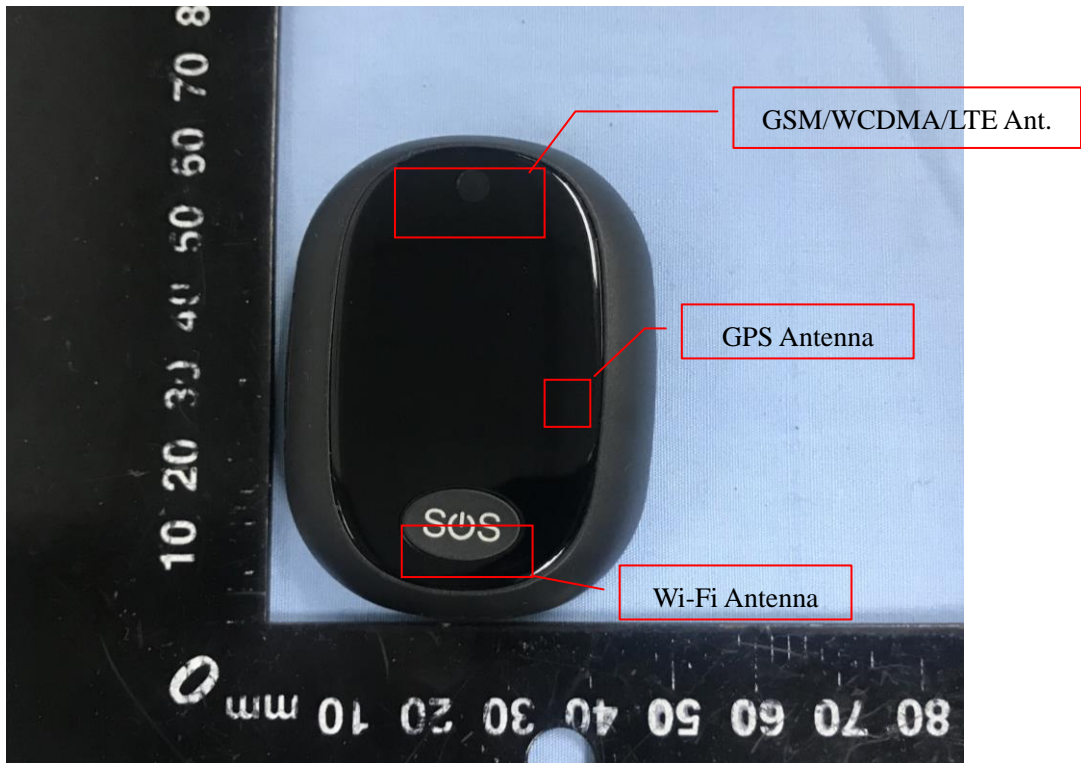


Annex D. Test Setup Photos


Body Back

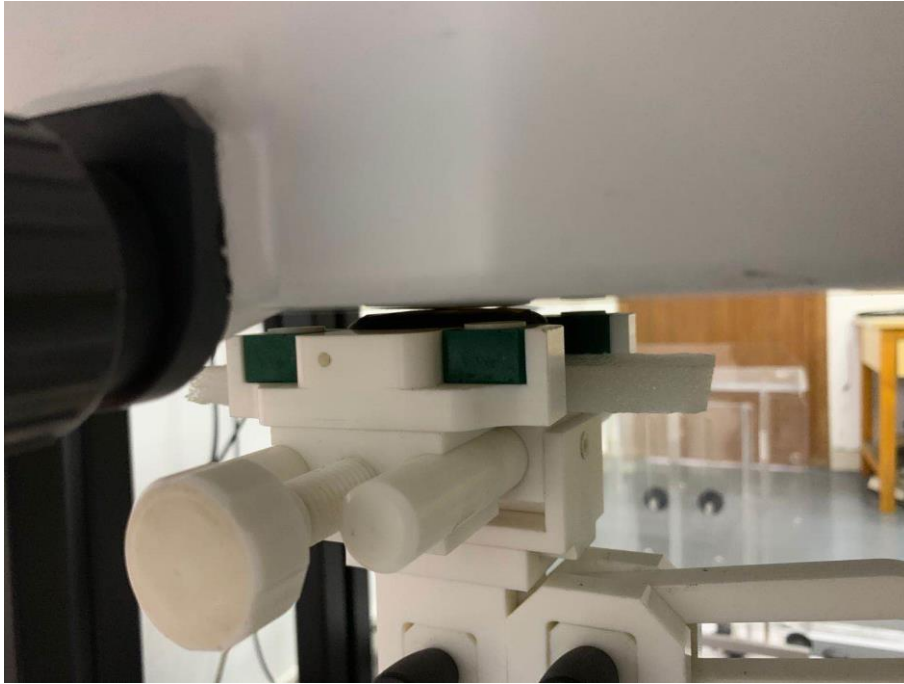


Body front

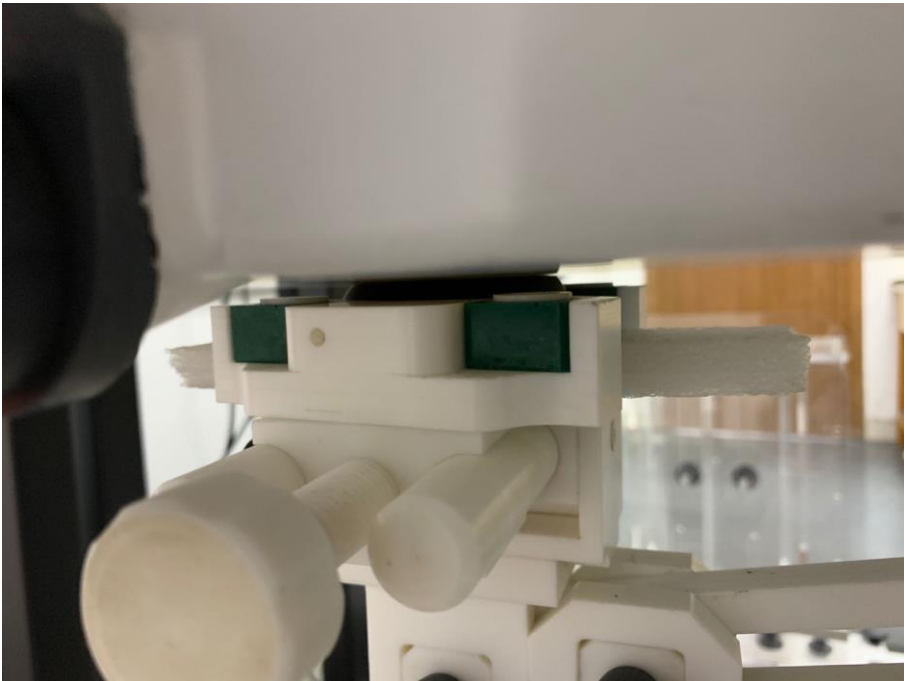


Body Left

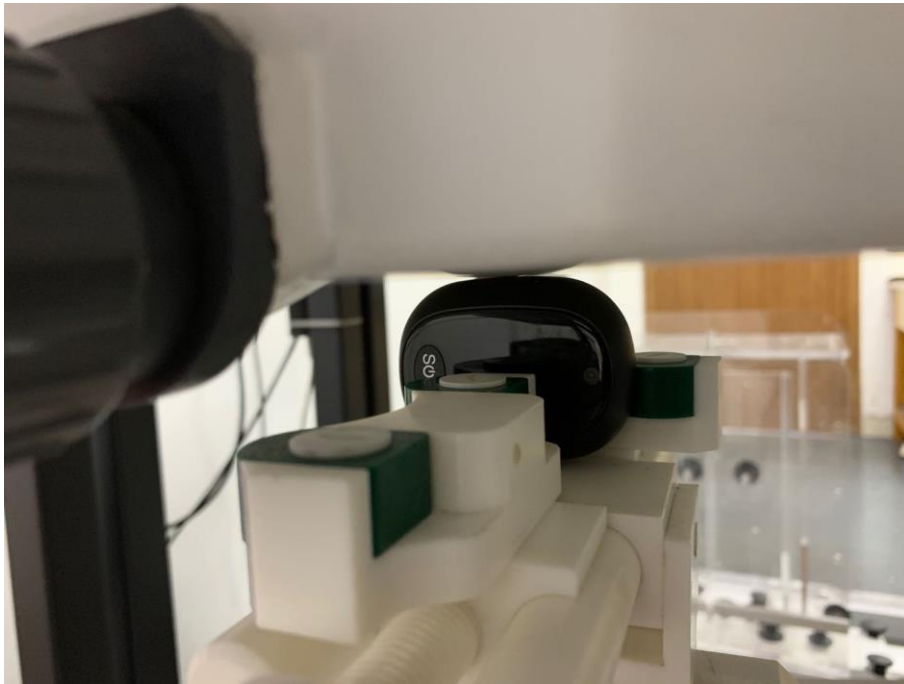


Body Right

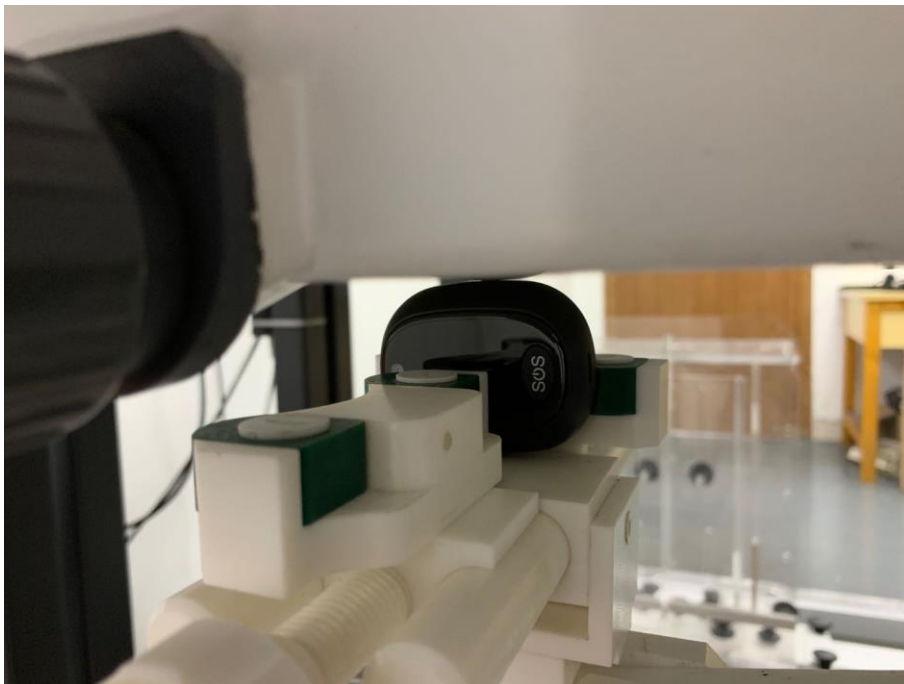

Body Top

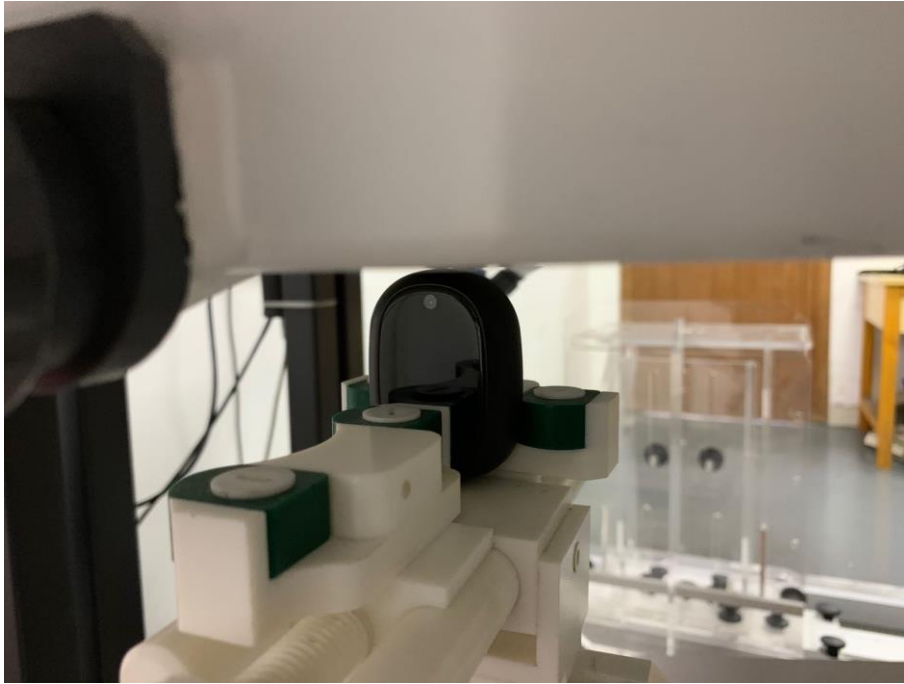

Body Bottom

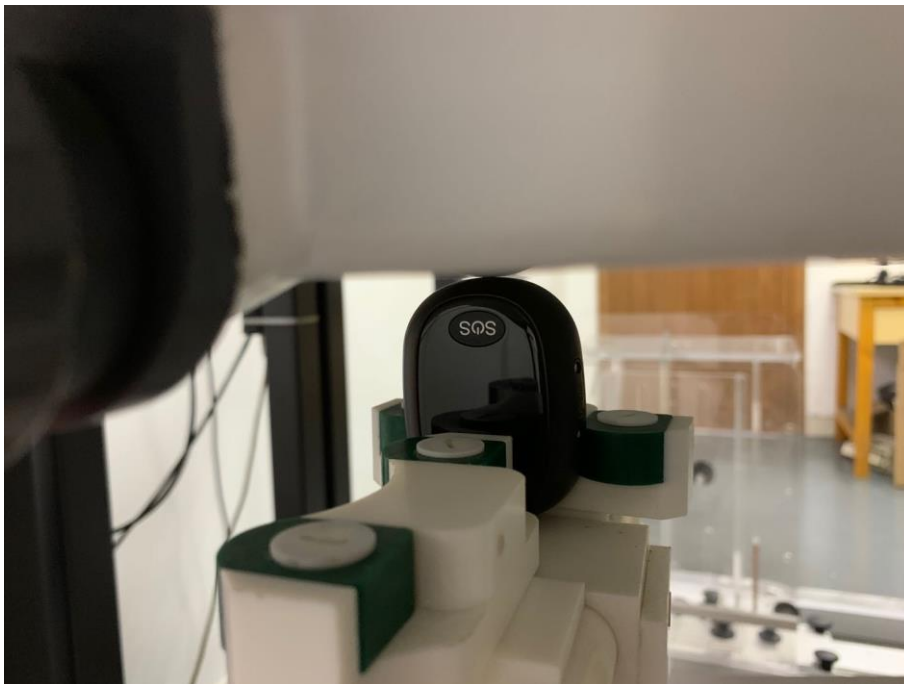



Annex E. Calibration Certificate

Please refer to the exhibit for the calibration certificate

******* END OF REPORT *******