


120.00 mm

BLAUPUNKT

Rear of Unit

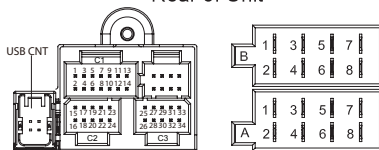

PIN	DEFINITION A PART	PIN	DEFINITION B PART
1	NC	1	REAR R+
2	NC	2	REAR R-
3	NC	3	FRONT R+
4	ACC	4	FRONT R-
5	NC	5	FRONT L+
6	ILLUMI	6	FRONT L-
7	Battery +12V	7	REAR L+
8	GND	8	REAR L-

DEFINITION C PART			
PIN	C1 PART	PIN	C1 PART
1	AUX IN CVBS	8	AGND
2	GND	9	REAR R
3	AUX IN R	10	REAR L
4	AUX IN L	11	AGND
5	AGND	12	FRONT R
6	NC	13	FRONT L
7	SUB.W	14	AGND
--	--	--	--
---	---	---	---
---	---	---	---
PIN	C2 PART	PIN	C3 PART
15	GND	25	DP2
16	CAM CVBS	26	DM2
17	NC	27	GND
18	P.ANT & P.CNT	28	+5V
19	PARKING	29	GND
20	REVERSE	30	VEDKO OUT
21	ILLUMI	31	NC
22	KAY GND	32	MIC-
23	KAY A	33	MIC+
24	KAY B	34	NC

Warnings:

Warranty void if this unit is damaged due to misuse or unauthorized service attempting.

Before making any electrical connections disconnect the vehicle battery's negative terminal and carefully read the unit's Operating Instructions.

Connect each pair of speaker leads only to a single pair of speakers (or speaker system) that has an impedance of at least 4 ohms, as well as 50-watt power handling capability. Never allow the uninsulated part of any speaker leads to touch a metal part of the vehicle.

Connect speaker leads to input of external amplifiers ONLY if indicated in amplifier's manual, otherwise this unit's internal amplifier will be damaged.

This product was produced using lead free technology. Help keep the world clean! Dispose properly!

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:
 (1) This device may not cause harmful interference, and
 (2) This device must accept any interference received, including interference that may cause undesired operation.



FCC ID: 2AJ8A-PDE960

QDID: XXXXXXX

Remarks: (*) Total max. 150 mA / Fuse: 15 Ampere

12V ⊕ GROUND ≡ 15A max

PN: 12707200xxxx

100.00 mm