


120.00 mm



Rear of Unit

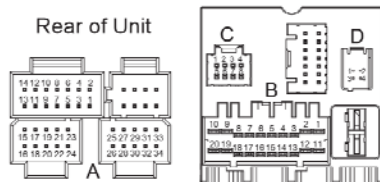

PIN DEFINITION A PART	PIN DEFINITION A PART	PIN DEFINITION A PART			
1	AGND	15	GND	29	GND
2	FL LINE	16	CAMERA_CVBS	30	VIDEO_OUT
3	FR LINE	17	NC	31	GND
4	AGND	18	P.CONT	32	MIC-
5	RL LINE	19	PARKING	33	MIC+
6	RR LINE	20	REVHSA	34	GND
7	AGND	21	ILLUMI		
8	SUB LINE	22	GND		
9	NC	23	SWC 1		
10	AGND	24	SWC 2		
11	AV IN L	25	NC		
12	AV IN R	26	NC		
13	GND	27	GND		
14	AV IN CVBS	28	NC		

This product was produced using lead free technology.
Help keep the world clean! Dispose properly!

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:
(1) This device may not cause harmful interference, and
(2) This device must accept any interference received, including interference that may cause undesired operation.

FCC ID: 2AJ8A-SANPEDRO

Model: San Pedro 800

PIN DEFINITION B PART	PIN	DEFINITION C PART	
1	B+	1	NC
2	ILL	2	NC
3	H+	3	GND
4	FR+	4	AUX_L
5	RL+	5	NC
6	RR+	6	AUX_DET
7	NC	7	AGND
8	SWC2	8	AUX_R
9	ACC	9	
10	NC		PIN DEFINITION D PART
11	GND	1	USB_5V
12	ILL (NK)	2	GND
13	FL-	3	DM
14	FR-	4	LSP
15	RR-		
16	RR-		
17	NC		
18	P.CONT		
19	SWC1		
20	GND		

Warnings:

Warranty void if this unit is damaged due to misuse or unauthorized service attempting.
Before making any electrical connections disconnect the vehicle battery's negative terminal and carefully read the unit's Owner's Manual.

Connect each pair of speaker leads only to a single pair of speakers (or speaker system) that has an impedance of at least 4 ohms, as well as 45-watt power handling capability. Never allow the uninsulated part of any speaker leads to touch a metal part of the vehicle.

Connect speaker leads to input of external amplifiers ONLY if indicated in amplifier's manual, otherwise this unit's internal amplifier will be damaged.

12V Ⓞ GROUND --- 15A max

100.00 mm

PIN.127072002787