


120.00 mm

**BLAUPUNKT**

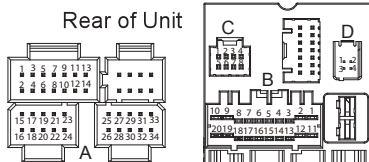

PIN	DEFINITION A PART	PIN	DEFINITION A PART
1	AUX IN CVBS	18	P.ANT/CONT
2	GND	19	PARKING
3	AUX IN R	20	REVERSE
4	AUX IN L	21	NC
5	AGND	22	NC
6	NC	23	NC
7	SUB.W	24	NC
8	AGND	25	NC
9	REAR R	26	NC
10	REAR L	27	NC
11	AGND	28	NC
12	FRONT R	29	GND
13	FRONT L	30	NC
14	AGND	31	NC
15	GND	32	MIC-
16	CAMERA CVBS	33	MIC+
17	NC	34	NC

This product was produced using lead free technology.  
Help keep the world clean! Dispose properly!

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:  
(1) This device may not cause harmful interference, and  
(2) This device must accept any interference received, including interference that may cause undesired operation.

FCC ID: 2AJ8A-SANPEDRO950

Model: San Pedro 950

PIN	DEFINITION B PART	PIN	DEFINITION C PART
1	B+	1	NC
2	ILL	2	NC
3	FL+	3	NC
4	FR+	4	AUX_L
5	RL+	5	NC
6	RR+	6	AUX_DET
7	NC	7	AGND
8	SWC2	8	AUX_R
9	ACC		
PIN	DEFINITION D PART	PIN	DEFINITION D PART
10	P.ANT	1	USB_5V
11	GND	2	GND
12	NC	3	DN
13	FL-	4	DP
14	FR-		
15	RL-		
16	RR-		
17	NC		
18	NC		
19	SWC1		
20	GND		

**Warnings:**

Warranty void if this unit is damaged due to misuse or unauthorized service attempting.

Before making any electrical connections disconnect the vehicle battery's negative terminal and carefully read the unit's Owner's Manual.

Connect each pair of speaker leads only to a single pair of speakers (or speaker system) that has an impedance of at least 4 ohms, as well as 45-watt power handling capability. Never allow the uninsulated part of any speaker leads to touch a metal part of the vehicle.

Connect speaker leads to input of external amplifiers ONLY if indicated in amplifier's manual, otherwise this unit's internal amplifier will be damaged.

12V @ GROUND --- 15A max

P/N:12707200XXXX

100.00 mm