



TESTING LABORATORY
CERTIFICATE#4323.01



FCC PART 15.247

TEST REPORT

Fulham Electronic Co., Ltd

No.9 Xingchang Road, Nanshao District, Changping Science Area, Beijing, China 102200

FCC ID: 2AJ9LT1R1UNV210P60W

Report Type: Original Report	Product Type: LED Driver
Test Engineer: Hope Zhang	Hope Zhang
Report Number: RKSA180905001-00B	
Report Date: 2018-12-26	
Reviewed By: Oscar Ye RF Leader	Oscar Ye
Prepared By:	Bay Area Compliance Laboratories Corp. (Kunshan) No.248 Chenghu Road, Kunshan, Jiangsu province, China Tel: +86-0512-86175000 Fax: +86-0512-88934268 www.baclcorp.com.cn

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	4
MEASUREMENT UNCERTAINTY	5
TEST FACILITY	5
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EQUIPMENT MODIFICATIONS	6
EUT EXERCISE SOFTWARE	6
SUPPORT EQUIPMENT LIST AND DETAILS	7
EXTERNAL I/O CABLE.....	7
BLOCK DIAGRAM OF TEST SETUP	8
SUMMARY OF TEST RESULTS	10
TEST EQUIPMENT LIST	11
FCC §1.1310& §2.1091 –MAXIMUM PERMISSIBLE EXPOSURE (MPE).....	12
FCC §15.203 - ANTENNA REQUIREMENT.....	13
APPLICABLE STANDARD	13
ANTENNA CONNECTOR CONSTRUCTION	13
FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS	14
APPLICABLE STANDARD	14
EUT SETUP	14
EMI TEST RECEIVER SETUP.....	14
TEST PROCEDURE	15
CORRECTED FACTOR & MARGIN CALCULATION	15
TEST RESULTS SUMMARY	15
TEST DATA	15
FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS.....	20
APPLICABLE STANDARD	20
EUT SETUP	20
EMI TEST RECEIVER SETUP.....	21
TEST PROCEDURE	21
CORRECTED AMPLITUDE & MARGIN CALCULATION	21
TEST RESULTS SUMMARY	21
TEST DATA	22
FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH.....	30
APPLICABLE STANDARD	30
TEST PROCEDURE	30
TEST DATA	30
FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER.....	33
APPLICABLE STANDARD	33

TEST PROCEDURE	33
TEST DATA	33
FCC §15.247(d) – BAND EDGE.....	36
APPLICABLE STANDARD	36
TEST PROCEDURE	36
TEST DATA	36
FCC §15.247(e) - POWER SPECTRAL DENSITY	38
APPLICABLE STANDARD	38
TEST PROCEDURE	38
TEST DATA	38

FINAL

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Applicant	Fulham Electronic Co., Ltd
Tested Model	T1R1UNV210P-60C
Series Model	T1R1UNV210P-60C-XXX ("XXX" could be any alphanumeric)
Model Difference	Model names and Trade name
Product Type	LED Driver
Dimension	151.4mm(L) × 90mm(W) × 32 mm(H)
Power Supply	AC120~277V

**All measurement and test data in this report was gathered from production sample serial number: 20180905001. (Assigned by the BACL. The EUT supplied by the applicant was received on 2018-09-05)*

Objective

This report is prepared on behalf of *Fulham Electronic Co., Ltd* in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

No related submittal/grant.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices and FCC KDB 558074 D01 15.247 Meas Guidance v05.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Kunshan). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement Uncertainty

Item		Uncertainty
AC Power Lines Conducted Emissions		3.19 dB
RF conducted test with spectrum		0.9dB
RF Output Power with Power meter		0.5dB
Radiated emission	30MHz~1GHz	6.11dB
	1GHz~6GHz	4.45dB
	6GHz~18GHz	5.23dB
	18GHz~40GHz	5.65dB
Occupied Bandwidth		0.5kHz
Temperature		1.0℃
Humidity		6%

Test Facility

The test site used by Bay Area Compliance Laboratories Corp. (Kunshan) to collect test data is located on the No.248 Chenghu Road, Kunshan, Jiangsu province, China.

Bay Area Compliance Laboratories Corp. (Kunshan) Lab is accredited to ISO/IEC 17025 by A2LA (Lab code: 4323.01) and the FCC designation No. CN1185 under the FCC KDB 974614 D01. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2014.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

Channel list for Zigbee mode:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
11	2405	19	2445
12	2410	...	...
...	...	...	...
...	...	...	...
...	...	25	2475
18	2440	26	2480

EUT was tested with Channel 11, 18 and 26.

Equipment Modifications


No modification was made to the EUT tested.

EUT Exercise Software

RF test tool: SecureCRT

The worst case was performed as below:

Channel	Power Level
Low	11
Middle	11
High	9

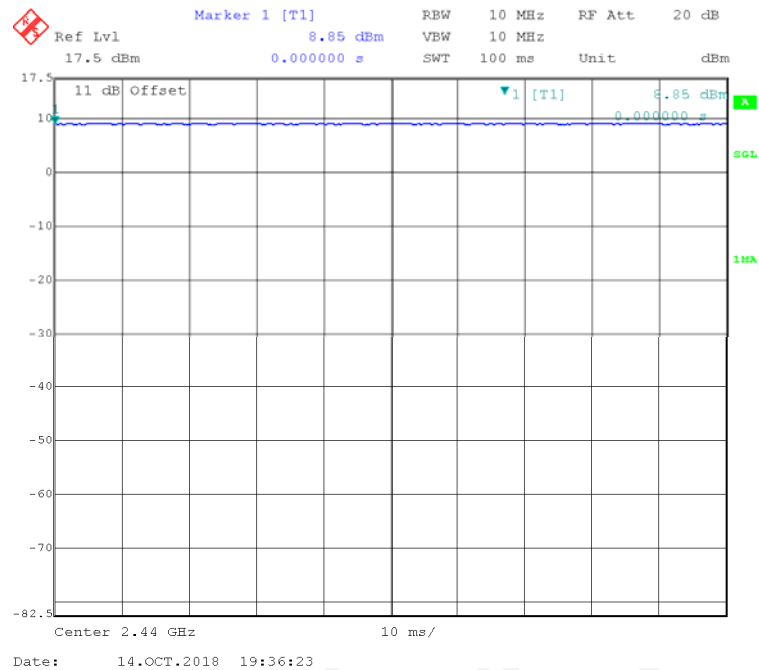Duty Cycle:**Middle Channel**

Duty Cycle	T(us)	1/T(kHz)	10log(1/x)
100%	/	/	0

Note: “x” means the Duty Cycle.

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
Fulham	Lamp	/	/

External I/O Cable


Cable Description	Length (m)	From Port	To
Power Cable	1.0	EUT	Lamp

Block Diagram of Test Setup


For Conducted Emissions:

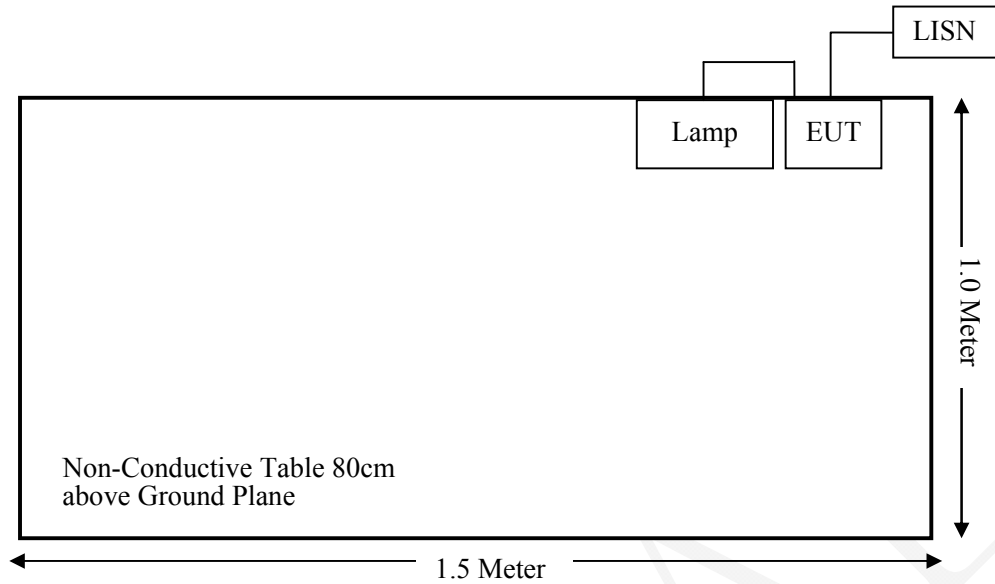

For Radiated Emissions (Below 1GHz):

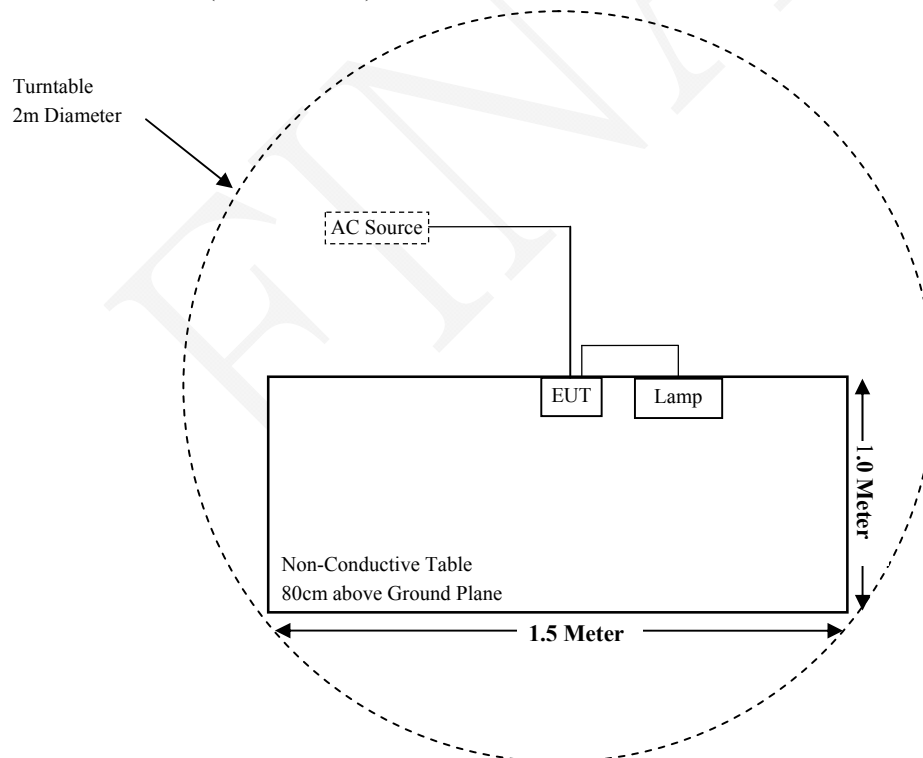

For Radiated Emissions(Above 1GHz):

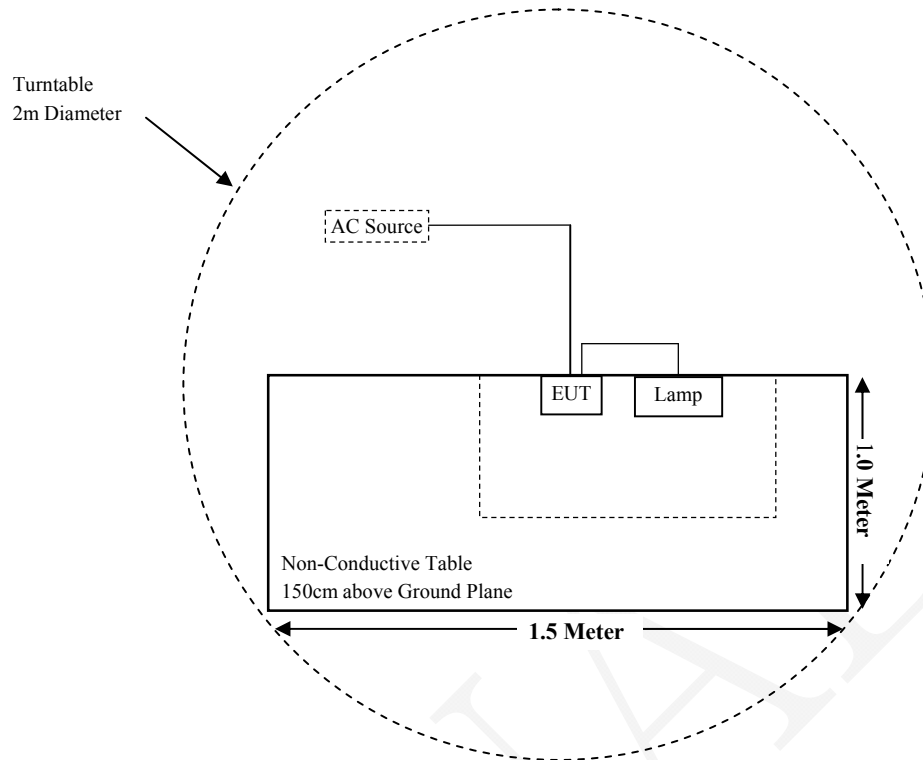

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§1.1310 & §2.1091	Maximum Permissible Exposure (MPE)	Compliance
§15.203	Antenna Requirement	Compliance
§15.207 (a)	AC Line Conducted Emissions	Compliance
§15.247(d)	Spurious Emissions at Antenna Port	Compliance
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliance
§15.247 (a)(2)	6 dB Emission Bandwidth	Compliance
§15.247(b)(3)	Maximum Conducted Output Power	Compliance
§15.247(d)	Band Edge	Compliance
§15.247(e)	Power Spectral Density	Compliance

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Radiated Emission Test (Chamber 1#)					
Rohde & Schwarz	EMI Test Receiver	ESCI	100195	2017-11-12	2018-11-11
Rohde & Schwarz	EMI Test Receiver	ESCI	100195	2018-11-12	2019-11-11
Sunol Sciences	Broadband Antenna	JB3	A090413-1	2016-12-26	2019-12-25
Sonoma Instrument	Pre-amplifier	310N	171205	2018-08-15	2019-08-14
Rohde & Schwarz	Auto test Software	EMC32	100361	/	/
MICRO-COAX	Coaxial Cable	Cable-8	008	2018-08-15	2019-08-14
MICRO-COAX	Coaxial Cable	Cable-9	009	2018-08-15	2019-08-14
MICRO-COAX	Coaxial Cable	Cable-10	010	2018-08-15	2019-08-14
Radiated Emission Test (Chamber 2#)					
Rohde & Schwarz	EMI Test Receiver	ESU40	100207	2018-08-27	2019-08-26
ETS-LINDGREN	Horn Antenna	3115	6229	2016-01-11	2019-01-10
ETS-LINDGREN	Horn Antenna	3116	00084159	2016-10-18	2019-10-17
A.H.Systems, inc	Amplifier	2641-1	466	2018-09-11	2019-09-10
EM Electronics	Amplifier	EM18G40G	060726	2018-03-22	2019-03-21
MICRO-TRONICS	Band Reject Filter	BRC50703	G094	2018-08-05	2019-08-04
Narda	Attenuator	10dB	010	2018-08-15	2019-08-14
Rohde & Schwarz	Auto test Software	EMC32	100361	/	/
MICRO-COAX	Coaxial Cable	Cable-11	011	2018-08-15	2019-08-14
MICRO-COAX	Coaxial Cable	Cable-12	012	2018-08-15	2019-08-14
MICRO-COAX	Coaxial Cable	Cable-13	013	2018-08-15	2019-08-14
MICRO-COAX	Coaxial Cable	Cable-16	016	2018-08-15	2019-08-14
RF Conducted Test					
Rohde & Schwarz	Signal Analyzer	FSIQ26	836131/009	2017-11-12	2018-11-11
Rohde & Schwarz	Signal Analyzer	FSIQ26	836131/009	2018-11-12	2019-11-11
Narda	Attenuator	10dB	010	2018-08-15	2019-08-14
Fulham	RF Cable	Fulham01	C01	Each Time	/
Conducted Emission Test					
Rohde & Schwarz	EMI Test Receiver	ESCS30	834115/007	2017-11-12	2018-11-11
Rohde & Schwarz	LISN	ENV216	3560655016	2017-11-15	2018-11-14
BACL	Auto test Software	BACL-EMC	CE001	/	/
Narda	Attenuator/6dB	10690812-2	26850-6	2018-01-10	2019-01-09

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC §1.1310& §2.1091 –MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Applicable Standard

According to subpart §2.1091 and subpart §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

Limits for Maximum Permissible Exposure (MPE) (§1.1310, §2.1091)

(B) Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm²)	Averaging Time (minutes)
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500	/	/	f/1500	30
1500-100,000	/	/	1.0	30

f = frequency in MHz; * = Plane-wave equivalent power density;

According to §1.1310 and §2.1091 RF exposure is calculated.

Calculated Formulary:

Predication of MPE limit at a given distance

$S = PG/4\pi R^2$ = power density (in appropriate units, e.g. mW/cm²);

P = power input to the antenna (in appropriate units, e.g., mW);

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain;

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm);

Calculated Data:

Mode	Frequency Range (MHz)	Antenna Gain		Tune-up Conducted Power		Evaluation Distance (cm)	Power Density (mW/cm²)	MPE Limit (mW/cm²)
		(dBi)	(numeric)	(dBm)	(mW)			
Zigbee	2405~2480	2.20	1.66	10.00	10.00	20	0.0033	1.0

Conclusion: The device meets FCC MPE at 20 cm distance.

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
 - b. Antenna must use a unique type of connector to attach to the EUT.
- Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Antenna Connector Construction

The EUT has a RP-SMA connector to attach an external antenna arrangement, which antenna gain is 2.2dBi, fulfill the requirement of this section. Please refer to the EUT photos.


Result: Compliance.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC §15.207(a)

EUT Setup

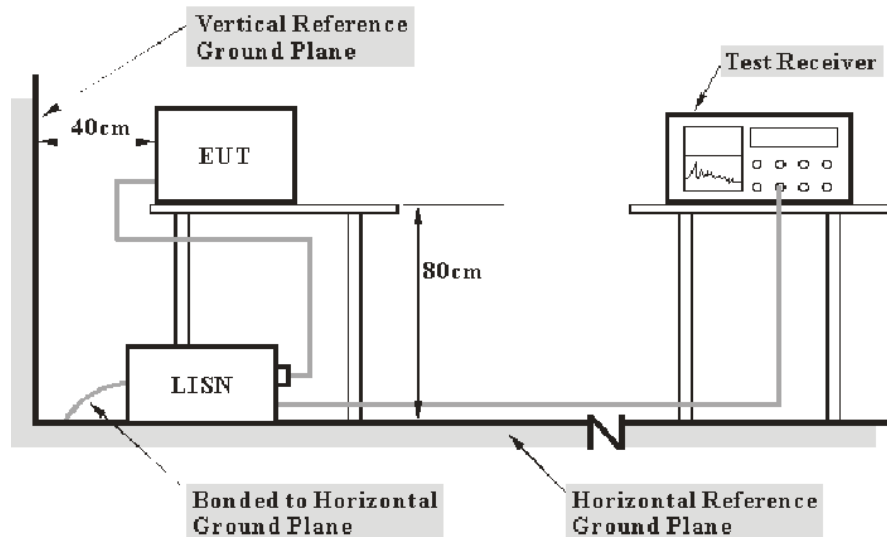

Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

Corrected Factor & Margin Calculation

The Corrected factor is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Corrected Factor (dB)} = \text{LISN VDF (dB)} + \text{Cable Loss (dB)} + \text{Transient Limiter Attenuation (dB)}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin (dB)} = \text{Limit (dB}\mu\text{V)} - \text{Corrected Amplitude (dB}\mu\text{V)}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207.

Test Data


Environmental Conditions

Temperature:	24.1 °C
Relative Humidity:	50 %
ATM Pressure:	101.2kPa

The testing was performed by Hope Zhang on 2018-10-29.


EUT operation mode: Transmitting in Middle channel (worst case)

AC 120V/60 Hz, Line

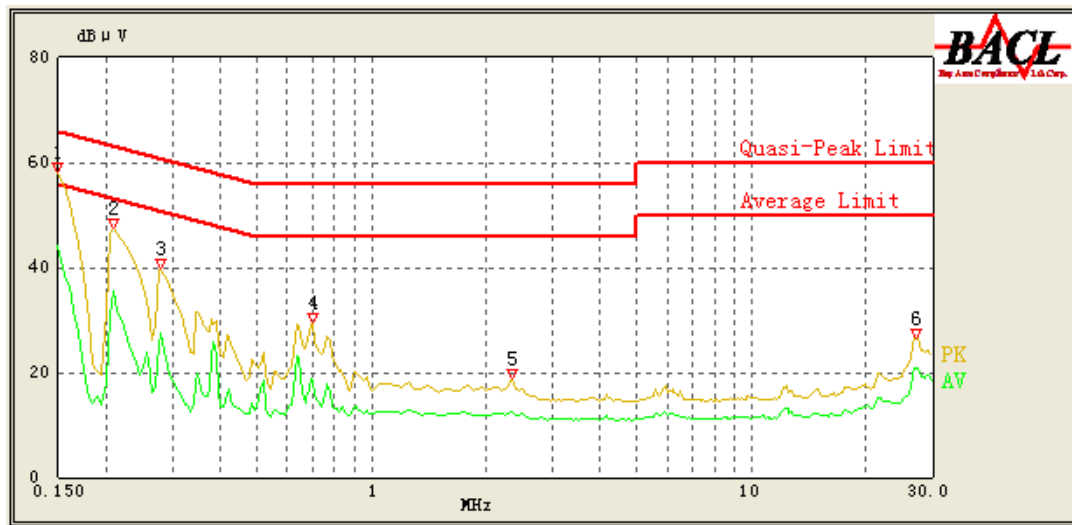

Frequency (MHz)	Corrected Amplitude (dBμV)	Detector (PK/AV/QP)	Bandwidth (kHz)	Line	Corrected Factor (dB)	Limit (dBμV)	Margin (dB)	Comment
0.150	58.02	QP	9.000	L1	16.06	66.00	7.98	Compliant
0.150	44.17	AV	9.000	L1	16.06	56.00	11.83	Compliant
0.210	47.56	QP	9.000	L1	16.01	63.21	15.65	Compliant
0.210	35.40	AV	9.000	L1	16.01	53.21	17.81	Compliant
0.280	39.82	QP	9.000	L1	16.03	60.82	21.00	Compliant
0.280	27.42	AV	9.000	L1	16.03	50.82	23.40	Compliant
0.700	29.66	QP	9.000	L1	15.95	56.00	26.34	Compliant
0.700	18.55	AV	9.000	L1	15.95	46.00	27.45	Compliant
2.350	18.78	QP	9.000	L1	15.85	56.00	37.22	Compliant
2.350	12.43	AV	9.000	L1	15.85	46.00	33.57	Compliant
27.000	26.48	QP	9.000	L1	16.51	60.00	33.52	Compliant
27.100	20.89	AV	9.000	L1	16.51	50.00	29.11	Compliant

AC 120V/60 Hz, Neutral

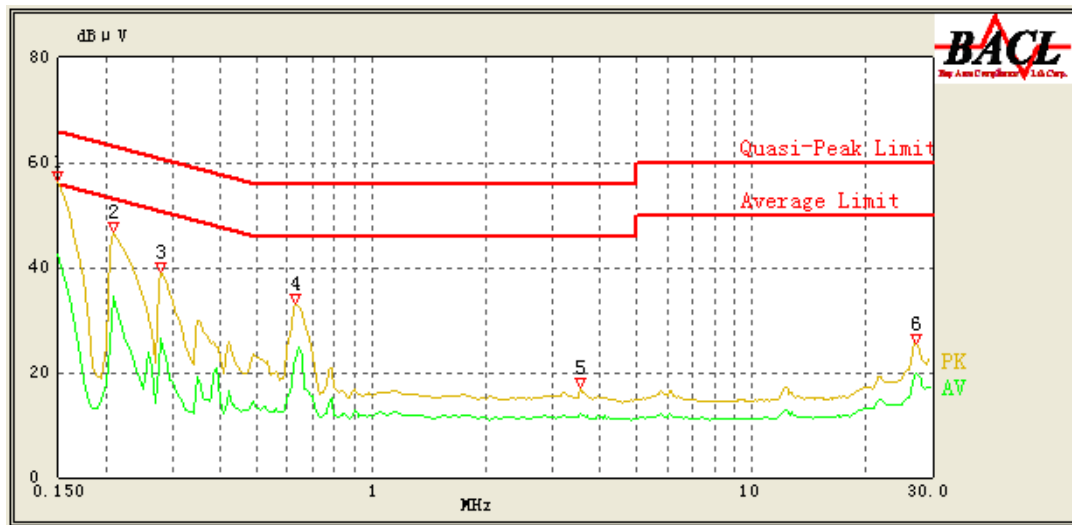


Frequency (MHz)	Corrected Amplitude (dB μ V)	Detector (PK/AV/QP)	Bandwidth (kHz)	Line	Corrected Factor (dB)	Limit (dB μ V)	Margin (dB)	Comment
0.150	56.63	QP	9.000	N	16.06	66.00	9.37	Compliant
0.150	42.53	AV	9.000	N	16.06	56.00	13.47	Compliant
0.210	46.81	QP	9.000	N	16.05	63.21	16.40	Compliant
0.210	34.40	AV	9.000	N	16.05	53.21	18.81	Compliant
0.280	39.20	QP	9.000	N	16.07	60.82	21.62	Compliant
0.280	26.58	AV	9.000	N	16.07	50.82	24.24	Compliant
0.630	33.08	QP	9.000	N	16.03	56.00	22.92	Compliant
0.630	22.11	AV	9.000	N	16.03	46.00	23.89	Compliant
3.550	17.07	QP	9.000	N	15.89	56.00	38.93	Compliant
3.550	12.13	AV	9.000	N	15.89	46.00	33.87	Compliant
27.050	25.57	QP	9.000	N	16.28	60.00	34.43	Compliant
27.050	19.76	AV	9.000	N	16.28	50.00	30.24	Compliant

Note:

1) Corrected Factor (dB) = LISN VDF (dB) + Cable Loss (dB) + Transient Limiter Attenuation (dB)


2) Margin (dB) = Limit (dB μ V) - Corrected Amplitude (dB μ V)

AC 277V/60 Hz, Line

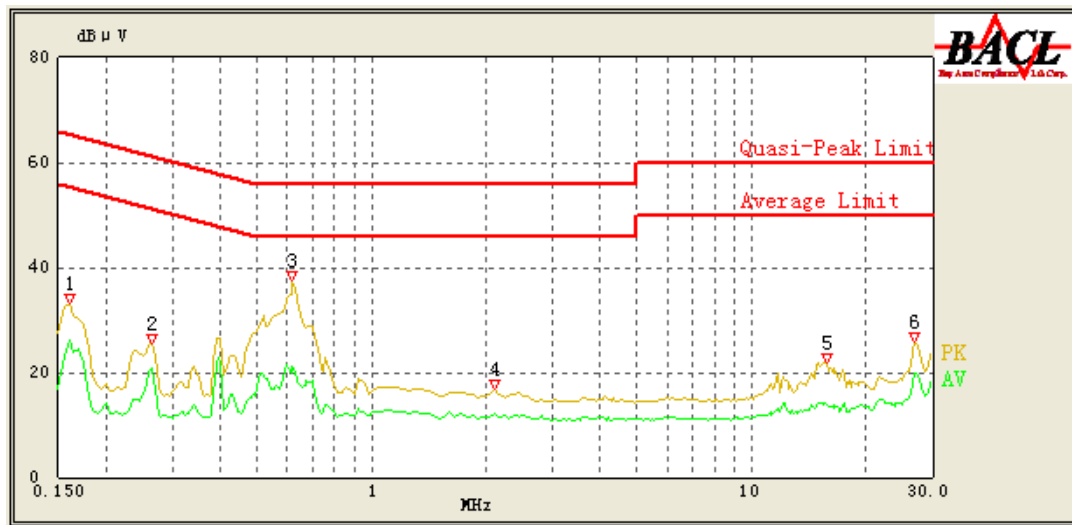

Frequency (MHz)	Corrected Amplitude (dBμV)	Detector (PK/AV/QP)	Bandwidth (kHz)	Line	Corrected Factor (dB)	Limit (dBμV)	Margin (dB)	Comment
0.160	33.12	QP	9.000	L1	16.05	65.46	32.34	Compliant
0.160	26.07	AV	9.000	L1	16.05	55.46	29.39	Compliant
0.265	25.54	QP	9.000	L1	16.03	61.27	35.73	Compliant
0.265	20.91	AV	9.000	L1	16.03	51.27	30.36	Compliant
0.620	37.41	QP	9.000	L1	16.00	56.00	18.59	Compliant
0.620	21.30	AV	9.000	L1	16.00	46.00	24.70	Compliant
2.100	16.94	QP	9.000	L1	15.85	56.00	39.06	Compliant
2.100	12.16	AV	9.000	L1	15.85	46.00	33.84	Compliant
15.800	21.90	QP	9.000	L1	16.25	60.00	38.10	Compliant
15.700	14.28	AV	9.000	L1	16.24	50.00	35.72	Compliant
26.850	25.73	QP	9.000	L1	16.51	60.00	34.27	Compliant
26.900	19.80	AV	9.000	L1	16.51	50.00	30.20	Compliant

AC 277V/60 Hz, Neutral

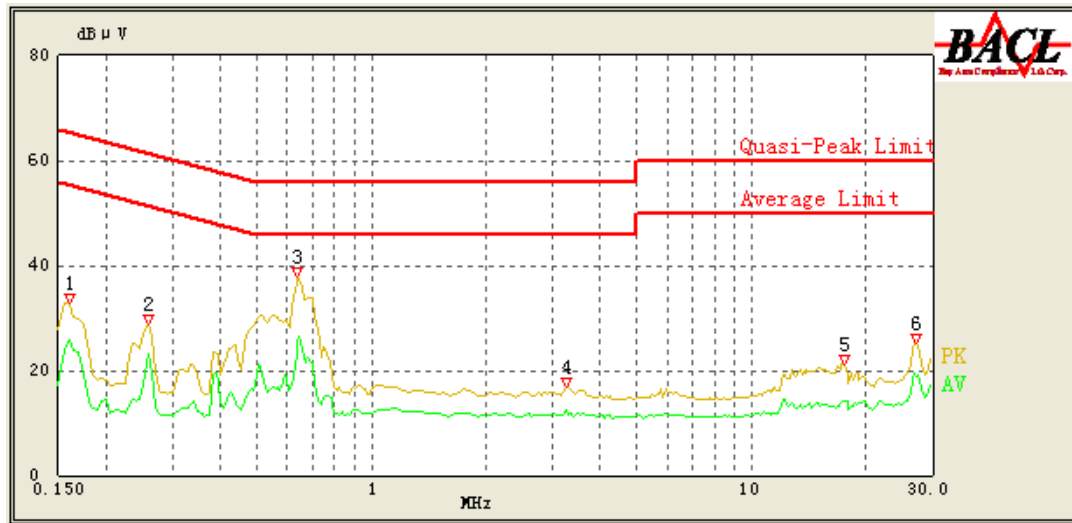

Frequency (MHz)	Corrected Amplitude (dBμV)	Detector (PK/AV/QP)	Bandwidth (kHz)	Line	Corrected Factor (dB)	Limit (dBμV)	Margin (dB)	Comment
0.160	32.83	QP	9.000	N	16.06	65.46	32.63	Compliant
0.160	25.96	AV	9.000	N	16.06	55.46	29.50	Compliant
0.260	28.87	QP	9.000	N	16.06	61.43	32.56	Compliant
0.260	23.10	AV	9.000	N	16.06	51.43	28.33	Compliant
0.640	37.76	QP	9.000	N	16.03	56.00	18.24	Compliant
0.640	25.41	AV	9.000	N	16.03	46.00	20.59	Compliant
3.250	16.76	QP	9.000	N	15.89	56.00	39.24	Compliant
3.250	12.41	AV	9.000	N	15.89	46.00	33.59	Compliant
17.500	21.26	QP	9.000	N	16.08	60.00	38.74	Compliant
17.500	14.12	AV	9.000	N	16.08	50.00	35.88	Compliant
27.100	25.23	QP	9.000	N	16.28	60.00	34.77	Compliant
27.050	18.82	AV	9.000	N	16.28	50.00	31.18	Compliant



Note:

1) Corrected Factor (dB) = LISN VDF (dB) + Cable Loss (dB) + Transient Limiter Attenuation (dB)

2) Margin (dB) = Limit (dBμV) - Corrected Amplitude (dBμV)

FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS**Applicable Standard**

FCC §15.247 (d); §15.209; §15.205;

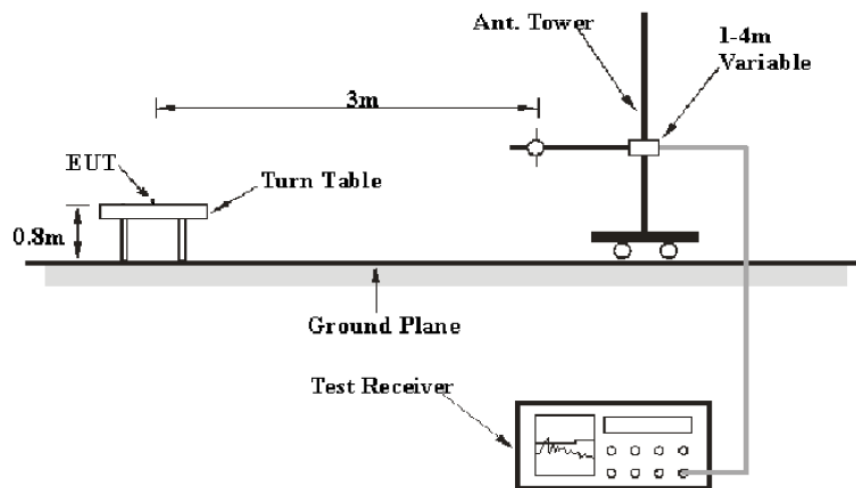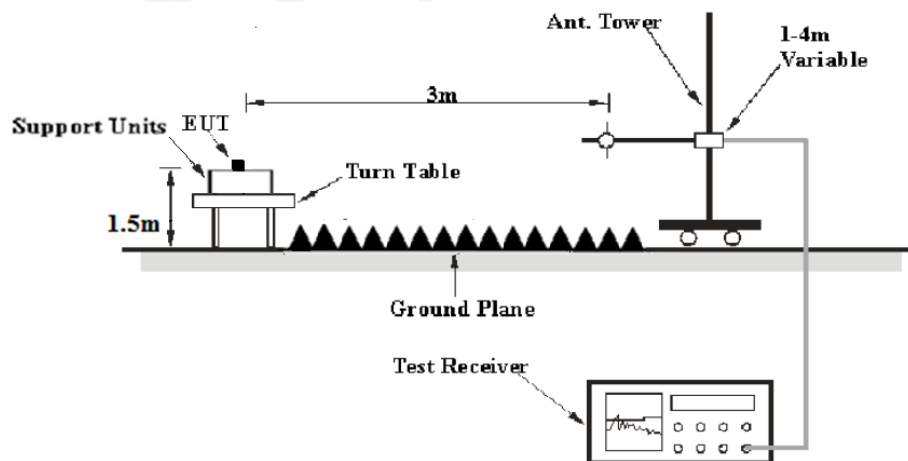EUT Setup**Below 1 GHz:****Above 1GHz:**

The radiated emission tests were performed in the 3 meters test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 limits.

EMI Test Receiver Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver setup was set with the following configurations:

Frequency Range	RBW	VBW	Detector	Duty Cycle	Measurement method
30 MHz - 1000 MHz	120 kHz	/	QP	/	QP
Above 1GHz	1MHz	3 MHz	PK	/	PK
	1MHz	3 MHz	RMS	≥98%	Ave
	1MHz	1/T	PK	<98%	Ave

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1 GHz, peak and Average detection mode for frequencies above 1 GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude (dB}\mu\text{V/m)} = \text{Meter Reading (dB}\mu\text{V)} + \text{Antenna Factor (dB/m)} + \text{Cable Loss (dB)} - \text{Amplifier Gain (dB)}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin (dB)} = \text{Limit (dB}\mu\text{V/m)} - \text{Corrected Amplitude (dB}\mu\text{V/m)}$$

Test Results Summary

According to the recorded data in following table, the EUT is compliant with the FCC Title 47, Part 15, Subpart C, section 15.205, 15.209 and 15.247.

Test Data**Environmental Conditions**


Temperature:	23.2-24.1 °C
Relative Humidity:	48-50 %
ATM Pressure:	101.0-101.2kPa

The testing was performed by Hope Zhang on 2018-10-14 to 2018-12-24.

EUT operation mode: Transmitting

Spurious Emission Test:**30MHz-1GHz**

(Pre-scan with low, middle and high channels of operation in the X,Y and Z axes of orientation, the worst case **middle channel of operation in X-axis of orientation** was recorded)

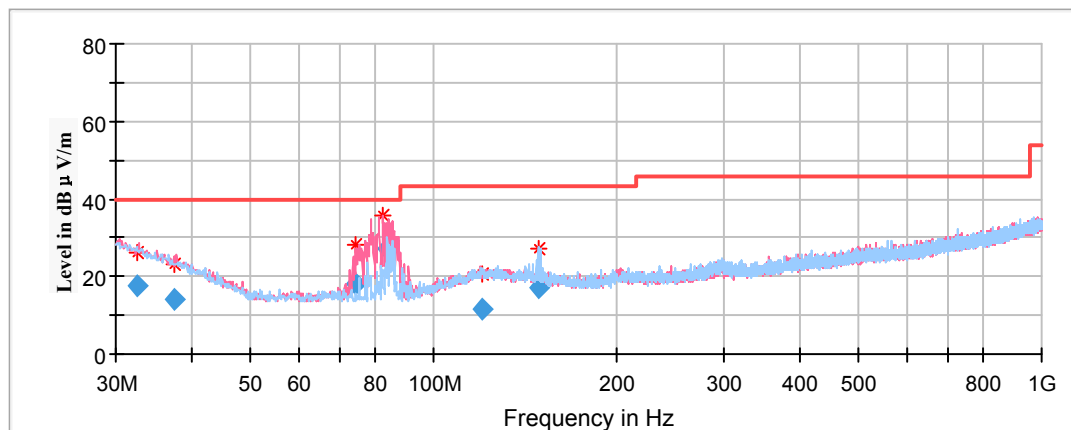

Frequency (MHz)	Corrected Amplitude	Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	QuasiPeak (dBμV/m)	Height (cm)	Polar (H/V)				
32.625200	17.51	199.0	V	212.0	-5.7	40.00	22.49
37.305800	14.20	199.0	V	321.0	-8.9	40.00	25.80
74.416350	18.24	199.0	V	150.0	-17.5	40.00	21.76
83.440050	27.12	101.0	V	358.0	-17.7	40.00	12.88
119.913950	11.53	199.0	V	316.0	-11.2	43.50	31.97
149.172200	17.25	101.0	H	263.0	-12.3	43.50	26.25

1GHz-18GHz


(Pre-scan in the X,Y and Z axes of orientation, the worst case **X-axis of orientation** was recorded.)

Note:

1. This test was performed with the 2.4 - 2.5GHz notch filter.
2. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) - Amplifier Factor (dB)
 Corrected Amplitude (dBμV/m) = Corrected Factor (dB/m) + Reading (dBμV)
 Margin (dB) = Limit (dBμV/m) - Corrected Amplitude (dBμV /m)

Low Channel: 2405MHz


Full Spectrum

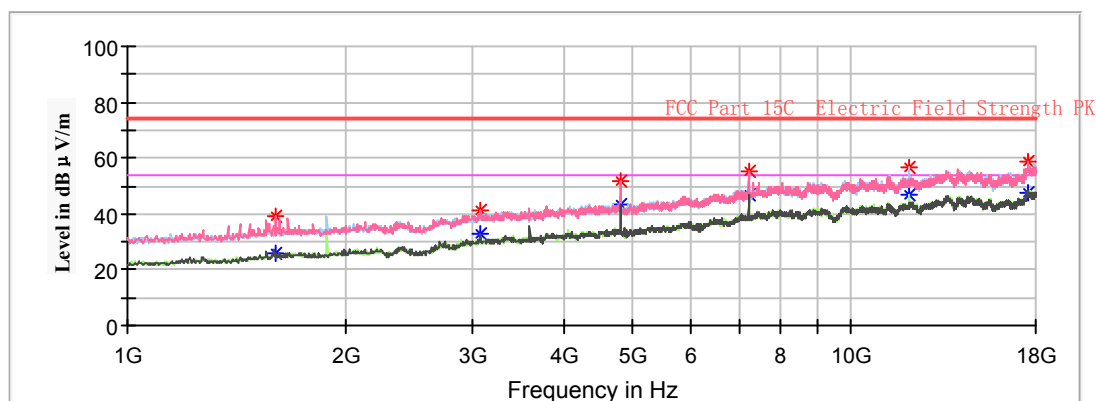

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV /m)	Average (dBμV /m)	Height (cm)	Polar (H/V)				
1601.800000	---	25.53	200.0	V	180.0	-7.2	54.00	28.47
1601.800000	39.23	---	200.0	V	180.0	-7.2	74.00	34.77
3070.600000	---	32.60	200.0	V	169.0	-1.5	54.00	21.40
3070.600000	41.45	---	200.0	V	169.0	-1.5	74.00	32.55
4810.000000	---	43.23	200.0	V	121.0	1.8	54.00	10.77
4810.000000	52.07	---	200.0	V	121.0	1.8	74.00	21.93
7215.000000	---	46.51	100.0	V	191.0	8.9	54.00	7.49
7215.000000	55.08	---	100.0	V	191.0	8.9	74.00	18.92
12022.800000	56.87	---	200.0	H	132.0	13.3	74.00	17.13
12022.800000	---	47.16	200.0	H	132.0	13.3	54.00	6.84
17530.800000	---	47.73	100.0	V	340.0	17.2	54.00	6.27
17530.800000	58.43	---	100.0	V	340.0	17.2	74.00	15.57

Middle Channel: 2440MHz


Full Spectrum

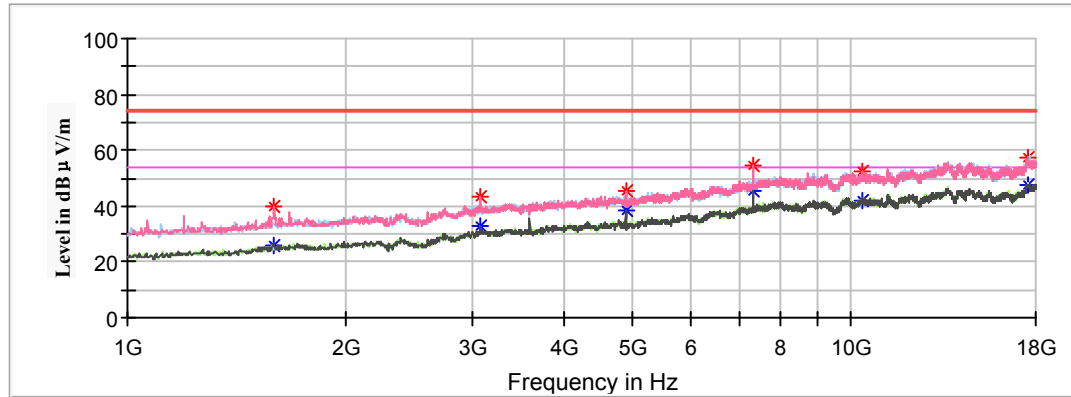

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBµV/m)	Margin (dB)
	MaxPeak (dBµV /m)	Average (dBµV /m)	Height (cm)	Polar (H/V)				
1595.000000	---	25.73	200.0	V	121.0	-7.2	54.00	28.27
1595.000000	39.76	---	200.0	V	121.0	-7.2	74.00	34.24
3070.600000	---	32.86	200.0	V	174.0	-1.5	54.00	21.14
3070.600000	43.06	---	200.0	V	174.0	-1.5	74.00	30.94
4880.000000	---	38.72	100.0	V	121.0	1.9	54.00	15.28
4880.000000	45.47	---	100.0	V	121.0	1.9	74.00	28.53
7320.000000	---	45.43	200.0	V	292.0	9.2	54.00	8.57
7320.000000	54.67	---	200.0	V	292.0	9.2	74.00	19.33
10370.400000	---	42.22	150.0	V	228.0	12.7	54.00	11.78
10370.400000	52.13	---	150.0	V	228.0	12.7	74.00	21.87
17544.400000	---	47.43	100.0	H	45.0	17.2	54.00	6.57
17544.400000	57.36	---	100.0	H	45.0	17.2	74.00	16.64

High Channel: 2480MHz

Full Spectrum

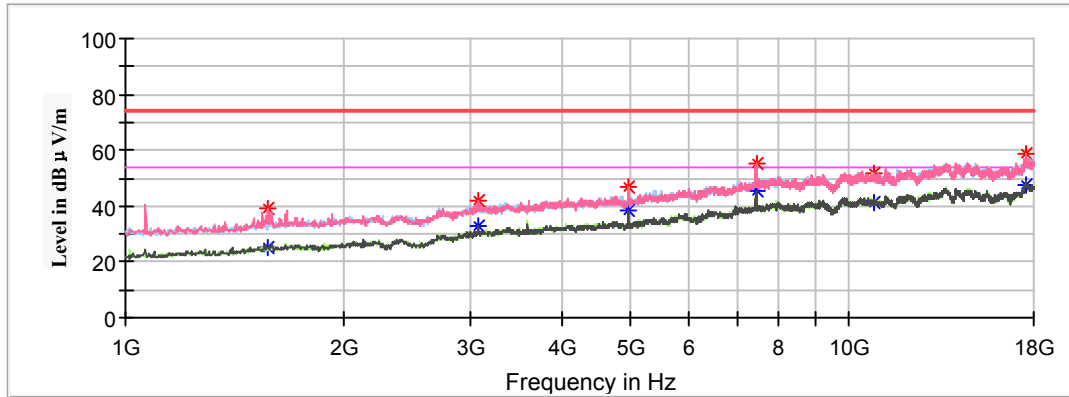


Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV /m)	Average (dBμV /m)	Height (cm)	Polar (H/V)				
1574.600000	---	24.89	200.0	V	158.0	-7.3	54.00	29.11
1574.600000	39.47	---	200.0	V	158.0	-7.3	74.00	34.53
3070.600000	---	32.87	200.0	V	190.0	-1.5	54.00	21.13
3070.600000	41.71	---	200.0	V	190.0	-1.5	74.00	32.29
4960.000000	---	38.49	100.0	V	324.0	2.0	54.00	15.51
4960.000000	46.97	---	100.0	V	324.0	2.0	74.00	27.03
7440.000000	---	45.80	150.0	V	196.0	9.6	54.00	8.20
7440.000000	55.31	---	150.0	V	196.0	9.6	74.00	18.69
10836.200000	---	41.31	100.0	V	276.0	13.2	54.00	12.69
10836.200000	51.58	---	100.0	V	276.0	13.2	74.00	22.42
17524.000000	---	47.36	200.0	V	105.0	17.2	54.00	6.64
17524.000000	58.44	---	200.0	V	105.0	17.2	74.00	15.56

18GHz-25GHz


(Pre-scan with low, middle and high channels of operation in the X,Y and Z axes of orientation, the worst case middle channel of operation in X-axis of orientation was recorded)

Horizontal

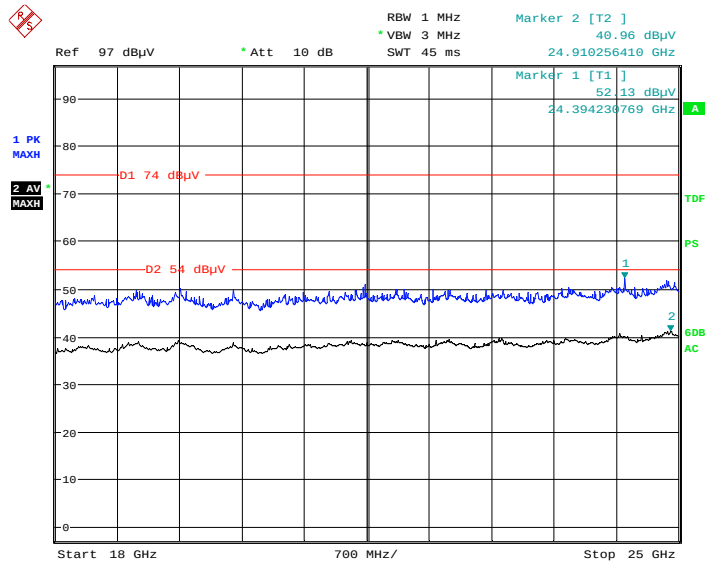

Date: 4.NOV.2018 18:38:44

Vertical

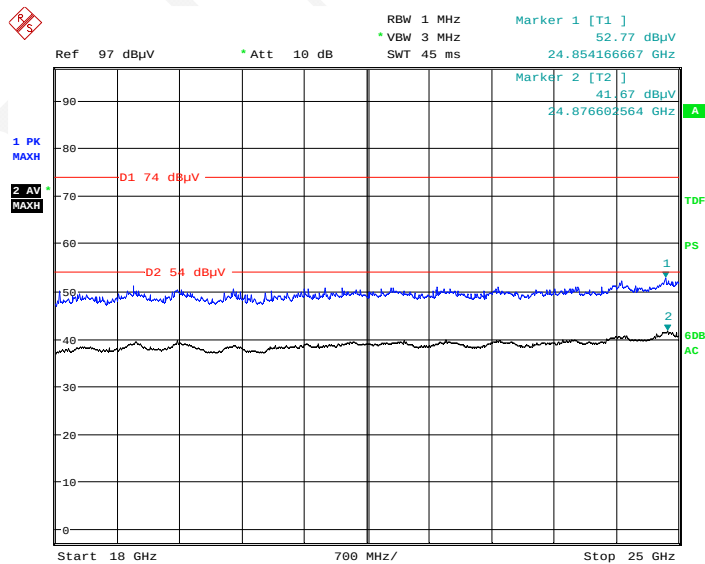

Date: 4.NOV.2018 19:14:20

Fundamental Test & Restricted Bands Emissions Test:(Pre-scan in the X, Y and Z axes of orientation, the worst case **X-axis of orientation** was recorded.)

Note:

1. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) - Amplifier Factor (dB)


Corrected Amplitude (dBμV/m) = Corrected Factor (dB/m) + Reading (dBμV)

Margin (dB) = Limit (dBμV/m) - Corrected Amplitude (dBμV /m)


Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV /m)	Average (dBμV /m)	Height (cm)	Polar (H/V)				
Low Channel: 2405MHz								
2405.000000	105.04	---	250.0	V	239.0	6.1	/	/
2405.000000	---	103.88	250.0	V	239.0	6.1	/	/
2405.000000	102.74	---	100.0	H	13.0	6.1	/	/
2405.000000	---	101.85	100.0	H	13.0	6.1	/	/
2390.000000	---	47.27	200.0	V	247.0	5.9	54.00	6.73
2390.000000	52.80	---	200.0	V	247.0	5.9	74.00	21.20
Middle Channel: 2440MHz								
2440.000000	106.05	---	200.0	V	193.0	3.0	/	/
2440.000000	---	104.93	200.0	V	193.0	3.0	/	/
2440.000000	103.61	---	250.0	H	345.0	3.0	/	/
2440.000000	---	102.74	250.0	H	345.0	3.0	/	/
High Channel: 2480MHz								
2480.000000	106.06	---	200.0	V	118.0	6.3	/	/
2480.000000	---	105.25	200.0	V	118.0	6.3	/	/
2480.000000	103.77	---	200.0	H	355.0	6.3	/	/
2480.000000	---	103.19	200.0	H	355.0	6.3	/	/
2483.500000	48.50	---	150.0	V	320.0	6.3	74.00	25.50
2483.500000	---	39.83	150.0	V	320.0	6.3	54.00	14.17

Conducted Spurious Emissions at Antenna Port


Low Channel

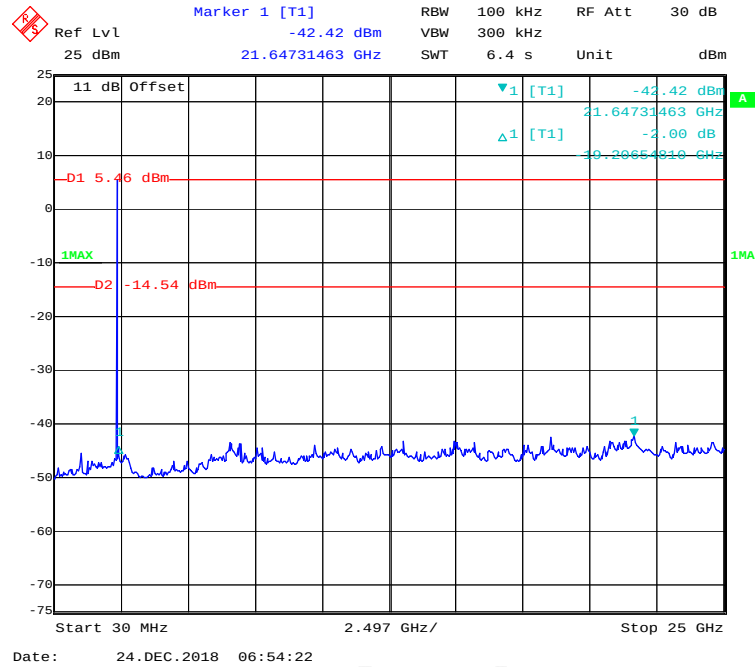

Middle Channel

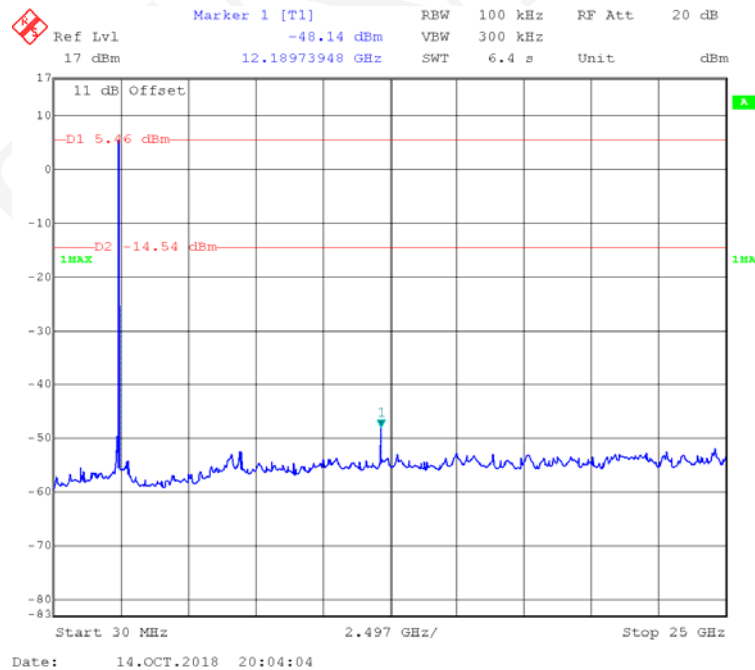

High Channel

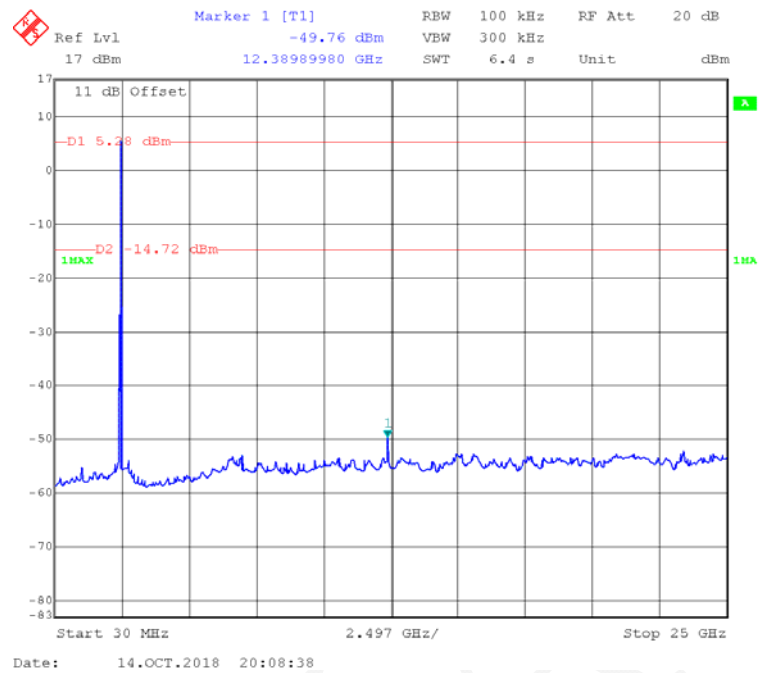

FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH


Applicable Standard

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

Test Procedure

According to ANSI C63.10-2013 sub-clause 11.8.1

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.



Test Data

Environmental Conditions

Temperature:	23.5-24 °C
Relative Humidity:	49-51 %
ATM Pressure:	101.0-101.3 kPa


The testing was performed by Hope Zhang on 2018-10-14 to 2018-12-17.

Test Result: Pass.


EUT operation mode: Transmitting

Channel	Frequency (MHz)	6 dB Emission Bandwidth (MHz)	Limit (MHz)
Low	2405	1.483	≥ 0.5
Middle	2440	1.573	≥ 0.5
High	2480	1.613	≥ 0.5


Low Channel

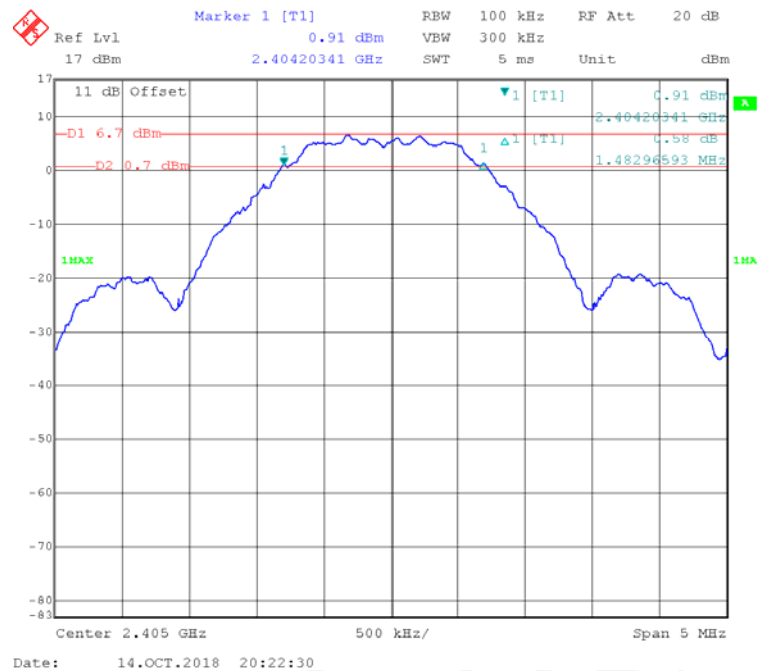

Middle Channel

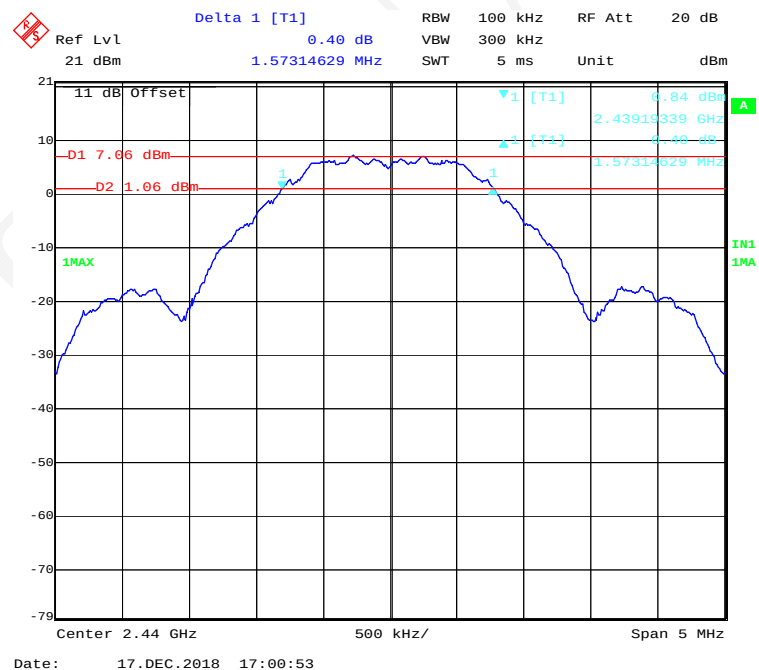

High Channel

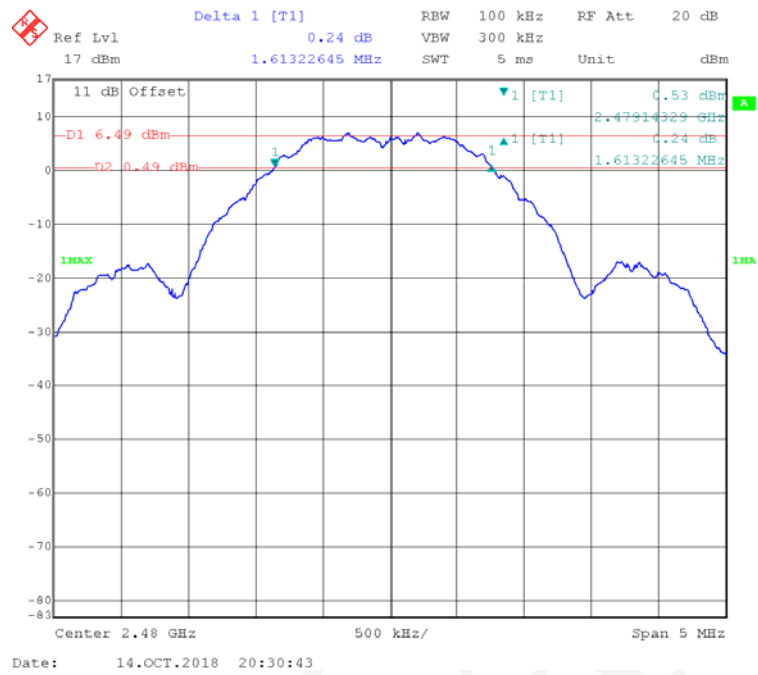

FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER

Applicable Standard

According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

Test Procedure

According to ANSI C63.10-2013 sub-clause 11.9.1.1

1. Set the RBW $\geq$ DTS bandwidth.
2. Set VBW $\geq 3 \times$ RBW.
3. Set span $\geq 3 \times$ RBW
4. Sweep time = auto couple.
5. Detector = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use peak marker function to determine the peak amplitude level.



Test Data

Environmental Conditions

Temperature:	23.8°C
Relative Humidity:	54 %
ATM Pressure:	101.2 kPa

The testing was performed by Hope Zhang on 2018-10-14.

EUT operation mode: Transmitting

Channel	Frequency (MHz)	Max Conducted Peak Output Power (dBm)	Limit (dBm)	Result
Low	2405	8.87	30	Pass
Middle	2440	9.74	30	Pass
High	2480	9.60	30	Pass

Marker 1 [T1]
 Ref Lvl 8.87 dBm
 21 dBm
 2.40432866 GHz

RBW 3 MHz
 VBW 10 MHz
 SWT 5 ms
 Unit dBm

11 dB Offset
 11 dB

1 [T1]
 8.87 dBm
 2.40432866 GHz

11dB
 11dB

Center 2.405 GHz
 1 MHz/
 Span 10 MHz

Date: 14.OCT.2018 19:23:47

Marker 1 [T1]

Ref Lvl 21 dBm

9.74 dBm

2.43930862 GHz

RBW 3 MHz

VBW 10 MHz

SWT 5 ms

RF Att 20 dB

Unit dBm

11 dB Offset

1 [T1]

9.74 dBm

2.43930862 GHz

1MAX

1MA


Center 2.4 GHz

1 MHz/

Span 10 MHz

Date: 14.OCT.2018 19:21:29

High Channel

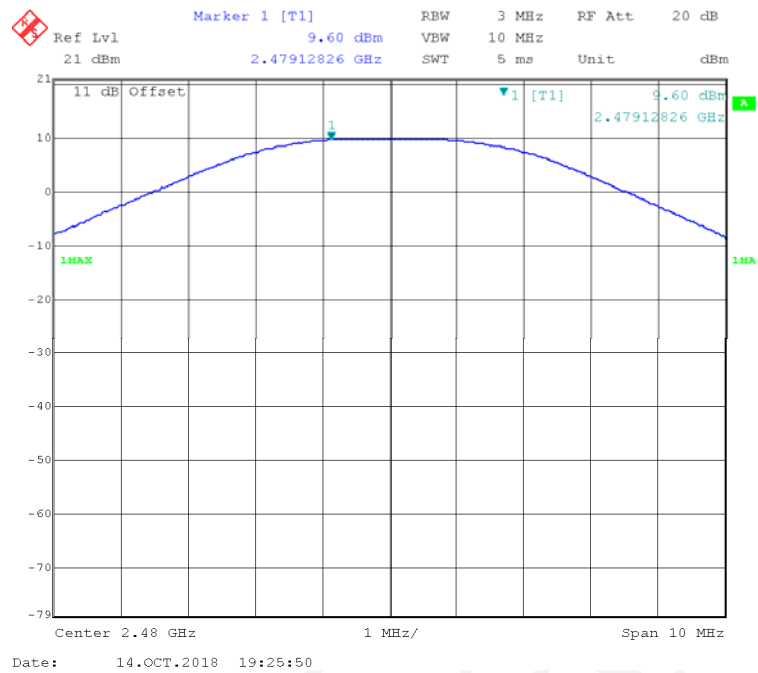

FCC §15.247(d) – BAND EDGE

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

According to ANSI C63.10-2013 sub-clause 6.10.

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Data

Environmental Conditions


Temperature:	24.3 °C
Relative Humidity:	50 %
ATM Pressure:	101.3 kPa

The testing was performed by Hope Zhang on 2018-10-14.


EUT operation mode: Transmitting

Test Result: *Compliance*

Left Side

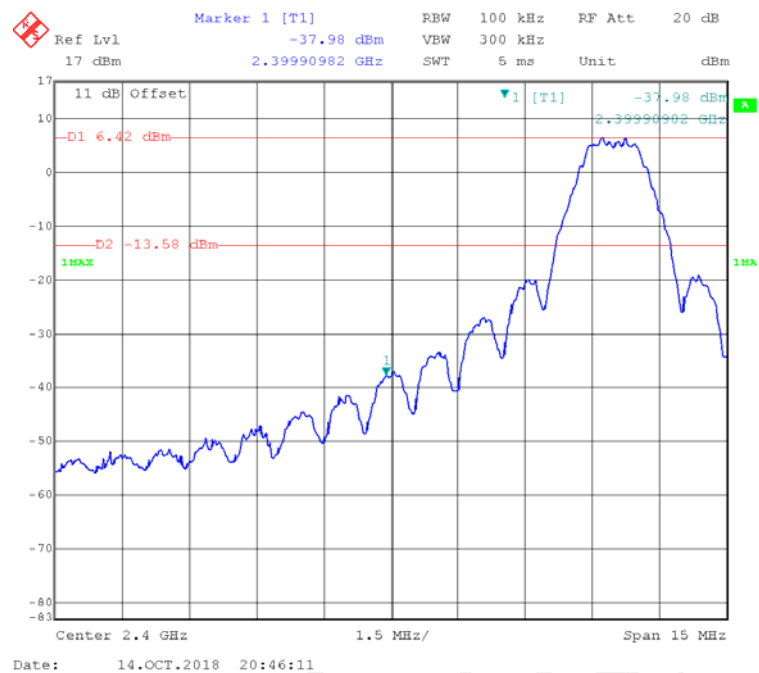

Right Side

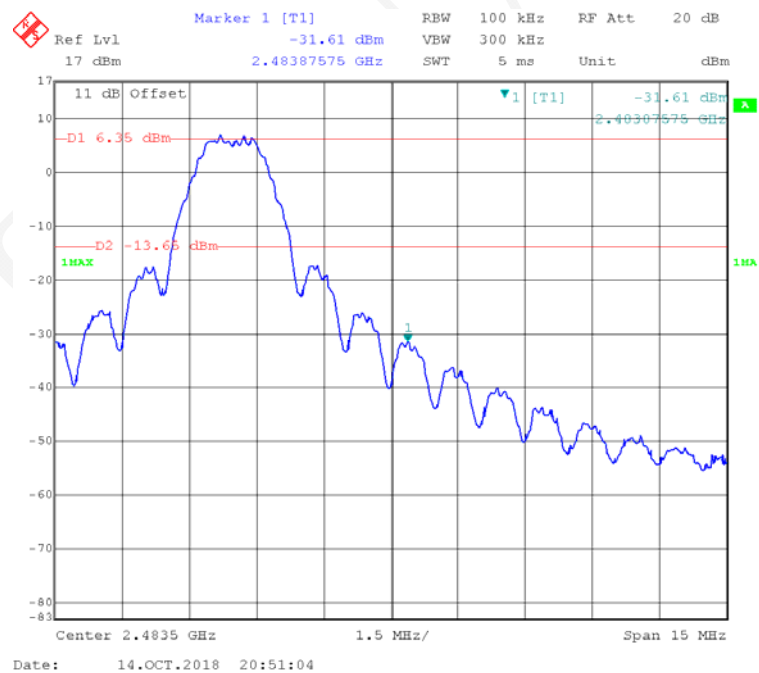

FCC §15.247(e) - POWER SPECTRAL DENSITY

Applicable Standard

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

Test Procedure

According to ANSI C63.10-2013 sub-clause 11.10.2

The following procedure shall be used if maximum peak conducted output power was used to determine compliance, and it is optional if the maximum conducted (average) output power was used to determine compliance:

1. Set the RBW to: $3\text{kHz} \leq \text{RBW} \leq 100\text{ kHz}$.
2. Set the VBW $\geq 3 \times \text{RBW}$.
3. Set the span to 1.5 times the DTS bandwidth.
4. Detector = peak.
5. Sweep time = auto couple.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the peak marker function to determine the maximum amplitude level within the RBW.
9. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

Test Data

Environmental Conditions

Temperature:	24.1 °C
Relative Humidity:	50%
ATM Pressure:	101.3 kPa


The testing was performed by Hope Zhang on 2018-10-14.

EUT operation mode: Transmitting


Test Result: Pass

Channel	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)
Low	2405	-3.20	≤ 8
Middle	2440	-2.57	≤ 8
High	2480	-2.87	≤ 8


Low Channel

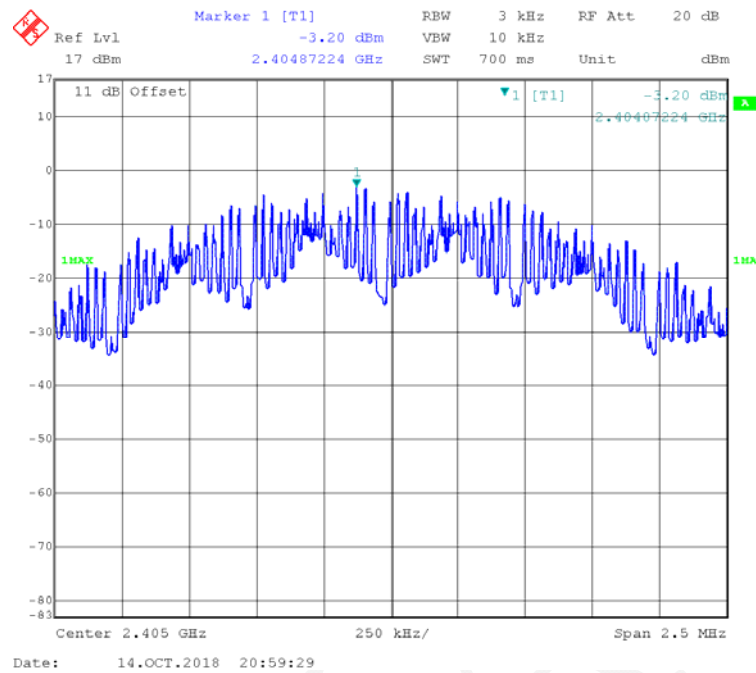

Middle Channel

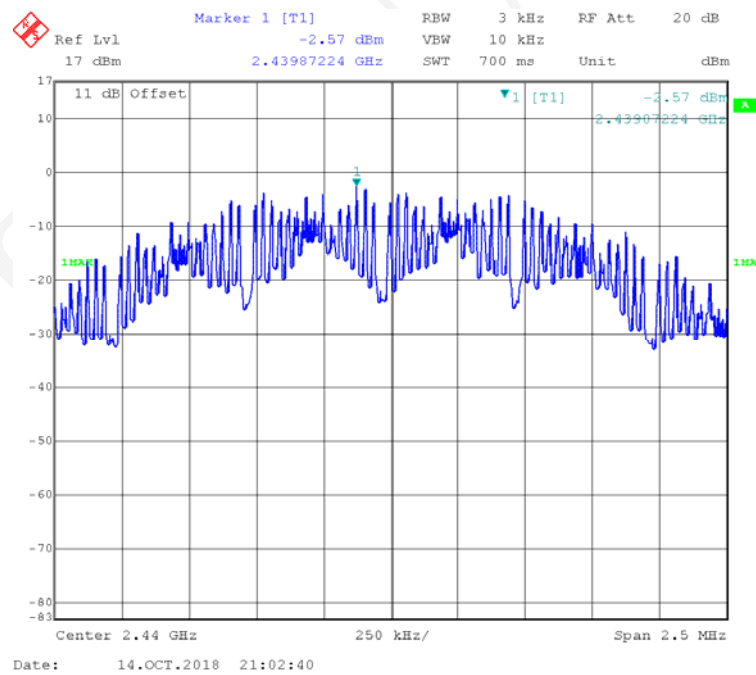

High Channel

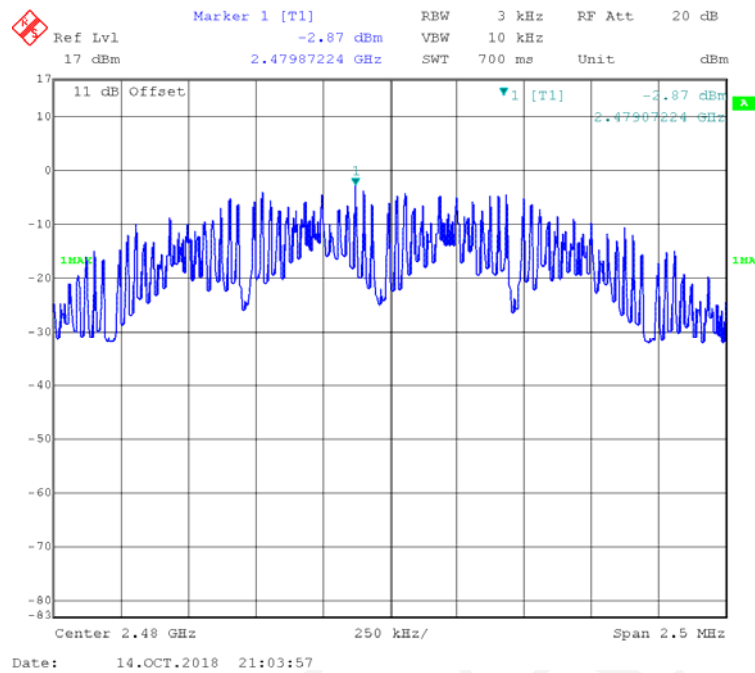

***** END OF REPORT *****