

# LIDL US LLC

# TEST REPORT

**SCOPE OF WORK**

EMC TESTING–AFT 77 B2 (CrS-345564\_2004)

**REPORT NUMBER**

200728140GZU-001

**ISSUE DATE**

14-August-2020

**[REVISED DATE]**

[-----]

**PAGES**

24

**DOCUMENT CONTROL NUMBER**

FCC part 15.231-d  
© 2017 INTERTEK



## TEST REPORT

Applicant Name & : LIDL US LLC  
Address : 3500 S.Clark street Arlington Virginia United States  
Manufacturing Site : Putian Yijia Electronic Co.,Ltd  
The West of Lihan Avenue Hanjiang District, 351100 Putian, Fujian,  
PEOPLE'S REPUBLIC OF CHINA  
Intertek Report No: 200728140GZU-001  
FCC ID: 2AJ9O-AFT77B2

## Test standards

**CFR 47, FCC PART 15 Subpart C: 2019 section 15.231**

## Sample Description

Product : Wireless weather station LCD  
Model No. : AFT 77 B2 (CrS-345564\_2004)  
Electrical Rating : 2 x 1.5VDC "AAA/LR03" size batteries  
Serial No. : Not Labeled  
Date Received : 28 July 2020  
Date Test : 29 July 2020-12 August 2020  
Conducted

Prepared and Checked By

Approved By:

Oscar Gao

Oscar Gao  
Project Engineer

Helen Ma

Helen Ma  
Team Leader

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

**TEST REPORT**

**CONTENT**

**TESTREPORT..... 1**

**CONTENT..... 3**

**1.0 TEST RESULT SUMMARY..... 4**

**2.0 GENERAL DESCRIPTION ..... 5**

    2.1 PRODUCT DESCRIPTION.....5

    2.2 RELATED SUBMITTAL(S) GRANTS .....5

    2.3 TEST METHODOLOGY .....5

    2.4 TEST FACILITY .....5

**3.0 SYSTEM TEST CONFIGURATION ..... 6**

    3.1 JUSTIFICATION .....6

    3.2 EUT EXERCISING SOFTWARE .....7

    3.3 SPECIAL ACCESSORIES .....7

    3.4 MEASUREMENT UNCERTAINTY .....7

    3.5 EQUIPMENT MODIFICATION .....8

    3.6 SUPPORT EQUIPMENT LIST AND DESCRIPTION.....8

**4.0 MEASUREMENT RESULTS ..... 9**

    4.1 ANTENNA REQUIREMENT .....9

    4.2 RADIATED EMISSIONS .....10

    4.3 OCCUPIED BANDWIDTH .....21

    4.4 DWELL TIME .....22

    4.5 CONDUCTED EMISSION TEST .....23

**5.0 TEST EQUIPMENT LIST..... 24**

**TEST REPORT****1.0 TEST RESULT SUMMARY**

Test Item	Test Requirement	Test Method	Result
Radiated Emission	FCC PART 15 section 15.231(e)	ANSI C 63.10: Clause 6.4, 6.5 and 6.6	PASS
Occupied Bandwidth	FCC PART 15 section 15.231(c)	ANSI C 63.10: Clause 6.9	PASS
Dwell Time	FCC PART 15 section 15.231(e)	FCC PART 15: Section 15.231(e)	PASS
<b>Remark:</b> N/A: not applicable. Refer to the relative section for the details. EUT: In this whole report EUT means Equipment Under Test. Tx: In this whole report Tx (or tx) means Transmitter. Rx: In this whole report Rx (or rx) means Receiver. RF: In this whole report RF means Radio Frequency. ANSI C63.10: the detail version is ANSI C63.10:2013 in the whole report			

## TEST REPORT

### 2.0 General Description

#### 2.1 Product Description

Operating Frequency	433.92 MHz
Type of Modulation:	ASK
Number of Channels	1 Channel
Channel Separation:	N/A
Antenna Type	Internal
Antenna gain:	0 dBi
Power Supply:	3V DC
Power cord:	N/A
Function:	Wireless weather data transmission with 433 MHz as carrier.

#### 2.2 Related Submittal(s) Grants

This is an application for certification of:  
DSC-Part 15 Security/Remote Control Transmitter.

#### 2.3 Test Methodology

Radiated emission measurements were performed according to the procedures in ANSI C63.10. Radiated emission measurement was performed in semi-anechoic chamber. For radiated emission measurement, preliminary scans and final tests were performed in the semi-anechoic chamber to determine the worst case modes. All radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise.

#### 2.4 Test Facility

All tests were performed at:  
Intertek Testing Services Shenzhen Ltd. Guangzhou Branch  
Room102/104, No 203, KeZhu Road, Science City, GETDD Guangzhou, China  
Except Conducted Emissions was performed at:  
Room 02, & 101/E201/E301/E401/E501/E601/E701/E801 of Room 01 1-8/F., No. 7-2. Caipin Road, Science City, GETDD, Guangzhou, Guangdong, China

## TEST REPORT

A2LA Certificate Number 0078.10

Intertek Testing Services Shenzhen Ltd. Guangzhou Branch is accredited by A2LA and Listed in FCC website. FCC accredited test labs may perform both Certification testing under Parts 15 and 18 and Declaration of Conformity testing.

### 3.0 System Test Configuration

#### 3.1 Justification

For emissions testing, the equipment under test (EUT) setup to transmit continuously to simplify the measurement methodology. Care was taken to ensure proper power supply voltages during testing. It was powered by 3V DC supply.

When below 30MHz, the measurement antenna was positioned with its plane perpendicular to the ground at the specified distance. When perpendicular to the ground plane, the lowest height of the magnetic antenna was 1 m above the ground and was positioned at 3m distance from the EUT. During testing the loop antenna was rotated about its vertical axis for maximum response at each azimuth and also investigated with the loop positioned in the horizontal plane. For each measurement antenna alignment, the EUT shall be rotated through 0° to 360° on a turntable.

When above 30MHz, the antenna height and polarization are varied during the search for maximum signal level. The antenna height is varied from 1 to 4 meters. Radiated emissions are taken at three meters unless the signal level is too low for measurement at that distance. If necessary, a pre-amplifier is used and/or the test is conducted at a closer distance.

All readings are extrapolated back to the equivalent three meter reading using inverse scaling with distance. The spurious emissions more than 20 dB below the permissible value are not reported.

For an intentional radiator, the spectrum shall be investigated from the lowest radio frequency signal generated in the device, without going below 9 kHz, up to at least the frequency shown in the following table:

Frequency range of radiated emission measurements

Lowest frequency generated in the device	Upper frequency range of measurement
9 kHz to below 10 GHz	10th harmonic of highest fundamental frequency or to 40 GHz, whichever is lower
At or above 10 GHz to below 30 GHz	5th harmonic of highest fundamental frequency or to 100 GHz, whichever is lower
At or above 30 GHz	5th harmonic of highest fundamental frequency or to 200 GHz, whichever is lower, unless otherwise specified

## TEST REPORT

Number of fundamental frequencies to be tested in EUT transmit band

Frequency range in which device operates	Number of frequencies	Location in frequency range of operation
1 MHz or less	1	Middle
1 MHz to 10 MHz	2	1 near top and 1 near bottom
More than 10 MHz	3	1 near top, 1 near middle and 1 near bottom

### 3.2 EUT Exercising Software

N/A

### 3.3 Special Accessories

No special accessories used.

### 3.4 Measurement Uncertainty

No.	Item	Measurement Uncertainty
1	20 dB Bandwidth	2.3%
	6dB Bandwidth	
	99% Bandwidth	
2	Carrier Frequencies Separated	2.3%
3	Dwell Time	1.2%
4	Maximum Peak Conducted Output Power	1.5dB
5	Peak Power Spectral Density	1.5dB
6	Out of Band Conducted Emissions	1.5dB
7	Band edges measurement	1.5dB
8	Radiated Emissions	4.7 dB (25 MHz-1 GHz)
		4.8 dB (1 GHz-18 GHz)
		5.21dB (18GZH-26GHz)
9	Conducted Emissions at Mains Terminals	2.58dB
10	Temperature	0.5 °C
11	Humidity	0.4 %
12	Time	1.2%

## TEST REPORT

The measurement uncertainty describes the overall uncertainty of the given measured value during the operation of the EUT.

Measurement uncertainty is calculated in accordance with ETSI TR 100 028-2001.

The measurement uncertainty is given with a confidence of 95%,  $k=2$ .

When determining of the test conclusion, the Measurement Uncertainty of test has been considered.

Uncertainty and Compliance – Unless the standard specifically states that measured values are to be extended by the measurement uncertainty in determining compliance, all compliance determinations are based on the actual measured value

### 3.5 Equipment Modification

Any modifications installed previous to testing by LIDL US LLC will be incorporated in each production model sold / leased in the United States.

No modifications were installed by Intertek Testing Services Shenzhen Ltd. Guangzhou Branch.

### 3.6 Support Equipment List and Description

The client made a continuous transmit sample for test, during normal use the product has duty cycle (Detailed information can refer to page 14-19).



## TEST REPORT

### 4.0 Measurement Results

#### 4.1 Antenna Requirement

Standard requirement:

15.203 requirement:

For intentional device. According to 15.203, an intentional radiator shall be designed to Ensure that no antenna other than that furnished by the responsible party shall be used with the device.

EUT Antenna

The antenna is an integral antenna and no consideration of replacement. The best case gain of the antenna is 0dBi.



**TEST REPORT**

**4.2 Radiated Emissions**

Test Requirement: FCC Part 15 C section 15.231(e)  
 Test Method: ANSI C63.10: Clause 6.4, 6.5 and 6.6  
 Measurement Distance: 3 m (Semi-Anechoic Chamber)  
 Test Status: Test the transmitter in continuous transmitting mode.  
 Test site: Measurement Distance: 3m (Semi-Anechoic Chamber)  
 Limit: The field strength of emissions from intentional radiators operated under this Section shall not exceed the following:

Fundamental Frequency MHz	Field Strength of Fundamental (dBμV/m @ 3 m)	Field Strength of Harmonics and Spurious Emissions (dBμV/m @ 3 m)
40.66 to 40.70	60.00	40.00
70 to 130	53.98	33.98
130 to 174	53.98 to 63.52**	33.98 to 43.52**
174 to 260	63.52	43.52
260 to 470	63.52 to 73.98**	43.52 to 53.98**
Above 470	73.98	53.98

\*\* linear interpolations

[Where F is the frequency in MHz, the formulas for calculating the maximum permitted fundamental field strengths are as follows: for the band 130-174 MHz, uV/m at 3 meters = 22.72727(F) – 2454.5454; for the band 260-470 MHz, uV/m at 3 meters = 16.6667(F) - 2833.3333. The maximum permitted unwanted emission level is 20 dB below the maximum permitted fundamental level.]

The fundamental frequency of the EUT is 433.92 MHz

The limit for average or QP field strength dBuV/m for the fundamental emission= 72.8 dBμV/m

No fundamental is allowed in the restricted bands.

The limit for average field strength dBuV/m for the spurious emission=52.8 dBuV/m. Spurious Emissions do not fall in the restricted bands must be less than 52.8 dBuV/m or limits shown in Section 15.209, whichever limit permits a higher field strength.

Spurious Emissions appear within the restricted bands shall not exceed the limits shown in Section 15.209.

## TEST REPORT

### Field Strength Calculation:

The field strength is calculated by adding the reading on the Spectrum Analyzer to the factors associated with preamplifiers (if any), antennas, cables, pulse desensitization and average factors (when specified limit is in average and measurements are made with peak detectors). A sample calculation is included below:

$$FS = RA + AF + CF - AG + PD + AV$$

$$FS = RA + \text{Correct Factor} + AV$$

FS = Field Strength in dB $\mu$ V/m

RA = Receiver Amplitude (including preamplifier) in dB $\mu$ V

AF = Antenna Factor in dB

CF = Cable Attenuation Factor in dB

AG = Amplifier Gain in dB

PD = Pulse Desensitization in dB

AV = Average Factor in -dB

$$\text{Correct Factor} = AF + CF - AG + PD$$

In the radiated emission table which follows, the reading shown on the data table may reflect the preamplifier gain.

An example of the calculations, where the reading does not reflect the preamplifier gain, follows:

$$FS = RA + AF + CF - AG + PD + AV$$

Assume a receiver reading of 62.0 dB $\mu$ V is obtained. The antenna factor of 7.4 dB and cable factor of 1.6 dB is added. The amplifier gain of 29 dB is subtracted. The pulse desensitization factor of the spectrum analyzer was 0 dB, and the resultant average factor was -10 dB. The net field strength for comparison to the appropriate emission limit is 32 dB $\mu$ V/m.

$$RA = 62.0 \text{ dB}\mu\text{V}$$

$$AF = 7.4 \text{ dB}$$

$$CF = 1.6 \text{ dB}$$

$$AG = 29.0 \text{ dB}$$

$$PD = 0 \text{ dB}$$

$$AV = -10 \text{ dB}$$


$$\text{Correct Factor} = 7.4 + 1.6 - 29.0 + 0 = -20 \text{ dB}$$

$$FS = 62 + (-20) + (-10) = 32 \text{ dB}\mu\text{V/m}$$


**TEST REPORT**

Test Configuration:

- 1) 9 kHz to 30 MHz emissions:

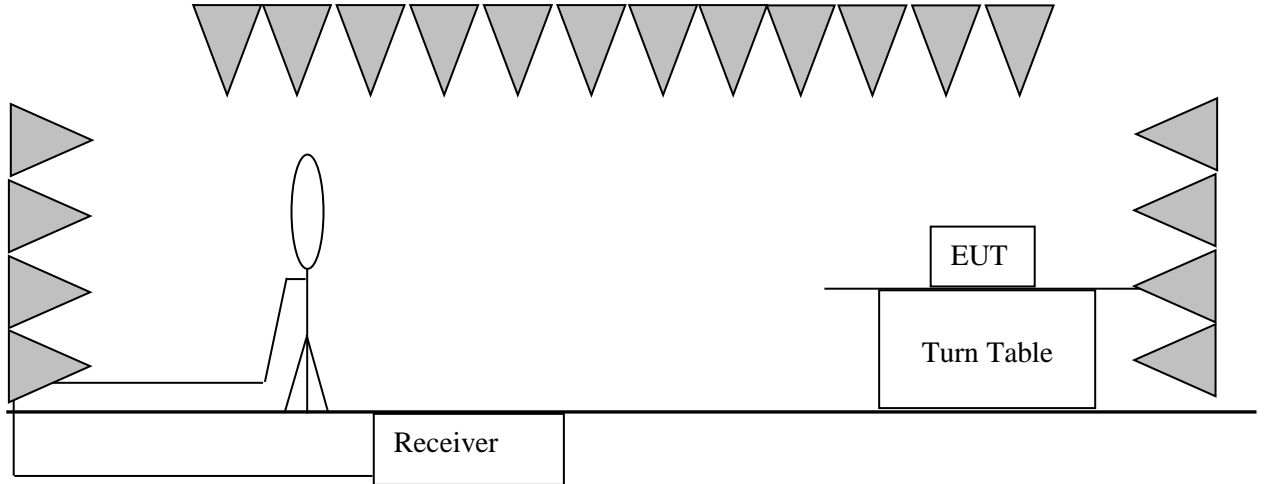


- 2) 30 MHz to 1 GHz emissions:

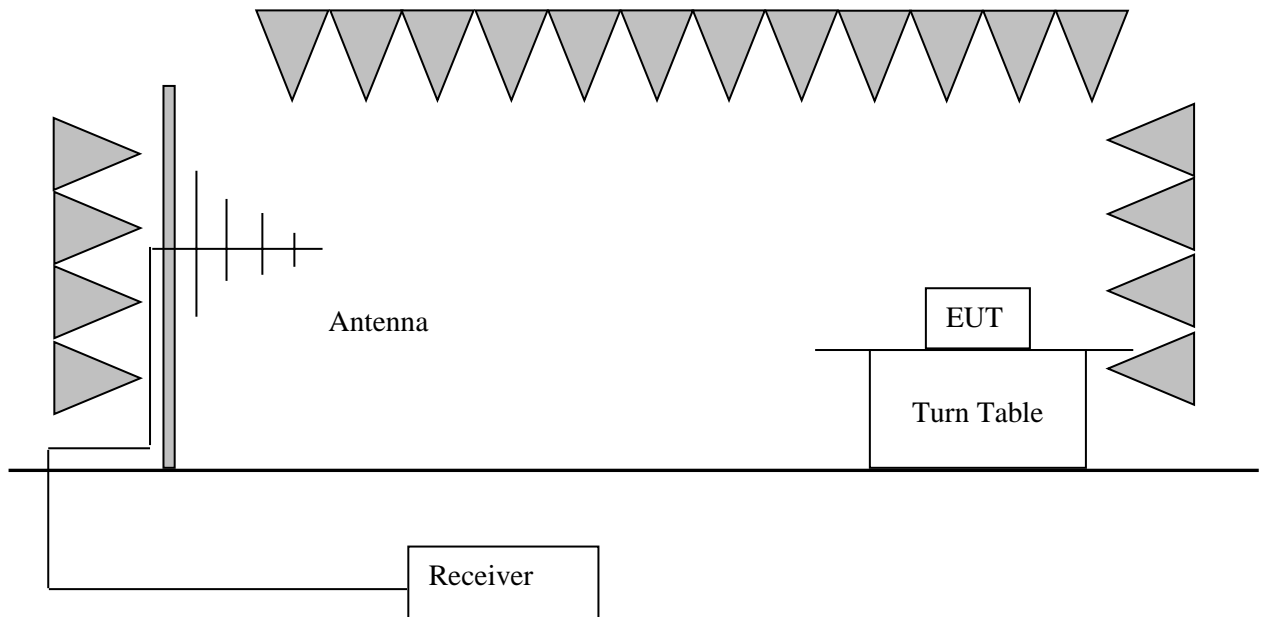

## TEST REPORT

### 3) 1 GHz to 40 GHz emissions:

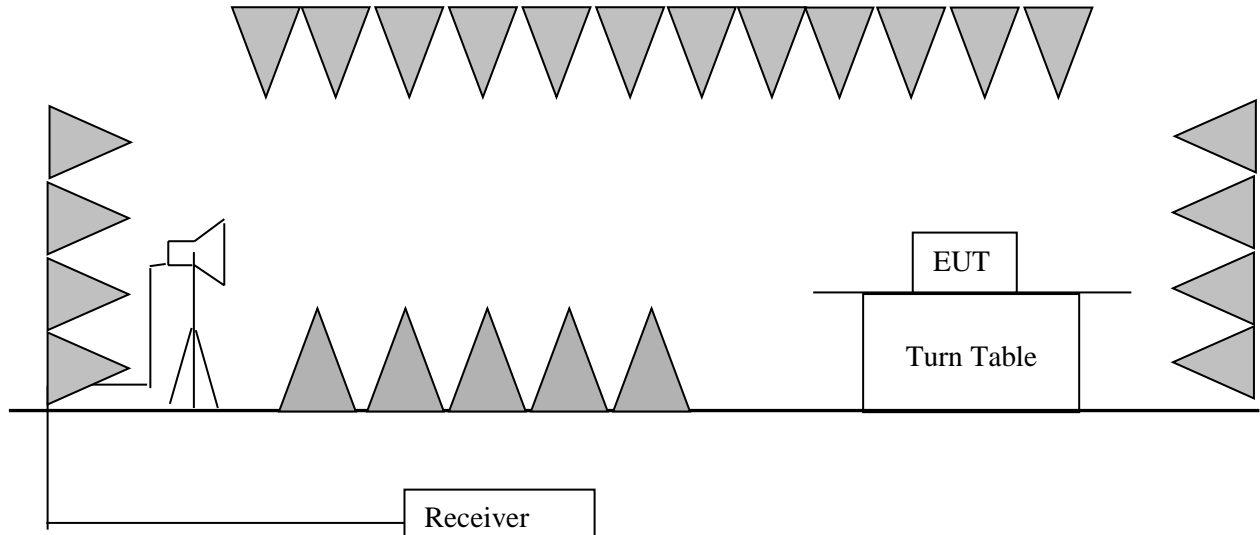

#### Test Procedure:

##### 1) 9 kHz to 30 MHz emissions:

For testing performed with the loop antenna. The centre of the loop was positioned 1 m above the ground and positioned with its plane vertical at the special distance from the EUT. During testing the loop was rotated about its vertical axis for maximum response at each azimuth and also investigated with the loop positioned in the horizontal plane.

##### 2) 30 MHz to 1 GHz emissions:

For testing performed with the bi-log type antenna. The measurement is performed with the EUT rotated 360°, the antenna height scanned between 1m and 4m, and the antenna rotated to repeat the measurement for both the horizontal and vertical antenna polarizations.

##### 3) 1 GHz to 40 GHz emissions:

Test site with RF absorbing material covering the ground plane that met the site validation criterion called out in CISPR 16-1-4:2010 was used to perform radiated emission test above 1 GHz.

For testing performed with the horn antenna. The measurement is performed with the EUT rotated 360°, the antenna height scanned between 1m and 4m, and the antenna rotated to repeat the measurement for both the horizontal and vertical antenna polarizations.

#### Detector:

For Peak and Quasi-Peak value:

RBW = 1 MHz for  $f \geq 1$  GHz,  
200 Hz for 9 kHz to 150 kHz  
9 kHz for 150 kHz to 30 MHz  
120 kHz for 30 MHz to 1GHz  
VBW  $\geq$  RBW

**TEST REPORT**

Sweep = auto  
 Detector function = peak for  $f \geq 1$  GHz, QP for  $f < 1$  GHz  
 Trace = max hold  
 For AV value:  
 Average = Peak value +  $20\log(\text{Duty cycle})$

The average correction factor is computed by analyzing the on time in 100ms over one complete pulse train. Analysis of the remote transmitter on time in one complete pulse train, therefore the average value of fundamental frequency is: Average = Peak value +  $20\log(\text{Duty cycle})$ , where the duty factor is calculated from following formula:

The duration of one cycle = 102.61ms > 100ms


Effective period of the cycle

$$=(12.17+3.043 \times 2+2.174 \times 3+0.87 \times 6+0.435 \times 11+2.609 \times 4+1.739+1.304 \times 3+5.217) \text{ ms}=56.08 \text{ ms}$$



$$\text{DC} = 56.08/100 = 0.5608 \text{ or } 56.08\%$$

Therefore, the averaging factor is found by  $20\log 0.5608 = -5.02$



Please refer to below plots for more details.

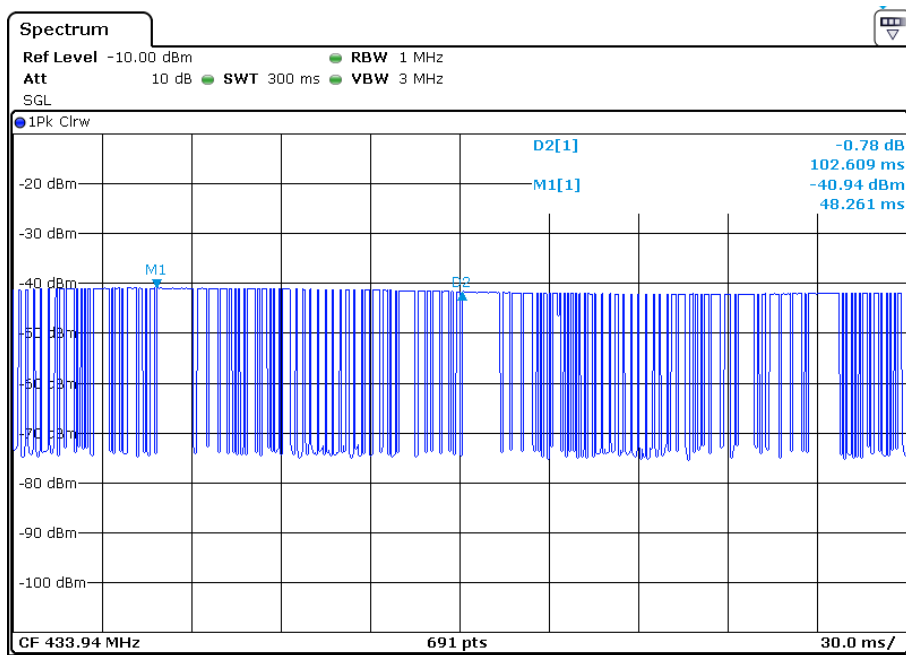

**TEST REPORT**

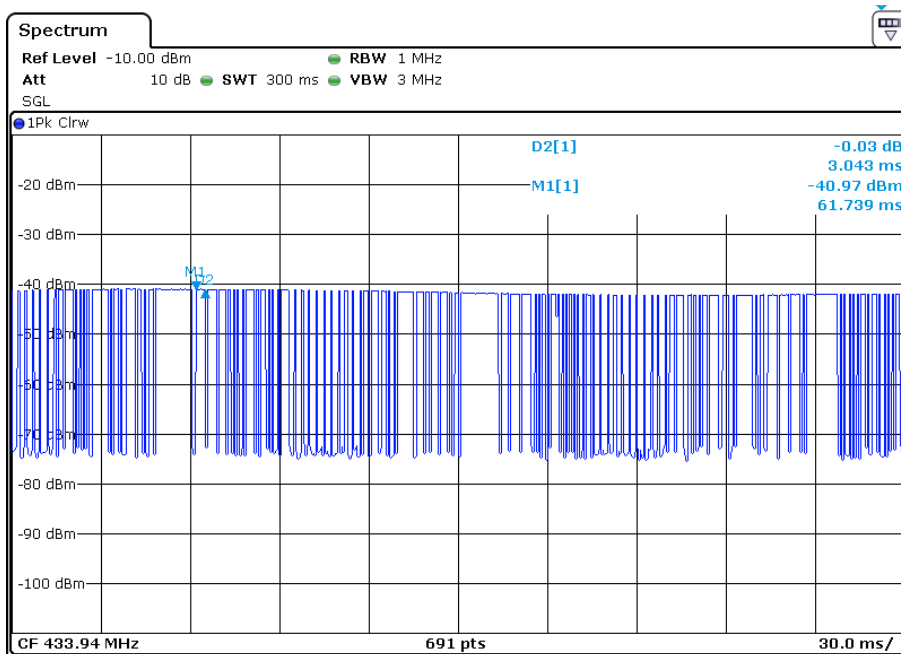
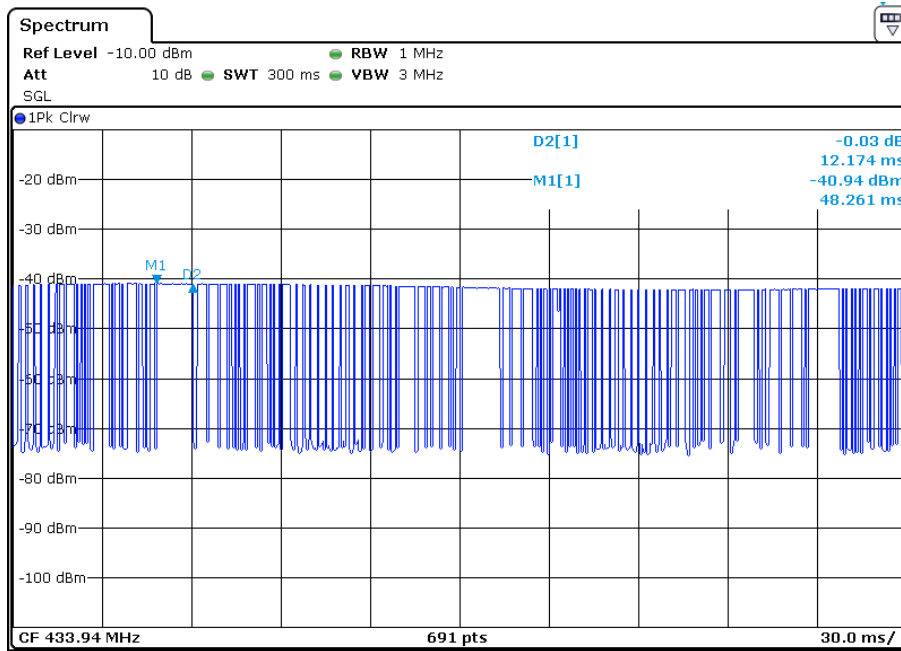


**TEST REPORT**

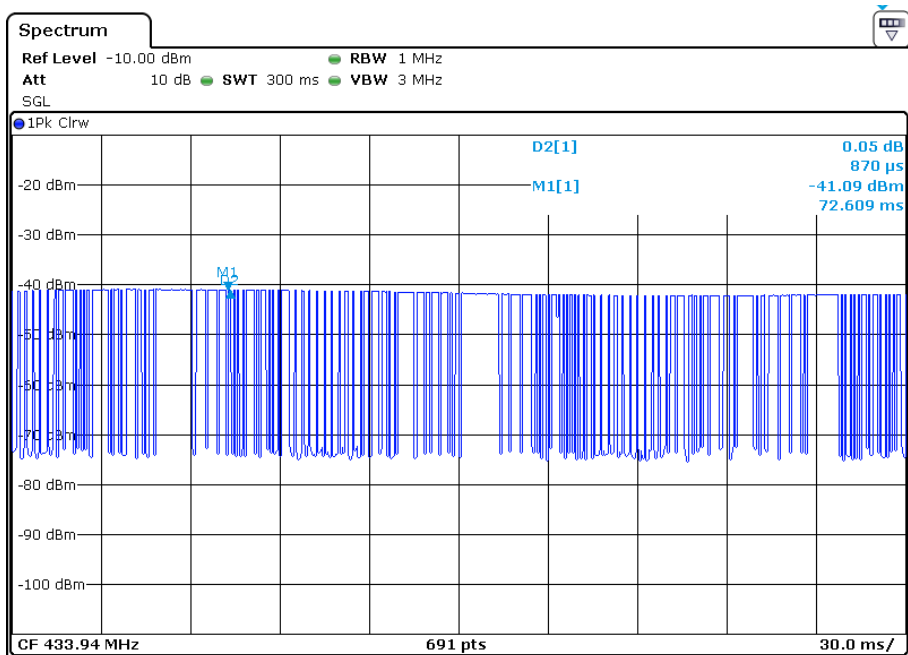
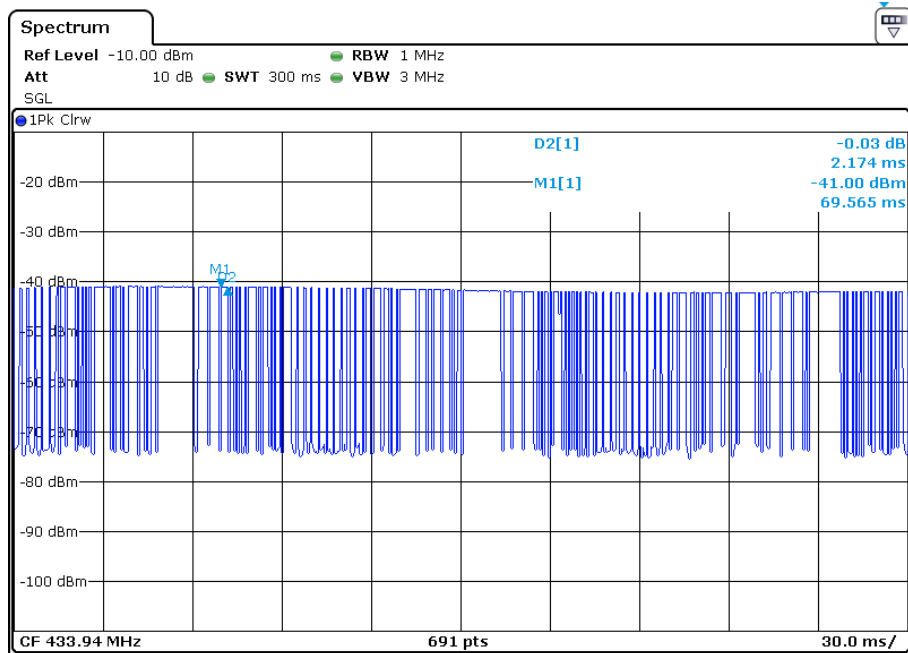





**TEST REPORT**

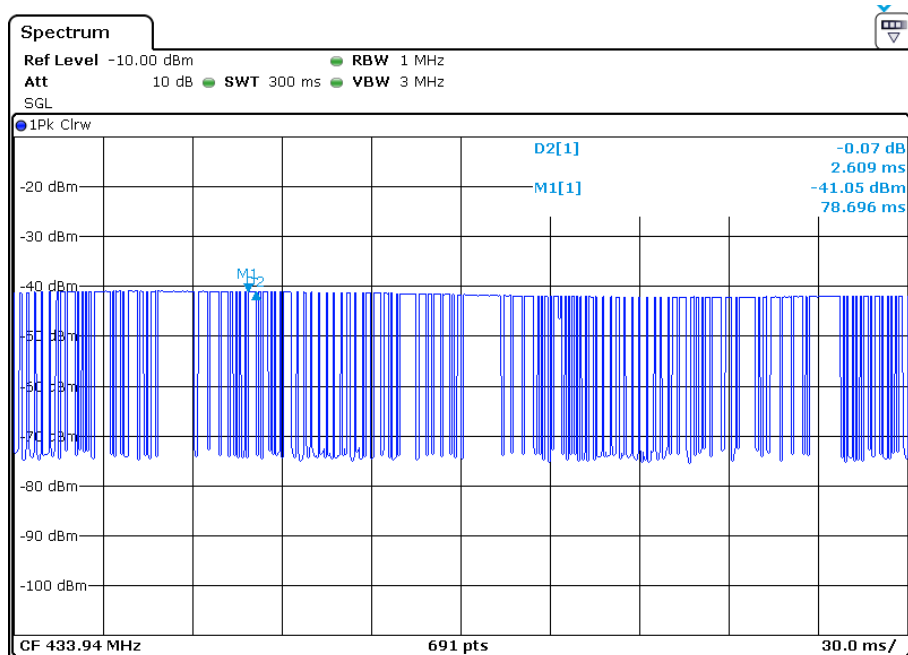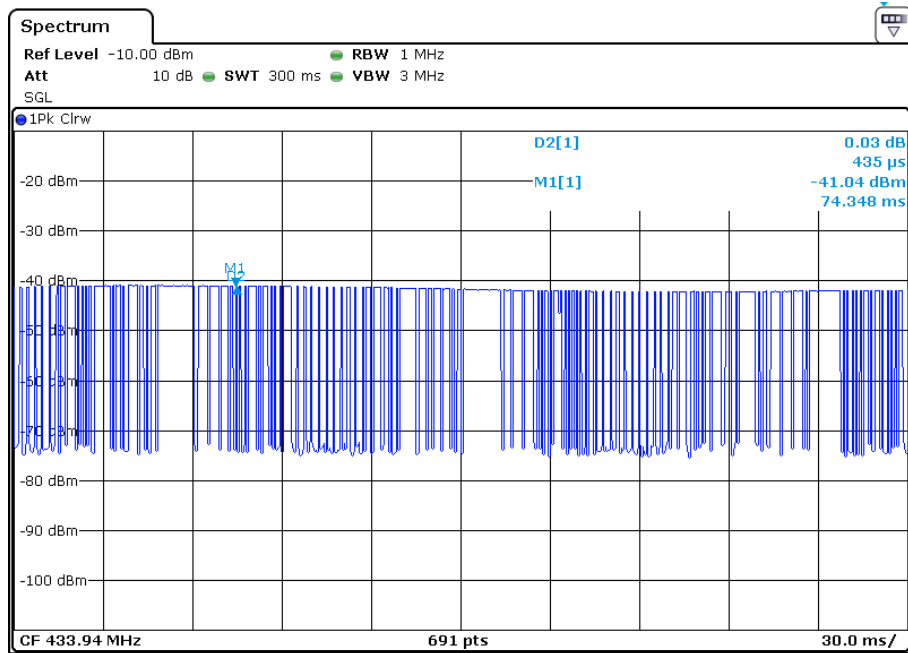

**TEST REPORT**

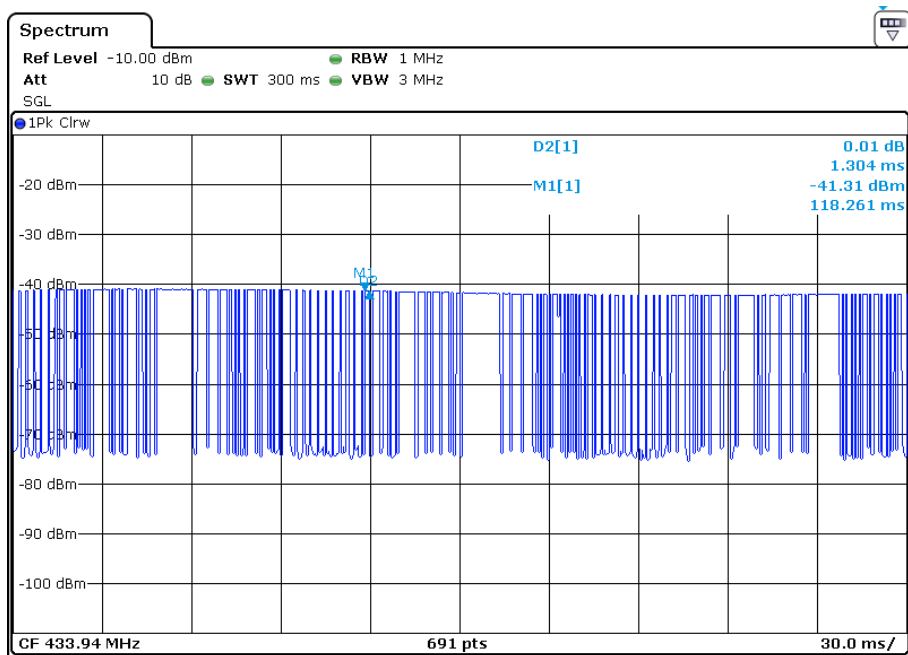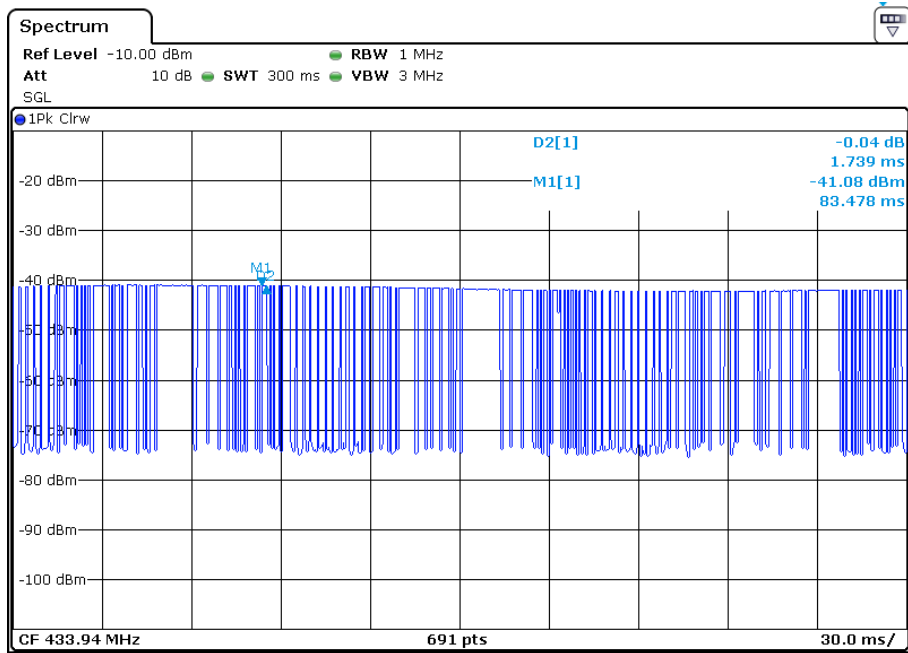

**TEST REPORT**

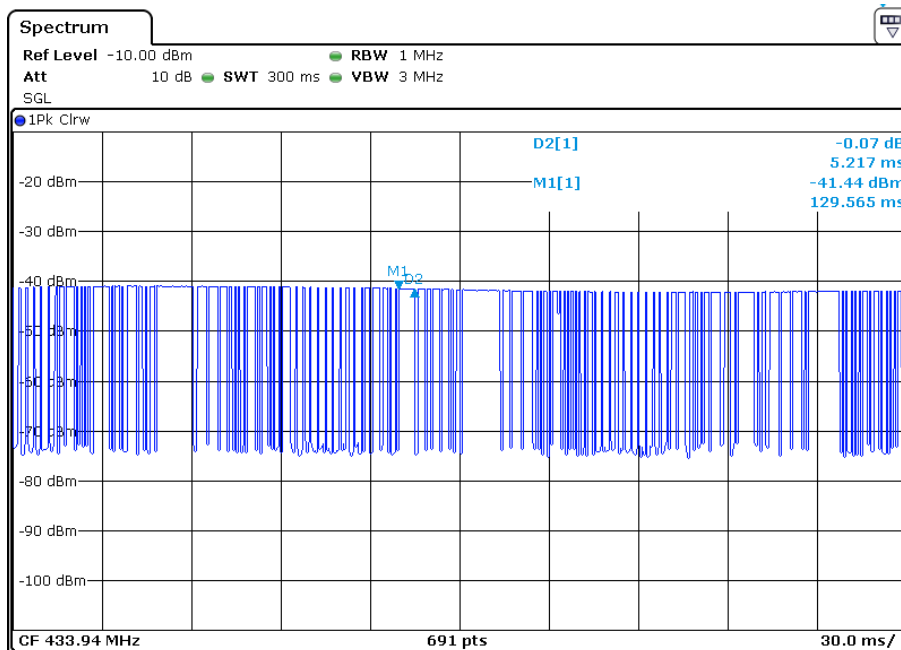

**Used Test Equipment List:**

3m Semi-Anechoic Chamber, EMI Test Receiver (9 kHz~7 GHz), Signal and Spectrum Analyzer (10 Hz~40 GHz), Loop antenna (9 kHz-30 MHz), TRILOG Super Broadband test Antenna(30 MHz-3 GHz) (RX), Bouble-Ridged Waveguide Horn Antenna (800 MHz-18 GHz)(RX). Refer to Clause 5 Test Equipment List for details.

**1) Fundamental emission:**

Polarization	Frequency (MHz)	PK Reading (dBuV)	Correction Factor(dB)	PK value (dBuV/m)	PK limit (dBuV/m)	Margin (dB)
Horizontal	433.90	54.3	18.3	72.6	92.8	20.2
Vertical	433.90	43.9	18.3	62.2	92.8	30.6

Polarization	Frequency (MHz)	PK value (dBuV/m)	Average Factor(dB)	AV value (dBuV/m)	AV limit (dBuV/m)	Margin (dB)
Horizontal	433.90	72.6	-5.0	67.6	72.8	5.2
Vertical	433.90	62.2	-5.0	57.2	72.8	15.6

Y: rotate EUT by 90° vertically.

X: rotate EUT by 90° clockwise.

Z: EUT as Radiated Emission test setup photograph.

**TEST REPORT**

1. Corr. (dB) = Antenna Factor (dB) + Cable Loss (dB)
2. Level (dBμV/m) = Corr. (dB) + Read Level (dBμV)
3. Margin (dB) = Limit (dBμV/m) –Level (dBμV/m)
4. Average value = Peak value + 20log (Duty cycle)

**2) other emissions:**

The field strength is calculated by adding the Antenna Factor, Cable Factor & Peramplifier. The basic equation with a sample calculation is as follows:

Final Test Level =Receiver Reading + Antenna Factor + Cable Factor –Peramplifier Factor.

The following test results were performed on the EUT in transmitting mode.

9 kHz~30 MHz Field Strength of Unwanted Emissions. Peak or Quasi-Peak measurement.

The measurements with active loop antenna were greater than 20dB below the limit, so the test data were not recorded in the test report.

30 MHz~6 GHz Field Strength of Unwanted Emissions. Peak measurement:

Polarization	Frequency (MHz)	PK Reading (dBuV)	Correction Factor(dB)	PK value (dBuV/m)	PK limit (dBuV/m)	Margin (dB)
Horizontal	867.85	20.2	25.1	45.3	72.8	27.5
Horizontal	1736.09	49.2	-10.8	38.4	72.8	34.4
Horizontal	2603.44	49.0	-7.4	41.6	72.8	31.2
Horizontal	3037.34	47.3	-5.8	41.5	72.8	31.3
Vertical	1735.78	47.8	-10.8	37.0	72.8	35.8
Vertical	2170.78	44.8	-9.0	35.8	72.8	37.0
Vertical	3905.47	45.2	-3.0	42.2	74.0	30.6

Since all the peak emission level listed above is lower than the average limit (52.8dBuV/m), the average emission level does not need to show.

Spurious Emission in Restricted Band Quasi-Peak measurement:

Polarization	Frequency (MHz)	PK Reading (dBuV)	Correction Factor(dB)	PK value (dBuV/m)	QP limit (dBuV/m)	Margin (dB)
Horizontal	325.43	14.9	16.4	31.3	46.0	14.7

Since peak emission level at 325.43MHz is lower than the Quasi-Peak limit (46.0 dBuV/m), the Quasi-Peak emission level does not need to show.

Remark:

According to 15.35 (b) When average radiated emission measurements are specified in the regulations, including emission measurements below 1000 MHz, there is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit for the frequency being investigated unless a different peak emission limit is otherwise specified in the rules, e.g., see Section 15.255.

**TEST REPORT**

**4.3 Occupied Bandwidth**

Test Requirement: FCC Part 15 C section 15.231 (c)  
 Test Method: ANSI C63.10: Clause 6.9  
 Test Status: Test in transmitting mode at lowest and highest channel.  
 Requirements: 15.231 (c) The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. For devices operating above 900 MHz, the emission shall be no wider than 0.5% of the center frequency. Bandwidth is determined at the points 20 dB down from the modulated carrier.  
 Method of measurement: The useful radiated emission from the EUT was detected by the spectrum analyzer with peak detector. Record the 20 dB bandwidth of the carrier.

**Used Test Equipment List:**


Spectrum Analyzer. Refer to Clause 5 Test Equipment List for details.

Test result:

Test Channel	bandwidth	Limit
433.92 MHz	51.52 kHz	1.08 MHz

Remark:  
The bandwidth limit is  $433.92 \times 0.0025 = 1.08$  MHz

Test plot:

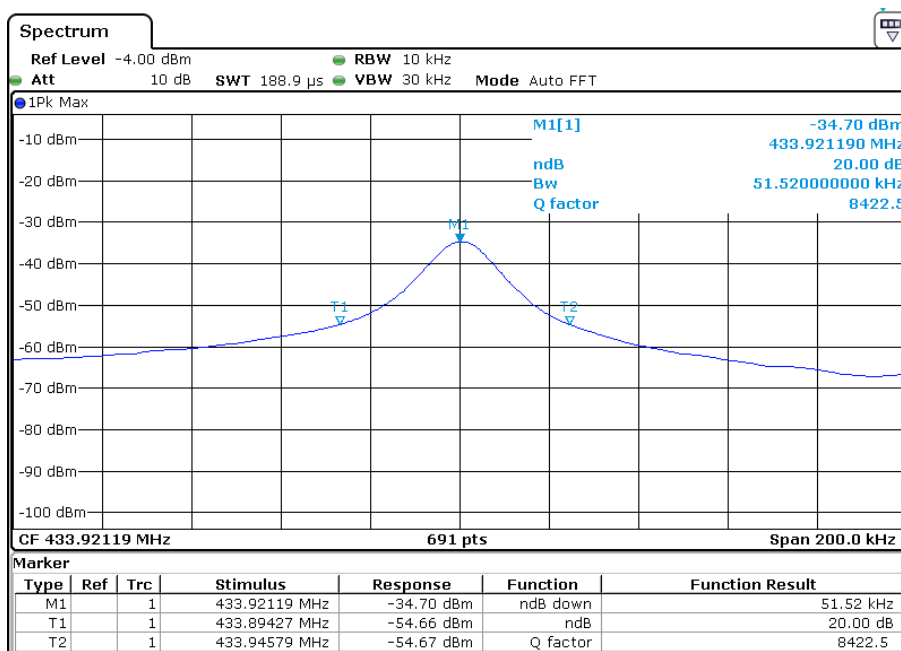

**TEST REPORT**

**4.4 Dwell Time**

Test Requirement: FCC Part 15 C section 15.231(e)  
 Test Method: FCC Part 15 C section 15.231(e)  
 Test Status: Test in transmitting mode.


**Requirements:**

**Regulation 15.231 (e)** Intentional radiators may operate at a periodic rate exceeding that specified in 15.231 (a) and may be employed for any type of operation, including operation prohibited in 15.231 (a). In addition, devices operated under the provisions of this section shall be provided with a means for automatically limiting operation so that the duration of each transmission shall not be greater than one second and the silent period between transmissions shall be at least 30 times the duration of the transmission but in no case less than 10 seconds.

**Result:**

The EUT meets the requirements of this section.

Carrier Frequency	Dwell time	Limit
433.94MHz	0.52s	≤1s

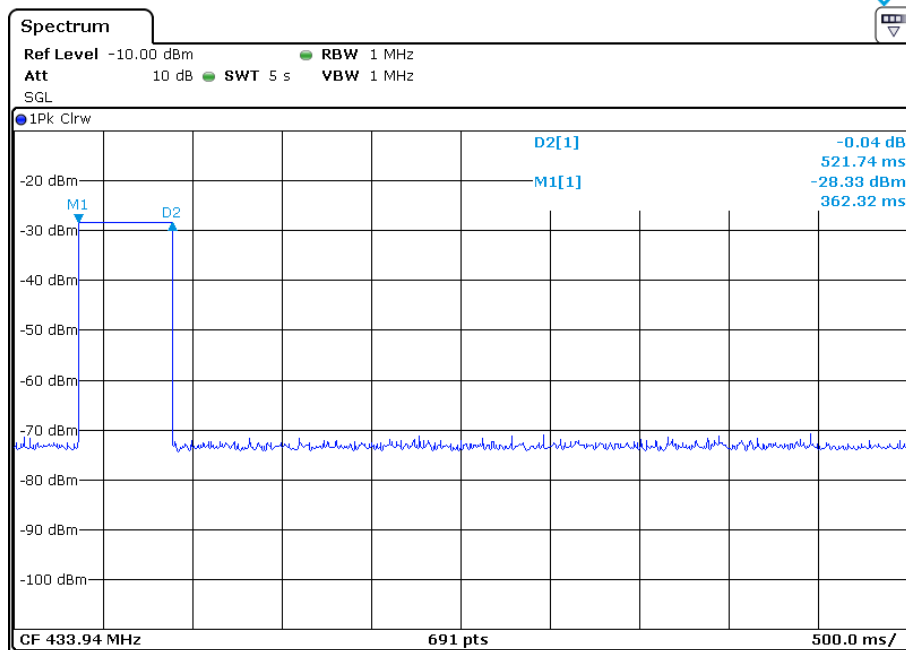


**TEST REPORT**

30 times the duration of the transmission:  $30 \times 0.52 = 15.6s > 10s$

Since the duration is 57.2s, so off time is:  $57.2 - 0.52 = 56.68s$

Carrier Frequency	Off time	Limit
433.94MHz	56.68s	$\geq 15.6s$

Result plot as follows:

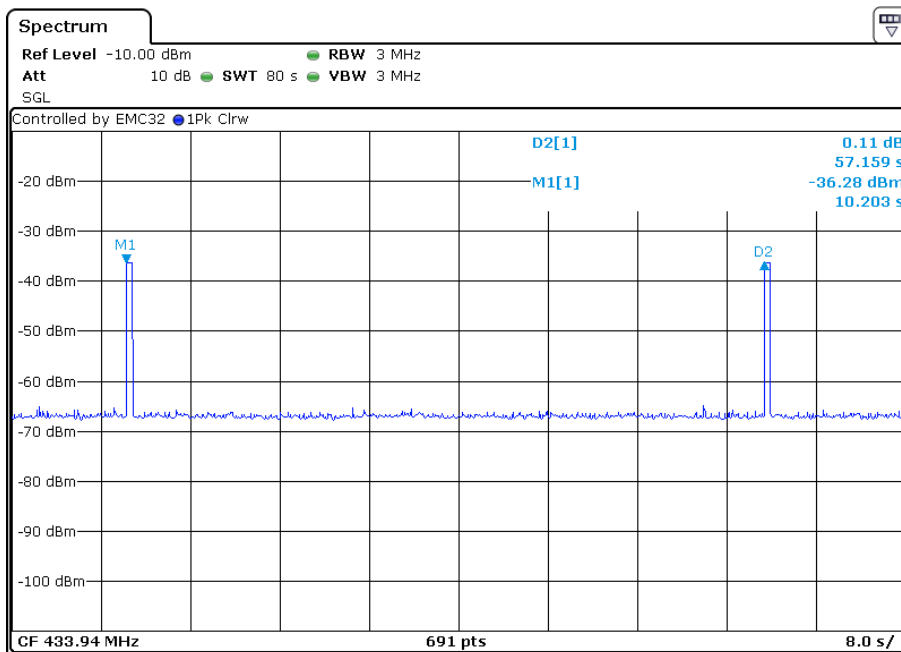

**4.5 Conducted Emission Test**

Test Result: Not Applicable.

**TEST REPORT**

**5.0 Test Equipment List**

<b>Radiated Emission/Radio</b>					
<b>Equipment No.</b>	<b>Equipment</b>	<b>Model</b>	<b>Manufacturer</b>	<b>Cal Due date (YYYY-MM-DD)</b>	<b>Calibration Interval</b>
EM030-04	3m Semi-Anechoic Chamber	9×6×6 m <sup>3</sup>	ETS·LINDGREN	2021/4/10	1Y
EM031-02	EMI Test Receiver (9 kHz~7 GHz)	R&S ESR7	R&S	2020/10/22	1Y
EM031-03	Signal and Spectrum Analyzer (10 Hz~40 GHz)	R&S FSV40	R&S	2020/9/6	1Y
EM011-04	Loop antenna (9 kHz~30 MHz)	HFH2-Z2	R&S	2021/6/18	1Y
EM061-03	TRILOG Super Broadband test Antenna (30 MHz~1.5 GHz) (TX)	VULB 9161	SCHWARZBEC K	2021/6/18	1Y
EM033-01	TRILOG Super Broadband test Antenna(30 MHz~3 GHz) (RX)	VULB 9163	SCHWARZBEC K	2020/9/19	1Y
EM033-02	Double-Ridged Waveguide Horn Antenna (800 MHz~18 GHz)(RX)	R&S HF907	R&S	2021/6/18	1Y
EM033-03	High Frequency Antenna & preamplifier(18 GHz~26.5 GHz) (RX)	R&S SCU-26	R&S	2021/4/24	1Y
EM033-04	High Frequency Antenna & preamplifier (26 GHz~40 GHz)	R&S SCU-40	R&S	2021/4/24	1Y
EM031-02-01	Coaxial cable(9 kHz~1 GHz)	N/A	R&S	2021/4/12	1Y
EM033-02-02	Coaxial cable(1 GHz~18 GHz)	N/A	R&S	2021/4/12	1Y
EM033-04-02	Coaxial cable(18 GHz~40 GHz)	N/A	R&S	2021/4/24	1Y
EM031-01	Signal Generator (9 kHz~6 GHz)	SMB100A	R&S	2021/7/22	1Y
EM040-01	Band Reject/Notch Filter	WRHFV	Wainwright	N/A	1Y
EM040-02	Band Reject/Notch Filter	WRCGV	Wainwright	N/A	1Y
EM040-03	Band Reject/Notch Filter	WRCGV	Wainwright	N/A	1Y
EM022-03	2.45 GHz Filter	BRM 50702	Micro-Tronics	2021/5/10	1Y
SA 016-16	Programmable Temperature & Humidity Test Chamber	MHU-800LJ	TERCHY	2020/10/13	1Y
SA 016-22	Climatic Test Chamber	C7-1500	Vötsch	2020/11/10	1Y
SA 012-74	Digital Multimeter	FLUKE175	FLUKE	2020/10/13	1Y
EM010-01	Regulated DC Power supply	PAB-3003A	GUANHUA	N/A	1Y
SA 040-22	Regulated DC Power supply	IT6721	ITECH	2020/9/6	1Y
EM084-06	Audio Analyzer	8903B	HP	2021/4/15	1Y
EM045-01-01	EM C32 s software (RE/RS)	V10.01.00	R&S	N/A	N/A
EM045-01-09	EM C32 s software (328/893)	V9.26.01	R&S	N/A	N/A
<b>Conducted emission at the mains terminals</b>					
<b>Equipment No.</b>	<b>Equipment</b>	<b>Model</b>	<b>Manufacturer</b>	<b>Cal Due date (YYYY-MM-DD)</b>	<b>Calibration Interval</b>
EM080-05	EMI receiver	ESCI	R&S	2021/7/19	1Y
EM006-05	LISN	ENV216	R&S	2021/6/7	1Y
EM006-06	LISN	ENV216	R&S	2021/9/6	1Y
EM006-06-01	Coaxial cable	/	R&S	2021/4/12	1Y
EM004-04	EMC shield Room	8m×3m×3m	Zhongyu	2021/1/5	1Y

\*\*\*\*\*End of the test report\*\*\*\*\*