



EUROFINS ELECTRICAL TESTING SERVICE (SHENZHEN) CO., LTD.

RADIO TEST - REPORT

FCC Compliance Test Report for

Product name: Wireless Grill Thermometer

Model name: GFGT 433 B1, WDJ7036

FCC ID: 2AJ90-GFGT433B1

Test Report Number: EFGX20120159-IE-01-E04

The above sample(s) and sample information was/were submitted and identified on behalf of the applicant.
Eurofins assures objectivity and impartiality of the test, and fulfills the obligation of confidentiality for applicant's commercial information and technical documents.

Content

| | | |
|----------|---|-----------|
| 1 | General Information | 3 |
| 1.1 | Notes | 3 |
| 1.2 | Testing laboratory | 4 |
| 1.3 | Details of applicant | 4 |
| 1.4 | Details of Manufacturer | 4 |
| 1.5 | Application details | 5 |
| 1.6 | Test item | 5 |
| 1.7 | Test standards | 5 |
| 2 | Technical test | 6 |
| 2.1 | Summary of test results | 6 |
| 2.2 | Test environment | 6 |
| 2.3 | Measurement uncertainty | 6 |
| 2.4 | Test mode | 6 |
| 2.5 | Test equipment utilized | 7 |
| 2.6 | Setup | 8 |
| 2.7 | Test results | 10 |
| 3 | Technical Requirement | 11 |
| 3.1 | Conducted emission AC power port | 11 |
| 3.2 | Automatically Deactivate | 12 |
| 3.3 | 20dB bandwidth | 13 |
| 3.4 | Field strength of fundamental and Field strength of spurious emission for transmitter | 14 |

1 General Information

1.1 Notes

The results of this test report relate exclusively to the item tested as specified in chapter “Description of test item” and are not transferable to any other test items.

Eurofins Product Testing Service (Shenzhen) Co., Ltd. is not responsible for any generalisations and conclusions drawn from this report. Any modification of the test item can lead to invalidity of test results and this test report may therefore be not applicable to the modified test item.

The test report may only be reproduced or published in full. Reproducing or publishing extracts of the report requires the prior written approval of the Eurofins Product Testing Service (Shenzhen) Co., Ltd.

This document is subject to the General Terms and Conditions and the Testing and Certification System of Eurofins Product Testing Service (Shenzhen) Co., Ltd., available on request or accessible at www.eurofins.com.

Operator:

2021-02-23

Bruce Zheng / Project Engineer



Date

Eurofins-Lab.

Name / Title

Signature

Technical responsibility for area of testing:

2021-02-23

Albert Xu / Laboratory Manager

Date

Eurofins-Lab.

Name / Title

Signature

1.2 Testing laboratory

Eurofins Electrical Testing Service (Shenzhen) Co., Ltd.

1st Floor, Building 2, Chungu, Meisheng Huigu Science and Technology Park, No. 83 Dabao Road, Bao'an District, Shenzhen. P.R.China.

Telephone : +86-755-82911867

Fax : +86-755-82910749

The Laboratory has passed the Accreditation by the American Association for Laboratory Accreditation (A2LA). The Accreditation number is 5376.01

The Laboratory has been listed by industry Canada to perform electromagnetic emission measurements, The CAB identifier is CN0088

1.3 Details of applicant

Name : Lidl US, LLC
Address : 3500 S. Clark Street, Arlington, VA22202 USA
Telephone : ./.
Fax : ./.

1.4 Details of Manufacturer

Name : Lidl US, LLC
Address : 3500 S. Clark Street, Arlington, VA22202 USA
Telephone : ./.
Fax : ./.

1.5 Application details

Date of receipt of application : 2020-12-28
 Date of receipt of test item : 2020-12-28
 Date of test : 2020-12-28 to 2021-01-19
 Date of issue : 2021-02-23

1.6 Test item

Product type : Wireless Grill Thermometer
 Model name : GFGT 433 B1, WDJ7036
 Brand : ./.
 Serial number : ./.
 Ratings : DC 3V (by AAA battery x2)
 Test voltage : DC 3V
 FCC ID : 2AJ9O-GFGT433B1
 Additional information : Both models are identical except model name.

RadioTechnical data

Frequency range : 433.92MHz
 Radio Tech. : N/A
 Frequency channel : 1 Channel
 Modulation : ASK
 Antenna type : Spring antenna
 Antenna gain : 0 dBi

1.7 Test standards

| Test Standards | |
|---|--|
| FCC Part 15 Subpart C January 15, 2021 | PART 15 - RADIO FREQUENCY DEVICES Subpart C - Intentional Radiators |

Test Method

1: ANSI C63.4-2014, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.
 2: ANSI C63.10-2013, American National Standard for Testing Unlicensed Wireless Devices.

2 Technical test

2.1 Summary of test results

No deviations from the technical specification(s) were ascertained in the course of the tests performed.

or

The deviations as specified were ascertained in the course of the tests performed.

2.2 Test environment

Temperature : 15 ... 35°C
 Relative humidity content : 20 ... 75 %
 Air pressure : 86 ... 106 kPa

2.3 Measurement uncertainty

The uncertainty is calculated using the methods suggested in the "Guide to the Expression of Uncertainty in Measurement" (GUM) published by ISO.

| System Measurement Uncertainty | |
|--|---|
| Test Items | Extended Uncertainty |
| Uncertainty for Conducted RF test | RF Power Conducted: 1.16dB Frequency test involved: 1.05×10 ⁻⁷ or 1% |
| Uncertainty for Radiated Spurious Emission 25MHz-1000MHz | Horizontal: 4.46dB; Vertical: 4.54dB; |
| Uncertainty for Radiated Spurious Emission 1000Mz-18000MHz | Horizontal: 4.42dB; Vertical: 4.41dB; |
| Uncertainty for Radiated Spurious Emission 18000MHz-40000MHz | Horizontal: 4.63dB; Vertical: 4.62dB; |

2.4 Test mode


The EUT was set at continuously transmitting during the test.

2.5 Test equipment utilized


| EQUIPMENT ID | EQUIPMENT NAME | MODEL NO. | CAL. DUE DATE |
|--------------|--------------------------|-------------------|---------------|
| 23-2-13-12 | Signal Analyzer | N9010B-544 | 2021-04-24 |
| 23-2-13-14 | Signal Generator | N5183B-520 | 2021-04-23 |
| 23-2-13-15 | Vector Signal Generator | N5182B-506 | 2021-04-23 |
| 23-2-10-43 | Switch and Control Unit | ERIT-E-JS0806-2 | 2021-06-17 |
| 23-2-10-44 | DC power supply | E3642A | 2021-06-03 |
| 23-2-10-45 | Temperature test chamber | SG-80-CC-2 | 2021-04-23 |
| 23-2-13-01 | EMI Test Receiver | ESR7 | 2021-04-24 |
| 23-2-13-02 | Signal Analyzer | N9020B-544 | 2021-04-24 |
| 23-2-12-01 | Active Loop Antenna | FMZB 1519B | 2021-05-13 |
| 23-2-12-02 | TRILOG Broadband Antenna | VULB9168 | 2021-04-27 |
| 23-2-12-03 | Horn Antenna | 3117 | 2021-05-11 |
| 23-2-10-01 | Preamplifier | BBV9745 | 2021-04-23 |
| 23-2-10-02 | Preamplifier | TAP01018048 | 2021-04-24 |
| 23-2-10-14 | Switch and Control Unit | ERIT-E-JS0806-SF1 | N/A |

2.6 Setup


Ac line conducted

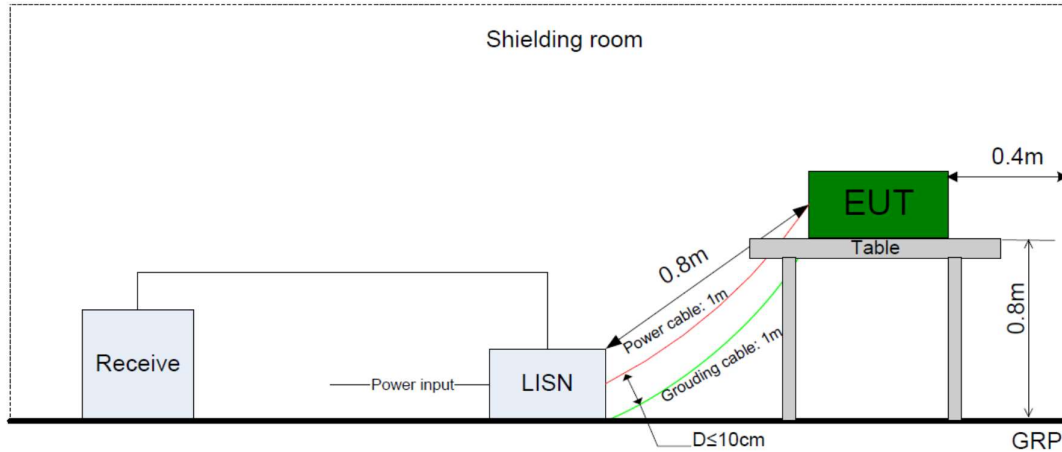


RF conducted tests

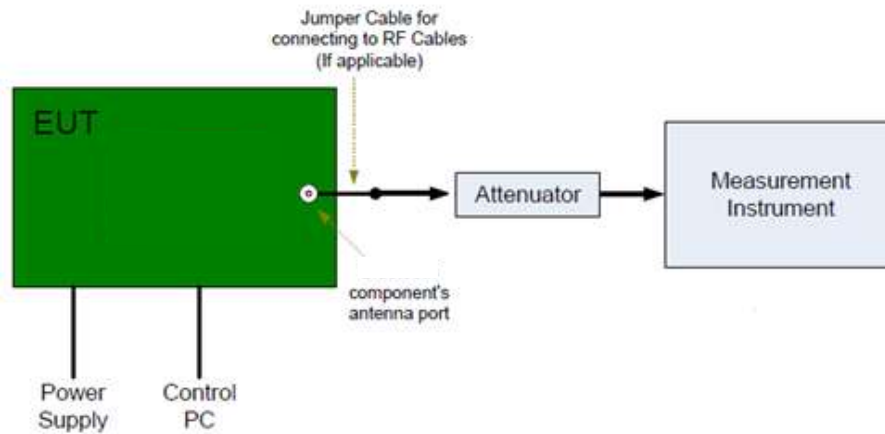

Radiated tests below 30MHz

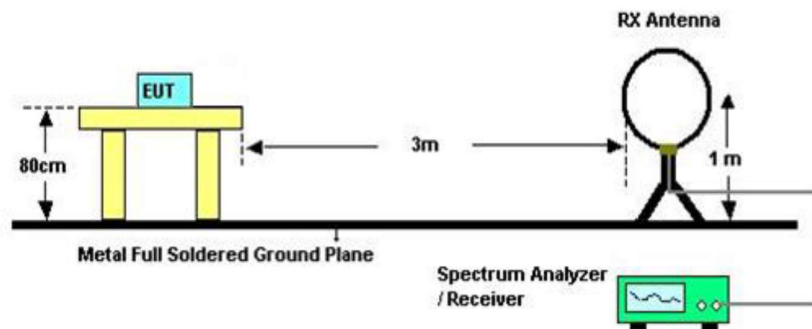


Radiated tests below 1GHz

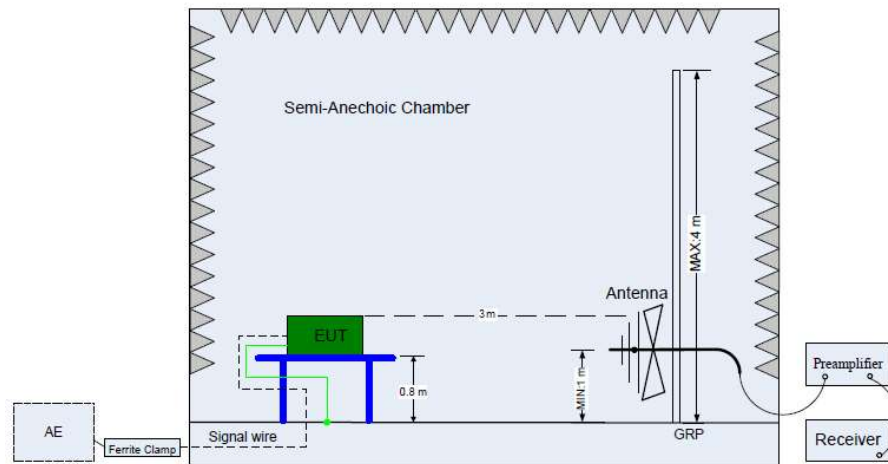

(Below 1 GHz)

Radiated tests above 1GHz

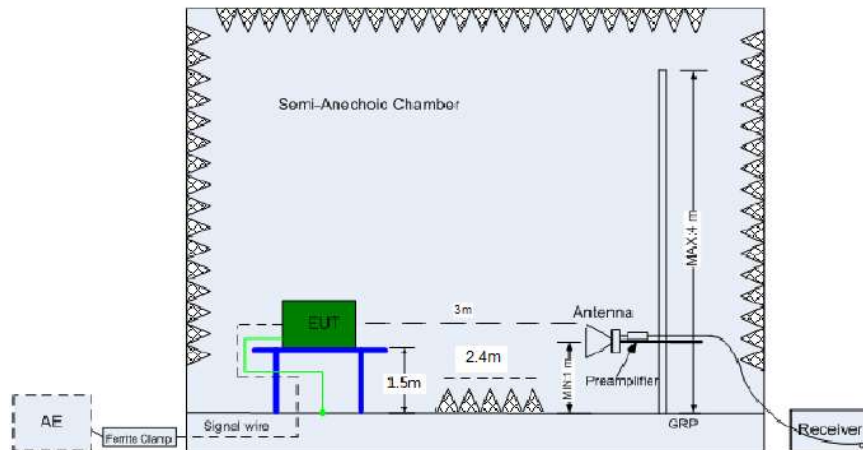

(Above 1 GHz)

2.7 Test results

 1st test

 test after modification

 production test

| Technical Requirements | | | | |
|---------------------------------------|-------------------------------------|-------------|---------|-----------|
| FCC Part 15 Subpart C | | | | |
| Test Condition | | Test Result | Verdict | Test Site |
| §15.207 | Conducted emission AC power port | -- | N/A | -- |
| §15.231(a)(1) | Automatically Deactivate | Page 12 | Pass | Site 1 |
| §15.231(c) | -20dB Bandwidth | Page 13 | Pass | Site 1 |
| §15.231(b)(3) | Field strength of fundamental | Page 17 | Pass | Site 1 |
| §15.231(b)(3) §15.209 & §15.205 | Field strength of spurious emission | Page 18 | Pass | Site 1 |
| §15.203 | Antenna requirement | See note 1 | Pass | -- |

Remark 1: N/A – Not Applicable.

Note 1: The EUT uses a spring antenna, the gain: 0 dBi. According to §15.203, it is considered sufficiently to comply with the provisions of this section.

3 Technical Requirement

3.1 Conducted emission AC power port

Test Method:

The test method was referred to the subclause 6.2 of ANSI C63.10-2013.

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.10.

The receiver is set to a resolution bandwidth of 9 kHz. Peak detection is used unless otherwise noted as quasi-peak or average.

Line conducted data is recorded for both Neutral and Live lines.

Limit:

FCC §15.207 (a)

| Frequency | QP Limit | AV Limit |
|-------------|------------|------------|
| MHz | dB μ V | dB μ V |
| 0.150-0.500 | 66-56* | 56-46* |
| 0.500-5 | 56 | 46 |
| 5-30 | 60 | 50 |

Decreasing linear.

Test Result:

Not Applicable, the EUT was supplied by 3Vdc from 2*AAA battery.

3.2 Automatically Deactivate

Test Method:

With the EUT's antenna attached, the EUT's output signal was received by the test antenna, which was connected to the spectrum analyzer set the center frequency, than set the spectrum analyzer to Zero Span for the release time reading. During the testing, the transmission duration was measured and recorded.


Limit:

FCC § 15.231 (a)

- (1) A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.
- (2) A transmitter activated automatically shall cease transmission within 5 seconds after activation.

Test Result:

| Time of Transmitting (ms) | Limit (sec) | Result |
|---------------------------|-------------|--------|
| 920 | 5 | Pass |

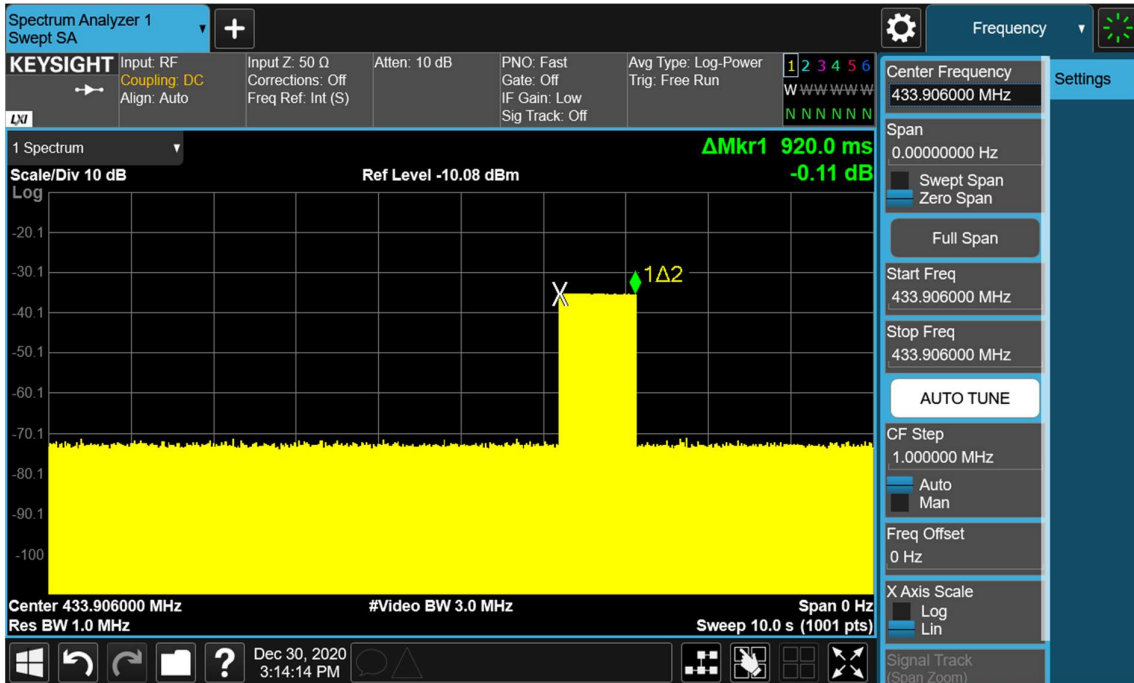

3.3 20dB bandwidth

Test Method:

The spectrum analyzer was receiving the maximum emission level. The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.


Limit:

FCC §15.231

(c) The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. For devices operating above 900 MHz, the emission shall be no wider than 0.5% of the center frequency. Bandwidth is determined at the points 20 dB down from the modulated carrier.

Test Result

| 20dB Bandwidth (KHz) | 99% Bandwidth (KHz) | Limit (KHz) | Result |
|----------------------|---------------------|-------------|--------|
| 51.69 | N/A | 1084.80 | Pass |

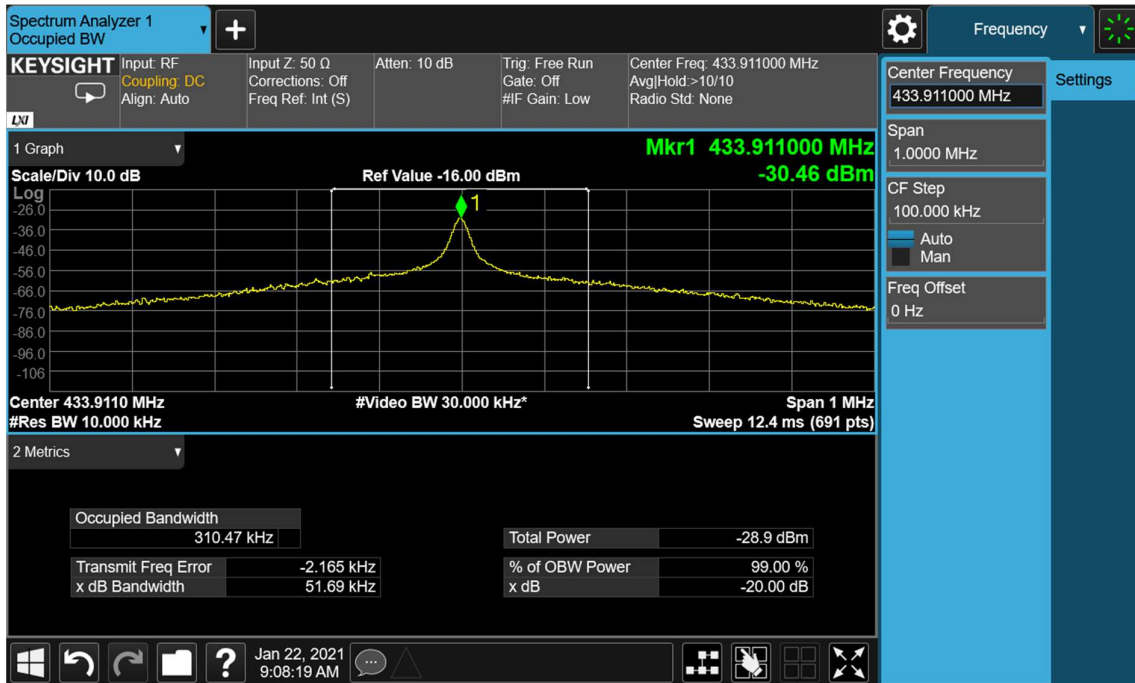

3.4 Field strength of fundamental and Field strength of spurious emission for transmitter

Test Method:

- 1: The EUT was placed on a turn table which is 1.5m above ground plane for above 1GHz and 0.8m above ground for below 1GHz at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- 2: The EUT was set 3 meters away from the interference – receiving antenna, which was mounted on the top of a variable – height antenna tower.
- 3: The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- 4: For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- 5: Use the following spectrum analyzer settings According to C63.10:
For Above 1GHz
Span = wide enough to capture the peak level of the in-band emission and all spurious
RBW = 1MHz, VBW \geq RBW for peak measurement, Sweep = auto, Detector function = peak,
Trace = max hold.
For Below 1GHz
Use the following spectrum analyzer settings:
Span = wide enough to capture the peak level of the in-band emission and all spurious
RBW = 100 KHz, VBW \geq RBW for peak measurement, Sweep = auto, Detector function = peak,
Trace = max hold.
For Below 30MHz
Use the following spectrum analyzer settings:
Span = wide enough to capture the peak level of the in-band emission and all spurious
RBW = 200 Hz, VBW \geq RBW from 9KHz to 0.15MHz, RBW 9KHz VBW \geq RBW from 0.15MHz
to 30MHz for peak measurement, Sweep = auto, Detector function = peak, Trace = max hold.

Note:

- 1: The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 KHz for Quasi-peak detection (QP) at frequency below 1GHz.
- 2: The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 3MHz for peak detection (PK) at frequency above 1GHz.
- 3: The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.31(o) was not reported.
- 4: According to C63.10, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement, so AV emission value did not show in below table if the peak value complies with average limit.

Limit:

FCC §15.205 and §15.209

| Frequency Range (MHz) | Field Strength Limit ($\mu\text{V/m}$) at 3 m | Field Strength Limit (dBuV/m) at 3 m |
|--------------------------|--|--|
| 0.009-0.490 | 2400/F(kHz) @ 300 m | - |
| 0.490-1.705 | 24000/F(kHz) @ 30 m | - |
| 1.705 - 30 | 30 @ 30m | - |
| 30 - 88 | 100 | 40 |
| 88 - 216 | 150 | 43.5 |
| 216 - 960 | 200 | 46 |
| Above 960 | 500 | 54 |

§15.205 Restricted bands of operation

| MHz | MHz | MHz | GHz |
|-------------------|---------------------|---------------|-------------|
| 0.090-0.110 | 16.42-16.423 | 399.9-410 | 4.5-5.15 |
| 0.495-0.505 | 16.69475-16.69525 | 608-614 | 5.35-5.46 |
| 2.1735-2.1905 | 16.80425-16.80475 | 960-1240 | 7.25-7.75 |
| 4.125-4.128 | 25.5-25.67 | 1300-1427 | 8.025-8.5 |
| 4.17725-4.17775 | 37.5-38.25 | 1435-1626.5 | 9.0-9.2 |
| 4.20725-4.20775 | 73-74.6 | 1645.5-1646.5 | 9.3-9.5 |
| 6.215-6.218 | 74.8-75.2 | 1660-1710 | 10.6-12.7 |
| 6.26775-6.26825 | 108-121.94 | 1718.8-1722.2 | 13.25-13.4 |
| 6.31175-6.31225 | 123-138 | 2200-2300 | 14.47-14.5 |
| 8.291-8.294 | 149.9-150.05 | 2310-2390 | 15.35-16.2 |
| 8.362-8.366 | 156.52475-156.52525 | 2483.5-2500 | 17.7-21.4 |
| 8.37625-8.38675 | 156.7-156.9 | 2690-2900 | 22.01-23.12 |
| 8.41425-8.41475 | 162.0125-167.17 | 3260-3267 | 23.6-24.0 |
| 12.29-12.293 | 167.72-173.2 | 3332-3339 | 31.2-31.8 |
| 12.51975-12.52025 | 240-285 | 3345.8-3358 | 36.43-36.5 |
| 12.57675-12.57725 | 322-335.4 | 3600-4400 | |
| 13.36-13.41 | | | |

§15.231 (b)

| Fundamental frequency (MHz) | Field strength of fundamental (microvolts/meter) | Field strength of spurious emissions (microvolts/meter) |
|-----------------------------|--|---|
| 40.66-40.70 | 2,250 | 225 |
| 70-130 | 1,250 | 125 |
| 130-174 | ¹ 1,250 to 3,750 | ¹ 125 to 375 |
| 174-260 | 3,750 | 375 |
| 260-470 | ¹ 3,750 to 12,500 | ¹ 375 to 1,250 |
| Above 470 | 12,500 | ¹ 1,250 |

¹ Linear interpolations.

Field Strength of the Fundamental Emissions

The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit.

Fundamental Quasi-peak/Average:

$$=20*\text{LOG}(((433.92-260)*(12500-3750))/(470-260)+3750) \approx 80.83\text{dBuV/m}$$

Fundamental Peak:

$$= 80.83\text{dBuV/m} + 20 = 100.83\text{dBuV/m}$$

Remark:


- (1) Data of measurement within this frequency range shown "--" in the table above means the reading of emissions are the noise floor or attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (2) Above 1GHz: Corrector factor = Antenna Factor + Cable Loss - Amplifier Gain.
- (3) Below 1GHz: Corrector factor = Antenna Factor + Cable Loss - Amplifier Gain.
- (4) Note: The low frequency, which started from 9 kHz to 30MHz with X/Y/Z axis, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

Field Strength of the Fundamental Emissions


| Freq. [MHz] | Factor [dB/m] | QP Value [dB μ V/m] | QP Limit [dB μ V/m] | QP Margin [dB] | Height [cm] | Angle [°] | Polarity |
|-------------|---------------|-------------------------|-------------------------|----------------|-------------|-----------|------------|
| 433.9181 | -12.74 | 39.22 | 46.00 | 6.78 | 216.4 | 105.2 | Horizontal |

| Freq. [MHz] | Factor [dB/m] | QP Value [dB μ V/m] | QP Limit [dB μ V/m] | QP Margin [dB] | Height [cm] | Angle [°] | Polarity |
|-------------|---------------|-------------------------|-------------------------|----------------|-------------|-----------|----------|
| 433.9239 | -12.74 | 29.63 | 46.00 | 16.37 | 116.4 | 297.8 | Vertical |

Field strength of spurious emission for transmitter 30MHz – 1GHz

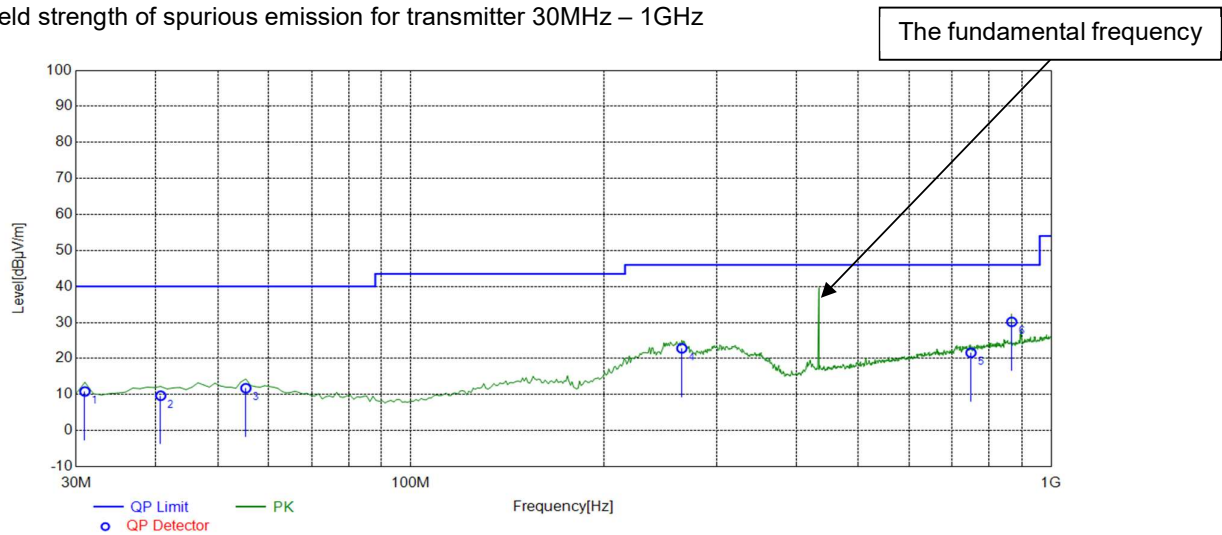


| Final Data List | | | | | | | | |
|-----------------|-------------|---------------|-------------------|-------------------|----------------|-------------|-----------|------------|
| NO. | Freq. [MHz] | Factor [dB/m] | QP Value [dBμV/m] | QP Limit [dBμV/m] | QP Margin [dB] | Height [cm] | Angle [°] | Polarity |
| 1 | 30.9710 | -18.36 | 10.85 | 40.00 | 29.15 | 200 | 198 | Horizontal |
| 2 | 40.6807 | -16.39 | 9.69 | 40.00 | 30.31 | 100 | 98 | Horizontal |
| 3 | 55.2452 | -16.11 | 11.77 | 40.00 | 28.23 | 100 | 84 | Horizontal |
| 4 | 264.9750 | -16.53 | 22.83 | 46.00 | 23.17 | 100 | 172 | Horizontal |
| 5 | 749.4895 | -7.28 | 21.60 | 46.00 | 24.40 | 100 | 35 | Horizontal |
| 6 | 867.9479 | -5.93 | 30.19 | 46.00 | 15.81 | 100 | 49 | Horizontal |

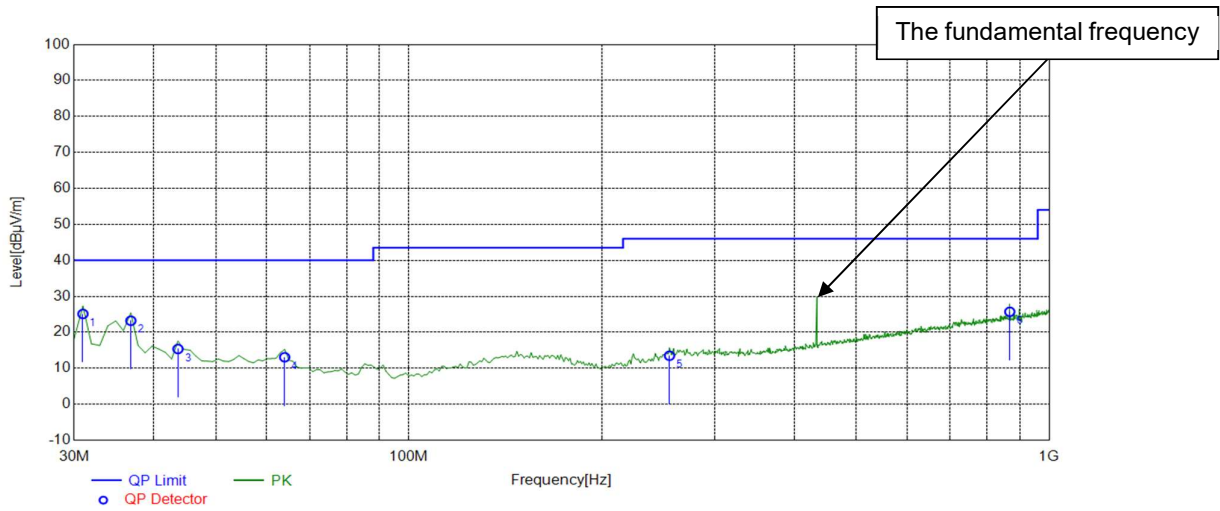


| Final Data List | | | | | | | | |
|-----------------|-------------|---------------|-------------------|-------------------|----------------|-------------|-----------|----------|
| NO. | Freq. [MHz] | Factor [dB/m] | QP Value [dBµV/m] | QP Limit [dBµV/m] | QP Margin [dB] | Height [cm] | Angle [°] | Polarity |
| 1 | 30.9710 | -18.36 | 25.11 | 40.00 | 14.89 | 100 | 18 | Vertical |
| 2 | 36.7968 | -17.11 | 23.22 | 40.00 | 16.78 | 100 | 13 | Vertical |
| 3 | 43.5936 | -16.26 | 15.37 | 40.00 | 24.63 | 100 | 250 | Vertical |
| 4 | 63.9840 | -17.27 | 13.07 | 40.00 | 26.93 | 100 | 223 | Vertical |
| 5 | 255.2653 | -16.88 | 13.49 | 46.00 | 32.51 | 100 | 122 | Vertical |
| 6 | 867.9479 | -5.93 | 25.71 | 46.00 | 20.29 | 100 | 106 | Vertical |

Field strength of spurious emission for transmitter above 1GHz

According to C63.10, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement, so AV emission value did not show in below table if the peak value complies with average limit.

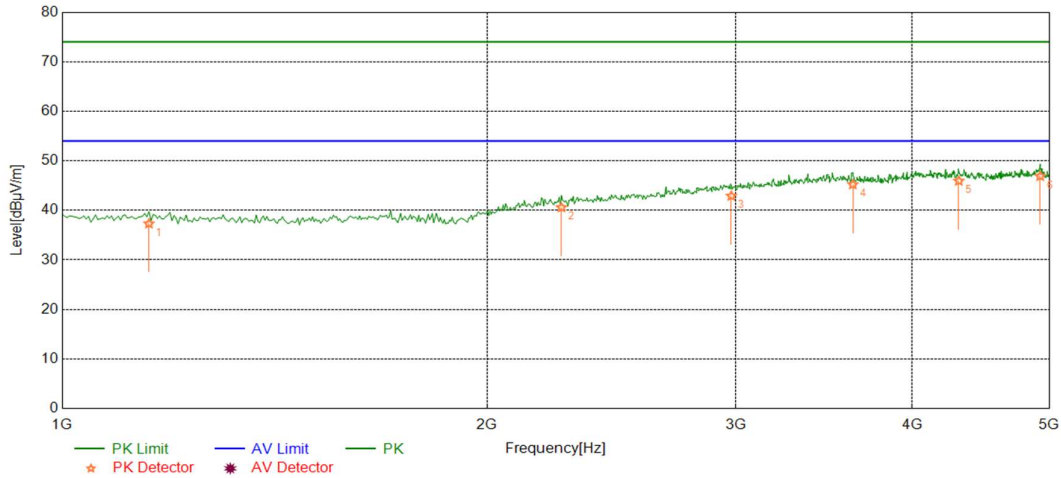

| Final Data List | | | | | | | | |
|-----------------|-------------|---------------|-------------------|-------------------|----------------|-------------|-----------|------------|
| NO. | Freq. [MHz] | Factor [dB/m] | PK Value [dBµV/m] | PK Limit [dBµV/m] | PK Margin [dB] | Height [cm] | Angle [°] | Polarity |
| 1 | 1152.1522 | -27.69 | 37.31 | 74.00 | 36.69 | 100 | 128 | Horizontal |
| 2 | 2257.2573 | -23.21 | 40.58 | 74.00 | 33.42 | 150 | 209 | Horizontal |
| 3 | 2977.9780 | -20.36 | 42.91 | 74.00 | 31.09 | 200 | 284 | Horizontal |
| 4 | 3630.6306 | -17.63 | 45.21 | 74.00 | 28.79 | 100 | 346 | Horizontal |
| 5 | 4315.3153 | -15.89 | 45.94 | 74.00 | 28.06 | 200 | 33 | Horizontal |
| 6 | 4927.9279 | -15.25 | 46.90 | 74.00 | 27.10 | 100 | 315 | Horizontal |

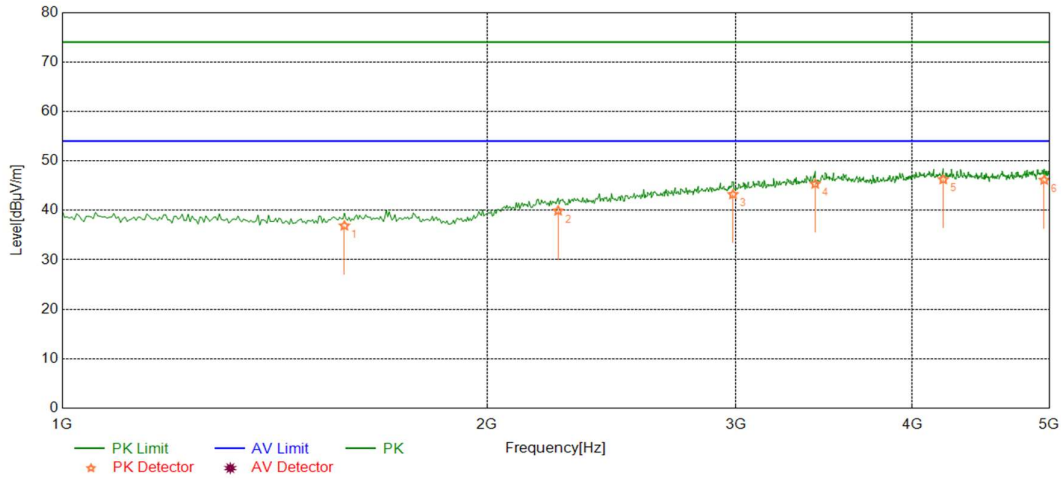

| Final Data List | | | | | | | | |
|-----------------|-------------|---------------|-------------------|-------------------|----------------|-------------|-----------|----------|
| NO. | Freq. [MHz] | Factor [dB/m] | PK Value [dBµV/m] | PK Limit [dBµV/m] | PK Margin [dB] | Height [cm] | Angle [°] | Polarity |
| 1 | 1584.5846 | -27.27 | 36.89 | 74.00 | 37.11 | 150 | 166 | Vertical |
| 2 | 2245.2452 | -23.25 | 39.91 | 74.00 | 34.09 | 200 | 261 | Vertical |
| 3 | 2985.9860 | -20.32 | 43.22 | 74.00 | 30.78 | 150 | 324 | Vertical |
| 4 | 3414.4144 | -18.52 | 45.34 | 74.00 | 28.66 | 200 | 228 | Vertical |
| 5 | 4207.2072 | -15.98 | 46.24 | 74.00 | 27.76 | 150 | 6 | Vertical |
| 6 | 4959.9600 | -15.22 | 46.14 | 74.00 | 27.86 | 200 | 259 | Vertical |

-End of report-