

# FCC Radio Test Report

## FCC ID: 2AJ9Z-4GX8

### Original Grant

**Report No.** : TB-FCC150372

**Applicant** : EMATIC LIMITED

#### Equipment Under Test (EUT)

**EUT Name** : X8+

**Model No.** : X8+

**Series No.** : N/A

**Brand Name** : EXTREM

**Receipt Date** : 2016-10-28

**Test Date** : 2016-10-29 to 2016-11-29

**Issue Date** : 2016-11-30

**Standards** : FCC Part 2  
FCC Part 22 Subpart H, FCC Part 24 Subpart E, 2015  
ANSI/TIA-C63.26: 2015

**Conclusions** : PASS

In the configuration tested, the EUT complied with the standards specified above,

The EUT technically complies with the FCC requirements

**Test/Witness Engineer** : *DWAN SU*

**Approved& Authorized** : *Leyla*



This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in the report.

TB-RF-074-1.0

## Contents

<b>CONTENTS.....</b>	<b>2</b>
<b>1. GENERAL INFORMATION ABOUT EUT .....</b>	<b>4</b>
1.1 Client Information.....	4
1.2 General Description of EUT (Equipment Under Test) .....	4
1.3 Block Diagram Showing the Configuration of System Tested.....	5
1.4 Description of Support Units .....	5
1.5 Description of Test Mode.....	5
1.6 Measurement Uncertainty .....	7
1.7 Test Facility.....	7
<b>2. TEST SUMMARY.....</b>	<b>8</b>
<b>3. TEST EQUIPMENT.....</b>	<b>9</b>
<b>4. FREQUENCY STABILITY.....</b>	<b>10</b>
4.1 Test Standard and Requirement .....	10
4.2 Test Setup.....	10
4.3 Test Procedure.....	11
4.4 EUT Operating Condition .....	11
<b>5. CONDUCTED RF OUTPUT POWER.....</b>	<b>15</b>
5.1 Test Standard and Limit.....	15
5.2 Test Setup.....	15
5.3 Test Procedure.....	15
5.4 EUT Operating Condition .....	15
5.5 EUT Operating Condition .....	15
<b>6. PEAK-AVERAGE RATIO .....</b>	<b>20</b>
6.1 Test Standard and Limit.....	20
6.2 Test Setup.....	20
6.3 Test Procedure.....	20
6.4 EUT Operating Condition .....	20
6.5 Test Data.....	21
<b>7. RADIATED OUTPUT POWER .....</b>	<b>25</b>
7.1 Test Standard and Limit.....	25
7.2 Test Setup.....	25
7.3 Test Procedure.....	26
7.4 EUT Operating Condition .....	26
7.5 Test Data.....	27
<b>8. OCCUPIED BANDWIDTH.....</b>	<b>30</b>
8.1 Test Standard and Limit.....	30
8.2 Test Setup.....	30

---

8.3 Test Procedure.....	30
8.4 EUT Operating Condition .....	31
8.5 Test Data.....	31
<b>9. CONDUCTED OUT OF BAND EMISSIONS .....</b>	<b>58</b>
9.1 Test Standard and Limit.....	58
9.2 Test Setup.....	58
9.3 Test Procedure.....	58
9.4 EUT Operating Condition .....	58
9.5 Test Data.....	59
Please refer following plots:.....	59
<b>10. BAND EDGE TEST .....</b>	<b>83</b>
10.1 Test Standard and Limit .....	83
10.2 Test Setup.....	83
10.3 Test Procedure.....	83
10.4 EUT Operating Condition .....	83
10.5 Test Data.....	84
<b>11. RADIATED OUT BAND OF EMISSIONS .....</b>	<b>96</b>
11.1 Test Standard and Limit .....	96
11.2 Test Setup.....	96
11.3 Test Procedure.....	96
11.4 EUT Operating Condition .....	97
11.5 Test Data.....	97

## 1. General Information about EUT

### 1.1 Client Information

**Applicant** : EMATIC LIMITED  
**Address** : Unit 17, 9/F Tower A, New Mandarin Plaza NO, 14 Science Museum Rd, TST, Hong Kong, China  
**Manufacturer** : EMATIC LIMITED  
**Address** : Unit 17, 9/F Tower A, New Mandarin Plaza NO, 14 Science Museum Rd, TST, Hong Kong, China

### 1.2 General Description of EUT (Equipment Under Test)


<b>EUT Name</b>	:	X8+
<b>Models No.</b>	:	X8+
<b>Model Difference</b>	:	N/A
<b>Product Description</b>	Frequency Bands: GSM850; PCS1900; UMTS FDD Band II; UMTS FDD Band V	
	GSM 850 Power :	Cond:32.74 dBm ERP:31.56 dBm
	PCS 1900 Power :	Cond:31.06 dBm EIRP:26.65 dBm
	UMTS Band II Power:	Cond:22.76 dBm EIRP:21.35 dBm
	UMTS Band V Power:	Cond:20.77 dBm ERP:19.72 dBm
	Antenna Gain:	GSM 850: -0.25 dBi PCS 1900: 2.79 dBi WCDMA Band V: -0.25 dBi WCDMA Band II: 2.79 dBi
	Modulation Type:	GSM/GPRS:GMSK EDGE: 8PSK UMTS:QPSK
<b>FCC Operating Frequency</b>	:	GSM 850: 824.20MHz-848.80MHz PCS1900: 1850.20MHz-1909.80MHz UMTS Band II: 1852.40MHz-1907.60MHz UMTS Band V:826.40MHz-846.60MHz
<b>Emission Designator</b>	:	GSM 850: 249KGXW, PCS 1900: 248KGXW GPRS 850: 249KG7W, GPRS 1900: 246KG7W EGPRS 850: 254KG7W, EGPRS 1900: 251KG7W UMTS Band V: 4M23F9W, UMTS Band II: 4M23F9W
<b>Power Supply</b>	:	DC power supplied by AC/DC Adapter. DC Voltage supplied from Li-ion battery.

<b>Power Rating</b>	:	Input: AC 100~240V 50/60Hz, 0.3A. Output: 5V/2000mA. DC 3.7V from 3050mA Li-ion battery.
<b>Connecting I/O Port(S)</b>	:	Please refer to the User's Manual

**Note:**

- (1) For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.
- (2) This test report only product for PCE-PCS Licensed Transmitter Held to ear.

### 1.3 Block Diagram Showing the Configuration of System Tested

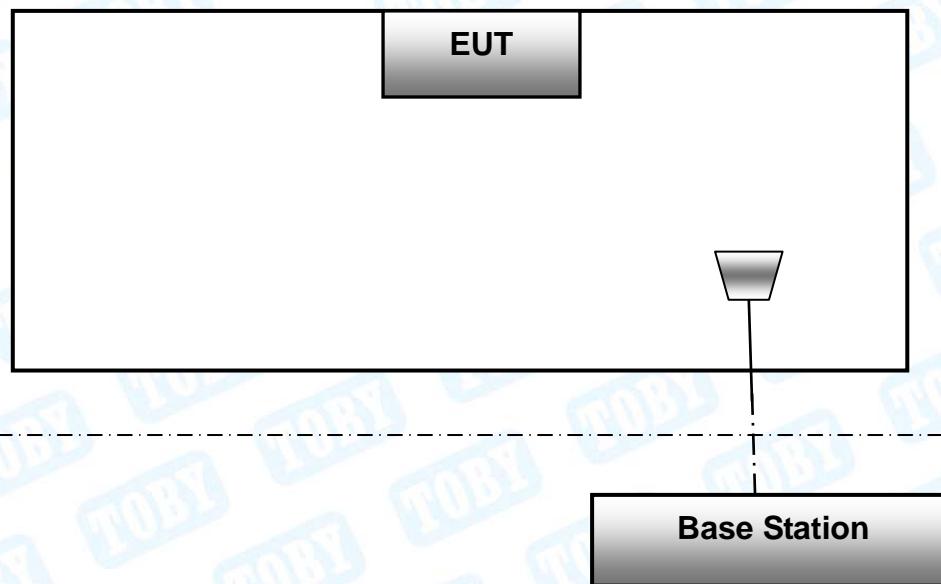

The above block diagram of setup is the normal mode. And more detail please refer to the test setup of each test item of bellow.

### 1.4 Description of Support Units

The EUT has been tested as an independent unit.

### 1.5 Description of Test Mode

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned follow was evaluated respectively.

During all testing, EUT is link mode with base station at maximum power level. The spurious emission measurements were carried out in semi-anechoic chamber with 3-meter test range. Frequency range investigated for radiated emission as below:

1. 9kHz~10GHz for GSM850 and UMTS Band V.

2. 9kHz~20GHz for PCS1900 and UMTS Band II.

Test Channel		
Mode	Channel	Frequency(MHz)
GSM 850	128	824.20
	190	836.60
	251	848.80
PCS 1900	512	1850.20
	661	1880.00
	810	1909.80
UMTS Band V	4132	826.40
	4183	836.60
	4233	846.60
UMTS Band II	9262	1852.40
	9400	1880.00
	9538	1907.60
Pre-scanning test Mode		Description
GSM 850	highest , middle, lowest channels	
GPRS 850	highest , middle, lowest channels	
GSM 1900	highest , middle, lowest channels	
GPRS 1900	highest , middle, lowest channels	
RMC UMTS Band V	highest , middle, lowest channels	
HSDPA UMTS Band V	highest , middle, lowest channels	
HSUPA UMTS Band V	highest , middle, lowest channels	
RMC UMTS Band II	highest , middle, lowest channels	
HSDPA UMTS Band II	highest , middle, lowest channels	
HSUPA UMTS Band II	highest , middle, lowest channels	
Final test Mode		Description
GSM 850	highest , middle, lowest channels	
GSM 1900	highest , middle, lowest channels	
RMC UMTS 850	highest , middle, lowest channels	
RMC UMTS Band II	highest , middle, lowest channels	

**Note:**

- (1) The measurements are performed at the highest, middle, lowest available channels.
- (2) During the testing procedure, the EUT is in link mode with base station emulator at

maximum power level in each test mode.

- (3) The EUT has GSM, GPRS, EDGE functions, and after pre-testing, GSM function is the worst case for all the emission tests.
- (4) The EUT has RMC, HSDPA, HSUPA functions in UMTS band II and UMTS band V, and after pre-testing, RMC mode is the worst case for all the emission tests.
- (5) The EUT is considered a portable unit; it was pre-tested on the positioned of each 3 axis, X-plane, Y-plane and Z-plane. The worst case was found positioned on Z-plane as the normal use. Therefore only the test data of this Z-plane was used for radiated emission measurement test.

## 1.6 Measurement Uncertainty

Test Item	Parameters	Expanded Uncertainty ( $U_{Lab}$ )
Conducted Emission	Level Accuracy: 9kHz~150kHz 150kHz to 30MHz	±3.42 dB ±3.42 dB
Radiated Emission	Level Accuracy: 9kHz to 30 MHz	±4.60 dB
Radiated Emission	Level Accuracy: 30MHz to 1000 MHz	±4.40 dB
Radiated Emission	Level Accuracy: Above 1000MHz	±4.20 dB

## 1.7 Test Facility

The testing was performed by the Shenzhen Toby Technology Co., Ltd., in their facilities located at: 1A/F., Bldg.6, Yusheng Industrial Zone, The National Road No.107 Xixiang Section 467, Xixiang, Bao'an, Shenzhen, Guangdong, China.

At the time of testing, the following bodies accredited the Laboratory:

### CNAS (L5813)

The Laboratory has been accredited by CNAS to ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories for the competence in the field of testing. And the Registration No.: CNAS L5813.

### FCC List No.: (811562)

The Laboratory is listed in the United States of American Federal Communications Commission (FCC), and the registration number is 811562.

### IC Registration No.: (11950A-1)

The Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing. The site registration: Site# 11950A-1.

## 2. Test Summary

Test Standards and Test Results			
Standard	Document Title		
Standard Section	Test Item	Judgment	Remark
FCC Part 2 (10-1-05 Edition)	Frequency Allocations and Radio Treaty Matters; General Rules and Regulations		
FCC Part 22 (10-1-05 Edition)	Public Mobile Services		
FCC Part 24 (10-1-05 Edition)	Personal Communications Services		
2.1046	Conducted RF Output Power	PASS	N/A
24.232(d)	Peak-Average Ratio	PASS	N/A
2.1049; 22.917; 24.238	99% & -26 dB Occupied Bandwidth	PASS	N/A
2.1055; 22.355; 24.235	Frequency Stability	PASS	N/A
2.1051; 2.1057; 22.917; 24.238	Conducted Out of Band Emissions	PASS	N/A
2.1051; 2.1057; 22.917; 24.238	Band Edge	PASS	N/A
22.913; 24.238	Transmitter Radiated Power (EIRP/ERP)	PASS	N/A
2.1053; 2.1057; 22.917; 24.238	Radiated Out of Band Emissions	PASS	N/A
<b>Note:</b> N/A is an abbreviation for Not Applicable.			

### 3. Test Equipment

<b>AC Main Conducted Emission</b>					
<b>Description</b>	<b>Manufacturer</b>	<b>Model No.</b>	<b>Serial No.</b>	<b>Cal. Date</b>	<b>Cal. Due Date</b>
EMI Test Receiver	ROHDE& SCHWARZ	ESCI	100321	Jul. 22, 2016	Jul. 21, 2017
50ΩCoaxial Switch	Anritsu	MP59B	X10321	Jul. 22, 2016	Jul. 21, 2017
L.I.S.N	Rohde & Schwarz	ENV216	101131	Jul. 22, 2016	Jul. 21, 2017
L.I.S.N	SCHWARZBECK	NNBL 8226-2	8226-2/164	Jul. 22, 2016	Jul. 21, 2017
<b>Radiation Spurious Emission</b>					
<b>Description</b>	<b>Manufacturer</b>	<b>Model No.</b>	<b>Serial No.</b>	<b>Cal. Date</b>	<b>Cal. Due Date</b>
Spectrum Analyzer	Agilent	E4407B	MY45106456	Jul. 22, 2016	Jul. 21, 2017
EMI Test Receiver	Rohde & Schwarz	ESCI	100010/007	Jul. 22, 2016	Jul. 21, 2017
Bilog Antenna	ETS-LINDGREN	3142E	00117537	Mar. 20, 2016	Mar. 19, 2017
Bilog Antenna	ETS-LINDGREN	3142E	00117542	Mar. 20, 2016	Mar. 19, 2017
Horn Antenna	ETS-LINDGREN	3117	00143207	Mar. 19, 2016	Mar. 18, 2017
Horn Antenna	ETS-LINDGREN	3117	00143209	Mar. 19, 2016	Mar. 18, 2017
Pre-amplifier	Sonoma	310N	185903	Mar. 20, 2016	Mar. 19, 2017
Pre-amplifier	HP	8449B	3008A00849	Mar. 26, 2016	Mar. 25, 2017
Cable	HUBER+SUHNER	100	SUCOFLEX	Mar. 26, 2016	Mar. 25, 2017
Signal Generator	Rohde & Schwarz	SML03	IKW682-054	Mar. 26, 2016	Mar. 25, 2017
Positioning Controller	ETS-LINDGREN	2090	N/A	N/A	N/A
Universal Radio Communication Tester	Rohde&Schwarz	CMU200	103903	Jun.23, 2016	Jun.22, 2017
<b>Antenna Conducted Emission</b>					
<b>Description</b>	<b>Manufacturer</b>	<b>Model No.</b>	<b>Serial No.</b>	<b>Cal. Date</b>	<b>Cal. Due Date</b>
Spectrum Analyzer	Agilent	E4407B	MY45106456	Jul. 22, 2016	Jul. 21, 2017
Spectrum Analyzer	Rohde & Schwarz	ESCI	100321	Jul. 22, 2016	Jul. 21, 2017
Universal Radio Communication Tester	Rohde&Schwarz	CMU200	103903	Jun.23, 2016	Jun.22, 2017

## 4. Frequency Stability

### 4.1 Test Standard and Requirement

#### 4.1.1 Test Standard

FCC Part 2.1055

FCC Part 22.355

FCC Part 24.235

#### 4.1.2 Requirement

According to FCC section 22.355 and FCC section 24.235, the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. According to FCC section 2.1055, the test conditions are:

#### (1) Temperature:


The temperature is varied from -30°C to +50°C at intervals of not more than 10°C.

#### (2) Primary Supply Voltage:


For hand carried battery powered equipment, the primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer. The supply voltage shall be measured at input to the cable normally provided with the equipment, or at the power supply terminals if cables are not normally provided.

### 4.2 Test Setup

For Temperature Test:

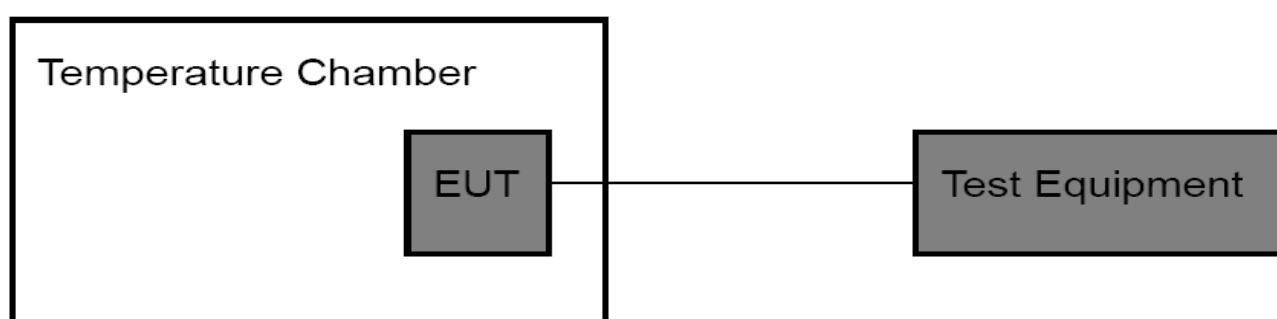

For Voltage Test:

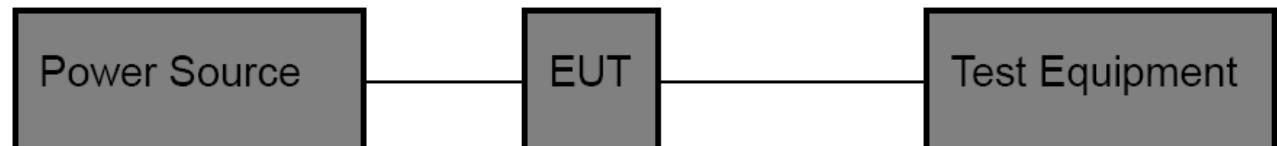

### 4.3 Test Procedure

#### Test Procedures for Temperature Variation:

- (1) The EUT was set up in the thermal chamber and connected with the base station.
- (2) With power off, the temperature was decreased to -30°C and the EUT was stabilized for three hours. Power was applied and the maximum change in frequency was recorded within one minute.
- (3) With power off, the temperature was raised in 10°C set up to 50°C and the EUT was stabilized for three hours. Power was applied and the maximum change in frequency was recorded within one minute.
- (4) If the EUT cannot be turned on at -30°C, the testing lowest temperature will be raised in 10°C step until the EUT can be turned on.

#### Test Procedures for Voltage Variation:

- (1) The EUT was placed in a temperature chamber at  $25 \pm 5^\circ\text{C}$  and connected with the base station.
- (2) Reduce the input voltage to specify extreme voltage variation (+/- 15%) and endpoint, record the maximum frequency change.
- (3) The variation in frequency was measured for the worst case.

### 4.4 EUT Operating Condition

The Equipment Under Test was set to Communication with the Base Station.

### 3.5 Test Data

Please refer the following pages.

**Temperature Variation**

Temperature Variation GSM 850 (CH190)						
Temperature (°C)	GSM		GPRS		EDGE	
	Freq. Dev. (Hz)	Deviation (ppm)	Freq. Dev. (Hz)	Deviation (ppm)	Freq. Dev. (Hz)	Deviation (ppm)
-30	3	0.004	2	0.002	5	0.006
-20	2	0.002	1	0.001	3	0.004
-10	5	0.006	3	0.004	4	0.005
0	1	0.001	2	0.002	2	0.002
10	4	0.005	1	0.001	3	0.004
20	3	0.004	2	0.002	4	0.005
30	1	0.001	4	0.005	3	0.004
40	5	0.006	2	0.002	2	0.002
50	2	0.002	3	0.004	5	0.006
60	3	0.004	1	0.001	1	0.001
<b>Limit</b>	<b>2.5 (ppm)</b>					
<b>Result</b>	<b>PASS</b>					

Temperature Variation GSM 1900 (CH661)						
Temperature (°C)	GSM		GPRS		EDGE	
	Freq. Dev. (Hz)	Deviation (ppm)	Freq. Dev. (Hz)	Deviation (ppm)	Freq. Dev. (Hz)	Deviation (ppm)
-30	2	0.003	3	0.005	7	0.011
-20	3	0.005	2	0.003	3	0.005
-10	1	0.002	3	0.005	5	0.008
0	4	0.006	5	0.008	4	0.006
10	3	0.005	3	0.005	8	0.012
20	2	0.003	4	0.006	5	0.008
30	1	0.002	5	0.008	3	0.005
40	2	0.003	6	0.009	5	0.008
50	3	0.005	4	0.006	4	0.006
60	1	0.002	3	0.005	6	0.009
<b>Limit</b>	<b>2.5 (ppm)</b>					
<b>Result</b>	<b>PASS</b>					

Temperature Variation UMTS Band V (CH 4183)		
Temperature (°C)	RMC Mode	
	Freq. Dev. (Hz)	Deviation (ppm)
-30	3	0.004
-20	1	0.001
-10	4	0.005
0	2	0.002
10	3	0.004
20	0	0.000
30	1	0.001
40	4	0.005
50	3	0.004
60	2	0.002
Limit	2.5 (ppm)	
Result	PASS	

Temperature Variation UMTS Band II (CH 9400)		
Temperature (°C)	RMC Mode	
	Freq. Dev. (Hz)	Deviation (ppm)
-30	10	0.005
-20	12	0.006
-10	9	0.005
0	11	0.006
10	9	0.005
20	8	0.004
30	10	0.005
40	9	0.005
50	8	0.004
60	11	0.006
Limit	2.5 (ppm)	
Result	PASS	

**Voltage Variation**

Voltage Variation GSM 850 (CH190)						
Voltage (V)	GSM		GPRS		EDGE	
	Freq. Dev. (Hz)	Deviation (ppm)	Freq. Dev. (Hz)	Deviation (ppm)	Freq. Dev. (Hz)	Deviation (ppm)
3.15	2	0.002	5	0.006	8	0.010
3.70	4	0.005	8	0.010	5	0.006
4.26	6	0.007	6	0.007	7	0.008
Limit	2.5 (ppm)					
Result	PASS					

Voltage Variation GSM 1900 (CH661)						
Voltage (V)	GSM		GPRS		EDGE	
	Freq. Dev. (Hz)	Deviation (ppm)	Freq. Dev. (Hz)	Deviation (ppm)	Freq. Dev. (Hz)	Deviation (ppm)
3.15	3	0.005	5	0.008	6	0.009
3.70	4	0.006	4	0.006	8	0.012
4.26	2	0.003	6	0.009	9	0.014
Limit	2.5 (ppm)					
Result	PASS					

Voltage Variation UMTS Band V (CH 4182)		
Voltage (V)	RMC Mode	
	Freq. Dev. (Hz)	Deviation (ppm)
3.15	8	0.010
3.70	5	0.006
4.26	3	0.004
Limit	2.5 (ppm)	
Result	PASS	

Voltage Variation UMTS Band II (CH 9400)		
Voltage (V)	RMC Mode	
	Freq. Dev. (Hz)	Deviation (ppm)
3.15	14	0.007
3.70	12	0.006
4.26	13	0.007
Limit	2.5 (ppm)	
Result	PASS	

## 5. Conducted RF Output Power

### 5.1 Test Standard and Limit

#### 5.1.1 Test Standard

FCC Part 2: 2.1046


FCC Part 22H : 22.913 (a)

FCC Part 24E: 24.232 (c)

#### 5.1.2 Test Limit

GSM850/UMTS Band V	PCS 1900/UMTS Band II
38.5 dBm (ERP)	33 dBm (EIRP)

### 5.2 Test Setup

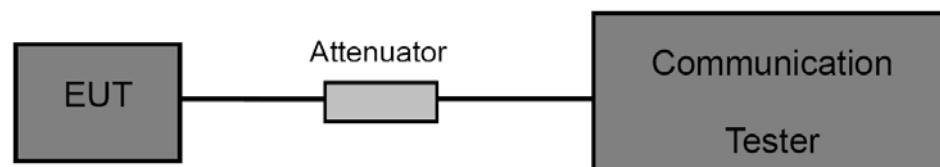

### 5.3 Test Procedure

- (1) The EUT is coupled to the Base Station with the suitable Attenuator, the path loss is calibrated to correct the reading.
- (2) A call is set up by the Base Station to the generic call set up procedure.
- (3) Set EUT at maximum power level through base station by power level command.
- (4) Then read record the power value from the Base Station in dBm.

### 5.4 EUT Operating Condition

The EUT was continuously connected with the Base station and transmitting in the max power during the test.

### 5.5 EUT Operating Condition

GSM 850				
Mode	Channel	Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)
GSM 850	128	824.2	32.65	1.841
	190	836.6	32.74	1.879
	251	848.8	32.72	1.871
GPRS 850 (1 Slot)	128	824.2	31.26	1.337
	190	836.6	31.12	1.294
	251	848.8	31.09	1.285
GPRS 850 (2 Slot)	128	824.2	30.65	1.161
	190	836.6	30.71	1.178
	251	848.8	30.72	1.180
GPRS 850 (3 Slot)	128	824.2	29.25	0.841
	190	836.6	29.42	0.875
	251	848.8	29.52	0.895
GPRS 850 (4 Slot)	128	824.2	28.15	0.653
	190	836.6	28.23	0.665
	251	848.8	28.15	0.653
EDGE 850 (1 Slot)	128	824.2	30.42	1.102
	190	836.6	30.11	1.026
	251	848.8	29.95	0.989
EDGE 850 (2 Slot)	128	824.2	28.29	0.675
	190	836.6	28.05	0.638
	251	848.8	27.82	0.605
EDGE 850 (3 Slot)	128	824.2	26.35	0.432
	190	836.6	26.98	0.499
	251	848.8	26.81	0.480
EDGE 850 (4 Slot)	128	824.2	25.30	0.339
	190	836.6	25.97	0.395
	251	848.8	25.81	0.381

PCS 1900				
Mode	Channel	Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)
GSM 1900	512	1850.2	31.06	1.276
	661	1880.0	30.78	1.197
	810	1909.8	30.52	1.127
GPRS 1900 (1 Slot)	512	1850.2	31.09	1.285
	661	1880.0	30.78	1.197
	810	1909.8	30.57	1.140
GPRS 1900 (2 Slot)	512	1850.2	29.09	0.811
	661	1880.0	29.82	0.959
	810	1909.8	29.60	0.912
GPRS 1900 (3 Slot)	512	1850.2	28.10	0.646
	661	1880.0	27.82	0.605
	810	1909.8	27.60	0.575
GPRS 1900 (4 Slot)	512	1850.2	26.09	0.406
	661	1880.0	26.78	0.476
	810	1909.8	26.57	0.454
EDGE 1900 (1 Slot)	512	1850.2	29.57	0.906
	661	1880.0	29.56	0.904
	810	1909.8	29.48	0.887
EDGE 1900 (2 Slot)	512	1850.2	28.35	0.684
	661	1880.0	28.16	0.655
	810	1909.8	28.05	0.638
EDGE 1900 (3 Slot)	512	1850.2	27.50	0.562
	661	1880.0	26.87	0.486
	810	1909.8	26.08	0.406
EDGE 1900 (4 Slot)	512	1850.2	25.23	0.333
	661	1880.0	25.17	0.329
	810	1909.8	25.08	0.322

UMTS Band V				
Mode	Channel	Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)
Band V RMC	4132	826.4	22.74	0.188
	4183	836.6	22.58	0.181
	4233	846.6	22.76	0.189
HSDPA Subtest 1	4132	826.4	21.74	0.149
	4183	836.6	21.66	0.147
	4233	846.6	21.81	0.152
HSDPA Subtest 2	4132	826.4	21.42	0.139
	4183	836.6	21.32	0.136
	4233	846.6	21.26	0.134
HSDPA Subtest 3	4132	826.4	20.86	0.122
	4183	836.6	20.98	0.125
	4233	846.6	20.75	0.119
HSDPA Subtest 4	4132	826.4	20.91	0.123
	4183	836.6	20.86	0.122
	4233	846.6	20.87	0.122
HSUPA Subtest 1	4132	826.4	21.42	0.139
	4183	836.6	21.32	0.136
	4233	846.6	21.23	0.133
HSUPA Subtest 2	4132	826.4	21.13	0.130
	4183	836.6	21.47	0.140
	4233	846.6	21.36	0.137
HSUPA Subtest 3	4132	826.4	21.26	0.134
	4183	836.6	21.18	0.131
	4233	846.6	21.36	0.137
HSUPA Subtest 4	4132	826.4	20.21	0.105
	4183	836.6	19.98	0.100
	4233	846.6	20.25	0.106
HSUPA Subtest 5	4132	826.4	20.11	0.103
	4183	836.6	20.15	0.104
	4233	846.6	19.99	0.100

UMTS Band II				
Mode	Channel	Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)
Band II RMC	9262	1852.4	20.04	0.101
	9400	1880.0	20.26	0.106
	9538	1907.6	20.77	0.119
HSDPA Subtest 1	9262	1852.4	20.68	0.117
	9400	1880.0	20.61	0.115
	9538	1907.6	20.57	0.114
HSDPA Subtest 2	9262	1852.4	20.16	0.104
	9400	1880.0	20.14	0.103
	9538	1907.6	20.18	0.104
HSDPA Subtest 3	9262	1852.4	19.35	0.086
	9400	1880.0	19.68	0.093
	9538	1907.6	19.54	0.090
HSDPA Subtest 4	9262	1852.4	19.84	0.096
	9400	1880.0	19.68	0.093
	9538	1907.6	19.67	0.093
HSUPA Subtest 1	9262	1852.4	20.34	0.108
	9400	1880.0	20.46	0.111
	9538	1907.6	20.57	0.114
HSUPA Subtest 2	9262	1852.4	20.18	0.104
	9400	1880.0	20.26	0.106
	9538	1907.6	20.33	0.108
HSUPA Subtest 3	9262	1852.4	19.54	0.090
	9400	1880.0	19.67	0.093
	9538	1907.6	19.74	0.094
HSUPA Subtest 4	9262	1852.4	19.35	0.086
	9400	1880.0	19.38	0.087
	9538	1907.6	19.75	0.094
HSUPA Subtest 5	9262	1852.4	19.38	0.087
	9400	1880.0	19.72	0.094
	9538	1907.6	19.84	0.096

## 6. Peak-Average Ratio

### 6.1 Test Standard and Limit

#### 6.1.1 Test Standard


FCC Part 24E: 24.232 (d)

#### 6.1.2 Test Limit

**PCS 1900 /UMTS Band II**

The peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

### 6.2 Test Setup

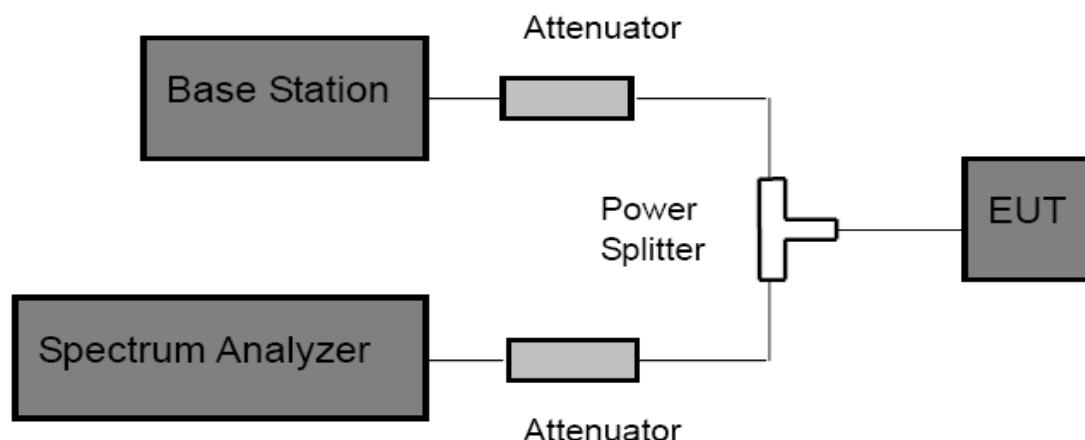

### 6.3 Test Procedure

According with KDB 971168

- (1) The signal analyzer's CCDF measurement profile is enabled.
- (2) Frequency = carrier center frequency.
- (3) Measurement BW>Emission bandwidth of signal.
- (4) The signal analyzer was set to collect one million samples to generate the CCDF curve.
- (5) The measurement interval was set depending on the type of signal analyzed. For continuous signals (>98% duty cycle), the measurement interval was set to 1ms. For burst transmissions, the spectrum analyzer is set to use an internal "RF Burst" trigger that is synced with an incoming pulse and the measurement interval is set to less than the duration of the "on time" of one burst to ensure that energy is only captured during a time in which the transmitter is operating at maximum power.


### 6.4 EUT Operating Condition


The EUT was continuously connected with the Base station and transmitting in the max power

during the test.

## 6.5 Test Data

PCS 1900			
Mode	Channel	Frequency (MHz)	Peak-Average Ratio (PAR)
PCS 1900	512	1850.2	0.065
	661	1880.0	0.004
	810	1909.8	0.004

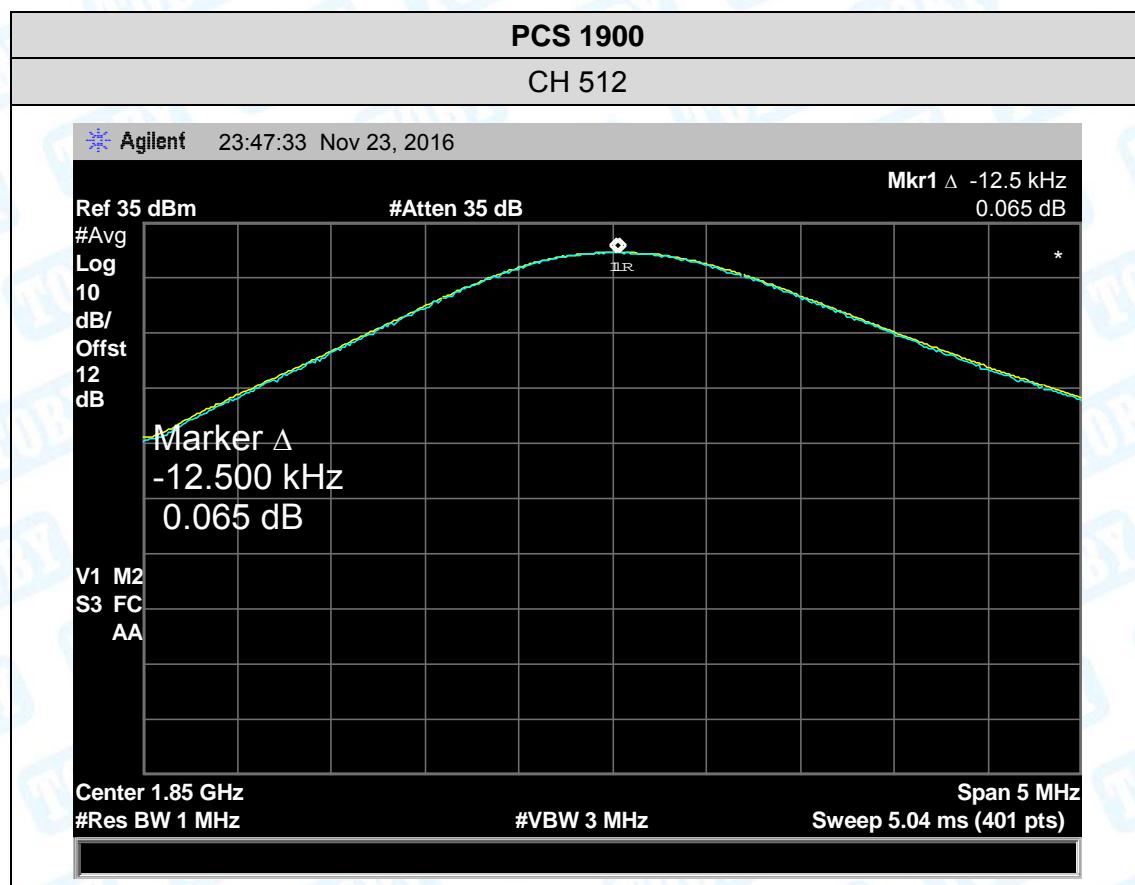

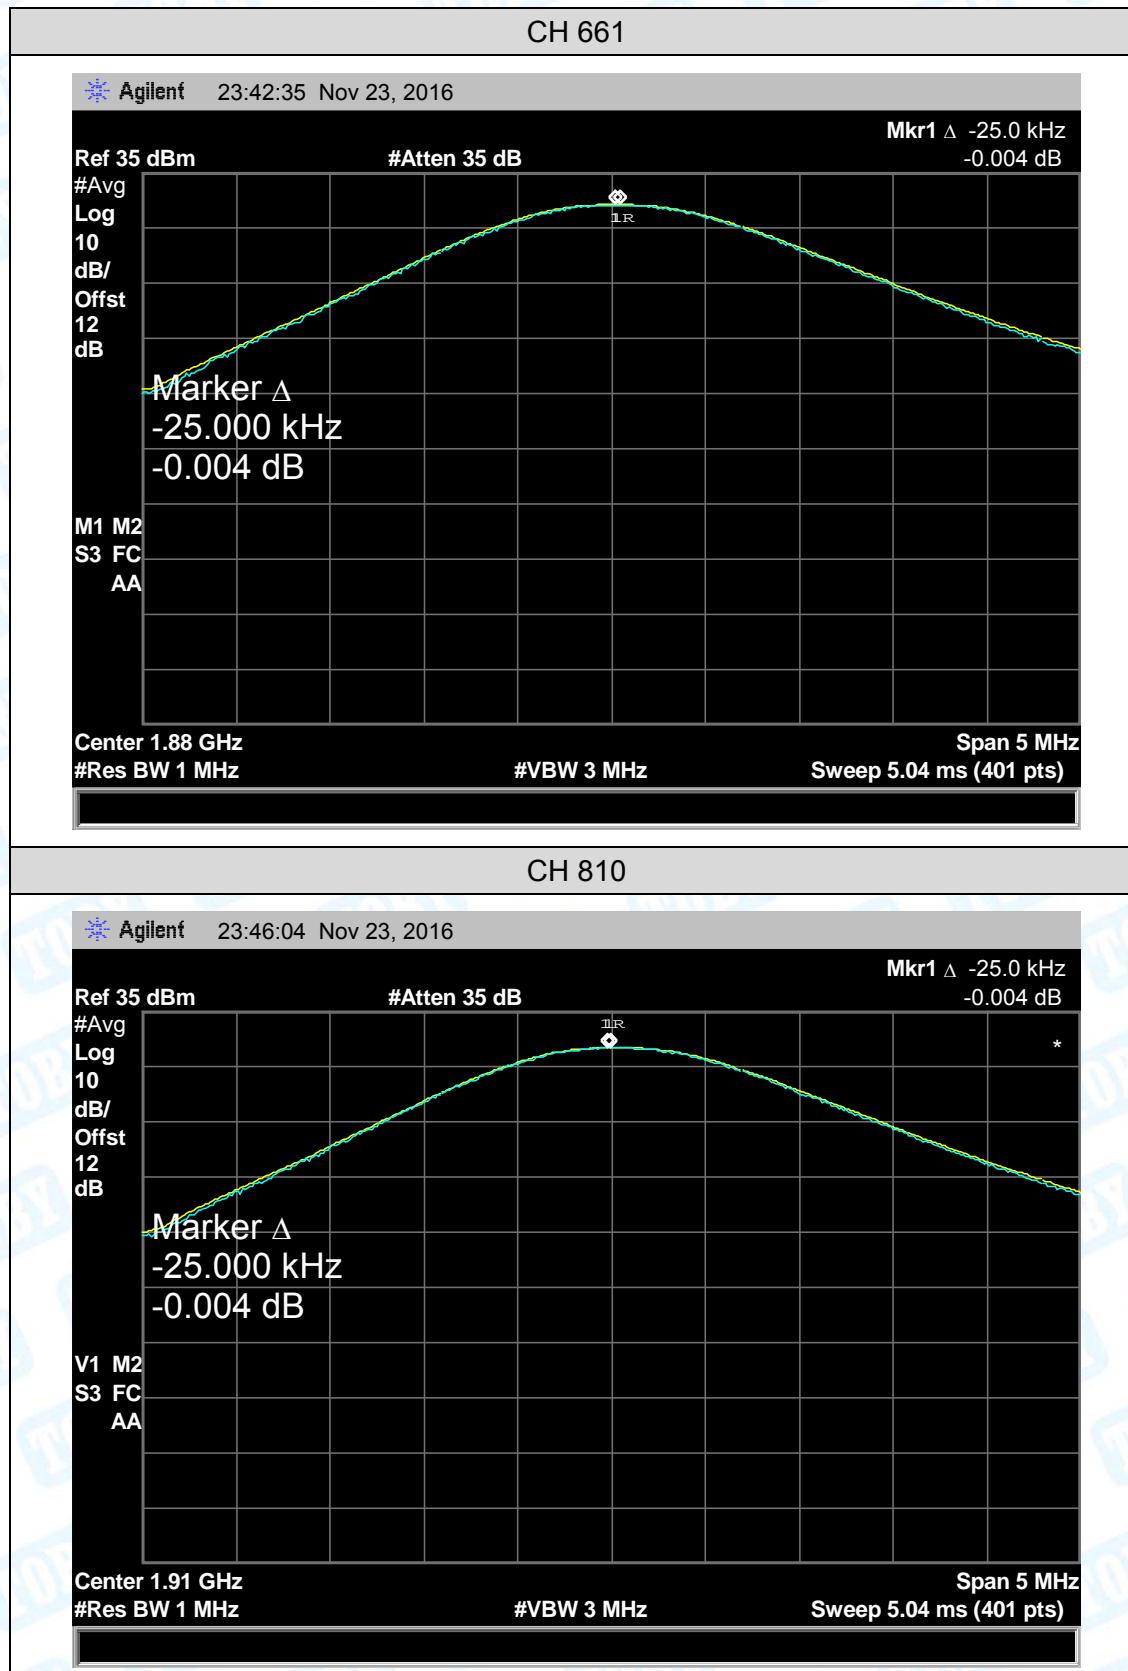


**UMTS Band II**

Mode	Channel	Frequency (MHz)	Peak-Average Ratio (PAR)
UMTS Band II	9262	1852.4	2.96
	9400	1880.0	3.10
	9538	1907.6	2.99

**UMTS Band II**

CH 9262

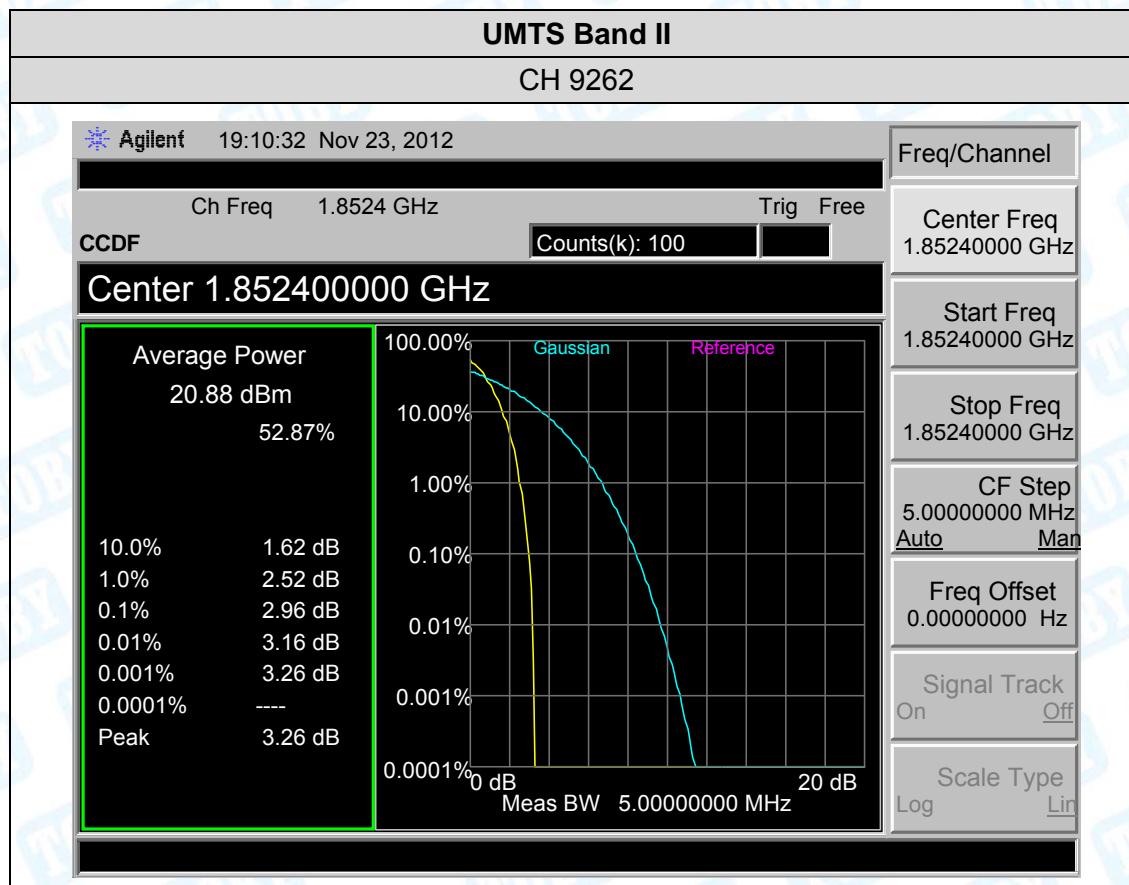



## 7. Radiated Output Power

### 7.1 Test Standard and Limit

#### 7.1.1 Test Standard

FCC Part 22H : 22.913 (a)

FCC Part 24E: 24.232 (c)


#### 7.1.2 Test Limit

According to FCC Part 22.913 (a), the ERP of Cellular mobile transmitters must not exceed 7 Watts(38.5 dBm).


According to FCC Part 24.232 (c), the Mobile/portable stations are limited to 2 Watts(33 dBm) EIRP peak power.

Cellular Band		PCS Band	
GSM850	UMTS Band V	PCS 1900	UMTS Band II
38.5 dBm (ERP)		33 dBm (EIRP)	

### 7.2 Test Setup

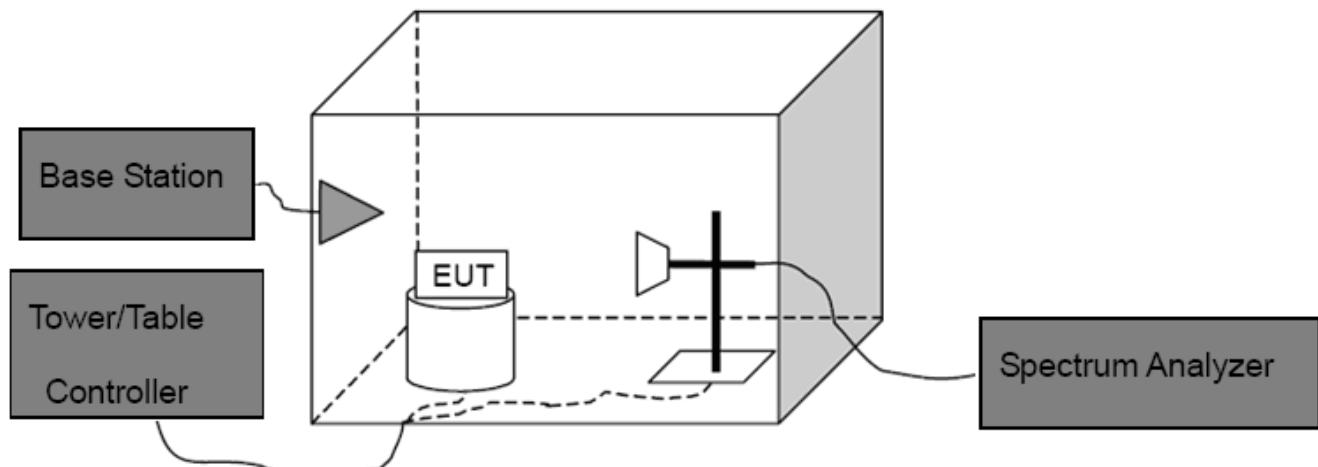

Above 1G

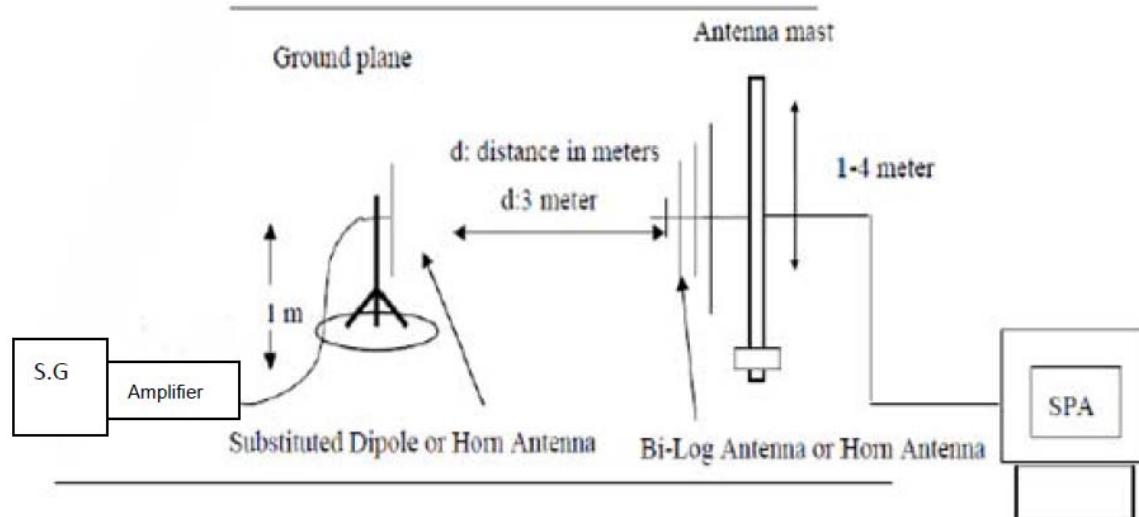

### Substituted Method

#### 7.3 Test Procedure

- (1) The EUT was placed on a non-conductive rotating platform with 0.8 meter height in an anechoic chamber. The radiated emission at the fundamental frequency was measured at 3 m with a test antenna and a spectrum analyzer with RBW=3 MHz, VBW=3 MHz and peak detector settings.
- (2) During the measurement, the EUT was enforced in maximum power and linked with the Base Station. The highest was recorded from analyzer power level (LVT) from the 360 degrees rotation of the turntable and the test antenna raised and lowered over a range from 1 to 4 meters in both horizontally and vertically polarized orientations.
- (3) Effective Isotropic Radiated Power (EIRP) was measured by substitution method according to C63.26. The EUT was replaced by dipole antenna (for frequency below 1 GHz) or Horn antenna (for frequency above 1 GHz) at same location with same polarize of receiver antenna and then a known power of each measure frequency from S.G. was applied into the dipole antenna or Horn antenna through a TX cable, and then recorded the maximum Analyzer reading through raised and lowered the test antenna.

**Note: In test, the S.G Connect the Pre-amplifier(Sonoma 310N Pre-amplifier for frequency below 1 GHz, HP 8449B Pre-amplifier for frequency above 1 GHz )**

Then the EUT's EIRP and ERP was calculated with the correction factor:

$$\text{ERP} = \text{S.G.Level} + \text{Antenna Gain Cord.(dBd)} - \text{Cable Loss(dB)}$$

$$\text{EIRP} = \text{S.G.Level} + \text{Antenna Gain Cord.(dBi)} - \text{Cable Loss(dB)}$$

#### 7.4 EUT Operating Condition

The EUT was continuously connected with the Base station and transmitting in the max power during the test.

## 7.5 Test Data

### Measurement Data (worst case)

GSM 850								
Mode	Channel	Frequency (MHz)	Antenna (H&V)	SG Level (dBm)	Antenna Factor (dBi)	Cable Loss (dB)	ERP Power (dBm)	ERP Power (W)
GSM 850	128	824.2	H	29.06	3.46	1.26	31.26	1.337
			V	27.25	3.46	1.26	29.45	0.881
	190	836.6	H	28.72	3.82	1.26	31.28	1.343
			V	26.79	3.82	1.26	29.35	0.861
	251	848.8	H	28.66	4.16	1.26	31.56	1.432
			V	26.26	4.16	1.26	29.16	0.824
GPRS 850 (1 Slot)	128	824.2	H	28.01	3.46	1.26	30.21	1.050
			V	26.14	3.46	1.26	28.34	0.682
	190	836.6	H	27.48	3.82	1.26	30.04	1.009
			V	25.39	3.82	1.26	27.95	0.624
	251	848.8	H	27.22	4.16	1.26	30.12	1.028
			V	25.25	4.16	1.26	28.15	0.653
EDGE 850 (1 Slot)	128	824.2	H	27.14	3.46	1.26	29.34	0.859
			V	24.93	3.46	1.26	27.13	0.516
	190	836.6	H	26.79	3.82	1.26	29.35	0.861
			V	24.53	3.82	1.26	27.09	0.512
	251	848.8	H	26.26	4.16	1.26	29.16	0.824
			V	24.42	4.16	1.26	27.32	0.540
Limit							38.5	7

PCS 1900								
Mode	Channel	Frequency (MHz)	Antenna (H&V)	SG Level (dBm)	Antenna Factor (dBi)	Cable Loss (dB)	EIRP Power (dBm)	EIRP Power (W)
GSM 1900	512	1850.2	H	24.23	5.01	2.59	26.65	0.462
			V	21.90	5.01	2.59	24.32	0.270
	661	1880.0	H	24.15	4.82	2.59	26.38	0.435
			V	21.89	4.82	2.59	24.12	0.258
	810	1909.8	H	24.59	4.45	2.59	26.45	0.442
			V	22.46	4.45	2.59	24.32	0.270
GPRS 1900 (1 Slot)	512	1850.2	H	23.26	5.01	2.59	25.68	0.370
			V	21.54	5.01	2.59	23.96	0.249
	661	1880.0	H	23.62	4.82	2.59	25.85	0.385
			V	20.92	4.82	2.59	23.15	0.207
	810	1909.8	H	24.01	4.45	2.59	25.87	0.386
			V	21.83	4.45	2.59	23.69	0.234
EDGE 1900 (1 Slot)	512	1850.2	H	22.90	5.01	2.59	25.32	0.340
			V	21.05	5.01	2.59	23.47	0.222
	661	1880.0	H	23.41	4.82	2.59	25.64	0.366
			V	20.91	4.82	2.59	23.14	0.206
	810	1909.8	H	23.79	4.45	2.59	25.65	0.367
			V	21.22	4.45	2.59	23.08	0.203
Limit							33	2

UMTS Band V								
Mode	Channel	Frequency (MHz)	Antenna (H&V)	SG Level (dBm)	Antenna Factor (dBi)	Cable Loss (dB)	EIRP Power (dBm)	EIRP Power (W)
Band V RMC	4132	826.4	H	19.15	3.46	1.26	21.35	0.137
			V	17.14	3.46	1.26	19.34	0.086
	4183	836.6	H	17.78	3.82	1.26	20.34	0.108
			V	16.42	3.82	1.26	18.98	0.079
	4233	846.6	H	17.22	4.16	1.26	20.12	0.103
			V	15.79	4.16	1.26	18.69	0.070
Limit							38.5	7

UMTS Band II								
Mode	Channel	Frequency (MHz)	Antenna (H&V)	SG Level (dBm)	Antenna Factor (dBi)	Cable Loss (dB)	EIRP Power (dBm)	EIRP Power (W)
Band II RMC	9262	1852.4	H	17.86	4.45	2.59	19.72	0.094
			V	14.93	5.01	2.59	17.35	0.054
	9400	1880.0	H	17.45	4.82	2.59	19.68	0.093
			V	15.23	4.82	2.59	17.46	0.056
	9538	1907.6	H	16.94	5.01	2.59	19.36	0.086
			V	15.38	4.45	2.59	17.24	0.053
Limit							33	2

## 8. Occupied Bandwidth

### 8.1 Test Standard and Limit

#### 8.1.1 Test Standard

FCC Part 2: 2.1049

FCC Part 22H : 22.913 (a)


FCC Part 24E: 24.232 (c)

#### 8.1.2 Test Requirement

According to FCC section 2.1049, the occupied bandwidth is the frequency bandwidth such that below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission.

Occupied bandwidth is also known as 99% power and -26dB occupied bandwidths.

### 8.2 Test Setup

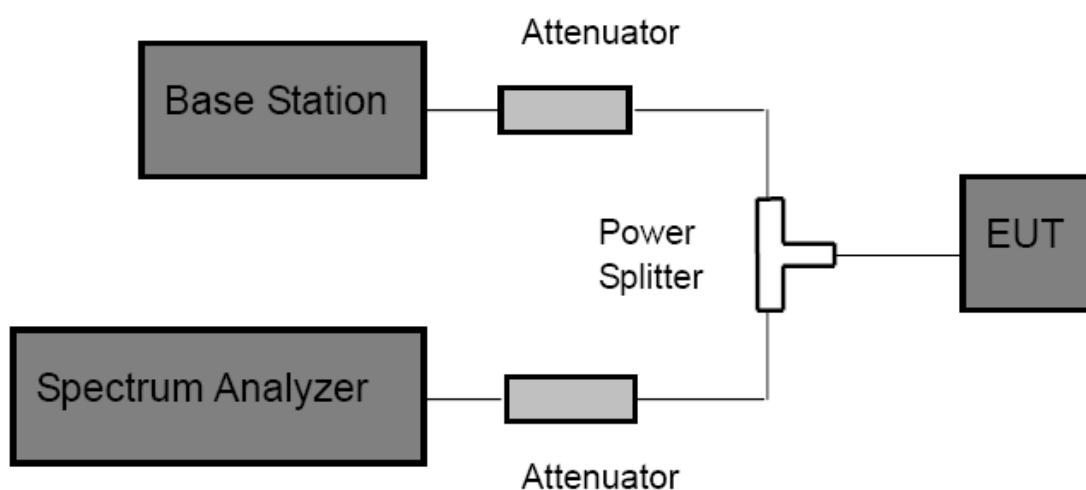

### 8.3 Test Procedure

- (1) The EUT was directly connected to the spectrum analyzer and Base station via power splitter as show in the block diagram above.
- (2) The resolution bandwidth of the Spectrum Analyzer is set to at least 1% of the occupied bandwidth.
- (3) The low, middle and the high channels are selected to perform tests respectively.
- (4) Set the frequency range of the Spectrum Analyzer suitably to capture the waveform; search peak; make a line whose value is 26dB lower than the peak; mark two points which the line intersected the waveform at; finally record the delta of the two points as the occupied bandwidth and the plot.
- (5) Set the Spectrum Analyzer Occupied bandwidth function to measure the 99% occupied bandwidth.

## 8.4 EUT Operating Condition


The EUT was continuously connected with the Base station and transmitting in the max power during the test.


## 8.5 Test Data


Please refer following pages.


<b>GSM 850</b>				
<b>Mode</b>	<b>Channel</b>	<b>Frequency (MHz)</b>	<b>99% OBW (MHz)</b>	<b>-26dB Bandwidth (kHz)</b>
GSM 850	128	824.2	246.6310	319.415
	190	836.6	244.1170	316.514
	251	848.8	248.7042	323.548
GPRS 850 (1 Slot)	128	824.2	246.7618	319.415
	190	836.6	244.6626	304.595
	251	848.8	249.0165	321.970
EDGE 850 (1 Slot)	128	824.2	253.7250	324.117
	190	836.6	247.0442	311.318
	251	848.8	251.1007	318.053
<b>PCS 1900</b>				
<b>Mode</b>	<b>Channel</b>	<b>Frequency (MHz)</b>	<b>99% OBW (MHz)</b>	<b>-26dB Bandwidth (kHz)</b>
GSM 1900	512	1850.2	247.3387	317.045
	661	1880.0	248.2962	320.306
	810	1909.8	242.7890	319.690
GPRS 1900 (1 Slot)	512	1850.2	239.1781	321.108
	661	1880.0	242.0911	320.367
	810	1909.8	246.0710	319.825
EDGE 1900 (1 Slot)	512	1850.2	246.0952	313.720
	661	1880.0	251.0495	324.039
	810	1909.8	246.7407	310.754


UMTS Band V				
Mode	Channel	Frequency (MHz)	99% OBW (MHz)	-26dB Bandwidth (MHz)
Band V RMC	4132	826.4	4.2274	4.899
	4183	836.6	4.2126	4.908
	4233	846.6	4.2049	4.914
Band V HSDPA	4132	826.4	4.2182	4.899
	4183	836.6	4.2145	4.870
	4233	846.6	4.2125	4.862
Band V HSUPA	4132	826.4	4.2116	4.910
	4183	836.6	4.2150	4.915
	4233	846.6	4.2106	4.877
UMTS Band II				
Mode	Channel	Frequency (MHz)	99% OBW (MHz)	-26dB Bandwidth (MHz)
Band II RMC	9262	1852.4	4.2191	4.894
	9400	1880.0	4.2333	4.844
	9538	1907.6	4.2055	4.884
Band II HSDPA	9262	1852.4	4.2144	4.860
	9400	1880.0	4.2112	4.897
	9538	1907.6	4.2205	4.888
Band II HSUPA	9262	1852.4	4.2238	4.897
	9400	1880.0	4.2189	4.854
	9538	1907.6	4.2337	4.869

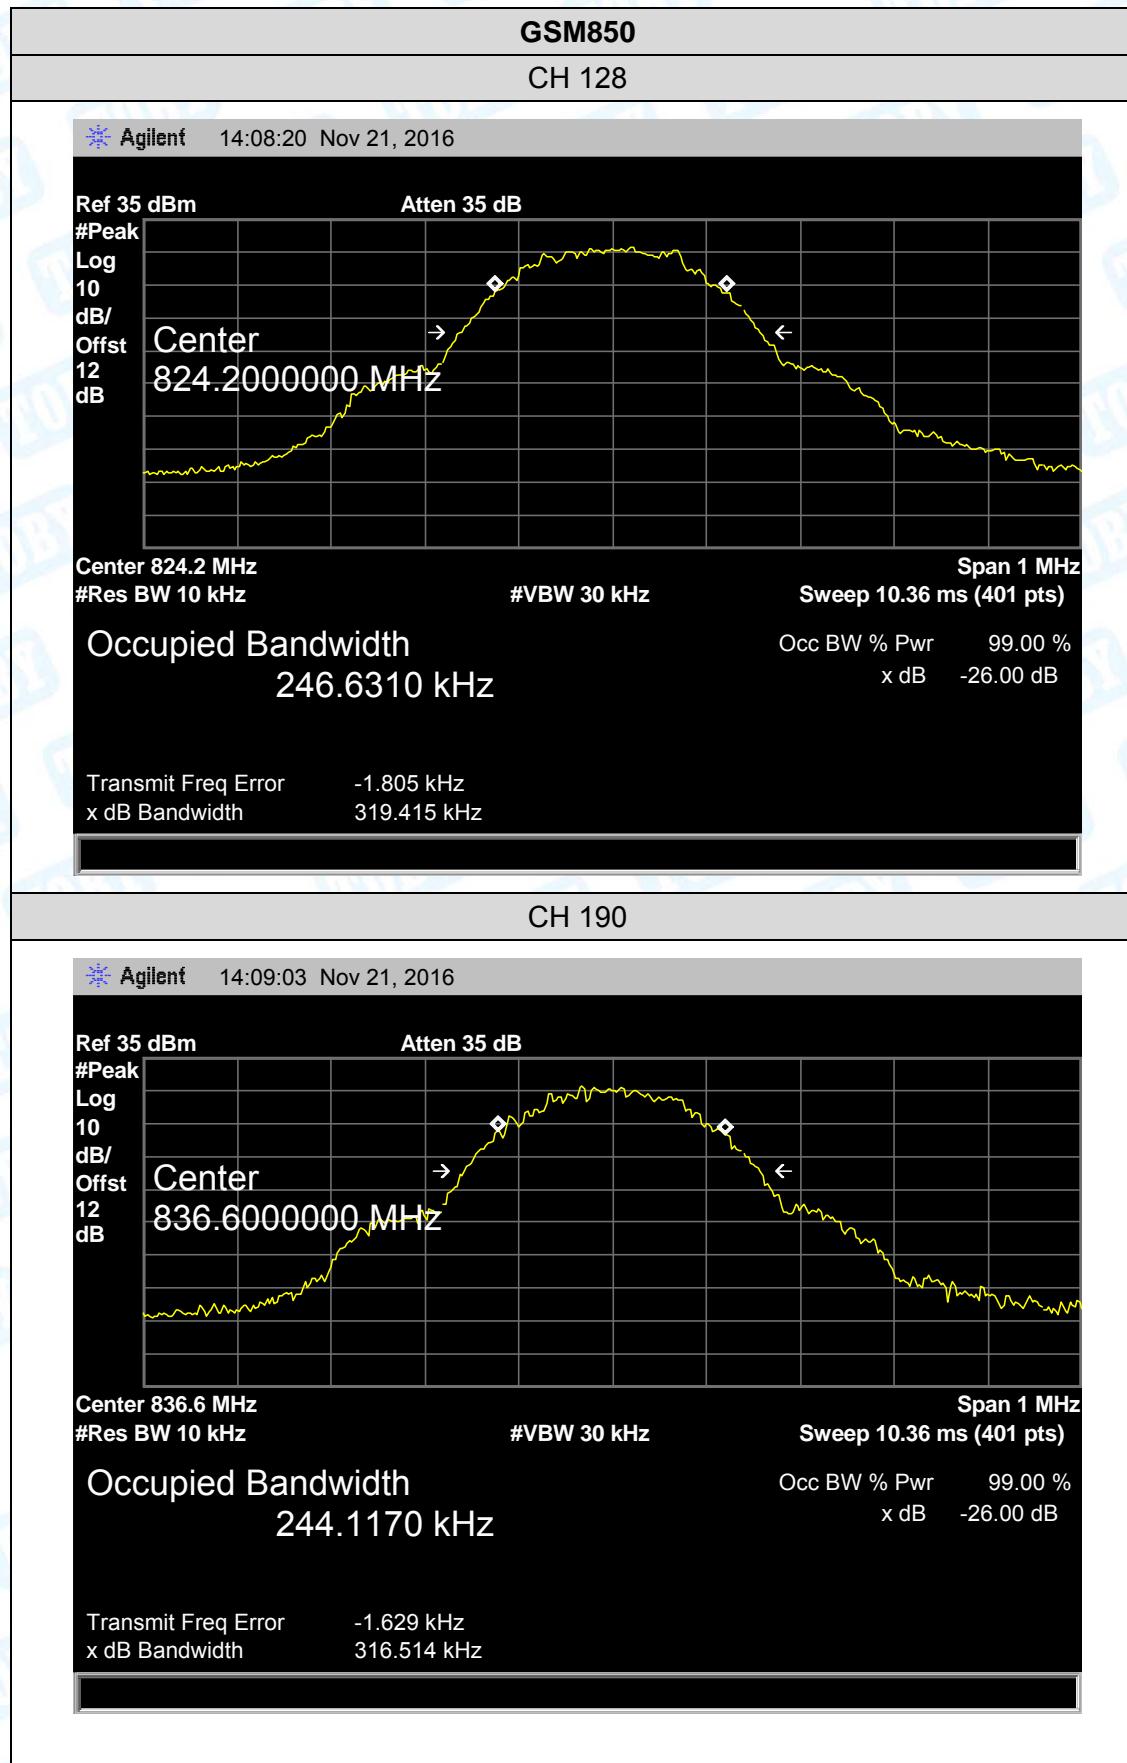


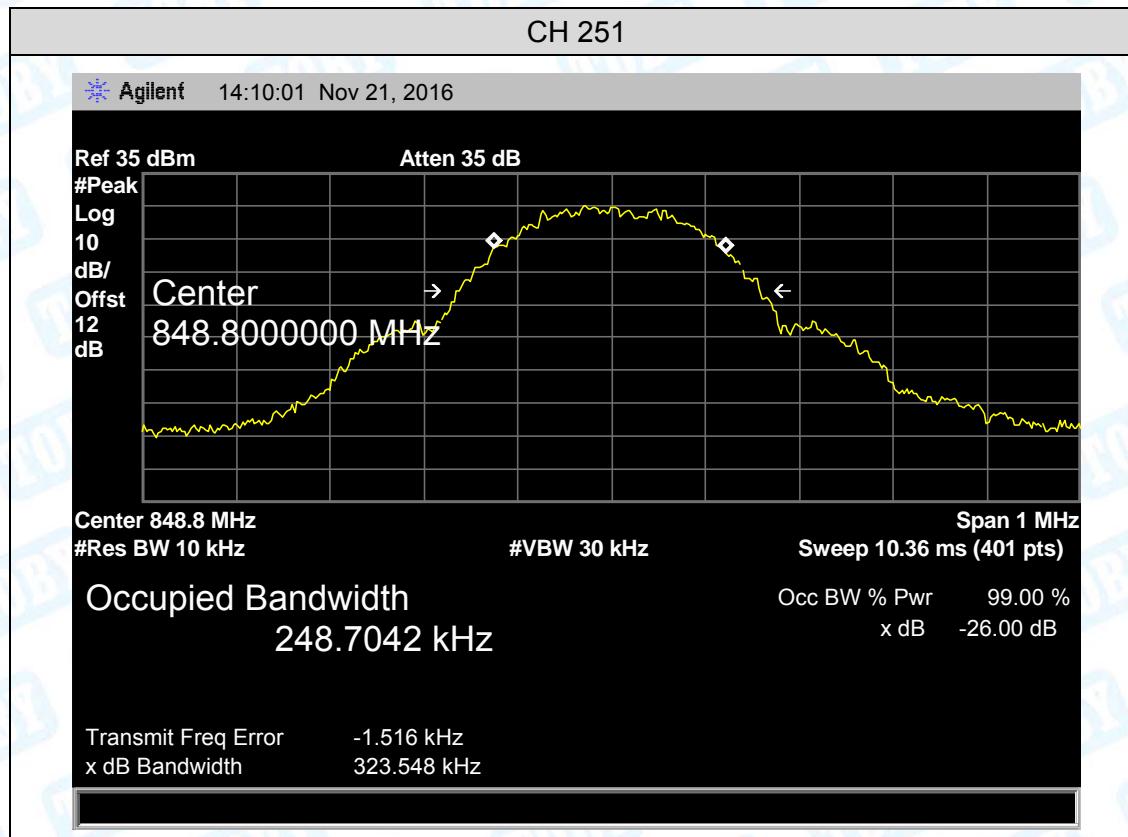


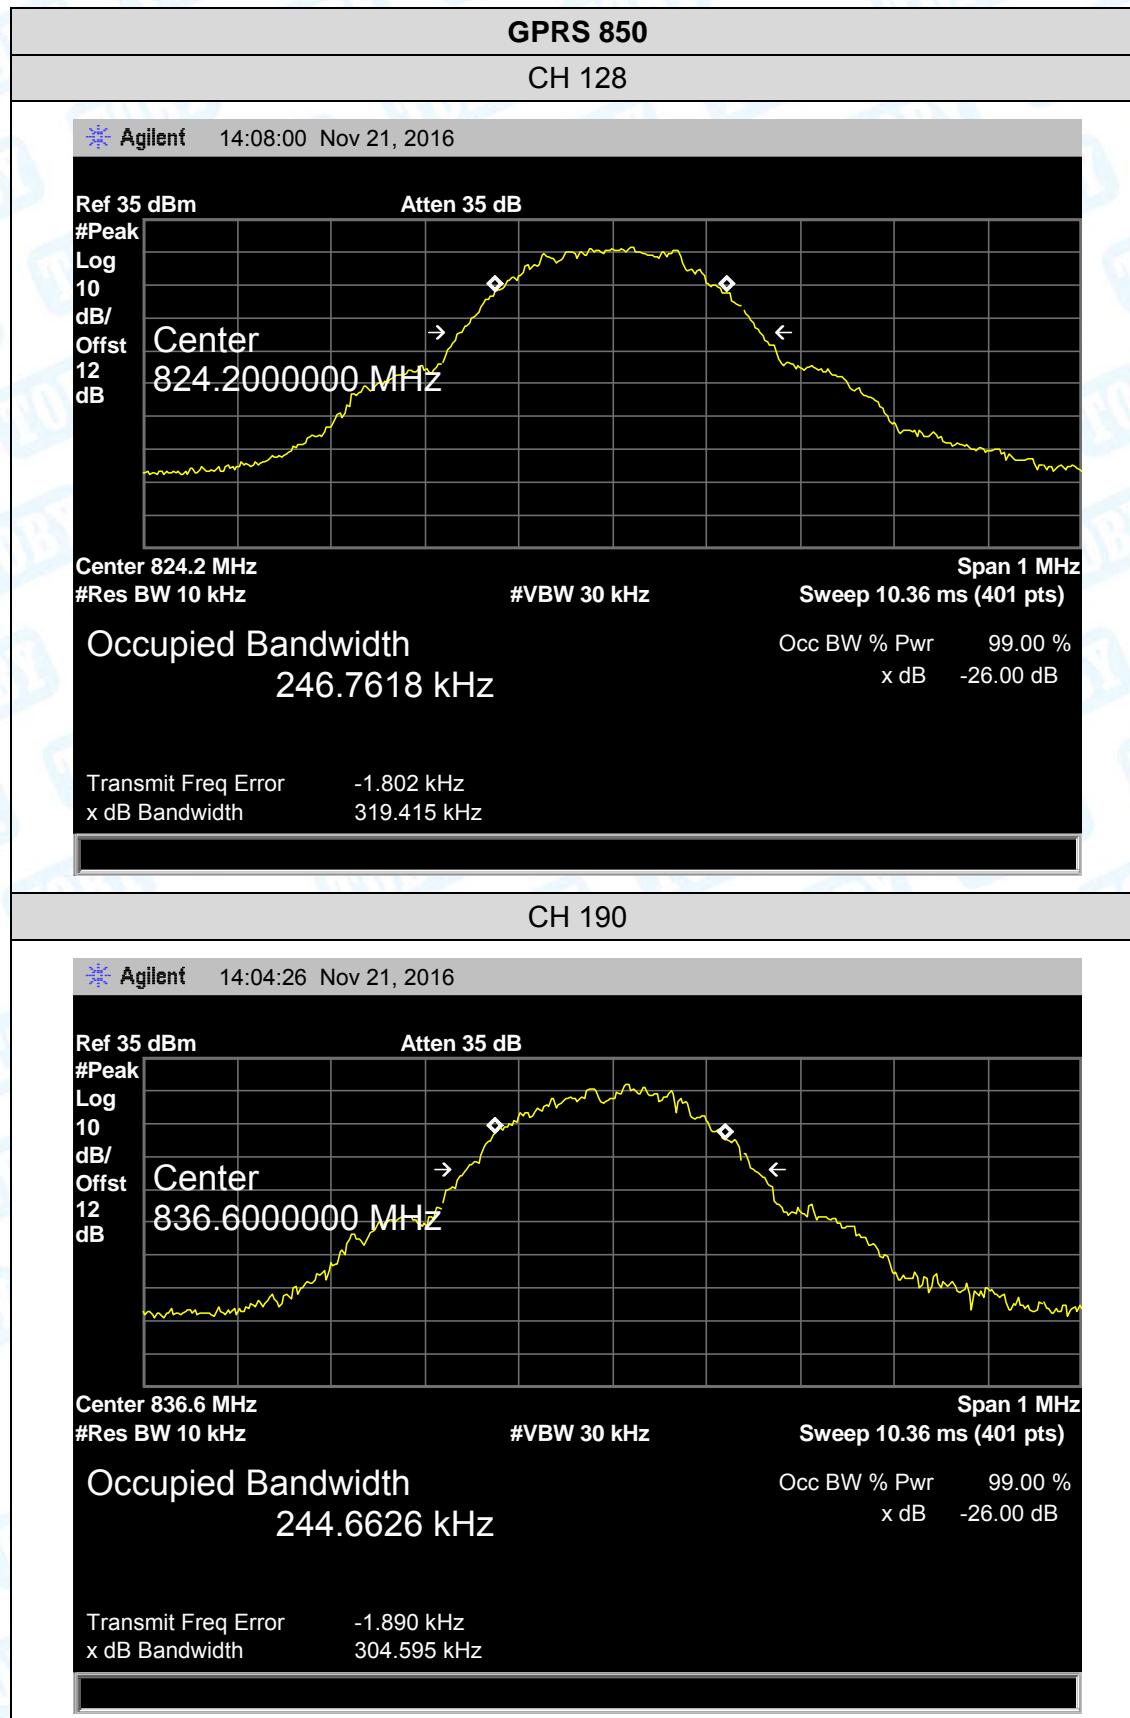


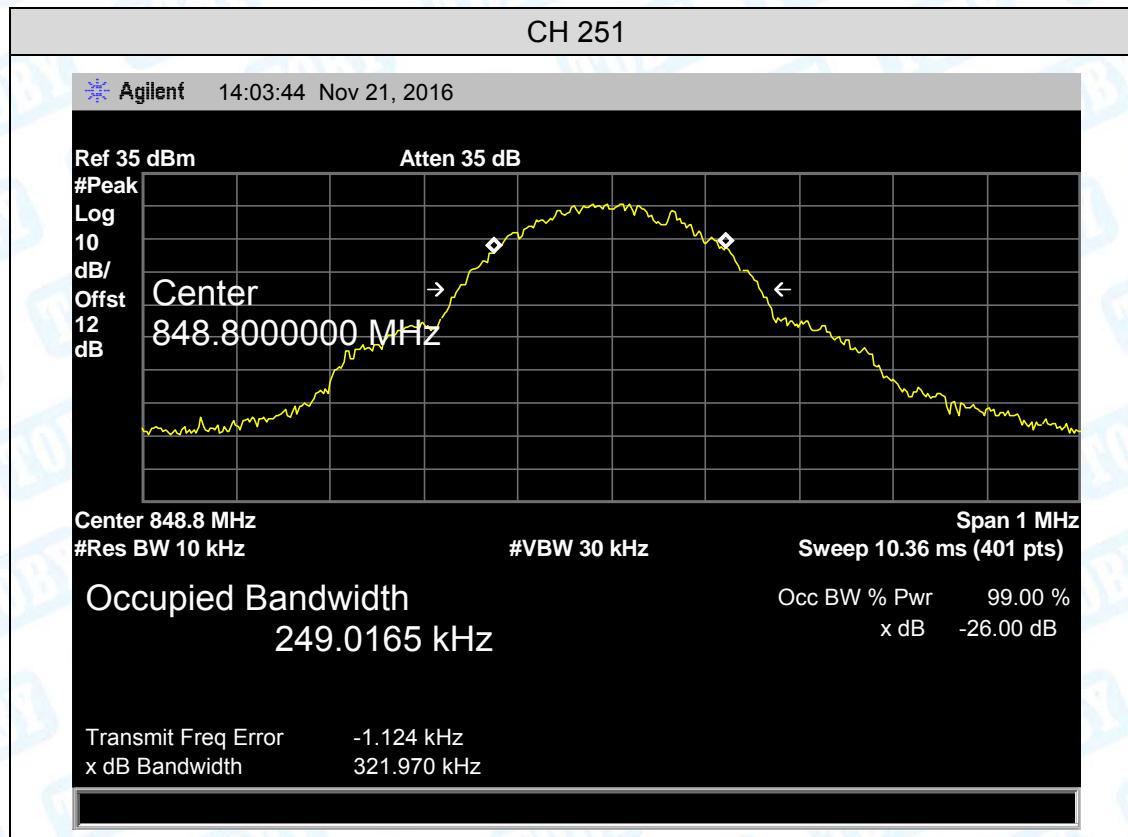


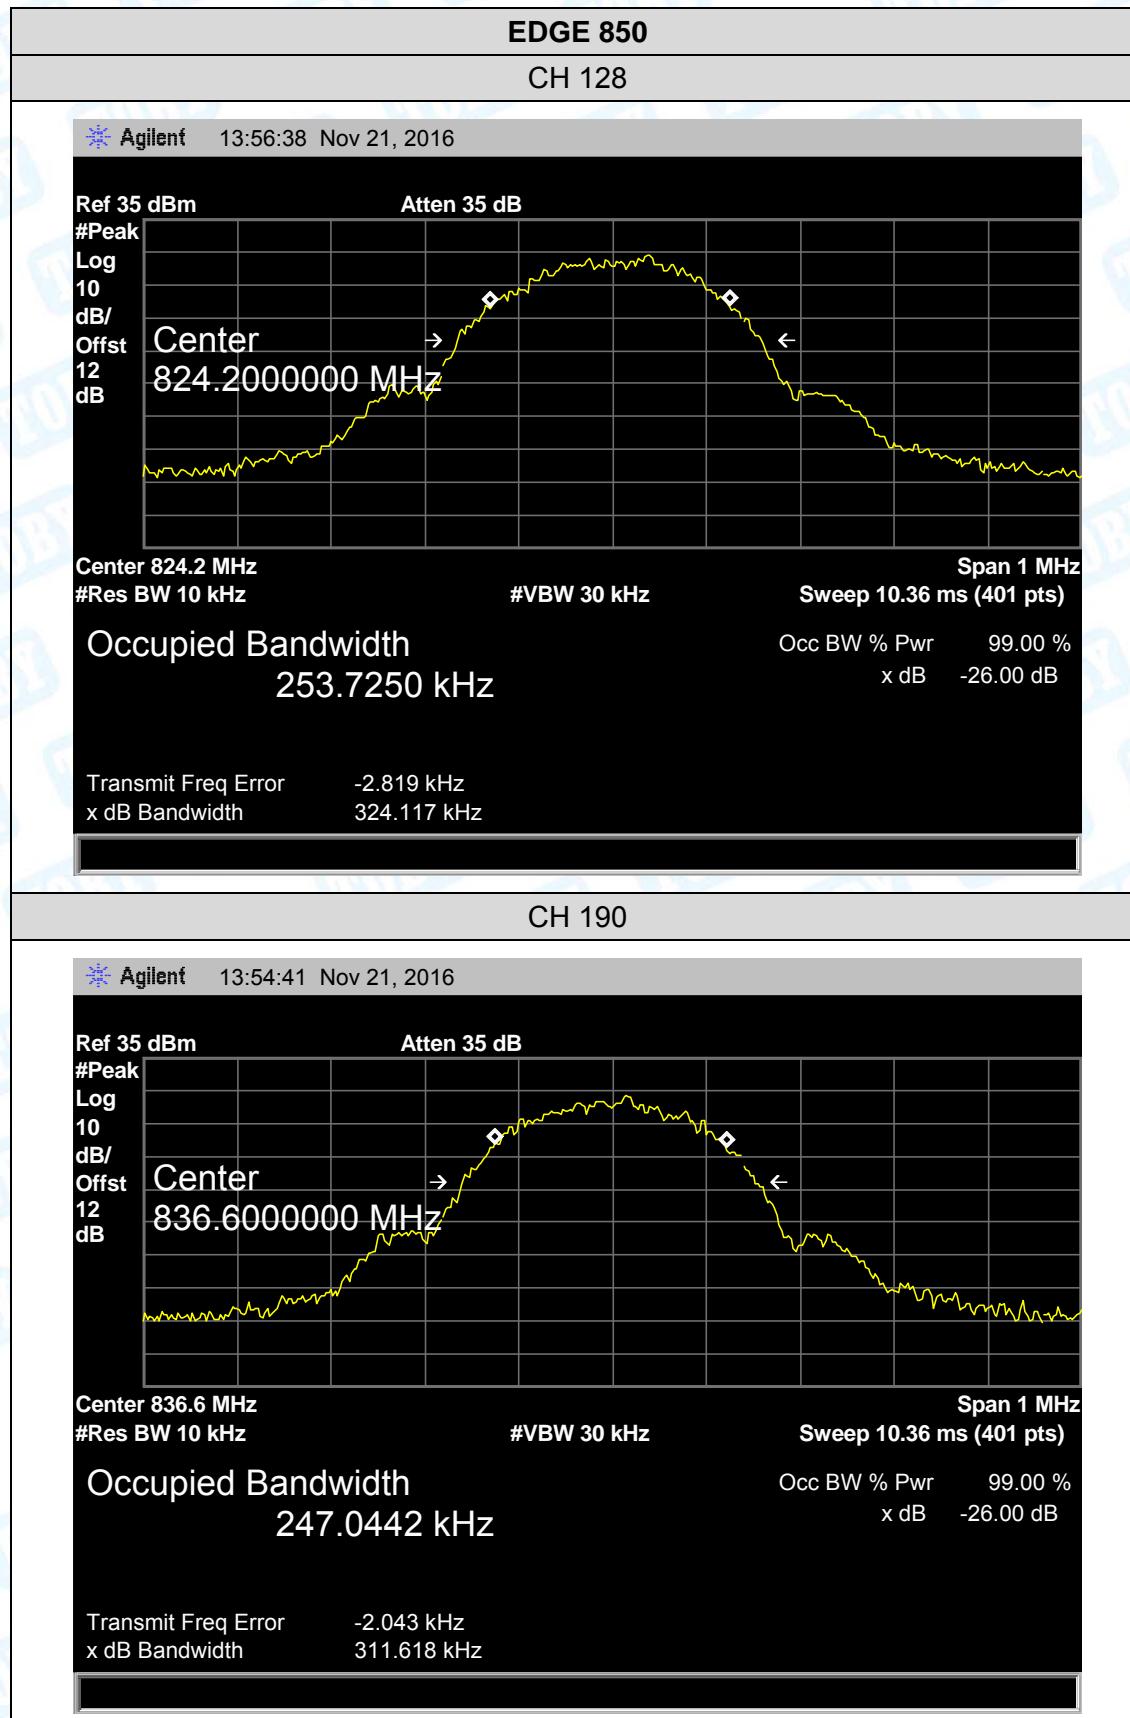


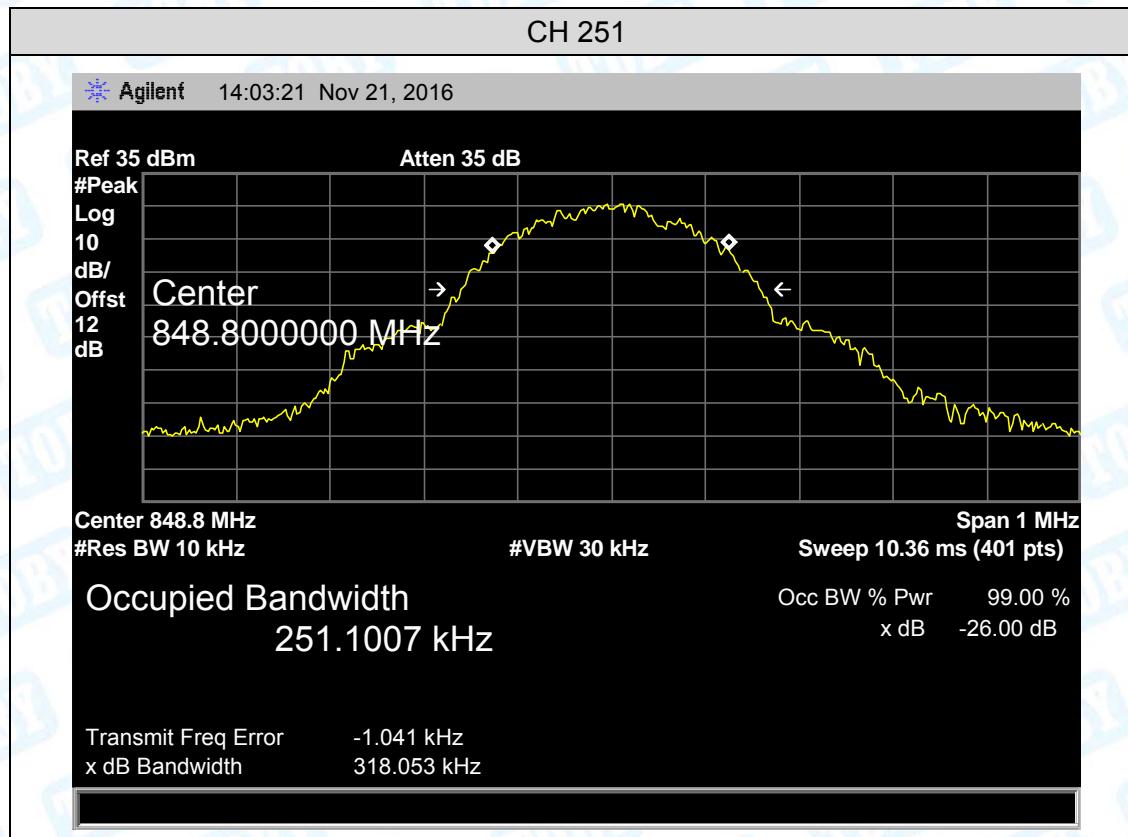


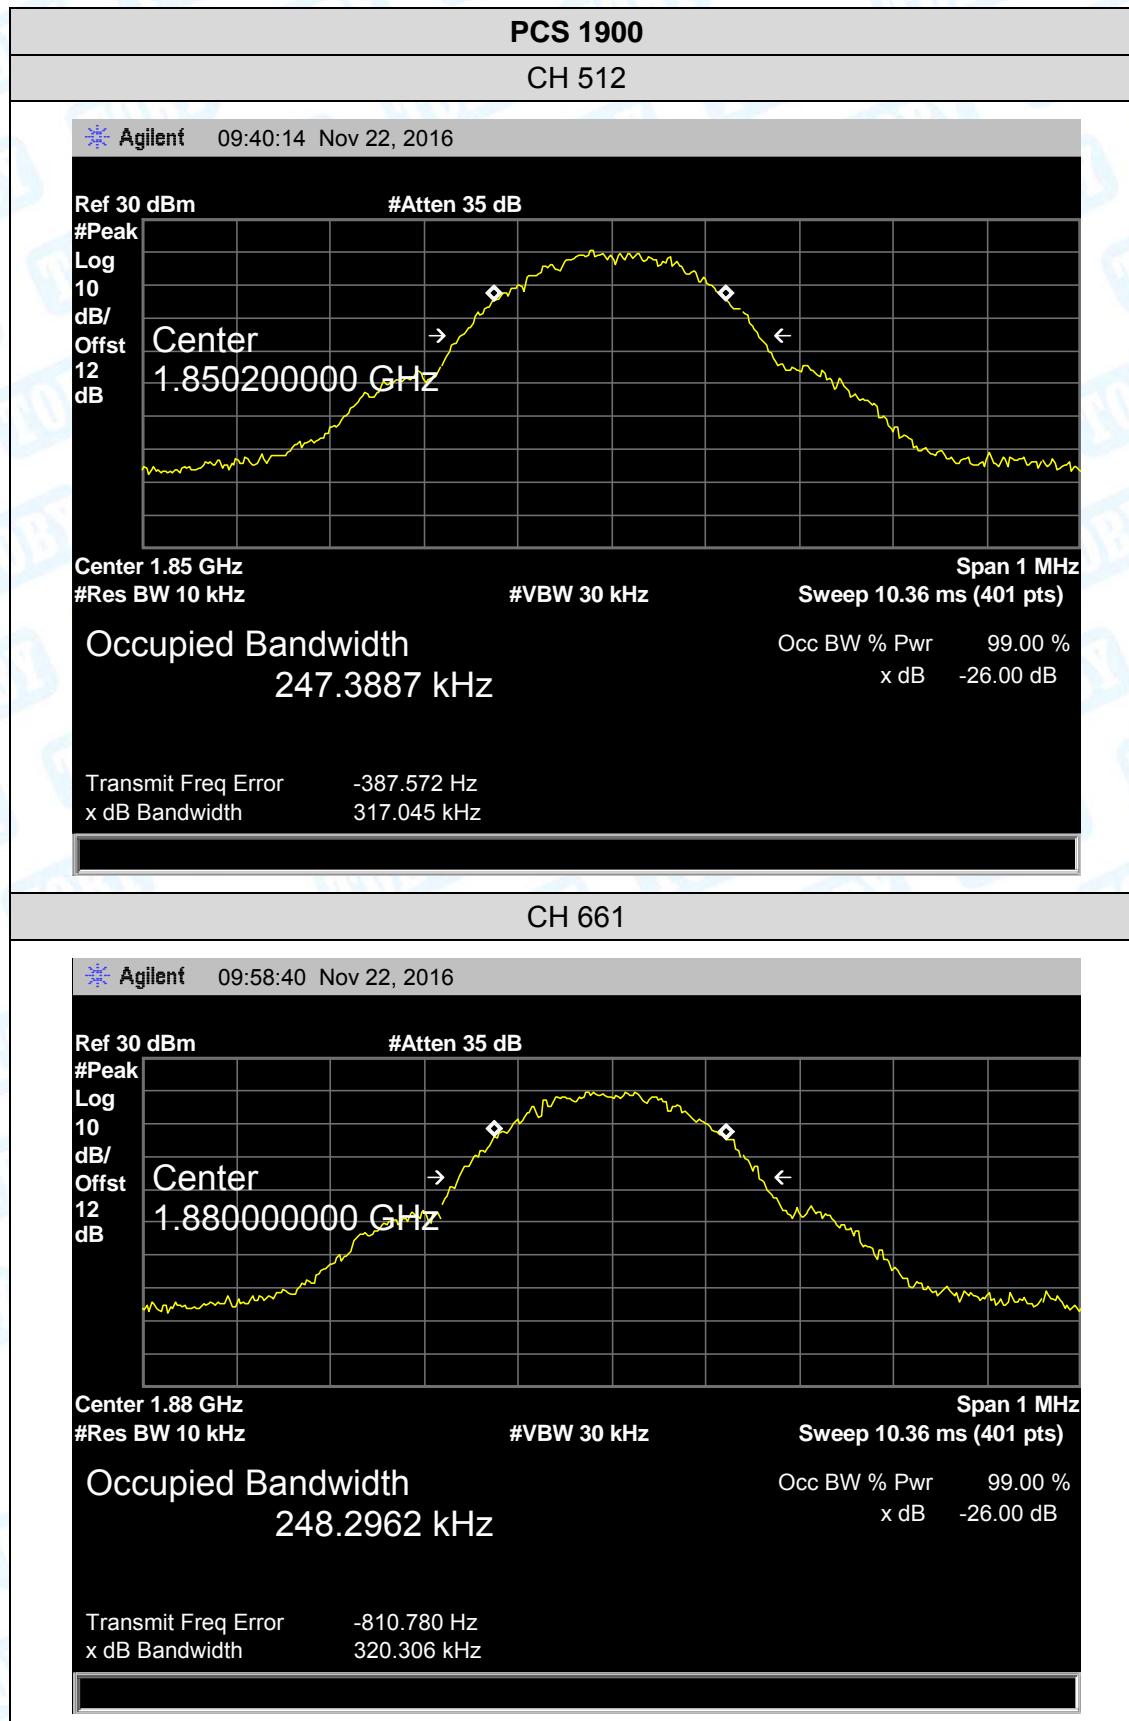


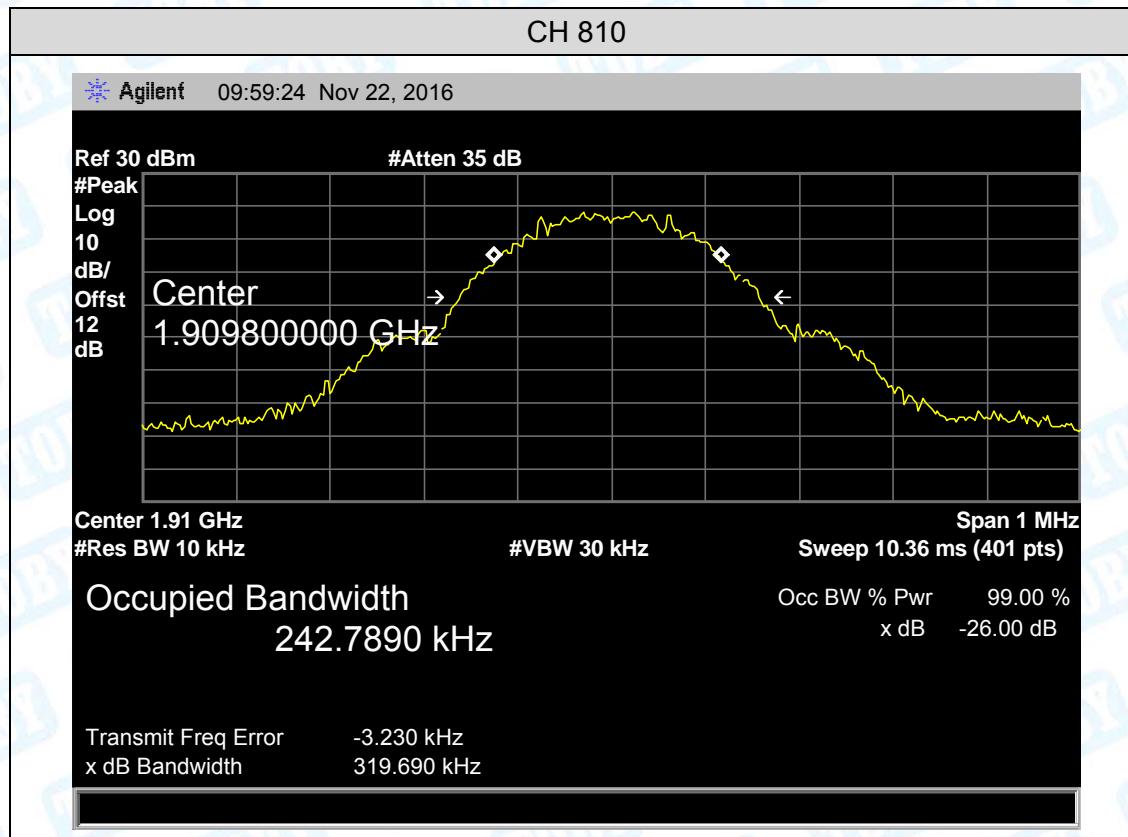


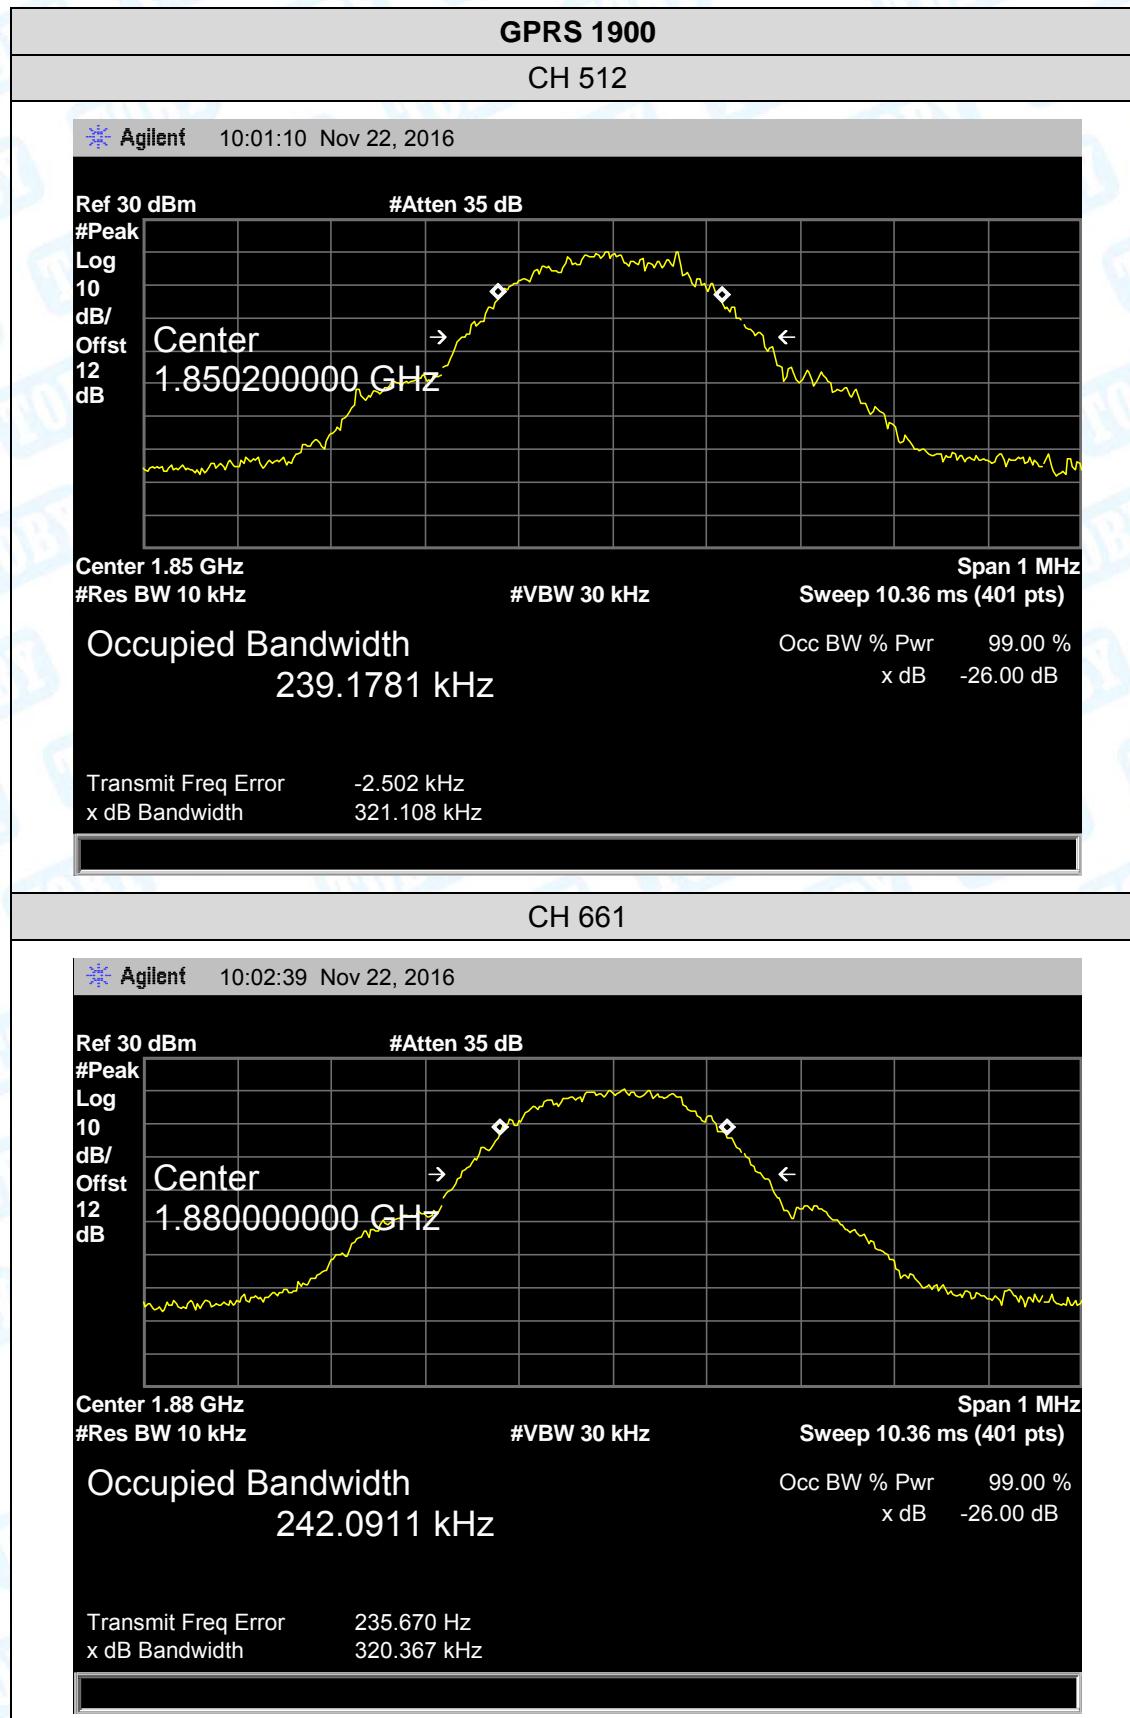


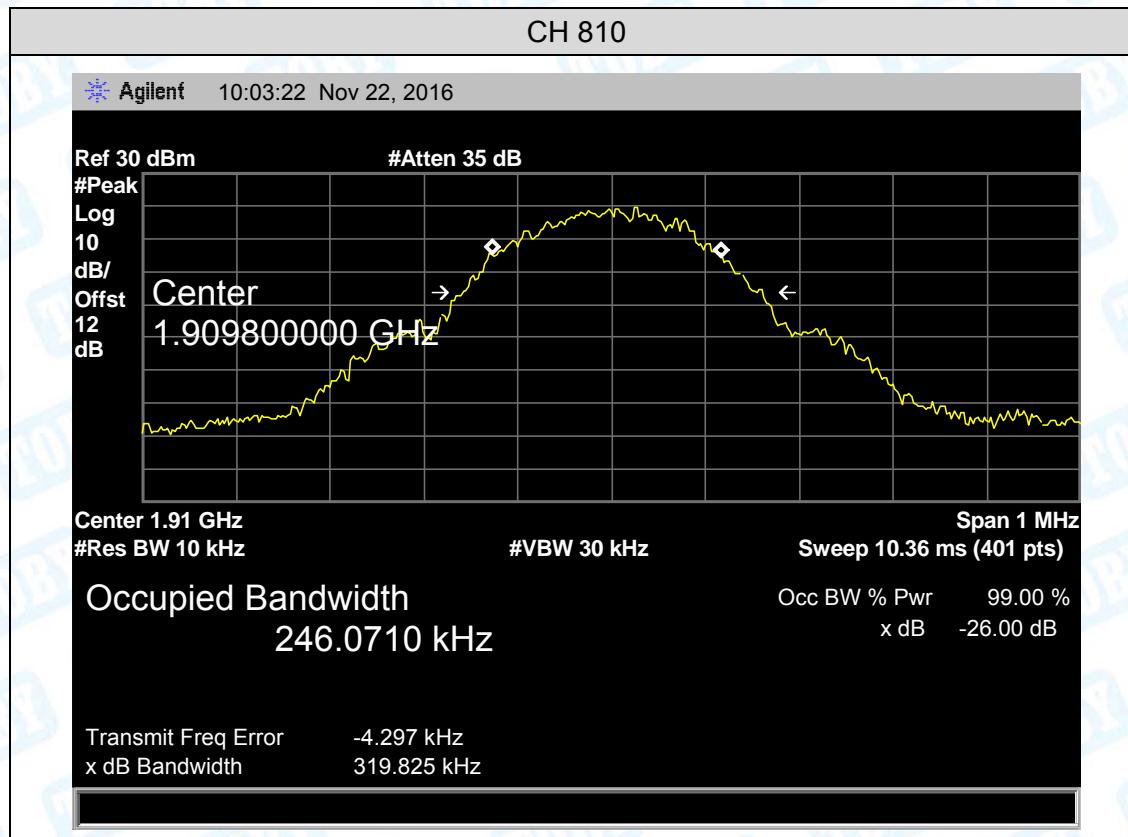


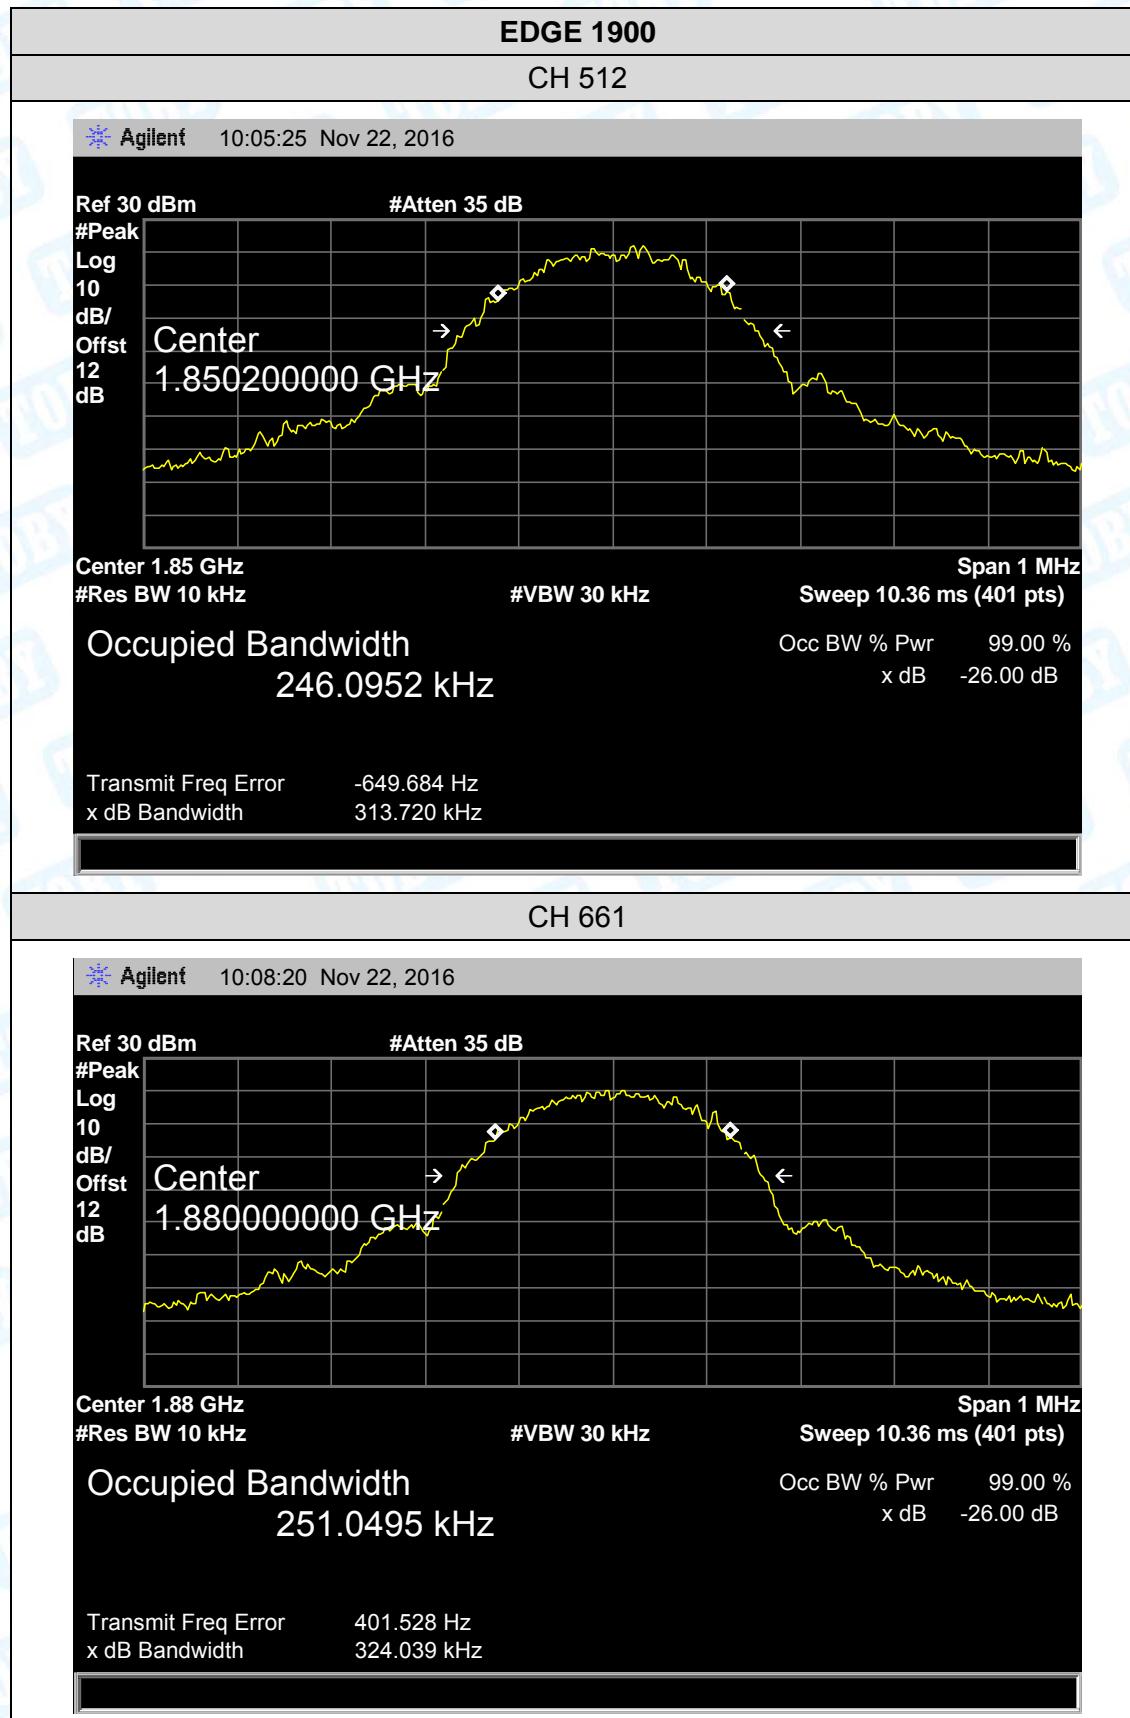


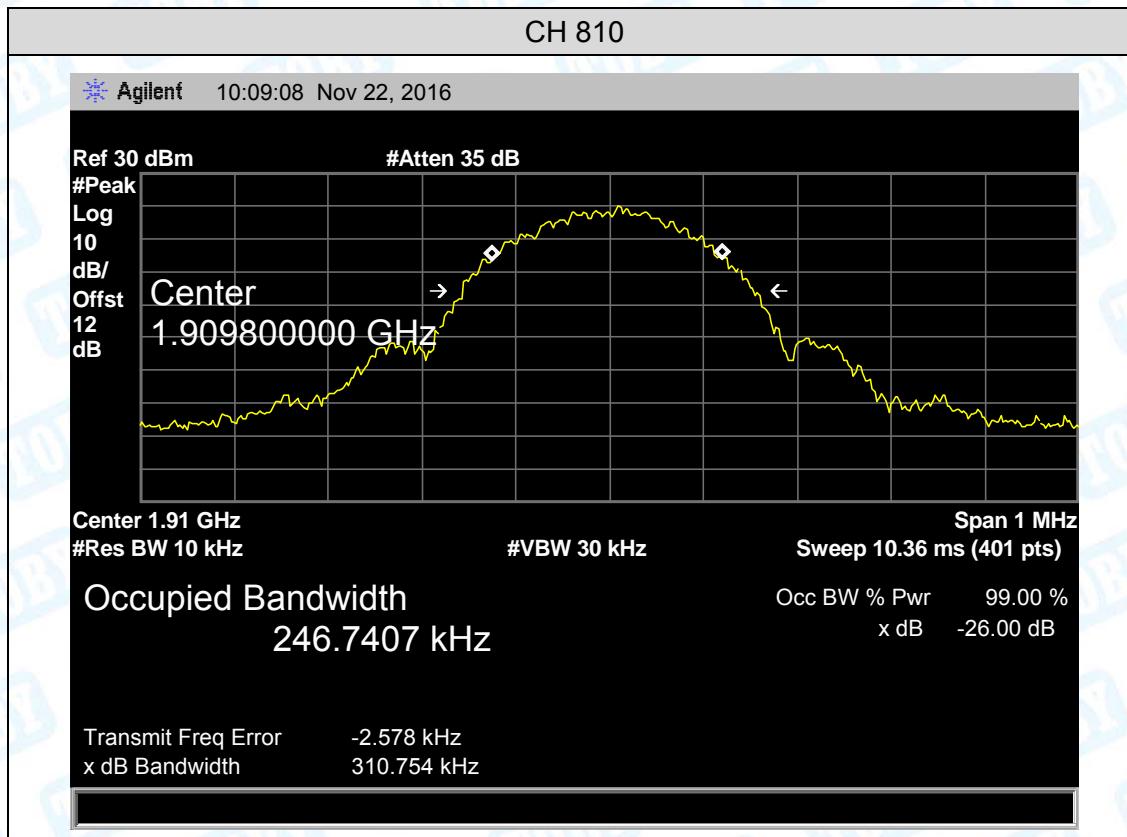

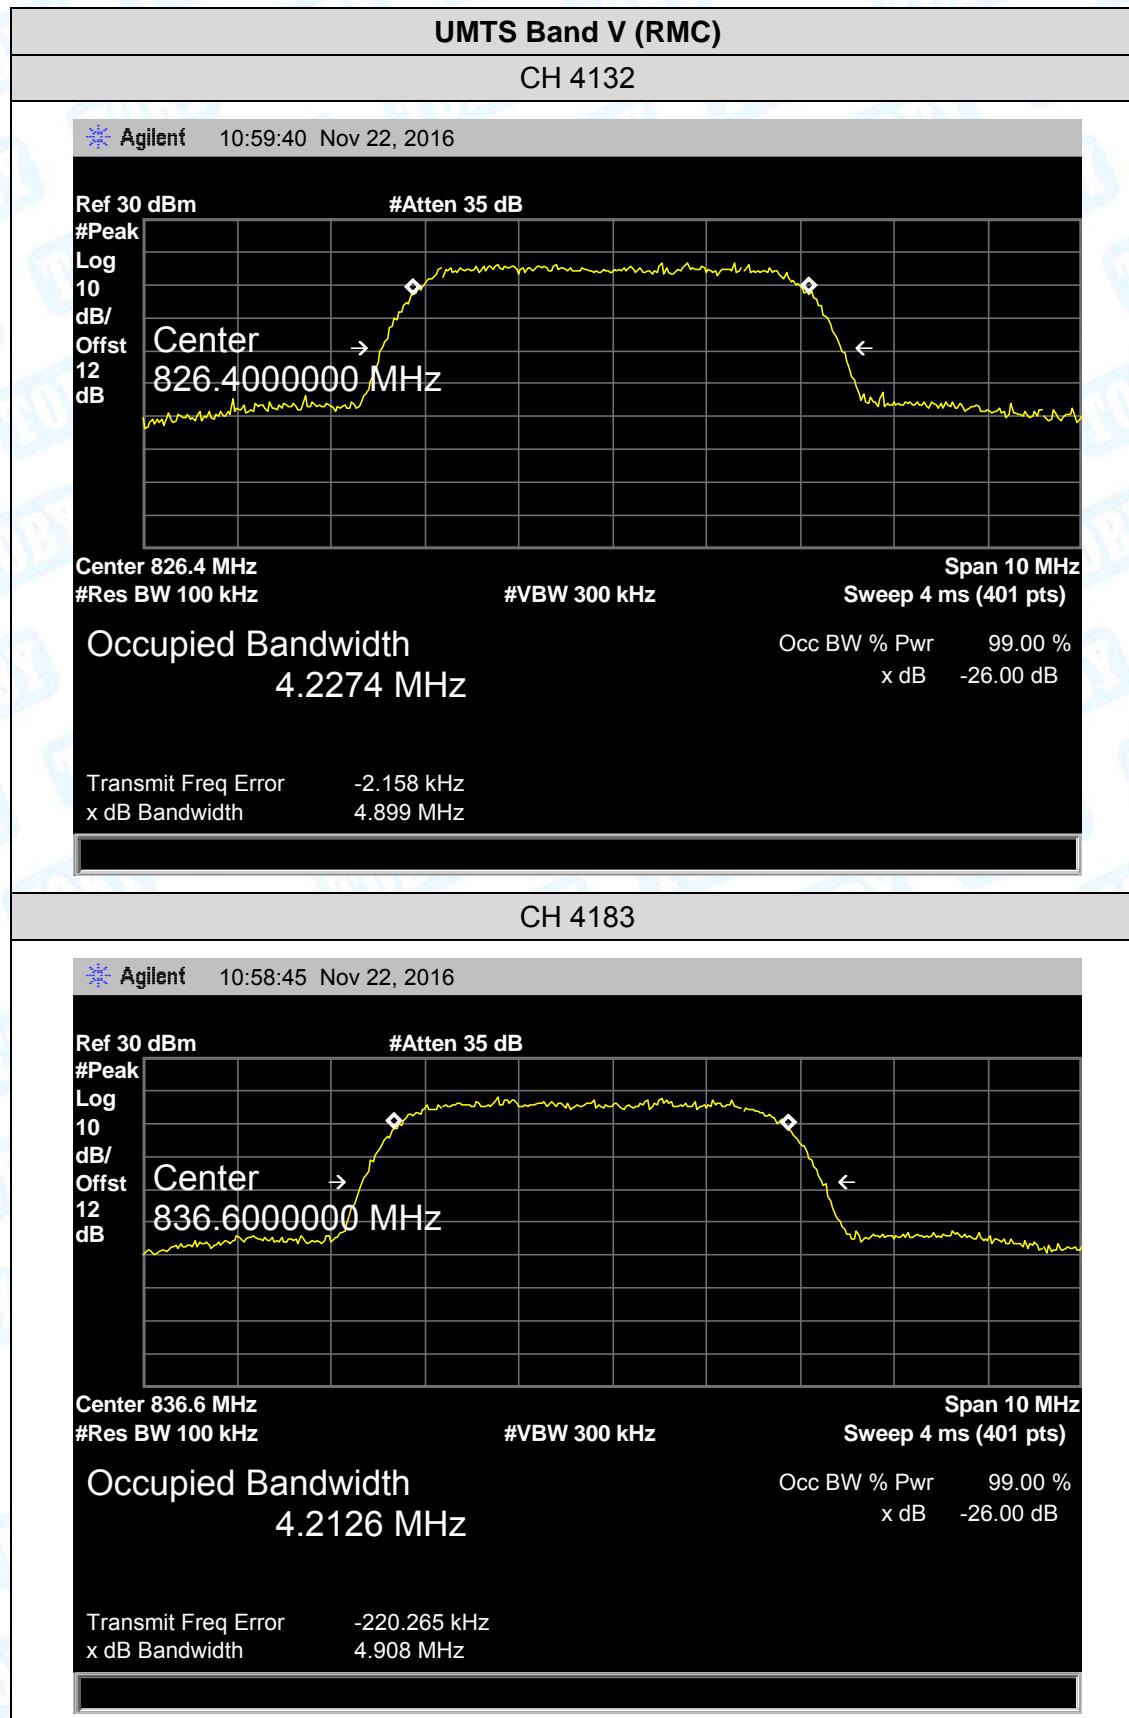


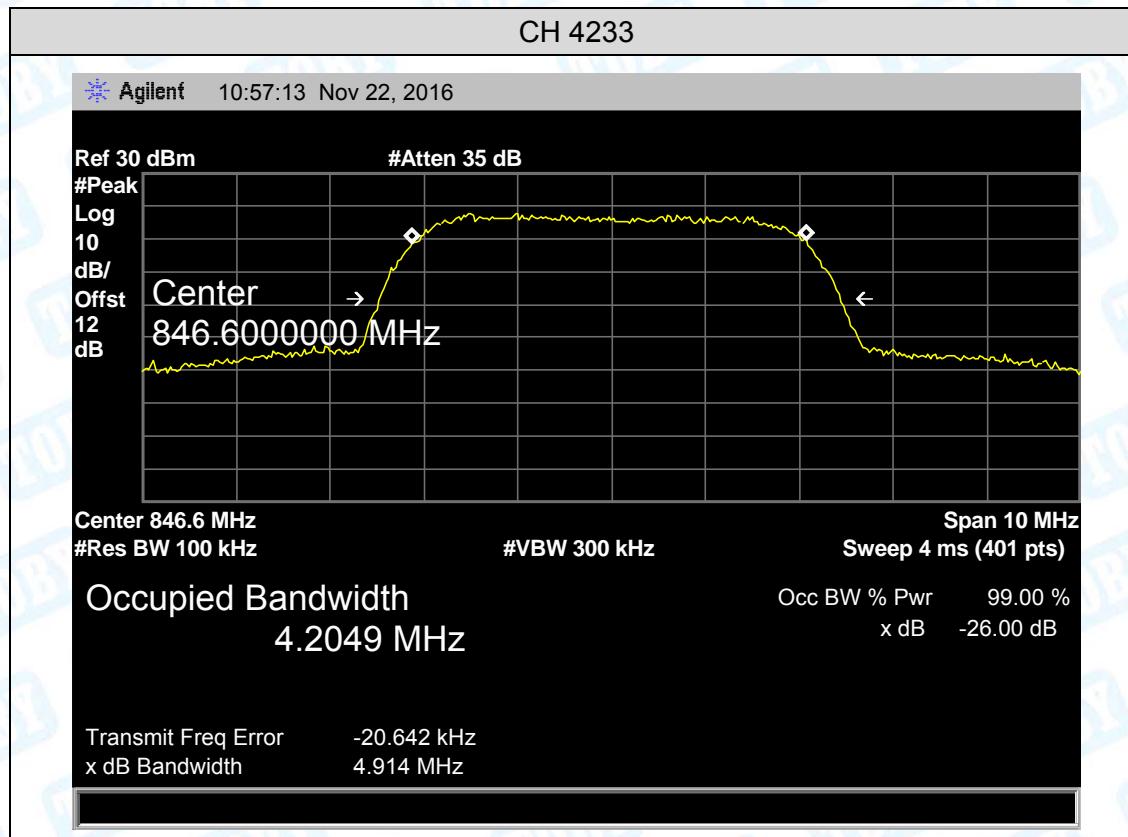


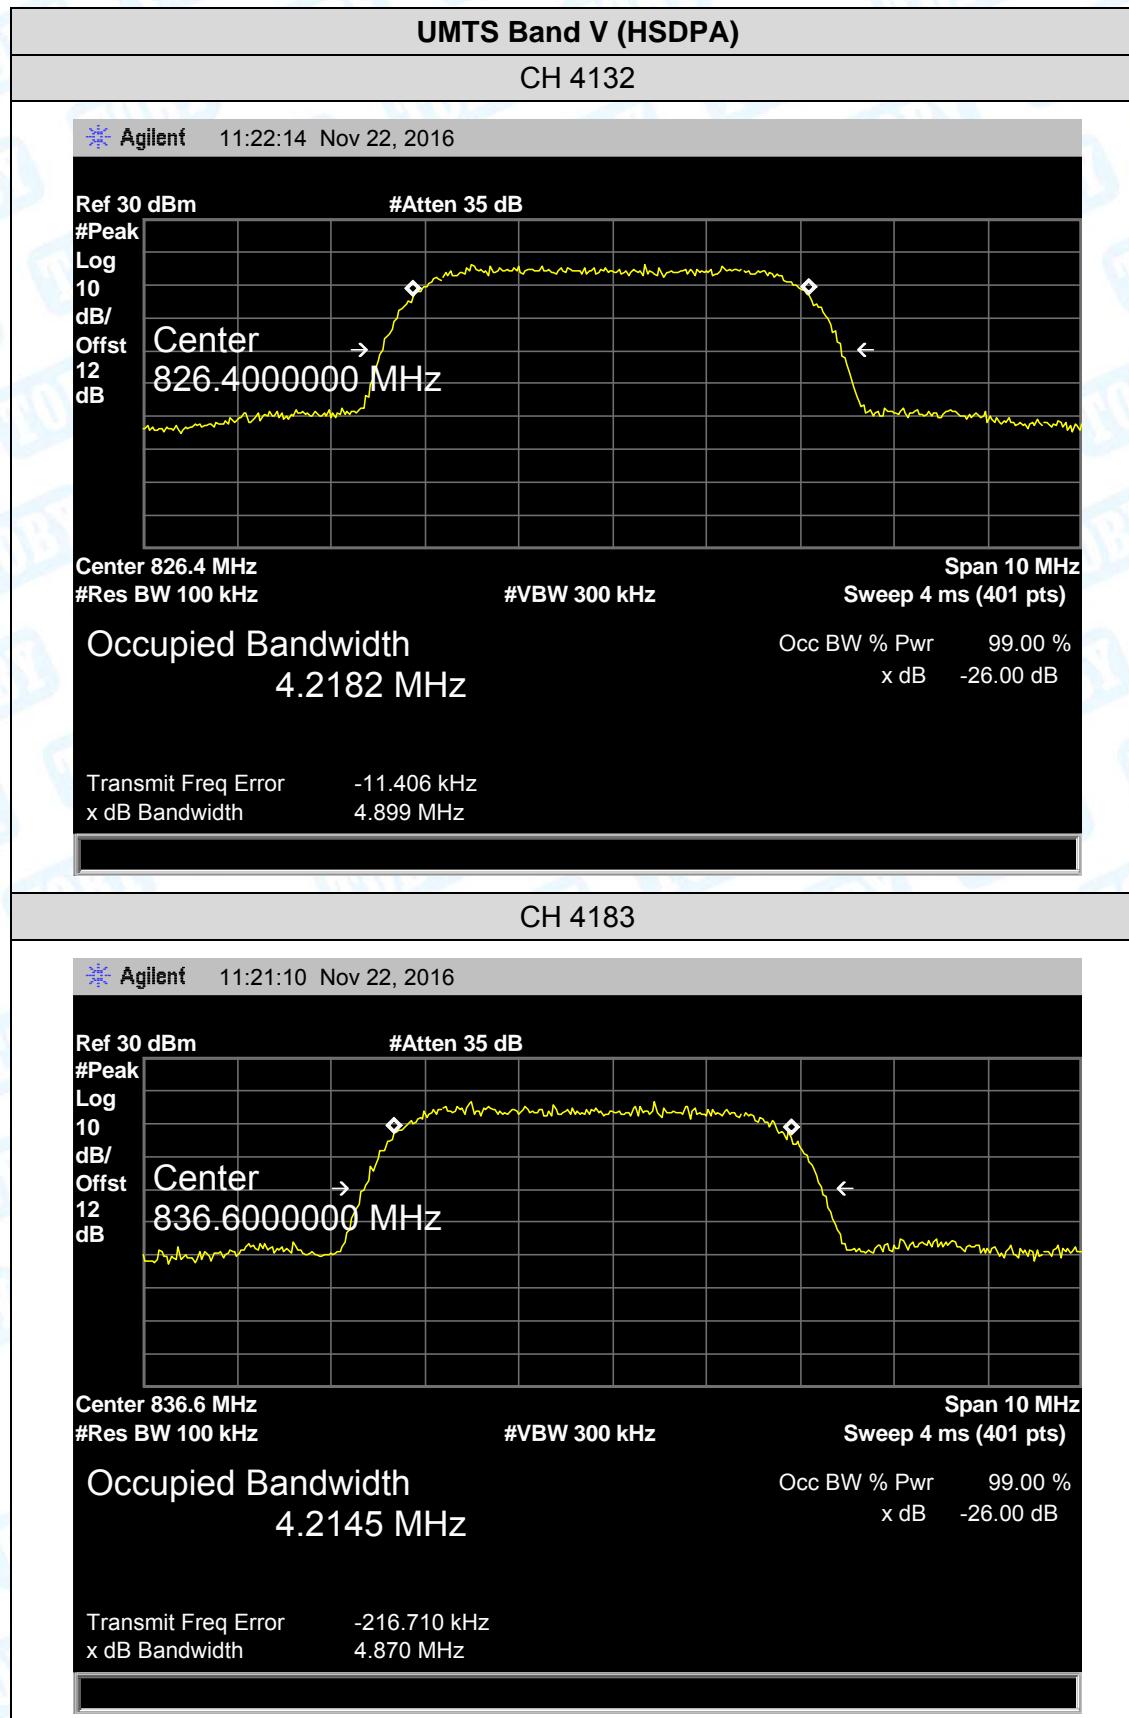


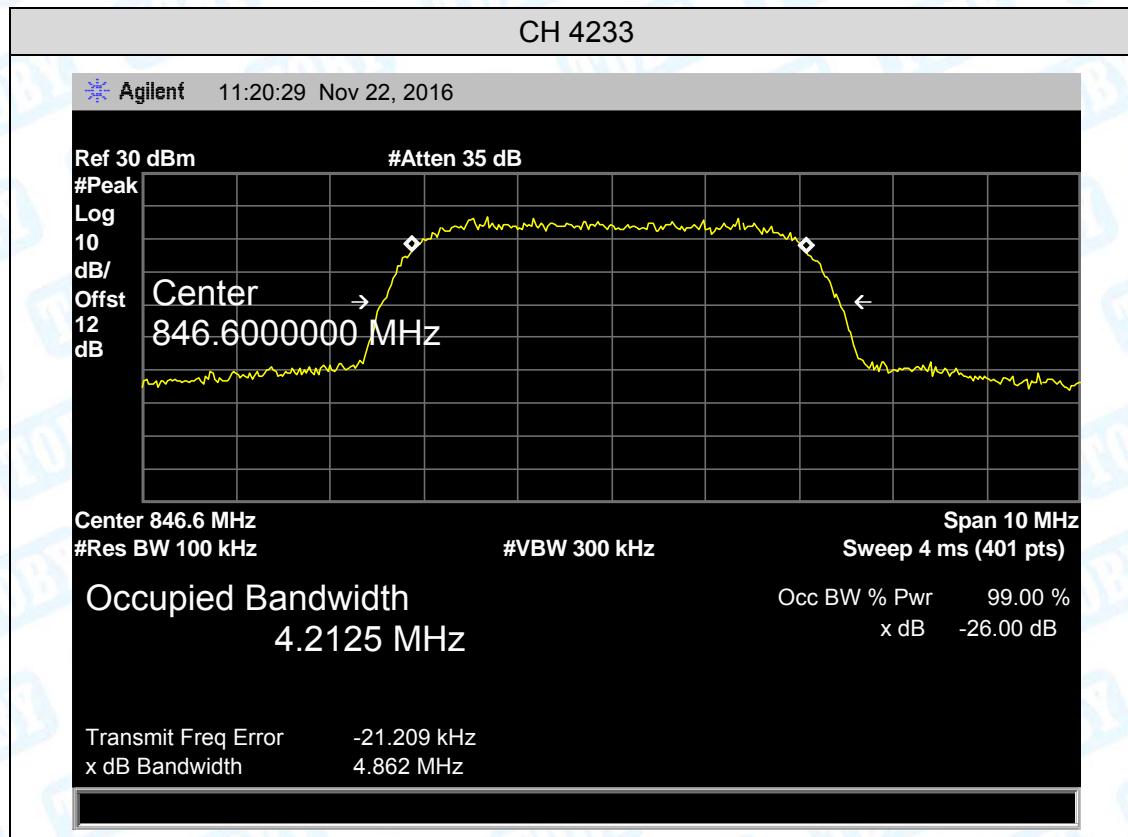





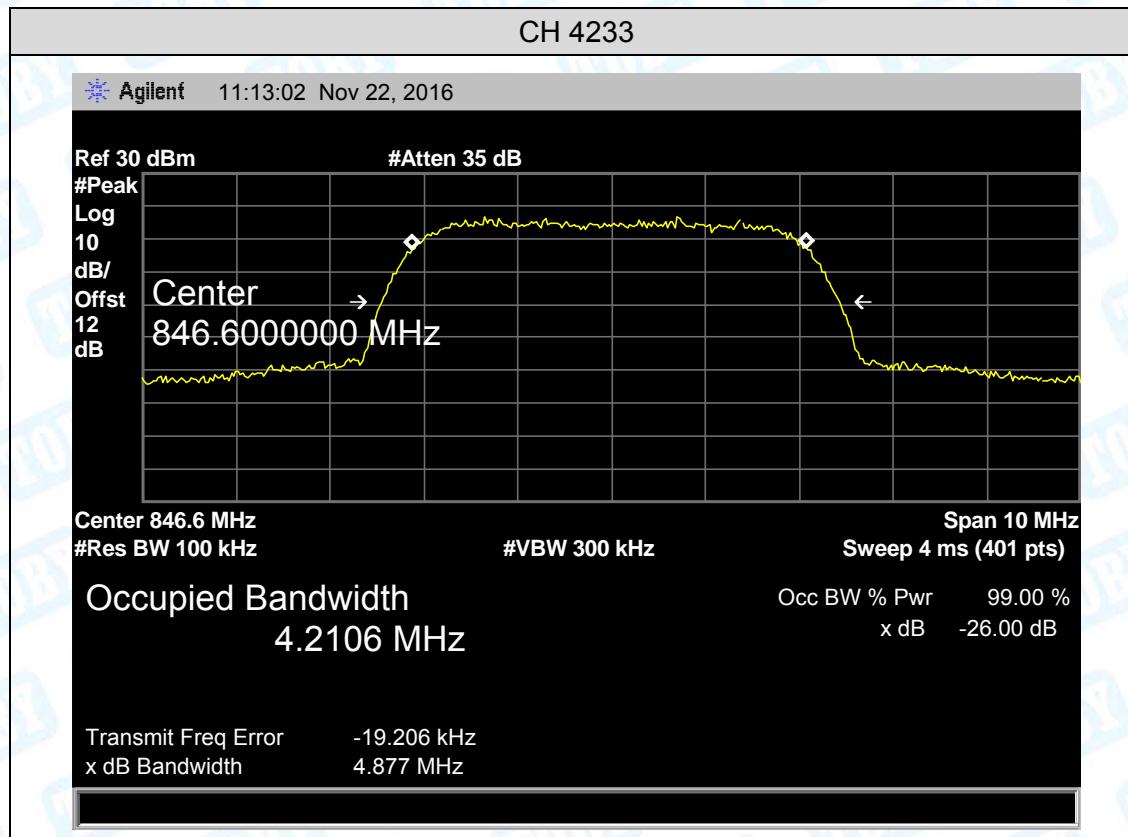


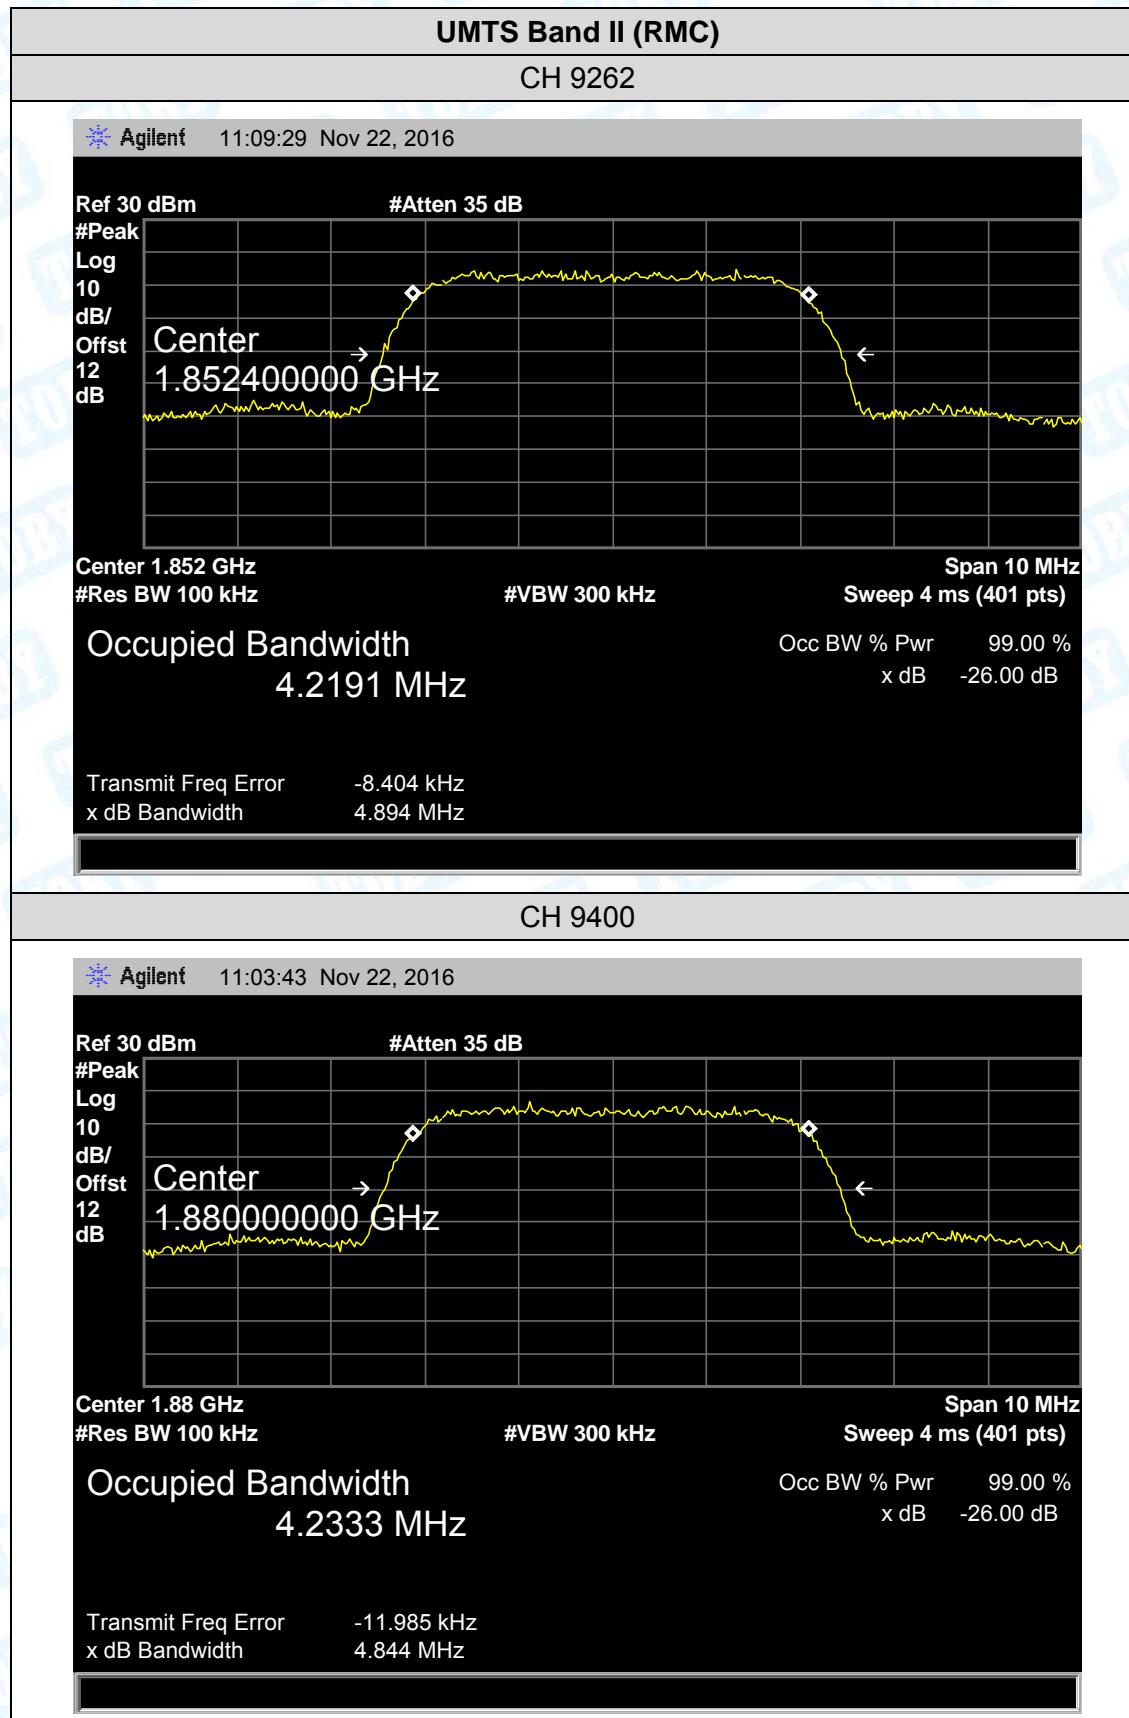


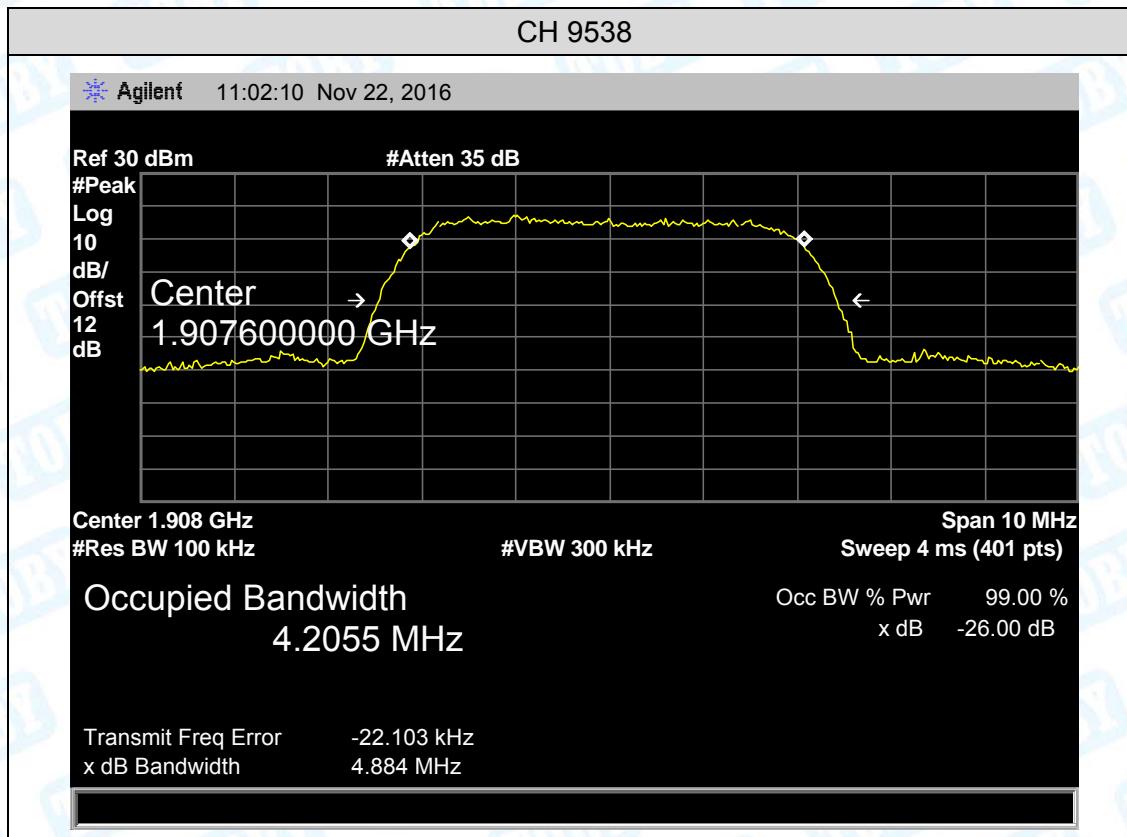

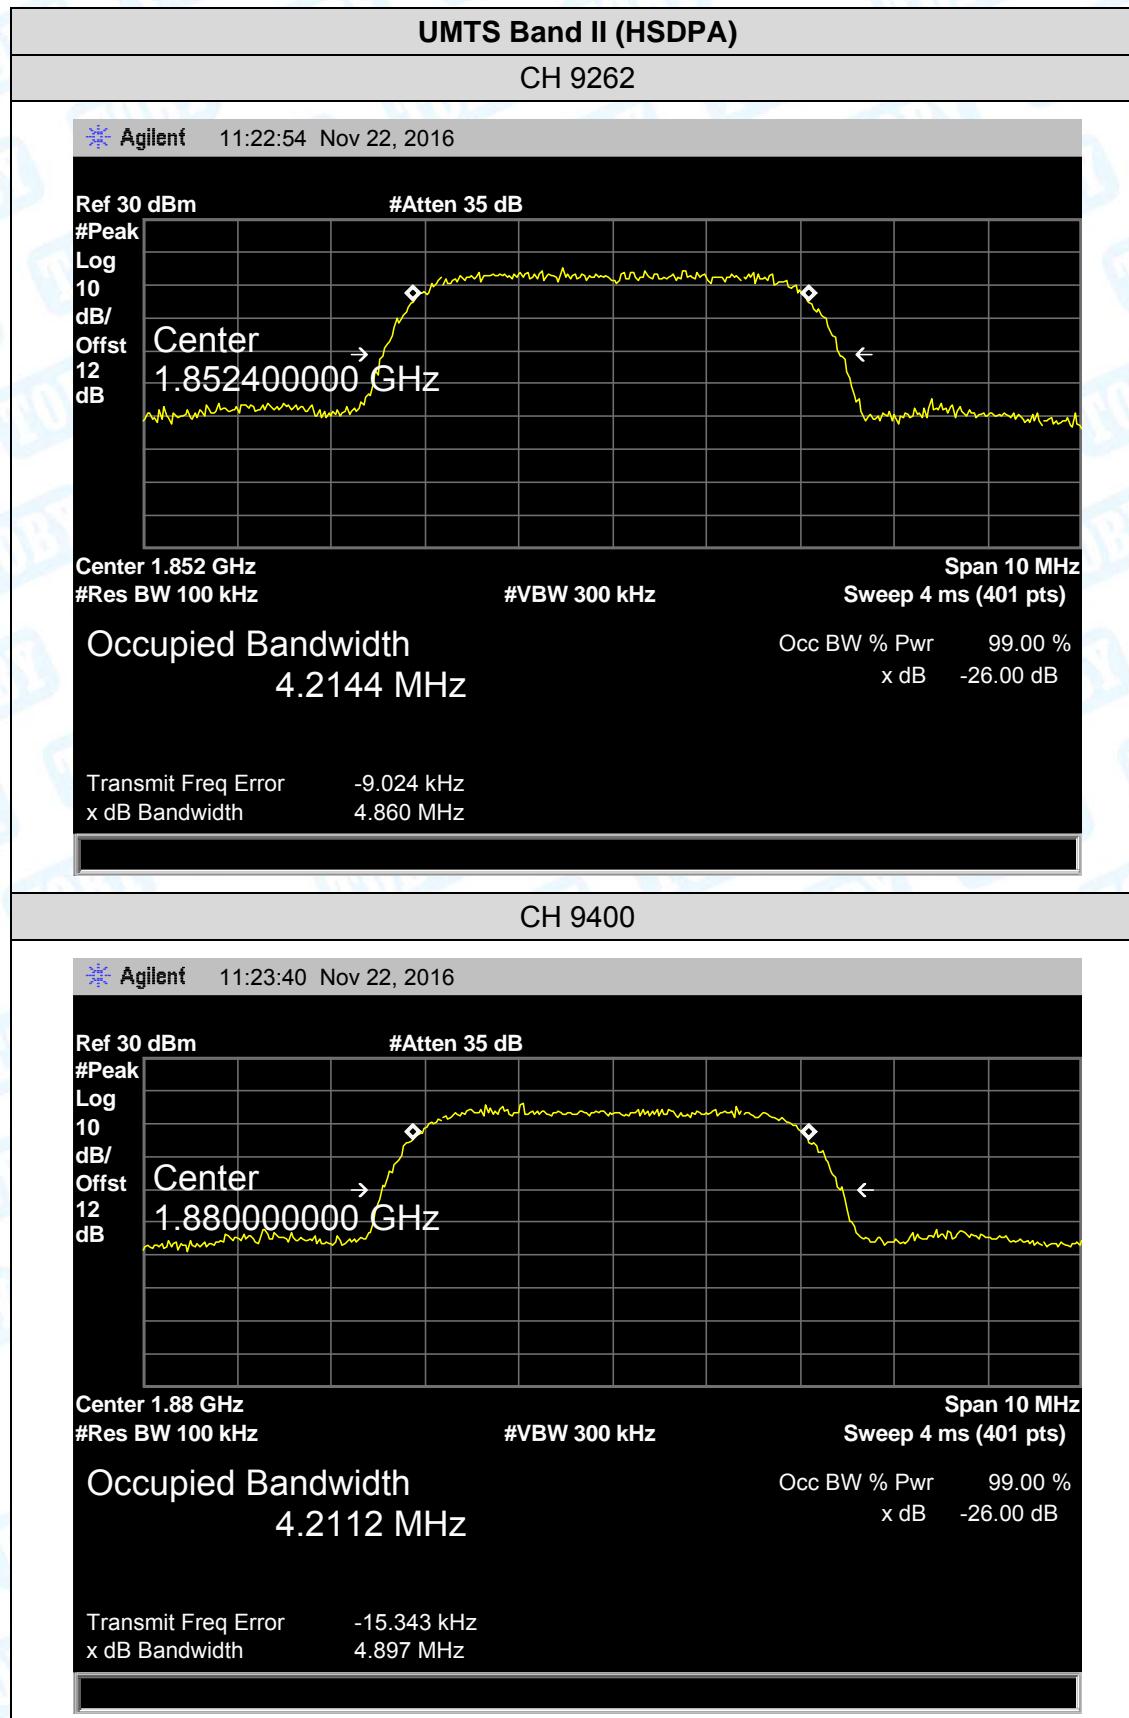

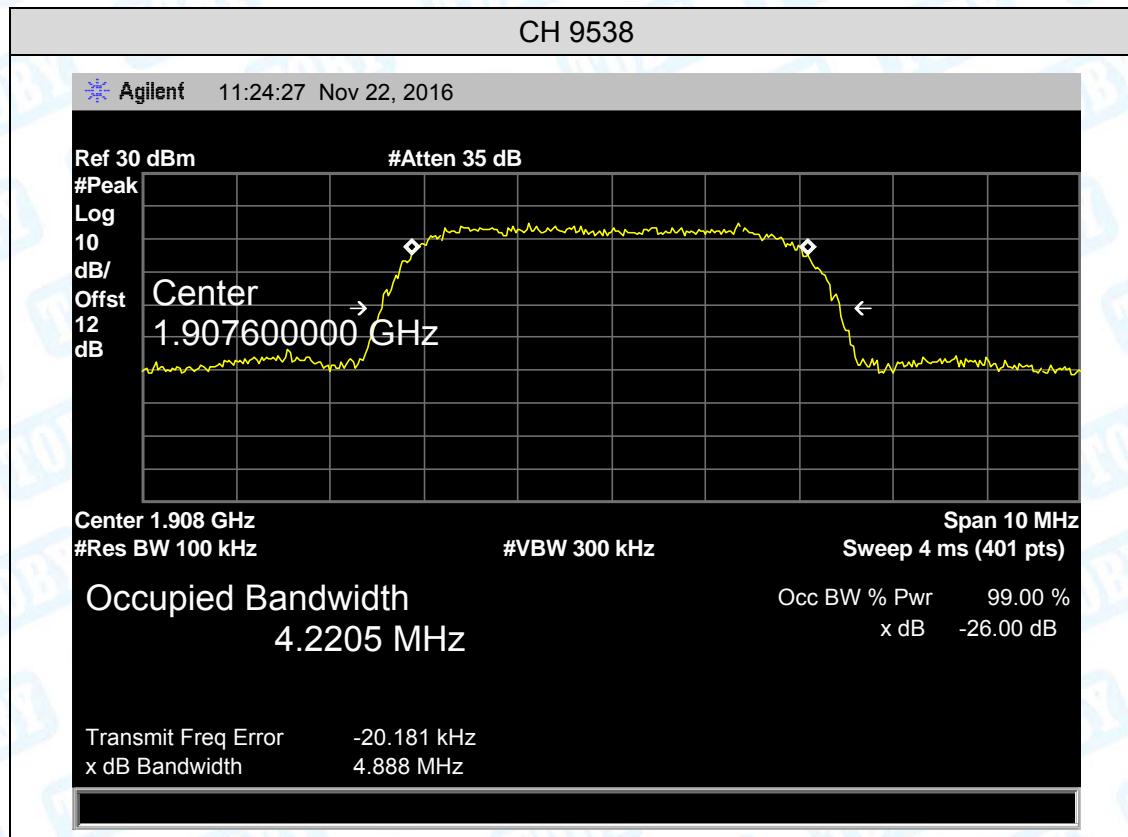

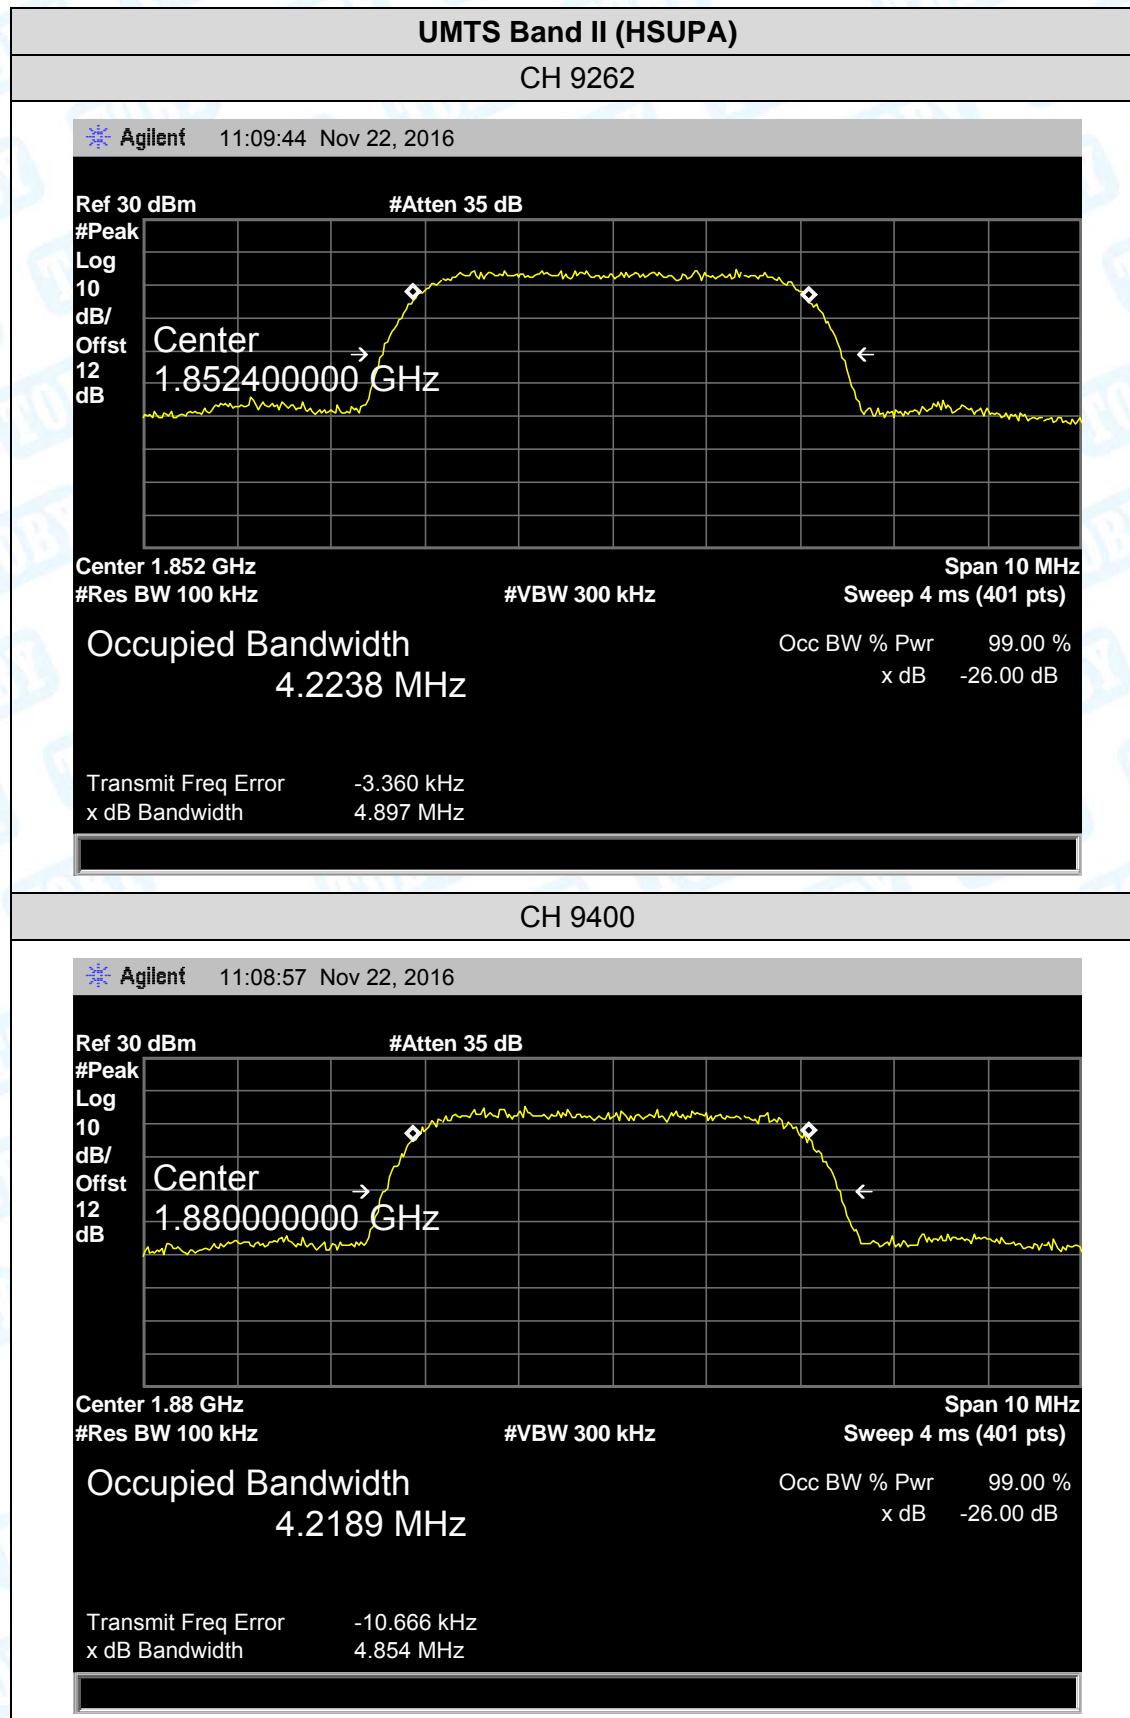

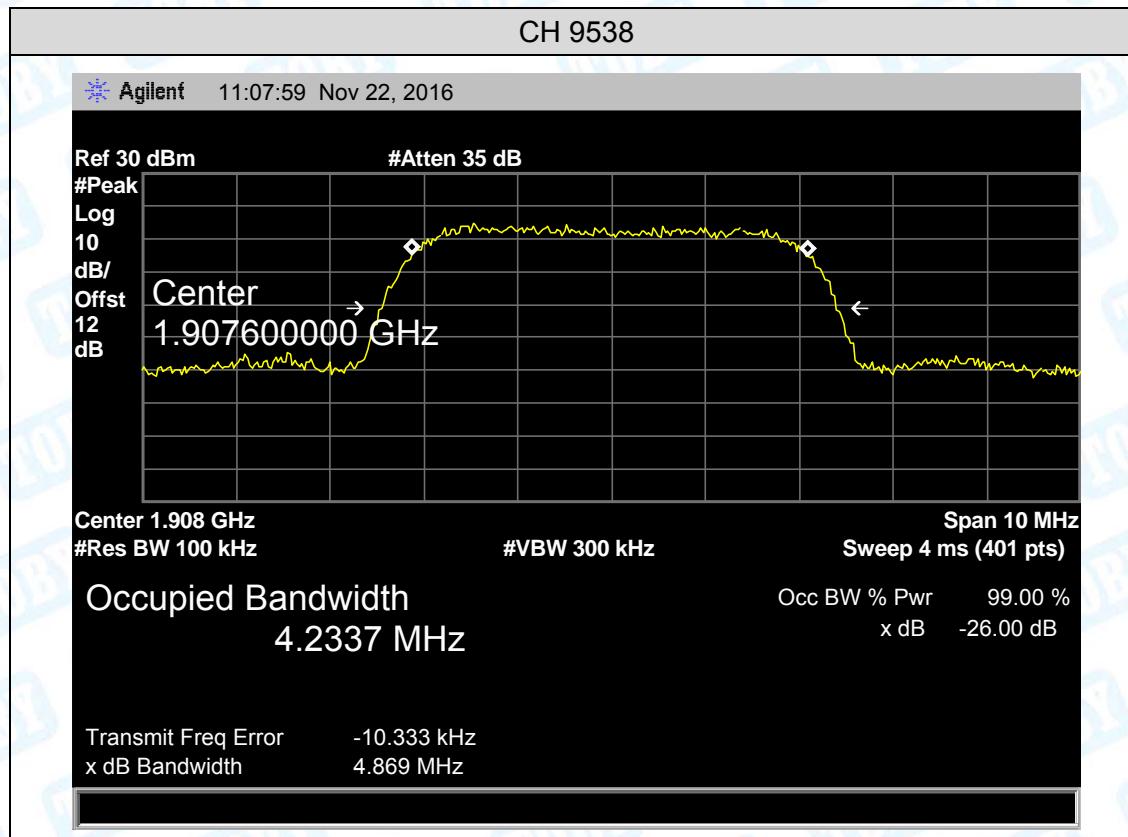

## 9. Conducted Out of Band Emissions

### 9.1 Test Standard and Limit

#### 9.1.1 Test Standard

FCC Part 2: 2.1051, 2.1057


FCC Part 22H: 22.917(a)

FCC Part 24E: 24.238(a)

#### 9.1.2 Test Limit

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power( $P$ ) by a factor of at least  $43+10\log(P)$  dB. For all power levels +30 dBm to 0 dBm, this becomes a constant specification limit of -13 dBm.

### 9.2 Test Setup

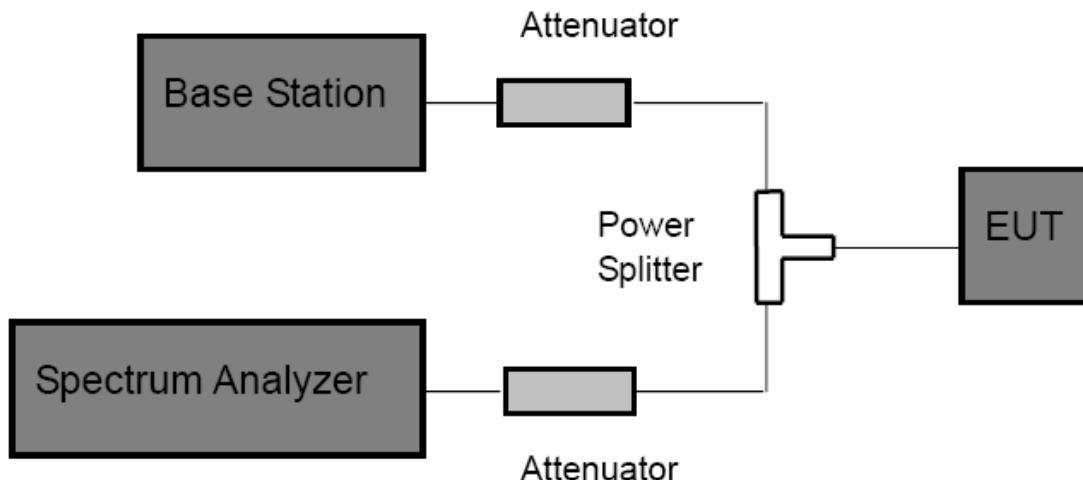

### 9.3 Test Procedure


- (1) The EUT was directly connected to the spectrum analyzer and Base station via power splitter as show in the block diagram above.
- (2) Spectrum Setting:
  - Frequency bellow 1 GHz: RBW=100 kHz, VBW=300 kHz.
  - Frequency above 1 GHz: RBW=1 MHz, VBW=3 MHz.
- (3) The low, middle and high channels of each band and mode's spurious emissions for 30 MHz to 10<sup>th</sup> Harmonic were measured by Spectrum analyzer.


### 9.4 EUT Operating Condition


The EUT was continuously connected with the Base station and transmitting in the max power during the test.


## 9.5 Test Data


## **Please refer following plots:**

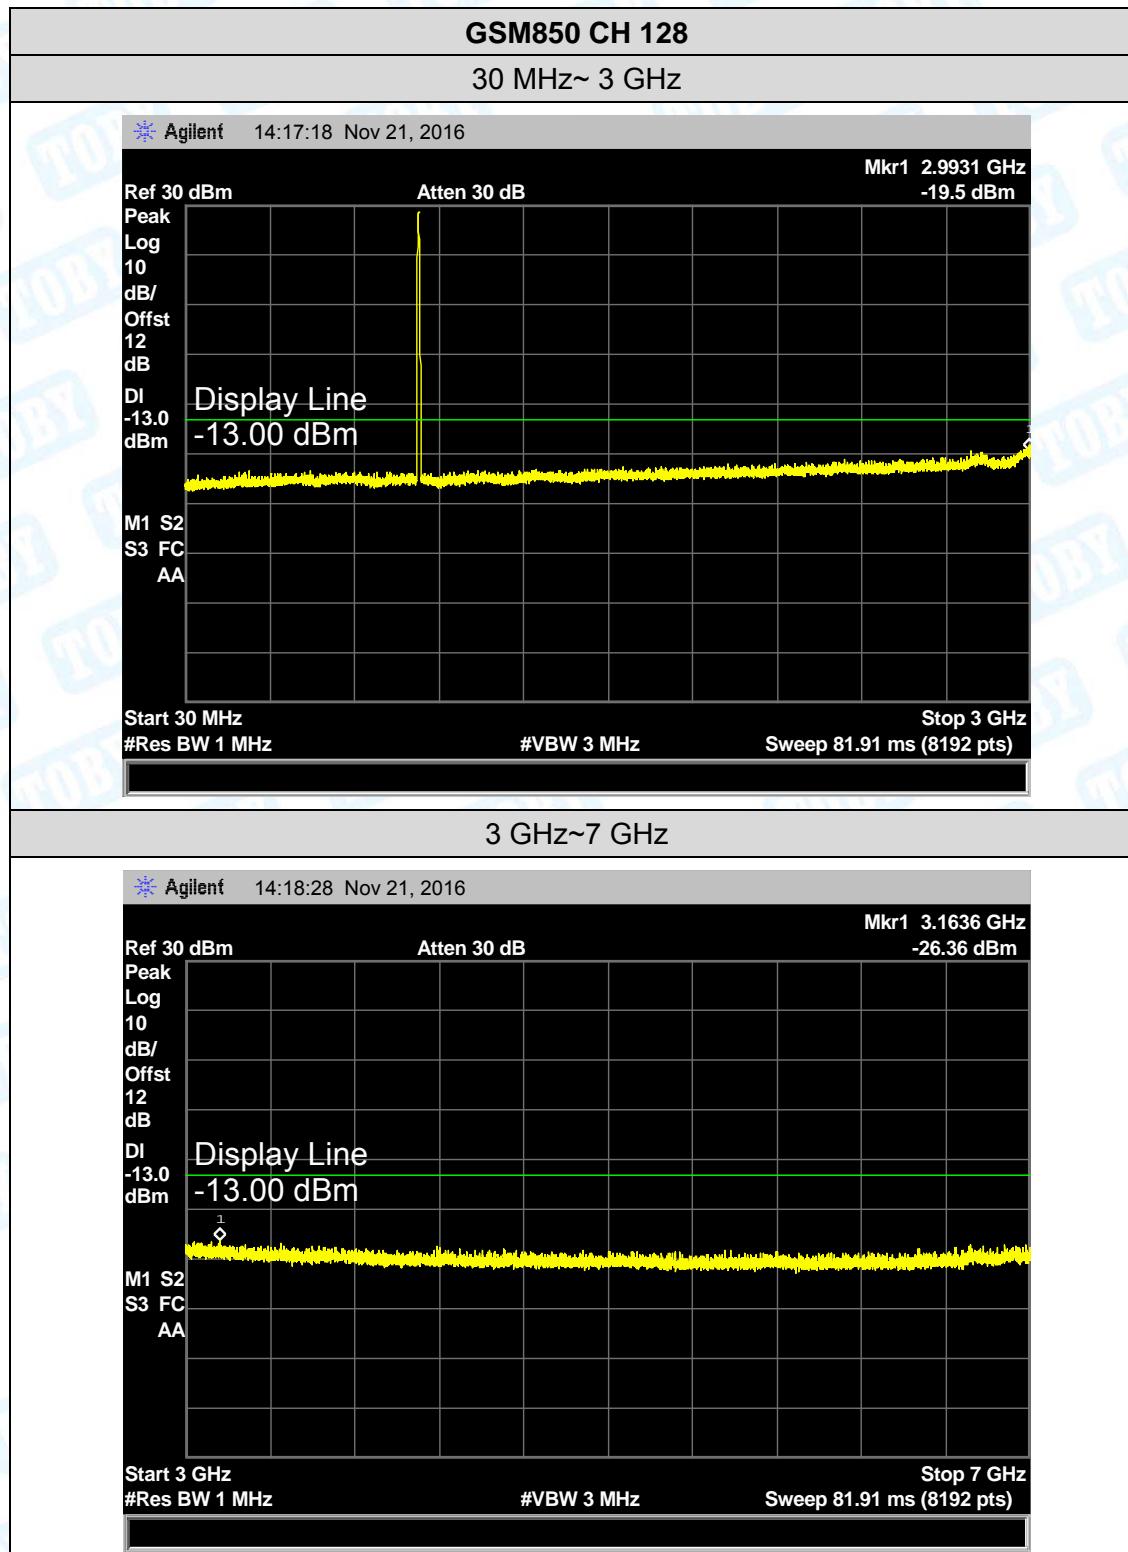


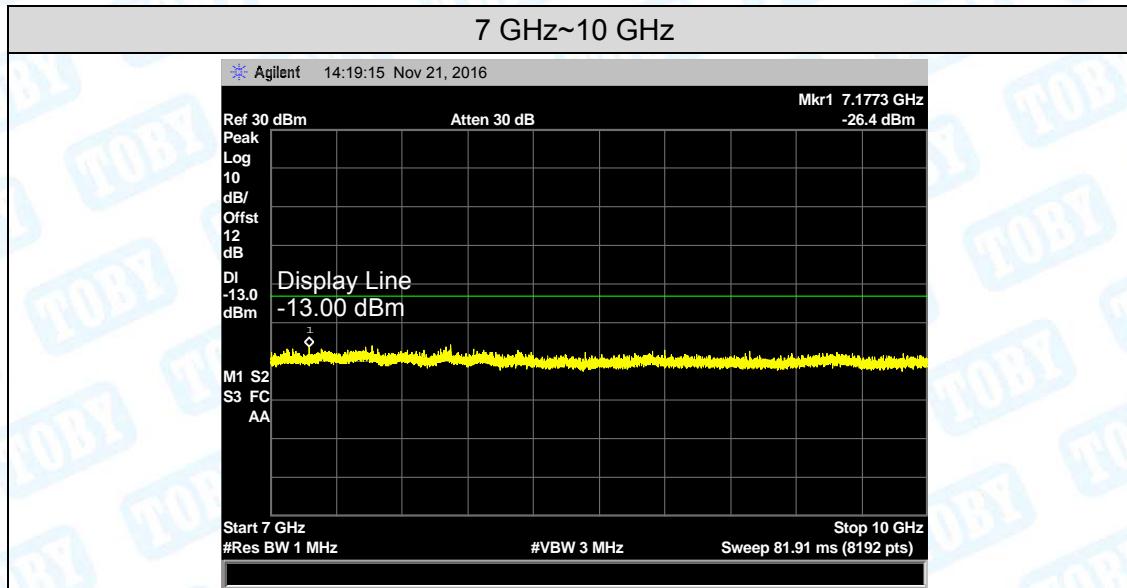


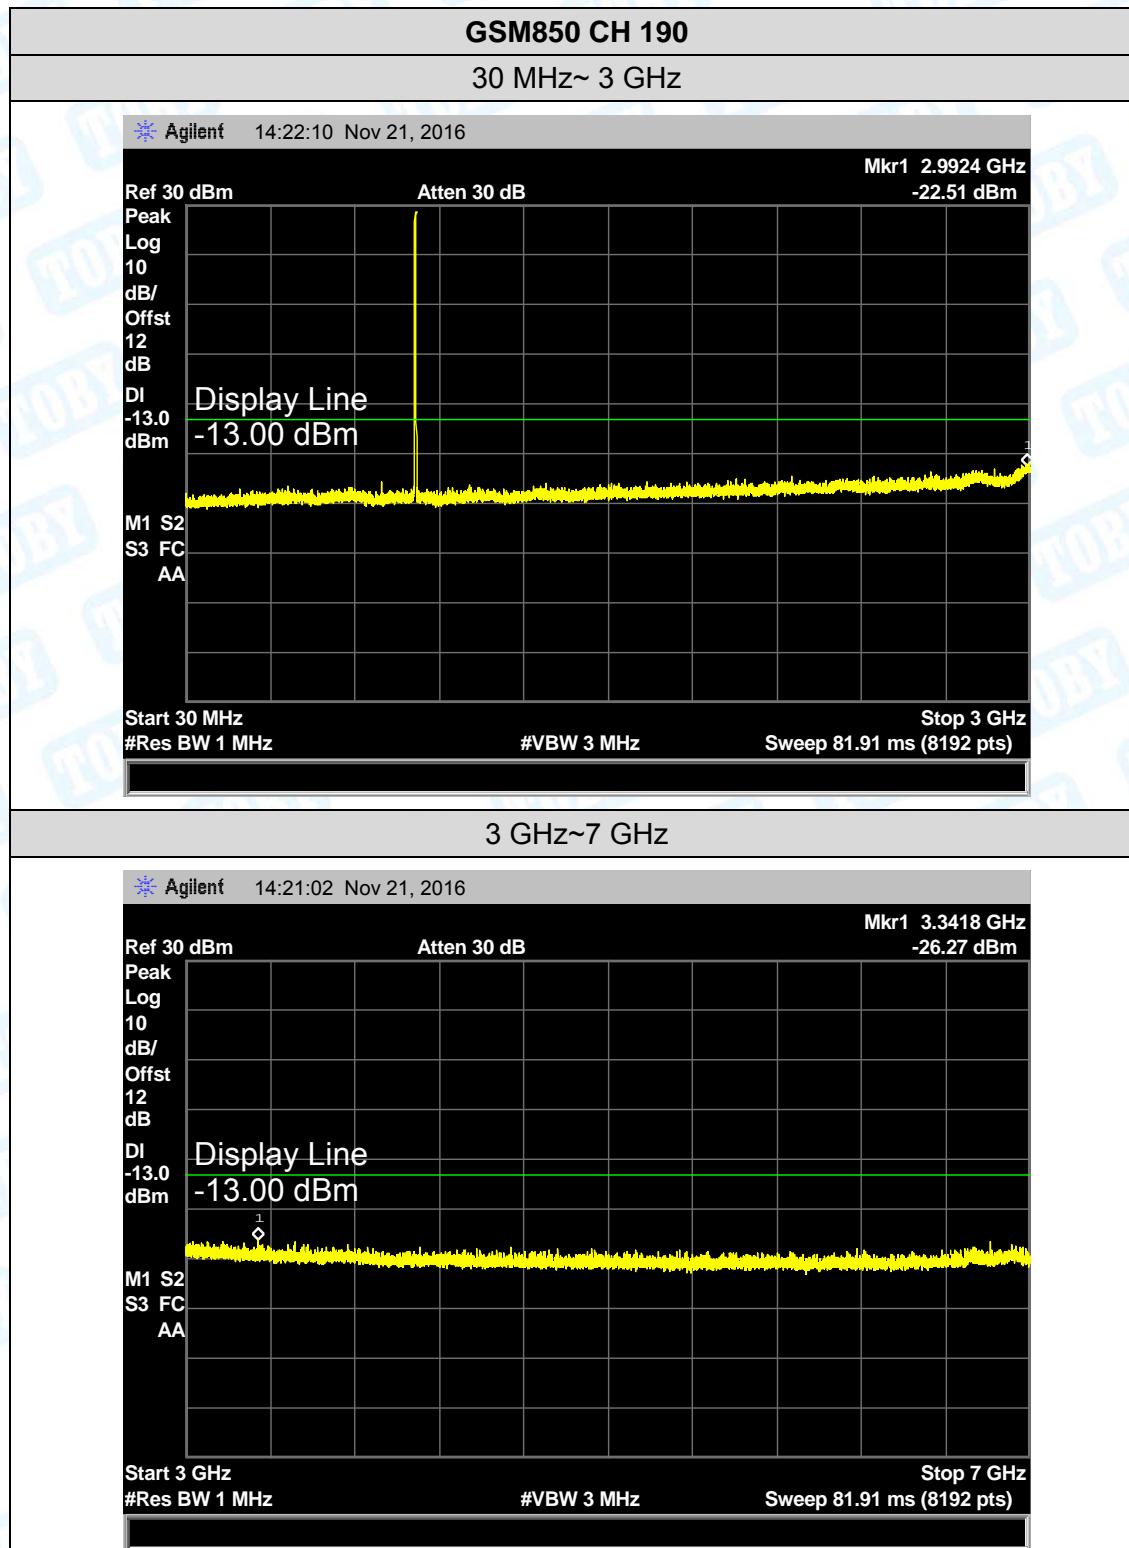


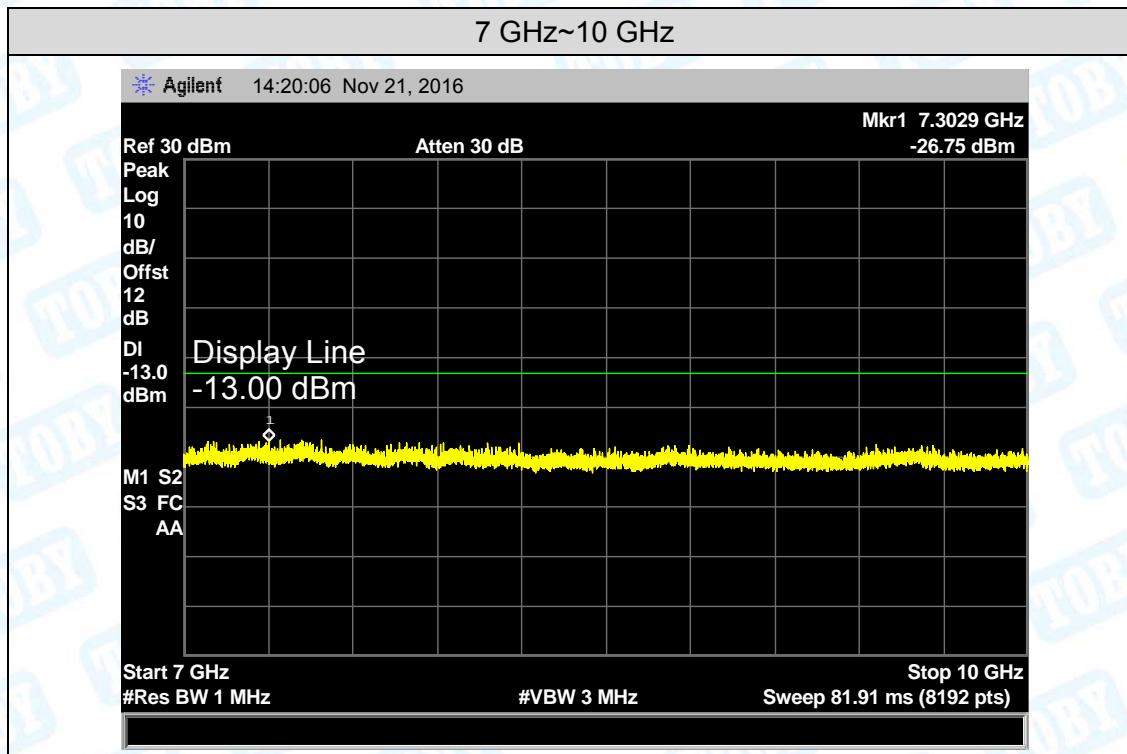


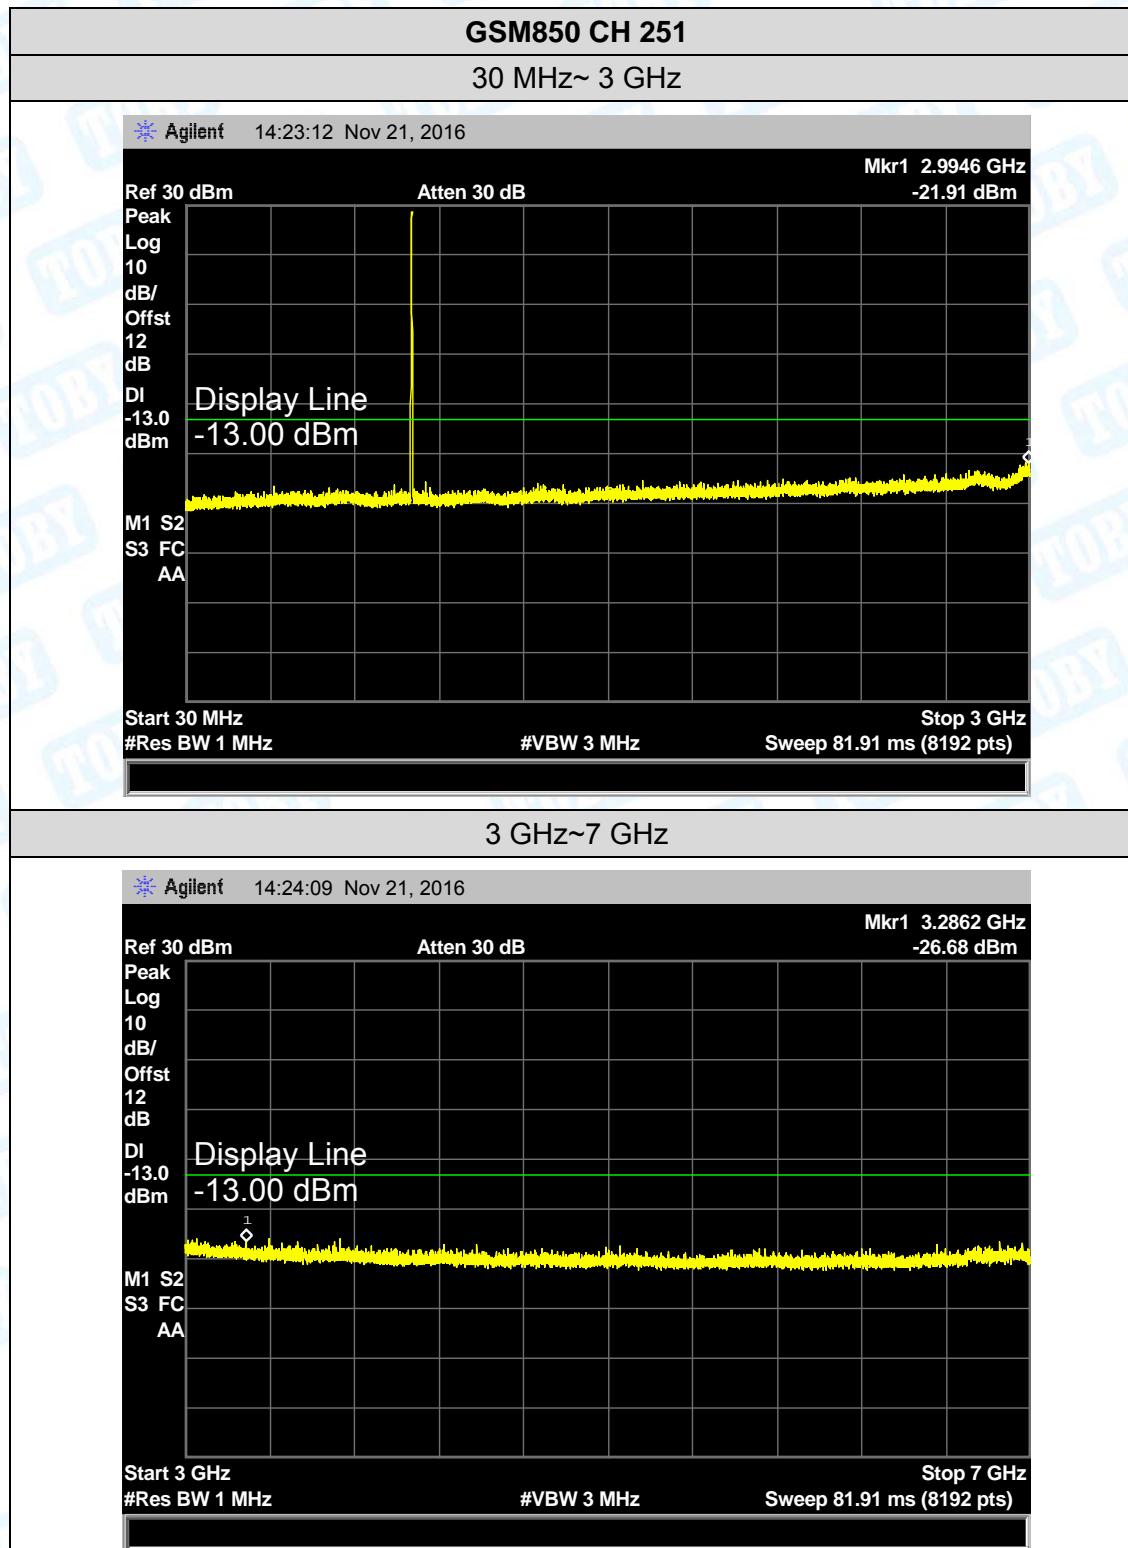


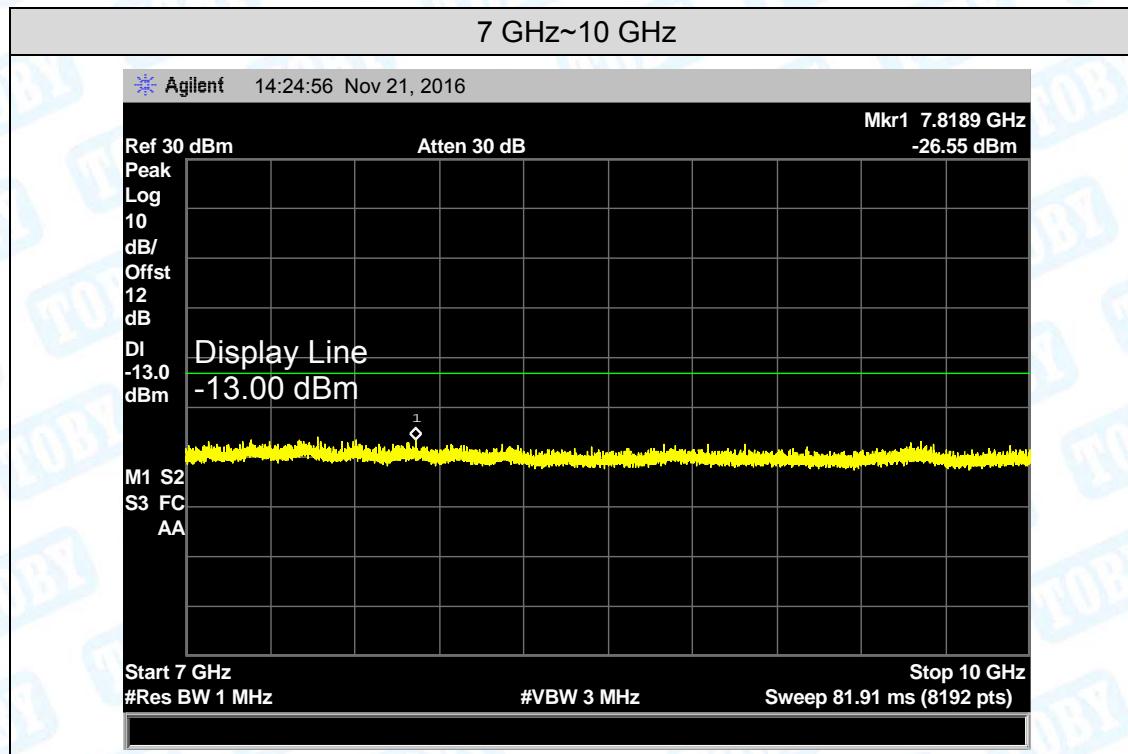


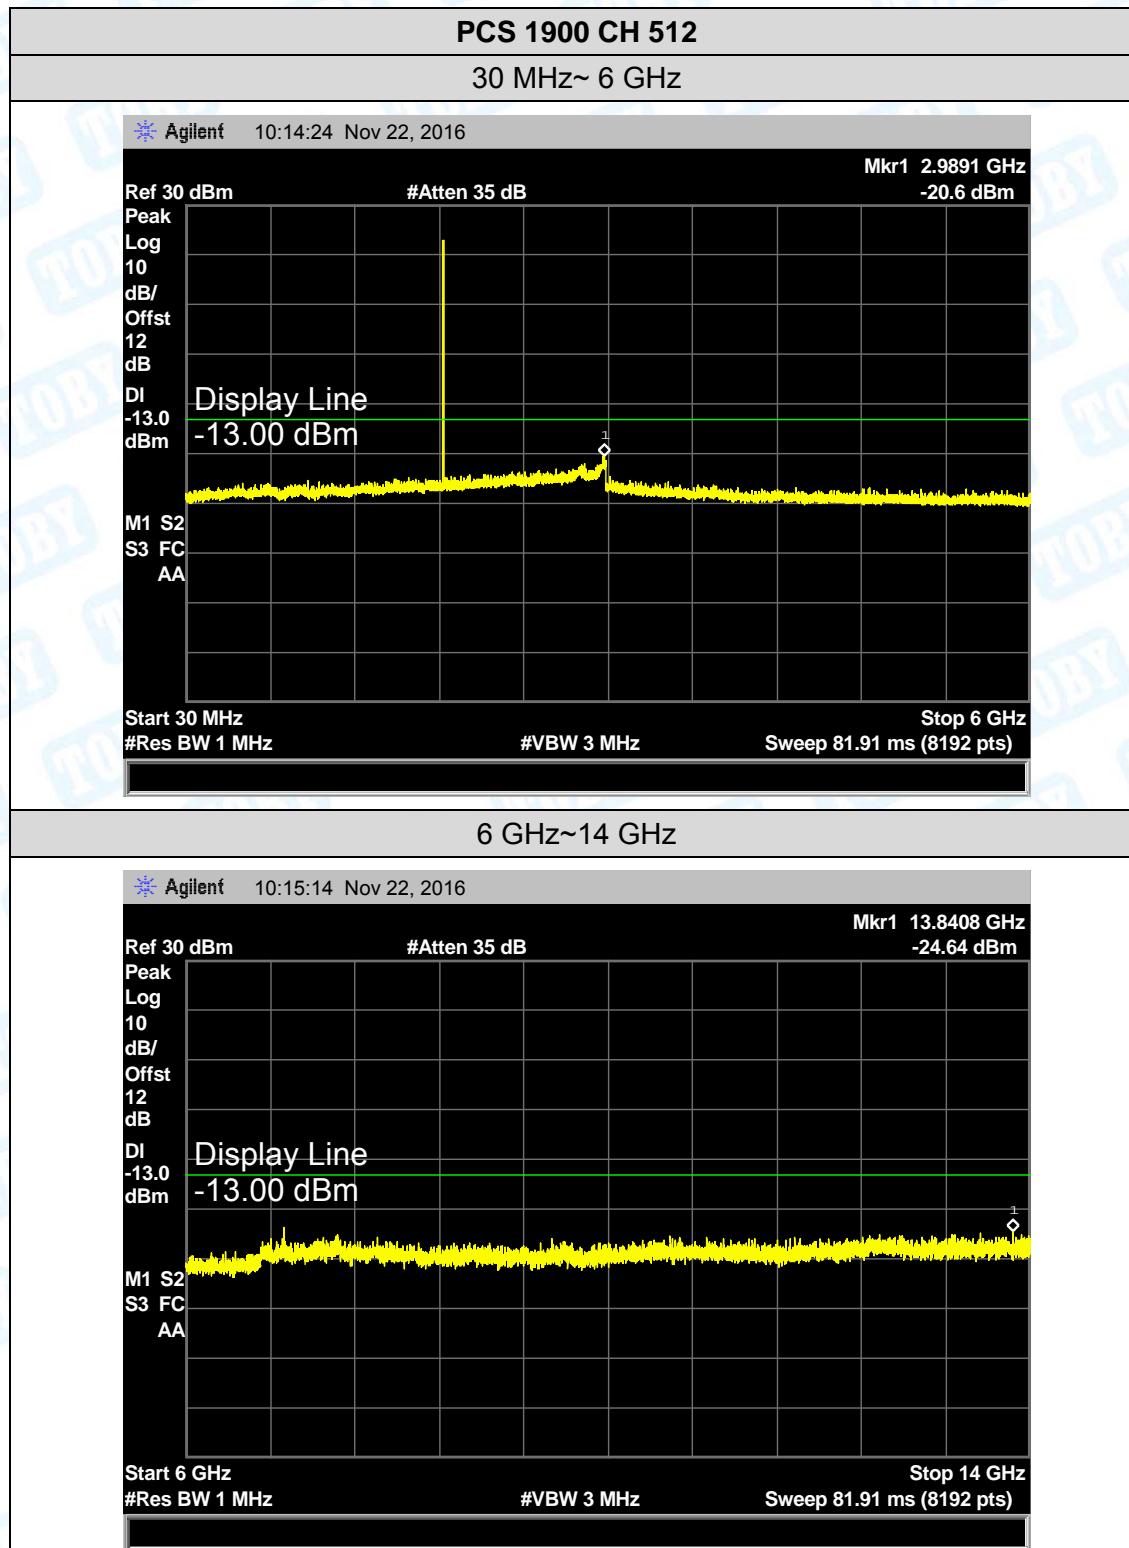


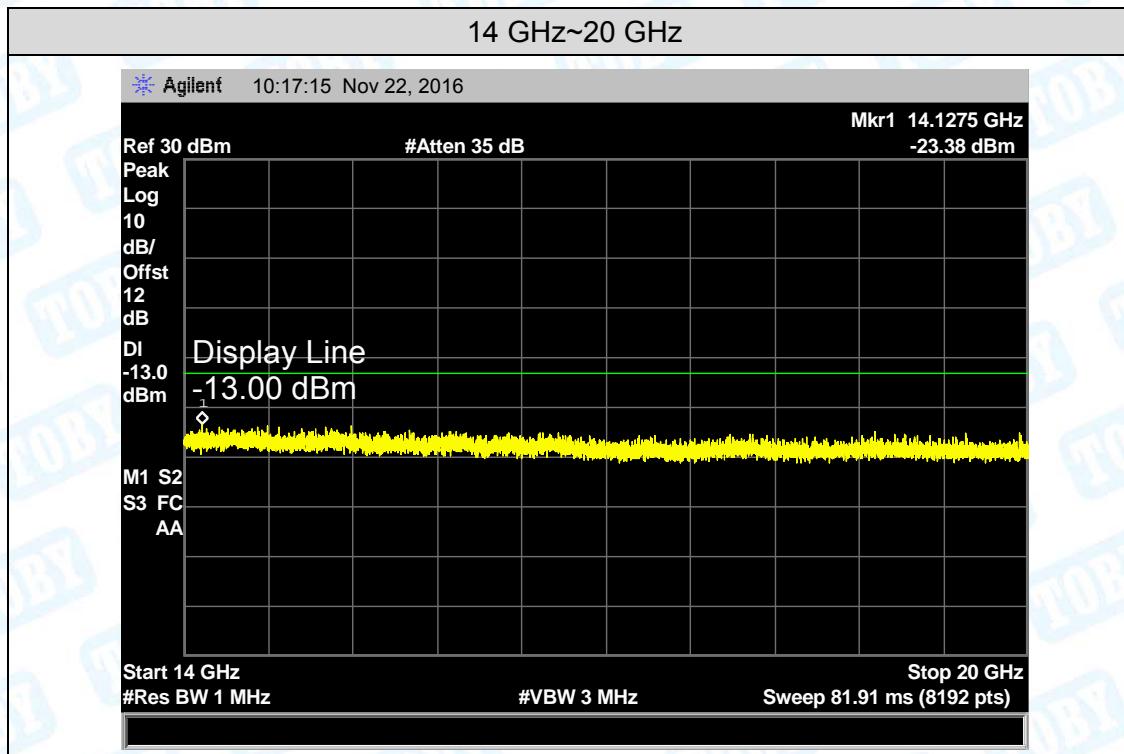


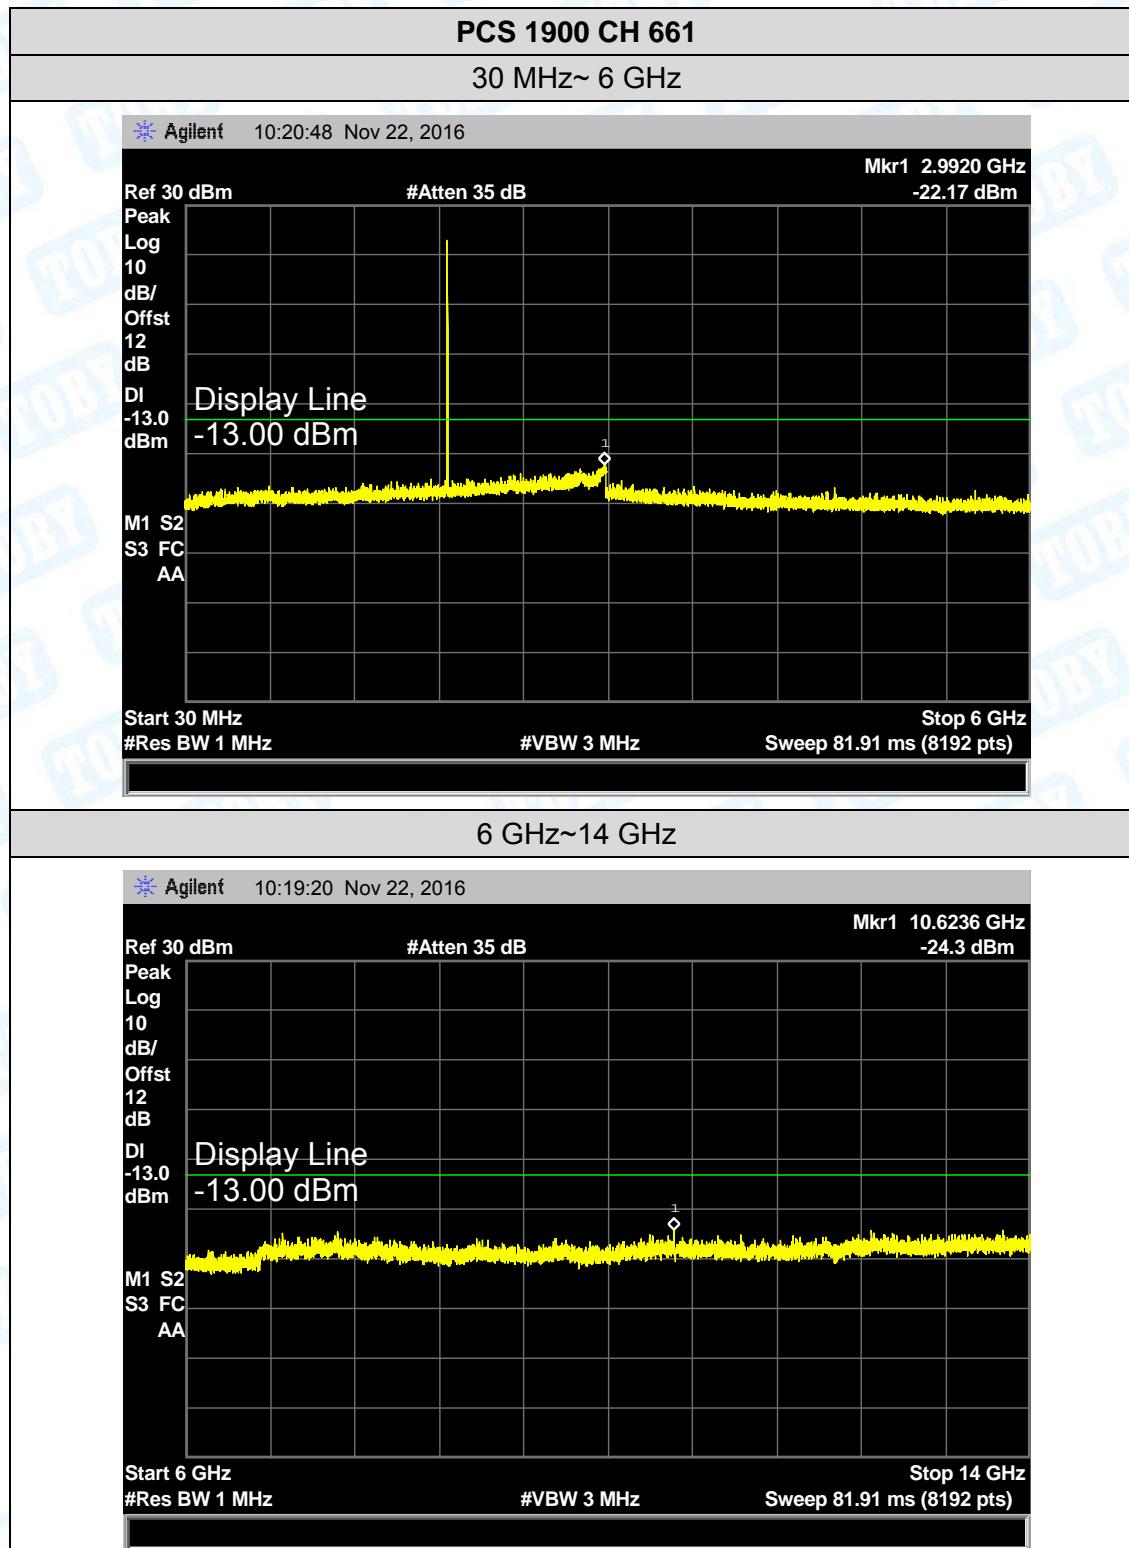


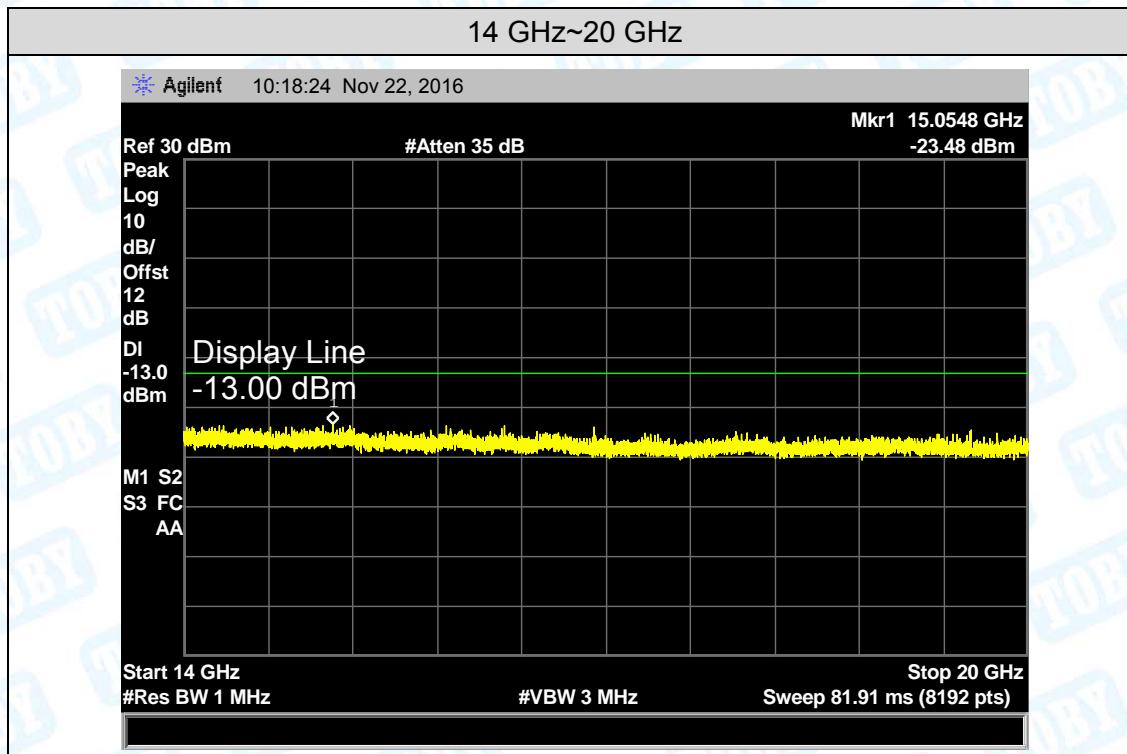


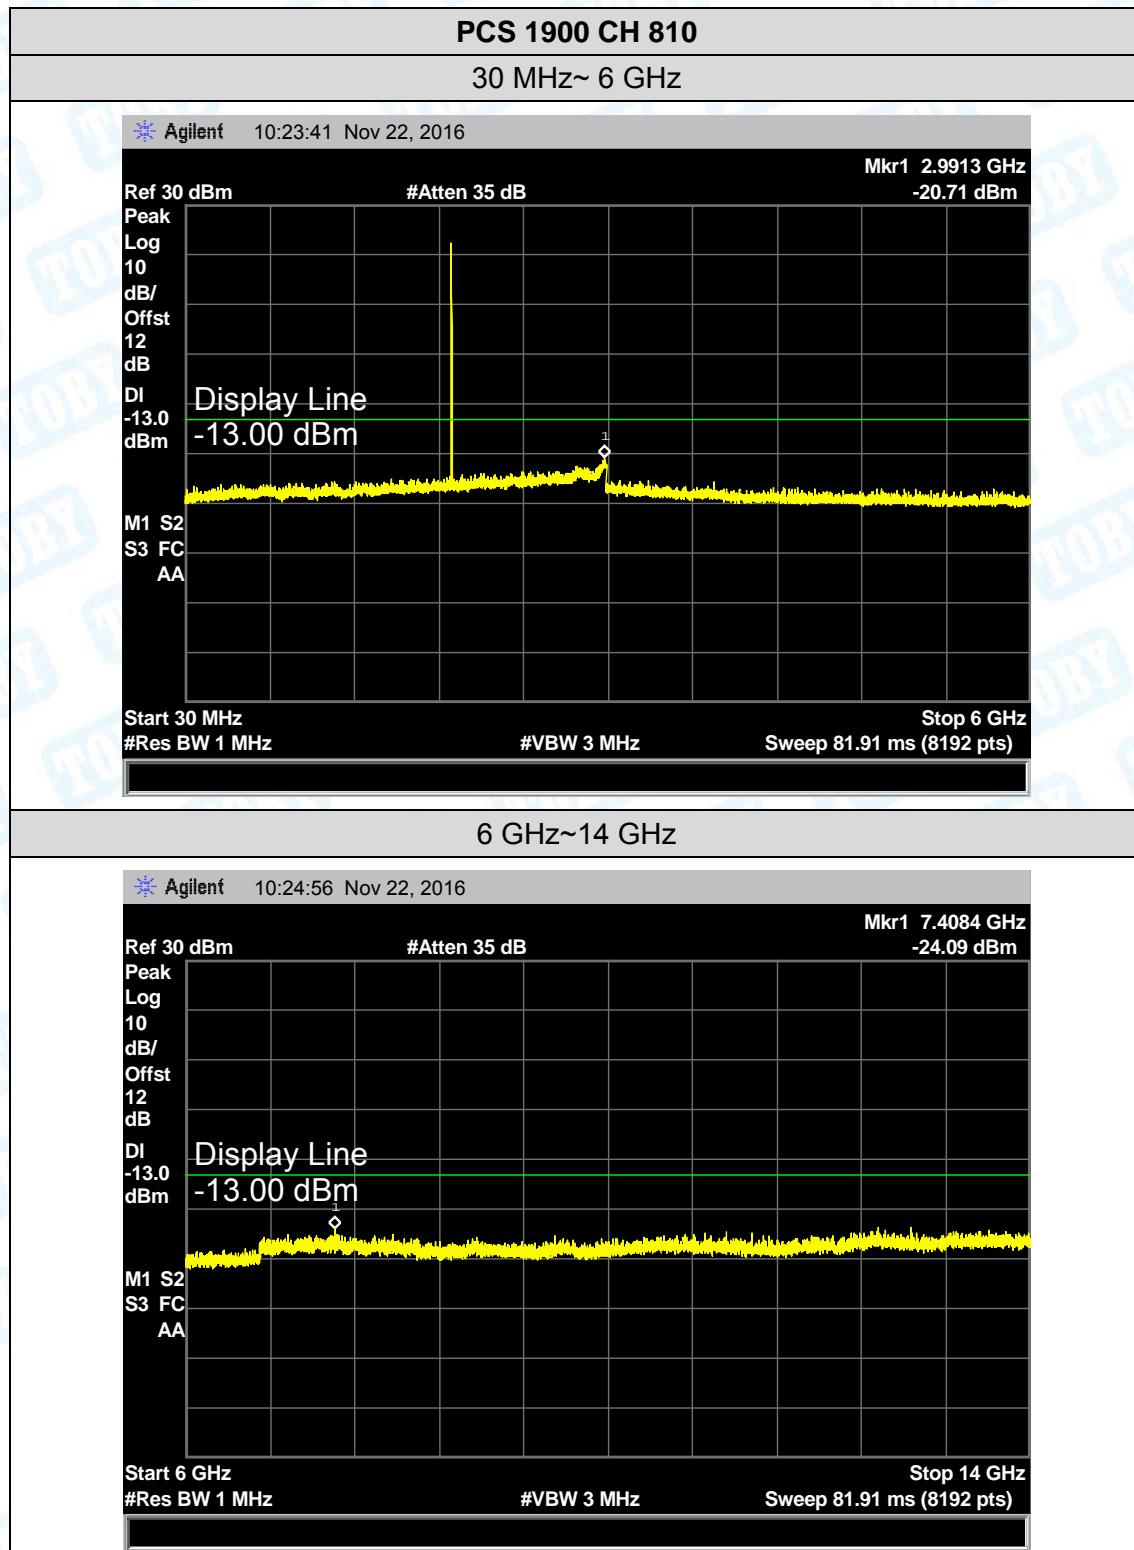


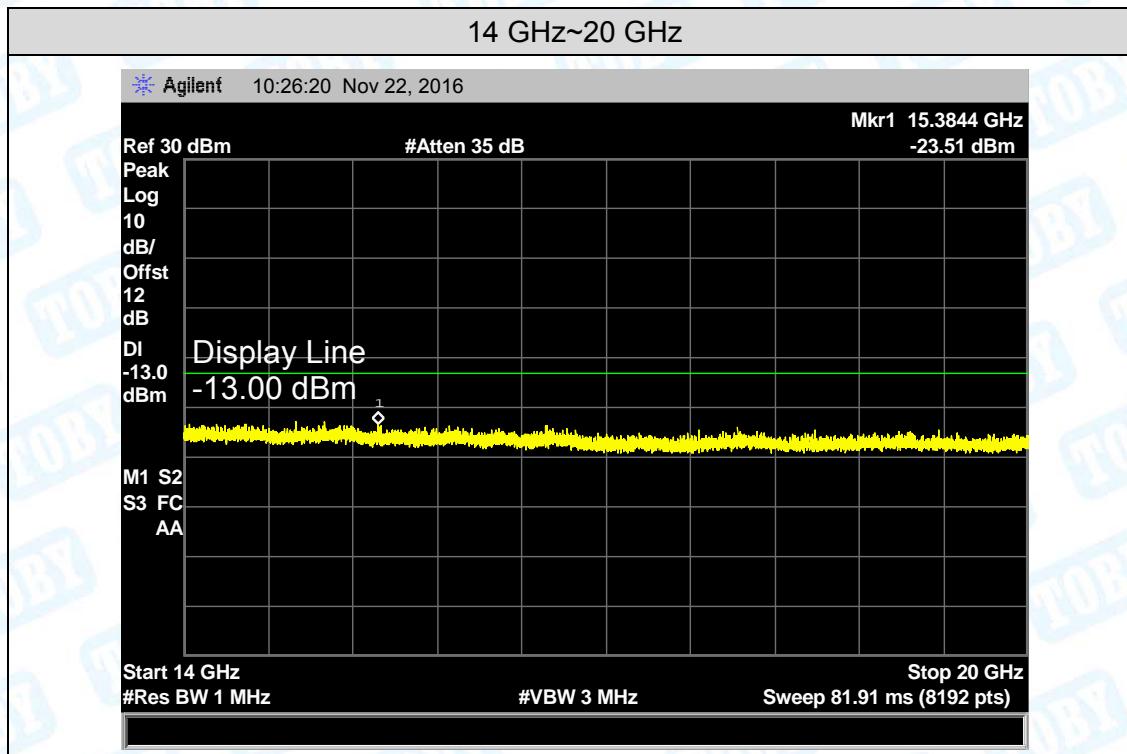


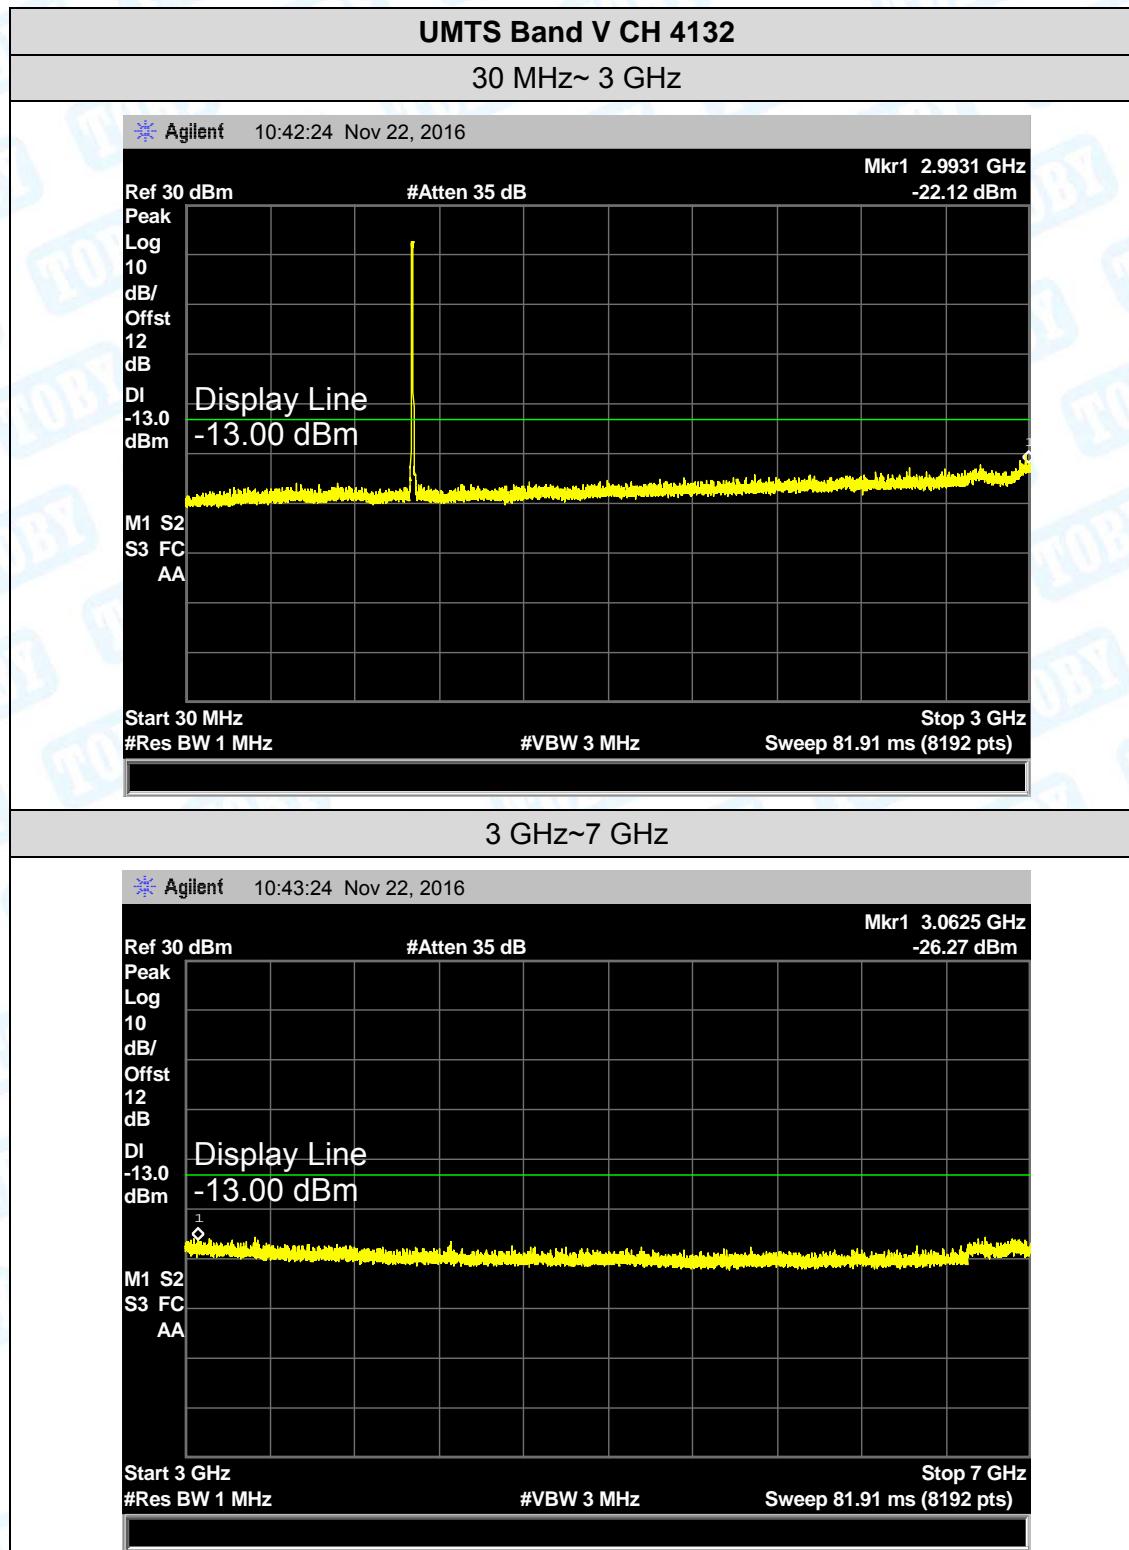


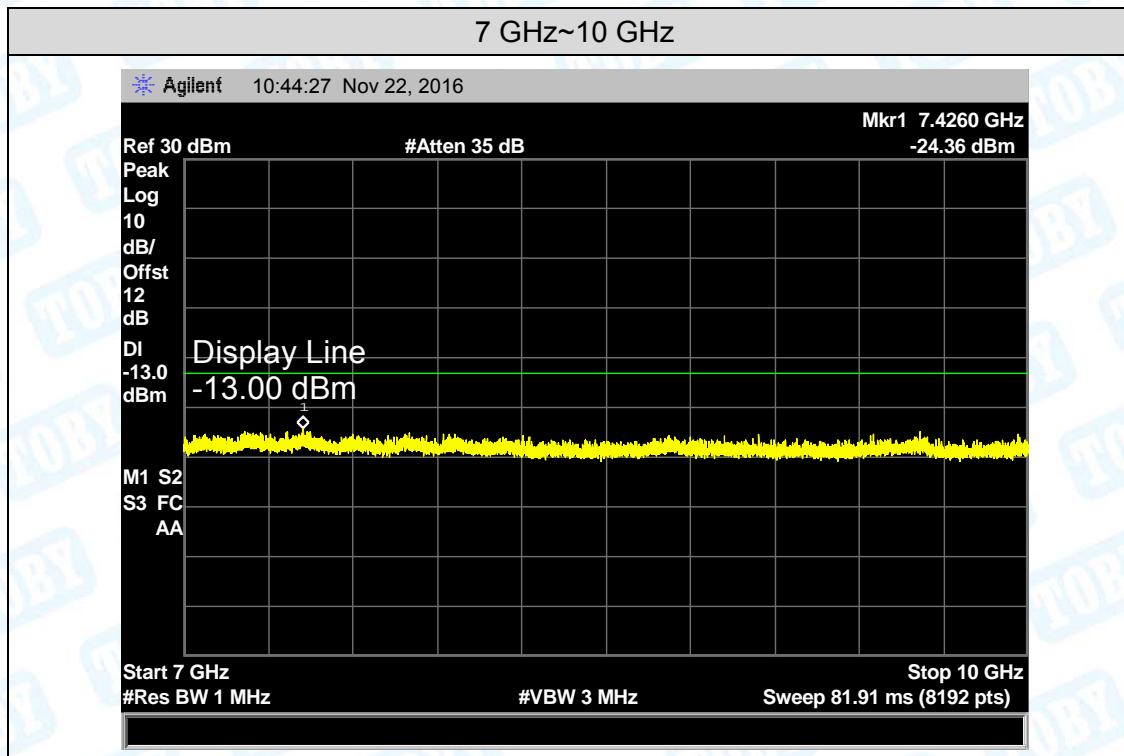


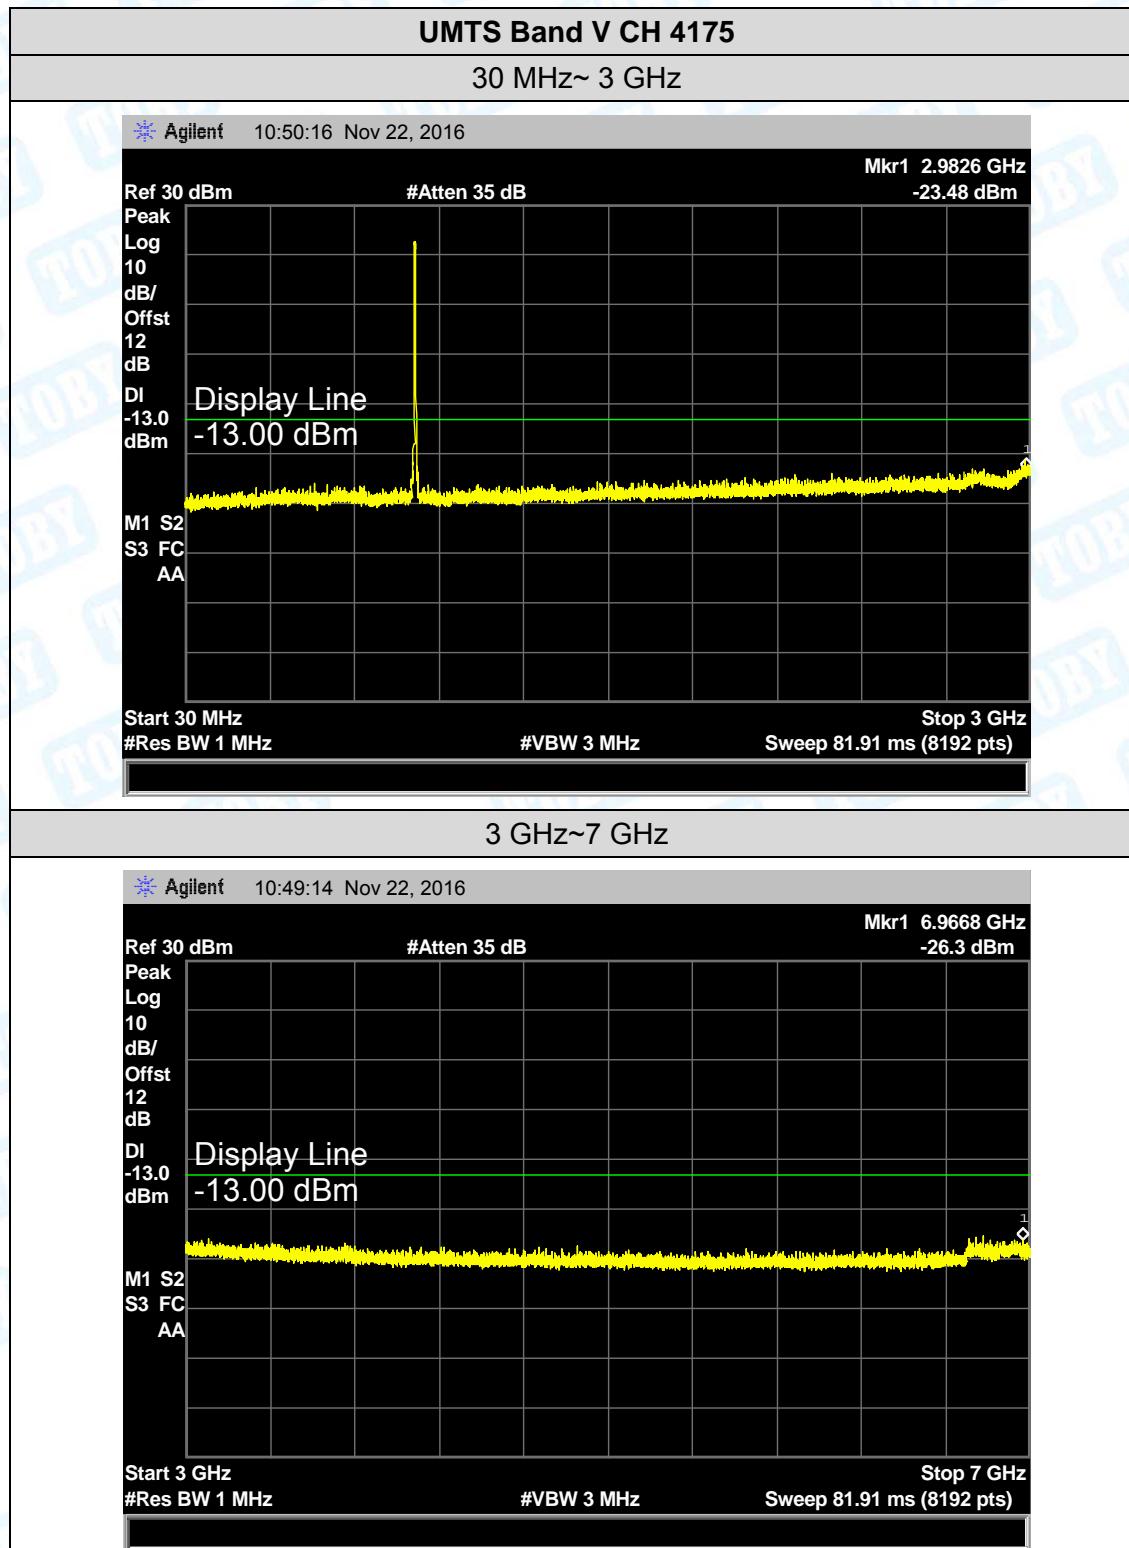


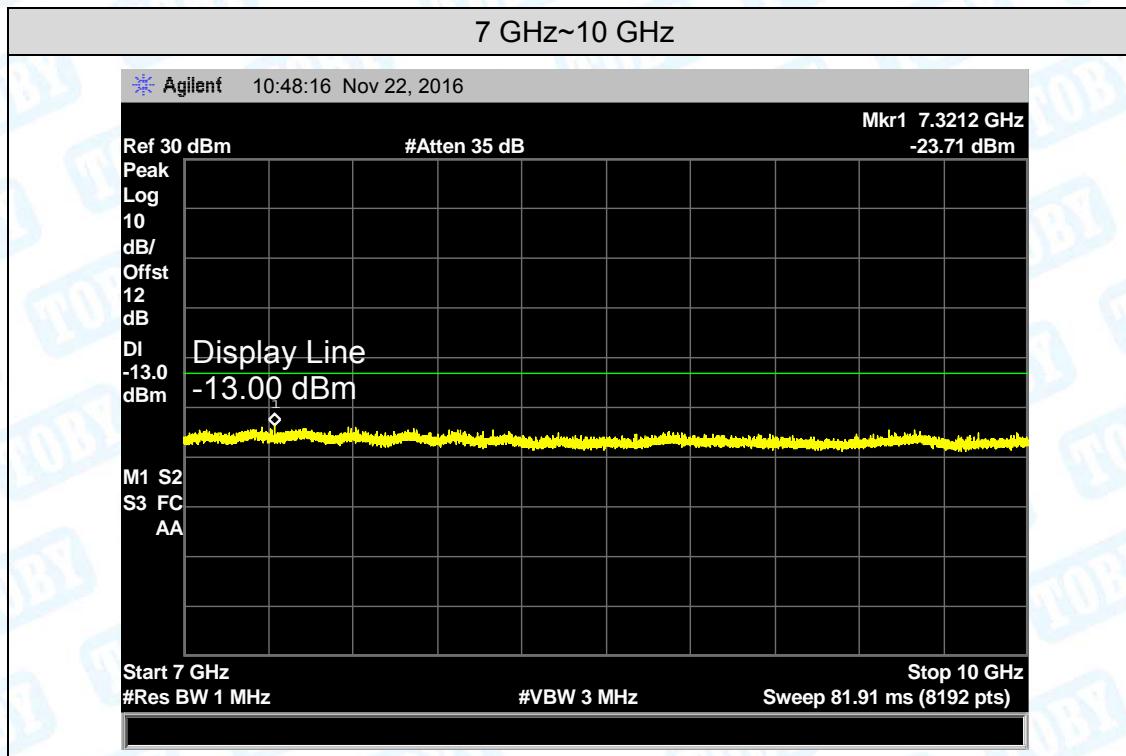


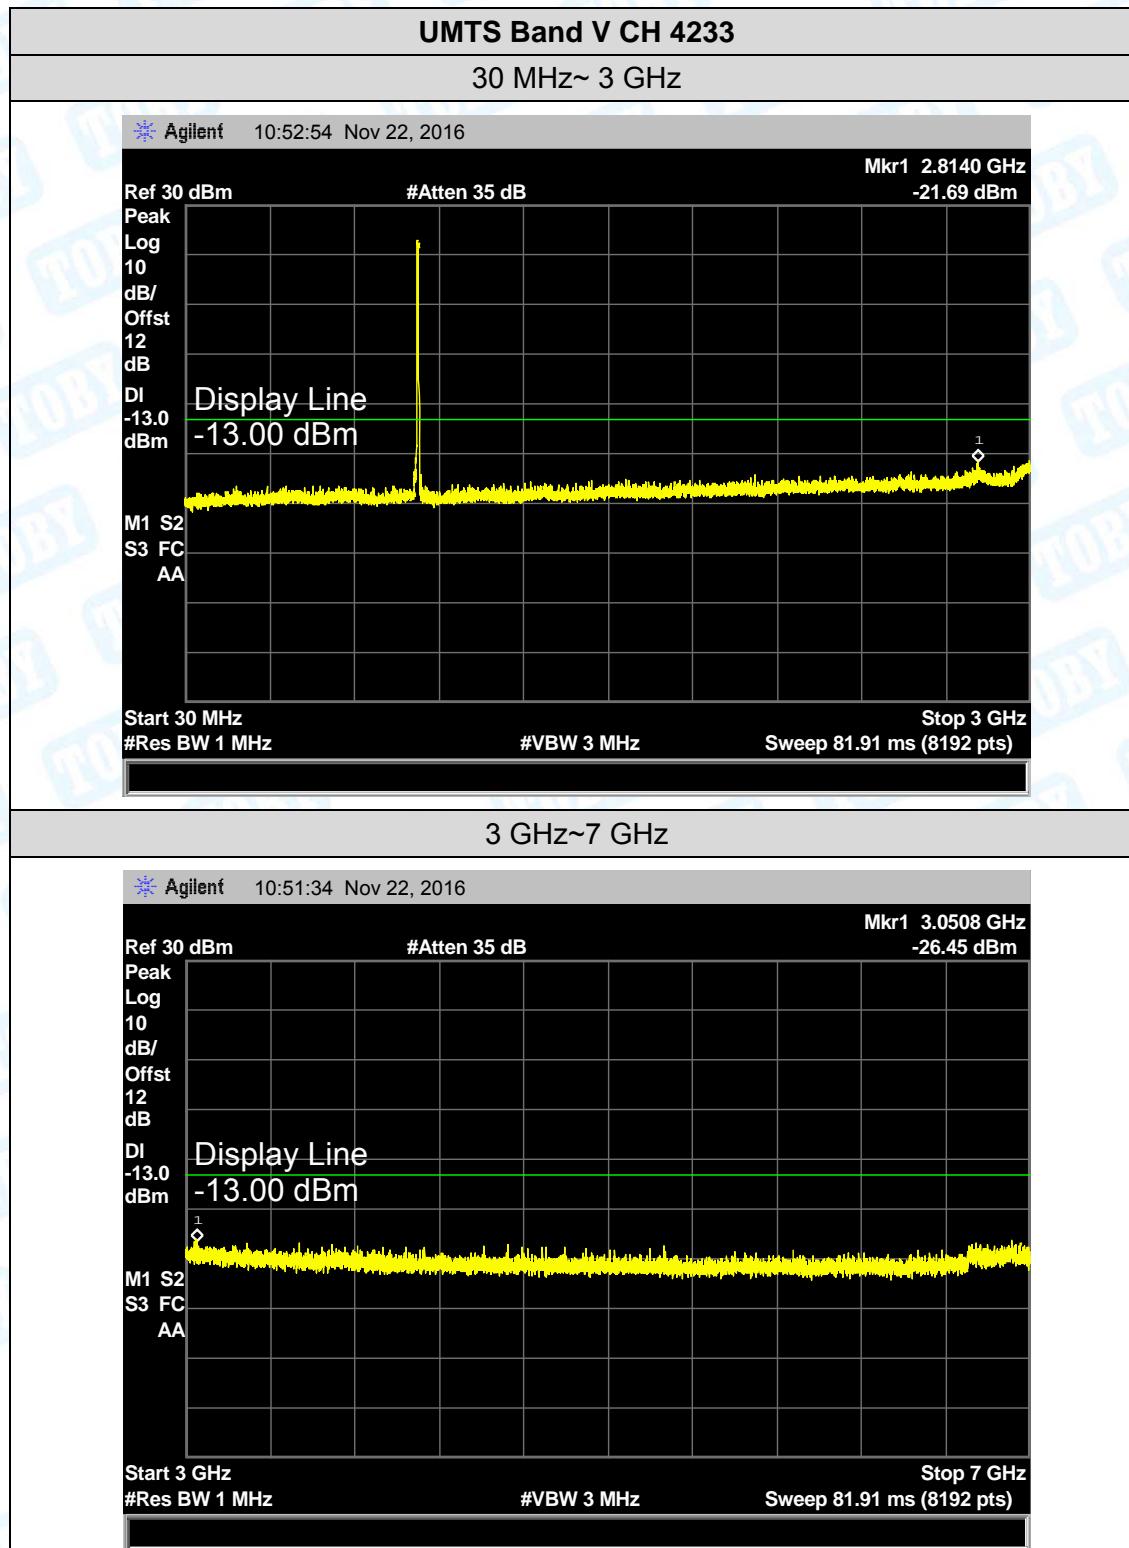


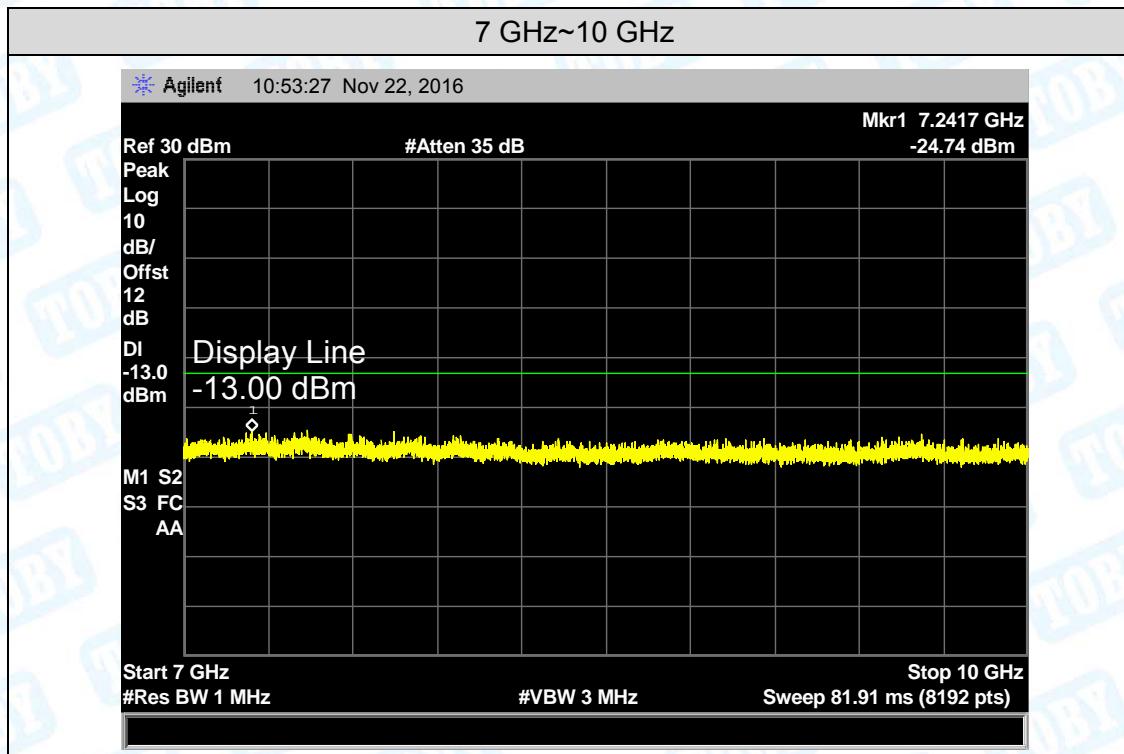


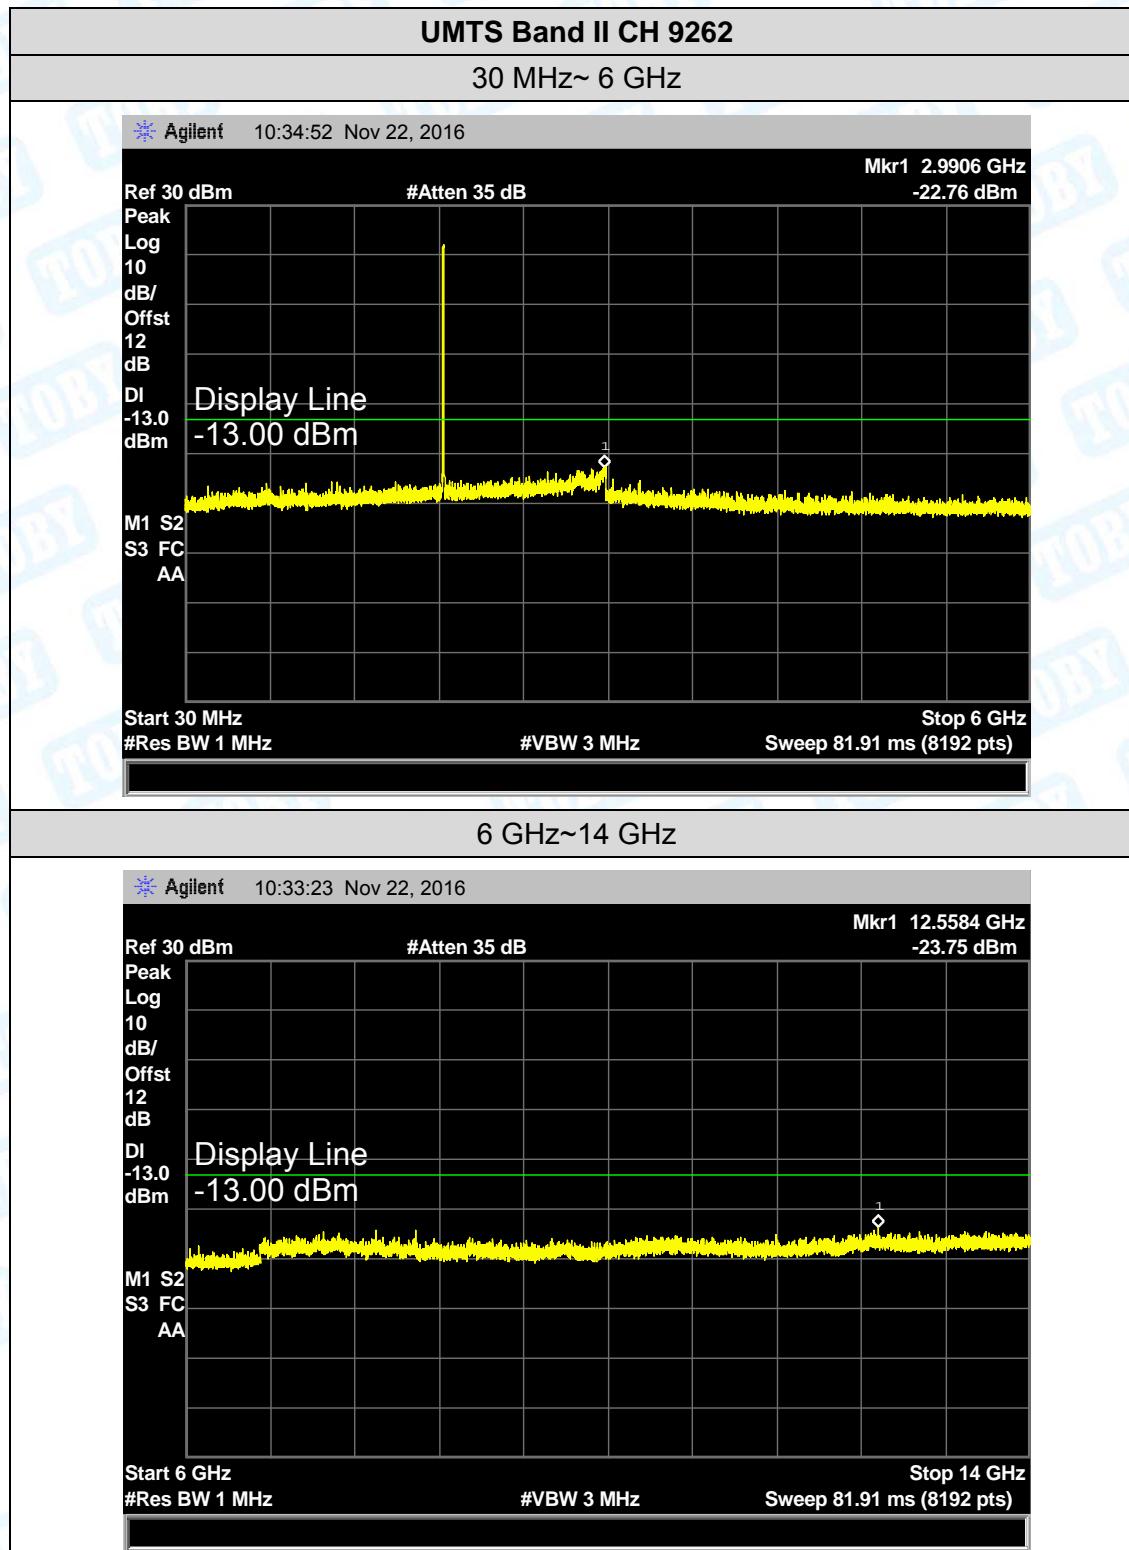


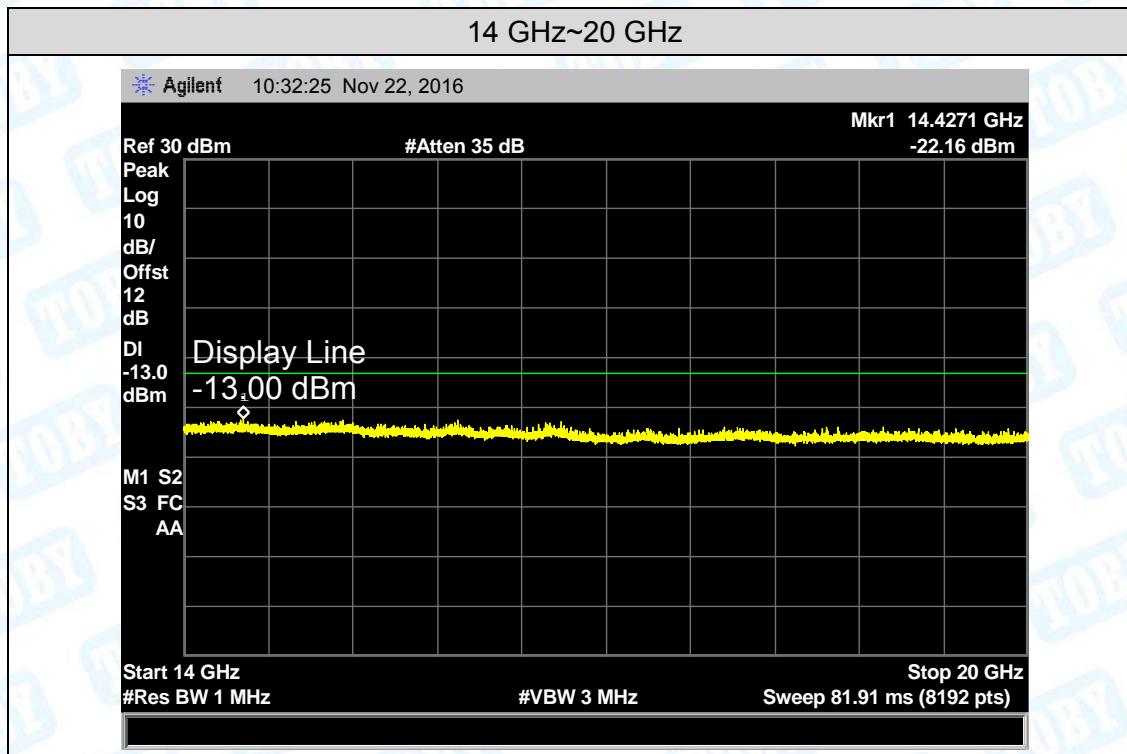

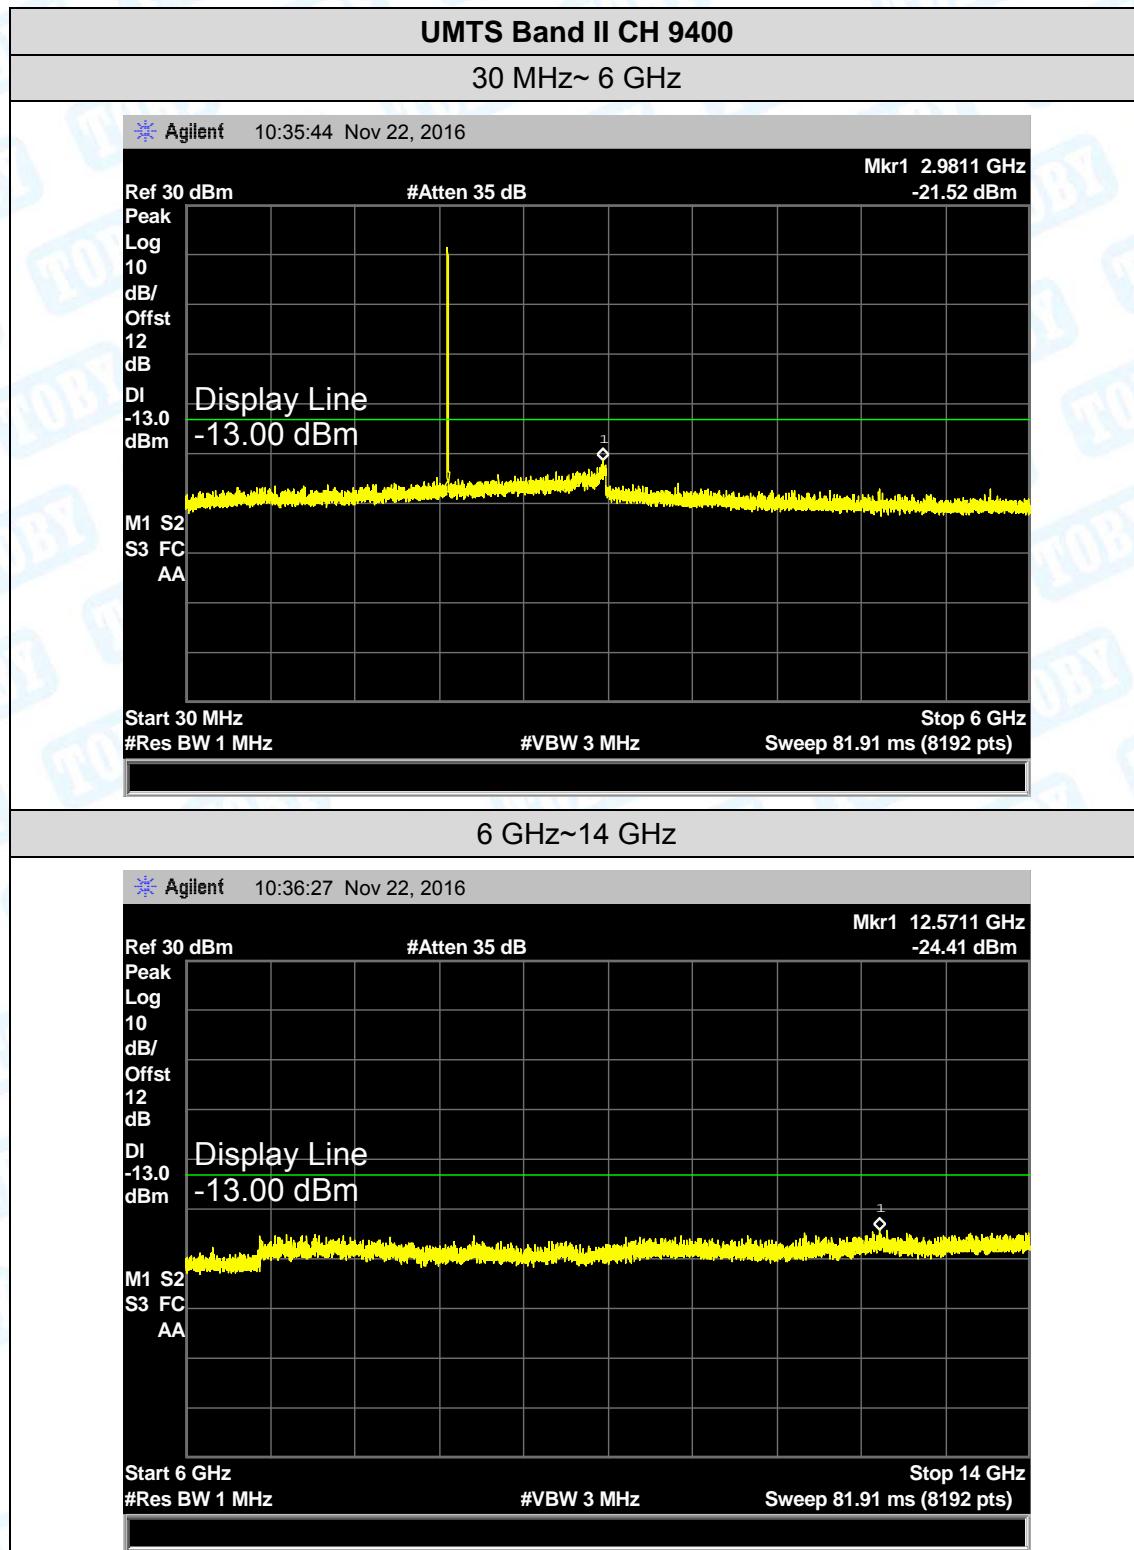

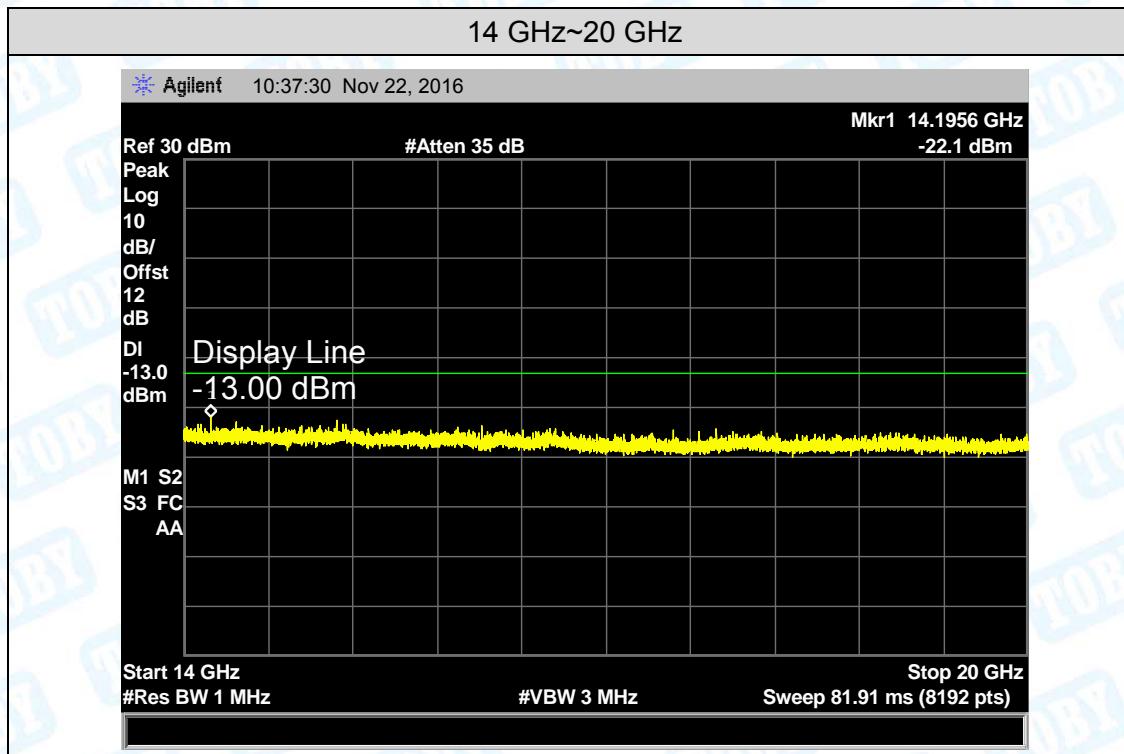

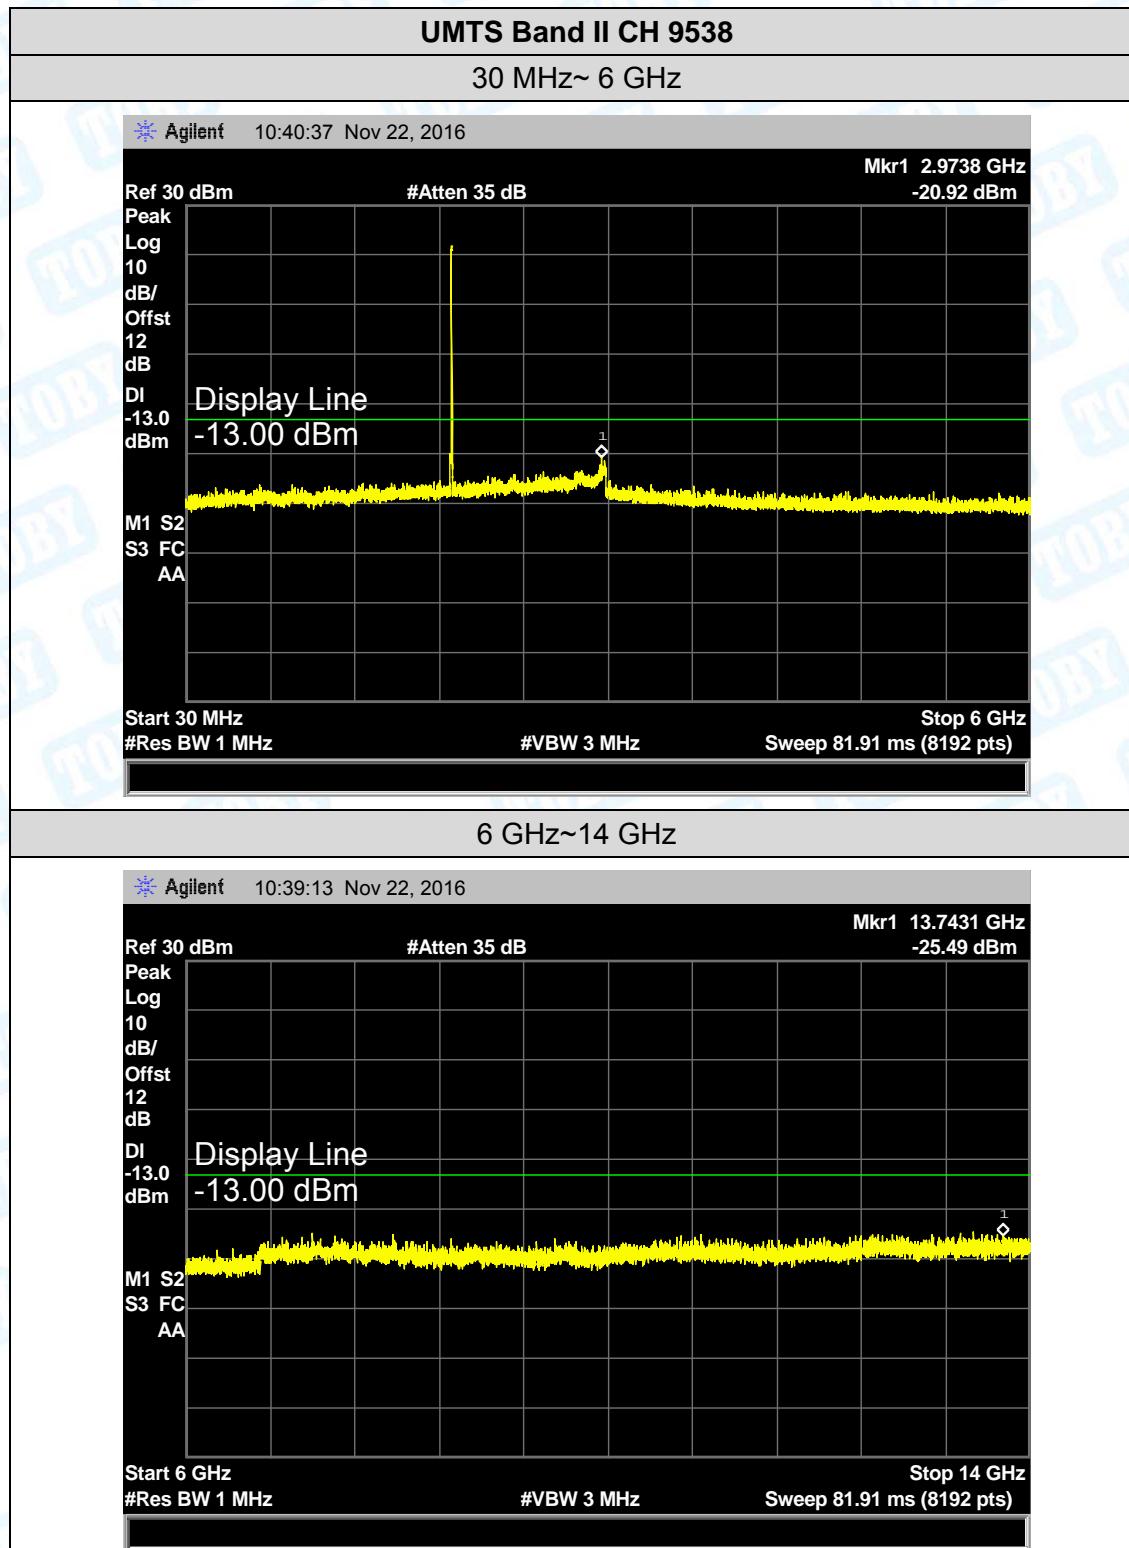

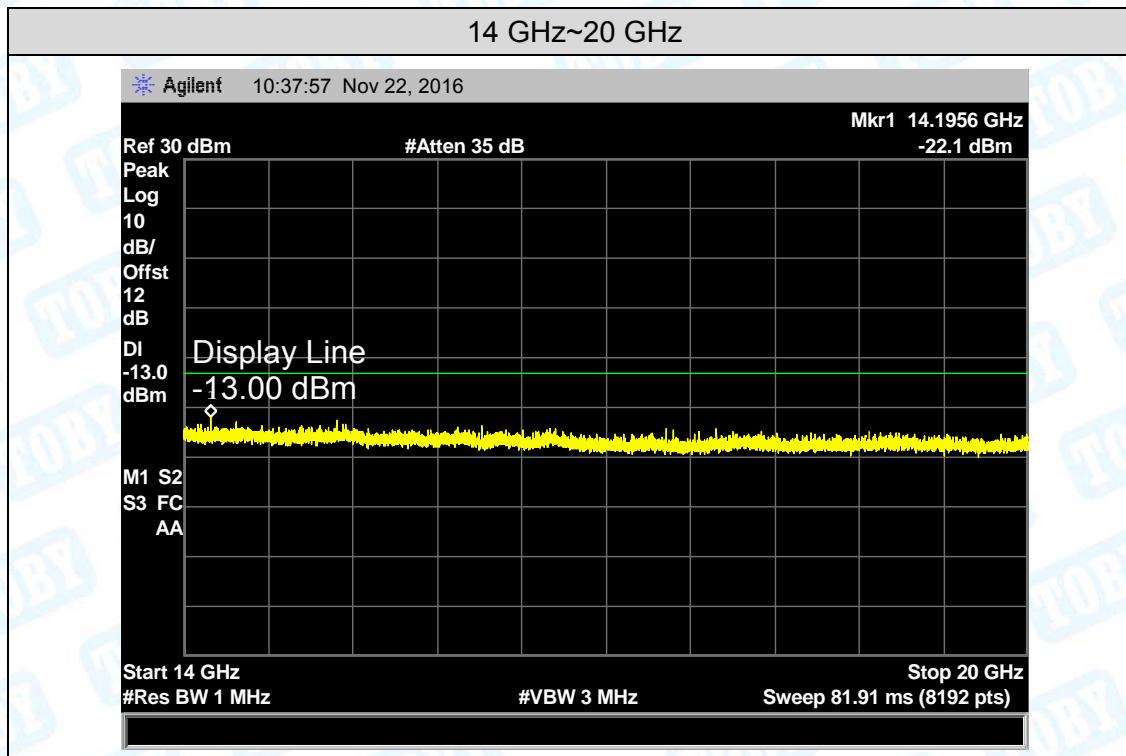

## 10. Band Edge Test

### 10.1 Test Standard and Limit

#### 10.1.1 Test Standard

FCC Part 2: 2.1051, 2.1057


FCC Part 22H: 22.917(a)

FCC Part 24E: 24.238(a)

#### 10.1.2 Test Limit

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power(P) by a factor of at least  $43+10\log(P)$  dB. For all power levels +30 dBm to 0 dBm, this becomes a constant specification limit of -13 dBm.

### 10.2 Test Setup

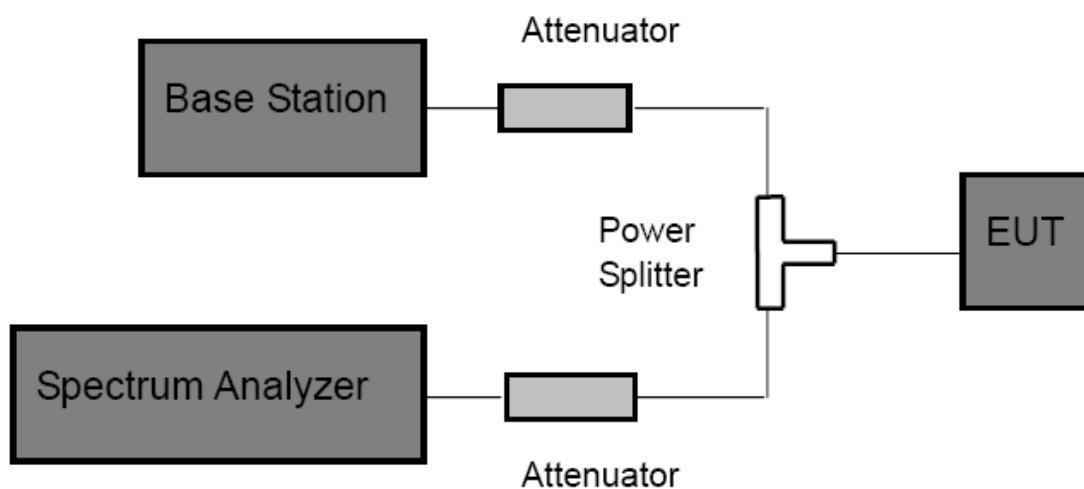

### 10.3 Test Procedure

(1) The EUT was directly connected to the spectrum analyzer and Base station via power splitter as show in the block diagram above.

(2) Spectrum Setting:

GSM and PCS:  $\text{RBW} \geq 1\%$  26db bandwidth,  $\text{VBW}=3 \text{ RBW}$ , Span 1 MHz, Detector: Peak Mode.

WCDMA:  $\text{RBW} \geq 1\%$  26db bandwidth,  $\text{VBW}=3 \text{ RBW}$ , Span 10 MHz, Detector: Peak Mode.

(3) The band edges of low and high channels for the highest RF powers were measured.

### 10.4 EUT Operating Condition


The EUT was continuously connected with the Base station and transmitting in the max power during the test.

## 10.5 Test Data

Please refer the following plots:

Band edge emission:

Test Mode:	GSM850
------------	--------

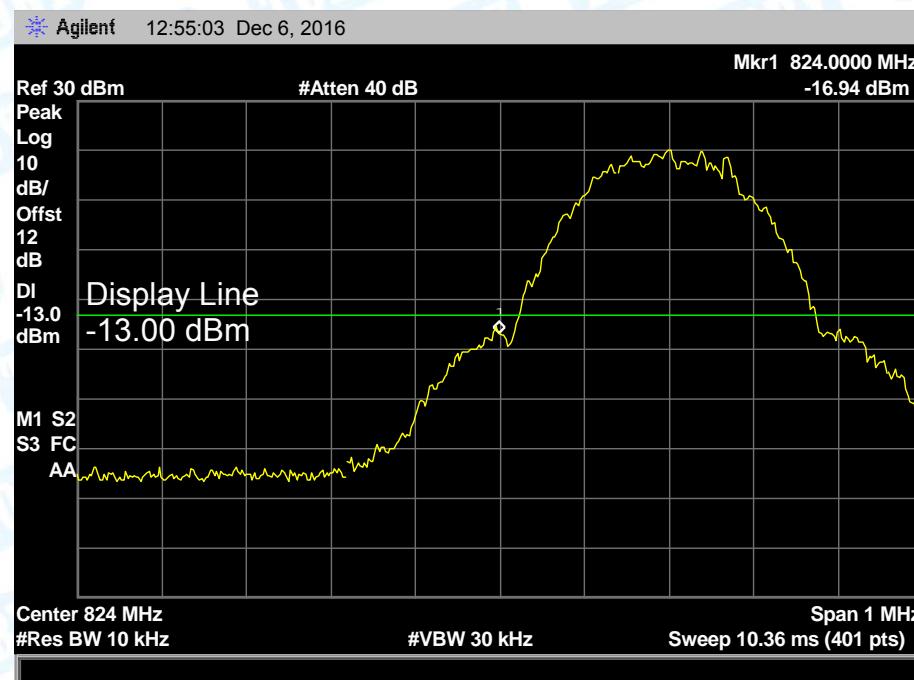


Lowest channel




Highest channel

Test Mode:	GPRS850
------------	---------

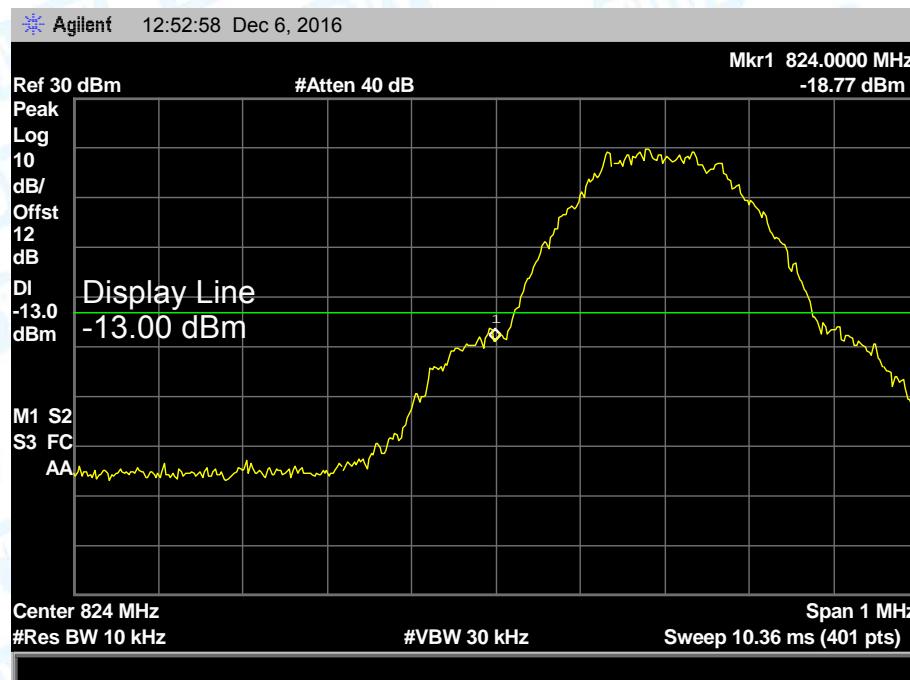


Lowest channel

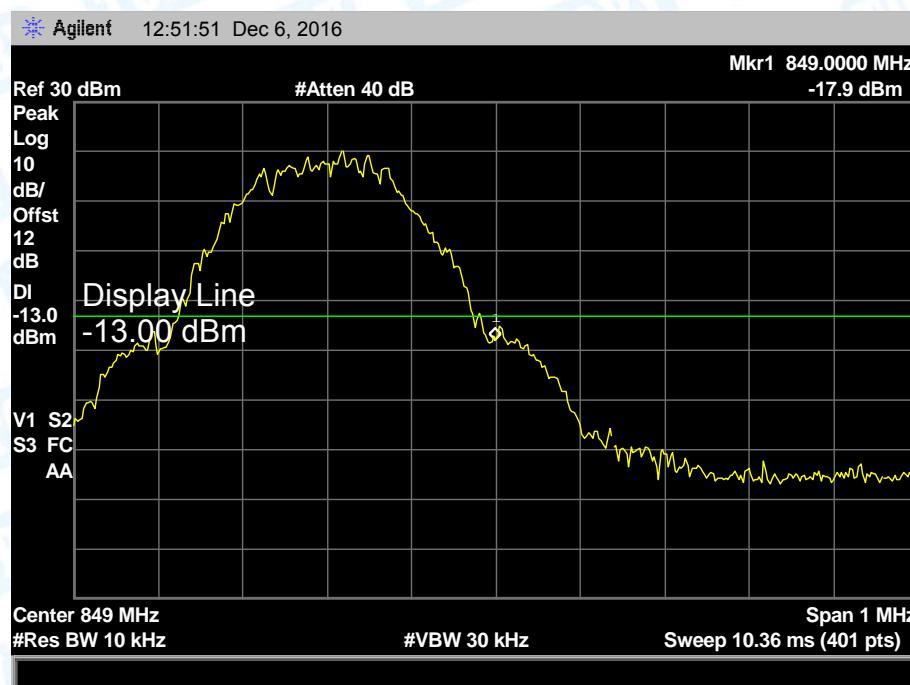

Highest channel

Test Mode:

EDGE850

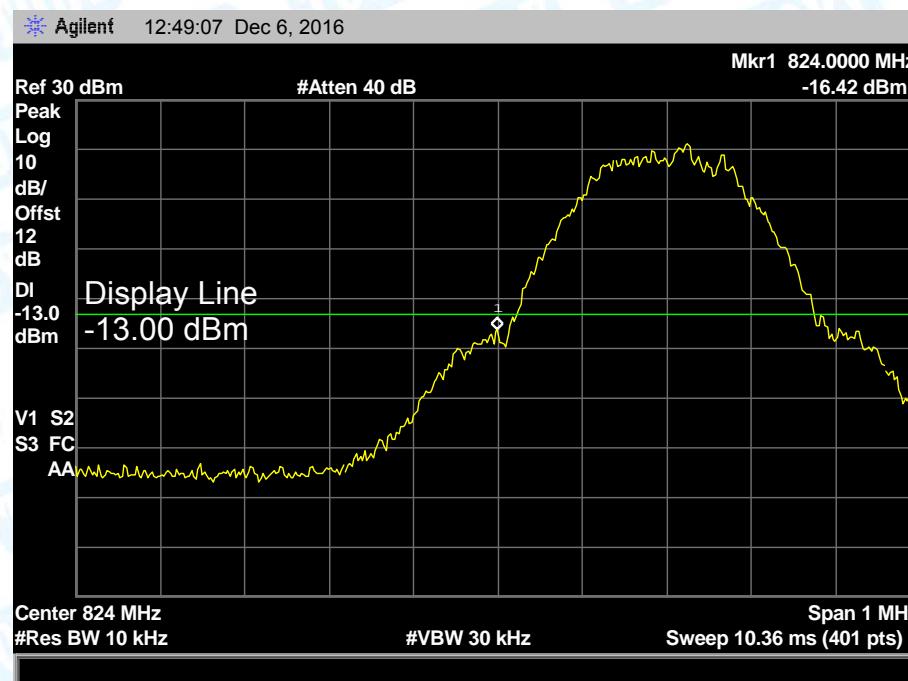


Lowest channel




Highest channel

Test Mode:	PCS1900
------------	---------

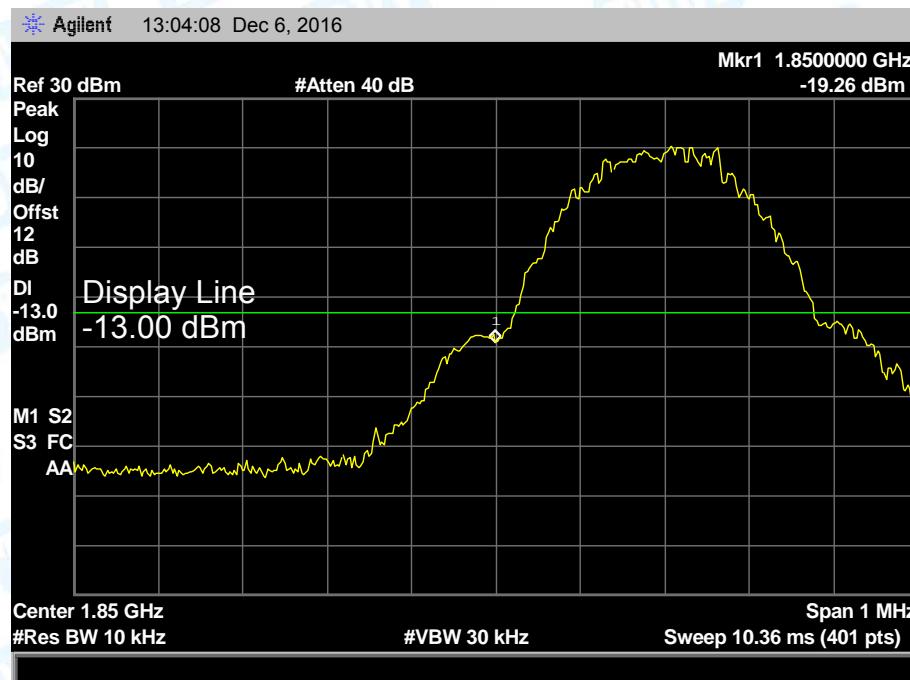


Test Mode:

GPRS1900

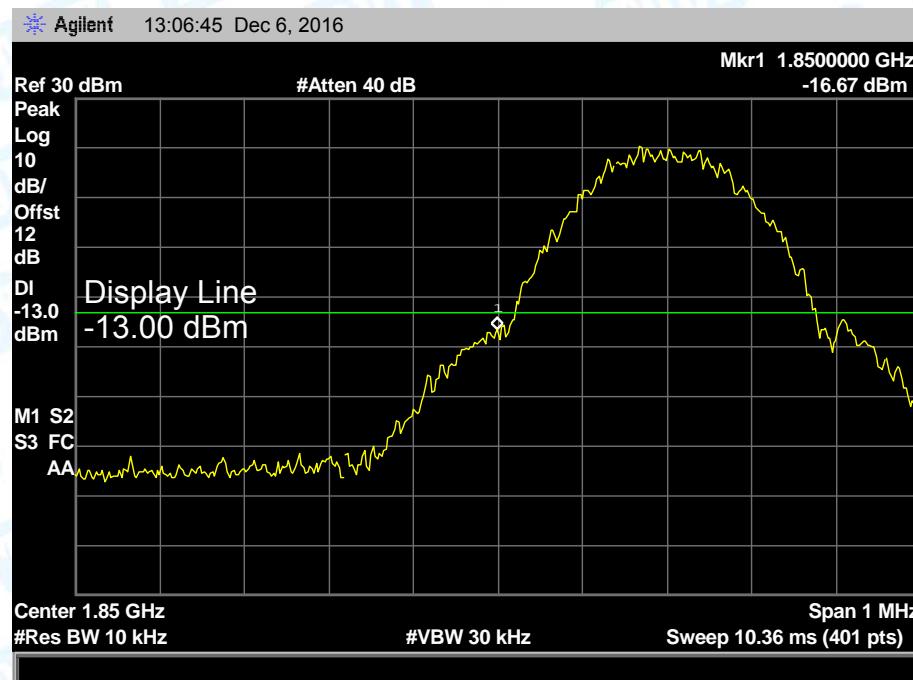


Test Mode:

EDGE1900

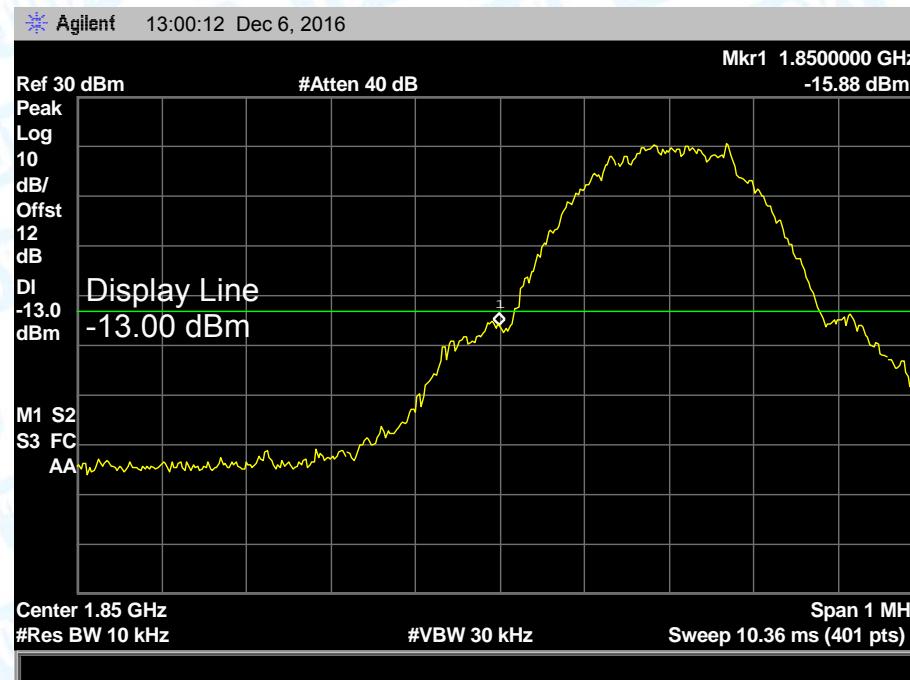


Lowest channel

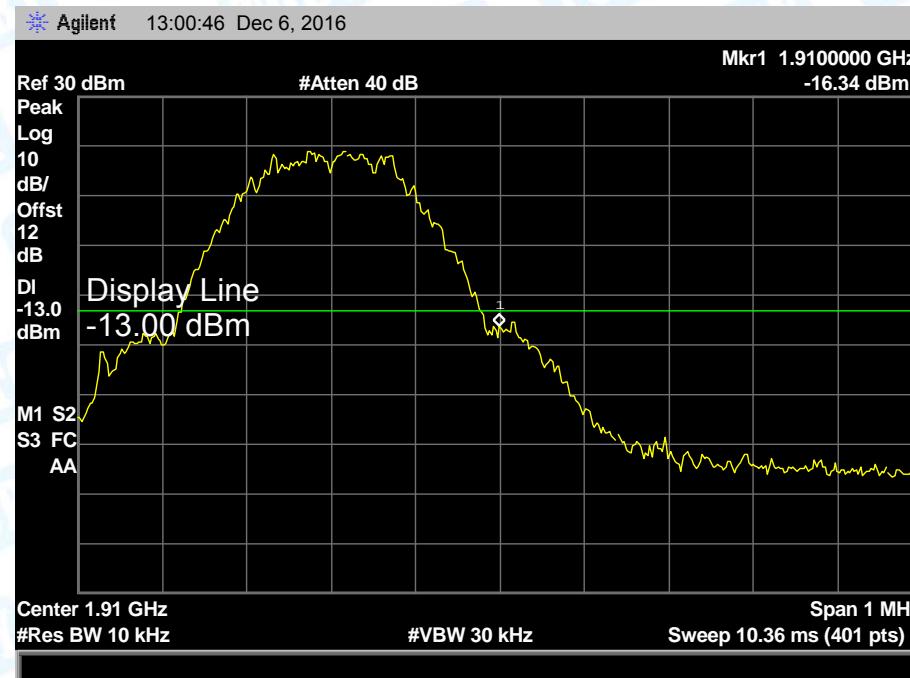


Highest channel

Test Mode:

UMTS Band V 12.2k RMC


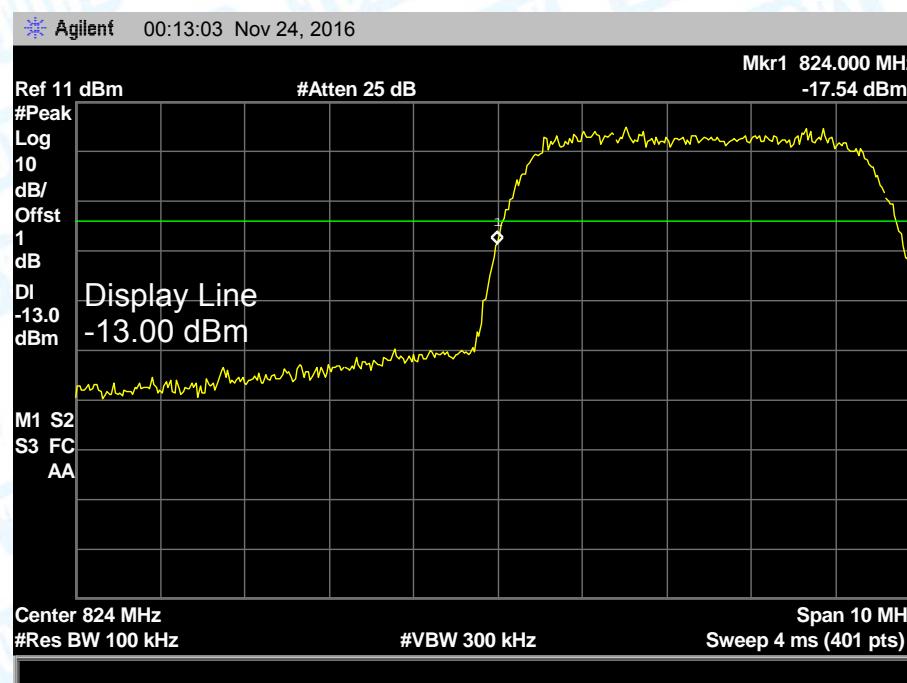


Lowest channel


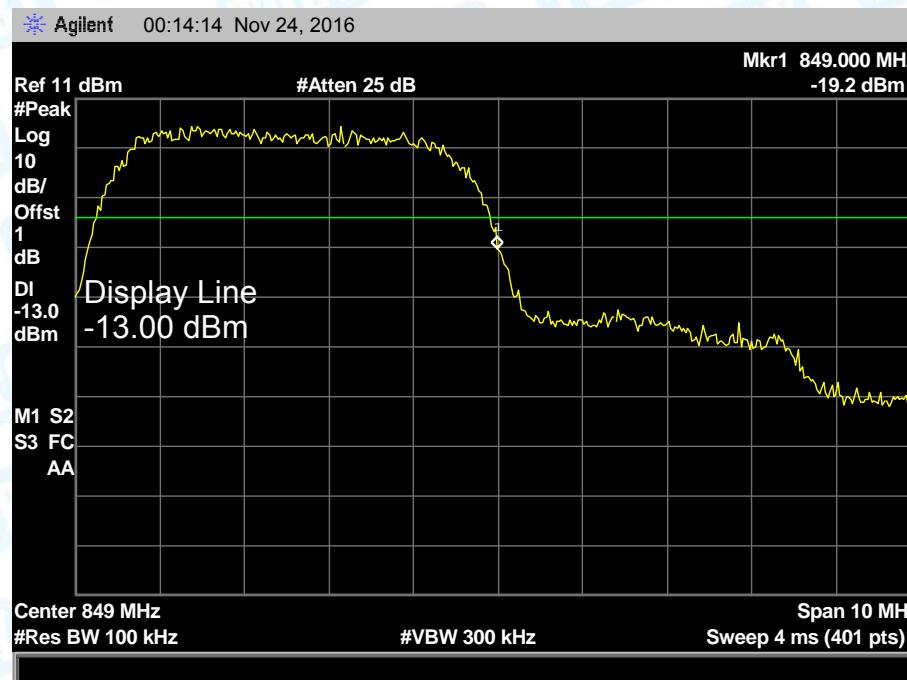


Highest channel

Test Mode:	UMTS Band V 12.2k HSDPA
------------	-------------------------

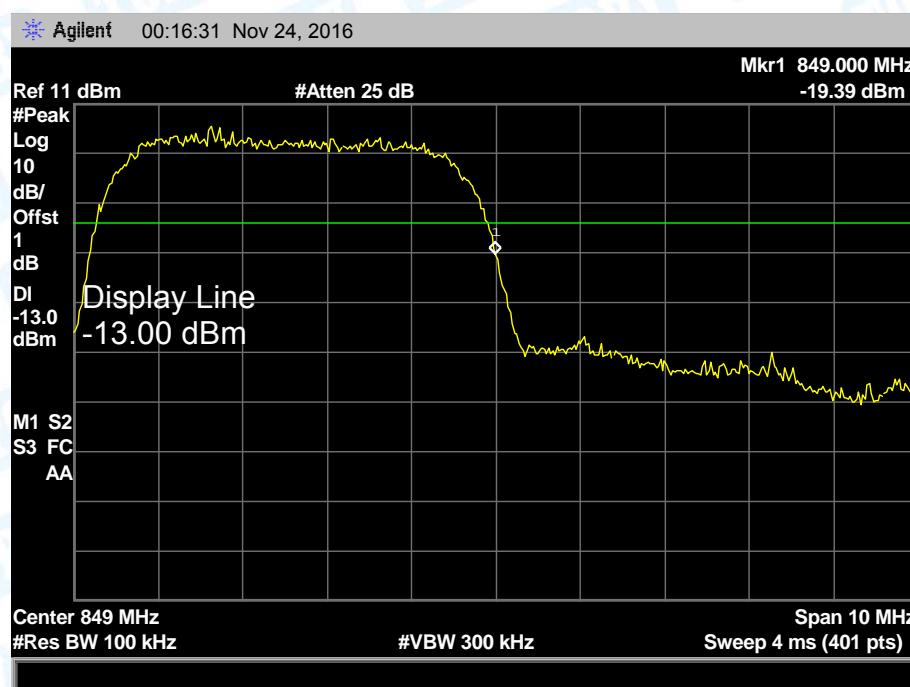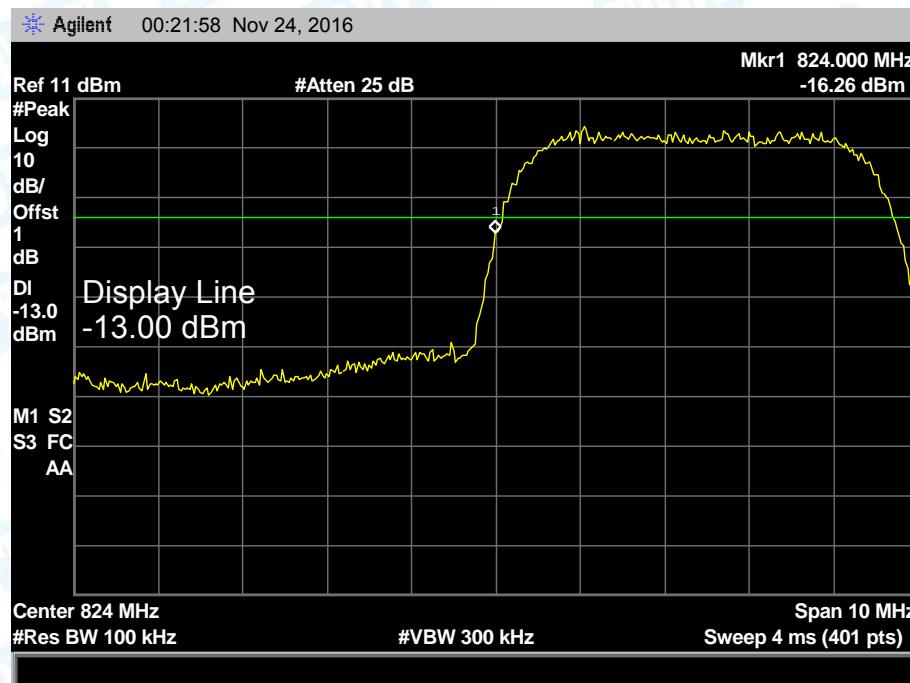


Test Mode:	UMTS Band V 12.2k HSUPA
------------	-------------------------

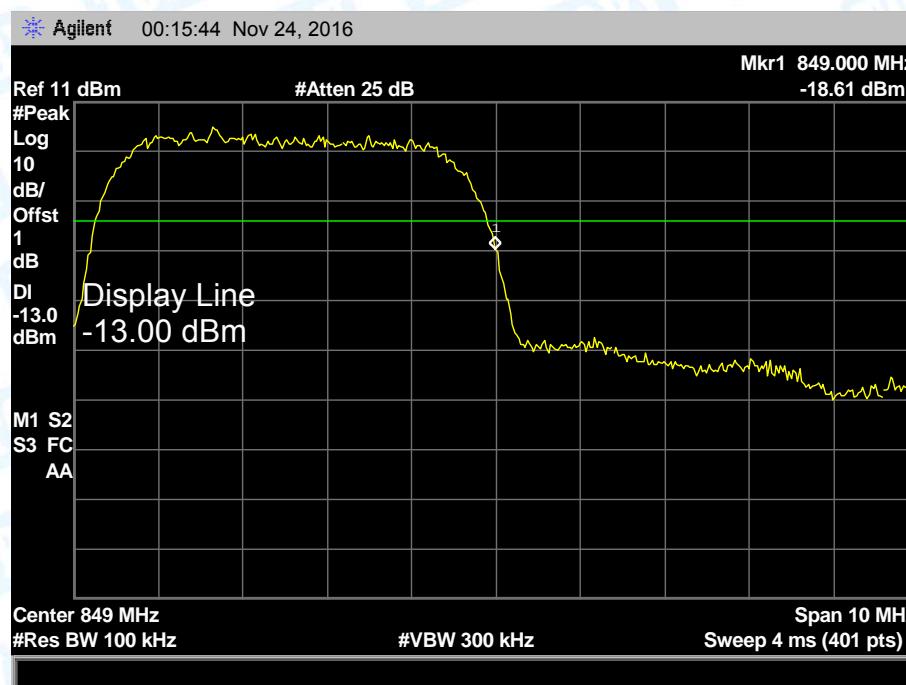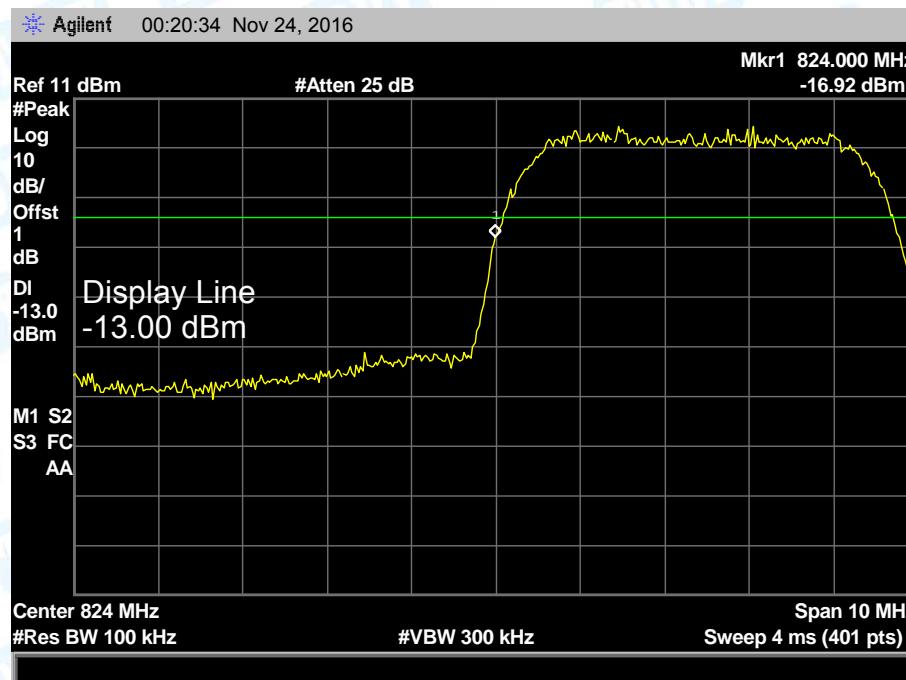


Test Mode:

UMTS Band II 12.2k RMC

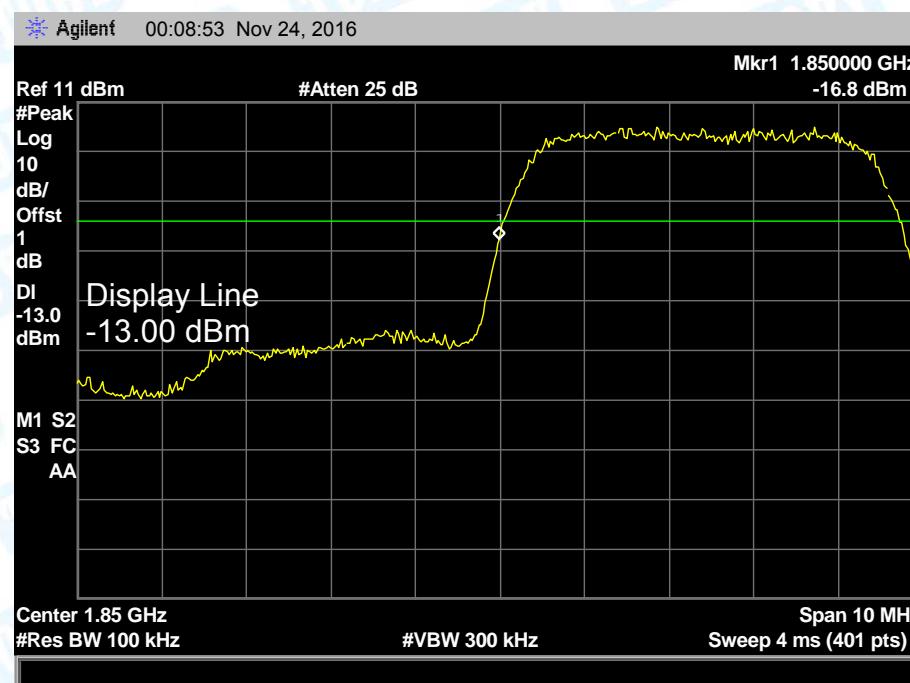


Lowest channel

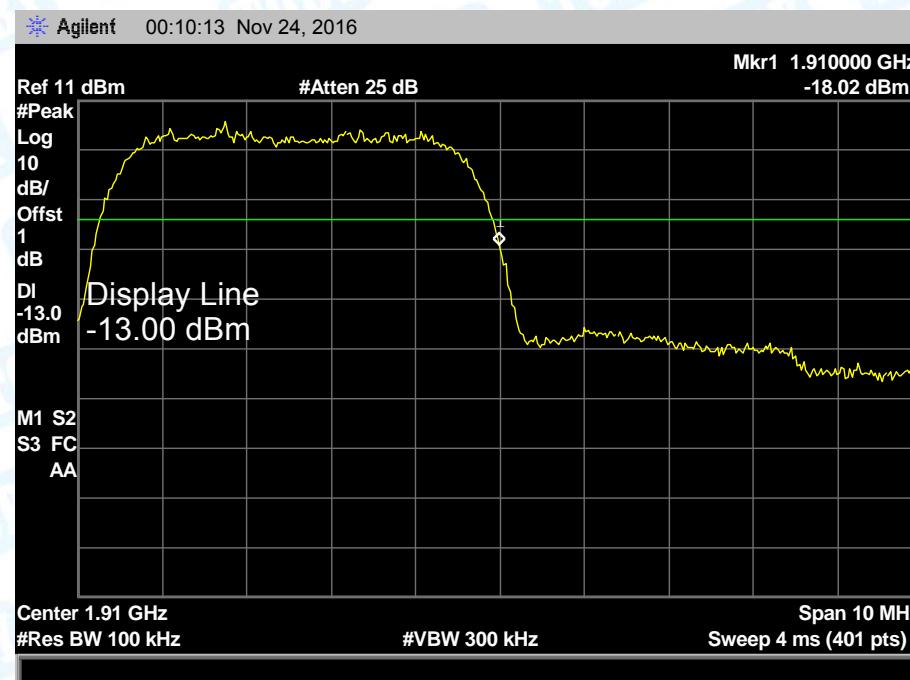


Highest channel

Test Mode:

UMTS Band II 12.2k HSDPA

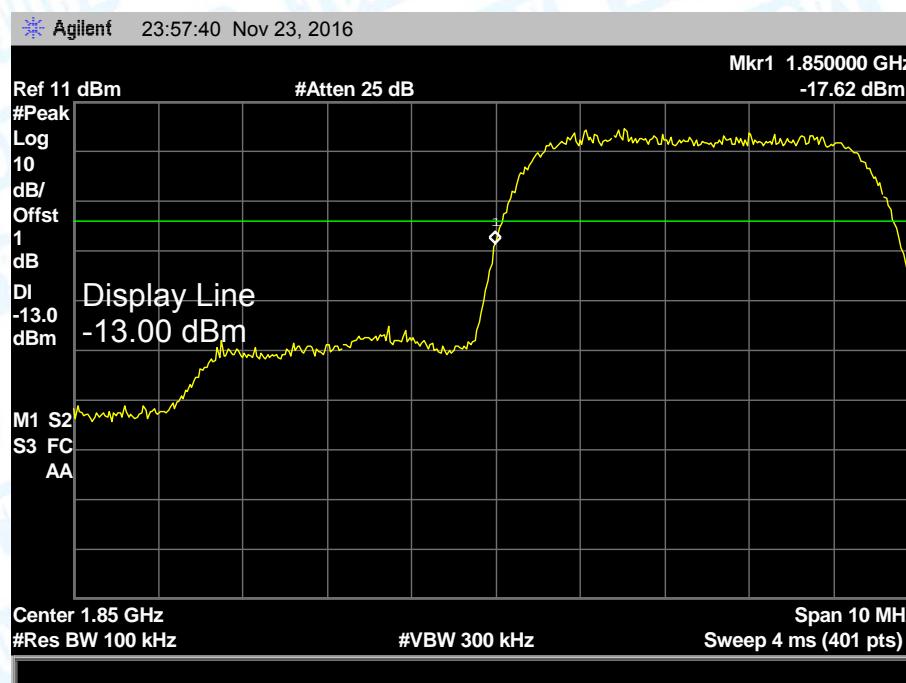


Lowest channel

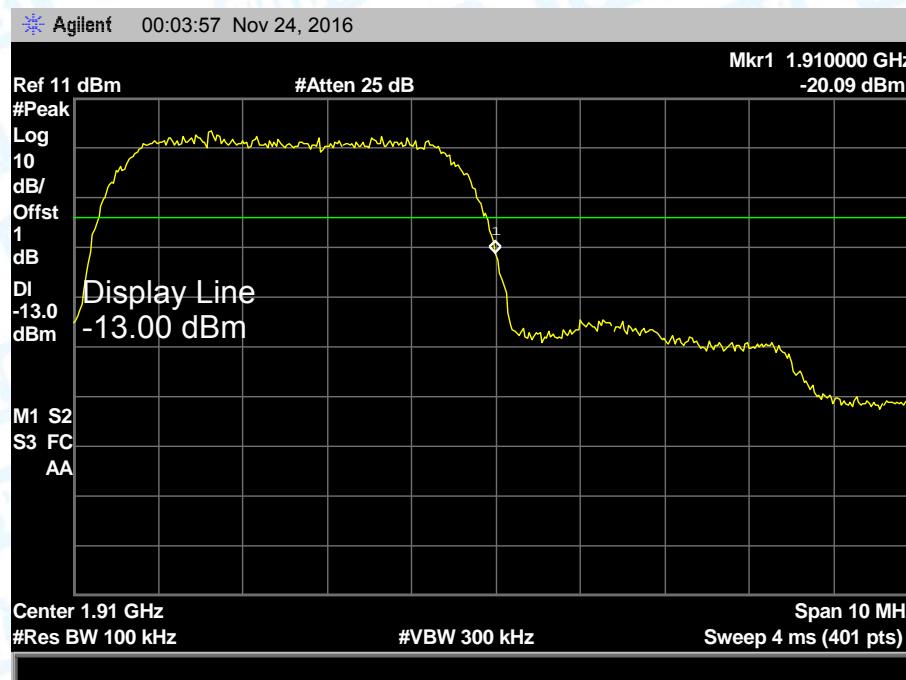


Highest channel

Test Mode:

UMTS Band II 12.2k HSUPA

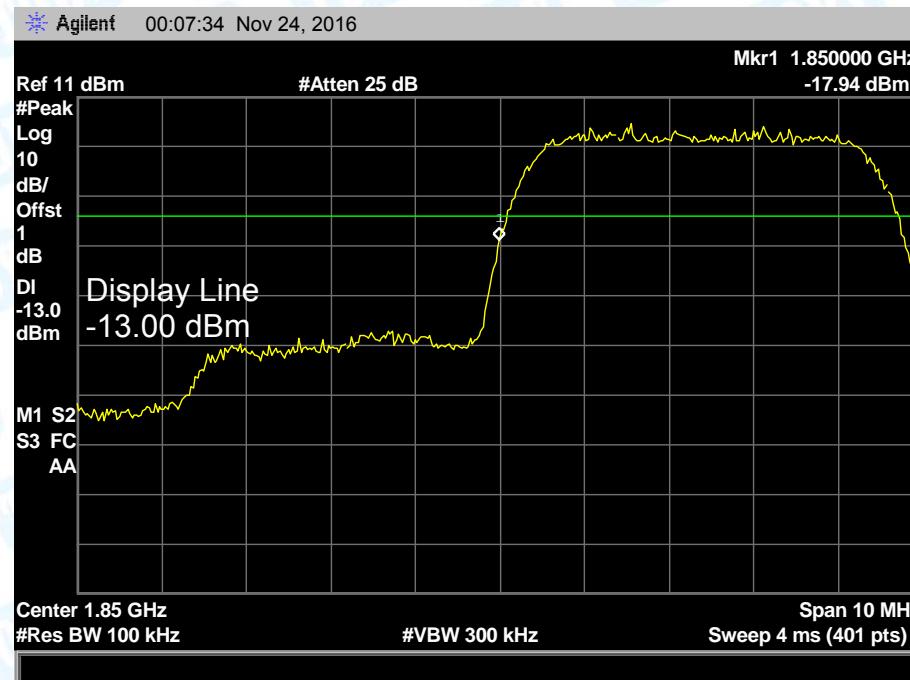

Lowest channel

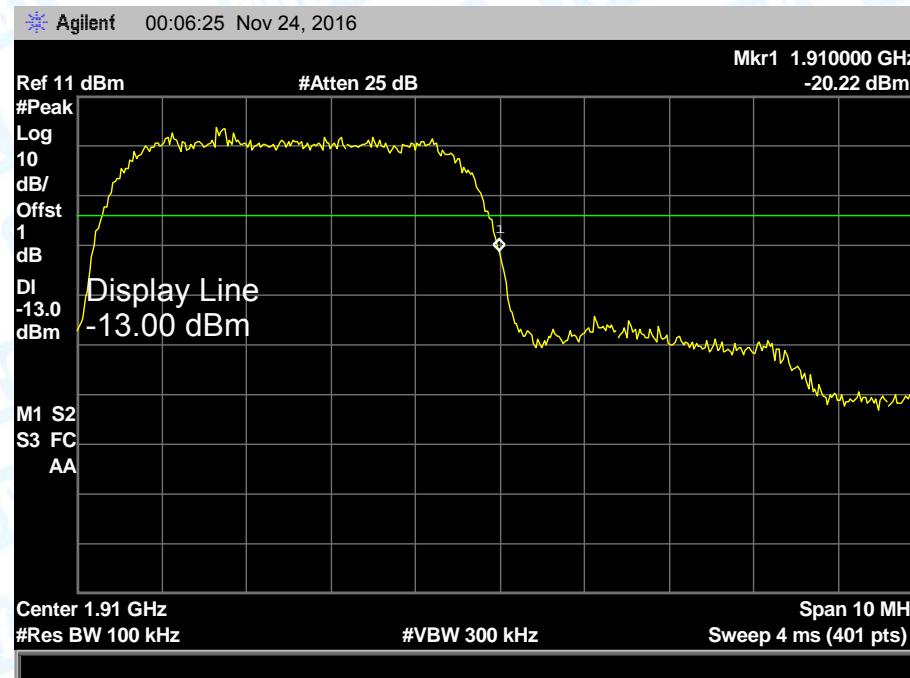

Highest channel

## 11. Radiated Out Band of Emissions

### 11.1 Test Standard and Limit

#### 11.1.1 Test Standard

FCC Part 2: 2.1053, 2.1057


FCC Part 22H: 22.917

FCC Part 24E: 24.238

#### 11.1.2 Test Limit

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power( $P$ ) by a factor of at least  $43+10\log(P)$  dB. For all power levels +30 dBm to 0 dBm, this becomes a constant specification limit of -13 dBm.

### 11.2 Test Setup

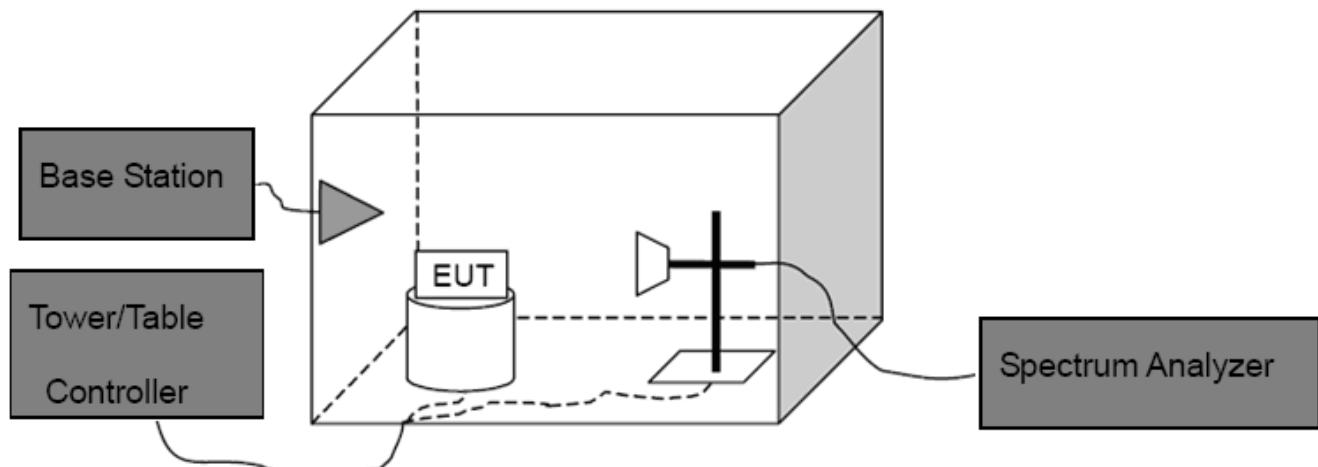

### 11.3 Test Procedure

- (1) The test system setup as show in the block diagram above.
- (2) The EUT was placed on an non-conductive rotating platform in an anechoic chamber. The radiated spurious emissions from 30MHz to 10<sup>th</sup> harmonious of fundamental frequency were measured at 3 m with a test antenna and a spectrum analyzer with RBW=1 MHz, VBW=1 MHz, peak detector settings.
- (3) During the measurement, the EUT was enforced in maximum power and linked with a base station. All the spurious emissions at 3m were measured by rotation of the turntable and the test antenna raised and lowered over a range from 1 to 4 meters in both horizontally and vertically polarized orientations.
- (4) When found the maximum level of emissions from the EUT. Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

---

Spurious emissions in dB=10 log(TX power in Watts/0.001)-the absolute level  
Spurious attenuation limit in dB=43+10 log(power out in Watts)

#### 11.4 EUT Operating Condition

The EUT was continuously connected with the Base station and transmitting in the max power during the test.

#### 11.5 Test Data

Please refer the following pages.

## Measurement Data (worst case)

Test mode:	GSM850						
Channel:	Middle		Date of Test:	2016-11-09			
Frequency (MHz)	Spurious Emission					Limit (dBm)	Result
	Polarization (H&V)	Read Level (dBm)	Antenna Correct Factor (dBi)	Cable Loss (dB)	Emission Level (dBm)		
1673.20	Horizontal	-26.32	7.49	3.97	-15.32	-13.00	Pass
2509.80	H	-36.79	7.03	5.05	-19.26		
3346.40	H	-41.13	12.48	5.98	-22.67		
4183.00	H	---	---	---	---		
5019.60	H	---	---	---	---		
5856.20	H	---	---	---	---		
1673.20	Vertical	-31.89	8.02	3.97	-17.45	-13.00	Pass
2509.80	V	-42.11	10.47	5.05	-20.14		
3346.40	V	-44.43	16.92	5.98	-23.41		
4183.00	V	---	---	---	---		
5019.60	V	---	---	---	---		
5856.20	V	---	---	---	---		

Test mode:	GPRS850						
Channel:	Middle		Date of Test:	2016-11-09			
Frequency (MHz)	Spurious Emission					Limit (dBm)	Result
	Polarization (H&V)	Read Level (dBm)	Antenna Correct Factor (dBi)	Cable Loss (dB)	Emission Level (dBm)		
1673.20	Horizontal	-26.38	7.49	3.97	-15.38	-13.00	Pass
2509.80	H	-37.21	7.03	5.05	-19.68		
3346.40	H	-41.33	12.48	5.98	-22.87		
4183.00	H	---	---	---	---		
5019.60	H	---	---	---	---		
5856.20	H	---	---	---	---		
1673.20	Vertical	-32.47	8.02	3.97	-18.03	-13.00	Pass
2509.80	V	-42.64	10.47	5.05	-20.67		
3346.40	V	-44.88	16.92	5.98	-23.86		
4183.00	V	---	---	---	---		
5019.60	V	---	---	---	---		
5856.20	V	---	---	---	---		

Remark: 1, The testing has been conformed to  $10 \times 836.6\text{MHz} = 8,366\text{MHz}$ .

2, All other emissions more than 30 dB below the limit.

3, Emission Level= Read Level+ Antenna Correct Factor +Cable Loss

Test mode:	EDGE850						
Channel:	Middle		Date of Test:	2016-11-09			
Frequency (MHz)	Spurious Emission					Limit (dBm)	Result
	Polarization (H&V)	Read Level (dBm)	Antenna Correct Factor (dBi)	Cable Loss (dB)	Emission Level (dBm)		
1673.20	Horizontal	-28.68	7.49	3.97	-17.68	-13.00	Pass
2509.80	H	-38.18	7.03	5.05	-20.65		
3346.40	H	-42.62	12.48	5.98	-24.16		
4183.00	H		---	---	---		
5019.60	H	---	---	---	---		
5856.20	H	---	---	---	---		
1673.20	Vertical	-34.09	8.02	3.97	-19.65	-13.00	Pass
2509.80	V	-44.10	10.47	5.05	-22.13		
3346.40	V	-47.59	16.92	5.98	-26.57		
4183.00	V	---	---	---	---		
5019.60	V	---	---	---	---		
5856.20	V	---	---	---	---		

Remark: 1, The testing has been conformed to  $10 \times 836.6\text{MHz} = 8,366\text{MHz}$ .  
 2, All other emissions more than 30 dB below the limit.  
 3, Emission Level= Read Level+ Antenna Correct Factor +Cable Loss

Test mode: PCS1900									
Channel:	Middle			Date of Test:	2016-11-09				
Frequency (MHz)	Spurious Emission					Limit (dBm)	Result		
	Polarization (H&V)	Read Level (dBm)	Antenna Correct Factor (dBi)	Cable Loss (dB)	Emission Level (dBm)				
3760.00	Horizontal	-39.49	14.70	6.12	-18.67	-13.00	Pass		
5640.00	H	-44.18	13.67	7.86	-22.65				
7520.00	H	-48.48	14.27	9.54	-24.67				
9400.00	H	---	---	---	---				
11280.00	H	---	---	---	---				
13160.00	H	---	---	---	---				
3760.00	Vertical	-41.57	15.81	6.12	-19.64	-13.00	Pass		
5640.00	V	-45.13	13.80	7.86	-23.47				
7520.00	V	-49.51	13.40	9.54	-26.57				
9400.00	V	---	---	---	---				
11280.00	V	---	---	---	---				
13160.00	V	---	---	---	---				
Test mode: GPRS1900									
Channel:	Middle			Date of Test:	2016-11-09				
Frequency (MHz)	Spurious Emission					Limit (dBm)	Result		
	Polarization (H&V)	Read Level (dBm)	Antenna Correct Factor (dBi)	Cable Loss (dB)	Emission Level (dBm)				
3760.00	Horizontal	-40.47	14.70	6.12	-19.65	-13.00	Pass		
5640.00	H	-44.40	13.67	7.86	-22.87				
7520.00	H	-49.26	14.27	9.54	-25.45				
9400.00	H	---	---	---	---				
11280.00	H	---	---	---	---				
13160.00	H	---	---	---	---				
3760.00	Vertical	-42.24	15.81	6.12	-20.31	-13.00	Pass		
5640.00	V	-46.33	13.80	7.86	-24.67				
7520.00	V	-50.08	13.40	9.54	-27.14				
9400.00	V	---	---	---	---				
11280.00	V	---	---	---	---				
13160.00	V	---	---	---	---				

Remark: 1, The testing has been conformed to  $10 * 1880.0 \text{ MHz} = 18,800 \text{ MHz}$ .  
 2, All other emissions more than 30 dB below the limit.  
 3, Emission Level= Read Level+ Antenna Correct Factor +Cable Loss

Test mode: EDGE1900							
Channel:	Middle		Date of Test:	2016-11-09			
Frequency (MHz)	Spurious Emission					Limit (dBm)	Result
	Polarization (H&V)	Read Level (dBm)	Antenna Correct Factor (dBi)	Cable Loss (dB)	Emission Level (dBm)		
3760.00	Horizontal	-41.46	14.70	6.12	-20.64	-13.00	Pass
5640.00	H	-46.09	13.67	7.86	-24.56		
7520.00	H	-50.59	14.27	9.54	-26.78		
9400.00	H	---	---	---	---		
11280.00	H	---	---	---	---		
13160.00	H	---	---	---	---		
3760.00	Vertical	-43.40	15.81	6.12	-21.47	-13.00	Pass
5640.00	V	-47.12	13.80	7.86	-25.46		
7520.00	V	-51.68	13.40	9.54	-28.74		
9400.00	V	---	---	---	---		
11280.00	V	---	---	---	---		
13160.00	V	---	---	---	---		

Remark: 1, The testing has been conformed to  $10 * 1880.0 \text{ MHz} = 18,800 \text{ MHz}$ .  
 2, All other emissions more than 30 dB below the limit.  
 3, Emission Level= Read Level+ Antenna Correct Factor +Cable Loss

Test mode:		UMTS Band V 12.2k RMC					
Channel:	Middle	Date of Test:			2016-11-09		
Frequency (MHz)	Spurious Emission					Limit (dBm)	Result
	Polarization (H&V)	Read Level (dBm)	Antenna Correct Factor (dBi)	Cable Loss (dB)	Emission Level (dBm)		
1673.20	Horizontal	-31.67	7.49	3.97	-20.67	-13.00	Pass
2509.80	H	-43.94	7.03	5.05	-26.41		
3346.40	H	-48.81	12.48	5.98	-30.35		
4183.00	H	---	---	---	---		
5019.60	H	---	---	---	---		
5856.20	H	---	---	---	---		
1673.20	Vertical	-36.82	8.02	3.97	-22.38	-13.00	Pass
2509.80	V	-49.49	10.47	5.05	-27.52		
3346.40	V	-52.70	16.92	5.98	-31.68		
4183.00	V	---	---	---	---		
5019.60	V	---	---	---	---		
5856.20	V	---	---	---	---		

Test mode:		UMTS Band V HSDPA					
Channel:	Middle	Date of Test:			2016-11-09		
Frequency (MHz)	Spurious Emission					Limit (dBm)	Result
	Polarization (H&V)	Read Level (dBm)	Antenna Correct Factor (dBi)	Cable Loss (dB)	Emission Level (dBm)		
1673.20	Horizontal	-32.65	7.49	3.97	-21.65	-13.00	Pass
2509.80	H	-45.16	7.03	5.05	-27.63		
3346.40	H	-50.88	12.48	5.98	-32.42		
4183.00	H	---	---	---	---		
5019.60	H	---	---	---	---		
5856.20	H	---	---	---	---		
1673.20	Vertical	-37.12	8.02	3.97	-22.68	-13.00	Pass
2509.80	V	-50.39	10.47	5.05	-28.42		
3346.40	V	-53.86	16.92	5.98	-32.84		
4183.00	V	---	---	---	---		
5019.60	V	---	---	---	---		
5856.20	V	---	---	---	---		

Remark: 1, The testing has been conformed to  $10 \times 836.6\text{MHz} = 8,366\text{MHz}$ .

2, All other emissions more than 30 dB below the limit.

3, Emission Level= Read Level+ Antenna Correct Factor +Cable Loss

Test mode:	UMTS Band V HSUPA						
Channel:	Middle			Date of Test:	2016-11-09		
Frequency (MHz)	Spurious Emission					Limit (dBm)	Result
	Polarization (H&V)	Read Level (dBm)	Antenna Correct Factor (dBi)	Cable Loss (dB)	Emission Level (dBm)		
1673.20	Horizontal	-32.65	7.49	3.97	-21.65	-13.00	Pass
2509.80	H	-44.41	7.03	5.05	-26.88		
3346.40	H	-50.10	12.48	5.98	-31.64		
4183.00	H		---	---	---		
5019.60	H	---	---	---	---		
5856.20	H	---	---	---	---		
1673.20	Vertical	-37.11	8.02	3.97	-22.67	-13.00	Pass
2509.80	V	-50.93	10.47	5.05	-28.96		
3346.40	V	-54.14	16.92	5.98	-33.12		
4183.00	V	---	---	---	---		
5019.60	V	---	---	---	---		
5856.20	V	---	---	---	---		

Remark: 1, The testing has been conformed to  $10 \times 836.6\text{MHz} = 8,366\text{MHz}$ .  
 2, All other emissions more than 30 dB below the limit.  
 3, Emission Level= Read Level+ Antenna Correct Factor +Cable Loss

<b>Test mode:</b>		UMTS Band II 12.2k RMC					
<b>Channel:</b>		Middle		Date of Test:		2016-11-09	
Frequency (MHz)	Spurious Emission					Limit (dBm)	Result
	Polarization (H&V)	Read Level (dBm)	Antenna Correct Factor (dBi)	Cable Loss (dB)	Emission Level (dBm)		
3760.00	Horizontal	-39.14	14.70	6.12	-18.32	-13.00	Pass
5640.00	H	-46.87	13.67	7.86	-25.34		
7520.00	H	-51.49	14.27	9.54	-27.68		
9400.00	H	---	---	---	---		
11280.00	H	---	---	---	---		
13160.00	H	---	---	---	---		
3760.00	Vertical	-41.27	15.81	6.12	-19.34	-13.00	Pass
5640.00	V	-48.08	13.80	7.86	-26.42		
7520.00	V	-51.78	13.40	9.54	-28.84		
9400.00	V	---	---	---	---		
11280.00	V	---	---	---	---		
13160.00	V	---	---	---	---		
<b>Test mode:</b>		UMTS Band II HSDPA					
<b>Channel:</b>		Middle		Date of Test:		2016-11-09	
Frequency (MHz)	Spurious Emission					Limit (dBm)	Result
	Polarization (H&V)	Read Level (dBm)	Antenna Correct Factor (dBi)	Cable Loss (dB)	Emission Level (dBm)		
3760.00	Horizontal	-40.06	14.70	6.12	-19.24	-13.00	Pass
5640.00	H	-47.74	13.67	7.86	-26.21		
7520.00	H	-52.15	14.27	9.54	-28.34		
9400.00	H	---	---	---	---		
11280.00	H	---	---	---	---		
13160.00	H	---	---	---	---		
3760.00	Vertical	-42.29	15.81	6.12	-20.36	-13.00	Pass
5640.00	V	-50.15	13.80	7.86	-28.49		
7520.00	V	-53.46	13.40	9.54	-30.52		
9400.00	V	---	---	---	---		
11280.00	V	---	---	---	---		
13160.00	V	---	---	---	---		

Remark: 1, The testing has been conformed to  $10 * 1880.0 \text{ MHz} = 18,800 \text{ MHz}$ .  
 2, All other emissions more than 30 dB below the limit.  
 3, Emission Level= Read Level+ Antenna Correct Factor +Cable Loss

Test mode: UMTS Band II HSUPA							
Channel:	Middle		Date of Test:	2016-11-09			
Frequency (MHz)	Spurious Emission					Limit (dBm)	Result
	Polarization (H&V)	Read Level (dBm)	Antenna Correct Factor (dBi)	Cable Loss (dB)	Emission Level (dBm)		
3760.00	Horizontal	-41.20	14.70	6.12	-20.38	-13.00	Pass
5640.00	H	-48.38	13.67	7.86	-26.85		
7520.00	H	-54.25	14.27	9.54	-30.44		
9400.00	H	---	---	---	---		
11280.00	H	---	---	---	---		
13160.00	H	---	---	---	---		
3760.00	Vertical	-43.56	15.81	6.12	-21.63	-13.00	Pass
5640.00	V	-50.35	13.80	7.86	-28.69		
7520.00	V	-55.68	13.40	9.54	-32.74		
9400.00	V	---	---	---	---		
11280.00	V	---	---	---	---		
13160.00	V	---	---	---	---		

Remark: 1, The testing has been conformed to  $10 * 1880.0 \text{ MHz} = 18,800 \text{ MHz}$ .  
 2, All other emissions more than 30 dB below the limit.  
 3, Emission Level= Read Level+ Antenna Correct Factor +Cable Loss

-----End of Report-----