

LABEL. a
Laser printing area
Dia 39.75mm

FCC ID:2A1AC-CLRC1SMKCO 1.35mm
IC:7848A-CLRC1SMKCO 1.35mm

ClareOne
SMOKE / CO DETECTOR
COMBINATION CARBON MONOXIDE & SMOKE DETECTOR
MODEL CLRC1SMKCO
FCC ID:2A1AC-CLRC1SMKCO
IC:7848A-CLRC1SMKCO
Date of Mfg: XXXXXXXXX (CO Alarm Response Time)
BATTERY TYPE: DURACELL DL123A (10 year 10 - 50 reheat) PANASONIC CR123A (10 year 10 - 15 reheat)
SMOKE SENSITIVITY RANGE: 1.41 - 2.28 %R
MAX AMBIENT TEMPERATURE: 14°C - 37.8°C (49°F - 100°F)
PUSH AND HOLD TEST BUTTON TO TEST DETECTOR WEEKLY
BATTERY INSTALLATION
Open battery compartment cover. Insert battery into compartment and make sure the "+" and "-" ends of each battery contacts are aligned properly. After battery is replaced, please press test button immediately to check if it alarms properly.

LABEL. b
Laser printing area
R 56.20mm R 32.6mm A 90°

THIS DETECTOR IS FOR CO & SMOKE DETECTION USE ONLY. FOR SAFETY INFORMATION AND INSTRUCTION, REFER TO INSTRUCTION MANUAL. Smoke/CO Detector User Guide (REV. V).
For all safety warnings, please refer to manual.
WARNING: HUMIDITY EXPOSURE TO HIGH OR LOW TEMPERATURES OR HIGH ALTITUDE MAY REDUCE BATTERY LIFE.
Test the detector on the page of purchase or return to the dealer for correct operation using the test button, whenever the battery is replaced.
For more information, please contact the manufacturer directly, for more information about CO safety and this equipment. Make sure that motor vehicles are not, have not been, operating in an attached garage or adjacent to the residence.
Intertek
5006669

LABEL. c
Laser printing area
R 56.20mm R 32.6mm A 90°

CARBON MONOXIDE CAN NOT BE SEEN OR SMELLED BUT CAN KILL YOU. IF ALARM SOUNDS: (1) OPERATE TEST/RESET BUTTON (2) CALL YOUR EMERGENCY SERVICES (FIRE DEPARTMENT) (3) MOVE TO FRESH AIR - OUTDOORS OR BY A WINDOW.
WARNING: CARBON MONOXIDE CAN NOT BE SEEN OR SMELLED BUT CAN KILL YOU. IF ALARM SOUNDS: (1) OPERATE TEST/RESET BUTTON (2) CALL YOUR EMERGENCY SERVICES (FIRE DEPARTMENT) (3) MOVE TO FRESH AIR - OUTDOORS OR BY A WINDOW.
Do a head count to check that all persons are accounted for. Do not reenter the premises nor move away from the open door/window until the emergency services responders have arrived, the premises have been aired out, and your alarm remains in its normal condition.
After following steps 1-3, if your alarm reactivates within a 24 hour period, repeat steps 1-3 and call a qualified appliance technician () to investigate for sources of CO from fuel burning equipment and appliances, and inspect for proper operation of this equipment. If problems are identified during this inspection have the equipment serviced immediately. Note any combustion equipment not inspected by the technician and consult the manufacturers' instruction, or contact the manufacturers directly, for more information about CO safety and this equipment. Make sure that motor vehicles are not, have not been, operating in an attached garage or adjacent to the residence.
You should write the telephone number of the emergency service provider and the qualified technician in the space provided in the labels. Place one label next to the alarm and the other label near a source of fresh air where you plan to gather after the alarm indicates the presence of carbon monoxide.
Intertek
5006669

LABEL. d
Laser printing area
H 8.8mm W 39.8mm

WARNING: Do not use any other type of battery. This Smoke and CO detector may not operate properly with other type of battery.


LABEL. e
Laser printing area
H 31mm W 94mm

WARNING When in alarm move to fresh air
COMBINATION CARBON MONOXIDE & SMOKE DETECTOR

	Visual	Audible
CO Alarm	4 Red Blinks	4 tones
Smoke Alarm	3 Red Blinks	3 tones
Low Battery	1 Yellow Blink	1 beep
CO Trouble	2 Yellow Blinks	3 beeps
Smoke Trouble	1 Yellow Blink	1 beep
Smoke Clear Me	2 Yellow Blinks	2 beeps
Smoke Low Sensitivity	1 Yellow Blink	2 beeps
Tamper Alarm	2 Yellow Blinks	2 tones
End-of-Life	4 Yellow Blinks	1 tone

LABEL. f
Self-adhesive label
H 80mm W 110mm

WARNING!! Actuation of your CO alarm indicates the presence of carbon monoxide (CO) which can kill you. If alarm sounds:
1. Operate test/reset button
2. Call your emergency services () - [Fire department or 911]
3. Immediately move to fresh air - outdoors or by an open door or window.
Do a head count to check that all persons are accounted for. Do not reenter the premises nor move away from the open door/window until the emergency services responders have arrived, the premises have been aired out, and your alarm remains in its normal condition.
After following steps 1-3, if your alarm reactivates within a 24 hour period, repeat steps 1-3 and call a qualified appliance technician () to investigate for sources of CO from fuel burning equipment and appliances, and inspect for proper operation of this equipment. If problems are identified during this inspection have the equipment serviced immediately. Note any combustion equipment not inspected by the technician and consult the manufacturers' instruction, or contact the manufacturers directly, for more information about CO safety and this equipment. Make sure that motor vehicles are not, have not been, operating in an attached garage or adjacent to the residence.
You should write the telephone number of the emergency service provider and the qualified technician in the space provided in the labels. Place one label next to the alarm and the other label near a source of fresh air where you plan to gather after the alarm indicates the presence of carbon monoxide.
WARNING!! Actuation of your CO alarm indicates the presence of carbon monoxide (CO) which can kill you. If alarm sounds:
1. Operate test/reset button
2. Call your emergency services () - [Fire department or 911]
3. Immediately move to fresh air - outdoors or by an open door or window.
Do a head count to check that all persons are accounted for. Do not reenter the premises nor move away from the open door/window until the emergency services responders have arrived, the premises have been aired out, and your alarm remains in its normal condition.
After following steps 1-3, if your alarm reactivates within a 24 hour period, repeat steps 1-3 and call a qualified appliance technician () to investigate for sources of CO from fuel burning equipment and appliances, and inspect for proper operation of this equipment. If problems are identified during this inspection have the equipment serviced immediately. Note any combustion equipment not inspected by the technician and consult the manufacturers' instruction, or contact the manufacturers directly, for more information about CO safety and this equipment. Make sure that motor vehicles are not, have not been, operating in an attached garage or adjacent to the residence.

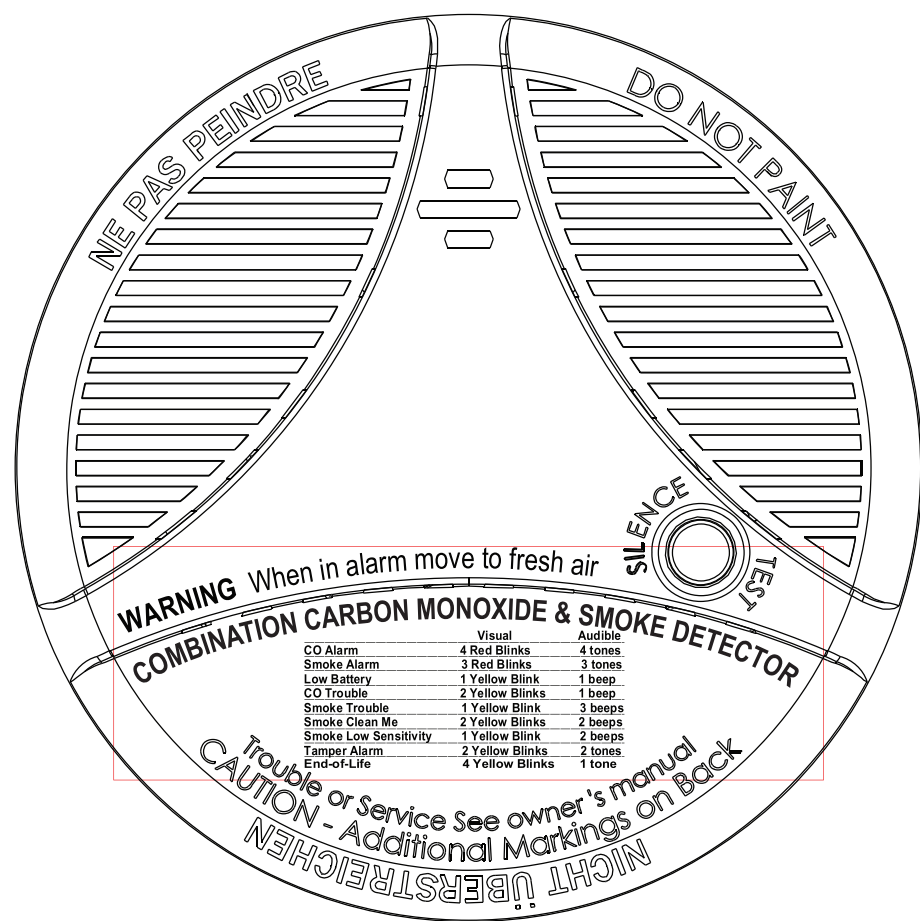

LABEL. g
H 21mm W 30mm

WARNING
NO BATTERY

NOTES
1. The date of manufacture shall be non-coded and in the format YEAR (in 4 digits), MONTH (in letters), DATE (in 2 digits) located on the outside of the smoke alarm.

PRINTING NOTES
1. Unit : mm / Scale : 1:1 / Undefined tolerance : ± 0.2mm.
2. Label a,b,c,d,e use Laser Printing Process.
3. Label f is a self-adhesive label.

REVISION NOTES

MODEL NAME CLRC1SMKCO UL Label
PART NO.

DESIGNER Lily
CHECK Ameli
DATE 2024.06.28