



FCC RADIO TEST REPORT

FCC ID : 2AJAS9WPIKA010901
Equipment : PIKA-CONN
Brand Name : Millitronic
Model Name : PIKA-CONN
Applicant : Millitronic
7F.-6, No.237, Sec.1,Datong Rd. Xizhi Dist.,New Taipei
City Taiwan
Manufacturer : Millitronic
7F.-6, No.237, Sec.1,Datong Rd. Xizhi Dist.,New Taipei
City Taiwan
Standard : 47 CFR FCC Part 15.407

The product was received on Dec. 15, 2020, and testing was started from Jan. 07, 2021 and completed on Jan. 18, 2021. We, SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2013 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

Approved by: Sam Chen

SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)



Table of Contents

History of this test report.....3

Summary of Test Result.....4

1 General Description5

1.1 Information.....5

1.2 Applicable Standards8

1.3 Testing Location Information.....8

1.4 Measurement Uncertainty8

2 Test Configuration of EUT.....9

2.1 Test Channel Mode9

2.2 The Worst Case Measurement Configuration.....11

2.3 EUT Operation during Test11

2.4 Accessories12

2.5 Support Equipment.....12

2.6 Test Setup Diagram13

3 Transmitter Test Result16

3.1 AC Power-line Conducted Emissions16

3.2 Emission Bandwidth.....18

3.3 Maximum Conducted Output Power19

3.4 Peak Power Spectral Density.....21

3.5 Unwanted Emissions.....24

4 Test Equipment and Calibration Data28

Appendix A. Test Results of AC Power-line Conducted Emissions

Appendix B. Test Results of Emission Bandwidth

Appendix C. Test Results of Maximum Conducted Output Power

Appendix D. Test Results of Peak Power Spectral Density

Appendix E. Test Results of Unwanted Emissions

Appendix F. Test Photos

Photographs of EUT v01



History of this test report

Report No.	Version	Description	Issued Date
FR0D1428	01	Initial issue of report	Feb. 19, 2021



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
1.1.2	15.203	Antenna Requirement	PASS	-
3.1	15.207	AC Power-line Conducted Emissions	PASS	-
3.2	15.407(a)	Emission Bandwidth	PASS	-
3.3	15.407(a)	Maximum Conducted Output Power	PASS	-
3.4	15.407(a)	Peak Power Spectral Density	PASS	-
3.5	15.407(b)	Unwanted Emissions	PASS	-

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

1. The test configuration, test mode and test software were written in this test report are declared by the manufacturer.
2. The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

Reviewed by: **Sam Chen**

Report Producer: **Vicky Huang**



1 General Description

1.1 Information

1.1.1 RF General Information

Frequency Range (MHz)	IEEE Std. 802.11	Ch. Frequency (MHz)	Channel Number
5150-5250	a, n (HT20), ac (VHT20), ax (HEW20)	5180-5240	36-48 [4]
5725-5850		5745-5825	149-165 [5]
5150-5250	n (HT40), ac (VHT40), ax (HEW40)	5190-5230	38-46 [2]
5725-5850		5755-5795	151-159 [2]
5150-5250	ac (VHT80), ax (HEW80)	5210	42 [1]
5725-5850		5775	155 [1]

Band	Mode	BWch (MHz)	Nant
5.15-5.25GHz	802.11a	20	2TX
5.15-5.25GHz	802.11n HT20	20	2TX
5.15-5.25GHz	802.11n HT20-BF	20	2TX
5.15-5.25GHz	802.11ac VHT20	20	2TX
5.15-5.25GHz	802.11ac VHT20-BF	20	2TX
5.15-5.25GHz	802.11ax HEW20	20	2TX
5.15-5.25GHz	802.11ax HEW20-BF	20	2TX
5.15-5.25GHz	802.11n HT40	40	2TX
5.15-5.25GHz	802.11n HT40-BF	40	2TX
5.15-5.25GHz	802.11ac VHT40	40	2TX
5.15-5.25GHz	802.11ac VHT40-BF	40	2TX
5.15-5.25GHz	802.11ax HEW40	40	2TX
5.15-5.25GHz	802.11ax HEW40-BF	40	2TX
5.15-5.25GHz	802.11ac VHT80	80	2TX
5.15-5.25GHz	802.11ac VHT80-BF	80	2TX
5.15-5.25GHz	802.11ax HEW80	80	2TX
5.15-5.25GHz	802.11ax HEW80-BF	80	2TX
5.725-5.85GHz	802.11a	20	2TX
5.725-5.85GHz	802.11n HT20	20	2TX
5.725-5.85GHz	802.11n HT20-BF	20	2TX
5.725-5.85GHz	802.11ac VHT20	20	2TX
5.725-5.85GHz	802.11ac VHT20-BF	20	2TX



Band	Mode	BWch (MHz)	Nant
5.725-5.85GHz	802.11ax HEW20	20	2TX
5.725-5.85GHz	802.11ax HEW20-BF	20	2TX
5.725-5.85GHz	802.11n HT40	40	2TX
5.725-5.85GHz	802.11n HT40-BF	40	2TX
5.725-5.85GHz	802.11ac VHT40	40	2TX
5.725-5.85GHz	802.11ac VHT40-BF	40	2TX
5.725-5.85GHz	802.11ax HEW40	40	2TX
5.725-5.85GHz	802.11ax HEW40-BF	40	2TX
5.725-5.85GHz	802.11ac VHT80	80	2TX
5.725-5.85GHz	802.11ac VHT80-BF	80	2TX
5.725-5.85GHz	802.11ax HEW80	80	2TX
5.725-5.85GHz	802.11ax HEW80-BF	80	2TX

Note:

- ◆ 11a, HT20 and HT40 use a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM modulation.
- ◆ VHT20, VHT40, VHT80 use a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM, 256QAM modulation.
- ◆ HEW20, HEW40, HEW80 use a combination of OFDMA-BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM modulation.
- ◆ BWch is the nominal channel bandwidth.

1.1.2 Antenna Information

Ant.	Port	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	
						5G Band 1	5G Band 4
1	1	Millitronic	5SN000000007	PCB Antenna	I-PEX	4.11	3.51
2	2	Millitronic	5SN000000007	PCB Antenna	I-PEX	4.11	3.51

Note: The above information was declared by manufacturer.

For IEEE 802.11a/n/ac/ax mode (2TX/2RX)

Port 1 and Port 2 can be used as transmitting/receiving antenna.

Port 1 and Port 2 could transmit/receive simultaneously.



1.1.3 Mode Test Duty Cycle

Mode	DC	DCF(dB)	T(s)	VBW(Hz) ≥ 1/T
802.11a	0.942	0.26	1.398m	1k
802.11ax HEW20	0.912	0.4	1.023m	1k
802.11ax HEW40	0.842	0.75	541.25u	3k
802.11ax HEW80	0.742	1.3	291.25u	10k

Note:

- ◆ DC is Duty Cycle.
- ◆ DCF is Duty Cycle Factor.

1.1.4 EUT Operational Condition

EUT Power Type	From host system			
	Testing: From Power Adapter			
Beamforming Function	<input checked="" type="checkbox"/>	With beamforming	<input type="checkbox"/>	Without beamforming
	The product has beamforming function for n/ac/ax in 5GHz			
Function	<input type="checkbox"/>	Outdoor P2M	<input type="checkbox"/>	Indoor P2M
	<input type="checkbox"/>	Fixed P2P	<input checked="" type="checkbox"/>	Client
Test Software Version	PUTTY 0.62			

Note: The above information was declared by manufacturer.



1.2 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ◆ 47 CFR FCC Part 15
- ◆ ANSI C63.10-2013
- ◆ FCC KDB 789033 D02 v02r01

The following reference test guidance is not within the scope of accreditation of TAF.

- ◆ FCC KDB 662911 D01 v02r01
- ◆ FCC KDB 412172 D01 v01r01
- ◆ FCC KDB 414788 D01 v01r01

1.3 Testing Location Information

Testing Location		
<input type="checkbox"/>	HWA YA	ADD : No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL : 886-3-327-3456 FAX : 886-3-327-0973
<input checked="" type="checkbox"/>	JHUBEI	ADD : No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County 302, Taiwan (R.O.C.) TEL : 886-3-656-9065 FAX : 886-3-656-9085

Test Condition	Test Site No.	Test Engineer	Test Environment (°C / %)	Test Date
RF Conducted	TH02-CB	Benson Su	13.6-14.6 / 59-62	Jan. 14, 2021~ Jan. 18, 2021
Radiated (Below 1GHz)	03CH06-CB	Stim Sung	15.8-16.2 / 54-56	Jan. 07, 2021
Radiated (Above 1GHz)	03CH03-CB	Lucke Hsieh	21.5-22.5 / 54-57	Jan. 14, 2021
AC Conduction	CO01-CB	Ryo Fan	18~19 / 60~61	Jan. 11, 2021

Test site Designation No. TW0006 with FCC
Test site registered number IC 4086D with Industry Canada.

1.4 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Test Items	Uncertainty	Remark
Conducted Emission (150kHz ~ 30MHz)	2.0 dB	Confidence levels of 95%
Radiated Emission (9kHz ~ 30MHz)	3.8 dB	Confidence levels of 95%
Radiated Emission (30MHz ~ 1,000MHz)	5.6 dB	Confidence levels of 95%
Radiated Emission (1GHz ~ 18GHz)	5.0 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	4.9 dB	Confidence levels of 95%
Conducted Emission	2.8 dB	Confidence levels of 95%
Output Power Measurement	1.4 dB	Confidence levels of 95%
Power Density Measurement	2.8 dB	Confidence levels of 95%
Bandwidth Measurement	0.4%	Confidence levels of 95%



2 Test Configuration of EUT

2.1 Test Channel Mode

Mode	Power Setting
802.11a_Nss1,(6Mbps)_2TX	-
5180MHz	53
5200MHz	62
5240MHz	Default
5745MHz	Default
5785MHz	Default
5825MHz	Default
802.11ax HEW20_Nss1,(MCS0)_2TX	-
5180MHz	51
5200MHz	58
5240MHz	Default
5745MHz	Default
5785MHz	Default
5825MHz	Default
802.11ax HEW40_Nss1,(MCS0)_2TX	-
5190MHz	42
5230MHz	62
5755MHz	Default
5795MHz	Default
802.11ax HEW80_Nss1,(MCS0)_2TX	-
5210MHz	40
5775MHz	Default
802.11ax HEW20-BF_Nss1,(MCS0)_2TX	-
5180MHz	51
5200MHz	58
5240MHz	Default
5745MHz	Default
5785MHz	Default
5825MHz	Default
802.11ax HEW40-BF_Nss1,(MCS0)_2TX	-
5190MHz	42
5230MHz	62
5755MHz	Default
5795MHz	Default



802.11ax HEW80-BF_Nss1,(MCS0)_2TX	-
5210MHz	40
5775MHz	Default

Note:

- ♦ The EUT supports beamforming and CDD modes for 5GHz: 802.11n/ac/ax, and the CDD mode is the worst case. Therefore, all test items are evaluated in the report. The beamforming mode only evaluates the output power.
- ♦ Evaluated HEW20/HEW40/HEW80 mode only, due to similar modulation. The power setting of HT20/HT40/VHT20/VHT40/VHT80 mode are the same or lower than HEW20/HEW40/HEW80.



2.2 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests	
Tests Item	AC power-line conducted emissions
Condition	AC power-line conducted measurement for line and neutral
Operating Mode	Normal Link

The Worst Case Mode for Following Conformance Tests	
Tests Item	Emission Bandwidth Maximum Conducted Output Power Peak Power Spectral Density
Test Condition	Conducted measurement at transmit chains

The Worst Case Mode for Following Conformance Tests	
Tests Item	Unwanted Emissions
Test Condition	Radiated measurement If EUT consist of multiple antenna assembly (multiple antenna are used in EUT regardless of spatial multiplexing MIMO configuration), the radiated test should be performed with highest antenna gain of each antenna type.
Operating Mode < 1GHz	Normal Link
1	EUT in Z axis
Operating Mode > 1GHz	CTX
The EUT was performed at X axis, Y axis and Z axis position for Unwanted Emissions above 1GHz test, and the worst case was found at Z axis. So the measurement will follow this same test configuration.	
1	EUT in Z axis

Note1: The USB port can not be used by the end-user. It is generally used by the professional installer.

Note2: The following support unit for measurement only, would not be marketed.

Support Unit	Brand Name	Model Name
Adapter	ADAPTER TECH	ATS018T-W120U

2.3 EUT Operation during Test

For CTX Mode:

The EUT was programmed to be in continuously transmitting mode.

For Normal Link:

During the test, the EUT operation to normal function.



2.4 Accessories

N/A

2.5 Support Equipment

For AC Conduction:

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	AP NB	DELL	E6430	N/A
B	TV	ASUS	VP28U	N/A
C	AP Router	ASUS	RP-N53	MSQ-RPN53
D	Adapter	ADAPTER TECH	ATS018T-W120U	N/A


For Radiated (below 1GHz):

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	TV	ASUS	VP28U	N/A
B	WLAN AP	ASUS	RT-AX88U	MSQ-RTAXHP00
C	NB	DELL	E4300	N/A
D	Adapter	ADAPTER TECH	ATS018T-W120U	N/A


For Radiated (above 1GHz) and RF Conducted:

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	NB	DELL	E4300	N/A
B	Adapter	ADAPTER TECH	ATS018T-W120U	N/A

2.6 Test Setup Diagram

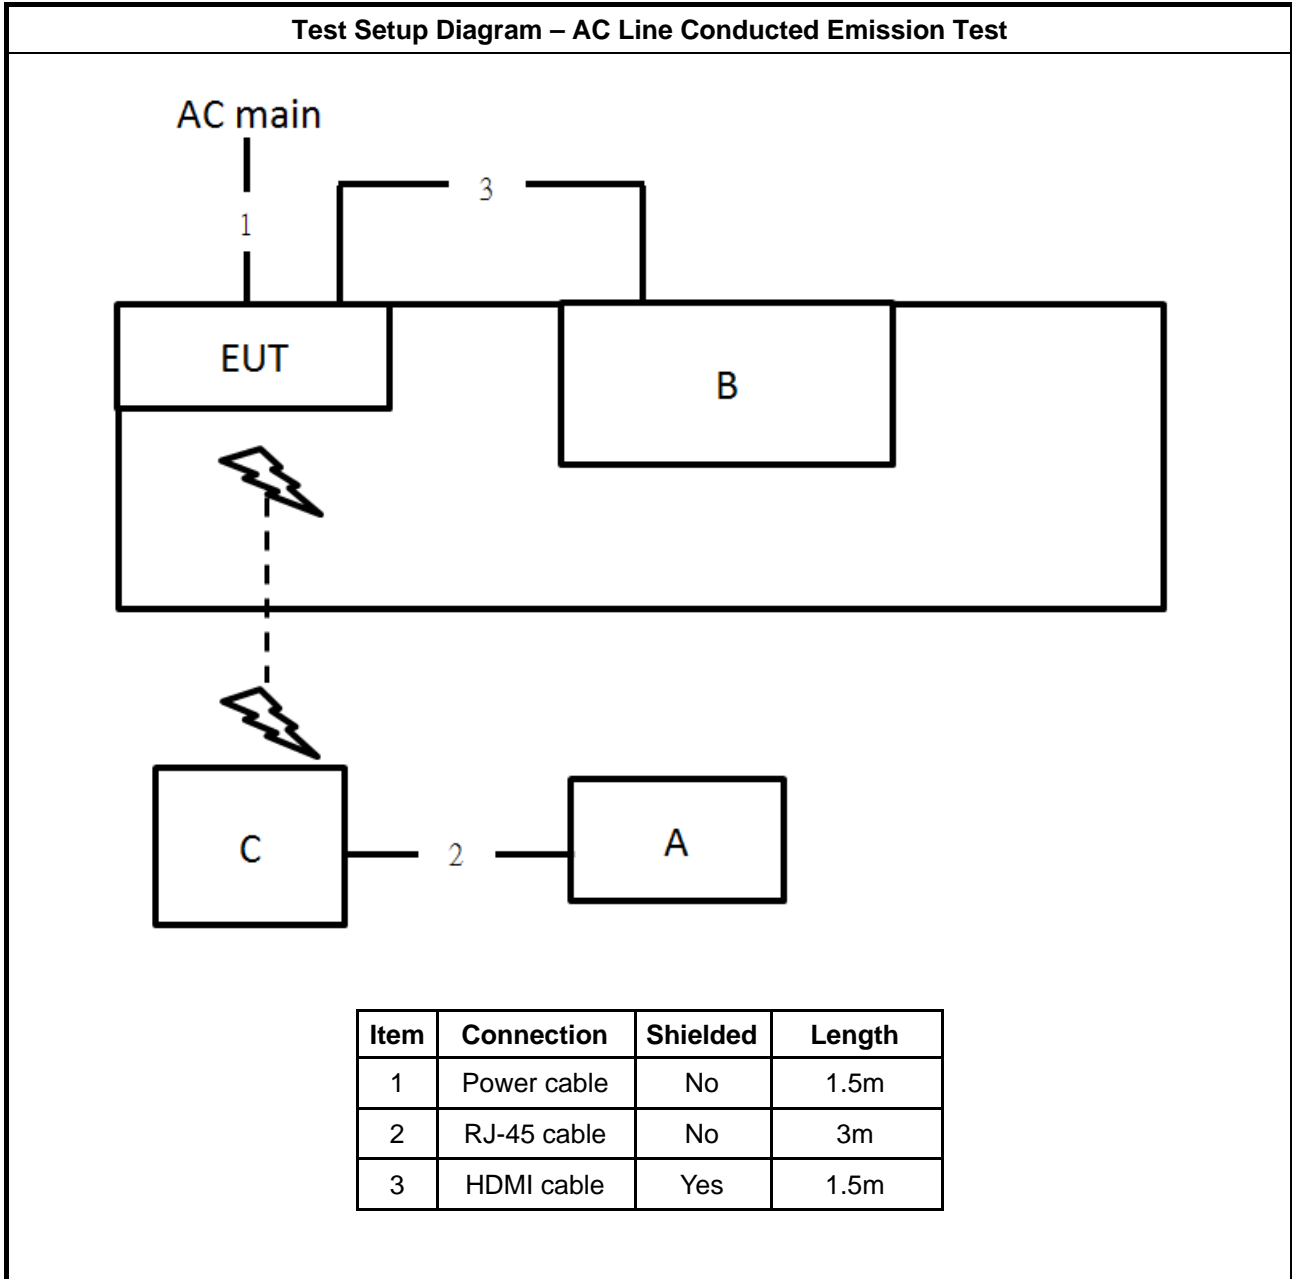


Test Setup Diagram - Radiated Test < 1GHz

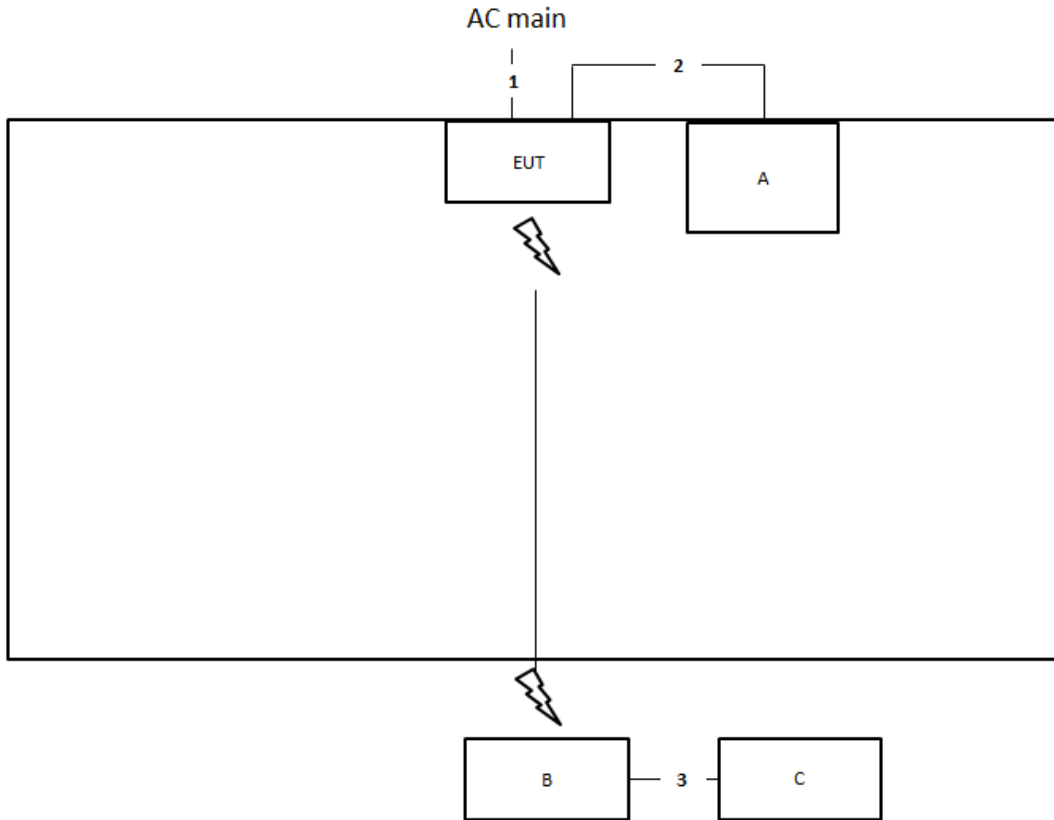

Item	Connection	Shielded	Length
1	Power cable	No	1.5m
2	HDMI cable	Yes	1.8m
3	RJ-45 cable	No	1.5m



Test Setup Diagram - Radiated Test > 1GHz

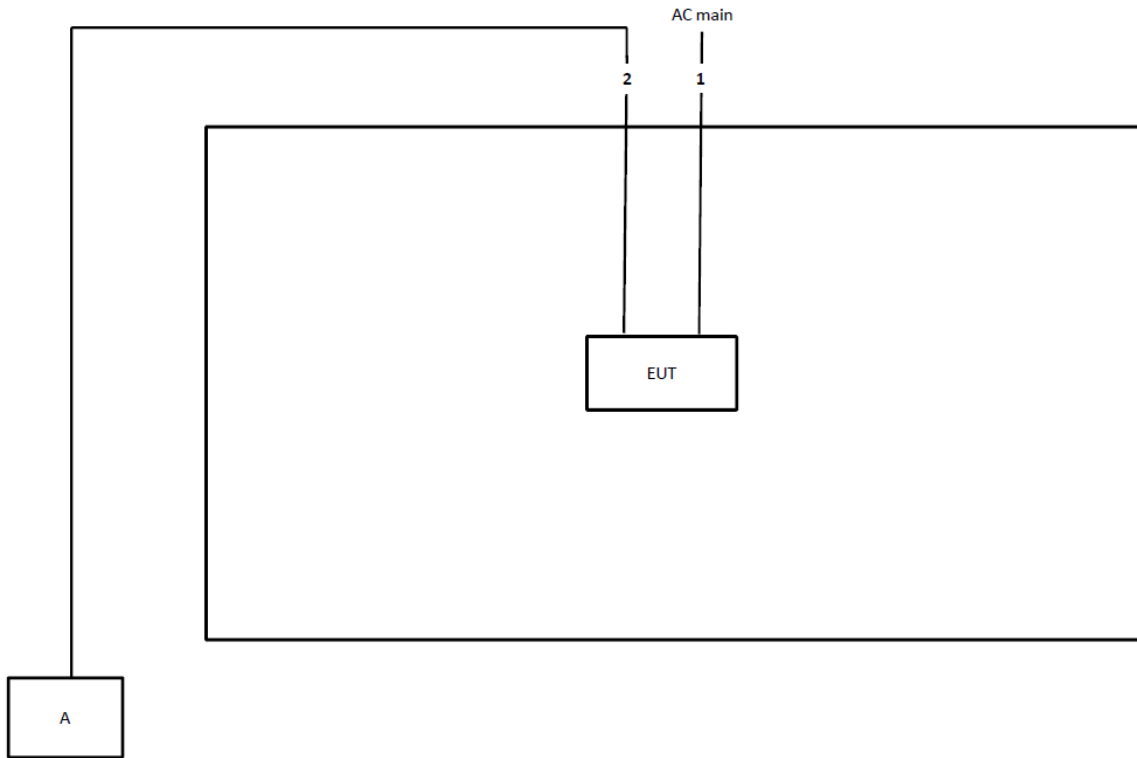

Item	Connection	Shielded	Length
1	Power cable	No	1.5m
2	RJ-45 cable	No	10m



3 Transmitter Test Result

3.1 AC Power-line Conducted Emissions

3.1.1 AC Power-line Conducted Emissions Limit

AC Power-line Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: * Decreases with the logarithm of the frequency.


3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.1.3 Test Procedures

Test Method
<input checked="" type="checkbox"/> Refer as ANSI C63.10-2013, clause 6.2 for AC power-line conducted emissions.

3.1.4 Test Setup

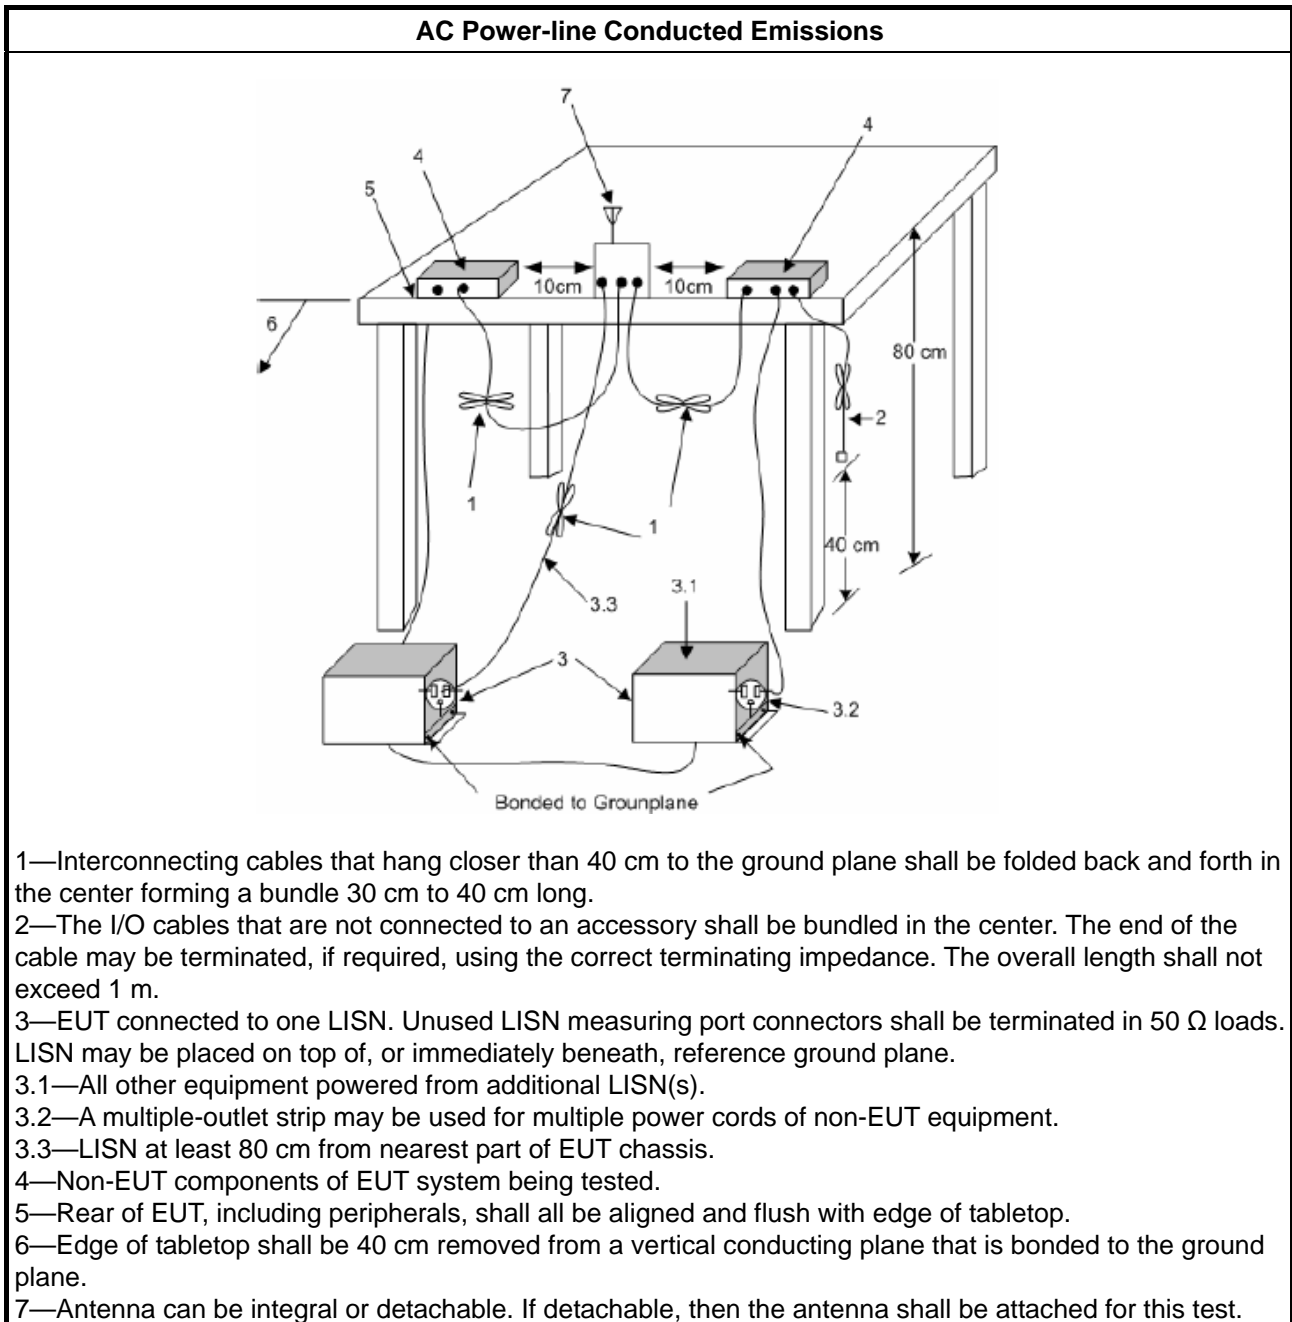

3.1.5 Measurement Results Calculation

The measured Level is calculated using:

- a. Corrected Reading: LISN Factor (LISN) + Attenuator (AT/AUX) + Cable Loss (CL) + Read Level (Raw) = Level
- b. Margin = -Limit + Level

3.1.6 Test Result of AC Power-line Conducted Emissions

Refer as Appendix A

3.2 Emission Bandwidth

3.2.1 Emission Bandwidth Limit

Emission Bandwidth Limit	
UNII Devices	
<input checked="" type="checkbox"/>	For the 5.15-5.25 GHz band, N/A
<input type="checkbox"/>	For the 5.25-5.35 GHz band, the maximum conducted output power shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in MHz.
<input type="checkbox"/>	For the 5.47-5.725 GHz band, the maximum conducted output power shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in MHz.
<input checked="" type="checkbox"/>	For the 5.725-5.85 GHz band, 6 dB emission bandwidth \geq 500kHz.
LE-LAN Devices	
<input type="checkbox"/>	For the band 5.15-5.25 GHz, the maximum e.i.r.p. shall not exceed 200 mW or 10 + 10 log B, dBm, whichever power is less. B is the 99% emission bandwidth in MHz.
<input type="checkbox"/>	For the 5.25-5.35 GHz band, the maximum e.i.r.p. shall not exceed 1.0 W or 17 + 10 log B, dBm, whichever power is less. B is the 99% emission bandwidth in MHz
<input type="checkbox"/>	For the 5.47-5.6 GHz band and 5.65-5.725 GHz band, the maximum e.i.r.p. shall not exceed 1.0 W or 17 + 10 log B, dBm, whichever power is less. B is the 99% emission bandwidth in MHz
<input type="checkbox"/>	For the 5.725-5.85 GHz band, 6 dB emission bandwidth \geq 500kHz.


3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.2.3 Test Procedures

Test Method							
<ul style="list-style-type: none"> ▪ For the emission bandwidth shall be measured using one of the options below: <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 30px;"><input checked="" type="checkbox"/></td> <td>Refer as FCC KDB 789033, clause C for EBW and clause D for OBW measurement.</td> </tr> <tr> <td><input type="checkbox"/></td> <td>Refer as ANSI C63.10, clause 6.9.1 for occupied bandwidth testing.</td> </tr> <tr> <td><input type="checkbox"/></td> <td>Refer as IC RSS-Gen, clause 4.6 for bandwidth testing.</td> </tr> </table> 		<input checked="" type="checkbox"/>	Refer as FCC KDB 789033, clause C for EBW and clause D for OBW measurement.	<input type="checkbox"/>	Refer as ANSI C63.10, clause 6.9.1 for occupied bandwidth testing.	<input type="checkbox"/>	Refer as IC RSS-Gen, clause 4.6 for bandwidth testing.
<input checked="" type="checkbox"/>	Refer as FCC KDB 789033, clause C for EBW and clause D for OBW measurement.						
<input type="checkbox"/>	Refer as ANSI C63.10, clause 6.9.1 for occupied bandwidth testing.						
<input type="checkbox"/>	Refer as IC RSS-Gen, clause 4.6 for bandwidth testing.						

3.2.4 Test Setup

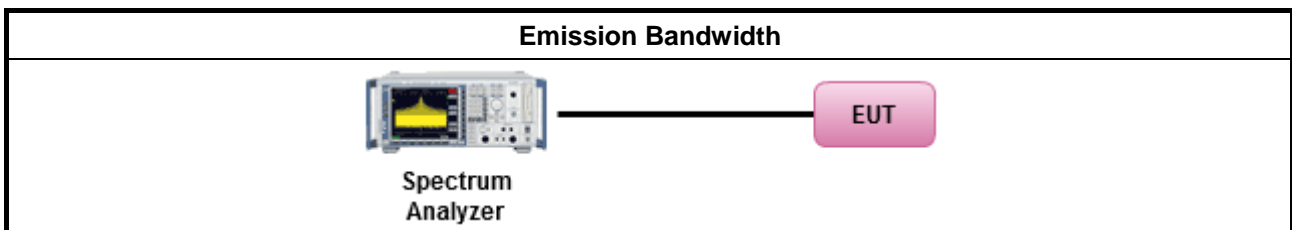

3.2.5 Test Result of Emission Bandwidth

Refer as Appendix B



3.3 Maximum Conducted Output Power

3.3.1 Maximum Conducted Output Power Limit

Maximum Conducted Output Power Limit	
UNII Devices	
<input checked="" type="checkbox"/> For the 5.15-5.25 GHz band:	
<input type="checkbox"/>	<ul style="list-style-type: none"> ▪ Outdoor AP: the maximum conducted output power (P_{Out}) shall not exceed the lesser of 1 W. If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$. e.i.r.p. at any elevation angle above 30 degrees $\leq 125mW$ [21dBm] ▪ Indoor AP: the maximum conducted output power (P_{Out}) shall not exceed the lesser of 1 W. If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$ ▪ Point-to-point AP: the maximum conducted output power (P_{Out}) shall not exceed the lesser of 1 W. If $G_{TX} > 23$ dBi, then $P_{Out} = 30 - (G_{TX} - 23)$. ▪ Mobile or Portable Client: the maximum conducted output power (P_{Out}) shall not exceed the lesser of 250 mW. If $G_{TX} > 6$ dBi, then $P_{Out} = 24 - (G_{TX} - 6)$.
<input type="checkbox"/>	For the 5.25-5.35 GHz band, the maximum conducted output power (P_{Out}) shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in MHz. If $G_{TX} > 6$ dBi, then $P_{Out} = 24 - (G_{TX} - 6)$.
<input type="checkbox"/>	For the 5.47-5.725 GHz band, the maximum conducted output power (P_{Out}) shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in MHz. If $G_{TX} > 6$ dBi, then $P_{Out} = 24 - (G_{TX} - 6)$.
<input checked="" type="checkbox"/> For the 5.725-5.85 GHz band:	
<input type="checkbox"/>	<ul style="list-style-type: none"> ▪ Point-to-multipoint systems (P2M): the maximum conducted output power (P_{Out}) shall not exceed the lesser of 1 W. If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$. ▪ Point-to-point systems (P2P): the maximum conducted output power (P_{Out}) shall not exceed the lesser of 1 W.
LE-LAN Devices	
<input type="checkbox"/>	For the 5.15-5.25 GHz band, the maximum e.i.r.p. shall not exceed 200 mW or $10 + 10 \log B$, dBm, whichever power is less. B is the 99% emission bandwidth in MHz.
<input type="checkbox"/>	For the 5.25-5.35 GHz band, the maximum e.i.r.p. shall not exceed 1.0 W or $17 + 10 \log B$, dBm, whichever power is less. B is the 99% emission bandwidth in MHz
<input type="checkbox"/>	For the 5.47-5.6 GHz band and 5.65-5.725 GHz band, the maximum e.i.r.p. shall not exceed 1.0 W or $17 + 10 \log B$, dBm, whichever power is less. B is the 99% emission bandwidth in MHz
<input type="checkbox"/> For the 5.725-5.85 GHz band:	
<input type="checkbox"/>	<ul style="list-style-type: none"> ▪ Point-to-multipoint systems (P2M): the maximum conducted output power (P_{Out}) shall not exceed the lesser of 1 W. If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$. ▪ Point-to-point systems (P2P): the maximum conducted output power (P_{Out}) shall not exceed the lesser of 1 W.
P_{Out} = maximum conducted output power in dBm, G_{TX} = the maximum transmitting antenna directional gain in dBi.	


3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.3.3 Test Procedures

Test Method	
<ul style="list-style-type: none"> ▪ Maximum Conducted Output Power 	
Average over on/off periods with duty factor	
<input type="checkbox"/>	Refer as FCC KDB 789033, clause E Method SA-2 (spectral trace averaging).
<input type="checkbox"/>	Refer as FCC KDB 789033, clause E Method SA-2 Alt. (RMS detection with slow sweep speed)
Wideband RF power meter and average over on/off periods with duty factor	
<input checked="" type="checkbox"/>	Refer as FCC KDB 789033, clause E Method PM-G (using an RF average power meter).
<ul style="list-style-type: none"> ▪ For conducted measurement. 	
<ul style="list-style-type: none"> ▪ If the EUT supports multiple transmit chains using options given below: Refer as FCC KDB 662911, In-band power measurements. Using the measure-and-sum approach, measured all transmit ports individually. Sum the power (in linear power units e.g., mW) of all ports for each individual sample and save them. 	
<ul style="list-style-type: none"> ▪ If multiple transmit chains, EIRP calculation could be following as methods: $P_{total} = P_1 + P_2 + \dots + P_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $EIRP_{total} = P_{total} + DG$ 	

3.3.4 Test Setup

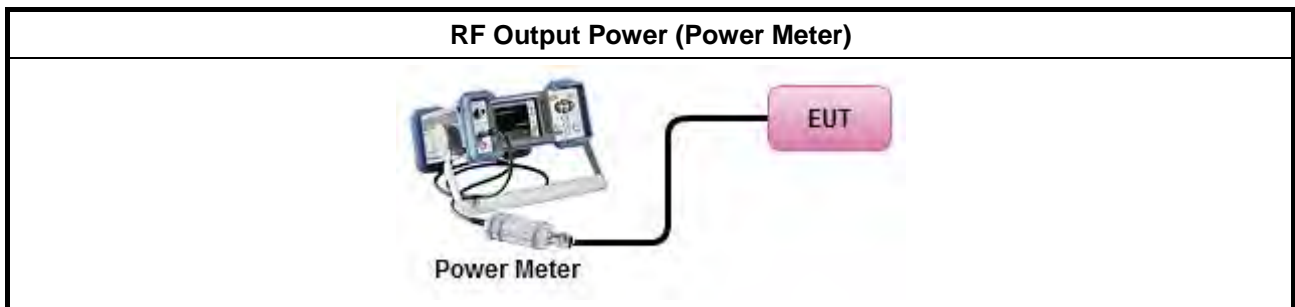

3.3.5 Test Result of Maximum Conducted Output Power

Refer as Appendix C



3.4 Peak Power Spectral Density

3.4.1 Peak Power Spectral Density Limit

Peak Power Spectral Density Limit	
UNII Devices	
<input checked="" type="checkbox"/> For the 5.15-5.25 GHz band:	
	<ul style="list-style-type: none"> ▪ Outdoor AP: the peak power spectral density (PPSD) shall not exceed the lesser of 17dBm/MHz. If $G_{TX} > 6$ dBi, then $P_{Out} = 17 - (G_{TX} - 6)$. ▪ Indoor AP: the peak power spectral density (PPSD) shall not exceed the lesser of 17dBm/MHz. If $G_{TX} > 6$ dBi, then $P_{Out} = 17 - (G_{TX} - 6)$. ▪ Point-to-point AP: the peak power spectral density (PPSD) shall not exceed the lesser of 17dBm/MHz. If $G_{TX} > 23$ dBi, then $P_{Out} = 17 - (G_{TX} - 23)$. ▪ Mobile or Portable Client: the peak power spectral density (PPSD) ≤ 11 dBm/MHz. If $G_{TX} > 6$ dBi, then $PPSD = 11 - (G_{TX} - 6)$.
<input type="checkbox"/> For the 5.25-5.35 GHz band, the peak power spectral density (PPSD) ≤ 11 dBm/MHz. If $G_{TX} > 6$ dBi, then $PPSD = 11 - (G_{TX} - 6)$.	
<input type="checkbox"/> For the 5.47-5.725 GHz band, the peak power spectral density (PPSD) ≤ 11 dBm/MHz. If $G_{TX} > 6$ dBi, then $PPSD = 11 - (G_{TX} - 6)$.	
<input checked="" type="checkbox"/> For the 5.725-5.85 GHz band:	
	<ul style="list-style-type: none"> ▪ Point-to-multipoint systems (P2M): the peak power spectral density (PPSD) ≤ 30 dBm/500kHz. If $G_{TX} > 6$ dBi, then $PPSD = 30 - (G_{TX} - 6)$. ▪ Point-to-point systems (P2P): the peak power spectral density (PPSD) ≤ 30 dBm/500kHz.
LE-LAN Devices	
<input type="checkbox"/> For the 5.15-5.25 GHz band, the e.i.r.p. peak power spectral density (PPSD) ≤ 10 dBm/MHz.	
<input type="checkbox"/> For the 5.25-5.35 GHz band, the peak power spectral density (PPSD) ≤ 11 dBm/MHz.	
	<ul style="list-style-type: none"> ▪ e.i.r.p. greater than 200 mW shall comply with the following e.i.r.p. at different elevations, where θ is the angle above the local horizontal plane (of the Earth) as shown below: -13 dBW/MHz for $0^\circ \leq \theta < 8^\circ$; $-13 - 0.716(\theta - 8)$ dBW/MHz for $8^\circ \leq \theta < 40^\circ$ -35.9 - 1.22 $(\theta - 40)$ dBW/MHz for $40^\circ \leq \theta \leq 45^\circ$; -42 dBW/MHz for $\theta > 45^\circ$
<input type="checkbox"/> For the 5.47-5.6 GHz band and 5.65-5.725 GHz band, the peak power spectral density (PPSD) ≤ 11 dBm/MHz.	
<input type="checkbox"/> For the 5.725-5.85 GHz band:	
	<ul style="list-style-type: none"> ▪ Point-to-multipoint systems (P2M): the peak power spectral density (PPSD) ≤ 30 dBm/500kHz. If $G_{TX} > 6$ dBi, then $PPSD = 30 - (G_{TX} - 6)$. ▪ Point-to-point systems (P2P): the peak power spectral density (PPSD) ≤ 30 dBm/500kHz.
<p>PPSD = peak power spectral density that he same method as used to determine the conducted output power shall be used to determine the power spectral density. And power spectral density in dBm/MHz G_{TX} = the maximum transmitting antenna directional gain in dBi.</p>	




3.4.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.4.3 Test Procedures

Test Method	
<ul style="list-style-type: none"> ▪ Peak power spectral density procedures that the same method as used to determine the conducted output power shall be used to determine the peak power spectral density and use the peak search function on the spectrum analyzer to find the peak of the spectrum. For the peak power spectral density shall be measured using below options: 	
<input type="checkbox"/>	Refer as FCC KDB 789033, F)5) power spectral density can be measured using resolution bandwidths < 1 MHz provided that the results are integrated over 1 MHz bandwidth
[duty cycle ≥ 98% or external video / power trigger]	
<input checked="" type="checkbox"/>	Refer as FCC KDB 789033, clause E Method SA-1 (spectral trace averaging).
<input type="checkbox"/>	Refer as FCC KDB 789033, clause E Method SA-1 Alt. (RMS detection with slow sweep speed)
duty cycle < 98% and average over on/off periods with duty factor	
<input checked="" type="checkbox"/>	Refer as FCC KDB 789033, clause E Method SA-2 (spectral trace averaging).
<input type="checkbox"/>	Refer as FCC KDB 789033, clause E Method SA-2 Alt. (RMS detection with slow sweep speed)
<ul style="list-style-type: none"> ▪ For conducted measurement. 	
<ul style="list-style-type: none"> ▪ If the EUT supports multiple transmit chains using options given below: 	
<input checked="" type="checkbox"/>	Option 1: Measure and sum the spectra across the outputs. Refer as FCC KDB 662911, In-band power spectral density (PSD). Sample all transmit ports simultaneously using a spectrum analyzer for each transmit port. Where the trace bin-by-bin of each transmit port summing can be performed. (i.e., in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3, and so on up to the NTX output to obtain the value for the first frequency bin of the summed spectrum.). Add up the amplitude (power) values for the different transmit chains and use this as the new data trace.
<input type="checkbox"/>	Option 2: Measure and sum spectral maxima across the outputs. With this technique, spectra are measured at each output of the device at the required resolution bandwidth. The maximum value (peak) of each spectrum is determined. These maximum values are then summed mathematically in linear power units across the outputs. These operations shall be performed separately over frequency spans that have different out-of-band or spurious emission limits,
<input type="checkbox"/>	Option 3: Measure and add 10 log(N) dB, where N is the number of transmit chains. Refer as FCC KDB 662911, In-band power spectral density (PSD). Performed at each transmit chains and each transmit chains shall be compared with the limit have been reduced with 10 log(N). Or each transmit chains shall be add 10 log(N) to compared with the limit.
<ul style="list-style-type: none"> ▪ If multiple transmit chains, EIRP PPSD calculation could be following as methods: $PPSD_{total} = PPSD_1 + PPSD_2 + \dots + PPSD_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $EIRP_{total} = PPSD_{total} + DG$ 	

3.4.4 Test Setup

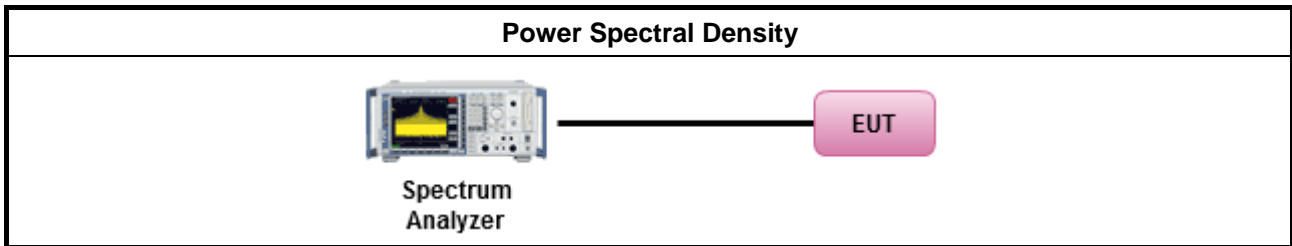

3.4.5 Test Result of Peak Power Spectral Density

Refer as Appendix D



3.5 Unwanted Emissions

3.5.1 Transmitter Unwanted Emissions Limit

Unwanted emissions below 1 GHz and restricted band emissions above 1GHz limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Note 3: Using the distance of 1m during the test for above 18 GHz, and the test value to correct for the distance factor at 3m.

Un-restricted band emissions above 1GHz Limit	
Operating Band	Limit
<input checked="" type="checkbox"/> 5.15 - 5.25 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
<input type="checkbox"/> 5.25 - 5.35 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
<input type="checkbox"/> 5.47 - 5.725 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
<input checked="" type="checkbox"/> 5.725 - 5.85 GHz	all emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Note 1: Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of



linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).


3.5.2 Measuring Instruments


Refer a test equipment and calibration data table in this test report.

3.5.3 Test Procedures

Test Method	
	<ul style="list-style-type: none"> ▪ Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. Measurements shall not be performed at a distance greater than 30 m for frequencies above 30 MHz, unless it can be further demonstrated that measurements at a distance of 30 m or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).
	<ul style="list-style-type: none"> ▪ The average emission levels shall be measured in [duty cycle ≥ 98 or duty factor].
	<ul style="list-style-type: none"> ▪ For the transmitter unwanted emissions shall be measured using following options below: <ul style="list-style-type: none"> ▪ Refer as FCC KDB 789033, clause G)2) for unwanted emissions into non-restricted bands. ▪ Refer as FCC KDB 789033, clause G)1) for unwanted emissions into restricted bands. <ul style="list-style-type: none"> <input type="checkbox"/> Refer as FCC KDB 789033, G)6) Method AD (Trace Averaging). <input checked="" type="checkbox"/> Refer as FCC KDB 789033, G)6) Method VB (Reduced VBW). <input type="checkbox"/> Refer as ANSI C63.10, clause 11.12.2.5.3 (Reduced VBW). VBW ≥ 1/T, where T is pulse time. <input type="checkbox"/> Refer as ANSI C63.10, clause 7.5 average value of pulsed emissions. <input checked="" type="checkbox"/> Refer as FCC KDB 789033, clause G)5) measurement procedure peak limit. <input type="checkbox"/> Refer as ANSI C63.10, clause 4.1.4.2.2 measurement procedure peak limit.
	<ul style="list-style-type: none"> ▪ For radiated measurement. <ul style="list-style-type: none"> ▪ Refer as ANSI C63.10, clause 6.4 for radiated emissions below 30 MHz and test distance is 3m. ▪ Refer as ANSI C63.10, clause 6.5 for radiated emissions 30 MHz to 1 GHz and test distance is 3m. ▪ Refer as ANSI C63.10, clause 6.6 for radiated emissions above 1GHz.
	<ul style="list-style-type: none"> ▪ The any unwanted emissions level shall not exceed the fundamental emission level.
	<ul style="list-style-type: none"> ▪ All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.

3.5.4 Test Setup

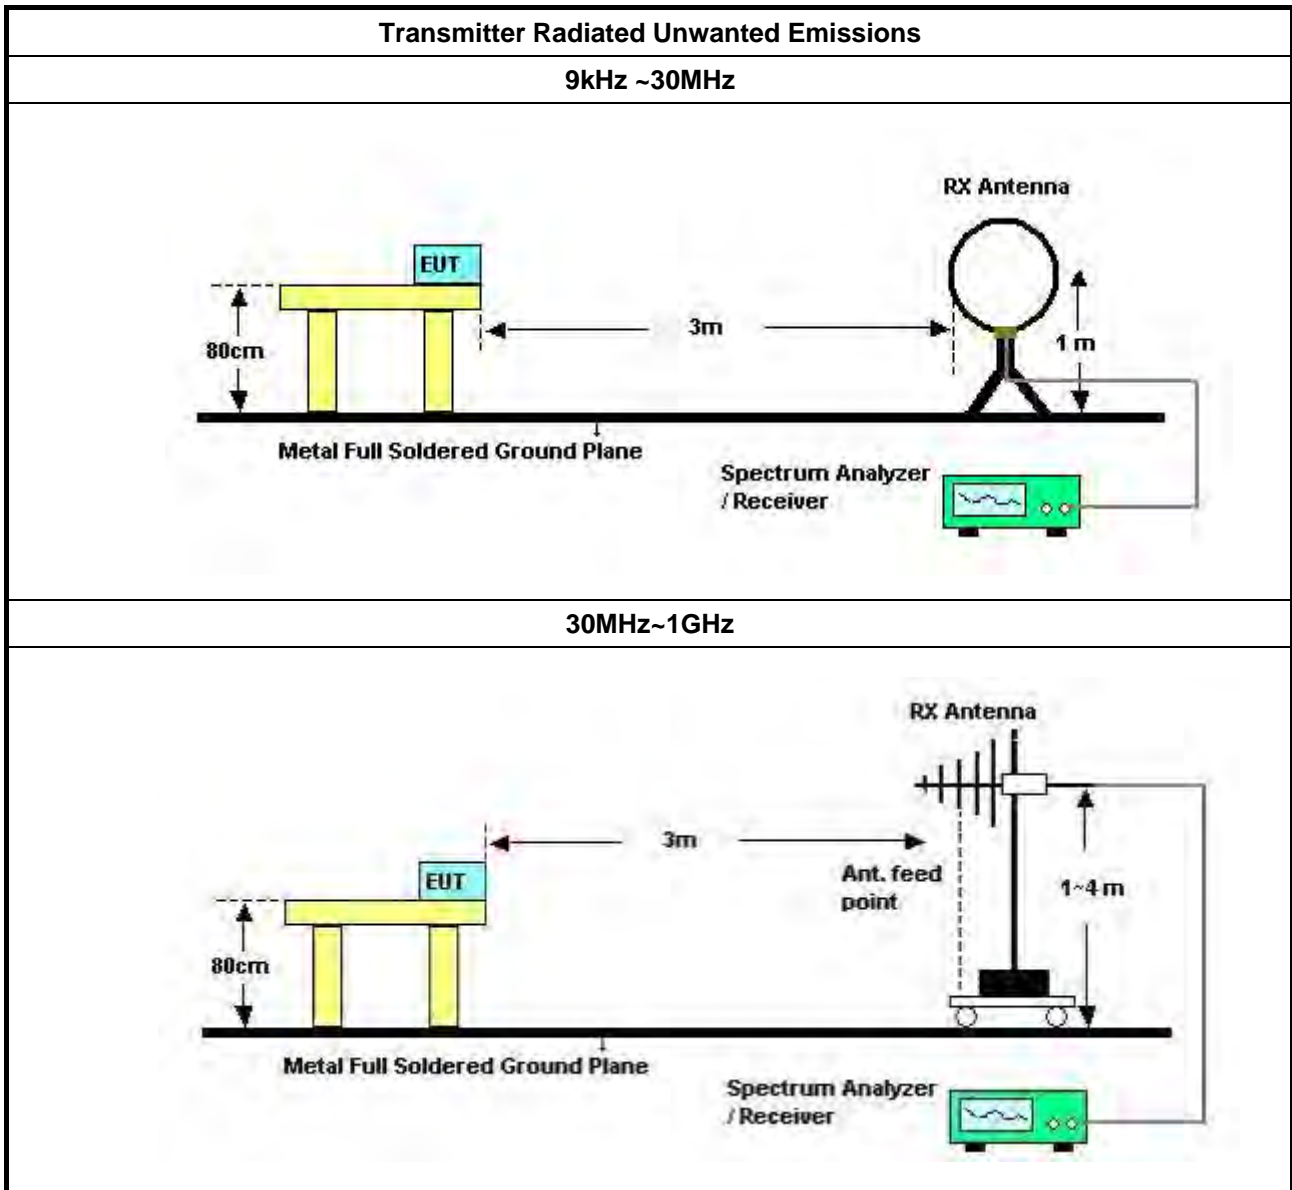

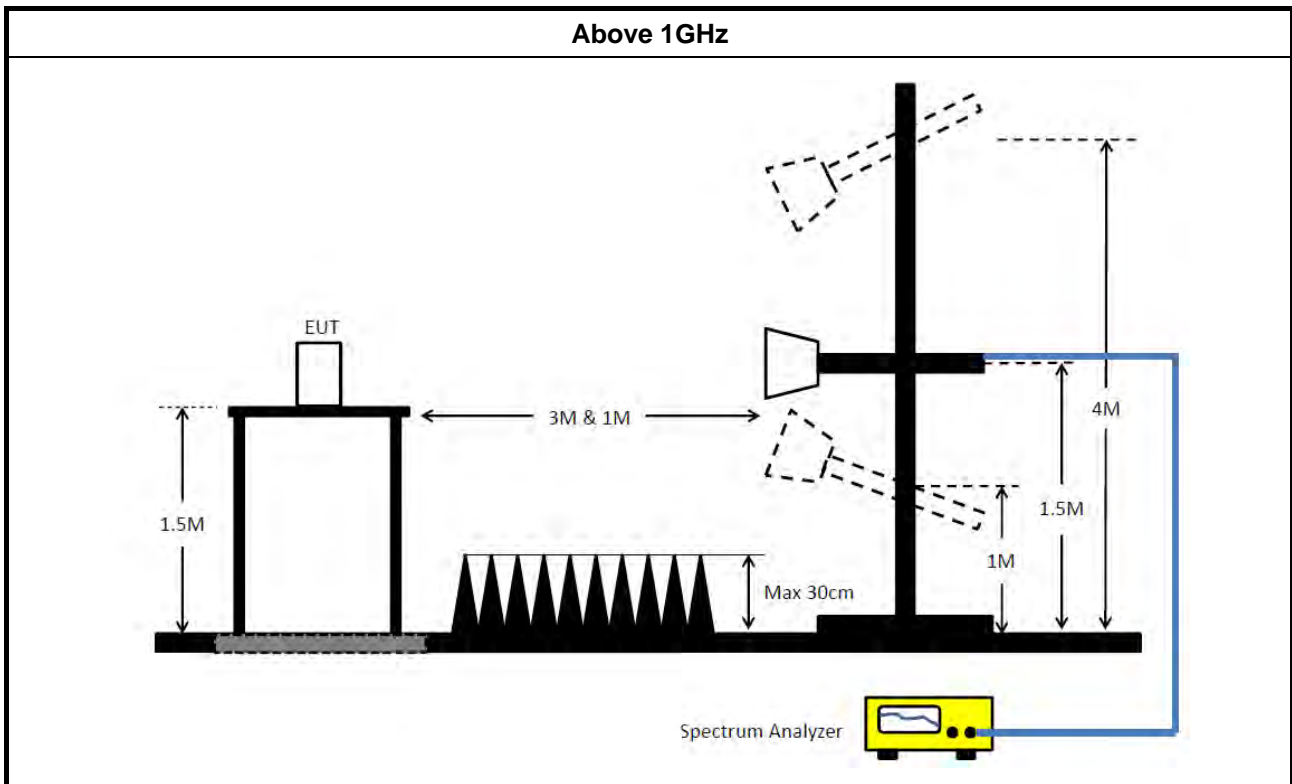

3.5.5 Measurement Results Calculation

The measured Level is calculated using:

Corrected Reading: Antenna factor (AF) + Cable loss (CL) + Read level (Raw) - Preamp factor (PA)(if applicable) = Level.

3.5.6 Transmitter Unwanted Emissions (Below 30MHz)

There is a comparison data of both open-field test site and alternative test site - semi-Anechoic chamber according to KDB414788 Radiated Test Site, and the result came out very similar.

All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.

The radiated emissions were investigated from 9 kHz or the lowest frequency generated within the device, up to the 10th harmonic or 40 GHz, whichever is appropriate.

3.5.7 Test Result of Transmitter Unwanted Emissions

Refer as Appendix E



4 Test Equipment and Calibration Data

Instrument	Brand	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
EMI Receiver	Agilent	N9038A	My52260123	9kHz ~ 8.4GHz	Feb. 26, 2020	Feb. 25, 2021	Conduction (CO01-CB)
LISN	F.C.C.	FCC-LISN-50-16-2	04083	150kHz ~ 100MHz	Jan. 06, 2021	Jan. 05, 2022	Conduction (CO01-CB)
LISN	Schwarzbeck	NSLK 8127	8127647	9kHz ~ 30MHz	Feb. 25, 2020	Feb. 24, 2021	Conduction (CO01-CB)
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100430	9kHz ~ 30MHz	Jan. 31, 2020	Jan. 30, 2021	Conduction (CO01-CB)
COND Cable	Woken	Cable	Low cable-CO01	9kHz ~ 30MHz	May 20, 2020	May 19, 2021	Conduction (CO01-CB)
Software	SPORTON	SENSE	V5.10	-	N.C.R.	N.C.R.	Conduction (CO01-CB)
3m Semi Anechoic Chamber NSA	TDK	SAC-3M	03CH06-CB	30 MHz ~ 1 GHz	Aug. 10, 2020	Aug. 09, 2021	Radiation (03CH06-CB)
Bilog Antenna with 6 dB attenuator	TESEQ & EMCI	CBL6112D & N-6-06	37878 & AT-N0606	20MHz ~ 2GHz	Aug. 02, 2020	Aug. 01, 2021	Radiation (03CH06-CB)
Loop Antenna	Teseq	HLA 6120	24155	9kHz - 30 MHz	Apr. 13, 2020	Apr. 12, 2021	Radiation (03CH06-CB)
Pre-Amplifier	Agilent	310N	187290	0.1MHz ~ 1GHz	Nov. 05, 2020	Nov. 04, 2021	Radiation (03CH06-CB)
Spectrum analyzer	R&S	FSP40	100080	9kHz~40GHz	Dec. 15, 2020	Dec. 14, 2021	Radiation (03CH06-CB)
EMI Test Receiver	R&S	ESCS	826547/017	9kHz ~ 2.75GHz	May 13, 2020	May 12, 2021	Radiation (03CH06-CB)
RF Cable-low	Woken	RG402	Low Cable-05+24	30MHz~1GHz	Oct. 05, 2020	Oct. 04, 2021	Radiation (03CH06-CB)
Test Software	SPORTON	SENSE	V5.10	-	N.C.R.	N.C.R.	Radiation (03CH06-CB)
3m Semi Anechoic Chamber VSWR	TDK	SAC-3M	03CH03-CB	1GHz ~18GHz 3m	May 28, 2020	May 27, 2021	Radiation (03CH03-CB)
Horn Antenna	ETS • Lindgren	3115	6821	750MHz~18GHz	Jan. 20, 2020	Jan. 19, 2021	Radiation (03CH03-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Jul. 21, 2020	Jul. 20, 2021	Radiation (03CH03-CB)
Pre-Amplifier	Agilent	8449B	3008A02097	1GHz ~ 26.5GHz	Jul. 03, 2020	Jun. 02, 2021	Radiation (03CH03-CB)
Pre-Amplifier	MITEQ	TTA1840-35-H G	1864479	18GHz ~ 40GHz	Jul. 08, 2020	Jul. 07, 2021	Radiation (03CH03-CB)
Spectrum Analyzer	R&S	FSP40	100019	9kHz ~; 40GHz	Jun. 09, 2020	Jun. 08, 2021	Radiation (03CH03-CB)
RF Cable-high	Woken	RG402	High Cable-20+29	1GHz ~ 18GHz	Oct. 05, 2020	Oct. 04, 2021	Radiation (03CH03-CB)



Instrument	Brand	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
RF Cable-high	Woken	RG402	High Cable-29	1GHz ~ 18GHz	Oct. 05, 2020	Oct. 04, 2021	Radiation (03CH03-CB)
RF Cable-high	Woken	RG402	High Cable-40G#1	18GHz~40 GHz	Jul. 16, 2020	Jul. 15, 2021	Radiation (03CH03-CB)
RF Cable-high	Woken	RG402	High Cable-40G#2	18GHz~40 GHz	Jul. 16, 2020	Jul. 15, 2021	Radiation (03CH03-CB)
Test Software	SPORTON	SENSE	V5.10	-	N.C.R.	N.C.R.	Radiation (03CH03-CB)
Spectrum analyzer	R&S	FSV40	101027	9kHz~40GHz	Jul. 27, 2020	Jul. 26, 2021	Conducted (TH02-CB)
Power Sensor	Anritsu	MA2411B	1126203	300MHz~40GHz	Sep. 17, 2020	Sep. 16, 2021	Conducted (TH02-CB)
Power Meter	Anritsu	ML2495A	1210004	300MHz~40GHz	Sep. 17, 2020	Sep. 16, 2021	Conducted (TH02-CB)
RF Cable-high	Woken	RG402	High Cable-01	1 GHz – 18 GHz	Oct. 05, 2020	Oct. 04, 2021	Conducted (TH02-CB)
RF Cable-high	Woken	RG402	High Cable-02	1 GHz – 18 GHz	Oct. 05, 2020	Oct. 04, 2021	Conducted (TH02-CB)
RF Cable-high	Woken	RG402	High Cable-03	1 GHz – 18 GHz	Oct. 05, 2020	Oct. 04, 2021	Conducted (TH02-CB)
RF Cable-high	Woken	RG402	High Cable-04	1 GHz – 18 GHz	Oct. 05, 2020	Oct. 04, 2021	Conducted (TH02-CB)
RF Cable-high	Woken	RG402	High Cable-05	1 GHz – 18 GHz	Oct. 05, 2020	Oct. 04, 2021	Conducted (TH02-CB)
Test Software	SPORTON	SENSE	V5.10	-	N.C.R.	N.C.R.	Conducted (TH02-CB)

Note: Calibration Interval of instruments listed above is one year.

NCR means Non-Calibration required.



AC Power Port Conducted Emission Result

Appendix A


Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Condition
Mode 1	Pass	QP	150k	55.87	66.00	-10.13	Line



Mode 1

11/01/2021

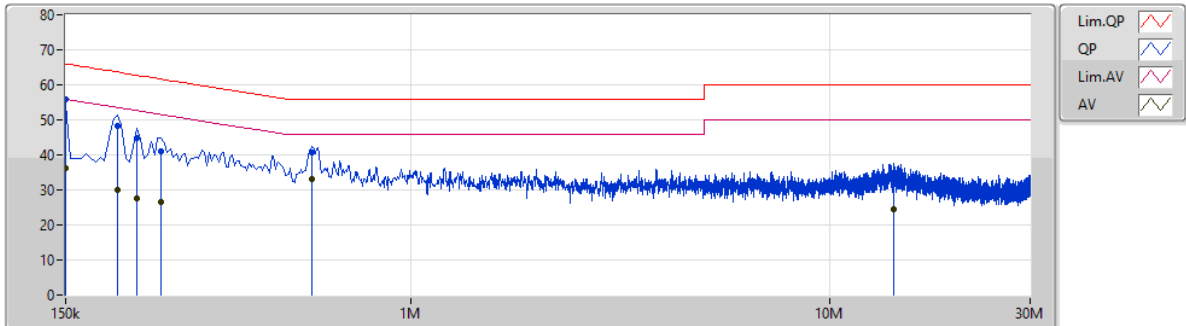


Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor (dB)	Condition	Comment	Raw (dBuV)	LISN (dB)	CL (dB)	AT (dB)
QP	150k	55.87	66.00	-10.13	9.89	Line	"Worst"	45.98	0.05	0.03	9.81
AV	150k	36.33	56.00	-19.67	9.89	Line	-	26.44	0.05	0.03	9.81
QP	199.5k	48.16	63.63	-15.47	9.89	Line	-	38.27	0.04	0.03	9.82
AV	199.5k	29.88	53.63	-23.75	9.89	Line	-	19.99	0.04	0.03	9.82
QP	222k	44.79	62.75	-17.96	9.89	Line	-	34.90	0.04	0.03	9.82
AV	222k	27.58	52.75	-25.17	9.89	Line	-	17.69	0.04	0.03	9.82
QP	253.5k	41.13	61.64	-20.51	9.89	Line	-	31.24	0.04	0.03	9.82
AV	253.5k	26.71	51.64	-24.93	9.89	Line	-	16.82	0.04	0.03	9.82
QP	582k	40.59	56.00	-15.41	9.90	Line	-	30.69	0.04	0.03	9.83
AV	582k	33.05	46.00	-12.95	9.90	Line	-	23.15	0.04	0.03	9.83
QP	14.226M	32.51	60.00	-27.49	10.34	Line	-	22.17	0.21	0.22	9.91
AV	14.226M	24.56	50.00	-25.44	10.34	Line	-	14.22	0.21	0.22	9.91



Mode 1

11/01/2021

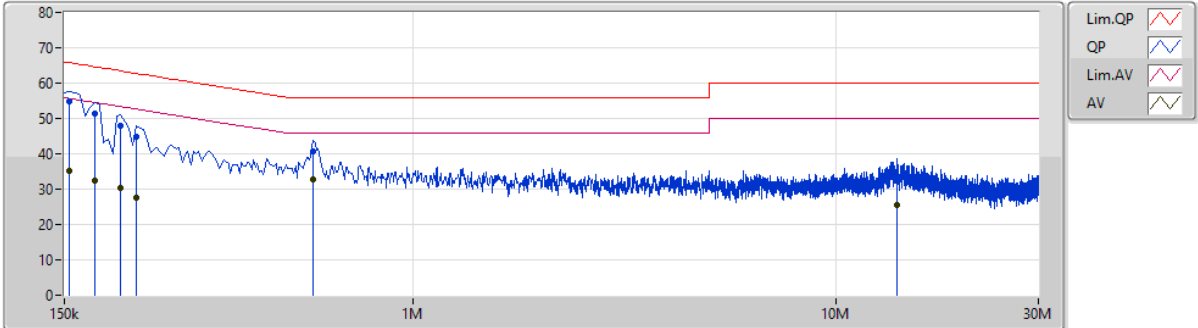

Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor (dB)	Condition	Comment	Raw (dBuV)	LISN (dB)	CL (dB)	AT (dB)
QP	154.5k	54.98	65.75	-10.77	9.88	Neutral	"Worst"	45.10	0.04	0.03	9.81
AV	154.5k	35.09	55.75	-20.66	9.88	Neutral	-	25.21	0.04	0.03	9.81
QP	177k	51.41	64.62	-13.21	9.89	Neutral	-	41.52	0.04	0.03	9.82
AV	177k	32.44	54.62	-22.18	9.89	Neutral	-	22.55	0.04	0.03	9.82
QP	204k	47.85	63.44	-15.59	9.89	Neutral	-	37.96	0.04	0.03	9.82
AV	204k	30.40	53.44	-23.04	9.89	Neutral	-	20.51	0.04	0.03	9.82
QP	222k	44.84	62.75	-17.91	9.89	Neutral	-	34.95	0.04	0.03	9.82
AV	222k	27.47	52.75	-25.28	9.89	Neutral	-	17.58	0.04	0.03	9.82
QP	582k	40.52	56.00	-15.48	9.91	Neutral	-	30.61	0.05	0.03	9.83
AV	582k	32.91	46.00	-13.09	9.91	Neutral	-	23.00	0.05	0.03	9.83
QP	13.893M	33.42	60.00	-26.58	10.32	Neutral	-	23.10	0.19	0.22	9.91
AV	13.893M	25.40	50.00	-24.60	10.32	Neutral	-	15.08	0.19	0.22	9.91



Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
5.15-5.25GHz	-	-	-	-	-
802.11a_Nss1,(6Mbps)_2TX	26.34M	16.942M	16M9D1D	21M	16.582M
802.11ax HEW20_Nss1,(MCS0)_2TX	25.71M	19.04M	19M0D1D	21M	18.951M
802.11ax HEW40_Nss1,(MCS0)_2TX	75.36M	37.961M	38M0D1D	40.14M	37.541M
802.11ax HEW80_Nss1,(MCS0)_2TX	81.72M	77.241M	77M2D1D	81.36M	77.241M
5.725-5.85GHz	-	-	-	-	-
802.11a_Nss1,(6Mbps)_2TX	16.32M	16.792M	16M8D1D	15.69M	16.642M
802.11ax HEW20_Nss1,(MCS0)_2TX	18.57M	18.981M	19M0D1D	16.02M	18.921M
802.11ax HEW40_Nss1,(MCS0)_2TX	37.56M	37.841M	37M8D1D	36.96M	37.661M
802.11ax HEW80_Nss1,(MCS0)_2TX	77.4M	77.121M	77M1D1D	77.28M	77.121M

Max-N dB = Maximum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;

Max-OBW = Maximum 99% occupied bandwidth;

Min-N dB = Minimum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;

Min-OBW = Minimum 99% occupied bandwidth;

Result

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)	Port 2-N dB (Hz)	Port 2-OBW (Hz)
802.11a_Nss1,(6Mbps)_2TX	-	-	-	-	-	-
5180MHz	Pass	Inf	21.3M	16.582M	21M	16.762M
5200MHz	Pass	Inf	23.58M	16.702M	26.34M	16.912M
5240MHz	Pass	Inf	24.18M	16.732M	26.25M	16.942M
5745MHz	Pass	500k	16.29M	16.672M	16.29M	16.762M
5785MHz	Pass	500k	15.69M	16.642M	16.32M	16.792M
5825MHz	Pass	500k	16.29M	16.672M	16.32M	16.732M
802.11ax HEW20_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5180MHz	Pass	Inf	21M	18.951M	21.3M	18.951M
5200MHz	Pass	Inf	21M	18.951M	21.39M	18.951M
5240MHz	Pass	Inf	23.76M	19.04M	25.71M	19.04M
5745MHz	Pass	500k	16.02M	18.981M	18.57M	18.921M
5785MHz	Pass	500k	18.03M	18.951M	18.3M	18.921M
5825MHz	Pass	500k	18.09M	18.921M	18.36M	18.951M
802.11ax HEW40_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5190MHz	Pass	Inf	40.14M	37.541M	40.2M	37.661M
5230MHz	Pass	Inf	75.36M	37.961M	74.46M	37.901M
5755MHz	Pass	500k	37.14M	37.781M	37.5M	37.781M
5795MHz	Pass	500k	36.96M	37.841M	37.56M	37.661M
802.11ax HEW80_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5210MHz	Pass	Inf	81.36M	77.241M	81.72M	77.241M
5775MHz	Pass	500k	77.4M	77.121M	77.28M	77.121M

Port X-N dB = Port X 6dB down bandwidth for 5.725-5.85GHz band / 26dB down bandwidth for other band

Port X-OBW = Port X 99% occupied bandwidth;


802.11a_Nss1,(6Mbps)_2TX

EBW


5180MHz

14/01/2021

CF: 5.18GHz
 Span: 60MHz
 RBW: 200kHz
 VBW: 1MHz
 Sweep Time: 100ms
 Detector Type: Peak

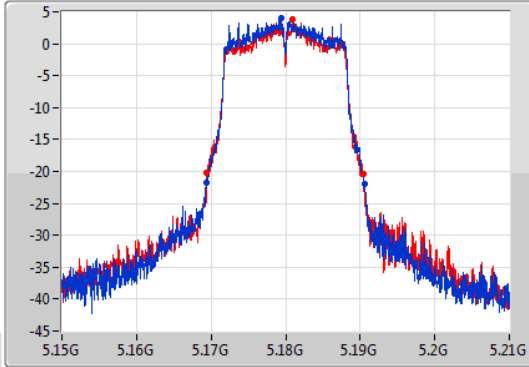

CF: 5.18GHz
 Span: 60MHz
 RBW: 200kHz
 VBW: 1MHz
 Sweep Time: 100ms
 Detector Type: Peak

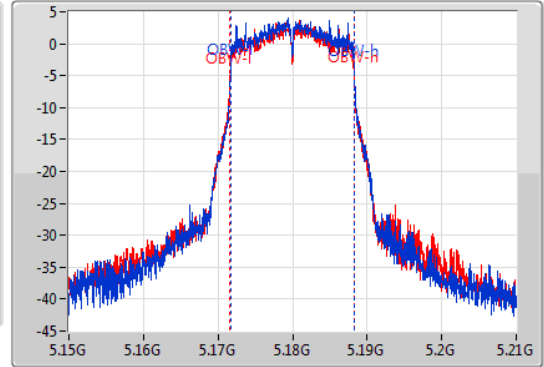

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
21.3M	5.16935G	5.19065G	16.582M	5.171694G	5.188276G	Inf	1
21M	5.16941G	5.19041G	16.762M	5.171574G	5.18836G	Inf	2


802.11a_Nss1,(6Mbps)_2TX

EBW


5200MHz

14/01/2021

CF: 5.2GHz
 Span: 60MHz
 RBW: 200kHz
 VBW: 1MHz
 Sweep Time: 100ms
 Detector Type: Peak

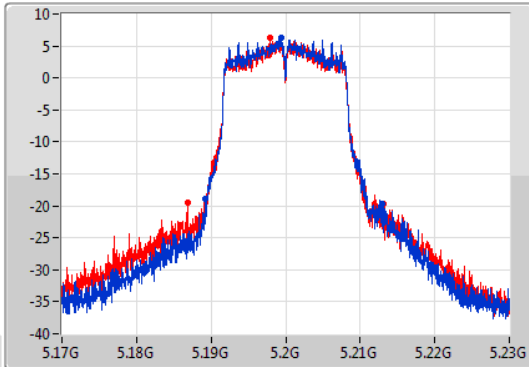

CF: 5.2GHz
 Span: 60MHz
 RBW: 200kHz
 VBW: 1MHz
 Sweep Time: 100ms
 Detector Type: Peak

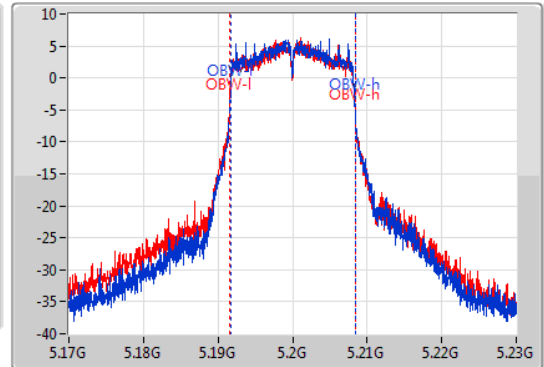

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
23.58M	5.18929G	5.21287G	16.702M	5.191664G	5.208366G	Inf	1
26.34M	5.1868G	5.21314G	16.912M	5.191514G	5.208426G	Inf	2


802.11a_Nss1,(6Mbps)_2TX

EBW


5240MHz

14/01/2021

CF
5.24GHz
Span
60MHz
RBW
200kHz
VBW
1MHz
Sweep Time
100ms
Detector Type
Peak

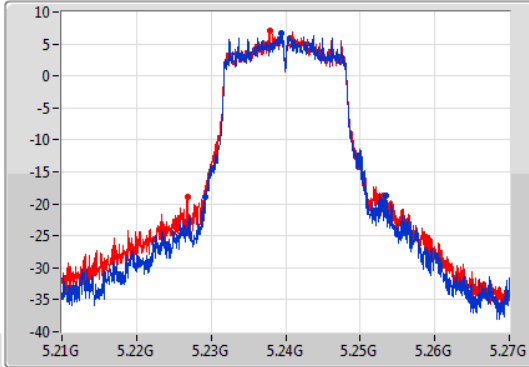

CF
5.24GHz
Span
60MHz
RBW
200kHz
VBW
1MHz
Sweep Time
100ms
Detector Type
Peak

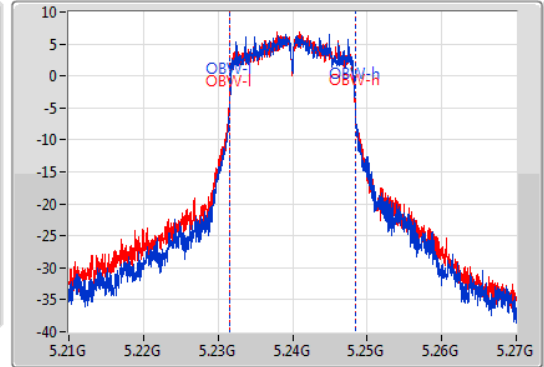

6dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
24.18M	5.22926G	5.25344G	16.732M	5.231634G	5.248366G	Inf	1
26.25M	5.22683G	5.25308G	16.942M	5.231484G	5.248426G	Inf	2


802.11a_Nss1,(6Mbps)_2TX

EBW


5745MHz

14/01/2021

CF
5.745GHz
Span
60MHz
RBW
100kHz
VBW
300kHz
Sweep Time
100ms
Detector Type
Peak

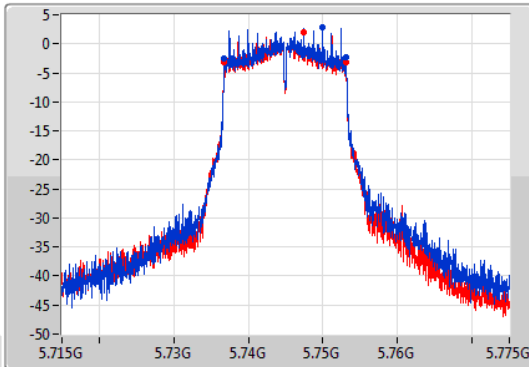

CF
5.745GHz
Span
60MHz
RBW
200kHz
VBW
1MHz
Sweep Time
100ms
Detector Type
Peak

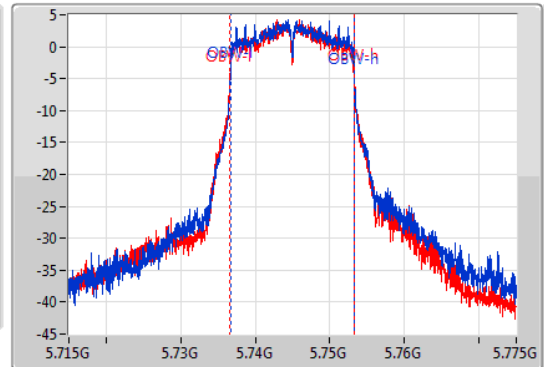


6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
16.29M	5.73681G	5.7531G	16.672M	5.736664G	5.753336G	500k	1
16.29M	5.73681G	5.7531G	16.762M	5.736574G	5.753336G	500k	2

802.11a_Nss1,(6Mbps)_2TX

EBW

5785MHz

14/01/2021

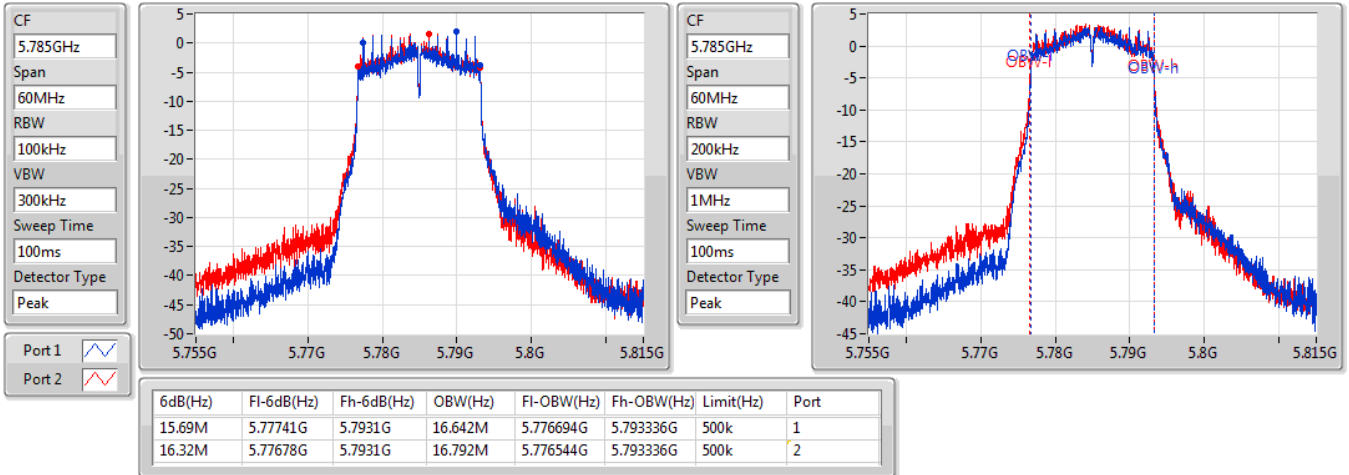


802.11a_Nss1,(6Mbps)_2TX

EBW

5825MHz

14/01/2021

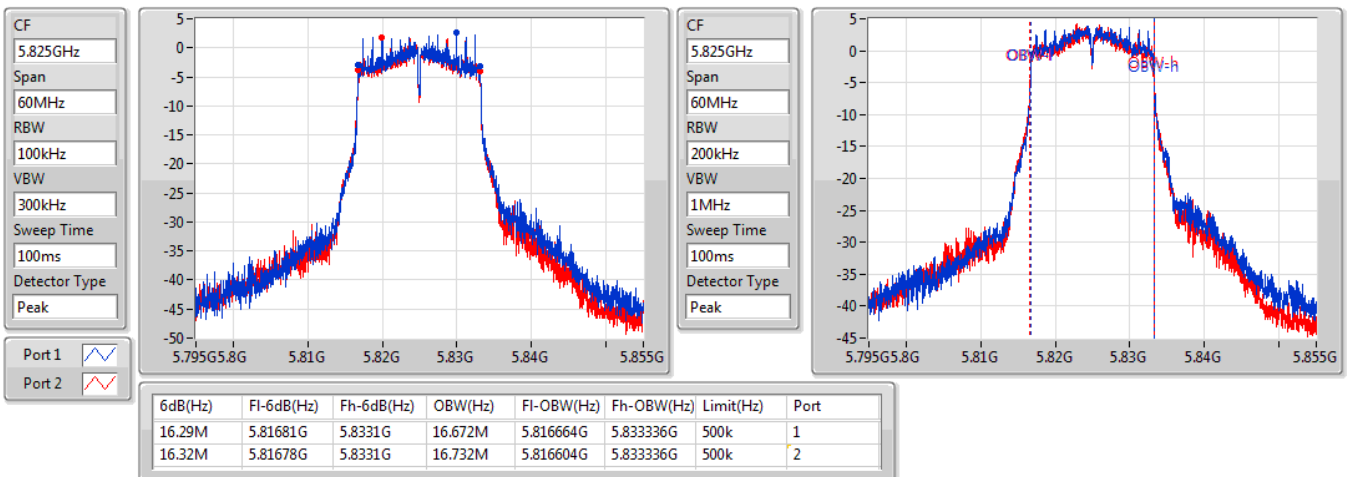


802.11ax HEW20_Nss1,(MCS0)_2TX

EBW

5180MHz

14/01/2021

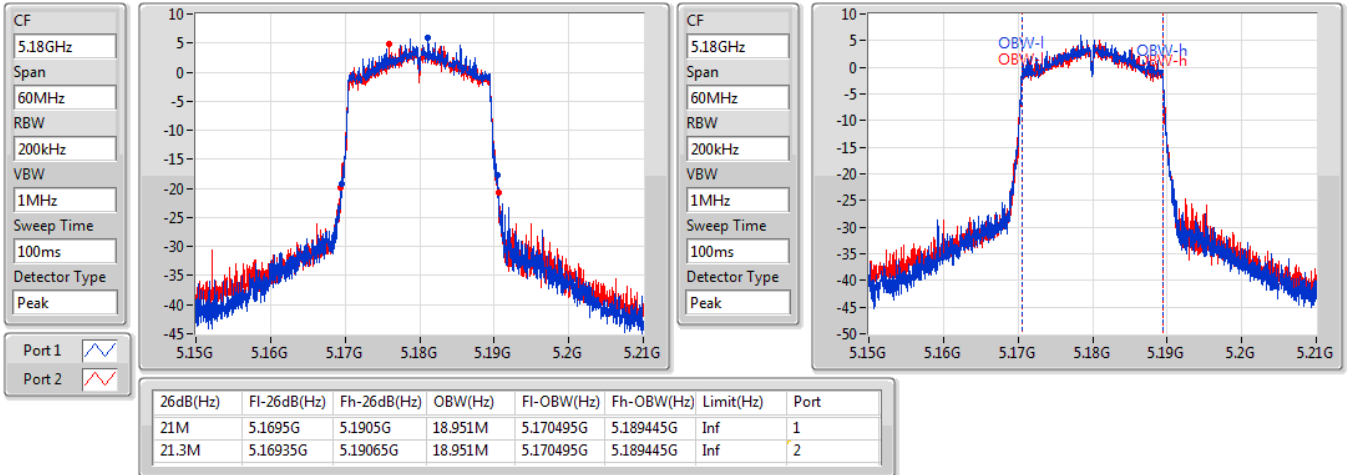


802.11ax HEW20_Nss1,(MCS0)_2TX

EBW

5200MHz

14/01/2021

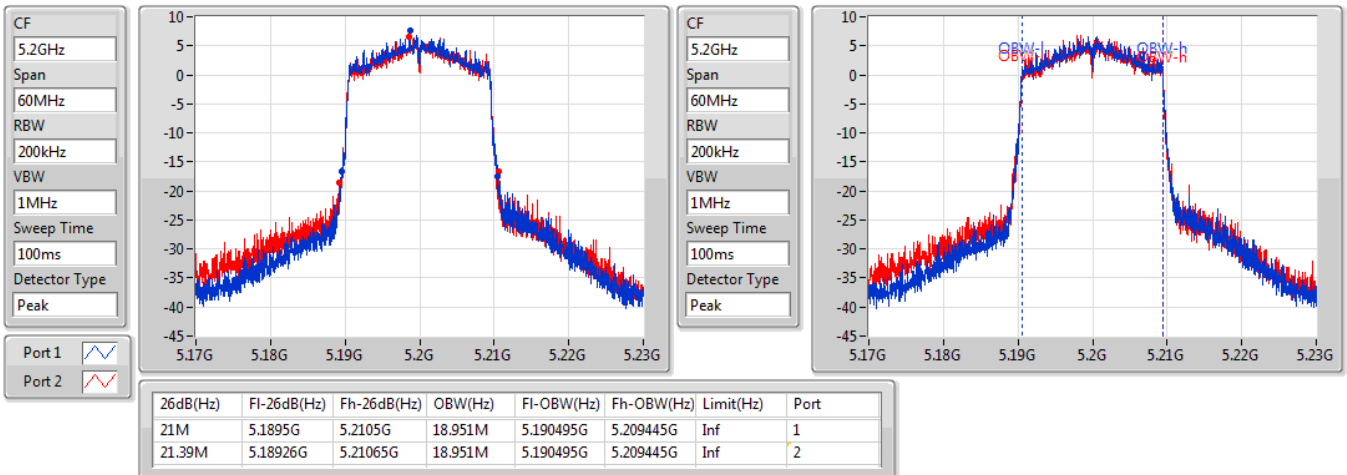


802.11ax HEW20_Nss1,(MCS0)_2TX

EBW


5240MHz

14/01/2021

CF
5.24GHz
Span
60MHz
RBW
200kHz
VBW
1MHz
Sweep Time
100ms
Detector Type
Peak

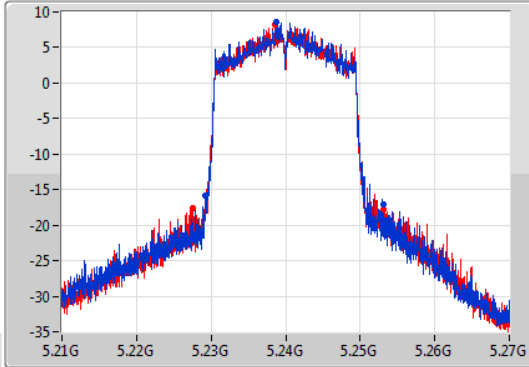

CF
5.24GHz
Span
60MHz
RBW
200kHz
VBW
1MHz
Sweep Time
100ms
Detector Type
Peak

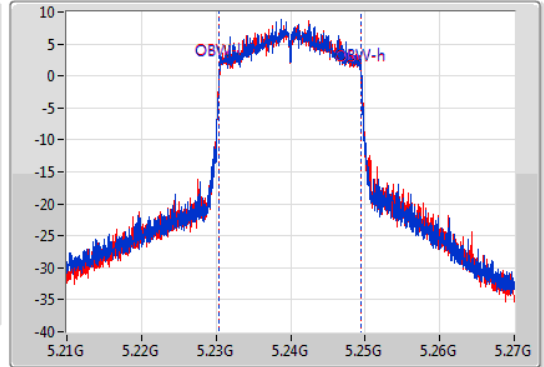

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
23.76M	5.22929G	5.25305G	19.04M	5.230435G	5.249475G	Inf	1
25.71M	5.22749G	5.2532G	19.04M	5.230435G	5.249475G	Inf	2


802.11ax HEW20_Nss1,(MCS0)_2TX

EBW


5745MHz

14/01/2021

CF
5.745GHz
Span
60MHz
RBW
100kHz
VBW
300kHz
Sweep Time
100ms
Detector Type
Peak

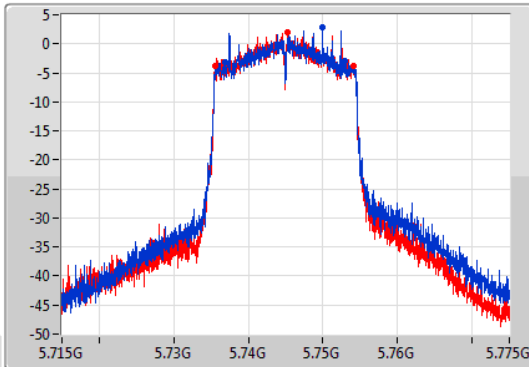

CF
5.745GHz
Span
60MHz
RBW
200kHz
VBW
1MHz
Sweep Time
100ms
Detector Type
Peak

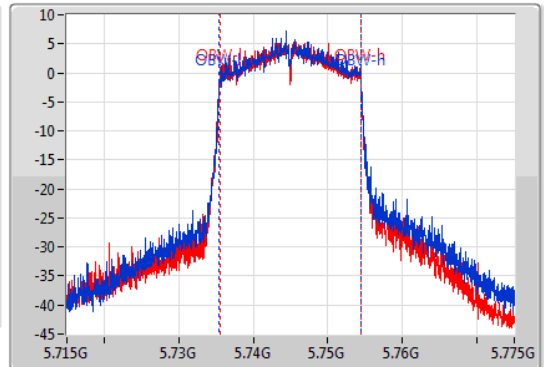

6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
16.02M	5.73693G	5.75295G	18.981M	5.735465G	5.754445G	500k	1
18.57M	5.73555G	5.75412G	18.921M	5.735495G	5.754415G	500k	2


802.11ax HEW20_Nss1,(MCS0)_2TX

EBW


5785MHz

14/01/2021

CF
5.785GHz
Span
60MHz
RBW
100kHz
VBW
300kHz
Sweep Time
100ms
Detector Type
Peak

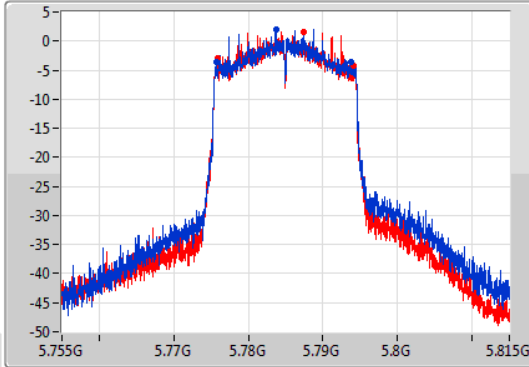

CF
5.785GHz
Span
60MHz
RBW
200kHz
VBW
1MHz
Sweep Time
100ms
Detector Type
Peak

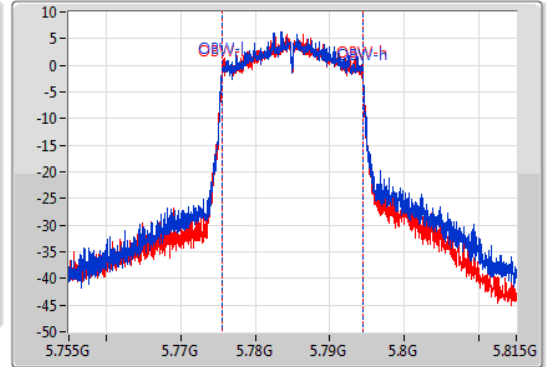

6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
18.03M	5.77573G	5.79376G	18.951M	5.775495G	5.794445G	500k	1
18.3M	5.77585G	5.79415G	18.921M	5.775495G	5.794415G	500k	2


802.11ax HEW20_Nss1,(MCS0)_2TX

EBW


5825MHz

14/01/2021

CF
5.825GHz
Span
60MHz
RBW
100kHz
VBW
300kHz
Sweep Time
100ms
Detector Type
Peak

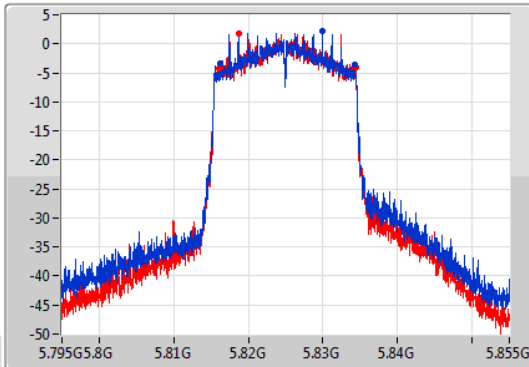

CF
5.825GHz
Span
60MHz
RBW
200kHz
VBW
1MHz
Sweep Time
100ms
Detector Type
Peak

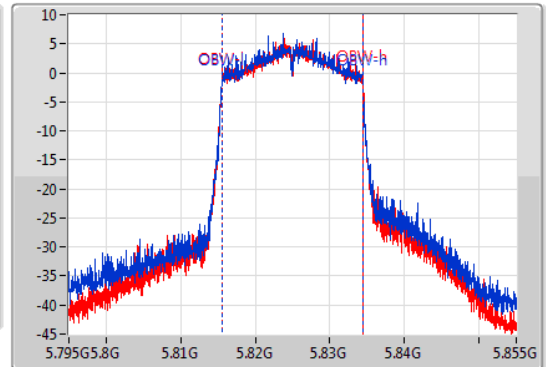


6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
18.09M	5.81621G	5.8343G	18.921M	5.815495G	5.834415G	500k	1
18.36M	5.81609G	5.83445G	18.951M	5.815495G	5.834445G	500k	2

802.11ax HEW40_Nss1,(MCS0)_2TX

EBW

5190MHz

14/01/2021

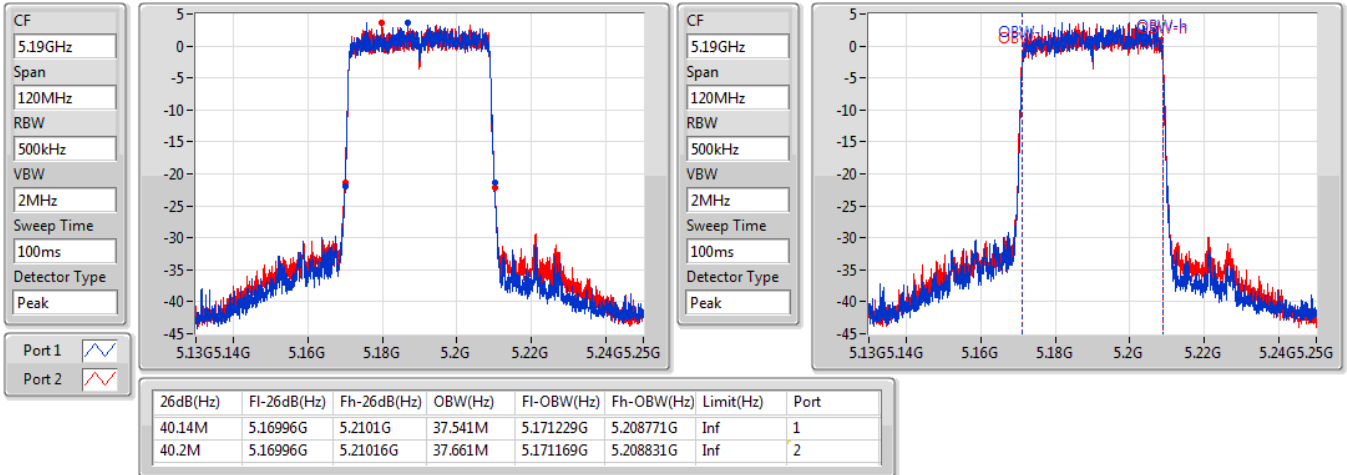


802.11ax HEW40_Nss1,(MCS0)_2TX

EBW

5230MHz

14/01/2021

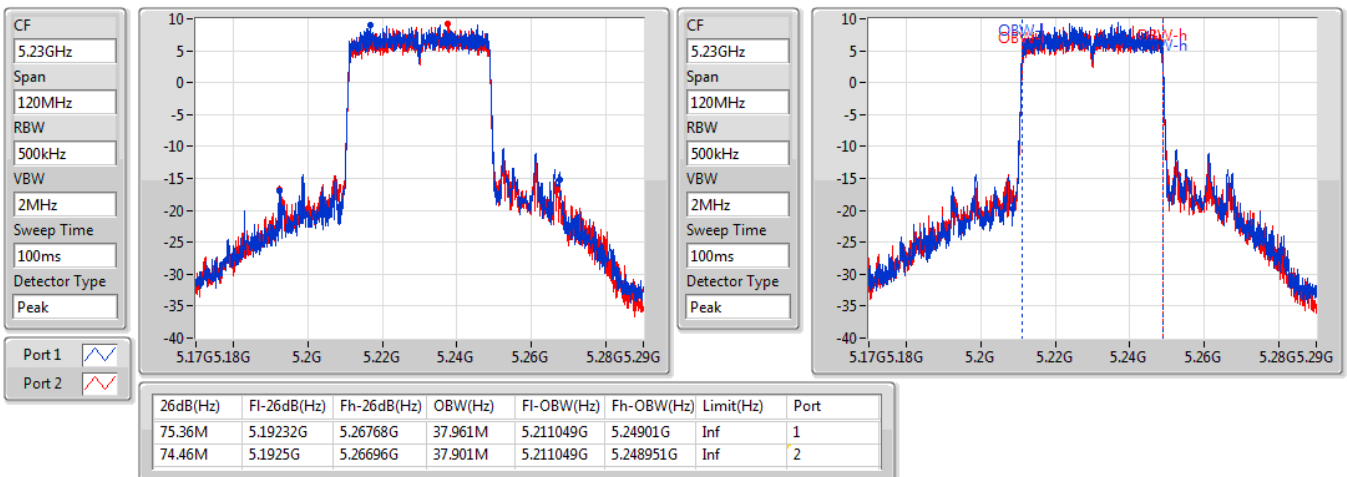


802.11ax HEW40_Nss1,(MCS0)_2TX

EBW

5755MHz

14/01/2021

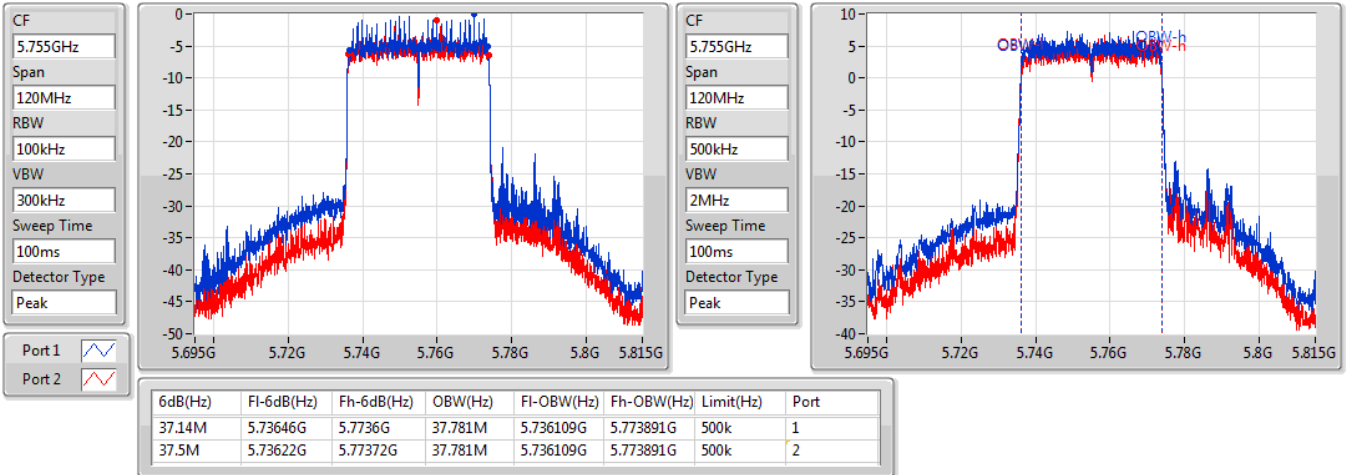


802.11ax HEW40_Nss1,(MCS0)_2TX

EBW

5795MHz

14/01/2021

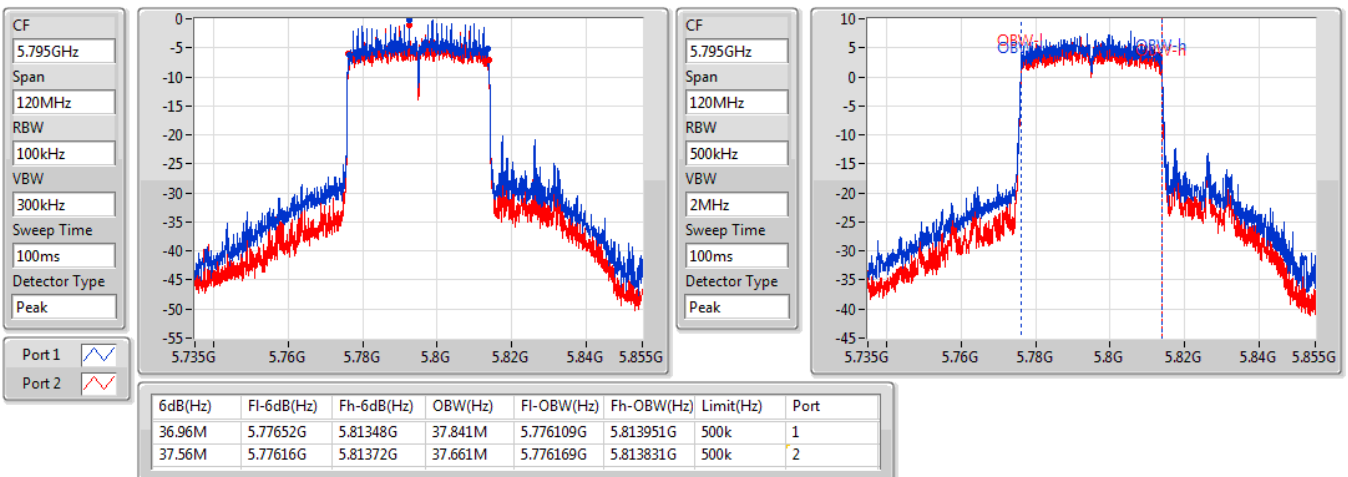


802.11ax HEW80_Nss1,(MCS0)_2TX

EBW

5210MHz

14/01/2021

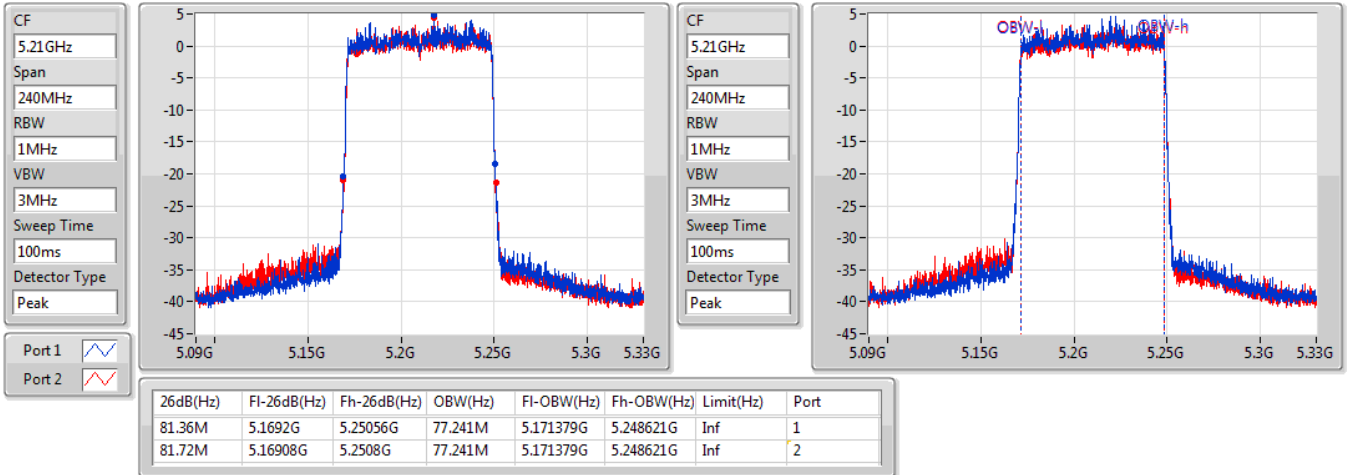


802.11ax HEW80_Nss1,(MCS0)_2TX

EBW

5775MHz

14/01/2021

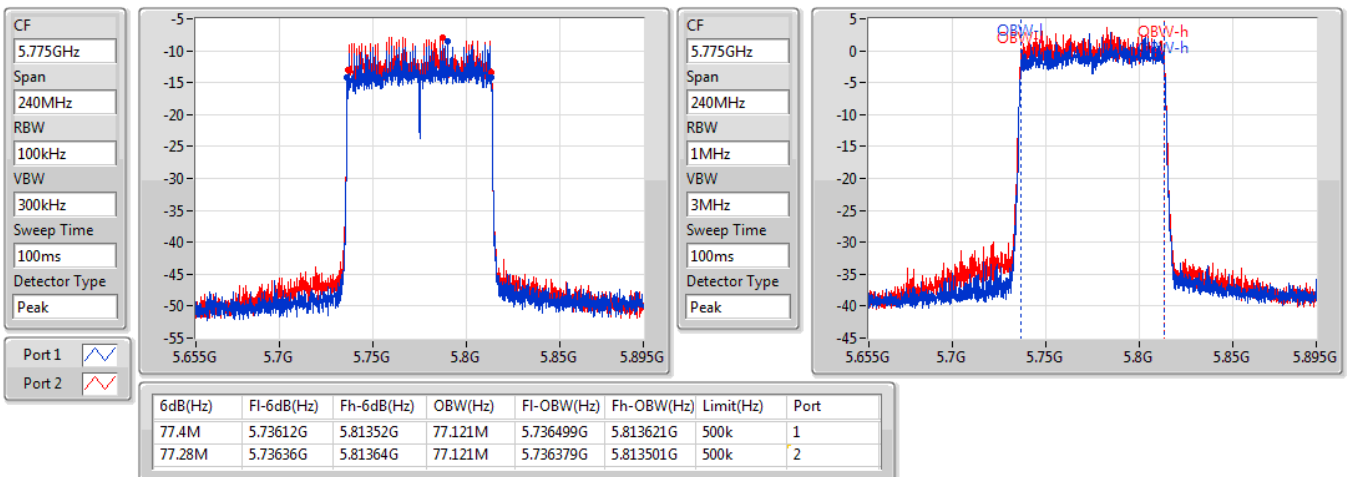



For non-beamforming mode:

Summary

Mode	Total Power (dBm)	Total Power (W)
5.15-5.25GHz	-	-
802.11a_Nss1,(6Mbps)_2TX	19.47	0.08851
802.11ax HEW20_Nss1,(MCS0)_2TX	19.66	0.09247
802.11ax HEW40_Nss1,(MCS0)_2TX	19.25	0.08414
802.11ax HEW80_Nss1,(MCS0)_2TX	13.70	0.02344
5.725-5.85GHz	-	-
802.11a_Nss1,(6Mbps)_2TX	17.37	0.05458
802.11ax HEW20_Nss1,(MCS0)_2TX	17.36	0.05445
802.11ax HEW40_Nss1,(MCS0)_2TX	17.30	0.05370
802.11ax HEW80_Nss1,(MCS0)_2TX	12.83	0.01919



Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Total Power (dBm)	Power Limit (dBm)
802.11a_Nss1,(6Mbps)_2TX	-	-	-	-	-	-
5180MHz	Pass	4.11	14.30	13.56	16.96	23.98
5200MHz	Pass	4.11	16.40	15.90	19.17	23.98
5240MHz	Pass	4.11	16.54	16.37	19.47	23.98
5745MHz	Pass	3.51	14.24	14.14	17.20	30.00
5785MHz	Pass	3.51	13.54	13.89	16.73	30.00
5825MHz	Pass	3.51	14.54	14.17	17.37	30.00
802.11ax HEW20_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5180MHz	Pass	4.11	13.83	13.38	16.62	23.98
5200MHz	Pass	4.11	15.47	15.13	18.31	23.98
5240MHz	Pass	4.11	16.87	16.41	19.66	23.98
5745MHz	Pass	3.51	14.50	14.16	17.34	30.00
5785MHz	Pass	3.51	14.29	14.00	17.16	30.00
5825MHz	Pass	3.51	14.49	14.20	17.36	30.00
802.11ax HEW40_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5190MHz	Pass	4.11	11.18	10.83	14.02	23.98
5230MHz	Pass	4.11	16.52	15.94	19.25	23.98
5755MHz	Pass	3.51	14.71	13.76	17.27	30.00
5795MHz	Pass	3.51	14.82	13.69	17.30	30.00
802.11ax HEW80_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5210MHz	Pass	4.11	10.78	10.60	13.70	23.98
5775MHz	Pass	3.51	9.21	10.35	12.83	30.00

DG = Directional Gain; **Port X** = Port X output power



**For beamforming mode:
Summary**

Mode	Total Power (dBm)	Total Power (W)
5.15-5.25GHz	-	-
802.11ax HEW20-BF_Nss1,(MCS0)_2TX	19.66	0.09247
802.11ax HEW40-BF_Nss1,(MCS0)_2TX	19.25	0.08414
802.11ax HEW80-BF_Nss1,(MCS0)_2TX	13.70	0.02344
5.725-5.85GHz	-	-
802.11ax HEW20-BF_Nss1,(MCS0)_2TX	17.36	0.05445
802.11ax HEW40-BF_Nss1,(MCS0)_2TX	17.30	0.05370
ax8,BF0_Nss1,(MCS0)_2TX	12.83	0.01919



Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Total Power (dBm)	Power Limit (dBm)
802.11ax HEW20-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5180MHz	Pass	7.12	13.83	13.38	16.62	22.86
5200MHz	Pass	7.12	15.47	15.13	18.31	22.86
5240MHz	Pass	7.12	16.87	16.41	19.66	22.86
5745MHz	Pass	6.52	14.5	14.16	17.34	29.48
5785MHz	Pass	6.52	14.29	14.00	17.16	29.48
5825MHz	Pass	6.52	14.49	14.20	17.36	29.48
802.11ax HEW40-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5190MHz	Pass	7.12	11.18	10.83	14.02	22.86
5230MHz	Pass	7.12	16.52	15.94	19.25	22.86
5755MHz	Pass	6.52	14.71	13.76	17.27	29.48
5795MHz	Pass	6.52	14.82	13.69	17.30	29.48
802.11ax HEW80-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5210MHz	Pass	7.12	10.78	10.60	13.70	22.86
5775MHz	Pass	6.52	9.21	10.35	12.83	29.48

DG = Directional Gain; **Port X** = Port X output power



Summary

Mode	PD (dBm/RBW)
5.15-5.25GHz	-
802.11a_Nss1,(6Mbps)_2TX	7.79
802.11ax HEW20_Nss1,(MCS0)_2TX	7.31
802.11ax HEW40_Nss1,(MCS0)_2TX	2.91
802.11ax HEW80_Nss1,(MCS0)_2TX	-5.81
5.725-5.85GHz	-
802.11a_Nss1,(6Mbps)_2TX	3.87
802.11ax HEW20_Nss1,(MCS0)_2TX	3.81
802.11ax HEW40_Nss1,(MCS0)_2TX	-0.87
802.11ax HEW80_Nss1,(MCS0)_2TX	-8.10




RBW = 500 kHz for 5.725-5.85GHz band / 1MHz for other band;









Result




Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
802.11a_Nss1,(6Mbps)_2TX	-	-	-	-	-	-
5180MHz	Pass	7.12	2.46	1.62	4.89	9.88
5200MHz	Pass	7.12	3.85	3.37	6.58	9.88
5240MHz	Pass	7.12	5.02	4.66	7.79	9.88
5720MHz Straddle 5.725-5.85GHz						
5745MHz	Pass	6.52	1.13	0.67	3.87	29.48
5785MHz	Pass	6.52	0.18	0.34	3.22	29.48
5825MHz	Pass	6.52	1.14	0.52	3.77	29.48
802.11ax HEW20_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5180MHz	Pass	7.12	1.49	1.09	4.22	9.88
5200MHz	Pass	7.12	2.97	2.48	5.60	9.88
5240MHz	Pass	7.12	4.61	4.45	7.31	9.88
5720MHz Straddle 5.725-5.85GHz						
5745MHz	Pass	6.52	0.94	0.71	3.81	29.48
5785MHz	Pass	6.52	0.94	0.18	3.47	29.48
5825MHz	Pass	6.52	0.64	0.37	3.36	29.48
802.11ax HEW40_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5190MHz	Pass	7.12	-5.36	-5.73	-2.72	9.88
5230MHz	Pass	7.12	0.23	-0.35	2.91	9.88
5710MHz Straddle 5.725-5.85GHz						
5755MHz	Pass	6.52	-3.40	-4.15	-0.87	29.48
5795MHz	Pass	6.52	-3.30	-4.45	-0.90	29.48
802.11ax HEW80_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5210MHz	Pass	7.12	-8.62	-8.82	-5.81	9.88
5690MHz Straddle 5.725-5.85GHz						
5775MHz	Pass	6.52	-11.46	-10.60	-8.10	29.48




DG = Directional Gain; RBW = 500 kHz for 5.725-5.85GHz band / 1MHz for other band;
 PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X power density;

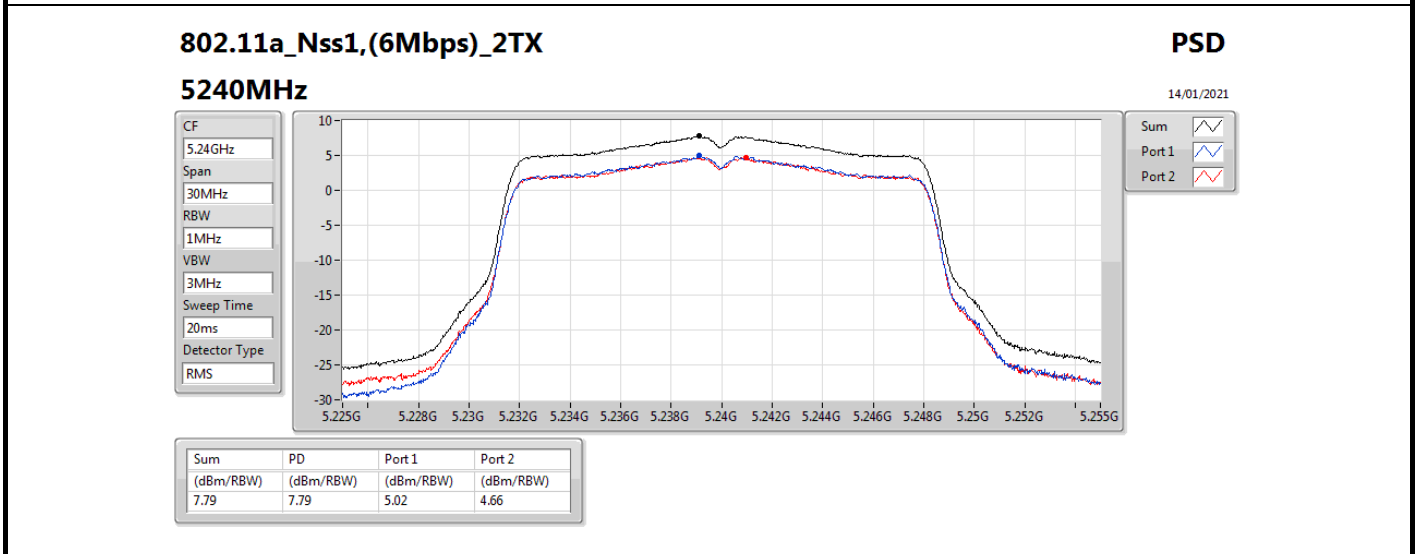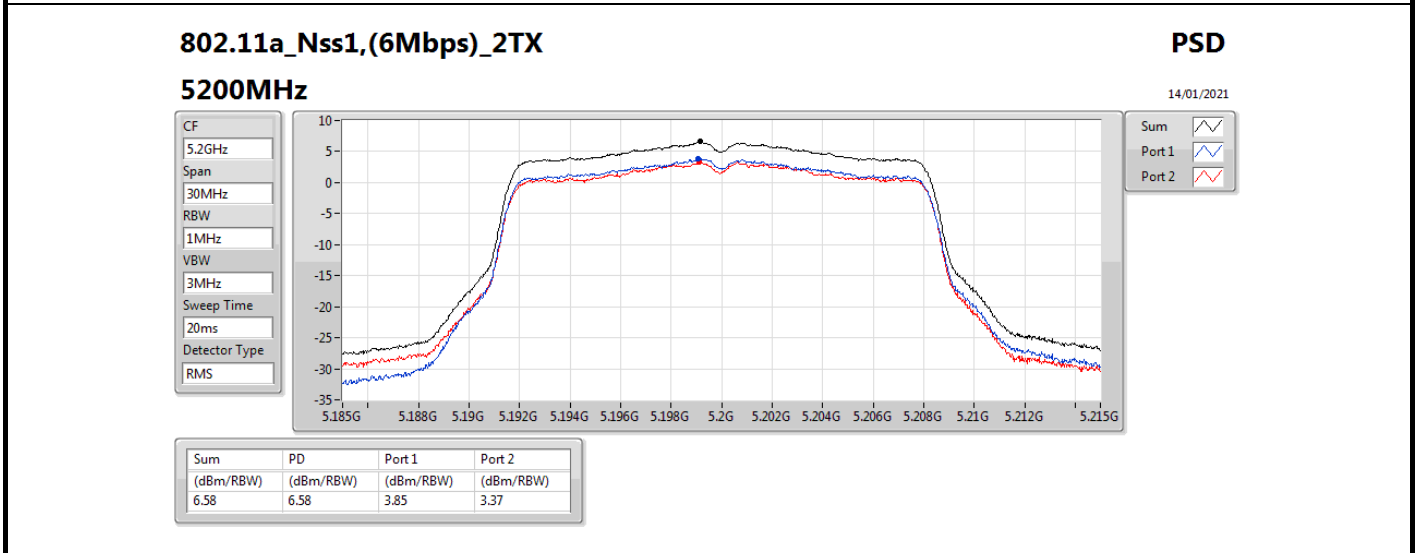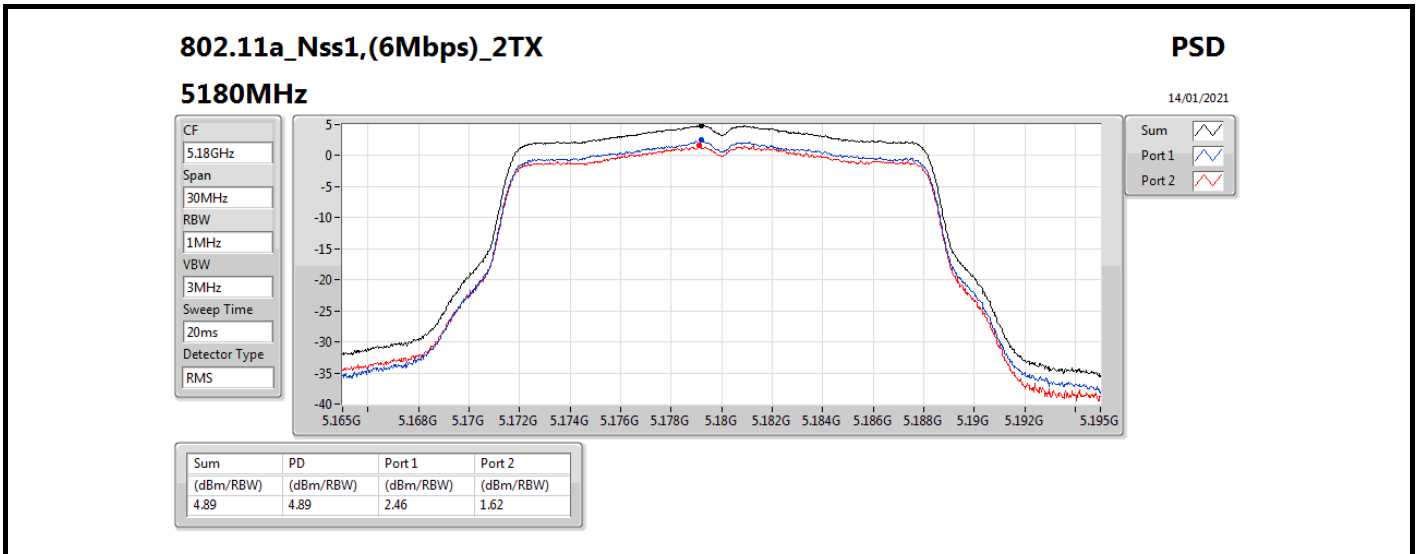

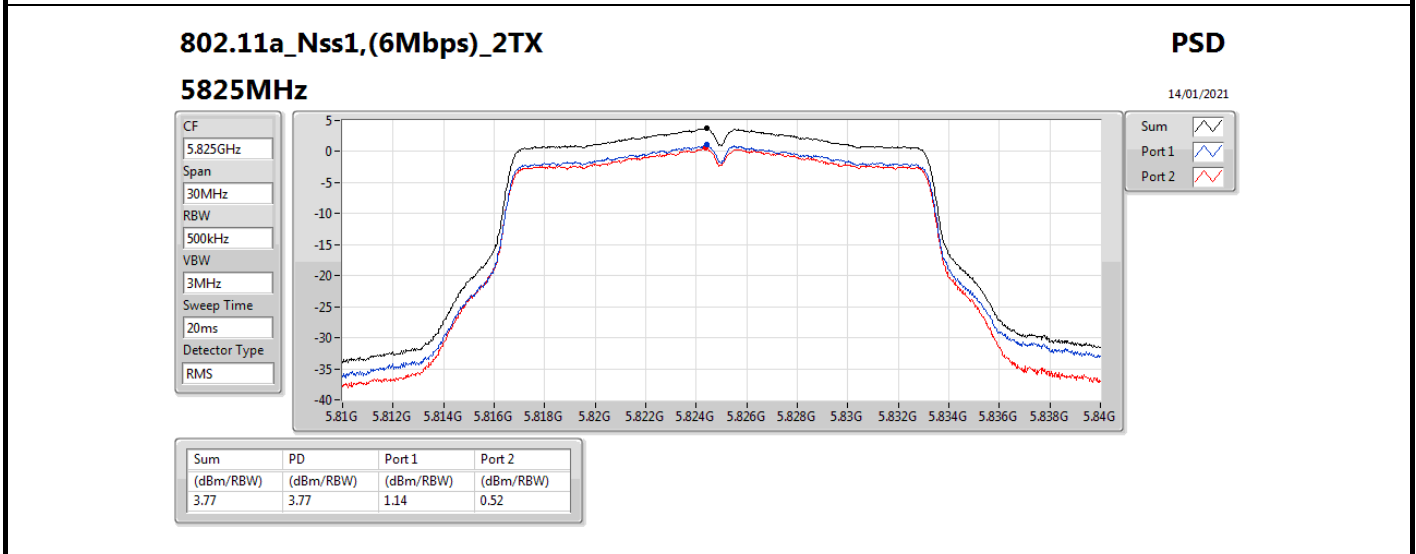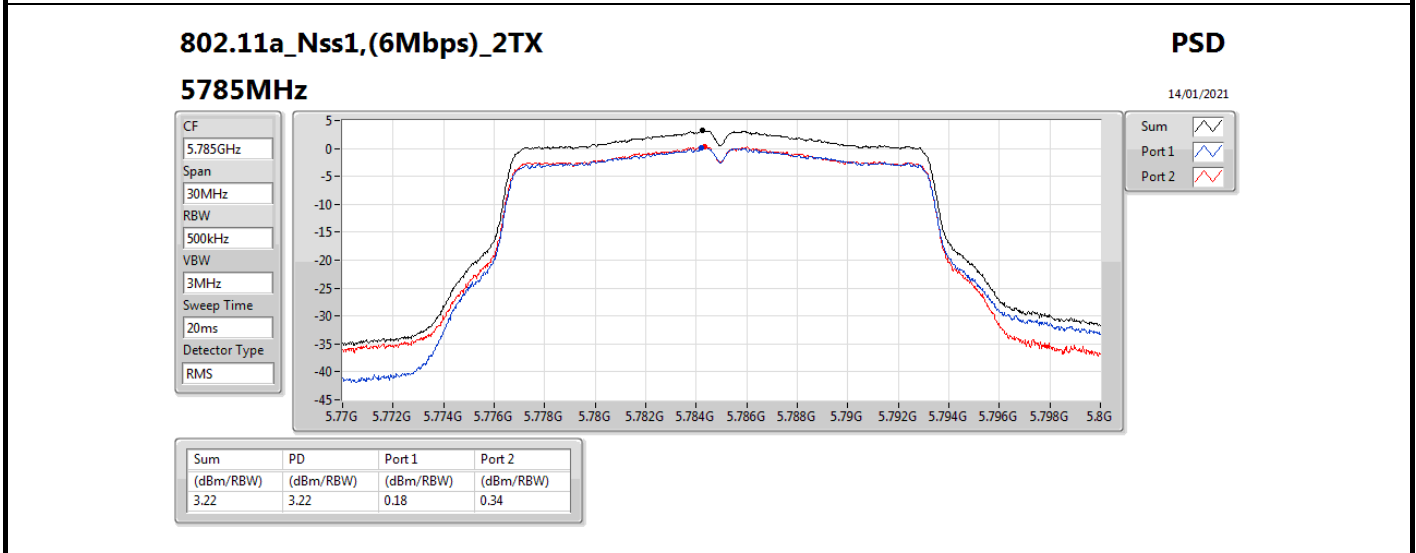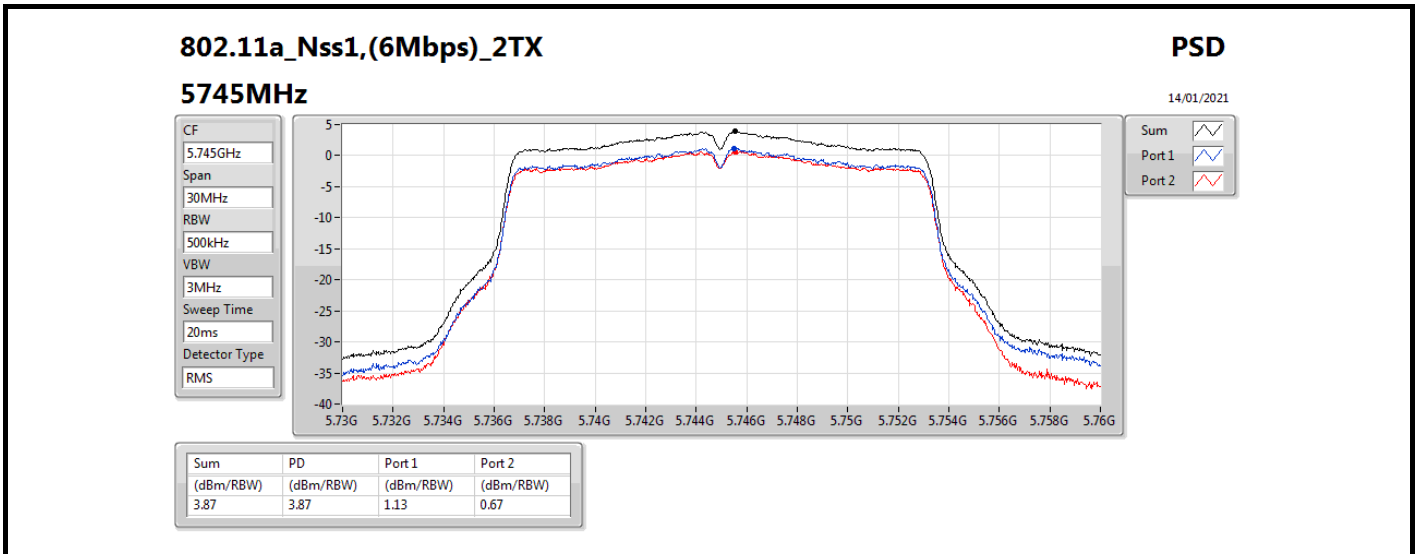

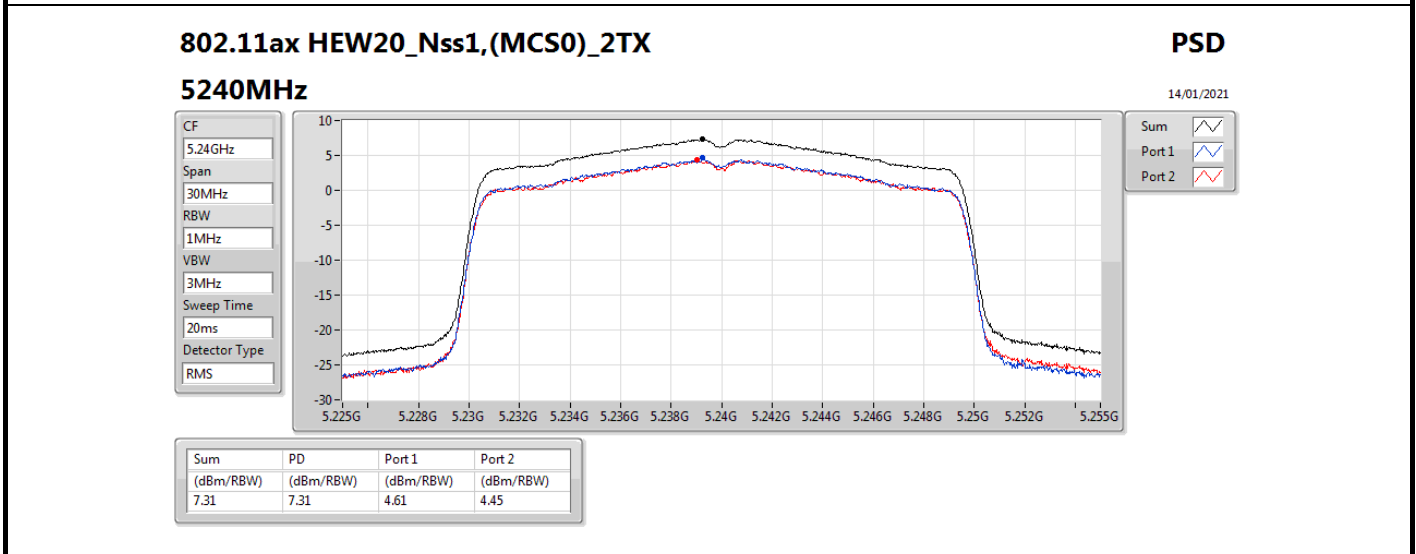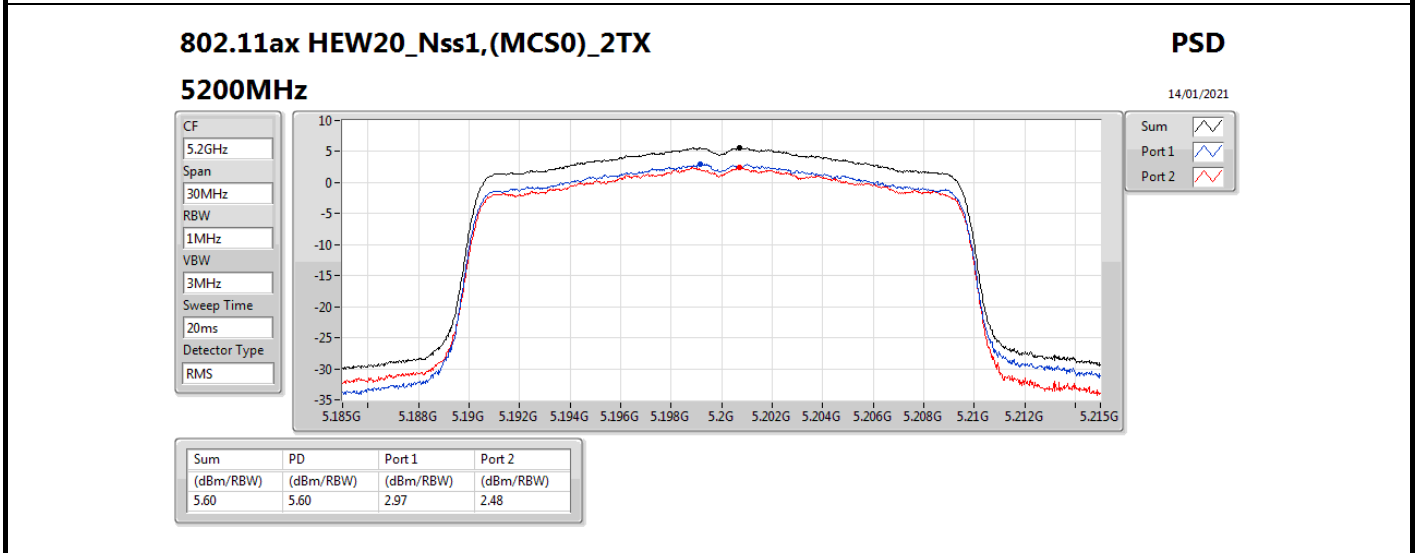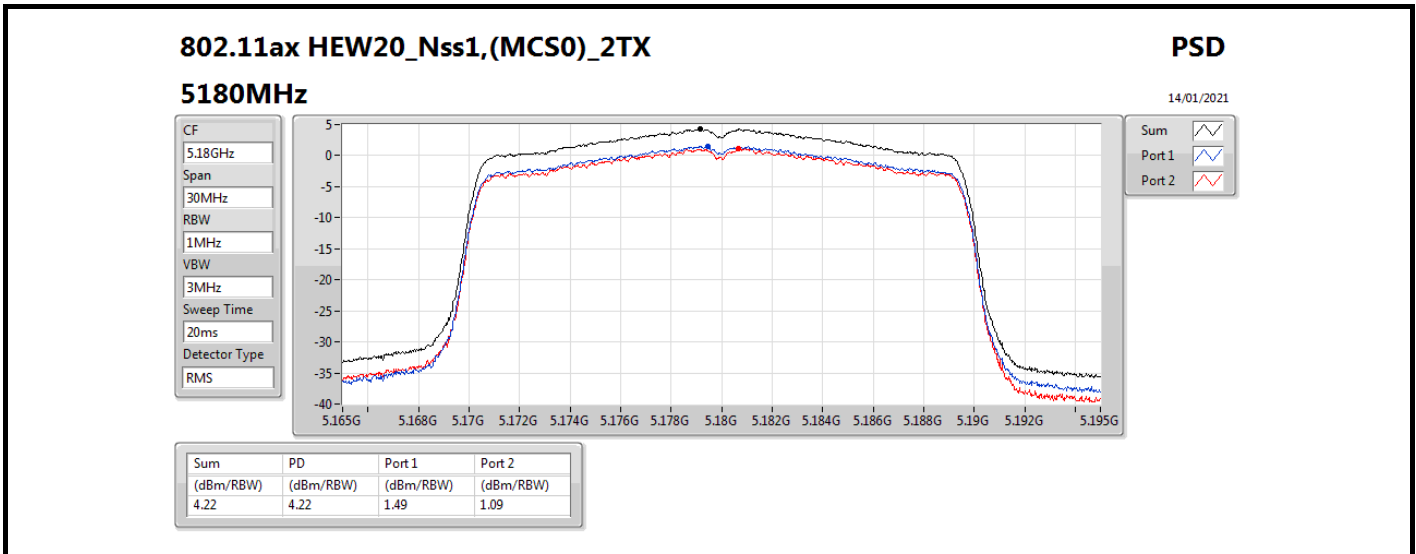

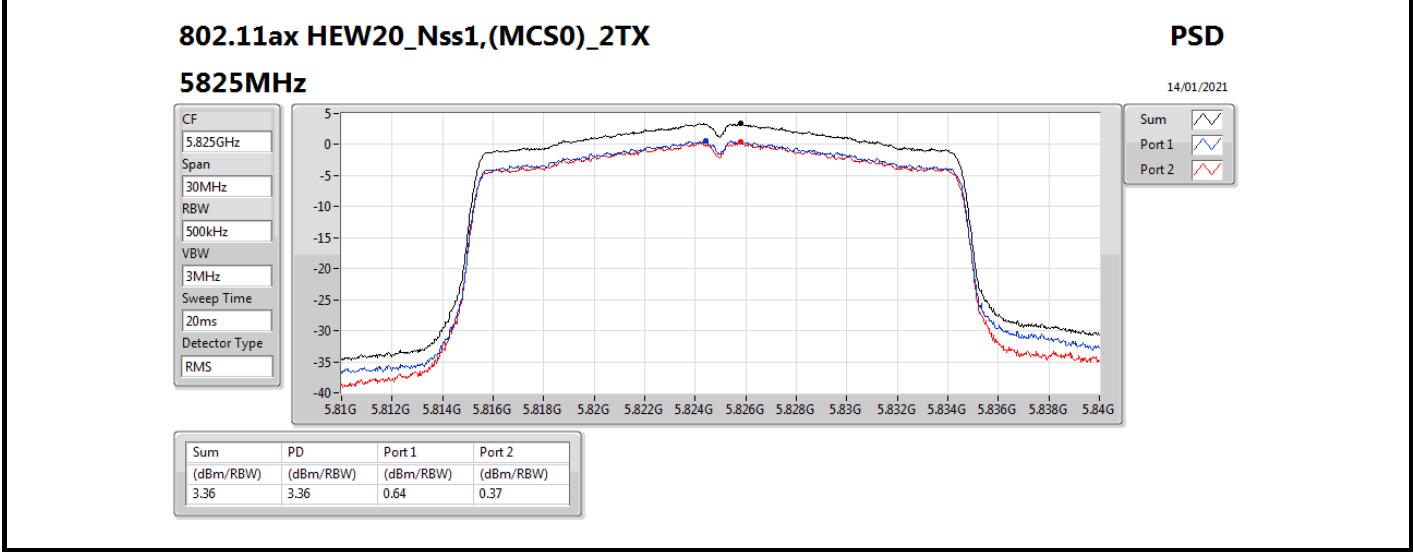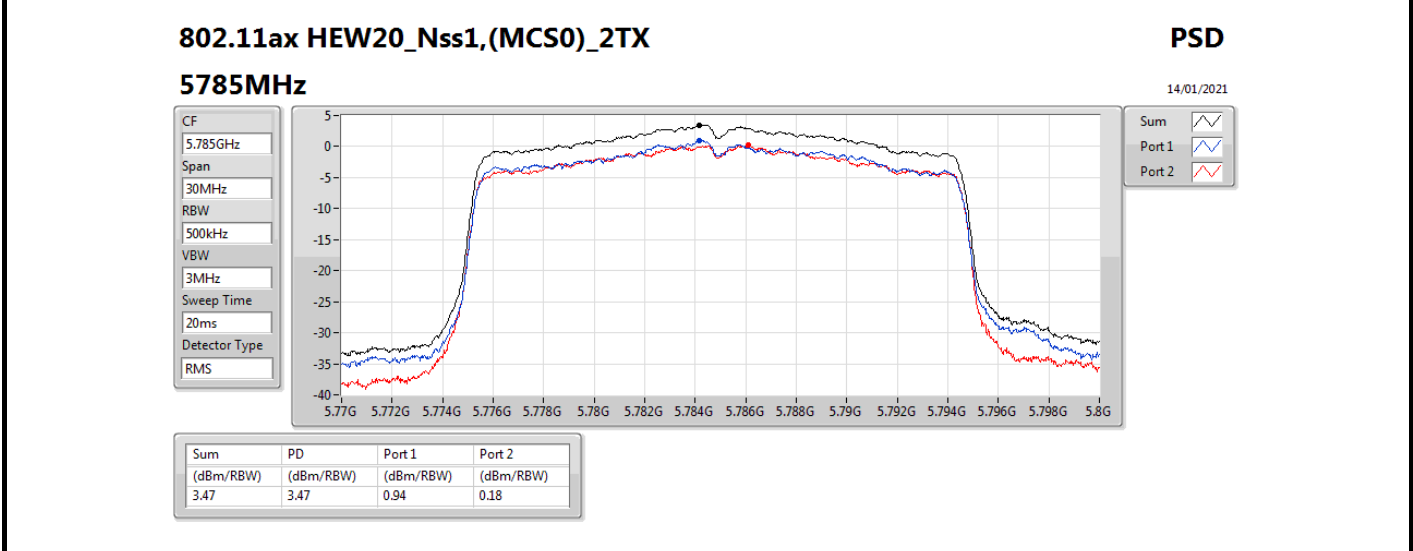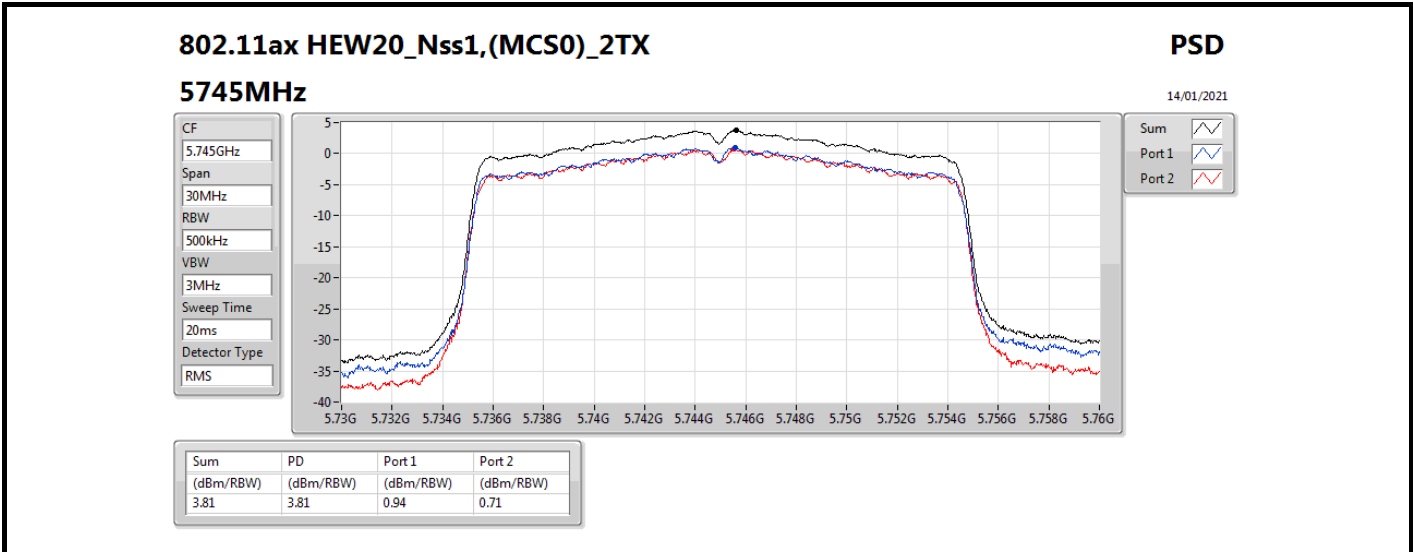

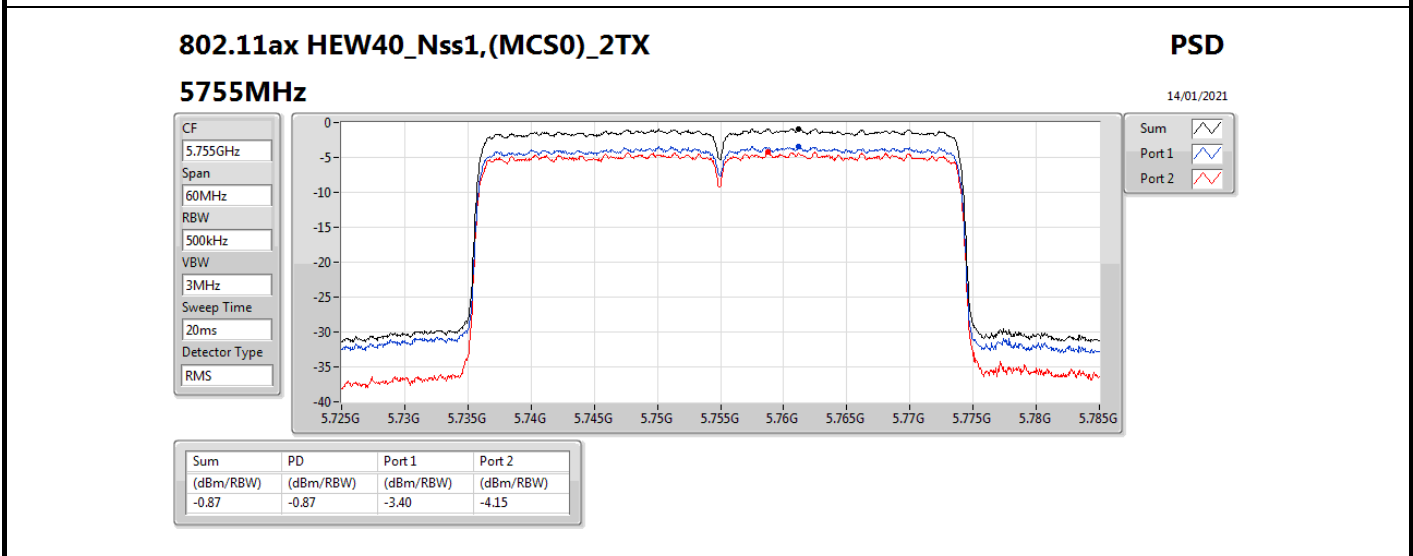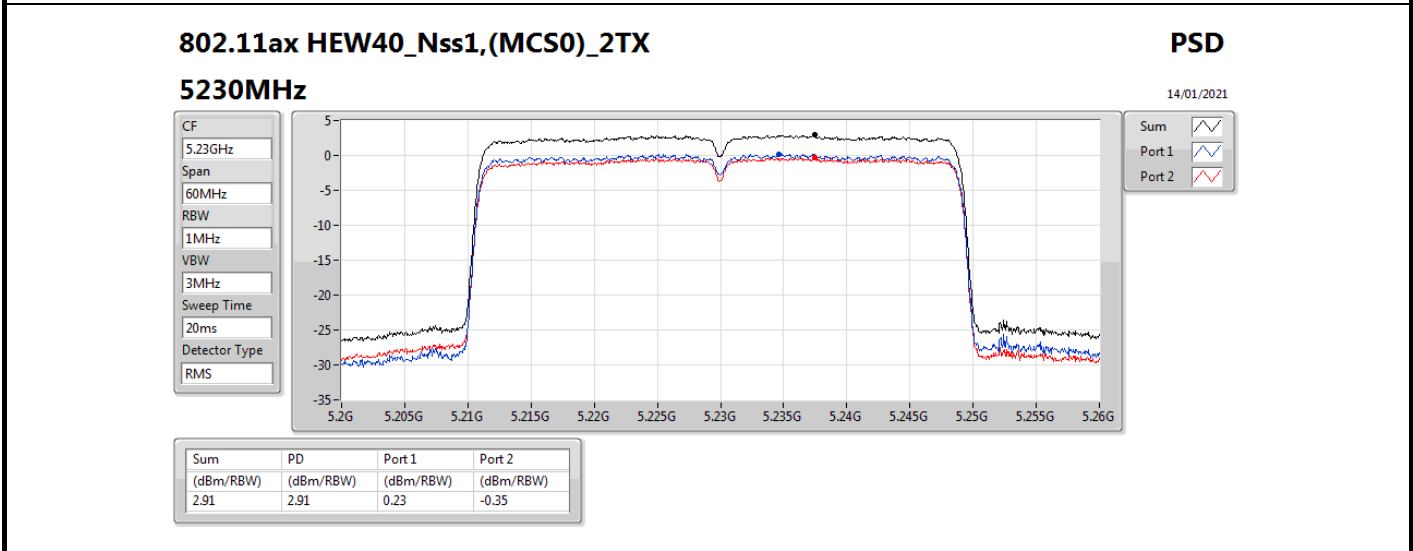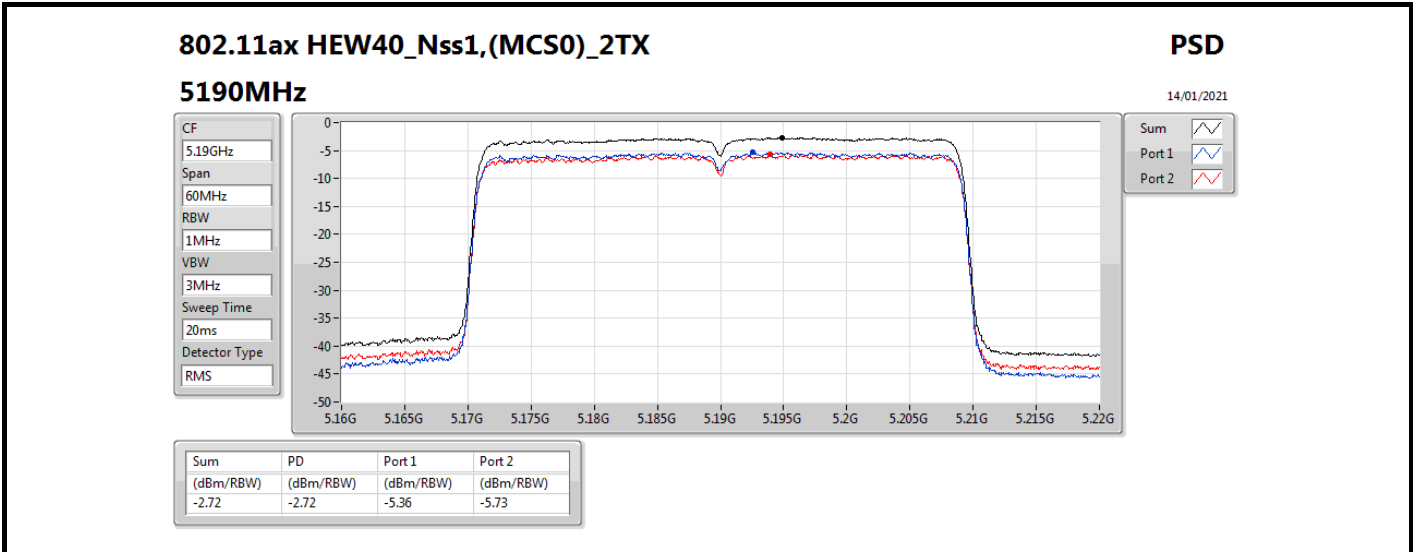


802.11ax HEW40_Nss1,(MCS0)_2TX

PSD

5795MHz

14/01/2021

CF
5.795GHz
Span
60MHz
RBW
500kHz
VBW
3MHz
Sweep Time
20ms
Detector Type
RMS

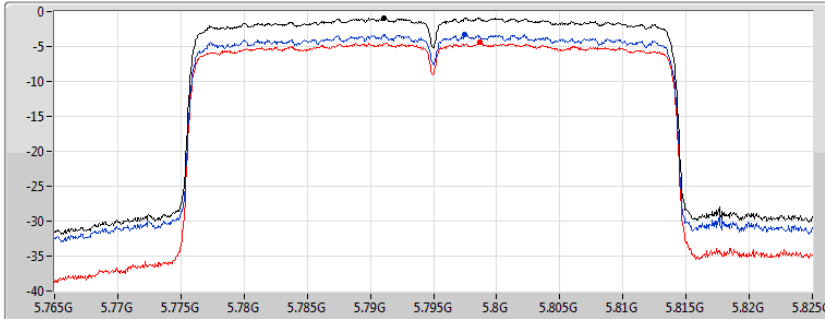

Sum
Port 1
Port 2

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-0.90	-0.90	-3.30	-4.45


802.11ax HEW80_Nss1,(MCS0)_2TX

PSD

5210MHz

14/01/2021

CF
5.21GHz
Span
120MHz
RBW
1MHz
VBW
3MHz
Sweep Time
20ms
Detector Type
RMS

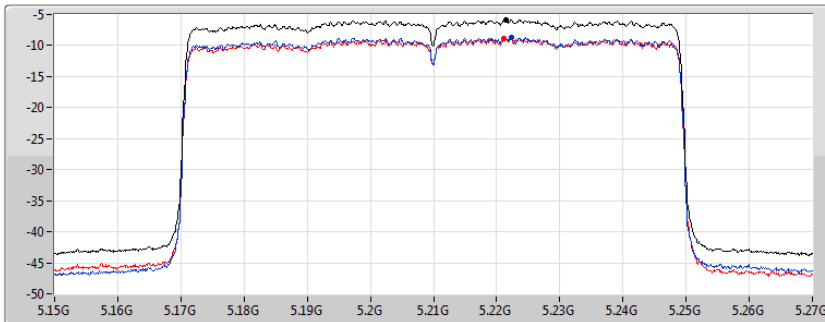

Sum
Port 1
Port 2

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-5.81	-5.81	-8.62	-8.82


802.11ax HEW80_Nss1,(MCS0)_2TX

PSD

5775MHz

14/01/2021

CF
5.775GHz
Span
120MHz
RBW
500kHz
VBW
3MHz
Sweep Time
20ms
Detector Type
RMS

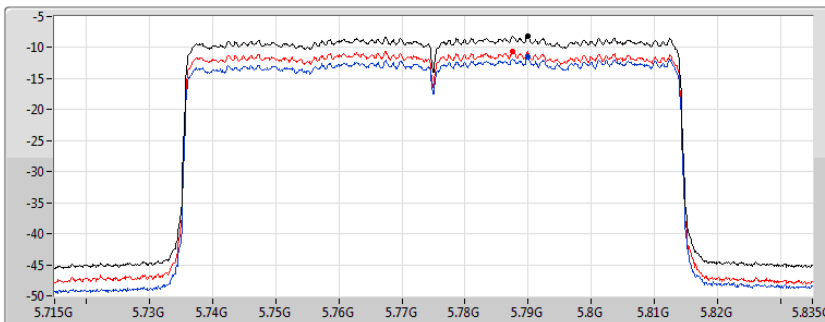

Sum
Port 1
Port 2

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-8.10	-8.10	-11.46	-10.60



Radiated Emission below 1GHz Result


Appendix E.1




Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Condition
Mode 1	Pass	PK	653.71M	42.37	46.00	-3.63	Vertical

Mode 1

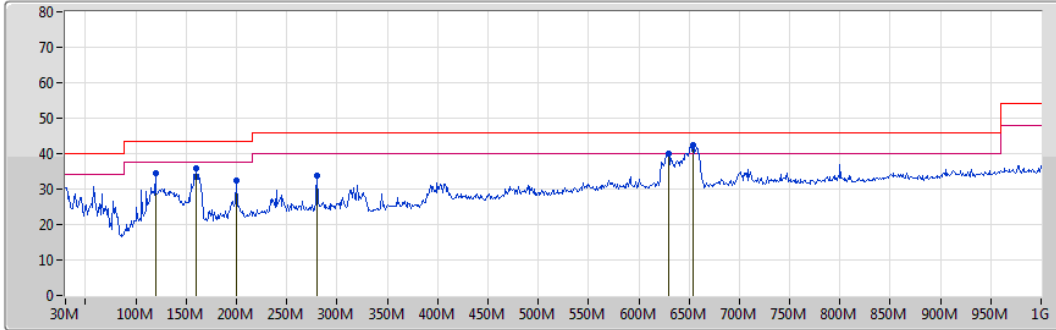07/01/2021




Lim.QP 
 QP 
 -6dB 

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV/m)	AF (dB/m)	CL (dB)	PA (dB)
PK	119.24M	34.46	43.50	-9.04	-12.02	3	Vertical	273	1.25	-	46.48	18.30	1.99	32.31
PK	159.98M	35.95	43.50	-7.55	-14.01	3	Vertical	3	1.00	-	49.96	15.97	2.30	32.28
PK	199.75M	32.28	43.50	-11.22	-14.36	3	Vertical	43	1.50	-	46.64	15.26	2.60	32.22
PK	280.26M	33.72	46.00	-12.28	-10.42	3	Vertical	0	1.00	-	44.14	18.75	3.02	32.19
PK	629.46M	40.04	46.00	-5.96	-1.80	3	Vertical	360	1.00	-	41.84	25.45	4.82	32.07
PK	653.71M	42.37	46.00	-3.63	-1.95	3	Vertical	172	1.50	"Worst"	44.32	25.24	4.91	32.10



Mode 1

07/01/2021

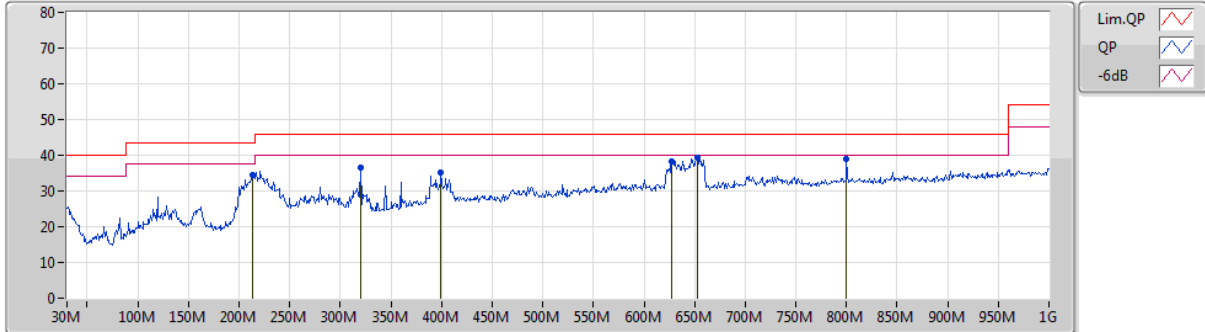

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV/m)	AF (dB/m)	CL (dB)	PA (dB)
PK	213.33M	34.54	43.50	-8.96	-14.60	3	Horizontal	161	1.25	-	49.14	14.93	2.68	32.21
PK	320.03M	36.52	46.00	-9.48	-9.33	3	Horizontal	200	1.00	-	45.85	19.56	3.26	32.15
PK	399.57M	35.10	46.00	-10.90	-6.47	3	Horizontal	174	1.00	-	41.57	21.88	3.80	32.15
PK	627.52M	38.37	46.00	-7.63	-1.82	3	Horizontal	181	1.00	-	40.19	25.44	4.81	32.07
PK	652.74M	39.31	46.00	-6.69	-1.95	3	Horizontal	173	1.00	"Worst"	41.26	25.24	4.91	32.10
PK	800.18M	39.11	46.00	-6.89	-0.33	3	Horizontal	130	2.00	-	39.44	25.99	5.50	31.82




Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
5.15-5.25GHz	-	-	-	-	-	-	-	-	-	-	-
802.11ax HEW20_Nss1,(MCS0)_2TX	Pass	AV	5.1484G	53.95	54.00	-0.05	3	Horizontal	353	1.00	-

802.11a_Nss1,(6Mbps)_2TX

14/01/2021

5180MHz_TX

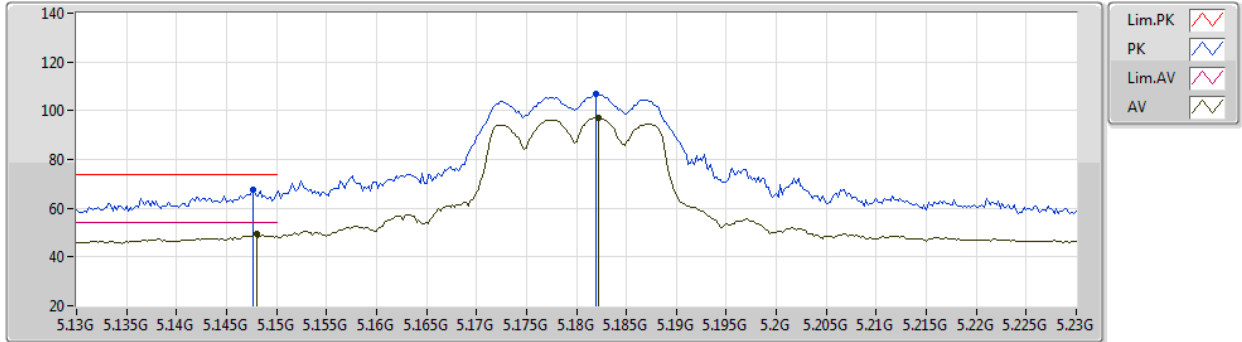


EUT Z_2TX
Setting 53
03-F-L-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.1476G	67.50	74.00	-6.50	62.50	3	Vertical	81	2.96	-	33.90	6.43	35.33
AV	5.148G	49.24	54.00	-4.76	44.24	3	Vertical	81	2.96	-	33.90	6.43	35.33
PK	5.182G	107.01	Inf	-Inf	101.99	3	Vertical	81	2.96	-	33.90	6.41	35.29
AV	5.1822G	97.28	Inf	-Inf	92.26	3	Vertical	81	2.96	-	33.90	6.41	35.29

802.11a_Nss1,(6Mbps)_2TX

14/01/2021

5180MHz_TX

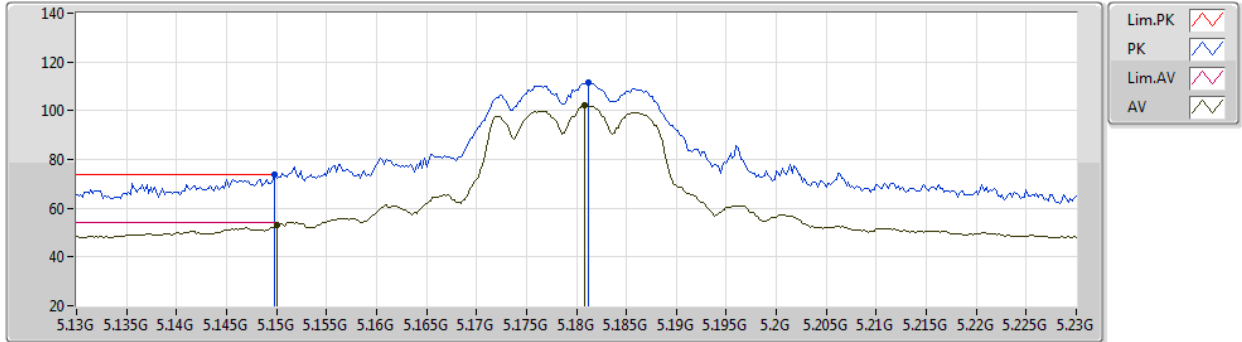


EUT_Z_2TX
Setting 53
03-F-L-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.1498G	73.85	74.00	-0.15	68.85	3	Horizontal	360	1.00	-	33.90	6.43	35.33
AV	5.15G	52.96	54.00	-1.04	47.96	3	Horizontal	360	1.00	-	33.90	6.43	35.33
PK	5.1812G	111.57	Inf	-Inf	106.55	3	Horizontal	360	1.00	-	33.90	6.41	35.29
AV	5.1808G	102.28	Inf	-Inf	97.26	3	Horizontal	360	1.00	-	33.90	6.41	35.29

802.11a_Nss1,(6Mbps)_2TX

14/01/2021

5180MHz_TX

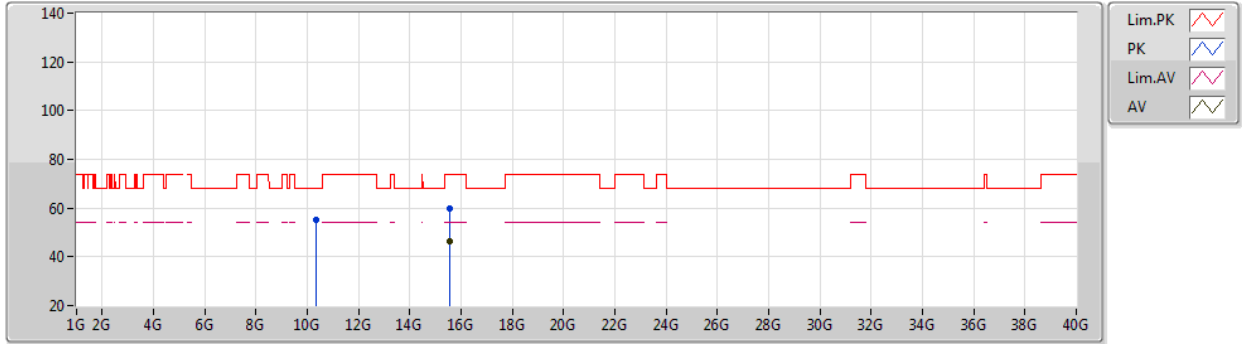


EUT Z_2TX
Setting 53
03-F-L-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	10.351G	55.09	68.20	-13.11	42.33	3	Vertical	143	2.94	-	38.05	9.67	34.96
PK	15.54988G	60.07	74.00	-13.93	45.33	3	Vertical	116	1.17	-	38.00	11.77	35.03
AV	15.54384G	46.38	54.00	-7.62	31.63	3	Vertical	116	1.17	-	38.01	11.77	35.03

802.11a_Nss1,(6Mbps)_2TX

14/01/2021

5180MHz_TX

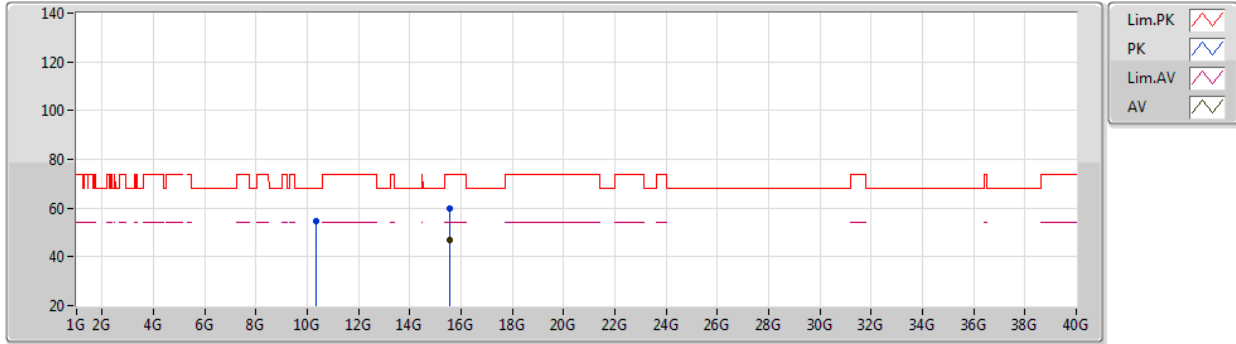


EUT Z_2TX
Setting 53
03-F-L-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	10.35616G	54.74	68.20	-13.46	41.99	3	Horizontal	60	1.80	-	38.04	9.67	34.96
PK	15.54808G	59.67	74.00	-14.33	44.93	3	Horizontal	285	2.48	-	38.00	11.77	35.03
AV	15.54808G	46.82	54.00	-7.18	32.08	3	Horizontal	285	2.48	-	38.00	11.77	35.03

802.11a_Nss1,(6Mbps)_2TX

14/01/2021

5200MHz_TX

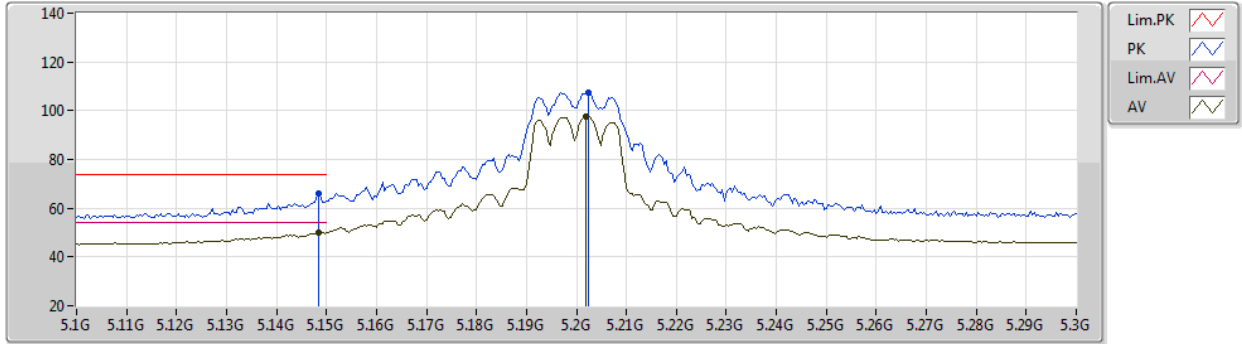


EUT Z_2TX
Setting 62
03-F-L-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.1484G	66.22	74.00	-7.78	61.22	3	Vertical	71	2.80	-	33.90	6.43	35.33
AV	5.1484G	50.13	54.00	-3.87	45.13	3	Vertical	71	2.80	-	33.90	6.43	35.33
PK	5.2024G	107.42	Inf	-Inf	102.39	3	Vertical	71	2.80	-	33.90	6.40	35.27
AV	5.202G	97.83	Inf	-Inf	92.80	3	Vertical	71	2.80	-	33.90	6.40	35.27

802.11a_Nss1,(6Mbps)_2TX

14/01/2021

5200MHz_TX

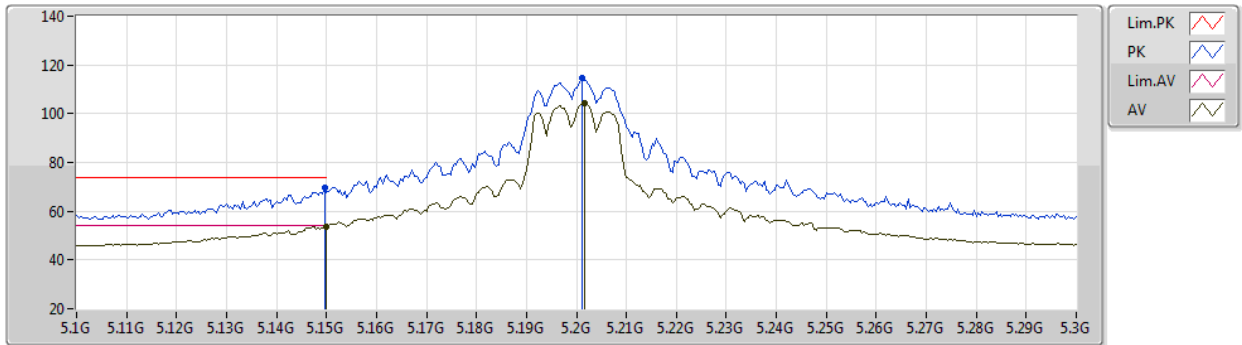

EUT Z_2TX
Setting 62
03-F-L-2-10


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.1496G	69.66	74.00	-4.34	64.66	3	Horizontal	355	2.77	-	33.90	6.43	35.33
AV	5.15G	53.82	54.00	-0.18	48.82	3	Horizontal	355	2.77	-	33.90	6.43	35.33
PK	5.2012G	114.47	Inf	-Inf	109.44	3	Horizontal	355	2.77	-	33.90	6.40	35.27
AV	5.2016G	104.36	Inf	-Inf	99.33	3	Horizontal	355	2.77	-	33.90	6.40	35.27



802.11a_Nss1,(6Mbps)_2TX

14/01/2021

5200MHz_TX

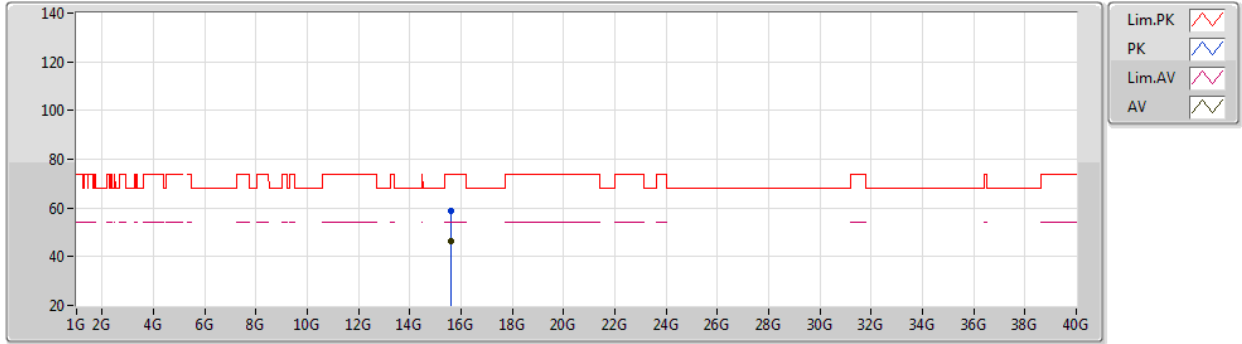


EUT Z_2TX
Setting 62
03-F-L-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	15.6096G	59.00	74.00	-15.00	44.39	3	Vertical	359	1.08	-	37.88	11.80	35.07
AV	15.60161G	46.61	54.00	-7.39	31.98	3	Vertical	359	1.08	-	37.90	11.80	35.07

802.11a_Nss1,(6Mbps)_2TX

14/01/2021

5200MHz_TX

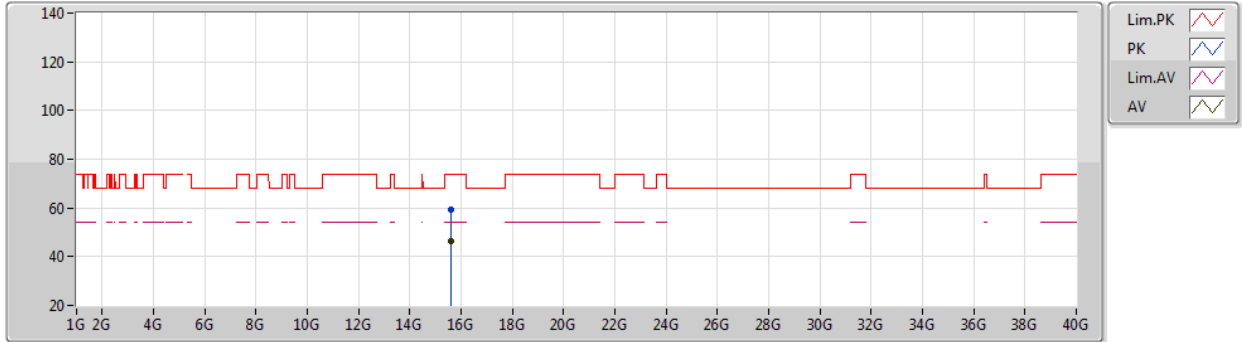


EUT Z_2TX
Setting 62
03-F-L-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	15.6009G	59.09	74.00	-14.91	44.45	3	Horizontal	339	1.38	-	37.90	11.80	35.06
AV	15.59836G	46.52	54.00	-7.48	31.88	3	Horizontal	339	1.38	-	37.90	11.80	35.06

802.11a_Nss1,(6Mbps)_2TX

14/01/2021

5240MHz_TX

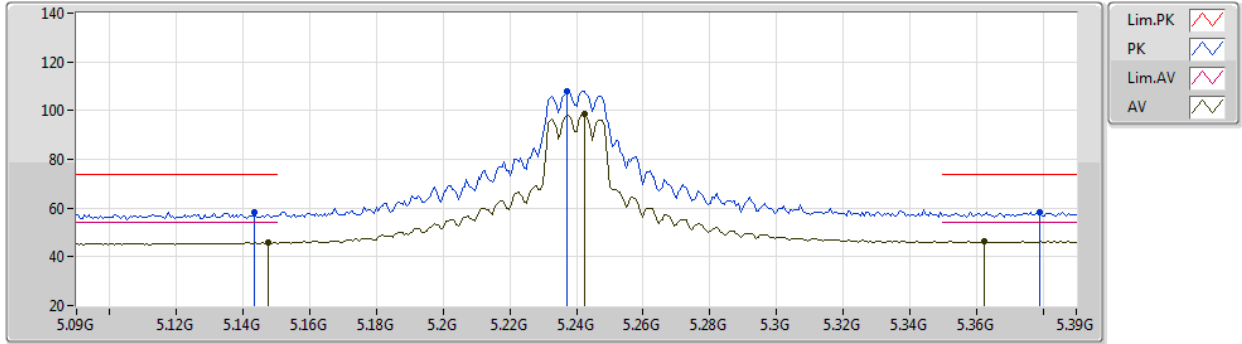


EUT_Z_2TX
Setting Default
03-F-L-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.1434G	58.22	74.00	-15.78	53.23	3	Vertical	70	2.73	-	33.90	6.43	35.34
AV	5.1476G	45.82	54.00	-8.18	40.82	3	Vertical	70	2.73	-	33.90	6.43	35.33
PK	5.237G	108.06	Inf	-Inf	102.90	3	Vertical	70	2.73	-	33.97	6.42	35.23
AV	5.2424G	98.87	Inf	-Inf	93.70	3	Vertical	70	2.73	-	33.98	6.42	35.23
PK	5.3792G	58.39	74.00	-15.61	52.64	3	Vertical	70	2.73	-	34.34	6.49	35.08
AV	5.3624G	46.22	54.00	-7.78	40.46	3	Vertical	70	2.73	-	34.38	6.48	35.10

802.11a_Nss1,(6Mbps)_2TX

14/01/2021

5240MHz_TX

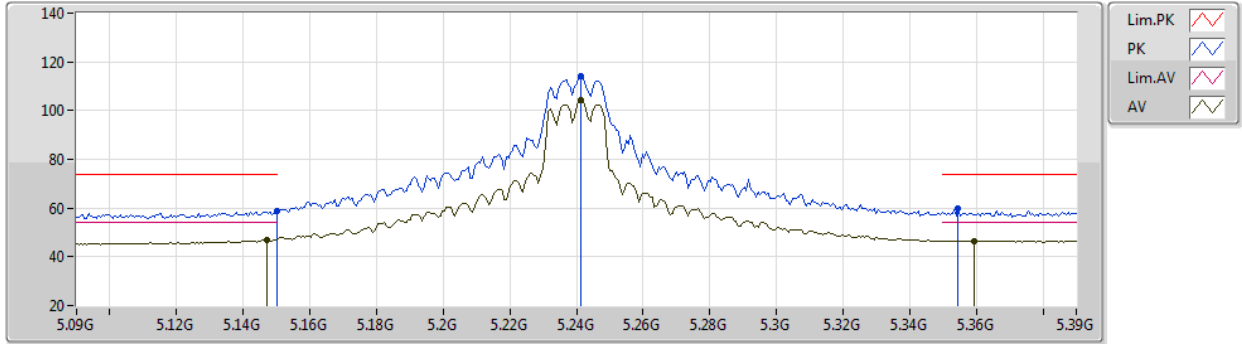


EUT Z_2TX
Setting Default
03-F-L-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.15G	58.55	74.00	-15.45	53.55	3	Horizontal	357	1.04	-	33.90	6.43	35.33
AV	5.147G	46.88	54.00	-7.12	41.88	3	Horizontal	357	1.04	-	33.90	6.43	35.33
PK	5.2412G	113.96	Inf	-Inf	108.79	3	Horizontal	357	1.04	-	33.98	6.42	35.23
AV	5.2412G	104.20	Inf	-Inf	99.03	3	Horizontal	357	1.04	-	33.98	6.42	35.23
PK	5.3546G	59.59	74.00	-14.41	53.83	3	Horizontal	357	1.04	-	34.39	6.48	35.11
AV	5.3594G	46.63	54.00	-7.37	40.87	3	Horizontal	357	1.04	-	34.38	6.48	35.10

802.11a_Nss1,(6Mbps)_2TX

14/01/2021

5240MHz_TX

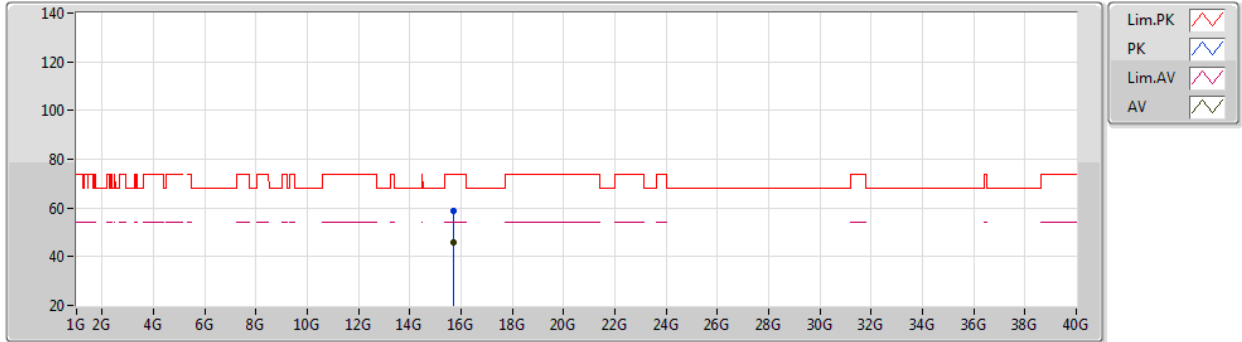


EUT Z_2TX
Setting Default
03-F-L-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	15.71839G	58.96	74.00	-15.04	44.61	3	Vertical	296	1.19	-	37.63	11.86	35.14
AV	15.71752G	45.82	54.00	-8.18	31.47	3	Vertical	296	1.19	-	37.63	11.86	35.14

802.11a_Nss1,(6Mbps)_2TX

14/01/2021

5240MHz_TX

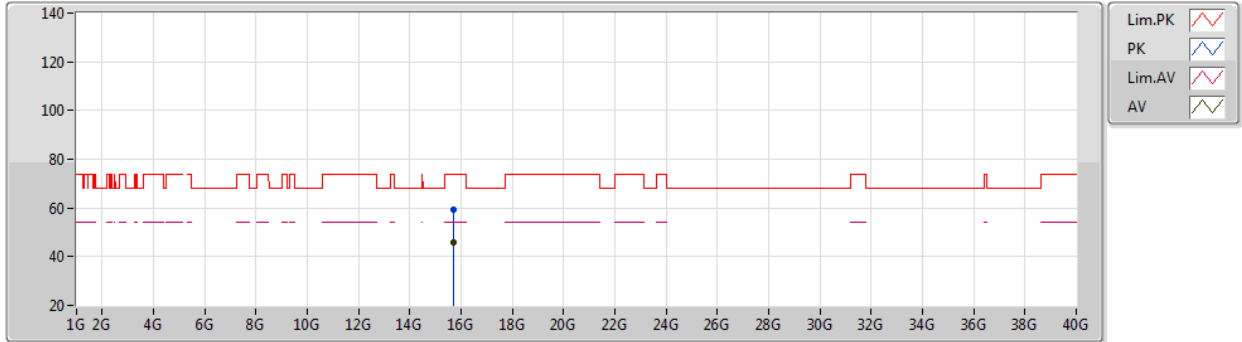

EUT Z_2TX
Setting Default
03-F-L-2


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	15.72023G	59.52	74.00	-14.48	45.18	3	Horizontal	94	2.74	-	37.62	11.86	35.14
AV	15.71968G	45.78	54.00	-8.22	31.44	3	Horizontal	94	2.74	-	37.62	11.86	35.14



802.11a_Nss1,(6Mbps)_2TX

14/01/2021

5745MHz_TX

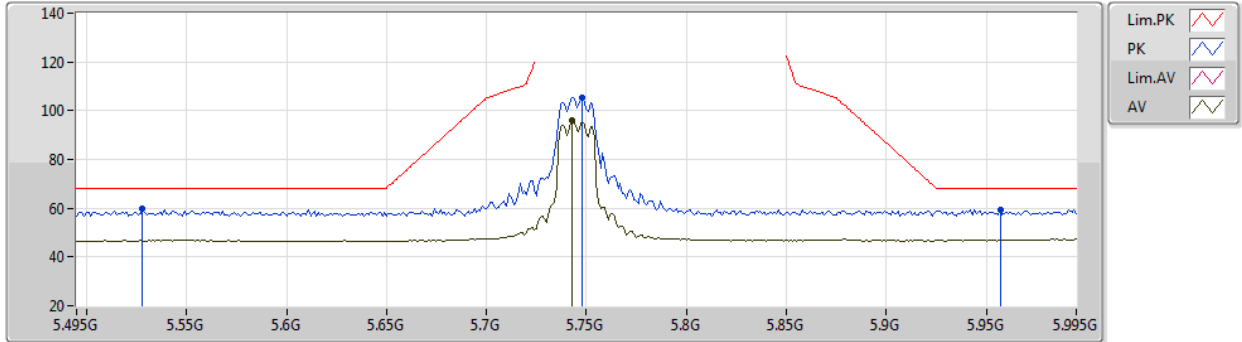

EUT_Z_2TX
Setting Default
03-F-L-2-10


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.528G	59.61	68.20	-8.59	53.41	3	Vertical	32	2.83	-	34.46	6.69	34.95
PK	5.748G	105.33	Inf	-Inf	99.20	3	Vertical	32	2.83	-	34.20	6.87	34.94
AV	5.743G	95.96	Inf	-Inf	89.83	3	Vertical	32	2.83	-	34.20	6.87	34.94
PK	5.957G	59.47	68.20	-8.73	52.80	3	Vertical	32	2.83	-	34.61	6.98	34.92



802.11a_Nss1,(6Mbps)_2TX

14/01/2021

5745MHz_TX

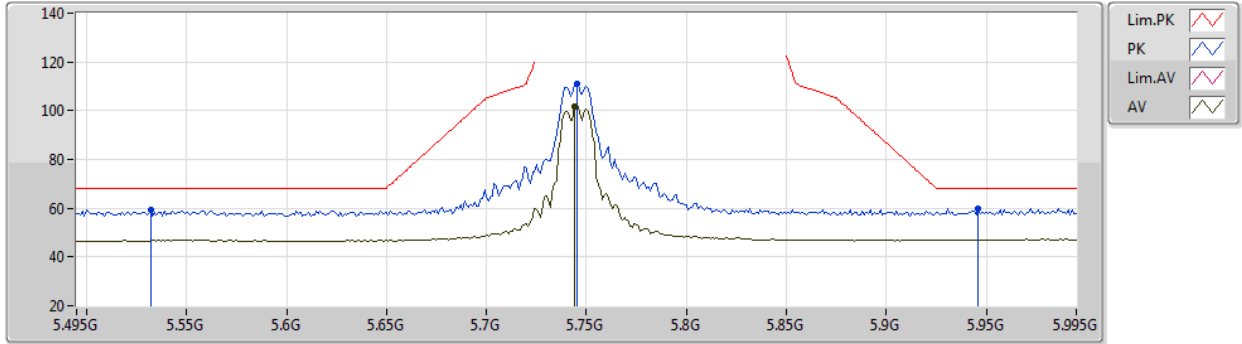


EUT_Z_2TX
Setting Default
03-F-L-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.532G	59.12	68.20	-9.08	52.91	3	Horizontal	169	2.70	-	34.46	6.70	34.95
PK	5.745G	111.00	Inf	-Inf	104.87	3	Horizontal	169	2.70	-	34.20	6.87	34.94
AV	5.744G	101.98	Inf	-Inf	95.85	3	Horizontal	169	2.70	-	34.20	6.87	34.94
PK	5.946G	60.01	68.20	-8.19	53.38	3	Horizontal	169	2.70	-	34.58	6.97	34.92

802.11a_Nss1,(6Mbps)_2TX

14/01/2021

5745MHz_TX

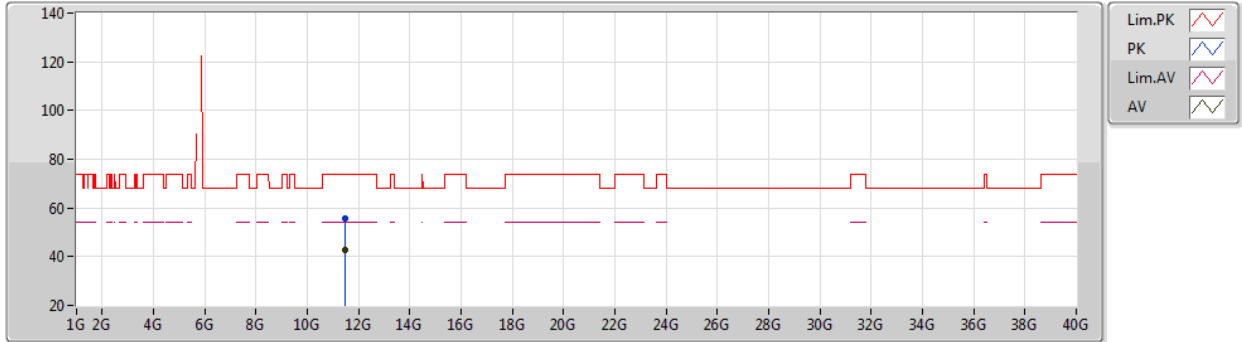


EUT Z_2TX
Setting Default
03-F-L-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	11.48833G	55.78	74.00	-18.22	41.55	3	Vertical	172	2.39	-	38.98	9.90	34.65
AV	11.48849G	42.90	54.00	-11.10	28.67	3	Vertical	172	2.39	-	38.98	9.90	34.65

802.11a_Nss1,(6Mbps)_2TX

14/01/2021

5745MHz_TX

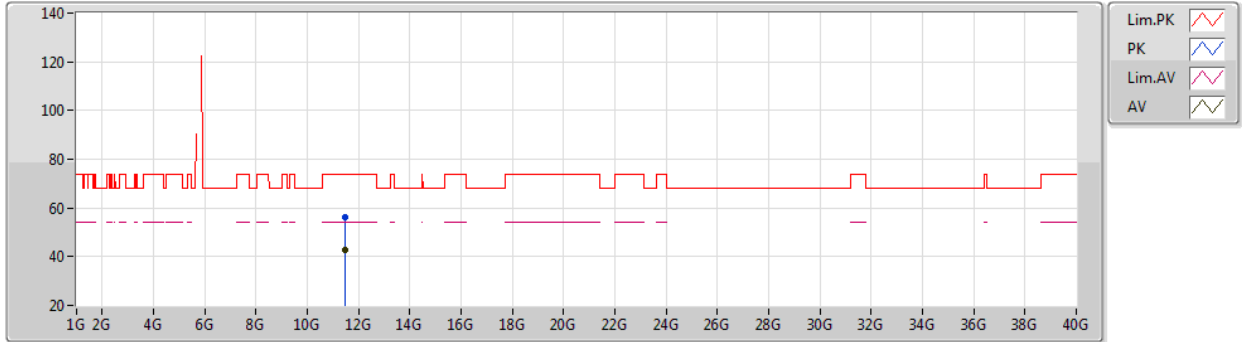


EUT Z_2TX
Setting Default
03-F-L-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	11.4883G	56.14	74.00	-17.86	41.91	3	Horizontal	313	2.49	-	38.98	9.90	34.65
AV	11.49096G	42.82	54.00	-11.18	28.59	3	Horizontal	313	2.49	-	38.98	9.90	34.65

802.11a_Nss1,(6Mbps)_2TX

14/01/2021

5785MHz_TX

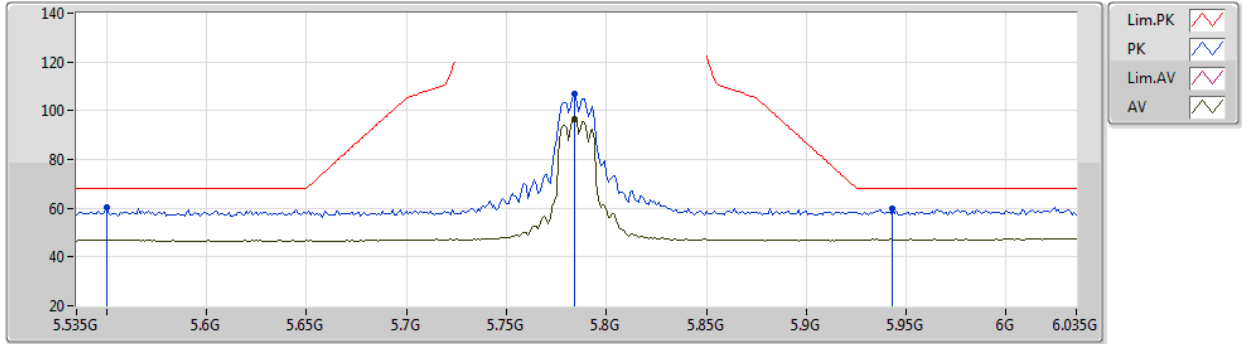

EUT_Z_2TX
Setting Default
03-F-L-2-10


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.55G	60.54	68.20	-7.66	54.27	3	Vertical	24	2.93	-	34.50	6.72	34.95
PK	5.784G	106.78	Inf	-Inf	100.62	3	Vertical	24	2.93	-	34.20	6.89	34.93
AV	5.784G	96.72	Inf	-Inf	90.56	3	Vertical	24	2.93	-	34.20	6.89	34.93
PK	5.943G	59.74	68.20	-8.46	53.12	3	Vertical	24	2.93	-	34.57	6.97	34.92



802.11a_Nss1,(6Mbps)_2TX

14/01/2021

5785MHz_TX

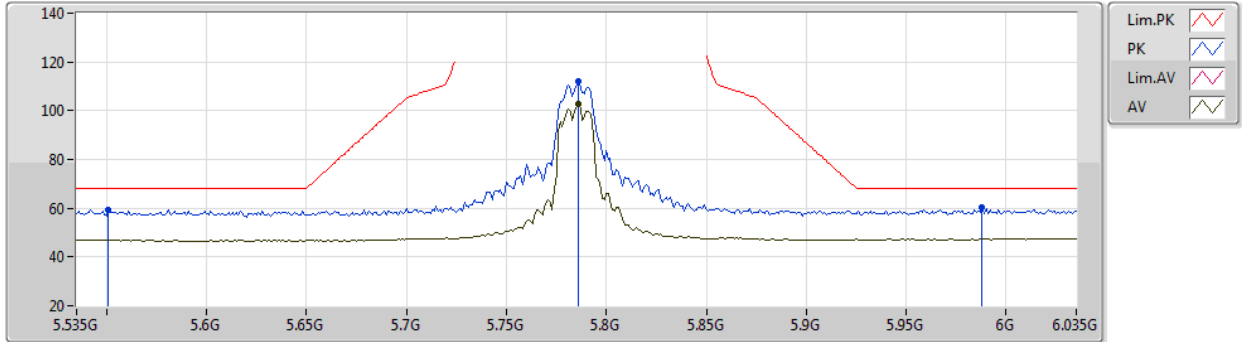


EUT Z_2TX
Setting Default
03-F-L-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.551G	59.21	68.20	-8.99	52.93	3	Horizontal	0	1.03	-	34.50	6.73	34.95
PK	5.786G	111.90	Inf	-Inf	105.74	3	Horizontal	0	1.03	-	34.20	6.89	34.93
AV	5.786G	102.84	Inf	-Inf	96.68	3	Horizontal	0	1.03	-	34.20	6.89	34.93
PK	5.988G	60.29	68.20	-7.91	53.54	3	Horizontal	0	1.03	-	34.68	6.99	34.92

802.11a_Nss1,(6Mbps)_2TX

14/01/2021

5785MHz_TX

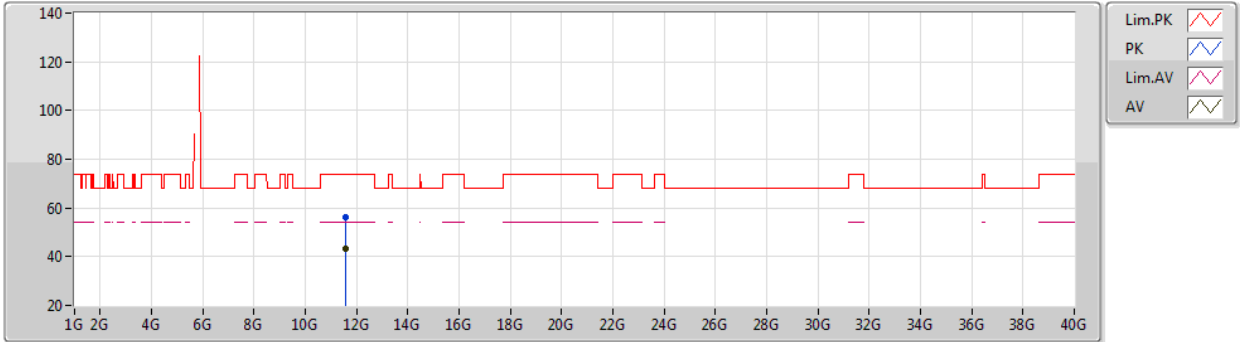


EUT Z_2TX
Setting Default
03-F-L-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	11.5704G	56.24	74.00	-17.76	41.79	3	Vertical	335	1.56	-	39.21	9.91	34.67
AV	11.57067G	43.17	54.00	-10.83	28.72	3	Vertical	335	1.56	-	39.21	9.91	34.67

802.11a_Nss1,(6Mbps)_2TX

14/01/2021

5785MHz_TX

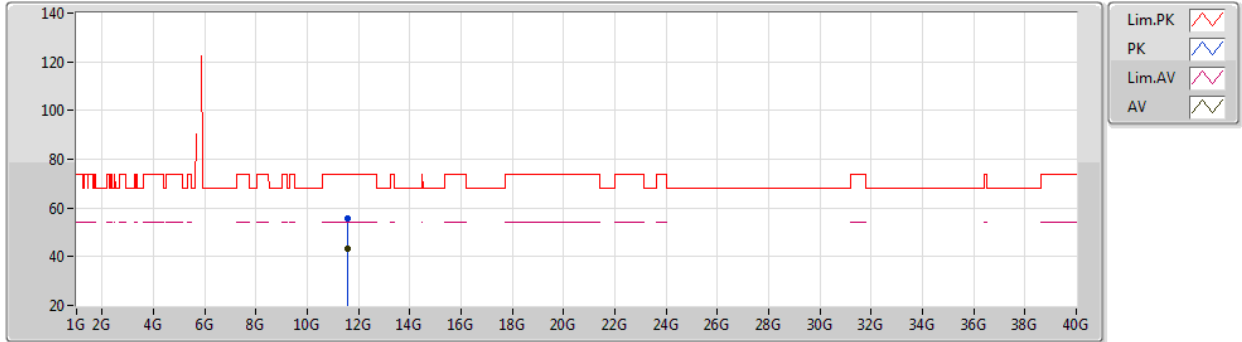

EUT Z_2TX
Setting Default
03-F-L-2


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	11.57126G	55.60	74.00	-18.40	41.15	3	Horizontal	344	2.70	-	39.21	9.91	34.67
AV	11.57032G	43.12	54.00	-10.88	28.67	3	Horizontal	344	2.70	-	39.21	9.91	34.67



802.11a_Nss1,(6Mbps)_2TX

14/01/2021

5825MHz_TX

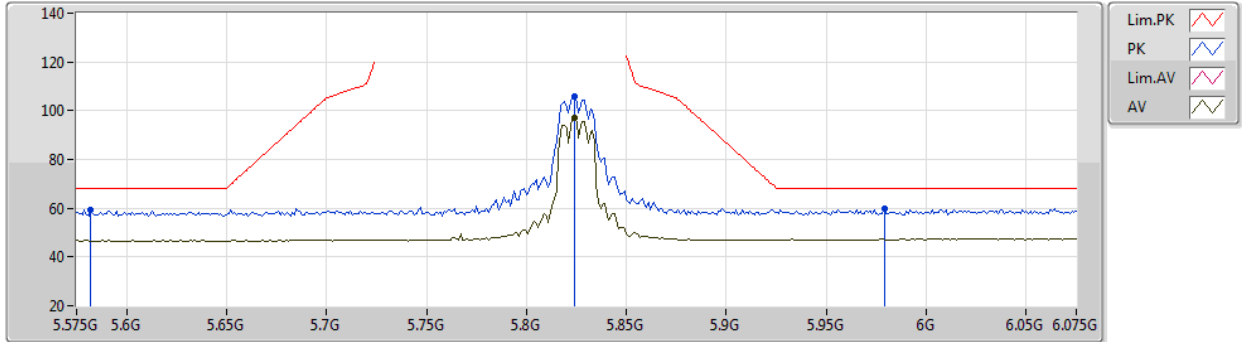

EUT_Z_2TX
Setting Default
03-F-L-2-10


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.582G	59.37	68.20	-8.83	53.18	3	Vertical	21	2.65	-	34.37	6.77	34.95
PK	5.824G	106.08	Inf	-Inf	99.80	3	Vertical	21	2.65	-	34.30	6.91	34.93
AV	5.824G	96.88	Inf	-Inf	90.60	3	Vertical	21	2.65	-	34.30	6.91	34.93
PK	5.979G	59.86	68.20	-8.34	53.13	3	Vertical	21	2.65	-	34.66	6.99	34.92



802.11a_Nss1,(6Mbps)_2TX

14/01/2021

5825MHz_TX

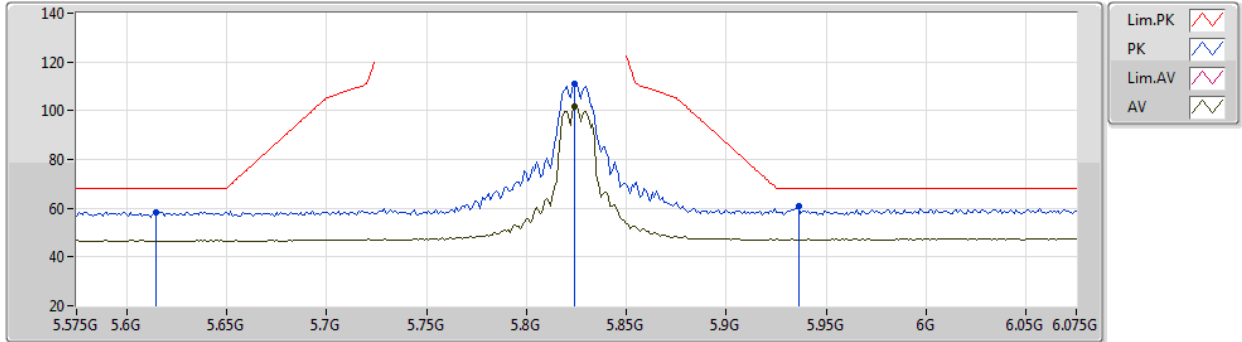


EUT Z_2TX
Setting Default
03-F-L-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.615G	58.53	68.20	-9.67	52.33	3	Horizontal	163	2.92	-	34.33	6.81	34.94
PK	5.824G	111.22	Inf	-Inf	104.94	3	Horizontal	163	2.92	-	34.30	6.91	34.93
AV	5.824G	101.86	Inf	-Inf	95.58	3	Horizontal	163	2.92	-	34.30	6.91	34.93
PK	5.936G	60.72	68.20	-7.48	54.13	3	Horizontal	163	2.92	-	34.54	6.97	34.92

802.11a_Nss1,(6Mbps)_2TX

14/01/2021

5825MHz_TX

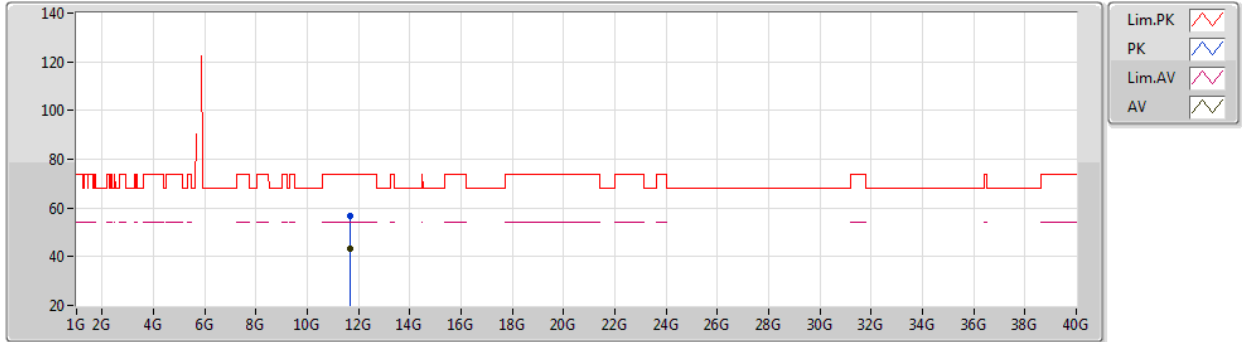


EUT Z_2TX
Setting Default
03-F-L-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	11.65211G	56.78	74.00	-17.22	42.19	3	Vertical	309	1.80	-	39.35	9.93	34.69
AV	11.65128G	43.45	54.00	-10.55	28.86	3	Vertical	309	1.80	-	39.35	9.93	34.69

802.11a_Nss1,(6Mbps)_2TX

14/01/2021

5825MHz_TX

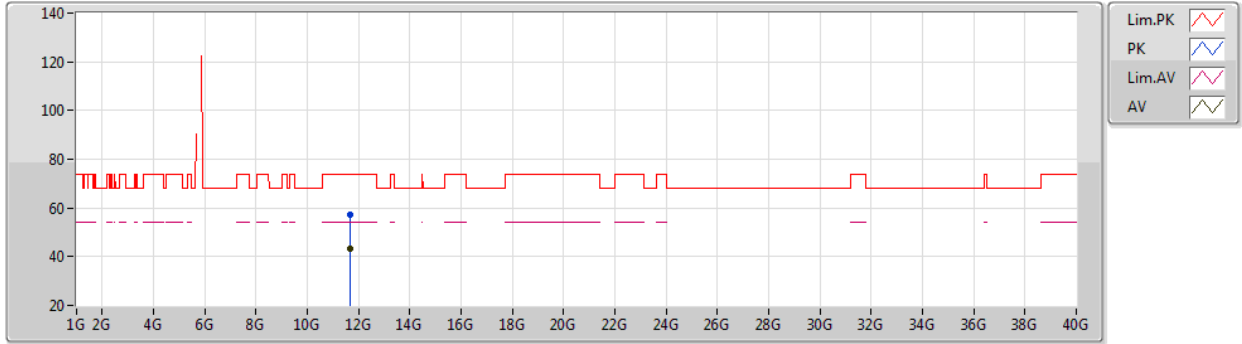


EUT Z_2TX
Setting Default
03-F-L-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	11.6483G	57.40	74.00	-16.60	42.81	3	Horizontal	211	2.99	-	39.35	9.93	34.69
AV	11.64964G	43.50	54.00	-10.50	28.91	3	Horizontal	211	2.99	-	39.35	9.93	34.69

802.11ax HEW20_Nss1,(MCS0)_2TX

14/01/2021

5180MHz_TX

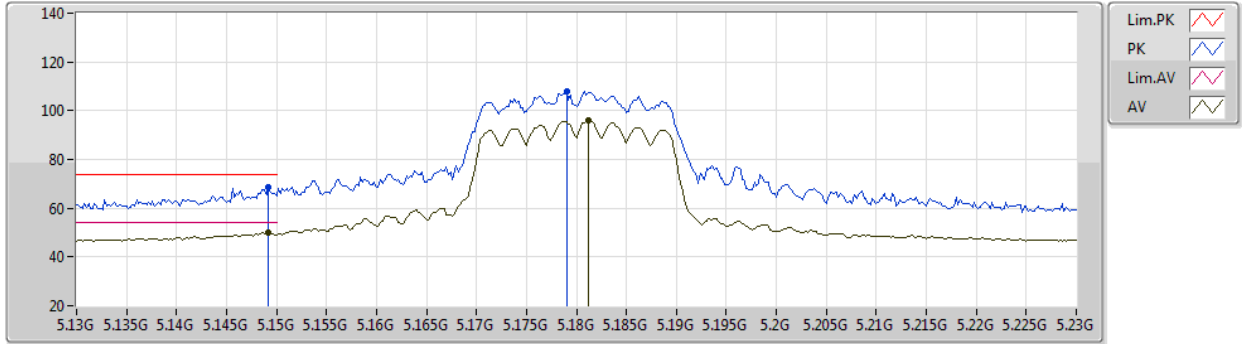


EUT Z_2TX
Setting 51
03-F-L-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.1492G	68.45	74.00	-5.55	63.45	3	Vertical	68	2.96	-	33.90	6.43	35.33
AV	5.1492G	50.15	54.00	-3.85	45.15	3	Vertical	68	2.96	-	33.90	6.43	35.33
PK	5.179G	108.13	Inf	-Inf	103.12	3	Vertical	68	2.96	-	33.90	6.41	35.30
AV	5.1812G	95.81	Inf	-Inf	90.79	3	Vertical	68	2.96	-	33.90	6.41	35.29

802.11ax HEW20_Nss1,(MCS0)_2TX

14/01/2021

5180MHz_TX

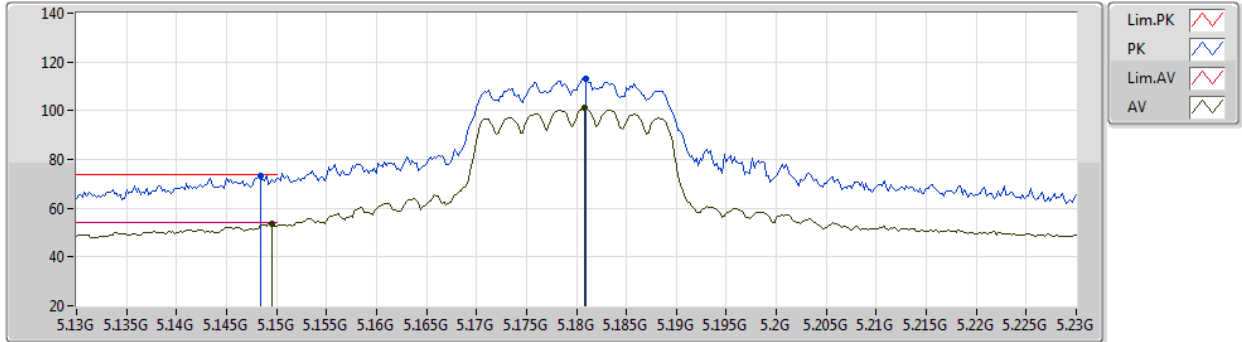


EUT_Z_2TX
Setting 51
03-F-L-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.1484G	73.39	74.00	-0.61	68.39	3	Horizontal	354	2.40	-	33.90	6.43	35.33
AV	5.1496G	53.80	54.00	-0.20	48.80	3	Horizontal	354	2.40	-	33.90	6.43	35.33
PK	5.181G	113.02	Inf	-Inf	108.00	3	Horizontal	354	2.40	-	33.90	6.41	35.29
AV	5.1808G	101.30	Inf	-Inf	96.28	3	Horizontal	354	2.40	-	33.90	6.41	35.29

802.11ax HEW20_Nss1,(MCS0)_2TX

14/01/2021

5180MHz_TX

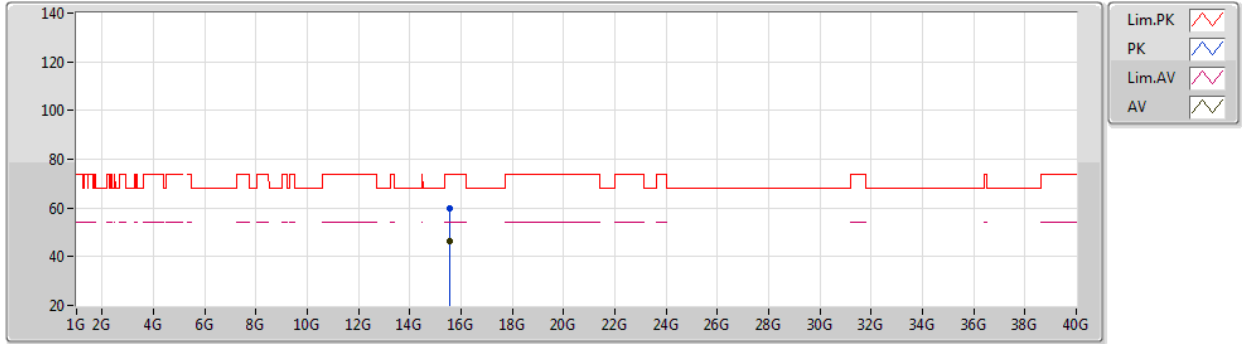


EUT Z_2TX
Setting 51
03-F-L-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	15.54093G	59.86	74.00	-14.14	45.10	3	Vertical	140	1.72	-	38.02	11.77	35.03
AV	15.53864G	46.47	54.00	-7.53	31.70	3	Vertical	140	1.72	-	38.02	11.77	35.02

802.11ax HEW20_Nss1,(MCS0)_2TX

14/01/2021

5180MHz_TX

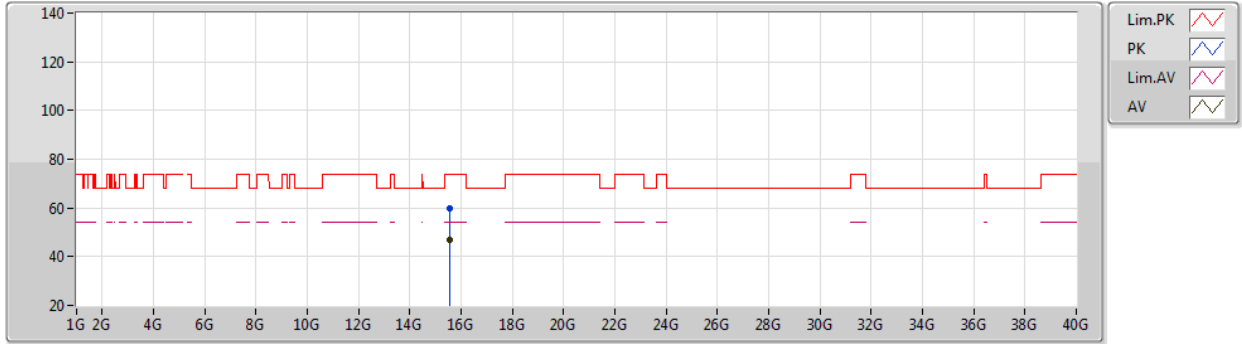


EUT Z_2TX
Setting 51
03-F-L-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	15.53919G	59.85	74.00	-14.15	45.09	3	Horizontal	179	2.43	-	38.02	11.77	35.03
AV	15.54078G	46.65	54.00	-7.35	31.89	3	Horizontal	179	2.43	-	38.02	11.77	35.03

802.11ax HEW20_Nss1,(MCS0)_2TX

14/01/2021

5200MHz_TX

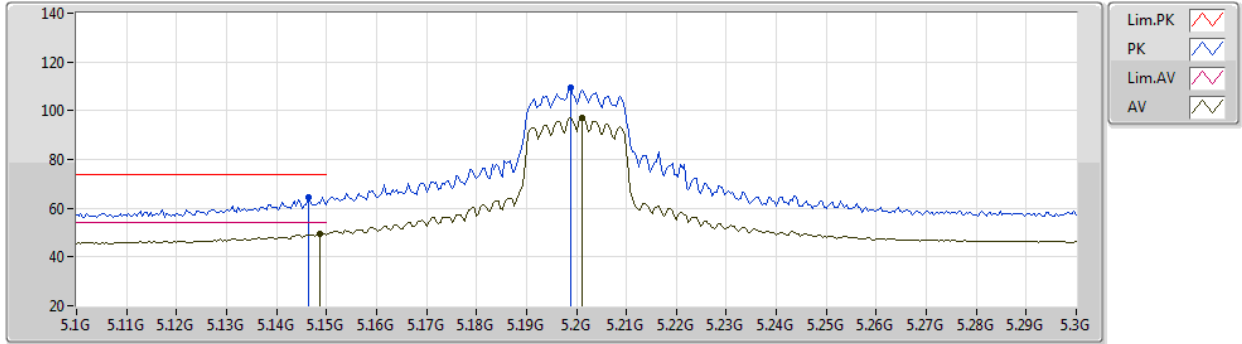


EUT_Z_2TX
Setting 58
03-F-L-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.1464G	64.47	74.00	-9.53	59.47	3	Vertical	65	2.94	-	33.90	6.43	35.33
AV	5.1488G	49.73	54.00	-4.27	44.73	3	Vertical	65	2.94	-	33.90	6.43	35.33
PK	5.1988G	109.40	Inf	-Inf	104.38	3	Vertical	65	2.94	-	33.90	6.40	35.28
AV	5.2012G	97.32	Inf	-Inf	92.29	3	Vertical	65	2.94	-	33.90	6.40	35.27

802.11ax HEW20_Nss1,(MCS0)_2TX

14/01/2021

5200MHz_TX

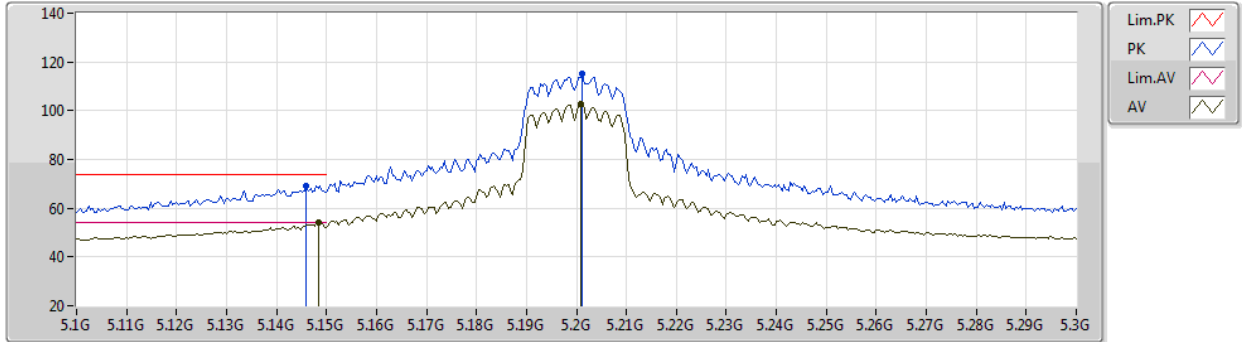


EUT Z_2TX
Setting 58
03-F-L-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.146G	69.32	74.00	-4.68	64.32	3	Horizontal	353	1.00	-	33.90	6.43	35.33
AV	5.1484G	53.95	54.00	-0.05	48.95	3	Horizontal	353	1.00	-	33.90	6.43	35.33
PK	5.2012G	115.22	Inf	-Inf	110.19	3	Horizontal	353	1.00	-	33.90	6.40	35.27
AV	5.2008G	102.68	Inf	-Inf	97.65	3	Horizontal	353	1.00	-	33.90	6.40	35.27

802.11ax HEW20_Nss1,(MCS0)_2TX

14/01/2021

5200MHz_TX

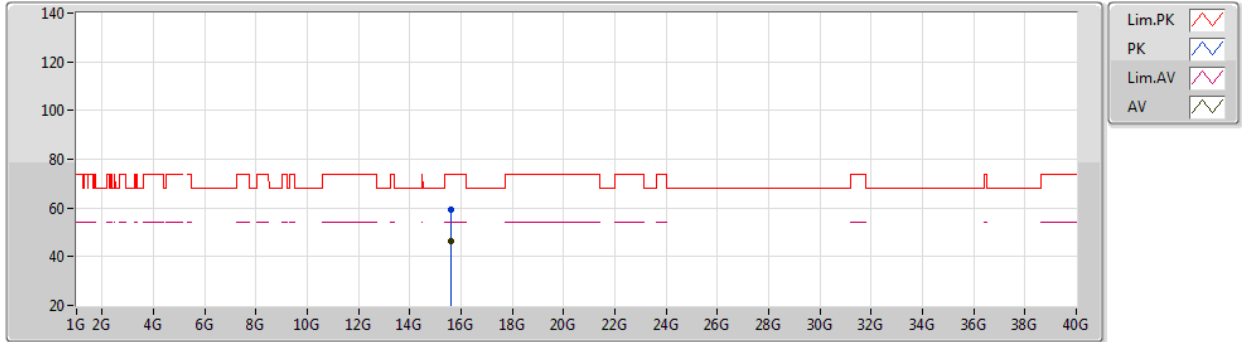


EUT Z_2TX
Setting 58
03-F-L-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	15.59972G	59.25	74.00	-14.75	44.61	3	Vertical	60	2.34	-	37.90	11.80	35.06
AV	15.59795G	46.53	54.00	-7.47	31.89	3	Vertical	60	2.34	-	37.90	11.80	35.06

802.11ax HEW20_Nss1,(MCS0)_2TX

14/01/2021

5200MHz_TX

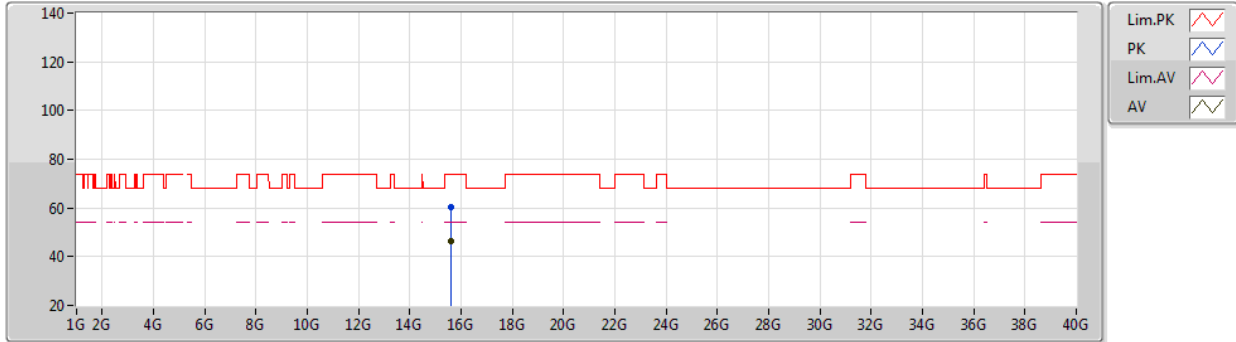


EUT Z_2TX
Setting 58
03-F-L-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	15.60242G	60.21	74.00	-13.79	45.58	3	Horizontal	271	1.16	-	37.90	11.80	35.07
AV	15.60191G	46.53	54.00	-7.47	31.90	3	Horizontal	271	1.16	-	37.90	11.80	35.07

802.11ax HEW20_Nss1,(MCS0)_2TX

14/01/2021

5240MHz_TX

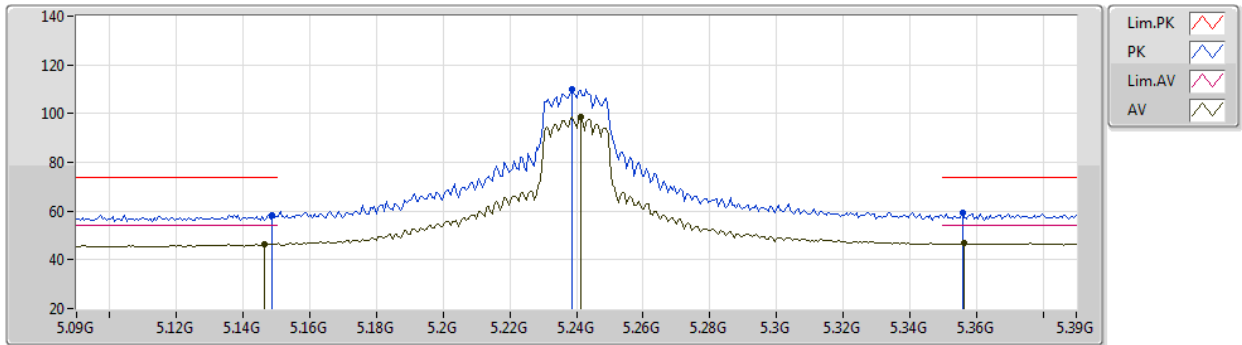


EUT Z_2TX
Setting Default
03-F-L-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.1488G	58.40	74.00	-15.60	53.40	3	Vertical	68	2.73	-	33.90	6.43	35.33
AV	5.1464G	46.60	54.00	-7.40	41.60	3	Vertical	68	2.73	-	33.90	6.43	35.33
PK	5.2388G	110.11	Inf	-Inf	104.94	3	Vertical	68	2.73	-	33.98	6.42	35.23
AV	5.2412G	98.78	Inf	-Inf	93.61	3	Vertical	68	2.73	-	33.98	6.42	35.23
PK	5.3558G	59.09	74.00	-14.91	53.33	3	Vertical	68	2.73	-	34.39	6.48	35.11
AV	5.3564G	46.66	54.00	-7.34	40.90	3	Vertical	68	2.73	-	34.39	6.48	35.11

802.11ax HEW20_Nss1,(MCS0)_2TX

14/01/2021

5240MHz_TX

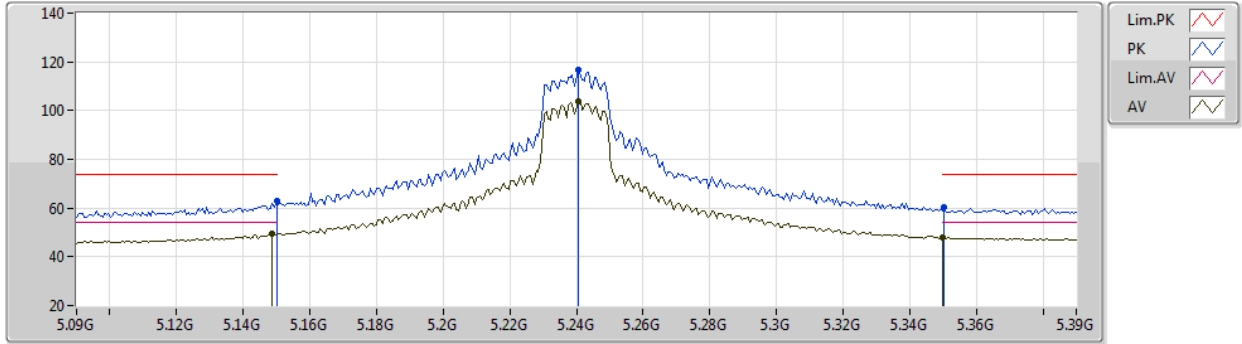


EUT Z_2TX
Setting Default
03-F-L-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.15G	62.82	74.00	-11.18	57.82	3	Horizontal	356	1.09	-	33.90	6.43	35.33
AV	5.1488G	49.30	54.00	-4.70	44.30	3	Horizontal	356	1.09	-	33.90	6.43	35.33
PK	5.2406G	116.48	Inf	-Inf	111.31	3	Horizontal	356	1.09	-	33.98	6.42	35.23
AV	5.2406G	103.86	Inf	-Inf	98.69	3	Horizontal	356	1.09	-	33.98	6.42	35.23
PK	5.3504G	60.49	74.00	-13.51	54.72	3	Horizontal	356	1.09	-	34.40	6.48	35.11
AV	5.35G	47.85	54.00	-6.15	42.08	3	Horizontal	356	1.09	-	34.40	6.48	35.11

802.11ax HEW20_Nss1,(MCS0)_2TX

14/01/2021

5240MHz_TX

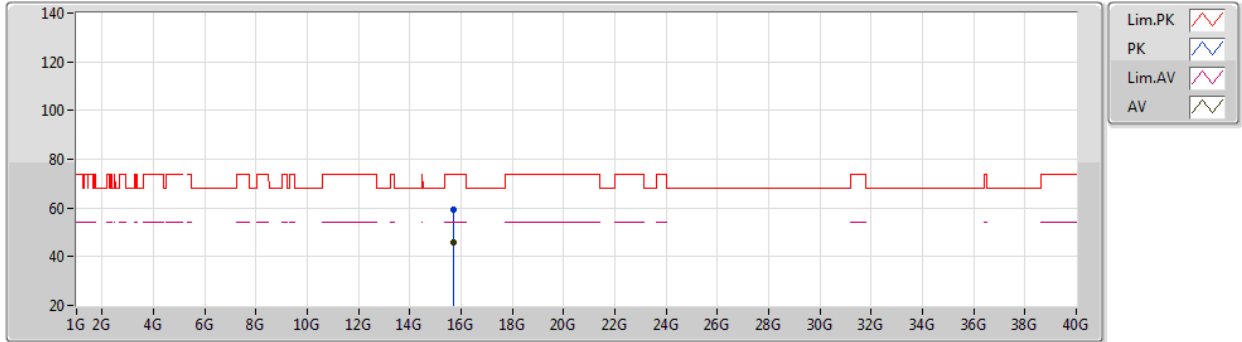


EUT Z_2TX
Setting Default
03-F-L-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	15.7182G	59.35	74.00	-14.65	45.00	3	Vertical	295	2.11	-	37.63	11.86	35.14
AV	15.71775G	45.75	54.00	-8.25	31.40	3	Vertical	295	2.11	-	37.63	11.86	35.14

802.11ax HEW20_Nss1,(MCS0)_2TX

14/01/2021

5240MHz_TX

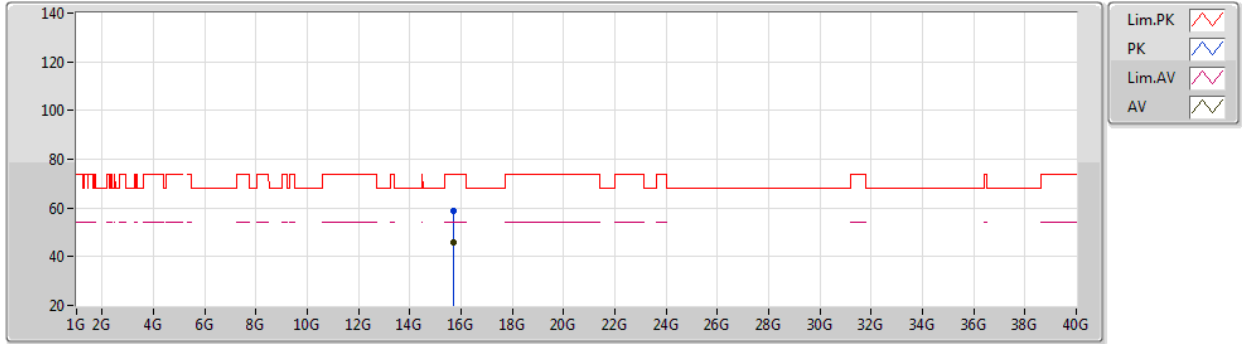


EUT Z_2TX
Setting Default
03-F-L-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	15.71909G	58.82	74.00	-15.18	44.48	3	Horizontal	358	1.01	-	37.62	11.86	35.14
AV	15.72099G	45.68	54.00	-8.32	31.34	3	Horizontal	358	1.01	-	37.62	11.86	35.14

802.11ax HEW20_Nss1,(MCS0)_2TX

14/01/2021

5745MHz_TX

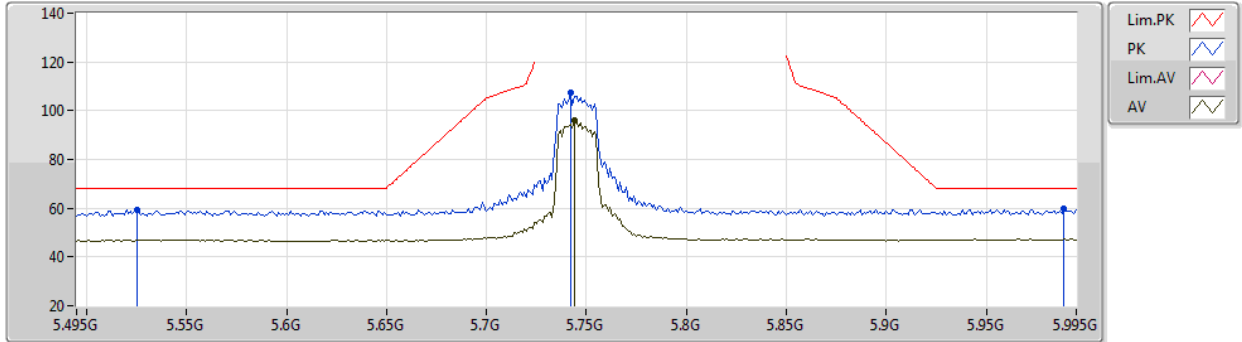

EUT Z_2TX
Setting Default
03-F-L-2-10


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.525G	59.27	68.20	-8.93	53.08	3	Vertical	22	3.00	-	34.45	6.69	34.95
PK	5.742G	107.29	Inf	-Inf	101.16	3	Vertical	22	3.00	-	34.20	6.87	34.94
AV	5.744G	95.79	Inf	-Inf	89.66	3	Vertical	22	3.00	-	34.20	6.87	34.94
PK	5.989G	59.82	68.20	-8.38	53.07	3	Vertical	22	3.00	-	34.68	6.99	34.92



802.11ax HEW20_Nss1,(MCS0)_2TX

14/01/2021

5745MHz_TX

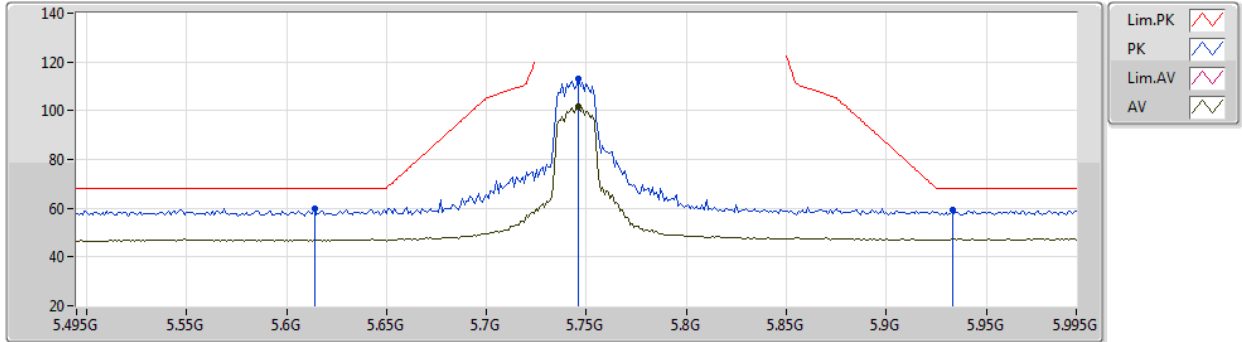


EUT_Z_2TX
Setting Default
03-F-L-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.614G	59.71	68.20	-8.49	53.51	3	Horizontal	360	1.00	-	34.33	6.81	34.94
PK	5.746G	113.10	Inf	-Inf	106.97	3	Horizontal	360	1.00	-	34.20	6.87	34.94
AV	5.746G	101.58	Inf	-Inf	95.45	3	Horizontal	360	1.00	-	34.20	6.87	34.94
PK	5.933G	59.16	68.20	-9.04	52.58	3	Horizontal	360	1.00	-	34.53	6.97	34.92

802.11ax HEW20_Nss1,(MCS0)_2TX

14/01/2021

5745MHz_TX

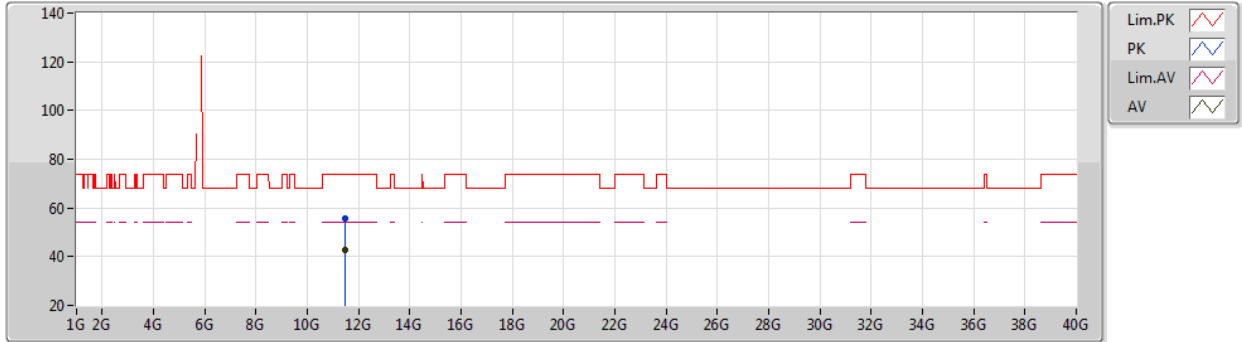


EUT Z_2TX
Setting Default
03-F-L-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	11.48764G	55.94	74.00	-18.06	41.71	3	Vertical	179	2.95	-	38.98	9.90	34.65
AV	11.48913G	42.88	54.00	-11.12	28.65	3	Vertical	179	2.95	-	38.98	9.90	34.65

802.11ax HEW20_Nss1,(MCS0)_2TX

14/01/2021

5745MHz_TX

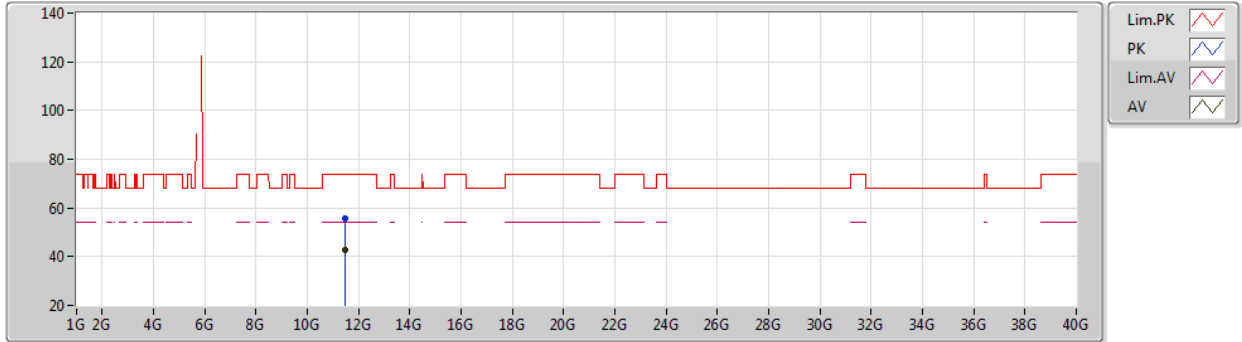


EUT Z_2TX
Setting Default
03-F-L-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	11.48757G	55.51	74.00	-18.49	41.28	3	Horizontal	121	1.89	-	38.98	9.90	34.65
AV	11.48893G	42.91	54.00	-11.09	28.68	3	Horizontal	121	1.89	-	38.98	9.90	34.65

802.11ax HEW20_Nss1,(MCS0)_2TX

14/01/2021

5785MHz_TX

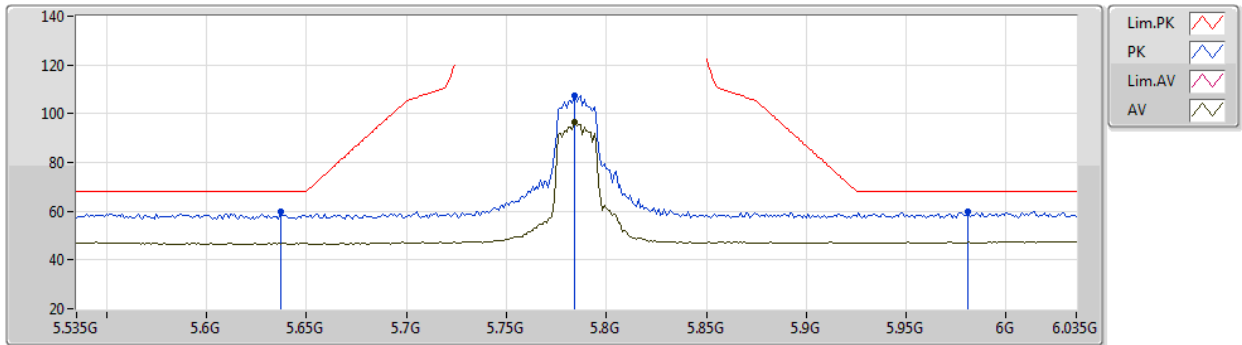


EUT_Z_2TX
Setting Default
03-F-L-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.637G	59.73	68.20	-8.47	53.48	3	Vertical	27	2.70	-	34.37	6.82	34.94
PK	5.784G	107.42	Inf	-Inf	101.26	3	Vertical	27	2.70	-	34.20	6.89	34.93
AV	5.784G	96.65	Inf	-Inf	90.49	3	Vertical	27	2.70	-	34.20	6.89	34.93
PK	5.981G	59.75	68.20	-8.45	53.02	3	Vertical	27	2.70	-	34.66	6.99	34.92

802.11ax HEW20_Nss1,(MCS0)_2TX

14/01/2021

5785MHz_TX

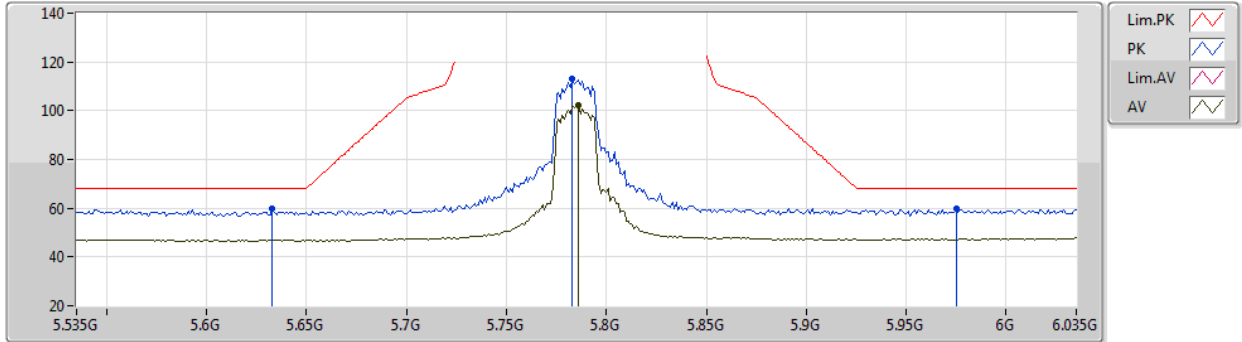


EUT_Z_2TX
Setting Default
03-F-L-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.633G	60.07	68.20	-8.13	53.82	3	Horizontal	355	1.06	-	34.37	6.82	34.94
PK	5.783G	113.20	Inf	-Inf	107.04	3	Horizontal	355	1.06	-	34.20	6.89	34.93
AV	5.786G	102.22	Inf	-Inf	96.06	3	Horizontal	355	1.06	-	34.20	6.89	34.93
PK	5.975G	59.57	68.20	-8.63	52.85	3	Horizontal	355	1.06	-	34.65	6.99	34.92

802.11ax HEW20_Nss1,(MCS0)_2TX

14/01/2021

5785MHz_TX

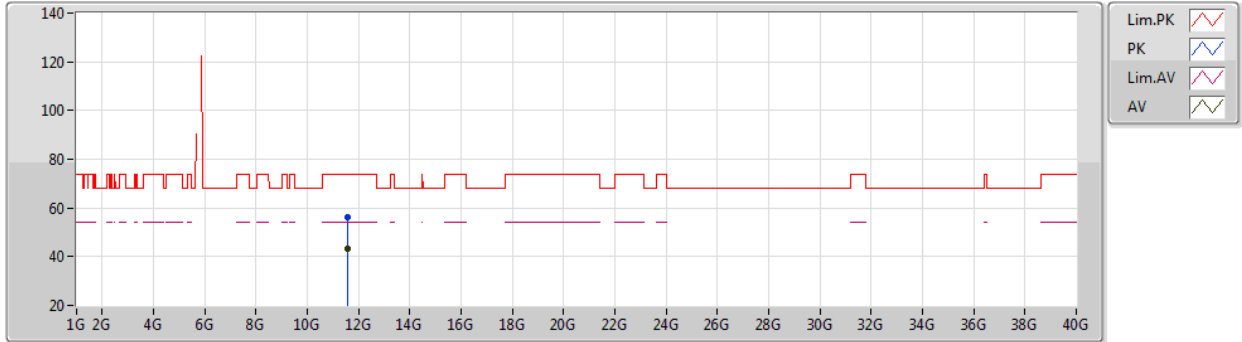


EUT Z_2TX
Setting Default
03-F-L-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	11.5723G	55.96	74.00	-18.04	41.50	3	Vertical	324	2.21	-	39.22	9.91	34.67
AV	11.57231G	43.21	54.00	-10.79	28.75	3	Vertical	324	2.21	-	39.22	9.91	34.67

802.11ax HEW20_Nss1,(MCS0)_2TX

14/01/2021

5785MHz_TX

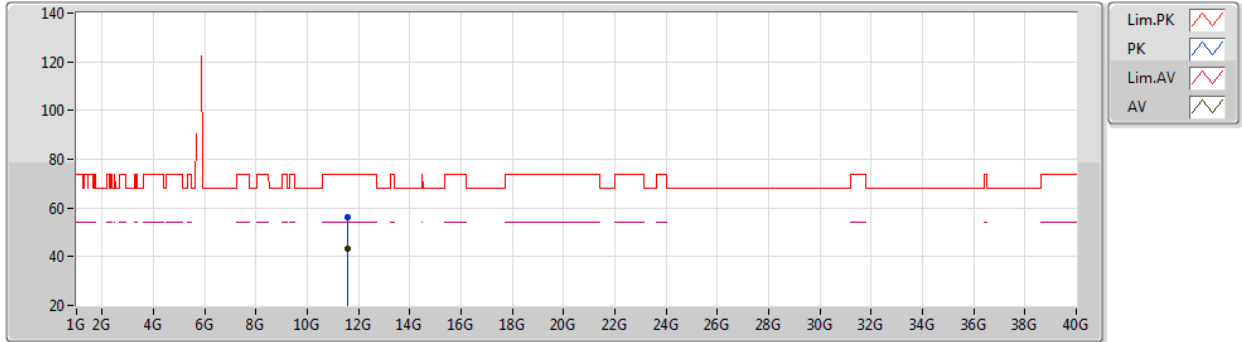


EUT Z_2TX
Setting Default
03-F-L-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	11.57217G	56.37	74.00	-17.63	41.91	3	Horizontal	236	2.22	-	39.22	9.91	34.67
AV	11.57216G	43.09	54.00	-10.91	28.63	3	Horizontal	236	2.22	-	39.22	9.91	34.67

802.11ax HEW20_Nss1,(MCS0)_2TX

14/01/2021

5825MHz_TX

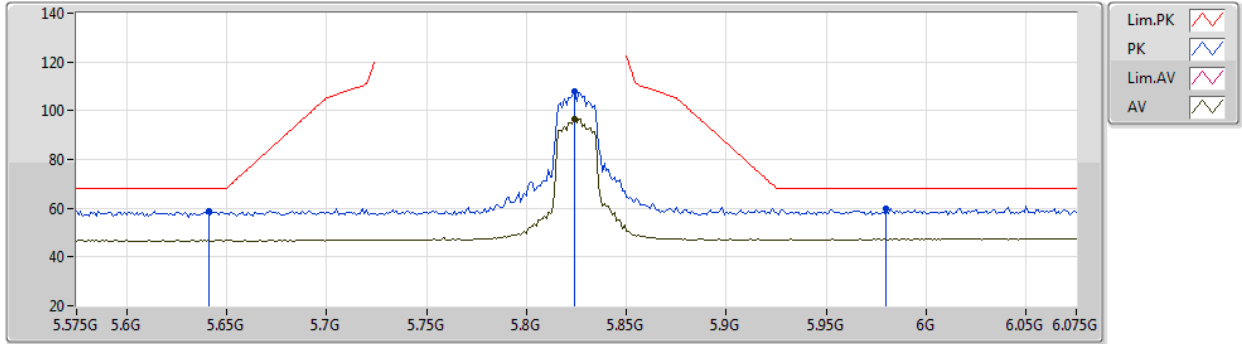


EUT Z_2TX
Setting Default
03-F-L-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.641G	58.93	68.20	-9.27	52.67	3	Vertical	31	2.67	-	34.38	6.82	34.94
PK	5.824G	107.76	Inf	-Inf	101.48	3	Vertical	31	2.67	-	34.30	6.91	34.93
AV	5.824G	96.73	Inf	-Inf	90.45	3	Vertical	31	2.67	-	34.30	6.91	34.93
PK	5.98G	59.69	68.20	-8.51	52.96	3	Vertical	31	2.67	-	34.66	6.99	34.92

802.11ax HEW20_Nss1,(MCS0)_2TX

14/01/2021

5825MHz_TX

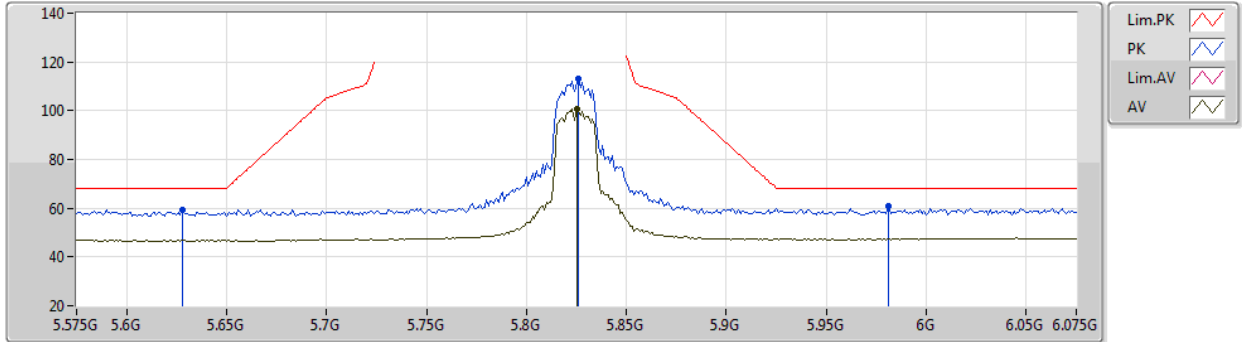


EUT_Z_2TX
Setting Default
03-F-L-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.628G	59.23	68.20	-8.97	53.00	3	Horizontal	181	2.61	-	34.36	6.81	34.94
PK	5.826G	113.17	Inf	-Inf	106.89	3	Horizontal	181	2.61	-	34.30	6.91	34.93
AV	5.825G	100.85	Inf	-Inf	94.57	3	Horizontal	181	2.61	-	34.30	6.91	34.93
PK	5.981G	60.75	68.20	-7.45	54.02	3	Horizontal	181	2.61	-	34.66	6.99	34.92

802.11ax HEW20_Nss1,(MCS0)_2TX

14/01/2021

5825MHz_TX

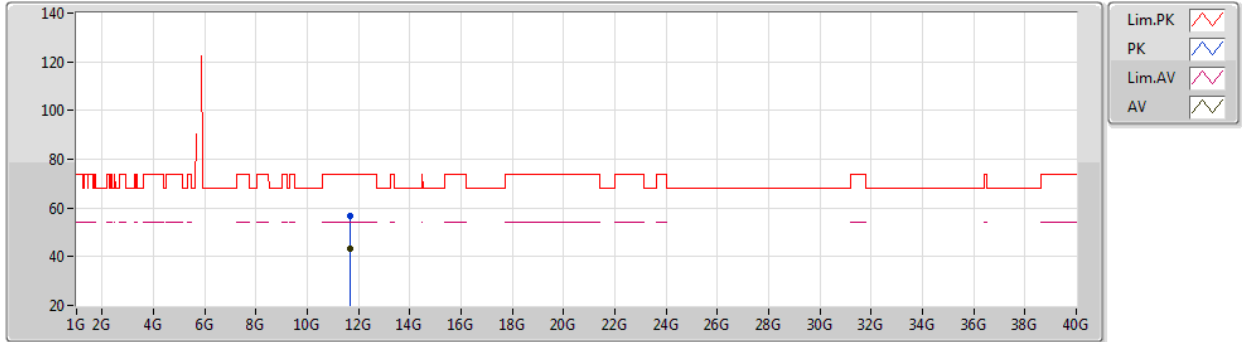


EUT Z_2TX
Setting Default
03-F-L-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	11.64824G	56.74	74.00	-17.26	42.15	3	Vertical	225	1.67	-	39.35	9.93	34.69
AV	11.64806G	43.45	54.00	-10.55	28.86	3	Vertical	225	1.67	-	39.35	9.93	34.69

802.11ax HEW20_Nss1,(MCS0)_2TX

14/01/2021

5825MHz_TX

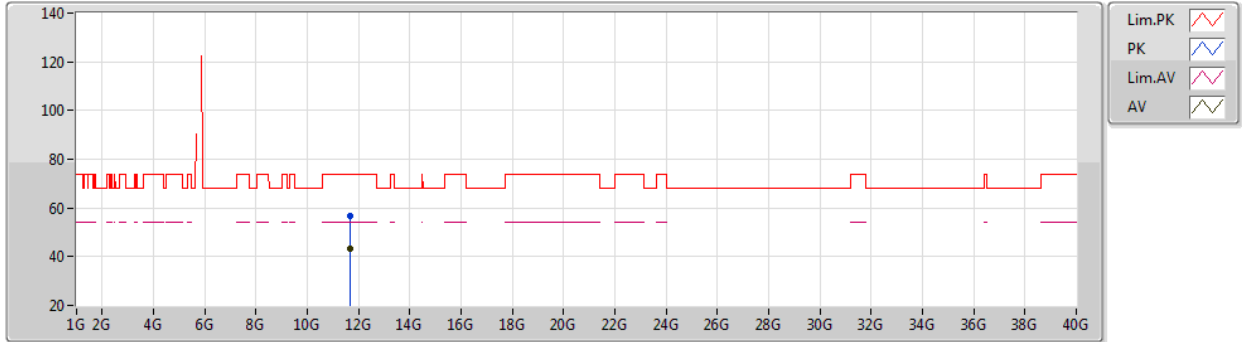


EUT Z_2TX
Setting Default
03-F-L-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	11.65201G	56.81	74.00	-17.19	42.22	3	Horizontal	150	1.75	-	39.35	9.93	34.69
AV	11.65132G	43.45	54.00	-10.55	28.86	3	Horizontal	150	1.75	-	39.35	9.93	34.69

802.11ax HEW40_Nss1,(MCS0)_2TX

14/01/2021

5190MHz_TX

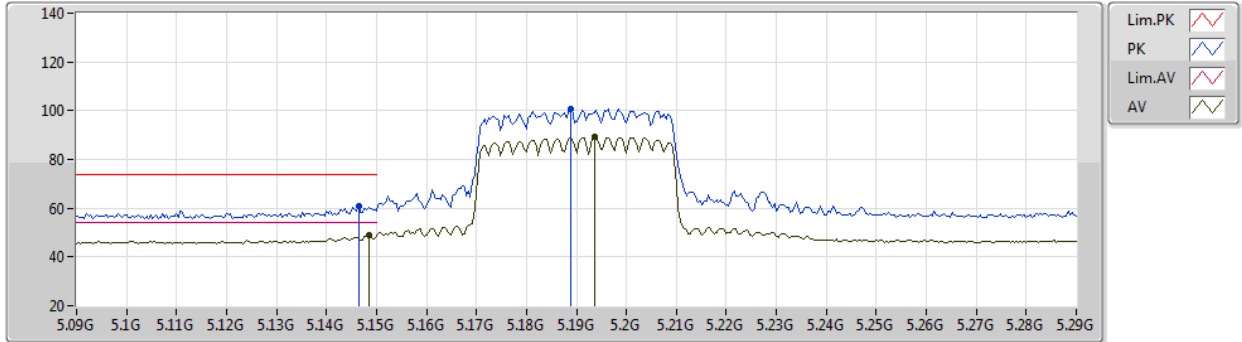


EUT Z_2TX
Setting 42
03-F-L-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.1464G	61.04	74.00	-12.96	56.04	3	Vertical	71	2.92	-	33.90	6.43	35.33
AV	5.1484G	48.75	54.00	-5.25	43.75	3	Vertical	71	2.92	-	33.90	6.43	35.33
PK	5.1888G	100.87	Inf	-Inf	95.85	3	Vertical	71	2.92	-	33.90	6.41	35.29
AV	5.1936G	89.45	Inf	-Inf	84.43	3	Vertical	71	2.92	-	33.90	6.40	35.28

802.11ax HEW40_Nss1,(MCS0)_2TX

14/01/2021

5190MHz_TX

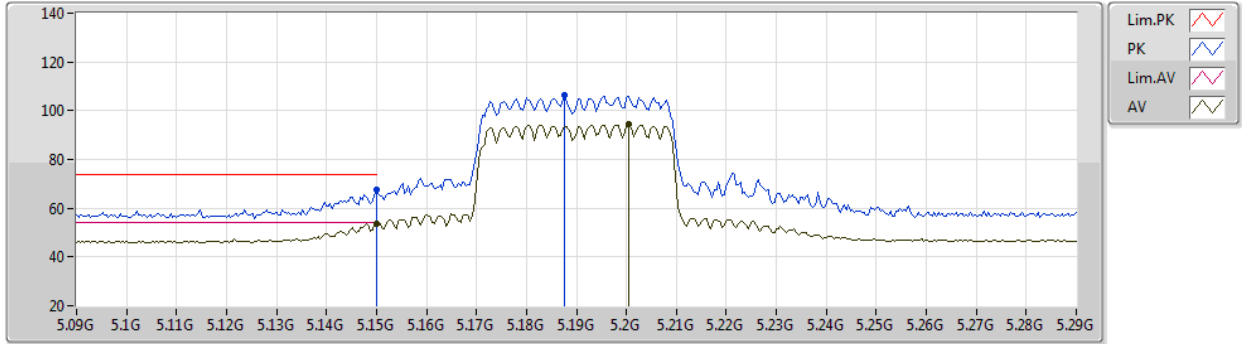


EUT Z_2TX
Setting 42
03-F-L-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.15G	67.36	74.00	-6.64	62.36	3	Horizontal	172	2.93	-	33.90	6.43	35.33
AV	5.15G	53.78	54.00	-0.22	48.78	3	Horizontal	172	2.93	-	33.90	6.43	35.33
PK	5.1876G	106.21	Inf	-Inf	101.19	3	Horizontal	172	2.93	-	33.90	6.41	35.29
AV	5.2004G	94.49	Inf	-Inf	89.46	3	Horizontal	172	2.93	-	33.90	6.40	35.27

802.11ax HEW40_Nss1,(MCS0)_2TX

14/01/2021

5190MHz_TX

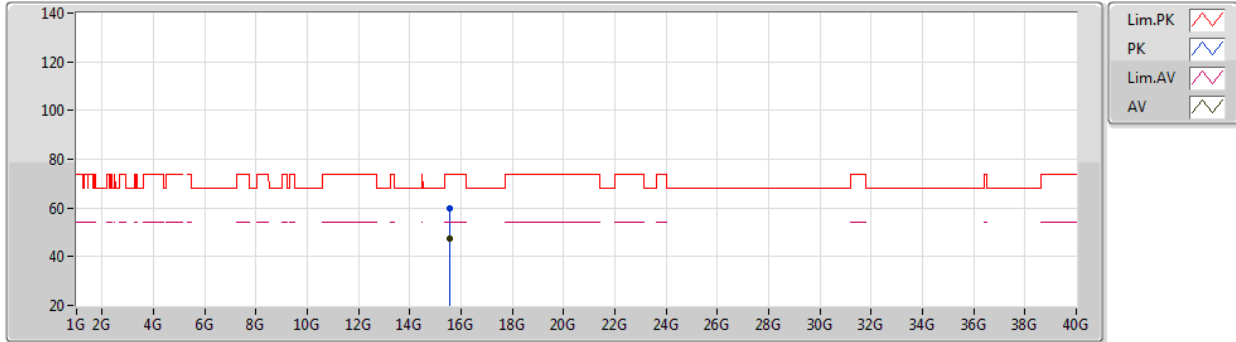


EUT Z_2TX
Setting 42
03-F-L-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	15.57153G	60.06	74.00	-13.94	45.36	3	Vertical	36	2.67	-	37.96	11.79	35.05
AV	15.56865G	47.30	54.00	-6.70	32.60	3	Vertical	36	2.67	-	37.96	11.78	35.04

802.11ax HEW40_Nss1,(MCS0)_2TX

14/01/2021

5190MHz_TX

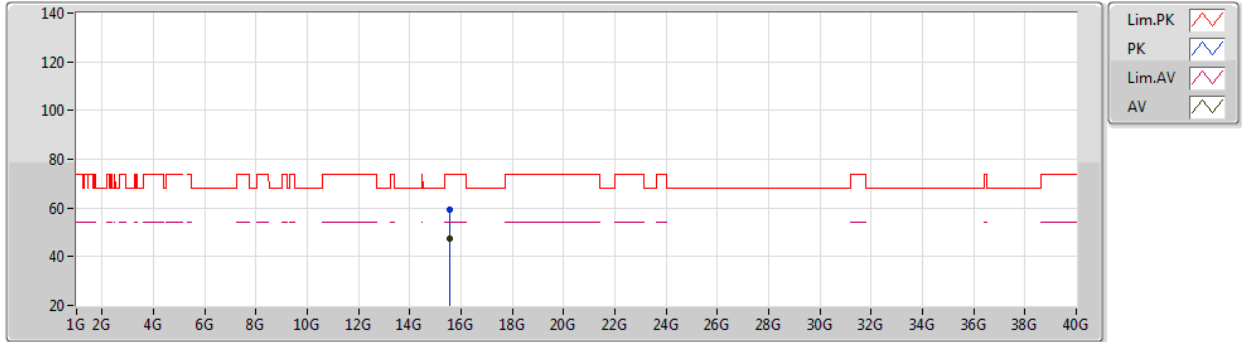


EUT Z_2TX
Setting 42
03-F-L-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	15.56851G	59.44	74.00	-14.56	44.74	3	Horizontal	29	2.92	-	37.96	11.78	35.04
AV	15.57209G	47.26	54.00	-6.74	32.56	3	Horizontal	29	2.92	-	37.96	11.79	35.05

802.11ax HEW40_Nss1,(MCS0)_2TX

14/01/2021

5230MHz_TX

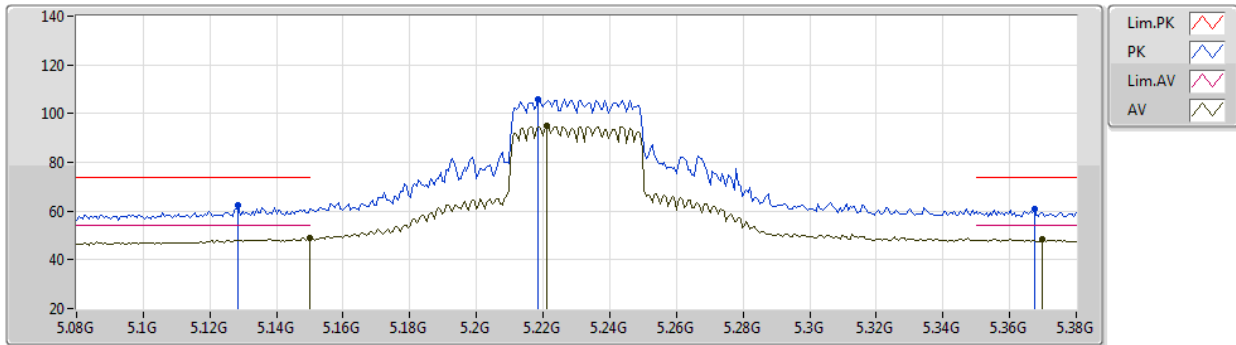


EUT_Z_2TX
Setting 62
03-F-L-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.1286G	62.50	74.00	-11.50	57.51	3	Vertical	70	2.91	-	33.90	6.44	35.35
AV	5.15G	48.94	54.00	-5.06	43.94	3	Vertical	70	2.91	-	33.90	6.43	35.33
PK	5.2186G	105.97	Inf	-Inf	100.87	3	Vertical	70	2.91	-	33.94	6.41	35.25
AV	5.221G	94.91	Inf	-Inf	89.81	3	Vertical	70	2.91	-	33.94	6.41	35.25
PK	5.3674G	60.87	74.00	-13.13	55.11	3	Vertical	70	2.91	-	34.37	6.48	35.09
AV	5.3698G	48.26	54.00	-5.74	42.51	3	Vertical	70	2.91	-	34.36	6.48	35.09

802.11ax HEW40_Nss1,(MCS0)_2TX

14/01/2021

5230MHz_TX

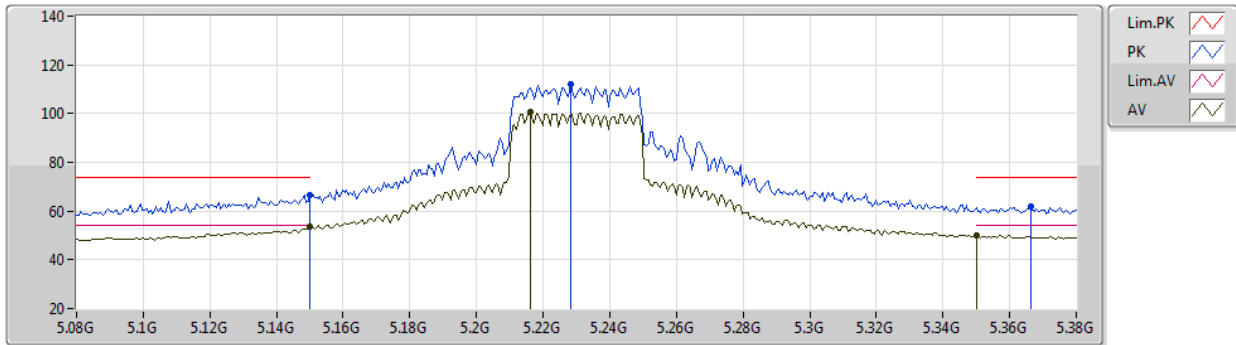


EUT Z_2TX
Setting 62
03-F-L-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.15G	66.81	74.00	-7.19	61.81	3	Horizontal	352	2.50	-	33.90	6.43	35.33
AV	5.15G	53.77	54.00	-0.23	48.77	3	Horizontal	352	2.50	-	33.90	6.43	35.33
PK	5.2282G	112.01	Inf	-Inf	106.88	3	Horizontal	352	2.50	-	33.96	6.41	35.24
AV	5.2162G	100.49	Inf	-Inf	95.41	3	Horizontal	352	2.50	-	33.93	6.41	35.26
PK	5.3662G	61.73	74.00	-12.27	55.97	3	Horizontal	352	2.50	-	34.37	6.48	35.09
AV	5.35G	49.89	54.00	-4.11	44.13	3	Horizontal	352	2.50	-	34.40	6.47	35.11

802.11ax HEW40_Nss1,(MCS0)_2TX

14/01/2021

5230MHz_TX

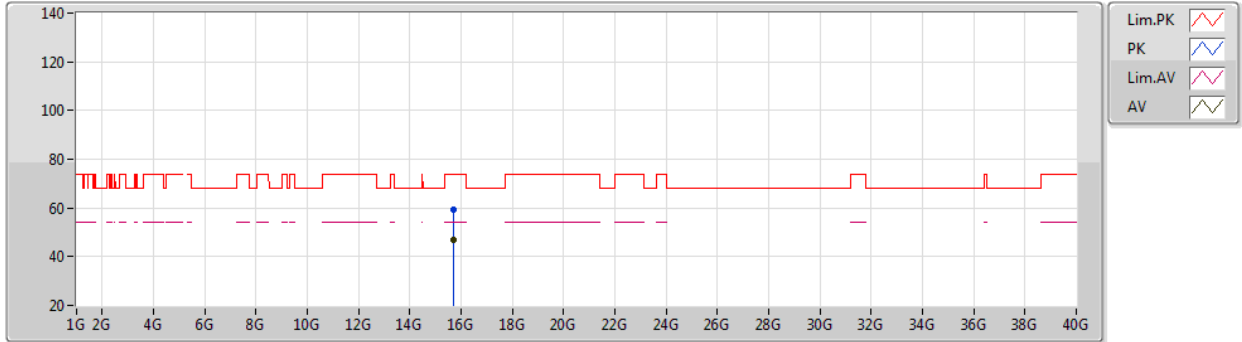


EUT Z_2TX
Setting 62
03-F-L-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	15.68883G	59.11	74.00	-14.89	44.67	3	Vertical	177	2.40	-	37.72	11.84	35.12
AV	15.68939G	47.13	54.00	-6.87	32.69	3	Vertical	177	2.40	-	37.72	11.84	35.12

802.11ax HEW40_Nss1,(MCS0)_2TX

14/01/2021

5230MHz_TX

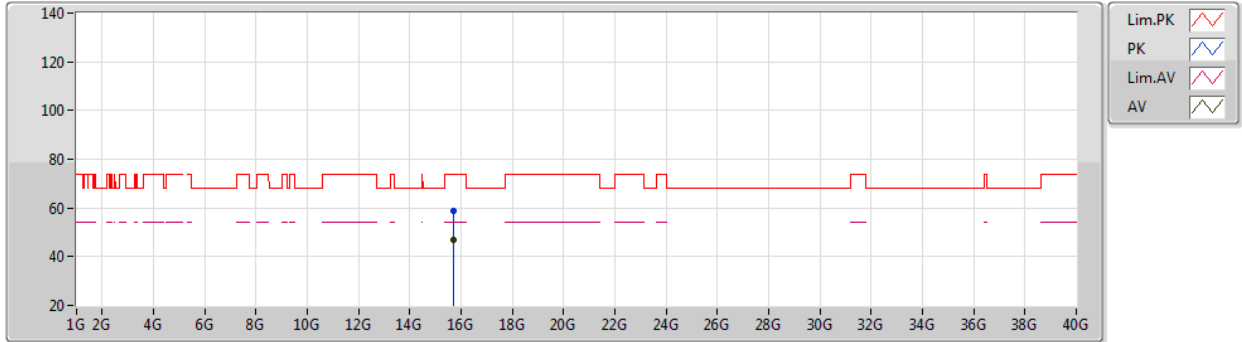


EUT Z_2TX
Setting 62
03-F-L-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	15.69055G	58.78	74.00	-15.22	44.33	3	Horizontal	255	2.95	-	37.72	11.85	35.12
AV	15.68975G	47.01	54.00	-6.99	32.57	3	Horizontal	255	2.95	-	37.72	11.84	35.12

802.11ax HEW40_Nss1,(MCS0)_2TX

14/01/2021

5755MHz_TX

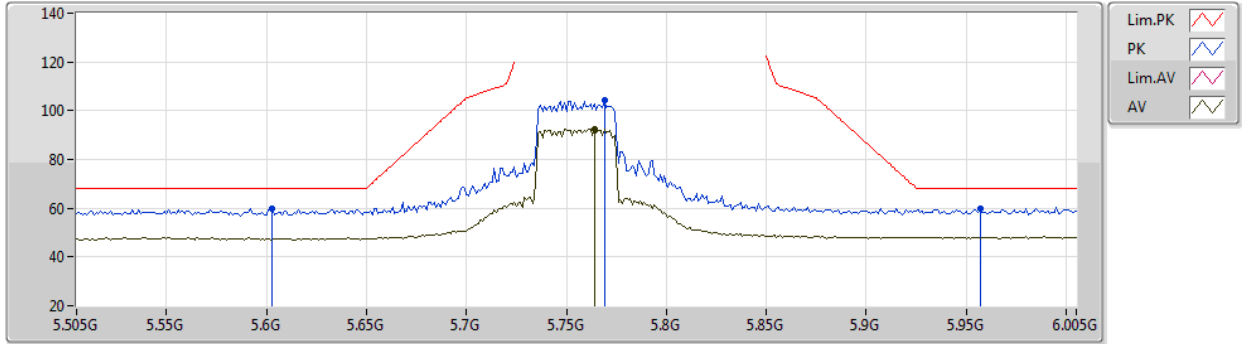


EUT Z_2TX
Setting Default
03-F-L-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.603G	59.65	68.20	-8.55	53.48	3	Vertical	30	2.48	-	34.31	6.80	34.94
PK	5.769G	104.54	Inf	-Inf	98.39	3	Vertical	30	2.48	-	34.20	6.88	34.93
AV	5.764G	92.45	Inf	-Inf	86.30	3	Vertical	30	2.48	-	34.20	6.88	34.93
PK	5.957G	60.04	68.20	-8.16	53.37	3	Vertical	30	2.48	-	34.61	6.98	34.92

802.11ax HEW40_Nss1,(MCS0)_2TX

14/01/2021

5755MHz_TX

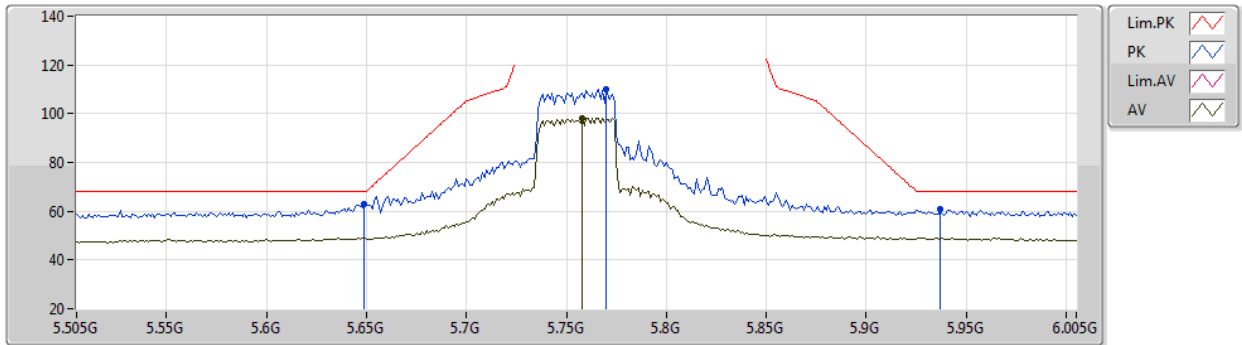


EUT Z_2TX
Setting Default
03-F-L-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.649G	63.13	68.20	-5.07	56.85	3	Horizontal	0	1.05	-	34.40	6.82	34.94
PK	5.77G	110.02	Inf	-Inf	103.86	3	Horizontal	0	1.05	-	34.20	6.89	34.93
AV	5.758G	98.24	Inf	-Inf	92.09	3	Horizontal	0	1.05	-	34.20	6.88	34.93
PK	5.937G	60.92	68.20	-7.28	54.32	3	Horizontal	0	1.05	-	34.55	6.97	34.92

802.11ax HEW40_Nss1,(MCS0)_2TX

14/01/2021

5755MHz_TX

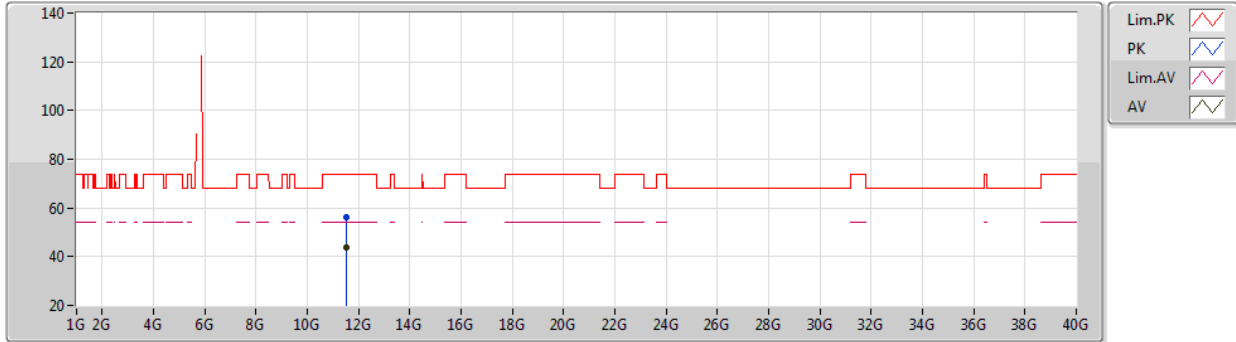


EUT Z_2TX
Setting Default
03-F-L-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	11.50856G	56.14	74.00	-17.86	41.86	3	Vertical	308	1.16	-	39.03	9.90	34.65
AV	11.50869G	43.70	54.00	-10.30	29.42	3	Vertical	308	1.16	-	39.03	9.90	34.65

802.11ax HEW40_Nss1,(MCS0)_2TX

14/01/2021

5755MHz_TX

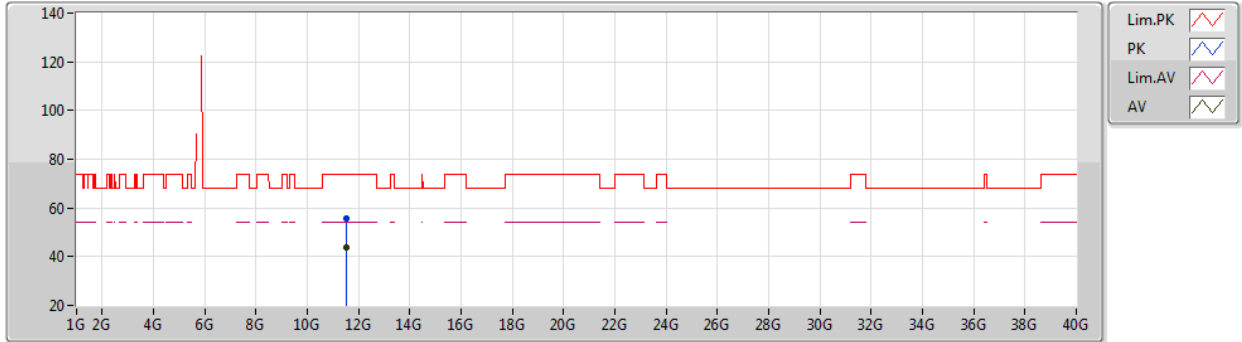


EUT Z_2TX
Setting Default
03-F-L-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	11.5083G	55.76	74.00	-18.24	41.49	3	Horizontal	81	2.10	-	39.02	9.90	34.65
AV	11.51029G	43.87	54.00	-10.13	29.59	3	Horizontal	81	2.10	-	39.03	9.90	34.65

802.11ax HEW40_Nss1,(MCS0)_2TX

14/01/2021

5795MHz_TX

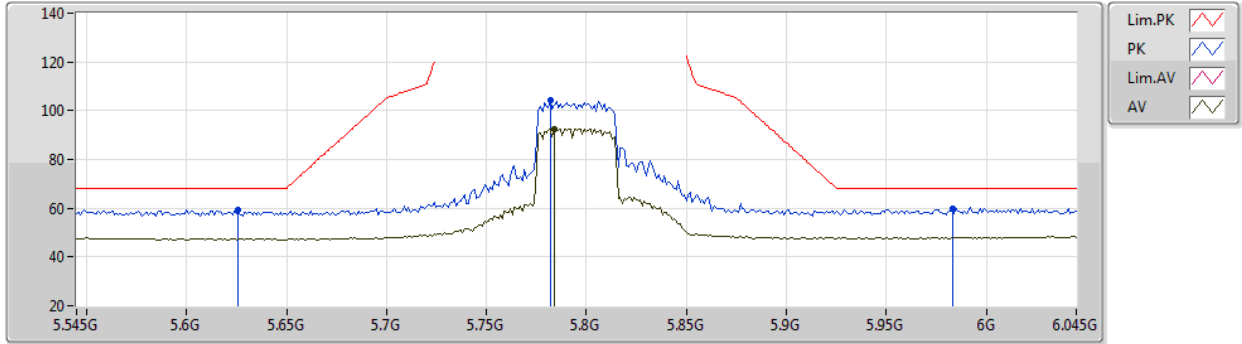


EUT_Z_2TX
Setting Default
03-F-L-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.626G	59.43	68.20	-8.77	53.21	3	Vertical	28	2.56	-	34.35	6.81	34.94
PK	5.782G	104.33	Inf	-Inf	98.17	3	Vertical	28	2.56	-	34.20	6.89	34.93
AV	5.784G	92.67	Inf	-Inf	86.51	3	Vertical	28	2.56	-	34.20	6.89	34.93
PK	5.983G	59.85	68.20	-8.35	53.11	3	Vertical	28	2.56	-	34.67	6.99	34.92

802.11ax HEW40_Nss1,(MCS0)_2TX

14/01/2021

5795MHz_TX

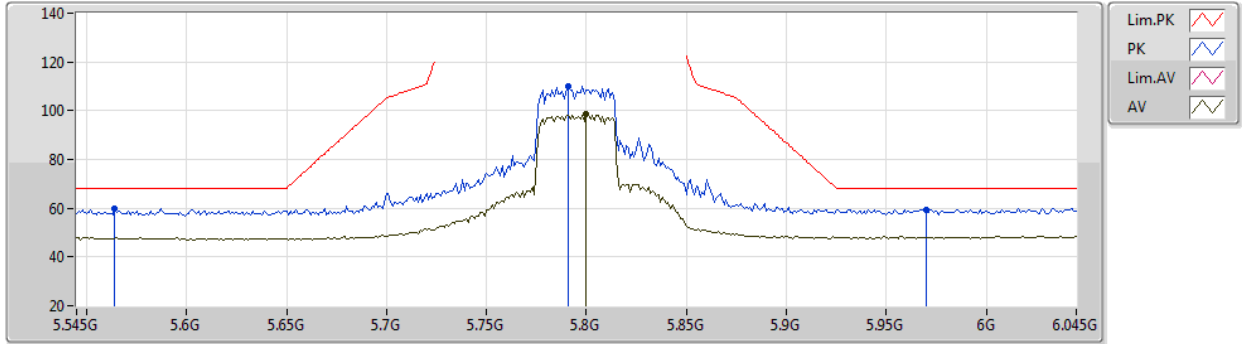


EUT Z_2TX
Setting Default
03-F-L-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.564G	59.67	68.20	-8.53	53.43	3	Horizontal	0	1.05	-	34.44	6.75	34.95
PK	5.791G	109.81	Inf	-Inf	103.64	3	Horizontal	0	1.05	-	34.20	6.90	34.93
AV	5.8G	98.48	Inf	-Inf	92.31	3	Horizontal	0	1.05	-	34.20	6.90	34.93
PK	5.97G	59.55	68.20	-8.65	52.84	3	Horizontal	0	1.05	-	34.64	6.99	34.92

802.11ax HEW40_Nss1,(MCS0)_2TX

14/01/2021

5795MHz_TX

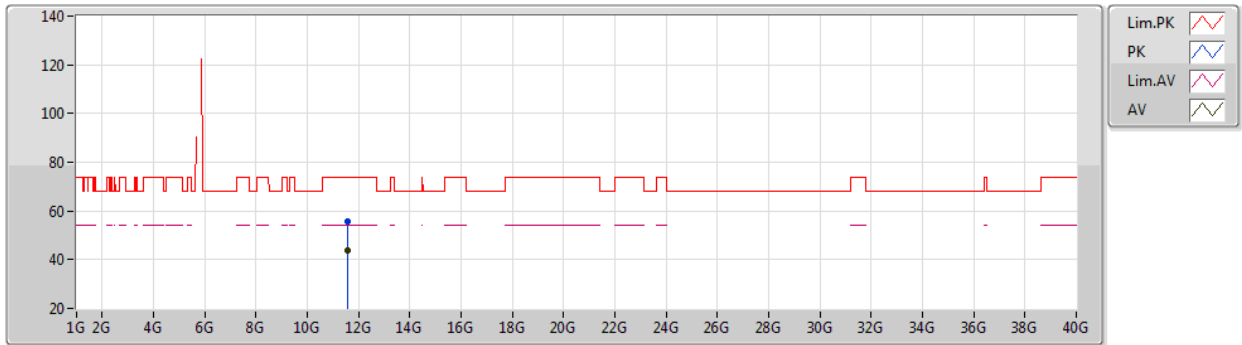


EUT Z_2TX
Setting Default
03-F-L-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	11.59202G	55.71	74.00	-18.29	41.18	3	Vertical	116	1.60	-	39.28	9.92	34.67
AV	11.59234G	44.01	54.00	-9.99	29.48	3	Vertical	116	1.60	-	39.28	9.92	34.67

802.11ax HEW40_Nss1,(MCS0)_2TX

14/01/2021

5795MHz_TX

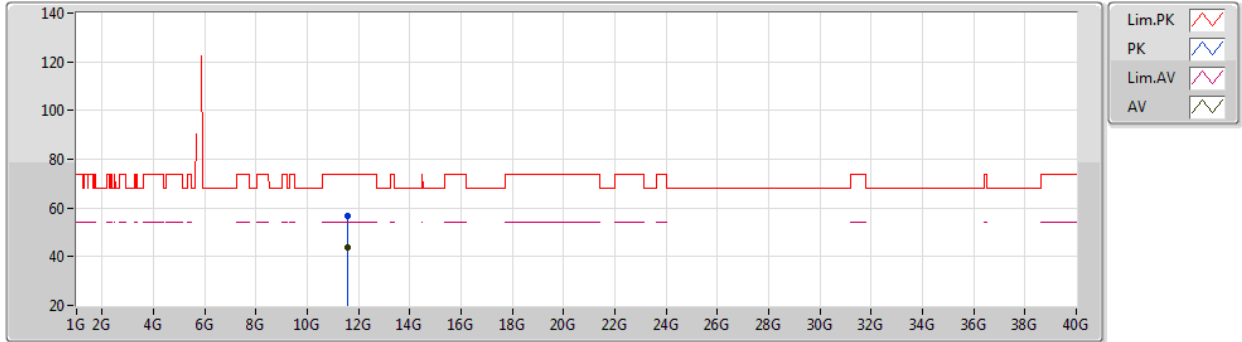

EUT Z_2TX
Setting Default
03-F-L-2


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	11.592G	56.47	74.00	-17.53	41.94	3	Horizontal	217	2.72	-	39.28	9.92	34.67
AV	11.59127G	43.91	54.00	-10.09	29.39	3	Horizontal	217	2.72	-	39.27	9.92	34.67



802.11ax HEW80_Nss1,(MCS0)_2TX

14/01/2021

5210MHz_TX

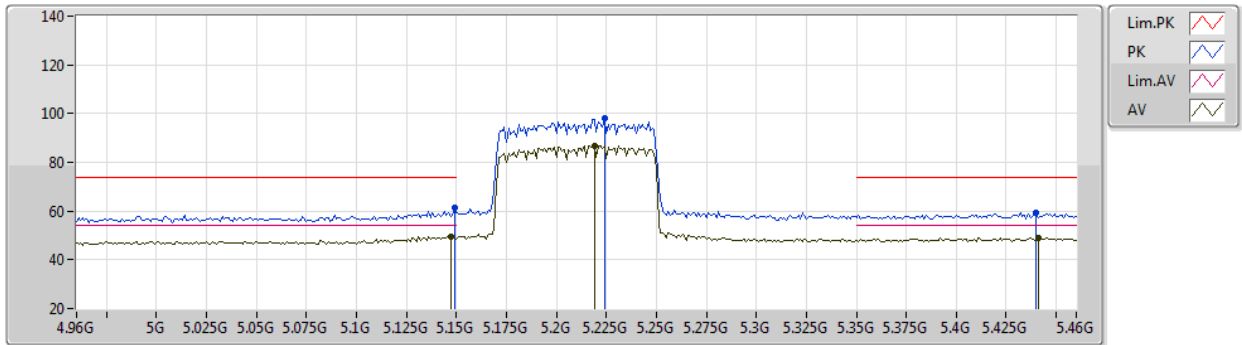


EUT_Z_2TX
Setting 40
03-F-L-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.149G	61.24	74.00	-12.76	56.24	3	Vertical	65	2.92	-	33.90	6.43	35.33
AV	5.147G	49.43	54.00	-4.57	44.43	3	Vertical	65	2.92	-	33.90	6.43	35.33
PK	5.224G	97.96	Inf	-Inf	92.85	3	Vertical	65	2.92	-	33.95	6.41	35.25
AV	5.219G	86.84	Inf	-Inf	81.74	3	Vertical	65	2.92	-	33.94	6.41	35.25
PK	5.44G	59.24	74.00	-14.76	53.15	3	Vertical	65	2.92	-	34.54	6.56	35.01
AV	5.441G	48.99	54.00	-5.01	42.89	3	Vertical	65	2.92	-	34.55	6.56	35.01

802.11ax HEW80_Nss1,(MCS0)_2TX

14/01/2021

5210MHz_TX

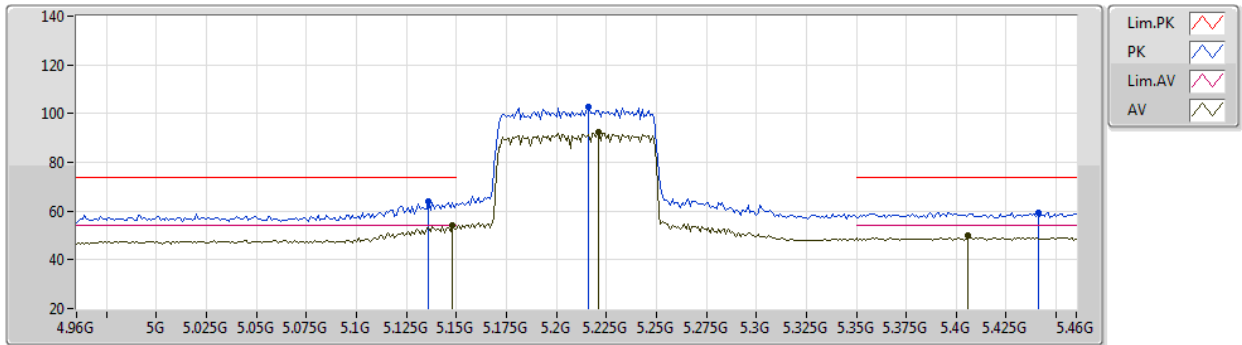


EUT_Z_2TX
Setting 40
03-F-L-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.136G	64.19	74.00	-9.81	59.20	3	Horizontal	355	1.14	-	33.90	6.43	35.34
AV	5.148G	53.93	54.00	-0.07	48.93	3	Horizontal	355	1.14	-	33.90	6.43	35.33
PK	5.216G	102.59	Inf	-Inf	97.51	3	Horizontal	355	1.14	-	33.93	6.41	35.26
AV	5.221G	92.38	Inf	-Inf	87.28	3	Horizontal	355	1.14	-	33.94	6.41	35.25
PK	5.441G	59.42	74.00	-14.58	53.32	3	Horizontal	355	1.14	-	34.55	6.56	35.01
AV	5.406G	49.99	54.00	-4.01	44.19	3	Horizontal	355	1.14	-	34.34	6.51	35.05

802.11ax HEW80_Nss1,(MCS0)_2TX

14/01/2021

5210MHz_TX

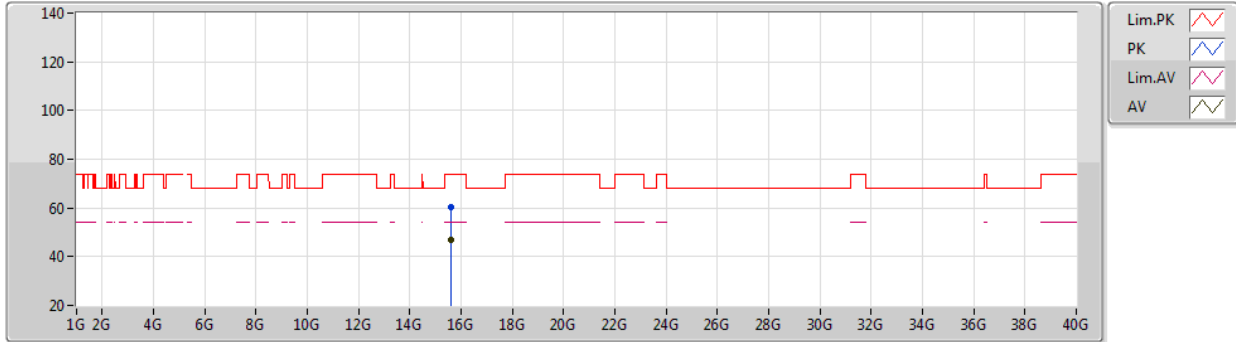


EUT Z_2TX
Setting 40
03-F-L-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	15.62815G	60.18	74.00	-13.82	45.61	3	Vertical	300	2.34	-	37.84	11.81	35.08
AV	15.62876G	46.92	54.00	-7.08	32.35	3	Vertical	300	2.34	-	37.84	11.81	35.08

802.11ax HEW80_Nss1,(MCS0)_2TX

14/01/2021

5210MHz_TX

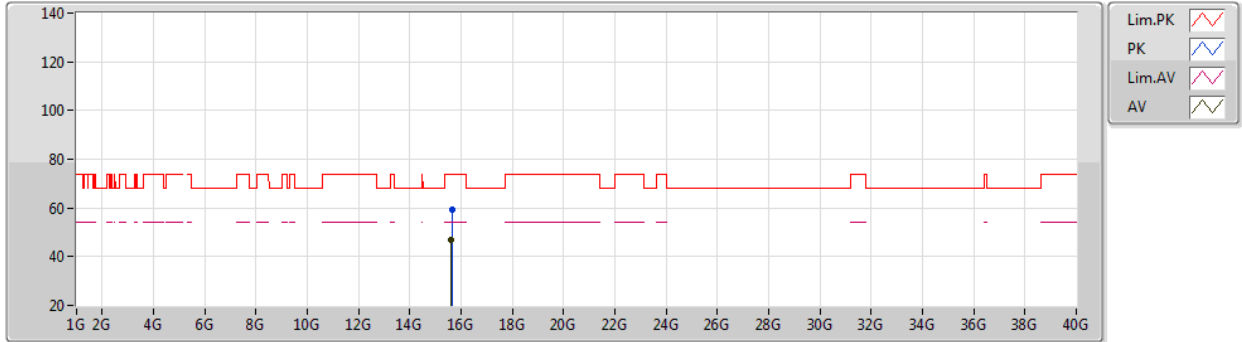


EUT Z_2TX
Setting 40
03-F-L-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	15.63176G	59.48	74.00	-14.52	44.90	3	Horizontal	62	2.23	-	37.84	11.82	35.08
AV	15.62892G	47.02	54.00	-6.98	32.45	3	Horizontal	62	2.23	-	37.84	11.81	35.08

802.11ax HEW80_Nss1,(MCS0)_2TX

14/01/2021

5775MHz_TX

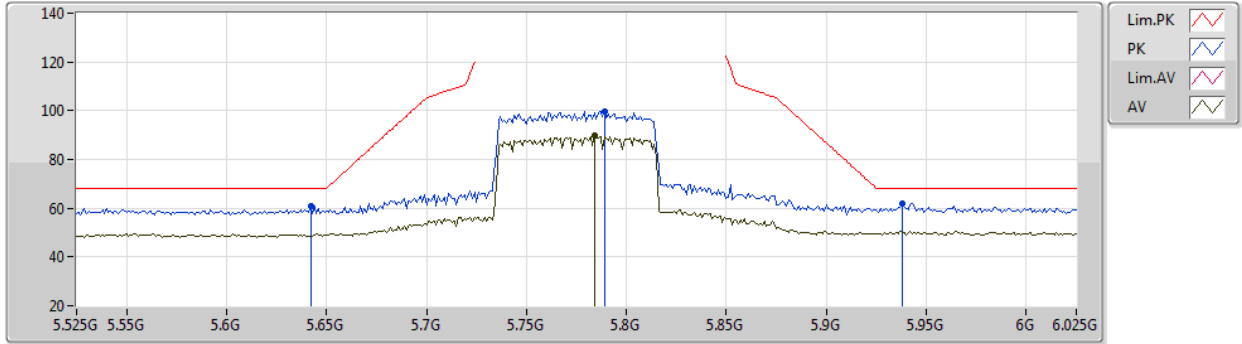


EUT Z_2TX
Setting Default
03-F-L-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.642G	60.75	68.20	-7.45	54.49	3	Vertical	28	2.95	-	34.38	6.82	34.94
PK	5.789G	99.75	Inf	-Inf	93.59	3	Vertical	28	2.95	-	34.20	6.89	34.93
AV	5.784G	89.57	Inf	-Inf	83.41	3	Vertical	28	2.95	-	34.20	6.89	34.93
PK	5.938G	61.71	68.20	-6.49	55.11	3	Vertical	28	2.95	-	34.55	6.97	34.92

802.11ax HEW80_Nss1,(MCS0)_2TX

14/01/2021

5775MHz_TX

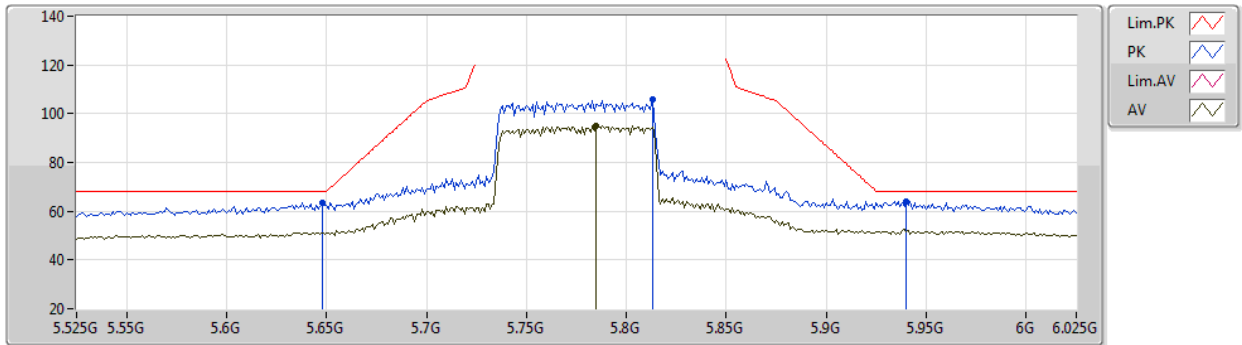


EUT_Z_2TX
Setting Default
03-F-L-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.648G	63.52	68.20	-4.68	57.24	3	Horizontal	0	1.03	-	34.40	6.82	34.94
PK	5.813G	105.65	Inf	-Inf	99.42	3	Horizontal	0	1.03	-	34.25	6.91	34.93
AV	5.785G	94.90	Inf	-Inf	88.74	3	Horizontal	0	1.03	-	34.20	6.89	34.93
PK	5.94G	64.11	68.20	-4.09	57.50	3	Horizontal	0	1.03	-	34.56	6.97	34.92

802.11ax HEW80_Nss1,(MCS0)_2TX

14/01/2021

5775MHz_TX

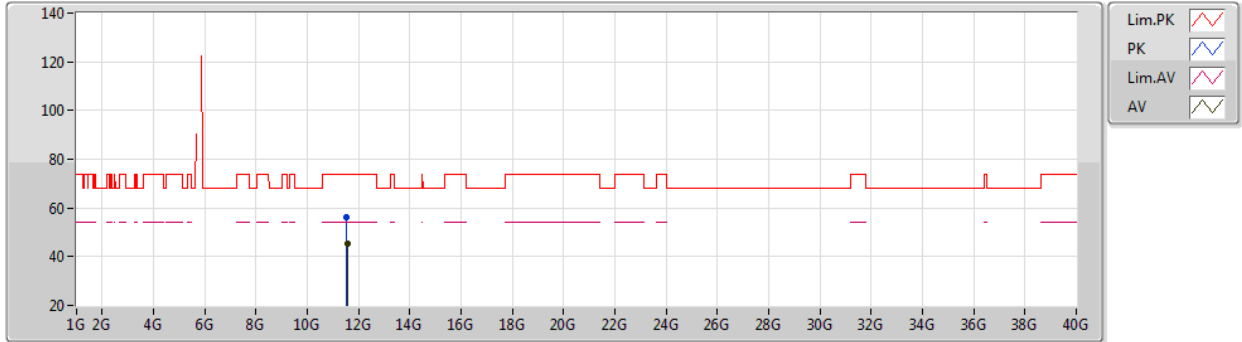


EUT Z_2TX
Setting Default
03-F-L-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	11.54794G	55.96	74.00	-18.04	41.57	3	Vertical	44	1.15	-	39.14	9.91	34.66
AV	11.55221G	45.11	54.00	-8.89	30.70	3	Vertical	44	1.15	-	39.16	9.91	34.66

802.11ax HEW80_Nss1,(MCS0)_2TX

14/01/2021

5775MHz_TX

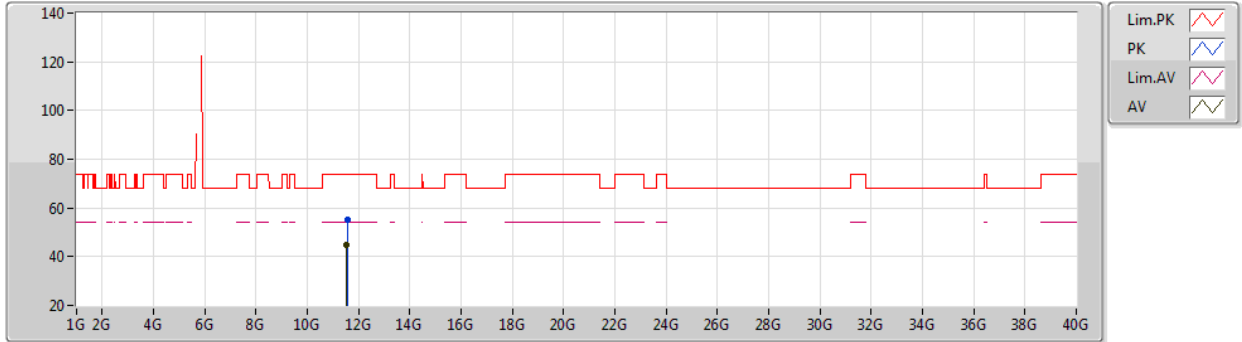

EUT Z_2TX
Setting Default
03-F-L-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	11.55175G	55.36	74.00	-18.64	40.95	3	Horizontal	238	1.11	-	39.16	9.91	34.66
AV	11.54903G	44.99	54.00	-9.01	30.59	3	Horizontal	238	1.11	-	39.15	9.91	34.66