

FCC REPORT

Applicant: SHENZHEN LOFTYNN INTELLIGENCE TECHNOLOGY CO., LTD.

Address of Applicant: Room 301, Xindongxing Commercial Centre, Liuxian 2nd Road, Baoan, Shenzhen, GD 518101

Equipment Under Test (EUT)

Product Name: Baby Monitor

Model No.: E600T, E660T

Trade mark: Axvue, Lanman

FCC ID: 2AJD6-600T

Applicable standards: FCC CFR Title 47 Part 15 Subpart C Section 15.247

Date of sample receipt: 20 Apr., 2017

Date of Test: 20 Apr., to 05 May, 2017

Date of report issued: 08 May, 2017

Test Result: PASS*

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Bruce Zhang
Laboratory Manager
This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product and does not permit the use of the CCIS product certification mark. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

2 Version

Version No.	Date	Description
00	08 May, 2017	Original

Prepared by:

Mike.Ou

Date:

08 May, 2017

Test Engineer

Reviewed by:

Ryan.Lee

Date:

08 May, 2017

Project Engineer

3 Contents

	Page
1 COVER PAGE.....	1
2 VERSION.....	2
3 CONTENTS	3
4 TEST SUMMARY.....	4
5 GENERAL INFORMATION.....	5
5.1 CLIENT INFORMATION	5
5.2 GENERAL DESCRIPTION OF E.U.T.....	5
5.3 TEST MODE	6
5.4 LABORATORY FACILITY.....	6
5.5 LABORATORY LOCATION	6
5.6 TEST INSTRUMENTS LIST.....	7
6 TEST RESULTS AND MEASUREMENT DATA	8
6.1 ANTENNA REQUIREMENT	8
6.2 CONDUCTED EMISSIONS	9
6.3 CONDUCTED OUTPUT POWER.....	12
6.4 20dB OCCUPY BANDWIDTH.....	14
6.5 CARRIER FREQUENCIES SEPARATION.....	16
6.6 HOPPING CHANNEL NUMBER	19
6.7 DWELL TIME.....	20
6.8 PSEUDORANDOM FREQUENCY HOPPING SEQUENCE.....	22
6.9 BAND EDGE.....	23
6.9.1 Conducted Emission Method.....	23
6.9.2 Radiated Emission Method	25
6.10 SPURIOUS EMISSION	30
6.10.1 Conducted Emission Method.....	30
6.10.2 Radiated Emission Method	33
7 TEST SETUP PHOTO	38
8 EUT CONSTRUCTIONAL DETAILS.....	40

4 Test Summary

Test Item	Section in CFR 47	Result
Antenna Requirement	15.203/15.247 (c)	Pass
AC Power Line Conducted Emission	15.207	Pass
Conducted Peak Output Power	15.247 (b)(1)	Pass
20dB Occupied Bandwidth	15.247 (a)(1)	Pass
Carrier Frequencies Separation	15.247 (a)(1)	Pass
Hopping Channel Number	15.247 (a)(1)	Pass
Dwell Time	15.247 (a)(1)	Pass
Radiated Emission	15.205/15.209	Pass
Band Edge	15.247(d)	Pass

Pass: The EUT complies with the essential requirements in the standard.

Test according to ANSI C63.4:2014;ANSI C63.10:2013

5 General Information

5.1 Client Information

Applicant:	SHENZHEN LOFTYNN INTELLIGENCE TECHNOLOGY CO., LTD.
Address of Applicant:	Room 301, Xindongxing Commercial Centre,Liuxian 2nd Road, Baoan, Shenzhen, GD 518101
Manufacturer/Factory:	SHENZHEN LOFTYNN INTELLIGENCE TECHNOLOGY CO., LTD.
Address of Manufacturer/Factory:	Room 301, Xindongxing Commercial Centre,Liuxian 2nd Road, Baoan, Shenzhen, GD 518101

5.2 General Description of E.U.T.

Product Name:	Baby Monitor
Model No.:	E600T, E660T
Operation Frequency:	2410.875-2468.250MHz
Transfer rate:	1 Mbits/s
Number of channel:	15
Modulation type:	GFSK
Modulation technology:	FHSS
Antenna Type:	Integral Antenna
Antenna gain:	0 dBi
AC adapter:	Model: P5 0750500 Input: AC100-240V 50/60Hz 250mA Output: DC 7.5V, 500mA
Remark:	The No.: E600T, E660T were identical inside, the electrical circuit design, layout,components used and internal wiring are same ,except E660T have one more lamp than E600T and model no is different.

Channel List			
Channel	Frequency	Channel	Frequency
0	2410.875MHz	8	2444.625MHz
1	2414.250MHz	9	2448.000MHz
2	2417.625MHz	10	2451.375MHz
3	2424.375MHz	11	2458.125MHz
4	2427.750MHz	12	2461.500MHz
5	2431.125MHz	13	2464.875MHz
6	2434.500MHz	14	2468.250MHz
7	2441.250MHz		

Remark: Channel 0, 7 &14 selected for test.

5.3 Test mode

Transmitting mode:	Keep the EUT in transmitting mode with modulation
The sample was placed 0.8m above the ground plane of 3m chamber*. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working with a fresh battery, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.	

5.4 Laboratory Facility

The test facility is recognized, certified, or accredited by the following organizations:

● **FCC - Registration No.: 817957**

Shenzhen Zhongjian Nanfang Testing Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in out files. Registration 817957, February 27, 2012.

● **IC - Registration No.: 10106A-1**

The 3m Semi-anechoic chamber of Shenzhen Zhongjian Nanfang Testing Co., Ltd. has been Registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 10106A-1.

● **CNAS - Registration No.: CNAS L6048**

Shenzhen Zhongjian Nanfang Testing Co., Ltd. is accredited to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration laboratories for the competence of testing. The Registration No. is CNAS L6048.

5.5 Laboratory Location

Shenzhen Zhongjian Nanfang Testing Co., Ltd.

Address: No. B-C, 1/F., Building 2, Laodong No.2 Industrial Park, Xixiang Road,

Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755-23118282

Fax: +86-755-23116366



5.6 Test Instruments list

Radiated Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. Date (mm-dd-yy)	Cal. Due date (mm-dd-yy)
1	3m SAC	SAEMC	9(L)*6(W)* 6(H)	CCIS0001	08-23-2014	08-22-2017
2	BiConiLog Antenna	SCHWARZBECK	VULB9163	CCIS0005	02-25-2017	02-24-2018
3	Horn Antenna	SCHWARZBECK	BBHA9120D	CCIS0006	02-25-2017	02-24-2018
4	Pre-amplifier (10kHz-1.3GHz)	HP	8447D	CCIS0003	02-25-2017	02-24-2018
5	Pre-amplifier (1GHz-18GHz)	Compliance Direction Systems Inc.	PAP-1G18	CCIS0011	02-25-2017	02-24-2018
6	Pre-amplifier (18-26GHz)	Rohde & Schwarz	AFS33-18002 650-30-8P-44	GTS218	02-25-2017	02-24-2018
7	Horn Antenna	ETS-LINDGREN	3160	GTS217	02-25-2017	02-24-2018
8	Spectrum analyzer 9k-30GHz	Rohde & Schwarz	FSP30	CCIS0023	02-25-2017	02-24-2018
9	EMI Test Receiver	Rohde & Schwarz	ESRP7	CCIS0167	02-25-2017	02-24-2018
10	Loop antenna	Laplace instrument	RF300	EMC0701	02-25-2017	02-24-2018
11	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
12	Coaxial Cable	N/A	N/A	CCIS0018	02-25-2017	02-24-2018
13	Coaxial Cable	N/A	N/A	CCIS0020	02-25-2017	02-24-2018

Conducted Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. Date (mm-dd-yy)	Cal. Due date (mm-dd-yy)
1	Shielding Room	ZhongShuo Electron	11.0(L)x4.0(W)x3.0(H)	CCIS0061	08-23-2014	08-22-2017
2	EMI Test Receiver	Rohde & Schwarz	ESCI	CCIS0002	02-25-2017	02-24-2018
3	LISN	CHASE	MN2050D	CCIS0074	02-25-2017	02-24-2018
4	Coaxial Cable	CCIS	N/A	CCIS0086	02-25-2017	02-24-2018
5	EMI Test Software	AUDIX	E3	N/A	N/A	N/A


6 Test results and Measurement Data

6.1 Antenna requirement

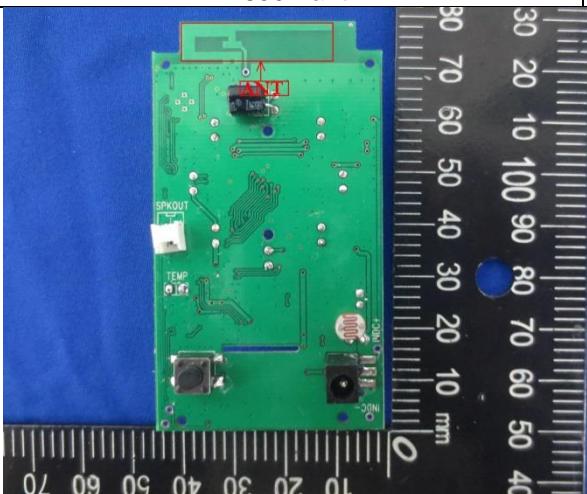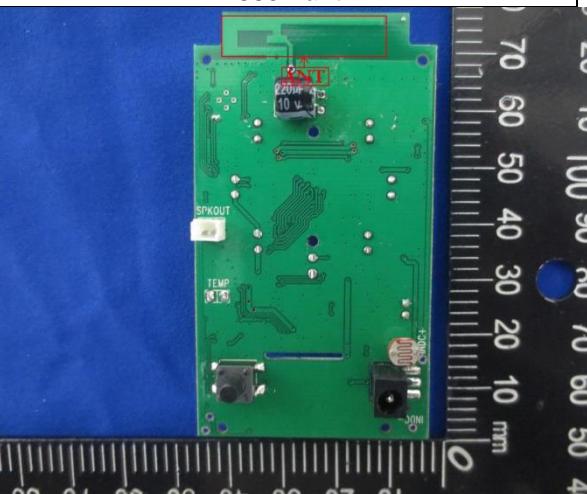Standard requirement:	FCC Part15 C Section 15.203 /247(c)
15.203 requirement:	<p>An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</p>
15.247(c) (1)(i) requirement:	<p>(i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.</p>
E.U.T Antenna:	<p>The EUT antenna is an integral antenna which permanently attached, and the best case gain of the antenna is 0 dBi.</p>
E600T ant	 <p>A photograph of a green printed circuit board (PCB) labeled 'E600T ant'. The PCB features various electronic components, including a red 'ANT' label with an arrow pointing to a small circular antenna element, a black 'TEMP' label, and a white 'SPKOUT' label. A metric ruler is placed next to the PCB for scale, showing measurements from 0 to 100 mm.</p>
E660T ant	 <p>A photograph of a green printed circuit board (PCB) labeled 'E660T ant'. The PCB features various electronic components, including a red 'ANT' label with an arrow pointing to a small circular antenna element, a black 'TEMP' label, and a white 'SPKOUT' label. A metric ruler is placed next to the PCB for scale, showing measurements from 0 to 100 mm.</p>

6.2 Conducted Emissions

Test Requirement:	FCC Part 15 C Section 15.207		
Test Method:	ANSI C63.4:2014		
Test Frequency Range:	150 kHz to 30 MHz		
Class / Severity:	Class B		
Receiver setup:	RBW=9 kHz, VBW=30 kHz, Sweep time=auto		
Limit:	Frequency range (MHz)	Limit (dBuV)	
		Quasi-peak	Average
	0.15-0.5	66 to 56*	56 to 46*
	0.5-5	56	46
	5-30	60	50
* Decreases with the logarithm of the frequency.			
Test setup:	<p><i>Remark</i> E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m</p>		
Test procedure:	<ol style="list-style-type: none"> The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4: 2014 on conducted measurement. 		
Test Instruments:	Refer to section 5.7 for details		
Test mode:	Bluetooth (Continuous transmitting) mode		
Test results:	Pass		

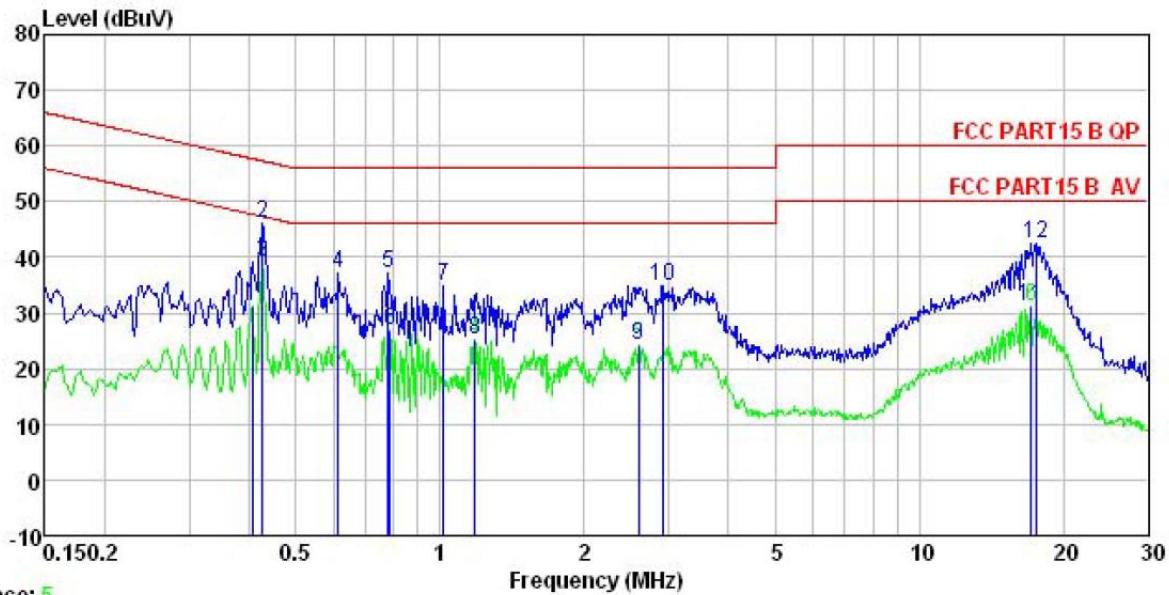
Measurement Data:**Line:**

Site : CCIS Shielding Room
 Condition : FCC PART15 B QP LISN LINE
 EUT : Baby Monitor
 Model : E600T
 Test Mode : TX mode
 Power Rating : AC 120/60Hz
 Environment : Temp: 23 °C Huni:56% Atmos:101KPa
 Test Engineer: Mike
 Remark :

Freq	Read	LISM	Cable	Limit	Over	Remark		
	Freq	Level	Factor	Loss	Level	Line	Limit	
1	0.406	20.25	0.24	10.72	31.21	47.73	-16.52	Average
2	0.426	35.21	0.24	10.73	46.18	57.33	-11.15	QP
3	0.426	28.22	0.24	10.73	39.19	47.33	-8.14	Average
4	0.614	26.16	0.29	10.77	37.22	56.00	-18.78	QP
5	0.779	26.15	0.30	10.80	37.25	56.00	-18.75	QP
6	0.788	15.86	0.30	10.81	26.97	46.00	-19.03	Average
7	1.016	23.76	0.26	10.87	34.89	56.00	-21.11	QP
8	1.184	13.91	0.27	10.89	25.07	46.00	-20.93	Average
9	2.594	12.91	0.33	10.93	24.17	46.00	-21.83	Average
10	2.931	23.70	0.33	10.92	34.95	56.00	-21.05	QP
11	17.109	20.10	0.29	10.91	31.30	50.00	-18.70	Average
12	17.475	31.25	0.30	10.91	42.46	60.00	-17.54	QP

Notes:

- An initial pre-scan was performed on the line and neutral lines with peak detector.
- Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
- Final Level =Receiver Read level + LISN Factor + Cable Loss.

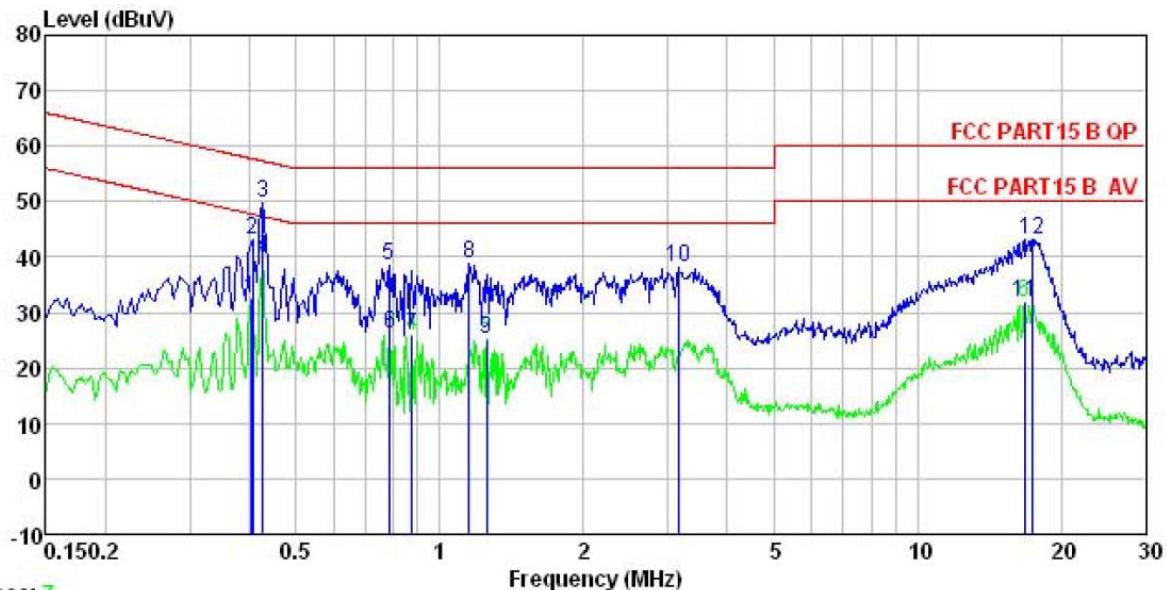Neutral:


Trace: 7
 Site : CCIS Shielding Room
 Condition : FCC PART15 B QP LISN NEUTRAL
 EUT : Baby Monitor
 Model : E600T
 Test Mode : TX mode
 Power Rating : AC 120/60Hz
 Environment : Temp: 23 °C Humi:56% Atmos:101KPa
 Test Engineer: Mike
 Remark :

Freq	Read Level	LISN Factor	Cable Loss	Limit Level	Line Limit	Over Limit	Remark
MHz	dBuV	dB	dB	dBuV	dBuV	dB	
1	0.402	21.67	0.23	10.72	32.62	47.81	-15.19 Average
2	0.406	32.06	0.23	10.72	43.01	57.73	-14.72 QP
3	0.426	38.80	0.23	10.73	49.76	57.33	-7.57 QP
4	0.426	28.97	0.23	10.73	39.93	47.33	-7.40 Average
5	0.783	27.39	0.31	10.81	38.51	56.00	-17.49 QP
6	0.788	15.08	0.31	10.81	26.20	46.00	-19.80 Average
7	0.876	14.61	0.29	10.83	25.73	46.00	-20.27 Average
8	1.153	27.77	0.26	10.89	38.92	56.00	-17.08 QP
9	1.255	14.18	0.26	10.90	25.34	46.00	-20.66 Average
10	3.156	26.81	0.31	10.91	38.03	56.00	-17.97 QP
11	16.750	20.65	0.27	10.91	31.83	50.00	-18.17 Average
12	17.383	32.00	0.27	10.91	43.18	60.00	-16.82 QP

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Receiver Read level + LISN Factor + Cable Loss.


6.3 Conducted Output Power

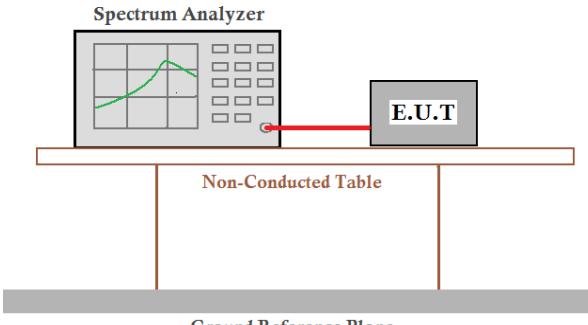Test Requirement:	FCC Part 15 C Section 15.247 (b)(1)
Test Method:	ANSI C63.10:2013 and DA00-705
Receiver setup:	RBW=1MHz, VBW=3MHz, Detector=Peak (If 20dB BW ≤ 1 MHz) RBW=3MHz, VBW=10MHz, Detector=Peak (If 20dB BW > 1 MHz and < 3MHz)
Limit:	125 mW(21 dBm)
Test setup:	 <p>The diagram illustrates the test setup for conducted output power. A Spectrum Analyzer is positioned at the top left, displaying a green waveform on its screen. A red line extends from the analyzer's output port to a grey rectangular box labeled "E.U.T". This entire assembly sits on a light-colored rectangular platform labeled "Non-Conducted Table". Below the table is a thick grey horizontal bar labeled "Ground Reference Plane".</p>
Test Instruments:	Refer to section 5.7 for details
Test mode:	Non-hopping mode
Test results:	Pass

Measurement Data


Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
Lowest	16.12	21.00	Pass
Middle	16.09	21.00	Pass
Highest	15.79	21.00	Pass

Test plot as follows:

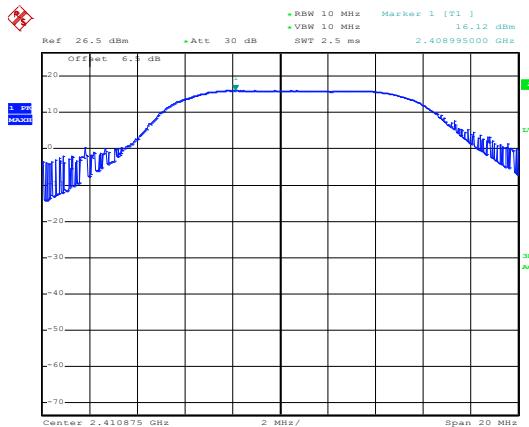


Date: 2.MAY.2017 19:04:58

Lowest channel

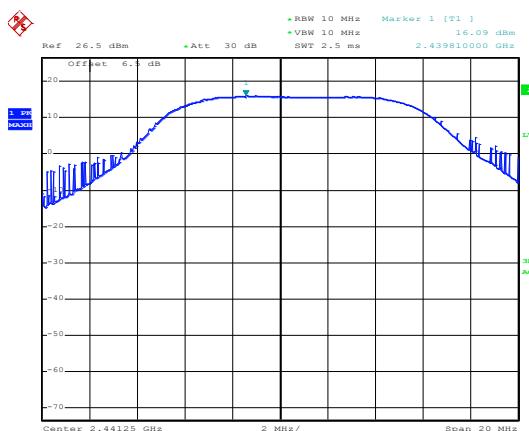

Date: 2.MAY.2017 19:05:49


Middle channel

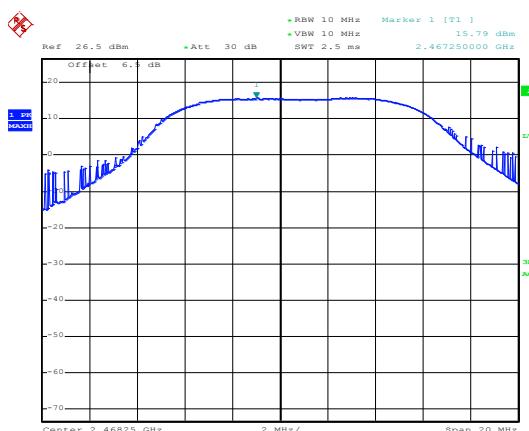

Date: 2.MAY.2017 19:06:17

Highest channel


6.4 20dB Occupy Bandwidth

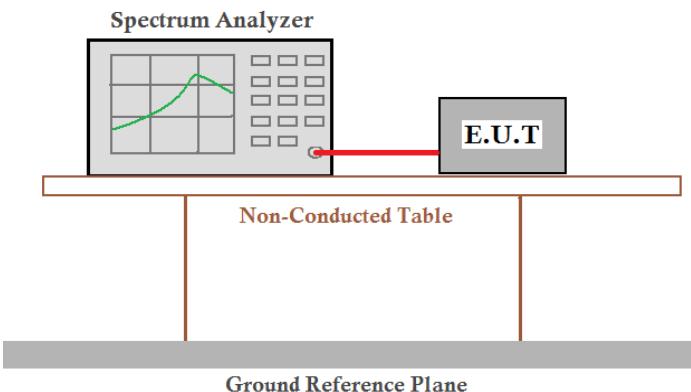Test Requirement:	FCC Part 15 C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2013 and DA00-705
Receiver setup:	RBW=30 kHz, VBW=100 kHz, detector=Peak
Limit:	NA
Test setup:	
Test Instruments:	Refer to section 5.7 for details
Test mode:	Non-hopping mode
Test results:	Pass

Measurement Data:


Test channel	20dB Occupy Bandwidth (kHz)
Lowest	3708
Middle	3636
Highest	3672

Test plot as follows:

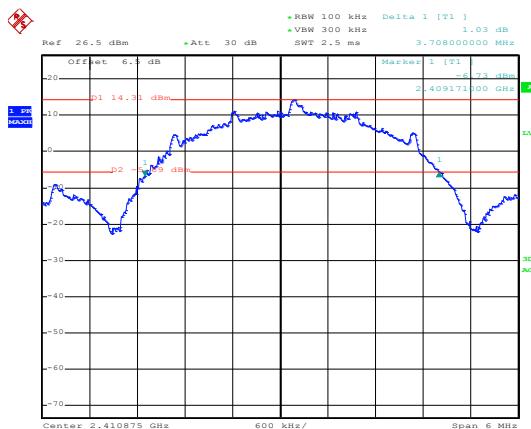


Date: 2.MAY.2017 19:12:43

Lowest channel

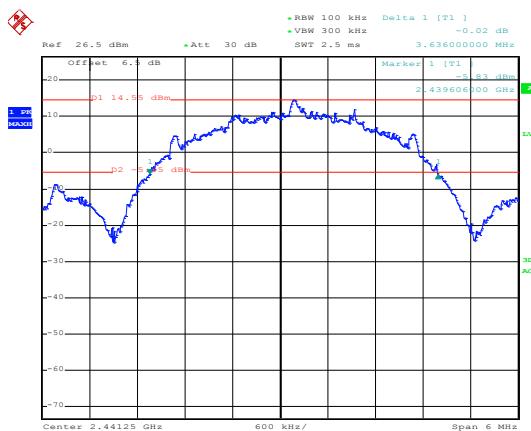

Date: 2.MAY.2017 19:10:57


Middle channel

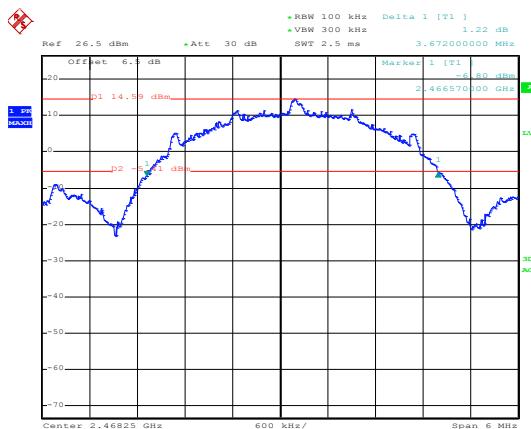

Date: 2.MAY.2017 19:09:23

Highest channel

6.5 Carrier Frequencies Separation

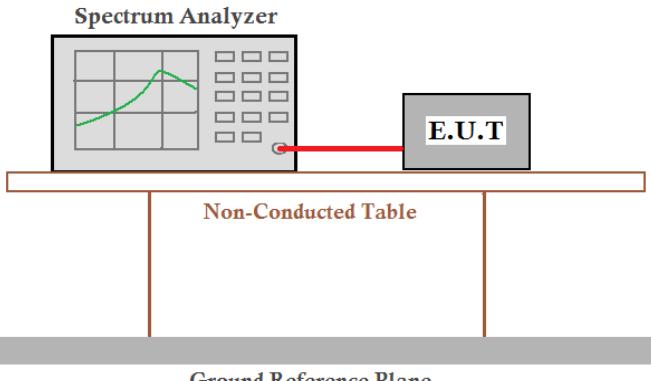Test Requirement:	FCC Part 15 C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2013 and DA00-705
Receiver setup:	RBW=100 kHz, VBW=300 kHz, Detector=Peak
Limit:	0.025MHz or 2/3 of the 20dB bandwidth (whichever is greater)
Test setup:	<p style="text-align: center;">Spectrum Analyzer</p>  <p style="text-align: center;">Non-Conducted Table</p> <p style="text-align: center;">Ground Reference Plane</p>
Test Instruments:	Refer to section 5.7 for details
Test mode:	Hopping mode
Test results:	Pass




Measurement Data:

Test Frequencies(MHz)	Carrier Frequencies Separation (kHz)	Limit (kHz)	Result
2410	3384	2424.00	Pass
2417	6760	2424.00	Pass
2434	6760	2424.00	Pass
2441	3384	2424.00	Pass
2451	6760	2424.00	Pass
2468	3408	2424.00	Pass


Note: According to section 6.3

Mode	20dB bandwidth (kHz) (worse case)	Limit (kHz) (Carrier Frequencies Separation)
GFSK	3636	2424.00

Test plot as follows:

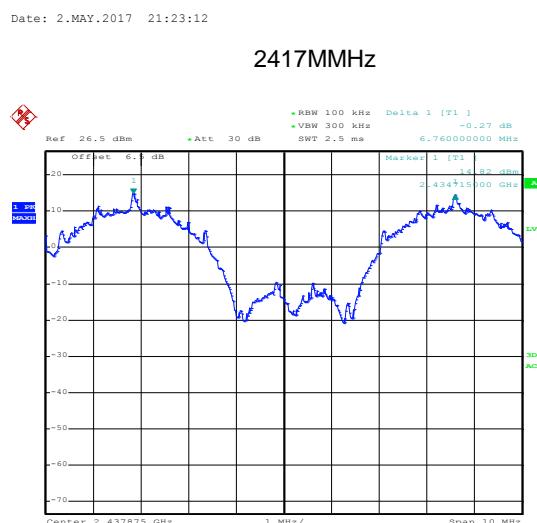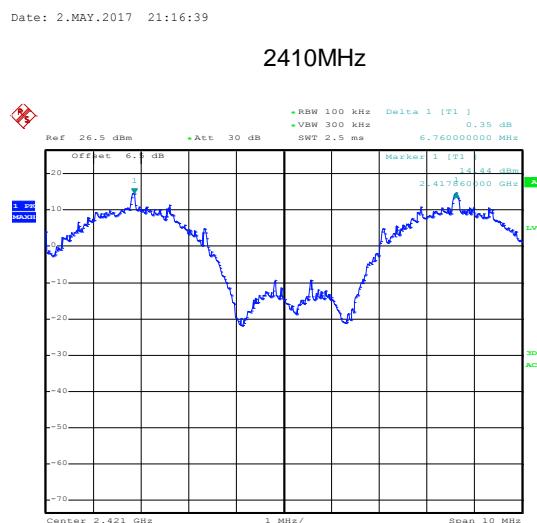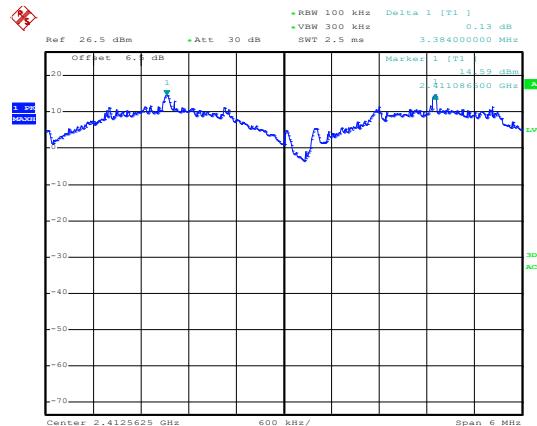


2434MHz

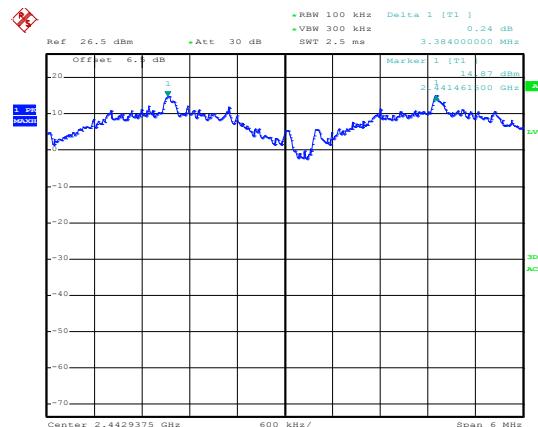


Date: 2.MAY.2017 21:21:06

2441MHz

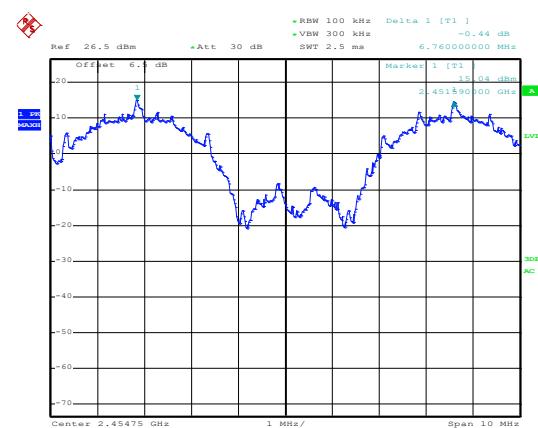

Date: 2.MAY.2017 21:30:37


2451MHz

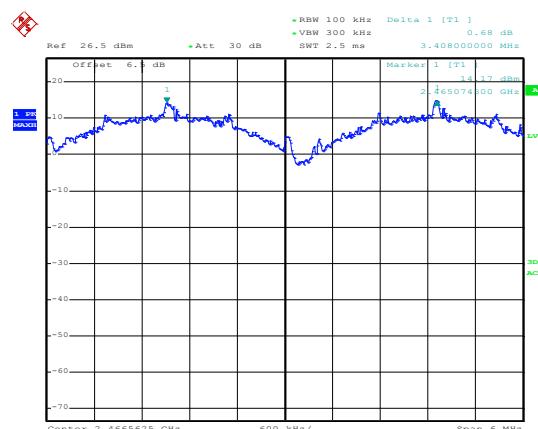

Date: 2.MAY.2017 21:18:54

2468MHz


6.6 Hopping Channel Number

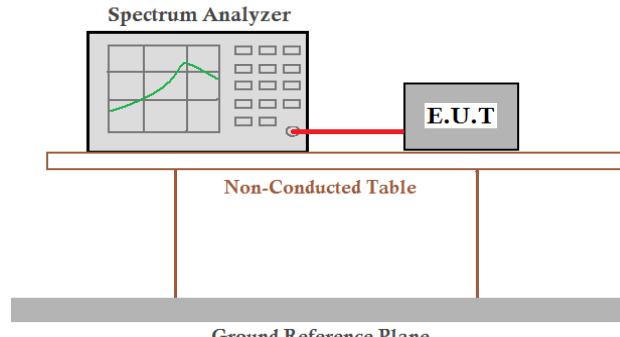Test Requirement:	FCC Part 15 C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2013 and DA00-705
Receiver setup:	RBW=100 kHz, VBW=300 kHz, Frequency range=2400MHz-2483.5MHz, Detector=Peak
Limit:	15 channels
Test setup:	 <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected to the E.U.T. (Equipment Under Test) via a coaxial cable. The setup is placed on a Non-Conducted Table, which sits above a Ground Reference Plane.</p>
Test Instruments:	Refer to section 5.7 for details
Test mode:	Hopping mode
Test results:	Pass

Measurement Data:


Hopping channel numbers	Limit	Result
15	≥ 15	Pass

Test plot as follows:

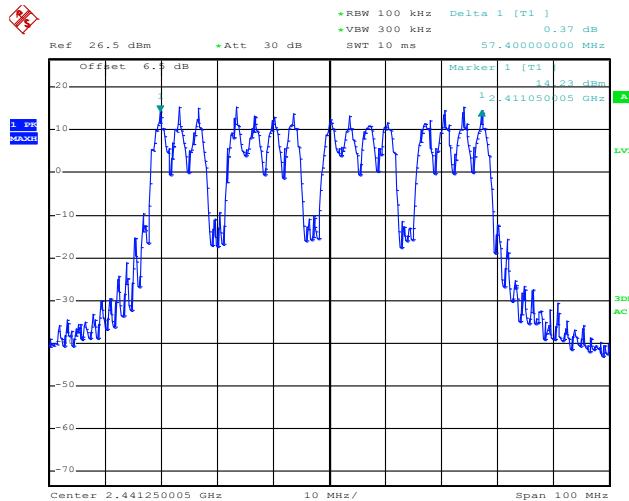

Date: 2.MAY.2017 19:37:19

6.7 Dwell Time

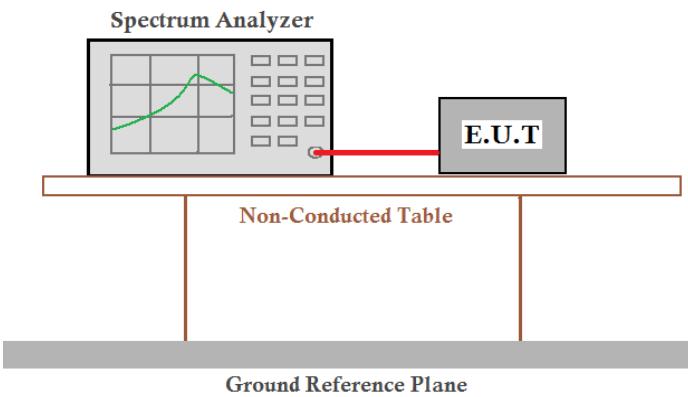Test Requirement:	FCC Part 15 C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2013 and KDB DA00-705
Receiver setup:	RBW=1 MHz, VBW=1 MHz, Span=0 Hz, Detector=Peak
Limit:	0.4 Second
Test setup:	 <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected to the E.U.T (Equipment Under Test) via a coaxial cable. The E.U.T is placed on a Non-Conducted Table. The entire assembly sits on a Ground Reference Plane.</p>
Test Instruments:	Refer to section 5.7 for details
Test mode:	Hopping mode
Test results:	Pass


Measurement Data (Worse case)

Dwell time per hop (Second)	Hopping numbers	Dwell time in one period (Second)	Limit (Second)	Result
0.00584	59	0.34456	0.4	Pass


Remark:

The test period: T = 0.4 Second/Channel x15 Channel = 6 s

Test plot as follows:

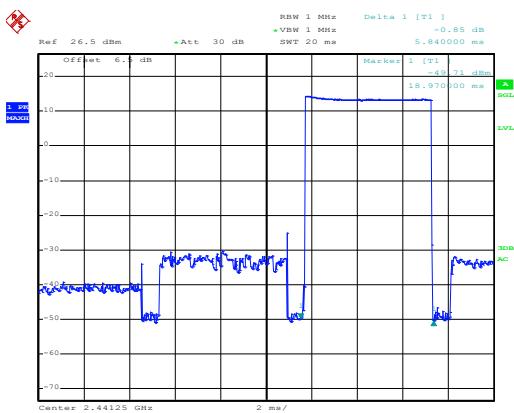

Date: 3.MAY.2017 17:57:17

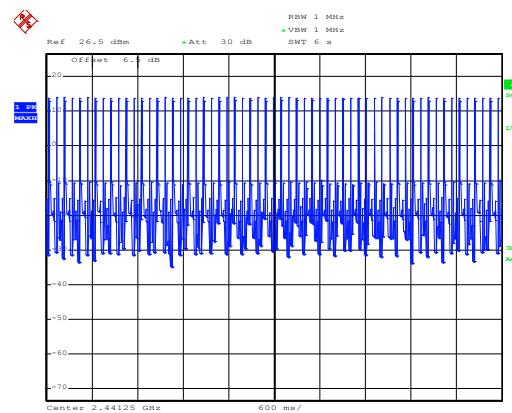

Date: 3.MAY.2017 17:25:41

6.8 Pseudorandom Frequency Hopping Sequence

Test Requirement:

FCC Part 15 C Section 15.247 (a)(1) requirement:


Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Alternatively, Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

EUT Pseudorandom Frequency Hopping Sequence


The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONES; i.e. the shift register is initialized with nine ones.

- Number of shift register stages: 9
- Length of pseudo-random sequence: $2^9 - 1 = 511$ bits
- Longest sequence of zeros: 8 (non-inverted signal)

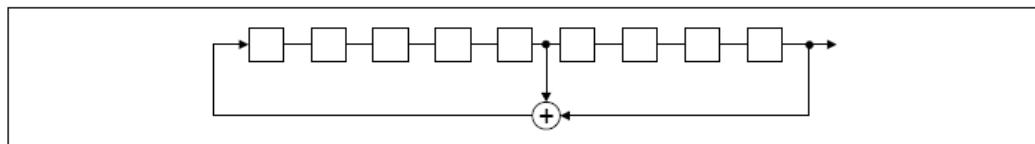

Linear Feedback Shift Register for Generation of the PRBS sequence

An example of Pseudorandom Frequency Hopping Sequence as follow:

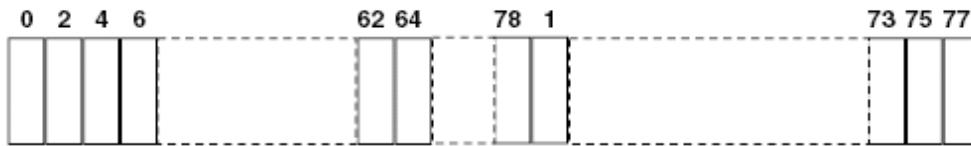


Each frequency used equally on the average by each transmitter.


The system receivers have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shift frequencies in synchronization with the transmitted signals.

6.9 Band Edge

6.9.1 Conducted Emission Method

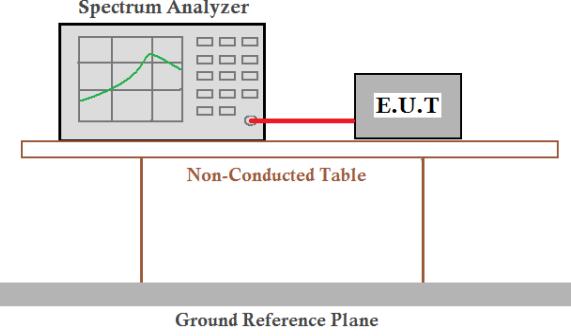
Test Requirement:	FCC Part 15 C Section 15.247 (d)
Test Method:	ANSI C63.10:2013 and DA00-705
Receiver setup:	RBW=100 kHz, VBW=300 kHz, Detector=Peak
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test setup:	
Test Instruments:	Refer to section 5.7 for details
Test mode:	Non-hopping mode and hopping mode
Test results:	Pass

Test plot as follows:

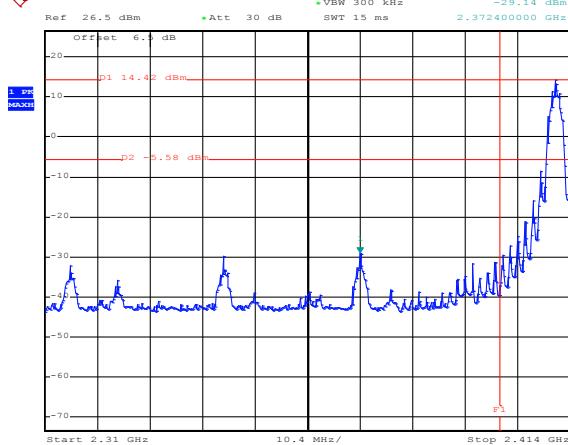


Date: 2.MAY.2017 19:17:46

No-hopping mode

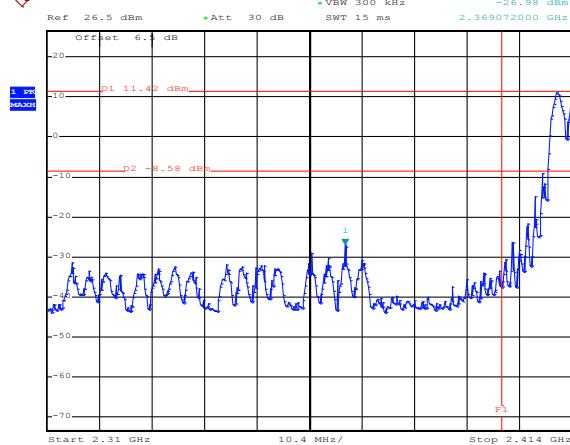


Date: 2.MAY.2017 19:35:10

Hopping mode

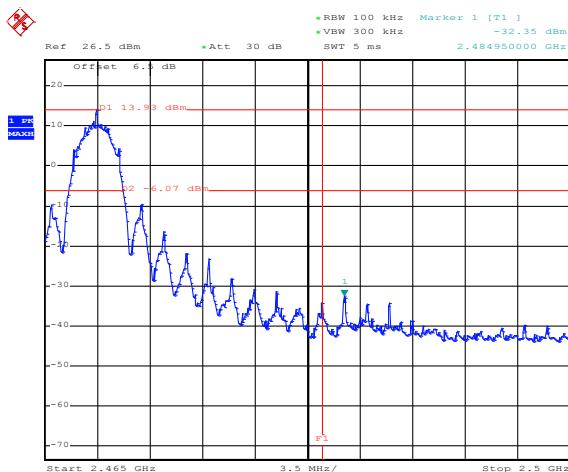

Date: 2.MAY.2017 19:20:21

No-hopping mode

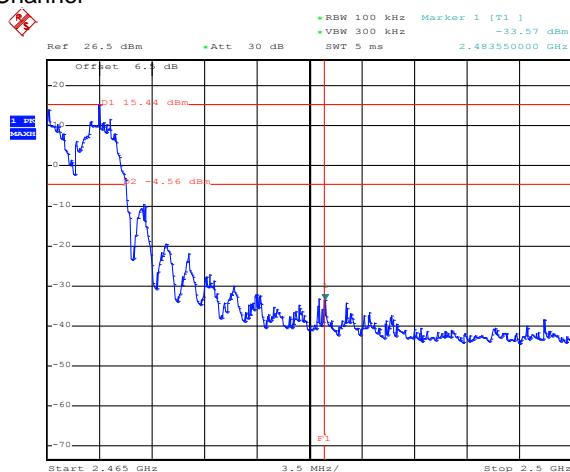

Date: 2.MAY.2017 19:33:20

Hopping mode

6.9.2 Radiated Emission Method


Test Requirement:	FCC Part 15 C Section 15.209 and 15.205							
Test Method:	ANSI C63.10: 2013							
Test Frequency Range:	2.3GHz to 2.5GHz							
Test site:	Measurement Distance: 3m							
Receiver setup:	Frequency	Detector	RBW	VBW	Remark			
	Above 1GHz	Peak	1MHz	3MHz	Peak Value			
		Peak	1MHz	10Hz	Average Value			
Limit:	Frequency	Limit (dBuV/m @3m)			Remark			
	Above 1GHz	54.00			Average Value			
		74.00			Peak Value			
Test setup:								
Test Procedure:	<ol style="list-style-type: none"> The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. 							
Test Instruments:	Refer to section 5.7 for details							
Test mode:	Non-hopping mode							
Test results:	Passed							

Remark:

- Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the Y-axis is the worst case.

Test channel: Lowest


Horizontal:

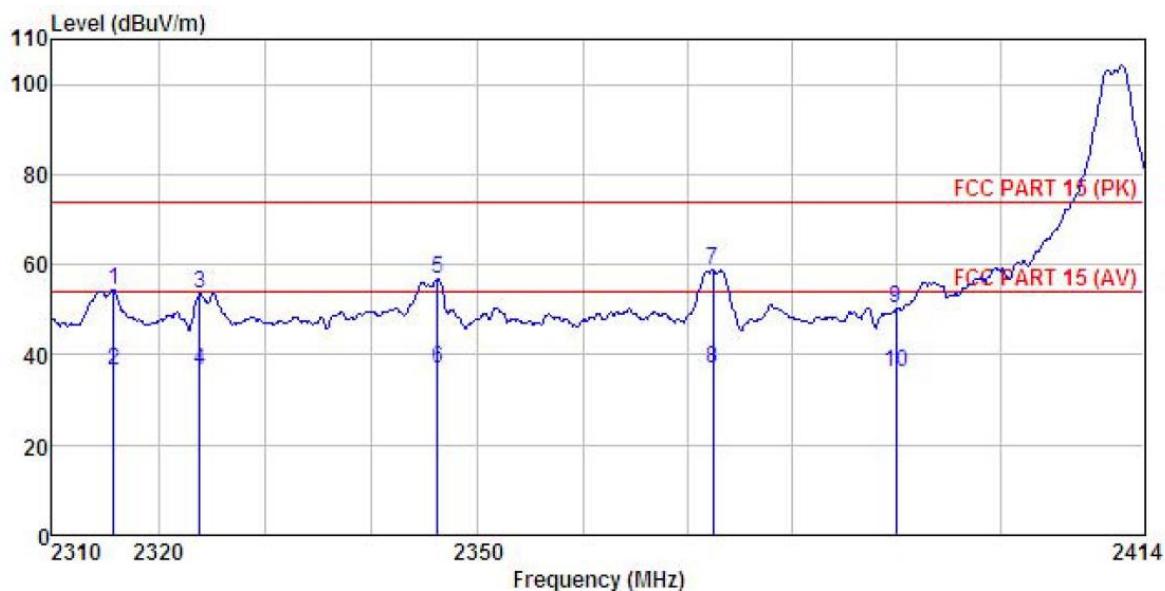

Site : 3m chamber
 Condition : FCC PART 15 (PK) 3m BBHA9120(1G18) HORIZONTAL
 EUT : Baby Monitor
 Model : E600T
 Test mode : L Mode
 Power Rating : AC 120V/60Hz
 Environment : Temp:25.5°C Huni:55%
 Test Engineer: Mike
 REMARK :

Freq	Read	Antenna	Cable	Preamp	Limit	Over	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	
1	2315.704	26.05	23.67	4.62	0.00	54.34	74.00 -19.66 Peak
2	2315.704	8.12	23.67	4.62	0.00	36.41	54.00 -17.59 Average
3	2323.774	25.20	23.67	4.63	0.00	53.50	74.00 -20.50 Peak
4	2323.774	8.22	23.67	4.63	0.00	36.52	54.00 -17.48 Average
5	2346.190	28.69	23.67	4.65	0.00	57.01	74.00 -16.99 Peak
6	2346.190	8.64	23.67	4.65	0.00	36.96	54.00 -17.04 Average
7	2372.372	30.46	23.68	4.67	0.00	58.81	74.00 -15.19 Peak
8	2372.372	8.45	23.68	4.67	0.00	36.80	54.00 -17.20 Average
9	2390.000	21.94	23.68	4.69	0.00	50.31	74.00 -23.69 Peak
10	2390.000	7.95	23.68	4.69	0.00	36.32	54.00 -17.68 Average

Vertical:

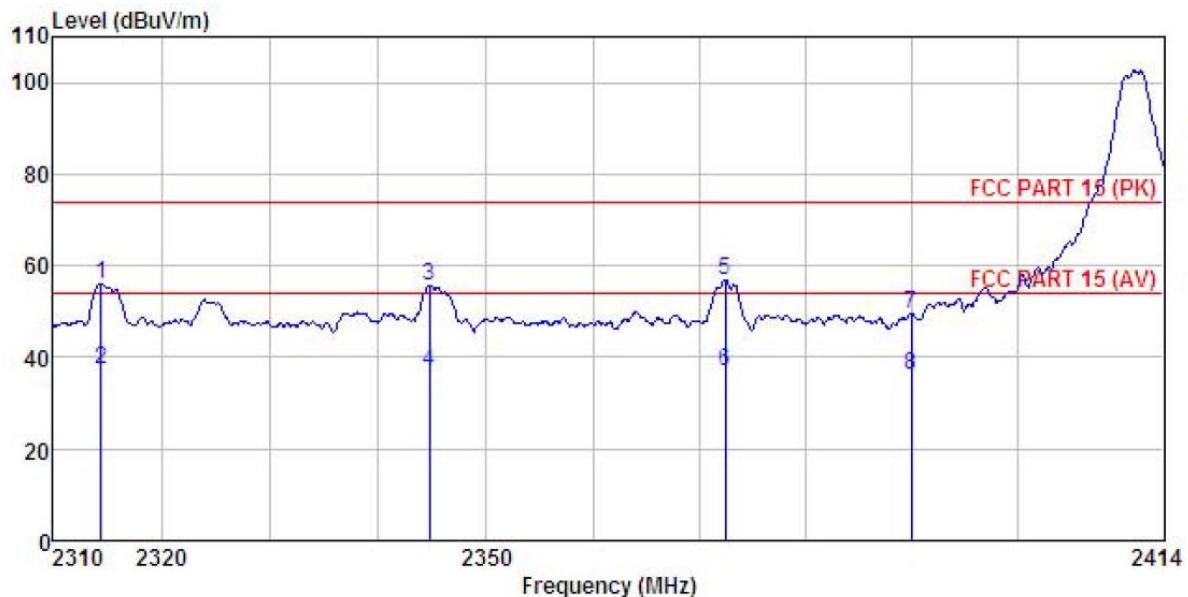


Site : 3m chamber
 Condition : FCC PART 15 (PK) 3m BBHA9120(1G18) VERTICAL
 EUT : Baby Monitor
 Model : E600T
 Test mode : L Mode
 Power Rating : AC 120V/60Hz
 Environment : Temp:25.5°C Huni:55%
 Test Engineer: Mike
 REMARK :

Freq	ReadAntenna		Cable	Preamp	Limit	Over	Remark
	Level	Factor	Loss	Factor			
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 2314.378	27.92	23.66	4.61	0.00	56.19	74.00	-17.81 Peak
2 2314.378	8.92	23.66	4.61	0.00	37.19	54.00	-16.81 Average
3 2344.744	27.42	23.67	4.65	0.00	55.74	74.00	-18.26 Peak
4 2344.744	8.42	23.67	4.65	0.00	36.74	54.00	-17.26 Average
5 2372.372	28.66	23.68	4.67	0.00	57.01	74.00	-16.99 Peak
6 2372.372	8.64	23.68	4.67	0.00	36.99	54.00	-17.01 Average
7 2390.000	21.07	23.68	4.69	0.00	49.44	74.00	-24.56 Peak
8 2390.000	7.75	23.68	4.69	0.00	36.12	54.00	-17.88 Average

Test channel: Highest


Horizontal:

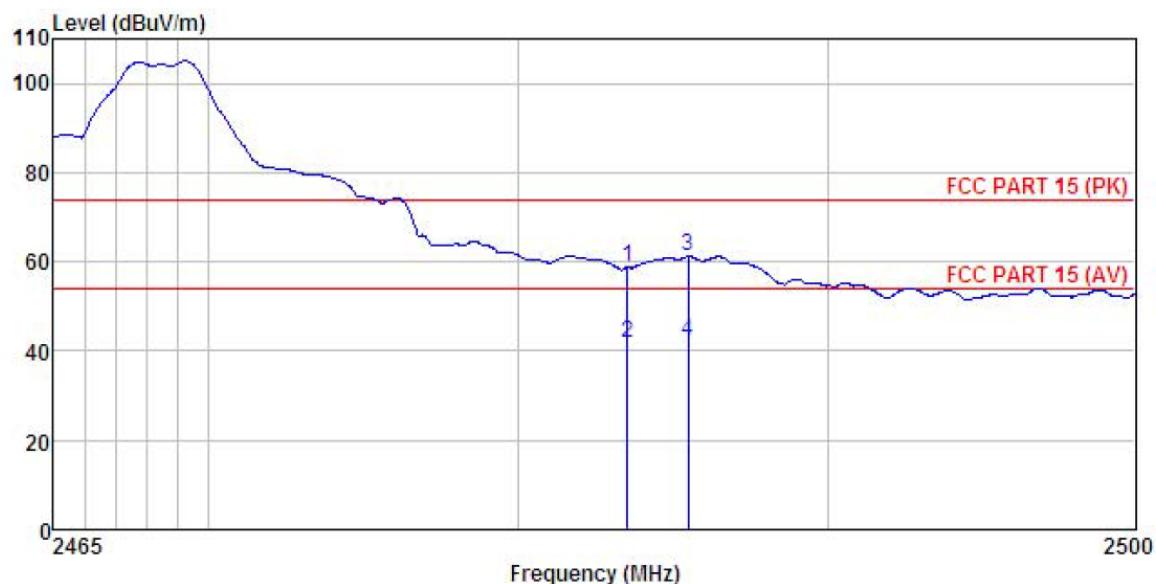

Site : 3m chamber
Condition : FCC PART 15 (PK) 3m BBHA9120(1G18) HORIZONTAL
EUT : Baby Monitor
Model : E600T
Test mode : H Mode
Power Rating : AC 120V/60Hz
Environment : Temp:25.5°C Huni:55%
Test Engineer: Mike
REMARK :

	Read	Antenna	Cable	Preamp		Limit	Over	
Freq	Level	Factor	Loss	Factor	Level	Line	Line	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2483.500	30.22	23.70	4.81	0.00	58.73	74.00	-15.27 Peak
2	2483.500	13.35	23.70	4.81	0.00	41.86	54.00	-12.14 Average
3	2485.485	32.69	23.70	4.81	0.00	61.20	74.00	-12.80 Peak
4	2485.485	13.53	23.70	4.81	0.00	42.04	54.00	-11.96 Average

Vertical:

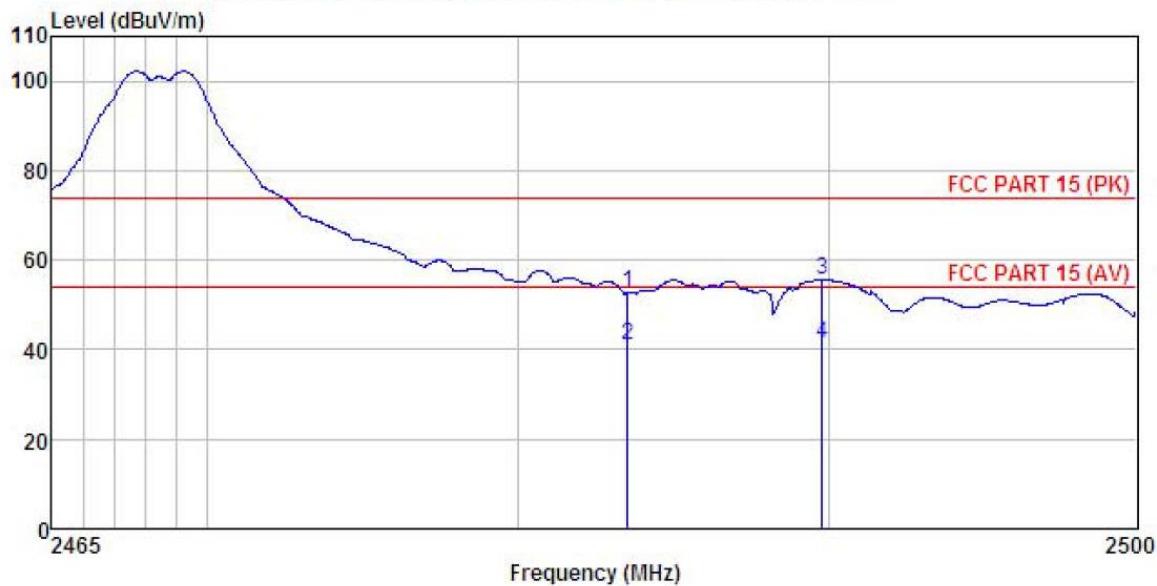


Site : 3m chamber
Condition : FCC PART 15 (PK) 3m BBHA9120(1G18) VERTICAL
EUT : Baby Monitor
Model : E600T
Test mode : H Mode
Power Rating : AC 120V/60Hz
Environment : Temp:25.5°C Huni:55%
Test Engineer: Mike
REMARK :


Freq	ReadAntenna	Cable	Preamp	Limit	Over	Remark	
	Level	Factor	Loss				
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	2483.500	24.20	23.70	4.81	0.00	52.71	74.00 -21.29 Peak
2	2483.500	12.30	23.70	4.81	0.00	40.81	54.00 -13.19 Average
3	2489.799	27.07	23.70	4.82	0.00	55.59	74.00 -18.41 Peak
4	2489.799	12.71	23.70	4.82	0.00	41.23	54.00 -12.77 Average

6.10 Spurious Emission

6.10.1 Conducted Emission Method

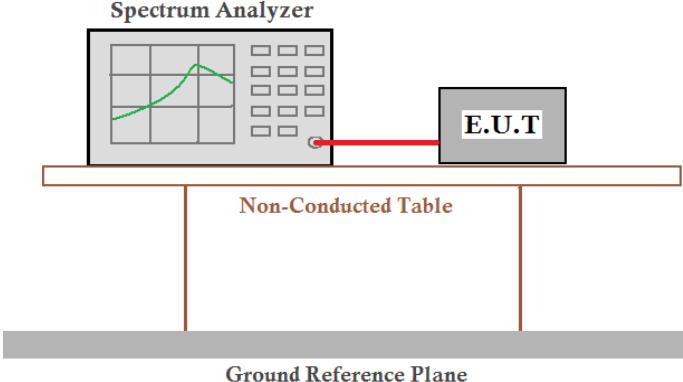
Test Requirement:	FCC Part 15 C Section 15.247 (d)
Test Method:	ANSI C63.10:2013 and DA00-705
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test setup:	
Test Instruments:	Refer to section 5.7 for details
Test mode:	Non-hopping mode
Test results:	Pass

Test plot as follows:

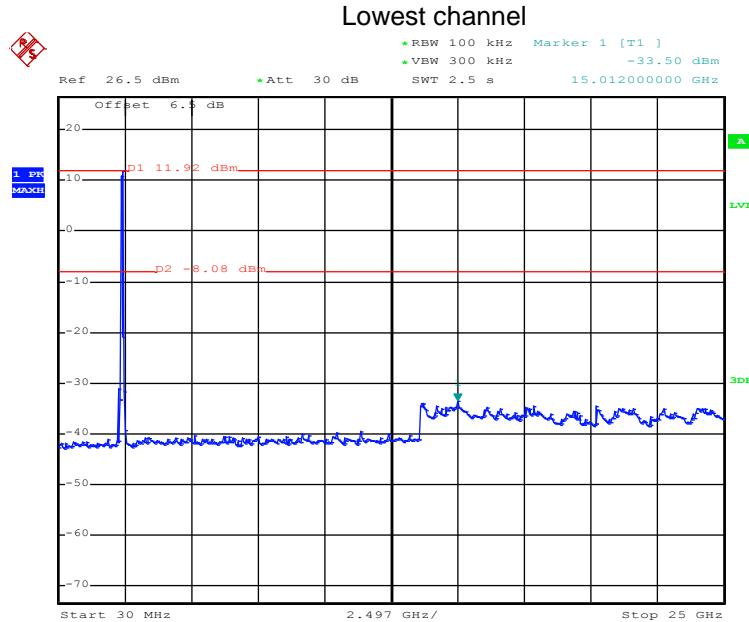


Date: 2.MAY.2017 23:06:14

30MHz~25GHz

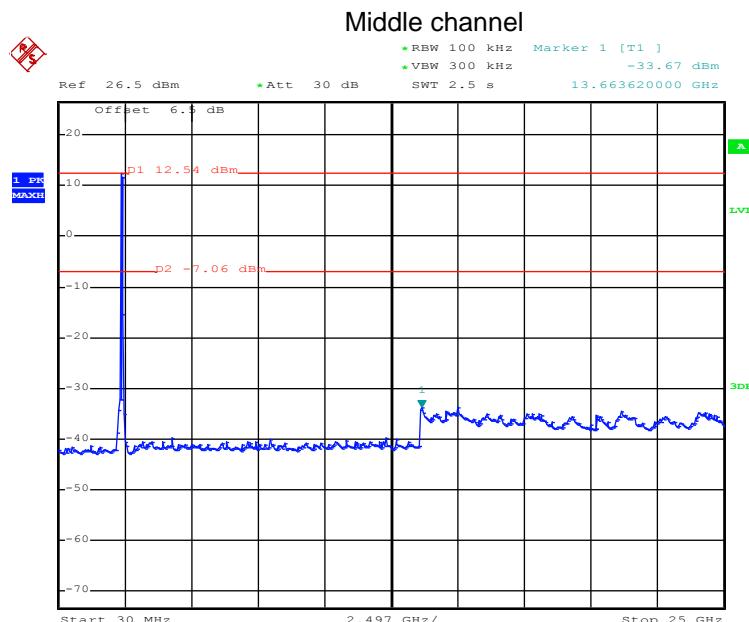

Date: 2.MAY.2017 23:18:48

30MHz~25GHz

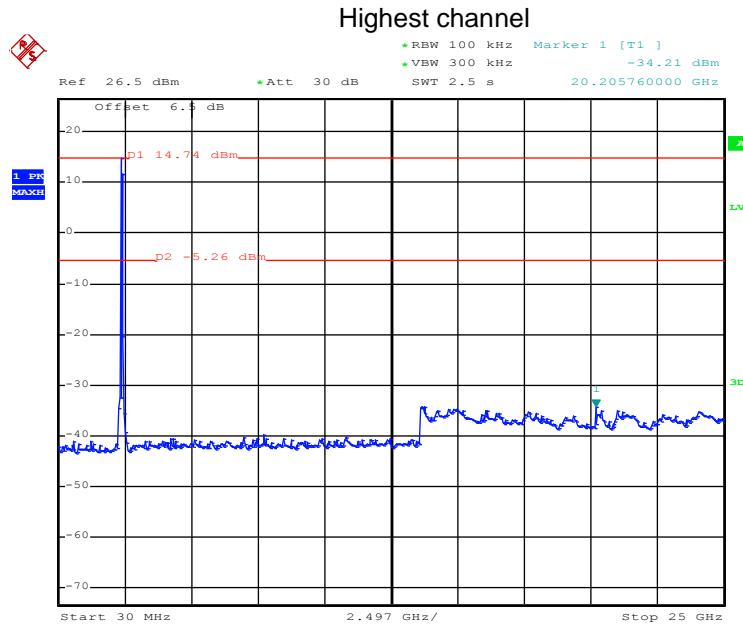

Date: 2.MAY.2017 23:23:45

30MHz~25GHz

6.10.2 Radiated Emission Method

Test Requirement:	FCC Part 15 C Section 15.209				
Test Method:	ANSI C63.10: 2013				
Test Frequency Range:	9 kHz to 25 GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Remark
	30MHz-1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak Value
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
		Peak	1MHz	10Hz	Average Value
Limit:	Frequency	Limit (dBuV/m @3m)		Remark	
	30MHz-88MHz	40.0		Quasi-peak Value	
	88MHz-216MHz	43.5		Quasi-peak Value	
	216MHz-960MHz	46.0		Quasi-peak Value	
	960MHz-1GHz	54.0		Quasi-peak Value	
	Above 1GHz	54.0		Average Value	
		74.0		Peak Value	
Test setup:	<p>Below 1GHz</p> <p>Above 1GHz</p>				

Test Procedure:	<ol style="list-style-type: none">1. The EUT was placed on the top of a rotating table 0.8m(below 1GHz) /1.5m(above 1GHz) above the ground at a 3 meter chamber. The table was rotated 360 degrees to determine the position of the highest radiation.2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
Test Instruments:	Refer to section 5.7 for details
Test mode:	Non-hopping mode
Test results:	Pass


Remark:

1. Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the Y-axis is the worst case.
2. 9 kHz to 30 MHz is noise floor, so only shows the data of above 30MHz in this report.

Measurement data:

Below 1GHz


Vertical:

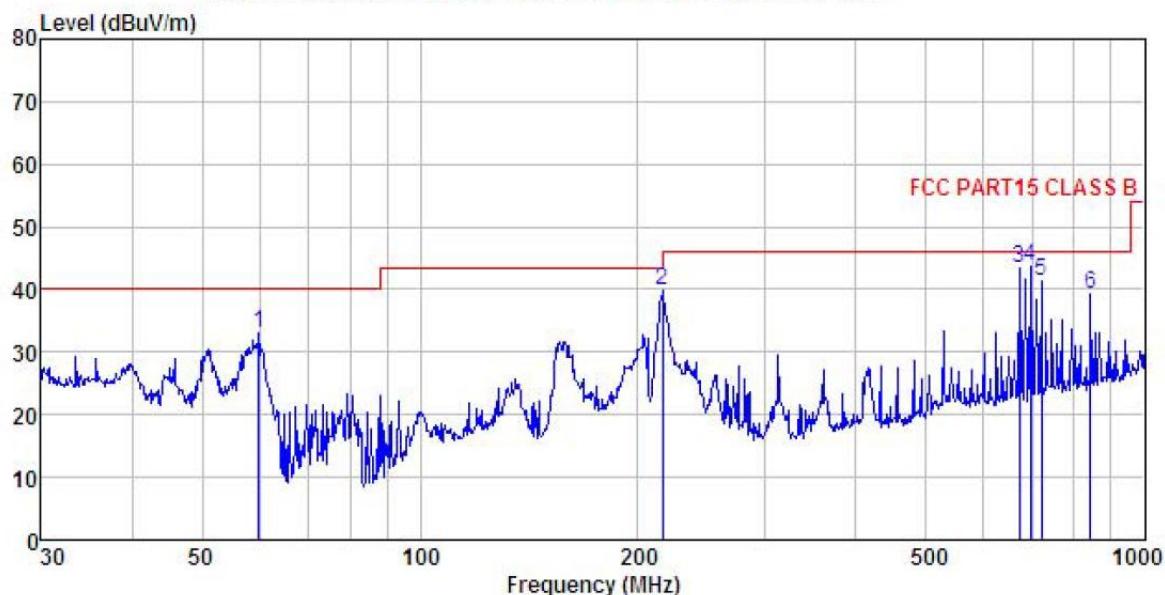

Site : 3m chamber
Condition : FCC PART15 CLASS B 3m VULB9163(30M3G) VERTICAL
EUT : Baby Monitor
Model : E600T
Test mode : TX Mode
Power Rating : AC 120V/60Hz
Environment : Temp:25.5°C Huni:55%
Test Engineer: Mike
REMARK :

Freq	ReadAntenna		Cable		Preamp Loss Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB					
1	59.859	51.06	10.32	1.38	29.77	32.99	40.00	-7.01	QP
2	216.024	54.43	11.18	2.85	28.73	39.73	46.00	-6.27	QP
3	672.845	49.07	18.98	4.00	28.73	43.32	46.00	-2.68	QP
4	696.857	49.07	19.18	4.16	28.68	43.73	46.00	-2.27	QP
5	721.726	45.87	19.76	4.26	28.58	41.31	46.00	-4.69	QP
6	842.130	41.99	20.94	4.22	28.03	39.12	46.00	-6.88	QP

Horizontal:

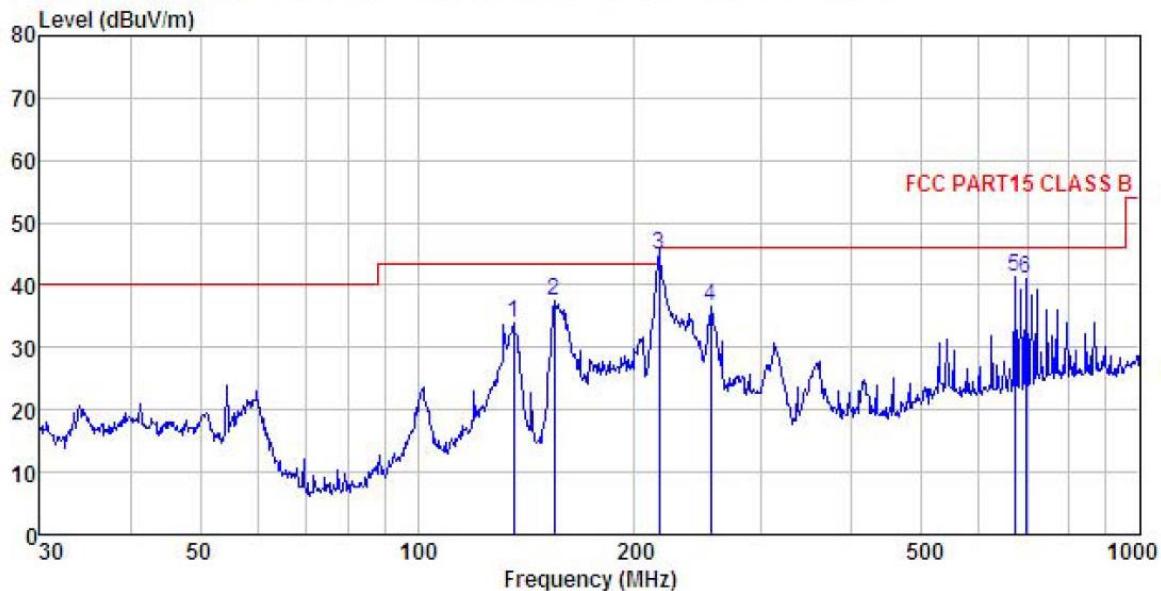

Site : 3m chamber
Condition : FCC PART15 CLASS B 3m VULB9163(30M3G) HORIZONTAL
EUT : Baby Monitor
Model : E600T
Test mode : TX Mode
Power Rating : AC 120V/60Hz
Environment : Temp:25.5°C Huni:55%
Test Engineer: Mike
REMARK :

Freq	Read	Antenna	Cable	Preamp	Limit	Over	Remark
	Level	Factor	Loss	Factor			
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	135.982	48.90	11.95	2.35	29.29	33.91	43.50 -9.59 QP
2	154.821	53.85	10.30	2.55	29.18	37.52	43.50 -5.98 QP
3	216.024	59.54	11.18	2.85	28.73	44.84	46.00 -1.16 QP
4	254.728	50.46	11.81	2.82	28.53	36.56	46.00 -9.44 QP
5	672.845	46.94	18.98	4.00	28.73	41.19	46.00 -4.81 QP
6	696.857	46.28	19.18	4.16	28.68	40.94	46.00 -5.06 QP

Above 1GHz:

Test channel:		Lowest			Level:		Peak	
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4821.75	53.69	35.99	6.80	41.81	54.67	74.00	-19.33	Vertical
4821.75	53.85	35.99	6.80	41.81	54.83	74.00	-19.17	Horizontal

Test channel:		Lowest			Level:		Average	
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4821.75	39.72	35.99	6.80	41.81	40.70	54.00	-13.30	Vertical
4821.75	43.84	35.99	6.80	41.81	44.82	54.00	-9.18	Horizontal

Test channel:		Middle			Level:		Peak	
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4882.50	54.33	36.38	6.86	41.84	55.73	74.00	-18.27	Vertical
4882.50	51.49	36.38	6.86	41.84	52.89	74.00	-21.11	Horizontal

Test channel:		Middle			Level:		Average	
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4882.50	40.37	36.38	6.86	41.84	41.77	54.00	-12.23	Vertical
4882.50	41.52	36.38	6.86	41.84	42.92	54.00	-11.08	Horizontal

Test channel:		Highest			Level:		Peak	
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4936.50	55.42	36.71	6.91	41.87	57.17	74.00	-16.83	Vertical
4936.50	50.93	36.71	6.91	41.87	52.68	74.00	-21.32	Horizontal

Test channel:		Highest			Level:		Average	
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4936.50	41.49	36.71	6.91	41.87	43.24	54.00	-10.76	Vertical
4936.50	40.36	36.71	6.91	41.87	42.11	54.00	-11.89	Horizontal