



FCC TEST REPORT

FCC ID:2AJDD-MEASTR100

Report Number..... : ZKT-2305293948E-3
Date of Test..... : May. 29, 2023- Jun. 07, 2023
Date of issue..... : Jun. 07, 2023
Total number of pages : 77
Test Result..... : PASS

Testing Laboratory..... : **Shenzhen ZKT Technology Co., Ltd.**
Address : 1/F, No. 101, Building B, No. 6, Tangwei Community Industrial Avenue, Fuhai Street, Bao'an District, Shenzhen, China

Applicant's name : **SHENZHEN FCAR TECHNOLOGY CO.,LTD**
Address : 8th floor, Chuangyi Building, No. 3025 Nanhai Ave., Nanshan, Shenzhen, Guangdong, China 518060

Manufacturer's name : **SHENZHEN FCAR TECHNOLOGY CO.,LTD**
Address : 8th floor, Chuangyi Building, No. 3025 Nanhai Ave., Nanshan, Shenzhen, Guangdong, China 518060

Test specification:

Standard : FCC CFR Title 47 Part 15 Subpart C Section 15.247
 ANSI C63.10:2013
Test procedure..... : /
Non-standard test method : N/A

Test Report Form No. : TRF-EL-110_V0

Test Report Form(s) Originator : ZKT Testing

Master TRF : Dated: 2020-01-06

This device described above has been tested by ZKT, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of ZKT, this document may be altered or revised by ZKT, personal only, and shall be noted in the revision of the document.

Product name..... : **Tire Tread Depth Gauge**

Trademark : FCAR

Model/Type reference : TR100

Ratings..... : Input: DC 5V by adapter
 Battery: DC 3.6V



Testing procedure and testing location:

Testing Laboratory..... : **Shenzhen ZKT Technology Co., Ltd.**

Address..... : 1/F, No. 101, Building B, No. 6, Tangwei Community
Industrial Avenue, Fuhai Street, Bao'an District,
Shenzhen, China

Tested by (name + signature) : Tom Zou

Tom Zou

Reviewer (name + signature)..... : Jackson Fang

Jackson Fang

Approved (name + signature) : Lake Xie





Table of Contents

	Page
1. VERSION	5
2. SUMMARY OF TEST RESULTS.....	6
2.1 TEST FACILITY	7
2.2 MEASUREMENT UNCERTAINTY	8
3. GENERAL INFORMATION	9
3.1 GENERAL DESCRIPTION OF EUT.....	9
3.2 DESCRIPTION OF TEST MODES	10
3.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED.....	11
3.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)	11
3.5EQUIPMENTS LIST FOR ALL TEST ITEMS.....	12
4. EMC EMISSION TEST	14
4.1 CONDUCTED EMISSION MEASUREMENT	14
4.1.1 POWER LINE CONDUCTED EMISSION Limits.....	14
4.1.2 TEST PROCEDURE	14
4.1.3 DEVIATION FROM TEST STANDARD.....	14
4.1.4 TEST SETUP	15
4.1.5 EUT OPERATING CONDITIONS.....	15
4.1.6 TEST RESULT	15
4.2 RADIATED EMISSION MEASUREMENT	18
4.2.1 RADIATED EMISSION LIMITS	18
4.2.2 TEST PROCEDURE	19
4.2.3 DEVIATION FROM TEST STANDARD.....	20
4.2.4 TEST SETUP	20
4.2.5 EUT OPERATING CONDITIONS.....	22
4.2.6 TEST RESULTS.....	22
BETWEEN 9KHZ – 30MHZ.....	22
5.3 DEVIATION FROM TEST STANDARD	38
5.4 TEST SETUP.....	38
5.5 EUT OPERATING CONDITIONS	38
5.6 TEST RESULT	39
6.POWER SPECTRAL DENSITY TEST	42
6.1 APPLIED PROCEDURES / LIMIT.....	42
6.2 TEST PROCEDURE.....	42
6.3 DEVIATION FROM STANDARD	42
6.4 TEST SETUP.....	42



- 6.5 EUT OPERATION CONDITIONS43
- 6.6 TEST RESULT44
- 7. -6DB BANDWIDTH52
 - 7.1 APPLIED PROCEDURES / LIMIT52
 - 7.2 TEST PROCEDURE52
 - 7.3 DEVIATION FROM STANDARD52
 - 7.4 TEST SETUP53
 - 7.5 EUT OPERATION CONDITIONS53
 - 7.6 TEST RESULT54
- 8. PEAK OUTPUT POWER TEST60
 - 8.1 APPLIED PROCEDURES/LIMIT60
 - 8.2 TEST PROCEDURE60
 - 8.3 DEVIATION FROM STANDARD60
 - 8.4 TEST SETUP60
 - 8.5 EUT OPERATION CONDITIONS60
 - 8.6 TEST RESULT61
- 9. CONDUCTED BAND EDGE AND SPURIOUS EMISSION69
 - 9.1 APPLICABLE STANDARD69
 - 9.2 TEST PROCEDURE69
 - 9.3 DEVIATION FROM STANDARD69
 - 9.4 TEST SETUP69
 - 9.5 EUT OPERATION CONDITIONS69
 - 9.6 TEST RESULTS69
- 10. ANTENNA REQUIREMENT76
- 11. TEST SETUP PHOTO77
- 12. EUT CONSTRUCTIONAL DETAILS77



1. VERSION

Report No.	Version	Description	Approved
ZKT-2305293948E-3	Rev.01	Initial issue of report	Jun. 07, 2023



2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15 (15.247) , Subpart C				
Standard Section	Test Item	Result	Remark	
FCC part 15.203/15.247 (c)	Antenna requirement	PASS		
FCC part 15.207	AC Power Line Conducted Emission	PASS		
FCC part 15.247 (b)(3)	Conducted Peak Output Power	PASS		
FCC part 15.247 (a)(2)	-6DB Bandwidth& 99% Occupied Bandwidth	PASS		
FCC part 15.247 (e)	Power Spectral Density	PASS		
FCC part 15.247(d)	Band Edge	PASS		
FCC part 15.205/15.209	Spurious Emission	PASS		

NOTE:

(1) " N/A" denotes test is not applicable in this Test Report



2.1 TEST FACILITY

Shenzhen ZKT Technology Co., Ltd.

Add. : 1/F, No. 101, Building B, No. 6, Tangwei Community Industrial Avenue, Fuhai Street, Bao'an District, Shenzhen, China

FCC Test Firm Registration Number: 692225

Designation Number: CN1299

IC Registered No.: 27033

CAB identifier: CN0110



2.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$ where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$ providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	3m chamber Radiated spurious emission(9KHz-30MHz)	U=4.5dB
2	3m chamber Radiated spurious emission(30MHz-1GHz)	U=4.8dB
3	3m chamber Radiated spurious emission(1GHz-6GHz)	U=4.9dB
4	3m chamber Radiated spurious emission(6GHz-40GHz)	U=5.0dB
5	Conducted disturbance	U=3.2dB
6	RF Band Edge	U=1.68dB
7	RF power conducted	U=1.86dB
8	RF conducted Spurious Emission	U=2.2dB
9	RF Occupied Bandwidth	U=1.8dB
10	RF Power Spectral Density	U=1.75dB
11	humidity uncertainty	U=5.3%
12	Temperature uncertainty	U=0.59°C



3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Product Name:	Tire Tread Depth Gauge
Model No.:	TR100
Model Different.:	N/A
Serial No.:	N/A
Hardware Version:	H1.0
Software Version:	S1.0
Sample(s) Status:	Engineer sample
Channel numbers:	802.11b/802.11g /802.11n(HT20):11 802.11n(HT40):7
Channel separation:	5MHz
Modulation technology:	802.11b: Direct Sequence Spread Spectrum(DSSS) 802.11g/802.11n(H20)/802.11n(HT40): Orthogonal Frequency Division Multiplexing(OFDM)
Antenna Type:	FPCB Antenna
Antenna gain:	1dBi
Power supply:	Input: DC 5V by adapter Battery: DC 3.6V



Operation Frequency each of channel							
Channel	Frequency	Chann el	Frequency	Chann el	Frequency	Chann el	Frequency
1	2412MHz	4	2427MHz	7	2442MHz	10	2457MHz
2	2417MHz	5	2432MHz	8	2447MHz	11	2462MHz
3	2422MHz	6	2437MHz	9	2452MHz	X	

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Test channel	Frequency (MHz)	
	802.11b/802.11g/802.11n(HT20)	802.11n(HT40)
Lowest channel	2412MHz	2422MHz
Middle channel	2437MHz	2437MHz
Highest channel	2462MHz	2452MHz

3.2 DESCRIPTION OF TEST MODES

Transmitting mode	Keep the EUT in continuously transmitting mode
Remark: the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition' s data.	

We have verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows:				
Pre-scan all kind of data rate in lowest channel, and found the follow list which it was worst case.				
Mode	802.11b	802.11g	802.11n(HT20)	802.11n(HT40)
Data rate	1Mbps	6Mbps	6.5Mbps	13Mbps

Test Software	Realtek Test Tool
Power level setup	<13dBm



3.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED


Conducted Emission



Radiated Emission



Conducted Spurious



3.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E-1	Tire Tread Depth Gauge	FCAR	TR100	N/A	EUT
A-1	AC Adapter	HuaWei	HW-200200CP1	N/A	Auxiliary

Item	Shielded Type	Ferrite Core	Length	Note

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.



3.5EQUIPMENTS LIST FOR ALL TEST ITEMS

Conducted emissions Test

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Firmware Version	Last calibration	Calibrated until
1	LISN	R&S	ENV216	101471	N/A	Oct. 21, 2022	Oct. 20, 2023
2	LISN	CYBERTEK	EM5040A	E185040014 9	N/A	Oct. 21, 2022	Oct. 20, 2023
3	Test Cable	N/A	C-01	N/A	N/A	Oct. 21, 2022	Oct. 20, 2023
4	Test Cable	N/A	C-02	N/A	N/A	Oct. 21, 2022	Oct. 20, 2023
5	Test Cable	N/A	C-03	N/A	N/A	Oct. 21, 2022	Oct. 20, 2023
6	EMI Test Receiver	R&S	ESC13	101393	4.42 SP3	Oct. 28, 2022	Oct. 27, 2023
7	Triple-Loop Antenna	N/A	RF300	N/A	N/A	Oct. 28, 2022	Oct. 27, 2023
8	Absorbing Clamp	DZ	ZN23201	15034	N/A	Oct. 31, 2022	Oct. 30, 2023
9	EMC Software	Frad	EZ-EMC	Ver.EMC-CO N 3A1.1	N/A	\	\

Radiation emissions& Radio Test equipment

Item	Equipment	Manufacturer	Type No.	Serial No.	Firmware Version	Last calibration	Calibrated until
1	Spectrum Analyzer (9kHz-26.5GHz)	KEYSIGHT	9020A	MY55370835	A.17.05	Oct. 28, 2022	Oct. 27, 2023
2	Spectrum Analyzer (10kHz-39.9GHz)	R&S	FSV40-N	100363	1.71 SP2	Oct. 28, 2022	Oct. 27, 2023
3	EMI Test Receiver (9kHz-7GHz)	R&S	ESC17	101169	4.32	Oct. 28, 2022	Oct. 27, 2023
4	Bilog Antenna (30MHz-1500MHz)	Schwarzbeck	VULB9168	N/A	N/A	Nov. 02, 2022	Nov. 01, 2023
5	Horn Antenna (1GHz-18GHz)	Agilent	AH-118	071145	N/A	Nov. 01, 2022	Oct. 31, 2023
6	Horn Antenna (15GHz-40GHz)	A.H.System	SAS-574	588	N/A	Oct. 28, 2022	Oct. 27, 2023
7	Loop Antenna	TESEQ	HLA6121	58357	N/A	Nov. 01, 2022	Oct. 31, 2023
8	Amplifier (30-1000MHz)	EM Electronics	EM330 Amplifier	060747	N/A	Nov. 15, 2022	Nov. 14, 2023
9	Amplifier (1GHz-26.5GHz)	Agilent	8449B	3008A00315	N/A	Oct. 28, 2022	Oct. 27, 2023
10	Amplifier (500MHz-40GHz)	QUANJUDA	DLE-161	097	N/A	Oct. 28, 2022	Oct. 27, 2023
11	Test Cable	N/A	R-01	N/A	N/A	Oct. 28, 2022	Oct. 27, 2023
12	Test Cable	N/A	R-02	N/A	N/A	Oct. 28, 2022	Oct. 27, 2023
13	Test Cable	N/A	R-03	N/A	N/A	Oct. 28, 2022	Oct. 27, 2023
14	Test Cable	N/A	RF-01	N/A	N/A	Oct. 28, 2022	Oct. 27, 2023
15	Test Cable	N/A	RF-02	N/A	N/A	Oct. 28, 2022	Oct. 27, 2023
16	Test Cable	N/A	RF-03	N/A	N/A	Oct. 28, 2022	Oct. 27, 2023



17	ESG Signal Generator	Agilent	E4421B	N/A	B.03.84	Oct. 21, 2022	Oct. 20, 2023
18	Signal Generator	Agilent	N5182A	N/A	A.01.87	Oct. 21, 2022	Oct. 20, 2023
19	Magnetic Field Probe Tester	Narda	ELT-400	0-0344	N/A	Nov. 15, 2022	Nov. 14, 2023
20	Wideband Radio Communication Test	R&S	CMW500	106504	V 3.7.22	Oct. 28, 2022	Oct. 27, 2023
21	RF Power Meter	KEYSIGHT	N1912AP	N/A	A.05.00	Oct. 21, 2022	Oct. 20, 2023
22	D.C. Power Supply	LongWei	TPR-6405D	N/A	N/A	\	\
23	EMC Software	Frad	EZ-EMC	Ver.EMC-CO N 3A1.1	N/A	\	\
24	RF Software	MW	MTS8310	V2.0.0.0	N/A	\	\
25	Turntable	MF	MF-7802BS	N/A	N/A	\	\
26	Antenna tower	MF	MF-7802BS	N/A	N/A	\	\



4. EMC EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

Test Requirement:	FCC Part15 C Section 15.207
Test Method:	ANSI C63.10:2013
Test Frequency Range:	150KHz to 30MHz
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto

4.1.1 POWER LINE CONDUCTED EMISSION Limits

FREQUENCY (MHz)	Limit (dBuV)		Standard
	Quasi-peak	Average	
0.15 -0.5	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	56.00	46.00	FCC
5.0 -30.0	60.00	50.00	FCC

Note:

- (1) *Decreases with the logarithm of the frequency.

4.1.2 TEST PROCEDURE


- a. The EUT was placed 0.1 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.1.3 DEVIATION FROM TEST STANDARD

No deviation



4.1.4 TEST SETUP

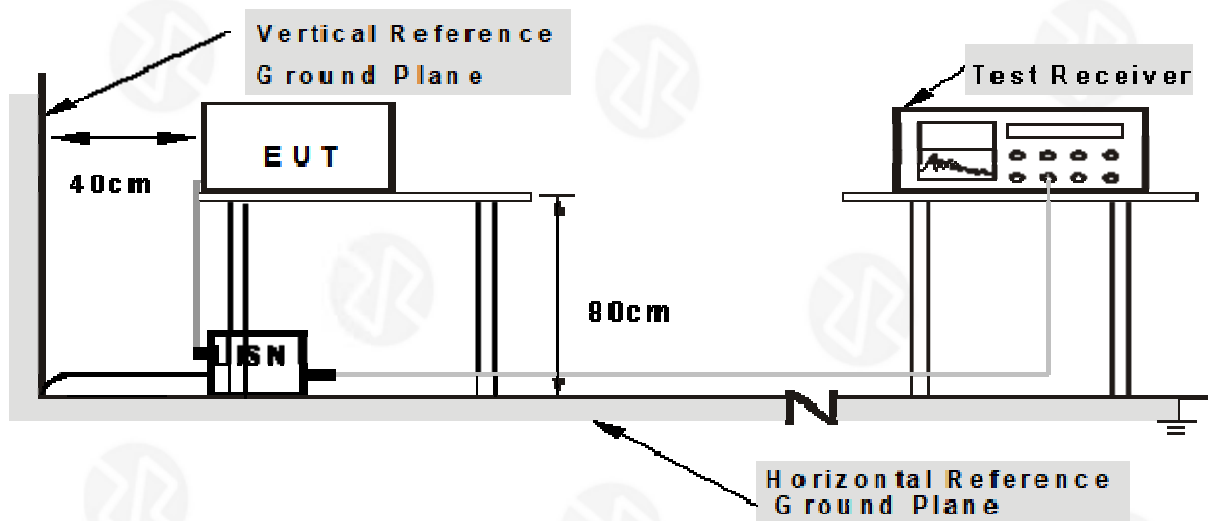

- Note:**
- 1.Support units were connected to second LISN.
 - 2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

4.1.5 EUT OPERATING CONDITIONS


The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

We pretest AC 120V and AC 230V, the worst voltage was AC 120V and the data recording in the report.

4.1.6 TEST RESULT



Temperature :	26°C	Relative Humidity:	54%
Pressure :	101kPa	Phase :	L
Test Voltage :	AC 120V/60Hz	Test Mode:	TX Mode (802.11b worst case)

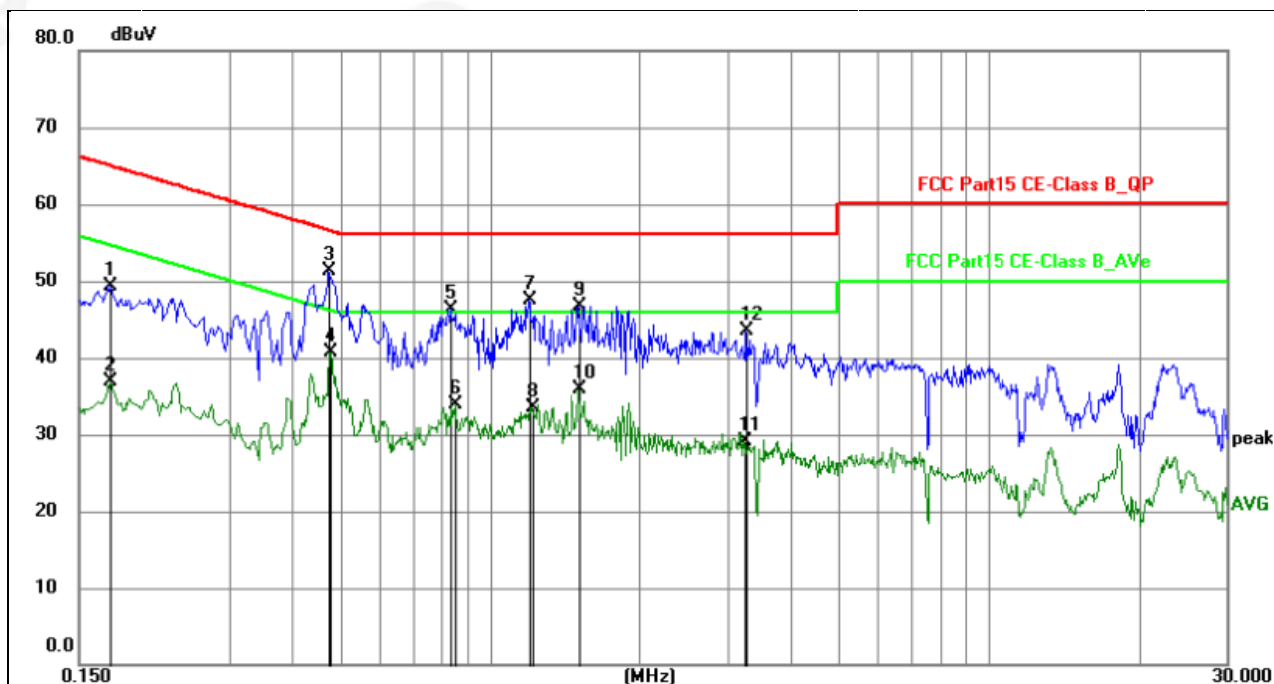


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1728	28.71	20.57	49.28	64.82	-15.54	QP	P	
2	0.1728	16.25	20.57	36.82	54.82	-18.00	AVG	P	
3	0.4737	30.72	20.57	51.29	56.45	-5.16	QP	P	
4	0.4783	20.21	20.56	40.77	46.37	-5.60	AVG	P	
5	0.8384	25.67	20.68	46.35	56.00	-9.65	QP	P	
6	0.8564	13.17	20.69	33.86	46.00	-12.14	AVG	P	
7	1.1935	26.79	20.76	47.55	56.00	-8.45	QP	P	
8	1.2116	12.71	20.77	33.48	46.00	-12.52	AVG	P	
9	1.5041	25.87	20.81	46.68	56.00	-9.32	QP	P	
10	1.5041	15.18	20.81	35.99	46.00	-10.01	AVG	P	
11	3.2280	8.23	20.79	29.02	46.00	-16.98	AVG	P	
12	3.2730	22.66	20.79	43.45	56.00	-12.55	QP	P	

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Measurement Level = Reading level + Correct Factor



Temperature :	26°C	Relative Humidity:	54%
Pressure :	101kPa	Phase :	N
Test Voltage :	AC 120V/60Hz	Test Mode:	TX Mode (802.11b worst case)

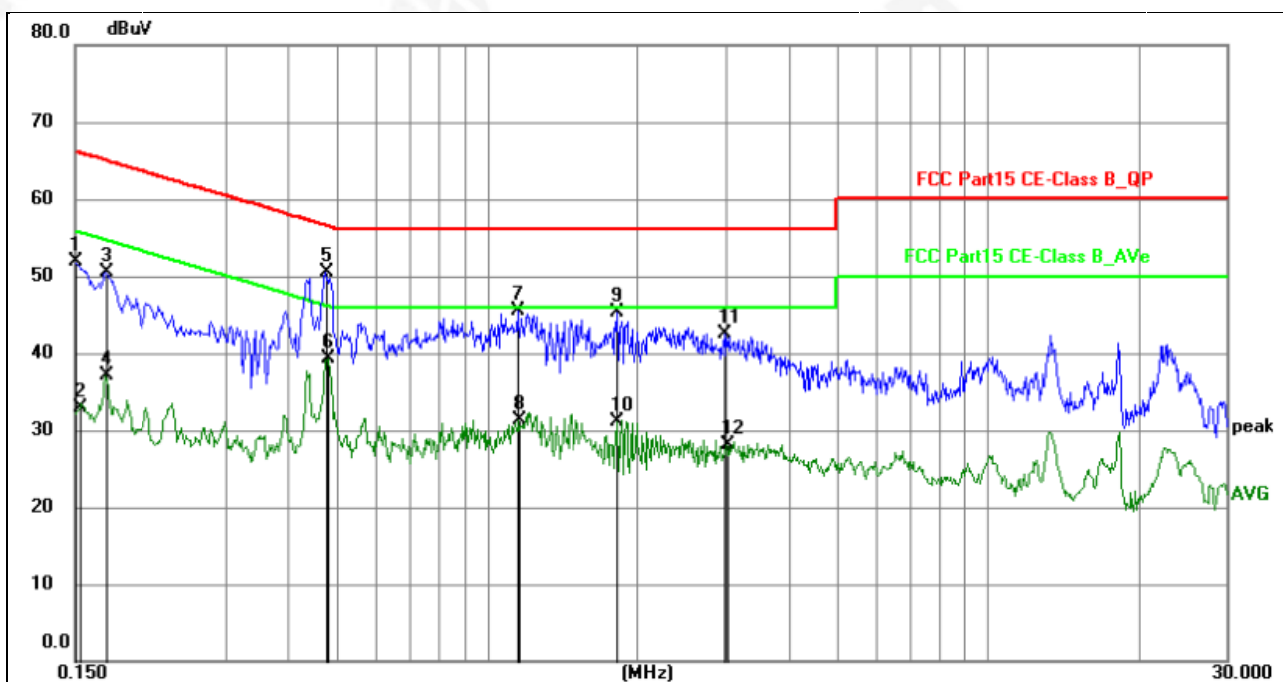

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1500	31.33	20.58	51.91	66.00	-14.09	QP	P	
2	0.1532	12.38	20.59	32.97	55.82	-22.85	AVG	P	
3	0.1723	29.91	20.68	50.59	64.85	-14.26	QP	P	
4	0.1723	16.38	20.68	37.06	54.85	-17.79	AVG	P	
5	0.4783	29.73	20.70	50.43	56.37	-5.94	QP	P	
6	0.4828	18.68	20.69	39.37	46.29	-6.92	AVG	P	
7	1.1489	24.60	20.81	45.41	56.00	-10.59	QP	P	
8	1.1576	10.42	20.81	31.23	46.00	-14.77	AVG	P	
9	1.8191	24.42	20.83	45.25	56.00	-10.75	QP	P	
10	1.8191	10.35	20.83	31.18	46.00	-14.82	AVG	P	
11	2.9849	21.65	20.91	42.56	56.00	-13.44	QP	P	
12	3.0164	7.14	20.91	28.05	46.00	-17.95	AVG	P	

Notes:

- 1.An initial pre-scan was performed on the line and neutral lines with peak detector.
- 2.Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
- 3.Measurement Level = Reading level + Correct Factor



4.2 RADIATED EMISSION MEASUREMENT

Test Requirement:	FCC Part15 C Section 15.209				
Test Method:	ANSI C63.10:2013				
Test Frequency Range:	9kHz to 25GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	9KHz-150KHz	Quasi-peak	200Hz	600Hz	Quasi-peak
	150KHz-30MHz	Quasi-peak	9KHz	30KHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average

4.2.1 RADIATED EMISSION LIMITS

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT



FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

4.2.2 TEST PROCEDURE

Below 1GHz test procedure as below:

- a. The EUT was placed on the top of a rotating table 0.1 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- g. Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change from table 0.8 meter to 1.5 meter (Above 18GHz the distance is 1 meter and table is 1.5 meter).
- h. Test the EUT in the lowest channel, the middle channel, the Highest channel

Note:



Both horizontal and vertical antenna polarities were tested


and performed pretest to three orthogonal axis. The worst case emissions were reported

4.2.3 DEVIATION FROM TEST STANDARD

No deviation


4.2.4 TEST SETUP

(A) Radiated Emission Test-Up Frequency Below 30MHz

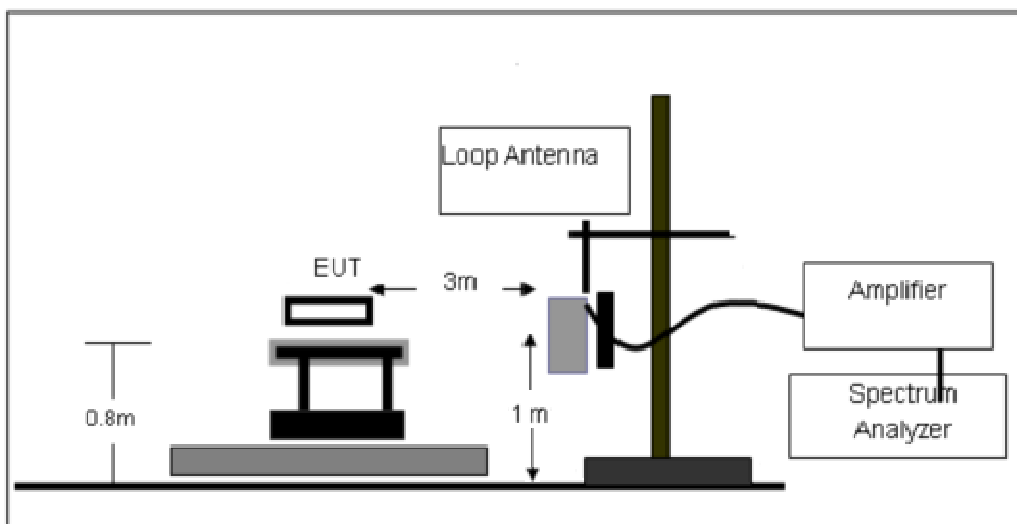




(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

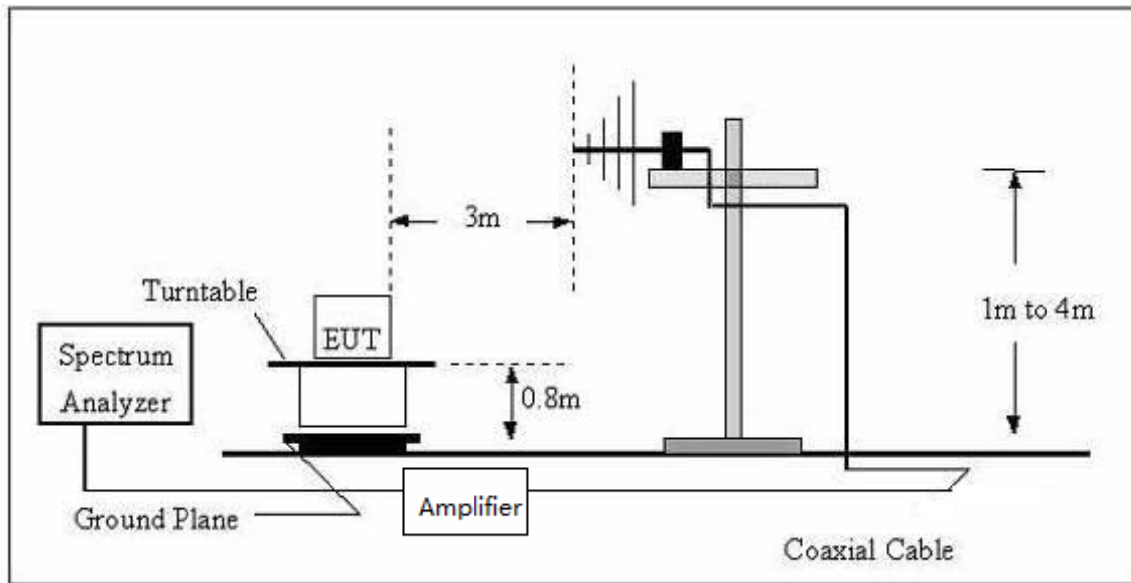

(C) Radiated Emission Test-Up Frequency Above 1GHz

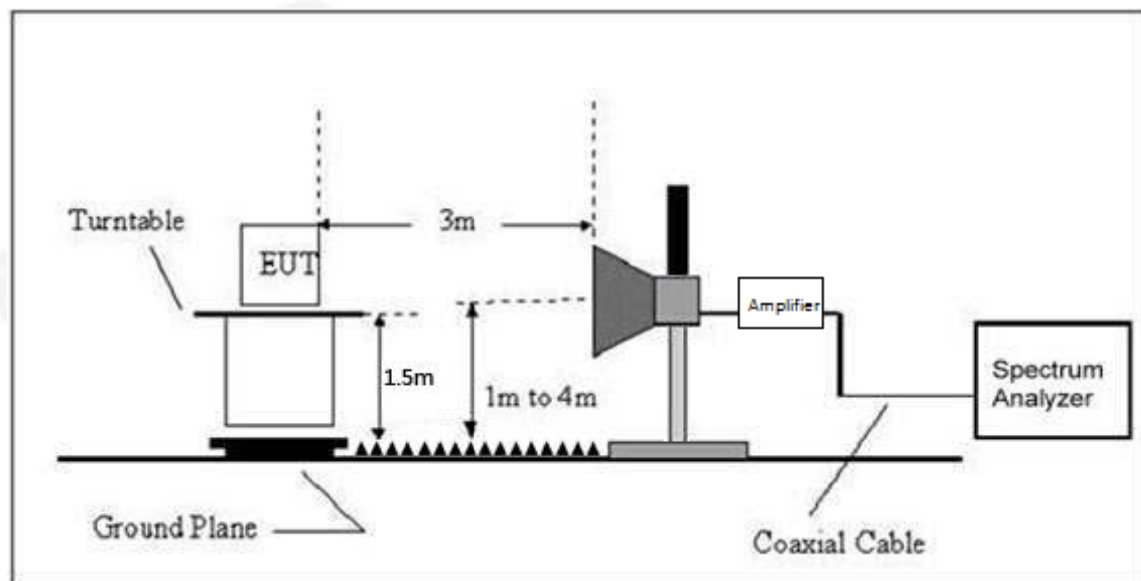



4.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

4.2.6 TEST RESULTS


BETWEEN 9KHZ – 30MHZ

The emission from 9 kHz to 30MHz was pre-tested and found the result was 20dB lower than the limit, and according to 15.31(o) & RSS-Gen 6.13, the test result no need to reported.



Between 30MHz – 1GHz


Temperature:	26°C	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	Horizontal
Test Voltage:	DC 3.6V	Test Mode	802.11b 2412MHz

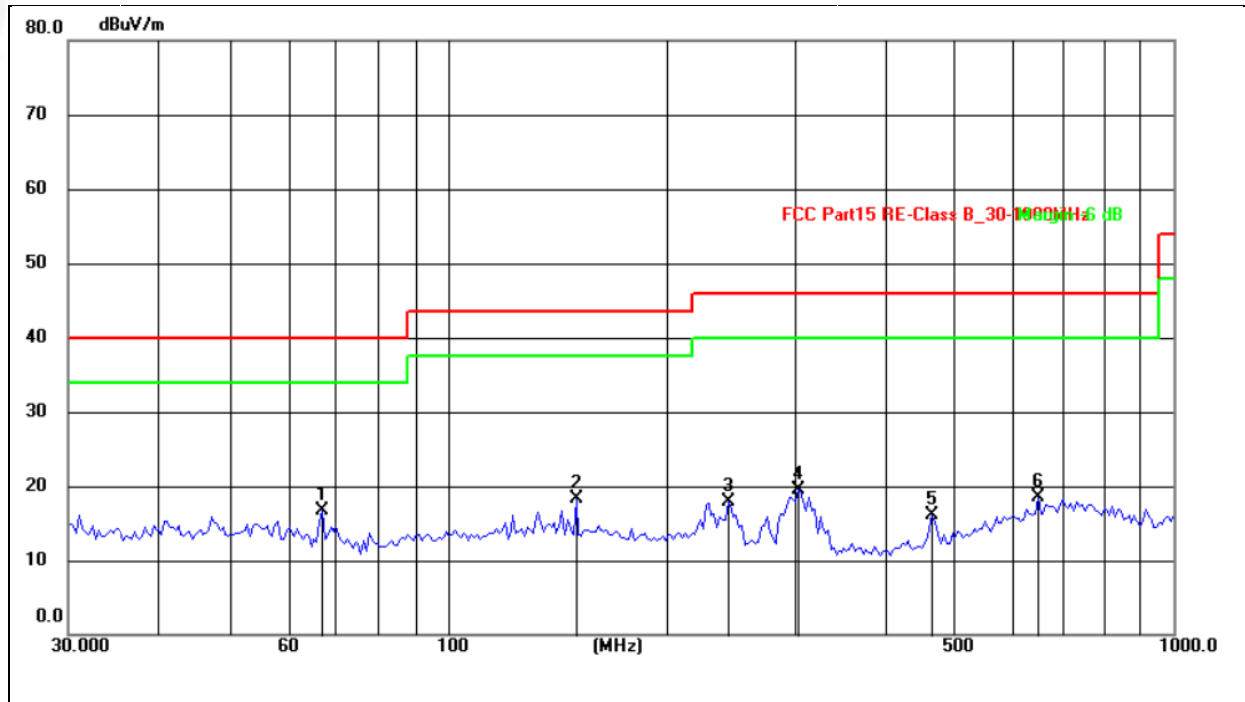

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	67.2021	34.55	-17.78	16.77	40.00	-23.23	QP
2	150.5377	37.74	-19.35	18.39	43.50	-25.11	QP
3	243.8042	38.27	-20.43	17.84	46.00	-28.16	QP
4	303.5437	41.66	-22.18	19.48	46.00	-26.52	QP
5	466.4164	35.21	-19.12	16.09	46.00	-29.91	QP
6	650.7997	32.85	-14.30	18.55	46.00	-27.45	QP



Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Polarization:	Vertical
Test Voltage:	DC 3.6V	Test Mode	802.11b 2412MHz

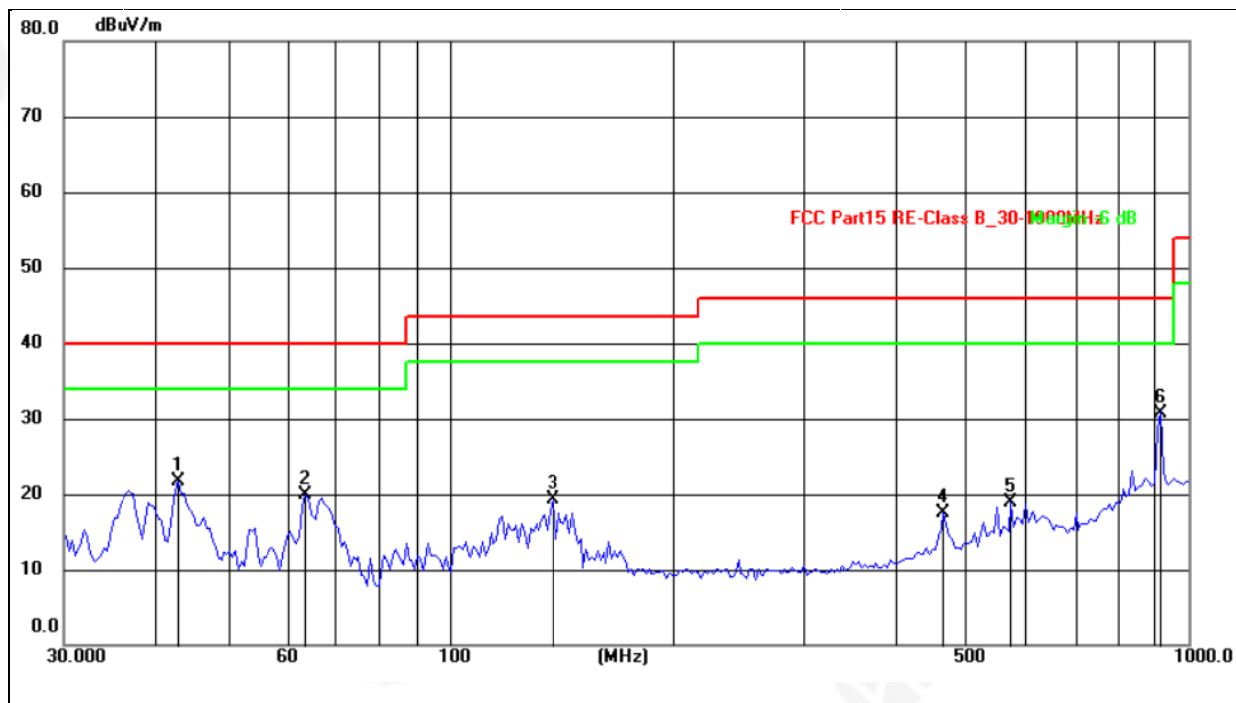

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	42.9750	40.01	-18.34	21.67	40.00	-18.33	QP
2	63.7588	40.13	-20.29	19.84	40.00	-20.16	QP
3	137.9028	42.81	-23.58	19.23	43.50	-24.27	QP
4	466.4164	36.01	-18.57	17.44	46.00	-28.56	QP
5	575.6340	33.78	-14.95	18.83	46.00	-27.17	QP
6	916.0683	39.07	-8.27	30.80	46.00	-15.20	QP

Remarks:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.
3. The test data shows only the worst case 802.11b 2412MHz mode



1GHz~25GHz

802.11b

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detect or Type
Low Channel:2412MHz									
V	4824.00	51.67	30.55	5.77	24.66	51.55	74.00	-22.45	PK
V	4824.00	43.04	30.55	5.77	24.66	42.92	54.00	-11.08	AV
V	7236.00	53.92	30.33	6.32	24.55	54.46	74.00	-19.54	PK
V	7236.00	43.99	30.33	6.32	24.55	44.53	54.00	-9.47	AV
V	9648.00	51.11	30.85	7.45	24.69	52.40	74.00	-21.60	PK
V	9648.00	43.06	30.85	7.45	24.69	44.35	54.00	-9.65	AV
V	12060.00	50.80	31.02	8.99	25.57	54.34	74.00	-19.66	PK
V	12060.00	43.16	31.02	8.99	25.57	46.70	54.00	-7.30	AV
H	4824.00	53.82	30.55	5.77	24.66	53.70	74.00	-20.30	PK
H	4824.00	43.53	30.55	5.77	24.66	43.41	54.00	-10.59	AV
H	7236.00	53.99	30.33	6.32	24.55	54.53	74.00	-19.47	PK
H	7236.00	43.78	30.33	6.32	24.55	44.32	54.00	-9.68	AV
H	9648.00	54.12	30.85	7.45	24.69	55.41	74.00	-18.59	PK
H	9648.00	43.12	30.85	7.45	24.69	44.41	54.00	-9.59	AV
H	12060.00	52.89	31.02	8.99	25.57	56.43	74.00	-17.57	PK
H	12060.00	43.06	31.02	8.99	25.57	46.60	54.00	-7.40	AV



Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Middle Channel:2437MHz									
V	4874.00	51.89	30.55	5.77	24.66	51.77	74.00	-22.23	PK
V	4874.00	43.45	30.55	5.77	24.66	43.33	54.00	-10.67	AV
V	7311.00	50.31	30.33	6.32	24.55	50.85	74.00	-23.15	PK
V	7311.00	43.35	30.33	6.32	24.55	43.89	54.00	-10.11	AV
V	9748.00	53.60	30.85	7.45	24.69	54.89	74.00	-19.11	PK
V	9748.00	43.27	30.85	7.45	24.69	44.56	54.00	-9.44	AV
V	12185.00	50.87	31.02	8.99	25.57	54.41	74.00	-19.59	PK
V	12185.00	43.60	31.02	8.99	25.57	47.14	54.00	-6.86	AV
H	4874.00	52.42	30.55	5.77	24.66	52.30	74.00	-21.70	PK
H	4874.00	43.49	30.55	5.77	24.66	43.37	54.00	-10.63	AV
H	7311.00	54.79	30.33	6.32	24.55	55.33	74.00	-18.67	PK
H	7311.00	43.13	30.33	6.32	24.55	43.67	54.00	-10.33	AV
H	9748.00	51.57	30.85	7.45	24.69	52.86	74.00	-21.14	PK
H	9748.00	43.03	30.85	7.45	24.69	44.32	54.00	-9.68	AV
H	12185.00	54.66	31.02	8.99	25.57	58.20	74.00	-15.80	PK
H	12185.00	43.94	31.02	8.99	25.57	47.48	54.00	-6.52	AV



Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detect or Type
High Channel:2462MHz									
V	4924.00	53.96	30.55	5.77	24.66	53.84	74.00	-20.16	PK
V	4924.00	43.75	30.55	5.77	24.66	43.63	54.00	-10.37	AV
V	7386.00	50.32	30.33	6.32	24.55	50.86	74.00	-23.14	PK
V	7386.00	43.29	30.33	6.32	24.55	43.83	54.00	-10.17	AV
V	9848.00	51.40	30.85	7.45	24.69	52.69	74.00	-21.31	PK
V	9848.00	43.78	30.85	7.45	24.69	45.07	54.00	-8.93	AV
V	12310.00	52.59	31.02	8.99	25.57	56.13	74.00	-17.87	PK
V	12310.00	43.82	31.02	8.99	25.57	47.36	54.00	-6.64	AV
H	4924.00	54.96	30.55	5.77	24.66	54.84	74.00	-19.16	PK
H	4924.00	43.22	30.55	5.77	24.66	43.10	54.00	-10.90	AV
H	7386.00	51.31	30.33	6.32	24.55	51.85	74.00	-22.15	PK
H	7386.00	43.30	30.33	6.32	24.55	43.84	54.00	-10.16	AV
H	9848.00	53.63	30.85	7.45	24.69	54.92	74.00	-19.08	PK
H	9848.00	43.68	30.85	7.45	24.69	44.97	54.00	-9.03	AV
H	12310.00	50.45	31.02	8.99	25.57	53.99	74.00	-20.01	PK
H	12310.00	43.76	31.02	8.99	25.57	47.30	54.00	-6.70	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,

Margin= Emission Level - Limit

2. If peak below the average limit, the average emission was no test.

3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



802.11g

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detect or Type
Low Channel:2412MHz									
V	4824.00	53.27	30.55	5.77	24.66	53.15	74.00	-20.85	PK
V	4824.00	43.98	30.55	5.77	24.66	43.86	54.00	-10.14	AV
V	7236.00	50.29	30.33	6.32	24.55	50.83	74.00	-23.17	PK
V	7236.00	43.33	30.33	6.32	24.55	43.87	54.00	-10.13	AV
V	9648.00	52.11	30.85	7.45	24.69	53.40	74.00	-20.60	PK
V	9648.00	43.55	30.85	7.45	24.69	44.84	54.00	-9.16	AV
V	12060.00	51.44	31.02	8.99	25.57	54.98	74.00	-19.02	PK
V	12060.00	43.44	31.02	8.99	25.57	46.98	54.00	-7.02	AV
H	4824.00	54.56	30.55	5.77	24.66	54.44	74.00	-19.56	PK
H	4824.00	43.70	30.55	5.77	24.66	43.58	54.00	-10.42	AV
H	7236.00	54.98	30.33	6.32	24.55	55.52	74.00	-18.48	PK
H	7236.00	43.71	30.33	6.32	24.55	44.25	54.00	-9.75	AV
H	9648.00	52.87	30.85	7.45	24.69	54.16	74.00	-19.84	PK
H	9648.00	43.61	30.85	7.45	24.69	44.90	54.00	-9.10	AV
H	12060.00	50.44	31.02	8.99	25.57	53.98	74.00	-20.02	PK
H	12060.00	43.11	31.02	8.99	25.57	46.65	54.00	-7.35	AV



Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amp lifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/ m)	Margin (dB)	Detect or Type
Middle Channel:2437MHz									
V	4874.00	52.88	30.55	5.77	24.66	52.76	74.00	-21.24	PK
V	4874.00	43.58	30.55	5.77	24.66	43.46	54.00	-10.54	AV
V	7311.00	53.81	30.33	6.32	24.55	54.35	74.00	-19.65	PK
V	7311.00	43.59	30.33	6.32	24.55	44.13	54.00	-9.87	AV
V	9748.00	51.40	30.85	7.45	24.69	52.69	74.00	-21.31	PK
V	9748.00	43.96	30.85	7.45	24.69	45.25	54.00	-8.75	AV
V	12185.00	52.22	31.02	8.99	25.57	55.76	74.00	-18.24	PK
V	12185.00	43.16	31.02	8.99	25.57	46.70	54.00	-7.30	AV
H	4874.00	50.92	30.55	5.77	24.66	50.80	74.00	-23.20	PK
H	4874.00	43.94	30.55	5.77	24.66	43.82	54.00	-10.18	AV
H	7311.00	54.49	30.33	6.32	24.55	55.03	74.00	-18.97	PK
H	7311.00	43.18	30.33	6.32	24.55	43.72	54.00	-10.28	AV
H	9748.00	52.88	30.85	7.45	24.69	54.17	74.00	-19.83	PK
H	9748.00	43.76	30.85	7.45	24.69	45.05	54.00	-8.95	AV
H	12185.00	53.28	31.02	8.99	25.57	56.82	74.00	-17.18	PK
H	12185.00	43.72	31.02	8.99	25.57	47.26	54.00	-6.74	AV



Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detect or Type
High Channel:2462MHz									
V	4924.00	52.73	30.55	5.77	24.66	52.61	74.00	-21.39	PK
V	4924.00	43.49	30.55	5.77	24.66	43.37	54.00	-10.63	AV
V	7386.00	53.08	30.33	6.32	24.55	53.62	74.00	-20.38	PK
V	7386.00	43.34	30.33	6.32	24.55	43.88	54.00	-10.12	AV
V	9848.00	50.16	30.85	7.45	24.69	51.45	74.00	-22.55	PK
V	9848.00	43.59	30.85	7.45	24.69	44.88	54.00	-9.12	AV
V	12310.00	52.71	31.02	8.99	25.57	56.25	74.00	-17.75	PK
V	12310.00	43.20	31.02	8.99	25.57	46.74	54.00	-7.26	AV
H	4924.00	54.03	30.55	5.77	24.66	53.91	74.00	-20.09	PK
H	4924.00	43.62	30.55	5.77	24.66	43.50	54.00	-10.50	AV
H	7386.00	50.84	30.33	6.32	24.55	51.38	74.00	-22.62	PK
H	7386.00	43.17	30.33	6.32	24.55	43.71	54.00	-10.29	AV
H	9848.00	51.96	30.85	7.45	24.69	53.25	74.00	-20.75	PK
H	9848.00	43.15	30.85	7.45	24.69	44.44	54.00	-9.56	AV
H	12310.00	50.66	31.02	8.99	25.57	54.20	74.00	-19.80	PK
H	12310.00	43.46	31.02	8.99	25.57	47.00	54.00	-7.00	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,

Margin= Emission Level - Limit

2. If peak below the average limit, the average emission was no test.

3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



802.11n20

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Low Channel:2412MHz									
V	4824.00	50.07	30.55	5.77	24.66	49.95	74.00	-24.05	PK
V	4824.00	43.88	30.55	5.77	24.66	43.76	54.00	-10.24	AV
V	7236.00	51.63	30.33	6.32	24.55	52.17	74.00	-21.83	PK
V	7236.00	43.56	30.33	6.32	24.55	44.10	54.00	-9.90	AV
V	9648.00	54.22	30.85	7.45	24.69	55.51	74.00	-18.49	PK
V	9648.00	43.84	30.85	7.45	24.69	45.13	54.00	-8.87	AV
V	12060.00	51.32	31.02	8.99	25.57	54.86	74.00	-19.14	PK
V	12060.00	43.41	31.02	8.99	25.57	46.95	54.00	-7.05	AV
H	4824.00	51.50	30.55	5.77	24.66	51.38	74.00	-22.62	PK
H	4824.00	43.54	30.55	5.77	24.66	43.42	54.00	-10.58	AV
H	7236.00	51.65	30.33	6.32	24.55	52.19	74.00	-21.81	PK
H	7236.00	43.24	30.33	6.32	24.55	43.78	54.00	-10.22	AV
H	9648.00	53.82	30.85	7.45	24.69	55.11	74.00	-18.89	PK
H	9648.00	43.76	30.85	7.45	24.69	45.05	54.00	-8.95	AV
H	12060.00	53.22	31.02	8.99	25.57	56.76	74.00	-17.24	PK
H	12060.00	43.68	31.02	8.99	25.57	47.22	54.00	-6.78	AV



Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detect or Type
Middle Channel:2437MHz									
V	4874.00	50.33	30.55	5.77	24.66	50.21	74.00	-23.79	PK
V	4874.00	43.58	30.55	5.77	24.66	43.46	54.00	-10.54	AV
V	7311.00	50.81	30.33	6.32	24.55	51.35	74.00	-22.65	PK
V	7311.00	43.45	30.33	6.32	24.55	43.99	54.00	-10.01	AV
V	9748.00	51.84	30.85	7.45	24.69	53.13	74.00	-20.87	PK
V	9748.00	43.24	30.85	7.45	24.69	44.53	54.00	-9.47	AV
V	12185.00	54.65	31.02	8.99	25.57	58.19	74.00	-15.81	PK
V	12185.00	43.45	31.02	8.99	25.57	46.99	54.00	-7.01	AV
H	4874.00	53.85	30.55	5.77	24.66	53.73	74.00	-20.27	PK
H	4874.00	43.59	30.55	5.77	24.66	43.47	54.00	-10.53	AV
H	7311.00	52.28	30.33	6.32	24.55	52.82	74.00	-21.18	PK
H	7311.00	43.62	30.33	6.32	24.55	44.16	54.00	-9.84	AV
H	9748.00	54.76	30.85	7.45	24.69	56.05	74.00	-17.95	PK
H	9748.00	43.43	30.85	7.45	24.69	44.72	54.00	-9.28	AV
H	12185.00	52.98	31.02	8.99	25.57	56.52	74.00	-17.48	PK
H	12185.00	43.94	31.02	8.99	25.57	47.48	54.00	-6.52	AV



Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detect or Type
High Channel:2462MHz									
V	4924.00	51.67	30.55	5.77	24.66	51.55	74.00	-22.45	PK
V	4924.00	43.35	30.55	5.77	24.66	43.23	54.00	-10.77	AV
V	7386.00	53.31	30.33	6.32	24.55	53.85	74.00	-20.15	PK
V	7386.00	43.23	30.33	6.32	24.55	43.77	54.00	-10.23	AV
V	9848.00	53.28	30.85	7.45	24.69	54.57	74.00	-19.43	PK
V	9848.00	43.02	30.85	7.45	24.69	44.31	54.00	-9.69	AV
V	12310.00	50.97	31.02	8.99	25.57	54.51	74.00	-19.49	PK
V	12310.00	43.27	31.02	8.99	25.57	46.81	54.00	-7.19	AV
H	4924.00	51.26	30.55	5.77	24.66	51.14	74.00	-22.86	PK
H	4924.00	43.66	30.55	5.77	24.66	43.54	54.00	-10.46	AV
H	7386.00	53.53	30.33	6.32	24.55	54.07	74.00	-19.93	PK
H	7386.00	43.85	30.33	6.32	24.55	44.39	54.00	-9.61	AV
H	9848.00	54.17	30.85	7.45	24.69	55.46	74.00	-18.54	PK
H	9848.00	43.22	30.85	7.45	24.69	44.51	54.00	-9.49	AV
H	12310.00	50.58	31.02	8.99	25.57	54.12	74.00	-19.88	PK
H	12310.00	43.24	31.02	8.99	25.57	46.78	54.00	-7.22	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



802.11n40

Polar (H/V)	Frequenc y (MHz)	Meter Reading (dBuV)	Pre-ampli fier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/ m)	Margin (dB)	Detect or Type
Low Channel:2422MHz									
V	4844.00	53.10	30.55	5.77	24.66	52.98	74.00	-21.02	PK
V	4844.00	43.67	30.55	5.77	24.66	43.55	54.00	-10.45	AV
V	7266.00	53.22	30.33	6.32	24.55	53.76	74.00	-20.24	PK
V	7266.00	43.49	30.33	6.32	24.55	44.03	54.00	-9.97	AV
V	9688.00	53.99	30.85	7.45	24.69	55.28	74.00	-18.72	PK
V	9688.00	43.89	30.85	7.45	24.69	45.18	54.00	-8.82	AV
V	12110.00	51.47	31.02	8.99	25.57	55.01	74.00	-18.99	PK
V	12110.00	43.03	31.02	8.99	25.57	46.57	54.00	-7.43	AV
H	4844.00	54.68	30.55	5.77	24.66	54.56	74.00	-19.44	PK
H	4844.00	43.81	30.55	5.77	24.66	43.69	54.00	-10.31	AV
H	7266.00	52.16	30.33	6.32	24.55	52.70	74.00	-21.30	PK
H	7266.00	43.17	30.33	6.32	24.55	43.71	54.00	-10.29	AV
H	9688.00	53.44	30.85	7.45	24.69	54.73	74.00	-19.27	PK
H	9688.00	43.65	30.85	7.45	24.69	44.94	54.00	-9.06	AV
H	12110.00	52.45	31.02	8.99	25.57	55.99	74.00	-18.01	PK
H	12110.00	43.67	31.02	8.99	25.57	47.21	54.00	-6.79	AV



Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Middle Channel:2437MHz									
V	4874.00	52.74	30.55	5.77	24.66	52.62	74.00	-21.38	PK
V	4874.00	43.58	30.55	5.77	24.66	43.46	54.00	-10.54	AV
V	7311.00	52.64	30.33	6.32	24.55	53.18	74.00	-20.82	PK
V	7311.00	43.41	30.33	6.32	24.55	43.95	54.00	-10.05	AV
V	9748.00	53.83	30.85	7.45	24.69	55.12	74.00	-18.88	PK
V	9748.00	43.62	30.85	7.45	24.69	44.91	54.00	-9.09	AV
V	12185.00	52.16	31.02	8.99	25.57	55.70	74.00	-18.30	PK
V	12185.00	43.17	31.02	8.99	25.57	46.71	54.00	-7.29	AV
H	4874.00	50.73	30.55	5.77	24.66	50.61	74.00	-23.39	PK
H	4874.00	43.10	30.55	5.77	24.66	42.98	54.00	-11.02	AV
H	7311.00	51.76	30.33	6.32	24.55	52.30	74.00	-21.70	PK
H	7311.00	43.54	30.33	6.32	24.55	44.08	54.00	-9.92	AV
H	9748.00	52.08	30.85	7.45	24.69	53.37	74.00	-20.63	PK
H	9748.00	43.84	30.85	7.45	24.69	45.13	54.00	-8.87	AV
H	12185.00	52.55	31.02	8.99	25.57	56.09	74.00	-17.91	PK
H	12185.00	43.61	31.02	8.99	25.57	47.15	54.00	-6.85	AV



Polar (H/V)	Frequency	Meter Reading	Pre-amp lifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
High Channel:2452MHz									
V	4904.00	53.42	30.55	5.77	24.66	53.30	74.00	-20.70	PK
V	4904.00	43.85	30.55	5.77	24.66	43.73	54.00	-10.27	AV
V	7356.00	54.10	30.33	6.32	24.55	54.64	74.00	-19.36	PK
V	7356.00	43.21	30.33	6.32	24.55	43.75	54.00	-10.25	AV
V	9808.00	54.03	30.85	7.45	24.69	55.32	74.00	-18.68	PK
V	9808.00	43.42	30.85	7.45	24.69	44.71	54.00	-9.29	AV
V	12260.00	51.70	31.02	8.99	25.57	55.24	74.00	-18.76	PK
V	12260.00	43.86	31.02	8.99	25.57	47.40	54.00	-6.60	AV
H	4904.00	52.69	30.55	5.77	24.66	52.57	74.00	-21.43	PK
H	4904.00	43.53	30.55	5.77	24.66	43.41	54.00	-10.59	AV
H	7356.00	53.30	30.33	6.32	24.55	53.84	74.00	-20.16	PK
H	7356.00	43.32	30.33	6.32	24.55	43.86	54.00	-10.14	AV
H	9808.00	50.82	30.85	7.45	24.69	52.11	74.00	-21.89	PK
H	9808.00	43.85	30.85	7.45	24.69	45.14	54.00	-8.86	AV
H	12260.00	53.63	31.02	8.99	25.57	57.17	74.00	-16.83	PK
H	12260.00	43.87	31.02	8.99	25.57	47.41	54.00	-6.59	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,

Margin= Emission Level - Limit

2. If peak below the average limit, the average emission was no test.

3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



5. RADIATED Band EMISSION MEASUREMENT

5.1 Test Requirement:

Test Requirement:	FCC Part15 C Section 15.209 and 15.205				
Test Method:	ANSI C63.10: 2013				
Test Frequency Range:	All of the restrict bands were tested, only the worst band' s (2310MHz to 2500MHz) data was showed.				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Average	1MHz	3MHz	Average

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Class B (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

5.2 TEST PROCEDURE

Above 1GHz test procedure as below:

- a. 1. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.



- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could bestopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dBmargin would be re-tested one by one using peak, quasi-peak or average method as specified and then reportedin a data sheet.
- g. Test the EUT in the lowest channel,the Highest channel

Note:

Both horizontal and vertical antenna polarities were tested


and performed pretest to three orthogonal axis. The worst case emissions were reported

5.3 DEVIATION FROM TEST STANDARD

No deviation

5.4 TEST SETUP

Radiated Emission Test-Up Frequency Above 1GHz

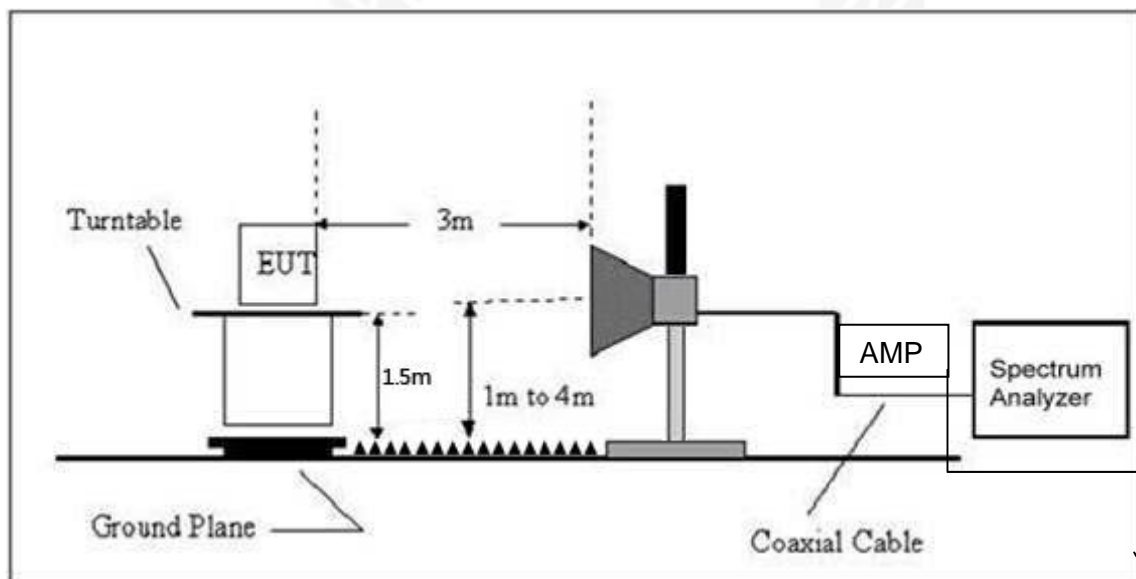

5.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.



5.6 TEST RESULT

	Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission level (dBuV/m)	Limit (dBuV/m)	Detector Type	Result
802.11b	Low Channel 2412MHz									
	H	2390.00	53.34	30.22	4.85	23.98	51.95	74.00	PK	PASS
	H	2390.00	44.14	30.22	4.85	23.98	42.75	54.00	AV	PASS
	H	2400.00	54.19	30.22	4.85	23.98	52.80	74.00	PK	PASS
	H	2400.00	44.01	30.22	4.85	23.98	42.62	54.00	AV	PASS
	V	2390.00	54.55	30.22	4.85	23.98	53.16	74.00	PK	PASS
	V	2390.00	44.86	30.22	4.85	23.98	43.47	54.00	AV	PASS
	V	2400.00	53.16	30.22	4.85	23.98	51.77	74.00	PK	PASS
	V	2400.00	44.29	30.22	4.85	23.98	42.90	54.00	AV	PASS
	High Channel 2462MHz									
	H	2483.50	54.59	30.22	4.85	23.98	53.20	74.00	PK	PASS
	H	2483.50	44.54	30.22	4.85	23.98	43.15	54.00	AV	PASS
	H	2500.00	54.45	30.22	4.85	23.98	53.06	74.00	PK	PASS
	H	2500.00	44.78	30.22	4.85	23.98	43.39	54.00	AV	PASS
	V	2483.50	53.04	30.22	4.85	23.98	51.65	74.00	PK	PASS
	V	2485.50	44.79	30.22	4.85	23.98	43.40	54.00	AV	PASS
V	2500.00	53.62	30.22	4.85	23.98	52.23	74.00	PK	PASS	
V	2500.00	44.60	30.22	4.85	23.98	43.21	54.00	AV	PASS	
802.11g	Low Channel 2412MHz									
	H	2390.00	54.55	30.22	4.85	23.98	53.16	74.00	PK	PASS
	H	2390.00	44.37	30.22	4.85	23.98	42.98	54.00	AV	PASS
	H	2400.00	53.76	30.22	4.85	23.98	52.37	74.00	PK	PASS
	H	2400.00	44.63	30.22	4.85	23.98	43.24	54.00	AV	PASS
	V	2390.00	54.65	30.22	4.85	23.98	53.26	74.00	PK	PASS
	V	2390.00	44.75	30.22	4.85	23.98	43.36	54.00	AV	PASS
V	2400.00	54.79	30.22	4.85	23.98	53.40	74.00	PK	PASS	



	V	2400.00	44.79	30.22	4.85	23.98	43.40	54.00	AV	PASS
	High Channel 2462MHz									
	H	2483.50	51.99	30.22	4.85	23.98	63.08	74.00	PK	PASS
	H	2483.50	38.91	30.22	4.85	23.98	50.00	54.00	AV	PASS
	H	2500.00	37.11	30.22	4.85	23.98	48.20	74.00	PK	PASS
	H	2500.00	31.21	30.22	4.85	23.98	42.30	54.00	AV	PASS
	V	2483.50	53.27	30.22	4.85	23.98	64.36	74.00	PK	PASS
	V	2485.50	37.14	30.22	4.85	23.98	48.23	54.00	AV	PASS
	V	2500.00	35.29	30.22	4.85	23.98	46.38	74.00	PK	PASS
	V	2500.00	31.89	30.22	4.85	23.98	42.98	54.00	AV	PASS
	Low Channel 2412MHz									
	H	2390.00	53.15	30.22	4.85	23.98	51.76	74.00	PK	PASS
	H	2390.00	44.43	30.22	4.85	23.98	43.04	54.00	AV	PASS
	H	2400.00	53.68	30.22	4.85	23.98	52.29	74.00	PK	PASS
	H	2400.00	44.13	30.22	4.85	23.98	42.74	54.00	AV	PASS
	V	2390.00	53.23	30.22	4.85	23.98	51.84	74.00	PK	PASS
	V	2390.00	44.18	30.22	4.85	23.98	42.79	54.00	AV	PASS
	V	2400.00	54.67	30.22	4.85	23.98	53.28	74.00	PK	PASS
802.11n20	V	2400.00	44.05	30.22	4.85	23.98	42.66	54.00	AV	PASS
	High Channel 2462MHz									
	H	2483.50	52.07	30.22	4.85	23.98	63.16	74.00	PK	PASS
	H	2483.50	38.99	30.22	4.85	23.98	50.08	54.00	AV	PASS
	H	2500.00	37.19	30.22	4.85	23.98	48.28	74.00	PK	PASS
	H	2500.00	31.29	30.22	4.85	23.98	42.38	54.00	AV	PASS
	V	2483.50	53.35	30.22	4.85	23.98	64.44	74.00	PK	PASS
	V	2485.50	37.22	30.22	4.85	23.98	48.31	54.00	AV	PASS
	V	2500.00	35.37	30.22	4.85	23.98	46.46	74.00	PK	PASS
	V	2500.00	31.97	30.22	4.85	23.98	43.06	54.00	AV	PASS
	Low Channel 2422MHz									
802.11n40	H	2390.00	53.87	30.22	4.85	23.98	52.48	74.00	PK	PASS



H	2390.00	44.96	30.22	4.85	23.98	43.57	54.00	AV	PASS
H	2400.00	54.47	30.22	4.85	23.98	53.08	74.00	PK	PASS
H	2400.00	44.65	30.22	4.85	23.98	43.26	54.00	AV	PASS
V	2390.00	53.89	30.22	4.85	23.98	52.50	74.00	PK	PASS
V	2390.00	44.51	30.22	4.85	23.98	43.12	54.00	AV	PASS
V	2400.00	54.39	30.22	4.85	23.98	53.00	74.00	PK	PASS
V	2400.00	44.85	30.22	4.85	23.98	43.46	54.00	AV	PASS
High Channel 2452MHz									
H	2483.50	53.12	30.22	4.85	23.98	64.21	74.00	PK	PASS
H	2483.50	40.04	30.22	4.85	23.98	51.13	54.00	AV	PASS
H	2500.00	38.24	30.22	4.85	23.98	49.33	74.00	PK	PASS
H	2500.00	32.34	30.22	4.85	23.98	43.43	54.00	AV	PASS
V	2483.50	54.4	30.22	4.85	23.98	65.49	74.00	PK	PASS
V	2485.50	38.27	30.22	4.85	23.98	49.36	54.00	AV	PASS
V	2500.00	36.42	30.22	4.85	23.98	47.51	74.00	PK	PASS
V	2500.00	33.02	30.22	4.85	23.98	44.11	54.00	AV	PASS
Remark:									
1. Emission Level = Meter Reading + Antenna Factor + Cable Loss - Pre-amplifier, Margin= Emission Level - Limit									



6. POWER SPECTRAL DENSITY TEST

Test Requirement:	FCC Part15 C Section 15.247 (e)
Test Method:	KDB558074 D0115.247 Meas Guidancev05r02

6.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247	Power Spectral Density	8dBm/3kHz	2400-2483.5	PASS

6.2 TEST PROCEDURE

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: $3\text{ kHz} \leq \text{RBW} \leq 100\text{ kHz}$.
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

6.3 DEVIATION FROM STANDARD

No deviation.

6.4 TEST SETUP



6.5 EUT OPERATION CONDITIONS


The EUT tested system was configured as the statements of 2.1 Unless otherwise a special operating condition is specified in the follows during the testing.





6.6 TEST RESULT

Temperature :	26°C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	DC 3.6V
Test Mode :	TX b Mode		

Frequency	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
2412 MHz	-12.95	8	PASS
2437 MHz	-12.51	8	PASS
2462 MHz	-13.09	8	PASS

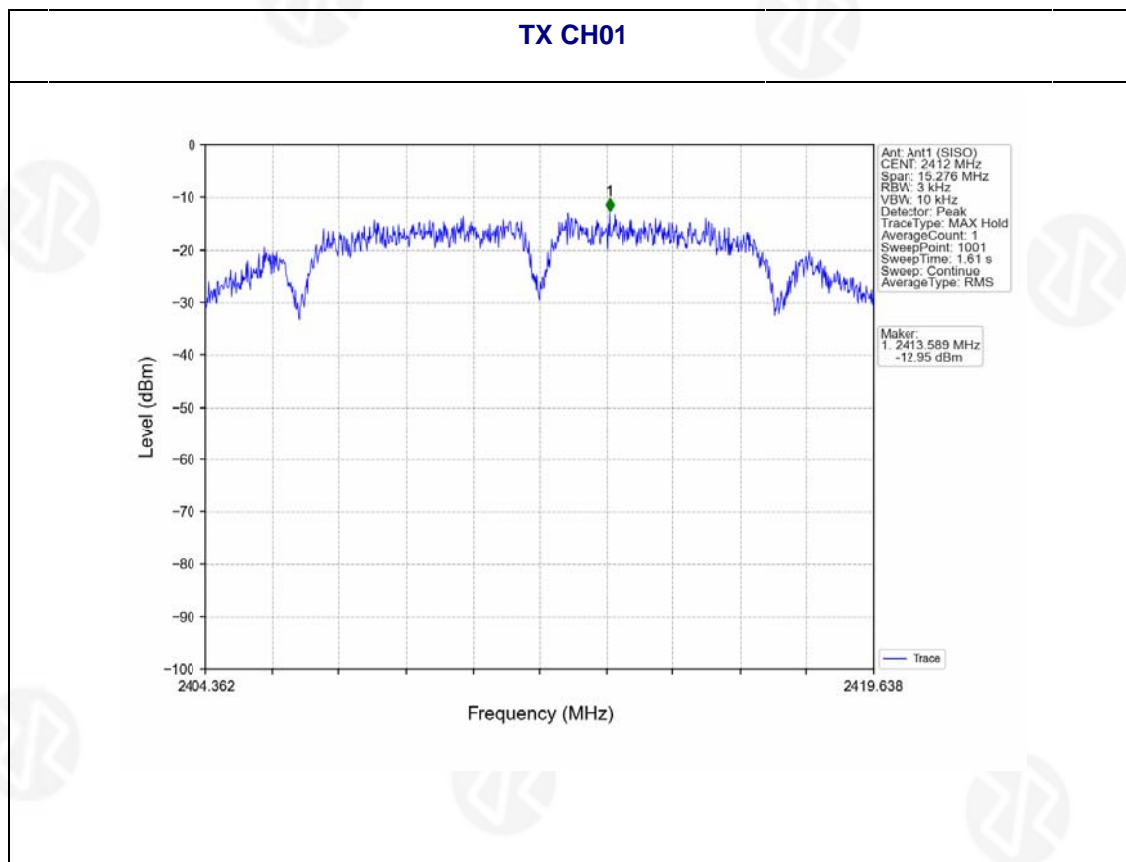


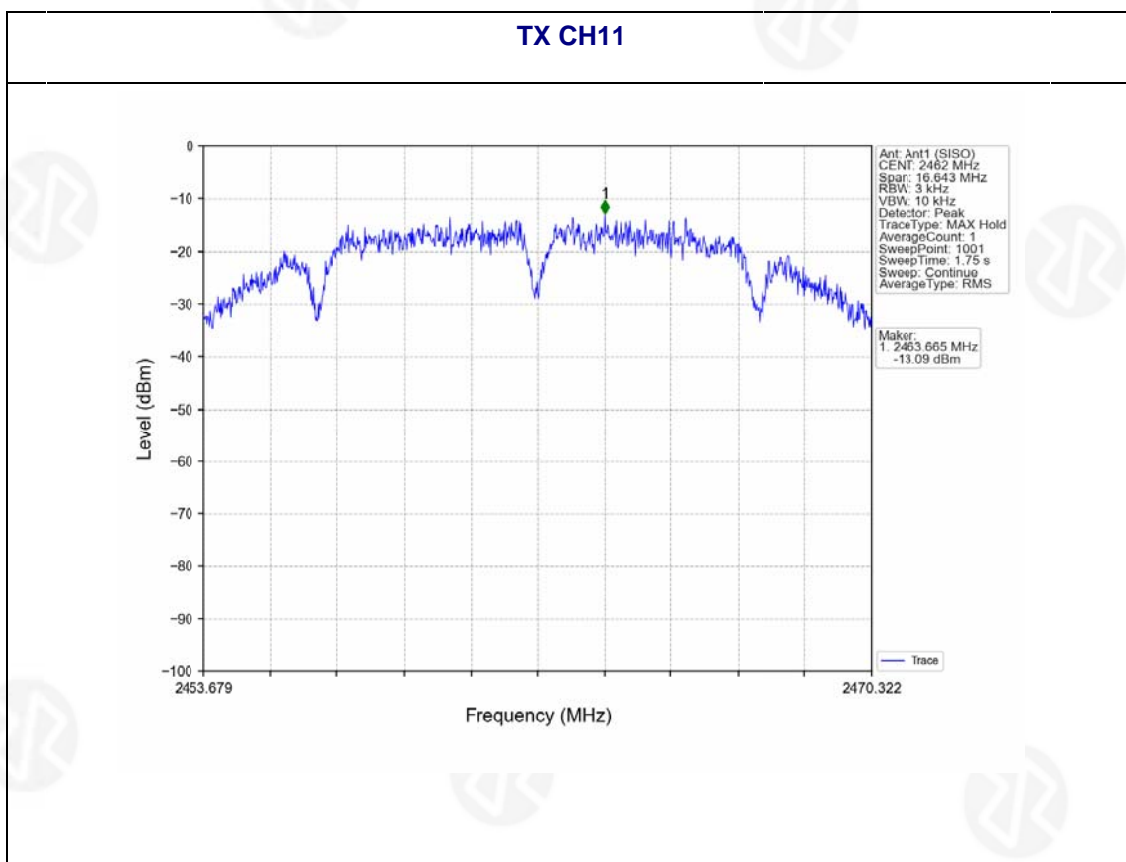
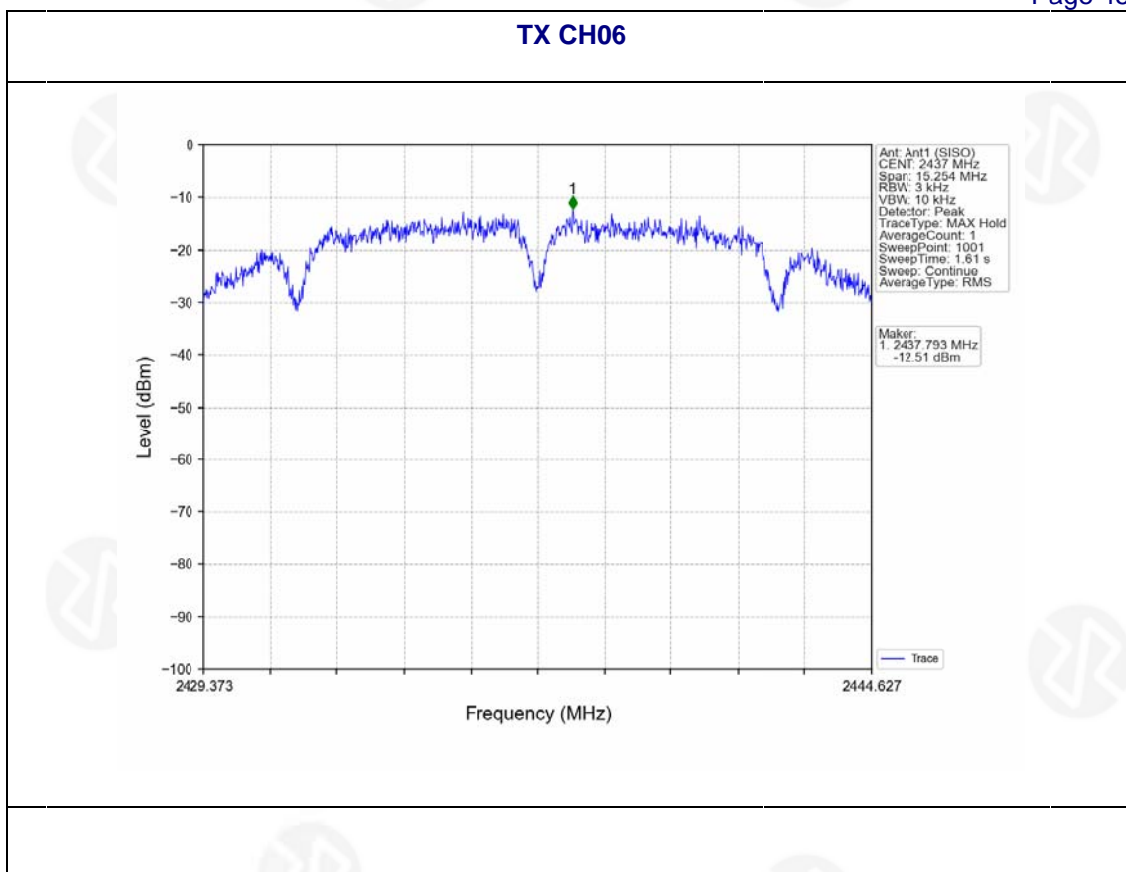




Temperature :	26°C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	DC 3.6V
Test Mode :	TX g Mode		

Frequency	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
2412 MHz	-14.32	8	PASS
2437 MHz	-16.31	8	PASS
2462 MHz	-16.86	8	PASS

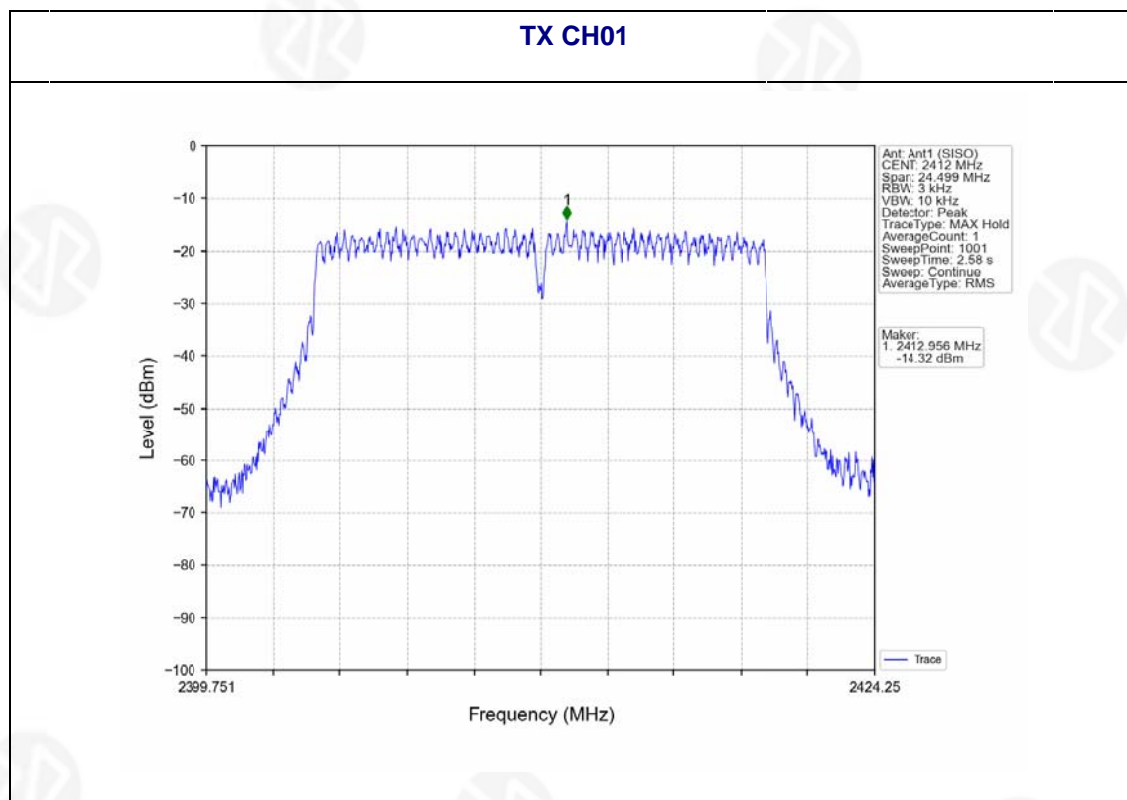


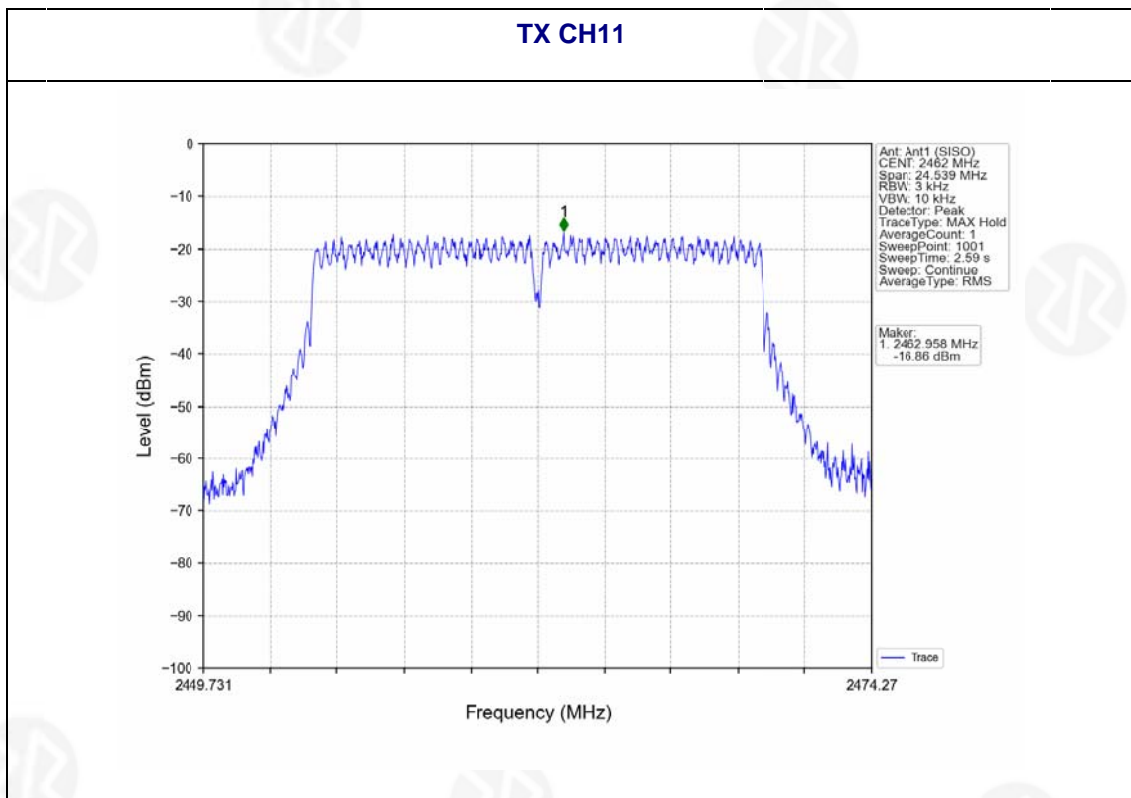
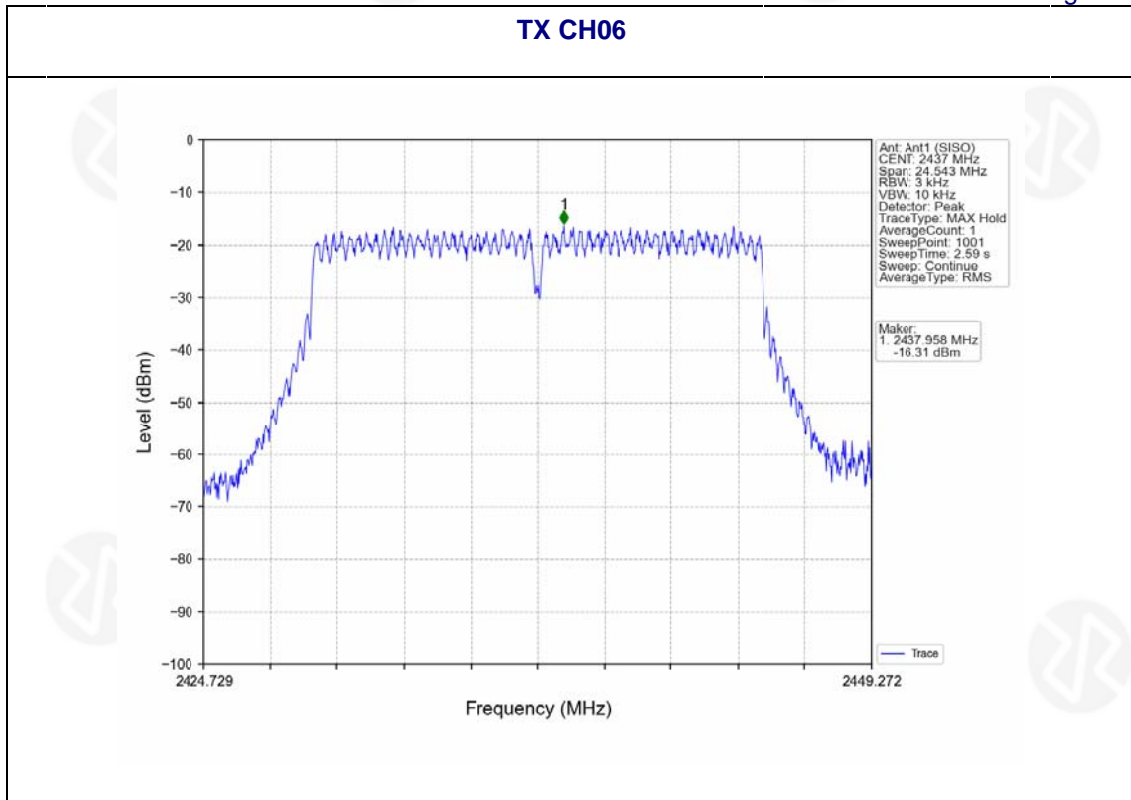




Temperature :	26°C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	DC 3.6V
Test Mode :	TX n Mode(20M)		

Frequency	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
2412 MHz	-16.43	8	PASS
2437 MHz	-17.00	8	PASS
2462 MHz	-17.14	8	PASS

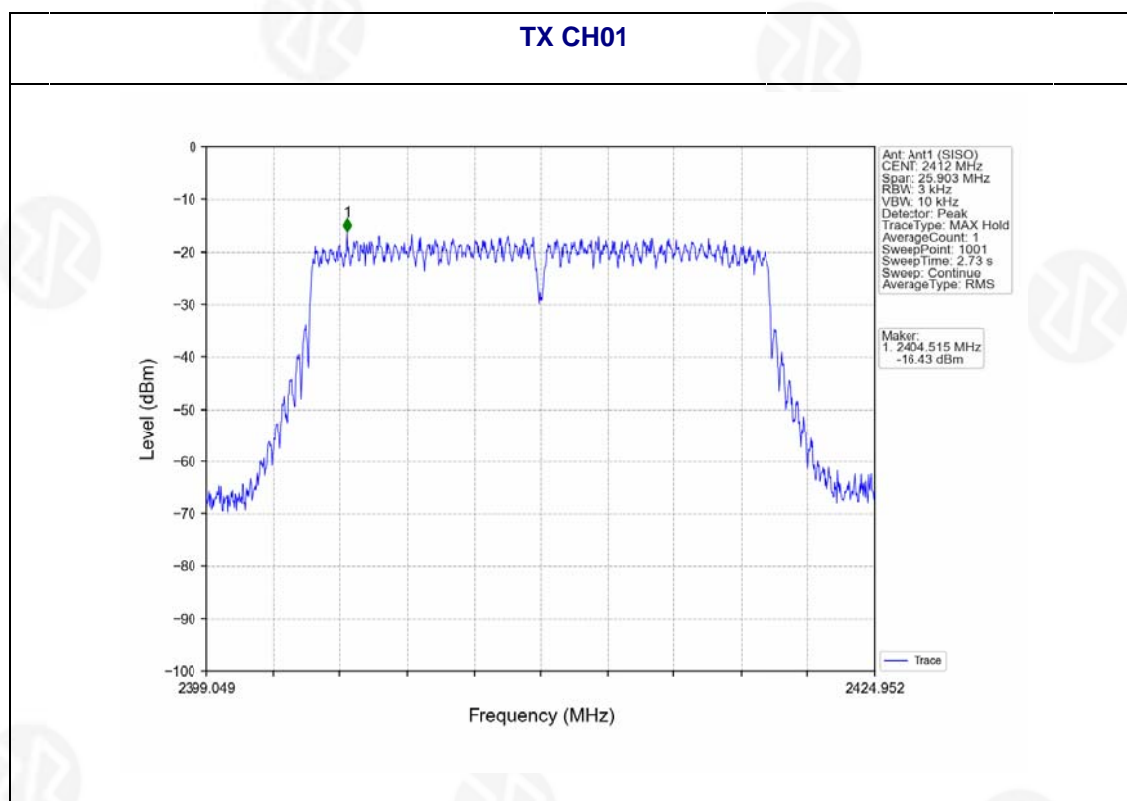

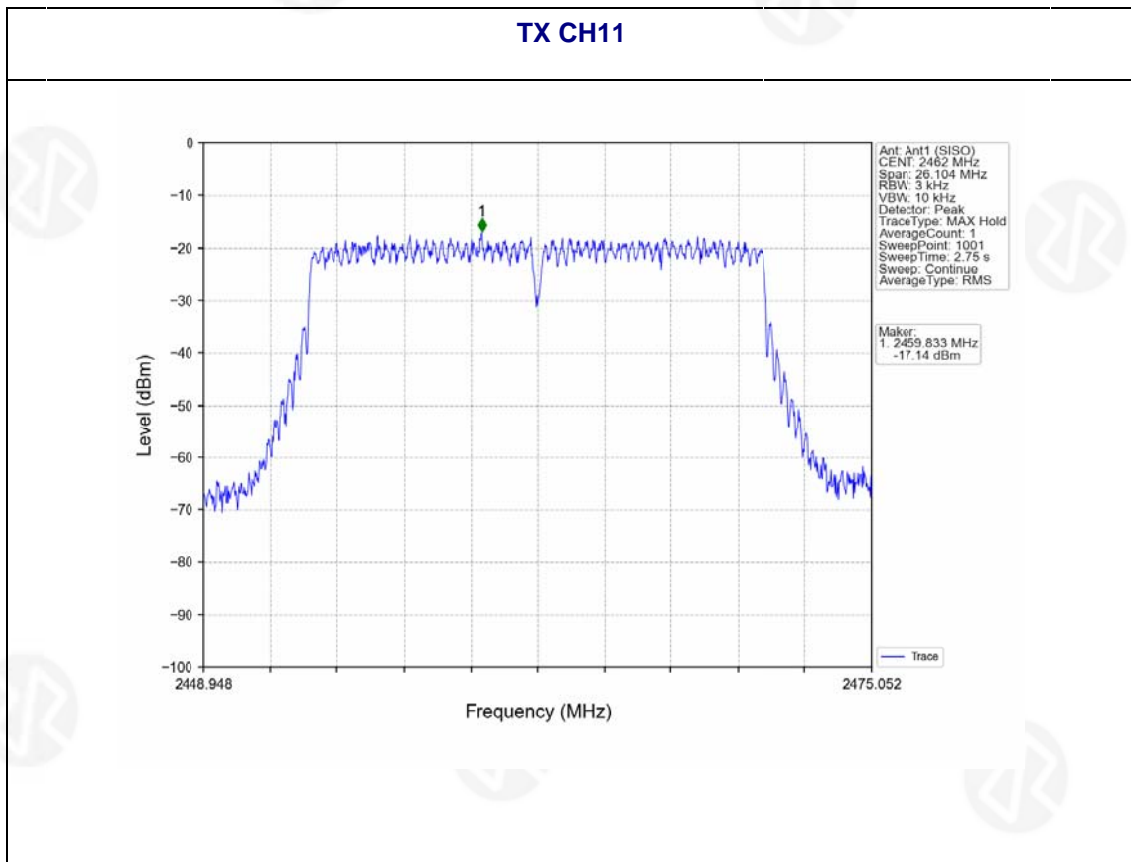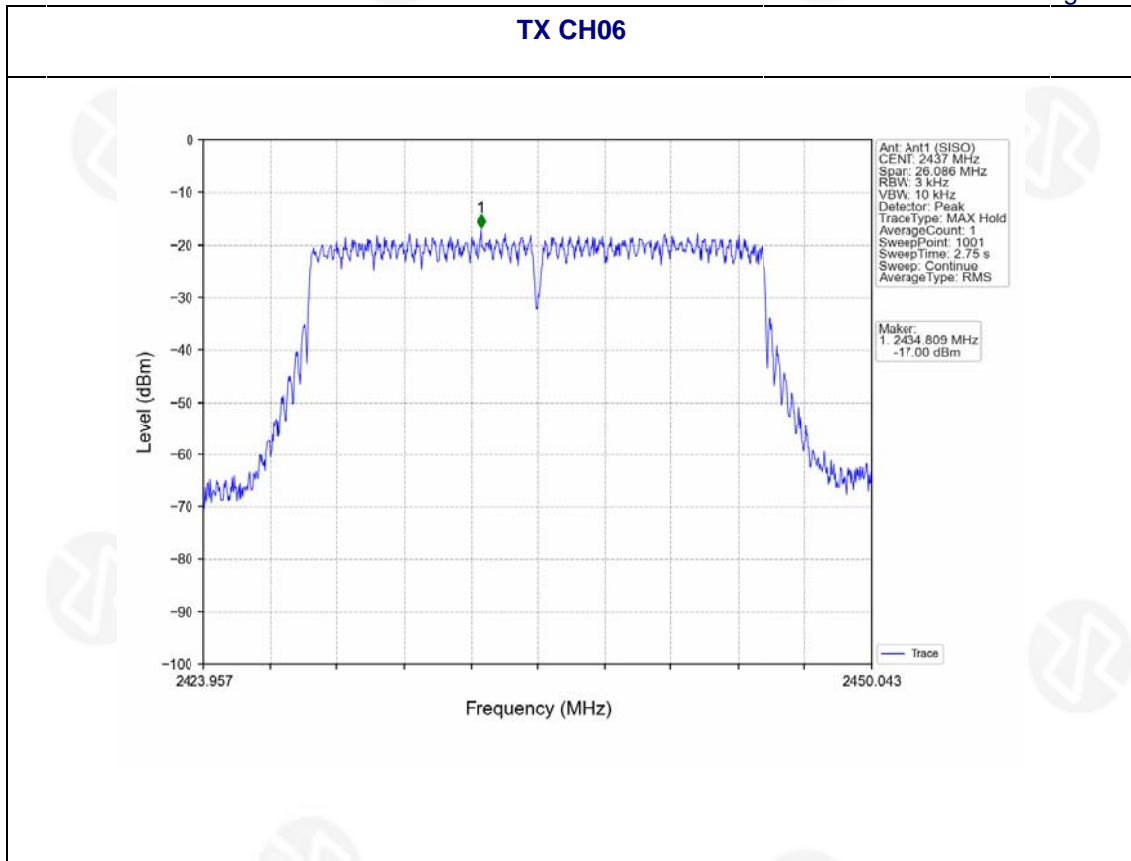




Temperature :	26°C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	DC 3.6V
Test Mode :	TX n Mode(40M)		


Frequency	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
2422 MHz	-18.99	8	PASS
2437 MHz	-17.37	8	PASS
2452 MHz	-17.66	8	PASS

TX CH03

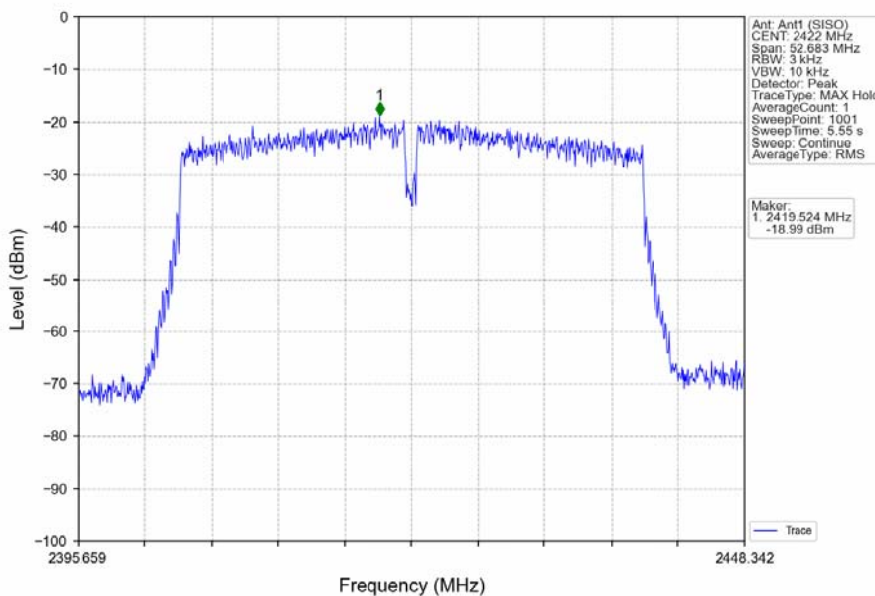




TX CH06

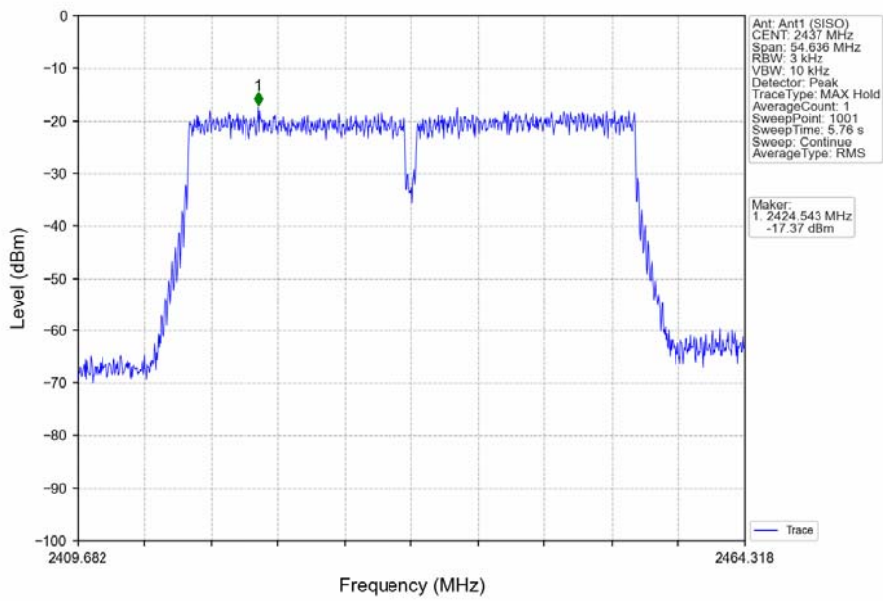

TX CH09

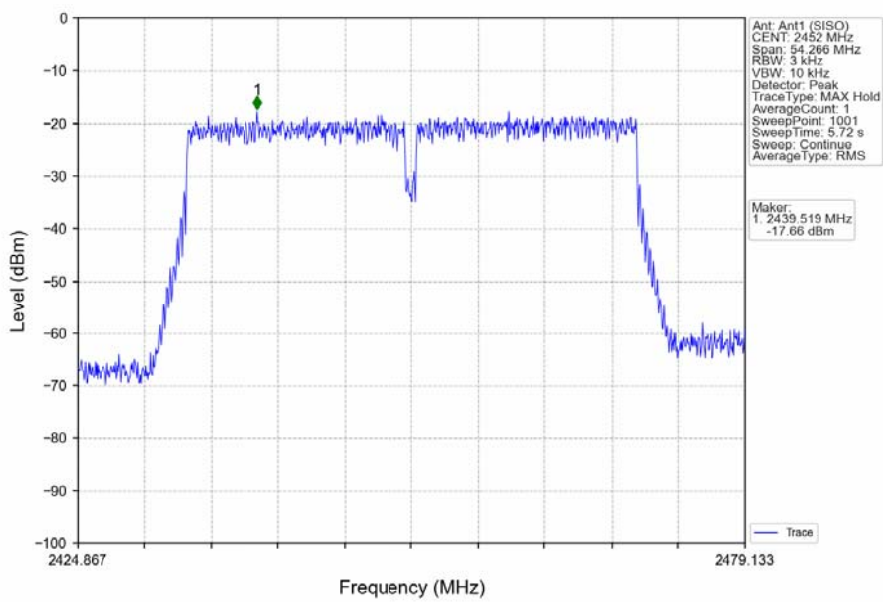



7. 6DB BANDWIDTH& 99% OCCUPIED BANDWIDTH

Test Requirement:	FCC Part15 C Section 15.247 (a)(2)
Test Method:	KDB558074 D0115.247 Meas Guidancev05r02

7.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	$\geq 500\text{KHz}$ (6dB bandwidth)	2400-2483.5	PASS

7.2 TEST PROCEDURE

1. Set RBW = 100 kHz.for 6dB / 1%-5% OBW for 99%OBW
2. Set the video bandwidth (VBW) $\geq 3 \times \text{RBW}$.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

7.3 DEVIATION FROM STANDARD

No deviation.



7.4 TEST SETUP



7.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.



7.6 TEST RESULT

Temperature :	26°C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	DC 3.6V
Test Mode :	TX Mode		

Test CH	-6dB Occupy Bandwidth (MHz)				Limit(KHz)	Result
	802.11b	802.11g	802.11n(HT20)	802.11n(HT 40)		
Lowest	10.184	16.333	17.269	35.122	>500	Pass
Middle	10.169	16.362	17.391	36.424		
Highest	11.095	16.359	17.403	36.177		

Test CH	99% Occupied Bandwidth (MHz)				Limit(KHz)	Result
	802.11b	802.11g	802.11n(HT20)	802.11n(HT 40)		
Lowest	14.876	16.696	17.614	35.765	>500	Pass
Middle	14.926	16.748	17.641	36.405		
Highest	14.916	16.739	17.630	36.352		





99% Occupied Bandwidth



802.11b

802.11g



Lowest channel

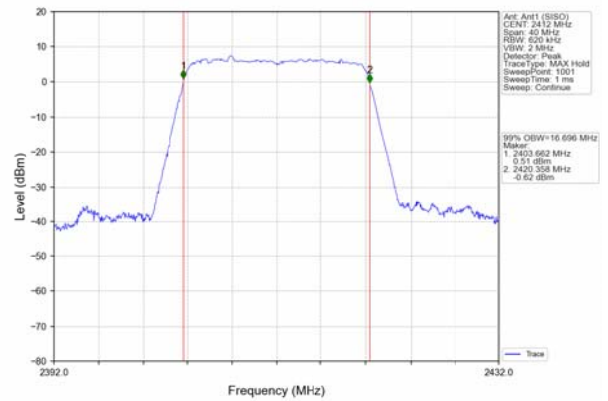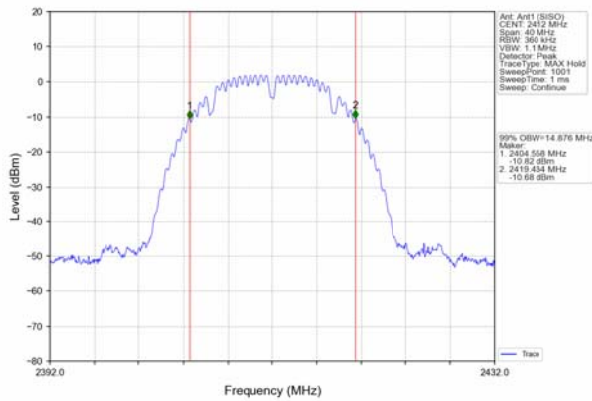

Middle channel

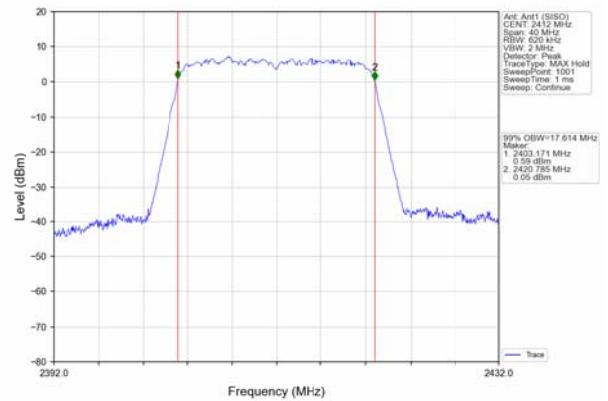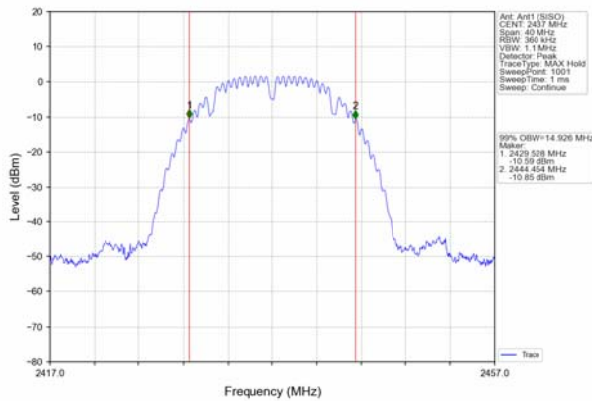

Highest channel

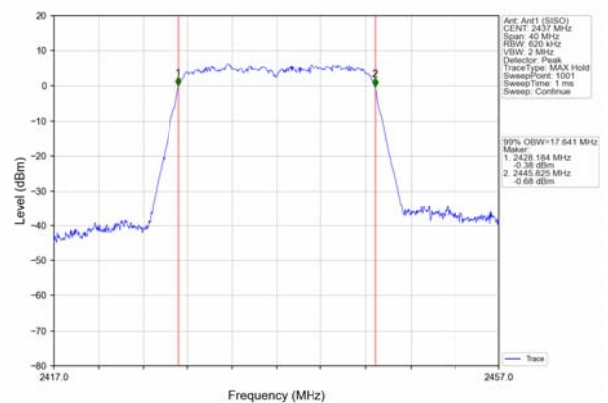
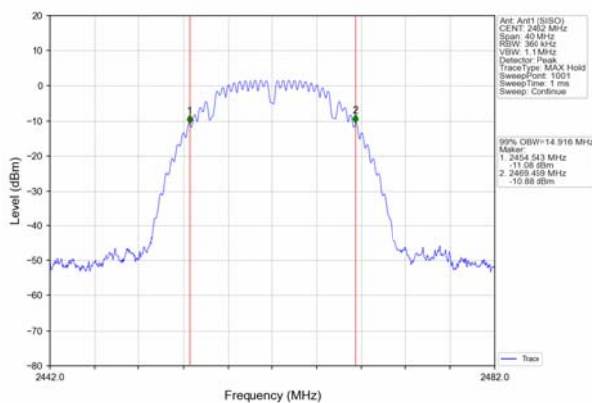






802.11n20

802.11n40



Lowest channel

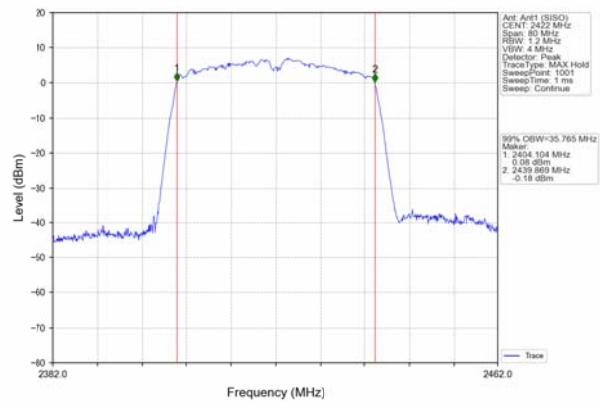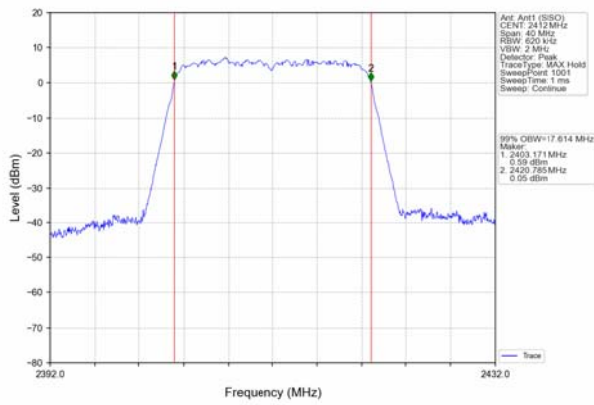

Middle channel

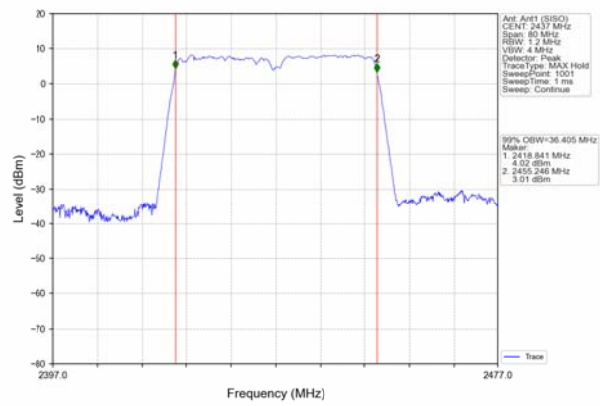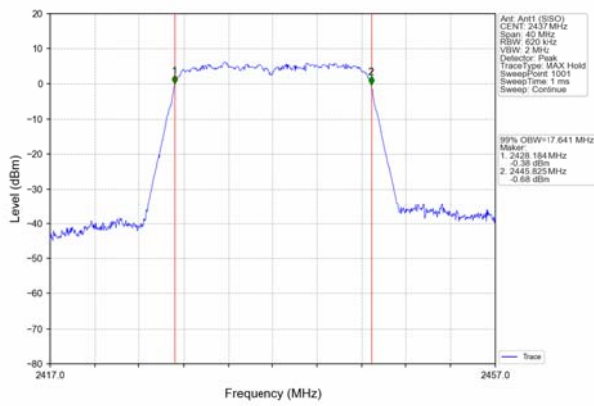

Highest channel

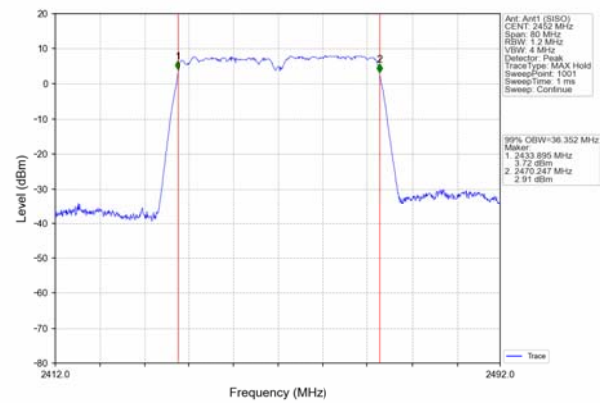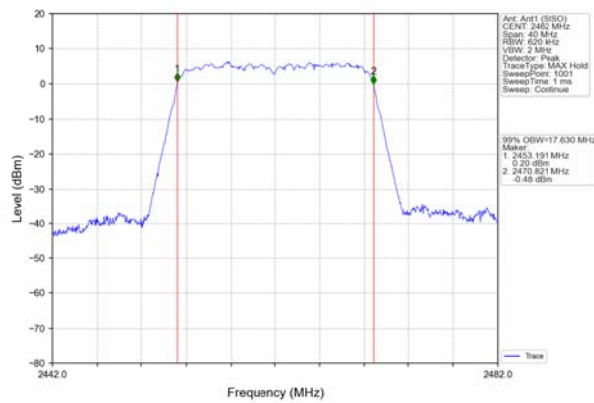







20dB BW

Test plot as follows:



802.11b

802.11g



Lowest channel

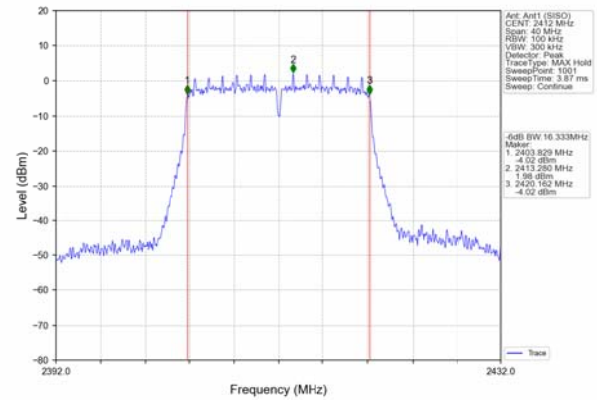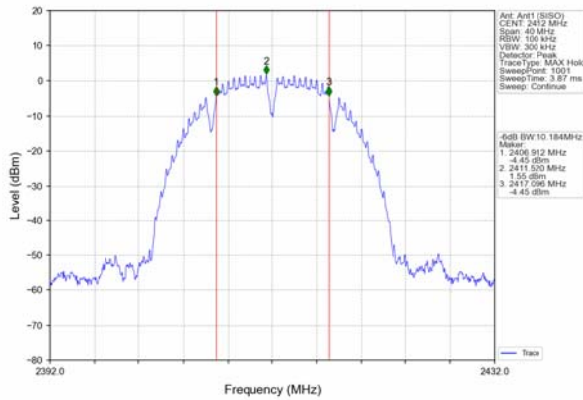

Middle channel

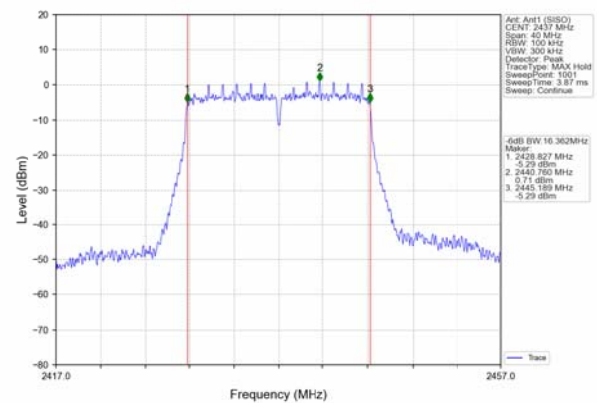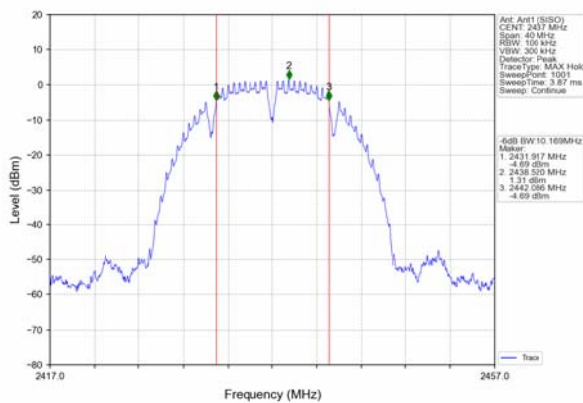

Highest channel

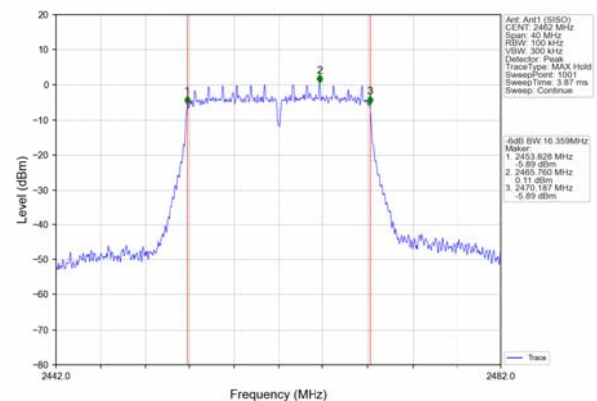
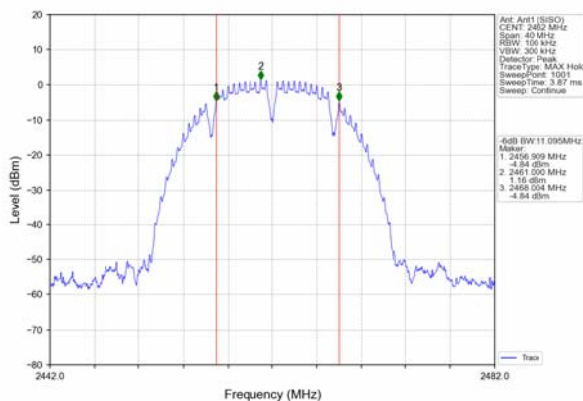






802.11n20

802.11n40



Lowest channel

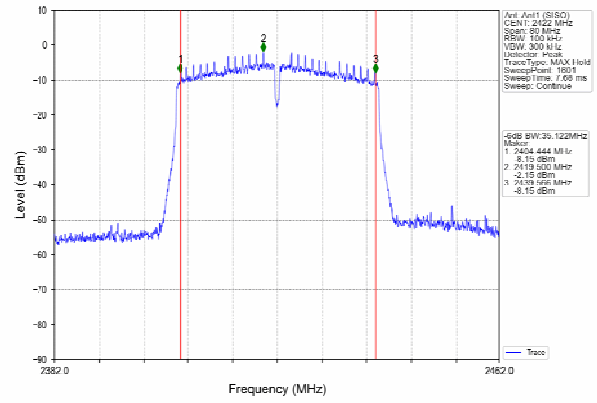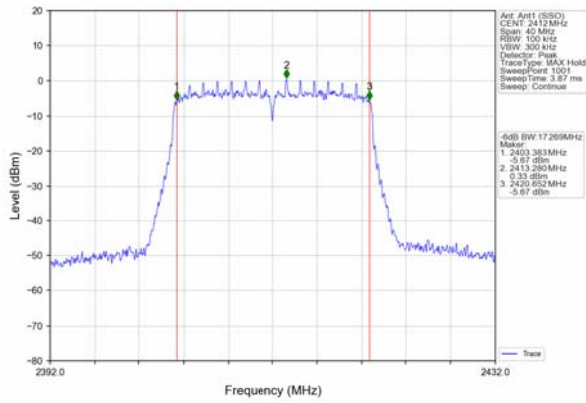

Middle channel

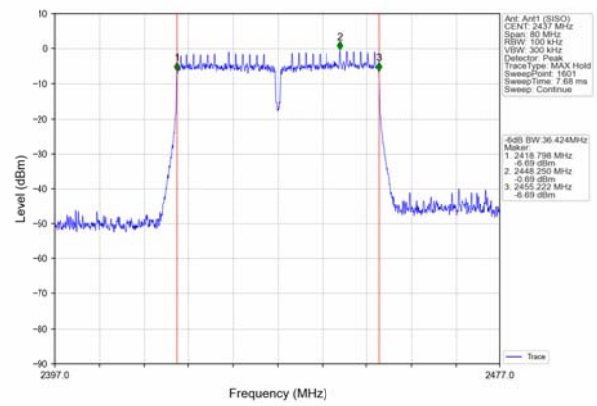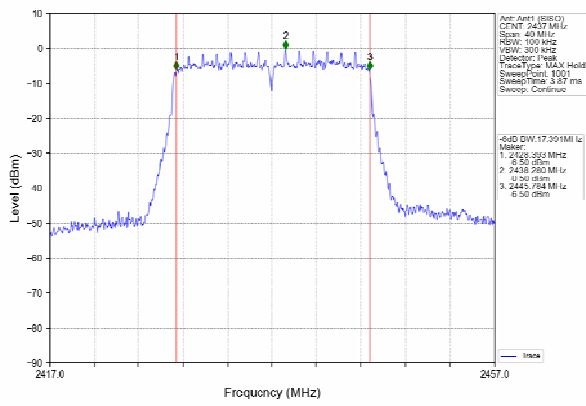

Highest channel

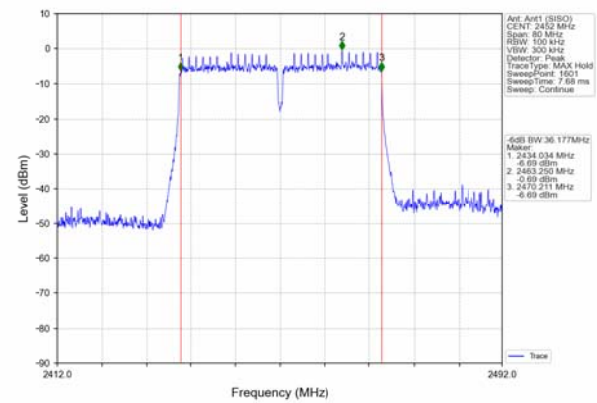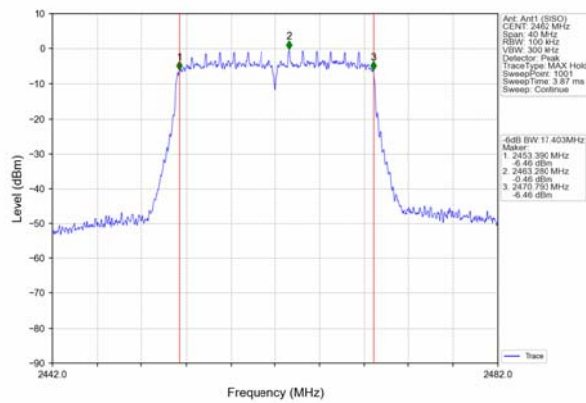



8. PEAK OUTPUT POWER TEST

Test Requirement:	FCC Part15 C Section 15.247 (b)(3)
Test Method:	KDB558074 D0115.247 Meas Guidancev05r02

8.1 APPLIED PROCEDURES/LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Peak Output Power	1 watt or 30dBm	2400-2483.5	PASS

8.2 TEST PROCEDURE

- a. The EUT was directly connected to the Power meter

8.3 DEVIATION FROM STANDARD

No deviation.

8.4 TEST SETUP



8.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.



8.6 TEST RESULT



Temperature :	26℃	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	DC 3.6V

Test CH	Peak Output Power (dBm)				Limit(dBm)	Result
	802.11b	802.11g	802.11n(HT20)	802.11n(HT40)		
Lowest	13.80	20.77	19.59	13.35	30.00	Pass
Middle	13.51	19.73	18.80	17.46		
Highest	13.63	19.15	18.90	17.52		

TX							
Mode	TX Type	Frequency (MHz)	T_on (ms)	Period (ms)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	Max. DC Variation (%)
802.11b	SISO	2412	8.190	8.693	94.21	0.26	0.04
		2437	8.193	8.696	94.22	0.26	0.04
		2462	8.190	8.693	94.21	0.26	0.04
802.11g	SISO	2412	1.361	1.863	73.05	1.36	0.03
		2437	1.360	1.862	73.04	1.36	0.03
		2462	1.360	1.862	73.04	1.36	0.03
802.11n (HT20)	SISO	2412	1.148	1.651	69.53	1.58	0.06
		2437	1.148	1.650	69.58	1.58	0.03
		2462	1.148	1.651	69.53	1.58	0.06
802.11n (HT40)	SISO	2422	0.573	1.075	53.30	2.73	0.05
		2437	0.573	1.075	53.30	2.73	0.03
		2452	0.573	1.075	53.30	2.73	0.03




Test Graph

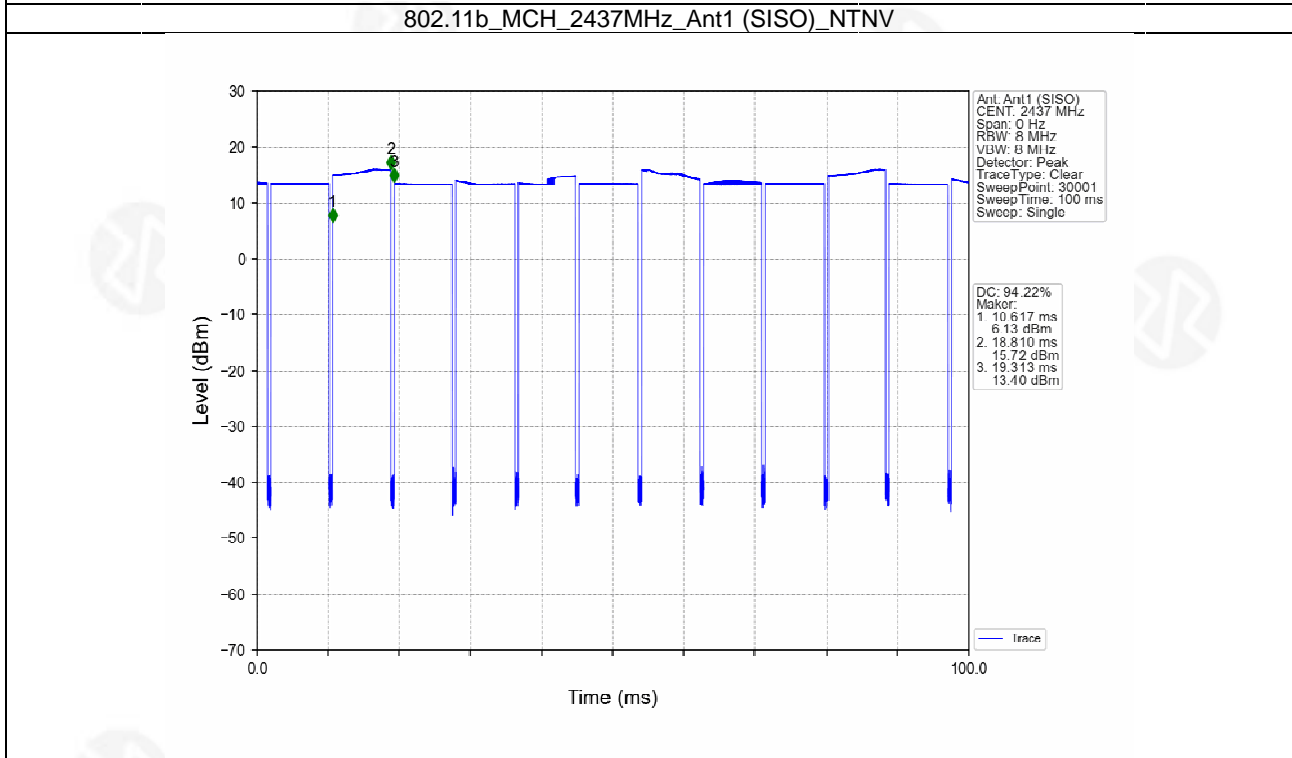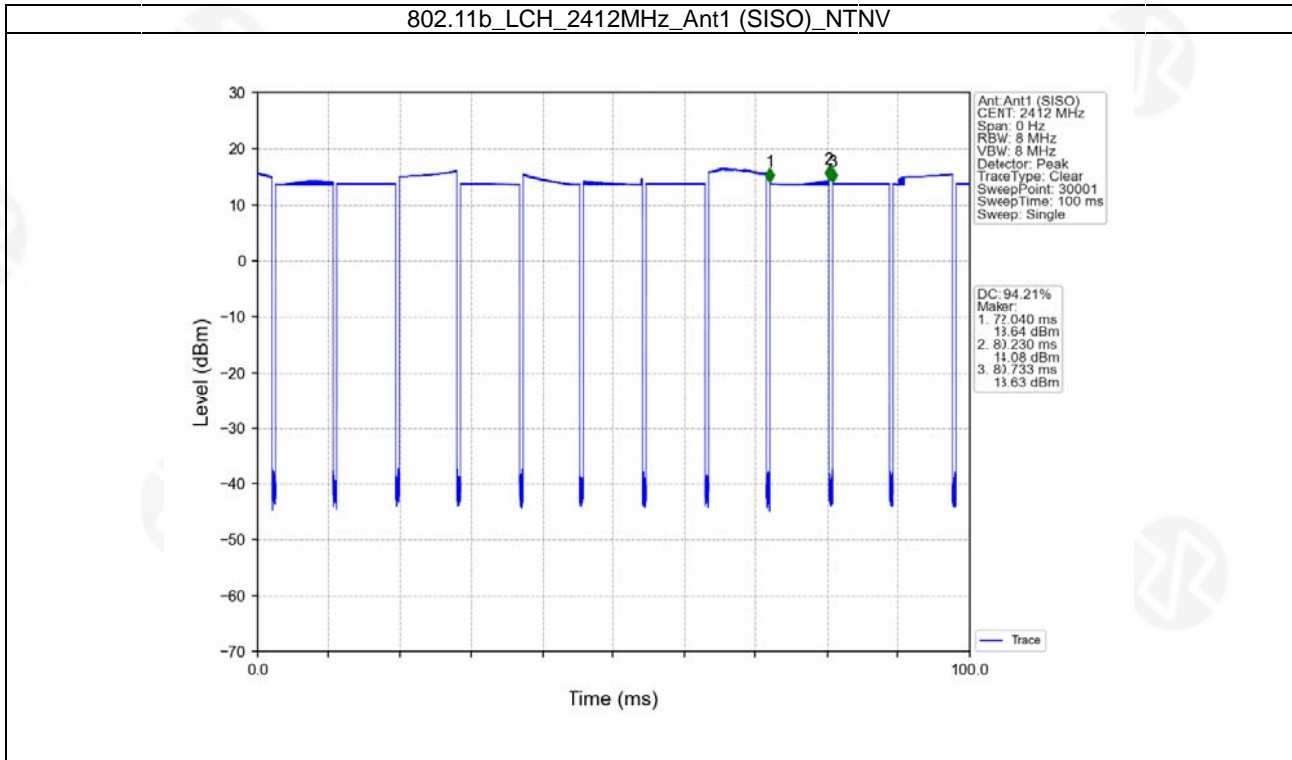




802.11b_HCH_2462MHz_Ant1 (SISO)_NTNV

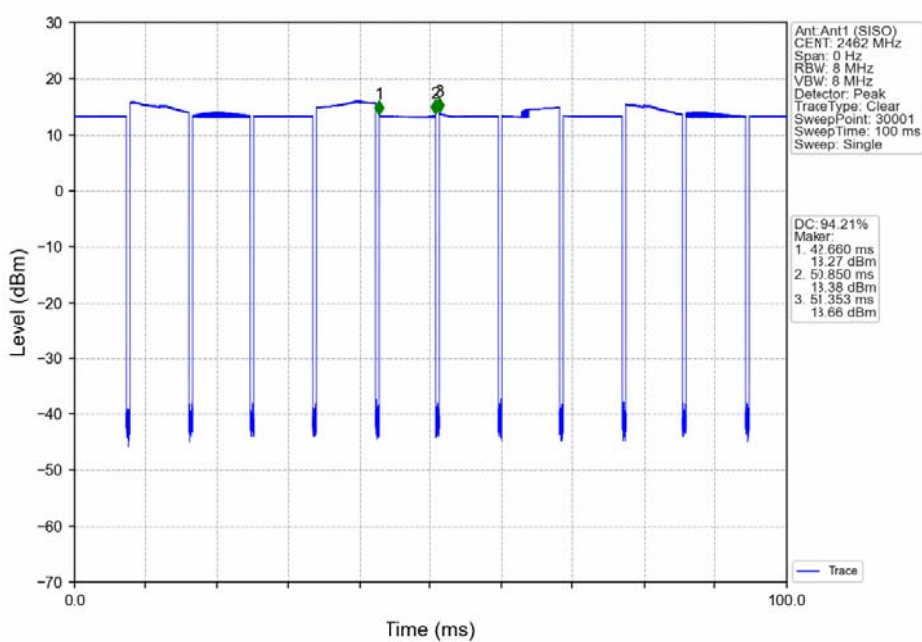


802.11g_LCH_2412MHz_Ant1 (SISO)_NTNV

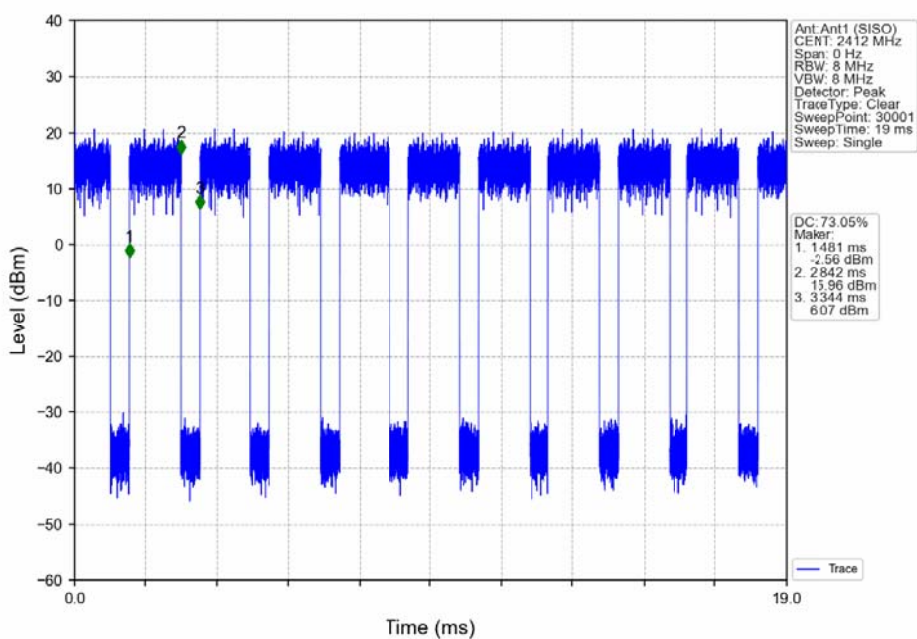




802.11g_MCH_2437MHz_Ant1 (SISO)_NTNV

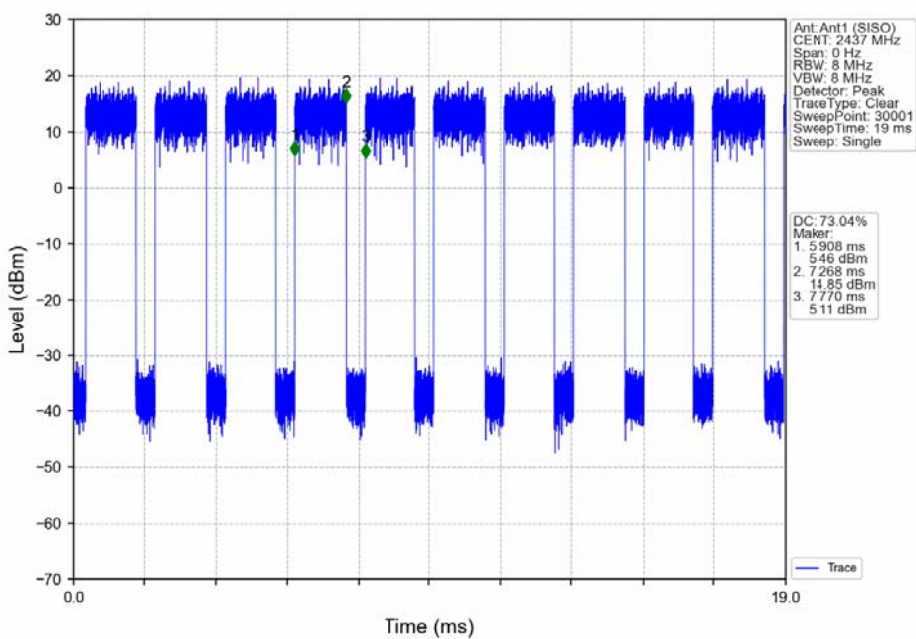


802.11g_HCH_2462MHz_Ant1 (SISO)_NTNV

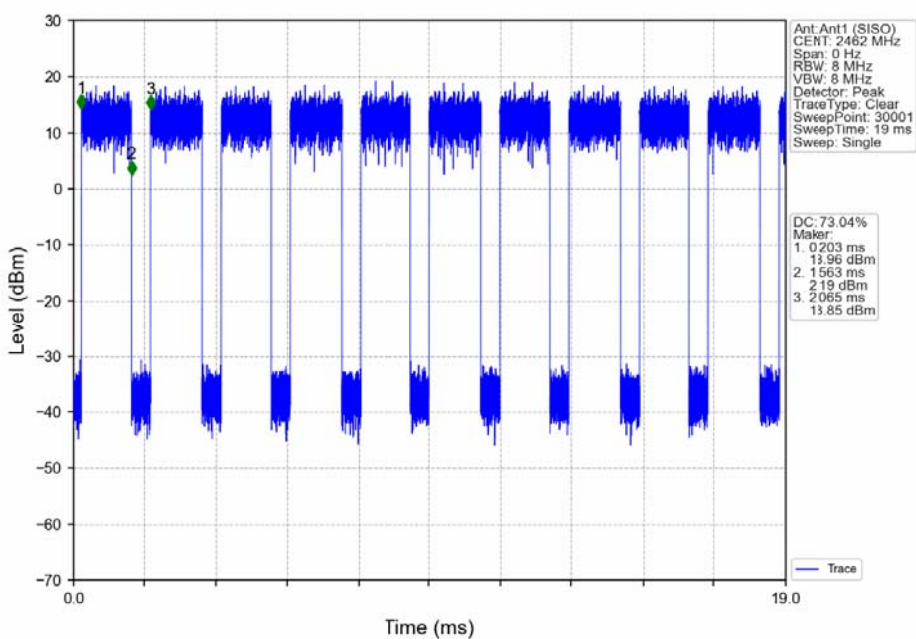




802.11n(HT20)_LCH_2412MHz_Ant1 (SISO)_NTNV

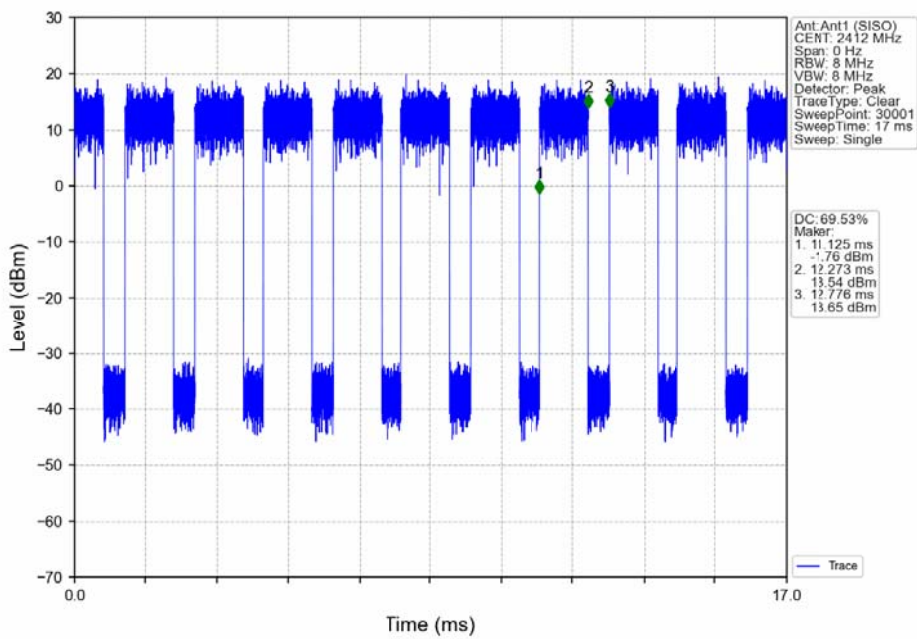


802.11n(HT20)_MCH_2437MHz_Ant1 (SISO)_NTNV

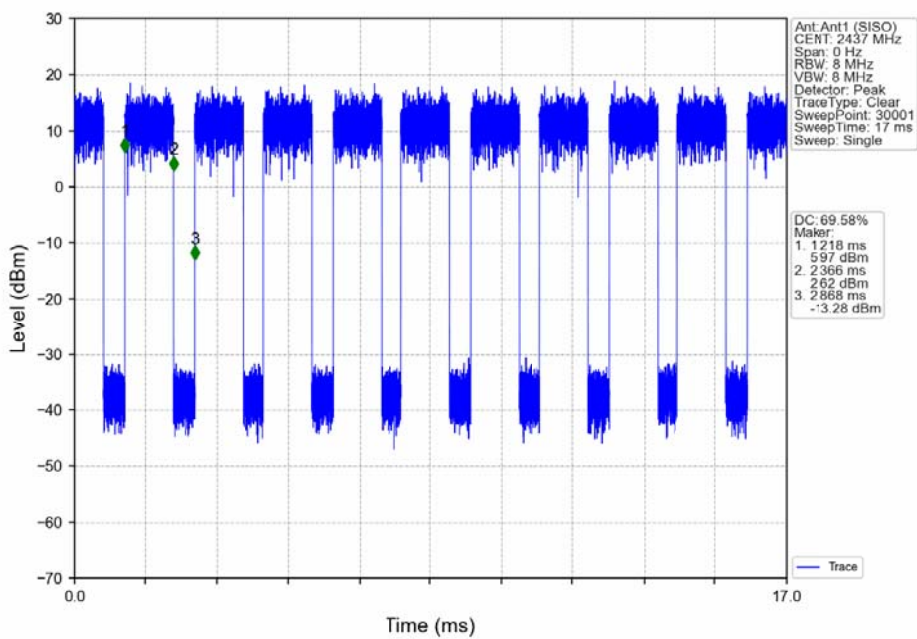




802.11n(HT20)_HCH_2462MHz_Ant1 (SISO)_NTNV

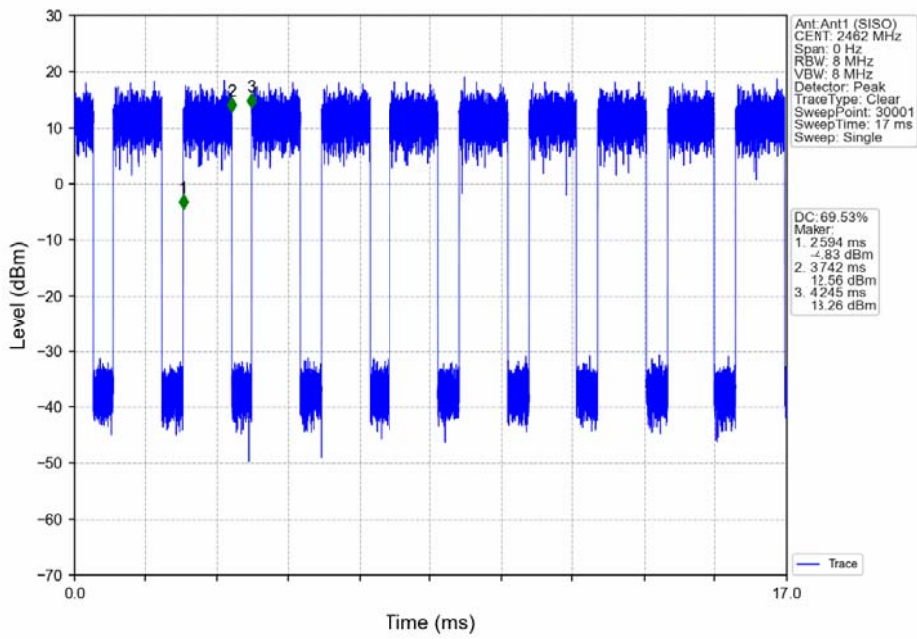


802.11n(HT40)_LCH_2422MHz_Ant1 (SISO)_NTNV

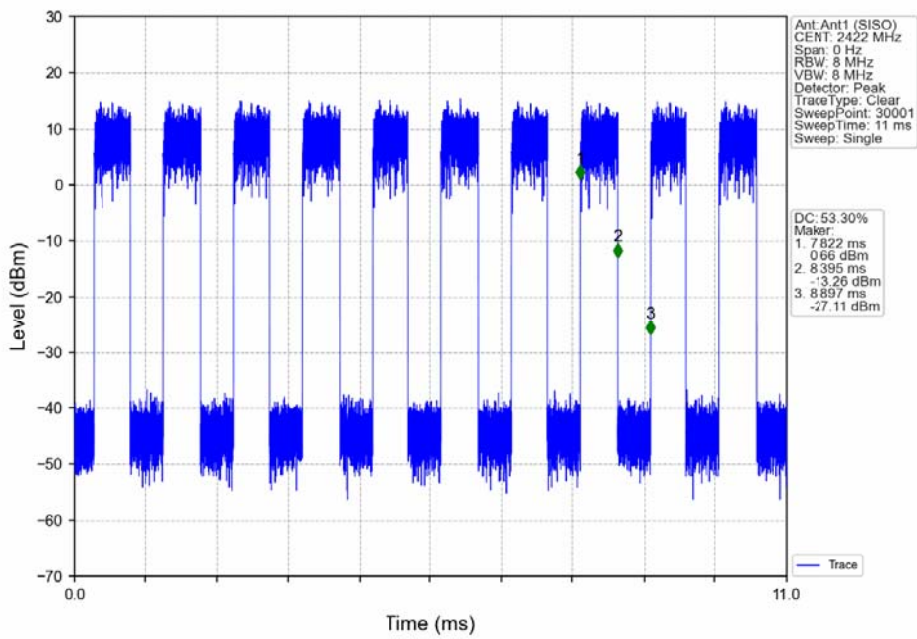




802.11n(HT40)_MCH_2437MHz_Ant1 (SISO)_NTNV

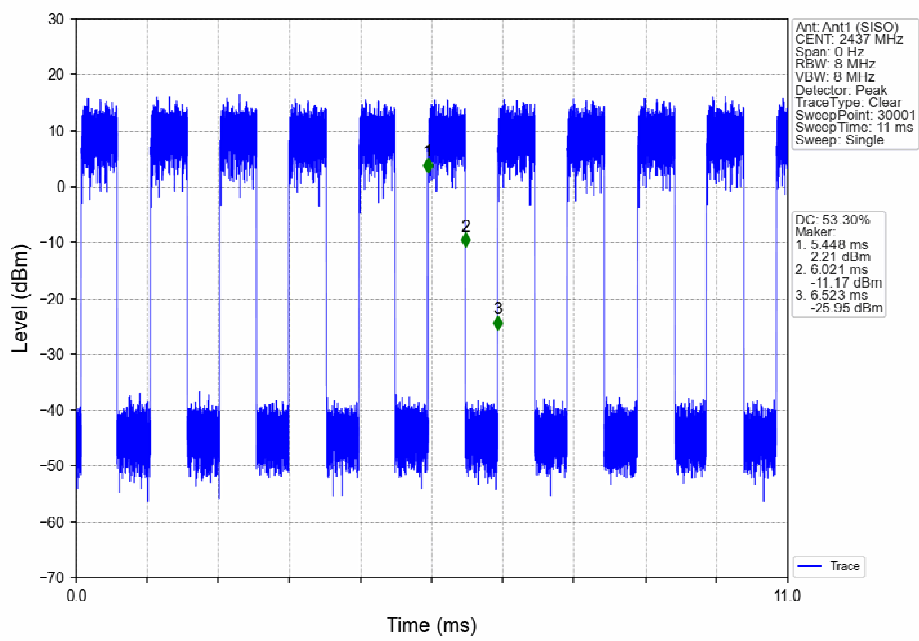

802.11n(HT40)_HCH_2452MHz_Ant1 (SISO)_NTNV

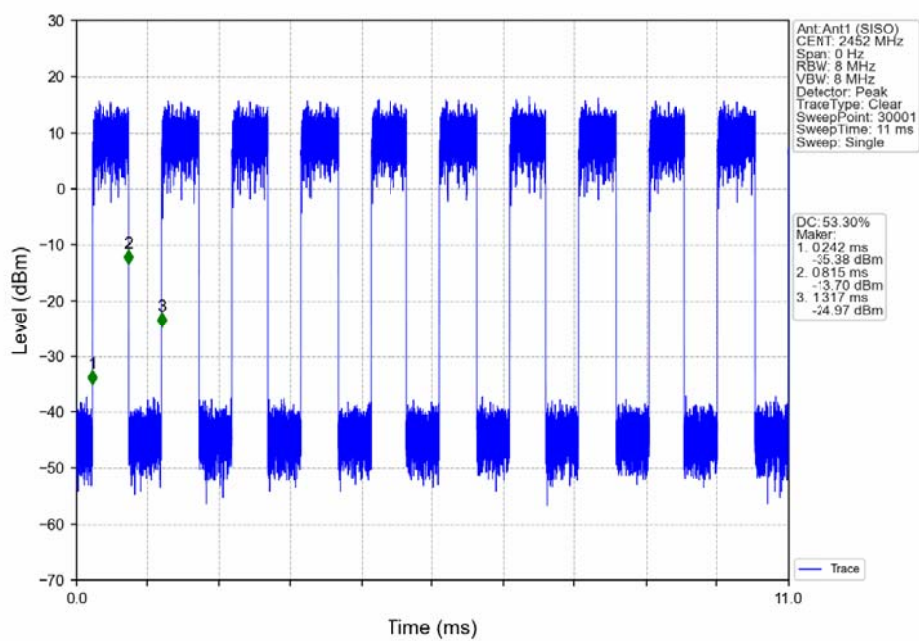





9. CONDUCTED BAND EDGE AND SPURIOUS EMISSION

Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	KDB558074 D0115.247 Meas Guidancev05r02

9.1 APPLICABLE STANDARD

in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in§15.205(a), must also comply with the radiated emission limits specified in15.209(a).

9.2 TEST PROCEDURE

Using the following spectrum analyzer setting:

- A) Set the RBW = 100KHz.
- B) Set the VBW = 300KHz.
- C) Sweep time = auto couple.
- D) Detector function = peak.
- E) Trace mode = max hold.
- F) Allow trace to fully stabilize.

9.3 DEVIATION FROM STANDARD

No deviation.

9.4 TEST SETUP




9.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.


9.6 TEST RESULTS



Test plot as follows:
Test mode:802.11b

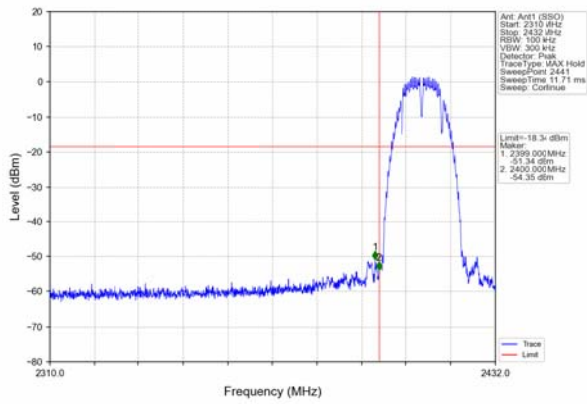


Lowest channel

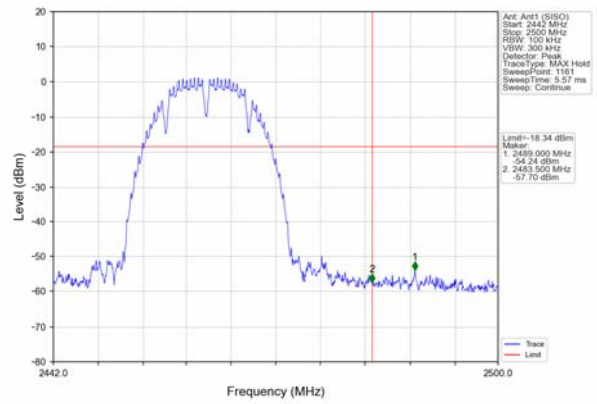


Highest channel

Test mode:802.11g

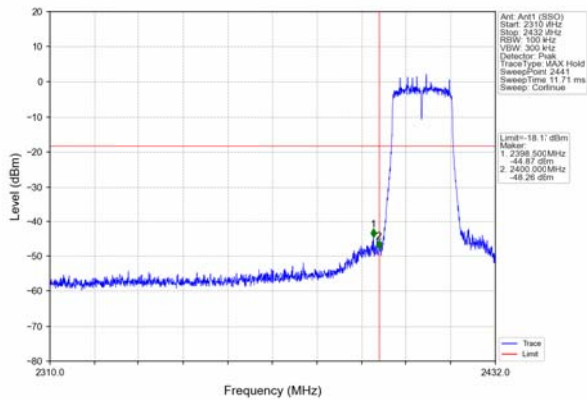


Lowest channel

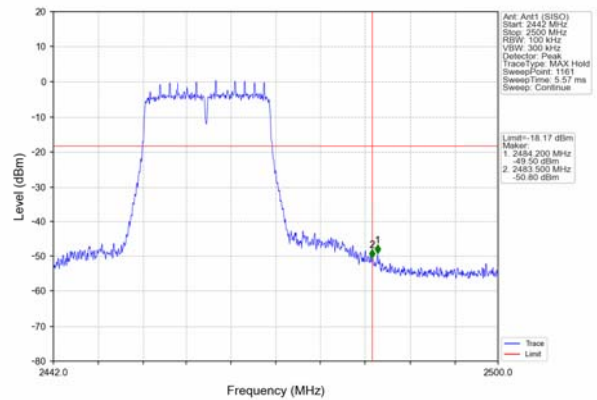


Highest channel



Test mode:802.11n(HT20)

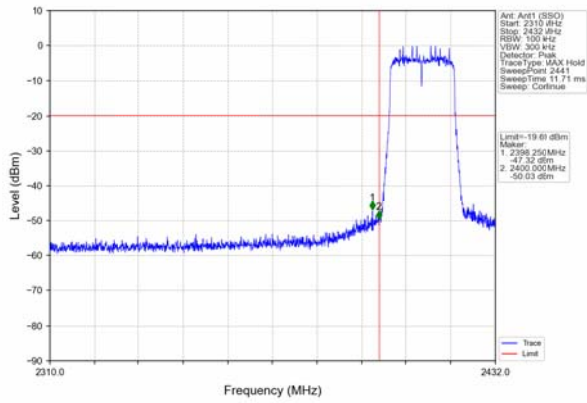


Lowest channel

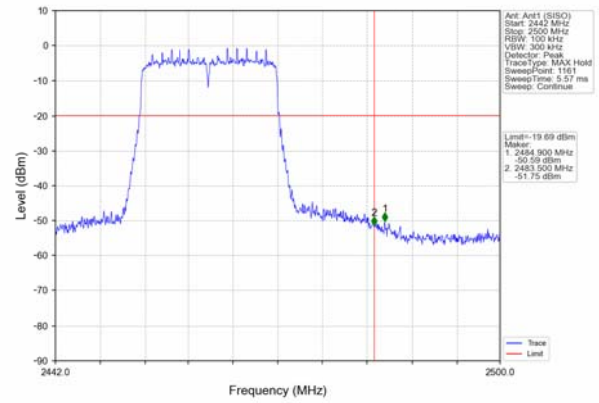


Highest channel

Test mode:802.11n(HT40)

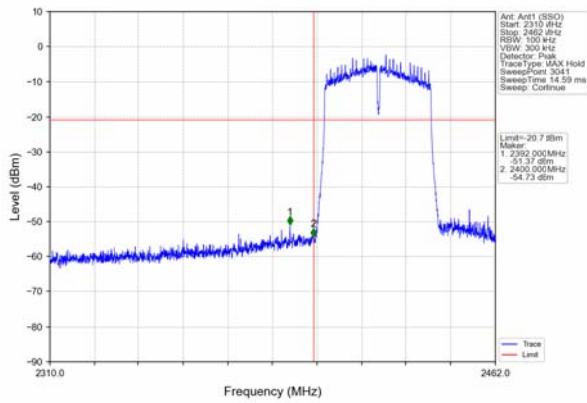

Lowest channel

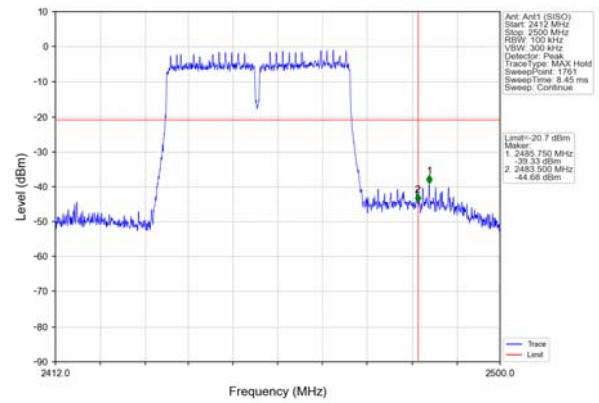



Highest channel





Test plot as follows:

802.11b



Lowest channel

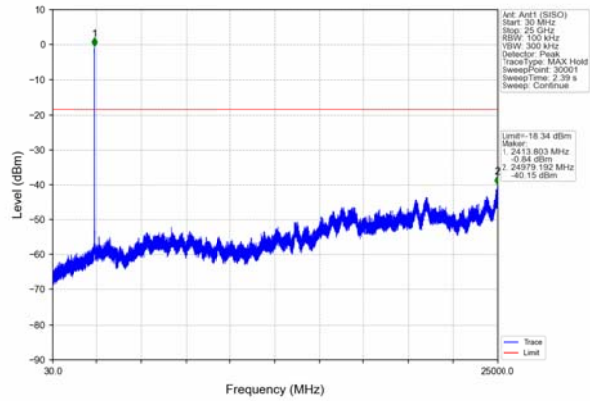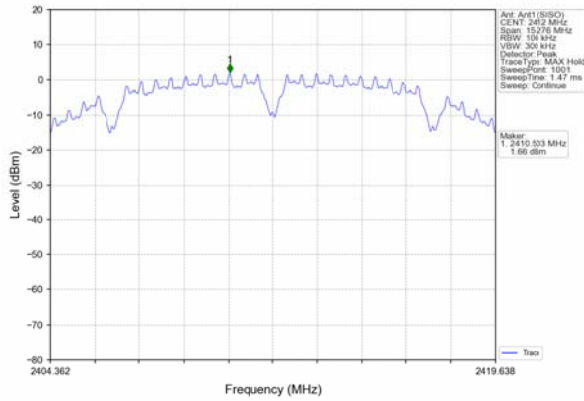

Middle channel

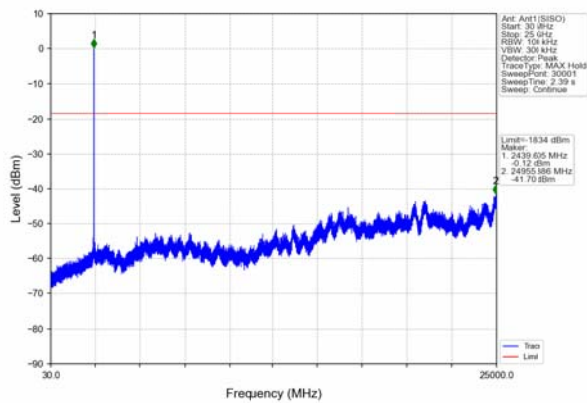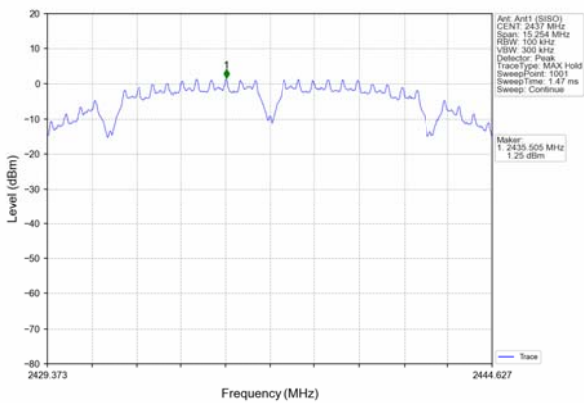



Highest channel

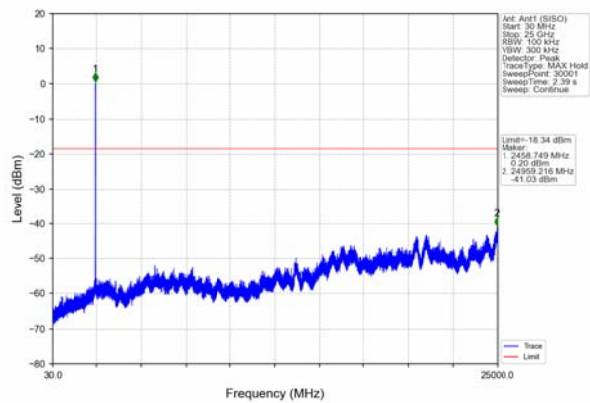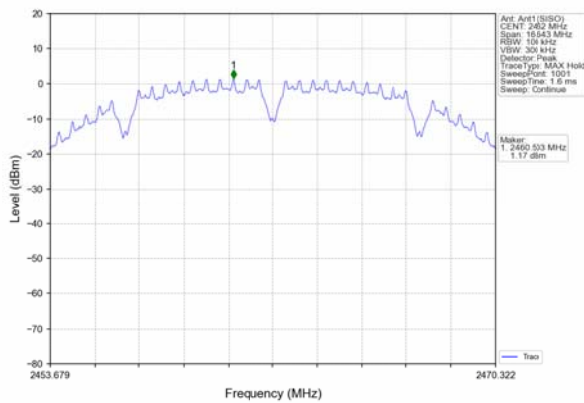





802.11g



Lowest channel

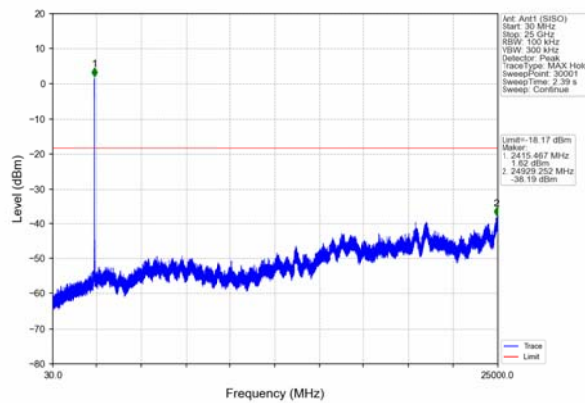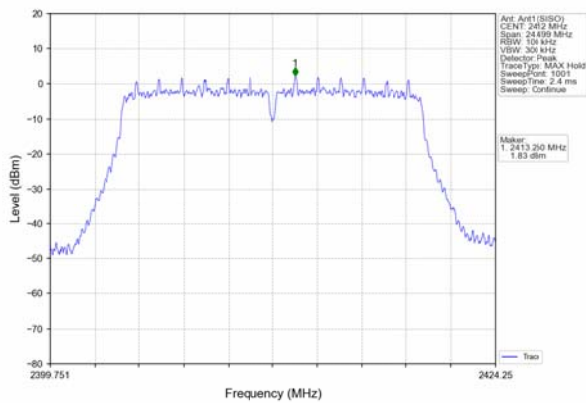

Middle channel

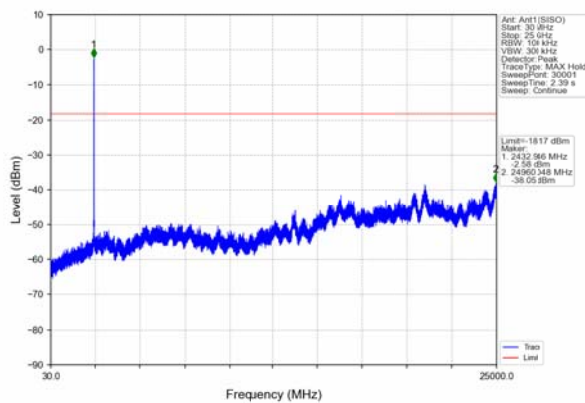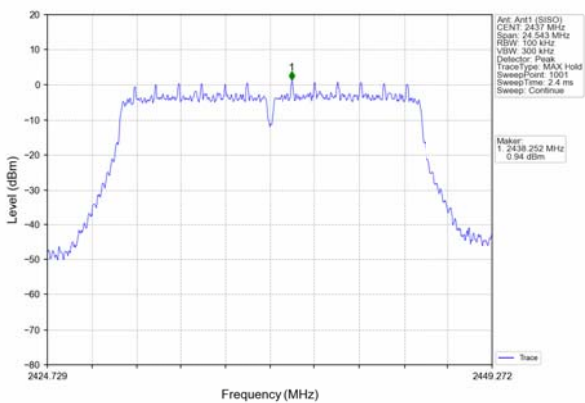



Highest channel

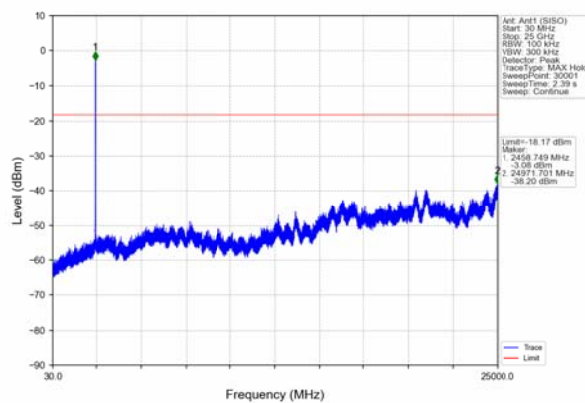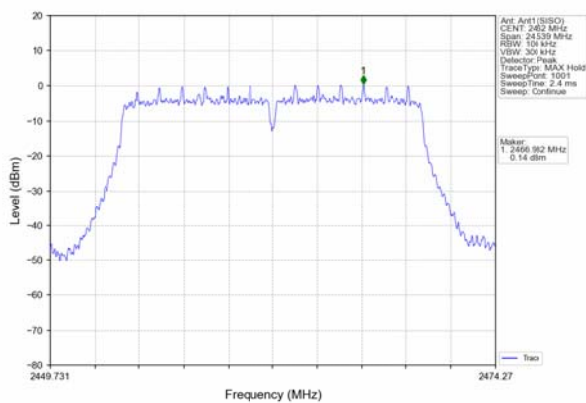





802.11n(HT20)



Lowest channel

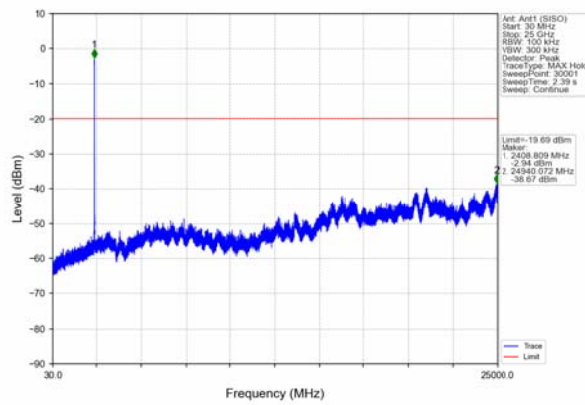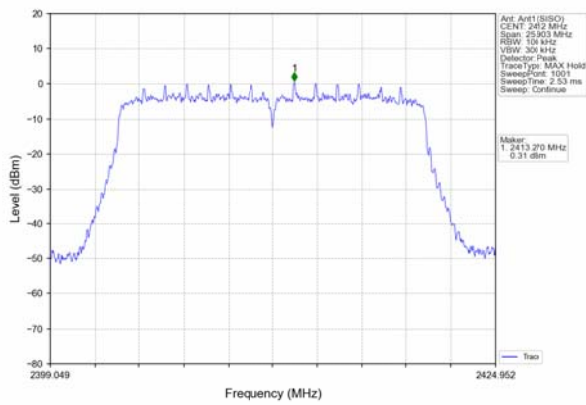

Middle channel

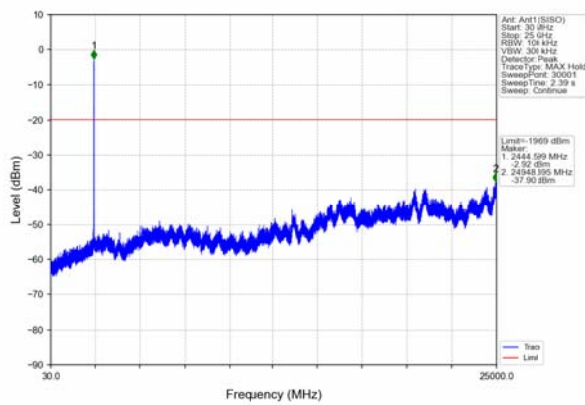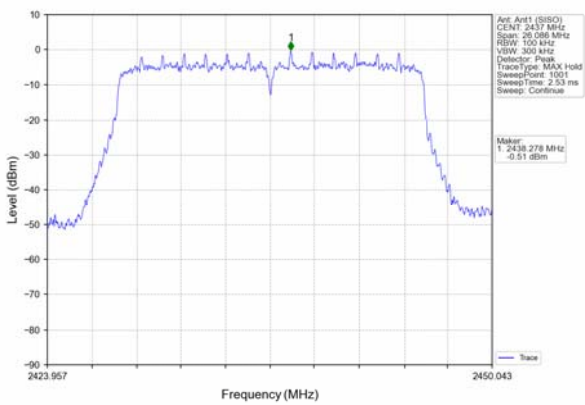



Highest channel

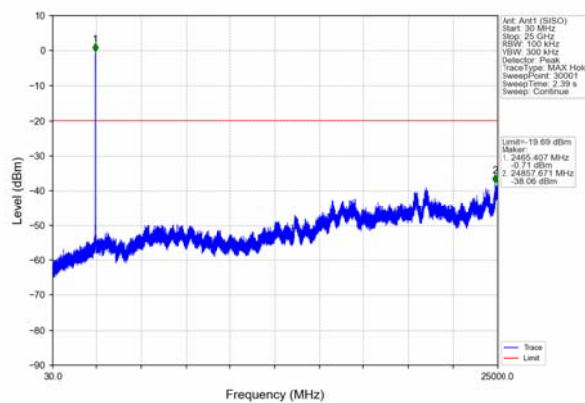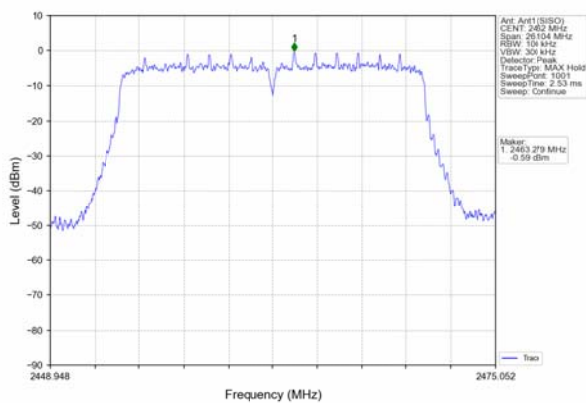





802.11n(HT40)



Lowest channel

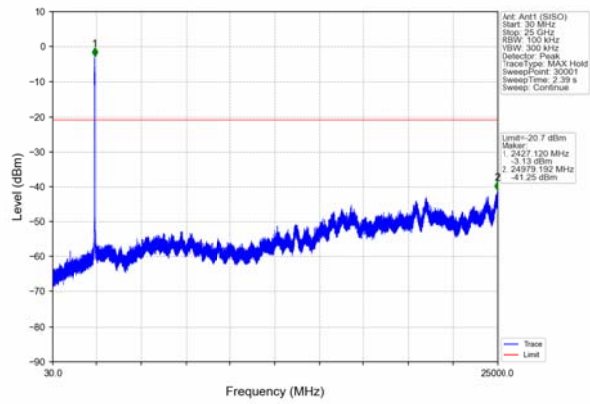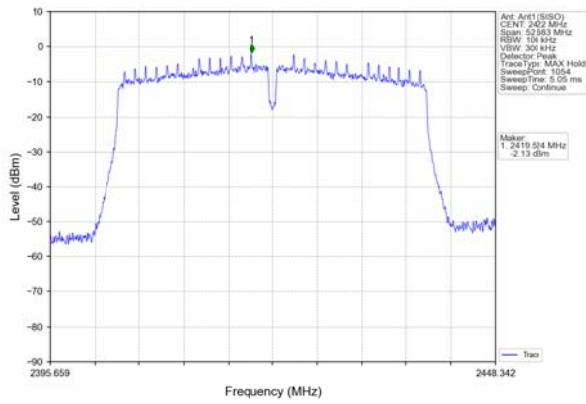

Middle channel

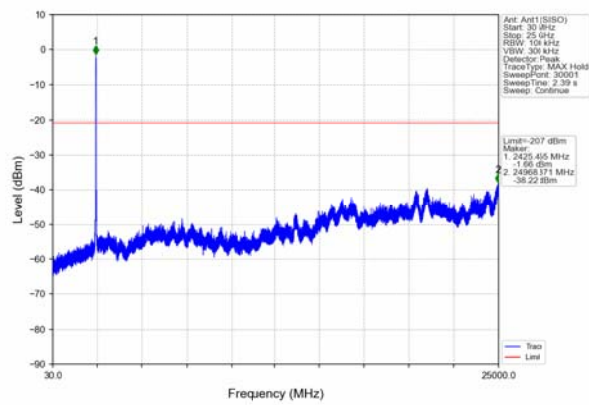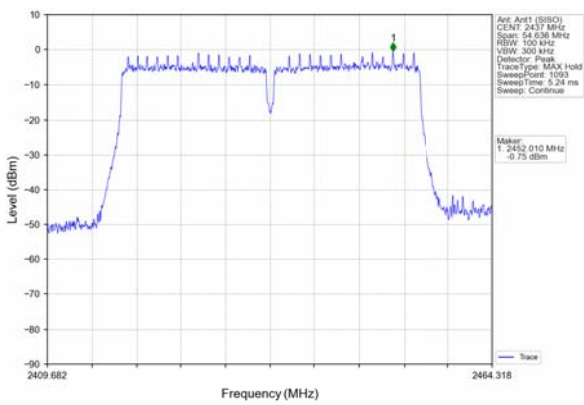

Highest channel

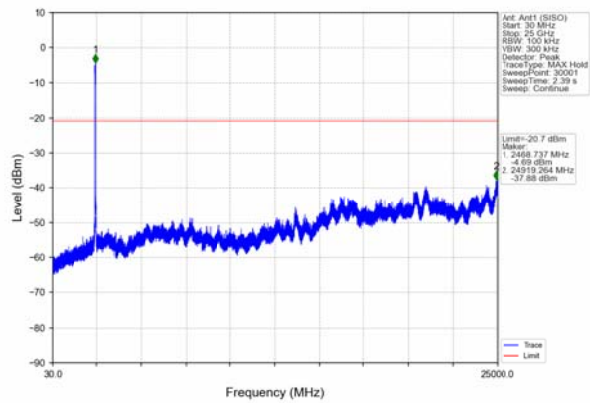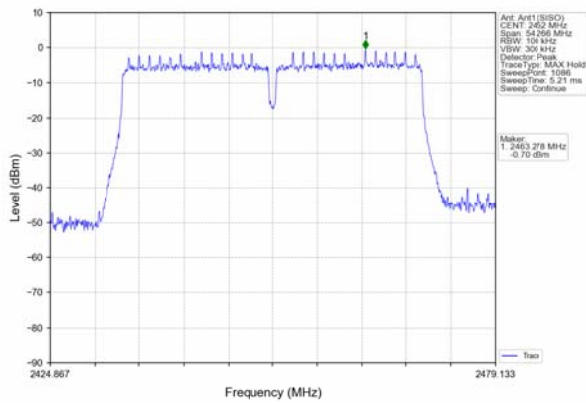



10. ANTENNA REQUIREMENT

Standard requirement:	FCC Part15 C Section 15.203 /247(c)
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.	
15.247(c) (1)(i) requirement: (i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.	
EUT Antenna:	
The antenna is FPCB Antenna, the best case gain of the antenna is 1 dBi, reference to the appendix II for details	



11. TEST SETUP PHOTO

Reference to the appendix I for details.

12. EUT CONSTRUCTIONAL DETAILS

Reference to the appendix II for details.

***** END OF REPORT *****