



FCC Test Report (Bluetooth)

FCC ID : 2AJEO-X11

Applicant : Xiamen Padmate Technology Co.,LTD
RM 804, No. 619#, Sishui Road, Huli, Xiamen, 361009, China.

Sample Description

Product Name : True wireless earbuds

Model No. : X11

Trademark : N/A

Receipt Date : 2016-08-06

Test Date : 2016-08-07 to 2016-08-11

Issue Date : 2016-08-12

Test Standard(s) : FCC CFR Title 47 Part 15 Subpart C Section 15.247

Conclusions : PASSED*

*In the configuration tested, the EUT complied with the standards specified above.

Test/Witness Engineer : Tom Chen

Approved & Authorized : Frank Zhang

This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in the report.



Contents

| | |
|--|-----------|
| CONTENTS..... | 2 |
| 1. GENERAL INFORMATION..... | 4 |
| 1.1. Client Information..... | 4 |
| 1.2. General Description of EUT (Equipment Under Test)..... | 4 |
| 1.3. Block Diagram Showing The Configuration of System Tested..... | 5 |
| 1.4. Description of Support Units..... | 6 |
| 1.5. External I/O Cable..... | 6 |
| 1.6. Description of Test Mode..... | 6 |
| 1.7. Test Instruments List..... | 7 |
| 1.8. Laboratory Location..... | 7 |
| 2. TEST SUMMARY..... | 9 |
| 3. ANTENNA REQUIREMENT..... | 10 |
| 3.1. Standard Requirement..... | 10 |
| 3.2. Antenna Connected Construction..... | 10 |
| 4. CONDUCTED EMISSION TEST..... | 11 |
| 4.1. Test Standard and Limit..... | 11 |
| 4.2. Test Setup..... | 11 |
| 4.3. Test Procedure..... | 11 |
| 4.4. Test Data..... | 12 |
| 5. CONDUCTED PEAK OUTPUT POWER TEST..... | 15 |
| 5.1. Test Standard and Limit..... | 15 |
| 5.2. Test Setup..... | 15 |
| 5.3. Test Procedure..... | 15 |
| 5.4. Test Data..... | 15 |
| 6. 20DB OCCUPY BANDWIDTH TEST..... | 22 |
| 6.1. Test Standard and Limit..... | 22 |
| 6.2. Test Setup..... | 22 |
| 6.3. Test Procedure..... | 22 |
| 6.4. Test Data..... | 22 |
| 7. CARRIER FREQUENCY SEPARATION TEST..... | 29 |
| 7.1. Test Standard and Limit..... | 29 |
| 7.2. Test Setup..... | 29 |
| 7.3. Test Procedure..... | 29 |
| 7.4. Test Data..... | 29 |
| 8. NUMBER OF HOPPING CHANNEL..... | 33 |
| 8.1. Test Standard and Limit..... | 33 |
| 8.2. Test Setup..... | 33 |



ATA Testing Technology Service Co., Ltd.

Report No.: ATA160808003F

Page: 3 of 58

| | | |
|------------|---|-----------|
| 8.3. | Test Procedure..... | 33 |
| 8.4. | Test Data..... | 33 |
| 9. | DWELL TIME TEST..... | 36 |
| 9.1. | Test Standard and Limit..... | 36 |
| 9.2. | Test Setup..... | 36 |
| 9.3. | Test Procedure..... | 36 |
| 9.4. | Test Data..... | 36 |
| 10. | PSEUDORANDOM FREQUENCY HOPPING SEQUENCE..... | 44 |
| 10.1. | Standard Requirement..... | 44 |
| 10.2. | EUT Pseudorandom Frequency Hopping Sequence..... | 44 |
| 11. | BAND EDGE REQUIREMENT (CONDUCTED EMISSION METHOD)..... | 45 |
| 11.1. | Test Standard and Limit..... | 45 |
| 11.2. | Test Setup..... | 45 |
| 11.3. | Test Procedure..... | 45 |
| 11.4. | Test Data..... | 45 |
| 12. | BAND EDGE REQUIREMENT (RADIATED EMISSION METHOD)..... | 49 |
| 12.1. | Test Standard and Limit..... | 49 |
| 12.2. | Test Setup..... | 49 |
| 12.3. | Test Procedure..... | 49 |
| 12.4. | Test Data..... | 50 |
| 13. | SPURIOUS EMISSION (RADIATED EMISSION METHOD)..... | 52 |
| 14.1. | Test Standard and Limit..... | 52 |
| 14.2. | Test Setup..... | 52 |
| 14.3. | Test Procedure..... | 52 |
| 14.4. | Test Data..... | 53 |



1. General Information

1.1. Client Information

| | | |
|--------------|---|---|
| Applicant | : | Xiamen Padmate Technology Co.,LTD. |
| Address | : | RM 804, No. 619#, Sishui Road, Huli, Xiamen, 361009, China. |
| Manufacturer | : | Xiamen Padmate Technology Co.,LTD. |
| Address | : | RM 804, No. 619#, Sishui Road, Huli, Xiamen, 361009, China. |

1.2. General Description of EUT (Equipment Under Test)

| | | | |
|---------------------|---|--|------------------------------|
| Product Name | : | True wireless earbuds | |
| Models No. | : | X11 | |
| Difference | : | N/A | |
| Product Description | : | Operation Frequency: | 2402MHz~2480MHz |
| | : | Transfer Rate: | 1/2/3 Mbits/s |
| | : | Number of Channel: | 79 Channels |
| | : | Modulation Type: | GFSK, $\pi/4$ -DQPSK, 8-DPSK |
| | : | Modulation Technology: | FHSS |
| | : | Antenna Type: | Integral PCB Antenna |
| | : | Antenna Gain: | 0 dBi |
| Power Supply | : | USB DC 5V from PC, DC 3.7V from Li-ion battery | |

Note:

- (1) For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.
- (2) Channel List:


| Channel | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) |
|---------|-----------------|---------|-----------------|---------|-----------------|
| 00 | 2402 | 27 | 2429 | 54 | 2456 |
| 01 | 2403 | 28 | 2430 | 55 | 2457 |
| 02 | 2404 | 29 | 2431 | 56 | 2458 |
| 03 | 2405 | 30 | 2432 | 57 | 2459 |
| 04 | 2406 | 31 | 2433 | 58 | 2460 |
| 05 | 2407 | 32 | 2434 | 59 | 2461 |
| 06 | 2408 | 33 | 2435 | 60 | 2462 |
| 07 | 2409 | 34 | 2436 | 61 | 2463 |



| | | | | | |
|----|------|----|------|----|------|
| 08 | 2410 | 35 | 2437 | 62 | 2464 |
| 09 | 2411 | 36 | 2438 | 63 | 2465 |
| 10 | 2412 | 37 | 2439 | 64 | 2466 |
| 11 | 2413 | 38 | 2440 | 65 | 2467 |
| 12 | 2414 | 39 | 2441 | 66 | 2468 |
| 13 | 2415 | 40 | 2442 | 67 | 2469 |
| 14 | 2416 | 41 | 2443 | 68 | 2470 |
| 15 | 2417 | 42 | 2444 | 69 | 2471 |
| 16 | 2418 | 43 | 2445 | 70 | 2472 |
| 17 | 2419 | 44 | 2446 | 71 | 2473 |
| 18 | 2420 | 45 | 2447 | 72 | 2474 |
| 19 | 2421 | 46 | 2448 | 73 | 2475 |
| 20 | 2422 | 47 | 2449 | 74 | 2476 |
| 21 | 2423 | 48 | 2450 | 75 | 2477 |
| 22 | 2424 | 49 | 2451 | 76 | 2478 |
| 23 | 2425 | 50 | 2452 | 77 | 2479 |
| 24 | 2426 | 51 | 2453 | 78 | 2480 |
| 25 | 2427 | 52 | 2454 | | |
| 26 | 2428 | 53 | 2455 | | |

Remark: Channel 0, 39 & 78 selected for GFSK, $\pi/4$ -DQPSK and 8DPSK.

1.3. Block Diagram Showing The Configuration of System Tested

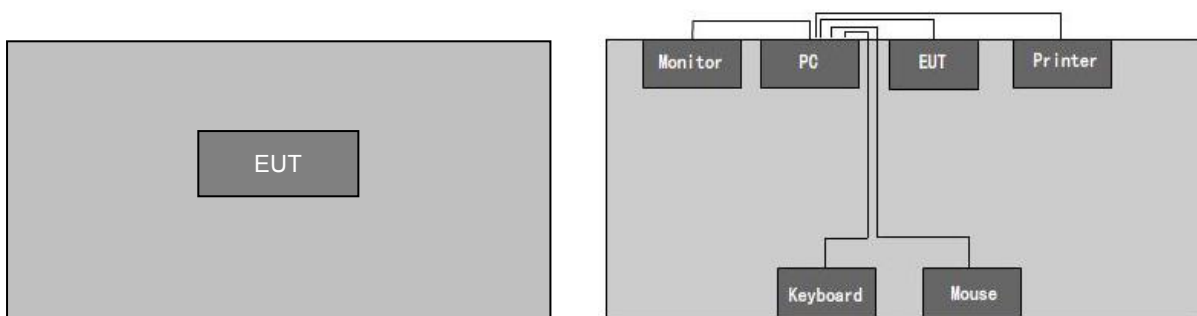



1.4. Description of Support Units

| Name | Model | Serial Number | Manufacturer |
|-------------|--------------|------------------------|--------------|
| Printer | HP1020 | CNCJ410726 | HP |
| LCD Monitor | G205HV | 10306738385 | ACER |
| PC | ASPIREM1830 | PTSF90C00305005CAC3000 | ACER |
| Keyboard | SK-9625 | KBUSB1580500037E0100 | ACER |
| Mouse | MS.11200.014 | M-UAY-ACR2 | ACER |

1.5. External I/O Cable

| Cable Description | Length(m) | From/ Port | To |
|-----------------------------------|-----------|------------|-------------|
| Shielding Detachable USB Cable | 1.5 | Host PC | Mouse |
| Shielding Detachable K/B Cable | 1.5 | Host PC | Keyboard |
| Shielding Detachable serial Cable | 1.5 | Host PC | Printer |
| Shielding Detachable VGA Cable | 1.5 | Host PC | LCD Monitor |
| Unshielding Detachable USB Cable | 0.8 | EUT | Host PC |
| Unshielding Audio Cable | 0.6 | EUT | Host PC |

1.6. Description of Test Mode

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned follow was evaluated respectively.

| Test Mode | Description |
|-------------------------|---|
| Charging & Working mode | Keep the EUT in Charging& working mode |
| Transmitting mode | Keep the EUT in Transmitting mode with worst case data rate |
| Remark | GFSK(1Mbps) is the worst case mode |

Remark: The sample was placed 0.8m above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.



1.7. Test Instruments List

| | Test Equipment | Manufacturer | Model No. | Cal. Date | Cal. Due date |
|----|--|--------------------------------------|-----------------------------|---------------|---------------|
| 1 | Bilog Antenna | SCHWARZBECK MESS-ELEKTRONIK | VULB9163 | May 22, 2016 | May 21, 2017 |
| 2 | Double -ridged waveguide horn | SCHWARZBECK MESS-ELEKTRONIK | BBHA9120D | May 27, 2016 | May 26, 2017 |
| 3 | Coaxial Cable | N/A | N/A | Mar. 28, 2016 | Mar. 27, 2017 |
| 4 | Coaxial Cable | N/A | N/A | Mar. 29, 2016 | Mar. 29, 2017 |
| 5 | Coaxial cable | N/A | N/A | Mar. 29, 2016 | Mar. 29, 2017 |
| 6 | Coaxial Cable | N/A | N/A | Mar. 29, 2016 | Mar. 29, 2017 |
| 7 | Coaxial Cable | N/A | N/A | Mar. 29, 2016 | Mar. 29, 2017 |
| 8 | Amplifier (10kHz-1.3GHz) | HP | 8447D | Mar. 29, 2016 | Mar. 29, 2017 |
| 9 | Amplifier (1GHz-18GHz) | Compliance Direction Systems Inc. | PAP-1G18 | Jun. 06, 2016 | Mar. 29, 2017 |
| 10 | Pre-amplifier (18-26GHz) | Rohde & Schwarz | AFS33-18002 650-30-8P-44 | Mar. 29, 2016 | Mar. 29, 2017 |
| 11 | Horn Antenna | ETS-LINDGREN | 3160 | Mar. 27, 2016 | Mar. 27, 2017 |
| 12 | Positioning Controller | UC | UC3000 | N/A | N/A |
| 13 | Spectrum analyzer 9kHz-30GHz | Rohde & Schwarz | FSP | May 26, 2016 | May 27, 2017 |
| 14 | EMI Test Receiver | Rohde & Schwarz | ESPI | Mar. 29, 2016 | Mar. 30, 2017 |
| 15 | Loop antenna | Laplace instrument | RF300 | May 22., 2016 | May 23, 2017 |
| 16 | Universal radio communication tester | Rhode & Schwarz | CMU200 | May 26, 2016 | May 27, 2017 |
| 17 | Signal Analyzer | Rohde & Schwarz | FSIQ3 | May 26, 2016 | May 27, 2017 |
| 18 | L.I.S.N.#1 | Rohde & Schwarz | NSLK8126 | May 26, 2016 | May 27, 2017 |
| 19 | L.I.S.N.#2 | Rohde & Schwarz | ENV216 | May 26, 2016 | May 27, 2017 |
| 20 | Power Meter | Anritsu | ML2495A | May 26, 2016 | May 27, 2017 |
| 21 | Power sensor | Anritsu | ML2491A | May 26, 2016 | May 27, 2017 |



1.8. Laboratory Location

Shenzhen TOBY technology Co., Ltd

Address: 1 A/F., Bldg.6, Yusheng Industrial Zone The National Road No.107 Xixiang Section 467,
Xixiang, Bao'an, Shenzhen, Guangdong, 518057, China

At the time of testing, the Laboratory is accredited. It is listed in the United States of American Federal Communications Commission (FCC), and the registration number is 811562 7.

Tel:0086-755-26509301 Fax: 0086-755-26509195



2. Test Summary

| Standard Section | Test Item | Judgment |
|---|--|----------|
| 15.203/15.247(c) | Antenna Requirement | PASSED |
| 15.207 | Conducted Emission | PASSED |
| 15.247(b)(1) | Conducted Peak Output Power | PASSED |
| 15.247(a)(1) | 20dB Occupied Bandwidth | PASSED |
| 15.247(a)(1) | Carrier Frequencies Separation | PASSED |
| 15.247(a)(1) | Hopping Channel Number | PASSED |
| 15.247(a)(1) | Dwell Time | PASSED |
| 15.247(b)(4)&TCB Exclusion List (7 July 2002) | Pseudorandom Frequency Hopping Sequence | PASSED |
| 15.205/15.209 | Spurious Emission | PASSED |
| 15.247(d) | Band Edge | PASSED |
| Remark: "N/A" is an abbreviation for Not Applicable. | | |



3. Antenna Requirement

3.1. Standard Requirement

3.1.1 Test standard

FCC Part15 Section 15.203 /247(c)

3.1.2 Requirement

1) 15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

2) 15.247(c) (1)(i) requirement:

Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

3.2. Antenna Connected Construction

The bluetooth antenna is an integral antenna which permanently attached, and the best case gain of the antenna is 0 dBi. It complies with the standard requirement.

4. Conducted Emission Test

4.1. Test Standard and Limit

4.1.1 Test Standard

FCC Part15 Section 15.207


4.1.2 Test Limit

Conducted Emission Test Limit

| Frequency | Maximum RF Line Voltage (dB μ V) | |
|---------------|--------------------------------------|---------------|
| | Quasi-peak Level | Average Level |
| 150kHz~500kHz | 66 ~ 56 * | 56 ~ 46 * |
| 500kHz~5MHz | 56 | 46 |
| 5MHz~30MHz | 60 | 50 |

Remark: (1) *Decreasing linearly with logarithm of the frequency.
 (2) The lower limit shall apply at the transition frequencies.

4.2. Test Setup

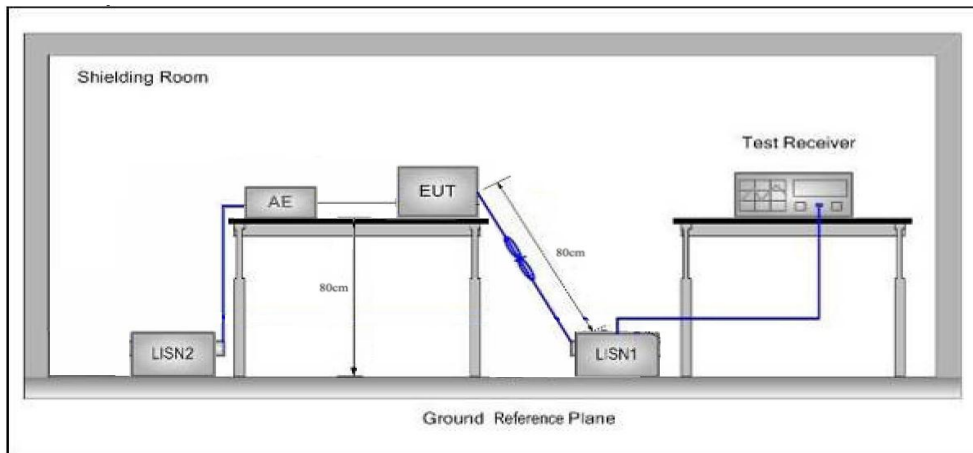

4.3. Test Procedure

- 1) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a $50 \Omega / 50\mu\text{H} + 5 \Omega$ linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 2) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane.

The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal



ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.

The Test Receiver setup: RBW=9kHz, VBW=30kHz, Sweep time= auto


4.4. Test Data

Please to see the following pages



Conducted Emission Test Data

EUT: True wireless earbuds M/N: X11
 Operating Condition: Charging & Working mode
 Test Site: Shielded room
 Operator: Tom
 Test Specification: AC120V/60Hz
 Polarization: Line
 Note: Tem:25°C Hum:50%

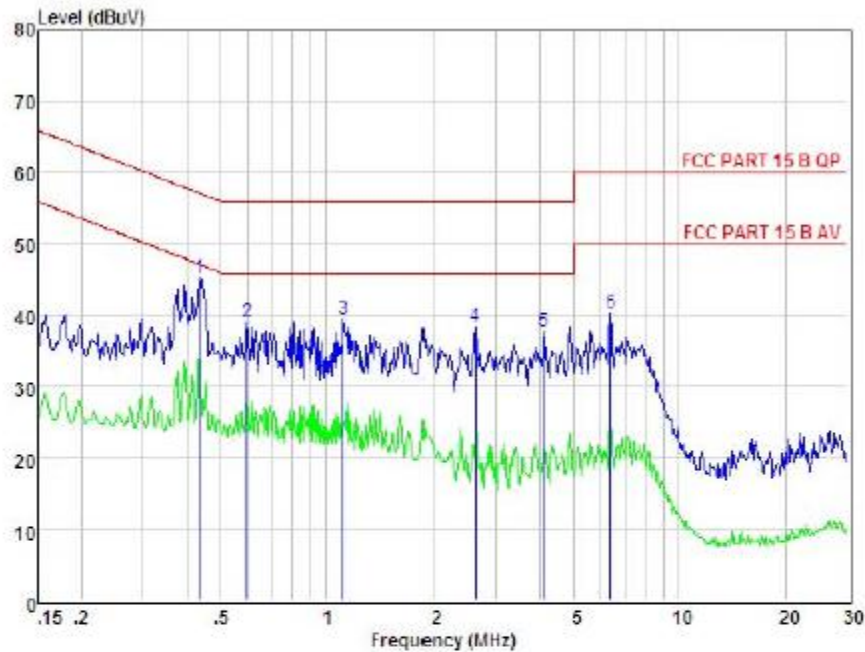


| Item | Freq MHz | Read Level dBuV | LISN Factor dB | Preamp Factor dB | Cable Loss dB | Level dBuV | Limit dBuV | Margin dBuV | Remark |
|------|-------------|-----------------------|----------------------|------------------------|---------------------|---------------|---------------|----------------|--------|
| 1 | 0.435 | 35.49 | 0.03 | -9.57 | 0.10 | 45.19 | 57.15 | -11.96 | Peak |
| 2 | 0.592 | 29.37 | 0.03 | -9.59 | 0.10 | 39.09 | 56.00 | -16.91 | Peak |
| 3 | 1.117 | 29.74 | 0.04 | -9.64 | 0.10 | 39.52 | 56.00 | -16.48 | Peak |
| 4 | 2.622 | 28.49 | 0.06 | -9.76 | 0.11 | 38.42 | 56.00 | -17.58 | Peak |
| 5 | 4.114 | 27.62 | 0.08 | -9.88 | 0.12 | 37.76 | 56.00 | -18.24 | Peak |
| 6 | 6.352 | 30.00 | 0.12 | -9.97 | 0.14 | 40.23 | 60.00 | -19.77 | Peak |

Remark: Level = Read Level + LISN Factor - Preamp Factor + Cable Loss



Conducted Emission Test Data

EUT: True wireless earbuds M/N: X11
 Operating Condition: Charging & Working mode
 Test Site: Shielded room
 Operator: Tom
 Test Specification: AC 120V/60Hz
 Polarization: Neutral
 Note: Tem:25°C Hum:50%

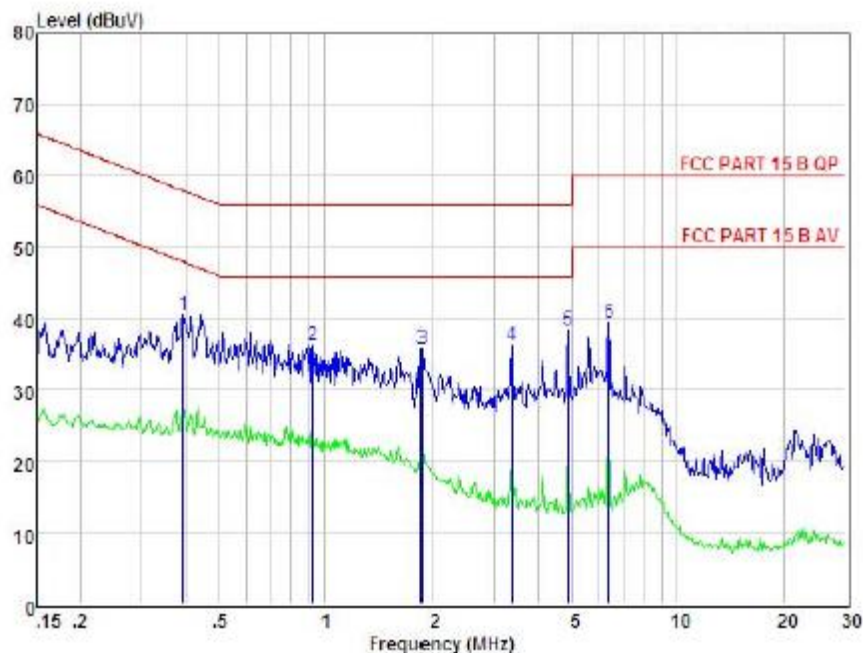

| Item | Condition | Freq | Read Level | LISN Factor | Preamp Factor | Cable Loss | Level | Limit | Margin | Remark |
|------|------------------|-------|------------|-------------|---------------|------------|-------|-------|--------|--------|
| | | MHz | dBuV | dB | dB | dB | dBuV | dBuV | dBuV | |
| 1 | FCC PART 15 B QP | 0.393 | 30.93 | 0.03 | -9.57 | 0.10 | 40.63 | 57.99 | -17.36 | Peak |
| 2 | FCC PART 15 B QP | 0.923 | 26.47 | 0.04 | -9.62 | 0.10 | 36.23 | 56.00 | -19.77 | Peak |
| 3 | FCC PART 15 B QP | 1.878 | 26.06 | 0.05 | -9.71 | 0.10 | 35.91 | 56.00 | -20.09 | Peak |
| 4 | FCC PART 15 B QP | 3.364 | 26.20 | 0.06 | -9.84 | 0.12 | 36.24 | 56.00 | -19.76 | Peak |
| 5 | FCC PART 15 B QP | 4.874 | 26.16 | 0.10 | -9.92 | 0.12 | 38.30 | 56.00 | -17.70 | Peak |
| 6 | FCC PART 15 B QP | 6.352 | 29.24 | 0.12 | -9.97 | 0.14 | 39.47 | 60.00 | -20.53 | Peak |

Remark: Level = Read Level + LISN Factor - Preamp Factor + Cable Loss



5. Conducted Peak Output Power Test

5.1. Test Standard and Limit


5.1.1 Test Standard

FCC Part15 C Section 15.247 (b)(3)

5.1.2 Test Limit

| FCC Part 15 Subpart C(15.247) | | |
|-------------------------------|---|-----------------------|
| Test Item | Limit | Frequency Range (MHz) |
| Peak Output Power | Hopping Channels>75 Power<1W(30dBm) Other <125 mW(21dBm) | 2400~2483.5 |

5.2. Test Setup



5.3. Test Procedure

- (1) The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- (2) Spectrum Setting:
RBW=1MHz, VBW=3MHz, Detector=Peak (If 20dB BW \leq 1 MHz)
RBW=3MHz, VBW=10MHz, Detector=Peak (If 20dB BW > 1 MHz)
- (3) The EUT was set to continuously transmitting in the max power during the test.

5.4. Test Data



ATA Testing Technology Service Co., Ltd.

Report No.: ATA160808003F

Page: 16 of 58

| GFSK mode | | | | |
|----------------|-------------------------|-------------------|---------------|----------|
| Channel Number | Channel Frequency (MHz) | Test Result (dBm) | Limit (30dBm) | Judgment |
| CH 00 | 2402 | 3.734 | 21 | PASSED |
| CH 39 | 2441 | 4.096 | 21 | PASSED |
| CH 78 | 2480 | 4.243 | 21 | PASSED |

| $\pi/4$ -DQPSK mode | | | | |
|---------------------|-------------------------|-------------------|---------------|----------|
| Channel Number | Channel Frequency (MHz) | Test Result (dBm) | Limit (30dBm) | Judgment |
| CH 00 | 2402 | 3.113 | 21 | PASSED |
| CH 39 | 2441 | 3.432 | 21 | PASSED |
| CH 78 | 2480 | 3.608 | 21 | PASSED |

| 8DPSK mode | | | | |
|----------------|-------------------------|-------------------|---------------|----------|
| Channel Number | Channel Frequency (MHz) | Test Result (dBm) | Limit (30dBm) | Judgment |
| CH 00 | 2402 | 3.219 | 21 | PASSED |
| CH 39 | 2441 | 3.566 | 21 | PASSED |
| CH 78 | 2480 | 3.741 | 21 | PASSED |

Remark: Test plot as follows

.....






ATA Testing Technology Service Co., Ltd.

Report No.: ATA160808003F

Page: 17 of 58

| | Modulation mode | GFSK mode |
|----------------|-----------------|-----------|
| <p>2402MHz</p> | | |
| <p>2441MHz</p> | | |

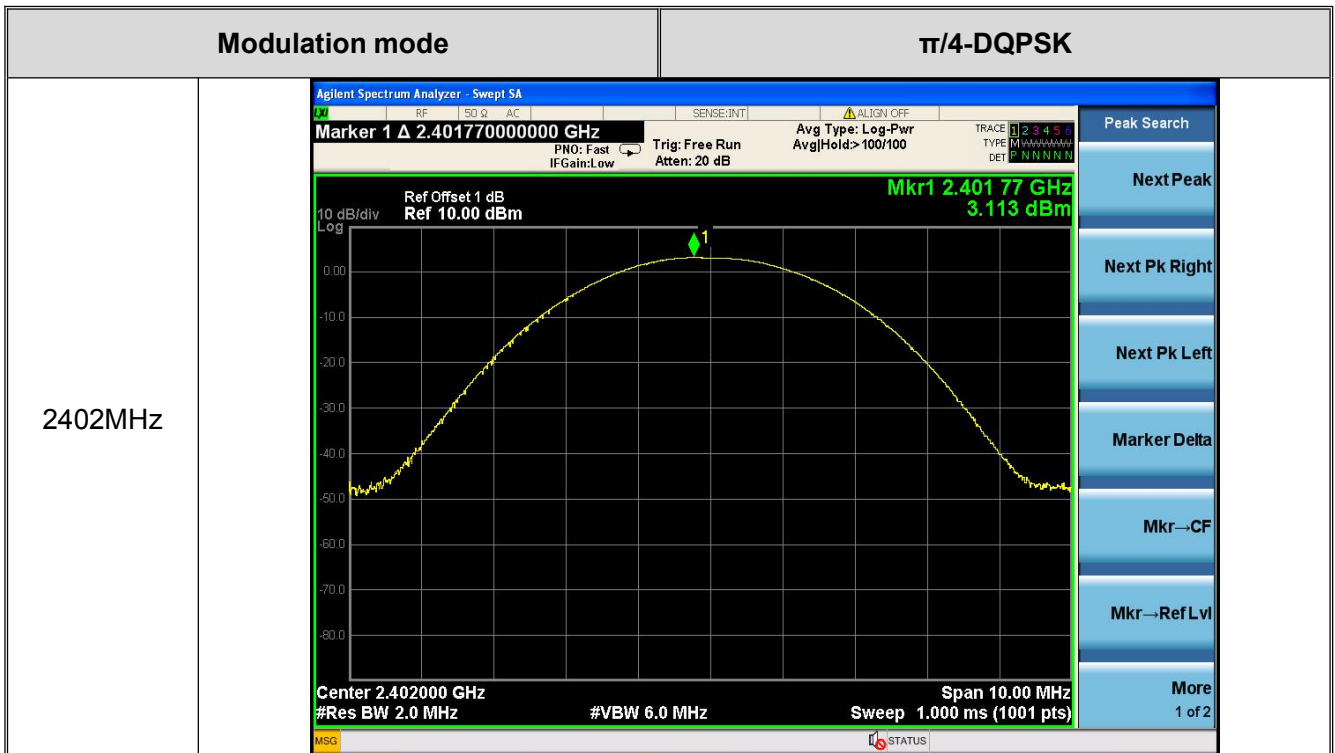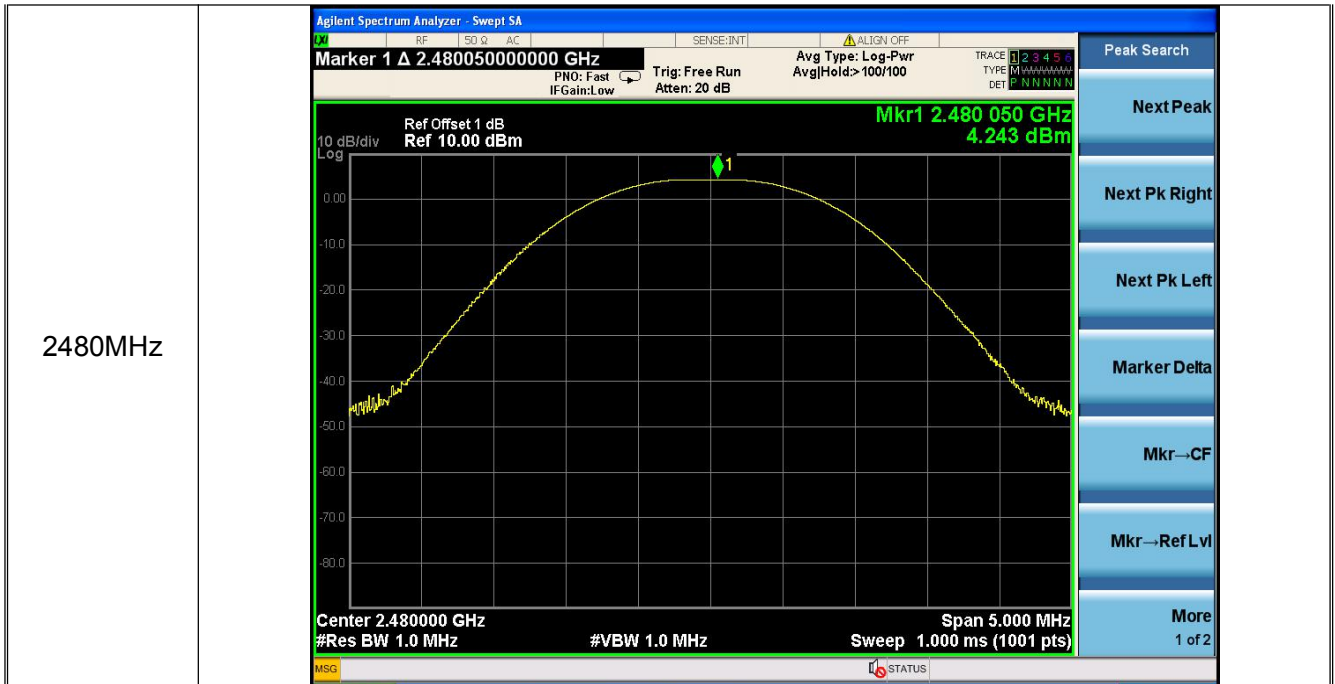

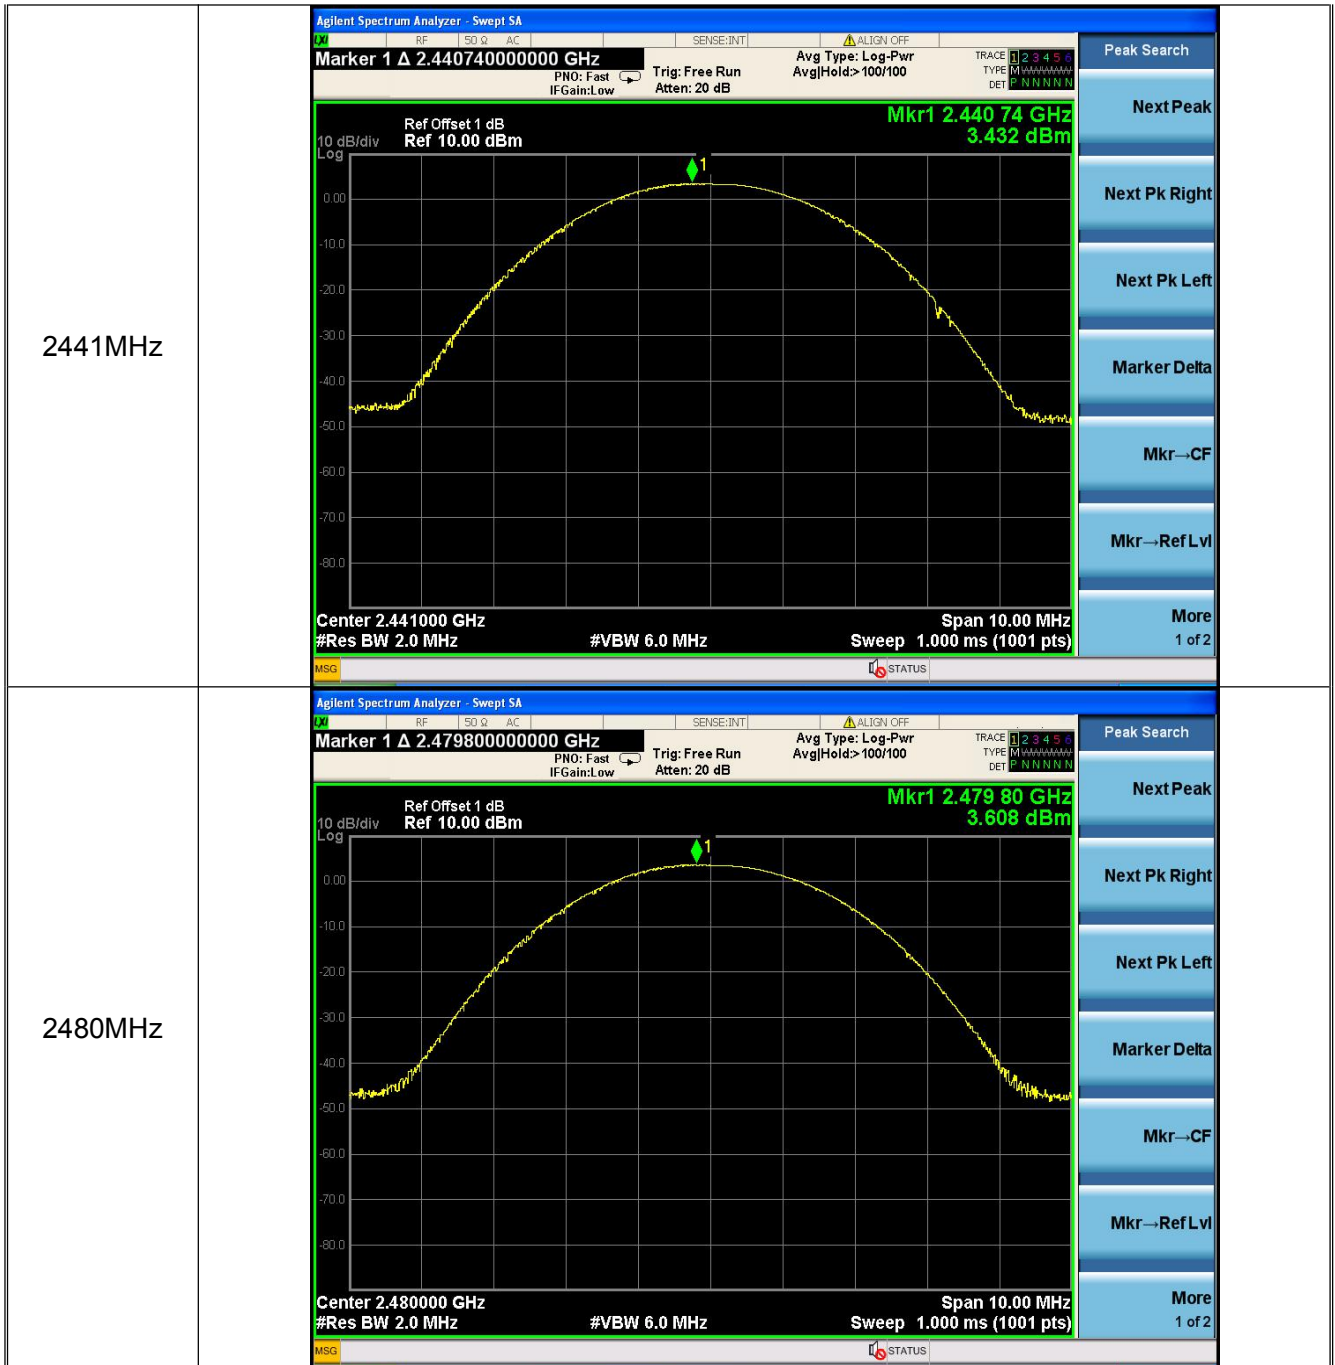




ATA Testing Technology Service Co., Ltd.

Report No.: ATA160808003F

Page: 20 of 58

| Modulation mode | | 8DPSK | |
|-----------------|--|--|--|
| 2402MHz | | <p>Agilent Spectrum Analyzer - Swept SA Marker 1 Δ 2.401980000000 GHz PNO: Fast IFGain:Low Trig: Free Run Atten: 20 dB Avg Type: Log-Pwr AvgHold:>100/100 Ref Offset 1 dB Ref 10.00 dBm Mkr1 2.401 98 GHz 3.219 dBm Center 2.402000 GHz Span 10.00 MHz #Res BW 2.0 MHz #VBW 6.0 MHz Sweep 1.000 ms (1001 pts)</p> | <p>Peak Search</p> <p>Next Peak</p> <p>Next Pk Right</p> <p>Next Pk Left</p> <p>Marker Delta</p> <p>Mkr--CF</p> <p>Mkr--Ref Lvl</p> <p>More 1 of 2</p> |
| 2441MHz | | <p>Agilent Spectrum Analyzer - Swept SA Marker 1 Δ 2.440980000000 GHz PNO: Fast IFGain:Low Trig: Free Run Atten: 20 dB Avg Type: Log-Pwr AvgHold:>100/100 Ref Offset 1 dB Ref 10.00 dBm Mkr1 2.440 98 GHz 3.566 dBm Center 2.441000 GHz Span 10.00 MHz #Res BW 2.0 MHz #VBW 6.0 MHz Sweep 1.000 ms (1001 pts)</p> | <p>Peak Search</p> <p>Next Peak</p> <p>Next Pk Right</p> <p>Next Pk Left</p> <p>Marker Delta</p> <p>Mkr--CF</p> <p>Mkr--Ref Lvl</p> <p>More 1 of 2</p> |

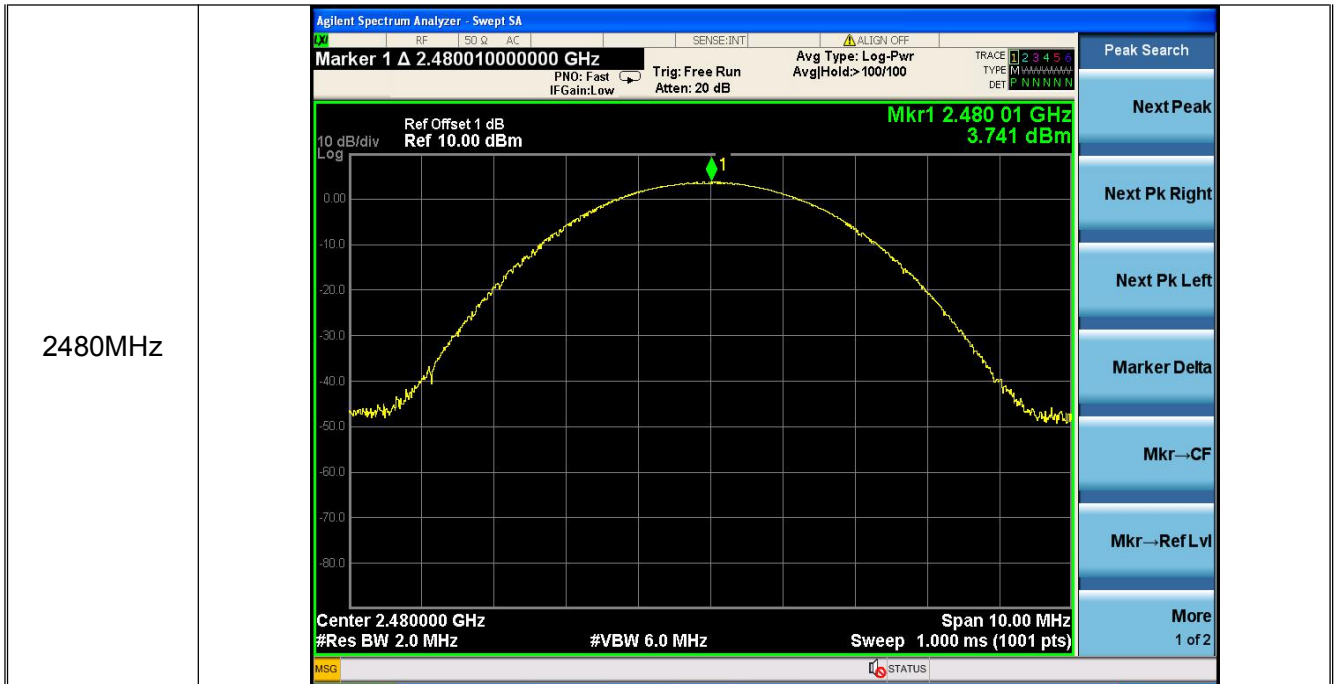



6. 20dB Occupy Bandwidth Test

6.1. Test Standard and Limit


6.1.1 Test Standard

FCC Part15 C Section 15.247 (a)(1)

6.1.2 Test Limit

| FCC Part 15 Subpart C(15.247) | | |
|-------------------------------|----------------|-----------------------|
| Test Item | Limit | Frequency Range (MHz) |
| Bandwidth | 20dB bandwidth | 2400~2483.5 |

6.2. Test Setup



6.3. Test Procedure

- (1) The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- (2) Spectrum Setting:
Bandwidth: RBW=30 kHz, VBW=100 kHz, detector= Peak

6.4. Test Data

| Channel Number | Channel Frequency | 20dB Bandwidth (MHz) | | |
|----------------|-------------------|----------------------|----------------|-------|
| | | GFSK | $\pi/4$ -DQPSK | 8DPSK |
| CH 00 | 2402(MHz) | 0.836 | 1.119 | 1.165 |
| CH 39 | 2441(MHz) | 0.834 | 1.119 | 1.165 |
| CH 78 | 2480(MHz) | 0.832 | 1.119 | 1.162 |

Remark: Test plot as follows



ATA Testing Technology Service Co., Ltd.

Report No.: ATA160808003F

Page: 23 of 58

| Modulation mode | | GFSK mode |
|-----------------|--|--|
| 2402MHz | | <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.40200000 GHz</p> <p>Center Freq: 2.402000000 GHz</p> <p>Trig: Free Run AvglHold: > 10/10</p> <p>Radio Std: None</p> <p>#IFGain: Low #Atten: 20 dB Radio Device: BTS</p> <p>Ref Offset 1 dB Ref 10.00 dBm</p> <p>10 dB/div Log</p> <p>Center 2.402 GHz Span 3 MHz</p> <p>#Res BW 30 kHz #VBW 100 kHz Sweep 3.2 ms</p> <p>Occupied Bandwidth 837.46 kHz</p> <p>Total Power 9.88 dBm</p> <p>Transmit Freq Error -12.658 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 836.4 kHz x dB -20.00 dB</p> <p>Frequency 2.40200000 GHz</p> <p>CF Step 300.000 kHz</p> <p>Freq Offset 0 Hz</p> |
| 2441MHz | | <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.44100000 GHz</p> <p>Center Freq: 2.441000000 GHz</p> <p>Trig: Free Run AvglHold: > 10/10</p> <p>Radio Std: None</p> <p>#IFGain: Low #Atten: 20 dB Radio Device: BTS</p> <p>Ref Offset 1 dB Ref 10.00 dBm</p> <p>10 dB/div Log</p> <p>Center 2.441 GHz Span 3 MHz</p> <p>#Res BW 30 kHz #VBW 100 kHz Sweep 3.2 ms</p> <p>Occupied Bandwidth 839.27 kHz</p> <p>Total Power 10.3 dBm</p> <p>Transmit Freq Error -11.142 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 834.0 kHz x dB -20.00 dB</p> <p>Frequency 2.44100000 GHz</p> <p>CF Step 300.000 kHz</p> <p>Freq Offset 0 Hz</p> |



ATA Testing Technology Service Co., Ltd.

Report No.: ATA160808003F

Page: 24 of 58





ATA Testing Technology Service Co., Ltd.

Report No.: ATA160808003F

Page: 25 of 58


| Modulation mode | | $\pi/4$ -DQPSK | |
|-----------------|---|----------------|--|
| 2402MHz | <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.40200000 GHz Center Freq: 2.402000000 GHz Radio Std: None</p> <p>Trig: Free Run AvglHold: > 10/10</p> <p>#IFGain: Low #Atten: 20 dB Radio Device: BTS</p> <p>Ref Offset 1 dB Ref 10.00 dBm</p> <p>10 dB/div Log</p> <p>Center 2.402 GHz Span 3 MHz</p> <p>#Res BW 30 kHz #VBW 100 kHz Sweep 3.2 ms</p> <p>Occupied Bandwidth 1.0634 MHz Total Power 9.50 dBm</p> <p>Transmit Freq Error -9.005 kHz OBW Power 99.00 %</p> <p>x dB Bandwidth 1.119 MHz x dB -20.00 dB</p> | | <p>Frequency</p> <p>Center Freq 2.40200000 GHz</p> <p>CF Step 300.000 kHz</p> <p>Freq Offset 0 Hz</p> |
| 2441MHz | <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.441000000 GHz Center Freq: 2.441000000 GHz Radio Std: None</p> <p>Trig: Free Run AvglHold: > 10/10</p> <p>#IFGain: Low #Atten: 20 dB Radio Device: BTS</p> <p>Ref Offset 1 dB Ref 10.00 dBm</p> <p>10 dB/div Log</p> <p>Center 2.441 GHz Span 3 MHz</p> <p>#Res BW 30 kHz #VBW 100 kHz Sweep 3.2 ms</p> <p>Occupied Bandwidth 1.0640 MHz Total Power 9.76 dBm</p> <p>Transmit Freq Error -9.187 kHz OBW Power 99.00 %</p> <p>x dB Bandwidth 1.119 MHz x dB -20.00 dB</p> | | <p>Frequency</p> <p>Center Freq 2.441000000 GHz</p> <p>CF Step 300.000 kHz</p> <p>Freq Offset 0 Hz</p> |



ATA Testing Technology Service Co., Ltd.

Report No.: ATA160808003F

Page: 26 of 58

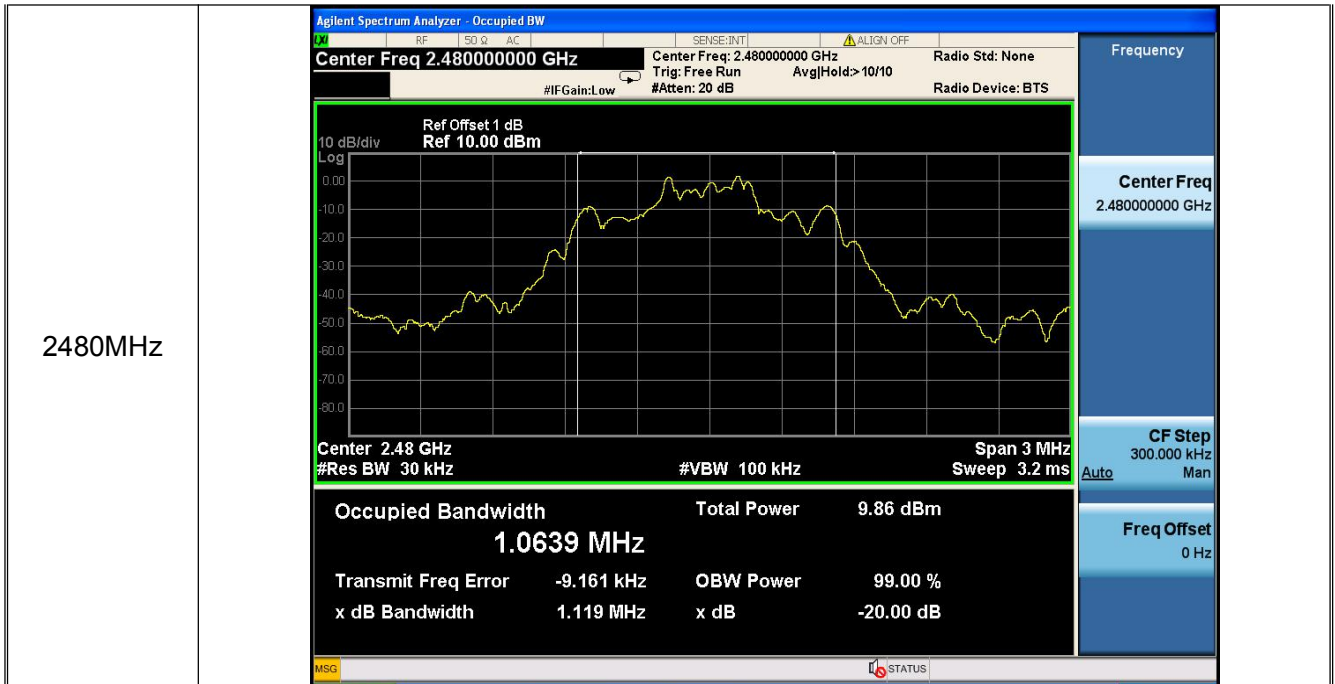



ATA Testing Technology Service Co., Ltd.

Report No.: ATA160808003F

Page: 27 of 58

| Modulation mode | | 8DPSK | |
|-----------------|--|-------|---|
| 2402MHz | <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.40200000 GHz</p> <p>Center Freq: 2.402000000 GHz</p> <p>Trig: Free Run AvglHold: > 10/10</p> <p>Radio Std: None</p> <p>#IFGain: Low #Atten: 20 dB Radio Device: BTS</p> <p>Ref Offset 1 dB Ref 10.00 dBm</p> <p>10 dB/div Log</p> <p>Center 2.402 GHz Span 3 MHz</p> <p>#Res BW 30 kHz #VBW 100 kHz Sweep 3.2 ms</p> <p>Occupied Bandwidth 1.1030 MHz</p> <p>Total Power 9.02 dBm</p> <p>Transmit Freq Error -9.935 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 1.165 MHz x dB -20.00 dB</p> | | <p>Frequency</p> <p>Center Freq 2.40200000 GHz</p> <p>CF Step 300.000 kHz</p> <p>Auto Man</p> <p>Freq Offset 0 Hz</p> |
| 2441MHz | <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.44100000 GHz</p> <p>Center Freq: 2.441000000 GHz</p> <p>Trig: Free Run AvglHold: > 10/10</p> <p>Radio Std: None</p> <p>#IFGain: Low #Atten: 20 dB Radio Device: BTS</p> <p>Ref Offset 1 dB Ref 10.00 dBm</p> <p>10 dB/div Log</p> <p>Center 2.441 GHz Span 3 MHz</p> <p>#Res BW 30 kHz #VBW 100 kHz Sweep 3.2 ms</p> <p>Occupied Bandwidth 1.1017 MHz</p> <p>Total Power 9.23 dBm</p> <p>Transmit Freq Error -9.961 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 1.165 MHz x dB -20.00 dB</p> | | <p>Frequency</p> <p>Center Freq 2.44100000 GHz</p> <p>CF Step 300.000 kHz</p> <p>Auto Man</p> <p>Freq Offset 0 Hz</p> |



ATA Testing Technology Service Co., Ltd.

Report No.: ATA160808003F

Page: 28 of 58





7. Carrier Frequency Separation Test

7.1. Test Standard and Limit


7.1.1 Test Standard

FCC Part15 C Section 15.247 (a)(1)

7.1.2 Test Limit

| FCC Part 15 Subpart C(15.247) | | |
|-------------------------------|---|-----------------------|
| Test Item | Limit | Frequency Range (MHz) |
| Channel Separation | >25KHz or >two-thirds of the 20 dB bandwidth (Which is greater) | 2400~2483.5 |

7.2. Test Setup



7.3. Test Procedure

- (1) The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- (2) Spectrum Setting:
RBW=100 kHz, VBW=300 kHz, detector= Peak, Sweep Time =auto.
- (3) The EUT was set to the Hopping Mode for Channel Separation Test and continuously transmitting for the Test.

7.4. Test Data



ATA Testing Technology Service Co., Ltd.

Report No.: ATA160808003F

Page: 30 of 58

| GFSK mode | | | | |
|------------------------------|-------------------------|-------------------|-------------|----------|
| Channel Number | Channel Frequency (MHz) | Test Result (MHz) | Limit (MHz) | Judgment |
| CH 39 | 2441 | 1.002 | 0.556 | PASSED |
| $\pi/4$ -DQPSK mode | | | | |
| Channel Number | Channel Frequency (MHz) | Test Result (MHz) | Limit (MHz) | Judgment |
| CH 39 | 2441 | 1.002 | 0.746 | PASSED |
| 8DPSK mode | | | | |
| Channel Number | Channel Frequency (MHz) | Test Result (MHz) | Limit (MHz) | Judgment |
| CH 39 | 2441 | 1.002 | 0.777 | PASSED |
| Remark: Test plot as follows | | | | |

According to section 6.4


| Test Mode | 20dB bandwidth (MHz) (worse case) | Limit (MHz) (Carrier Frequency Separation) |
|----------------|--------------------------------------|---|
| GFSK | 0.834 | 0.556 |
| $\pi/4$ -DQPSK | 1.119 | 0.746 |
| 8DPSK | 1.165 | 0.777 |




ATA Testing Technology Service Co., Ltd.

Report No.: ATA160808003F

Page: 31 of 58

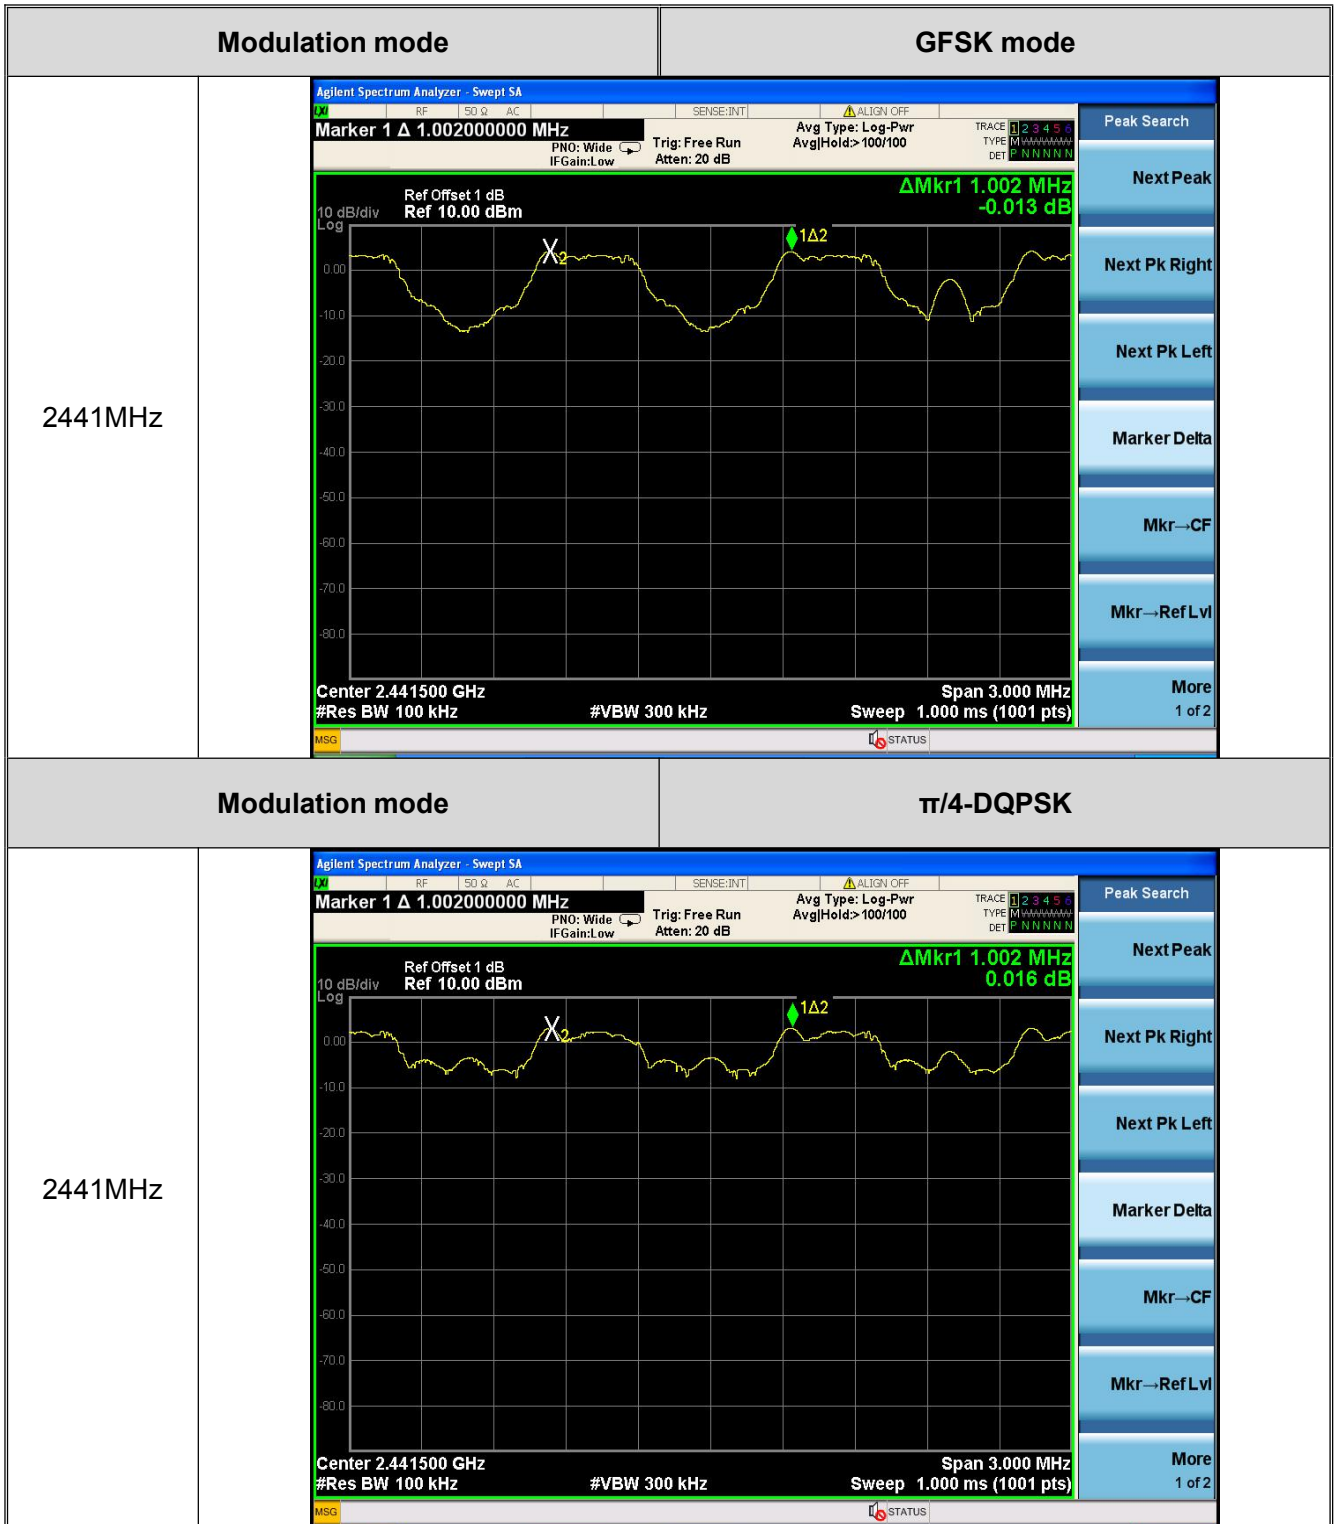

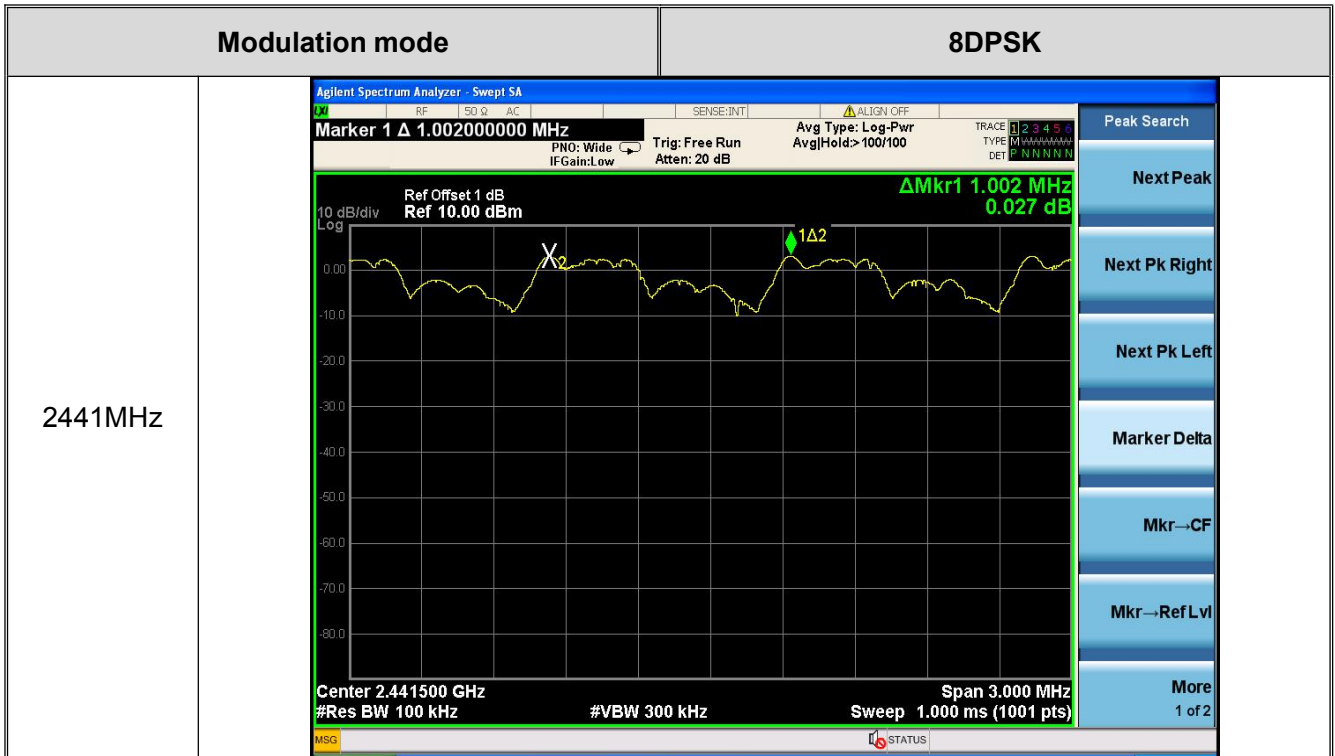



8. Number of Hopping Channel

8.1. Test Standard and Limit


8.1.1 Test Standard

FCC Part15 C Section 15.247 (a)(1)

8.1.2 Test Limit

| FCC Part 15 Subpart C (15.247) | | |
|--------------------------------|--------------|-----------------------|
| Test Item | Limit | Frequency Range (MHz) |
| Number of Hopping Channel | >15 channels | 2400~2483.5 |

8.2. Test Setup



8.3. Test Procedure

- (1) The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- (2) Spectrum Setting: RBW=100 kHz, VBW=300 kHz, Detector=Peak, Sweep time= Auto.
- (3) The EUT was set to the Hopping Mode for Channel Separation Test and continuously transmitting for the Test.

8.4. Test Data



| Mode | Quantity of Hopping Channel | Limit | Judgment |
|-----------------------------|-----------------------------|-------|----------|
| GFSK, $\pi/4$ -DQPSK, 8DPSK | 79 | >15 | PASSED |




ATA Testing Technology Service Co., Ltd.

Report No.: ATA160808003F

Page: 34 of 58

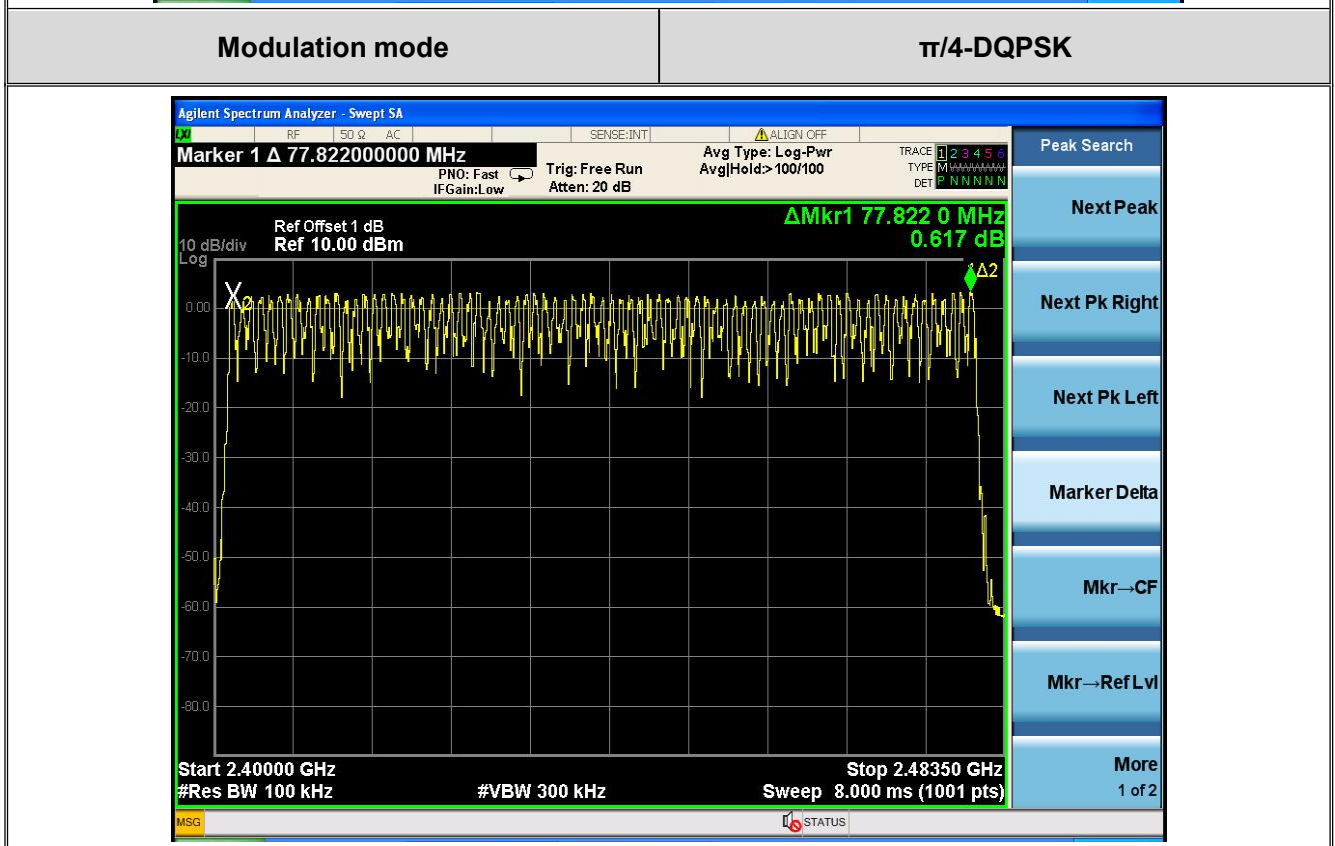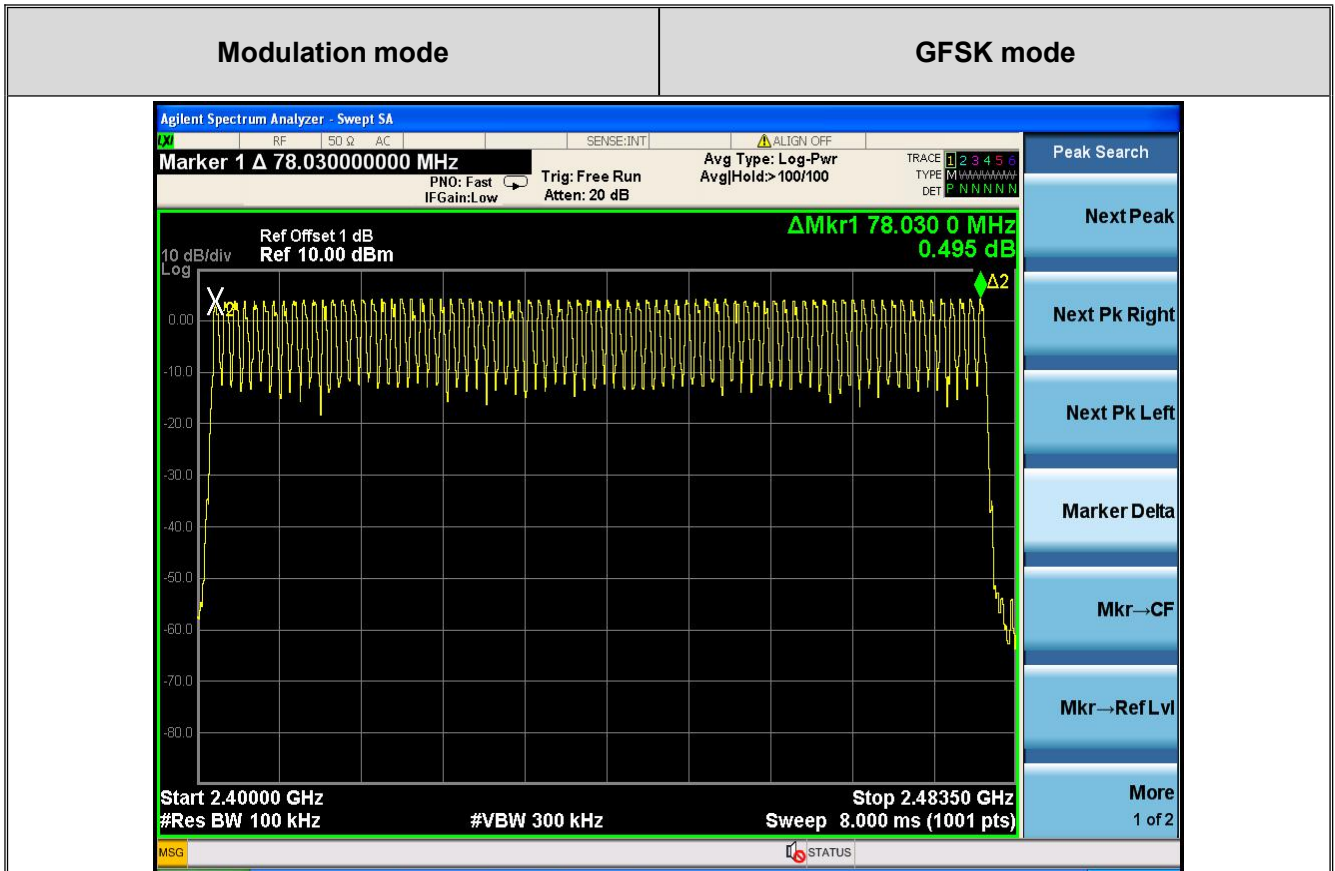

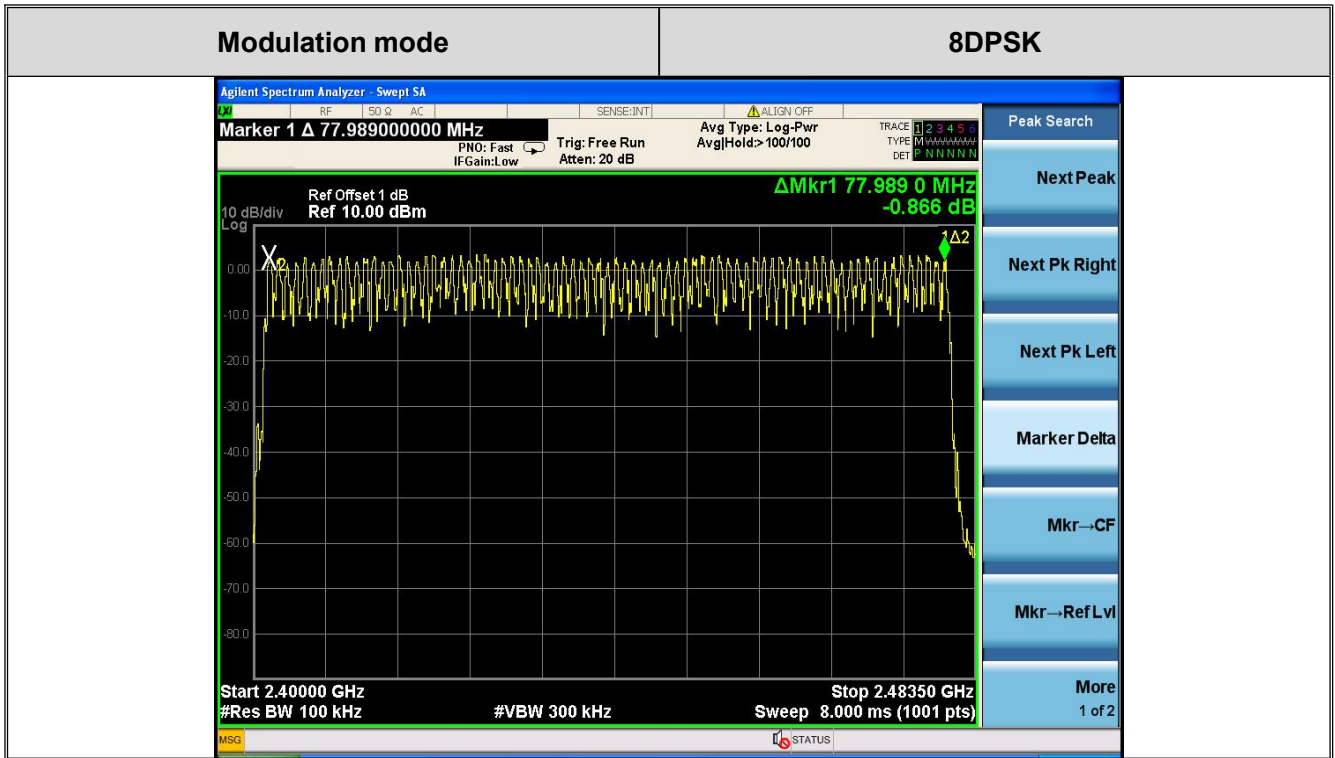



9. Dwell Time Test

9.1. Test Standard and Limit


9.1.1 Test Standard

FCC Part15 C Section 15.247 (a)(1)

9.1.2 Test Limit

| FCC Part 15 Subpart C(15.247) | | |
|-------------------------------|------------|---------|
| Section | Test Item | Limit |
| 15.247(a)(1) | Dwell time | 0.4 sec |

9.2. Test Setup



9.3. Test Procedure

- (1) The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- (2) Spectrum Setting: RBW=1MHz, VBW=1MHz, Span=0Hz, Detector=Peak
- (3) Use video trigger with the trigger level set to enable triggering only on full pulses.
- (4) Sweep Time is more than once pulse time.
- (5) Set the center frequency on any frequency would be measure and set the frequency span to zero span.
- (6) Measure the maximum time duration of one single pulse.
- (7) Set the EUT for packet transmitting.
- (8) Measure the maximum time duration of one single pulse.
- (9) The EUT was set to the Hopping Mode for Dwell Time Test

9.4. Test Data



ATA Testing Technology Service Co., Ltd.

Report No.: ATA160808003F

Page: 37 of 58

For GFSK, $\pi/4$ -DQPSK and 8DPSK:

The test period: T= 0.4 Second/Channel x 79 Channel = 31.6 s

| EUT: Bluetooth Headset | | M/N: X7 | | | | |
|------------------------|-------------|--------------------|---------------------|----------------|-----------|------------|
| Test date: 2016-08-09 | | Test site: RF site | | | | |
| Mode | Data Packet | Frequency (MHz) | Pulse Duration (ms) | Dwell Time (s) | Limit (s) | Conclusion |
| GFSK | DH1 | 2441 | 0.3616 | 0.116 | 0.3616 | PASS |
| | DH3 | 2441 | 1.616 | 0.345 | 1.616 | PASS |
| | DH5 | 2441 | 2.868 | 0.367 | 2.868 | PASS |
| $\pi/4$ DQPSK | DH1 | 2441 | 0.368 | 0.236 | 0.368 | PASS |
| | DH3 | 2441 | 1.62 | 0.346 | 1.62 | PASS |
| | DH5 | 2441 | 2.872 | 0.368 | 2.872 | PASS |
| 8- DQPSK | DH1 | 2441 | 0.3704 | 0.237 | 0.3704 | PASS |
| | DH3 | 2441 | 1.616 | 0.345 | 1.616 | PASS |
| | DH5 | 2441 | 2.868 | 0.367 | 2.868 | PASS |


Note: 1 A period time = 0.4 (s) * 79 = 31.6(s)
2 DH1 time slot = Pulse Duration * (1600/(1*79)) * A period time
DH3 time slot = Pulse Duration * (1600/(3*79)) * A period time
DH5 time slot = Pulse Duration * (1600/(5*79)) * A period time



ATA Testing Technology Service Co., Ltd.

Report No.: ATA160808003F

Page: 38 of 58

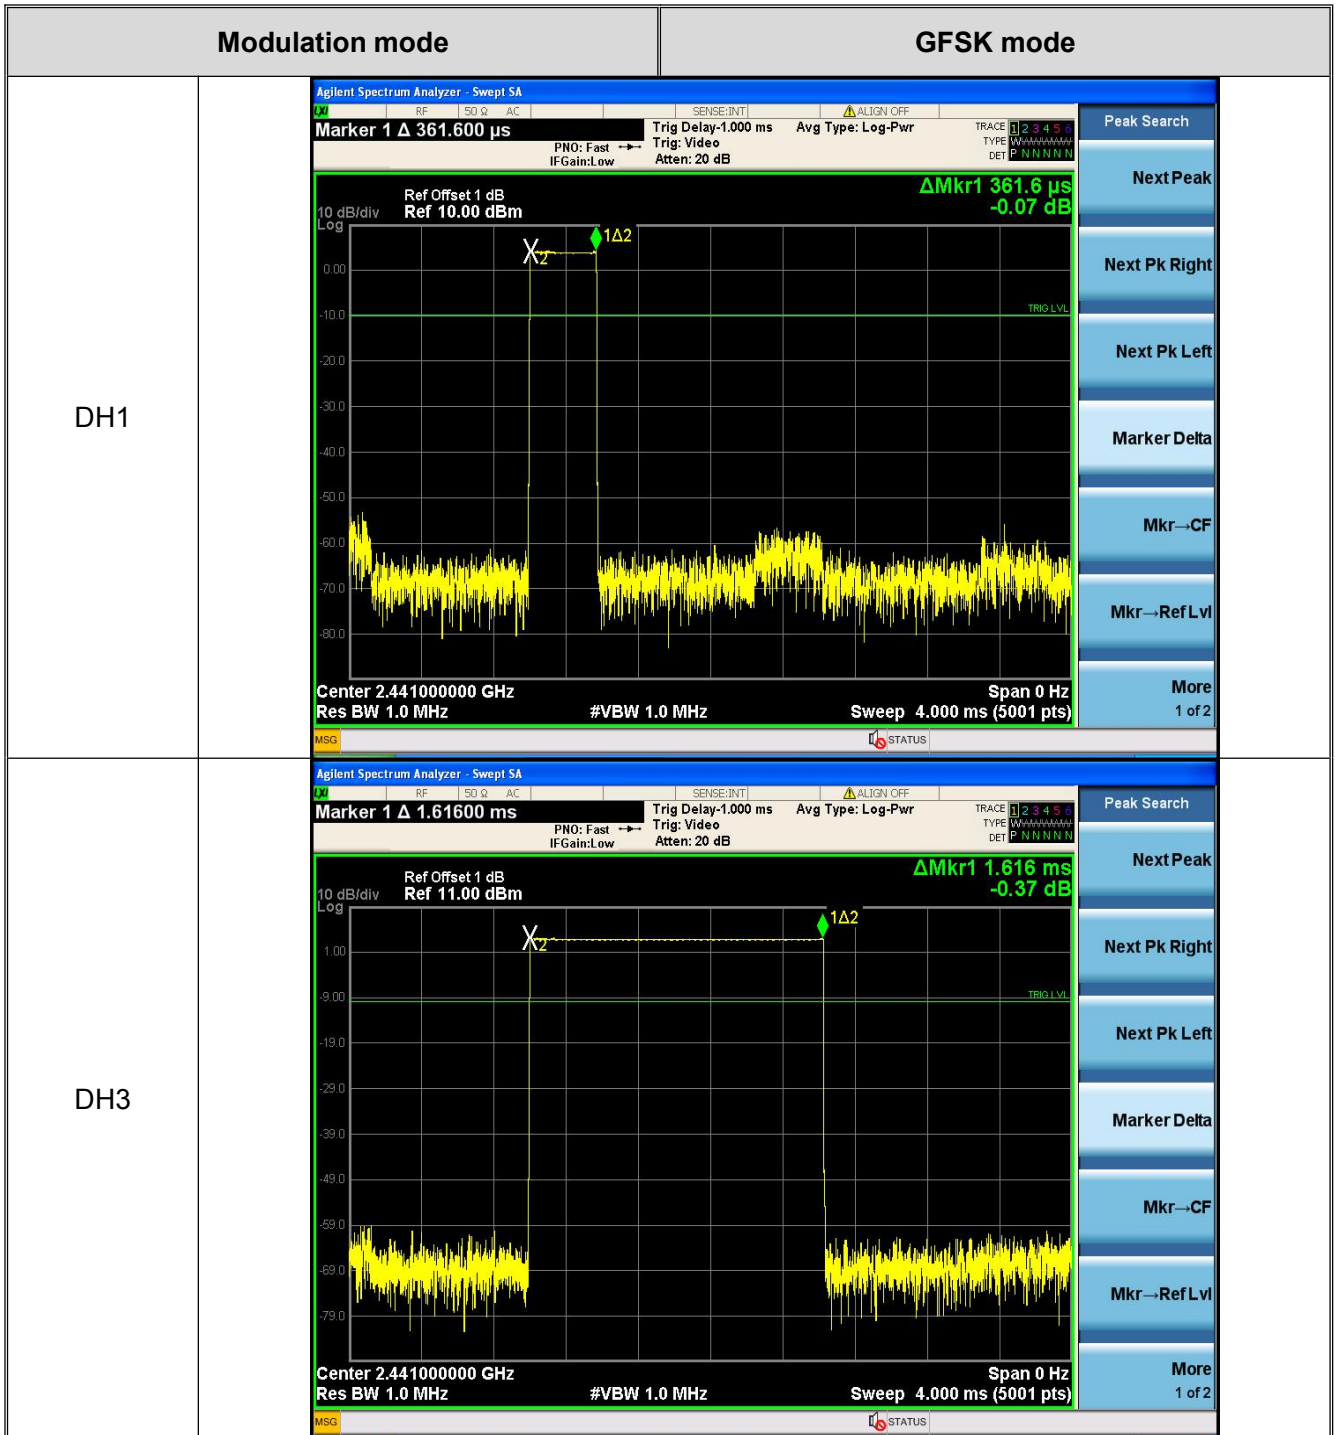




ATA Testing Technology Service Co., Ltd.

Report No.: ATA160808003F

Page: 40 of 58

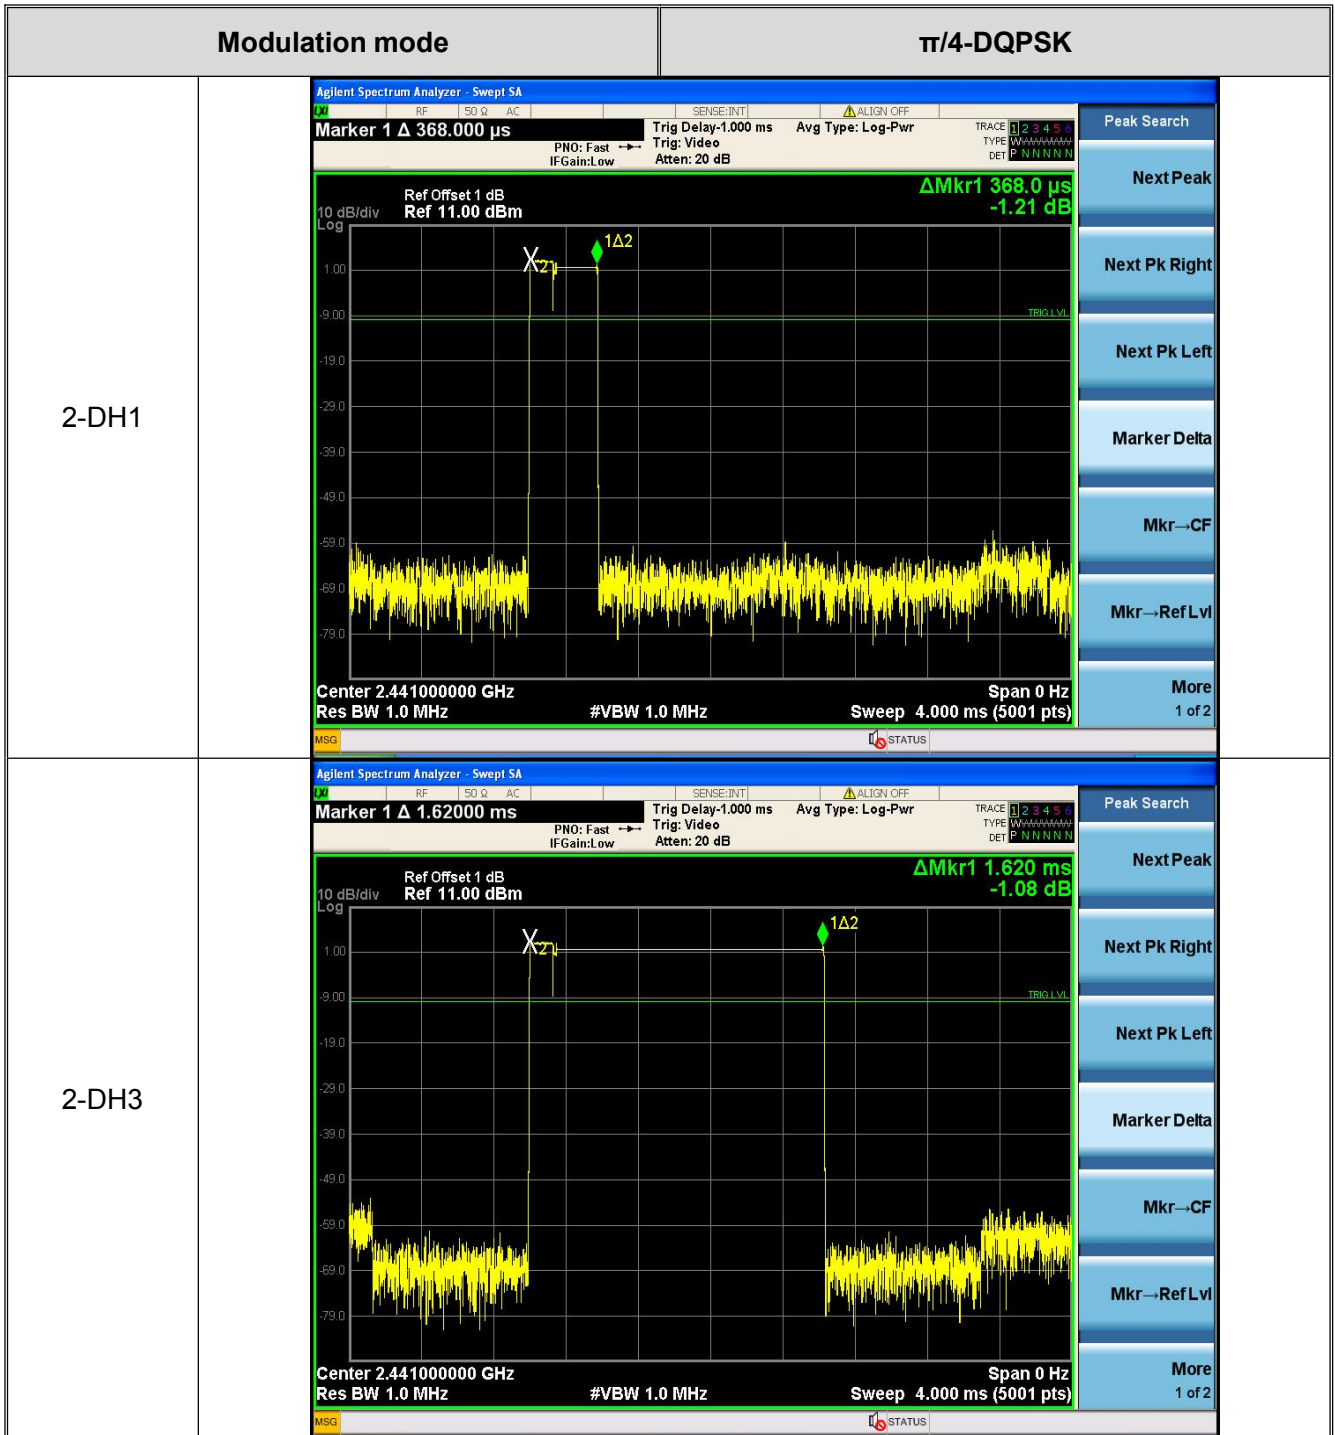




ATA Testing Technology Service Co., Ltd.

Report No.: ATA160808003F

Page: 41 of 58

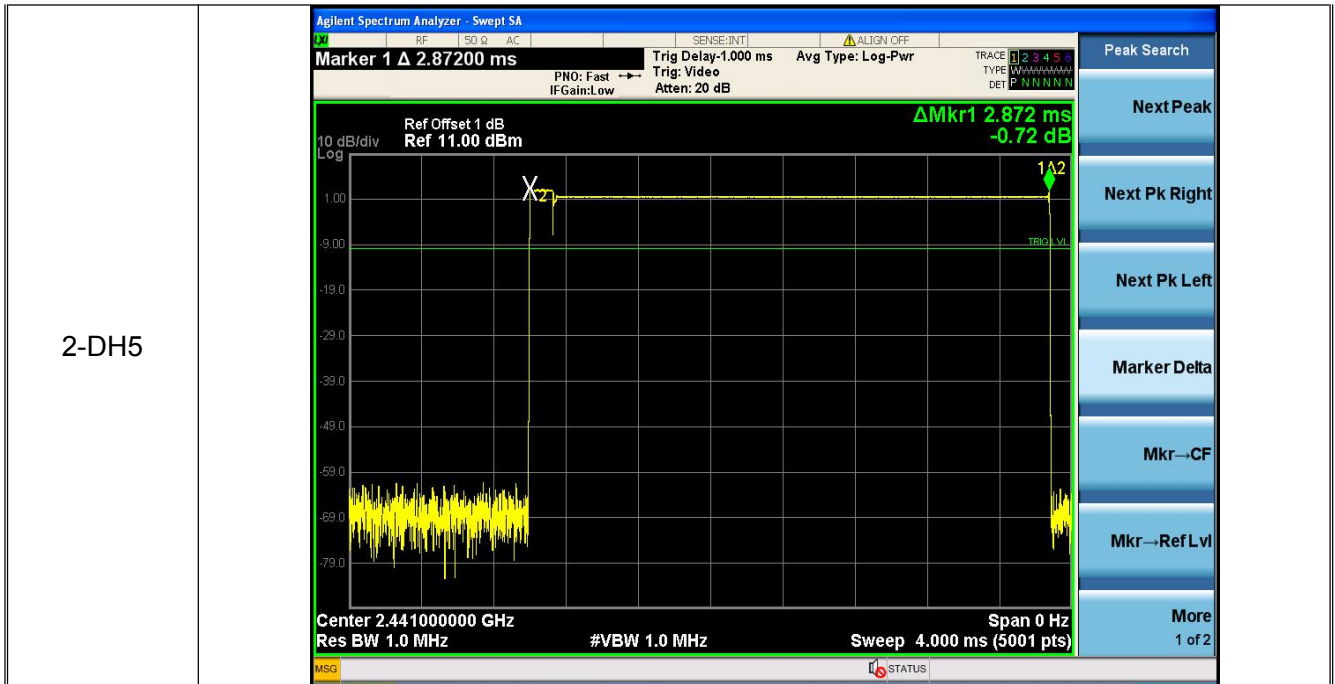




ATA Testing Technology Service Co., Ltd.

Report No.: ATA160808003F

Page: 42 of 58

| Modulation mode | | 8DPSK | |
|-----------------|--|--|--|
| <p>3-DH1</p> | | <p>Agilent Spectrum Analyzer - Swept SA</p> <p>Marker 1 Δ 370.400 μs</p> <p>Trig Delay: 1.000 ms Trig: Video Atten: 20 dB</p> <p>Avg Type: Log-Pwr</p> <p>Ref Offset: 1 dB Ref: 11.00 dBm</p> <p>ΔMkr1 370.4 μs -0.51 dB</p> <p>Center 2.441000000 GHz Res BW 1.0 MHz #VBW 1.0 MHz Sweep 4.000 ms (5001 pts)</p> <p>Span 0 Hz</p> <p>Peak Search</p> <p>Next Peak</p> <p>Next Pk Right</p> <p>Next Pk Left</p> <p>Marker Delta</p> <p>Mkr--CF</p> <p>Mkr--Ref Lvl</p> <p>More 1 of 2</p> | |
| <p>3-DH3</p> | | <p>Agilent Spectrum Analyzer - Swept SA</p> <p>Marker 1 Δ 1.616 ms</p> <p>Trig Delay: 1.000 ms Trig: Video Atten: 20 dB</p> <p>Avg Type: Log-Pwr</p> <p>Ref Offset: 1 dB Ref: 11.00 dBm</p> <p>ΔMkr1 1.616 ms -0.47 dB</p> <p>Center 2.441000000 GHz Res BW 1.0 MHz #VBW 1.0 MHz Sweep 4.000 ms (5001 pts)</p> <p>Span 0 Hz</p> <p>Peak Search</p> <p>Next Peak</p> <p>Next Pk Right</p> <p>Next Pk Left</p> <p>Marker Delta</p> <p>Mkr--CF</p> <p>Mkr--Ref Lvl</p> <p>More 1 of 2</p> | |

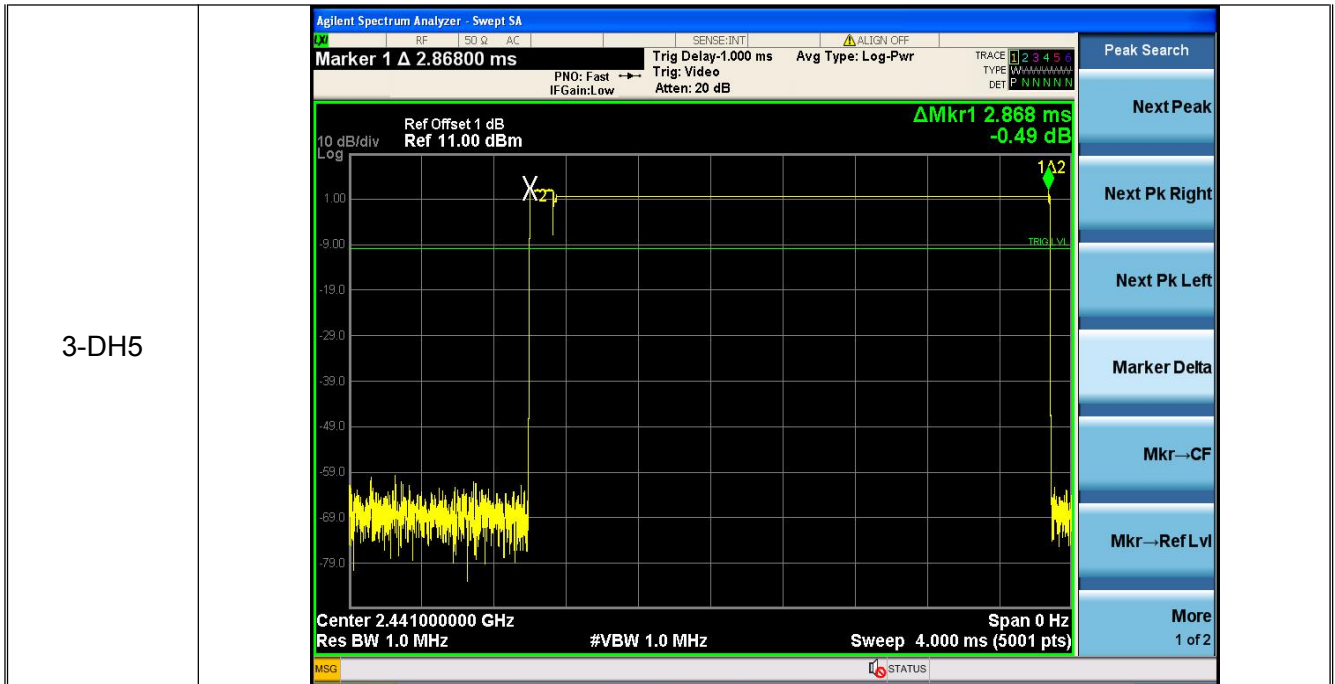



10. Pseudorandom Frequency Hopping Sequence

10.1. Standard Requirement

10.1.1 Test Standard

FCC Part15 C Section 15.247 (a)(1)

10.1.2 Requirement


Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Alternatively. Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

10.2. EUT Pseudorandom Frequency Hopping Sequence


The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONES; i.e. the shift register is initialized with nine ones.

- Number of shift register stages: 9
- Length of pseudo-random sequence: $2^9 - 1 = 511$ bits
- Longest sequence of zeros: 8 (non-inverted signal)

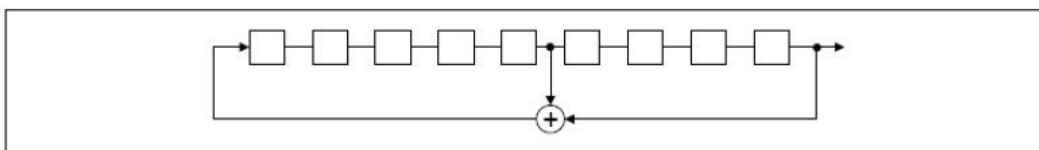

Linear Feedback Shift Register for Generation of the PRBS Sequence.

An example of Pseudorandom Frequency Hopping Sequence as follow:

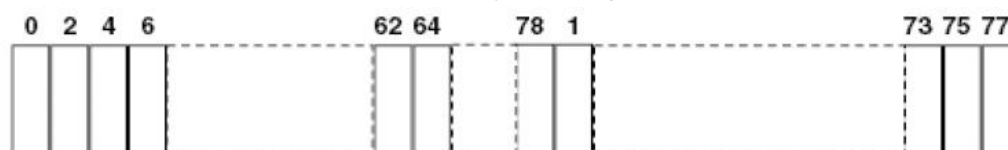

Each frequency used equally on the average by each transmitter. The system receivers have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shift frequencies in synchronization with the transmitted signals.



11. Band Edge Requirement (Conducted Emission Method)

11.1. Test Standard and Limit


11.1.1 Test Standard

FCC Part15 C Section 15.247 (d)

11.1.2 Test Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

11.2. Test Setup



11.3. Test Procedure

- (1) The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- (2) Spectrum Setting: RBW=100 kHz, VBW=300 kHz, Detector=Peak

11.4. Test Data

Test plot as follows