



ATA Testing Technology Service Co., Ltd.

Report No.: ATA160808003F

Page: 46 of 58

Modulation mode	GFSK	Test channel	Lowest
No-hopping mode		Hopping mode	

Modulation mode	GFSK	Test channel	Highest
No-hopping mode		Hopping mode	



ATA Testing Technology Service Co., Ltd.

Report No.: ATA160808003F

Page: 47 of 58

Modulation mode	$\pi/4$ -DQPSK	Test channel	Lowest
No-hopping mode		Hopping mode	

Modulation mode	$\pi/4$ -DQPSK	Test channel	Highest
No-hopping mode		Hopping mode	



ATA Testing Technology Service Co., Ltd.

Report No.: ATA160808003F

Page: 48 of 58

Modulation mode	8DPSK	Test channel	Lowest
No-hopping mode		Hopping mode	

Modulation mode	8DPSK	Test channel	Highest
No-hopping mode		Hopping mode	

12. Band Edge Requirement (Radiated Emission Method)

12.1. Test Standard and Limit

12.1.1 Test Standard


FCC Part15 C Section 15.209 and 15.205

12.1.2 Test Limit

Radiated Emission Test Limit

Frequency	Limit (dB μ V/m @3m)	Remark
Above 1GHz	54.00	Average value
	74.00	Peak value

12.2. Test Setup

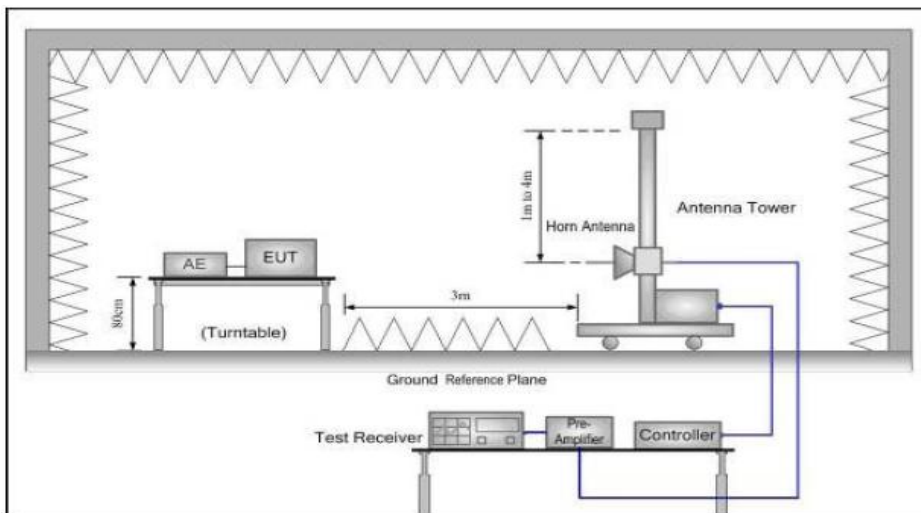

12.3. Test Procedure

- 1) The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- 2) The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- 3) The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- 4) For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- 5) The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum



ATA Testing Technology Service Co., Ltd.

Report No.: ATA160808003F

Page: 50 of 58

Hold Mode. Peak Value: RBW=1MHz, VBW=3MHz; Average value: RBW=1MHz, VBW=10Hz

- 6) If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

12.4. Test Data

Remark:

1. During the test, pre-scan the GFSK, $\pi/4$ -DQPSK, 8DPSK, and all data were shown in the report.
2. Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the Y-axis is the worst case.

Test mode: GFSK					Test channel: Lowest				
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.	Level
2400.00	23.31	27.58	5.67	0	56.56	74.00	-17.44	H	PEAK
2400.00	22.86	27.58	5.67	0	56.11	74.00	-17.89	V	PEAK
2400.00	11.29	27.58	5.67	0	44.54	54.00	-9.46	H	AVG.
2400.00	11.71	27.58	5.67	0	44.96	54.00	-9.04	V	AVG.
Test mode: GFSK					Test channel: Highest				
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.	Level
2483.50	23.91	27.52	5.7	0	57.13	74.00	-16.87	H	PEAK
2483.50	23.34	27.52	5.7	0	56.56	74.00	-17.44	V	PEAK
2483.50	11.71	27.52	5.7	0	44.93	54.00	-9.07	H	AVG.
2483.50	12.05	27.52	5.7	0	45.27	54.00	-8.73	V	AVG.

Remark:

1. Final Level = Read Level + Antenna Factor + Cable Loss - Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.



ATA Testing Technology Service Co., Ltd.

Report No.: ATA160808003F

Page: 51 of 58

Test mode: $\pi/4$ -DQPSK					Test channel: Lowest				
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.	Level
2400.00	22.07	27.58	5.67	0	55.32	74.00	-18.68	H	PEAK
2400.00	22.49	27.58	5.67	0	55.74	74.00	-18.26	V	PEAK
2400.00	11.5	27.58	5.67	0	44.75	54.00	-9.25	H	AVG.
2400.00	11.96	27.58	5.67	0	45.21	54.00	-8.79	V	AVG.
Test mode: $\pi/4$ -DQPSK					Test channel: Highest				
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.	Level
2483.50	22.29	27.52	5.7	0	55.51	74.00	-18.49	H	PEAK
2483.50	23.18	27.52	5.7	0	56.4	74.00	-17.60	V	PEAK
2483.50	10.96	27.52	5.7	0	44.18	54.00	-9.82	H	AVG.
2483.50	11.3	27.52	5.7	0	44.52	54.00	-9.48	V	AVG.

Remark:

1. Final Level = Read Level + Antenna Factor + Cable Loss - Pre-amplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

Test mode: 8DPSK					Test channel: Lowest				
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.	Level
2400.00	23.4	27.58	5.67	0	56.65	74.00	-17.35	H	PEAK
2400.00	23.54	27.58	5.67	0	56.79	74.00	-17.21	V	PEAK
2400.00	11.32	27.58	5.67	0	44.57	54.00	-9.43	H	AVG.
2400.00	11.5	27.58	5.67	0	44.75	54.00	-9.25	V	AVG.
Test mode: 8DPSK					Test channel: Highest				
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.	Level
2483.50	22.02	27.52	5.7	0	55.24	74.00	-18.76	H	PEAK
2483.50	23.16	27.52	5.7	0	56.38	74.00	-17.62	V	PEAK
2483.50	11.27	27.52	5.7	0	44.49	54.00	-9.51	H	AVG.
2483.50	11.52	27.52	5.7	0	44.74	54.00	-9.26	V	AVG.

Remark:

1. Final Level = Read Level + Antenna Factor + Cable Loss - Pre-amplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

13. Spurious Emission (Radiated Emission Method)

14.1. Test Standard and Limit

14.1.1 Test Standard

FCC Part15 C Section 15.209


14.1.2 Test Limit

Frequency (MHz)	Limit (dB μ V/m)	
	At 3m Distance	
30MHz~88MHz	40	Quasi-peak
88MHz~216MHz	43.5	Quasi-peak
216MHz~960MHz	46	Quasi-peak
960MHz~1000MHz	54	Quasi-peak
Above 1000MHz	54	Average
	74	Peak


Remark: 1. The lower limit shall apply at the transition frequency.

14.2. Test Setup

Below 1GHz

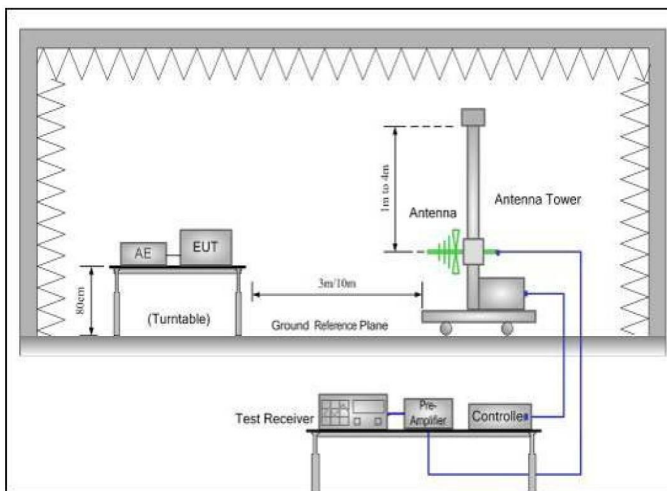

Above 1GHz

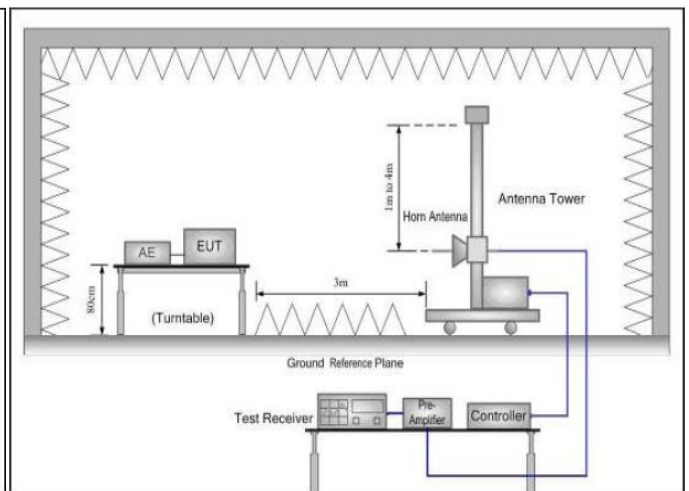

14.3. Test Procedure

- 1) The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- 2) The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- 3) The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set



to make the measurement.

- 4) For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- 5) The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
Peak value: RBW=1MHz, VBW=3MHz;
Average value: RBW=1MHz, VBW=10Hz;
QP Value: RBW=120kHz, VBW=300kHz
- 6) If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

14.4. Test Data

Remark:

1. During the test, pre-scan the GFSK, $\pi/4$ -DQPSK, 8-DPSK modulation, and found the GFSK modulation is the worst case.
2. Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the Y-axis is the worst case.
3. 9 kHz to 30 MHz is noise floor, so only shows the data of above 30MHz in this report.




ATA Testing Technology Service Co., Ltd.

Report No.: ATA160808003F

Page: 54 of 58

Radiated Emission Test Data (Below 1GHz)

EUT: True wireless earbuds M/N: X11
 Operating Condition: Bluetooth TX mode
 Test Site: 3m chamber
 Operator: Tom
 Test Specification: AC120V/60Hz
 Polarization: Horizontal
 Note: Tem:23°C Hum:50%

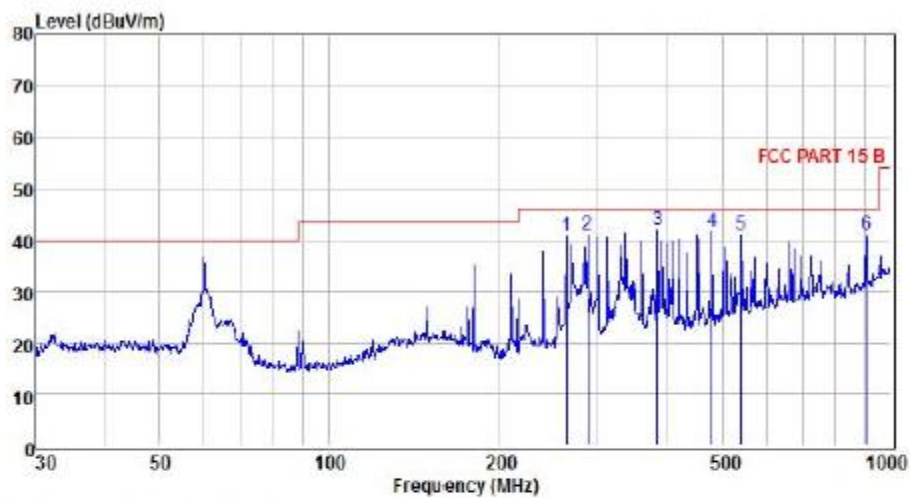

Condition	: FCC PART 15 B				POL: HORIZONTAL				
Item	Freq	Read	Antenna	Preamp	Cable	Level	Limit	Margin	Remark
	MHz	dBuV	Factor	Factor	Loss	dBuV	dBuV	dBuV	
1	263.82	56.37	11.90	28.16	0.65	40.76	46.00	-5.24	Peak
2	287.99	55.75	12.54	28.06	0.66	40.89	46.00	-5.11	Peak
3	383.93	54.05	14.48	27.40	0.81	41.94	46.00	-4.06	Peak
4	480.53	51.77	16.28	27.20	0.81	41.66	46.00	-4.34	Peak
5	541.37	49.77	17.22	26.98	1.01	41.02	46.00	-4.98	Peak
6	909.67	42.86	21.77	25.10	1.49	41.02	46.00	-4.98	Peak

Remark: Level = Read Level + Antenna Factor - Preamp Factor + Cable Loss




ATA Testing Technology Service Co., Ltd.

Report No.: ATA160808003F

Page: 55 of 58

Radiated Emission Test Data (Below 1GHz)

EUT: True wireless earbuds M/N: X11
 Operating Condition: Bluetooth TX mode
 Test Site: 3m chamber
 Operator: Tom
 Test Specification: AC120V/60Hz
 Polarization: Vertical
 Note: Tem:23°C Hum:50%

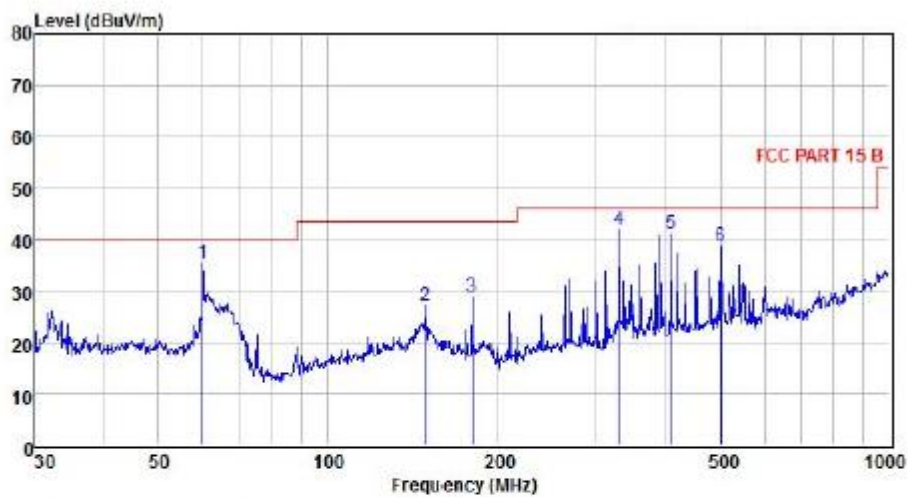

Condition		: FCC PART 15 B								POL: VERTICAL	
Item	Freq	Read Level	Antenna Factor	Preamp Factor	Cable Loss	Level	Limit	Margin	Remark		
	MHz	dBuV	dB	dB	dB	dBuV	dBuV	dBuV			
1	59.86	53.16	12.75	30.90	0.24	35.25	40.00	-4.75	Peak		
2	150.01	41.87	14.16	29.45	0.39	26.97	43.50	-16.53	Peak		
3	180.02	45.82	11.68	29.01	0.47	28.96	43.50	-14.54	Peak		
4	330.19	55.59	13.52	27.85	0.76	42.02	46.00	-3.98	Peak		
5	408.95	52.34	14.94	27.26	0.97	40.99	46.00	-5.01	Peak		
6	501.18	48.41	16.54	27.18	0.76	38.53	46.00	-7.47	Peak		

Remark: Level = Read Level + Antenna Factor - Preamp Factor + Cable Loss



ATA Testing Technology Service Co., Ltd.

Report No.: ATA160808003F

Page: 56 of 58

Radiated Emission Test Data (Above 1GHz)

Test mode: GFSK					Test channel: Lowest				
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.	Level
4804.00	42.69	31.53	8.9	40.24	42.88	74.00	-31.12	V	PEAK
7206.00	*					74.00		V	PEAK
9608.00	*					74.00		V	PEAK
12010.00	*					74.00		V	PEAK
14412.00	*					74.00		V	PEAK
16814.00	*					74.00		V	PEAK
4804.00	43.49	36.47	10.59	41.24	49.31	74.00	-24.69	H	PEAK
7206.00	*					74.00		H	PEAK
9608.00	*					74.00		H	PEAK
12010.00	*					74.00		H	PEAK
14412.00	*					74.00		H	PEAK
16814.00	*					74.00		H	PEAK
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.	Level
4804.00	31.69	31.53	8.9	40.24	31.88	54.00	-22.12	V	AVG.
7206.00	*					54.00		V	AVG.
9608.00	*					54.00		V	AVG.
12010.00	*					54.00		V	AVG.
14412.00	*					54.00		V	AVG.
16814.00	*					54.00		V	AVG.
4804.00	32.1	36.47	10.59	41.24	37.92	54.00	-16.08	H	AVG.
7206.00	*					54.00		H	AVG.
9608.00	*					54.00		H	AVG.
12010.00	*					54.00		H	AVG.
14412.00	*					54.00		H	AVG.
16814.00	*					54.00		H	AVG.

Remark:

1. Final Level = Read Level + Antenna Factor + Cable Loss – Pre-amplifier Factor
2. “*”, means this data is too weak instrument of signal is unable to test.
3. The emission levels of other frequencies are very lower than the limit and not show in test report.



ATA Testing Technology Service Co., Ltd.

Report No.: ATA160808003F

Page: 57 of 58

Radiated Emission Test Data (Above 1GHz)

Test mode: GFSK					Test channel: Middle				
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.	Level
4882.00	42.69	31.58	8.98	40.15	43.1	74.00	-30.90	V	PEAK
7323.00	*					74.00		V	PEAK
9764.00	*					74.00		V	PEAK
12205.00	*					74.00		V	PEAK
14646.00	*					74.00		V	PEAK
17087.00	*					74.00		V	PEAK
4882.00	43.49	36.48	10.69	41.15	49.51	74.00	-24.49	H	PEAK
7323.00	*					74.00		H	PEAK
9764.00	*					74.00		H	PEAK
12205.00	*					74.00		H	PEAK
14646.00	*					74.00		H	PEAK
17087.00	*					74.00		H	PEAK
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.	Level
4882.00	32.25	31.58	8.98	40.15	32.66	54.00	-21.34	V	AVG.
7323.00	*					54.00		V	AVG.
9764.00	*					54.00		V	AVG.
12205.00	*					54.00		V	AVG.
14646.00	*					54.00		V	AVG.
17087.00	*					54.00		V	AVG.
4882.00	32.91	36.48	10.69	41.15	38.93	54.00	-15.07	H	AVG.
7323.00	*					54.00		H	AVG.
9764.00	*					54.00		H	AVG.
12205.00	*					54.00		H	AVG.
14646.00	*					54.00		H	AVG.
17087.00	*					54.00		H	AVG.

Remark:

1. Final Level = Read Level + Antenna Factor + Cable Loss – Preamplifier Factor
2. “*”, means this data is the too weak instrument of signal is unable to test.
3. The emission levels of other frequencies are very lower than the limit and not show in test report.



ATA Testing Technology Service Co., Ltd.

Report No.: ATA160808003F

Page: 58 of 58

Radiated Emission Test Data (Above 1GHz)

Test mode: GFSK					Test channel: Highest				
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.	Level
4960.00	43.31	31.69	9.08	40.03	44.05	74.00	-29.95	V	PEAK
7440.00	*					74.00		V	PEAK
9920.00	*					74.00		V	PEAK
12400.00	*					74.00		V	PEAK
14880.00	*					74.00		V	PEAK
17360.00	*					74.00		V	PEAK
4960.00	43.6	36.6	10.8	41.05	49.95	74.00	-24.05	H	PEAK
7440.00	*					74.00		H	PEAK
9920.00	*					74.00		H	PEAK
12400.00	*					74.00		H	PEAK
14880.00	*					74.00		H	PEAK
17360.00	*					74.00		H	PEAK
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.	Level
4960.00	32.58	31.69	9.08	40.03	33.32	54.00	-20.68	V	AVG.
7440.00	*					54.00		V	AVG.
9920.00	*					54.00		V	AVG.
12400.00	*					54.00		V	AVG.
14880.00	*					54.00		V	AVG.
17360.00	*					54.00		V	AVG.
4960.00	33.11	36.6	10.8	41.05	39.46	54.00	-14.54	H	AVG.
7440.00	*					54.00		H	AVG.
9920.00	*					54.00		H	AVG.
12400.00	*					54.00		H	AVG.
14880.00	*					54.00		H	AVG.
17360.00	*					54.00		H	AVG.

Remark:

1. Final Level = Read Level + Antenna Factor + Cable Loss – Pre-amplifier Factor
2. “*”, means this data is too weak instrument of signal is unable to test.
3. The emission levels of other frequencies are very lower than the limit and not show in test report.