

FCC Test Report

Report No.: AGC02294201006FE10

FCC ID : 2AJGM-P10UV

PRODUCT DESIGNATION: Two-way radio

BRAND NAME : POFUNG, BAOFENG

MODEL NAME : P10UV, BF-UV10, UV10R, 10RX, GT-10R, TR-100, UV-10S, AR10S

APPLICANT: PO FUNG ELECTRONIC(HK) INTERNATIOANL GROUP COMPANY

DATE OF ISSUE : Nov. 20, 2020

STANDARD(S) : FCC Part 90 Rules


REPORT VERSION: V 1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd

AGC



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the specificated Pest no/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test resupresented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report report and in the report apply only to the test report should be addressed to AGC by agc@agc~cert.com.





Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	1	Nov. 20, 2020	Valid	Initial Release

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Restrict/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC, the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc=cert.com.



TABLE OF CONTENTS

1. VERIFICATION OF COMPLIANCE	5
2. GENERAL INFORMATION	6
2.1PRODUCT DESCRIPTION	6
2.2RELATED SUBMITTAL(S) / GRANT (S)	
2.3 TEST METHODOLOGY	<u>°</u>
2.4 ADDRESS OF THE TEST LABORATORY	9
2.5 TEST FACILITY	9
2.6 SPECIAL ACCESSORIES	
2.7 EQUIPMENT MODIFICATIONS	
3. SYSTEM TEST CONFIGURATION	11
3.1EUT CONFIGURATION	11
3.2 EUT EXERCISE	11
3.3 MEASUREMENT UNCERTAINTY	11
3.4 CONFIGURATION OF TESTED SYSTEM	
4. SUMMARY OF TEST RESULTS	13
5. DESCRIPTION OF TEST MODES	15
6. FREQUENCY TOLERANCE	16
6.1 PROVISIONS APPLICABLE	
6.2 MEASUREMENT PROCEDURE	
6.3 TEST SETUP BLOCK DIAGRAM	
6.4 TEST RESULTS	
7. EMISSION BANDWIDTH	21
7.1 PROVISIONS APPLICABLE	21
7.2 MEASUREMENT PROCEDURE	21
7.3 TEST SETUP BLOCK DIAGRAM	
7.4 MEASUREMENT RESULT	
8UNWANTED RADIATION	30
8.1 PROVISIONS APPLICABLE	30
8.2 MEASUREMENT PROCEDURE	30
8.3 TEST SETUP BLOCK DIAGRAM	31
8.4 MEASUREMENT RESULTS:	
8.5 EMISSION MASK PLOT	49
9.MODULATION CHARACTERISTICS	55
9.1 PROVISIONS APPLICABLE	55

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Restriction Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter purportization of AGC, the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



9.2 MEASUREMENT METHOD	55
9.3 MEASUREMENT RESULT	56
10.MAXIMUMN TRANSMITTER POWER (CONDUCTED OUTPUT POWER) PE	AK POWER 62
10.1 PROVISIONS APPLICABLE	62
10.2 TEST PROCEDURE	62
10.3 TEST CONFIGURATION	62
10.4 TEST RESULT	
11.SPURIOUS EMISSION ON ANTENNA PORT	66
11.1 PROVISIONS APPLICABLE	66
11.2 TEST PROCEDURE	
11.3 TEST CONFIGURATION	66
11.4 TEST RESULT	67
12.TRANSMITTER FREQUENCY BEHAVIOR	77
12.1PROVISIONS APPLICABLE	77
12.2 TEST CONFIGURATION	77
12.3 TEST METHOD	78
12.4 DESCRIBE LIMIT LINE OF RANSMITTER FREQUENCY BEHAVIOR	79
12.5 MEASURE RESULT	
13.AUDIO LOW PASS FILTER RESPONSE	82
13.1.TEST LIMITS	82
13.2. METHOD OF MEASUREMENTS	82
13.3.TEST CONFIGURATION	
13.4.TEST RESULT	
APPENDIX I: PHOTOGRAPHS OF SETUP	
APPENDIX II:PHOTOGRAPHS OF EUT	86

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated resting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter pulnorization of AGC, the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



1. VERIFICATION OF COMPLIANCE

Applicant:	PO FUNG ELECTRONIC(HK) INTERNATIOANL GROUP COMPANY
Address	3/F FULOK BLDG 131-133 WING LOK ST SHEUNG WAN, Hong Kong
Manufacturer:	PO FUNG ELECTRONIC(HK) INTERNATIOANL GROUP COMPANY
Address	3/F FULOK BLDG 131-133 WING LOK ST SHEUNG WAN, Hong Kong
Factory	PO FUNG ELECTRONIC(HK) INTERNATIOANL GROUP COMPANY
Address	3/F FULOK BLDG 131-133 WING LOK ST SHEUNG WAN, Hong Kong
Product Designation:	Two-way radio
Brand Name:	POFUNG, BAOFENG
Test Model	P10UV
Series Model	BF-UV10, UV10R, 10RX, GT-10R, TR-100, UV-10S, AR10S
Difference Description	All the same except the model name.
Measurement Procedure	TIA/EIA 603-E-2016
Deviation	No any deviation from the test method.
Date of Test:	Oct. 29, 2020~Nov. 20, 2020
Condition of Test Sample	Normal
Test Result	Pass

WE HEREBY CERTIFY THAT:

The above equipment was tested by Shenzhen Attestation of Global Compliance Science & Technology Co., Ltd.The data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI/TIA-603-E (2016). The sample tested as described in this report is in compliance with the FCC Rules Part 90 requirements. The test results of this report relate only to the tested sample identified in this report.

Prepared By	Jonjan H	ucong
	Donjon Huang (Project Engineer)	Nov. 20, 2020
Reviewed By	Calin	Lin 30
	Calvin Liu (Reviewer)	Nov. 20, 2020
Approved By	Forvest	en
·	Forrest Lei Authorized Officer	Nov. 20, 2020

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Bedicated Restrog/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGE. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.



2. GENERAL INFORMATION

2.1PRODUCT DESCRIPTION

The EUT is a **Two-way radio** designed for voice communication. It is designed by way of utilizing the FM modulation achieves the system operating.

A major technical description of EUT is described as following:

Communication Type	Voice/ Tone only			
Hardware Version	BF_UV10_V05			
Software Version	V1.00.32			
Modulation	FM	100 20		
Emission Type	11K0F3E			
Emission Bandwidth	10.18KHz(2W-12.5KHz) –VHF 10.19KHz(2W-12.5KHz)-UHF	NOO GO		
Peak Frequency Deviation	1.68KHz(2W-12.5KHz) –VHF 1.71KHz(2W-12.5KHz)-UHF			
Audio Frequency Response	7.33dB(2W-12.5KHz) –VHF 7.63dB(2W-12.5KHz)-UHF			
Maximum Transmitter Power	32.96dBm(2W-12.5 KHz)-VHF 32.69dBm(2W-12.5KHz)-UHF			
Output power Modification	2W (It was fixed by the manufacturer, any individual can't arbitrarily change it.)			
Data Rate	12.5KHz(Channel Spacing)			
Antenna Designation	Detachable			
Antenna Gain	1.50dBi	20 °		
Power Supply	DC 7.4V,1500mAh by battery, char	ging for DC8.4V		
Limiting Voltage	DC 6.29V-8.51V	· P		
	Frequency Range:150MHz-174(VH Channel Separation: 12.5KHz(Anal			
Operation Frequency Range and Channel Bottom Channel: 150.025MHz Middle Channel: 155.025MHz Middle Channel: 161.610MHz High Channel: 173.975MHz		Bottom Channel: 406.125MHz Middle Channel: 435.025MHz Middle Channel: 454.025MHz Middle Channel: 453.2125MHz Middle Channel: 458.2125MHz High Channel: 479.975MHz		
Frequency Tolerance	1.099ppm			

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Festing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC within 15day after the issued by AGC should be submitted to AGC within 15day after the issued of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Frequency Range (MHz)	Rated Transmit Power(W)(Conducted)	Transmit Mode/Emission Designator		
150-174	2W	11K0F3E(Analog Vioce;NB)		
400-480	2W	11K0F3E(Analog Vioce;NB)		

Channel No. (6.25KHz)	Channel No. (12.5KHz)	12.5KHz Channel Spaced 400MHz Band Plan(MHz) 150.025		
2	1-2			
3		455.005		
4	3-4	155.025		
5	5-6	173.975		
6	3-0	173.973		

Channel No. (6.25KHz)	Channel No. (12.5KHz)	12.5KHz Channel Spaced 400MHz Band Plan(MHz)	
1	1-2	400.025	
2	§ 1-2	400.023	
3	3	455.005	
4	3-4	455.025	
5	F 6	470.075	
6	5-6	479.975	

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Fermi glinspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter pathorization of AGC whe test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuence of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



FCC Rules and Regulations Part 2.202: Necessary Bandwidth and Emission Bandwidth

For FM Mode (ChannelSpacing:12.5kHz)

Emission Designator 11K0F3E

In this case, the maximum modulating frequency is 3.0 kHz with a 2.5 kHz deviation.

BW = 2(M+D) = 2*(3.0 kHz + 2.5 kHz) = 11 kHz = 11K0

portion of the designator represents an FM voice transmission

Therefore, the entire designator for 12.5 kHz channel spacing FM mode is 11K0F3E.

For FM Mode (Channel Spacing: 20kHz)

Emission Designator 16K0F3E

In this case, the maximum modulating frequency is 3.0 kHz with a 5.0 kHz deviation.

BW = 2(M+D) = 2*(3.0 kHz + 5.0 kHz) = 16 kHz = 16K0

F3E portion of the designator represents an FM voice transmission

Therefore, the entire designator for 20 kHz channel spacing FM mode is 16K0F3E.

For FM Mode (Channel Spacing: 25kHz)

Emission Designator 16K0F3E

In this case, the maximum modulating frequency is 3.0 kHz with a 5.0 kHz deviation.

BW = 2(M+D) = 2*(3.0 kHz + 5.0 kHz) = 16 kHz = 16K0

F3E portion of the designator represents an FM voice transmission

Therefore, the entire designator for 25 kHz channel spacing FM mode is 16K0F3E.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Bedicated Residual Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGE, the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.



2.2RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for FCC ID: **2AJGM-P10UV**, filing to comply with Part 2, Part 90 of the Federal Communication Commission rules.

2.3 TEST METHODOLOGY

The tests were performed according to following standards:

FCC Part 90 Private Land Mobile Radio Services

FCC Part 2 Frequency allocations and radio treaty matters, general rules and regulations.

TIA/EIA 603 E: March 2016 Land Mobile FM or PM Communications Equipment Measurement and

Performance Standards.

KDB579009 D03 v01: Applications Part 90 Refarming Bands.

KDB971168 D01 v03r01: Measurement Guidance For Certification Of Licensed Digital Transmitters

2.4 ADDRESS OF THE TEST LABORATORY

Laboratory: Attestation of Global Compliance (Shenzhen) Co., Ltd

Address: 1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

2.5 TEST FACILITY

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L5488

Attestation of Global Compliance (Shenzhen) Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2017 General Requirements) for the Competence of Testing and Calibration Laboratories


A2LA-Lab Cert. No.: 5054.02

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

FCC-Registration No.: 975832

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files with Registration 975832.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Festing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.





IC-Registration No.: 24842

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the Certification and Engineering Bureau of Industry Canada. The acceptance letter from the IC is maintained in our files with Registration 24842.

2.6 SPECIAL ACCESSORIES

Not available for this EUT intended for grant.

2.7 EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Festing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC he test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuence of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc=cert.com.



3. SYSTEM TEST CONFIGURATION

3.1EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

3.2 EUT EXERCISE

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

3.3 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement y ±U, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.

- Uncertainty of Conducted Emission, Uc = ±3.2 dB
- Uncertainty of Radiated Emission below 1GHz, Uc = ±3.9 dB
- Uncertainty of Radiated Emission above 1GHz, Uc = ±4.8 dB
- Uncertainty of total RF power, conducted, $Uc = \pm 0.8dB$
- Uncertainty of spurious emissions, conducted, Uc = ±2.7dB
- Uncertainty of Occupied Channel Bandwidth: Uc = ±2 %
- Uncertainty of Frequency: Uc = ±2 %
- Uncertainty of FM deviation: Uc=±2 %
- Uncertainty of Audio Level: Uc=±0.98dB
- Uncertainty of Modulation Limiting: Uc=0.42 %
- Uncertainty of Transient Frequency Behavior: Uc=6.8%

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Bedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGE, he test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.



3.4 CONFIGURATION OF TESTED SYSTEM

Fig. 2-1 Configuration of Tested System

EUT

Table 2-1 Equipment Used in Tested System

Item	Equipment	Model No.	o. Identifier	
1	Two-way radio	P10UV	FCC ID: 2AJGM-P10UV	EUT
	Adapter	480-10050-E.S	Input: AC 100-240V 50/60Hz, 0.25A Output: DC 10V 0.5A	Accessory
	Charger	N/A	Input: DC 10V 0.5A Output: DC 8.4V 0.5A	Accessory
2	Battery	BL-11UV	DC 7.4V 1500mAh	Accessory
	Back Clip	NA	NA	Accessory

Note: The battery is full-charged during the test

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



4. SUMMARY OF TEST RESULTS

Item	FCC Rules	Description Of Test	Result Pass	
1 @	FCC PART 90	Antenna Equipment		
2	§90.205& 2.1046	Maximum Transmitter Power	Pass	
3	§90.207& 2.1047	Modulation Characteristic	Pass	
4	§2.1047	Audio Low Pass Filter Response	Pass	
5	§90.209& 2.1049	Occupied Bandwidth	Pass	
6	§90.210& 2.1049	Emission Mask	Pass	
7	§90.213& 2.1055	Frequency Tolerance	Pass	
8	§90.214	Transmitter Frequency Behavior	Pass	
9	§90.210& 2.1051	Spurious Emission on Antenna Port	Pass	
10	§90.210& 2.1053	Spurious Ratiated Emission	Pass	

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Festing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



LIST OF EQUIPMENTS USED

	®			(8)	
Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESCI	10096	May 15, 2020	May 14, 202
EXA Signal Analyzer	Aglient	N9020A	W1312-60196	Aug. 21, 2020	Aug. 20, 202
EXA Signal Analyzer	Aglient	N9020A	MY52090123	Sep. 03, 2020	Sep. 02, 202
Horn antenna	SCHWARZBECK	BBHA 9170	#768	Sep.16, 2019	Sep.15, 2021
preamplifier	ChengYi	EMC184045SE	980508	Oct. 27, 2020	Oct. 26, 2021
Double-Ridged Waveguide Horn	ETS LINDGREN	3117	00034609	May. 17, 2019	May. 16, 202
Broadband Preamplifier	SCHWARZBECK	BBV 9718	9718-205	Jun. 09, 2020	Jun. 08, 202
HORN ANTENNA	EM	EM-AH-10180	/	Feb. 28, 2020	Feb. 27, 202
SIGNAL GENERATOR	AGILENT	E4421B	MY43351603	Jun. 09, 2020	Jun. 08, 202
SIGNAL GENERATOR	R&S	SMT03	A0304261	Jun. 09, 2020	Jun. 08, 202
ANTENNA	SCHWARZBECK	VULB9168	VULB9168-494	Jan. 09, 2019	Jan. 08, 202
ANTENNA	SCHWARZBECK	VULB9168	D69250	Sep. 20, 2019	Sep. 19, 202
Modulation Domain Analyzer	HP	53310A	3121A02467	Jul. 03, 2020	Jul. 02, 2022
RF Communication Test Set	HP	8920B	30 - 60	Sep. 03, 2020	Sep. 02, 202
Attenuator	Weinachel Corp	58-30-33	ML030	Oct. 26, 2020	Oct. 25, 2021
RF Cable	R&S	1#	, ®	Each time	N/A
RF Cable	R&S	2#	-60	Each time	N/A
Fliter-UHF	Microwave	N25155M2	498705	May. 11, 2020	May. 10, 202
Fliter-VHF	Microwave	N26460M1	498703	May. 11, 2020	May. 10, 202
	<u> </u>				-

NOTE: 8920B can generate audio modulation frequency.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Psychological Psycholo



5. DESCRIPTION OF TEST MODES

RF TEST MODES

The EUT (**Two-way radio**) has been tested under normal operating condition. (The top channel, the middle channel and the bottom channel) are chosen for testing at each channel separation.

NO.	TEST MODE DESCRIPTION	CHANNEL SEPARATION
1	TX Bottom channel	12.5 kHz
2	TX Middle channel	12.5 kHz
3	TX Middle channel	12.5 kHz
4	TX Top channel	12.5 kHz

Note:

- 1. Only the result of the worst case was recorded in the report, if no other cases.
- 2. For Radiated Emission, 3axis were chosen for testing for each applicable mode.
- 3. For Conducted Test method, a temporary antenna connector is provided by the manufacture.
- 4. Manufacturers use computer PC programming software to switch and operate frequency points, refer to the instructions for details

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written exporization of AGC, he test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc=cert.com.



6. FREQUENCY TOLERANCE

6.1 PROVISIONS APPLICABLE

- a). According to FCC §2.1055 and §90.213, the frequency stability shall be measured with variation of ambient temperature from -30° C to $+50^{\circ}$ C centigrade.
- b). According to FCC Part 2 Section 2.1055(d)(2), for battery powered equipment, the frequency stability shall be measured with reducing primary supply voltage to the battery operating end point, which is specified by the manufacturer.
- c). According to FCC Part 90 Section 90.213, the frequency tolerance must be maintained within 0.00025% for 12.5 KHz channel separation and 0.0001% for 6.25 KHz channel separation.

6.2 MEASUREMENT PROCEDURE

6.2.1 Frequency stability versus environmental temperature

- 1. Setup the configuration per figure 1 for frequencies measurement inside an environment chamber, Install new battery in the EUT.
- Turn on EUT and set SA center frequency to the EUT radiated frequency. Set SA Resolution Bandwidth
 to 1KHz and Video Resolution Bandwidth to 1KHz and Frequency Span to 50KHz.Record this
 frequency as reference frequency.
- 3. Set the temperature of chamber to 50 °C. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize. While maintaining a constant temperature inside the chamber, turn the EUT on and measure the EUT operating frequency.
- 4. Repeat step 2 with a 10℃ decreased per stage until the lowest temperature -30℃ is measured, record all measured frequencies on each temperature step.


6.2.2 Frequency stability versus input voltage

- Setup the configuration per figure 1 for frequencies measured at temperature if it is within 15℃ to 25℃.
 Otherwise, an environment chamber set for a temperature of 20℃ shall be used. The EUT shall be powered by DC 7.4V.
- 2. Set SA center frequency to the EUT radiated frequency. Set SA Resolution Bandwidth to 1 KHz and Video Resolution Bandwidth to 1KHz. Record this frequency as reference frequency.
- 3. Supply the EUT primary voltage at the operating end point which is specified by manufacturer and record the frequency.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written exporization of AGC, he test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc=cert.com.



6.3 TEST SETUP BLOCK DIAGRAM

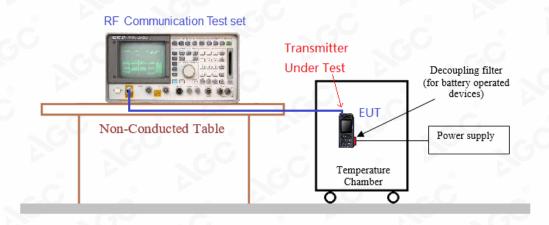

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Festing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written appropriation of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



6.4 TEST RESULTS

VHF:

(1) Frequency stability versus input voltage (Supply nominal voltage is 7.40V)-2W-12.5KHz

Environment	Power Supply	©	Reference	Frequency		Limit:
Temperature(°C)	(V)	150.025MHz	155.025MHz	161.610MHz	173.975MHz	ppm
50	DC 7.40	0.704	0.653	0.676	0.824	
40	DC 7.40	0.827	0.821	1.096	0.498	
30	DC 7.40	0.876	1.008	0.964	0.586	0
20	DC 7.40	0.547	0.902	0.918	0.322	
10	DC 7.40	0.898	1.083	0.838	0.886	5
0	DC 7.40	0.746	1.096	0.686	0.368	6
-10	DC 7.40	0.604	0.758	0.879	0.820	
-20	DC 7.40	0.982	0.811	0.771	0.757	
-30	DC 7.40	0.589	1.073	0.860	0.409	
Result	0		Pass	20	8	

(2) Frequency stability versus input voltage (Battery endpoint is 6.29V) -2W-12.5KHz

Environment	Power Supply		Reference	Frequency		Limit:
Temperature(°C)	(V)	150.025MHz	155.025MHz	161.610MHz	173.975MHz	ppm
50	DC 6.29	0.565	0.821	0.649	0.351	@
40	DC 6.29	0.762	0.639	0.610	0.632	-C
30	DC 6.29	0.933	0.541	0.817	0.376	
20	DC 6.29	0.738	1.036	0.600	0.804	
10	DC 6.29	0.521	0.836	0.597	0.916	<u> </u>
0	DC 6.29	1.015	1.099	1.003	0.389	G
-10	DC 6.29	0.797	0.902	0.906	0.718	
-20	DC 6.29	1.087	0.729	0.803	0.607	
-30	DC 6.29	0.838	0.917	0.640	0.505	
Result		- C	Pass	- 30		

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Restriction Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter exphorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

/Inspection The test results



UHF:

(1) Frequency stability versus input voltage (Supply nominal voltage is 7.40V)-2W-12.5KHz

Environment	Power Supply	Reference Frequency					
Temperature(°C)	(V)	406.125MHz	435.025MHz	454.025MHz	479.975MHz	ppm	
50	DC 7.40	0.900	0.913	0.869	0.764		
40	DC 7.40	0.793	0.674	0.854	0.524		
30	DC 7.40	0.695	0.874	0.599	0.655		
20	DC 7.40	1.023	0.567	0.591	0.367		
10	DC 7.40	0.743	1.029	0.752	0.846	2.5	
0	DC 7.40	0.685	0.710	0.572	0.588		
-10	DC 7.40	0.947	0.796	1.040	0.311	0	
-20	DC 7.40	1.090	0.984	0.752	0.733		
-30	DC 7.40	0.671	0.561	0.853	0.866		
Result	· ·		Pass				

(2) Frequency stability versus input voltage (Battery endpoint is 6.29V) -2W-12.5KHz

(2) Frequency star	bility versus iriput	voltage (battery	enapoint is 6.29	/) -2VV-12.3KHZ		
Environment	Power Supply	C	Reference	Frequency		Limit:
Temperature(°C)	(V)	406.125MHz	435.025MHz	454.025MHz	479.975MHz	ppm
50	DC 6.29	0.653	0.917	0.825	0.674	
40	DC 6.29	0.627	0.518	0.519	0.657	(6)
30	DC 6.29	1.062	0.598	0.748	0.370	0
20	DC 6.29	0.779	0.901	0.656	0.892	
10	DC 6.29	0.515	0.828	1.098	0.647	2.5
0	DC 6.29	0.709	0.837	0.839	0.744	®
-10	DC 6.29	0.847	0.585	0.571	0.852	0
-20	DC 6.29	0.502	0.622	0.519	0.495	
-30	DC 6.29	0.518	0.982	0.805	0.798	
Result	50	8	Pass		C ®	

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Festive Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written anthorization of AGC presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the report apply only to the test report should be addressed to AGC by agc@agc-cert.com.

/Inspection The test results

he test report.



(1) Frequency stability versus input voltage (Supply nominal voltage is 7.40V)-2W-12.5KHz

Environment	Power Supply	Reference	Frequency	Limit:
Temperature(°C)	(V)	453.2125MHz	458.2125MHz	ppm
50	DC 7.40	0.737	0.987	
40	DC 7.40	0.690	0.958	. 6
30	DC 7.40	0.888	1.093	
20	DC 7.40	0.675	0.689	
10	DC 7.40	0.743	0.674	2.5
0	DC 7.40	0.552	0.700	
-10	DC 7.40	0.636	0.733	
-20	DC 7.40	0.704	0.576	8
-30	DC 7.40	0.915	0.549	. G
Result		Pass		


(2) Frequency stability versus input voltage (Battery endpoint is 6.29V) -2W-12.5KHz

Environment	Power Supply	Reference	Frequency	Limit:
Temperature ($^{\circ}$ C)	(V)	453.2125MHz	458.2125MHz	ppm
50	DC 6.29	0.807	0.851	
40	DC 6.29	0.802	0.637	
30	DC 6.29	0.647	0.608	(6)
20	DC 6.29	0.511	0.682	60
10	DC 6.29	0.532	0.952	2.5
0	DC 6.29	0.757	0.609	
-10	DC 6.29	0.823	0.663	©
-20	DC 6.29	0.876	1.042	
-30	DC 6.29	0.700	0.529	
Result	0	Pass	(S)	

Note: 1.Battery terminal voltage is declared and specified by the manufacturer.

2. All test values are in "ppm"

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Bedicated Pestamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.





7. EMISSION BANDWIDTH

7.1 PROVISIONS APPLICABLE

For FCC Part 90 requirements:

The authorized bandwidth shall be 11.25 KHz for 12.5 KHz channel separation and 6 KHz for 6.25 KHz channel separation.


7.2 MEASUREMENT PROCEDURE


- 1). The EUT was placed on a turn table which is 0.8m above ground plane.
- 2). The EUT was modulated by 2.5 KHz Sine wave audio signal, The level of the audio signal employed is 16 dB greater than that necessary to produce 50% of rated system deviation. Rated system deviation is 2.5 kHz (12.5 kHz channel spacing).
 - 3). Set SPA Center Frequency = fundamental frequency, RBW=100Hz.VBW= 300 Hz, Span =50 KHz.
 - 4). Set SPA Max hold. Mark peak, -26 dB.

7.3 TEST SETUP BLOCK DIAGRAM

Radiation method:

Radiated Below1GHz

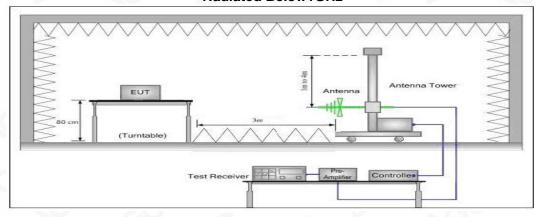


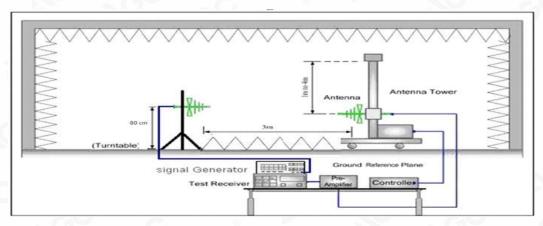


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the condicated restrouting portion of Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.



Radiated Above 1 GHz

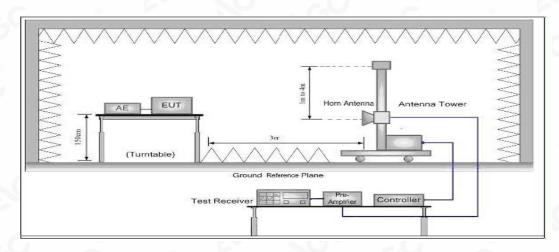

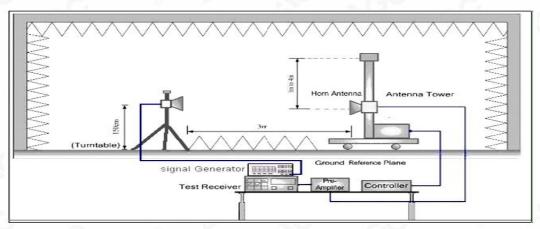

Conduction method:



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Residual Residual




7.4 MEASUREMENT RESULT

VHF:

Emission Bandwidth Measurement Result								
Operating Fraguency		12.5 KHz Channel S	eparation					
Operating Frequency	Occupied Bandwidth	Emission Bandwidth	Limits	Result				
150.025MHz	9.990 KHz	10.18 KHz	11.25 KHz	Pass				
155.025MHz	9.990 KHz	10.18 KHz	11.25 KHz	Pass				
161.610MHz	9.989 KHz	10.18 KHz	11.25 KHz	Pass				
173.975MHz	9.990 KHz	10.18 KHz	11.25 KHz	Pass				


Occupied bandwidth of Bottom Channel (150.025MHz)-2W

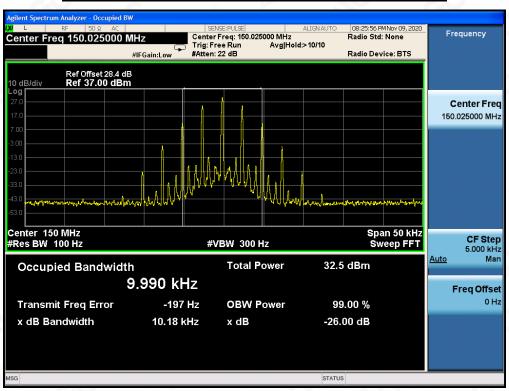


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the content of the report is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Occupied bandwidth of Bottom Channel (155.025MHz)-2W

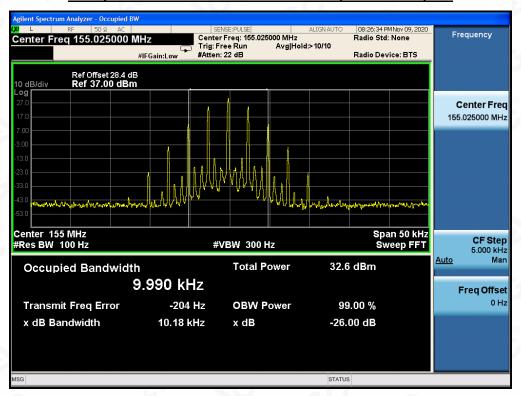


Occupied bandwidth of Bottom Channel (161.610MHz)-2W

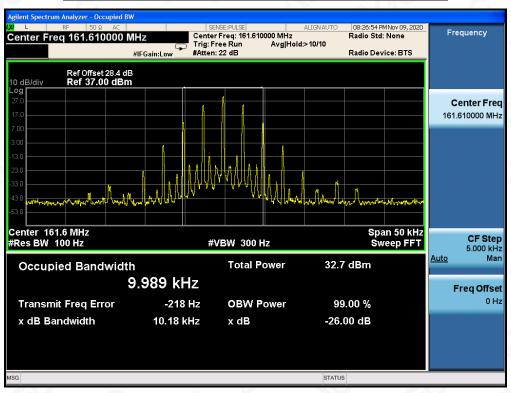

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Festivo/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written portorization of AGC the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Occupied bandwidth of Bottom Channel (173.975MHz)-2W

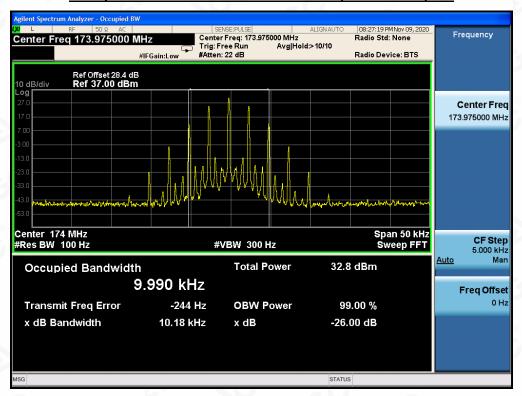


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Dedicated Pesthod/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC where the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.



UHF:

	Emission Bandwi	dth Measurement Resi	ult	
Operating Frequency		12.5 KHz Channel S	eparation	
Operating Frequency	Occupied Bandwidth	Emission Bandwidth	Limits	Result
406.125MHz	9.991 KHz	10.17 KHz	11.25 KHz	Pass
435.025MHz	9.990 KHz	10.18 KHz	11.25 KHz	Pass
453.2125MHz	9.990 KHz	10.17 KHz	11.25 KHz	Pass
454.025MHz	9.988 KHz	10.19 KHz	11.25 KHz	Pass
458.2125MHz	9.990 KHz	10.17 KHz	11.25 KHz	Pass
479.975MHz	9.989 KHz	10.19 KHz	11.25 KHz	Pass


Occupied bandwidth of Bottom Channel (406.125MHz)-2W

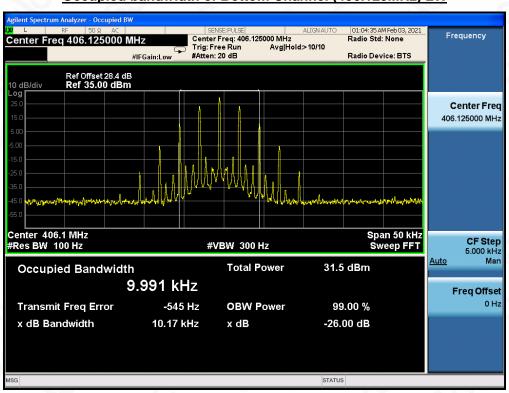


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written perhorization of AGE. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.





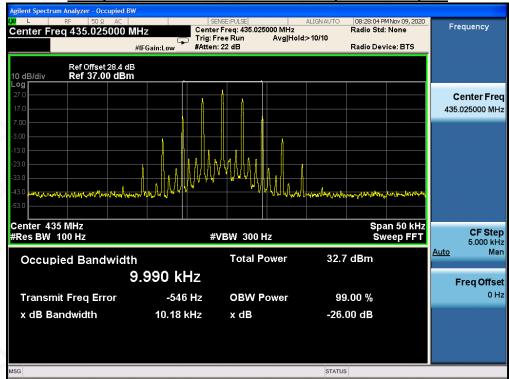


Occupied bandwidth of Middle Channel (453.2125MHz)-2W

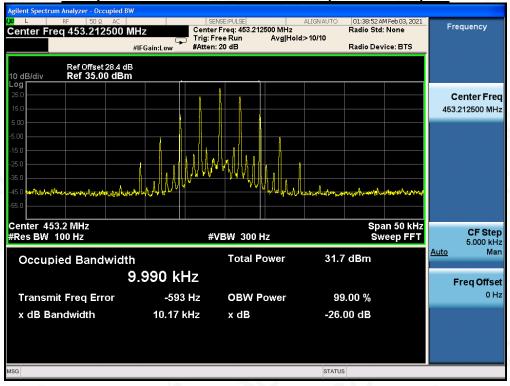


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Festivo/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written portorization of AGC the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Occupied bandwidth of Middle Channel (454.025MHz)-2W

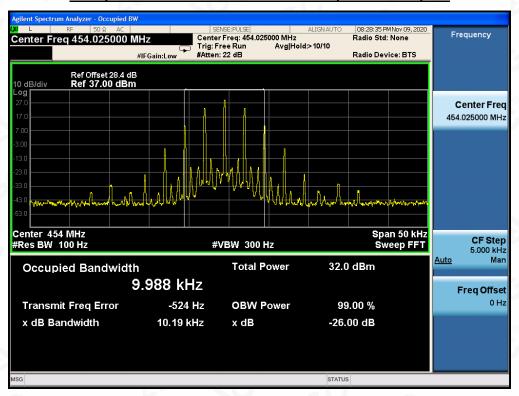


Occupied bandwidth of Middle Channel (458.2125MHz)-2W

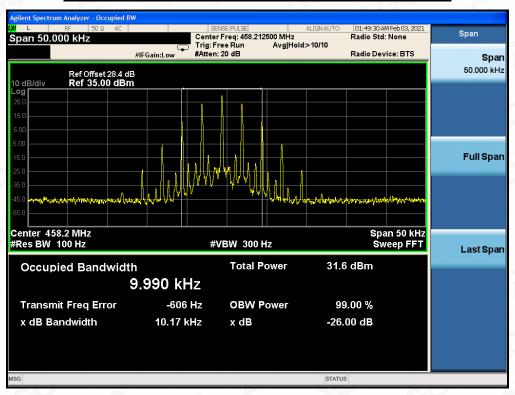

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Festivo/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written portorization of AGC the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Occupied bandwidth of Top Channel (479.975MHz)-2W

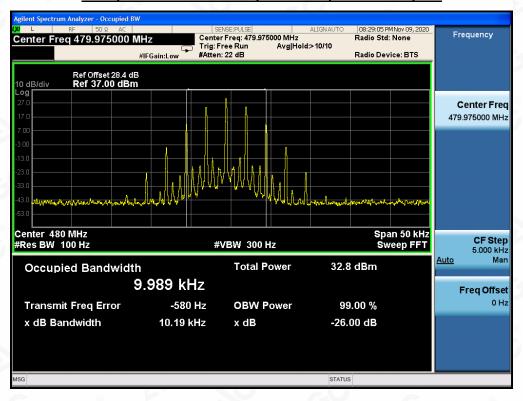

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Dedicated Pesthod/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC where the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.



8. UNWANTED RADIATION

8.1 PROVISIONS APPLICABLE

According to FCC §2.1049 and §90.210, the power of each unwanted emission shall be less than Transmitted Power as specified below for transmitters designed to operate with each channel separation.


Emission Mask D -for 12.5 KHz Channel Separation:

- (1).On any frequency removed from the center of the authorized bandwidth fo to 5.625 KHz removed from fo: Zero dB.
- (2).On any frequency removed from the center of the authorized bandwidth by a displacement Frequency (fd in KHz) fo of more than 5.625 KHz but no more than 12.5 KHz: At least 7.27(fd-2.88 KHz) dB
- (3).On any frequency removed from the center of the authorized bandwidth by a displacement Frequency (fd in KHz)fo of more than 12.5 KHz: At least 50+10 log(P) dB or 70 dB, whichever is lesser attenuation.

8.2 MEASUREMENT PROCEDURE

- (1)On a test site, the EUT shall be placed on a turntable, and in the position closest to the normal use as declared by the user.
- (2)The test antenna shall be oriented initially for vertical polarization located 3m from the EUT to correspond to the transmitter.
- (3)The output of the antenna shall be connected to the measuring receiver and either a peak or quasi-peak detector was used for the measurement as indicated on the report. The detector selection is based on how close the emission level was approaching the limit.
- (4) The transmitter shall be switched on; if possible, without the modulation and the measurement receiver shall be tuned to the frequency of the transmitter under test.
- (5)The test antenna shall be raised and lowered through the specified range of height until the measuring receiver detects a maximum signal level.
- (6)The transmitter shall than be rotated through 360° in the horizontal plane, until the maximum signal level is detected by the measuring receiver.
- (7)The test antenna shall be raised and lowered again through the specified range of height until the measuring receiver detects a maximum signal level.
- (8) The maximum signal level detected by the measuring receiver shall be noted.
- (9) The measurement shall be repeated with the test antenna set to horizontal polarization.
- (10) Replace the antenna with a proper Antenna (substitution antenna).
- (11) The substitution antenna shall be oriented for vertical polarization and, if necessary, the length of the substitution antenna shall be adjusted to correspond to the frequency of transmitting.
- (12) The substitution antenna shall be connected to a calibrated signal generator.
- (13)If necessary, the input attenuator setting of the measuring receiver shall be adjusted in order to increase the sensitivity of the measuring receiver.
- (14)The test antenna shall be raised and lowered through the specified range of the height to ensure that the maximum signal is received.
- (15)The input signal to substitution antenna shall be adjusted to the level that produces a level detected by the measuring receiver, that is equal to the level noted while the transmitter radiated power was measured, corrected for the change of input attenuation setting of the measuring receiver.
- (16)The input level to the substitution antenna shall be recorded as power level in dBm, corrected for any change of input attenuator setting of the measuring receiver.
- (17) The measurement shall be repeated with the test antenna and the substitution antenna oriented for horizontal polarization.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC he test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.







8.3 TEST SETUP BLOCK DIAGRAM


SUBSTITUTION METHOD: (Radiated Emissions) Radiation method:

Radiated Below1GHz

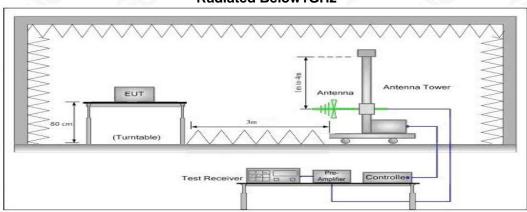

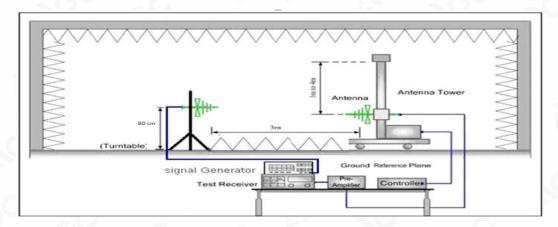


Radiated Above 1 GHz

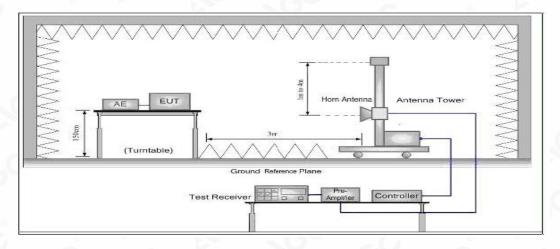

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the condition of stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written permitted without the written permitted without the written permitted in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



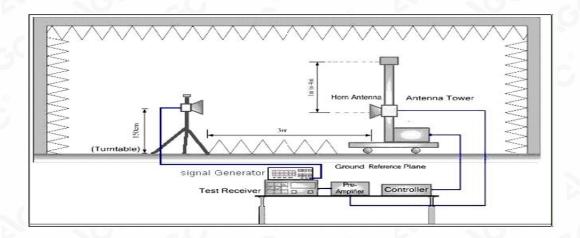

8.4 MEASUREMENT RESULTS:

Applicable Standard

FCC §2.1053 and §90.210

On any frequency removed from the center of the authorized bandwidth by a displacement

Frequency (fd in KHz)for of more than 12.5 KHz: at least 50+10 log(P) dB or 70 dB, whichever is lesser attenuation.

Test Procedure

The RF output of the EUT was connected to a spectrum analyzer through appropriate attenuation. The resolution bandwidth of the spectrum analyzer was set at 100 kHz for below 1GHz, and 1MHz for above 1GHz. Sufficient scans were taken to show any out of band emissions up to 10 harmonic.

In the semi-anechoic chamber, setup as illustrated above the DUT placed on the 0.8m height of Turn Table, rotated the table 45 degree each interval to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power for each degree interval. The "Read Value" is the spectrum reading of maximum power value.

The substitution antenna is substituted for DUT at the same position and signals generator (S.G) export the CW signal to the substitution antenna via a TX cable. The receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum radiation power. Record the power level of maximum radiation power from spectrum. So, the Measured substitution value = Ref level of S.G + TX cables loss – Substituted Antenna Gain.

EIRP = "Read Value" + Measured substitution value + 2.15.


Limit: At least 50+10 log (P) =50+10log (2) =50 (dB)—2W 33.01-53.01=-20dBm

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Bedicated Festing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written exporization of AGE, the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc=cert.com.



VHF:

Measurement Result for 12.5 KHz Channel Separation @ 150.025MHz-2W-Horizontal

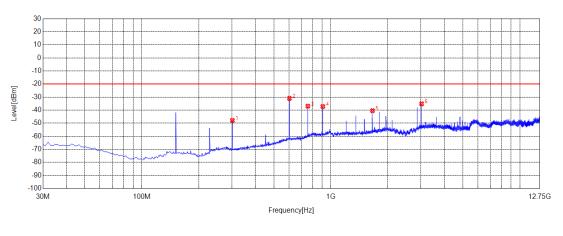

— Limit # Final Test — Horizontal


NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	300.9000	-79.90	-47.90	-20.00	27.90	32.00	197	Horizontal
2	601.2400	-70.89	-31.03	-20.00	11.03	39.86	281	Horizontal
3	750.5600	-78.93	-36.98	-20.00	16.98	41.95	121	Horizontal
4	902.8800	-80.30	-37.21	-20.00	17.21	43.09	131	Horizontal
5	1559.5912	-38.43	-40.43	-20.00	20.43	-2.00	243	Horizontal
6	3009.2021	-38.53	-35.20	-20.00	15.20	3.33	360	Horizontal

RESULT: PASS

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Measurement Result for 12.5 KHz Channel Separation @ 150.025MHz-2W-Vertical

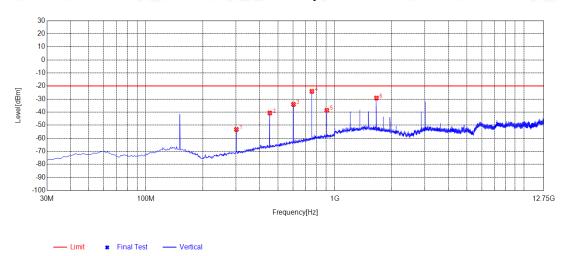


NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	300.7800	-84.28	-53.29	-20.00	33.29	30.99	332	Vertical
2	601.0500	-76.44	-40.71	-20.00	20.71	35.73	41	Vertical
3	750.1200	-72.87	-34.09	-20.00	14.09	38.78	341	Vertical
4	902.3500	-65.65	-24.12	-20.00	4.12	41.53	351	Vertical
5	1559.0512	-82.01	-38.63	-20.00	18.63	43.38	323	Vertical
6	3009.1021	-30.85	-29.26	-20.00	9.26	1.59	163	Vertical

RESULT: PASS

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.



Measurement Result for 12.5 KHz Channel Separation @ 155.025MHz-2W-Horizontal

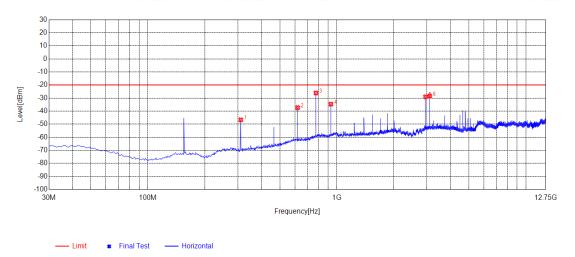


NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	310.3300	-78.88	-46.67	-20.00	26.67	32.21	263	Horizontal
2	620.7300	-77.27	-37.36	-20.00	17.36	39.91	291	Horizontal
3	774.9600	-68.69	-26.10	-20.00	6.10	42.59	102	Horizontal
4	930.1600	-78.26	-34.67	-20.00	14.67	43.59	187	Horizontal
5	2945.9946	-31.84	-29.06	-20.00	9.06	2.78	149	Horizontal
6	3101.1101	-31.92	-28.45	-20.00	8.45	3.47	338	Horizontal

RESULT: PASS

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the specificated resting/inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter pathorization of AGC, the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Measurement Result for 12.5 KHz Channel Separation @ 155.025MHz-2W-Vertical

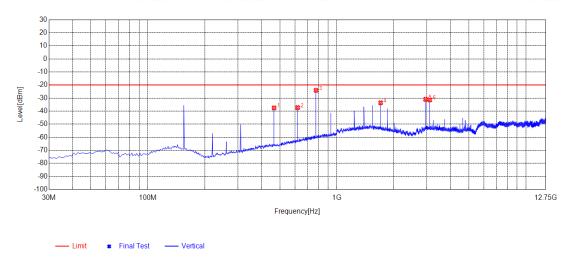


NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	465.5300	-73.45	-37.54	-20.00	17.54	35.91	164	Vertical
2	620.7300	-76.38	-37.31	-20.00	17.31	39.07	359	Vertical
3	775.9300	-66.02	-24.11	-20.00	4.11	41.91	351	Vertical
4	1705.0705	-35.08	-33.64	-20.00	13.64	1.44	175	Vertical
5	2945.9946	-33.71	-30.96	-20.00	10.96	2.75	334	Vertical
6	3101.1101	-34.61	-31.43	-20.00	11.43	3.18	324	Vertical

RESULT: PASS

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.



Measurement Result for 12.5 KHz Channel Separation @ 161.610MHz-2W-Horizontal

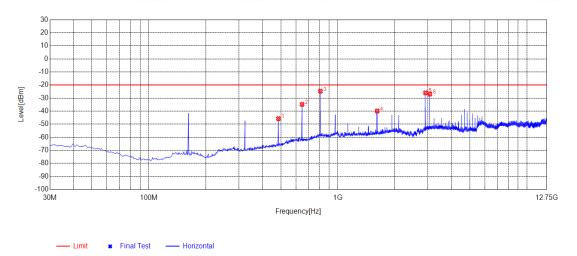


NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	484.9300	-81.83	-45.79	-20.00	25.79	36.04	234	Horizontal
2	646.9200	-74.84	-34.86	-20.00	14.86	39.98	291	Horizontal
3	808.9100	-68.10	-24.72	-20.00	4.72	43.38	272	Horizontal
4	1615.7616	-37.55	-39.89	-20.00	19.89	-2.34	360	Horizontal
5	2909.5660	-28.42	-25.99	-20.00	5.99	2.43	141	Horizontal
6	3070.5571	-30.41	-26.99	-20.00	6.99	3.42	338	Horizontal

RESULT: PASS



Measurement Result for 12.5 KHz Channel Separation @ 161.610MHz-2W-Vertical

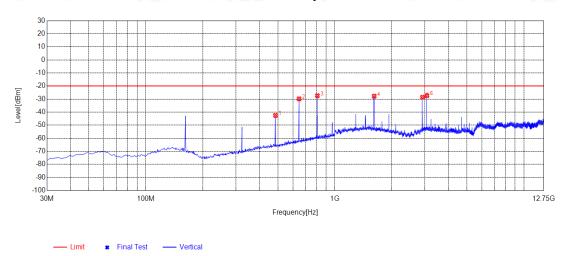


NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	484.9300	-78.72	-42.54	-20.00	22.54	36.18	174	Vertical
2	646.9200	-69.37	-29.83	-20.00	9.83	39.54	296	Vertical
3	808.9100	-69.90	-27.45	-20.00	7.45	42.45	13	Vertical
4	1615.7616	-29.53	-27.78	-20.00	7.78	1.75	174	Vertical
5	2909.5660	-31.06	-28.63	-20.00	8.63	2.43	315	Vertical
6	3070.5571	-30.56	-27.37	-20.00	7.37	3.19	334	Vertical

RESULT: PASS



Measurement Result for 12.5 KHz Channel Separation @ 173.975MHz-2W-Horizontal

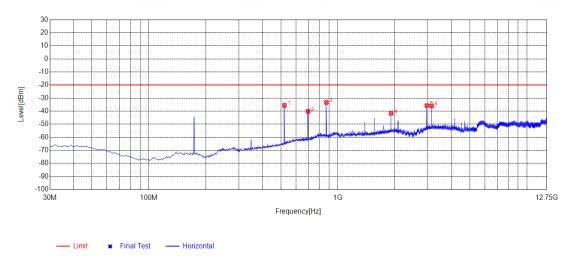


NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	521.7900	-72.67	-35.57	-20.00	15.57	37.10	244	Horizontal
2	696.3900	-80.29	-40.18	-20.00	20.18	40.11	281	Horizontal
3	870.0200	-76.44	-33.36	-20.00	13.36	43.08	300	Horizontal
4	1914.2414	-41.60	-41.71	-20.00	21.71	-0.11	300	Horizontal
5	2957.7458	-38.63	-35.74	-20.00	15.74	2.89	168	Horizontal
6	3131.6632	-39.55	-36.03	-20.00	16.03	3.52	338	Horizontal

RESULT: PASS



Measurement Result for 12.5 KHz Channel Separation @ 173.975MHz-2W-Vertical

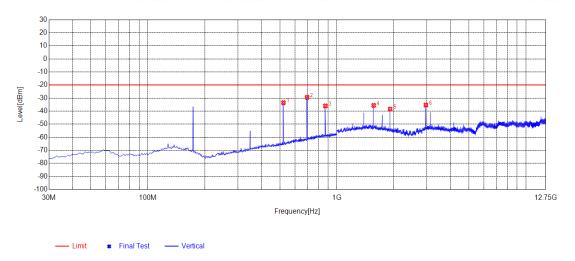


NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	521.7900	-70.47	-33.57	-20.00	13.57	36.90	351	Vertical
2	696.3900	-69.87	-29.46	-20.00	9.46	40.41	24	Vertical
3	870.0200	-79.09	-36.06	-20.00	16.06	43.03	297	Vertical
4	1566.4066	-37.56	-35.63	-20.00	15.63	1.93	164	Vertical
5	1914.2414	-39.19	-38.48	-20.00	18.48	0.71	164	Vertical
6	2957.7458	-38.21	-35.36	-20.00	15.36	2.85	325	Vertical

RESULT: PASS



UHF:

Measurement Result for 12.5 KHz Channel Separation @ 406.125MHz-2W-Horizontal

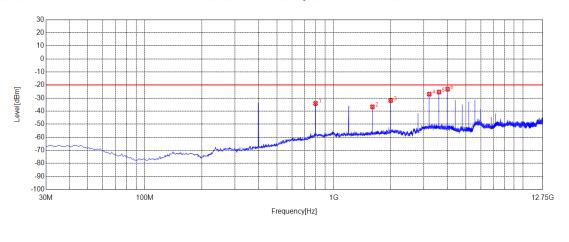


— Limit	Final Test	— Horizonta

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	800.1800	-77.54	-34.12	-20.00	14.12	43.42	274	Horizontal
2	1600.4850	-34.28	-36.74	-20.00	16.74	-2.46	123	Horizontal
3	2000.0250	-32.40	-31.87	-20.00	11.87	0.53	75	Horizontal
4	3199.8200	-30.65	-27.00	-20.00	7.00	3.65	170	Horizontal
5	3600.5351	-29.65	-25.36	-20.00	5.36	4.29	19	Horizontal
6	4000.0750	-27.96	-23.21	-20.00	3.21	4.75	292	Horizontal

RESULT: PASS



Measurement Result for 12.5 KHz Channel Separation @ 406.125MHz-2W-Vertical

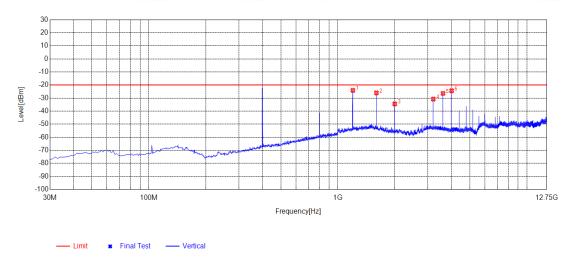


NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	1200.9451	-24.29	-24.12	-20.00	4.12	0.17	334	Vertical
2	1600.4850	-27.88	-26.07	-20.00	6.07	1.81	155	Vertical
3	2000.0250	-34.90	-34.49	-20.00	14.49	0.41	155	Vertical
4	3199.8200	-33.94	-30.79	-20.00	10.79	3.15	192	Vertical
5	3600.5351	-29.54	-26.43	-20.00	6.43	3.11	258	Vertical
6	4000.0750	-27.71	-24.42	-20.00	4.42	3.29	258	Vertical

RESULT: PASS



Measurement Result for 12.5 KHz Channel Separation @ 435.025MHz-2W-Horizontal

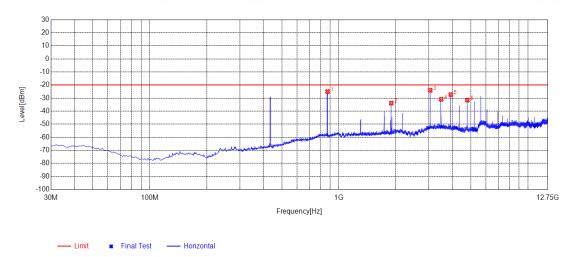


NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	870.9900	-68.09	-25.01	-20.00	5.01	43.08	300	Horizontal
2	1894.2644	-33.60	-33.86	-20.00	13.86	-0.26	235	Horizontal
3	3045.8796	-27.41	-24.04	-20.00	4.04	3.37	349	Horizontal
4	3480.6731	-35.12	-30.97	-20.00	10.97	4.15	310	Horizontal
5	3914.2914	-32.02	-27.37	-20.00	7.37	4.65	9	Horizontal
6	4785.0535	-35.26	-31.63	-20.00	11.63	3.63	244	Horizontal

RESULT: PASS



Measurement Result for 12.5 KHz Channel Separation @ 435.025MHz-2W-Vertical

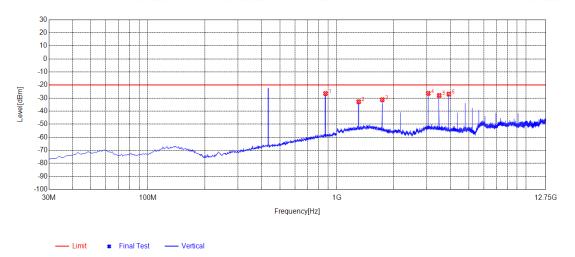


NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	870.9900	-69.55	-26.51	-20.00	6.51	43.04	44	Vertical
2	1305.5306	-33.67	-32.80	-20.00	12.80	0.87	306	Vertical
3	1740.3240	-32.59	-31.27	-20.00	11.27	1.32	175	Vertical
4	3045.8796	-29.62	-26.42	-20.00	6.42	3.20	166	Vertical
5	3480.6731	-31.09	-28.02	-20.00	8.02	3.07	222	Vertical
6	3915.4665	-30.23	-26.98	-20.00	6.98	3.25	351	Vertical

RESULT: PASS



Measurement Result for 12.5 KHz Channel Separation @ 454.025MHz-2W-Horizontal

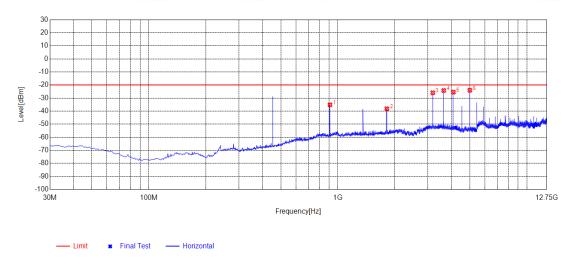


NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	908.8200	-78.30	-35.17	-20.00	15.17	43.13	234	Horizontal
2	1816.7067	-37.39	-38.23	-20.00	18.23	-0.84	328	Horizontal
3	3178.6679	-29.57	-25.96	-20.00	5.96	3.61	129	Horizontal
4	3632.2632	-28.55	-24.22	-20.00	4.22	4.33	17	Horizontal
5	4085.8586	-30.01	-25.48	-20.00	5.48	4.53	17	Horizontal
6	4994.2244	-27.78	-24.04	-20.00	4.04	3.74	166	Horizontal

RESULT: PASS



Measurement Result for 12.5 KHz Channel Separation @454.025MHz-2W-Vertical

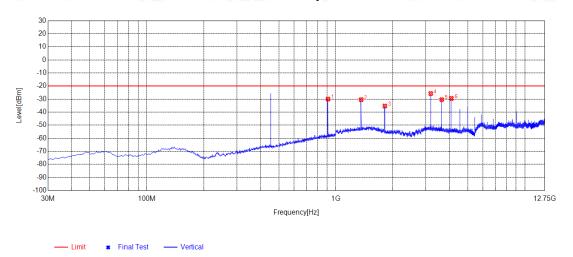


NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	908.8200	-73.47	-30.07	-20.00	10.07	43.40	334	Vertical
2	1361.9362	-31.70	-30.46	-20.00	10.46	1.24	315	Vertical
3	1816.7067	-36.41	-35.36	-20.00	15.36	1.05	194	Vertical
4	3178.6679	-28.96	-25.80	-20.00	5.80	3.16	315	Vertical
5	3633.4383	-33.57	-30.45	-20.00	10.45	3.12	325	Vertical
6	4087.0337	-32.79	-29.54	-20.00	9.54	3.25	288	Vertical

RESULT: PASS

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Psychological Psycholo



Measurement Result for 12.5 KHz Channel Separation @ 479.975MHz-2W-Horizontal

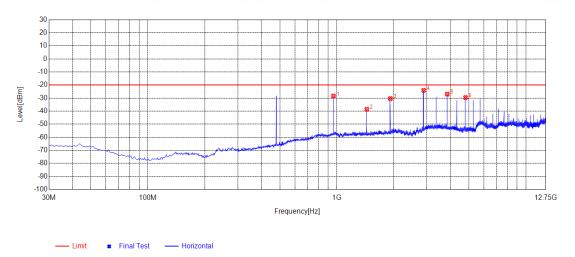


١	10.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
	1	960.2300	-72.72	-28.47	-20.00	8.47	44.25	281	Horizontal
	2	1440.6691	-35.30	-38.63	-20.00	18.63	-3.33	242	Horizontal
	3	1920.1170	-30.37	-30.44	-20.00	10.44	-0.07	290	Horizontal
	4	2880.1880	-26.27	-24.11	-20.00	4.11	2.16	139	Horizontal
	5	3840.2590	-31.55	-26.98	-20.00	6.98	4.57	17	Horizontal
	6	4800.3300	-33.23	-29.59	-20.00	9.59	3.64	251	Horizontal

RESULT: PASS



Measurement Result for 12.5 KHz Channel Separation @ 479.975MHz-2W-Vertical

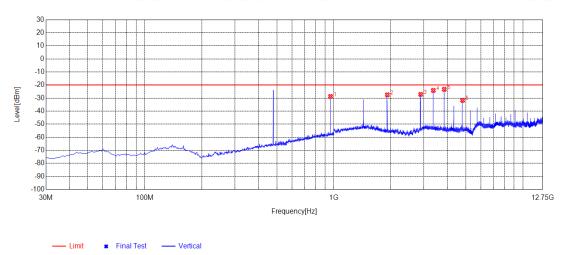


NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	960.2300	-72.68	-28.76	-20.00	8.76	43.92	351	Vertical
2	1920.1170	-28.23	-27.54	-20.00	7.54	0.69	155	Vertical
3	2880.1880	-29.38	-27.20	-20.00	7.20	2.18	305	Vertical
4	3360.8111	-27.26	-24.16	-20.00	4.16	3.10	343	Vertical
5	3841.4341	-26.55	-23.33	-20.00	3.33	3.22	277	Vertical
6	4800.3300	-35.36	-31.80	-20.00	11.80	3.56	325	Vertical

RESULT: PASS

Note

- 1. Factor=Antenna Factor + Cable loss. (Below 1GHz)
- 2. Factor=Antenna Factor+ Cable loss-Pre-amplifier.(Above 1 GHz)
- 3. Margin=Limit- Level
- 4. All the test frequencies was tested, but only the worst data be recorded in this part.





8.5 EMISSION MASK PLOT

The detailed procedure employed for Emission Mask measurements are specified as following:


- -Connect the equipment as illustrated.
- -Spectrum set as follow:
- Centre frequency = fundamental frequency, Span=50KHz for 12.5kHz and 25kHz channel spacing, RBW=100Hz, VBW=300Hz for 12.5kHz, RBW=300Hz, VBW=1000Hz for 25kHz,Sweep = auto, Detector function = peak, Trace = max hold
- Key the transmitter, and set the level of the unmodulated carrier to a full scale reference line. This is the 0dB reference for the measurement.
- Modulate the transmitter with a 2500 Hz sine wave at an input level 16 dB greater than that necessary to produce 50% of rated system deviation(Rated system deviation is 2.5 kHz for 12.5kHz channel spacing).
 The input level shall be established at the frequency of maximum response of the audio modulating circuit.
- 4. Transmitters employing digital modulation techniques that bypass the limiter and the audio low-pass filter shall be modulated as specified by the manufacturer
- 5. Measure and record the results in the test report.






VHF:

The Worst Emission Mask for (150.025MHz) of 12.5 KHz channel Separation (2W)

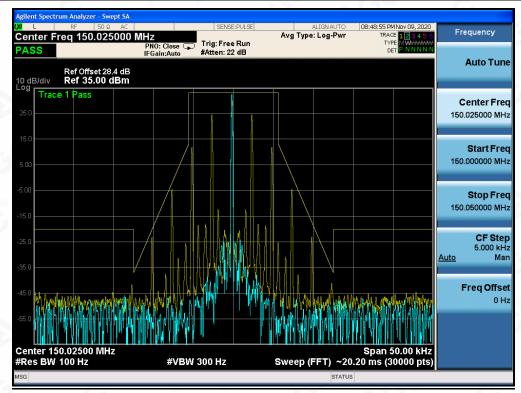

The Worst Emission Mask for (155.025MHz) of 12.5 KHz channel Separation (2W)

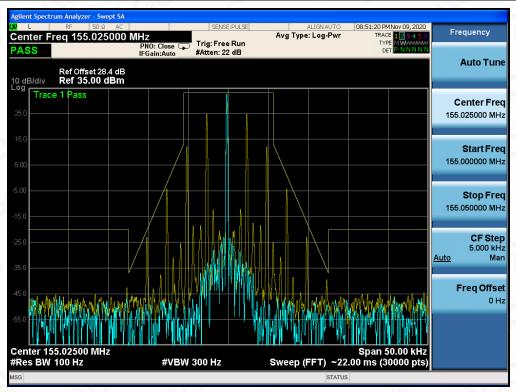

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.