

FCC Part 95 Rules Test Report

Report No.:AGC02294200403FE10

FCC ID : 2AJGM-P54U

PRODUCT DESIGNATION: TWO WAY RADIO

BRAND NAME : BAOFENG, POFUNG

MODEL NAME : P54U, BF-1904, P54UM, P54G, P54X

APPLICANT PO FUNG ELECTRONIC(HK) INTERNATIOANL GROUP

COMPANY

DATE OF ISSUE : Jun. 28, 2020

STANDARD(S) : FCC Part 95 Rules

REPORT VERSION : V 1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd

CAUTION:

This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the common stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.



Page 2 of 49

Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	1	Jun. 28, 2020	Valid	Initial release

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Resting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Page 3 of 49

VERIFICATION OF COMPLIANCE

Applicant	PO FUNG ELECTRONIC(HK) INTERNATIOANL GROUP COMPANY
Address	3/F FULOK BLDG 131-133 WING LOK ST SHEUNG WAN, Hong Kong
manufacturer	PO FUNG ELECTRONIC(HK) INTERNATIOANL GROUP COMPANY
Address	3/F FULOK BLDG 131-133 WING LOK ST SHEUNG WAN, Hong Kong
Factory	PO FUNG ELECTRONIC(HK) INTERNATIOANL GROUP COMPANY
Address	3/F FULOK BLDG 131-133 WING LOK ST SHEUNG WAN, Hong Kong
Product Designation:	TWO WAY RADIO
Brand Name:	BAOFENG,POFUNG
Test Model	P54U
Serial Model	BF-1904, P54UM, P54G, P54X
Difference Description	The same motherboard and specifications, only the shell design differences & models, trademarks are different
Date of Test:	Apr. 23, 2020~Jun. 28, 2020

WE HEREBY CERTIFY THAT:

The above equipment was tested by Attestation of Global Compliance (Shenzhen) Co., Ltd. The data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in TIA/EIA 603. The sample tested as described in this report is in compliance with the FCC Rules Part 95 requirements. The test results of this report relate only to the tested sample identified in this report.

Prepared By	Calin Lin	, Soc
CC -	Calvin Liu (Project Engineer)	Jun. 28, 2020
Reviewed By	Max Zhang	
, CO	Max Zhang (Reviewer)	Jun. 28, 2020
Approved By	Forrest Wi	CC CC
NGO	Forrest Lei Authorized Officer	Jun. 28, 2020

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Bedicated Postuo/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGE. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.



Page 4 of 49

TABLE OF CONTENTS

1. GENERAL INFORMATION	
1.1 PRODUCT DESCRIPTION	6
1.2 RELATED SUBMITTAL(S) / GRANT (S)	
1.3 TEST METHODOLOGY	
1.4 TEST FACILITY	
1.5 SPECIAL ACCESSORIES	
2. SYSTEM TEST CONFIGURATION	
2.1 EUT CONFIGURATION	
2.2 EUT EXERCISE	
2.3 CONFIGURATION OF TESTED SYSTEM	
3. SUMMARY OF TEST RESULTS	
4. DESCRIPTION OF TEST MODES	
5. FREQUENCY TOLERANCE	
5.1 PROVISIONS APPLICABLE	
5.2 MEASUREMENT PROCEDURE	15
5.3 TEST SETUP BLOCK DIAGRAM	
5.4TEST RESULT	
6. EMISSION BANDWIDTH	19
6.1 PROVISIONS APPLICABLE	19
6.2 MEASUREMENT PROCEDURE	19
6.3 TEST SETUP BLOCK DIAGRAM	
6.4 MEASUREMENT RESULT	
7. UNWANTED RADIATION	25
7.1 PROVISIONS APPLICABLE	25
7.2 MEASUREMENT PROCEDURE	
7.3 TEST SETUP BLOCK DIAGRAM	
7.4 MEASUREMENT RESULTS:	
7.5 EMISSION MASK PLOT	35
8. AUDIO LOW PASS FILTER RESPONSE	
8.1.PROVISIONS APPLICABLE	
8.2.TEST PROCEDURE	
8.3 TEST CONFIGURATION	
8 4 TEST RESULT	30

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the specificated resting/inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter pathorization of AGC, the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



APPENDIX I: PHOTOGRAPHS OF SETUP ..

Report No.:AGC02294200403FE10

	Page 5 of 49
. MAXIMUMN TRANSMITTER POWER	40
9.1 PROVISIONS APPLICABLE	40
9.2 TEST PROCEDURE	41
9.3 TEST CONFIGURATION	42
9.4 TEST RESULT	44
0. MODULATION CHARACTERISTICS	45
10.1 PROVISIONS APPLICABLE	45
10.2 MEASUREMENT METHOD	45
10.3 MEASUREMENT RESULT	46

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Page 6 of 49

1. GENERAL INFORMATION

1.1 PRODUCT DESCRIPTION

The EUT is a **TWO WAY RADIO** designed for voice communication. It is designed by way of utilizing the FM modulation achieves the system operating.

A major technical description of EUT is described as following:

Product Designation	TWO WAY RADIO
Test Model	P54U
Hardware Version	BF_1904_A21
Software Version	BF_1904_A21
Modulation	FM
Channel Separation	12.5KHz
Emission Type	F3E
Emission Bandwidth	10.57KHz
Maximum Transmitter Power	36.94dBm
Rated Output power	5W (It was fixed by the manufacturer, any individual can't arbitrarily change it.)
Antenna Designation	Inseparable
Antenna Type	Integral Antenna
Antenna Gain	1.50dBi
Power Supply	DC 7.40V
Limiting Voltage	DC 6.29V~ 8.51V
Operation Frequency Range and Channel	GMRS: 462.5625MHz -462.7125MHz(5W) 462.5500MHz -462.7250MHz(5W) 467.6500MHz(5W) Test Channel :4, 12 and 16 channel
Frequency Tolerance	1.096ppm

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written appropriation of AGE. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Page 7 of 49

Channel List:

CH. No	CH. Freq	Power	CH. No	CH. Freq	Power
1	462.5625	60	16	467.6500	
2	462.5875		17		
3	462.6125	@	18	1,0	
4	462.6375	G	19	1	E\\/
5	462.6625	7	20	1	5W
6	462.6875		21	9	
7	462.7125		22	107	
8	462.5500	5W	23	1	
9	462.5750		24	<i>1</i> ®	
10	462.6000		25	1 .6	8
11	462.6250	8	26	1	
12	462.6500	GU	27	® /	/
13	462.6750		28		
14	462.7000	8	29		
15	462.7250	,C	30	® //	

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Festing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Page 8 of 49

1.2 RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for FCC ID: **2AJGM-P54U**, filing to comply with the FCC Part 95 requirements.

1.3 TEST METHODOLOGY.

The radiated emission testing was performed according to the procedures of TIA/EIA 603.

1.4 TEST FACILITY

Test Site Attestation of Global Compliance (Shenzhen) Co., Ltd			
Location	1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China		
Designation Number	CN1259		
FCC Test Firm Registration Number	975832		
A2LA Cert. No.	5054.02		
Description	Attestation of Global Compliance(Shenzhen) Co., Ltd is accredited by A2LA		

1.5 SPECIAL ACCESSORIES

Not available for this EUT intended for grant.

1.6 EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC who test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Page 9 of 49

2. SYSTEM TEST CONFIGURATION

2.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT EXERCISE

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Festing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC whe test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Page 10 of 49

2.3 CONFIGURATION OF TESTED SYSTEM

Fig. 2-1 Configuration of Tested System

EUT√

Table 2-1 Equipment Used in Tested System

Item	Item Equipment		Identifier	Note
® 1	TWO WAY RADIO	P54U	FCC ID: 2AJGM-P54U	EUT
2	Battery	BL-194	DC 7.4V 2200mAh	AE
3	Adapter	N/A	Input: AC 100-240V 50/60Hz, 0.25A Output: DC 10V 0.5A	AE
4	Charger	CH-1904	Input: DC 10V Output: DC 8.4V 500mA	AE
5	Back clip	N/A	N/A	AE
6	Lanyard	N/A	N/A	AE

Note: The battery is full-charged during the test

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Page 11 of 49

3. SUMMARY OF TEST RESULTS

FCC 47 CFR Part 95 Test Cases						
Test Item	Test Requirement	Test Method	Result			
Maximum Transmitter Power	FCC CFR Part 95.1767 FCC 47 CFR Part 2.1046(a)	ANSI/TIA-603-E-2016	PASS			
Modulation Limit	FCC CFR Part 95.1775 FCC 47 CFR Part 2.1047(a)(b)	ANSI/TIA-603-E-2016	PASS			
Audio Frequency Response	FCC CFR Part 95.1775 FCC 47 CFR Part 2.1047(a)	ANSI/TIA-603-E-2016	PASS			
Audio Low Pass Filter Response	FCC 47 CFR Part 95.1775(e)	ANSI/TIA-603-E-2016	PASS			
Emission Bandwidth	FCC CFR Part 95.1773 FCC 47 CFR Part 2.1049	ANSI/TIA-603-E-2016	PASS			
Emission Mask	FCC CFR Part 95.1779	ANSI/TIA-603-E-2016	PASS			
Transmitter Radiated Spurious Emission	FCC CFR Part 95.1779 FCC 47 CFR Part 2.1053	ANSI/TIA-603-E-2016	PASS			
Spurious emissions at antenna terminals	FCC CFR Part 95.1779 FCC 47 CFR Part 2.1051	ANSI/TIA-603-E-2016	N/A			
Frequency Stability	FCC CFR Part 95.1765 FCC 47 CFR Part 2.1055 (a)(1)	ANSI/TIA-603-E-2016	PASS			

Note:

- 1) N/A: In this whole report not application.
- 2) The EUT antenna is integral antenna, so the test item part 2.1051 Spurious emissions at antenna terminals does not applicable.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Festivo/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written protocolor to the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issued of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Page 12 of 49

LIST OF EQUIPMENTS USED

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESCI	10096	Jun. 12, 2019	Jun. 11, 2020
TEST RECEIVER	R&S	ESCI	10096	Jun. 09, 2020	Jun. 08, 2021
EXA Signal Analyzer	Aglient	N9020A	W1312-60196	Oct. 08, 2019	Oct. 07, 2020
Horn antenna	SCHWARZBECK	BBHA 9170	#768	Sep.18, 2018	Sep.17, 2020
preamplifier	ChengYi	EMC184045SE	980508	Sep. 23, 2019	Sep. 22, 2020
Double-Ridged Waveguide Horn	ETS LINDGREN	3117	00034609	May. 19, 2017	May. 18, 2019
Double-Ridged Waveguide Horn	ETS LINDGREN	3117	00034609	May. 17, 2019	May. 16, 2021
Broadband Preamplifier	SCHWARZBECK	BBV 9718	9718-205	Jun. 12, 2019	Jun. 11, 2020
Broadband Preamplifier	SCHWARZBECK	BBV 9718	9718-205	Jun. 09, 2020	Jun. 08, 2021
Double-Ridged Waveguide Horn	ETS	3117	00154520	Oct. 26, 2019	Oct. 25, 2021
SIGNAL GENERATOR	AGILENT	E4421B	MY43351603	Jun. 12, 2019	Jun. 11, 2020
SIGNAL GENERATOR	AGILENT	E4421B	MY43351603	Jun. 09, 2020	Jun. 08, 2021
SIGNAL GENERATOR	R&S	SMT03	A0304261	Jun. 12, 2019	Jun. 11, 2020
SIGNAL GENERATOR	R&S	SMT03	A0304261	Jun. 09, 2020	Jun. 08, 2021
ANTENNA	SCHWARZBECK	VULB9168	VULB9168-494	Jan. 09, 2019	Jan. 08, 2021
ANTENNA	SCHWARZBECK	VULB9168	D69250	Sep.26, 2018	Sep.25, 2020
Modulation Domain Analyzer	HP	53310A	3121A02467	Oct. 30, 2019	Oct. 29, 2020
Small environmental tester	ESPEC	SH-242	• The Co	Oct. 08, 2019	Oct. 07, 2020
RF Communication Test Set	HP	8920B	Sec.	Jun. 12, 2019	Jun. 11, 2020

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Festing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written appropriation of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Report No.:AGC02294200403FE10
Page 13 of 49

		(8)		Page 13 01 49
HP	8920B	30 <u></u> 60	Jun. 09, 2020	Jun. 08, 2021
ZHINAN	ZN30900C	18051	Jun. 13, 2019	Jun. 12, 2020
ZHINAN	ZN30900C	18051	Jun. 11, 2020	Jun. 10, 2021
Schaffner	58-30-33	ML030	Oct. 28, 2019	Oct. 27, 2020
Agilent	E4440A	US40420298	July 02, 2019	July 01, 2020
R&S	1#	3 c.C	Each time	N/A
Microwave	N25155M2	498705	May. 13, 2019	May. 12, 2020
Microwave	N25155M2	498705	May. 11, 2020	May. 10, 2021
	ZHINAN ZHINAN Schaffner Agilent R&S Microwave	ZHINAN ZN30900C ZHINAN ZN30900C Schaffner 58-30-33 Agilent E4440A R&S 1# Microwave N25155M2	ZHINAN ZN30900C 18051 ZHINAN ZN30900C 18051 Schaffner 58-30-33 ML030 Agilent E4440A US40420298 R&S 1# Microwave N25155M2 498705	ZHINAN ZN30900C 18051 Jun. 13, 2019 ZHINAN ZN30900C 18051 Jun. 11, 2020 Schaffner 58-30-33 ML030 Oct. 28, 2019 Agilent E4440A US40420298 July 02, 2019 R&S 1# Each time Microwave N25155M2 498705 May. 13, 2019

Note: 8920B can generate audio modulation frequency.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Festing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Page 14 of 49

4. DESCRIPTION OF TEST MODES

RF TEST MODES

The EUT (**TWO WAY RADIO**) has been tested under normal operating condition. (GMRS TX) are chosen for testing at each channel separation.

No.		TEST MODES	CHANNEL SEPARATION
1	8	GMRS TX	12.5KHz

Note:1. Only the result of the worst case was recorded in the report.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Restrict/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuence of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Page 15 of 49

5. FREQUENCY TOLERANCE

5.1 PROVISIONS APPLICABLE

Standard Applicable [Part 95.1765]The carrier frequency stability is the ability of the transmitter to maintain an assigned carrier frequency.

FCC Part 95.1765,

GMRS: The carrier frequency of each GMRS transmitter transmitting an emission with an occupied bandwidth of 12.5 kHz or less must remain within 2.5 ppm

The carrier frequency of each GMRS transmitter transmitting an emission with an occupied bandwidth greater than 12.5 kHz must remain within 5 ppm

5.2 MEASUREMENT PROCEDURE

5.2.1 Frequency stability versus environmental temperature

- 1. Setup the configuration per figure 1 for frequencies measurement inside an environment chamber, Install new battery in the EUT.
- 2. Turn on EUT and set SA center frequency to the EUT radiated frequency. Set SA Resolution Bandwidth to 1KHz and Video Resolution Bandwidth to 1KHz and Frequency Span to 50KHz.Record this frequency as reference frequency.
- 3. Set the temperature of chamber to 50 ℃. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize. While maintaining a constant temperature inside the chamber, turn the EUT on and measure the EUT operating frequency.
- 4. Repeat step 2 with a 10℃ decreased per stage until the lowest temperature -30℃ is measured, record all measured frequencies on each temperature step.

5.2.2 Frequency stability versus input voltage


- Setup the configuration per figure 1 for frequencies measured at temperature if it is within 15℃ to 25℃.
 Otherwise, an environment chamber set for a temperature of 20℃ shall be used. The EUT shall be powered by DC 7.40V.
- 2. Set SA center frequency to the EUT radiated frequency. Set SA Resolution Bandwidth to 1 KHz and Video Resolution Bandwidth to 1KHz. Record this frequency as reference frequency.
- 3. Supply the EUT primary voltage at the operating end point which is specified by manufacturer and record the frequency.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC he test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Page 16 of 49

5.3 TEST SETUP BLOCK DIAGRAM

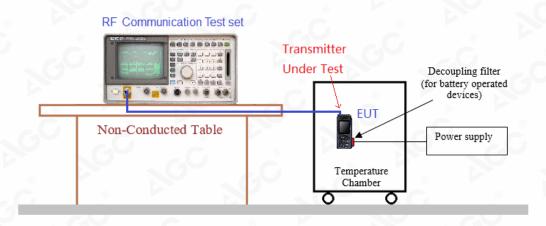

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Festing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written appropriation of AGC where the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.



Page 17 of 49

5.4TEST RESULT

(1) Frequency stability versus input voltage (Supply nominal voltage is 7.40V)

Environment	Power Supply	Reference Frequency			Limit:
Temperature (°C)	(V)	462.6375MHz	462.6500MHz	467.6500MHz	ppm
50	DC 7.40V	0.872	0.653	0.574	- 0
40	DC 7.40V	0.743	0.557	0.958	
30	DC 7.40V	0.761	1.065	0.896	
20	DC 7.40V	0.638	0.624	0.930	±2.5for
10	DC 7.40V	0.586	1.085	0.783	
0 0	DC 7.40V	1.005	0.951	0.741	GMRS
-10	DC 7.40V	0.654	0.853	0.955	
-20	DC 7.40V	0.954	0.736	0.717	
-30	DC 7.40V	0.662	0.761	0.894	_ (
Result		Pa	SS		

(2) Frequency stability versus input voltage (Battery limiting voltage is 6.29V)

Environment	Power Supply	Reference Frequency			
Temperature (°C)	(V)	462.6375MHz	462.6500MHz	467.6500MHz	ppm
50	DC 6.29V	0.360	0.653	0.874	
40	DC 6.29V	1.044	0.884	0.771	
30	DC 6.29V	0.517	0.773	0.702	
20	DC 6.29V	1.029	0.712	0.533	±2.5for
10	DC 6.29V	0.704	0.531	0.902	GMRS
0	DC 6.29V	1.055	0.670	0.664	GIVIKS
-10	DC 6.29V	0.966	0.568	0.585	
-20	DC 6.29V	0.941	0.722	0.937	®
-30	DC 6.29V	0.639	1.022	0.933	-C
Result		Pa	SS	®	

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Dedicated Festing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter portionization of AGC, the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issued by the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Page 18 of 49

/Inspection he test results the test report.

(3) Frequency stability versus input voltage (Battery Fully Charged voltage is 8.51V)

Environment	Power Supply	Reference Frequency			
Temperature $(^{\circ}\!\mathbb{C})$	(V)	462.6375MHz	462.6500MHz	467.6500MHz	ppm
50	DC 8.51V	0.437	0.653	0.978	
40	DC 8.51V	0.957	0.997	0.936	(8)
30	DC 8.51V	1.040	0.735	0.565	-C
20	DC 8.51V	0.619	0.815	1.080	±2.5for
10	DC 8.51V	0.707	0.765	0.751	GMRS
0	DC 8.51V	0.754	0.768	1.085	GIVIKS
-10	DC 8.51V	1.078	0.584	0.649	
-20	DC 8.51V	1.015	1.024	0.686	
-30	DC 8.51V	0.516	0.948	1.096	
Result	60 6	Pa	SS		

Note: 1.Battery terminal voltage is declared and specified by the manufacturer.

2. All test values are in "ppm"

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Selectated Restaurance of Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written perhorization of AGC presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Page 19 of 49

6. EMISSION BANDWIDTH

6.1 PROVISIONS APPLICABLE

FCC Part 95.1773: GMRS:

- (a) Main channels. The authorized bandwidth is 20 kHz for GMRS transmitters operating on any of the 462 MHz main channels, or any of the 467 MHz main channels.
- (b) Interstitial channels. The authorized bandwidth is 20 kHz for GMRS transmitters operating on any of the 462 MHz interstitial channels, and is 12.5 kHz for GMRS transmitters operating on any of the 467 MHz interstitial channels.

Occupied Bandwidth: The EUT was connected to the audio signal generator and the spectrum analyzer via the main RF connector, and through an appropriate attenuator. The EUT was controlled to transmit its maximum power. Then the bandwidth of 99% power can be measured by the spectrum analyzer.

6.2 MEASUREMENT PROCEDURE

- 1). The EUT was modulated by 2.5 KHz Sine wave audio signal, The level of the audio signal employed is 16 dB greater than that necessary to produce 50% of rated system deviation. Rated system deviation is 2.5 kHz (12.5 kHz channel spacing).
 - 2). Set SPA Center Frequency = fundamental frequency, RBW=300Hz.VBW= 1KHz, Span =50 KHz.
 - 3). Set SPA Max hold. Mark peak, -26 dB.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the common stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.





Page 20 of 49

6.3 TEST SETUP BLOCK DIAGRAM

Radiation method:

Radiated Below1GHz

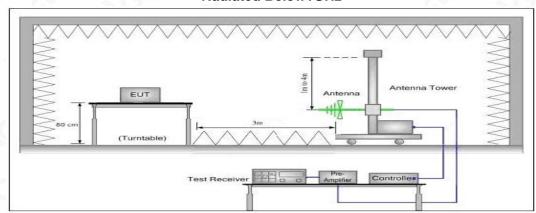

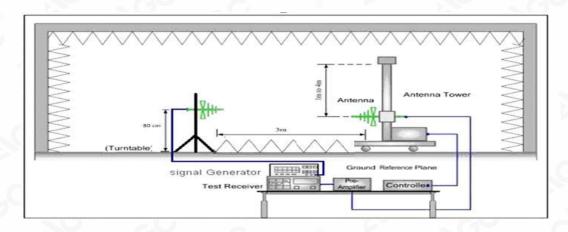



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the specificated resting/inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter pathorization of AGC, the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Report No.:AGC02294200403FE10 Page 21 of 49

Radiated Above 1 GHz

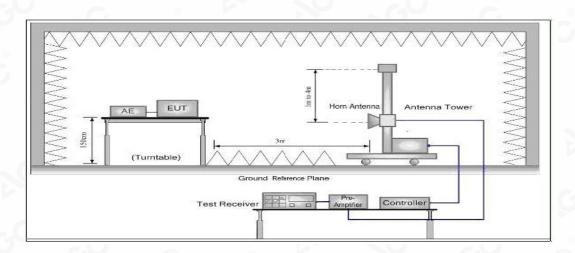

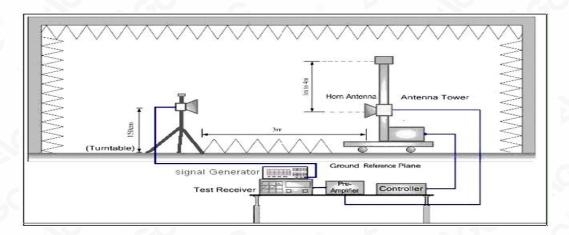


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the specificated resting/inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter pathorization of AGC, the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Conduction method:

Report No.:AGC02294200403FE10 Page 22 of 49

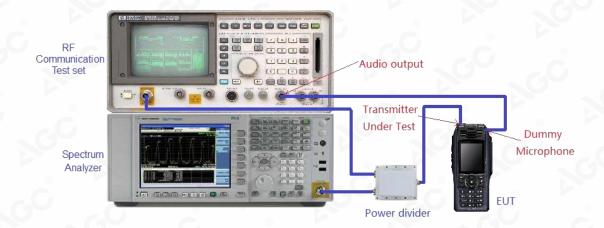

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Restriction Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC, the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.




Page 23 of 49

6.4 MEASUREMENT RESULT

26dB &99% Bandwidth Measurement Result									
Operating Frequency		12.5 KHz Channe	l Separation						
Operating Frequency	26dB Bandwidth	99% Bandwidth	Limits	Result					
462.6375MHz	10.57 KHz	9.961 KHz	20 KHz	Pass					
462.6500MHz	10.57 KHz	9.960 KHz	20 KHz	Pass					
467.6500MHz	10.57 KHz	9.960 KHz	20 KHz	Pass					

Occupied bandwidth of 462.6375MHz

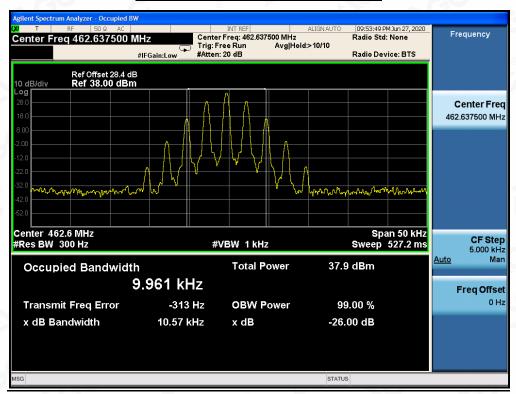


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the content of the report is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter pathorization of AGC, the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.




Report No.:AGC02294200403FE10 Page 24 of 49

Occupied bandwidth of 462.6500MHz

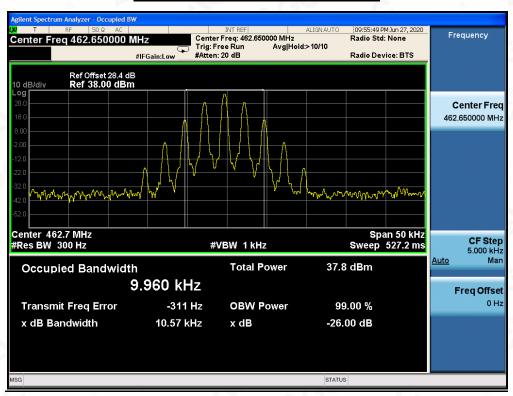

Occupied bandwidth of 467.6500MHz

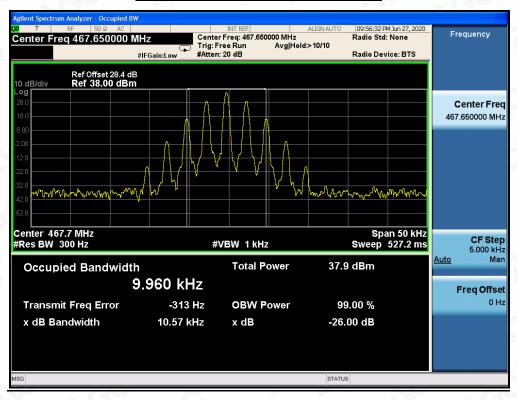

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Dedicated Festivo/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Page 25 of 49

7. UNWANTED RADIATION

7.1 PROVISIONS APPLICABLE

Standard Applicable [FCC Part 95.1779]

According to FCC section 95.1779, the unwanted emission should be attenuated below TP by at least 43+10 log(Transmit Power) dB.

7.2 MEASUREMENT PROCEDURE

Each GMRS transmitter type must be designed to comply with the applicable unwanted emissions limits in this section.

(a)Emission masks. Emission masks applicable to transmitting equipment in the GMRS are defined by the requirements in the following table. The numbers in the attenuation requirements column refer to rule paragraph numbers under paragraph (b) of this section.

Emission types filter	Attenuation requirements
A1D, A3E, F1D, G1D, F2D, F3E, G3E with audio filter	(1), (2), (7)
A1D, A3E, F1D, G1D, F3E, G3E without audio filter	(3), (4), (7)
H1D, J1D, R1D, H3E, J3E, R2E	(5), (6), (7)

- (1) Filtering noted for GMRS transmitters refers to the requirement in §95.1775(e).
- (2) Unwanted emission power may be measured as either mean power or peak envelope power, provided that the transmitter output power is measured the same way.
- (b) Attenuation requirements. The power of unwanted emissions must be attenuated below the transmitter output power in Watts (P) by at least:
- (1) 25 dB (decibels) on any frequency removed from the center of the authorized bandwidth by more than 50% up to and including 100% of the authorized bandwidth.
- (2) 35 dB on any frequency removed from the center of the authorized bandwidth by more than 100% up to and including 250% of the authorized bandwidth.
- (3) 83 log (fd ÷ 5) dB on any frequency removed from the center of the authorized bandwidth by a displacement frequency (fd in kHz) of more than 5 kHz up to and including 10 kHz.
- (4) 116 log (fd ÷ 6.1) dB or 50 + 10 log (P) dB, whichever is the lesser attenuation, on any frequency removed from the center of the authorized bandwidth by a displacement frequency (fd in kHz), of more than 10 kHz up to and including 250% of the authorized bandwidth.
- (5) 25 dB on any frequency removed from the center of the authorized bandwidth by more than 50% up to and including 150% of the authorized bandwidth.
- (6) 35 dB on any frequency removed from the center of the authorized bandwidth by more than 150% up to and including 250% of the authorized bandwidth.
- (7) 43 + 10 log (P) dB on any frequency removed from the center of the authorized bandwidth by more than 250%.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the bedicated resting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc=cert.com.



Page 26 of 49

- (1) EUT was placed on a 0.8 or 1.5 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The disturbance of the transmitter was maximized on the test receiver display by raising and lowering from 1m to 4m the receive antenna and by rotating through 360° the turntable. After the fundamental emission was maximized, a field strength measurement was made. The radiated emission measurements of all transmit frequencies in all channels were measured with peak detector.
- (2) A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
- (3)The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=1MHz, VBW=3MHz for above 1GHz and RBW=100kHz,VBW=300kHz for 30MHz to 1GHz, And the maximum value of the receiver should be recorded as (Pr).
- (4)The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (PMea) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (Pr). The power of signal source (PMea) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.
- (5)A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (Pcl) ,the Substitution Antenna Gain (Ga) and the Amplifier Gain (PAg) should be recorded after test.
- (6)The measurement results are obtained as described below: Power(EIRP)=PMea- PAg Pcl Ga The measurement results are amend as described below:
 - Power(EIRP)=PMea- Pcl Ga
- (7)This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.
 - ERP can be calculated from EIRP by subtracting the gain of the dipole, ERP = EIRP-2.15dBi.
- (8) Test the EUT in the lowest channel, the middle channel the Highest channel

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Bedicated Festivo/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC where test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.





Page 27 of 49

7.3 TEST SETUP BLOCK DIAGRAM

SUBSTITUTION METHOD: (Radiated Emissions)

Radiated Below1GHz

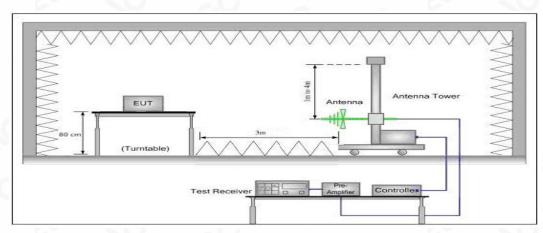

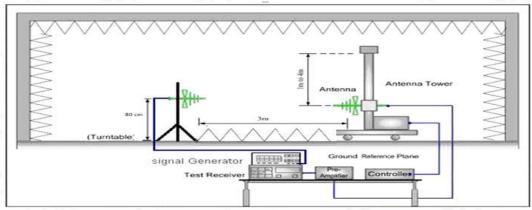



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the specificated resting/inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter pathorization of AGC, the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Report No.:AGC02294200403FE10 Page 28 of 49

Radiated Above 1 GHz

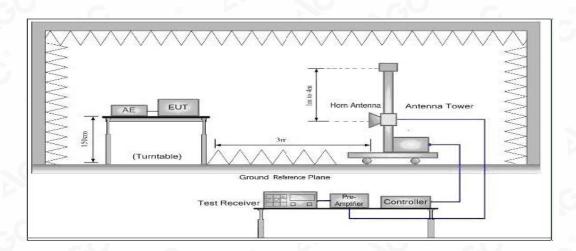

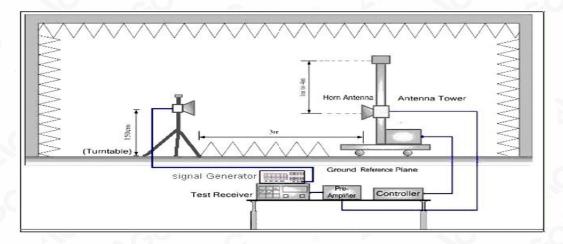

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the specificated resting/inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter pathorization of AGC, the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.




Page 29 of 49

7.4 MEASUREMENT RESULTS:

the unwanted emission should be attenuated below TP by at least 43+10 log(Transmit Power) dB

Limit: At least 43+10 log (P) =43+10log (5) =49.99 (dBc) 36.99-49.99=-13dBm

Measurement Result for 12.5 KHz Channel Separation @ 462.6375MHz-5W-Horizontal

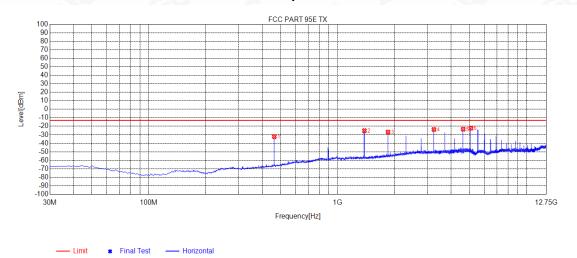

NO.	Freq.	Reading	Level	Limit	Margin	Factor	Angle	Dolority
	[MHz]	[dBm]	[dBm]	[dBm]	[dB]	[dB]	[°]	Polarity
1	462.6200	-67.75	-32.13	-13.00	19.13	35.62	120	Horizontal
2	1387.7888	-21.74	-25.19	-13.00	12.19	-3.45	334	Horizontal
3	1850.7851	-26.29	-26.88	-13.00	13.88	-0.59	9	Horizontal
4	3238.5989	-29.47	-23.76	-13.00	10.76	5.71	360	Horizontal
5	4626.4126	-32.99	-23.44	-13.00	10.44	9.55	316	Horizontal
6	5089.4089	-32.06	-22.29	-13.00	9.29	9.77	344	Horizontal

Note:


- 1. Factor=Antenna Factor + Cable loss. (Below 1GHz)
- 2. Factor=Antenna Factor+ Cable loss-Pre-amplifier.(Above 1 GHz)
- 3. Margin=Limit- Level

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Pest of Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Page 30 of 49

Measurement Result for 12.5 KHz Channel Separation @ 462.6375MHz-5W-Vertical

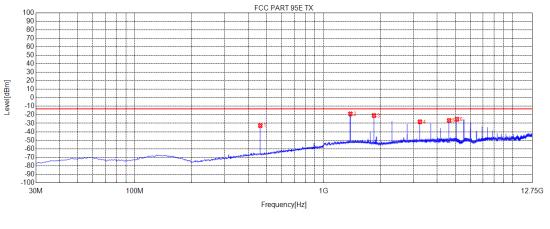

— Limit	*	Final Test	Vertical

3	NO.	Freq.	Reading	Level	Limit	Margin	Factor	Angle	Polarity
	140.	[MHz]	[dBm]	[dBm]	[dBm]	[dB]	[dB]	[°]	1 Olamy
	1	462.6200	-68.56	-32.69	-13.00	19.69	35.87	144	Vertical
	2	1387.7888	-20.35	-18.94	-13.00	5.94	1.41	341	Vertical
	3	1850.7851	-21.80	-20.87	-13.00	7.87	0.93	332	Vertical
	4	3238.5989	-33.85	-28.23	-13.00	15.23	5.62	351	Vertical
	5	4626.4126	-34.98	-26.71	-13.00	13.71	8.27	359	Vertical
	6	5089.4089	-34.39	-25.28	-13.00	12.28	9.11	359	Vertical

Note:

- 1. Factor=Antenna Factor + Cable loss. (Below 1GHz)
- 2. Factor=Antenna Factor+ Cable loss-Pre-amplifier.(Above 1 GHz)
- 3. Margin=Limit- Level


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Festivo/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written production of AGC within 15day after the issuance of the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Page 31 of 49

/Inspection The test results

Measurement Result for 12.5 KHz Channel Separation @ 462.6500MHz-5W-Horizontal

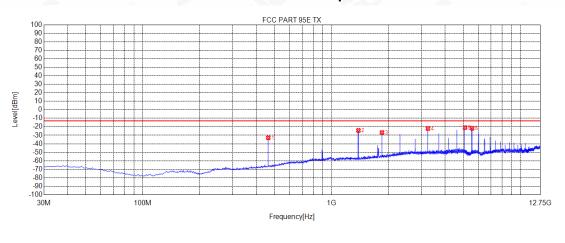

— Limit # Final Test — Horizontal

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
	[1711 12]	[dBiii]	[dDili]	[GDIII]	լսեյ	լսեյ	LJ	
1	462.6200	-68.55	-32.93	-13.00	19.93	35.62	123	Horizontal
2	1387.7888	-20.82	-24.27	-13.00	11.27	-3.45	1	Horizontal
3	1850.7851	-26.18	-26.77	-13.00	13.77	-0.59	10	Horizontal
4	3238.5989	-27.70	-21.99	-13.00	8.99	5.71	357	Horizontal
5	5089.4089	-30.74	-20.97	-13.00	7.97	9.77	58	Horizontal
6	5552.4052	-31.76	-21.75	-13.00	8.75	10.01	58	Horizontal

Note:

- 1. Factor=Antenna Factor + Cable loss. (Below 1GHz)
- 2. Factor=Antenna Factor+ Cable loss-Pre-amplifier.(Above 1 GHz)
- 3. Margin=Limit- Level


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Sedicated Festamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issued further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Page 32 of 49

/Inspection The test results

Measurement Result for 12.5 KHz Channel Separation @ 462.6500MHz-5W-Vertical

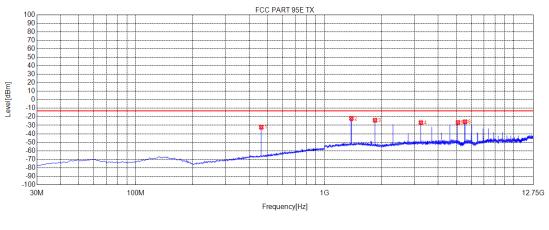

--- Limit # Final Test --- Vertical

NO.	Freq.	Reading	Level	Limit	Margin	Factor	Angle	Dolority
NO.	[MHz]	[dBm]	[dBm]	[dBm]	[dB]	[dB]	[°]	Polarity
1	462.6200	-68.13	-32.26	-13.00	19.26	35.87	230	Vertical
2	1387.7888	-23.42	-22.01	-13.00	9.01	1.41	202	Vertical
3	1850.7851	-25.06	-24.13	-13.00	11.13	0.93	332	Vertical
4	3238.5989	-32.52	-26.90	-13.00	13.90	5.62	313	Vertical
5	5089.4089	-35.79	-26.68	-13.00	13.68	9.11	351	Vertical
6	5552.4052	-36.03	-25.86	-13.00	12.86	10.17	313	Vertical

Note:

- 1. Factor=Antenna Factor + Cable loss. (Below 1GHz)
- 2. Factor=Antenna Factor+ Cable loss-Pre-amplifier.(Above 1 GHz)
- 3. Margin=Limit- Level


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Sedicated Festamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issued further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Page 33 of 49

/Inspection The test results

Measurement Result for 12.5 KHz Channel Separation @ 467.6500MHz-5W-Horizontal

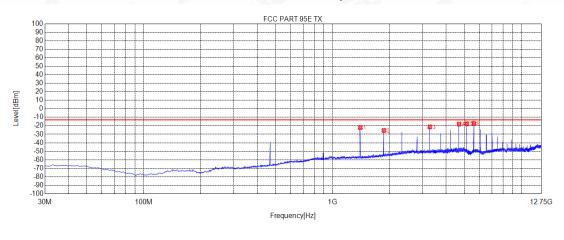

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	1403.0653	-18.72	-22.13	-13.00	9.13	-3.41	335	Horizontal
2	1870.7621	-25.10	-25.54	-13.00	12.54	-0.44	354	Horizontal
3	3273.8524	-27.04	-21.26	-13.00	8.26	5.78	360	Horizontal
4	4676.9427	-27.64	-18.07	-13.00	5.07	9.57	55	Horizontal
5	5144.6395	-27.36	-17.57	-13.00	4.57	9.79	36	Horizontal
6	5611.1611	-27.34	-17.22	-13.00	4.22	10.12	64	Horizontal

Note:

- 1. Factor=Antenna Factor + Cable loss. (Below 1GHz)
- 2. Factor=Antenna Factor+ Cable loss-Pre-amplifier.(Above 1 GHz)
- 3. Margin=Limit- Level


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "bedicated less Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGD presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Page 34 of 49

/Inspection The test results

Measurement Result for 12.5 KHz Channel Separation @ 467.6500MHz-5W -Vertical

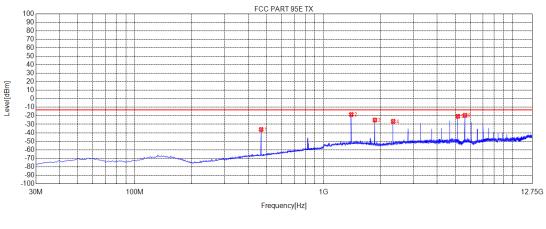

3	NO	Freq.	Reading	Level	Limit	Margin	Factor	Angle	D. L. St
,	NO.	[MHz]	[dBm]	[dBm]	[dBm]	[dB]	[dB]	[°]	Polarity
	1	467.4700	-72.03	-36.10	-13.00	23.10	35.93	341	Vertical
	2	1403.0653	-20.06	-18.54	-13.00	5.54	1.52	25	Vertical
	3	1870.7621	-25.85	-24.99	-13.00	11.99	0.86	248	Vertical
	4	2338.4588	-29.07	-26.52	-13.00	13.52	2.55	239	Vertical
	5	5144.6395	-29.87	-20.63	-13.00	7.63	9.24	16	Vertical
	6	5612.3362	-29.74	-19.47	-13.00	6.47	10.27	8	Vertical

Note:

- 1. Factor=Antenna Factor + Cable loss. (Below 1GHz)
- 2. Factor=Antenna Factor+ Cable loss-Pre-amplifier.(Above 1 GHz)
- 3. Margin=Limit- Level

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the selected for Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written appropriate of ACC presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issued Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Page 35 of 49

/Inspection

The test results

the test report.

7.5 EMISSION MASK PLOT

Standard Applicable [FCC Part 95.1779] GMRS: Unwanted emissions shall be attenuated below the unmodulated carrier power in accordance with the following:


- (1) At least 25 dB (decibels) on any frequency removed from the center of the authorized bandwidth by more than 50 %up to and including 100% of the authorized bandwidth.
- (2) At least 35 dB on any frequency removed from the center of the authorized bandwidth by more than 100 % up to and including 250 % of the authorized bandwidth.
- (3) At least 43 + 10 log10 (T) dB on any frequency removed from the center of the authorized bandwidth by more than 250 %.

The detailed procedure employed for Emission Mask measurements are specified as following:

- The transmitter shall be modulated by a 2.5 kHz audio signal,
- The level of the audio signal employed is 16 dB greater than that necessary to produce 50% of rated system deviation. Rated system deviation is 2.5 kHz.

CHANNEL 4:

The Worst Emission Mask for channel 4 -5W-12.5K

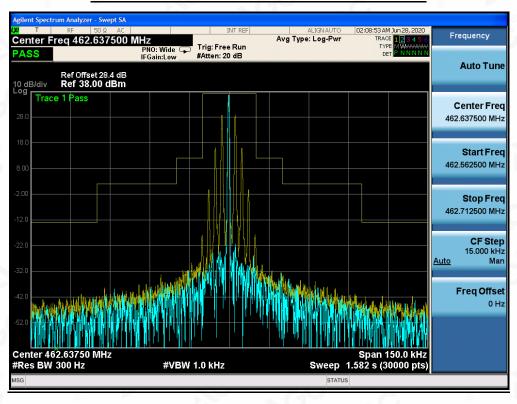


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Bedicated Fasting" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written achorization of AGC presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Page 36 of 49

CHANNEL 12:

The Worst Emission Mask for channel 12-5W-12.5K

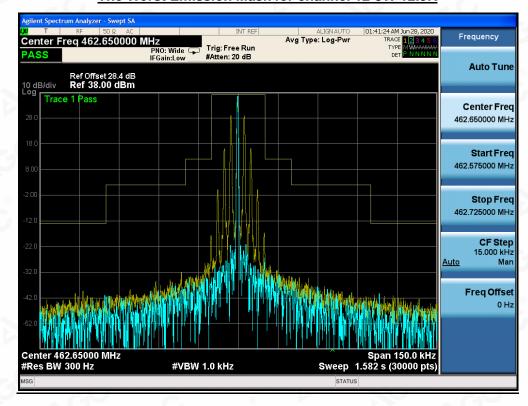


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Dedicated Pesthod/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written portion of AGC where the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.



Page 37 of 49

CHANNEL 16:

The Worst Emission Mask for channel 16-5W-12.5K

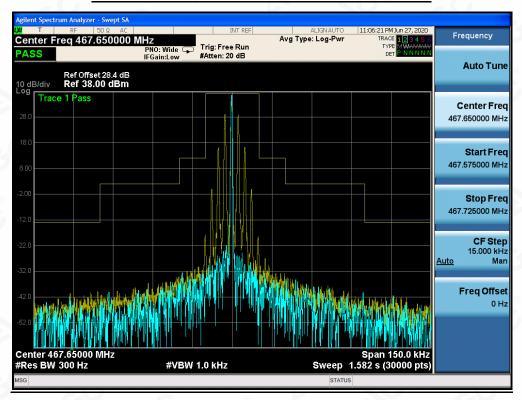

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Dedicated Pesthod/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written portion of AGC where the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.



Page 38 of 49

8. AUDIO LOW PASS FILTER RESPONSE 8.1.PROVISIONS APPLICABLE

§95.1775 GMRS modulation requirements

Audio filter. Each GMRS transmitter type must include audio frequency low pass filtering, unless it complies with the applicable paragraphs of §95.1779 (without filtering).

The filter must be between the modulation limiter and the modulated stage of the transmitter.

At any frequency (f in kHz) between 3 and 20 kHz, the filter must have an attenuation of at least 60 log (f/3) dB more than the attenuation at 1 kHz. Above 20 kHz, it must have an attenuation of at least 50 dB more than the attenuation at 1 kHz

8.2.TEST PROCEDURE

- (1) The DUT transmitter output port was connected to Modulation Analyzer.
- (2) Path loss for the measurement included.
- (3) Press 23.1SPCL on modulation analyzer to enable the external LO from Sigen.
- (4) Set the Sigen frequency to Fc + 1.5MHz, RF output level to 0dBm without modulation.
- (5) Transmit the radio and set the audio analyzer to 1 kHz audio frequency and 60% of the maximum deviation.
- (6) Up the amplitude by 20dB.
- (7) On DSA, get the reference point to 0dB.
- (8) Vary the frequency on audio analyzer from 3 kHz to 30 kHz, record the audio tone from DSA.

8.3 TEST CONFIGURATION



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Bedicated restrou/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.



Page 39 of 49

8.4 TEST RESULT

TEST CHANNEL: 4

TEST CHANNEL. 4					
Audio	Response	Limit			
Frequency	Attenuation	(dB)			
(kHz)	(dB)				
1	0	/			
3	-2.44	0.00			
4	-9.94	-7.50			
5	-15.75	-13.31			
6	-20.50	-18.06			
7	-24.52	-22.08			
8	-28.70	-25.56			
9	-31.77	-28.63			
10	-34.51	-31.37			
15	-46.19	-41.94			
20	-55.15	-50.00			
30	-55.18	-50.00			
50	-55.18	-50.00			
70	-55.18	-50.00			



Note: All the modes had been tested, but only the worst data recorded in the report.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Residual Any report having not been stamped by the Bedicated Residual Any Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written exphorization of ACC where the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Page 40 of 49

9. MAXIMUMN TRANSMITTER POWER 9.1 PROVISIONS APPLICABLE

FCC Part 95.1767 For GMRS, the maximum permissible transmitter output power effective radiated power (e.r.p.) as follows.

This section contains transmitting power limits for GMRS stations. The maximum transmitting power depends on which channels are being used and the type of station.

- (a)462/467 MHz main channels. The limits in this paragraph apply to stations transmitting on any of the 462 MHz main channels or any of the 467 MHz main channels. Each GMRS transmitter type must be capable of operating within the allowable power range. GMRS licensees are responsible for ensuring that their GMRS stations operate in compliance with these limits.
- (1) The transmitter output power of mobile, repeater and base stations must not exceed 50 Watts.
- (2) The transmitter output power of fixed stations must not exceed 15 Watts.
- (b)462 MHz interstitial channels. The effective radiated power (ERP) of mobile, hand-held portable and base stations transmitting on the 462 MHz interstitial channels must not exceed 5 Watts.
- (c)467 MHz interstitial channels. The effective radiated power (ERP) of hand-held portable units transmitting on the 467 MHz interstitial channels must not exceed 0.5 Watt. Each GMRS transmitter type capable of transmitting on these channels must be designed such that the ERP does not exceed 0.5 Watt.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written exporization of AGC, he test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc=cert.com.



Page 41 of 49

9.2 TEST PROCEDURE

- (1)EUT was placed on a 0.8 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The disturbance of the transmitter was maximized on the test receiver display by raising and lowering from 1m to 4m the receive antenna and by rotating through 360° the turntable. After the fundamental emission was maximized, a field strength measurement was made. The radiated emission measurements of all transmit frequencies in all channels were measured with peak detector
- (2)A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver
- (3)The EUT is then put into continuously transmitting mode at its maximum power level during the test.Set Test Receiver or Spectrum RBW=100kHz,VBW=300kHz for 30MHz to 1GHz, And the maximum value of the receiver should be recorded as (Pr).
- (4)The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (PMea) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (Pr). The power of signal source (PMea) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.
- (5)A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (Pcl) ,the Substitution Antenna Gain (Ga) and the Amplifier Gain (PAg) should be recorded after test.
- The measurement results are obtained as described below: Power(EIRP)=PMea- PAg Pcl Ga The measurement results are amend as described below:

Power(EIRP)=PMea-Pcl - Ga

- (6)This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.
- (7)ERP can be calculated from EIRP by subtracting the gain of the dipole, ERP = EIRP-2.15dBi.
- (8) Test the EUT in the lowest channel, the middle channel the Highest channel

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Dedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGE. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.





Page 42 of 49

9.3 TEST CONFIGURATION

Effective Radiated Power

Radiated Below1GHz

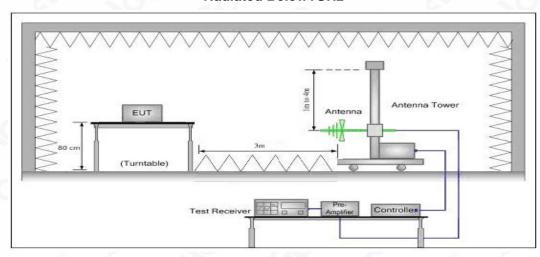

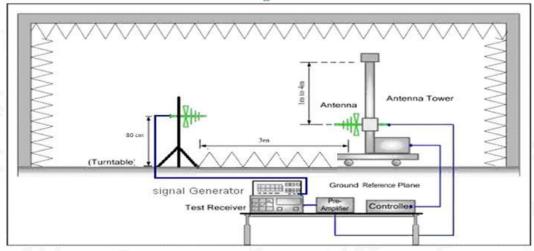



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the specificated resting/inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter pathorization of AGC, the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Report No.:AGC02294200403FE10 Page 43 of 49

Radiated Above 1 GHz

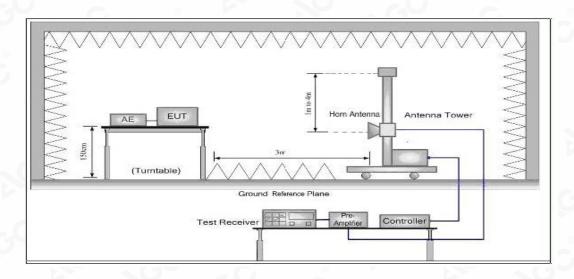

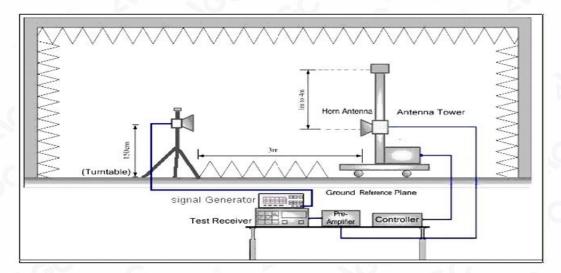

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the specificated resting/inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter pathorization of AGC, the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Page 44 of 49

9.4 TEST RESULT

The maximum Power (CP) for UHF is

Analog: 5W for 12.5 KHz Channel Separation

Calculation Formula: CP = R + A + L

* Note:

CP: The final Conducted Power

R: The reading value from spectrum analyzer A: The attenuation value of the used attenuator

L: The loss of all connection cables

ERP RESULT:

Frequency	Reading Level	Antenna	S.G.	Cable Loss	Ant.Gain	Emission Level	Emission Level	Limit	Margin
(MHz)	(dBuv/m)	Polarization	(dBm)	(dB)	(dBi)	(dBm)	(W)	(W)	(W)
z.C	(8)		Channe	Separat	ion:12.5KH	z	(8)		
462.6375	105.95	V	30.72	0.38	6.6	36.94	4.94	5	0.06
462.6375	105.86	Н	30.63	0.38	6.6	36.85	4.84	5	0.16
462.6500	105.92	V	30.69	0.38	6.6	36.91	4.91	50	45.09
462.6500	105.84	Н	30.61	0.38	6.6	36.83	4.82	50	45.18
467.6500	105.9	V	30.67	0.38	6.6	36.89	4.89	50	45.11
467.6500	105.8	Н	30.57	0.38	6.6	36.79	4.78	50	45.22

NOTE:

Calculation Formula:

Emission Level(dBm) = S.G.(dBm)- Cable Loss(dB)+ Ant.Gain(dBi)

The Ant. Gain including the correct factor 2.15.

Margin(dB) = Limit(dBm)- Emission Level(dBm)

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Residual Algorithms and the report is not permitted without the written appropriation of ACC where the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Page 45 of 49

10. MODULATION CHARACTERISTICS 10.1 PROVISIONS APPLICABLE

According to [FCC Part 95.1775, Part 2.1047(a)], for Voice Modulation Communication Equipment, the frequency response of the audio modulation circuit over a range of 100 to 5000Hz shall be measured.

Part 95.1775(a) A GMRS unit that transmits emission type F3E must not exceed a peak frequency deviation of plus orminus 2.5 kHz, and the audio frequency response must not exceed 3.125 kHz.

Part 2.1047(a) A curve or equivalent data showing the frequency response of the audio modulating circuit over a range of 100 to 5000Hz shall be submitted. For equipment required to have an audio low-pass filter, a curve showing thefrequency response of the filter, or of all circuitry installed between the modulation limiter and the modulated stage shallbe submitted.

10.2 MEASUREMENT METHOD

10.2.1 Modulation Limit

- (1). Configure the EUT as shown in figure 1, adjust the audio input for 60% of rated system deviation at 1KHz using this level as a reference (0dB) and vary the input level from –20 to +20dB. Record the frequency deviation obtained as a function of the input level.
- (2). Repeat step 1 with input frequency changing to 300, 1000, 1500 and 3000Hz in sequence.

10.2.2 Audio Frequency Response

Personal Radio Service stations that transmit voice emissions may also transmit audible or subaudible tones or other signals for the purpose of selective calling and/or receiver squelch activation. These tones and signals are ancillary to voice communications and are considered to be included within the voice emission types, e.g., A3E, F3E, and G3E.

- (a) Tones that are audible (having a frequency higher than 300 Hertz), must last no longer than 15 seconds at one time.
- (b) Tones that are subaudible (having a frequency of 300 Hertz or less), may be transmitted continuously during a communication session.
 - (1). Configure the EUT as shown in figure 1.
 - (2). Adjust the audio input for 20% of rated system deviation at 1 KHz using this level as a reference (0 dB).
 - (3). Vary the Audio frequency from 100 Hz to 10 KHz and record the frequency deviation.
 - (4). Audio Frequency Response = 20log10 (Deviation of test frequency/Deviation of 1 KHz reference).





Page 46 of 49


10.3 MEASUREMENT RESULT

TEST CHANNEL: 4

(A). MODULATION LIMIT:

462.6375MHz @ 12.5KHz Channel Separations-5W

Modulation Level (dB)	Peak Freq. Deviation At 300 Hz	Peak Freq. Deviation At 1000 Hz	Peak Freq. Deviation At 1500 Hz	Peak Freq. Deviation At 3000 Hz
-20	0.11	0.28	0.52	0.71
-15	0.36	0.55	0.76	0.88
-10	0.39	0.71	0.89	1.13
-5	0.47	0.82	0.99	1.22
0	0.69	1.03	1.23	1.38
+5	0.71	1.09	1.29	1.42
+10	0.82	1.12	1.32	1.51
+15	1.03	1.25	1.41	1.66
+20	1.05	1.22	1.39	1.62

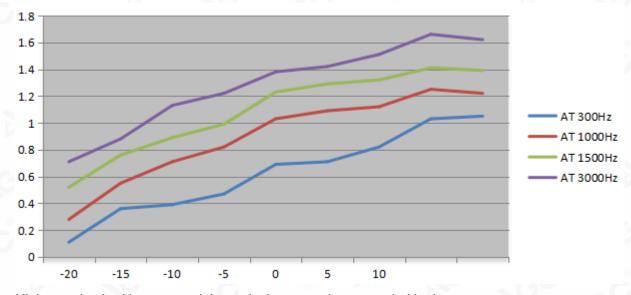

Note: All the modes had been tested, but only the worst data recorded in the report.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Page 47 of 49

(B). AUDIO FREQUENCY RESPONSE:

462.6375MHz @ 12.5 KHz Channel Separations-5W

Frequency (Hz)	Deviation (KHz)	Audio Frequency Response(dB)
100		0 14
200	- D-	
300	0.09	-18.98
400	0.22	-11.21
500	0.29	-8.81
600	0.36	-6.94
700	0.45	-5.00
800	0.61	-2.36
900	0.82	0.21
1000	0.88	0.83
1200	0.81	0.11
1400	0.99	1.85
1600	1.03	2.19
1800	1.11	2.84
2000	1.42	4.98
2400	1.72	6.65
2500	1.83	7.19
2800	1.61	6.07
3000	1.58	5.91
3200	1.63	6.18
3600	1.55	5.74
4000	1.61	6.07
4500	1.45	5.17
5000	1.39	4.80
5500	1.13	3.00
6000	0.88	0.83
6500	0.53	-3.58
7000	0.12	-16.48
7500	0.05	-24.08
9000	0	® <u></u>
10000		
14000	-0 -	-0
18000		
20000	D- 200	-6
30000		30 20 2


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the specificated resting/inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter pathorization of AGC, the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Page 48 of 49

Frequency Response Result

12.5 KHz Channel Separations

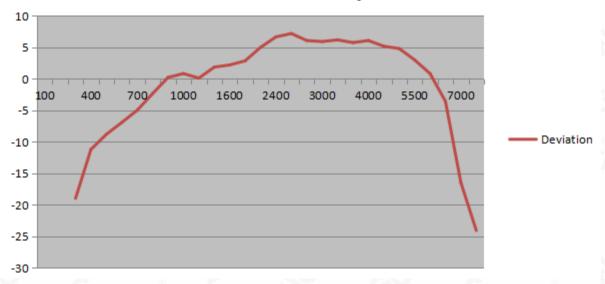

Note: All the modes had been tested, but only the worst data recorded in the report.


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Restriction Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter pathorization of AGC, the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Page 49 of 49

APPENDIX I: PHOTOGRAPHS OF SETUP

RADIATED EMISSION TEST SETUP

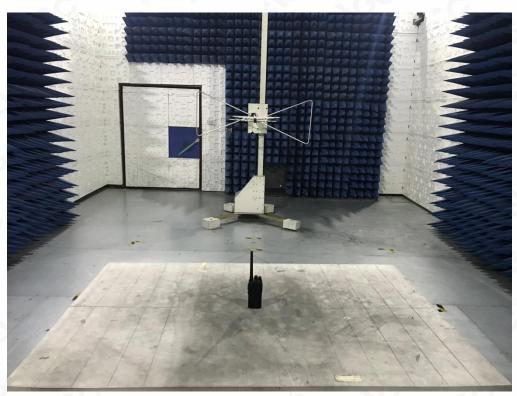



----END OF REPORT----

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.