



FCC TEST REPORT

Test report
On Behalf of
PO FUNG ELECTRONIC(HK) INTERNATIOANL GROUP
COMPANY
For
DUAL BAND FM TRANSCEIVER
Model No.: UV-82 III, UV-82X3

FCC-ID:2AJGM-UV82

Prepared for : PO FUNG ELECTRONIC(HK) INTERNATIOANL GROUP COMPANY
3/F FULOK BLDG 131-133 WING LOK ST SHEUNG WAN, Hong Kong

Prepared By : Shenzhen HUAKE Testing Technology Co., Ltd.
1F, B2 Building, Junfeng Zhongcheng Zhizao Innovation Park, Fuhai Street, Bao'an District, Shenzhen City, China

Date of Test: Oct. 15, 2018~Dec. 17, 2018

Date of Report: Dec. 18, 2018

Report Number: HK1901090073E




TEST RESULT CERTIFICATION

Applicant's name : PO FUNG ELECTRONIC(HK) INTERNATIOANL GROUP COMPANY
 Address..... : 3/F FULOK BLDG 131-133 WING LOK ST SHEUNG WAN, Hong Kong
Manufacture's Name..... : PO FUNG ELECTRONIC(HK) INTERNATIOANL GROUP COMPANY
 Address..... : 3/F FULOK BLDG 131-133 WING LOK ST SHEUNG WAN, Hong Kong
Product description : DUAL BAND FM TRANSCEIVER
 Brand Name : BAOFENG ,Pofung
 Mode Name : UV-82III
 Serial Name : UV-82X3
 Difference Description : All the same except the mode name.


Standards : FCC Rules and Regulations Part 15B

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen HUAK Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen HUAK Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.


Date of Test :
 Date (s) of performance of tests..... : **Oct. 15, 2018~Dec. 17, 2018**
 Date of Issue : **Dec. 18, 2018**
 Test Result..... : **Pass**

Testing Engineer : 

 (Gary Qian)

Technical Manager : 

 (Eden Hu)

Authorized Signatory : 

 (Jason Zhou)



Revision	Issue Date	Revisions	Revised By
V1.0	Jan. 09, 2019	Class II Permissive Change	Jason Zhou

Note: The original test report Ref. No. (AGC02294180601FE08) (dated 2018-06-23), was modified on 2019-01-09 to include the following changes and additions for:

Changed software version from UV82 to UV82III, Changed Hardware version from UV82-FST8-VER02 to UV82-FST8-VER05

- Changed software version from UV82 to UV82III, Changed Hardware version from UV82-FST8-VER02 to UV82-FST8-VER05
- Remove : VR1,U1,L30,L28,L25,L1
- Increase :L22(100NH)
- Replace: C124,C145,C174,C127,C172,C183,C194,C208,C218,C198,C199,C108,

L32 (Different package);

- Change position: CY3, and model name is A8717
- Model name changed from UV-82, UV-82L, GT-5 to UV-82 III
- Increase the frequency band 200MHz -260MHz
- PCB Layout changed



TABLE OF CONTENTS

1. VERIFICATION OF COMPLIANCE	5
2. PRODUCT INFORMATION	6
3. IDENTIFICATION OF THE RESPONSIBLE TESTING LOCATION.....	7
4. SUPPORT EQUIPMENT LIST	8
5. SYSTEM DESCRIPTION	8
6. SUMMARY OF TEST RESULTS.....	9
7. FCC RADIATED EMISSION TEST.....	10
7.1. TEST EQUIPMENT OF RADIATED EMISSION.....	10
7.2. LIMITS OF RADIATED EMISSION TEST.....	10
7.3 BLOCK DIAGRAM OF RADIATED EMISSION TEST	10
7.4 PROCEDURE OF RADIATED EMISSION TEST	12
7.5 TEST RESULT OF RADIATED EMISSION TEST	13
8. CONDUCTED EMISSION TEST	15
8.1 PROVISIONS APPLICABLE	15
8.2 MEASUREMENT PROCEDURE	15
8.3 TEST SETUP BLOCK DIAGRAM	16
8.4 TEST RESULT.....	17
9. ANTENNA CONDUCTED POWER FOR RECEIVERS	19
10. SCANNING RECEIVERS AND FREQUENCY CONVERTERS USED WITH SCANNING RECEIVERS.....	22
APPENDIX 1 PHOTOGRAPHS OF EUT	24



1. VERIFICATION OF COMPLIANCE

Hardware Version	UV82-FST8-VER05
Software Version	UV82III
Measurement Procedure	ANSI C63.4: 2014
Deviation:	None
Condition of Test Sample	Normal

The test results of this report relate only to the tested sample identified in this report.



2. PRODUCT INFORMATION

The EUT is a Analog Transceiver designed for voice communication. It is designed by way of utilizing the F3E modulation achieves the system operating.

A major technical description of EUT is described as following:

Communication Type	Voice / Tone only
Modulation	FM
RX Frequency Range	Rx: 136MHz -174MHz; Rx: 200MHz -260MHz; Rx: 400MHz -480MHz
Emission Type	F3E
Antenna Designation	Detachable
Antenna Gain	2.15dBi
Power Supply	DC 7.4V 2000mAh, charging with DC 8.4V.
Adapter Parameter	INPUT:AC 110-240V~ 50/60Hz ,0.4A OUTPUT:DC 10V 1A
Charger Parameter	INPUT: DC 10V 1A OUTPUT:DC 8.4V 0.5A

I/O Port Information (Applicable Not Applicable)

I/O Port of EUT			
I/O Port Type	Q'TY	Cable	Tested with
DC Input Port	1	1.14m, Unshielded	1
Antenna Connect Port	1	0	1

**3. IDENTIFICATION OF THE RESPONSIBLE TESTING LOCATION**

Site	Shenzhen HUAKE Testing Technology Co., Ltd.
Location	1F, B2 Building, Junfeng Zhongcheng Zhizao Innovation Park, Fuhai Street, Bao'an District, Shenzhen City, China
Designation Number	CN1229
Test Firm Registration Number : 616276	

List Of Test Equipment:

Conducted Emission Shielding Room Test Site (744)					
Equipment	Manufacturer	Model	Serial Number	Cal. Date	Cal. Due
Receiver	R&S	ESCI 7	HKE-010	Dec. 29, 2017	Dec. 28, 2018
LISN	R&S	ENV216	HKE-002	Dec. 29, 2017	Dec. 28, 2018
Conducted test software	Tonscend	TS+ Rev 2.5.0.0	HKE-081	N/A	N/A

TEST EQUIPMENT OF RADIATED EMISSION TEST

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
Broadband antenna	Schwarzbeck	VULB 9163	HKE-012	Dec. 29, 2017	Dec. 28, 2018
Receiver	R&S	ESCI 7	HKE-010	Dec. 29, 2017	Dec. 28, 2018
Preamplifier	Schwarzbeck	BBV 9743	HKE-006	Dec. 29, 2017	Dec. 28, 2018
Position controller	Taiwan MF	MF7802	HKE-011	Dec. 29, 2017	Dec. 28, 2018
Horn antenna	Schwarzbeck	9120D	HKE-013	Dec. 29, 2017	Dec. 28, 2018
Vector Analyzer	Agilent	E4440A	HKE-101	Mar.01,2018	Feb.28,2019
RF Communication Test Set	HP	HP8920B	HKE-089	June 12, 2018	June 11, 2019



4. SUPPORT EQUIPMENT LIST

Device Type	Manufacturer	Model Name	Serial No.	Data Cable	Power Cable
--	--	--	--	--	--

5. SYSTEM DESCRIPTION

EUT test procedure:

1. Connect EUT and peripheral devices.
2. Power on the EUT, the EUT begins to work.
3. Make sure the EUT normal working.

EMC TEST MODES

No.	TEST MODES
1	Scanning mode
2	Scanning stopped/Receiving at low channel of 136 MHz -174 MHz
3	Scanning stopped/Receiving at middle channel of 136 MHz -174 MHz
4	Scanning stopped/Receiving at high channel of 136 MHz -174 MHz
5	Scanning stopped/Receiving at low channel of 200 MHz -260 MHz
6	Scanning stopped/Receiving at middle channel of 200 MHz -260 MHz
7	Scanning stopped/Receiving at high channel of 200 MHz -260 MHz
8	Scanning stopped/Receiving at low channel of 400 MHz -480 MHz
9	Scanning stopped/Receiving at middle channel of 400 MHz -480 MHz
10	Scanning stopped/Receiving at high channel of 400 MHz -480 MHz

Note: Only the result of the worst case was recorded in the report.



6. SUMMARY OF TEST RESULTS

FCC Rules	Description Of Test	Result
§15.107	Conduction Emission	Compliant
§15.109	Radiated Emission	Compliant
§15.111	Antenna Conducted Power for receivers	Compliant
§15.121(b)	Scanning receivers and frequency converters used with scanning receivers	Compliant



7. FCC RADIATED EMISSION TEST

7.1. TEST EQUIPMENT OF RADIATED EMISSION


7.2. LIMITS OF RADIATED EMISSION TEST

Frequency (MHz)	Distance (m)	Maximum Field Strength Limit (dBuV/m/ Q.P.)
30~88	3	41.0
88~216	3	45.0
216~960	3	48.0
960~2000	3	53.5

**Note: The lower limit shall apply at the transition frequency. Because the EUT RX frequency range up to 480 MHz, so the upper the frequency range up to 2 GHz.


7.3 BLOCK DIAGRAM OF RADIATED EMISSION TEST

RADIATED EMISSION TEST SETUP 30MHz-1000MHz

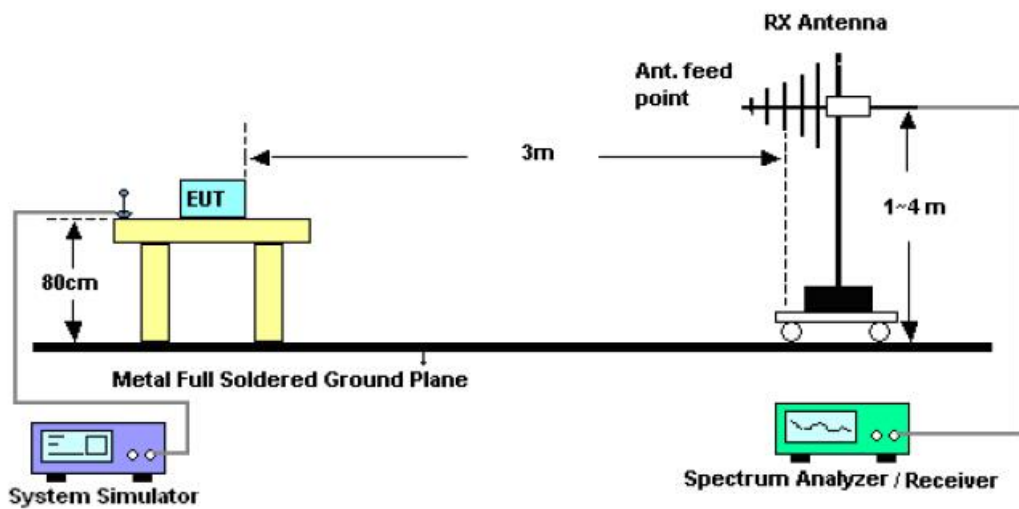



RADIATED EMISSION TEST SETUP ABOVE 1000MHz

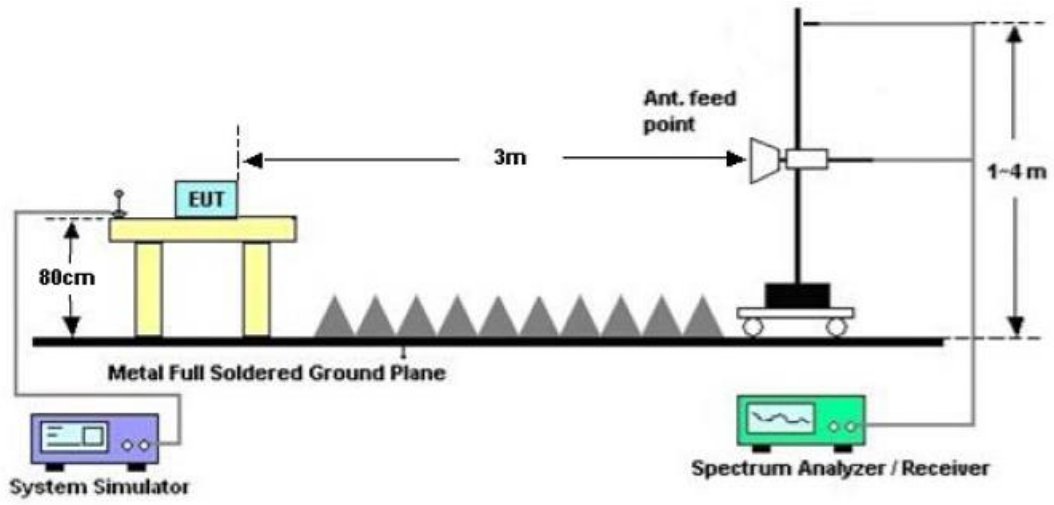



7.4 PROCEDURE OF RADIATED EMISSION TEST


- 1) The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden turntable with a height of 0.8 meters is used which is placed on the ground plane as per ANSI C63.4 (see Test Facility for the dimensions of the ground plane used). When the EUT is floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2) Support equipment, if needed, was placed as per ANSI C63.4.
- 3) All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4.
- 4) The EUT received power by AC 120V/60Hz.
- 5) The antenna was placed at 3 meter away from the EUT as stated in FCC Part 15. The antenna connected to the Analyzer via a cable and at times a pre-amplifier would be used.
- 6) The Analyzer / Receiver quickly scanned from 30MHz to 1000MHz. The EUT test program was started. Emissions were scanned and measured rotating the EUT to 360 degrees and positioning the antenna 1 to 4 meters above the ground plane, in both the vertical and the horizontal polarization, to maximize the emission reading level.
- 7) The test mode(s) were scanned during the test:
- 8) Recorded at least the six highest emissions. Emission frequency, amplitude, antenna position, polarization and turntable position were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit and Q.P./Peak reading is presented. For emissions below 1GHz, use 120KHz RBW and $VBW \geq 3RBW$ for QP reading.
- 9) For emissions above 1GHz, use 1MHz RBW and 3MHz VBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
- 10) When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
- 11) If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 12) For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 13) In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High - Low scan is not required in this case.
- 14) The test data of the worst case condition (mode 1) was reported on the following Data page



7.5 TEST RESULT OF RADIATED EMISSION TEST

UV-82 III(mode 1)

Radiated Emission Test –Horizontal -3m Below 1G

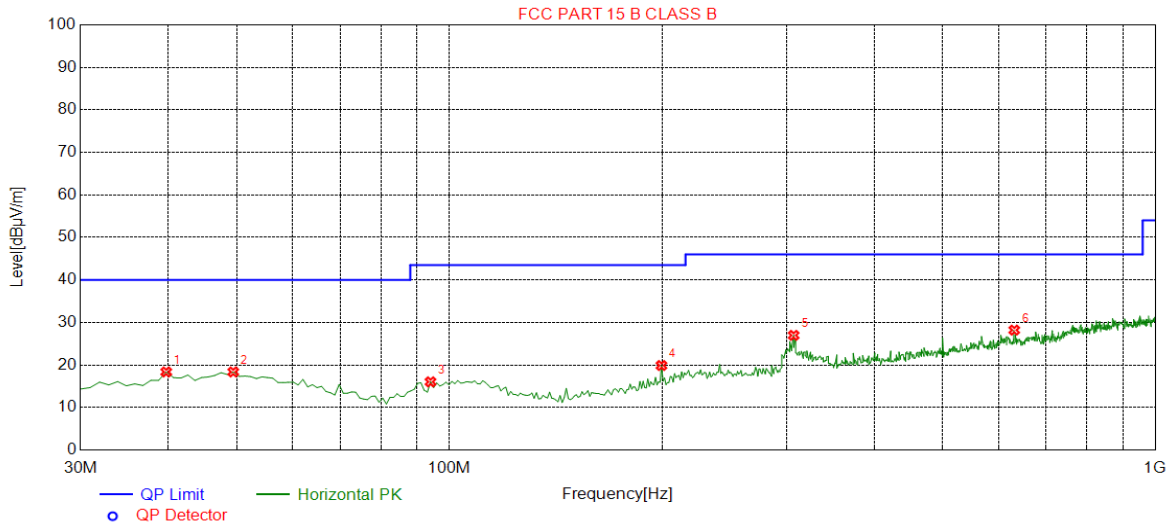


Suspected List								
NO.	Freq. [MHz]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	39.7000	18.37	-14.64	40.00	21.63	100	54	Horizontal
2	49.4000	18.37	-13.65	40.00	21.63	100	136	Horizontal
3	94.0200	16.04	-16.40	43.50	27.46	100	12	Horizontal
4	199.7500	19.88	-15.08	43.50	23.62	100	64	Horizontal
5	307.4200	26.97	-12.64	46.00	19.03	100	111	Horizontal
6	631.4000	28.21	-5.50	46.00	17.79	100	149	Horizontal

RESULT: PASS



Radiated Emission Test –Vertical -3m Below 1G

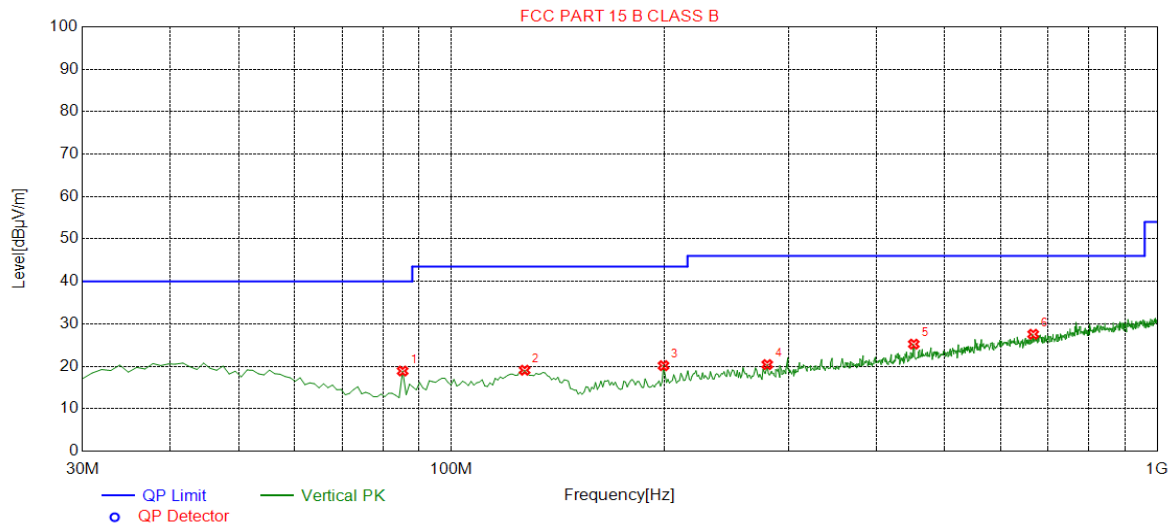

Suspected List

NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	85.2900	18.89	-18.20	40.00	21.11	100	71	Vertical
2	127.0000	19.08	-18.13	43.50	24.42	100	157	Vertical
3	199.7500	20.15	-15.08	43.50	23.35	100	208	Vertical
4	280.2600	20.41	-13.24	46.00	25.59	100	282	Vertical
5	451.9500	25.23	-8.93	46.00	20.77	100	348	Vertical
6	667.2900	27.56	-4.73	46.00	18.44	100	182	Vertical

RESULT: PASS

- Note:**
1. Factor=Antenna Factor + Cable loss - Amplifier gain, Margin=Measurement-Limit.
 2. The “Factor” value can be calculated automatically by software of measurement system.
 3. Emissions range from 1GHz to 2GHz have 20dB margin. No recording in the test report.
 4. Only the data of the worst case would be record in this test report.



8. CONDUCTED EMISSION TEST

8.1 PROVISIONS APPLICABLE

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the, the radio frequency voltage that is conducted back onto the AC power line on any frequencies within the band 150 KHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50uH/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequencies ranges.

Frequency of Emission (MHz)	Conducted Limit(dBuV)	
	Quasi-Peak	Average
0.15 – 0.5	66 to 56 *	56 to 46 *
0.5 – 5	56	46
5 – 30	60	50

* Decreases with the logarithm of the frequency.


8.2 MEASUREMENT PROCEDURE

- (1) The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.4 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- (2) Support equipment, if needed, was placed as per ANSI C63.4.
- (3) All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4.
- (4) The EUT received AC 120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
- (5) All support equipments received AC power from a second LISN, if any.
- (6) The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- (7) Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.

During the above scans, the emissions were maximized by cable manipulation.




8.3 TEST SETUP BLOCK DIAGRAM

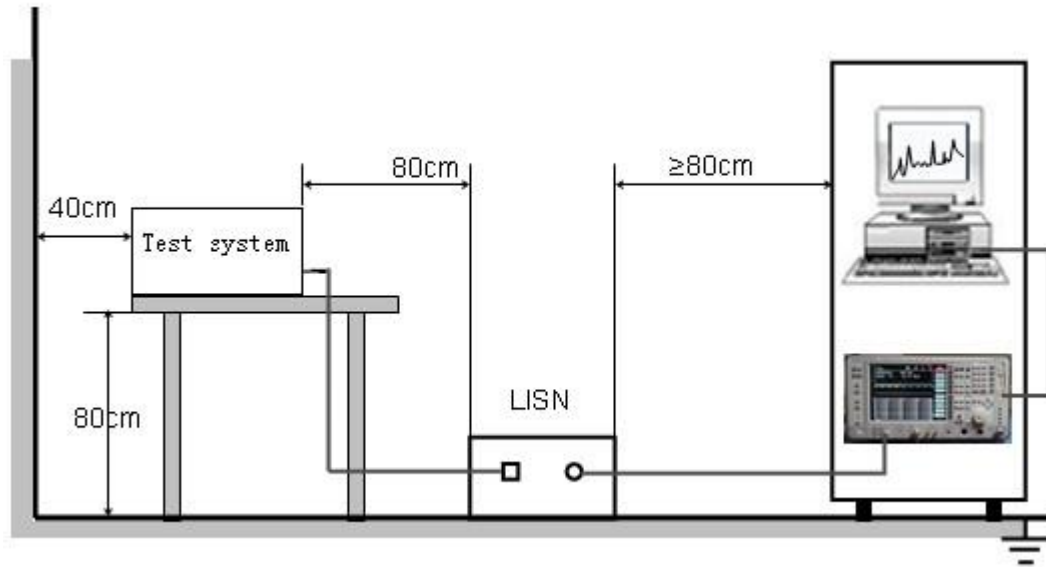



8.4 TEST RESULT

CONDUCTED EMISSION TEST – LINE L

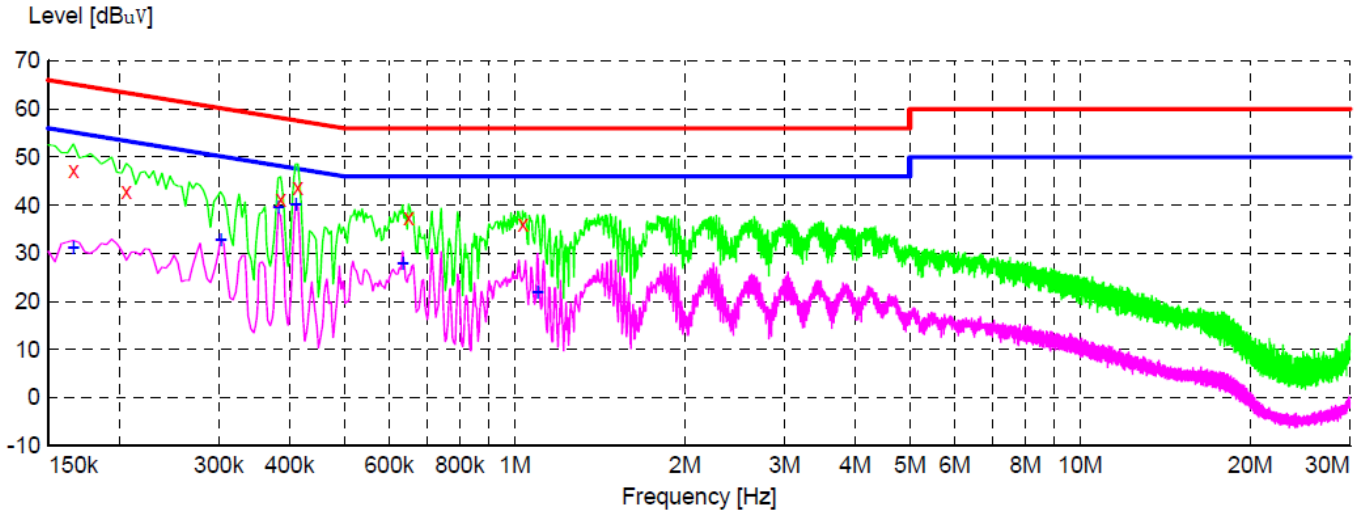

MEASUREMENT RESULT:

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.166000	47.30	10.0	65	17.9	QP	L1	FLO
0.206000	43.00	10.1	63	20.4	QP	L1	FLO
0.386000	41.40	10.1	58	16.7	QP	L1	FLO
0.414000	43.60	10.1	58	14.0	QP	L1	FLO
0.650000	37.40	10.1	56	18.6	QP	L1	FLO
1.034000	36.00	10.2	56	20.0	QP	L1	FLO


MEASUREMENT RESULT:

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.166000	31.10	10.0	55	24.1	AV	L1	FLO
0.302000	32.80	10.1	50	17.4	AV	L1	FLO
0.382000	39.70	10.1	48	8.5	AV	L1	FLO
0.410000	40.10	10.1	48	7.5	AV	L1	FLO
0.634000	28.00	10.1	46	18.0	AV	L1	FLO
1.098000	21.80	10.2	46	24.2	AV	L1	FLO

RESULT: PASS



CONDUCTED EMISSION TEST – LINE N

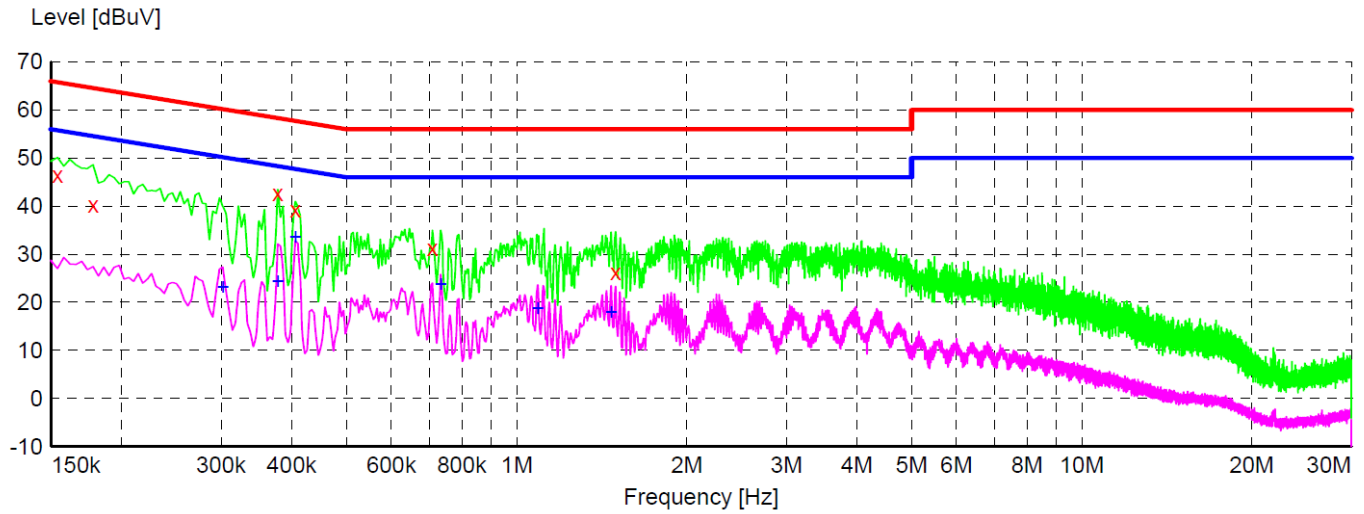

MEASUREMENT RESULT:

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.154000	46.40	10.0	66	19.4	QP	N	FLO
0.178000	40.20	10.0	65	24.4	QP	N	FLO
0.378000	42.70	10.1	58	15.6	QP	N	FLO
0.406000	39.30	10.1	58	18.4	QP	N	FLO
0.710000	31.10	10.1	56	24.9	QP	N	FLO
1.498000	26.20	10.2	56	29.8	QP	N	FLO

MEASUREMENT RESULT:

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.302000	23.10	10.1	50	27.1	AV	N	FLO
0.378000	24.30	10.1	48	24.0	AV	N	FLO
0.406000	33.60	10.1	48	14.1	AV	N	FLO
0.734000	23.90	10.1	46	22.1	AV	N	FLO
1.090000	18.70	10.2	46	27.3	AV	N	FLO
1.470000	17.90	10.2	46	28.1	AV	N	FLO

RESULT: PASS




9. ANTENNA CONDUCTED POWER FOR RECEIVERS

LIMIT

The antenna conducted power of the receiver as defined in §15.111 shall not exceed the values given in the following tables

Frequency Range	9 KHz to 2GHz
Limit	2.0 nW (-57 dBm)

TEST CONFIGURATION




TEST PROCEDURE

1. The receiver antenna terminal connected to a spectrum analyzer.
2. The test data of the worst case condition (mode 1) was reported on the following Data page.




TEST RESULTS

Conducted Measurement (9 KHz to 150 KHz)

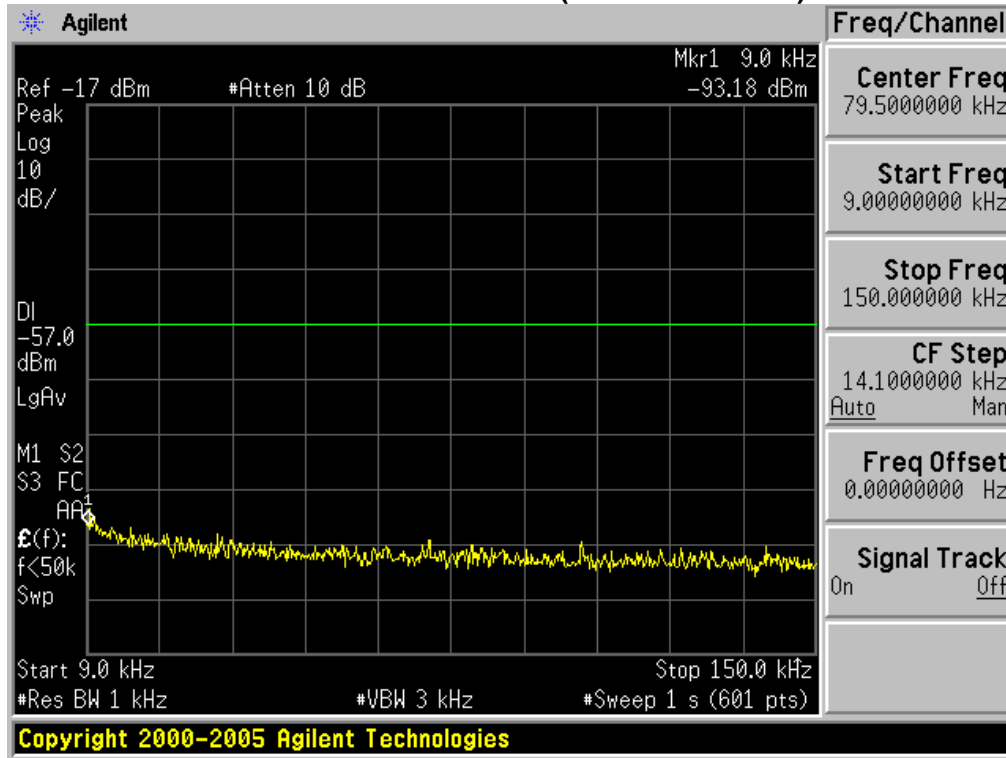


Conducted Measurement (150 KHz to 30MHz)

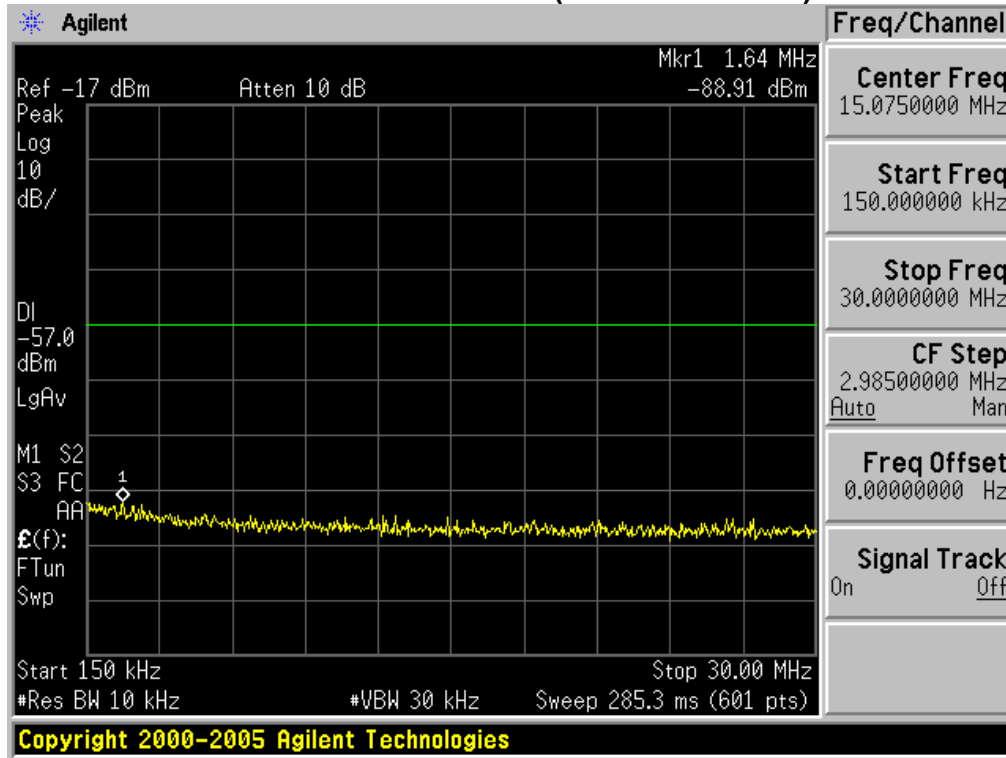




Conducted Measurement (30MHz to 1GHz)

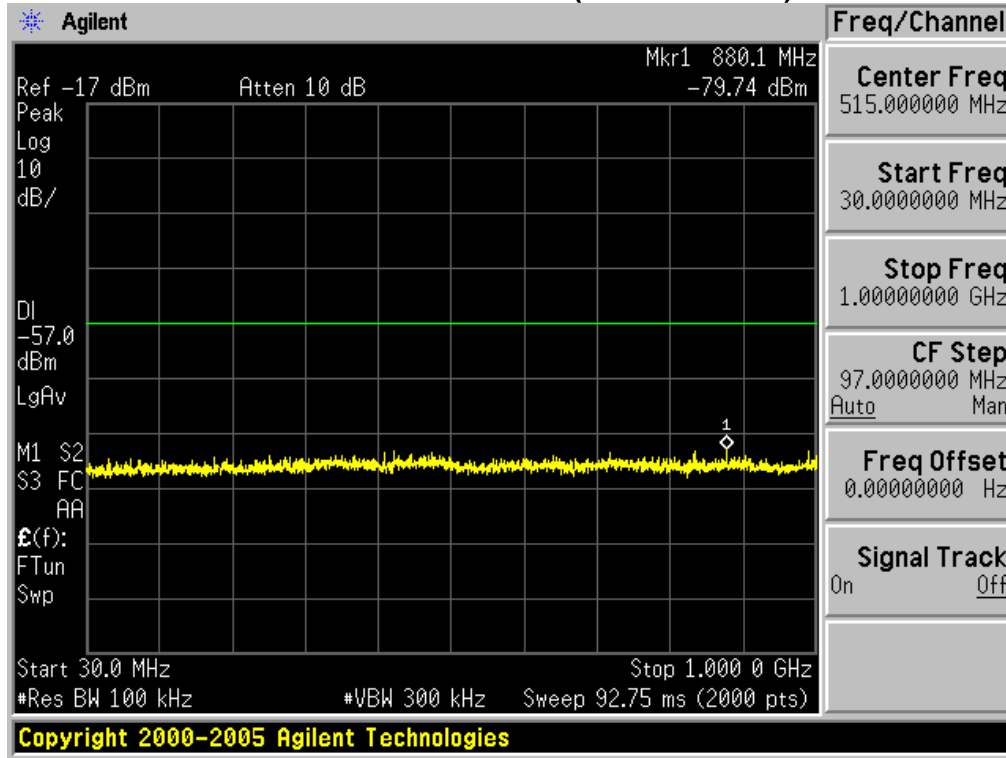

Conducted Measurement (1GHz to 2GHz)

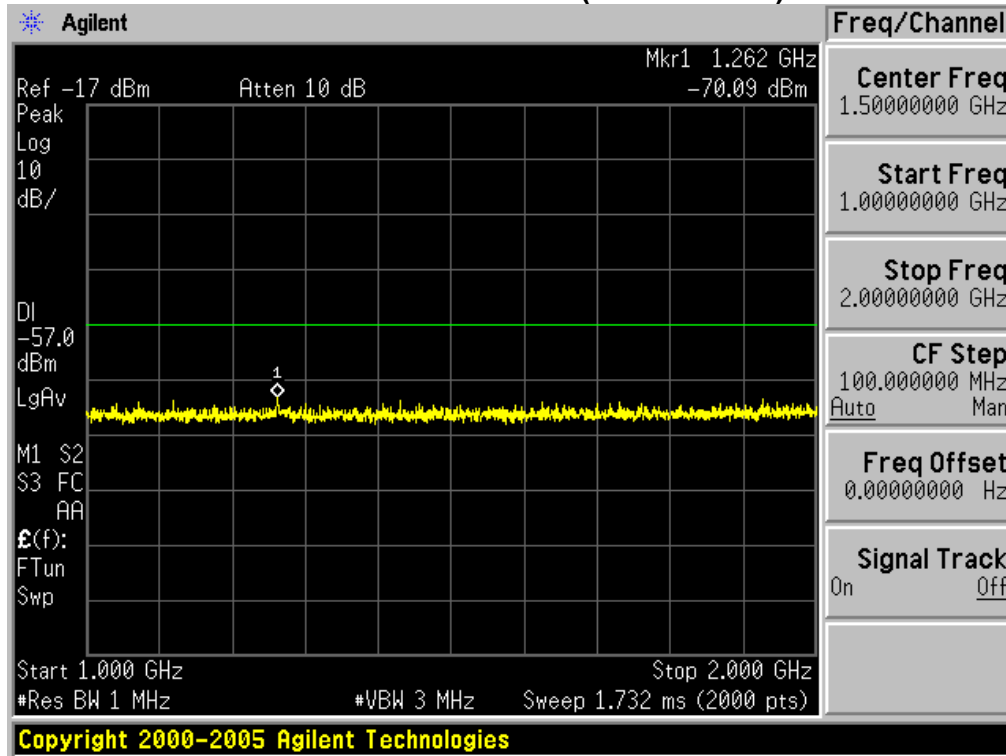

PASS




10. SCANNING RECEIVERS AND FREQUENCY CONVERTERS USED WITH SCANNING RECEIVERS.

LIMIT

Except as provided in paragraph (c) of this section, scanning receivers shall reject any signals from the Cellular Radiotelephone Service frequency bands that are 38 dB or lower based upon a 12 dB SINAD measurement, which is considered the threshold where a signal can be clearly discerned from any interference that may be present.

TEST CONFIGURATION

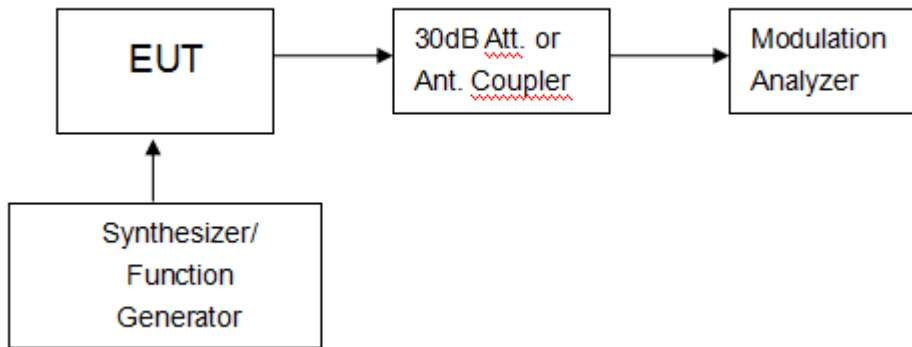

TEST PROCEDURE

Please review the FCC Part 15.121 b section requirements to meet the testing process

TEST RESULTS

VHF:

Frequency Range(MHz)	Channel	Measurement Result (dB)	Limit(dB)	Result
136-174	Bottom	46	> 38	Pass
136-174	Middle	50	> 38	Pass
136-174	Top	48	> 38	Pass

UHF:



Frequency Range(MHz)	Channel	Measurement Result (dB)	Limit(dB)	Result
220-260	Bottom	48	>38	Pass
220-260	Middle	48	>38	Pass
220-260	Top	51	>38	Pass

Frequency Range(MHz)	Channel	Measurement Result (dB)	Limit(dB)	Result
400-480	Bottom	52	>38	Pass
400-480	Middle	47	>38	Pass
400-480	Top	51	>38	Pass

Note:1.This device meets the requirements of FCC PART 15.121.b
2.The test report only shows the worst test results



APPENDIX 1 PHOTOGRAPHS OF EUT

TOTAL VIEW OF EUT



TOP VIEW OF EUT





BOTTOM VIEW OF EUT



FRONT VIEW OF EUT





BACK VIEW OF EUT



LEFT VIEW OF EUT





RIGHT VIEW OF EUT



OPEN VIEW-1 OF EUT






OPEN VIEW-2 OF EUT




OPEN VIEW-3 OF EUT

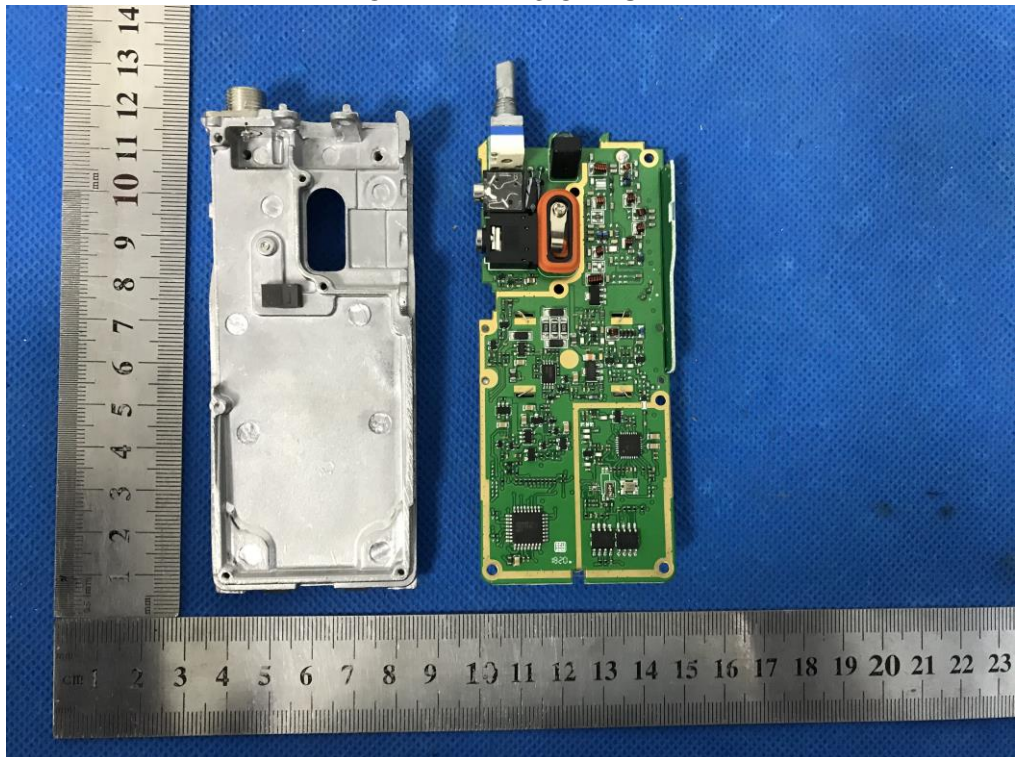




OPEN VIEW-4 OF EUT

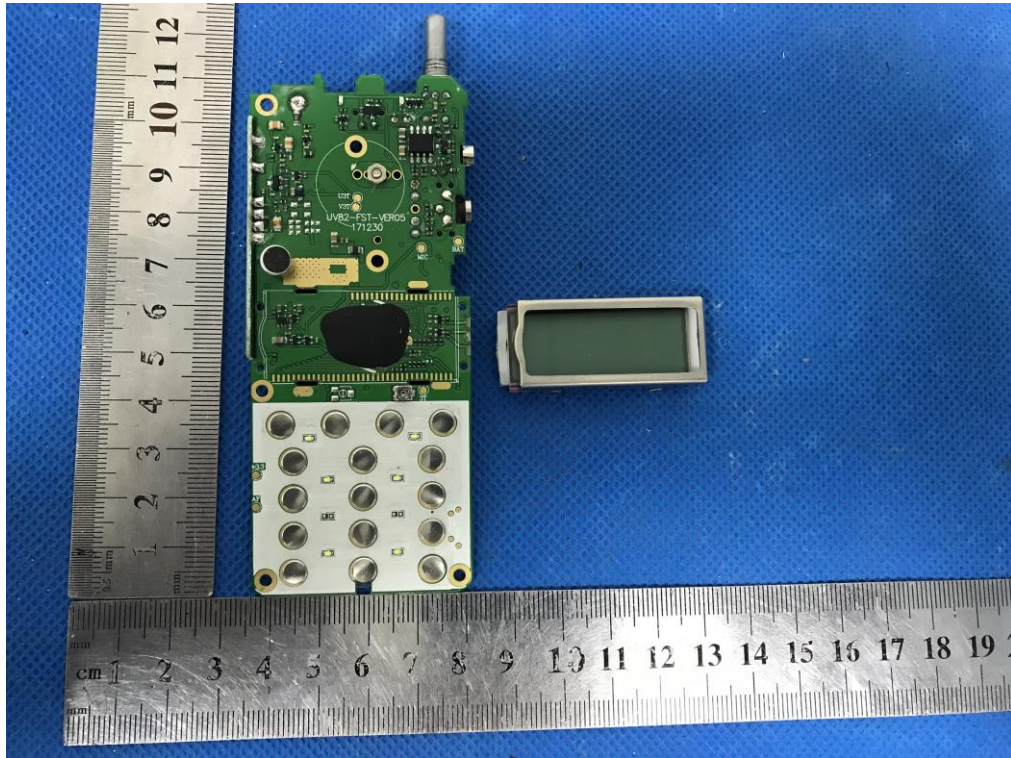


INTERNAL VIEW-1 OF EUT

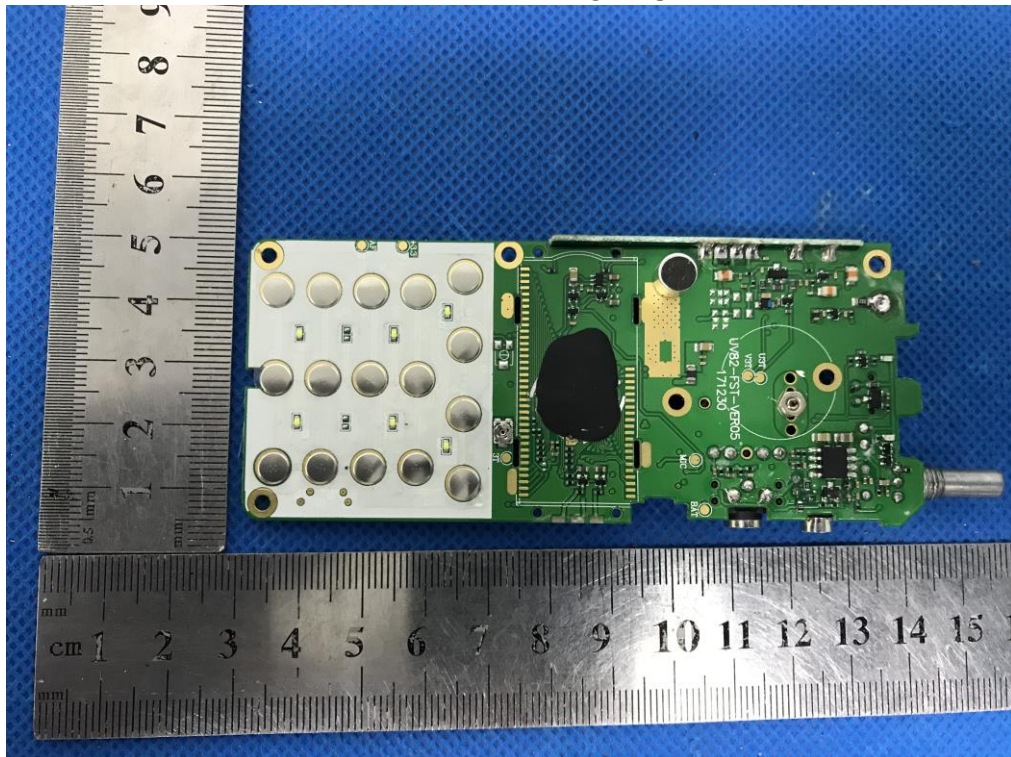




INTERNAL VIEW-2 OF EUT

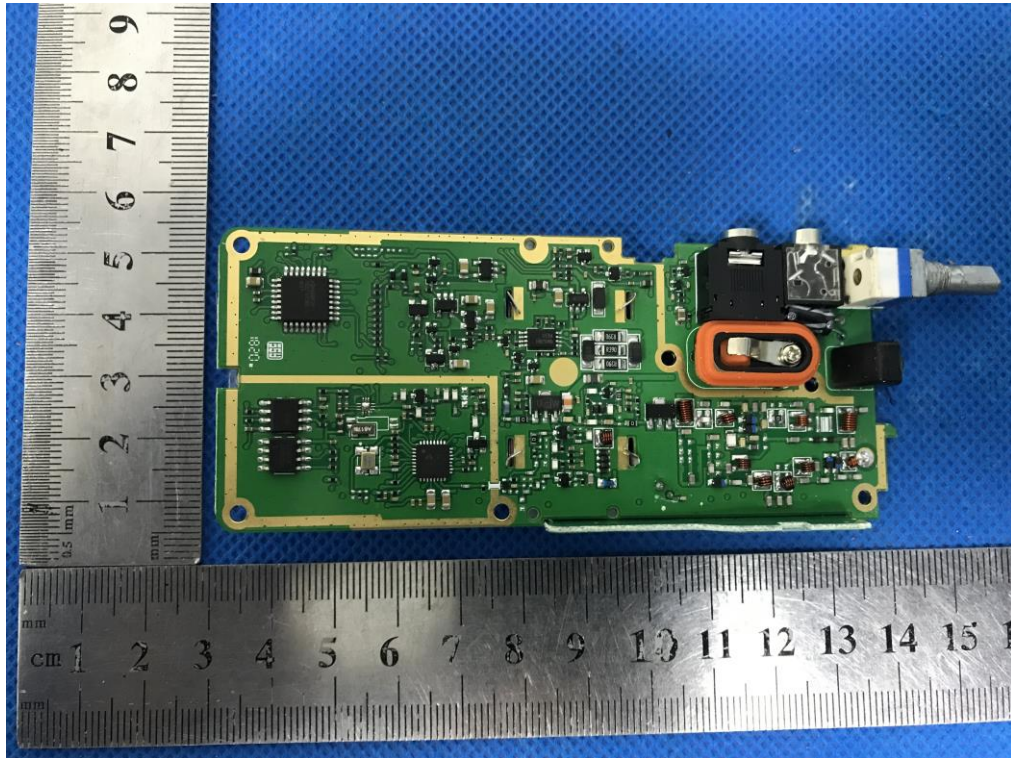


INTERNAL VIEW-3 OF EUT

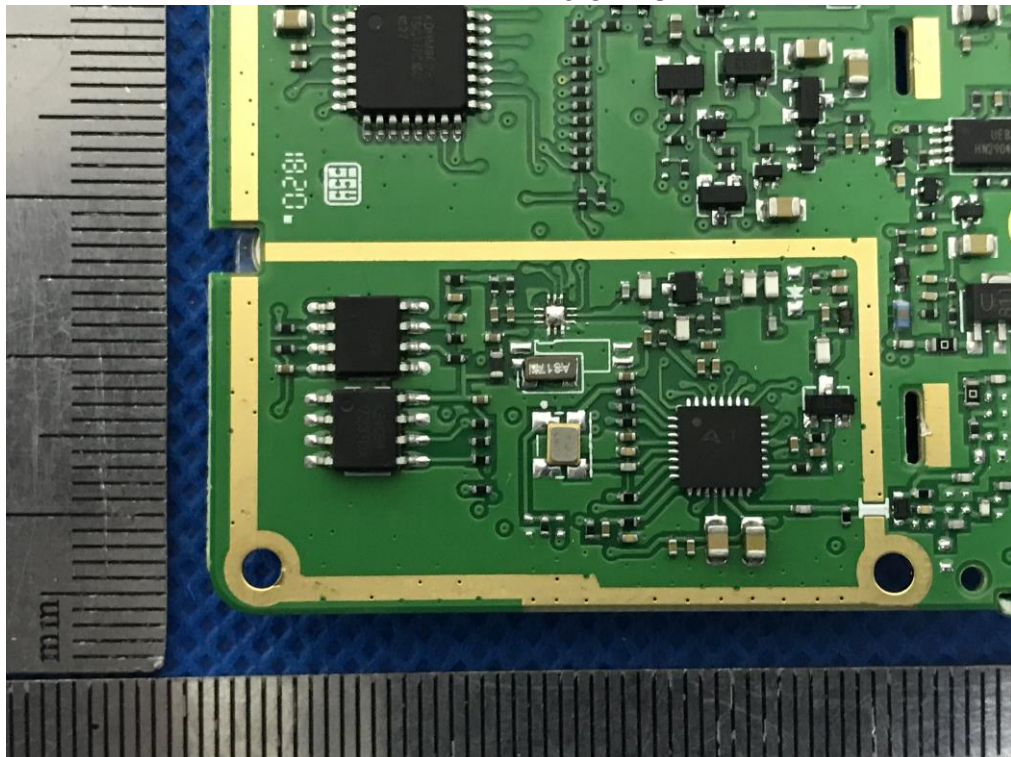




INTERNAL VIEW-4 OF EUT

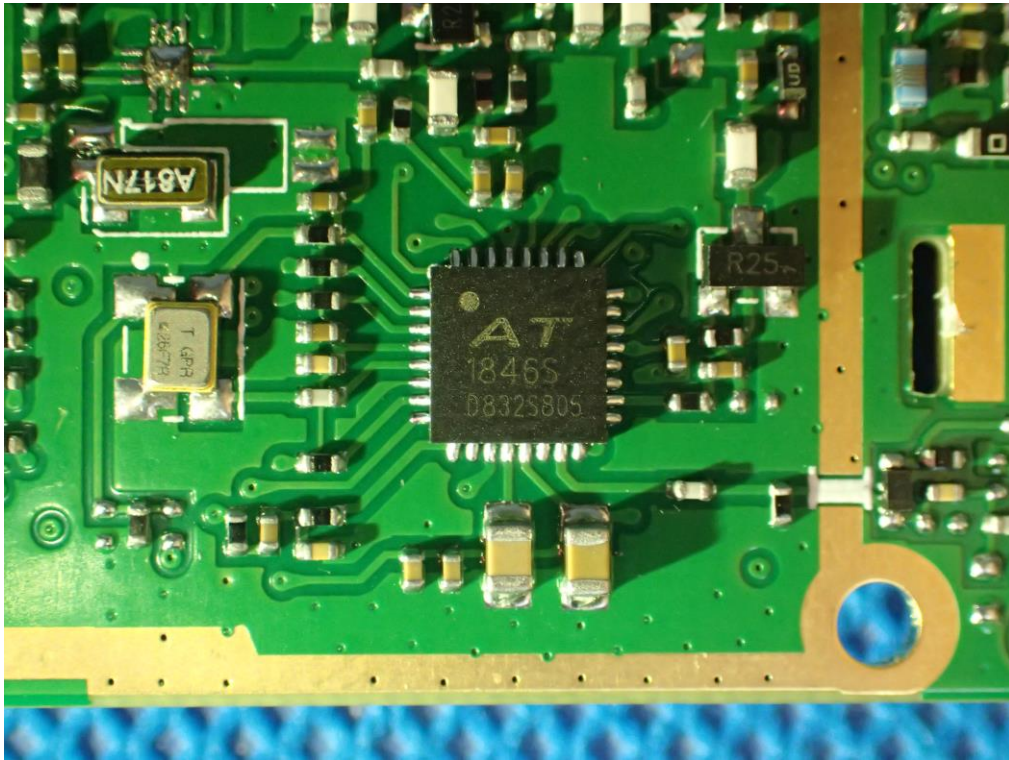

INTERNAL VIEW-5 OF EUT

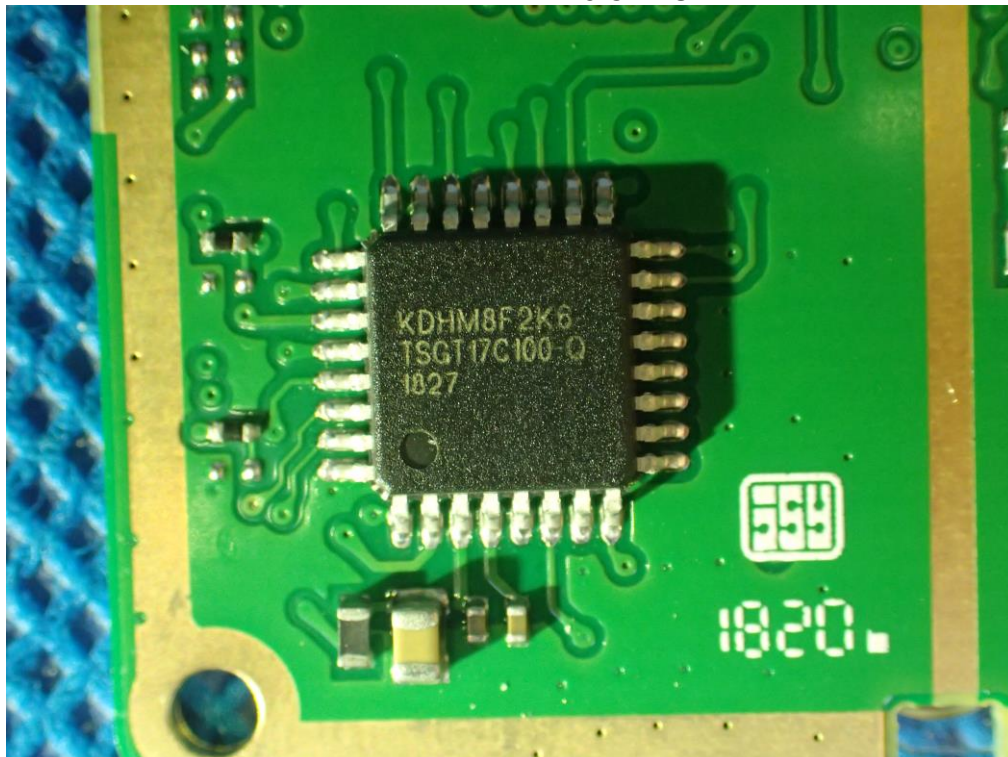

----END OF REPORT----