



## FCC TEST REPORT

Report No: STS1608101F01

Issued for

SHENZHEN UNICHAIN TECHNOLOGY CO.,LTD

Room 306, F3, Hongxiang Household AIP, Longjing Road,  
Yangmei, Bantian Street, Longgang District, Shenzhen city,  
China

<b>Product Name:</b>	Cordless Mouse
<b>Brand Name:</b>	TECKNET
<b>Model Name:</b>	M005
<b>Series Model:</b>	M001
<b>FCC ID:</b>	2AJIM-M005
<b>Test Standard:</b>	FCC Part 15.249

Any reproduction of this document must be done in full. No single part of this document may be reproduced without permission from STS. All Test Data Presented in this report is only applicable to presented Test sample.

Shenzhen STS Test Services Co., Ltd.  
1/F., Building B, Zhuoke Science Park, No.190,Chongqing Road,  
Fuyong Street, Bao'an District, Shenzhen, Guangdong,China  
TEL: +86-755 3688 6288 FAX: +86-755 3688 6277 E-mail:sts@stsapp.com



**TEST RESULT CERTIFICATION**

**Applicant's name :** SHENZHEN UNICHAIN TECHNOLOGY CO.,LTD  
Room 306, F3, Hongxiang Household AIP, Longjing Road,  
Address : Yangmei, Bantian Street, Longgang District, Shenzhen city,  
China

**Manufacture's Name :** SHENZHEN WINTOP ELECTRONICS COMPANY LIMITED  
4&5 floor ,No 40 ,xinhe road,shangmugu community of pinghu,  
Address : longgang district, Shenzhen city,China.

**Product description**

Product name : Cordless Mouse

Brand name : TECKNET

Model and/or type reference : M005, M001

**Standards :** FCC Part15.249

Test procedure : ANSI C63.10-2013

This device described above has been tested by STS, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of STS, this document may be altered or revised by STS, personal only, and shall be noted in the revision of the document.

Date of Test :

Date of performance of tests : 12 Aug. 2016 ~18 Aug. 2016

Date of Issue : 19 Aug. 2016

Test Result : **Pass**

Testing Engineer :

(Tony Liu)

Technical Manager :

(Vita Li)

Authorized Signatory :

(Bovey Yang)





Table of Contents	Page
<b>1. SUMMARY OF TEST RESULTS</b>	<b>5#</b>
1.1 TEST FACTORY	6#
1.2 MEASUREMENT UNCERTAINTY	6#
<b>2. GENERAL INFORMATION</b>	<b>7#</b>
2.1 GENERAL DESCRIPTION OF EUT	7#
2.2 DESCRIPTION OF TEST MODES	9#
2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	10#
2.4 DESCRIPTION OF SUPPORT UNITS	11#
2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS	12#
<b>3. EMC EMISSION TEST</b>	<b>13#</b>
3.1 CONDUCTED EMISSION MEASUREMENT	13#
3.2 RADIATED EMISSION MEASUREMENT	16#
<b>4. CONDUCTED SPURIOUS &amp; BAND EDGE EMISSION</b>	<b>27#</b>
4.1 REQUIREMENT	27#
4.2 TEST PROCEDURE	27#
4.3 TEST SETUP	27#
4.4 EUT OPERATION CONDITIONS	27#
4.5 TEST RESULTS	28#
<b>5. BANDWIDTH TEST</b>	<b>29#</b>
5.1 TEST PROCEDURE	29#
5.2 TEST SETUP	29#
5.3 EUT OPERATION CONDITIONS	29#
5.4 TEST RESULTS	30#
<b>6. ANTENNA REQUIREMENT</b>	<b>32#</b>
6.1 STANDARD REQUIREMENT	32#
6.2 EUT ANTENNA	32#
<b>APPENDIX- PHOTOS OF TEST SETUP</b>	<b>33#</b>



**Revision History**

Rev.	Issue Date	Report NO.	Effect Page	Contents
00	19 Aug. 2016	STS1608101F01	ALL	Initial Issue





## 1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

<b>FCC Part15 (15.249) , Subpart C</b>			
Standard Section	Test Item	Judgment	Remark
15.207	Conducted Emission	N/A	
15.203	Antenna Requirement	Pass	
15.249	Radiated Spurious Emission	Pass	
	conduction Spurious Emission	N/A	
15.205	Radiated Band Edge Emission	Pass	
	conduction Band Edge Emission	N/A	
15.249	20dB Bandwidth	Pass	

### NOTE:

(1) "N/A" denotes test is not applicable in this Test Report

(2) All tests are according to ANSI C63.4-2014 and ANSI C63.10-2013



### 1.1 TEST FACTORY

Shenzhen STS Test Services Co., Ltd.

Add. : 1/F., Building B, Zhuoke Science Park, No.190, Chongqing Road,  
Fuyong Street, Bao'an District, Shenzhen, Guangdong, China

CNAS Registration No.: L7649;

FCC Registration No.: 842334; IC Registration No.: 12108A-1

### 1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement  $y \pm U$ , where expanded uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately **95** %.

No.	Item	Uncertainty
1	Conducted Emission (9KHz-150KHz)	$\pm 2.88\text{Db}$
2	Conducted Emission (150KHz-30MHz)	$\pm 2.67\text{Db}$
3	RF power,conducted	$\pm 0.70\text{Db}$
4	Spurious emissions,conducted	$\pm 1.19\text{Db}$
5	All emissions,radiated(<1G) 30MHz-200MHz	$\pm 2.83\text{Db}$
6	All emissions,radiated(<1G) 200MHz-1000MHz	$\pm 2.94\text{Db}$
7	All emissions,radiated(>1G)	$\pm 3.03\text{Db}$
8	Temperature	$\pm 0.5^{\circ}\text{C}$
9	Humidity	$\pm 2\%$



## 2. GENERAL INFORMATION

### 2.1 GENERAL DESCRIPTION OF EUT

Equipment	Cordless Mouse
Trade Name	TECKNET
Model Name	M005
Series Model	M001
Model Difference	Only different in model name
Product Description	The EUT is a Cordless Mouse
	Operation Frequency: 2408-2474MHz
	Modulation Type: FSK
	Antenna Designation: PCB Antenna
	Antenna Gain(Peak) -1.5532 dBi
	ERP 84.97 dBuV/m@3m
	Based on the application, features, or specification exhibited in User's Manual, the EUT is considered as an ITE/Computing Device. More details of EUT technical specification, please refer to the User's Manual.
Channel List	Please refer to the Note 2.
Power Supply	DC 3V

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.



2.

Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2408	18	2442
02	2410	19	2444
03	2412	20	2446
04	2414	21	2448
05	2416	22	2450
06	2418	23	2452
07	2420	24	2454
08	2422	25	2456
09	2424	26	2458
10	2426	27	2460
11	2428	28	2462
12	2430	29	2464
13	2432	30	2466
14	2434	31	2468
15	2436	32	2470
16	2438	33	2472
17	2440	34	2474

3. Table for Filed Antenna

Ant	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	NOTE
1	TECKNET	M005	PCB	NA	-1.5532	Antenna

The EUT antenna is PCB Antenna. No antenna other than that furnished by the responsible party shall be used with the device.





## 2.2 DESCRIPTION OF TEST MODES

For conducted test items and radiated spurious emissions  
Each of these EUT operation mode(s) or test configuration mode(s) mentioned below was evaluated respectively..

Pretest Mode	Description	Data/Modulation
Mode 1	TX CH01	1 MHz/FSK
Mode 2	TX CH17	1 MHz/FSK
Mode 3	TX CH34	1 MHz/FSK

Note:

(1) All above mode have been measurement, only worst data was reported.





### 2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters

#### Radiated Spurious Emission Test





## 2.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Serial No.	Note
E-1	Cordless Mouse	TECKNET	M005	N/A	EUT
E-2	PC	4CV428DQXR	500-320cx	4CV428DQYN	N/A

Item	Shielded Type	Ferrite Core	Length	Note
N/A	N/A	N/A	N/A	N/A

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.



## 2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS

## Radiation Test equipment

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
Spectrum Analyzer	Agilent	E4407B	MY50140340	2015.10.25	2016.10.24
Test Receiver	R&S	ESCI	101427	2015.10.25	2016.10.24
Bilog Antenna	TESEQ	CBL6111D	34678	2015.11.25	2016.11.24
Horn Antenna	Schwarzbeck	BBHA 9120D(1201)	9120D-1343	2016.03.06	2017.03.05
50Ω Coaxial Switch	Anritsu	MP59B	6200264416	2016.06.06	2017.06.05
PreAmplifier	Agilent	8449B	60538	2015.10.25	2016.10.24
Loop Antenna	ARA	PLA-1030/B	1029	2016.06.08	2017.06.07
USB RF power sensor	DARE	RPR3006W	15I00041SNO0 3	2015.10.25	2016.10.24

## Conduction Test equipment

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
EMI Test Receiver	R&S	ESPI	102086	2015.11.20	2016.11.19
LISN	R&S	ENV216	101242	2015.10.25	2016.10.24
LISN	EMCO	3810/2NM	000-23625	2015.10.25	2016.10.24

### 3. EMC EMISSION TEST

#### 3.1 CONDUCTED EMISSION MEASUREMENT

##### 3.1.1 POWER LINE CONDUCTED EMISSION LIMITS

Operating frequency band. In case the emission fall within the restricted band specified on Part 15.249 limit in the table below has to be followed.

FREQUENCY (MHz)	Class B (dBuV)		Standard
	Quasi-peak	Average	
0.15 -0.5	66 - 56 *	56 - 46 *	CISPR
0.50 -5.0	56.00	46.00	CISPR
5.0 -30.0	60.00	50.00	CISPR

0.15 -0.5	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	56.00	46.00	FCC
5.0 -30.0	60.00	50.00	FCC

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " \* " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.


The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

### 3.1.2 TEST PROCEDURE

- a. The EUT was placed 0.4 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

### 3.1.3 TEST SETUP

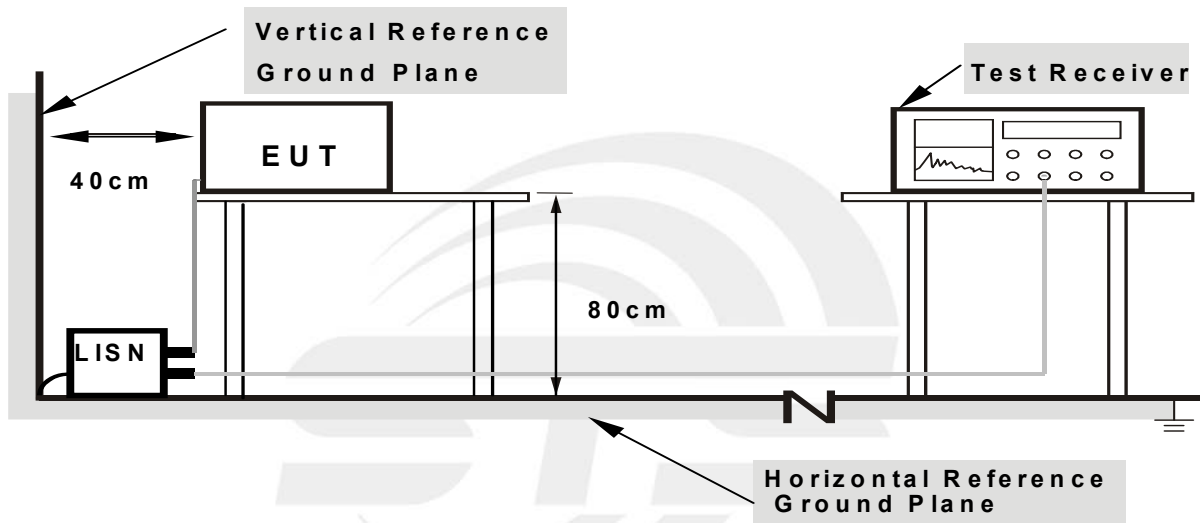

- Note:**
- 1. Support units were connected to second LISN.
  - 2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

### 3.1.4 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.



## 3.1.5 TEST RESULTS

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	1010hPa	Phase:	L/N
Test Voltage:	DC 3V	Test Mode:	N/A

*Note: denotes test is not applicable in this test report.*





### 3.2 RADIATED EMISSION MEASUREMENT

#### 3.2.1 RADIATED EMISSION LIMITS

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on Part 15.249 and the Part 15.209(a) limit in the table below has to be followed.

Standard FCC 15.209

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3
Above 1000	Other:74.0 dB(μV)/m (Peak) 54.0 dB(μV)/m (Average)	3

Standard FCC 15.249

Frequency of Emission (MHz)	Field Strength of fundamental (millivolts /meter)	Field Strength of Harmonics (microvolts/meter)
900~928	50	500
2400~2483.5	50	500
5725~5875	50	500
24000~242500	250	2500

Notes:

- (1) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.

Spectrum Parameter	Setting
Detector	Peak
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1 MHz / 3 MHz





Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
	150kHz~30MHz / RB 9kHz for QP
	30MHz~1000MHz / RB 100kHz for PK
	Above 1GHz / RB 1MHz VB 3M for PK RB 1MHz VB 3M for AV

### 3.2.2 TEST PROCEDURE


- a. The measuring distance of 3m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation (Below 1GHz)
- b. The measuring distance of 3m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation (Above 1GHz)
- c. The height of the test antenna shall vary between 1m to 4m. Both horizontal and vertical polarization of the antenna are set to make the measurement.
- d. The initial step in collecting radiated emission data is a receive peak detector mode. Pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. All readings are peak unless otherwise stated QP in column of Note. Peak denoted that the Peak reading complies with the QP limits and then QP Mode measurement didn't perform (Below 1GHz)
- f. All readings are Peak mode value unless otherwise stated AVG in column of Note. If the Peak mode measured value complies with the Peak limits and lower than AVG Limits, the EUT shall be deemed to meet Peak & AVG limits and then only Peak mode was measured, but AVG mode didn't perform. (Above 1GHz)
9. For the actual test configuration, please refer to the related Item –EUT Test Photos.  
Note: Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

### 3.2.3 DEVIATION FROM TEST STANDARD


No deviation

### 3.2.4 TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

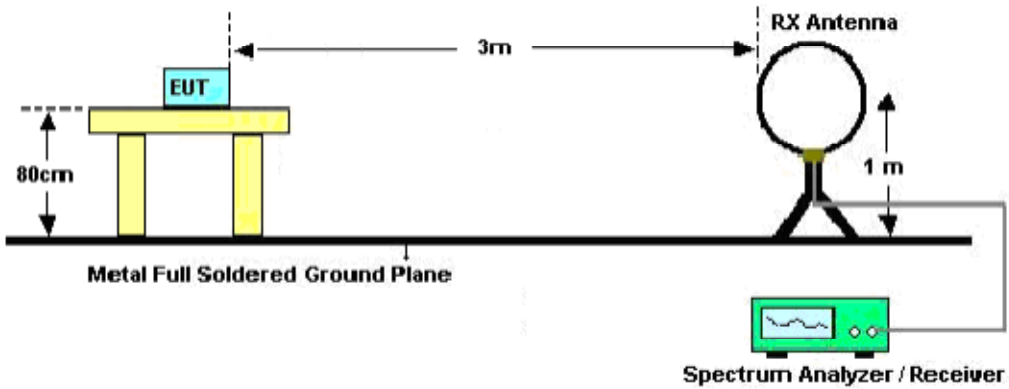

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

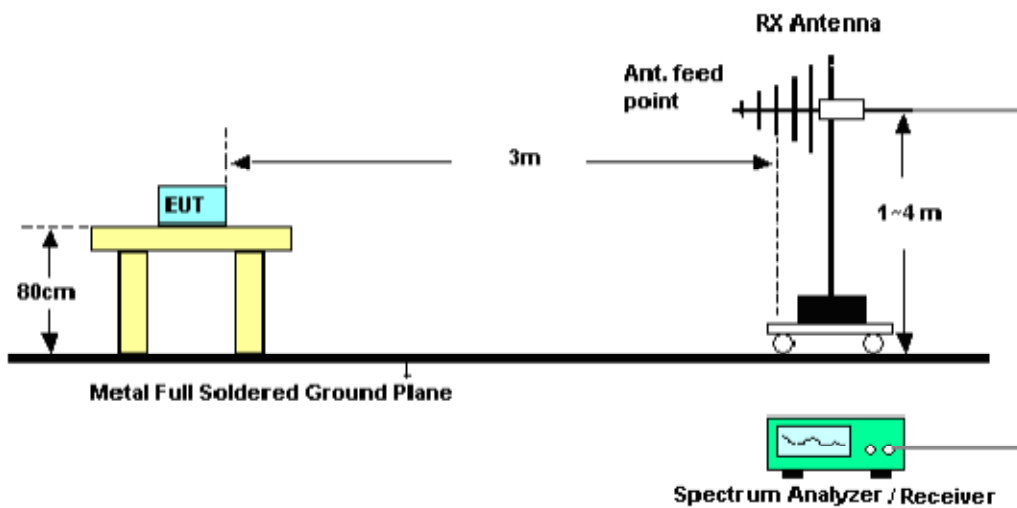

(C) Radiated Emission Test-Up Frequency Above 1GHz

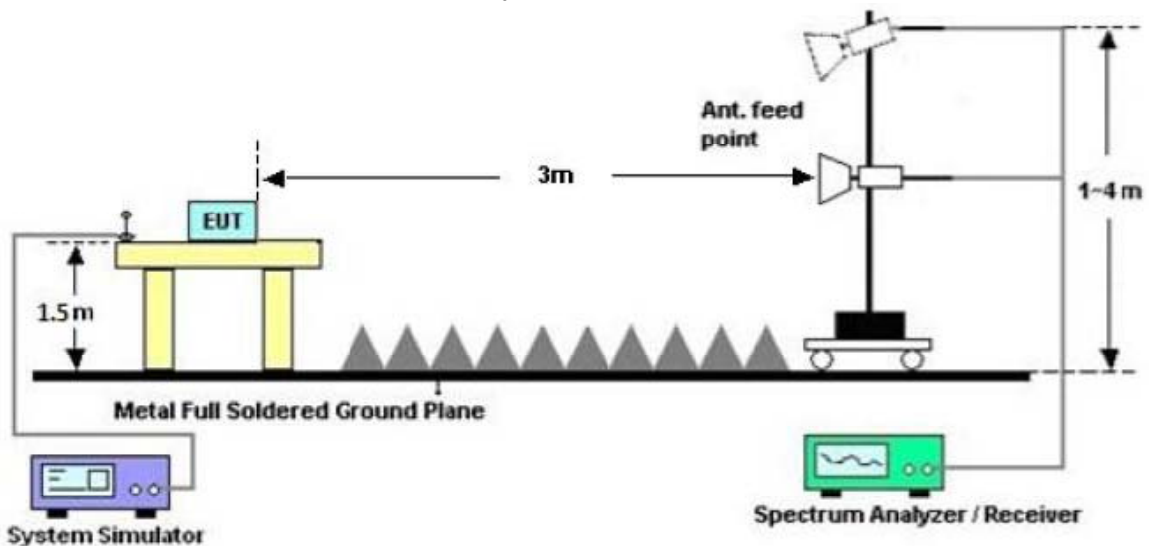



### 3.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

Below 30 MHz

Temperature :	23 °C	Relative Humidity :	50%
Pressure :	1010 hPa	Polarization :	---
Test Voltage :	DC 3V		
Test Mode :	TX Mode		

Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	PASS
--	--	--	--	PASS

**NOTE:**

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor =  $40 \log(\text{specific distance}/\text{test distance})$ (dB);

Limit line = specific limits(dBuv) + distance extrapolation factor.




Between 30MHz – 1000 MHz Radiation Spurious

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	1010hPa	Phase:	Horizontal
Test Voltage:	DC 3V	Test Mode:	Mode 1/2/3(Model 1 worst)

Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
48.8430	42.25	-20.89	21.36	40.00	-18.64	QP
95.7622	44.68	-19.61	25.07	43.50	-18.43	QP
200.6881	49.20	-20.14	29.06	43.50	-14.44	QP
235.8164	49.54	-18.06	31.48	46.00	-14.52	QP
501.1790	36.41	-8.90	27.51	46.00	-18.49	QP
689.5644	34.27	-5.57	28.70	46.00	-17.30	QP

Remark:

1. All readings are Quasi-Peak .
2. Margin = Result (Result =Reading + Factor )–Limit

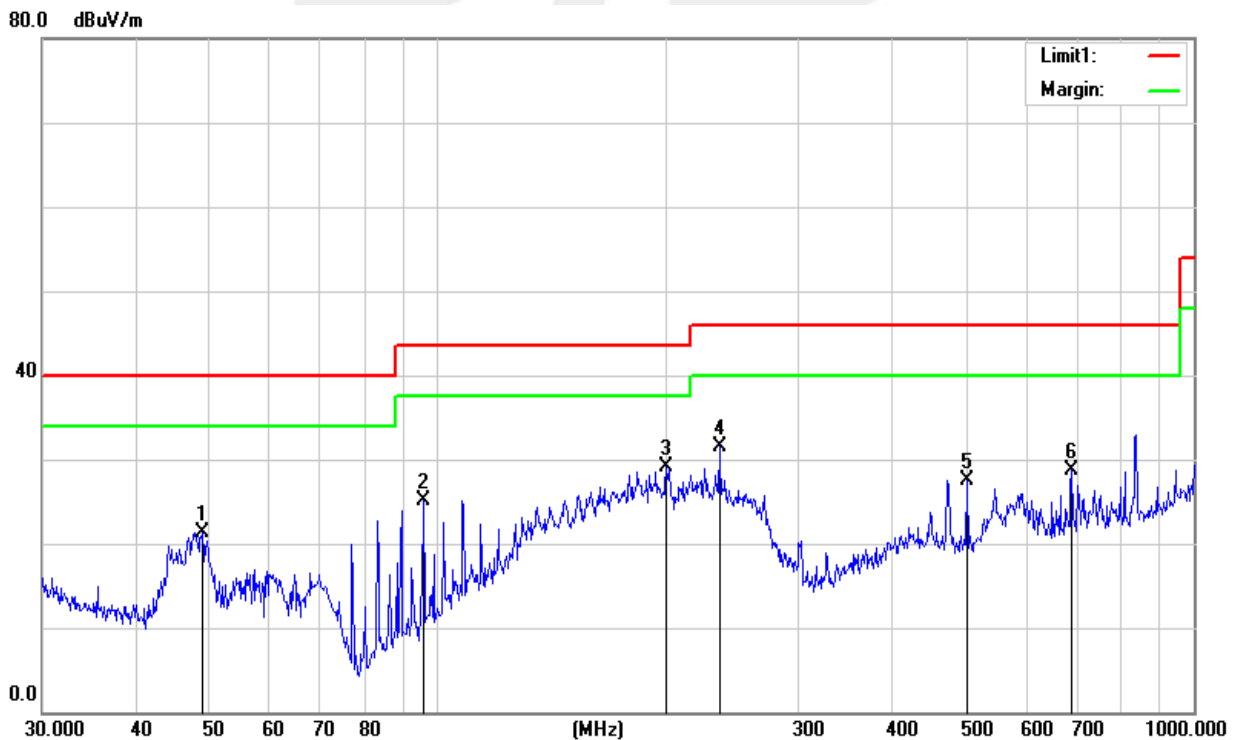




Temperature:	26 °C	Relative Humidity:	54%
Pressure:	1010hPa	Phase:	Vertical
Test Voltage:	DC 3V	Test Mode:	Mode 1/2/3(Model 1 worst)

Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
48.3318	49.18	-20.62	28.56	40.00	-11.44	QP
83.2298	44.84	-21.89	22.95	40.00	-17.05	QP
134.0882	45.11	-17.54	27.57	43.50	-15.93	QP
235.8164	41.75	-18.06	23.69	46.00	-22.31	QP
473.8347	42.93	-9.62	33.31	46.00	-12.69	QP
570.6100	38.50	-6.64	31.86	46.00	-14.14	QP

Remark:

- 1. All readings are Quasi-Peak.
- 2. Margin = Result (Result =Reading + Factor )–Limit

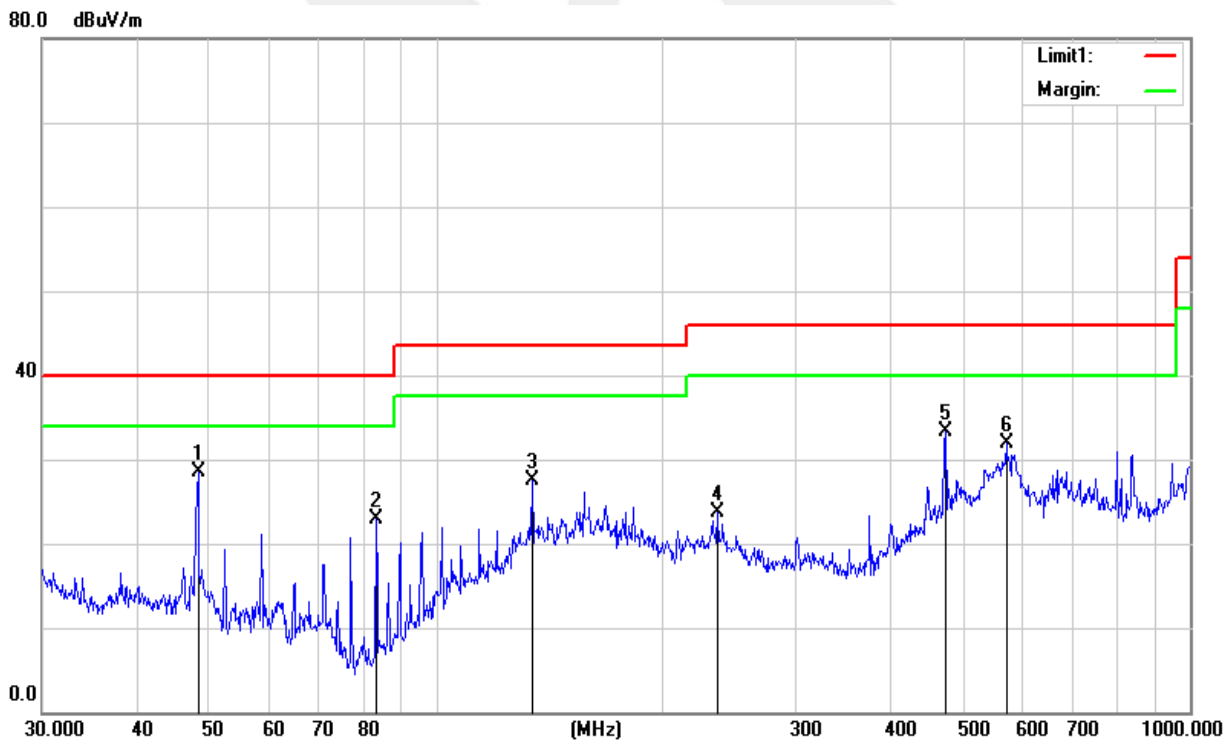



## Radiation Power

## PK

Frequency (MHz)	Reading (dB $\mu$ V/m)	Amplifier (dB)	Loss (dB)	Antenna Factor (dB/m)	Factor(dB) Corr.	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin(dB)	Polarization
	PEAK					PEAK	PEAK		
2408	95.734	44.40	6.03	27.60	-10.77	84.97	114	-29.03	Vertical
2408	93.687	44.40	6.03	27.60	-10.77	82.92	114	-31.08	Horizontal
2440	87.176	44.40	6.04	27.63	-10.73	76.45	114	-37.55	Vertical
2440	85.263	44.40	6.04	27.63	-10.73	74.54	114	-39.46	Horizontal
2474	91.414	44.40	6.06	27.66	-10.68	80.74	114	-33.26	Vertical
2474	89.243	44.40	6.06	27.66	-10.68	78.57	114	-35.43	Horizontal

## AV

Frequency (MHz)	Reading (dB $\mu$ V/m)	Amplifier (dB)	Loss (dB)	Antenna Factor (dB/m)	Factor(dB) Corr.	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin(dB)	Polarization
	AV					AV	PEAK	PEAK	
2408	75.445	44.40	6.03	27.60	-10.77	64.68	94	-29.32	Vertical
2408	74.673	44.40	6.03	27.60	-10.77	63.91	94	-30.09	Horizontal
2440	67.882	44.40	6.04	27.63	-10.73	57.16	94	-36.84	Vertical
2440	65.134	44.40	6.04	27.63	-10.73	54.41	94	-39.59	Horizontal
2474	71.856	44.40	6.06	27.66	-10.68	61.18	94	-32.82	Vertical
2474	89.154	44.40	6.06	27.66	-10.68	78.48	94	-15.52	Horizontal



Above 1G Radiation Spurious

Frequency (MHz)	Meter Reading (dBμV)	Amplifier (dB)	Loss (dB)	Antenna Factor (dB/m)	Orrected Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type	Comment
Low Channel (2408 MHz)										
3265.26	50.11	44.70	6.70	28.20	-9.80	40.31	74.00	-33.69	PK	Vertical
3265.26	40.08	44.70	6.70	28.20	-9.80	30.28	54.00	-23.72	AV	Vertical
3265.23	50.10	44.70	6.70	28.20	-9.80	40.30	74.00	-33.70	PK	Horizontal
3265.23	40.10	44.70	6.70	28.20	-9.80	30.30	54.00	-23.70	AV	Horizontal
4816.74	60.41	44.20	9.04	31.60	-3.56	56.85	74.00	-17.15	PK	Vertical
4816.74	50.42	44.20	9.04	31.60	-3.56	46.86	54.00	-7.14	AV	Vertical
4816.61	60.40	44.20	9.04	31.60	-3.56	56.84	74.00	-17.16	PK	Horizontal
4816.61	50.40	44.20	9.04	31.60	-3.56	46.84	54.00	-7.16	AV	Horizontal
5360.20	47.35	44.20	9.86	32.00	-2.34	45.01	74.00	-28.99	PK	Vertical
5360.20	39.34	44.20	9.86	32.00	-2.34	37.00	54.00	-17.00	AV	Vertical
5360.20	47.33	44.20	9.86	32.00	-2.34	44.99	74.00	-29.01	PK	Horizontal
5360.20	39.30	44.20	9.86	32.00	-2.34	36.96	54.00	-17.04	AV	Horizontal
7224.91	52.80	43.50	11.40	35.50	3.40	56.20	74.00	-17.80	PK	Vertical
7224.91	44.76	43.50	11.40	35.50	3.40	48.16	54.00	-5.84	AV	Vertical
7223.88	52.80	43.50	11.40	35.50	3.40	56.20	74.00	-17.80	PK	Horizontal
7223.88	44.79	43.50	11.40	35.50	3.40	48.19	54.00	-5.81	AV	Horizontal
11036.36	42.09	43.60	14.30	39.50	10.20	52.29	74.00	-21.71	PK	Vertical
11036.36	32.03	43.60	14.30	39.50	10.20	42.23	54.00	-11.77	AV	Vertical
11036.59	42.04	43.60	14.30	39.50	10.20	52.24	74.00	-21.76	PK	Horizontal
11036.59	32.04	43.60	14.30	39.50	10.20	42.24	54.00	-11.76	AV	Horizontal
13299.74	41.82	42.60	15.90	38.90	12.20	54.02	74.00	-19.98	PK	Vertical
13299.74	31.88	42.60	15.90	38.90	12.20	44.08	54.00	-9.92	AV	Vertical
13299.88	41.88	42.60	15.90	38.90	12.20	54.08	74.00	-19.92	PK	Horizontal
13299.88	30.88	42.60	15.90	38.90	12.20	43.08	54.00	-10.92	AV	Horizontal
16000.29	41.93	42.70	18.00	37.10	12.40	54.33	74.00	-19.67	PK	Vertical
16000.29	31.89	42.70	18.00	37.10	12.40	44.29	54.00	-9.71	AV	Vertical
16000.20	41.96	42.70	18.00	37.10	12.40	54.36	74.00	-19.64	PK	Horizontal
16000.20	31.18	42.70	18.00	37.10	12.40	43.58	54.00	-10.42	AV	Horizontal
17998.30	32.05	42.70	19.40	46.50	23.20	55.25	74.00	-18.75	PK	Vertical
17998.30	22.11	42.70	19.40	46.50	23.20	45.31	54.00	-8.69	AV	Vertical
17998.16	32.12	42.70	19.40	46.50	23.20	55.32	74.00	-18.68	PK	Horizontal
17998.16	22.10	42.70	19.40	46.50	23.20	45.30	54.00	-8.70	AV	Horizontal





Frequency (MHz)	Meter Reading (dBμV)	Amplifier (dB)	Loss (dB)	Antenna Factor (dB/m)	Corrected Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type	Comment
Middle Channel (2440 MHz)										
3265.16	50.04	44.70	6.70	28.20	-9.80	40.24	74.00	-33.76	PK	Vertical
3265.16	40.00	44.70	6.70	28.20	-9.80	30.20	54.00	-23.80	AV	Vertical
3265.17	50.06	44.70	6.70	28.20	-9.80	40.26	74.00	-33.74	PK	Horizontal
3265.17	40.04	44.70	6.70	28.20	-9.80	30.24	54.00	-23.76	AV	Horizontal
4880.85	60.31	44.20	9.04	31.60	-3.56	56.75	74.00	-17.25	PK	Vertical
4880.85	50.34	44.20	9.04	31.60	-3.56	46.78	54.00	-7.22	AV	Vertical
4880.80	60.33	44.20	9.04	31.60	-3.56	56.77	74.00	-17.23	PK	Horizontal
4880.80	50.30	44.20	9.04	31.60	-3.56	46.74	54.00	-7.26	AV	Horizontal
5360.10	47.24	44.20	9.86	32.00	-2.34	44.90	74.00	-29.10	PK	Vertical
5360.10	39.24	44.20	9.86	32.00	-2.34	36.90	54.00	-17.10	AV	Vertical
5360.02	47.22	44.20	9.86	32.00	-2.34	44.88	74.00	-29.12	PK	Horizontal
5360.02	39.24	44.20	9.86	32.00	-2.34	36.90	54.00	-17.10	AV	Horizontal
7320.46	52.70	43.50	11.40	35.50	3.40	56.10	74.00	-17.90	PK	Vertical
7320.46	44.64	43.50	11.40	35.50	3.40	48.04	54.00	-5.96	AV	Vertical
7320.58	52.73	43.50	11.40	35.50	3.40	56.13	74.00	-17.87	PK	Horizontal
7320.58	44.72	43.50	11.40	35.50	3.40	48.12	54.00	-5.88	AV	Horizontal
11036.30	41.98	43.60	14.30	39.50	10.20	52.18	74.00	-21.82	PK	Vertical
11036.30	31.98	43.60	14.30	39.50	10.20	42.18	54.00	-11.82	AV	Vertical
11036.47	41.93	43.60	14.30	39.50	10.20	52.13	74.00	-21.87	PK	Horizontal
11036.47	31.98	43.60	14.30	39.50	10.20	42.18	54.00	-11.82	AV	Horizontal
13299.83	41.75	42.60	15.90	38.90	12.20	53.95	74.00	-20.05	PK	Vertical
13299.83	31.80	42.60	15.90	38.90	12.20	44.00	54.00	-10.00	AV	Vertical
13299.75	41.83	42.60	15.90	38.90	12.20	54.03	74.00	-19.97	Pk	Horizontal
13299.75	30.77	42.60	15.90	38.90	12.20	42.97	54.00	-11.03	AV	Horizontal
16000.14	41.87	42.70	18.00	37.10	12.40	54.27	74.00	-19.73	PK	Vertical
16000.14	31.77	42.70	18.00	37.10	12.40	44.17	54.00	-9.83	AV	Vertical
16000.09	41.84	42.70	18.00	37.10	12.40	54.24	74.00	-19.76	PK	Horizontal
16000.09	31.09	42.70	18.00	37.10	12.40	43.49	54.00	-10.51	AV	Horizontal
17998.29	31.97	42.70	19.40	46.50	23.20	55.17	74.00	-18.83	PK	Vertical
17998.29	22.03	42.70	19.40	46.50	23.20	45.23	54.00	-8.77	AV	Vertical
17998.17	32.03	42.70	19.40	46.50	23.20	55.23	74.00	-18.77	PK	Horizontal
17998.17	21.98	42.70	19.40	46.50	23.20	45.18	54.00	-8.82	AV	Horizontal





Frequency (MHz)	Meter Reading (dBμV)	Amplifier (dB)	Loss (dB)	Antenna Factor (dB/m)	Corrected Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type	Comment
High Channel (2474 MHz)										
3265.16	50.00	44.70	6.70	28.20	-9.80	40.20	74.00	-33.80	PK	Vertical
3265.16	40.05	44.70	6.70	28.20	-9.80	30.25	54.00	-23.75	AV	Vertical
3265.16	50.06	44.70	6.70	28.20	-9.80	40.26	74.00	-33.74	PK	Horizontal
3265.16	40.06	44.70	6.70	28.20	-9.80	30.26	54.00	-23.74	AV	Horizontal
4944.34	60.30	44.20	9.04	31.60	-3.56	56.74	74.00	-17.26	PK	Vertical
4944.34	50.33	44.20	9.04	31.60	-3.56	46.77	54.00	-7.23	AV	Vertical
4944.51	60.31	44.20	9.04	31.60	-3.56	56.75	74.00	-17.25	PK	Horizontal
4944.51	50.31	44.20	9.04	31.60	-3.56	46.75	54.00	-7.25	AV	Horizontal
5360.14	47.25	44.20	9.86	32.00	-2.34	44.91	74.00	-29.09	PK	Vertical
5360.14	39.29	44.20	9.86	32.00	-2.34	36.95	54.00	-17.05	AV	Vertical
5360.14	47.23	44.20	9.86	32.00	-2.34	44.89	74.00	-29.11	PK	Horizontal
5360.14	39.22	44.20	9.86	32.00	-2.34	36.88	54.00	-17.12	AV	Horizontal
7422.16	52.73	43.50	11.40	35.50	3.40	56.13	74.00	-17.87	PK	Vertical
7422.16	44.65	43.50	11.40	35.50	3.40	48.05	54.00	-5.95	AV	Vertical
7422.23	52.74	43.50	11.40	35.50	3.40	56.14	74.00	-17.86	PK	Horizontal
7422.23	44.71	43.50	11.40	35.50	3.40	48.11	54.00	-5.89	AV	Horizontal
11036.26	41.99	43.60	14.30	39.50	10.20	52.19	74.00	-21.81	PK	Vertical
11036.26	31.98	43.60	14.30	39.50	10.20	42.18	54.00	-11.82	AV	Vertical
11036.30	41.97	43.60	14.30	39.50	10.20	52.17	74.00	-21.83	PK	Horizontal
11036.30	32.00	43.60	14.30	39.50	10.20	42.20	54.00	-11.80	AV	Horizontal
16000.14	41.88	42.70	18.00	37.10	12.40	54.28	74.00	-19.72	PK	Vertical
16000.14	31.78	42.70	18.00	37.10	12.40	44.18	54.00	-9.82	AV	Vertical
16000.15	41.85	42.70	18.00	37.10	12.40	54.25	74.00	-19.75	PK	Horizontal
16000.15	31.08	42.70	18.00	37.10	12.40	43.48	54.00	-10.52	AV	Horizontal
17998.29	31.99	42.70	19.40	46.50	23.20	55.19	74.00	-18.81	PK	Vertical
17998.29	22.00	42.70	19.40	46.50	23.20	45.20	54.00	-8.80	AV	Vertical
17998.17	32.03	42.70	19.40	46.50	23.20	55.23	74.00	-18.77	PK	Horizontal
17998.17	22.03	42.70	19.40	46.50	23.20	45.23	54.00	-8.77	AV	Horizontal



(Radiation Band edge)

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Amplifier (dB)	Loss (dB)	Antenna Factor (dB/m)	Orrected Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type	Comment
FSK										
2400.00	69.17	43.80	4.91	25.90	-12.99	56.18	74	-17.82	PK	Vertical
2400.00	55.00	43.80	4.91	25.90	-12.99	42.01	54	-11.99	AV	Vertical
2400.00	70.20	43.80	4.91	25.90	-12.99	57.21	74	-16.79	PK	Horizontal
2400.00	54.08	43.80	4.91	25.90	-12.99	41.09	54	-12.91	AV	Horizontal
2483.50	70.96	43.80	5.12	25.90	-12.78	58.18	74	-15.82	PK	Vertical
2483.50	53.95	43.80	5.12	25.90	-12.78	41.17	54	-12.83	AV	Vertical
2483.50	71.05	43.80	5.12	25.90	-12.78	58.27	74	-15.73	PK	Horizontal
2483.50	53.96	43.80	5.12	25.90	-12.78	41.18	54	-12.82	AV	Horizontal

Low measurement frequencies is range from 2310 to 2400 MHz, high measurement frequencies is range from 2483.5 to 2500 MHz.

Only show the worst point data of the emissions in the frequency 2310-2400 MHz and 2483.5-2500 MHz.

#### 4. CONDUCTED SPURIOUS & BAND EDGE EMISSION

##### 4.1 REQUIREMENT

According to FCC section 15.249, in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 50dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.


##### 4.2 TEST PROCEDURE

Spectrum Parameter	Setting
Detector	Peak
Start/Stop Frequency	30 MHz to 10th carrier harmonic
RB / VB (emission in restricted band)	100 KHz/300 KHz
Trace-Mode:	Max hold

For Band edge

Spectrum Parameter	Setting
Detector	Peak
Start/Stop Frequency	Lower Band Edge: 2310 – 2404 MHz Upper Band Edge: 2478 – 2500 MHz
RB / VB (emission in restricted band)	100 KHz/300 KHz
Trace-Mode:	Max hold

##### 4.3 TEST SETUP

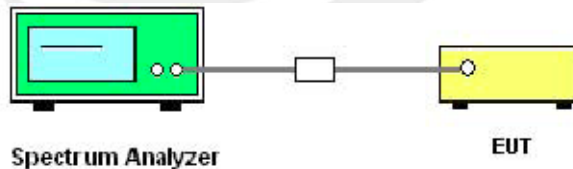

The EUT which is powered by the Battery, is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50 Ohm; the path loss as the factor is calibrated to correct the reading. Make the measurement with the spectrum analyzer's resolution bandwidth(RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW.

##### 4.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.



## 4.5 TEST RESULTS

Temperature :	25 °C	Relative Humidity :	50%
Pressure :	1012 hPa	Test Voltage :	DC 3V
Test Mode :	N/A		

Note: denotes test is not applicable in this test report.




## 5. BANDWIDTH TEST

### 5.1 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b. Spectrum Setting : RBW= 30KHz, VBW $\geq$ RBW, Sweep time = Auto.

### 5.2 TEST SETUP

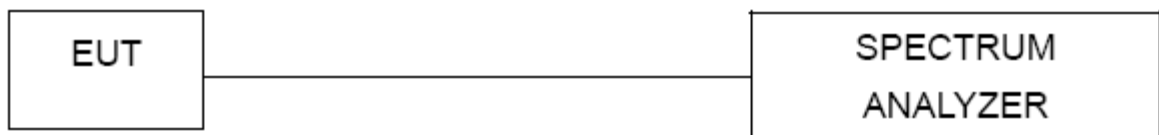

### 5.3 EUT OPERATION CONDITIONS

TX mode.






5.4 TEST RESULTS

Temperature :	25 °C	Relative Humidity :	50%
Pressure :	1012 hPa	Test Voltage :	DC 3V


Test Channel	Frequency (MHz)	20 dBc Bandwidth (MHz)	99% Bandwidth (MHz)
CH01	2408	2.079	2.0599
CH17	2440	2.086	2.0598
CH34	2474	2.082	2.0567

The Lowest Channel:2408MHz

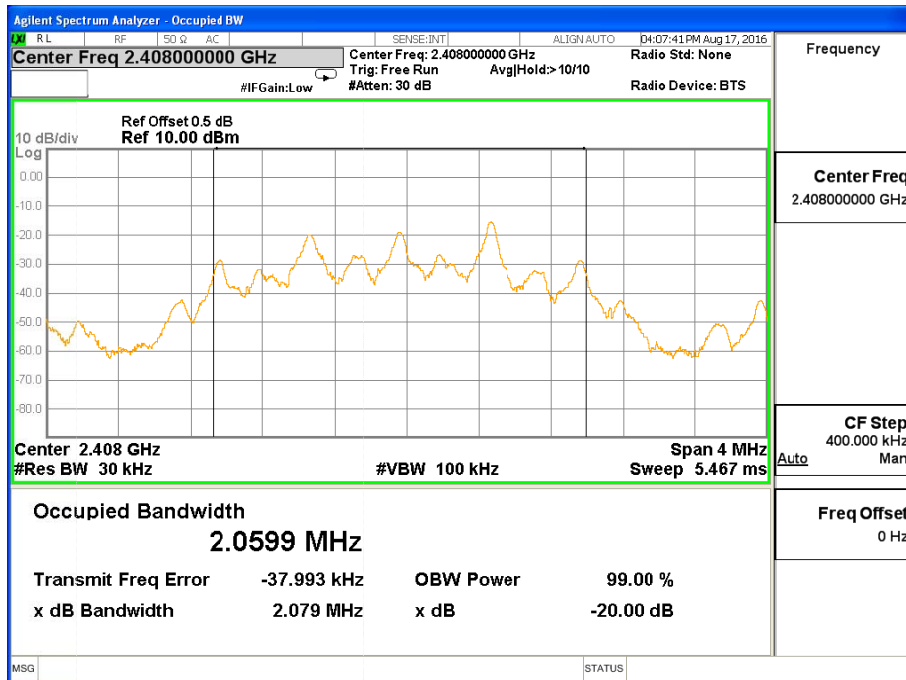




### The Middle Channel:2440MHz

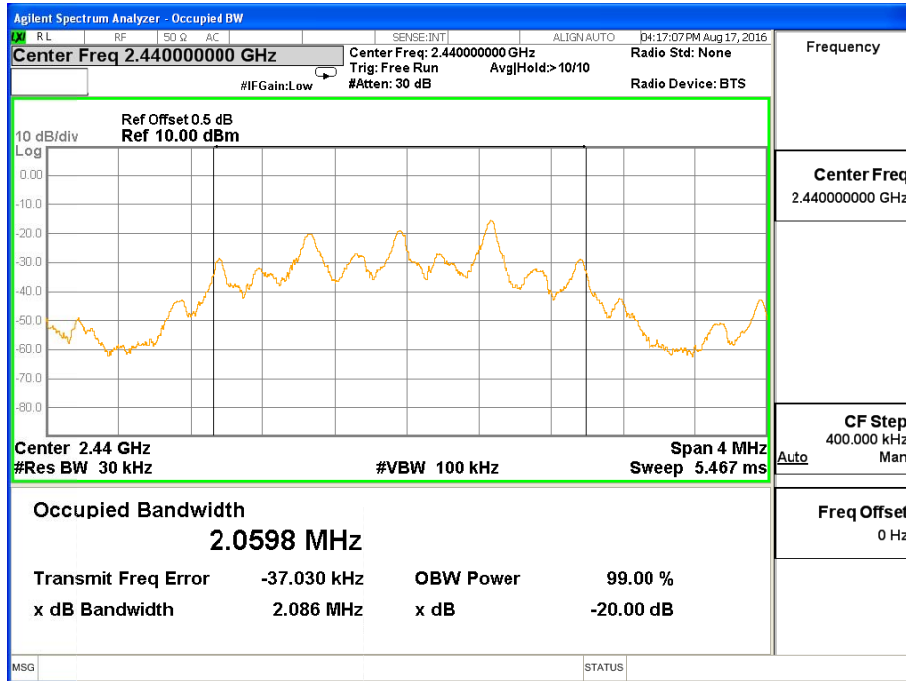

### The High Channel: 2474MHz

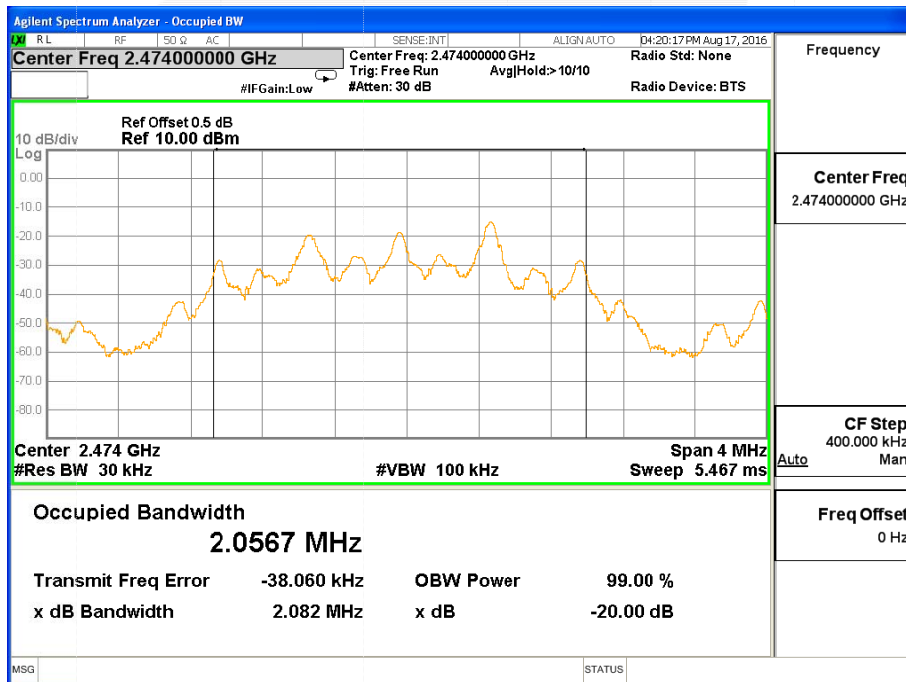



## 6. ANTENNA REQUIREMENT

### 6.1 STANDARD REQUIREMENT

According to the FCC Part 15 Paragraph 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna to the intentional radiator shall be considered sufficient to comply with the provisions of this section. This product use a permanent ceramic printed antenna, fulfill the requirement of this section

### 6.2 EUT ANTENNA


The EUT antenna is PCB Antenna.It conforms to the standard requirements.





## APPENDIX- PHOTOS OF TEST SETUP

### Radiated Measurement Photos

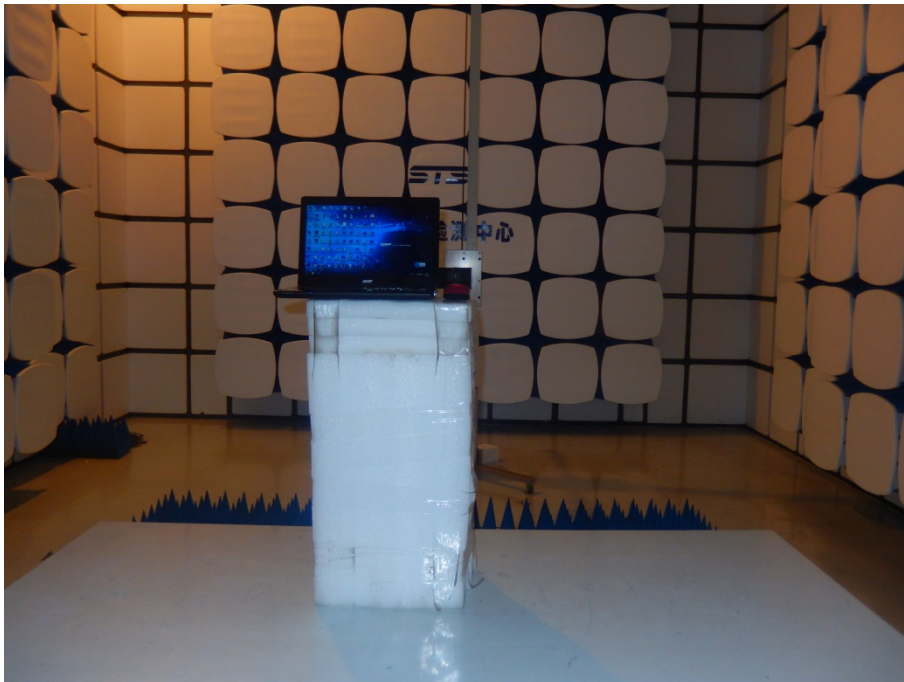

※※※※END OF THE REPORT※※※※