



FCC AND ISED CERTIFICATION TEST REPORT

Applicant	:	Creative Labs Pte. Ltd.
Address of Applicant	:	31 International Business Park, #03-01, Singapore 609921
Manufacturer	:	Creative Labs Pte. Ltd.
Address of Manufacturer	:	31 International Business Park, #03-01, Singapore 609921
Equipment under Test	:	CREATIVE ZEN AIR 2
Model No.	:	EF1190
FCC ID	:	2AJIV-EF1190
IC	:	20469-EF1190
Test Standard(s)	:	FCC Rules and Regulations Part 15 Subpart C, RSS-247 Issue 3 August 2023, ANSI C63.10:2013, RSS-Gen Issue 5, Apr. 2018, Amendment 2 (February 2021)
Report No.	:	DDT-RE24012628-2E02
Issue Date	:	2024/03/14
Issue By	:	Guangdong Dongdian Testing Service Co., Ltd. Unit 2, Building 1, No. 17, Zongbu 2nd Road, Songshan Lake Park, Dongguan, Guangdong, China, 523808

Table of Contents

1.	Summary of Test Results	7
2.	General Test Information.....	8
2.1.	Description of EUT	8
2.2.	Accessories of EUT	9
2.3.	Block diagram of EUT configuration for test	9
2.4.	Decision of final test mode	9
2.5.	Deviations of test standard	10
2.6.	Test environment conditions	10
2.7.	Test laboratory	10
2.8.	Measurement uncertainty	11
3.	Equipment Used During Conductive Test	12
4.	20 dB Bandwidth	13
4.1.	Block diagram of test setup	13
4.2.	Limits.....	13
4.3.	Test procedure	13
4.4.	Test result	14
4.5.	Test graphs	15
5.	99% Bandwidth	22
5.1.	Block diagram of test setup	22
5.2.	Limits.....	22
5.3.	Test procedure	22
5.4.	Test result	23
5.5.	Test graphs	24
6.	Maximum Peak Output Power.....	31
6.1.	Block diagram of test setup	31
6.2.	Limits.....	31
6.3.	Test procedure	31
6.4.	Test result	32
6.5.	Test graphs	33
7.	Carrier Frequency Separation	40
7.1.	Block diagram of test setup	40
7.2.	Limits.....	40
7.3.	Test procedure	40
7.4.	Test result	41
7.5.	Test graphs	42
8.	Dwell Time	45

8.1.	Block diagram of test setup	45
8.2.	Limits	45
8.3.	Test procedure	45
8.4.	Test result	46
8.5.	Test graphs	47
9.	Number of Hopping Channel	59
9.1.	Block diagram of test setup	59
9.2.	Limits	59
9.3.	Test procedure	59
9.4.	Test result	60
9.5.	Test graphs	61
10.	Band Edge Compliance (Conducted Method)	64
10.1.	Block diagram of test setup	64
10.2.	Limit	64
10.3.	Test procedure	64
10.4.	Test result	65
10.5.	Test graphs	66
11.	RF Conducted Spurious Emissions	75
11.1.	Block diagram of test setup	75
11.2.	Limits	75
11.3.	Test procedure	75
11.4.	Test result	75
11.5.	Test graphs	77
12.	Duty cycle	96
12.1.	Block diagram of test setup	96
12.2.	Limit	96
12.3.	Test procedure	96
12.4.	Test result	97
12.5.	Test graphs	98
13.	Antenna Requirements	105
13.1.	Limit	105
13.2.	Result	105
14.	Radiated Emission	106
14.1.	Test equipment	106
14.2.	Block diagram of test setup	107
14.3.	Limits	108
14.4.	Assistant equipment used for test	110
14.5.	Test procedure	110

14.6.	Test result	111
14.7.	Test data	112
15.	Band Edge Compliance.....	128
15.1.	Test equipment.....	128
15.2.	Block diagram of test setup	129
15.3.	Limits.....	129
15.4.	Assistant equipment used for test	129
15.5.	Test procedure	129
15.6.	Test result	129
15.7.	Test data	130
16.	Power Line Conducted Emissions.....	154
16.1.	Test equipment.....	154
16.2.	Block diagram of test setup	154
16.3.	Limits.....	154
16.4.	Assistant equipment used for test	154
16.5.	Test procedure	155
16.6.	Test result	155
16.7.	Test data	156
17.	Test Setup Photograph	158
18.	Photos of the EUT	161

Test Report Declare

Applicant	:	Creative Labs Pte. Ltd.
Address of Applicant	:	31 International Business Park, #03-01, Singapore 609921
Equipment under Test	:	CREATIVE ZEN AIR 2
Model No.	:	EF1190
Manufacturer	:	Creative Labs Pte. Ltd.
Address of Manufacturer	:	31 International Business Park, #03-01, Singapore 609921

Test Standard Used:

FCC Rules and Regulations Part 15 Subpart C,
 RSS-247 Issue 3 August 2023,
 ANSI C63.10:2013,
 RSS-Gen Issue 5, Apr. 2018, Amendment 2 (February 2021)

We Declare:

The equipment described above is tested by Guangdong Dongdian Testing Service Co., Ltd. and in the configuration tested the equipment complied with the standards specified above. The test results are contained in this test report and Guangdong Dongdian Testing Service Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests.

Report No.:	DDT-RE24012628-2E02		
Date of Receipt:	2024/01/30	Date of Test:	2024/01/30~2024/03/14

Prepared By:

Ziqin Chen

Ziqin Chen/Engineer

Approved By:



Damon Hu

Damon Hu/EMC Manager

Note: This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Guangdong Dongdian Testing Service Co., Ltd.

Revision History

Rev.	Revisions	Issue Date	Revised By
---	Initial issue	2024/03/14	

1. Summary of Test Results

No.	Test Parameter	Clause No.	Condition	Result
1	Maximum Peak Output Power	FCC Part 15: 15.247(b)(1), RSS-247 Issue 3 clause 5.4(b)	/	Pass
2	20 dB Bandwidth	FCC Part 15: 15.247(a)(1), RSS-247 Issue 3 clause 5.1(a)	/	Pass
3	99% Bandwidth	RSS-Gen Issue 5 clause 6.7	/	Pass
4	Carrier Frequency Separation	FCC Part 15: 15.247(a)(1), RSS-247 Issue 3 clause 5.1(b)	/	Pass
5	Number of Hopping Channel	FCC Part 15: 15.247(a)(1)(iii), RSS-247 Issue 3 clause 5.1(d)	/	Pass
6	Dwell Time	FCC Part 15: 15.247(a)(1)(iii), RSS-247 Issue 3 clause 5.1(d)	/	Pass
7	RF Conducted Spurious Emissions	FCC Part 15: 15.247(d), RSS- 247 Issue 3 clause 5.5	/	Pass
8	Radiated Emission	FCC Part 15: 15.205, FCC Part 15: 15.209, FCC Part 15: 15.247(d), RSS-247 Issue 3 clause 5.5, RSS-Gen Issue 5 clause 8.9, RSS-Gen Issue 5 clause 8.10	/	Pass
9	Band Edge Compliance	FCC Part 15: 15.205, FCC Part 15: 15.209, FCC Part 15: 15.247(d), RSS-247 Issue 3 clause 5.5, RSS-Gen Issue 5 clause 8.9, RSS-Gen Issue 5 clause 8.10	/	Pass
10	Antenna Requirement	FCC Part 15: 15.203, RSS- Gen Issue 5 clause 6.8	/	Pass
11	Power Line Conducted Emissions	FCC Part 15: 15.207(a), RSS- Gen Issue 5 clause 8.8	/	Pass

Note: N/A is an abbreviation for Not Applicable, and means this item is not applicable for this device or no need to test according to standard.

2. General Test Information

2.1. Description of EUT

EUT Name	: CREATIVE ZEN AIR 2
Model Number	: EF1190
Difference of model number	: /
EUT Function Description	: Please reference user manual of this device
Power Supply	: Case: DC 5V from USB cable and DC 3.7V built-in battery; Earbud: DC 5V from external charging case and DC 3.7V built-in battery
Hardware Version	: V1.0
Software Version	: V13

Note: This EUT support Bluetooth BR/EDR/LE, this report only for Bluetooth BR/EDR

Radio Specification	: Bluetooth BR/EDR
Operation Frequency	: 2402 MHz-2480 MHz
Modulation	: GFSK, $\pi/4$ -DQPSK, 8DPSK

Antenna information	
Antenna Type	: Chip Antenna
Max Antenna Gain(dBi)	: 2.5 dBi

Channel information					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	27	2429	54	2456
1	2403	28	2430	55	2457
2	2404	29	2431	56	2458
3	2405	30	2432	57	2459
4	2406	31	2433	58	2460
5	2407	32	2434	59	2461
6	2408	33	2435	60	2462
7	2409	34	2436	61	2463
8	2410	35	2437	62	2464
9	2411	36	2438	63	2465
10	2412	37	2439	64	2466
11	2413	38	2440	65	2467
12	2414	39	2441	66	2468
13	2415	40	2442	67	2469
14	2416	41	2443	68	2470
15	2417	42	2444	69	2471
16	2418	43	2445	70	2472

17	2419	44	2446	71	2473
18	2420	45	2447	72	2474
19	2421	46	2448	73	2475
20	2422	47	2449	74	2476
21	2423	48	2450	75	2477
22	2424	49	2451	76	2478
23	2425	50	2452	77	2479
24	2426	51	2453	78	2480
25	2427	52	2454		
26	2428	53	2455		


Note: The above EUT information is declared by manufacturer and for more detailed features description please refer to the manufacturer's specifications or User's Manual. The above Antenna information is declared by manufacturer and for more detailed features description please refer to the manufacturer's specifications, the laboratory shall not be held responsible.

"☑" means to be chosen or applicable; "☐" means don't to be chosen or not applicable; This note applies to entire report.

2.2. Accessories of EUT

Accessories	Manufacturer	Model number	Description
/	/	/	/

2.3. Block diagram of EUT configuration for test

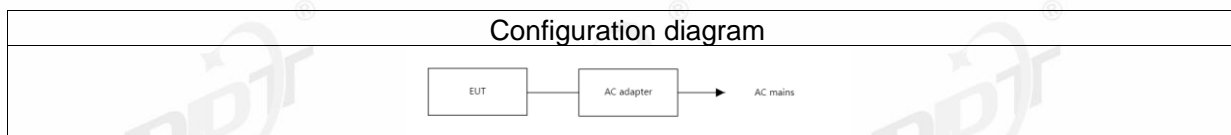

2.4. Decision of final test mode

According pre-test, the worst test modes were reported as below:

Test software: BT_Tool.exe

The test software was used to control EUT work in Continuous Tx mode, and select test channel, wireless mode as below table.

The pathloss of external cable: 0.5 dB (According to the manufacturer's claims)

Tested mode, channel, information			
Mode	Setting Tx Power	Channel	Frequency (MHz)
GFSK hopping on Tx mode	6	CH0 to CH78	2402 to 2480
p/4-DQPSK hopping on Tx mode	6	CH0 to CH78	2402 to 2480

8DPSK hopping on Tx mode	6	CH0 to CH78	2402 to 2480
GFSK hopping off Tx mode	6	CH0	2402
	6	CH39	2441
	6	CH78	2480
p/4-DQPSK hopping off Tx mode	6	CH0	2402
	6	CH39	2441
	6	CH78	2480
8DPSK hopping off Tx mode	6	CH0	2402
	6	CH39	2441
	6	CH78	2480
Worst-case data rates were: GFSK mode: DH5, p/4-DQPSK mode: 2DH5, 8DPSK mode: 3DH5			

2.5. Deviations of test standard

No deviation.

2.6. Test environment conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature range:	+15°C to +35 °C
Humidity range:	20% to 75%
Pressure range:	86 kPa to 106 kPa

Note: The specific temperature and humidity information of each test item refers to the temperature and humidity record in the corresponding test data.

2.7. Test laboratory

Guangdong Dongdian Testing Service Co., Ltd.

Add.: Unit 2, Building 1, No. 17, Zongbu 2nd Road, Songshan Lake Park, Dongguan, Guangdong, China, 523808.

Tel.: +86-0769-38826678, <http://www.dgddt.com>, Email: ddt@dgddt.com.

CNAS Accreditation No. L6451; A2LA Accreditation Number: 3870.01

FCC Designation Number: CN1182, Test Firm Registration Number: 540522

Innovation, Science and Economic Development Canada Site Registration Number: 10288A

Conformity Assessment Body identifier: CN0048

VCCI facility registration number: C-20087, T-20088, R-20123, R-20155, G-20118

2.8. Measurement uncertainty

Test Item	Uncertainty
Bandwidth	1.1%
Peak Output Power (Conducted) (Spectrum analyzer)	0.86 dB (10 MHz ≤ f < 3.6 GHz);
	1.38 dB (3.6 GHz ≤ f < 8 GHz)
Peak Output Power (Conducted) (Power Sensor)	0.74 dB
Power Spectral Density	0.74 dB (10 MHz ≤ f < 3.6 GHz);
	1.38 dB (3.6 GHz ≤ f < 8 GHz)
Frequencies Stability	6.7 x 10 ⁻⁸ (Antenna couple method)
	5.5 x 10 ⁻⁸ (Conducted method)
Conducted spurious emissions	0.86 dB (10 MHz ≤ f < 3.6 GHz);
	1.40 dB (3.6 GHz ≤ f < 8 GHz)
	1.66 dB (8 GHz ≤ f < 26.5 GHz)
Uncertainty for radio frequency (RBW < 20 kHz)	3x10 ⁻⁸
Temperature	0.4 °C
Humidity	2 %
Uncertainty for Radiation Emission test (9 kHz – 30 MHz)	3.44 dB
Uncertainty for Radiation Emission test (30 MHz - 1 GHz)	4.70 dB (Antenna Polarize: V)
	4.84 dB (Antenna Polarize: H)
Uncertainty for Radiation Emission test (1 GHz - 40 GHz)	4.10 dB (1 - 6 GHz)
	4.40 dB (6 GHz - 18 GHz)
	3.54 dB (18 GHz - 26 GHz)
	4.30 dB (26 GHz - 40 GHz)
Uncertainty for Power line conduction emission test	3.34dB (150KHz-30MHz)
	3.72dB (9KHz-150KHz)


Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

3. Equipment Used During Conductive Test

Equipment	Manufacturer	Model No.	Serial Number	Due Date
<input checked="" type="checkbox"/> RF Connected Test (RF Measurement System 2#)				
SPECTRUM ANALYZER	R&S	FSU26	201124	2024/07/11
Power Sensor	R&S	NRP-Z22	101254	2024/07/11
Test Software	Tonscend	JS1120-3	Ver.3.2.22	N/A

4. 20 dB Bandwidth

4.1. Block diagram of test setup

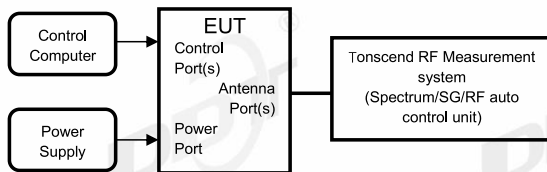

4.2. Limits

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in § 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

4.3. Test procedure

- (1) The test according to ANSI C63.10-2013 clause 6.9.2.
- (2) Connect EUT's antenna output to spectrum analyzer by RF cable, the path loss was compensated to the results
- (3) Set the EUT as maximum power setting and enable the EUT transmit continuously
- (4) Use the following spectrum analyzer settings for the 20 dB bandwidth measurement:


RBW:	1% to 5% of the OBW
VBW:	approximately three times RBW
Span:	between 2 times and 5 times the OBW
Detector Mode:	Peak
Sweep time:	Auto
Trace mode:	Max hold
- (5) Measure and record the results in the report.


4.4. Test result

Test Engineer:	Zoe	Test Site:	RF Measurement System 2#
Ambient Condition:	24.1°C,48.3%RH	Test Date:	2024.02.23
Test Power Supply:	Battery	EUT:	CREATIVE ZEN AIR 2
Sample Number:	S24012628-002	Model No.:	EF1190


Test Mode	Antenna	Frequency [MHz]	20dB EBW[MHz]
DH5	Left side	2402	0.95
	Right side	2402	0.95
	Left side	2441	0.95
	Right side	2441	0.95
	Left side	2480	0.95
	Right side	2480	0.95
2DH5	Left side	2402	1.32
	Right side	2402	1.32
	Left side	2441	1.32
	Right side	2441	1.32
	Left side	2480	1.32
	Right side	2480	1.33
3DH5	Left side	2402	1.31
	Right side	2402	1.30
	Left side	2441	1.30
	Right side	2441	1.30
	Left side	2480	1.30
	Right side	2480	1.30

4.5. Test graphs

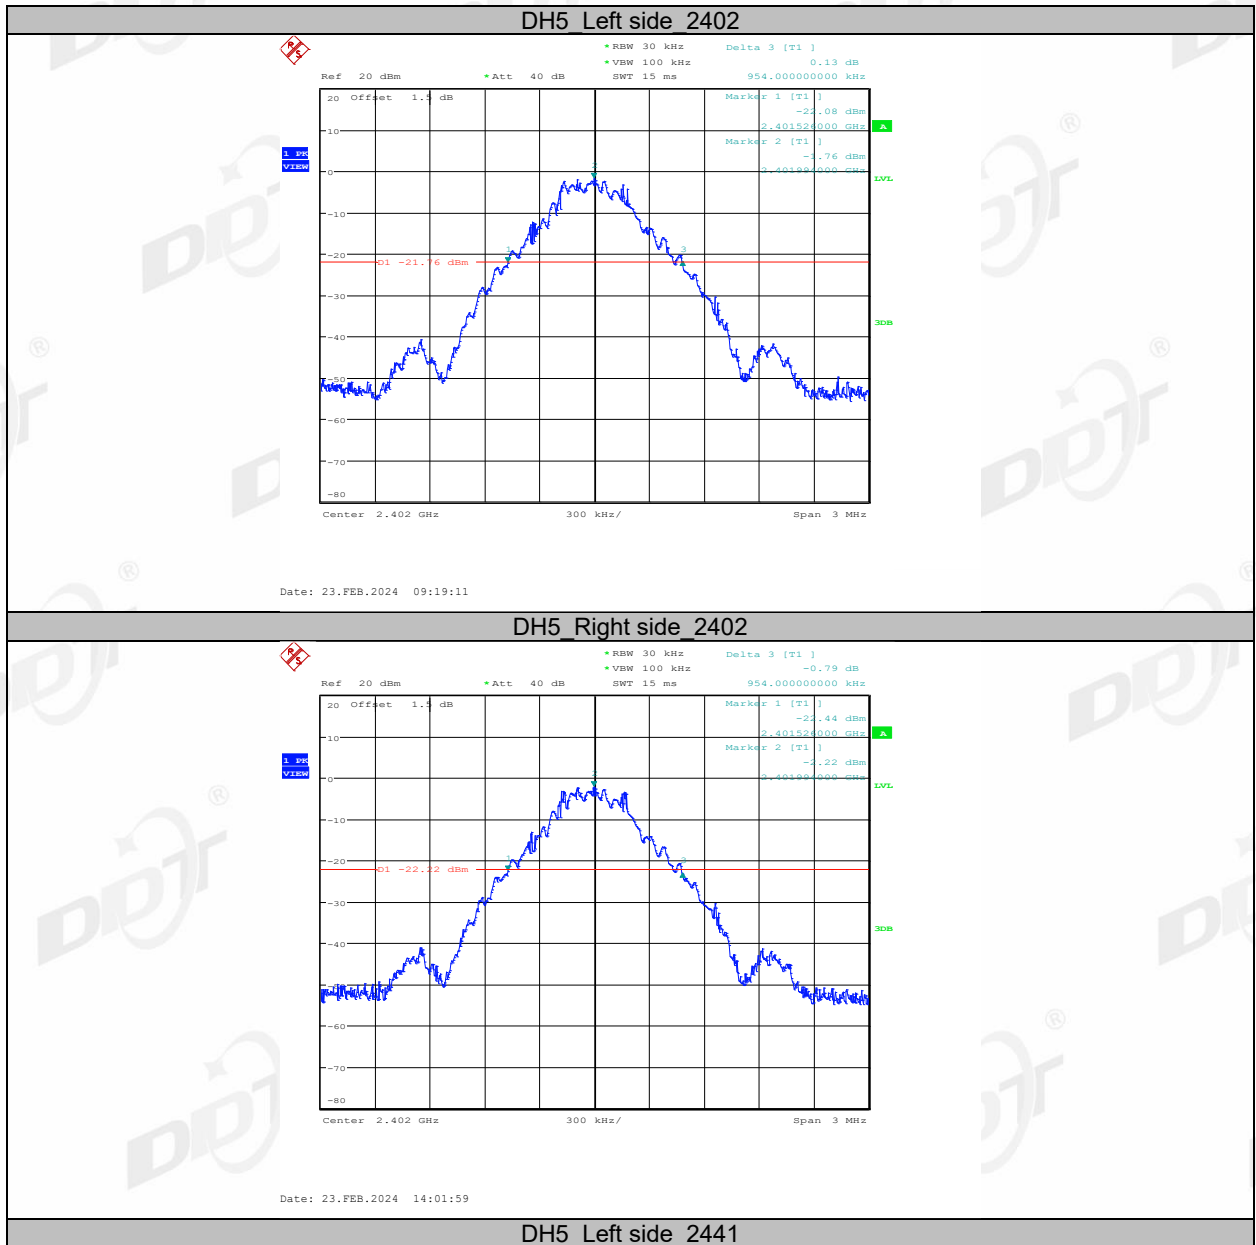


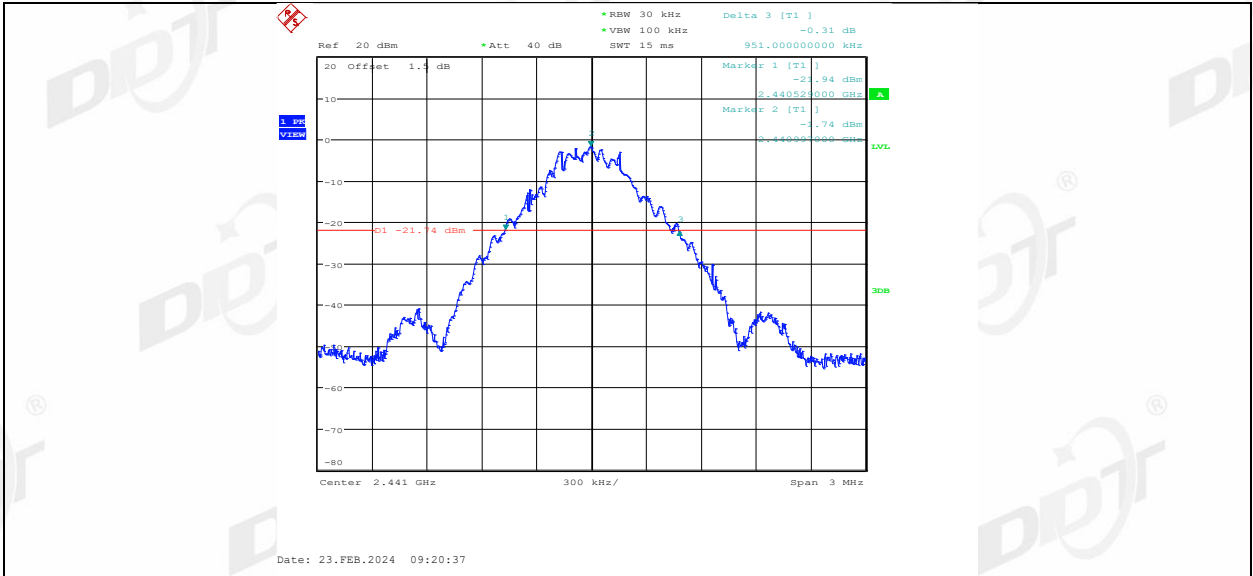


DH5 Right side 2441

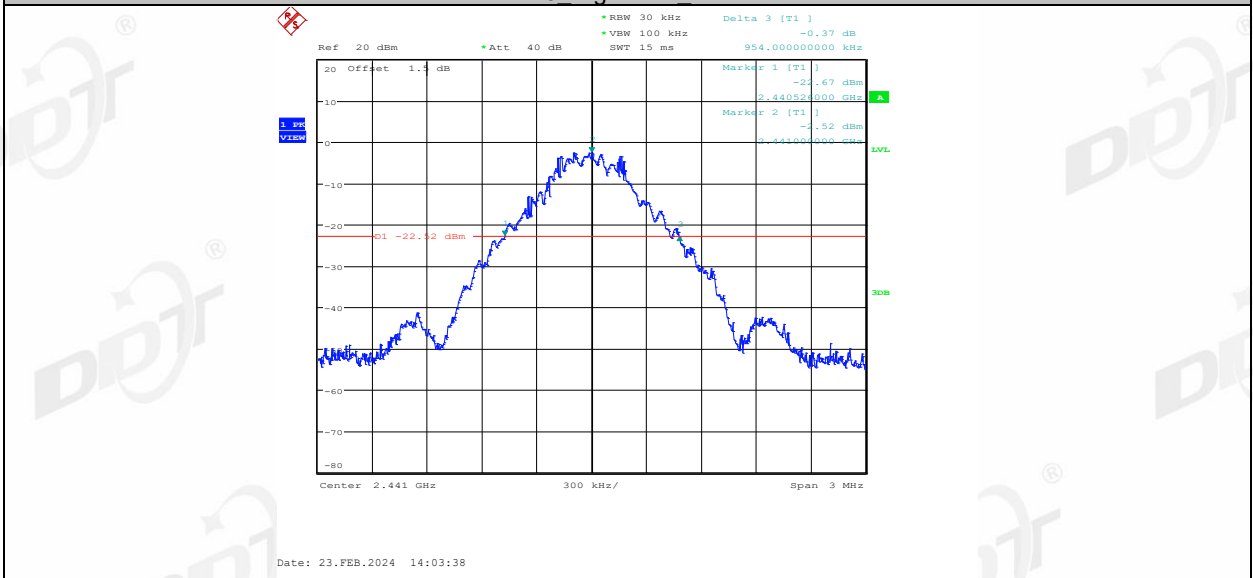


DH5 Left side 2480

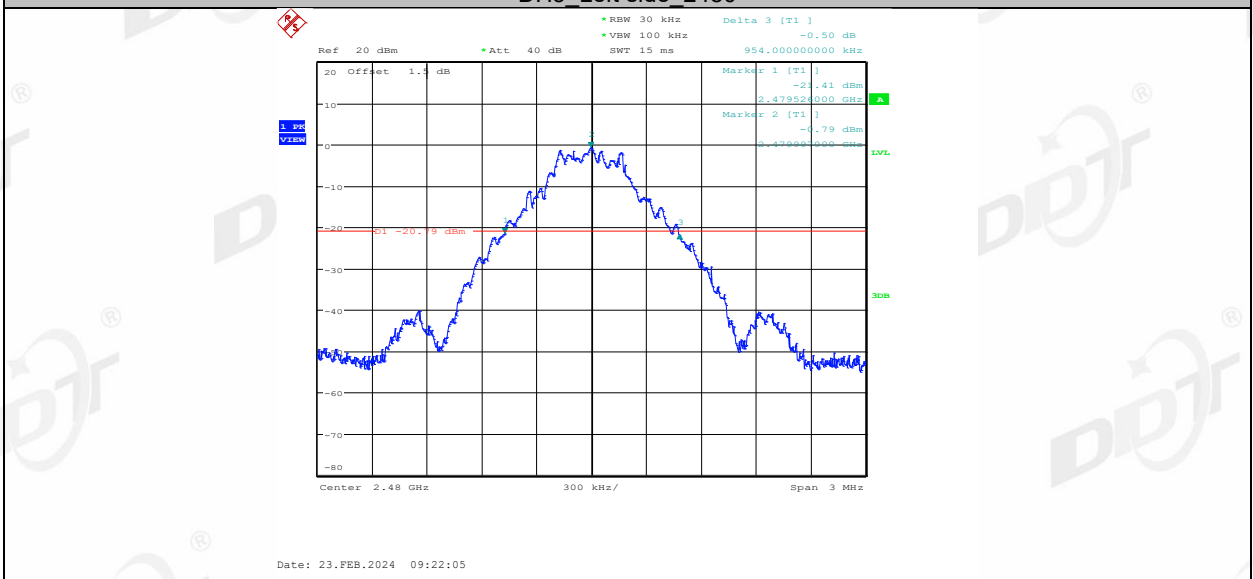


DH5 Right side 2480

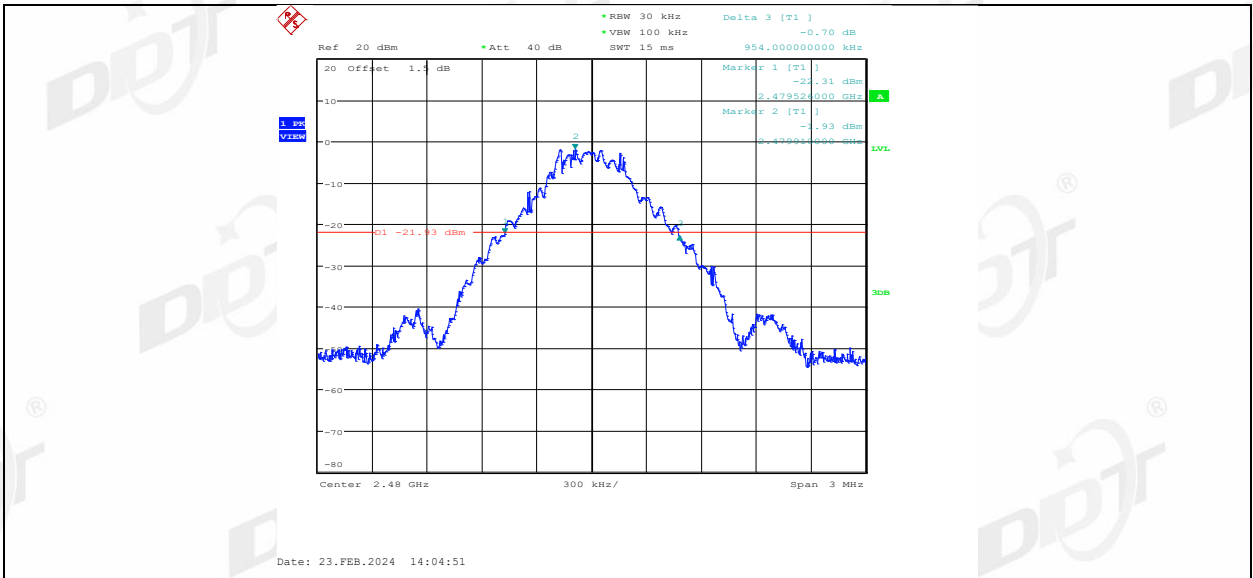


2DH5 Left side 2402

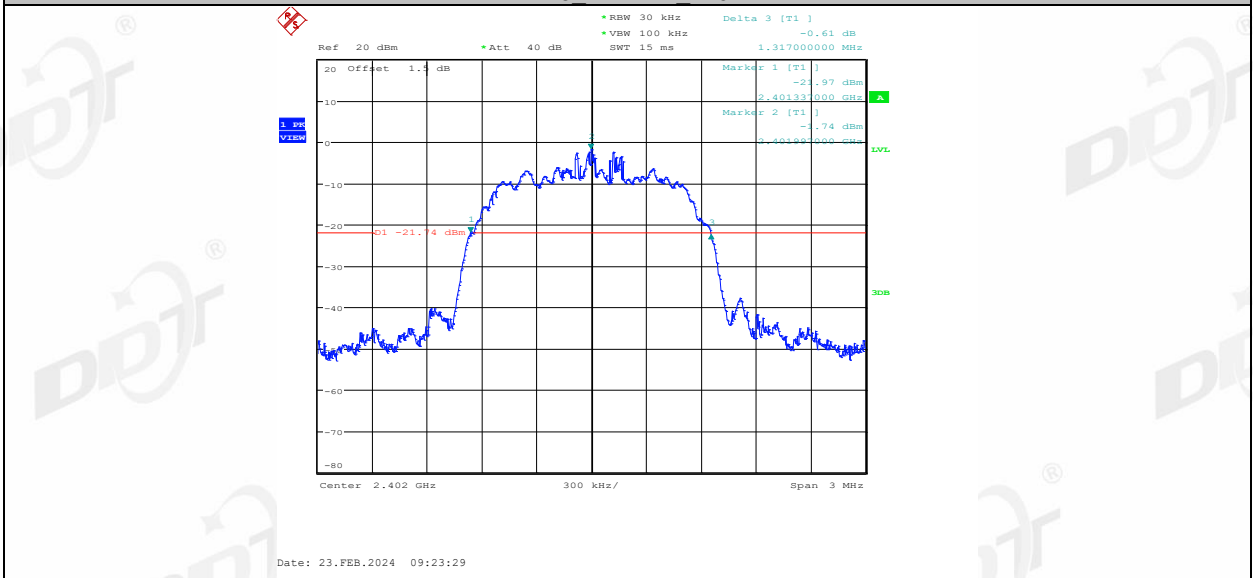


2DH5 Right side 2402

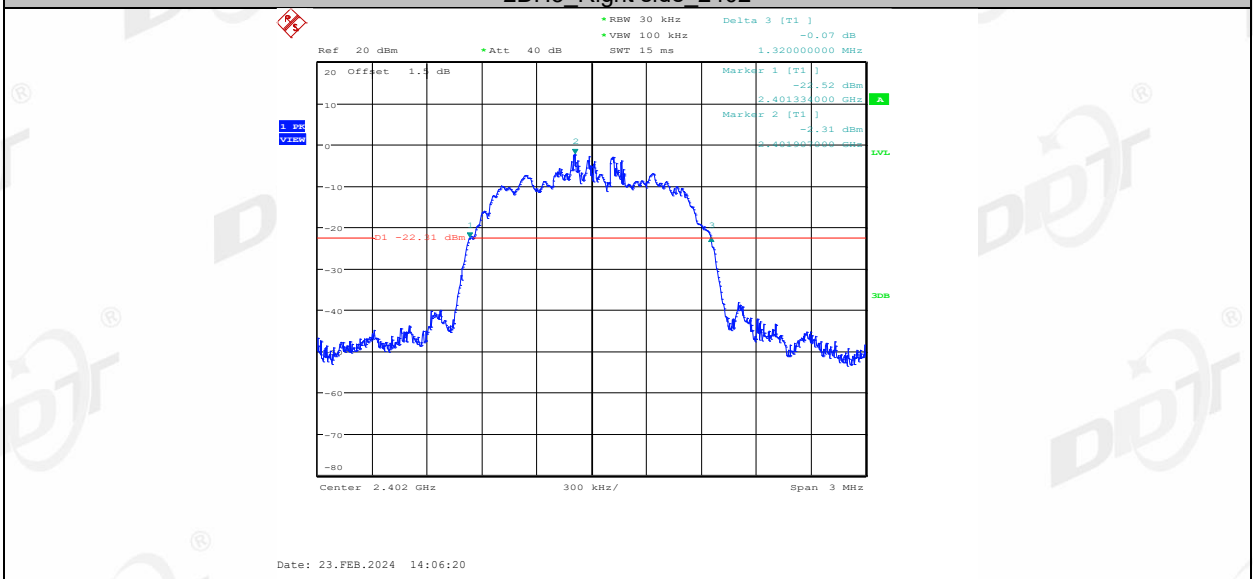


2DH5 Left side 2441

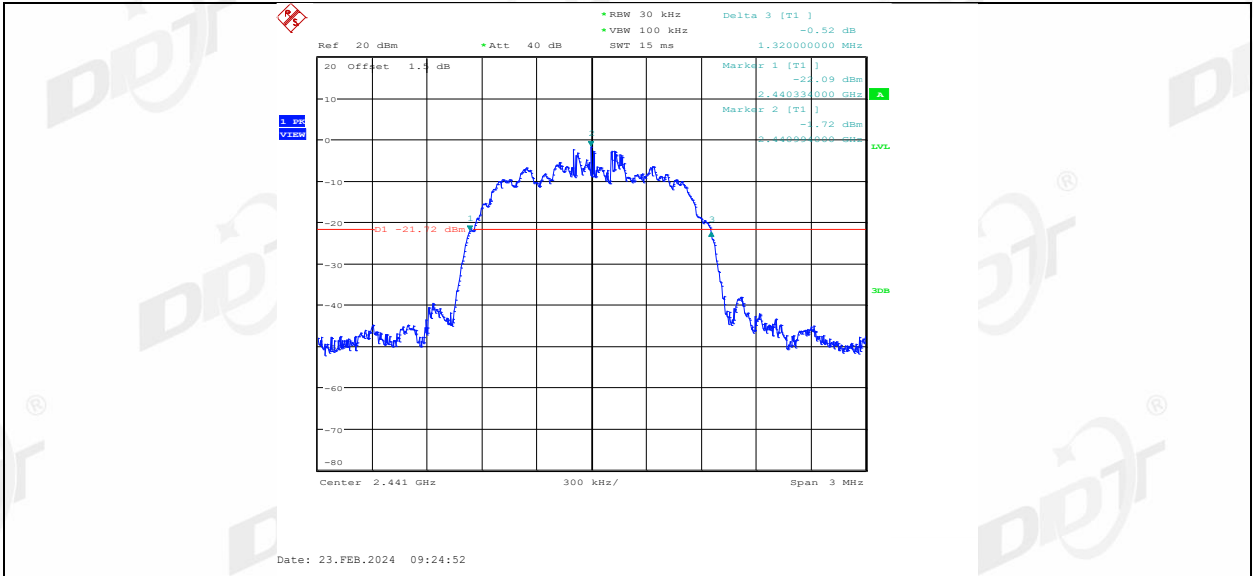


2DH5 Right side 2441

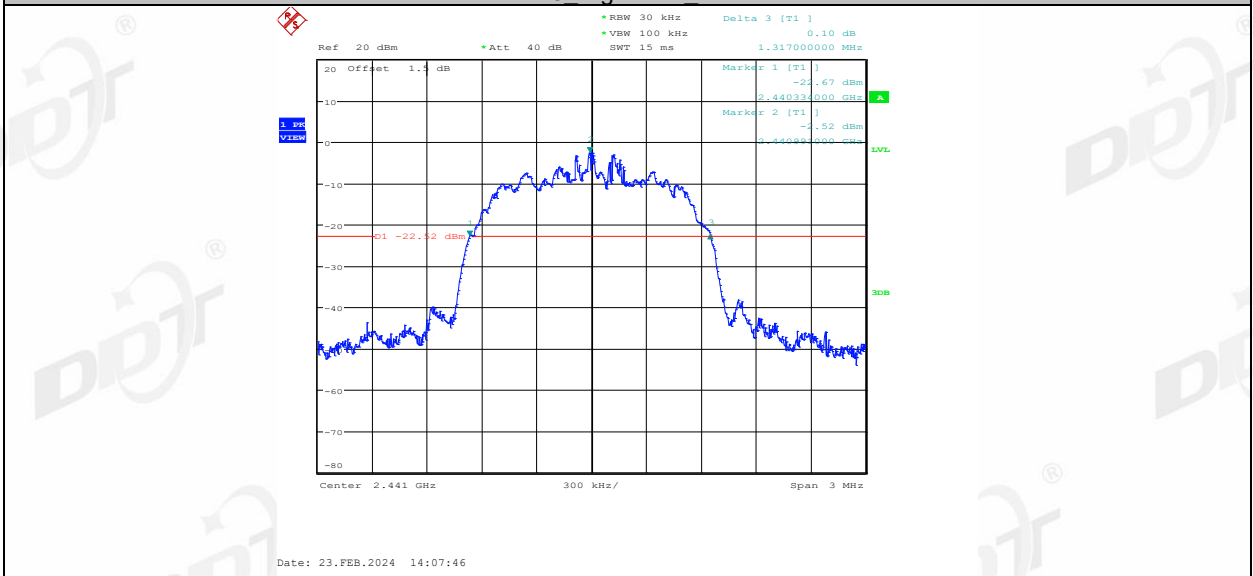


2DH5 Left side 2480

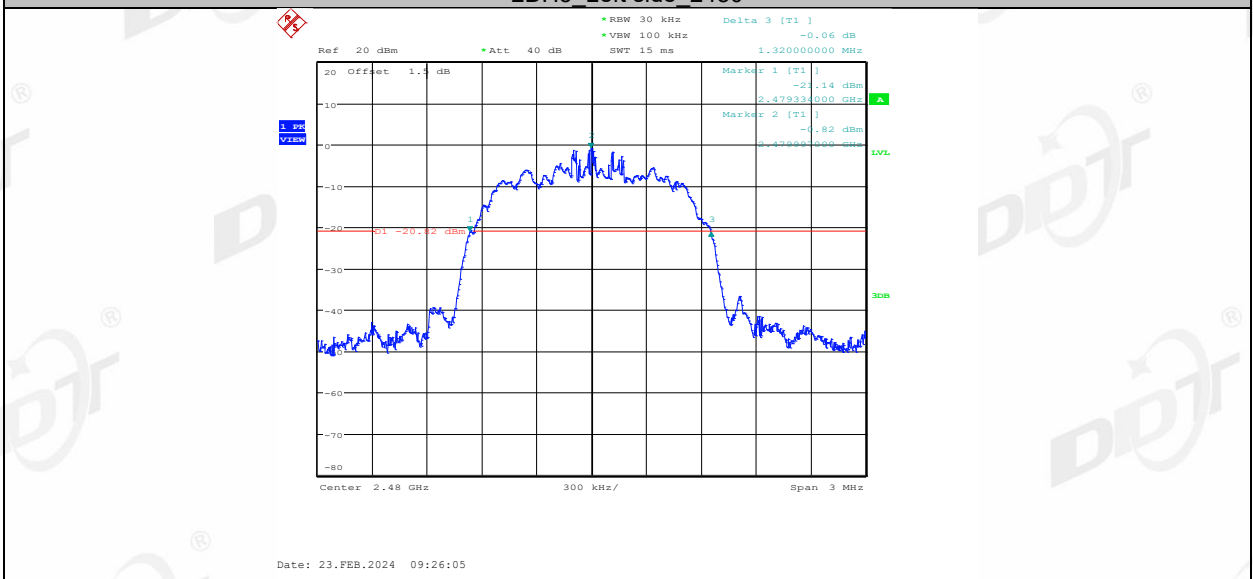


2DH5 Right side 2480

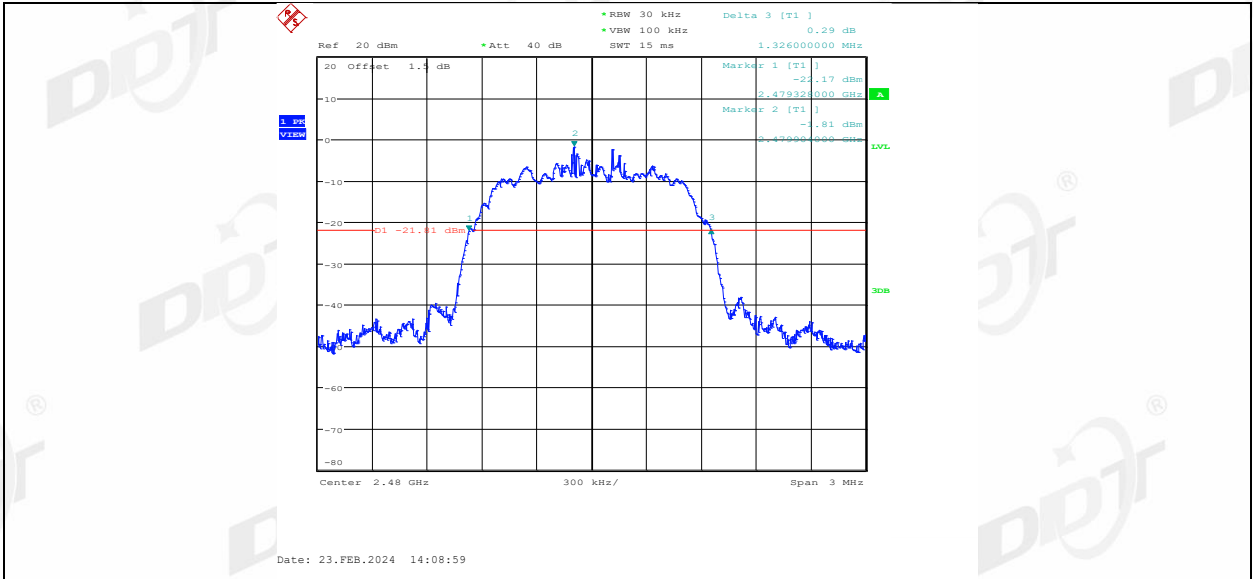


3DH5 Left side 2402

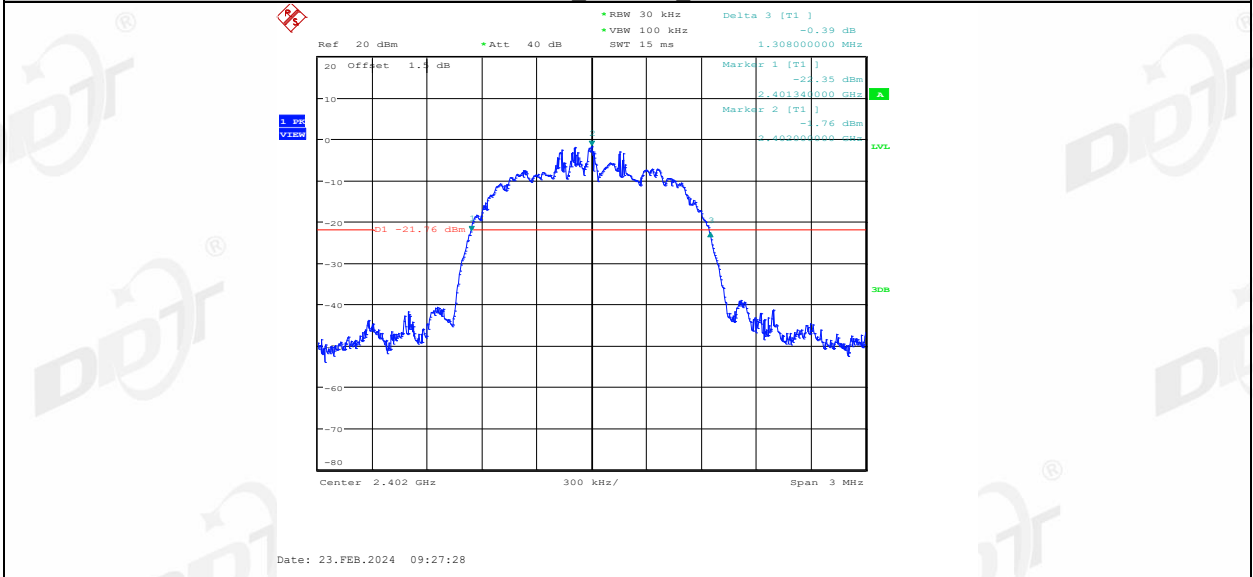


3DH5 Right side 2402

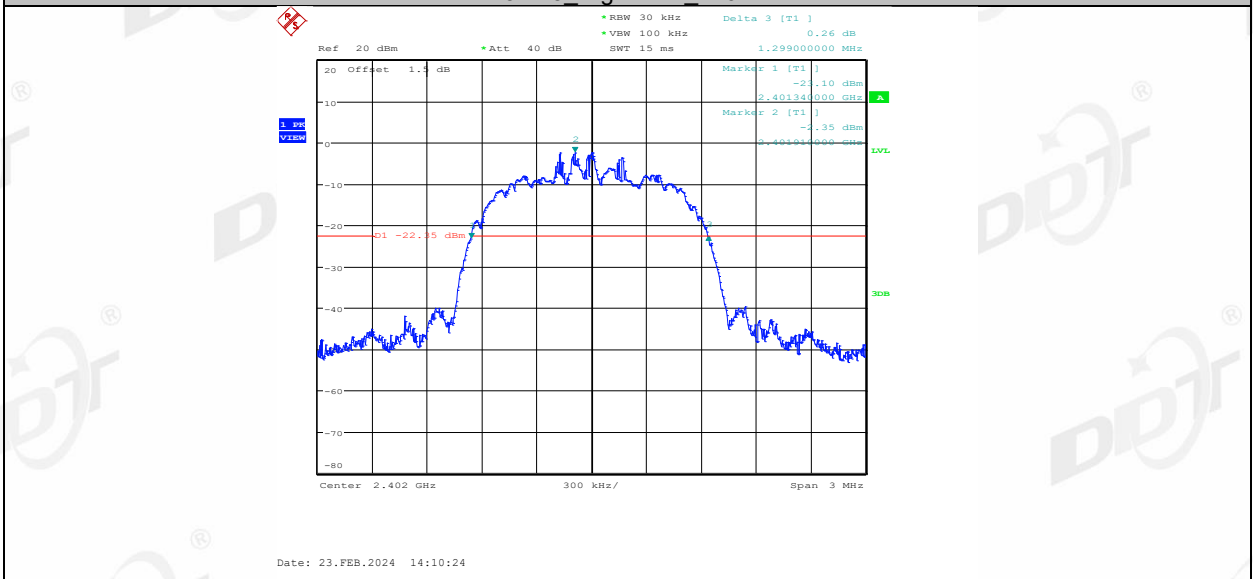


3DH5 Left side 2441

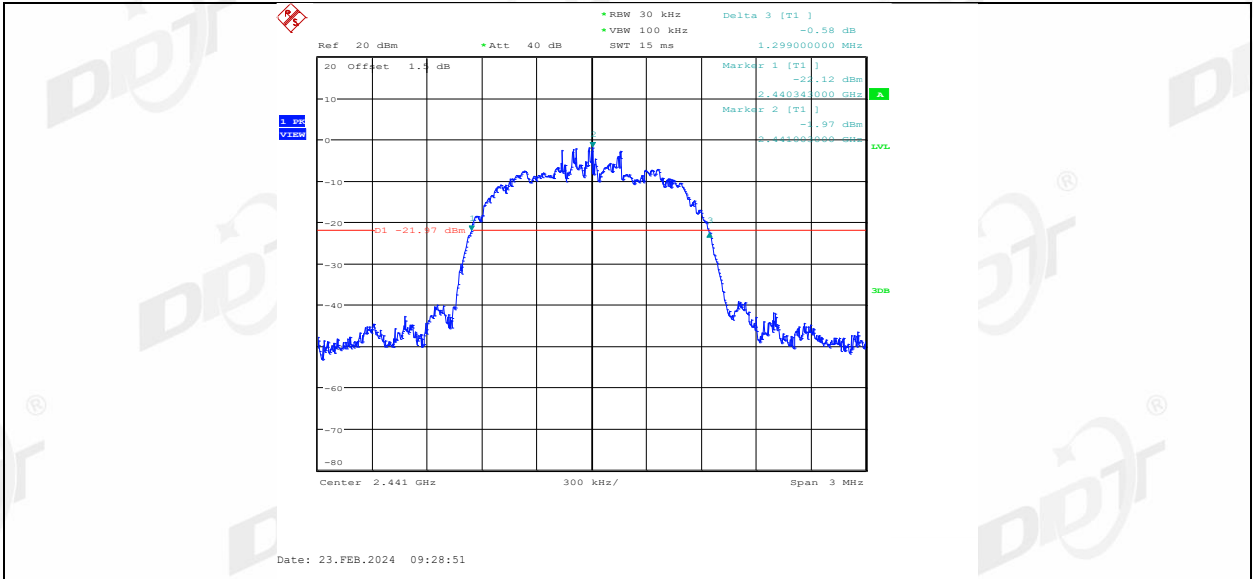


3DH5 Right side 2441

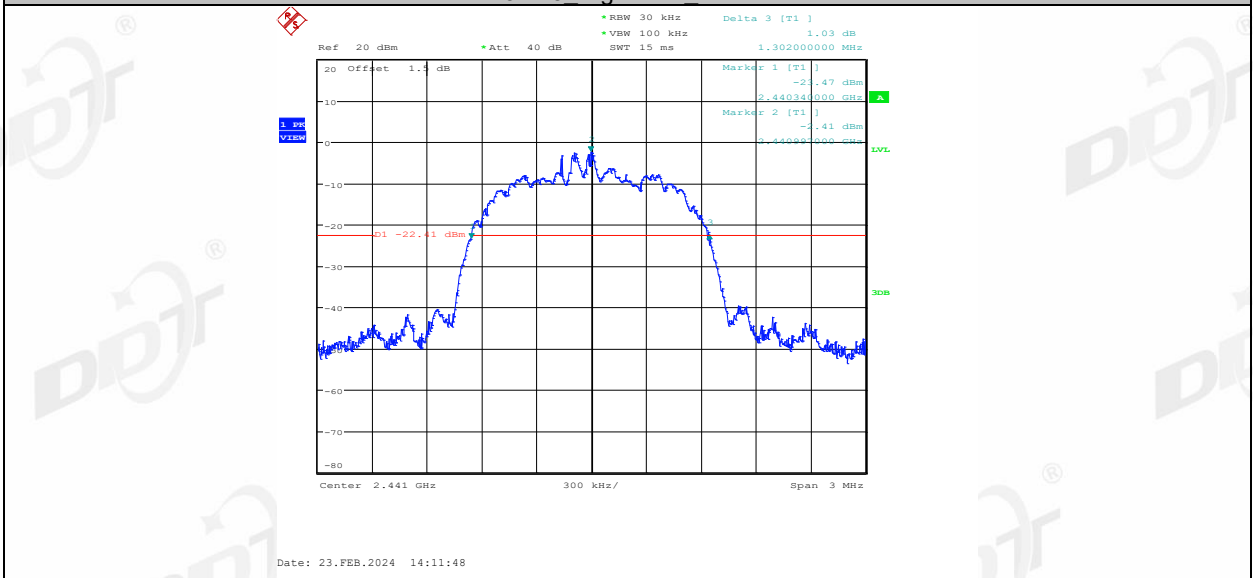

3DH5 Left side 2480

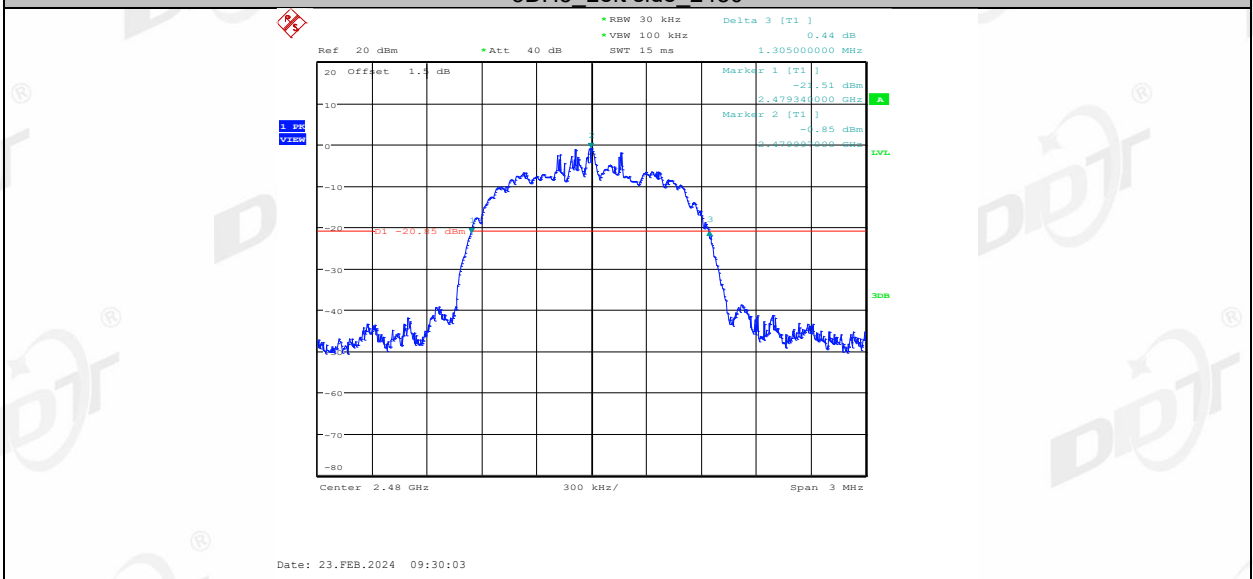


3DH5 Right side 2480

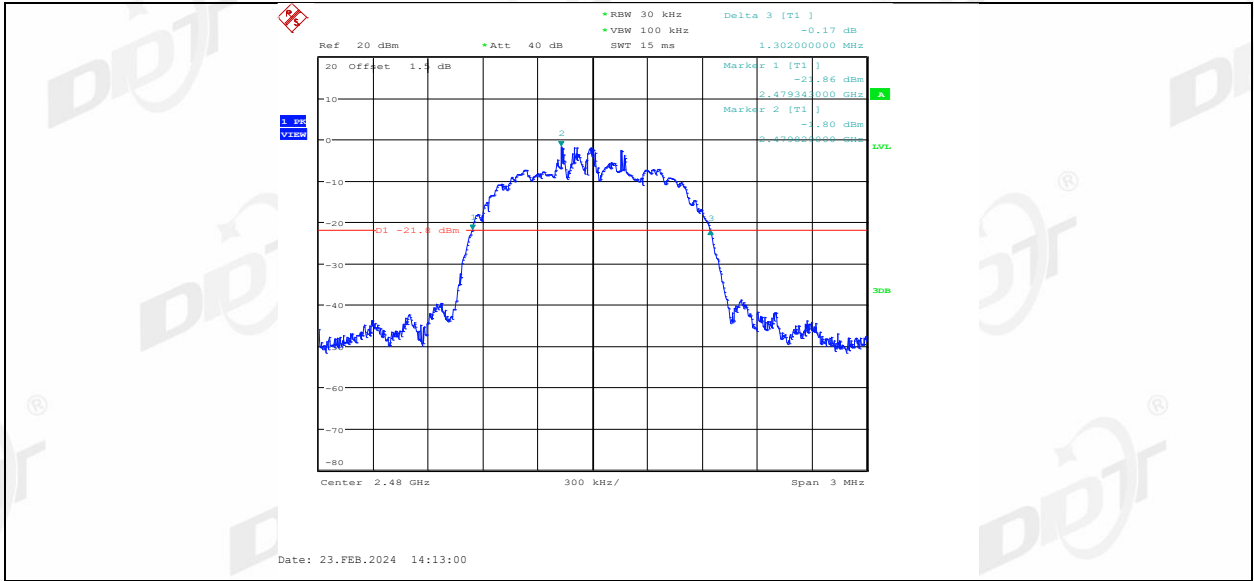

5. 99% Bandwidth

5.1. Block diagram of test setup

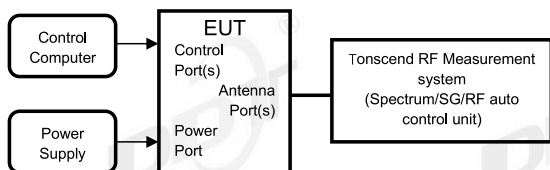

5.2. Limits

Just for Report.

5.3. Test procedure

- (1) The test according to ANSI C63.10-2013 clause 6.9.3.
- (2) Connect EUT's antenna output to spectrum analyzer by RF cable, the path loss was compensated to the results
- (3) Set the EUT as maximum power setting and enable the EUT transmit continuously
- (4) Use the following spectrum analyzer settings for the 99% bandwidth measurement:



RBW:	1% to 5% of the OBW
VBW:	approximately three times RBW
Span:	between 1.5 times and 5.0 times the OBW
Detector Mode:	Peak
Sweep time:	Auto
Trace mode:	Max hold
- (5) Measure and record the results in the report.

5.4. Test result


Test Engineer:	Zoe	Test Site:	RF Measurement System 2#
Ambient Condition:	24.1°C,48.3%RH	Test Date:	2024.02.23
Test Power Supply:	Battery	EUT:	CREATIVE ZEN AIR 2
Sample Number:	S24012628-002	Model No.:	EF1190

Test Mode	Antenna	Frequency [MHz]	OCB [MHz]	FL[MHz]	FH[MHz]
DH5	Left side	2402	0.858	2401.5620	2402.4200
	Right side	2402	0.858	2401.5620	2402.4200
	Left side	2441	0.858	2440.5620	2441.4200
	Right side	2441	0.852	2440.5620	2441.4140
	Left side	2480	0.858	2479.5620	2480.4200
	Right side	2480	0.858	2479.5590	2480.4170
2DH5	Left side	2402	1.182	2401.4000	2402.5820
	Right side	2402	1.182	2401.4000	2402.5820
	Left side	2441	1.176	2440.4030	2441.5790
	Right side	2441	1.176	2440.4030	2441.5790
	Left side	2480	1.176	2479.4030	2480.5790
	Right side	2480	1.179	2479.4000	2480.5790
3DH5	Left side	2402	1.176	2401.4060	2402.5820
	Right side	2402	1.179	2401.4030	2402.5820
	Left side	2441	1.173	2440.4060	2441.5790
	Right side	2441	1.173	2440.4060	2441.5790
	Left side	2480	1.173	2479.4090	2480.5820
	Right side	2480	1.179	2479.4030	2480.5820


5.5. Test graphs

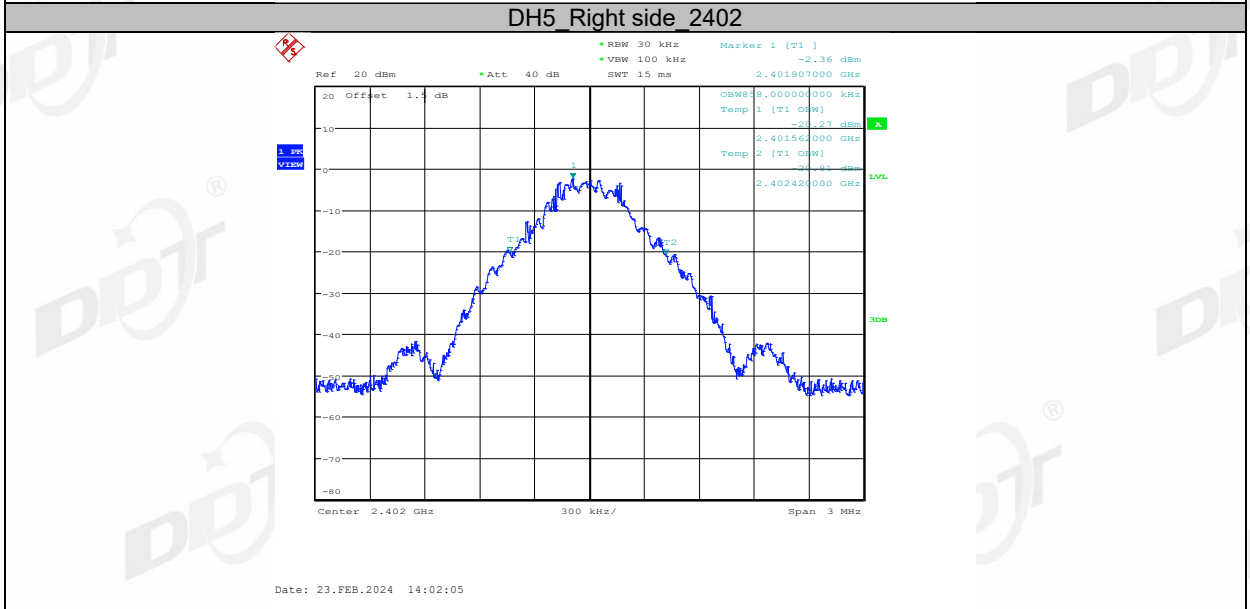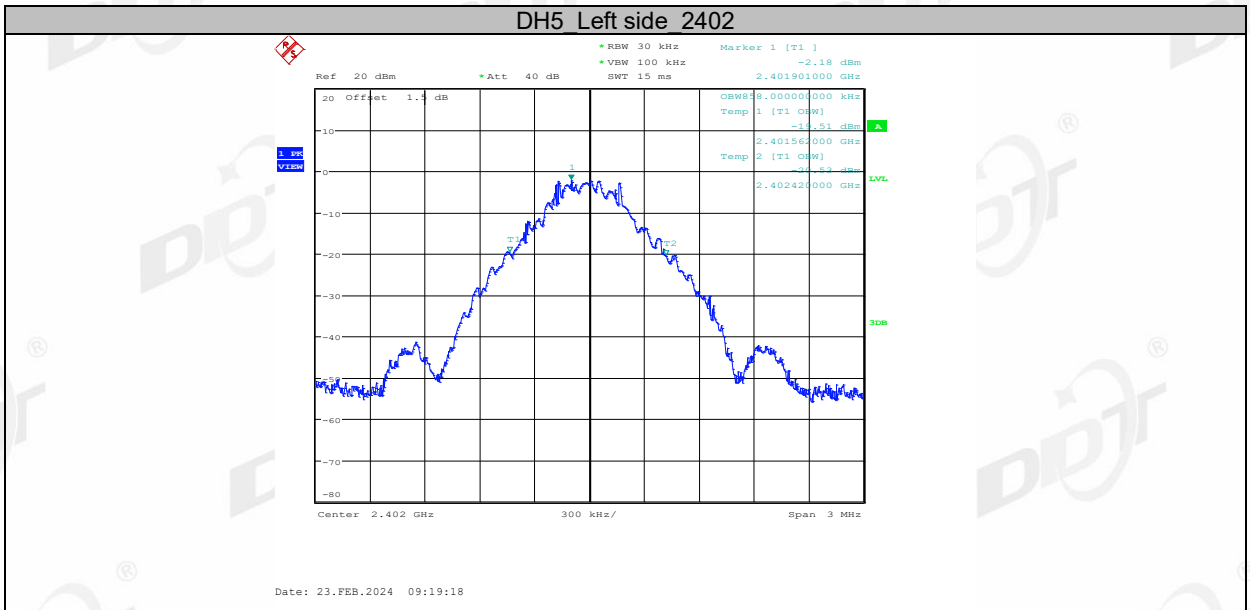


DH5 Left side 2441

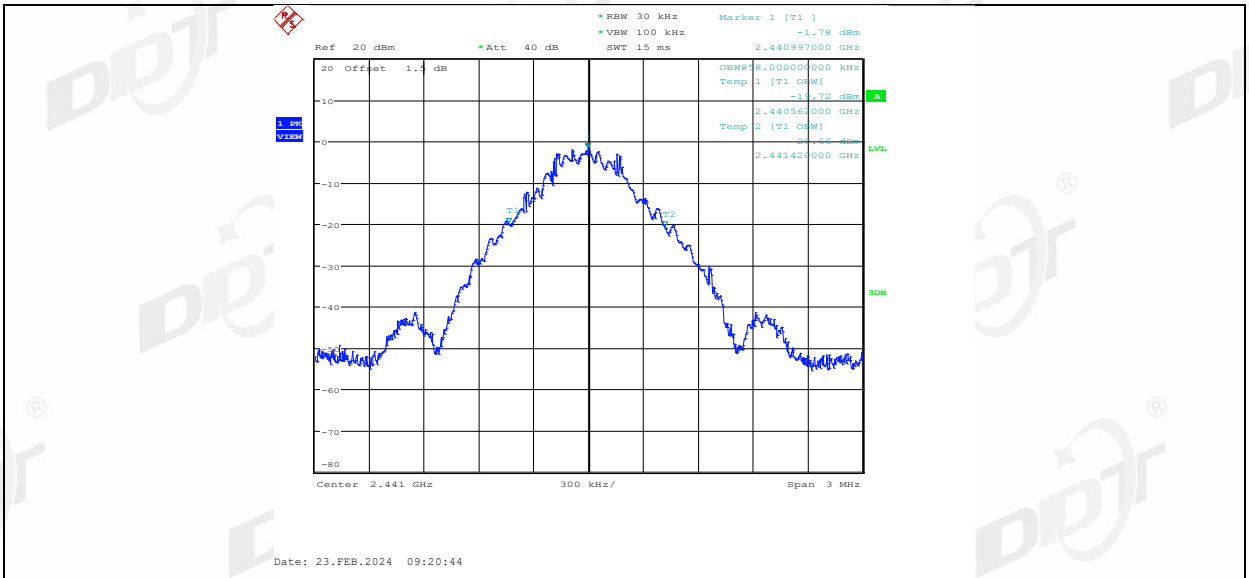


DH5 Right side 2441

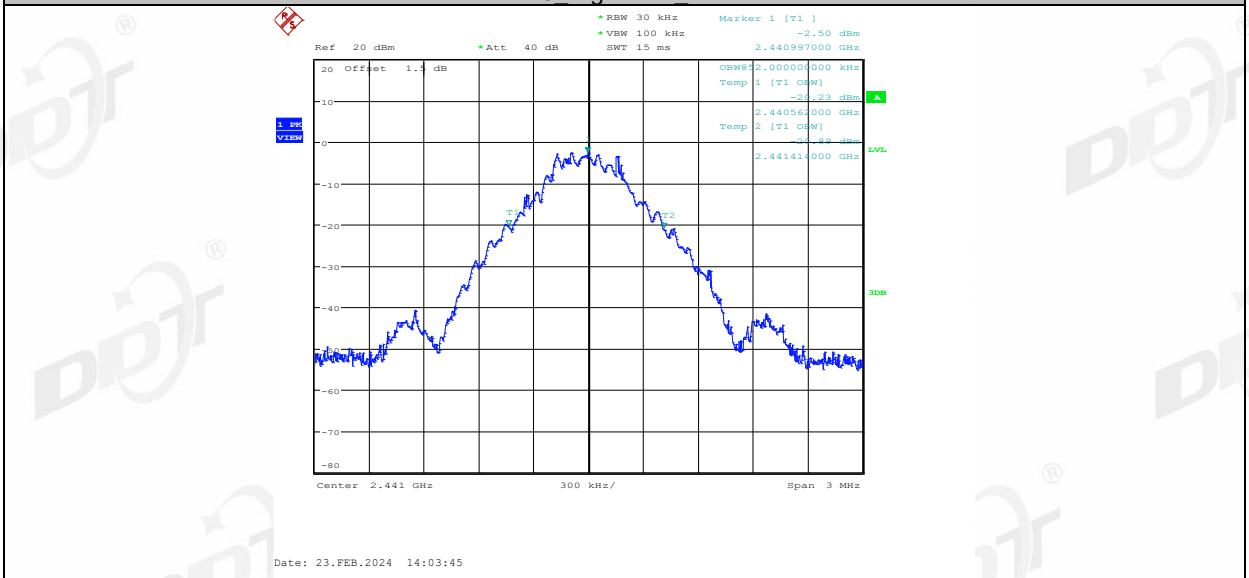


DH5 Left side 2480

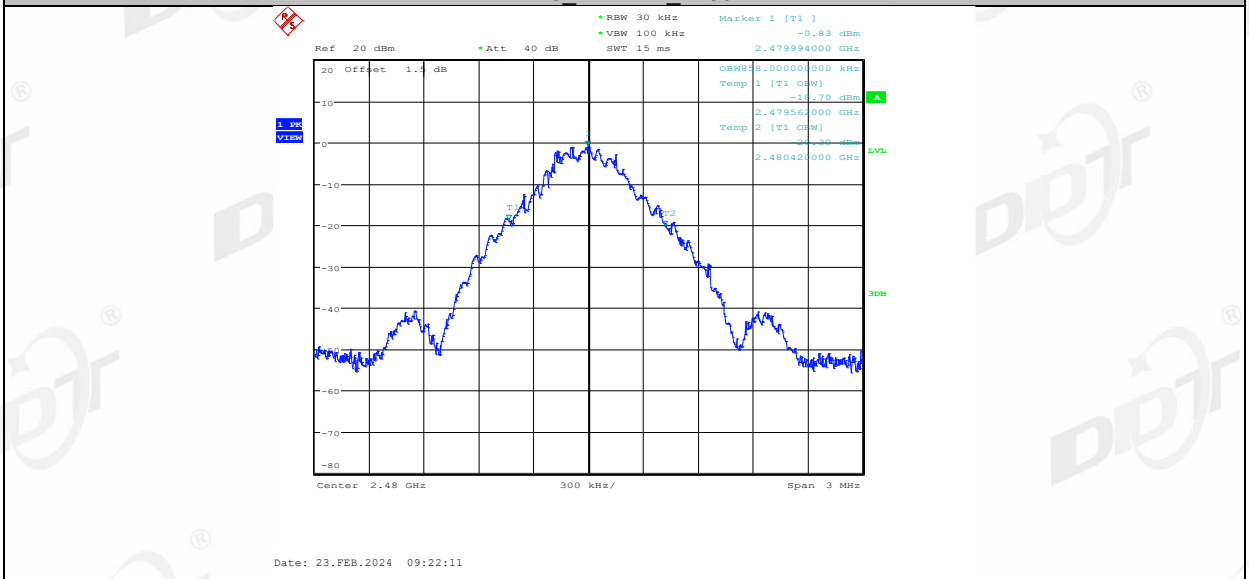


DH5 Right side 2480

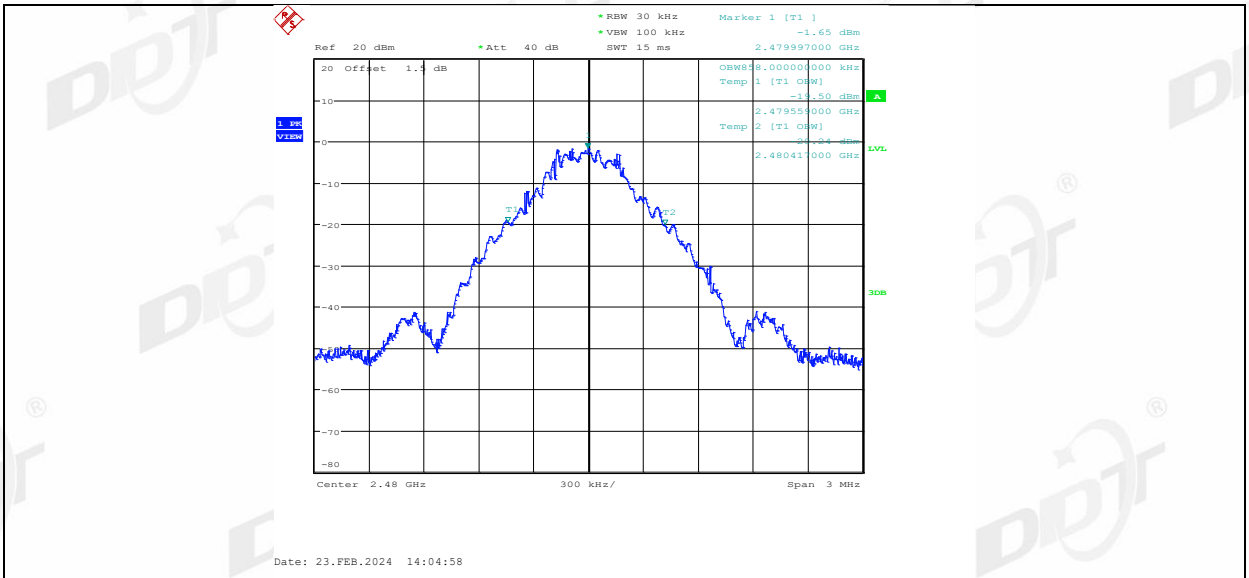


2DH5 Left side 2402

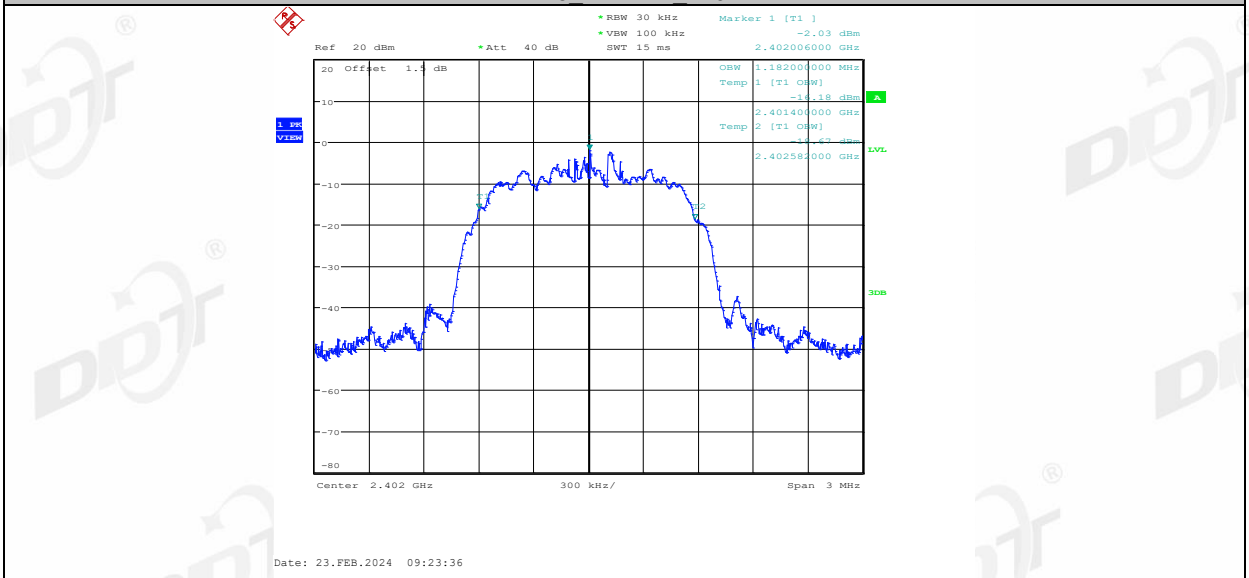


2DH5 Right side 2402

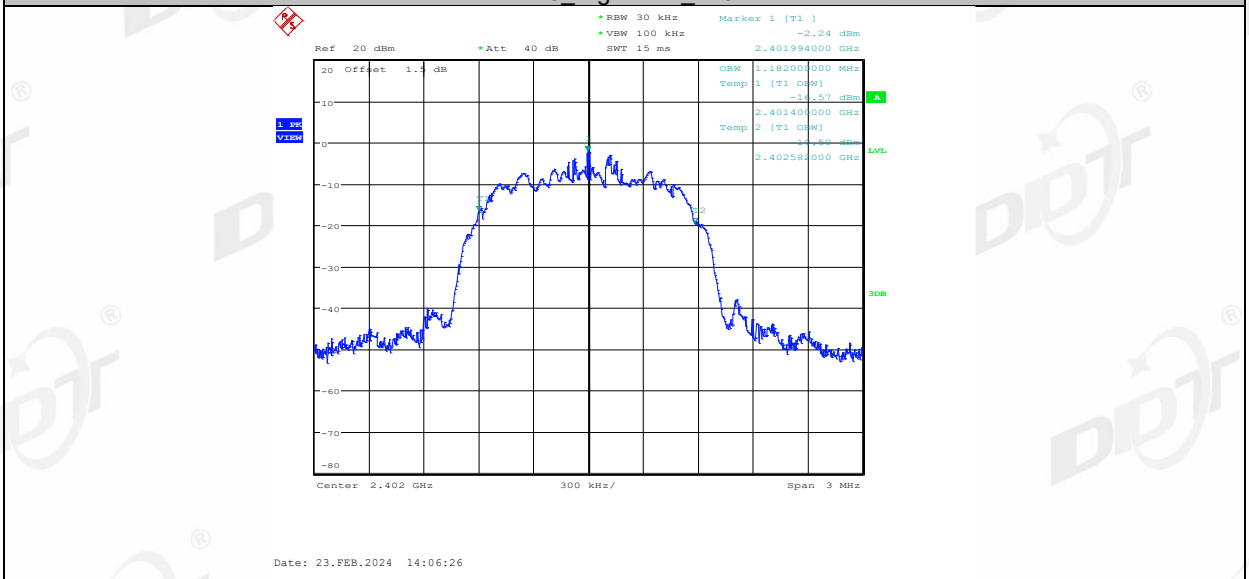


2DH5 Left side 2441

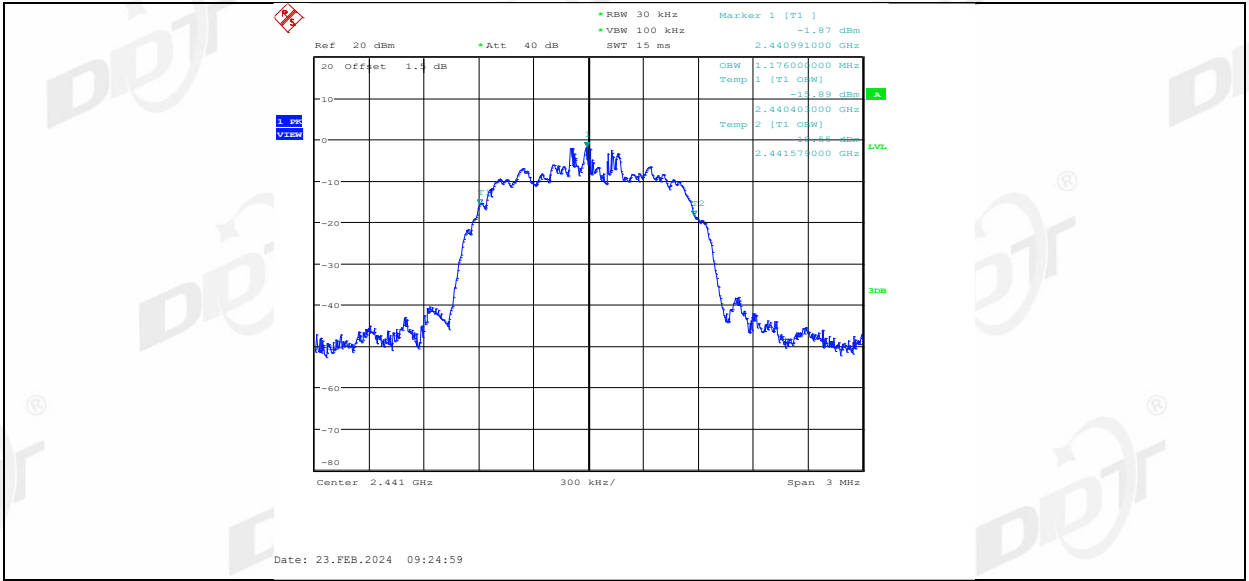


2DH5 Right side 2441

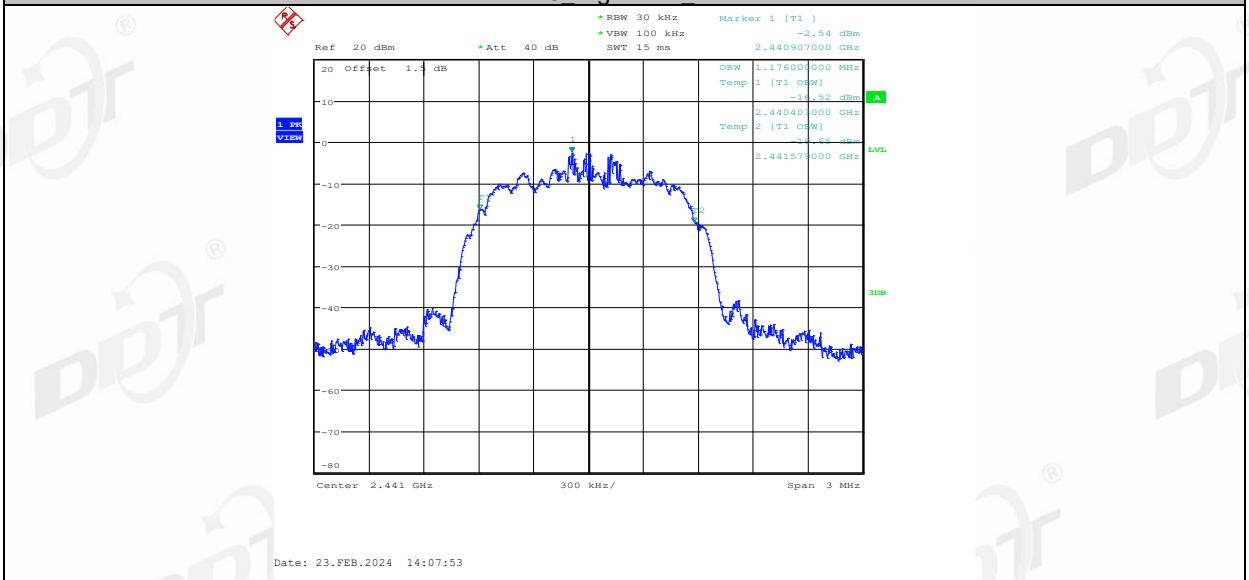


2DH5 Left side 2480

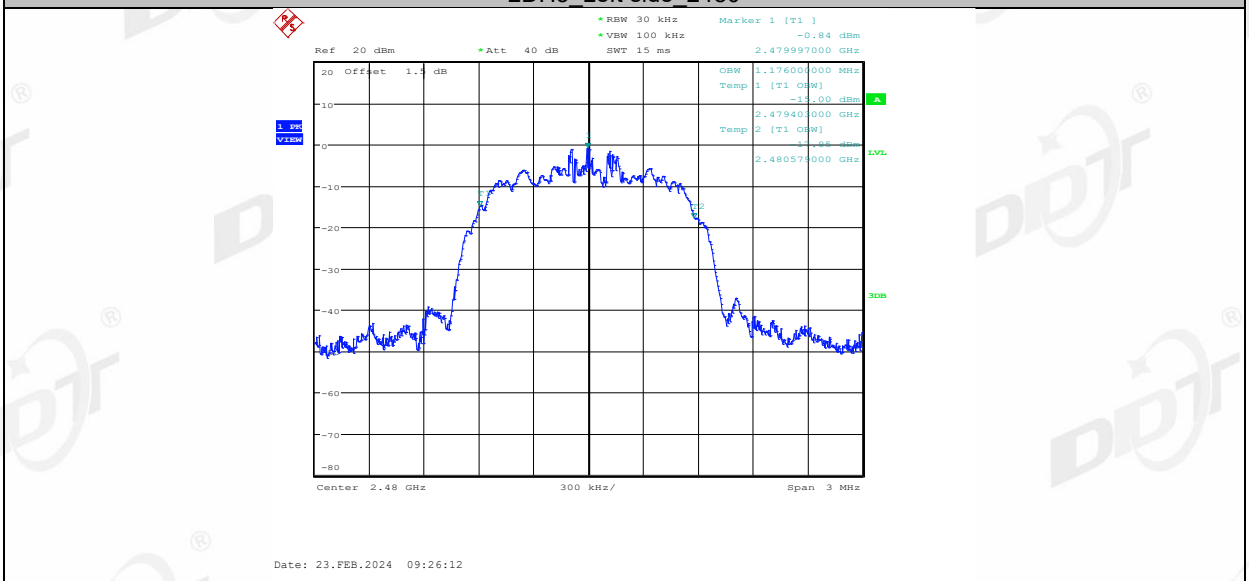


2DH5 Right side 2480

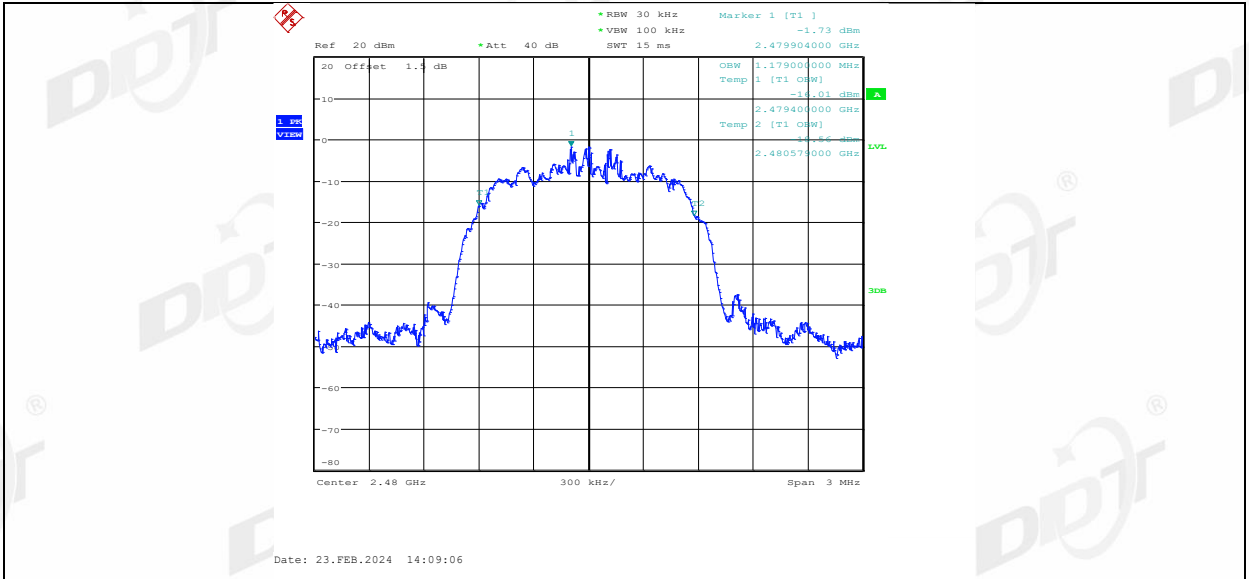


3DH5 Left side 2402

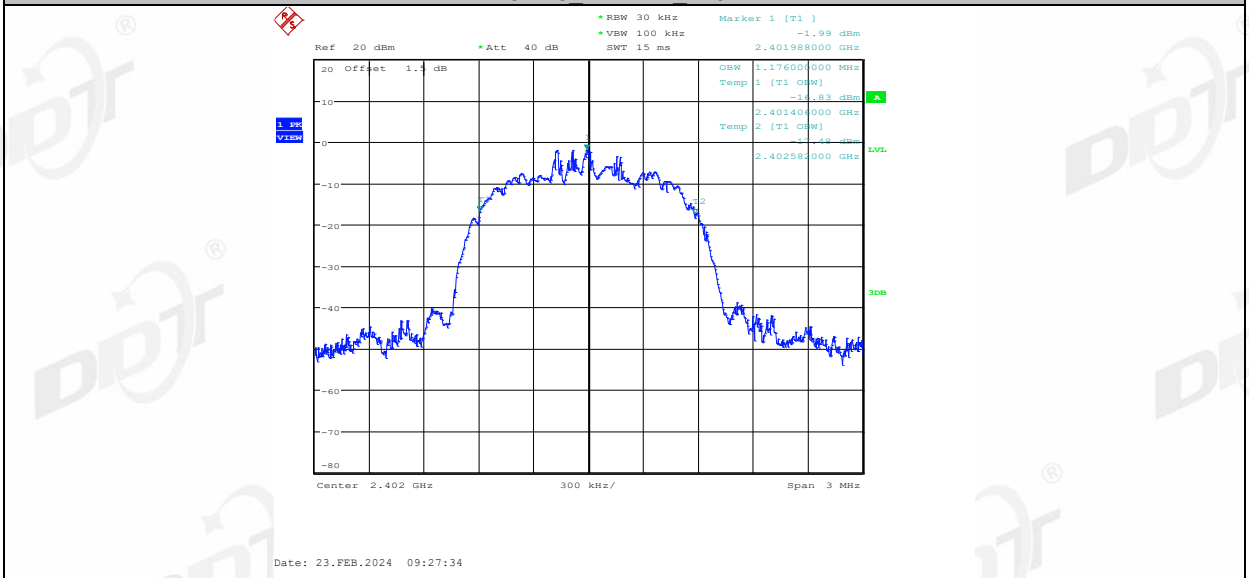


3DH5 Right side 2402

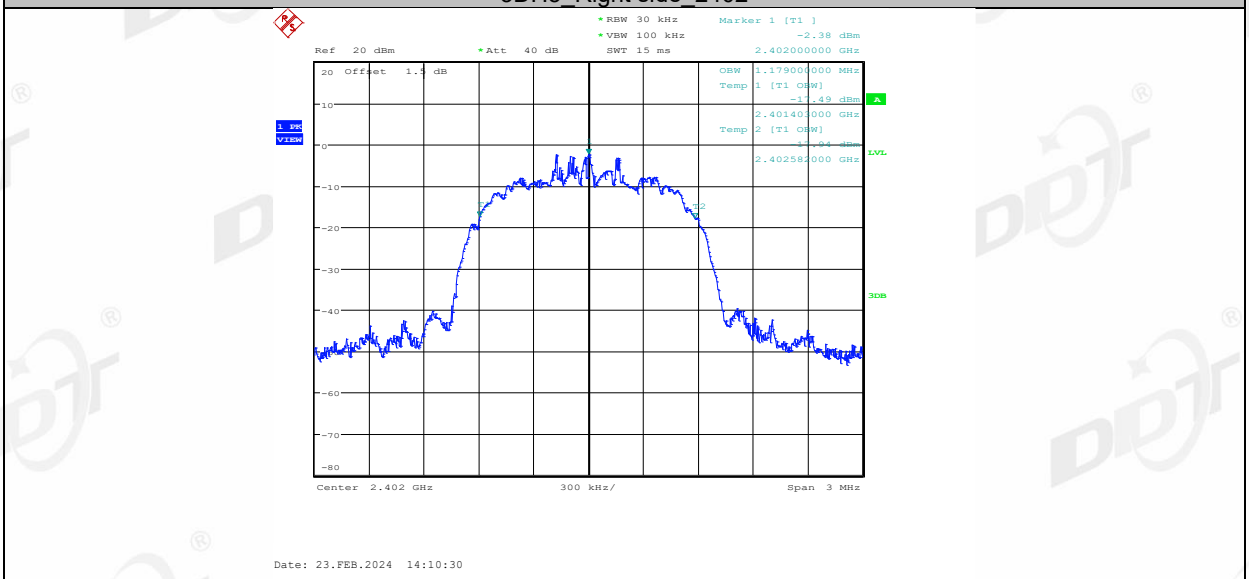


3DH5 Left side 2441

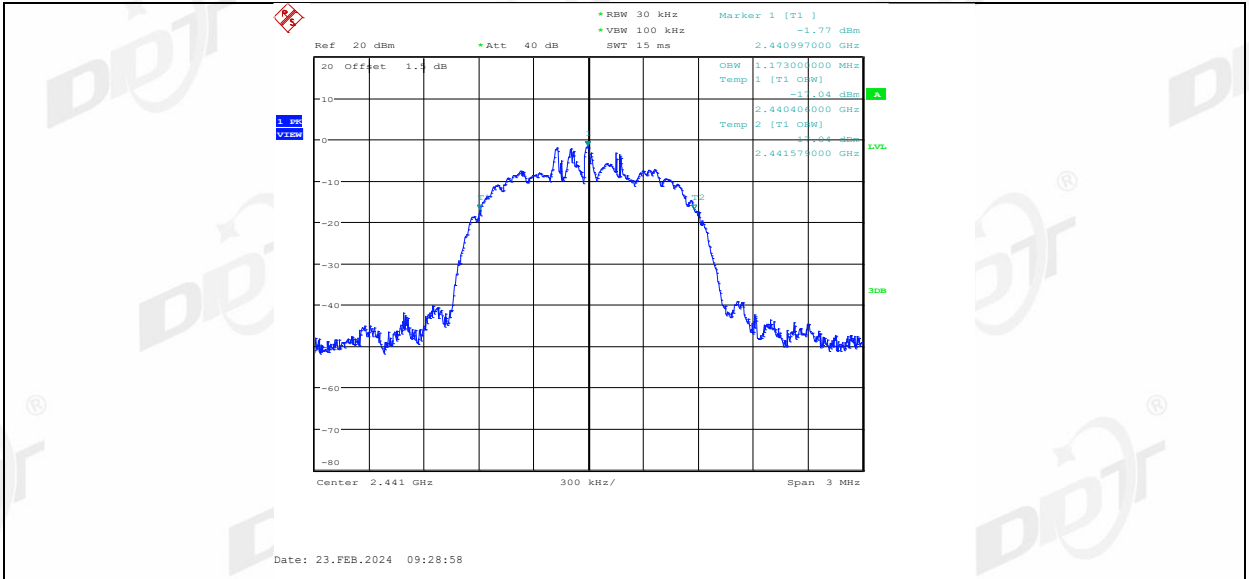


3DH5 Right side 2441

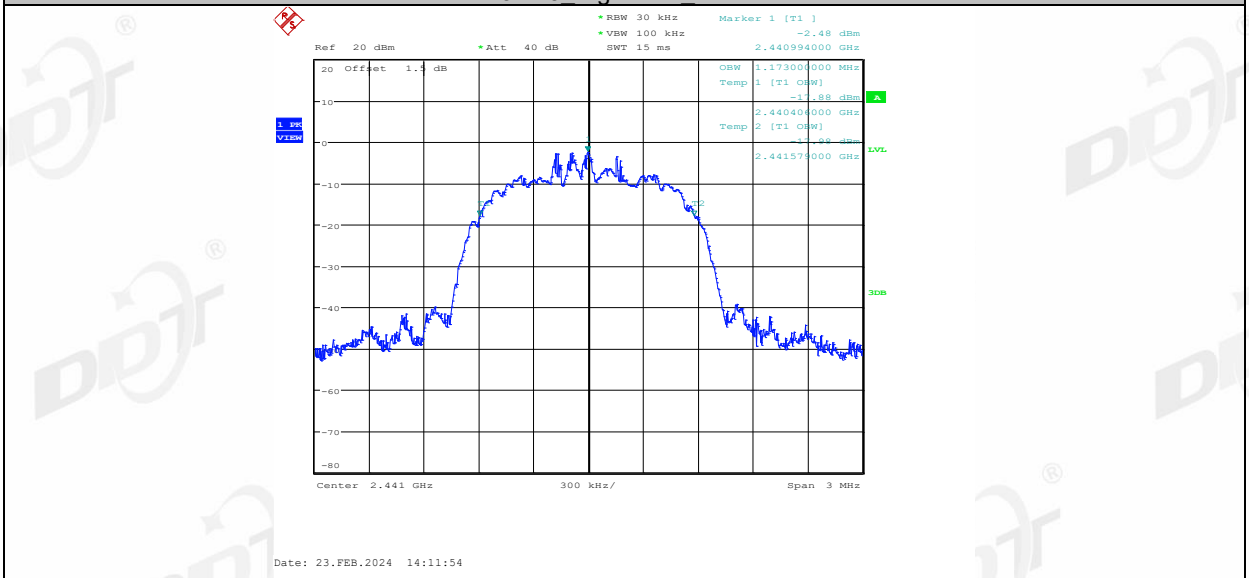

3DH5 Left side 2480

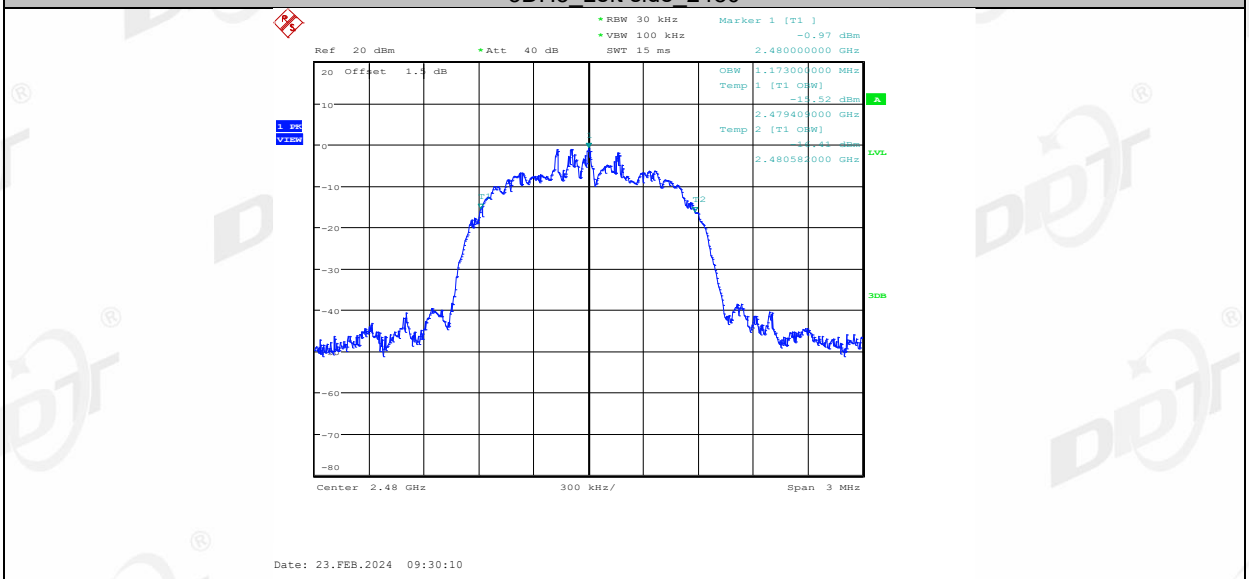


3DH5 Right side 2480

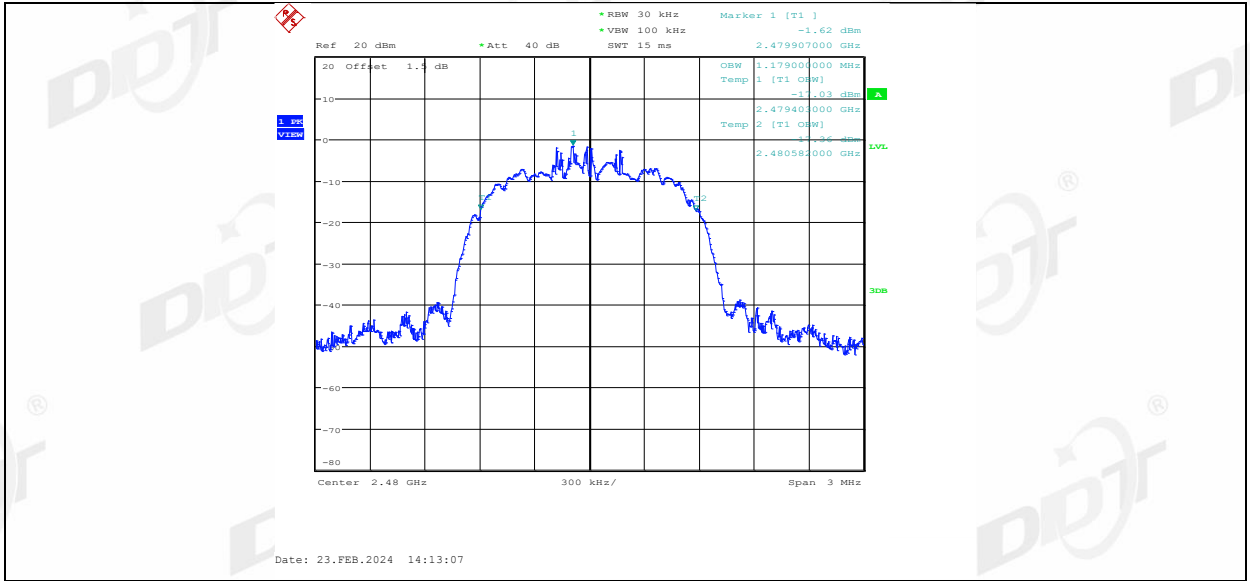

6. Maximum Peak Output Power

6.1. Block diagram of test setup

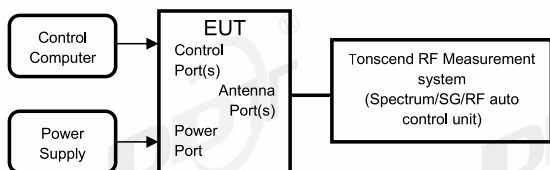

6.2. Limits

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts, the e.i.r.p shall not exceed 4W.

6.3. Test procedure

- (1) The test according to ANSI C63.10-2013 clause 7.8.5.
- (2) Connect EUT's antenna output to spectrum analyzer by RF cable, the path loss was compensated to the results.
- (3) Set the EUT as maximum power setting and enable the EUT transmit continuously.
- (4) Use the following spectrum analyzer settings for the maximum peak output power measurement:

RBW:	> 20 dB bandwidth of the emission being measured.
VBW:	VBW \geq RBW.
Span:	Approximately five times the 20 dB bandwidth, centered on a hopping channel.
Detector Mode:	Peak
Sweep time:	Auto
Trace mode:	Max hold
- (5) Use the marker-to-peak function to set the marker to the peak of the emission and record the results in the report.


6.4. Test result

Test Engineer:	Zoe	Test Site:	RF Measurement System 2#
Ambient Condition:	23.6°C,46.2%RH	Test Date:	2024.03.05
Test Power Supply:	Battery	EUT:	CREATIVE ZEN AIR 2
Sample Number:	S24012628-002	Model No.:	EF1190


Test Mode	Antenna	Frequency [MHz]	Conducted Peak Power[dBm]	Conducted Limit[dBm]	EIRP[dBm]	EIRP Limit[dBm]	Verdict
DH5	Left side	2402	-1.76	≤20.97	0.74	≤30	PASS
	Right side	2402	-2.55	≤20.97	-0.05	≤30	PASS
	Left side	2441	-1.93	≤20.97	0.57	≤30	PASS
	Right side	2441	-2.44	≤20.97	0.06	≤30	PASS
	Left side	2480	-0.98	≤20.97	1.52	≤30	PASS
	Right side	2480	-1.68	≤20.97	0.82	≤30	PASS
2DH5	Left side	2402	0.17	≤20.97	2.67	≤30	PASS
	Right side	2402	-0.51	≤20.97	1.99	≤30	PASS
	Left side	2441	0.13	≤20.97	2.63	≤30	PASS
	Right side	2441	-0.50	≤20.97	2.00	≤30	PASS
	Left side	2480	1.07	≤20.97	3.57	≤30	PASS
	Right side	2480	0.32	≤20.97	2.82	≤30	PASS
3DH5	Left side	2402	0.66	≤20.97	3.16	≤30	PASS
	Right side	2402	-0.06	≤20.97	2.44	≤30	PASS
	Left side	2441	0.55	≤20.97	3.05	≤30	PASS
	Right side	2441	-0.01	≤20.97	2.49	≤30	PASS
	Left side	2480	1.11	≤20.97	3.61	≤30	PASS
	Right side	2480	0.79	≤20.97	3.29	≤30	PASS

6.5. Test graphs




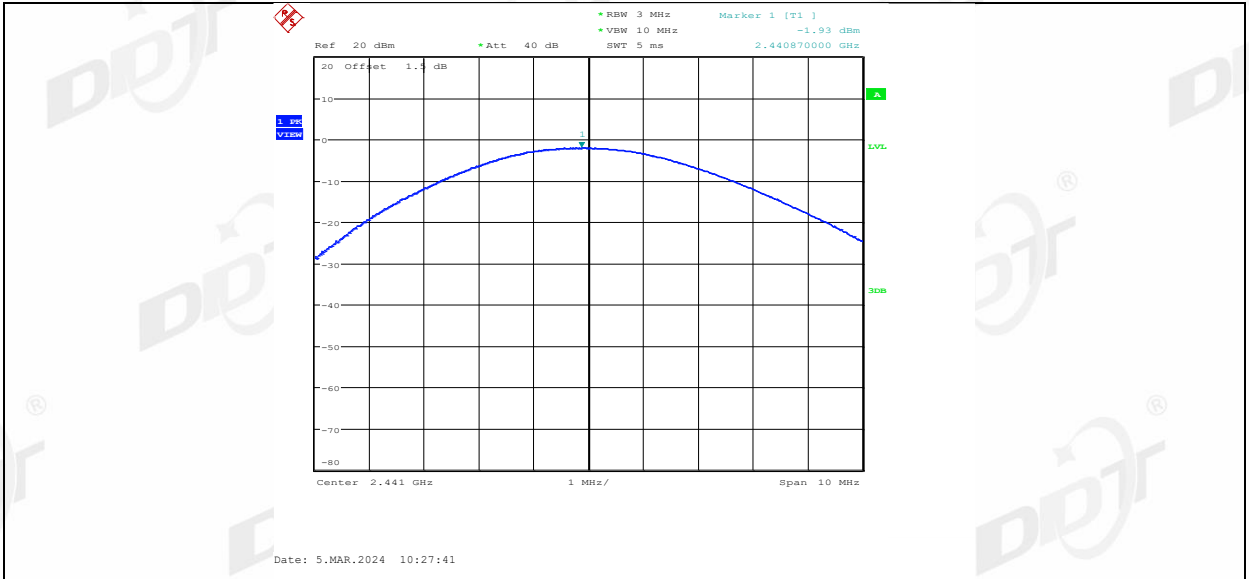


DH5 Right side 2441

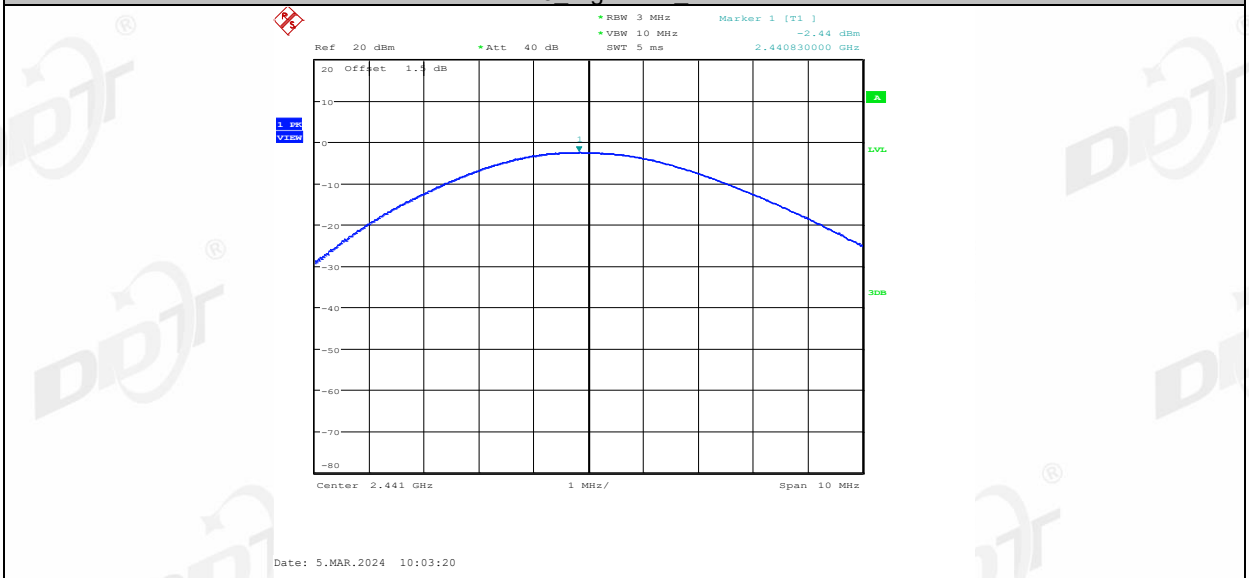


DH5 Left side 2480

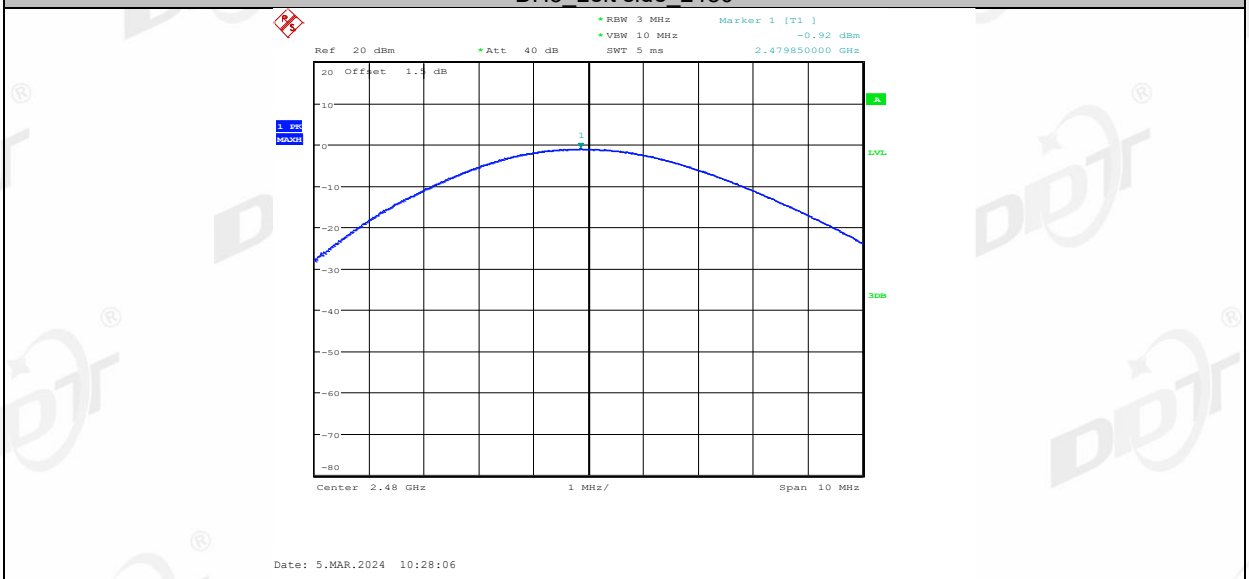


DH5 Right side 2480

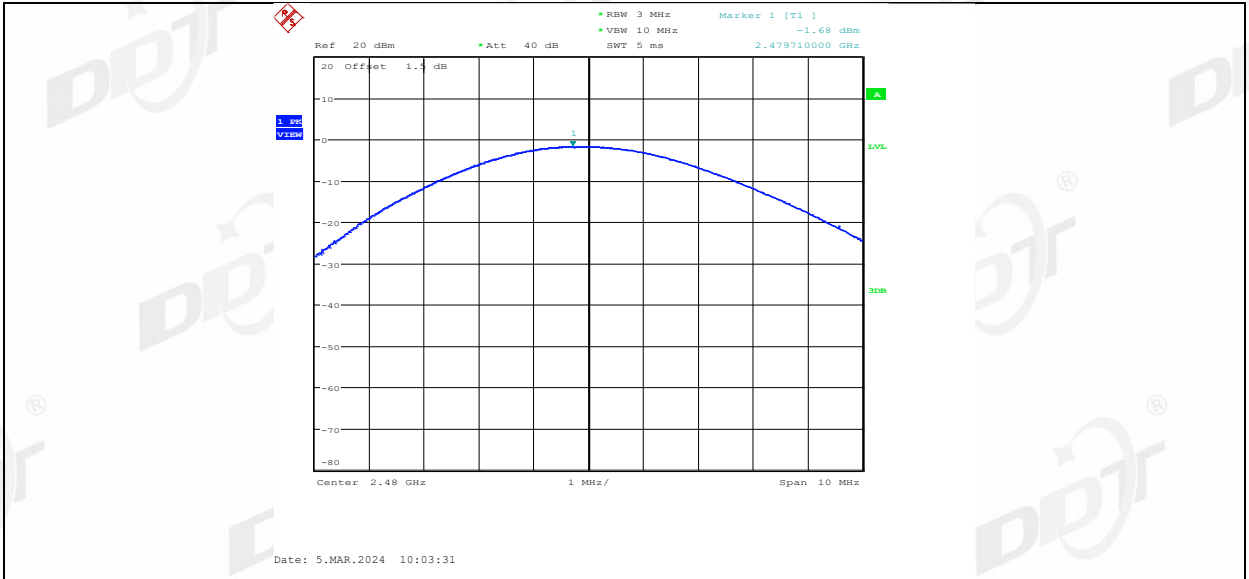


2DH5 Left side 2402

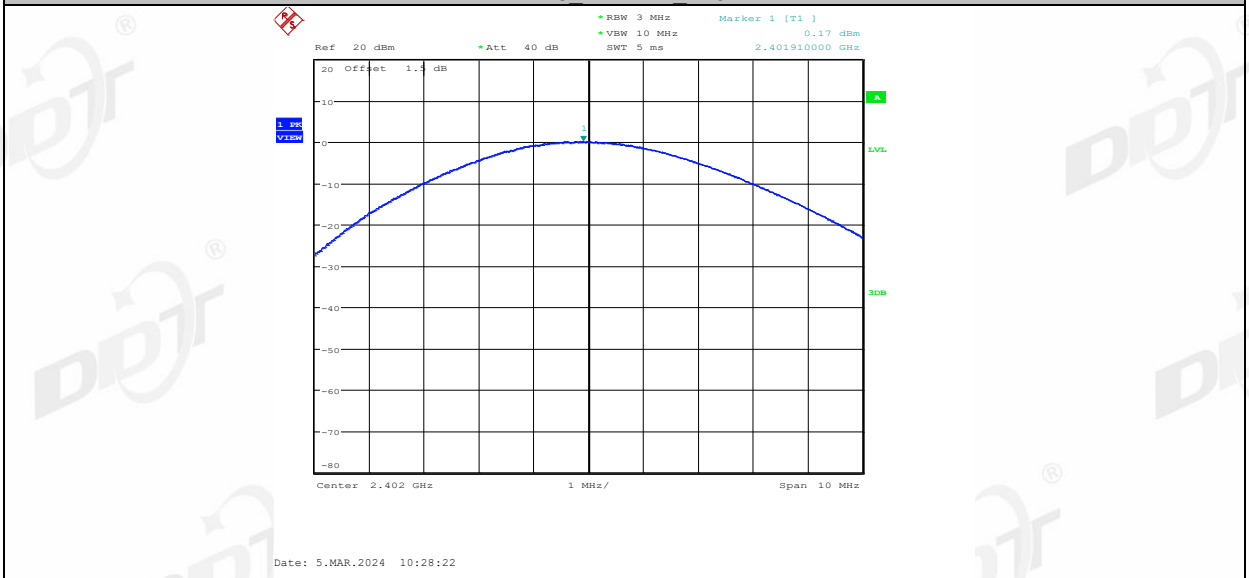


2DH5 Right side 2402

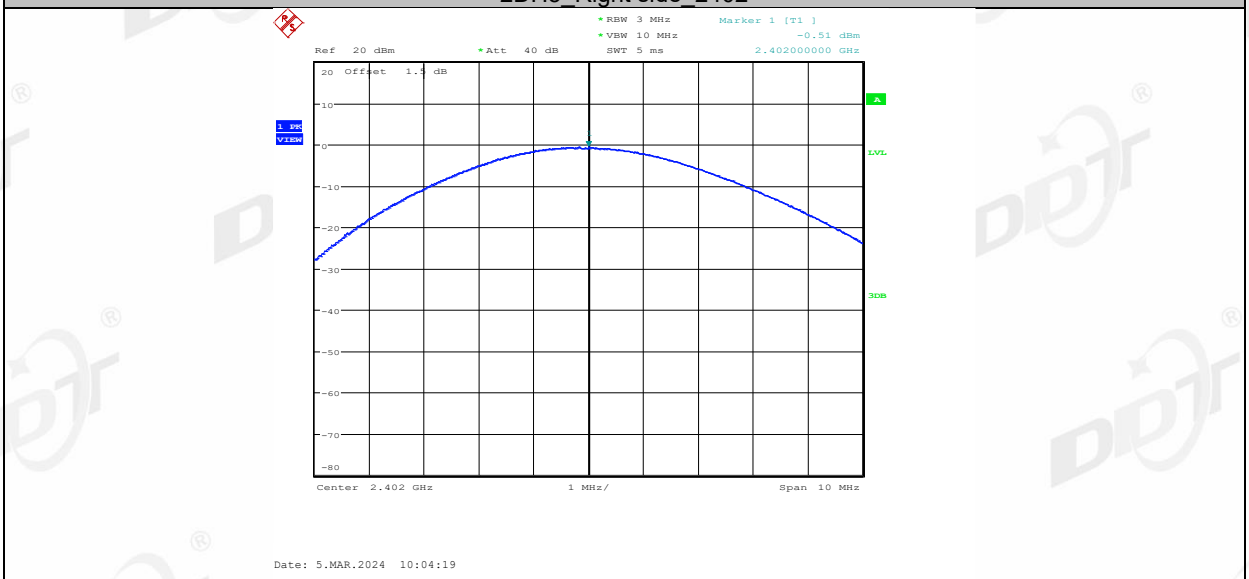


2DH5 Left side 2441

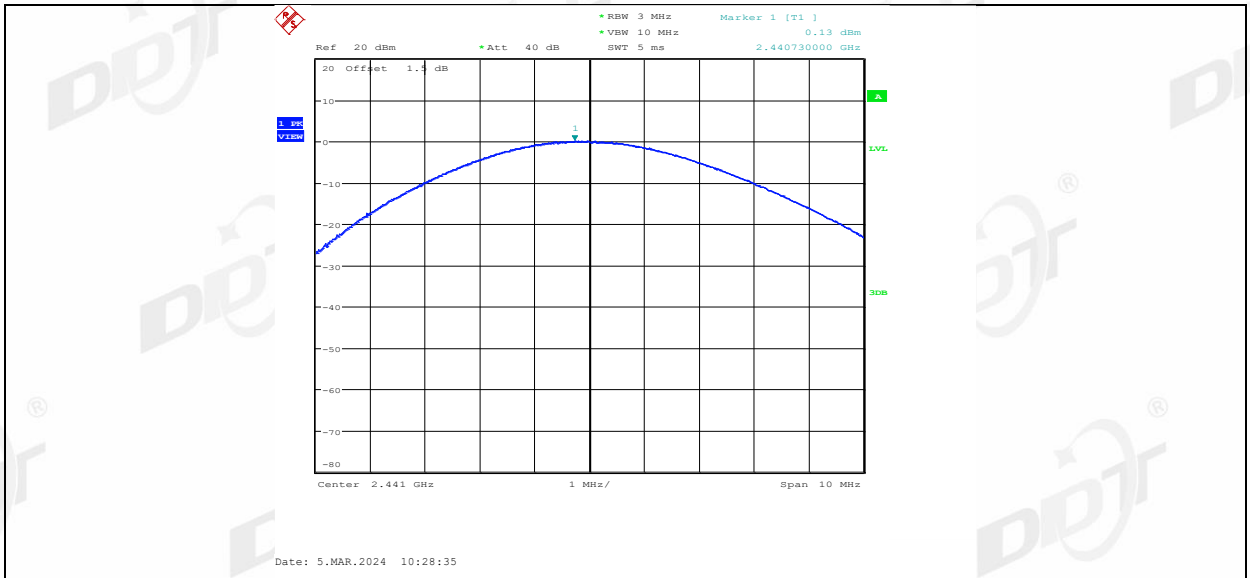


2DH5 Right side 2441

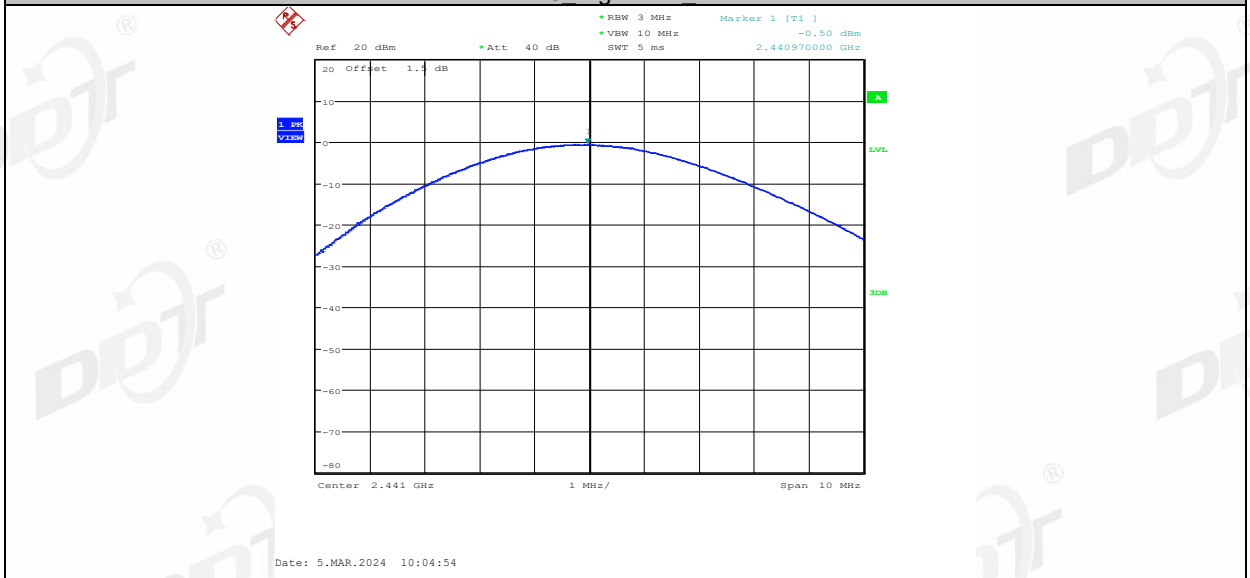


2DH5 Left side 2480

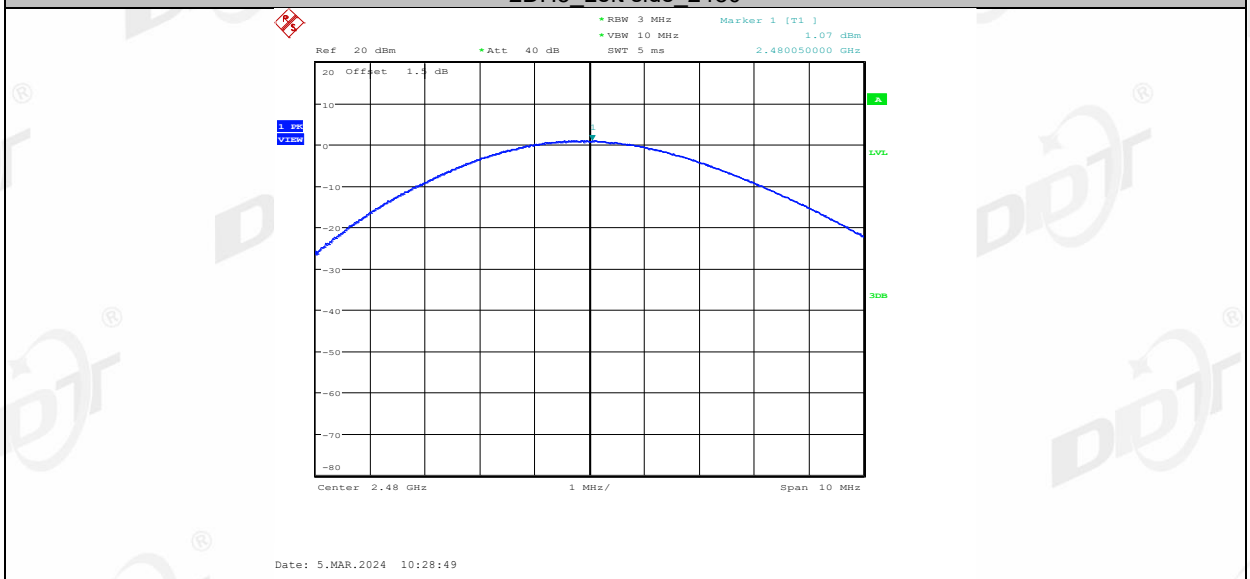


2DH5 Right side 2480

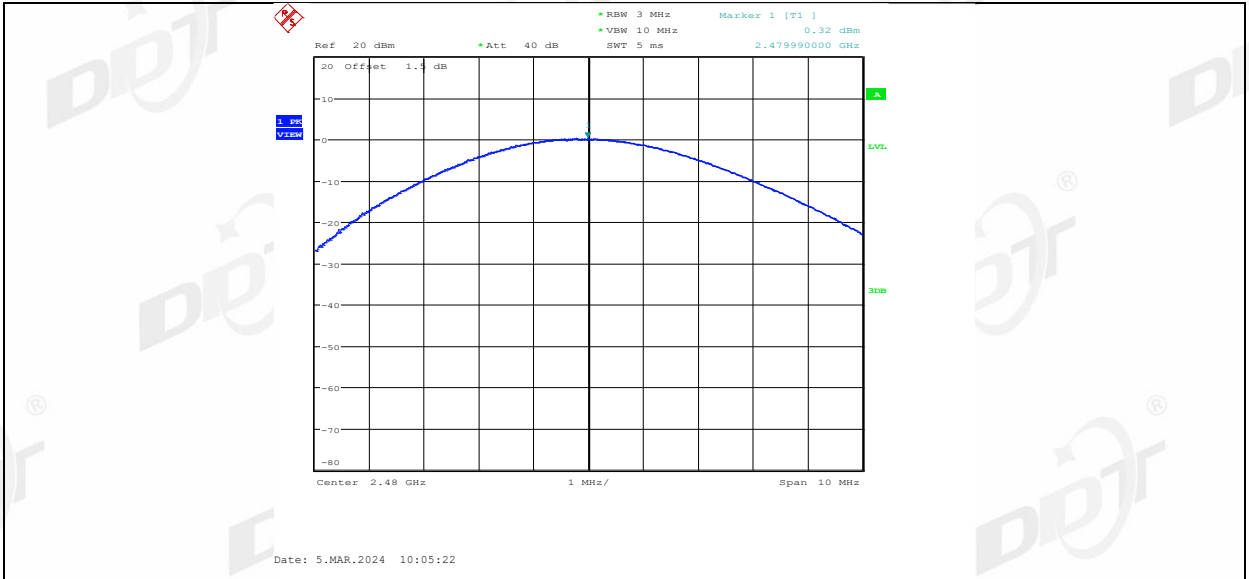


3DH5 Left side 2402

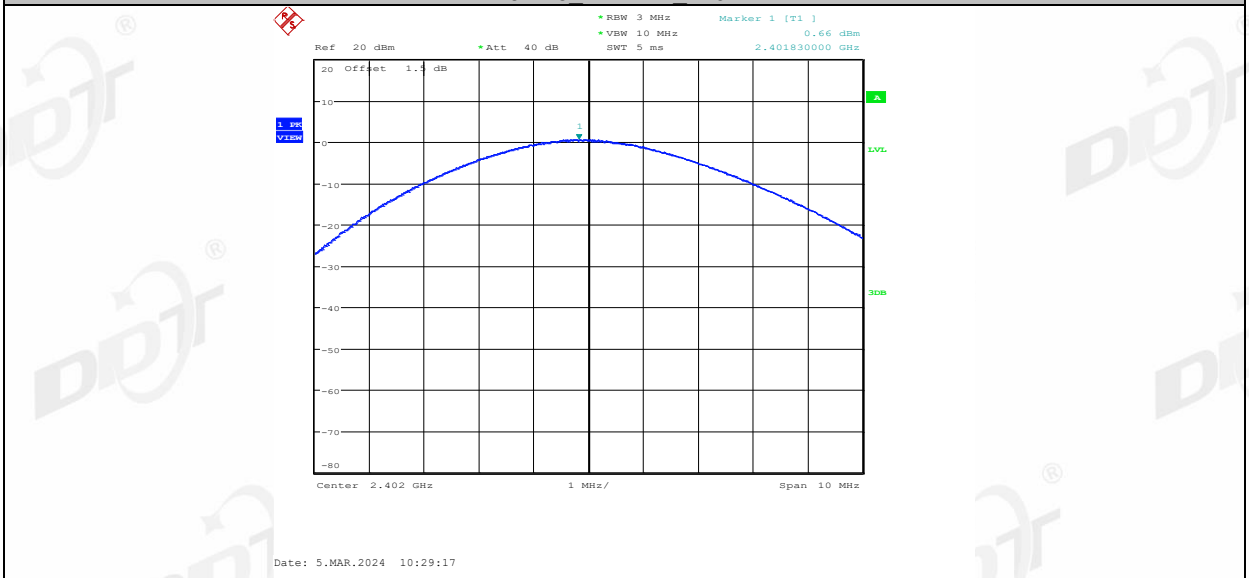


3DH5 Right side 2402

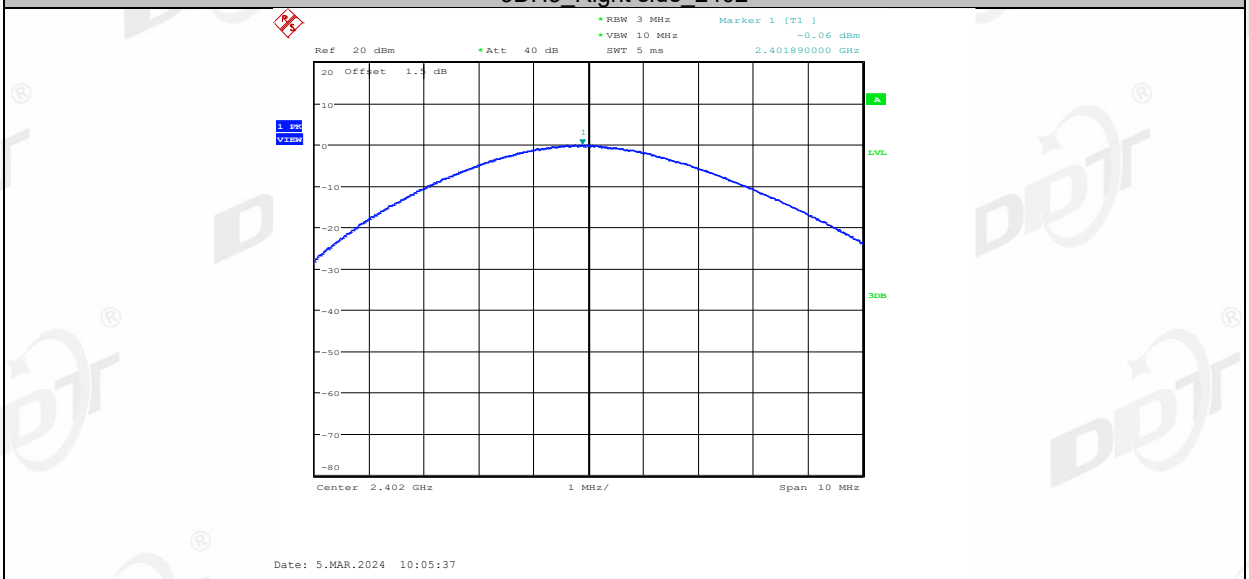


3DH5 Left side 2441

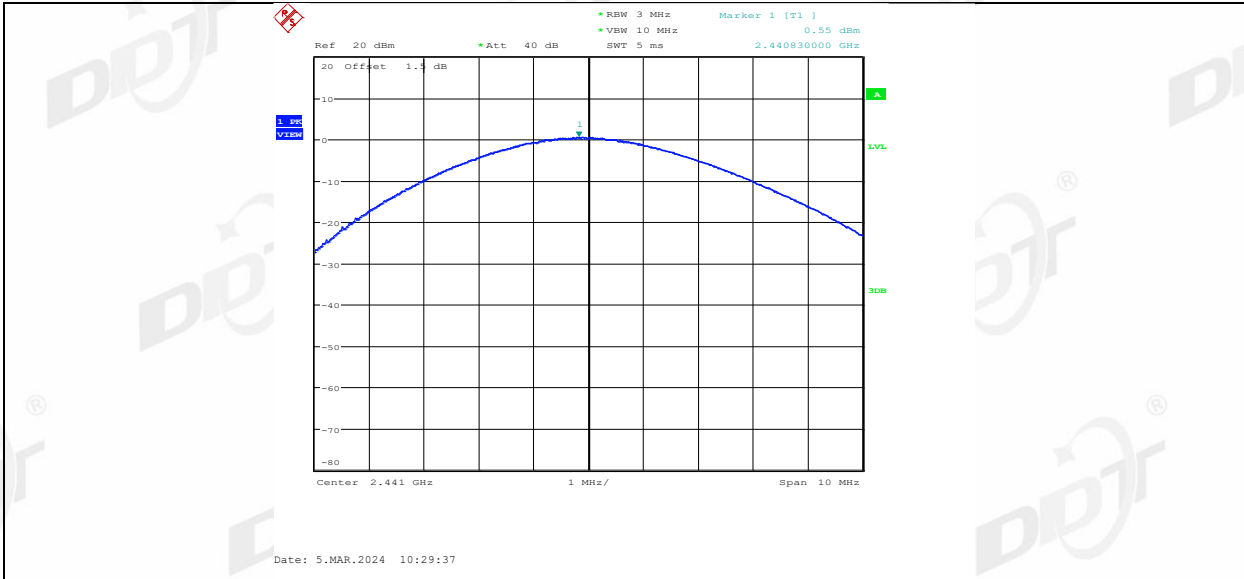


3DH5 Right side 2441

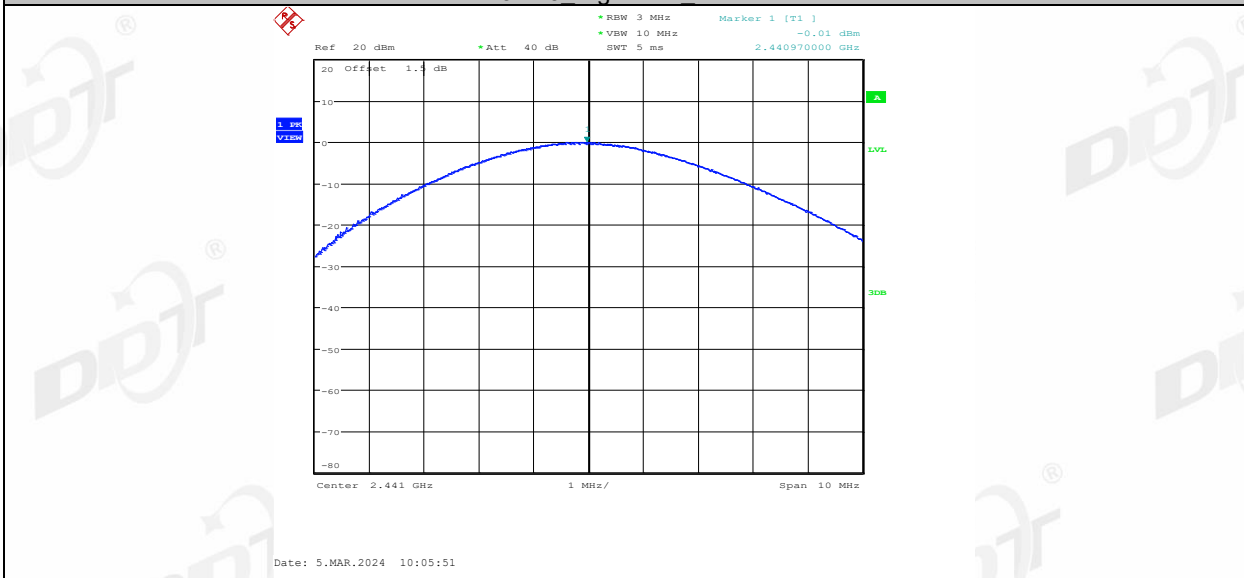

3DH5 Left side 2480

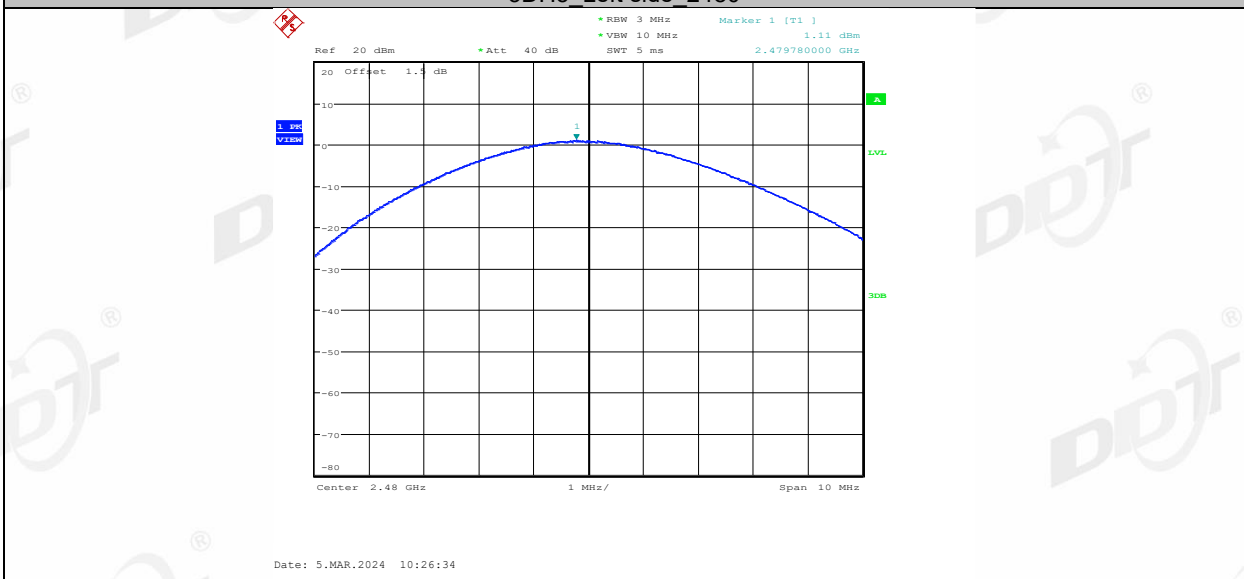


3DH5 Right side 2480

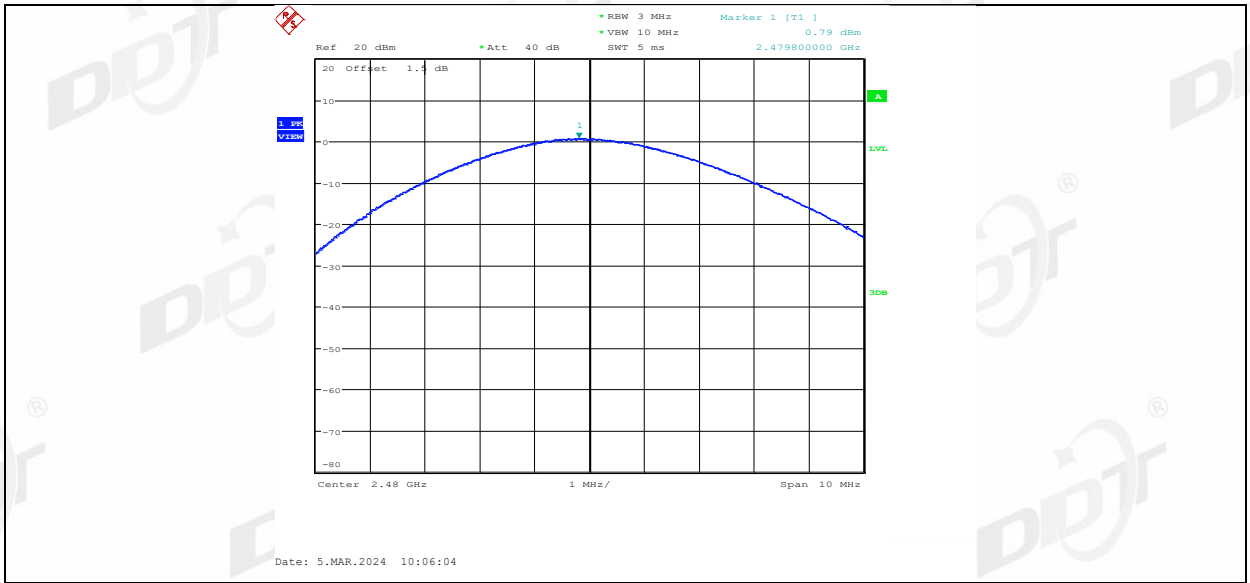

7. Carrier Frequency Separation

7.1. Block diagram of test setup

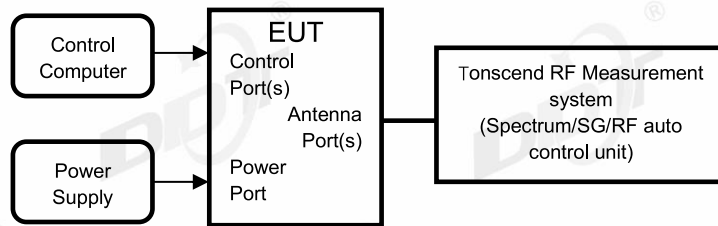

7.2. Limits

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

7.3. Test procedure

- (1) The test according to ANSI C63.10-2013 clause 7.8.2.
- (2) Connect EUT's antenna output to spectrum analyzer by RF cable, the path loss was compensated to the results.
- (3) Set the EUT as maximum power setting and enable the EUT transmit continuously.
- (4) Use the following spectrum analyzer settings for the maximum peak output power measurement:

RBW:	approximately 30% of the channel spacing
VBW:	VBW \geq RBW.
Span:	Wide enough to capture the peaks of two adjacent channels.
Detector Mode:	Peak
Sweep time:	Auto
Trace mode:	Max hold
- (5) Use the marker-delta function to determine the separation between the peaks of the adjacent channels and record the results in the report.


7.4. Test result

Test Engineer:	Zoe	Test Site:	RF Measurement System 2#
Ambient Condition:	24.1°C,48.3%RH	Test Date:	2024.02.23
Test Power Supply:	Battery	EUT:	CREATIVE ZEN AIR 2
Sample Number:	S24012628-002	Model No.:	EF1190


Test Mode	Antenna	Frequency [MHz]	Result [MHz]	Limit [MHz]	Verdict
DH5	Left side	Hop	1	≥0.950	PASS
	Right side	Hop	0.997	≥0.950	PASS
2DH5	Left side	Hop	1.003	≥0.880	PASS
	Right side	Hop	1.003	≥0.880	PASS
3DH5	Left side	Hop	0.994	≥0.873	PASS
	Right side	Hop	1.006	≥0.873	PASS

7.5. Test graphs




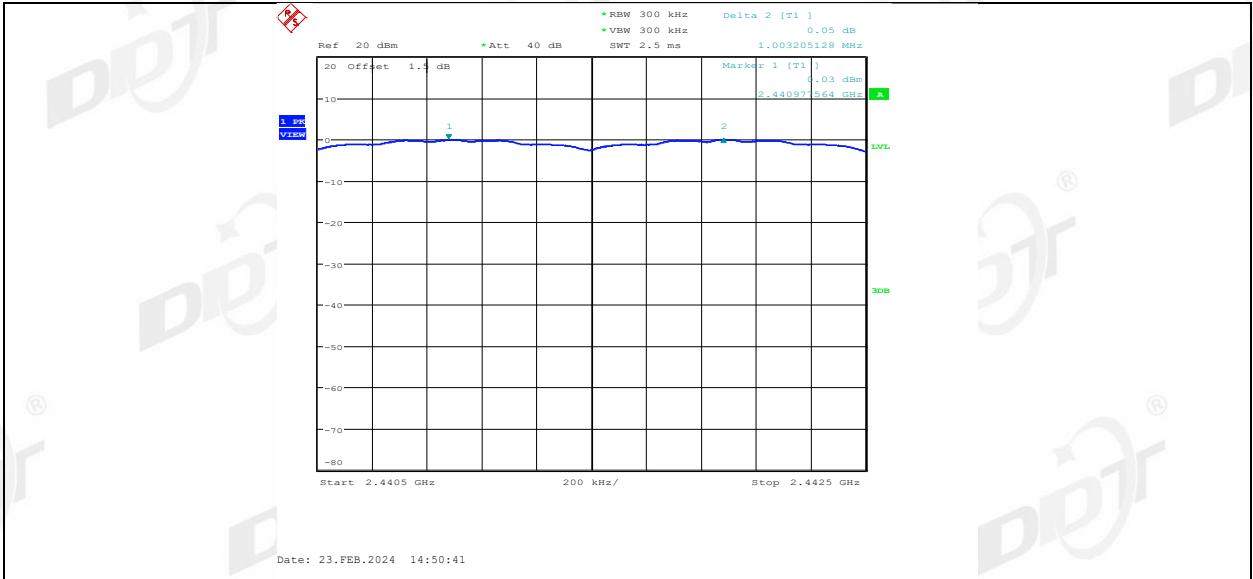


2DH5 Right side Hop

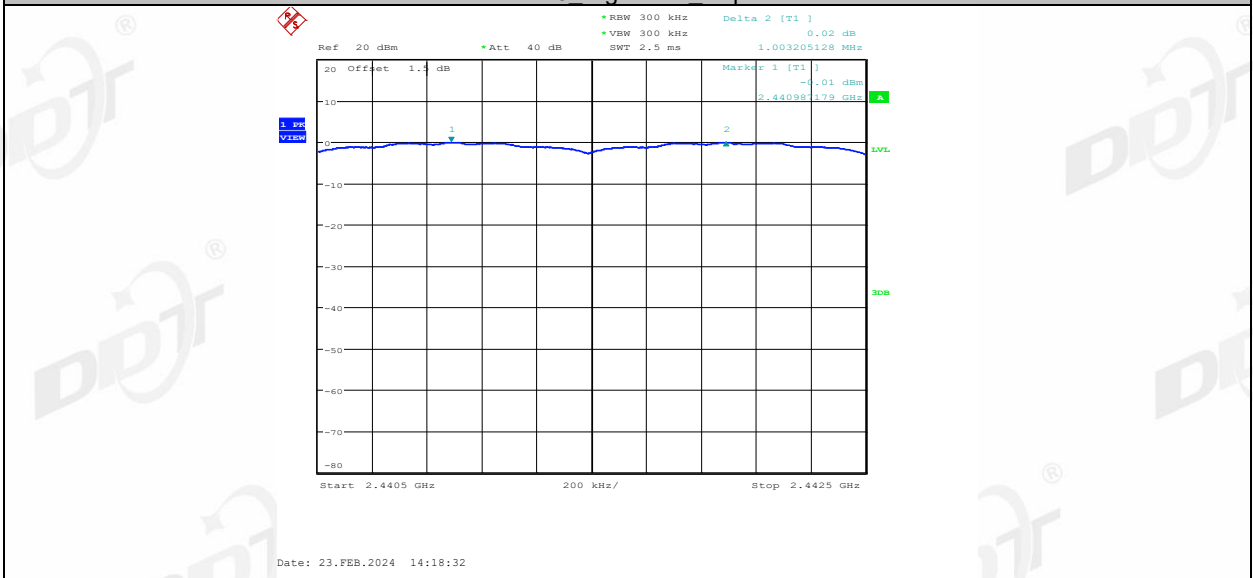

3DH5 Left side Hop

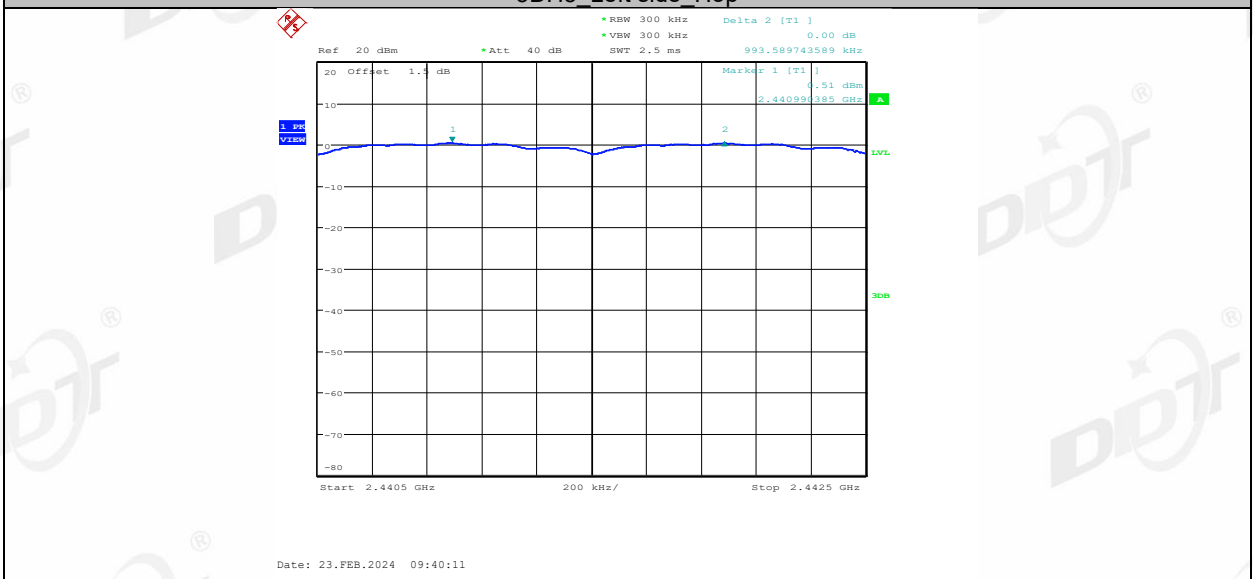


3DH5 Right side Hop

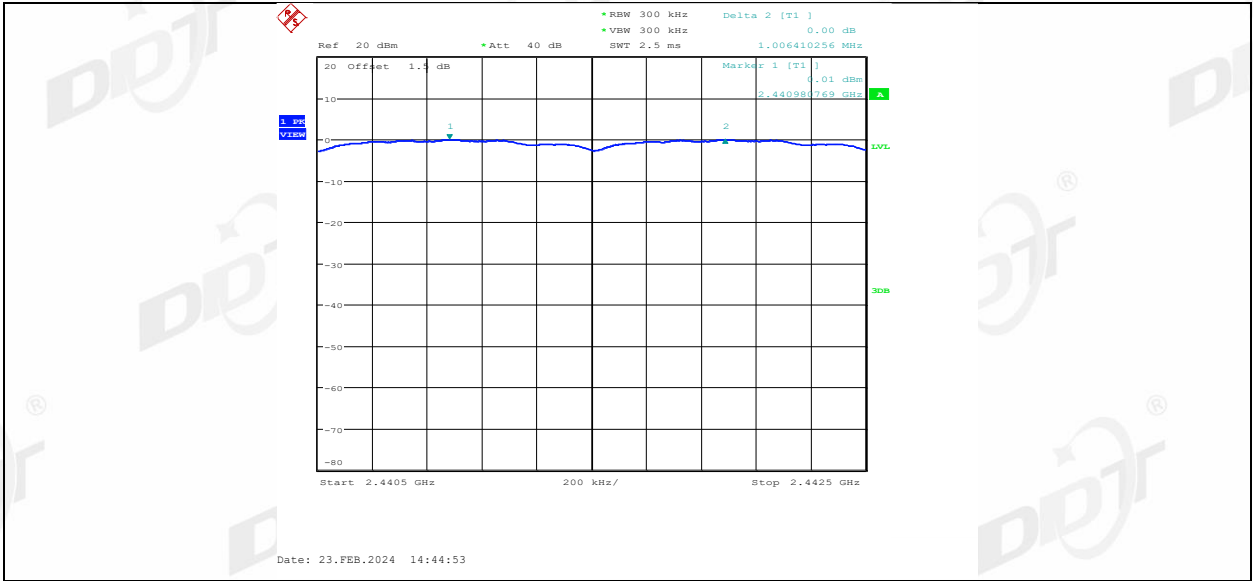

8. Dwell Time

8.1. Block diagram of test setup

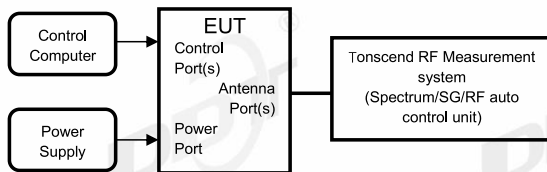

8.2. Limits

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

8.3. Test procedure

- (1) The test according to ANSI C63.10-2013 clause 7.8.4.
- (2) Connect EUT's antenna output to spectrum analyzer by RF cable, the path loss was compensated to the results.
- (3) Set the EUT as maximum power setting and enable the EUT transmit continuously.
- (4) Use the following spectrum analyzer settings for the maximum peak output power measurement:


RBW:	\leq channel spacing and where possible RBW should be set $\gg 1 / T$
VBW:	$VBW \geq RBW$.
Span:	Zero span, centered on a hopping channel.
Detector Mode:	Peak
Sweep time:	Auto
Trace mode:	Clear Write.
- (5) The test period: $T = 0.4 \text{ Second/Channel} \times 79 \text{ Channel} = 31.6 \text{ s}$
- (6) Measure the hopping number and on time of each pulse with spectrum analyzer in zero span set, and calculate dwell time with formula Dwell time = total hops * pulse's on time.
- (7) Measure and record the results in the report.


8.4. Test result

Test Engineer:	Zoe	Test Site:	RF Measurement System 2#
Ambient Condition:	24.1°C,48.3%RH	Test Date:	2024.02.23
Test Power Supply:	Battery	EUT:	CREATIVE ZEN AIR 2
Sample Number:	S24012628-002	Model No.:	EF1190



Test Mode	Antenna	Frequency [MHz]	BurstWidth [ms]	TotalHops [Num]	Result[s]	Limit[s]	Verdict
DH1	Left side	Hop	0.390	319	0.124	≤0.4	PASS
	Right side	Hop	0.380	320	0.122	≤0.4	PASS
DH3	Left side	Hop	1.640	160	0.262	≤0.4	PASS
	Right side	Hop	1.650	160	0.264	≤0.4	PASS
DH5	Left side	Hop	2.890	108	0.312	≤0.4	PASS
	Right side	Hop	2.900	104	0.302	≤0.4	PASS
2DH1	Left side	Hop	0.390	319	0.124	≤0.4	PASS
	Right side	Hop	0.390	319	0.124	≤0.4	PASS
2DH3	Left side	Hop	1.660	159	0.264	≤0.4	PASS
	Right side	Hop	1.650	160	0.264	≤0.4	PASS
2DH5	Left side	Hop	2.910	112	0.326	≤0.4	PASS
	Right side	Hop	2.900	98	0.284	≤0.4	PASS
3DH1	Left side	Hop	0.390	319	0.124	≤0.4	PASS
	Right side	Hop	0.400	320	0.128	≤0.4	PASS
3DH3	Left side	Hop	1.650	158	0.261	≤0.4	PASS
	Right side	Hop	1.650	153	0.252	≤0.4	PASS
3DH5	Left side	Hop	2.900	120	0.348	≤0.4	PASS
	Right side	Hop	2.900	103	0.299	≤0.4	PASS

8.5. Test graphs


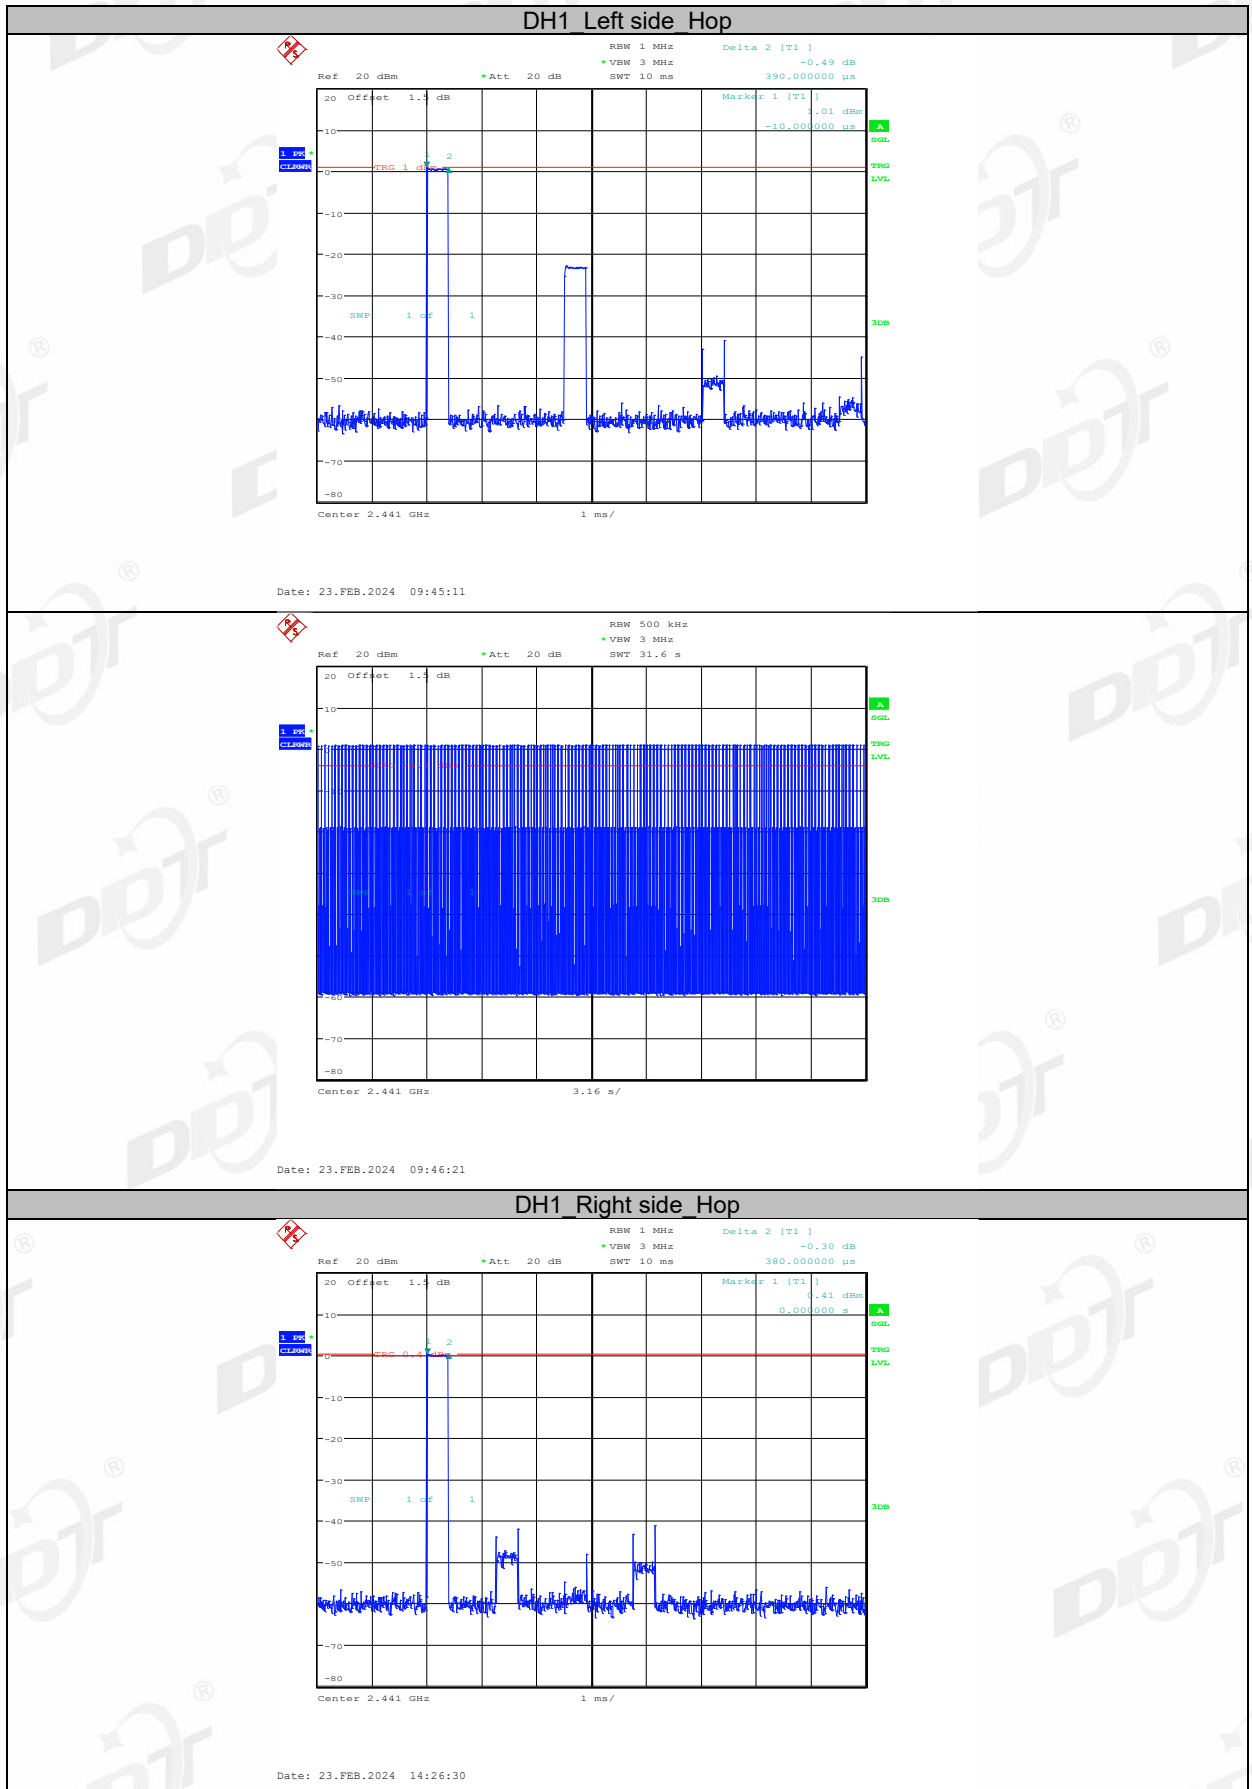


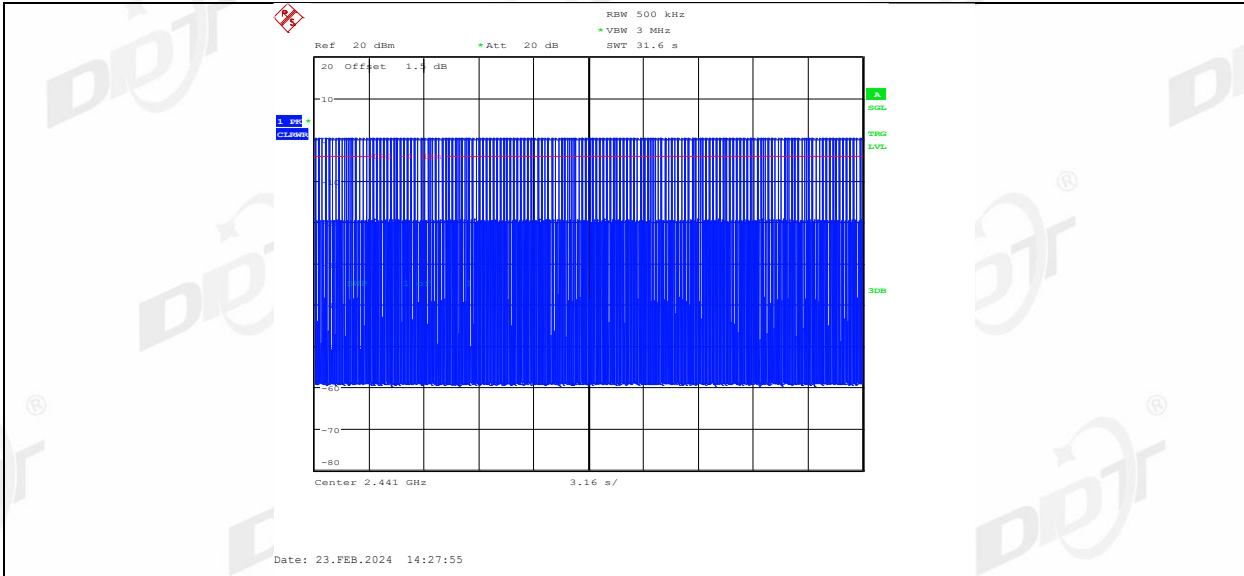


DH3 Left side Hop

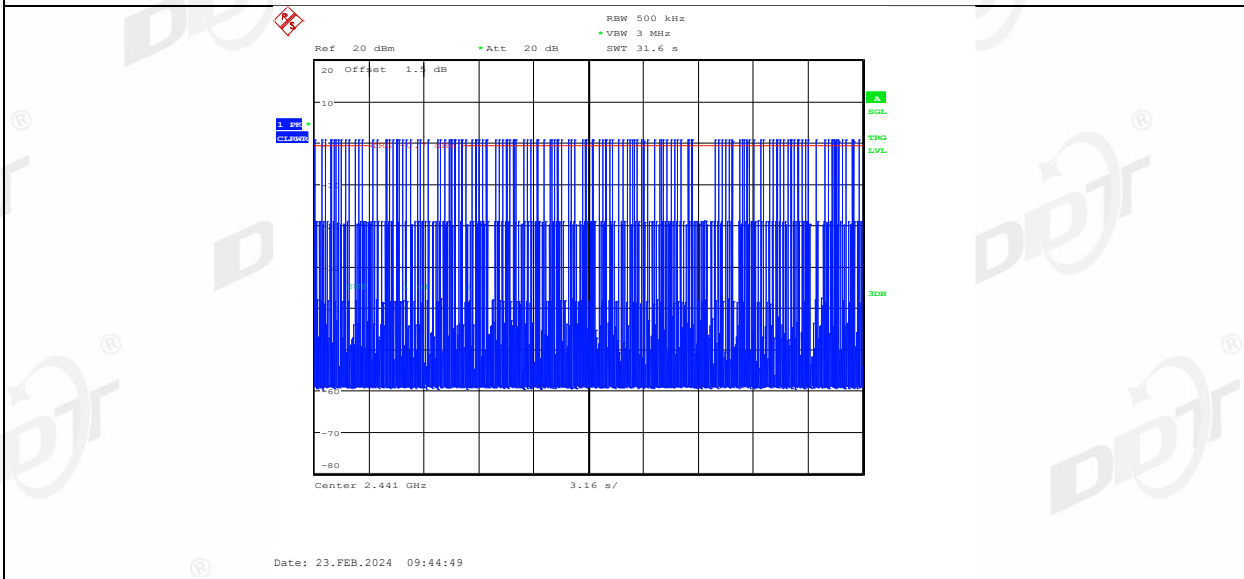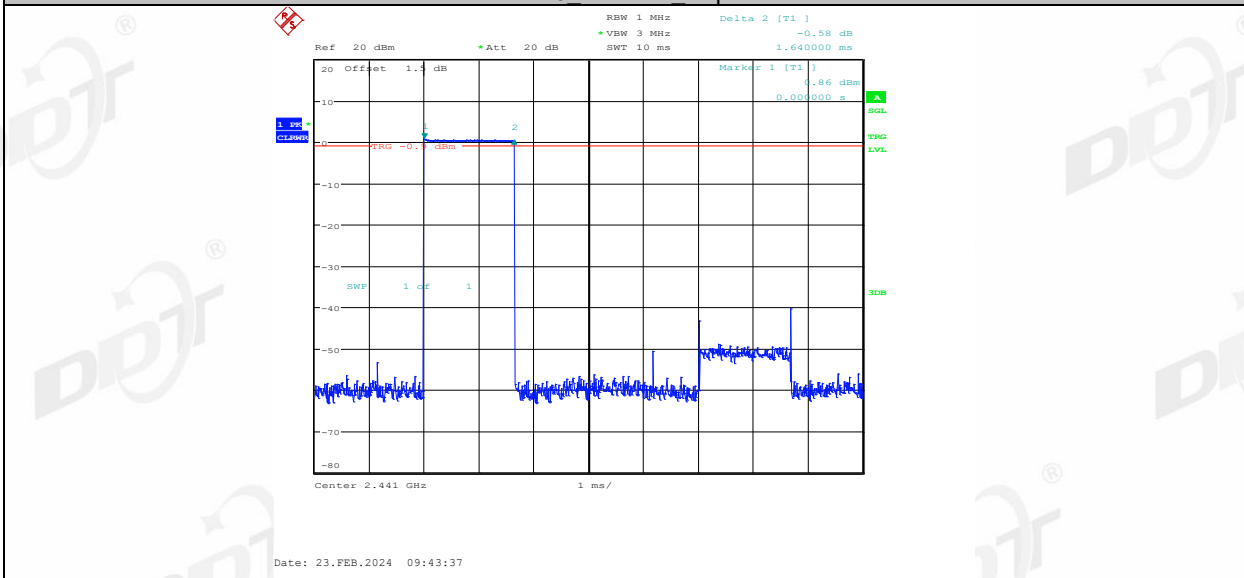


DH3 Right side Hop

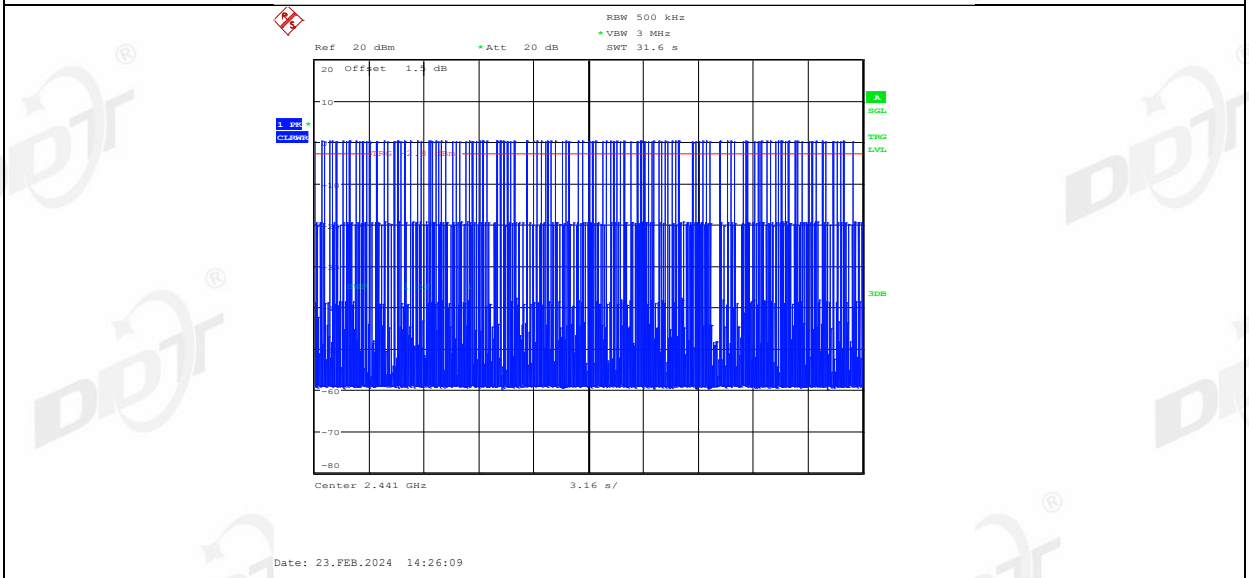
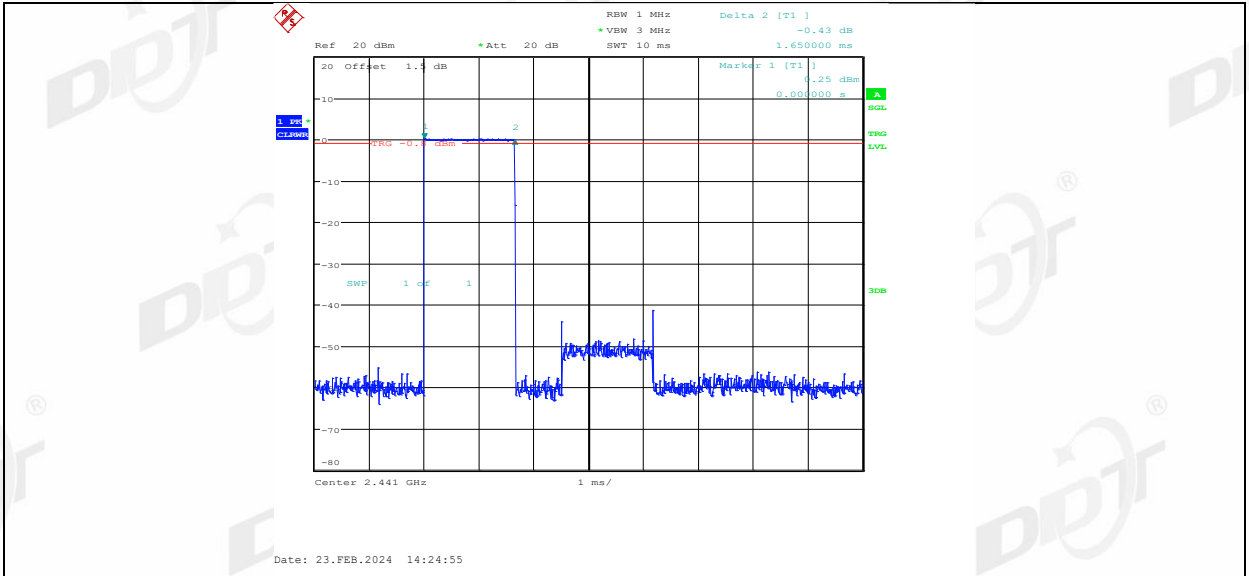


DH5 Left side Hop


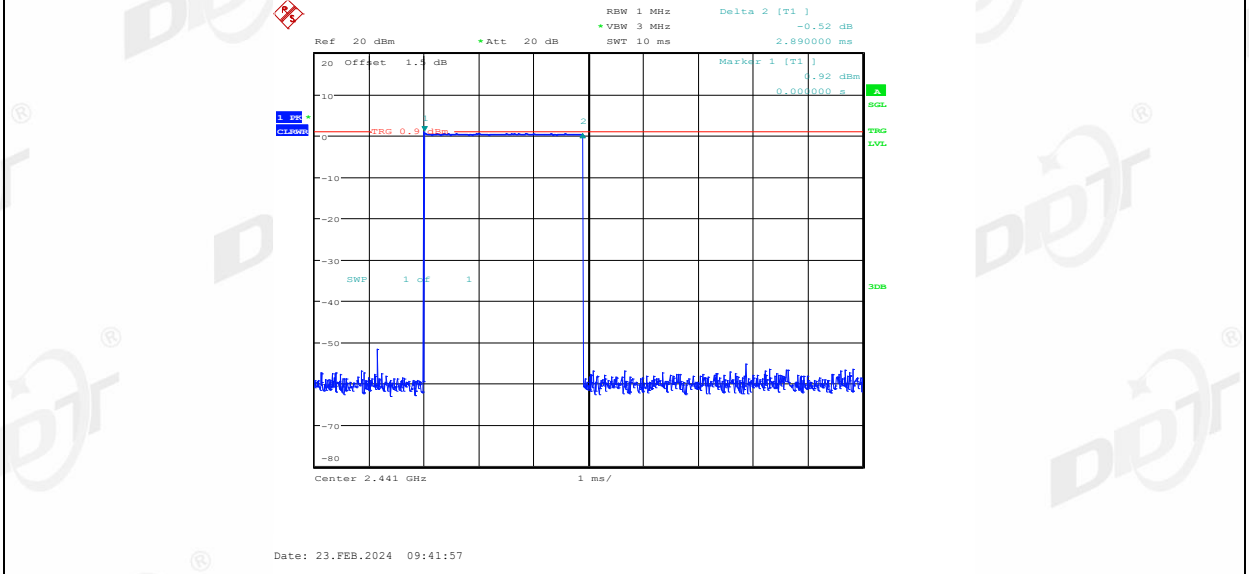


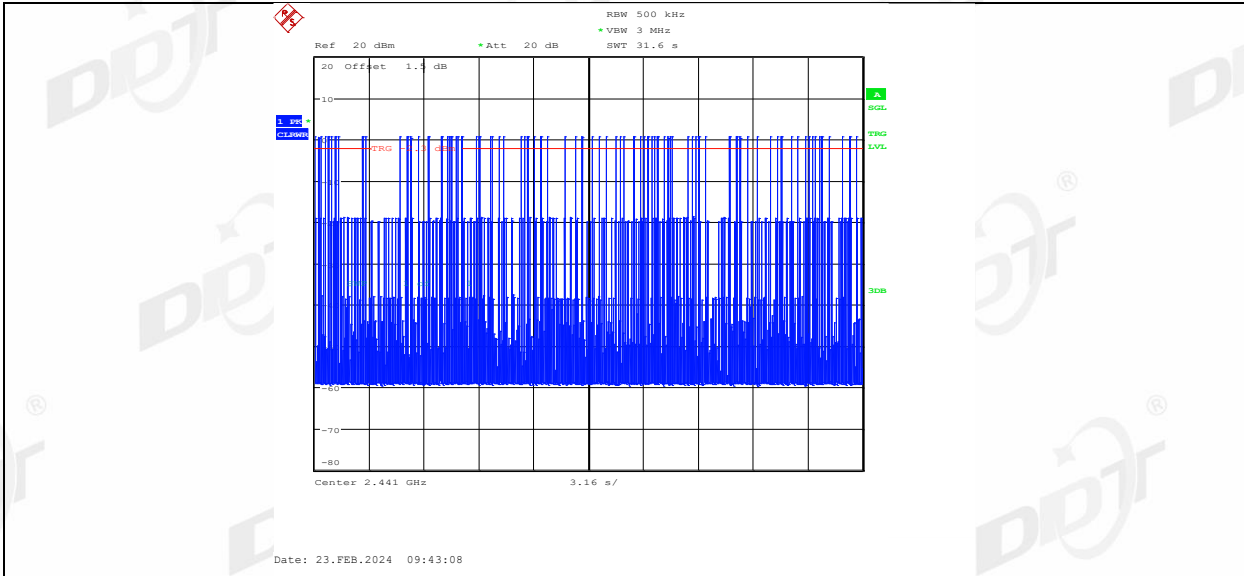


DH5 Right side Hop

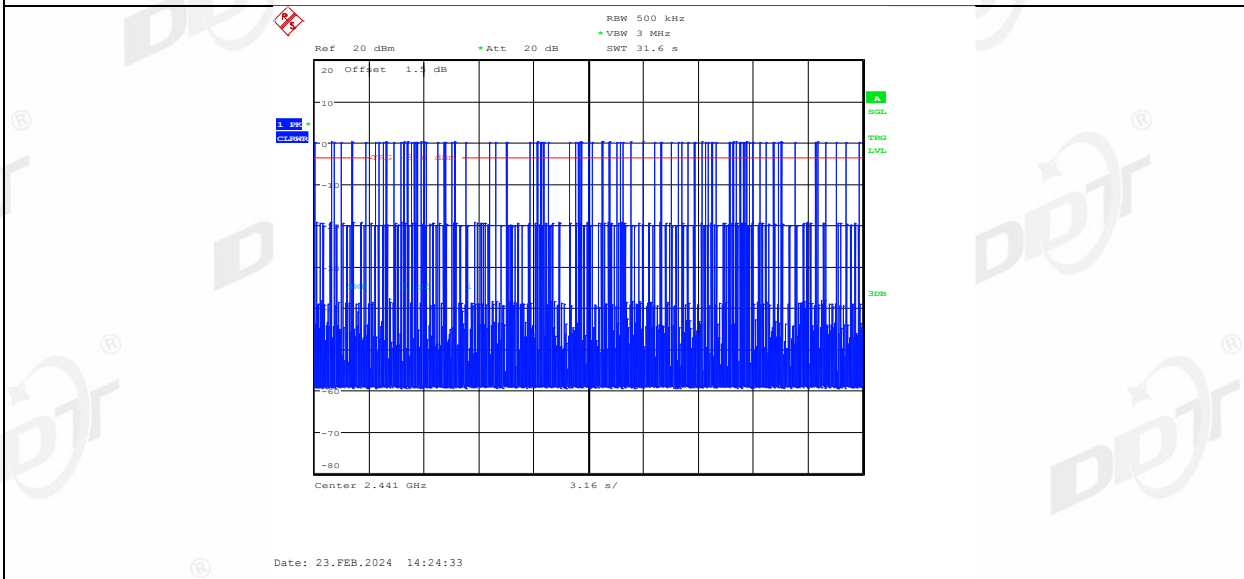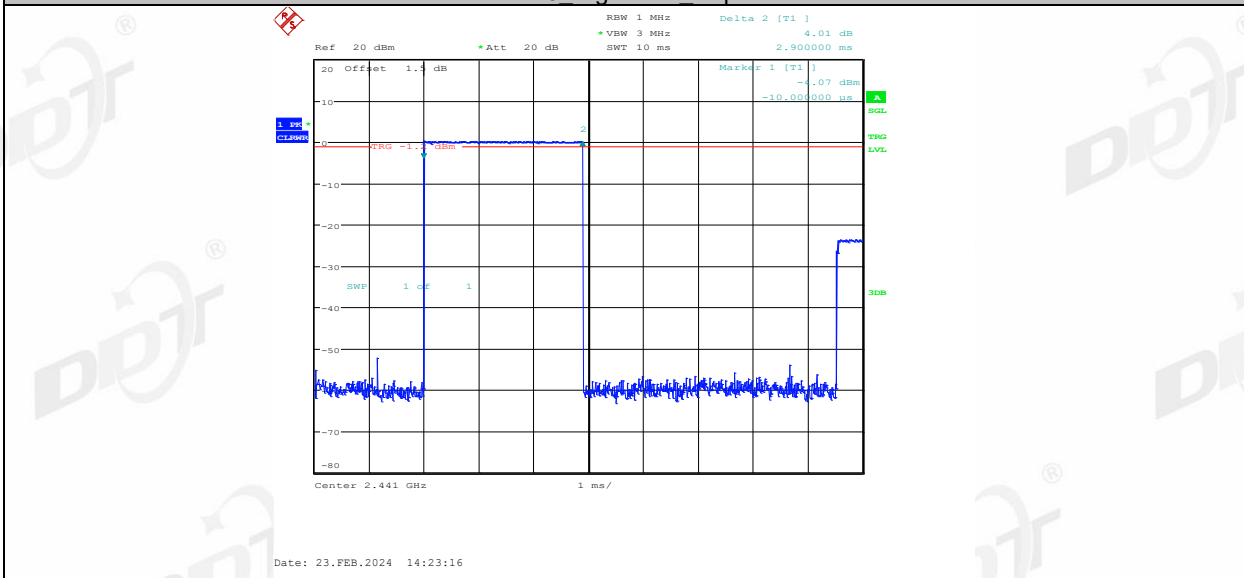


2DH1 Left side Hop

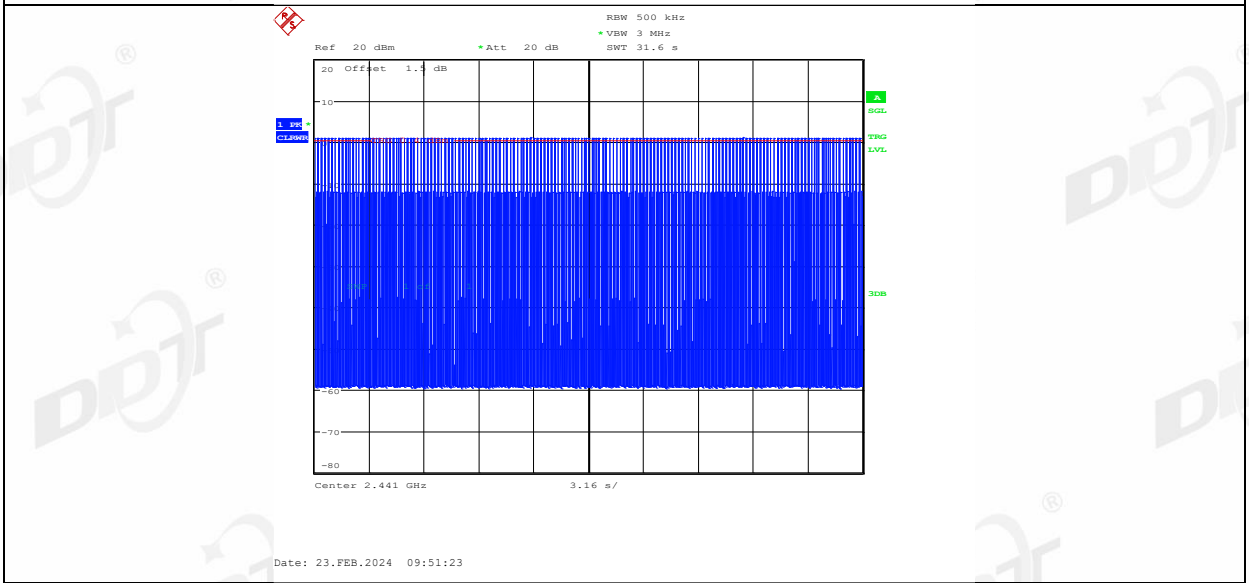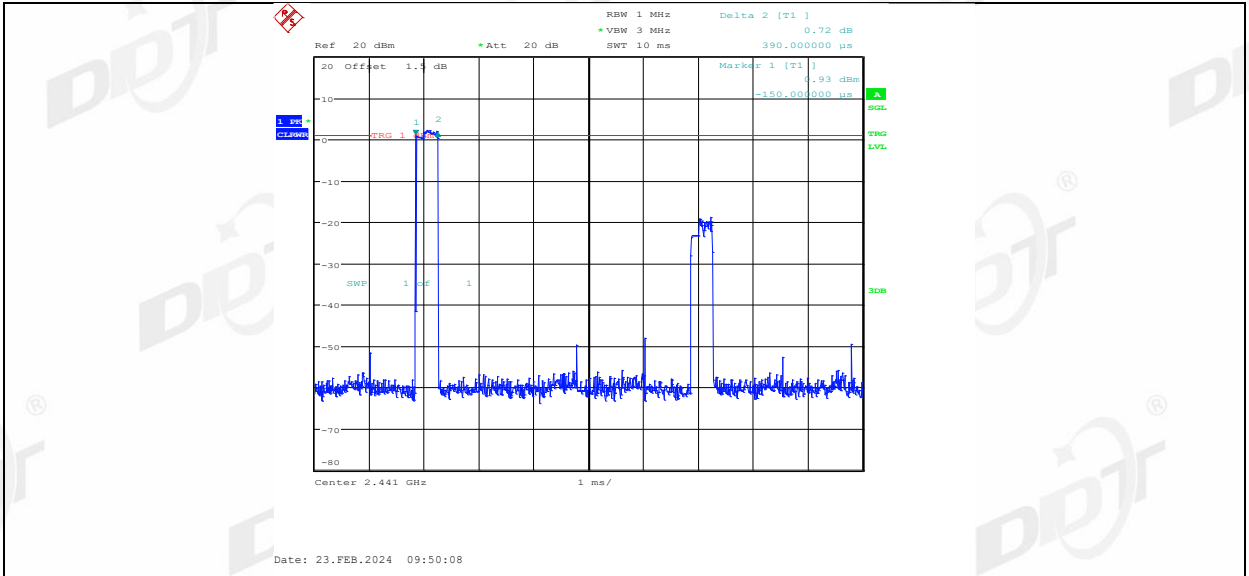


2DH1_Right side_Hop

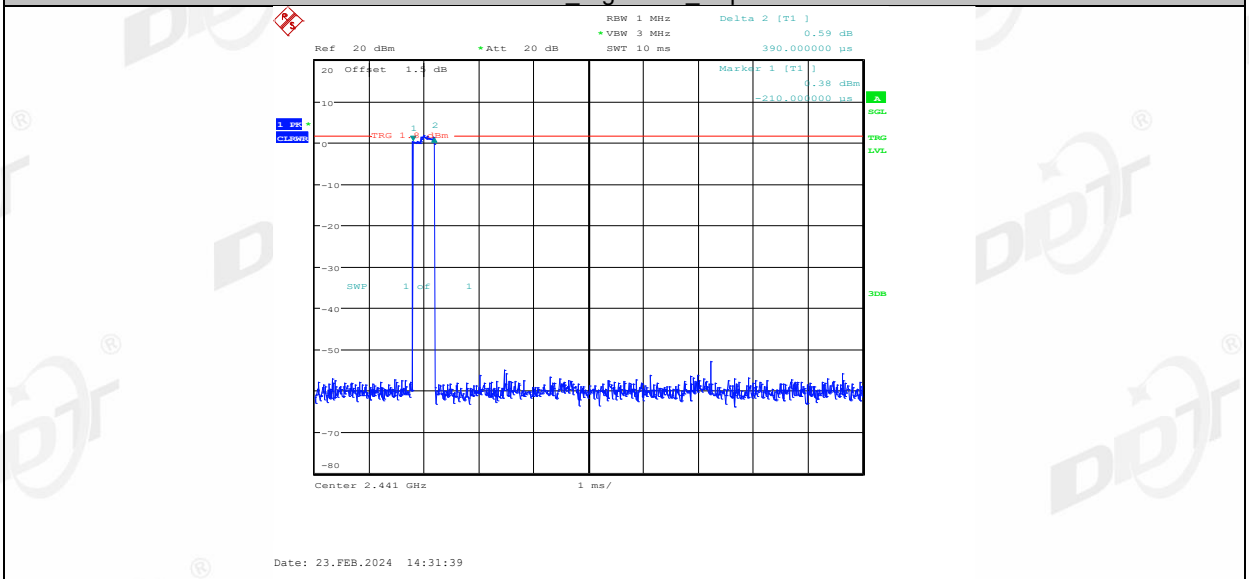



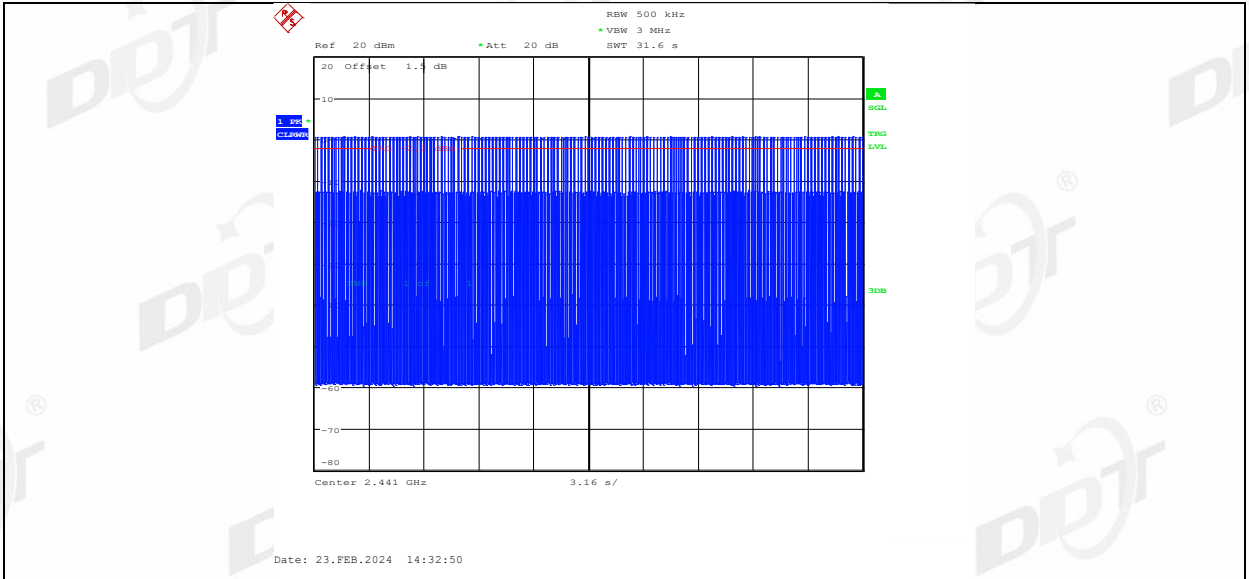


2DH3 Left side Hop

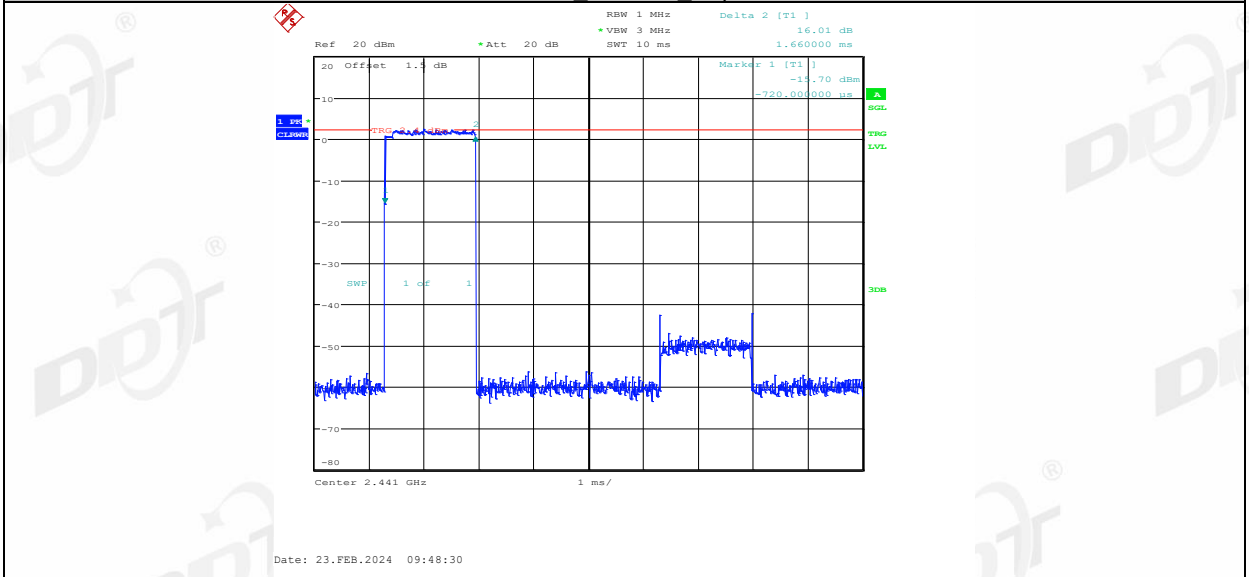



2DH3 Right side Hop

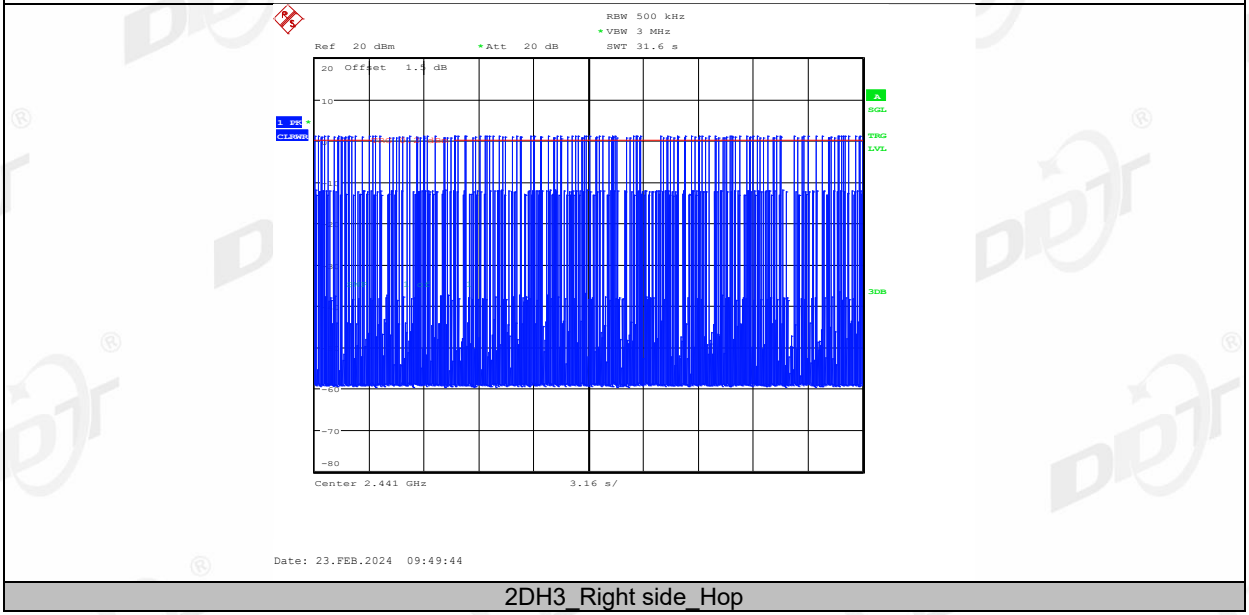

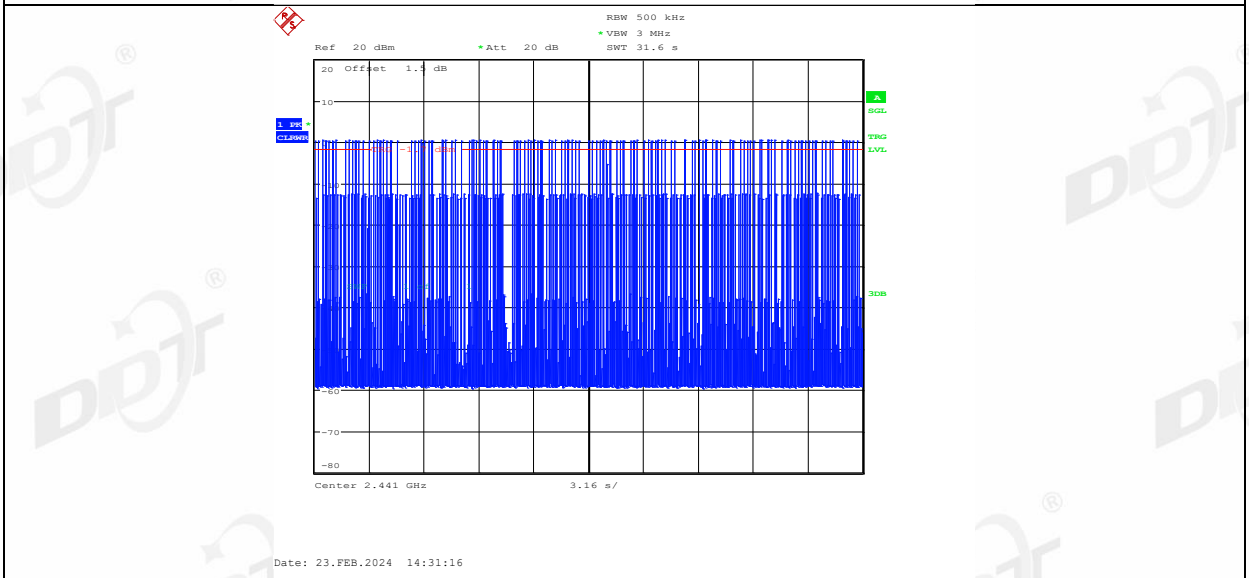
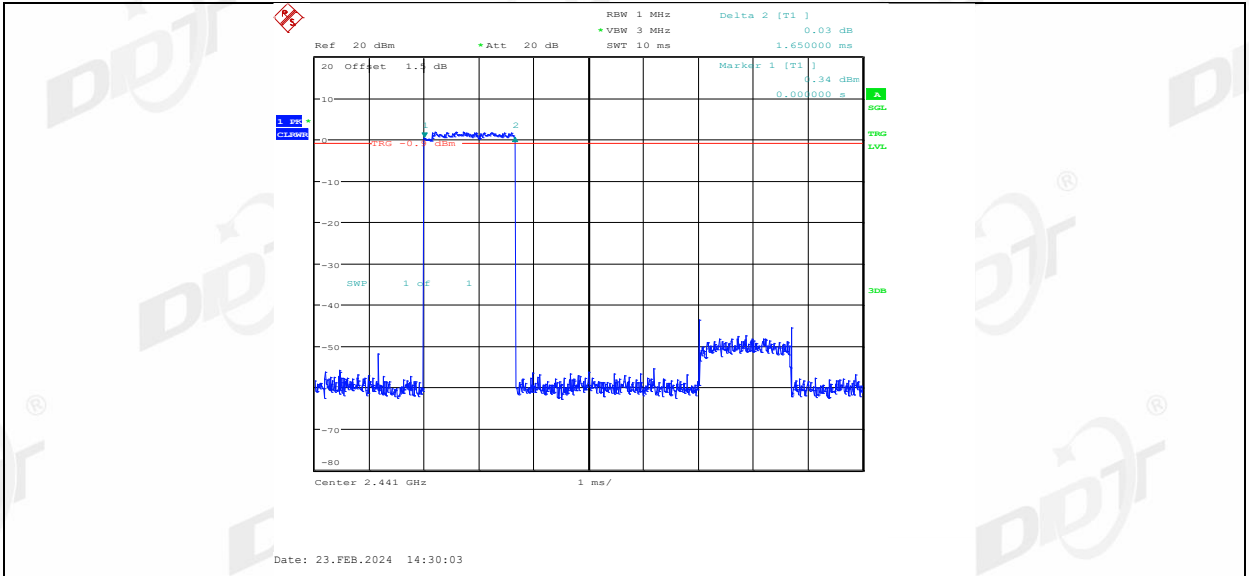


2DH5 Left side Hop


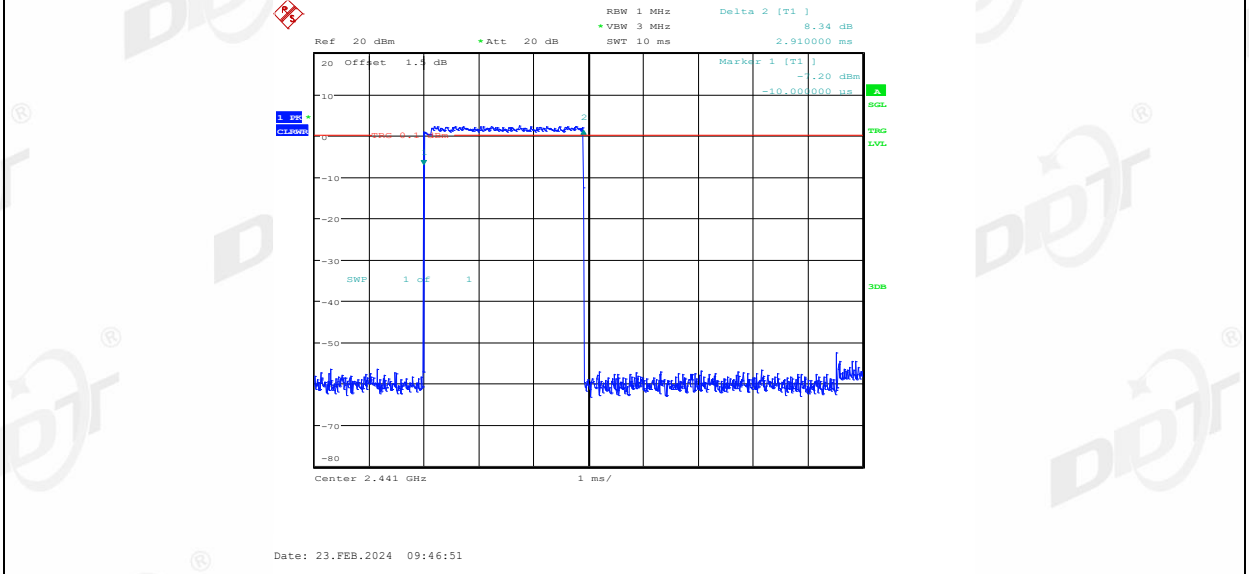


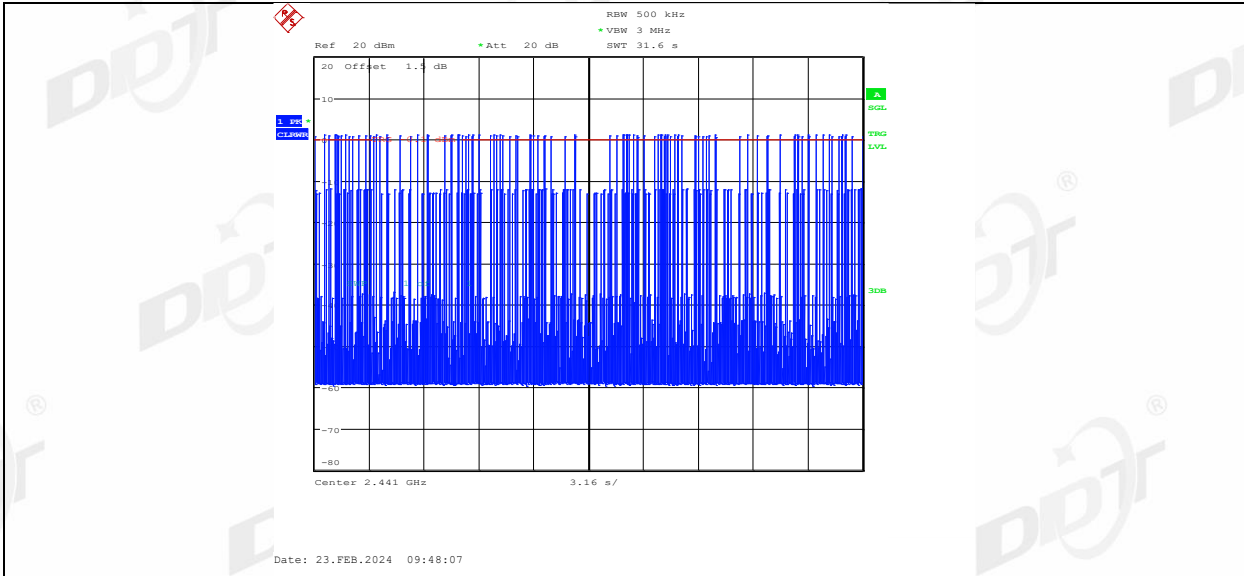


2DH5 Right side Hop

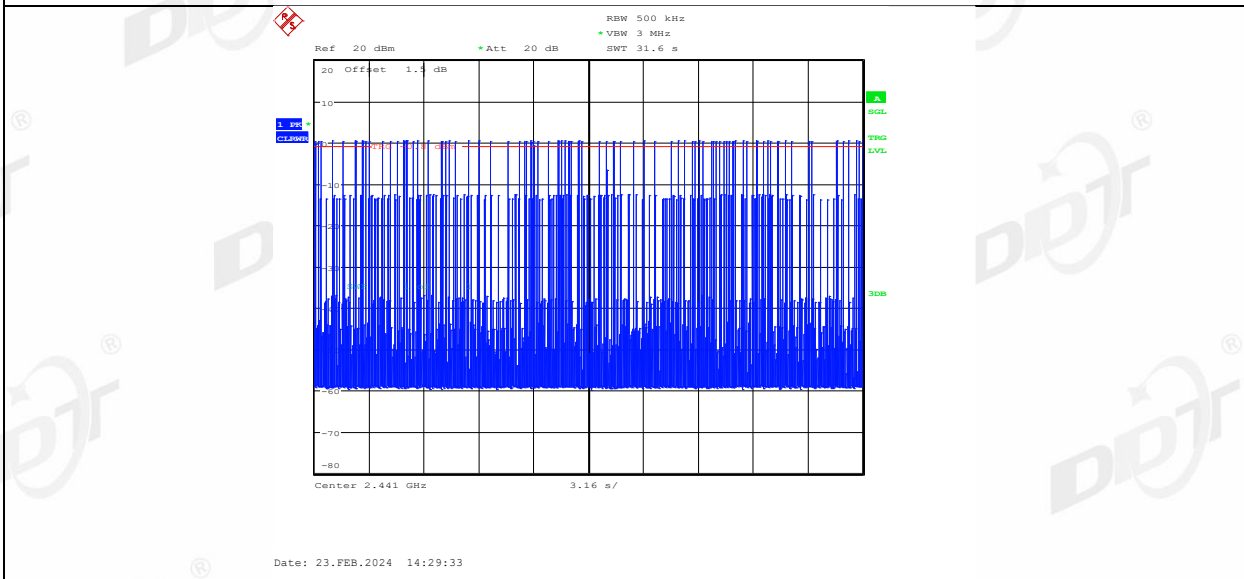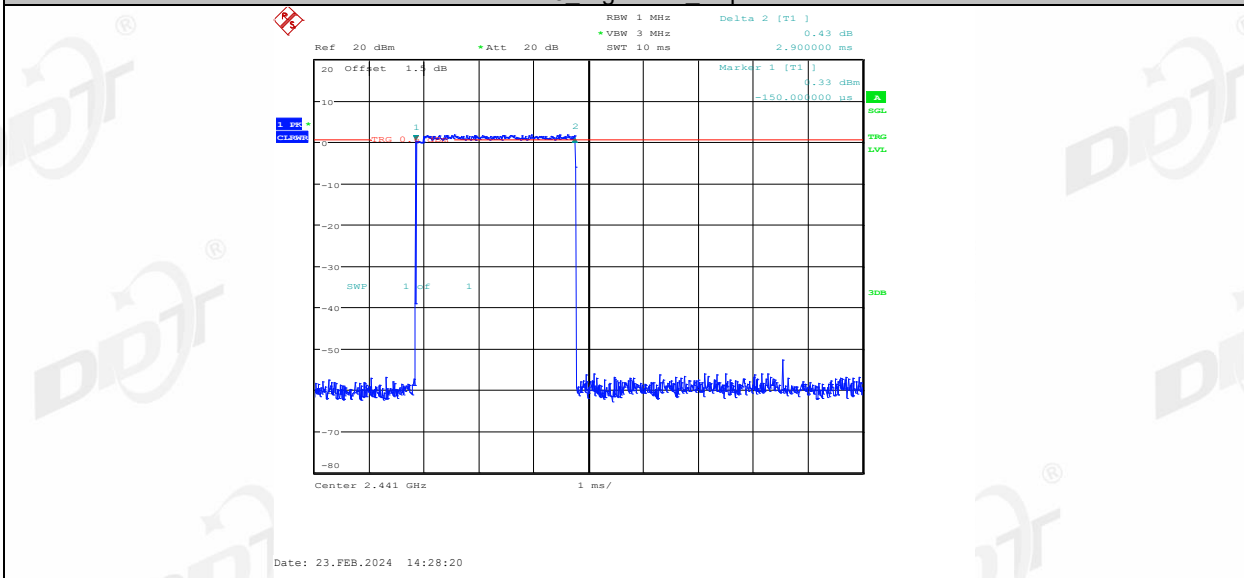


3DH1 Left side Hop

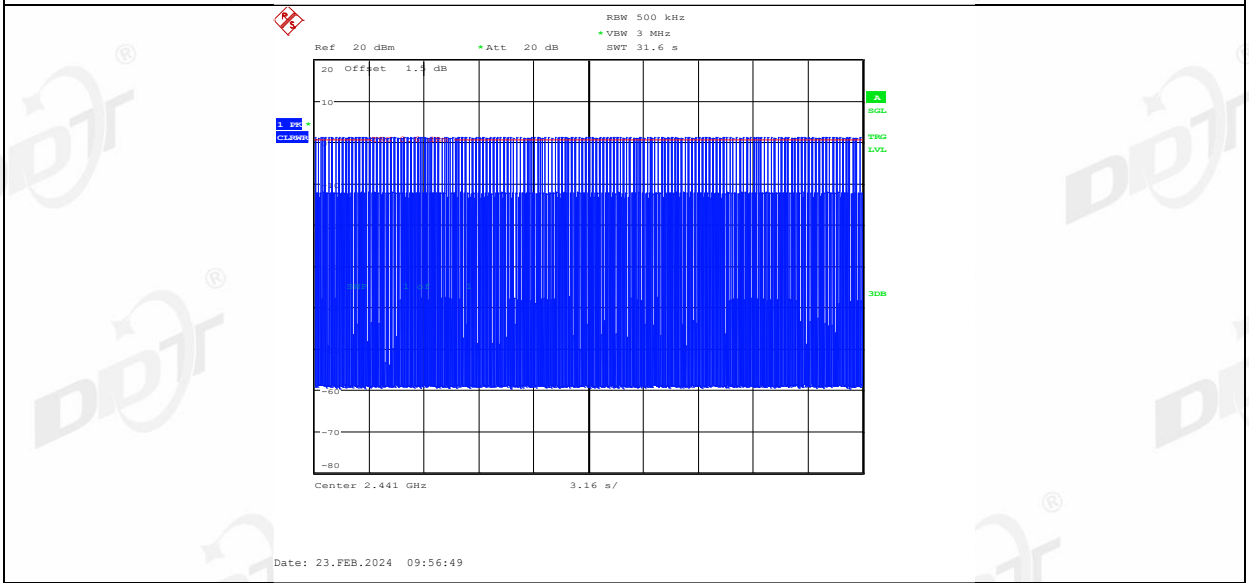
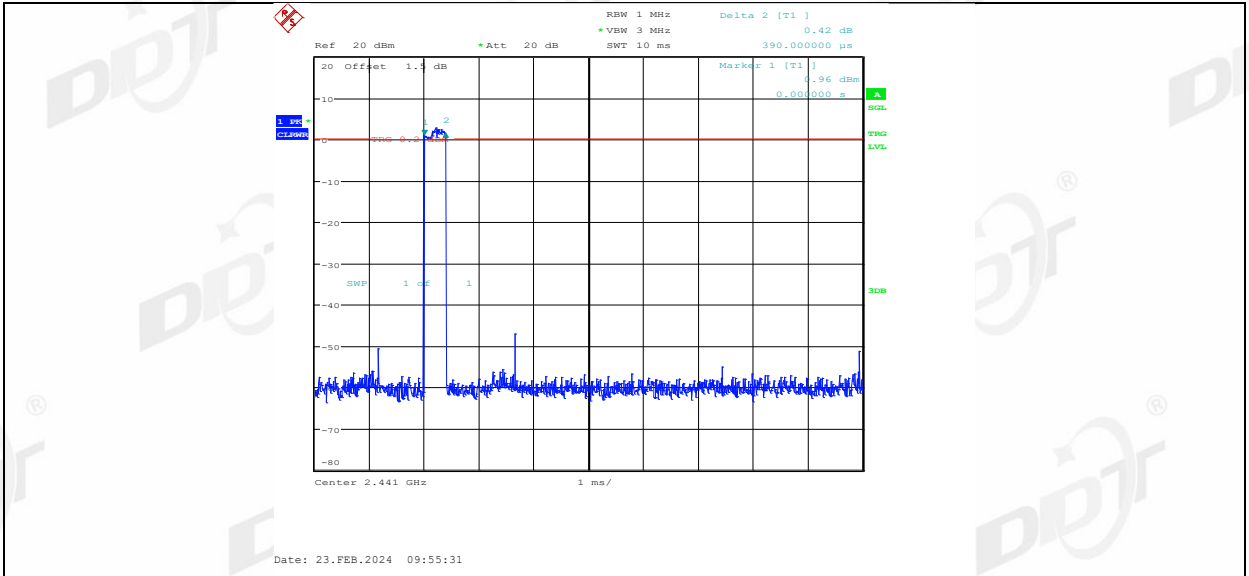


3DH1_Right side_Hop


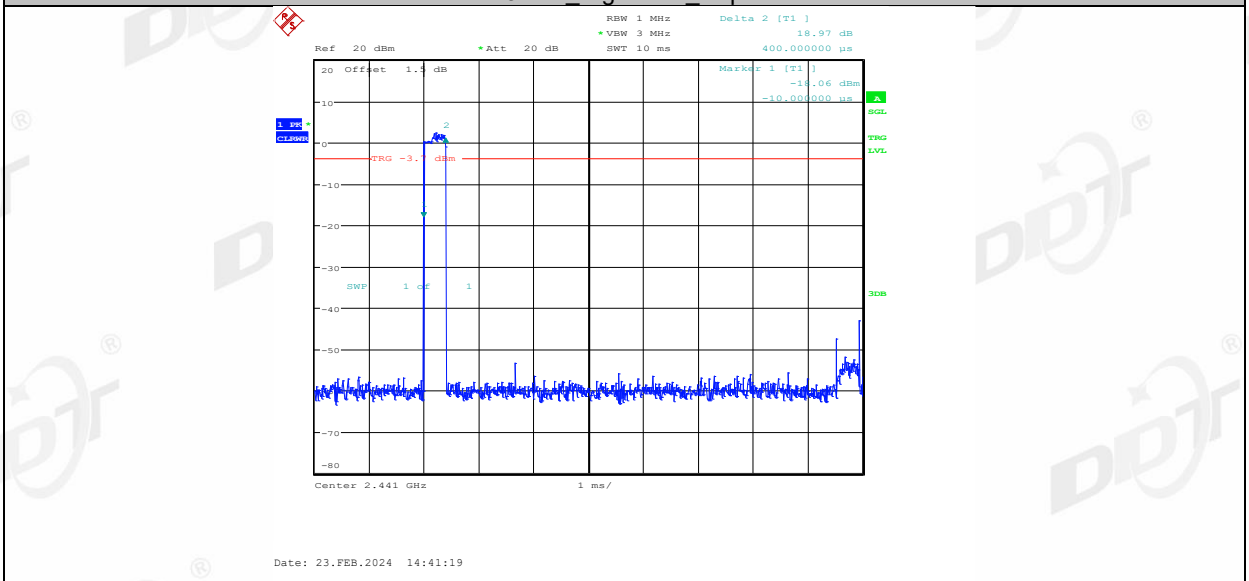


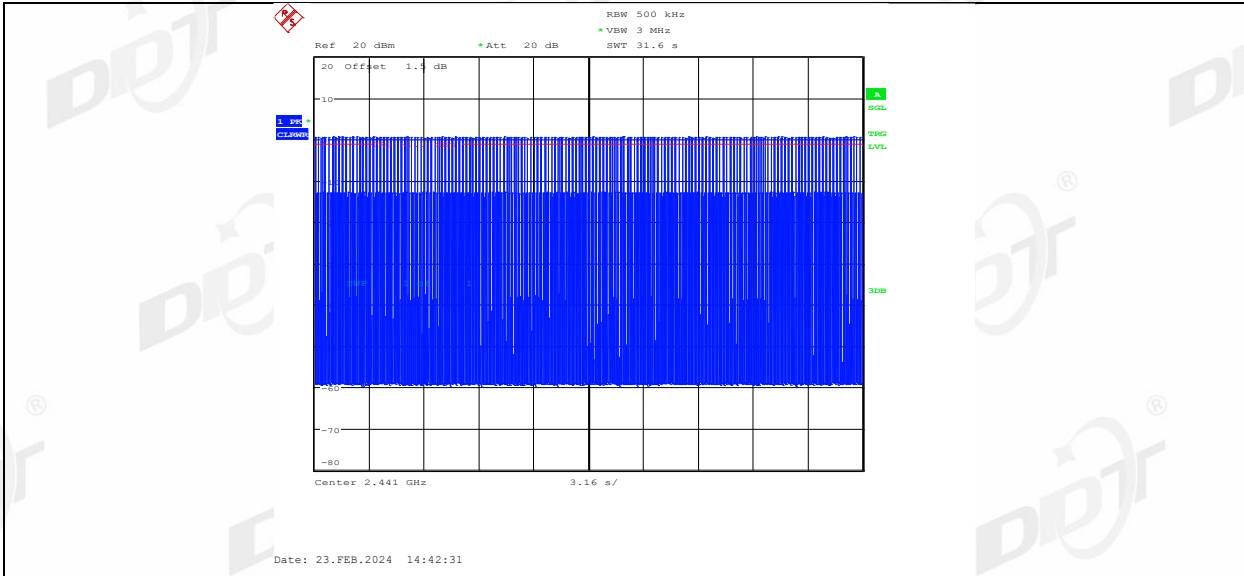


3DH3 Left side Hop

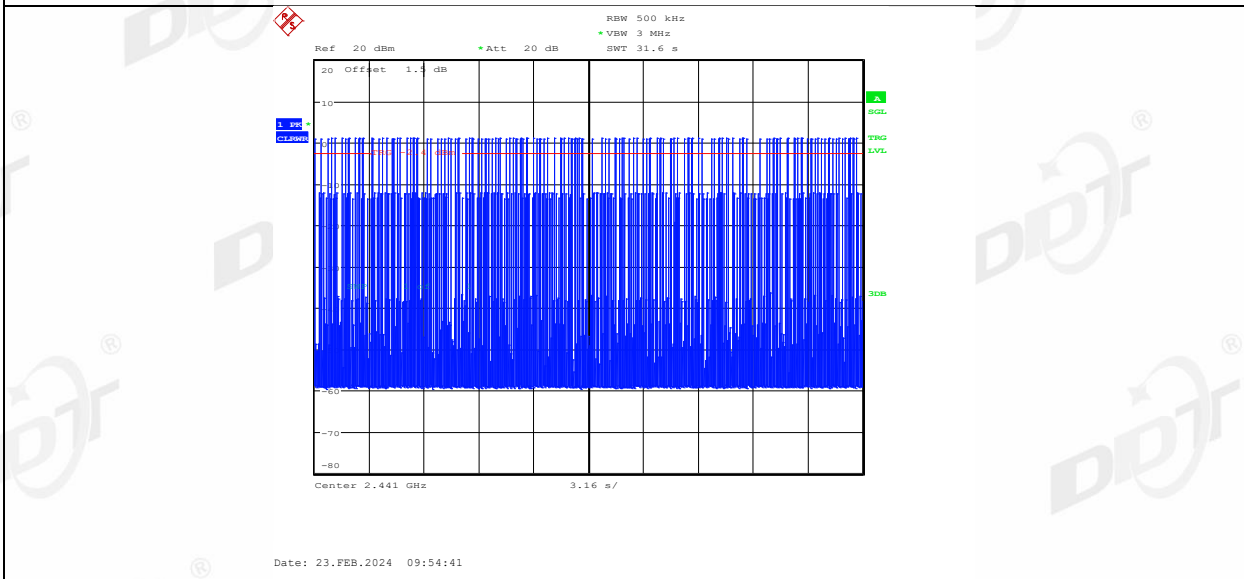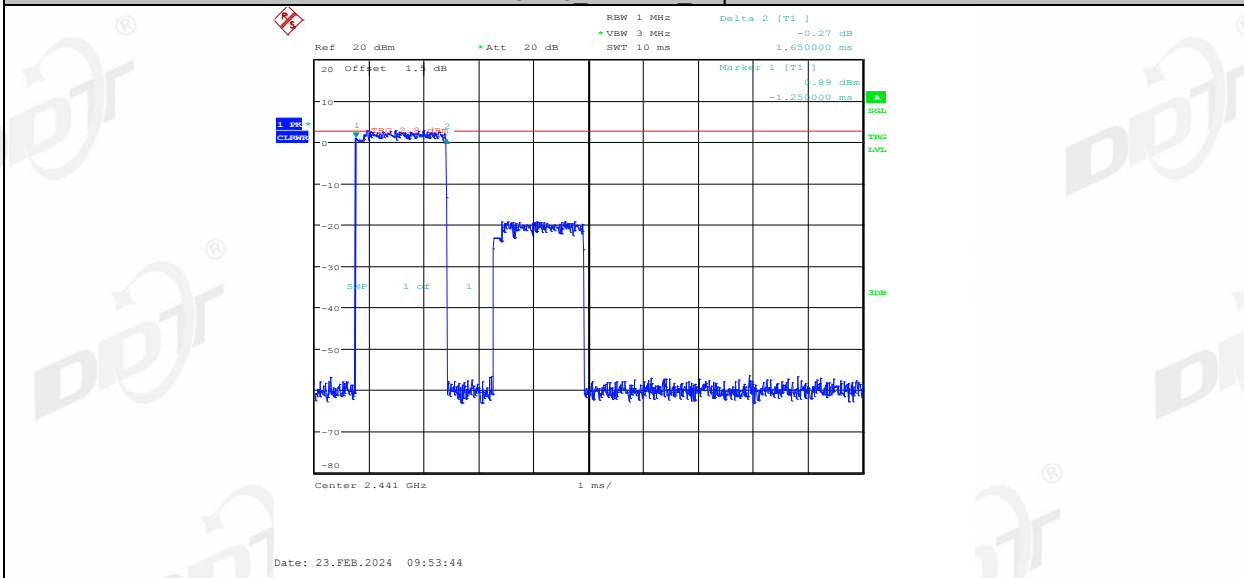


3DH3 Right side Hop

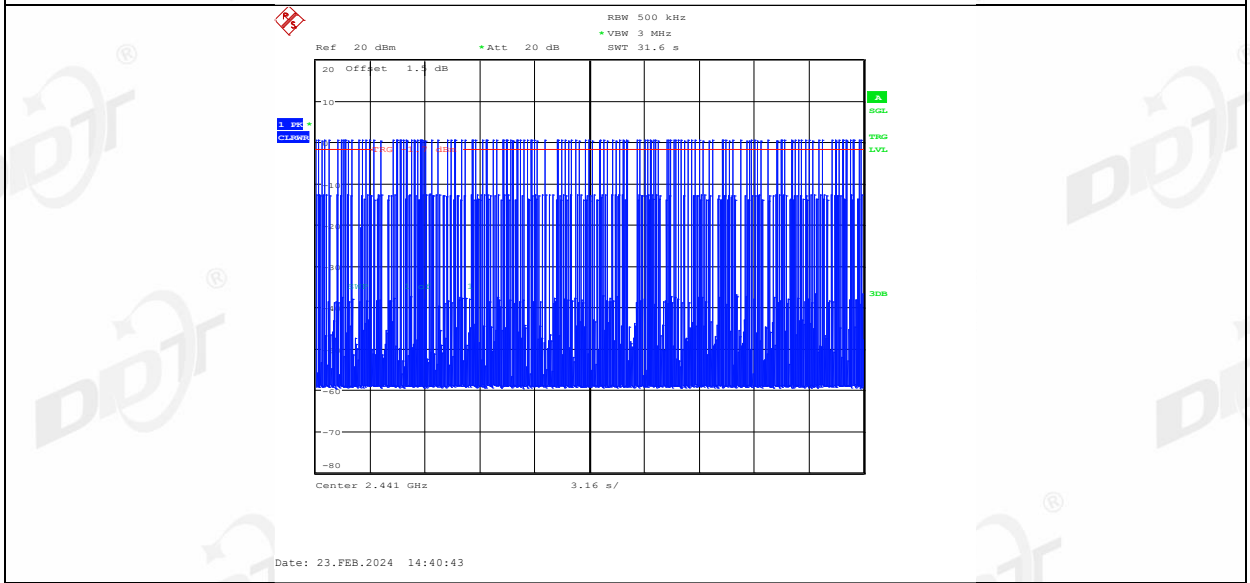
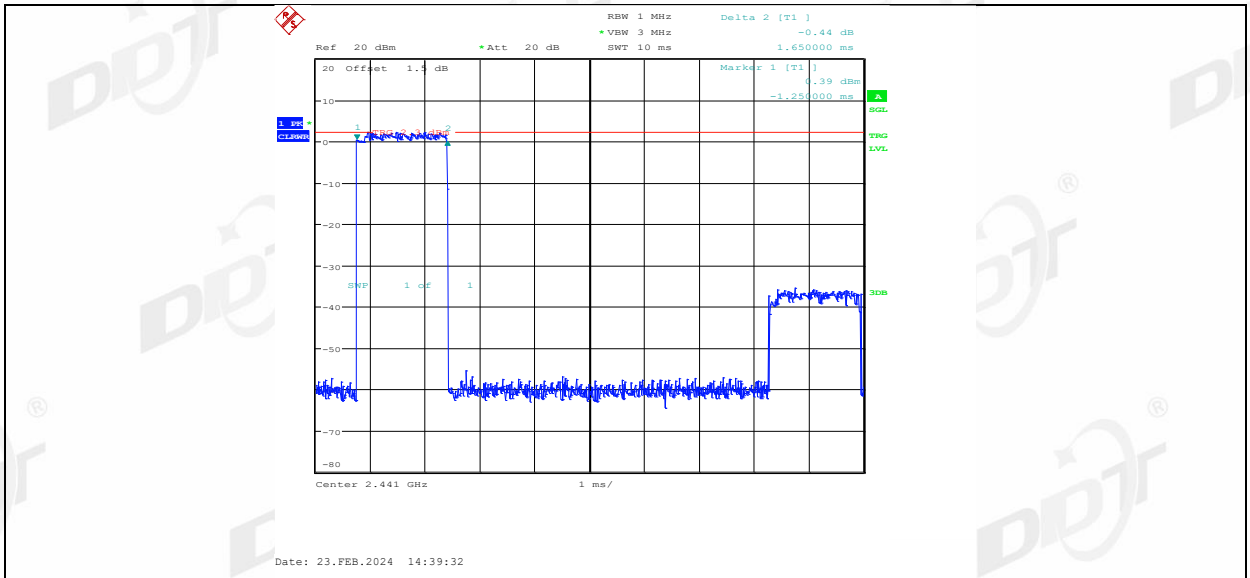


3DH5 Left side Hop

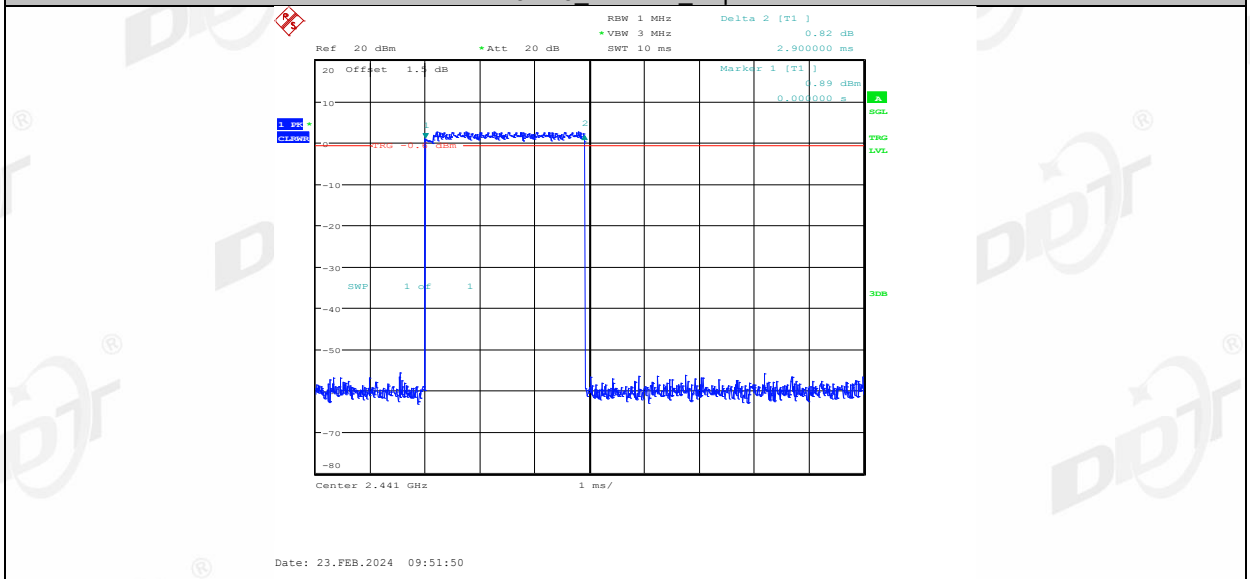

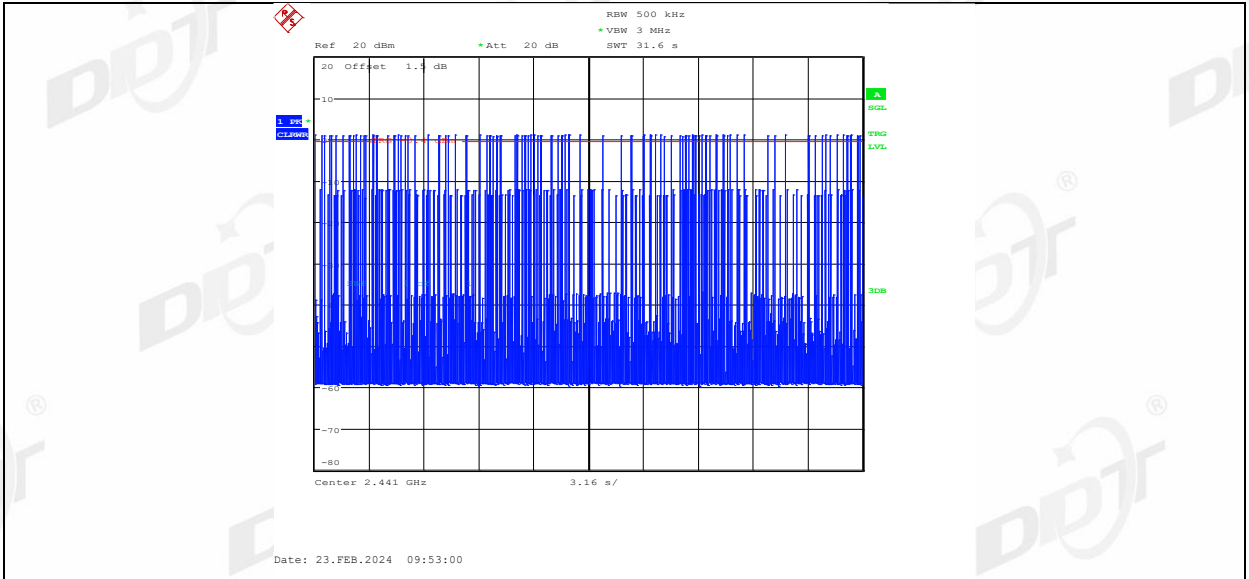


3DH5 Right side Hop

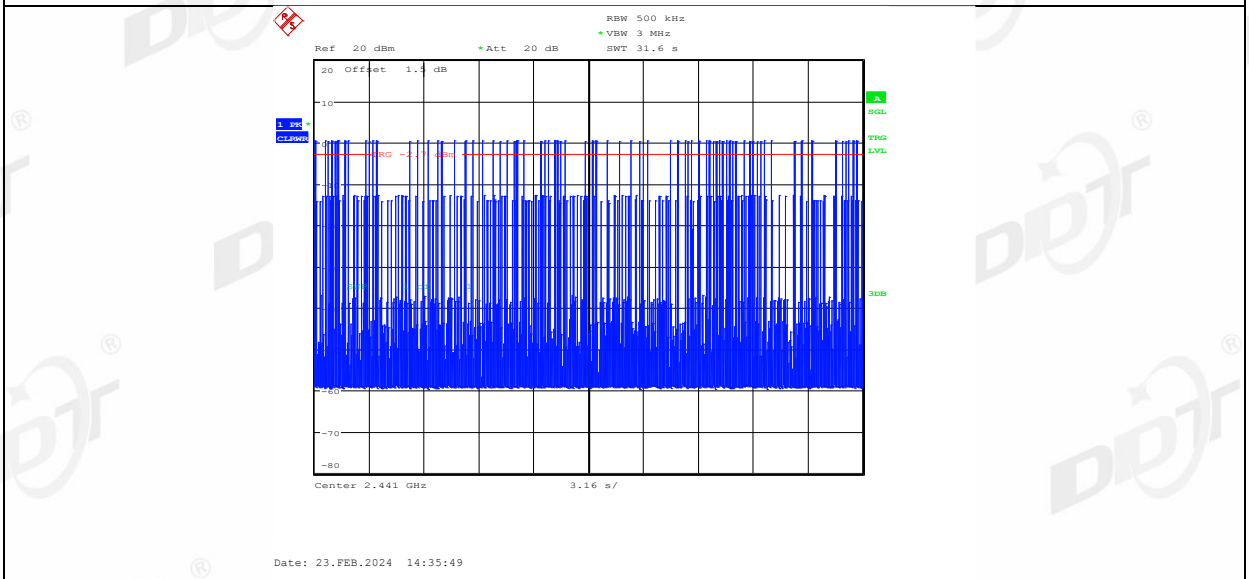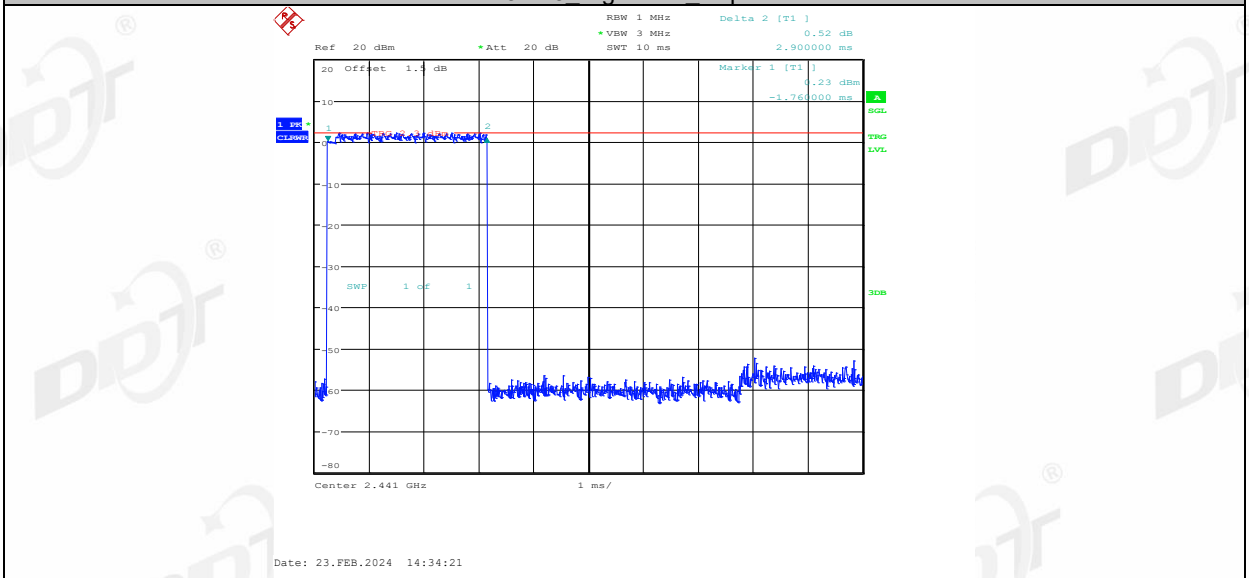

9. Number of Hopping Channel

9.1. Block diagram of test setup

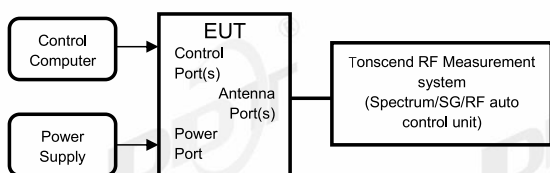

9.2. Limits

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

9.3. Test procedure

- (1) The test according to ANSI C63.10-2013 clause 7.8.3.
- (2) Connect EUT's antenna output to spectrum analyzer by RF cable, the path loss was compensated to the results.
- (3) Set the EUT as maximum power setting and enable the EUT transmit continuously.
- (4) Use the following spectrum analyzer settings for the maximum peak output power measurement:

RBW:	RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.
VBW:	VBW \geq RBW.
Span:	The frequency band of operation
Detector Mode:	Peak
Sweep time:	Auto
Trace mode:	Max hold
- (5) Measure the hopping number and record the results in the report.
- (6) Measure and record the results in the report.


9.4. Test result

Test Engineer:	Zoe	Test Site:	RF Measurement System 2#
Ambient Condition:	24.1°C,48.3%RH	Test Date:	2024.02.23
Test Power Supply:	Battery	EUT:	CREATIVE ZEN AIR 2
Sample Number:	S24012628-002	Model No.:	EF1190


Test Mode	Antenna	Frequency [MHz]	Result [Num]	Limit [Num]	Verdict
DH5	Left side	Hop	79	≥15	PASS
	Right side	Hop	79	≥15	PASS
2DH5	Left side	Hop	79	≥15	PASS
	Right side	Hop	79	≥15	PASS
3DH5	Left side	Hop	79	≥15	PASS
	Right side	Hop	79	≥15	PASS

9.5. Test graphs




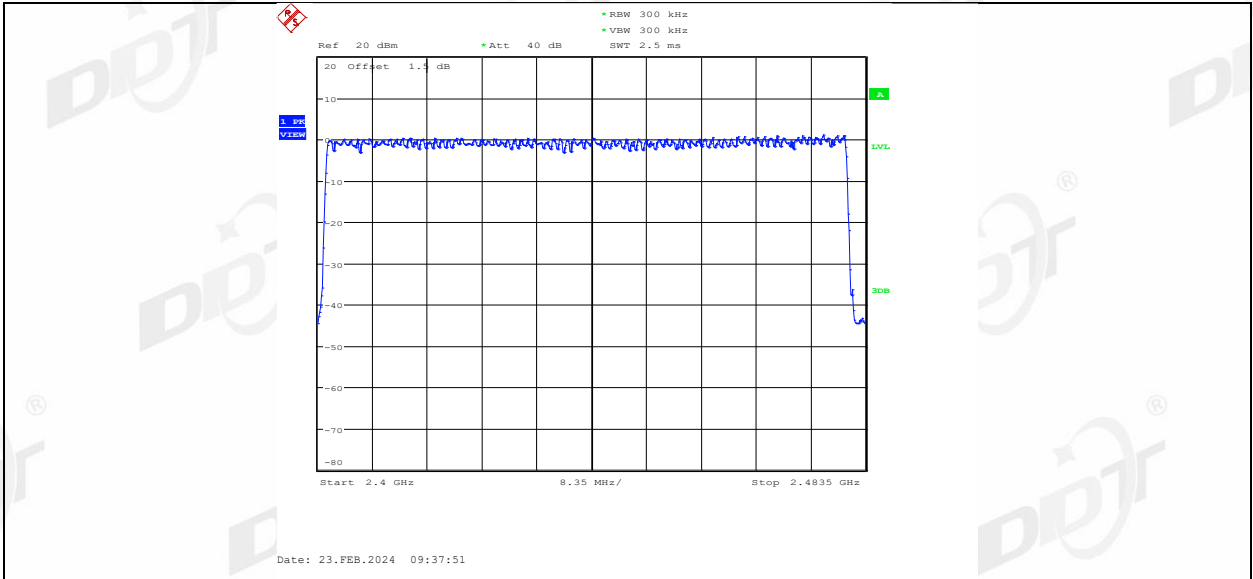


2DH5 Right side Hop

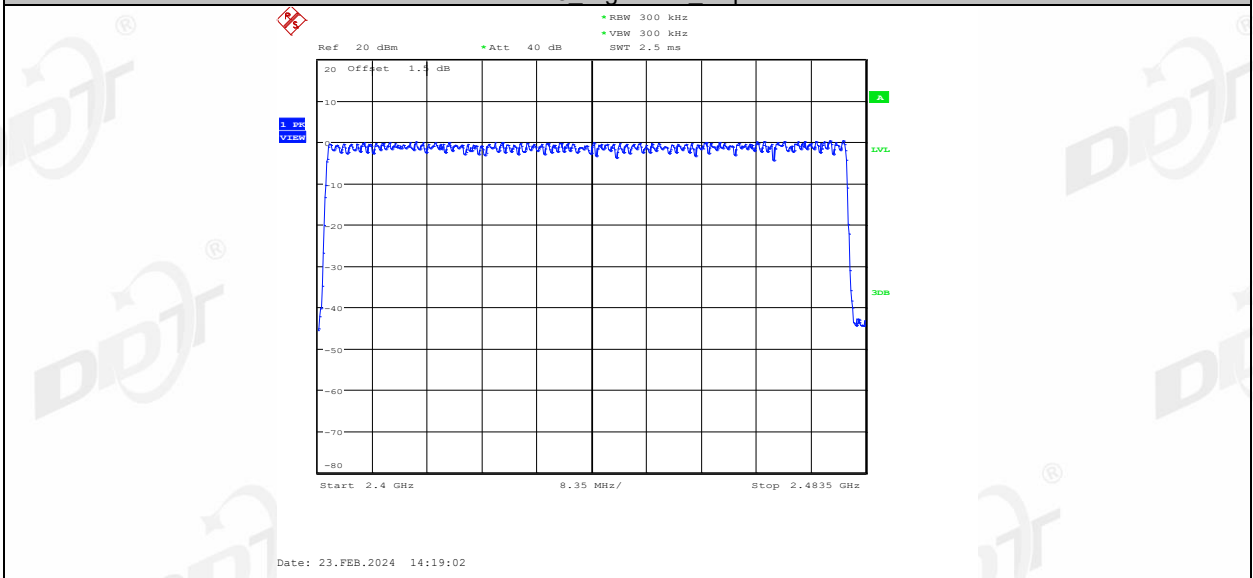

3DH5 Left side Hop

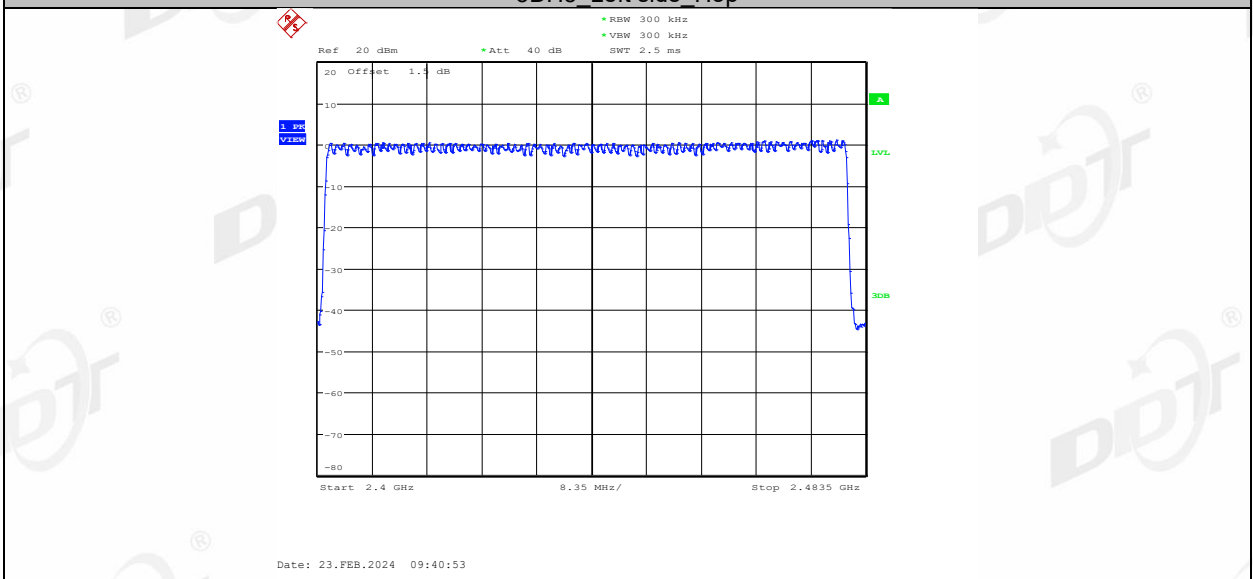


3DH5 Right side Hop

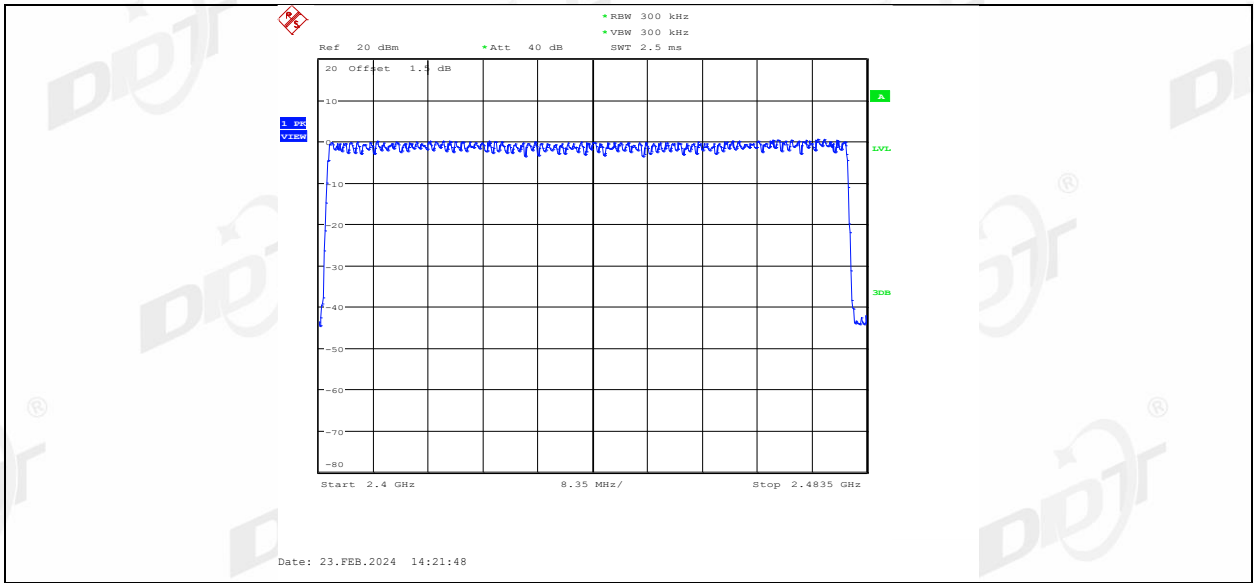

10. Band Edge Compliance (Conducted Method)

10.1. Block diagram of test setup

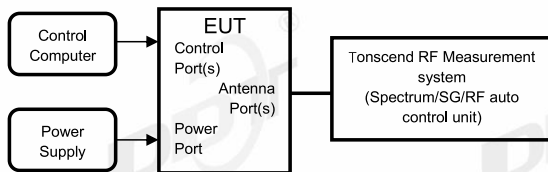

10.2. Limit

All restriction band should comply with 15.209, other emission should be at least 20dB below the fundamental.

10.3. Test procedure

- (1) Connect EUT's antenna output to spectrum analyzer by RF cable.
- (2) Establish a reference level by using the following procedure:


RBW:	100 kHz
VBW:	300 kHz
Span	Encompass frequency range to be measured
Detector Mode:	Peak
Sweep time:	Auto
Trace mode	Max hold
- (3) Allow the trace to stabilize, use the peak marker function to determine the maximum peak power level to establish the reference level.
- (4) Then mark the maximum amplitude of all unwanted emissions outside of the authorized frequency band.


10.4. Test result

Test Engineer:	Zoe	Test Site:	RF Measurement System 2#
Ambient Condition:	22.3°C,45.9%RH	Test Date:	2024.03.08
Test Power Supply:	Battery	EUT:	CREATIVE ZEN AIR 2
Sample Number:	S24012628-002	Model No.:	EF1190


Mode	Freq. (MHz)	Verdict
GFSK	Hopping off 2402	Pass
	Hopping off 2480	Pass
	Hopping on	Pass
$\pi/4$ -DQPSK	Hopping off 2402	Pass
	Hopping off 2480	Pass
	Hopping on	Pass
8DPSK	Hopping off 2402	Pass
	Hopping off 2480	Pass
	Hopping on	Pass

10.5. Test graphs

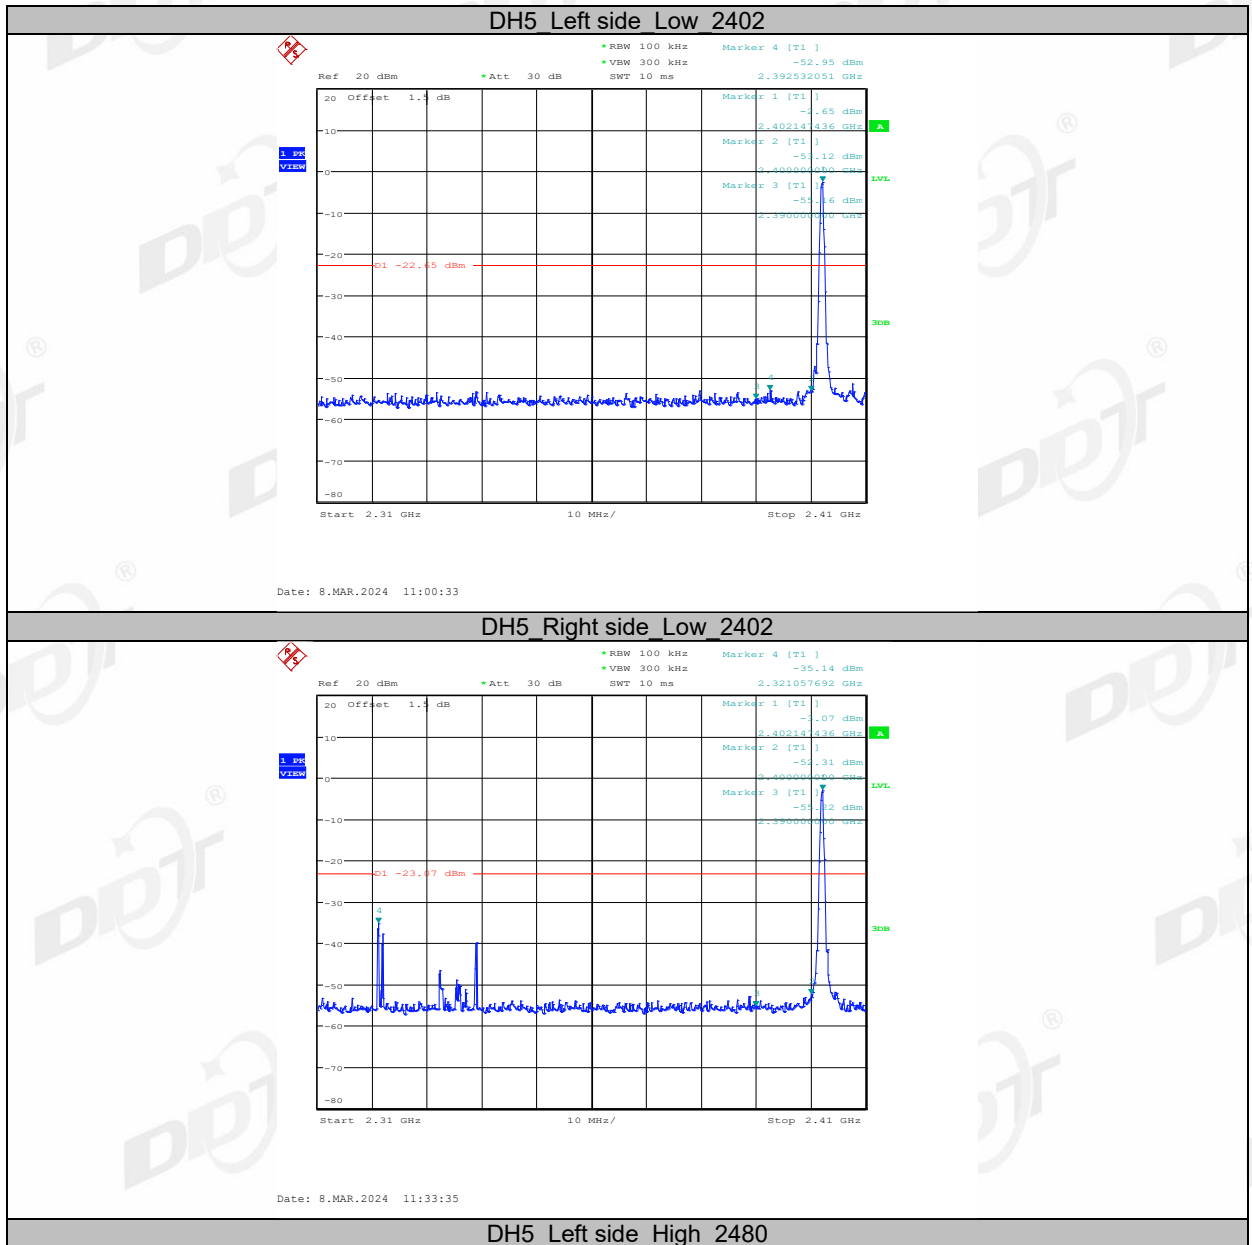


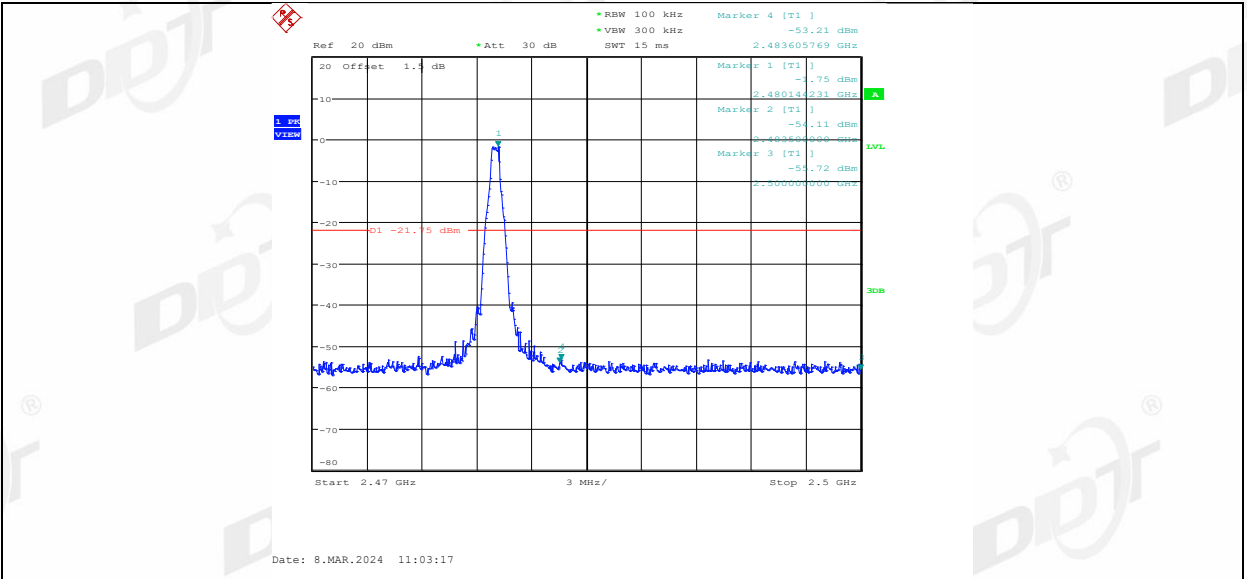


DH5 Right side High 2480

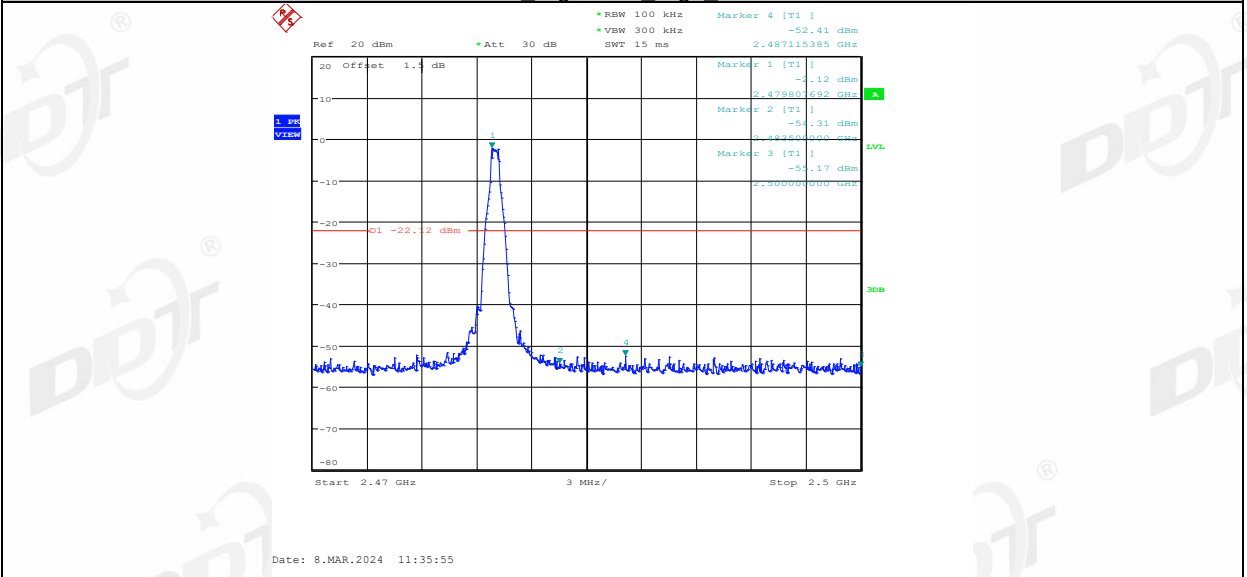


DH5 Left side Low Hop 2402

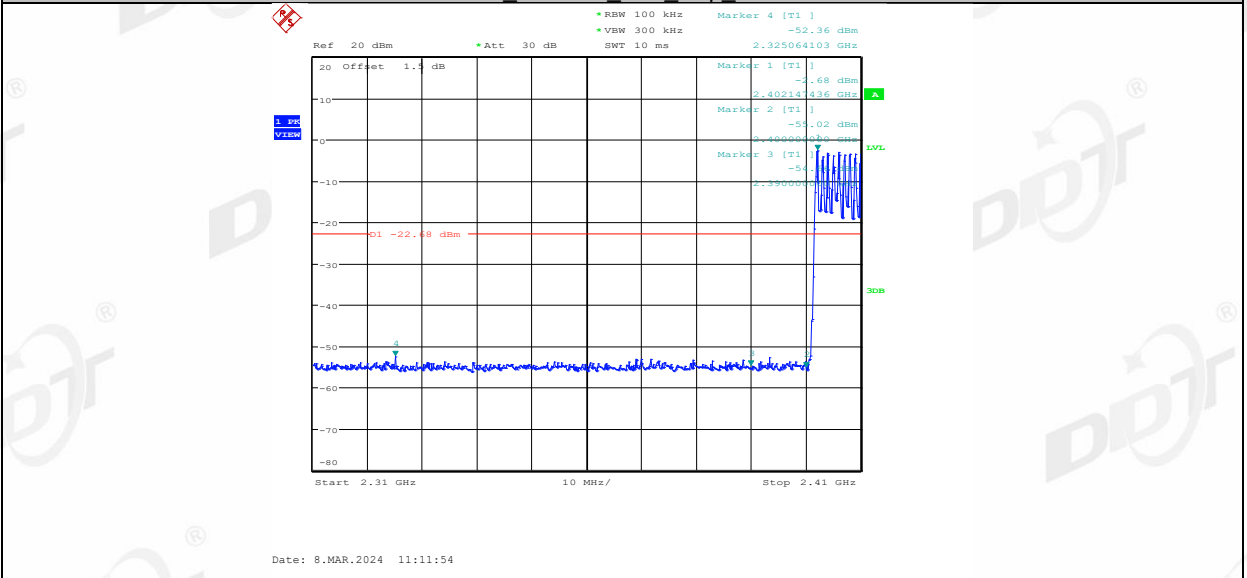


DH5 Right side Low Hop 2402

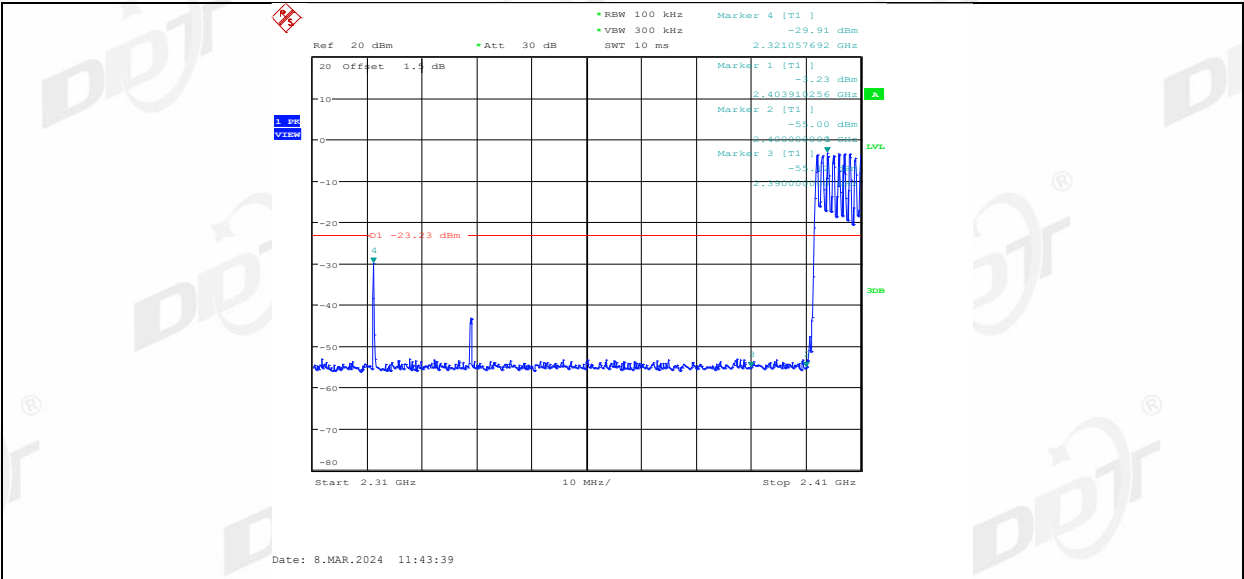


DH5 Left side High Hop 2480

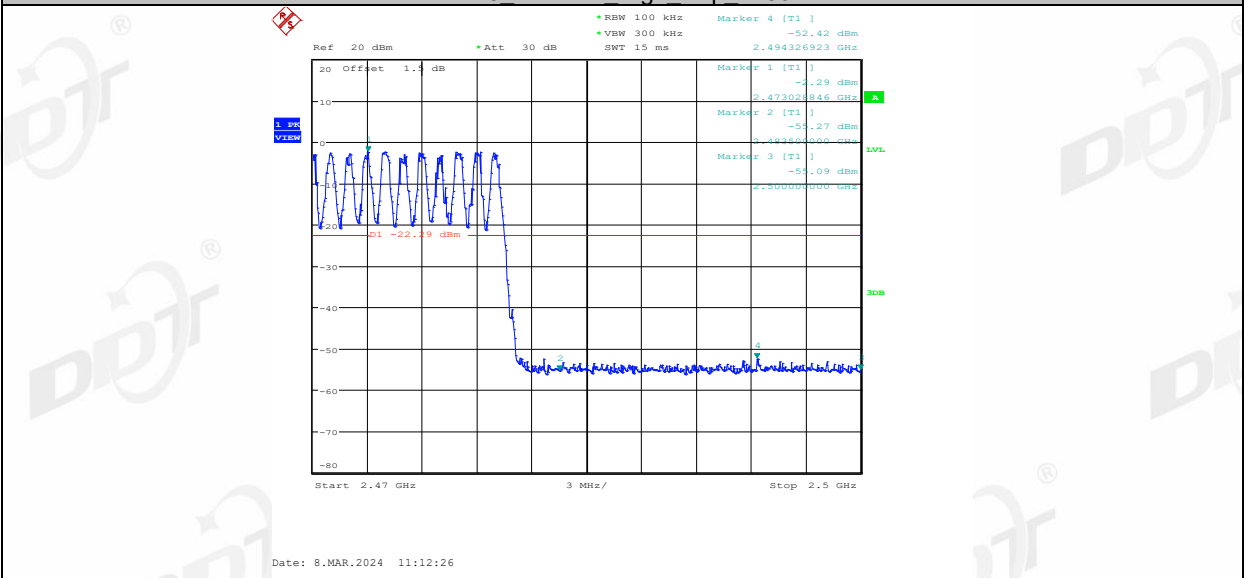


DH5 Right side High Hop 2480

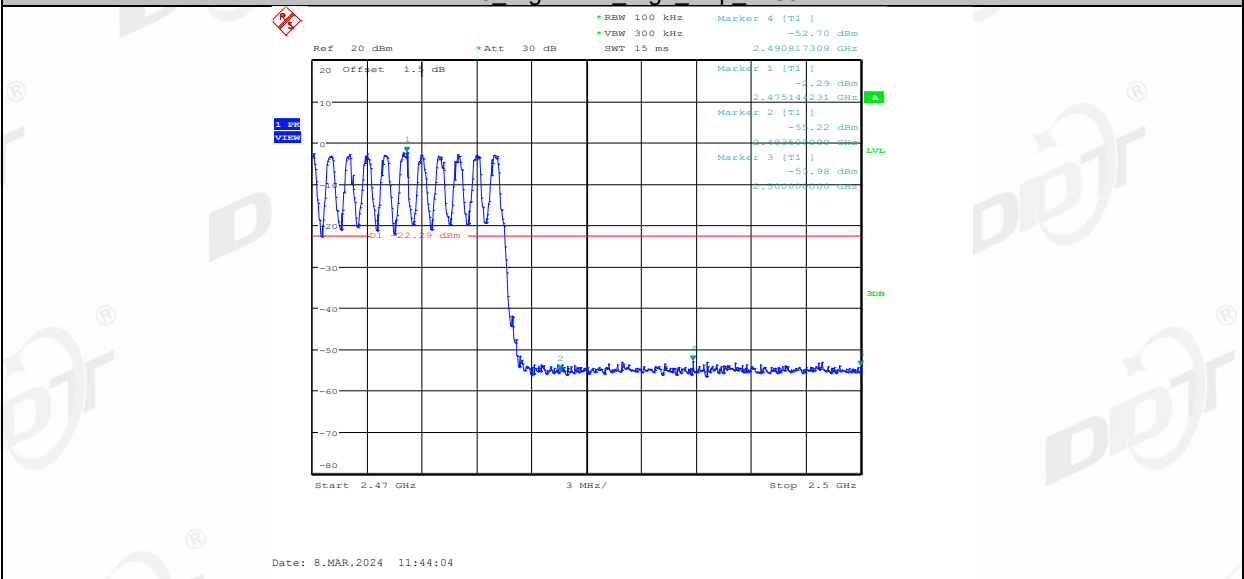


2DH5 Left side Low 2402

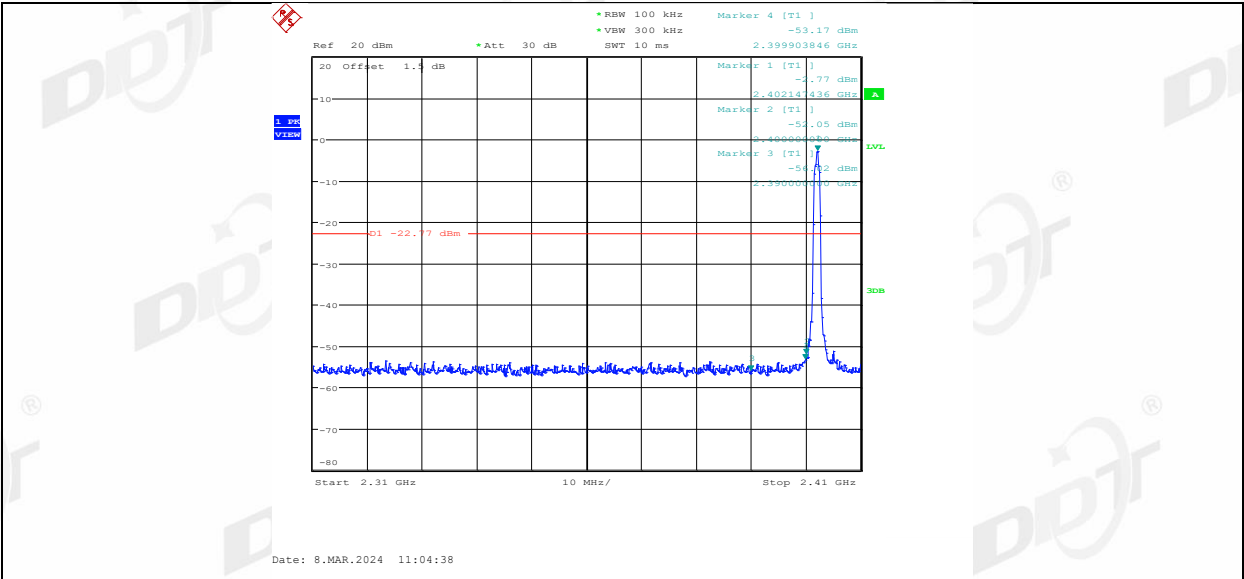


2DH5 Right side Low 2402

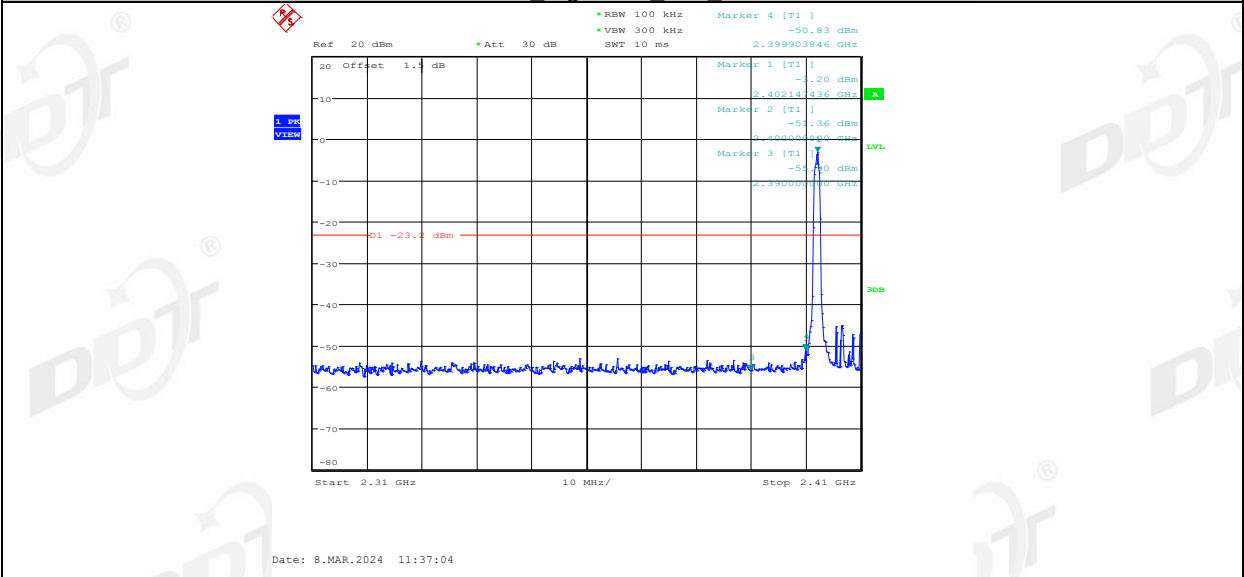


2DH5 Left side High 2480

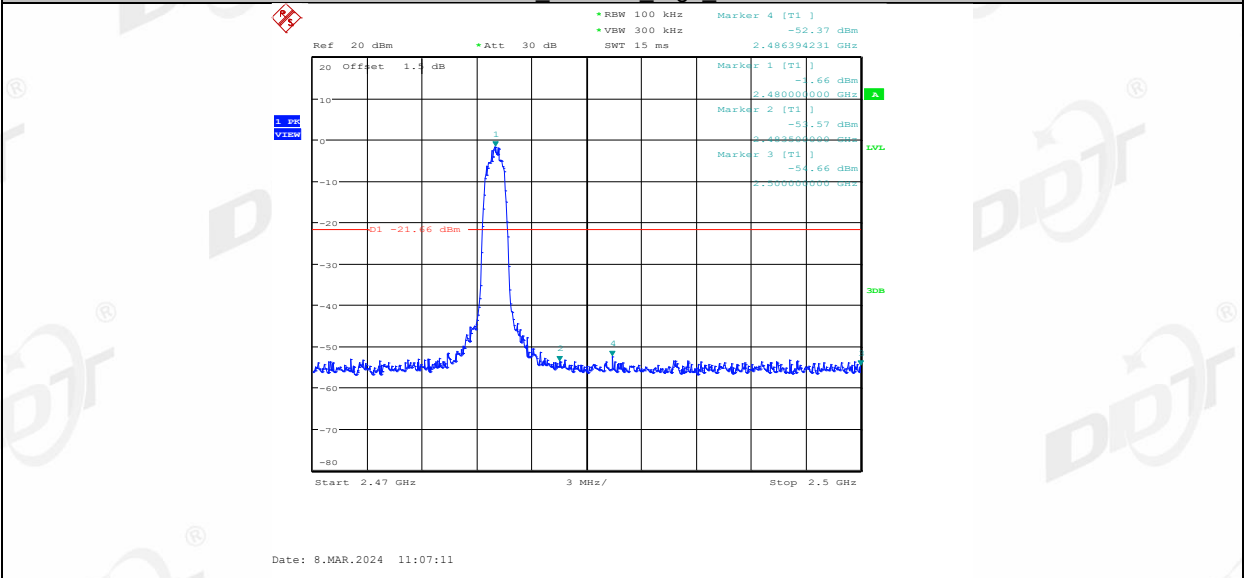


2DH5 Right side High 2480

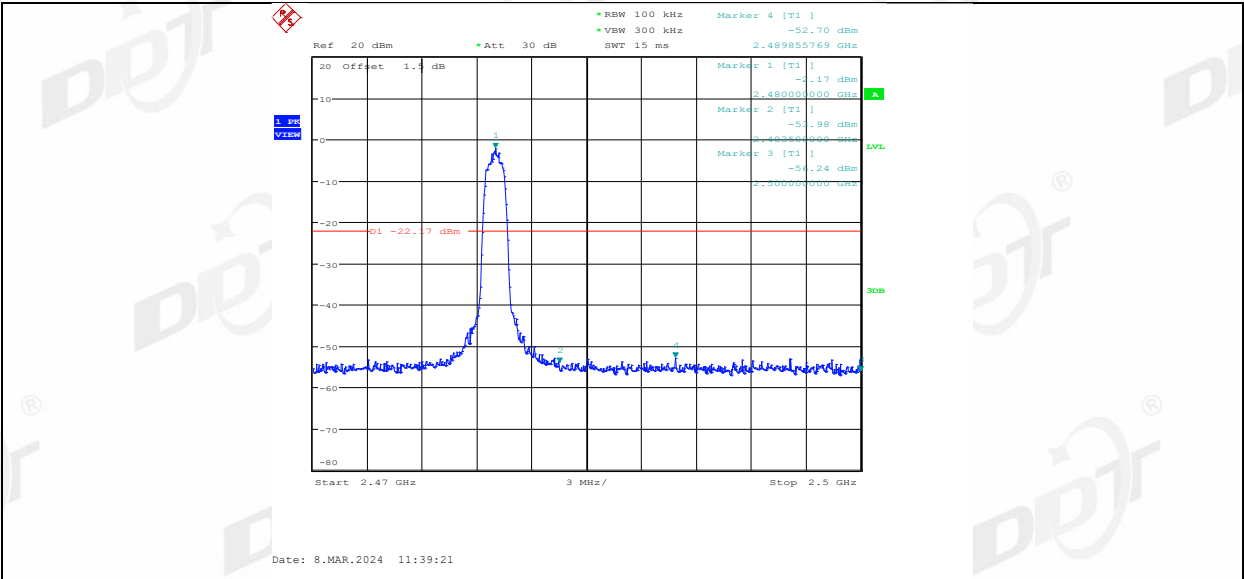


2DH5 Left side Low Hop 2402

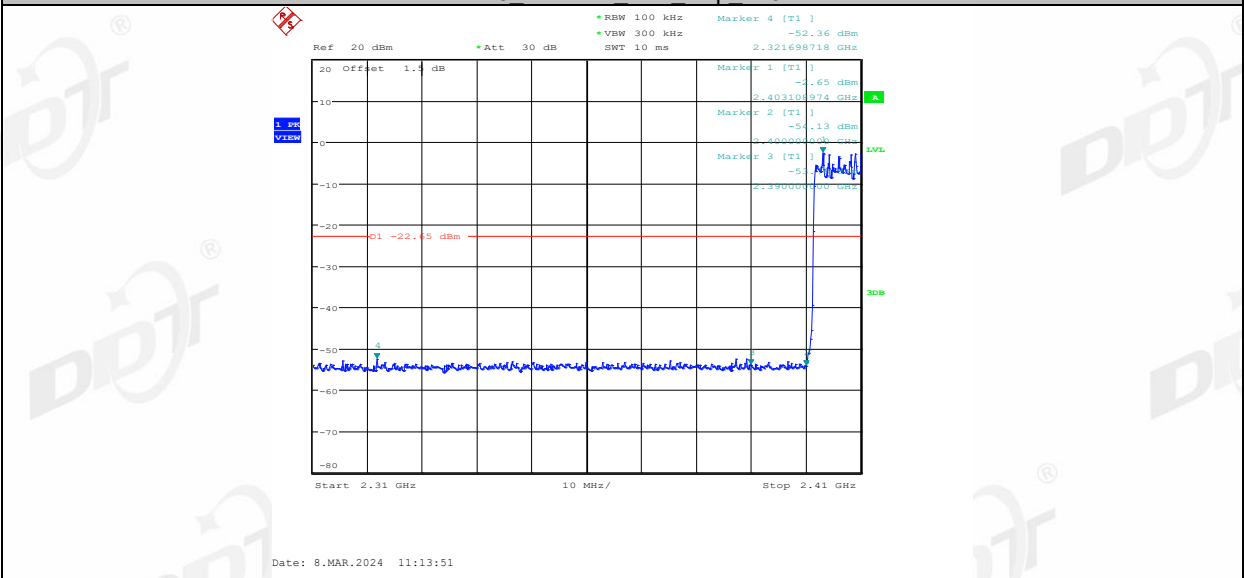


2DH5 Right side Low Hop 2402

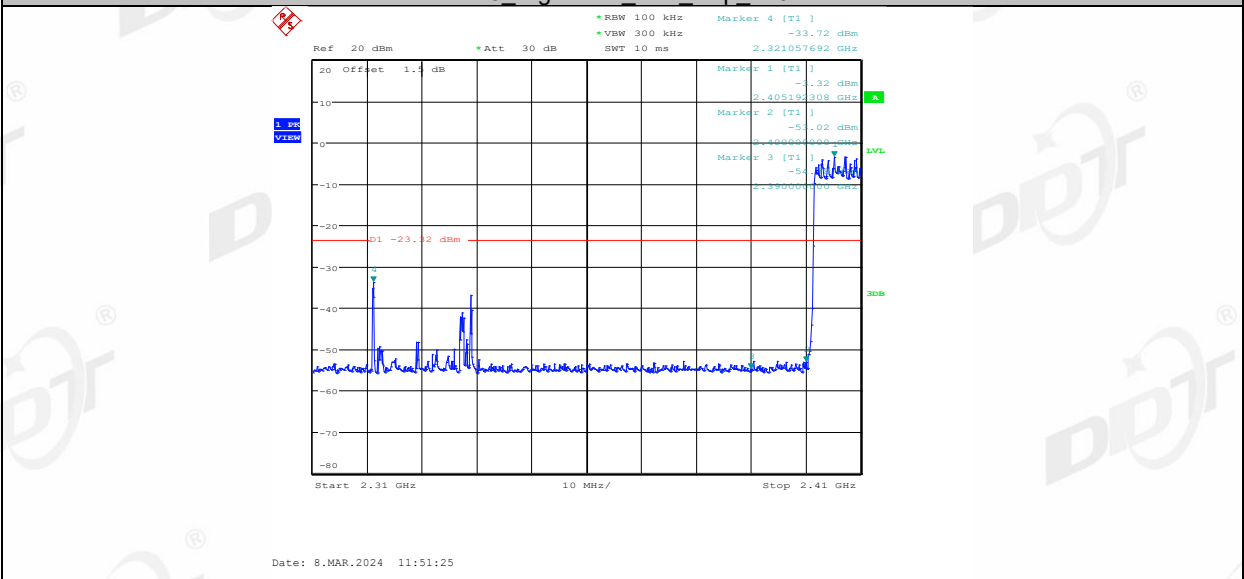


2DH5 Left side High Hop 2480

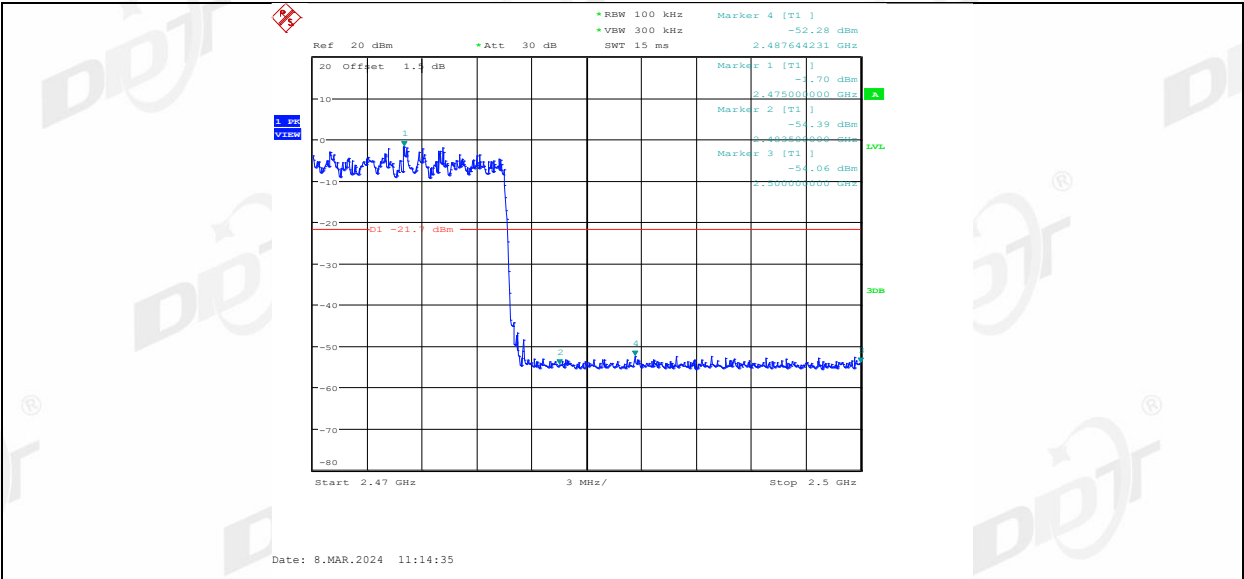


2DH5 Right side High Hop 2480

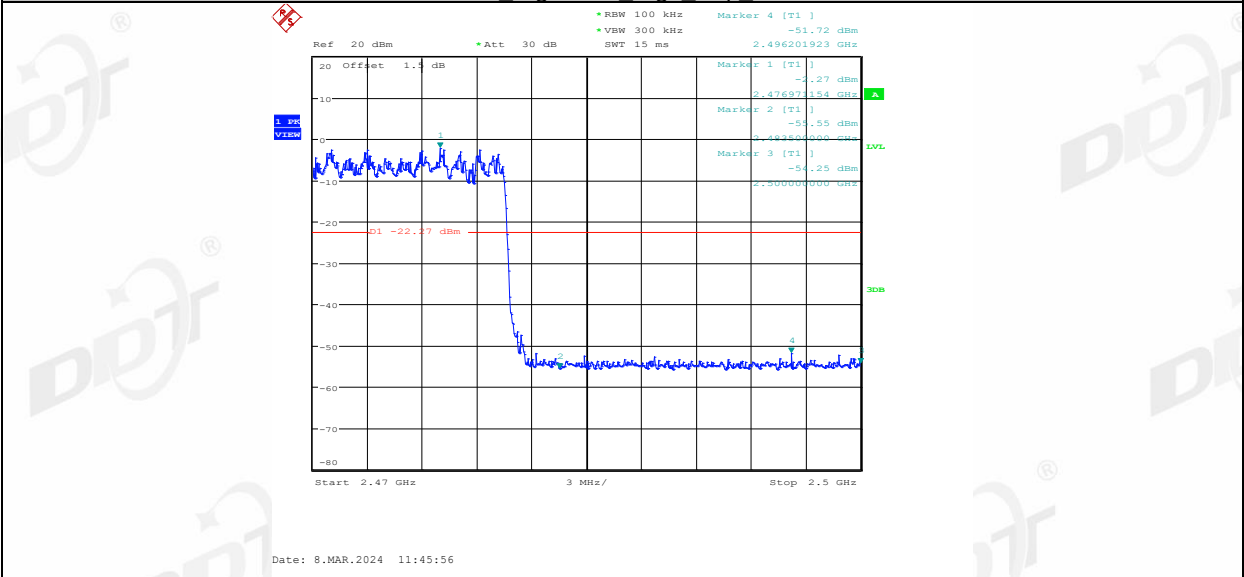


3DH5 Left side Low 2402

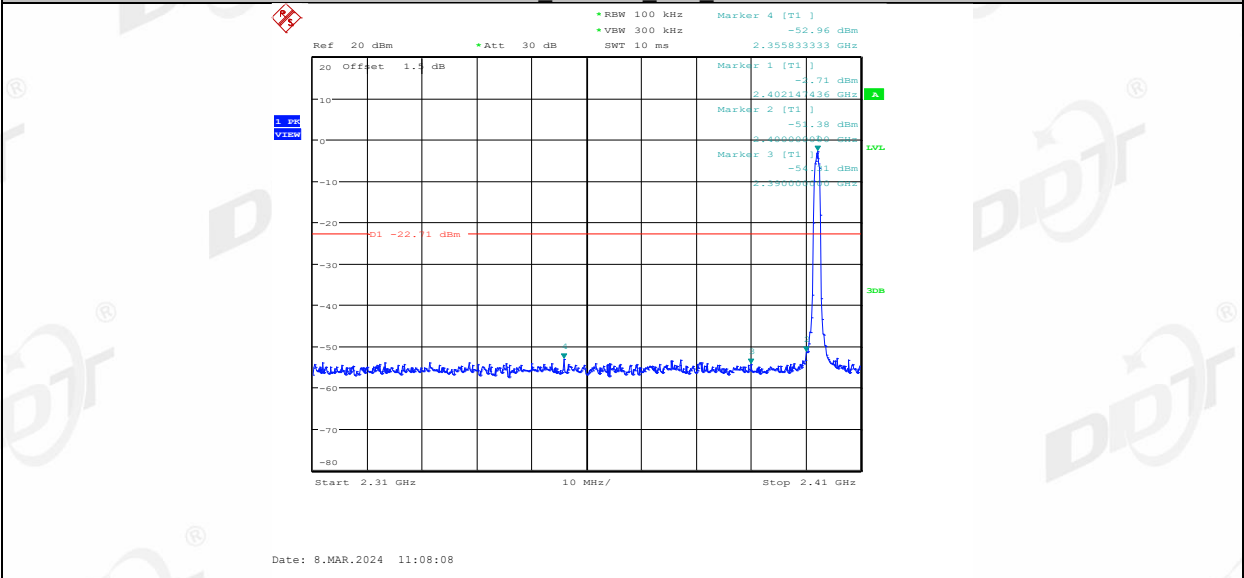


3DH5 Right side Low 2402

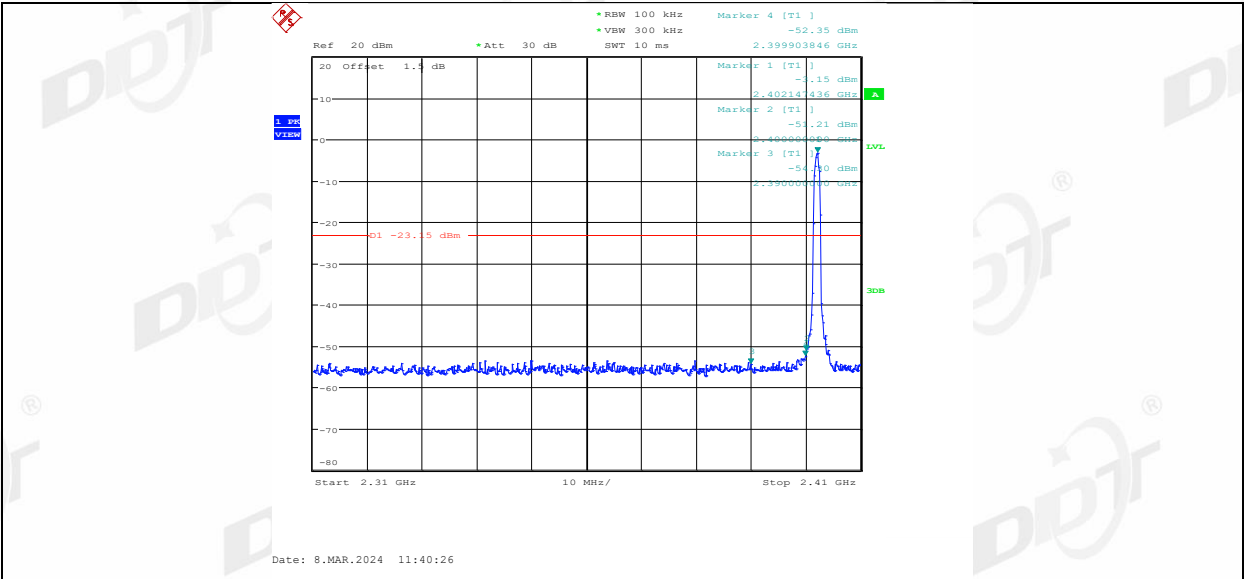


3DH5 Left side High 2480

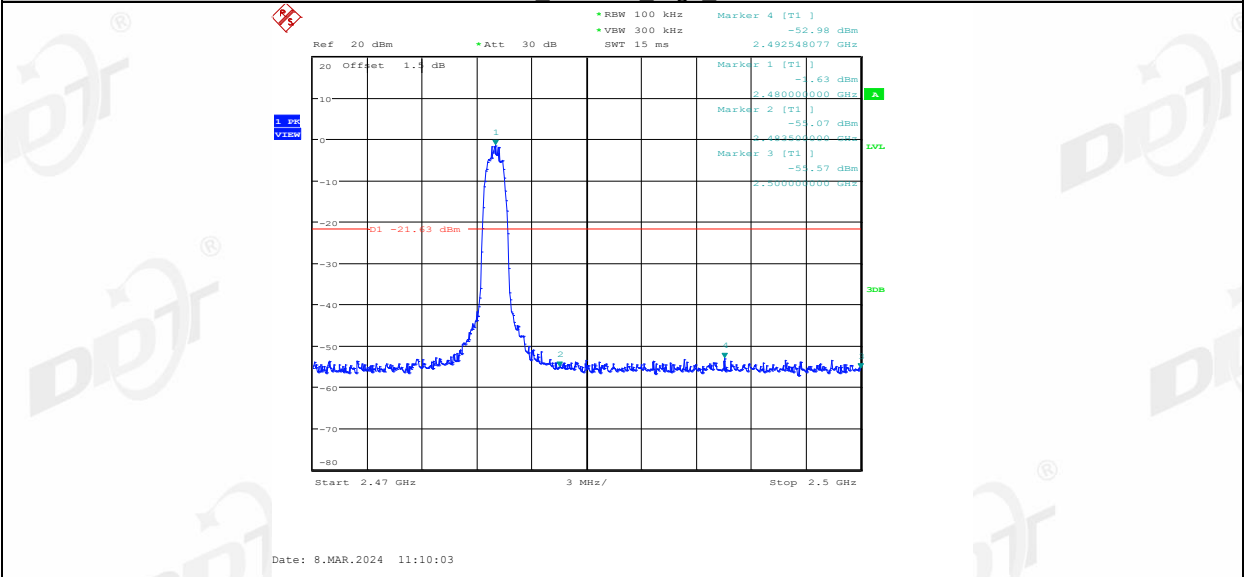


3DH5 Right side High 2480

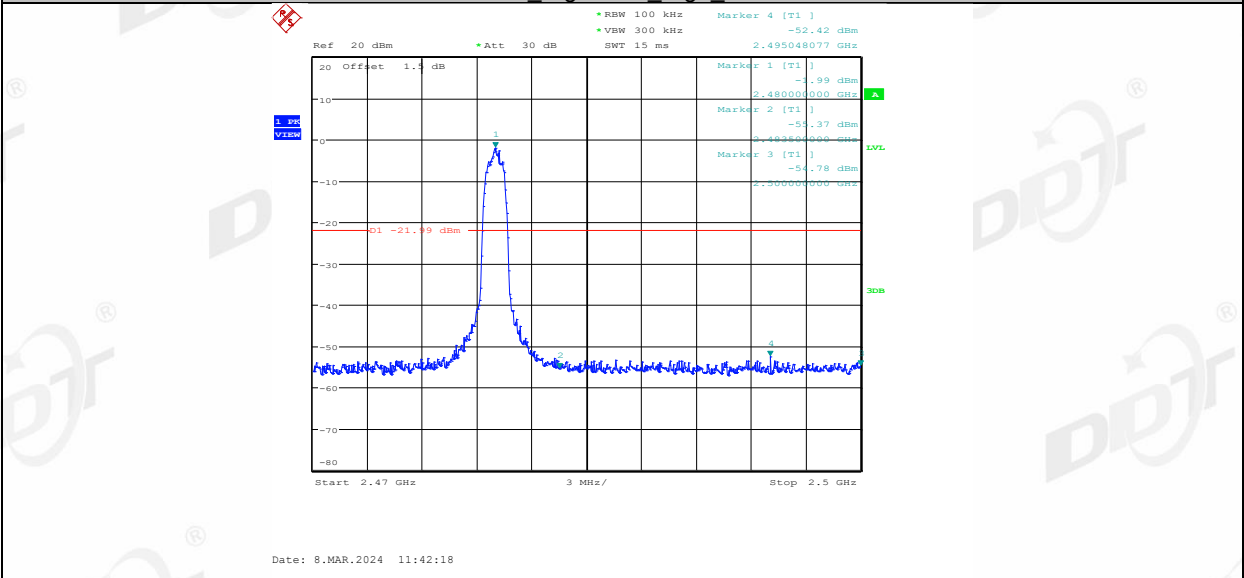


3DH5 Left side Low Hop 2402

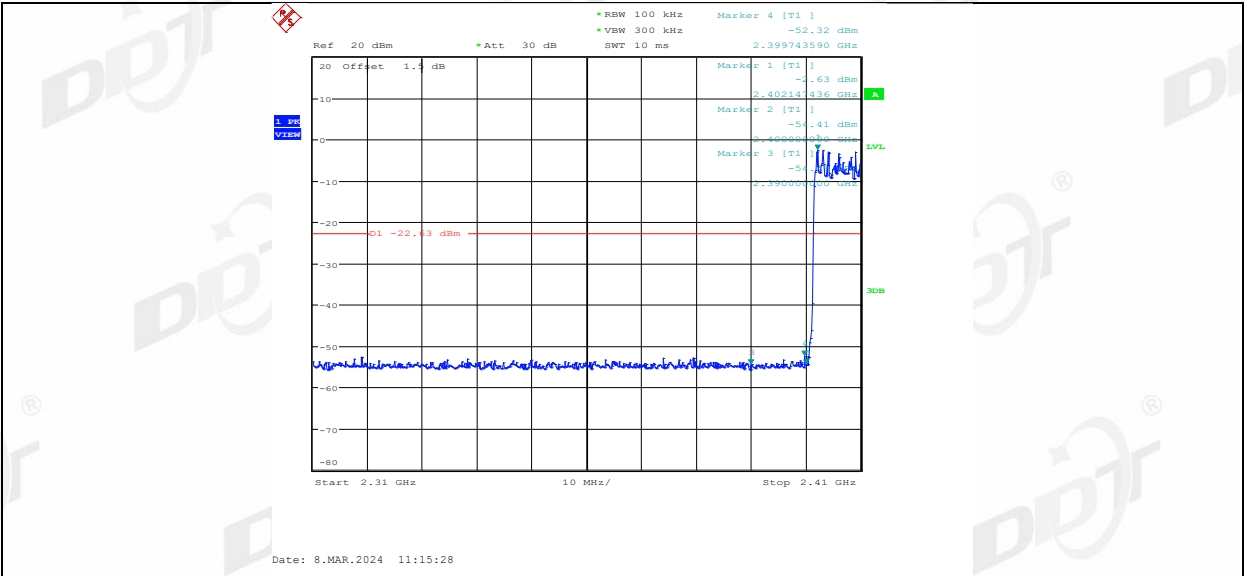


3DH5 Right side Low Hop 2402

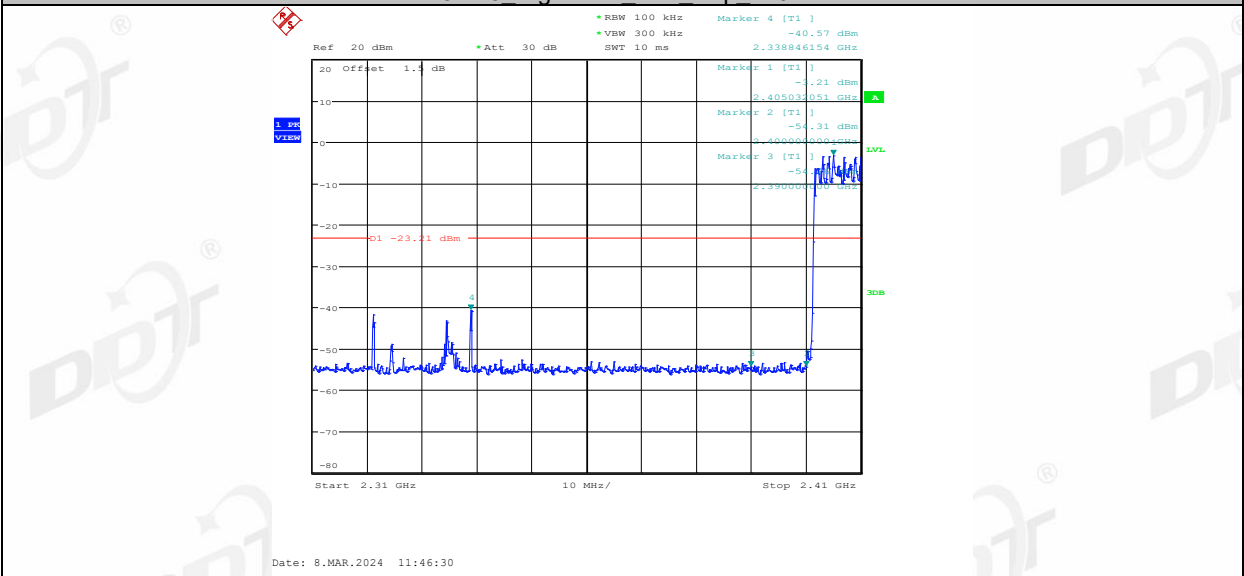

3DH5 Left side High Hop 2480

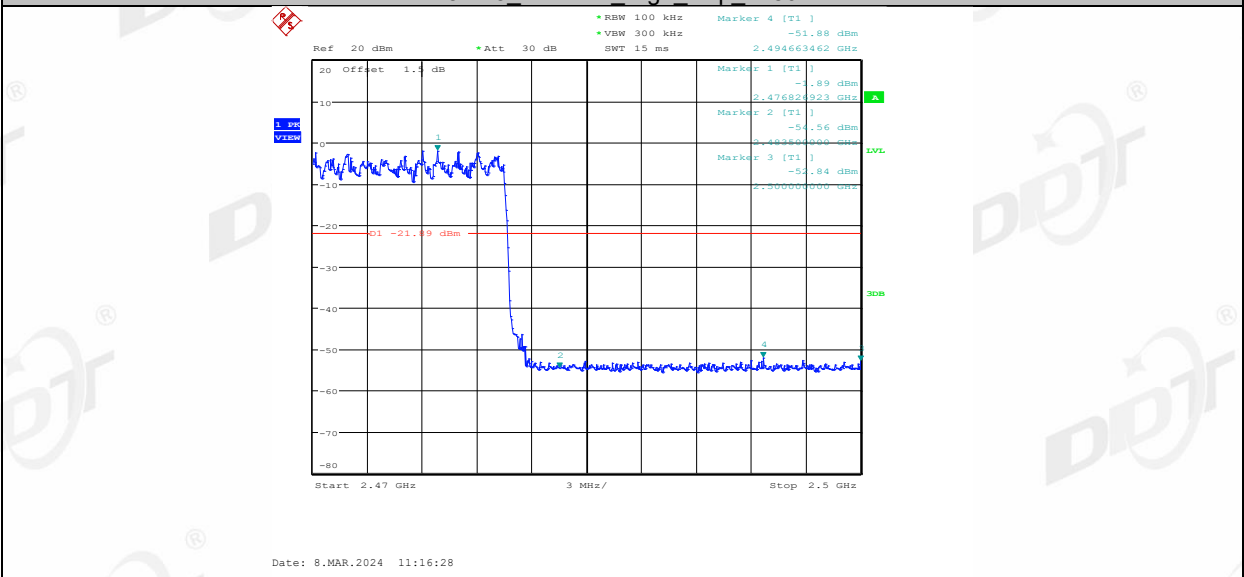


3DH5 Right side High Hop 2480

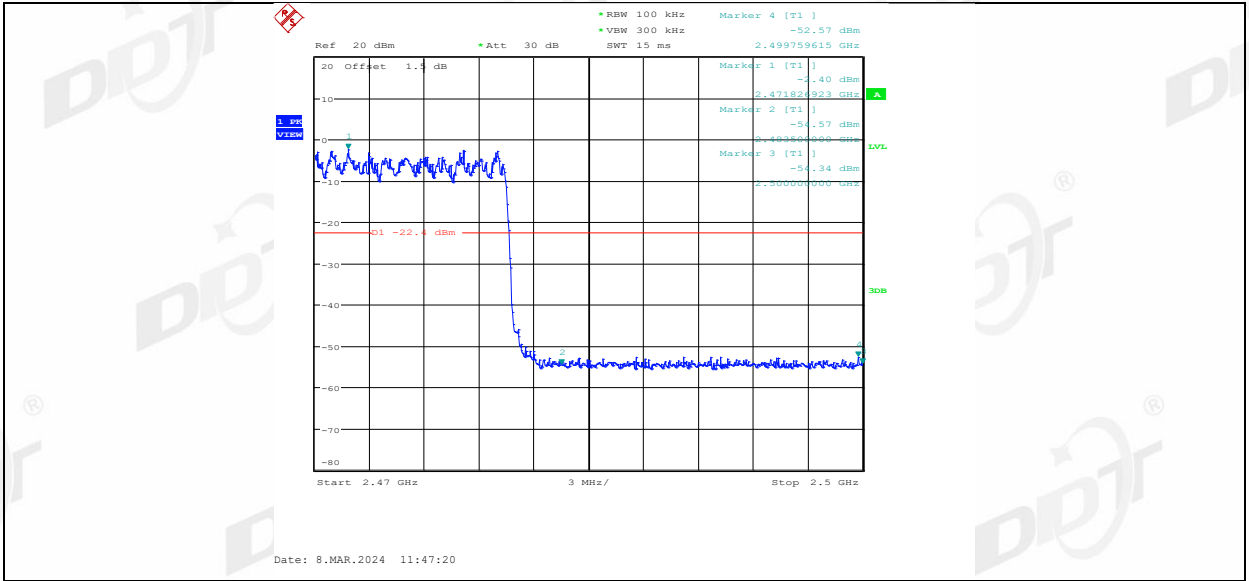

11. RF Conducted Spurious Emissions

11.1. Block diagram of test setup

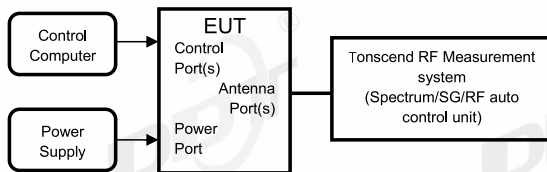

11.2. Limits

In any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.

11.3. Test procedure

- (1) Connect EUT's antenna output to spectrum analyzer by RF cable.
- (2) Establish a reference level by using the following procedure:

Center frequency	Test frequency
RBW:	100 kHz
VBW:	300 kHz
Span	Wide enough to capture the peak level of the in-band emission
Detector Mode:	Peak
Sweep time:	Auto
Trace mode	Max hold
- (3) Allow the trace to stabilize, use the peak marker function to determine the maximum peak power level to establish the reference level.
- (4) Set the spectrum analyzer as follows:

RBW:	100 kHz
VBW:	300 kHz
Span	Encompass frequency range to be measured
Number of measurement points	$\geq \text{Span}/\text{RBW}$
Detector Mode:	Peak
Sweep time:	Auto
Trace mode	Max hold



Allow the trace to stabilize, use the peak marker function to determine the maximum amplitude of all unwanted emissions outside of the authorized frequency band

11.4. Test result


Test Engineer:	Zoe	Test Site:	RF Measurement System 2#
Ambient Condition:	22.3°C,45.9%RH	Test Date:	2024.03.08
Test Power Supply:	Battery	EUT:	CREATIVE ZEN AIR 2
Sample Number:	S24012628-002	Model No.:	EF1190

Mode	Freq. (MHz)	Verdict
GFSK	Hopping off 2402	Pass
	Hopping off 2441	Pass
	Hopping off 2480	Pass
$\pi/4$ -DQPSK	Hopping off 2402	Pass
	Hopping off 2441	Pass
	Hopping off 2480	Pass
8DPSK	Hopping off 2402	Pass
	Hopping off 2441	Pass
	Hopping off 2480	Pass


11.5. Test graphs

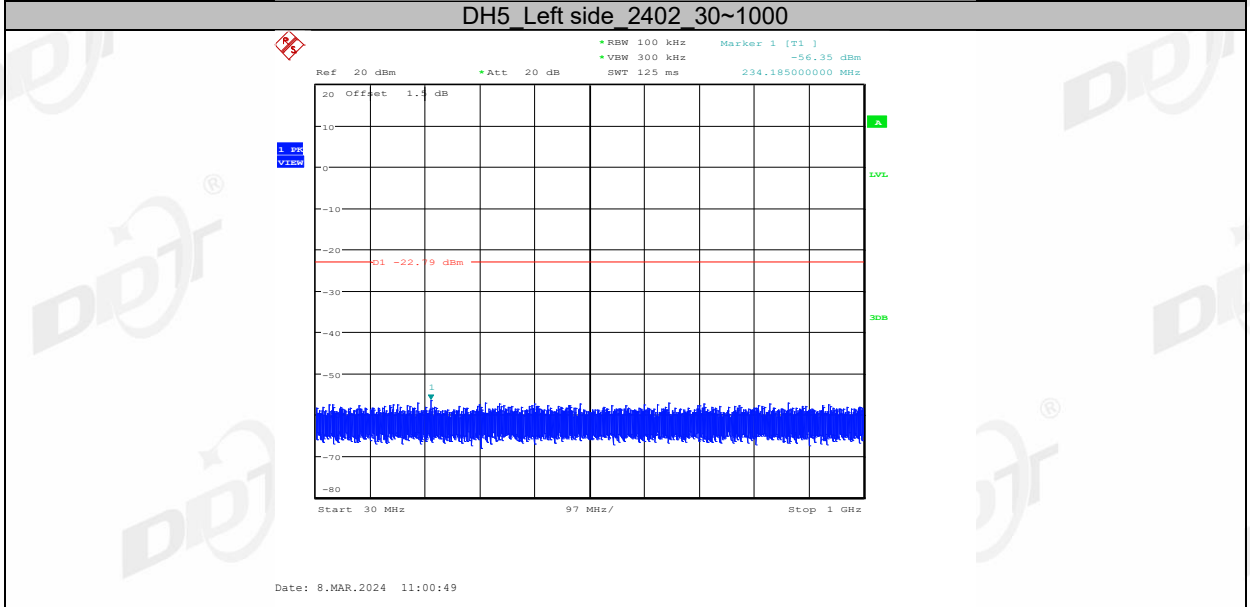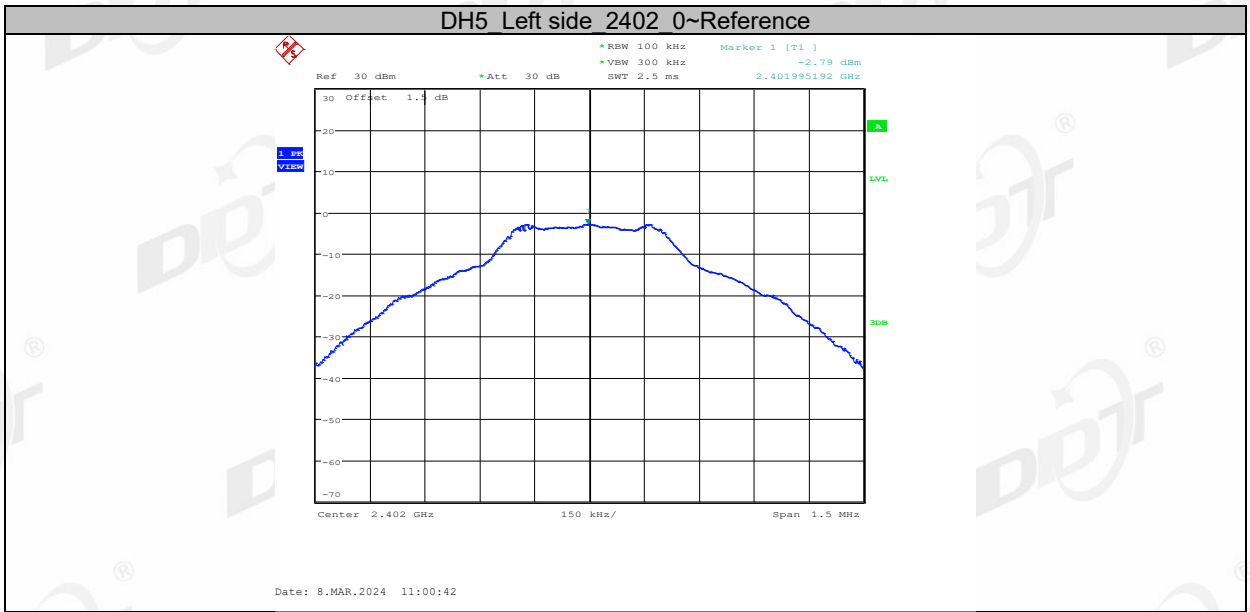


DH5 Left side 2402 1000~26500

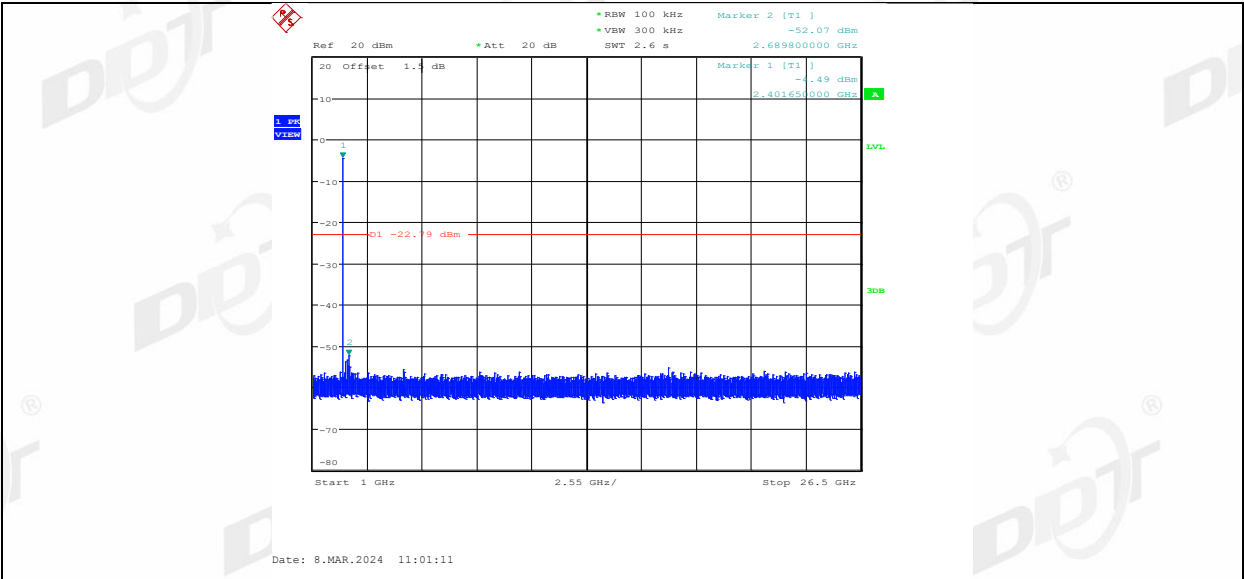


DH5 Right side 2402 0~Reference

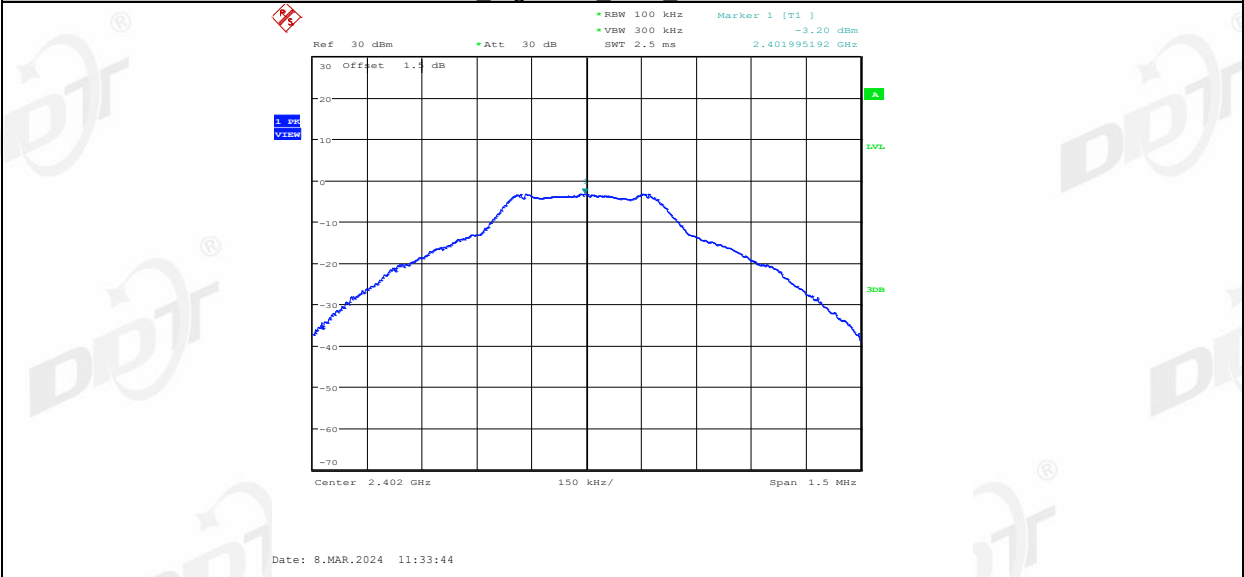


DH5 Right side 2402 30~1000

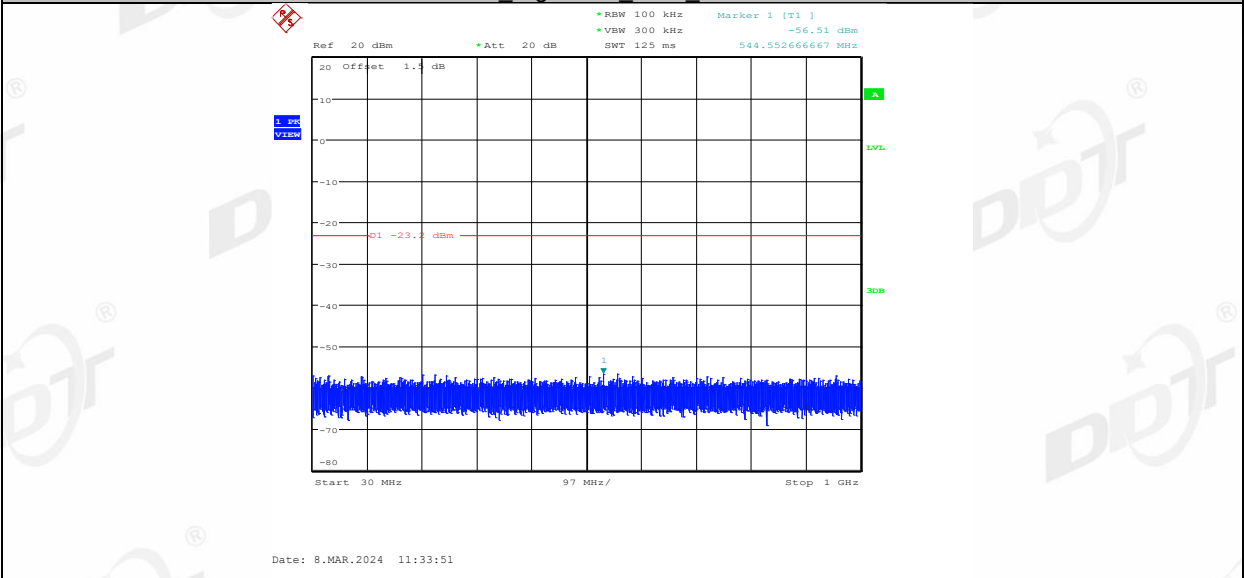


DH5 Right side 2402 1000~26500

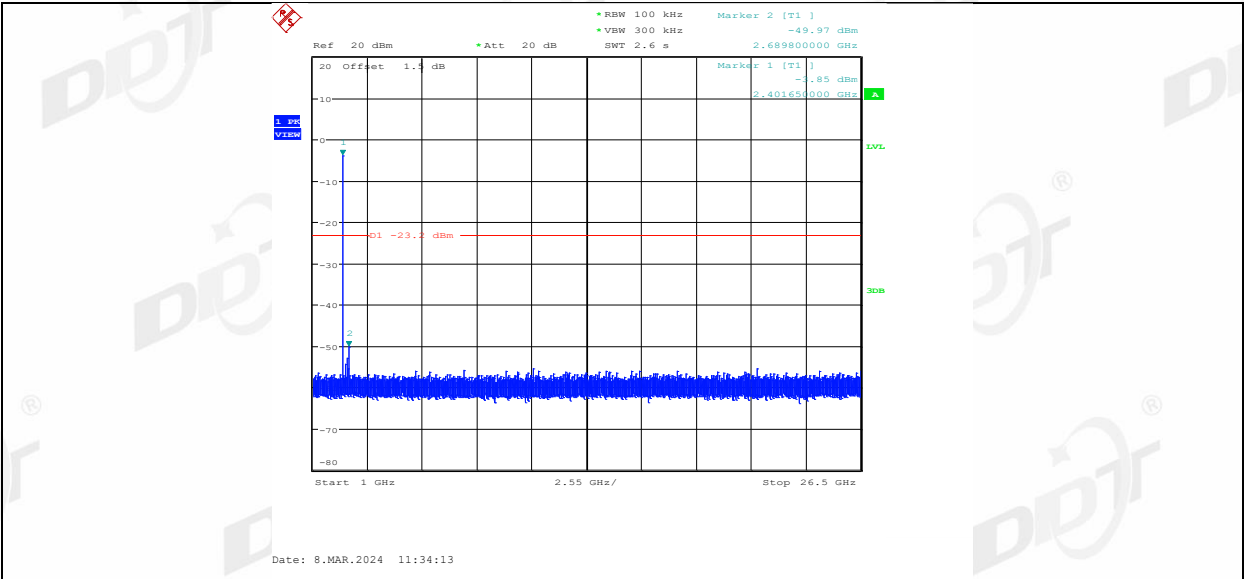


DH5 Left side 2441 0~Reference

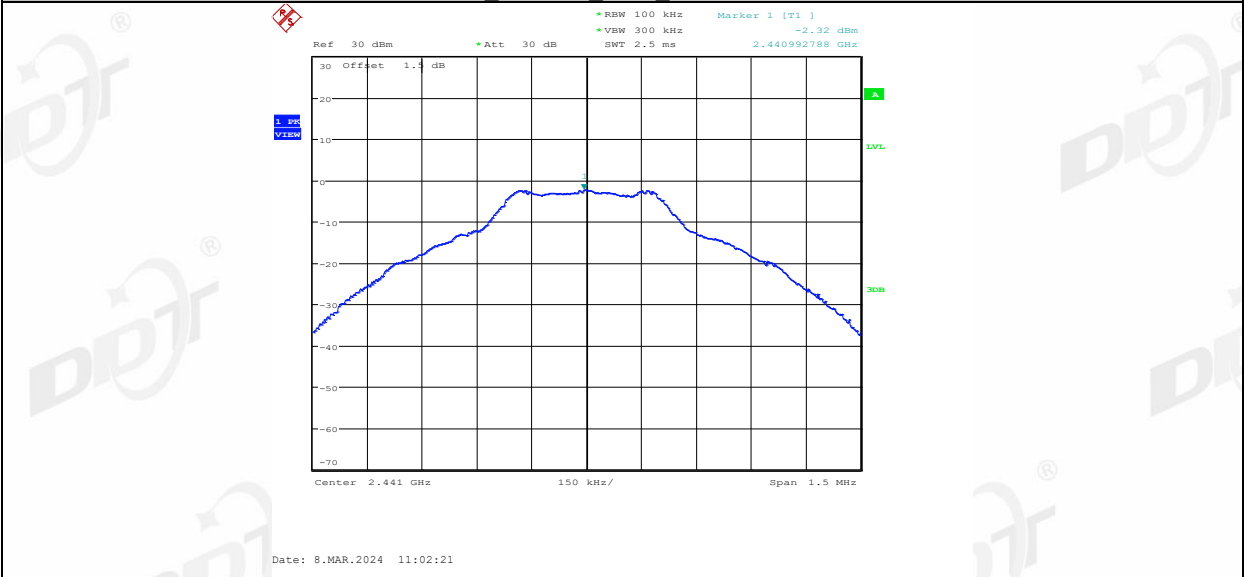


DH5 Left side 2441 30~1000

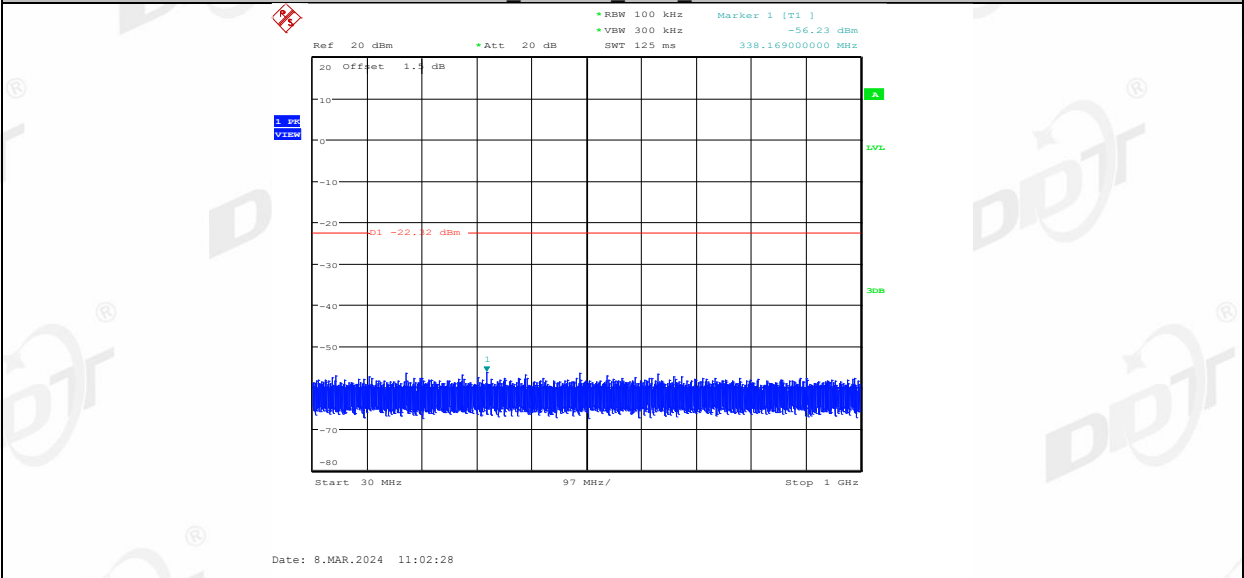


DH5 Left side 2441 1000~26500

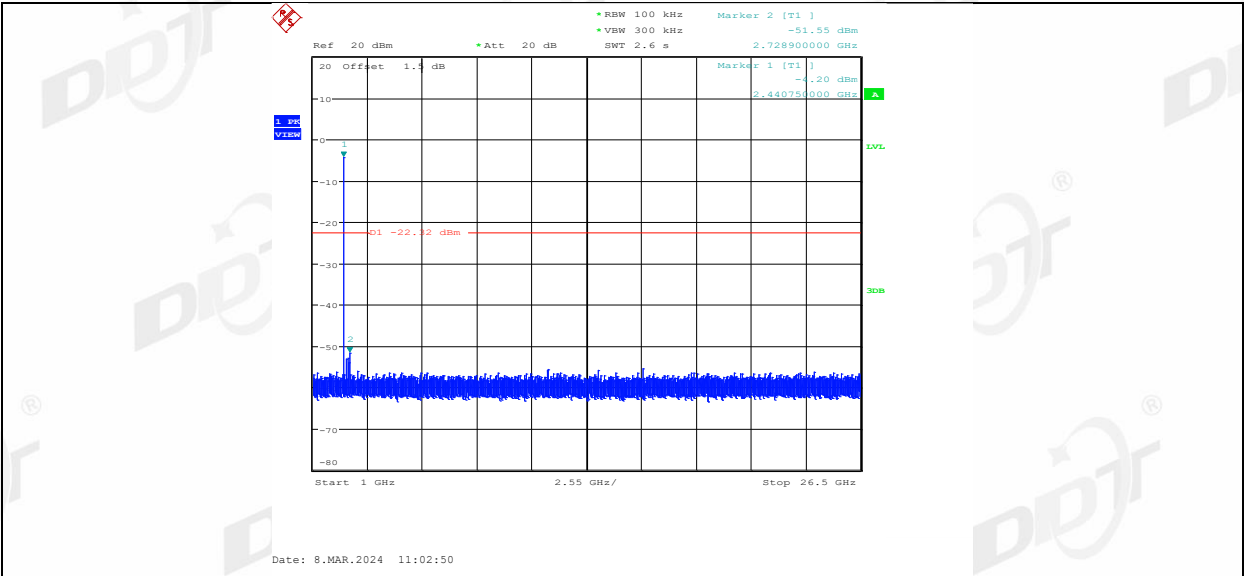

DH5 Right side 2441 0~Reference

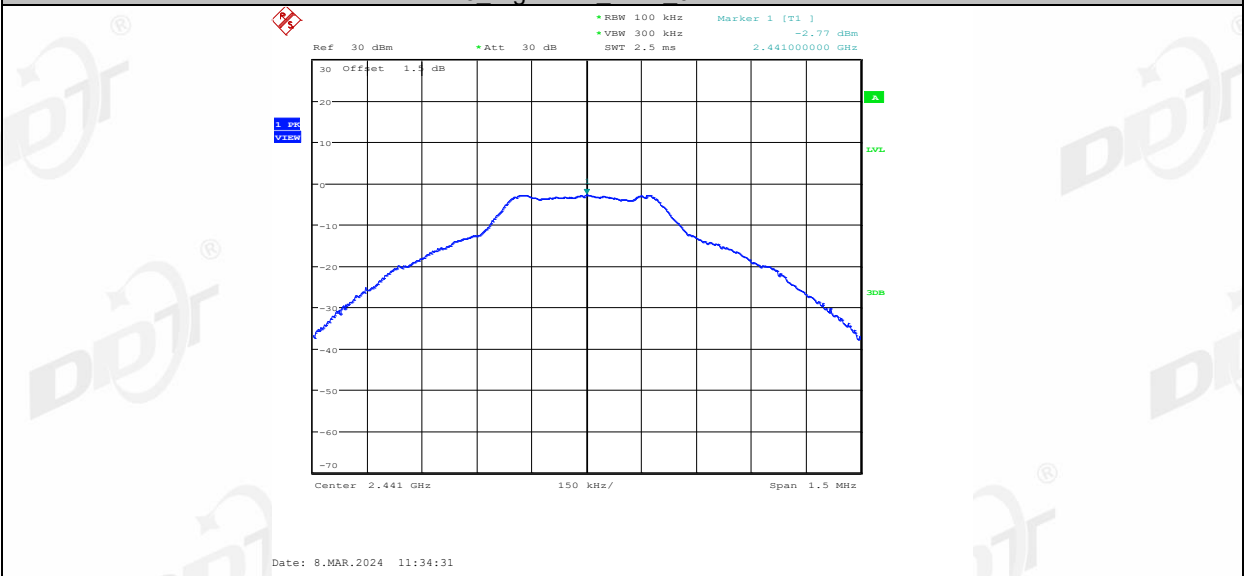

DH5 Right side 2441 30~1000

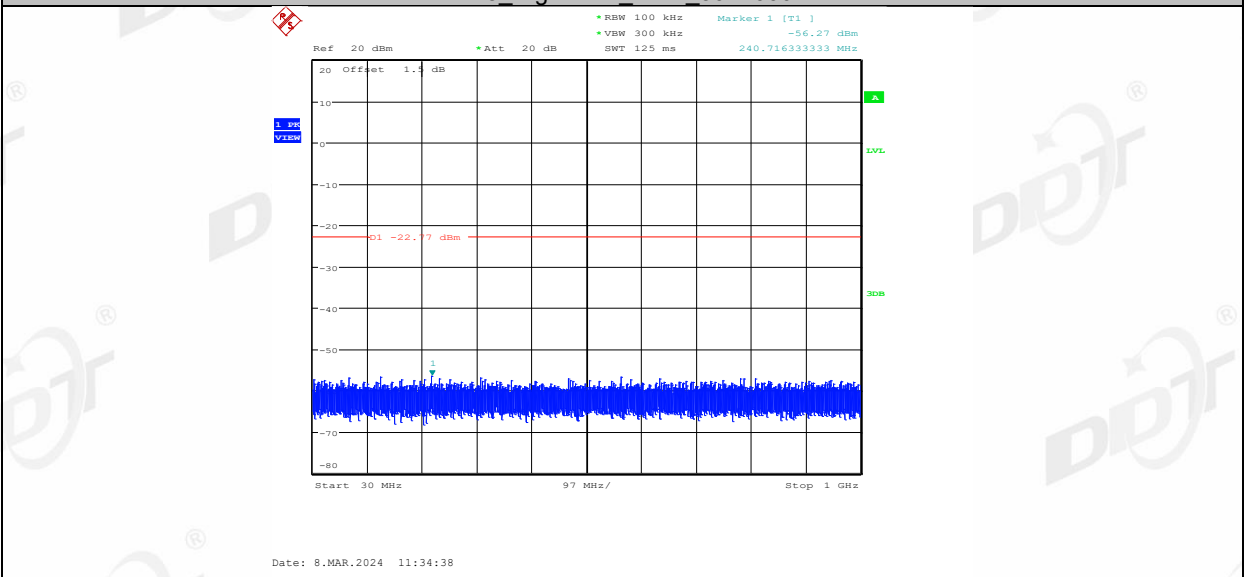

DH5 Right side 2441 1000~26500