

12. Hopping Channel Separation

12.1 Block Diagram Of Test Setup

EUT	SPECTRUM		
	ANALYZER		

12.2 Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 0.125W.

12.3 Test Procedure


- 1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
- 2. Set the spectrum analyzer: RBW = 30kHz. VBW = 100kHz , Span = 2.0MHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
- 3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section Submit this plot.

No.: BCTC/RF-EMC-005 Page 64 of 85 / / Edition: A.4





12.4 Test Result

Modulation	Test Channel	Test Channel Separation (MHz) Limit(MHz)		Result
GFSK	Low	1.012	0.577	PASS
GFSK	Middle	1.044	0.591	PASS
GFSK	High	1.05	0.581	PASS
π/4DQPSK	Low	1.062	0.793	PASS
π/4DQPSK	Middle	0.997	0.806	PASS
π/4DQPSK	High	1.026	0.807	PASS
8DPSK	8DPSK Low		0.803	PASS
8DPSK	8DPSK Middle		0.793	PASS
8DPSK	8DPSK High		0.804	PASS

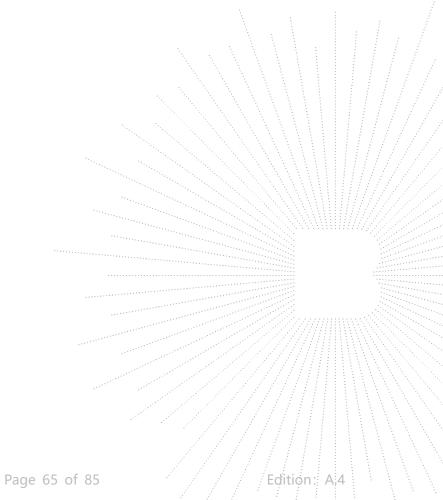

No.: BCTC/RF-EMC-005 Page 65 of 8

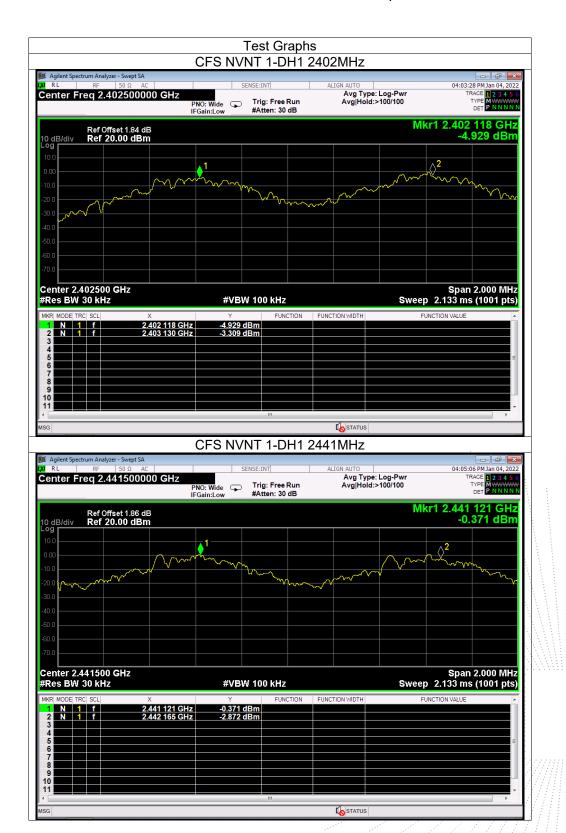


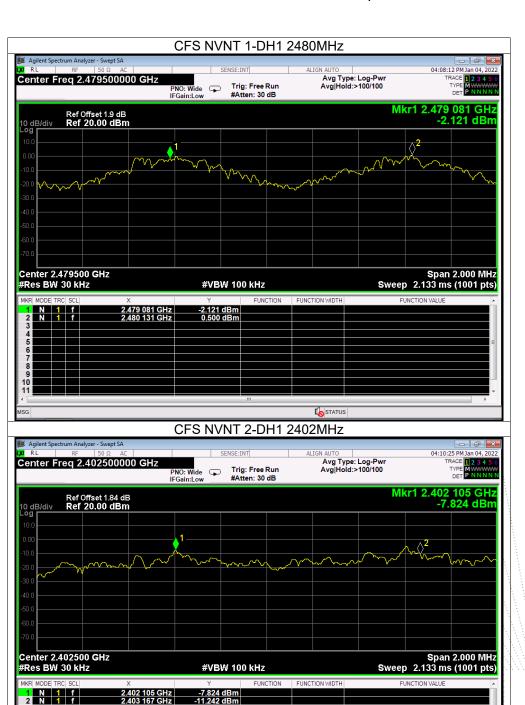

STATUS




STATUS

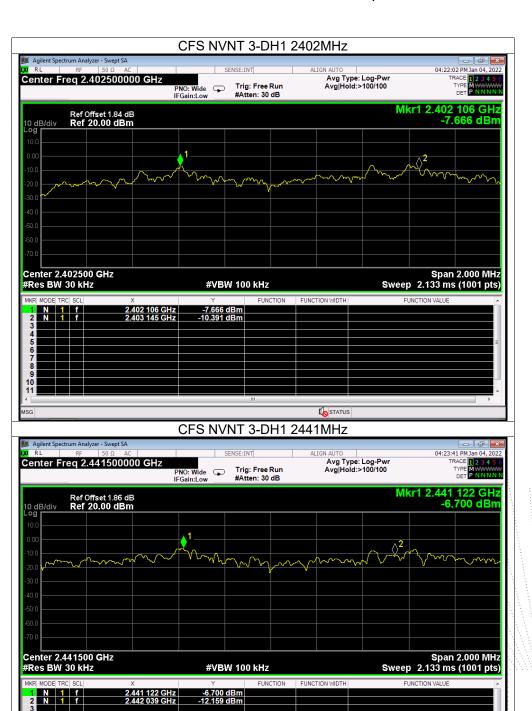

STATUS



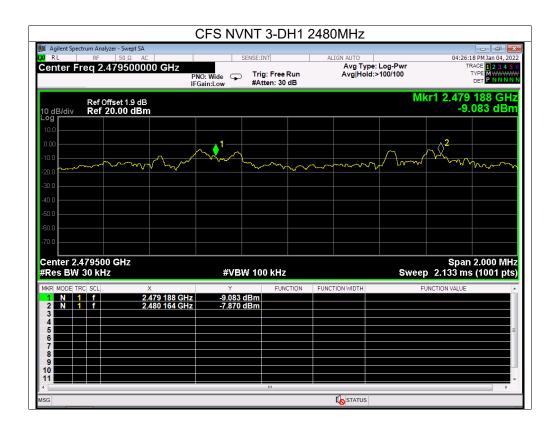





13. Number Of Hopping Frequency

13.1 Block Diagram Of Test Setup

EUT	SPECTRUM		
	ANALYZER		

13.2 Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.


13.3 Test Procedure

- 1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
- 2. Set the spectrum analyzer: RBW = 100kHz. VBW = 300kHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
- 3. Allow the trace to stabilize. It may prove necessary to break the span up to sections, in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section.
- 4. Set the spectrum analyzer: Start Frequency = 2.4GHz, Stop Frequency = 2.4835GHz. Sweep=auto;

No.: BCTC/RF-EMC-005 Page 71 of 85 / / Edition: A.4





13.4 Test Result

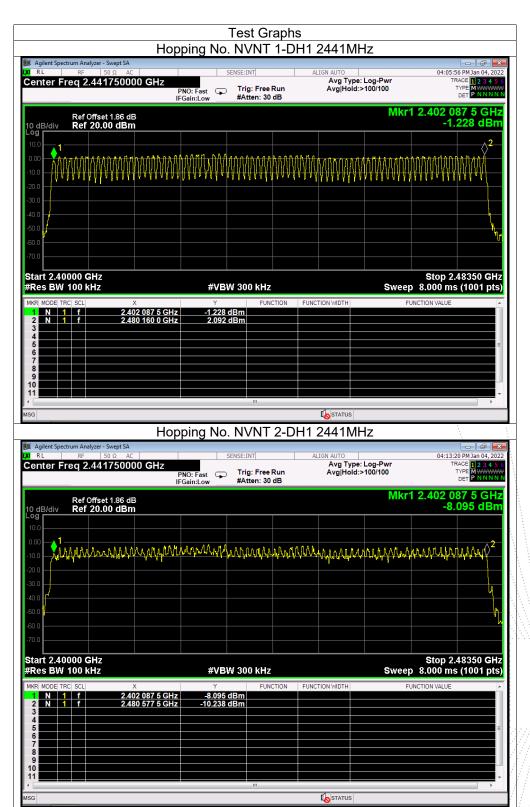



No.: BCTC/RF-EMC-005

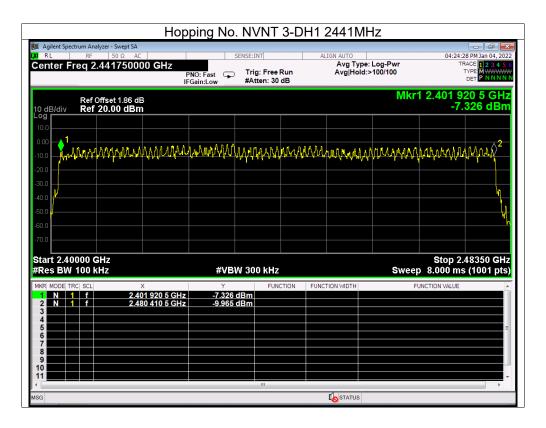

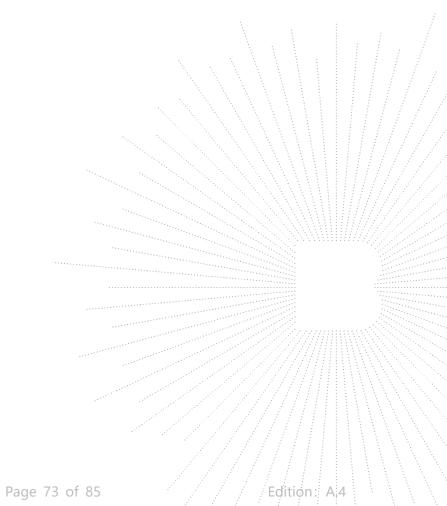



14. Dwell Time

14.1 Block Diagram Of Test Setup

EUT	SPECTRUM		
	ANALYZER		

14.2 Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

14.3 Test Procedure

- 1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
- 2. Set spectrum analyzer span = 0. Centred on a hopping channel;
- 3. Set RBW = 1MHz and VBW = 3MHz.Sweep = as necessary to capture the entire dwell time per hopping channel. Set the EUT for DH5, DH3 and DH1 packet transmitting.
- 4. Use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (e.g., data rate, modulation format, etc.), repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).

No.: BCTC/RF-EMC-005 Page 74 of 85 / / Edition: A.4



Edition: A.4

14.4 Test Result

DH5 Packet permit maximum 1600 / 79 / 6 hops per second in each channel (5 time slots RX, 1 time slot TX).

DH3 Packet permit maximum 1600 / 79 / 4 hops per second in each channel (3 time slots RX, 1 time slot TX).


DH1 Packet permit maximum 1600 / 79 /2 hops per second in each channel (1 time slot RX, 1 time slot TX). So, the Dwell Time can be calculated as follows:


DH5:1600/79/6*0.4*79*(MkrDelta)/1000 DH3:1600/79/4*0.4*79*(MkrDelta)/1000 DH1:1600/79/2*0.4*79*(MkrDelta)/1000 Remark: Mkr Delta is once pulse time.


Modulation	Channel Data	Packet	Pulse Time (ms)	Dwell Time (ms)	Limit (ms)	Verdict
		DH1	0.372	118.668	400	Pass
GFSK	Middle	DH3	1.64	262.4	400	Pass
		DH5	2.882	308.374	400	Pass
π/4DQPSK	Middle	2DH1	0.374	119.306	400	Pass
		2DH3	1.625	258.375	400	Pass
		2DH5	1.638	175.266	400	Pass
		3DH1	0.373	118.987	400	Pass
8DPSK	Middle	3DH3	1.624	258.216	400	Pass
		3DH5	2.872	307.304	400	Pass

No.: BCTC/RF-EMC-005 Page 75 of 85




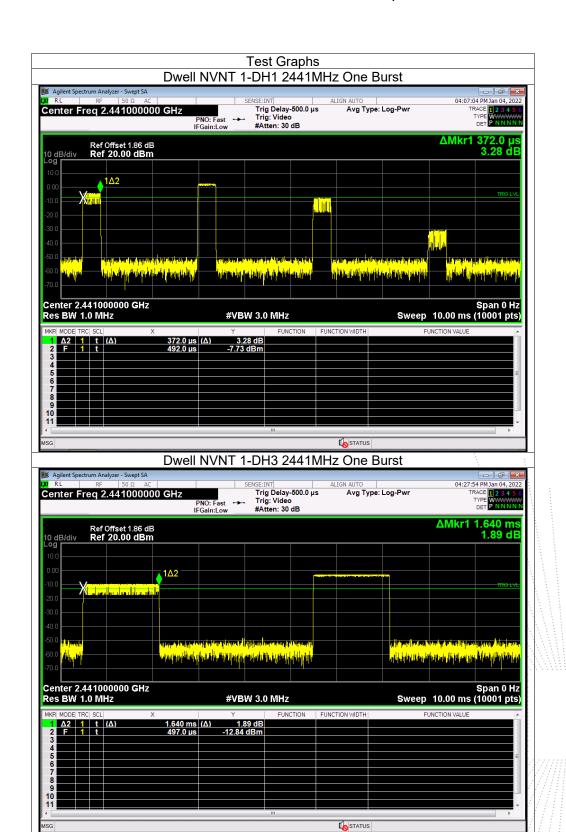


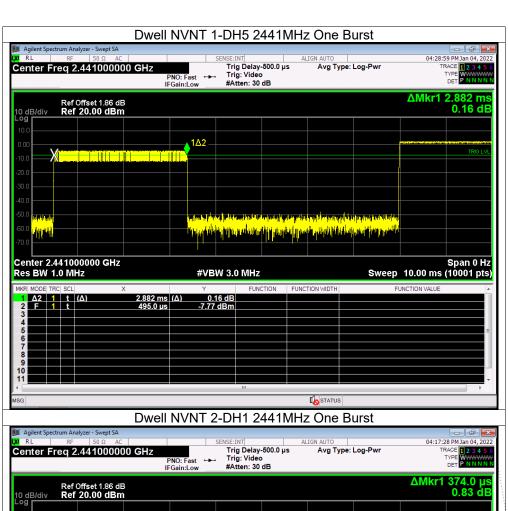


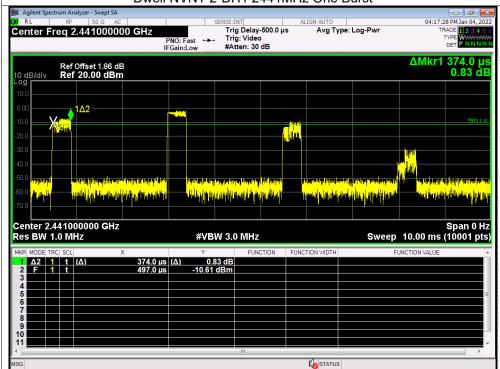




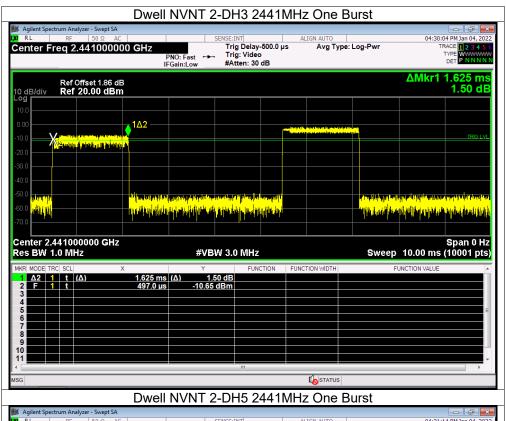

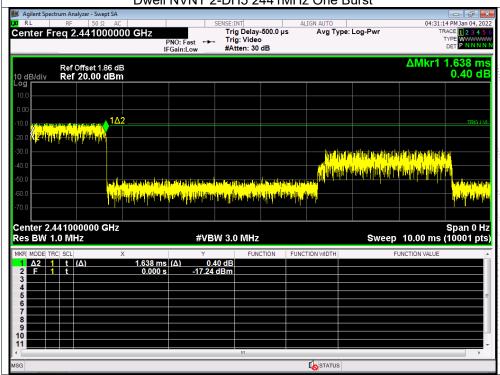


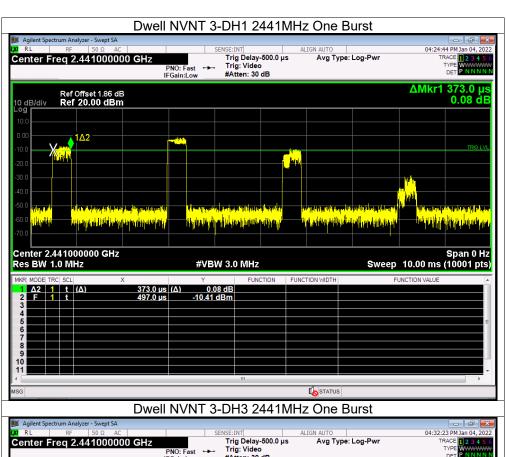

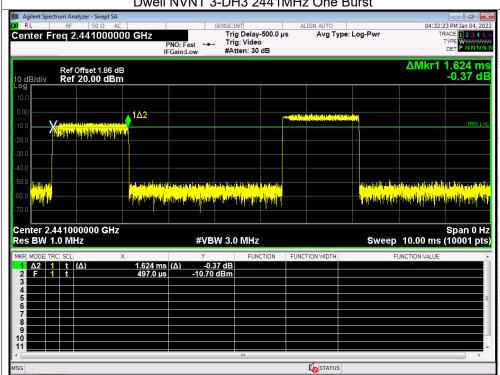



Edition: A.4

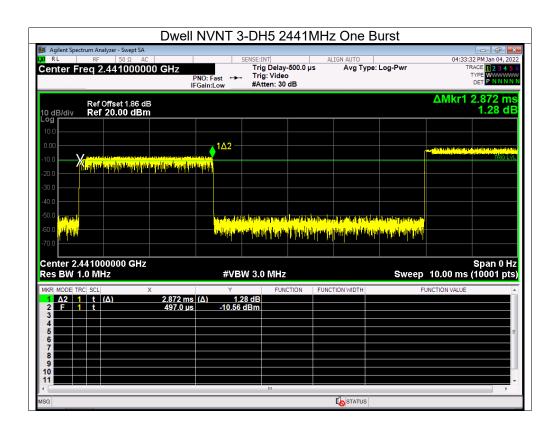






15. Antenna Requirement

15.1 Limit

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

15.2 Test Result

The EUT antenna is Internal antenna, fulfill the requirement of this section.

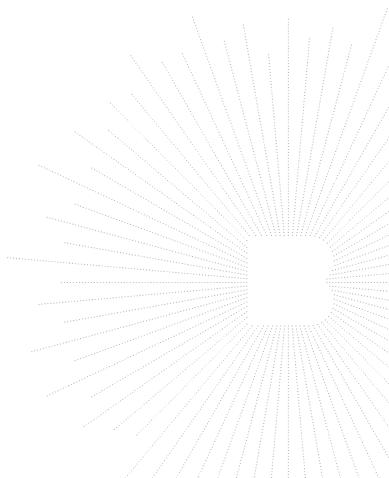

No.: BCTC/RF-EMC-005 Page 81 of 85



16. EUT Photographs

EUT Photo 1



EUT Photo 2





17. EUT Test Setup Photographs

Conducted Measurement Photos




Radiated Measurement Photos



No.: BCTC/RF-EMC-005 Page 83 of 85 / / Edition: A.4





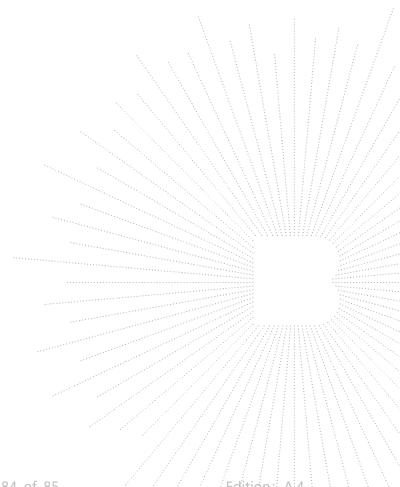

No.: BCTC/RF-EMC-005 Page 84 of 85

Edition: A.4



STATEMENT

1. The equipment lists are traceable to the national reference standards.

2.The test report can not be partially copied unless prior written approval is issued from our

lab.

3. The test report is invalid without stamp of laboratory.

4. The test report is invalid without signature of person(s) testing and authorizing.

5. The test process and test result is only related to the Unit Under Test.

6. The quality system of our laboratory is in accordance with ISO/IEC17025.

7.If there is any objection to report, the client should inform issuing laboratory within 15 days from the date of receiving test report.

Address:

1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Tangwei, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China

TEL: 400-788-9558

P.C.: 518103

FAX: 0755-33229357

Website: http://www.chnbctc.com

E-Mail: bctc@bctc-lab.com.cn

**** END ****

No.: BCTC/RF-EMC-005 Page 85 of 85 / / Edition: A4