

NORTHWEST EMC

BD Technologies

Conduit SMARTCAP

FCC 15.247:2016

Bluetooth Radio

Report # BDTE0001.1



NVLAP Lab Code: 200676-0

This report must not be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government of the United States of America.

CERTIFICATE OF TEST

Last Date of Test: July 26, 2016
BD Technologies
Model: Conduit SMARTCAP

Radio Equipment Testing

Standards

Specification	Method
FCC 15.247:2016	ANSI C63.10:2013 KDB 558074 D01 v03r05 (DTS)

Results

Method Clause	Test Description	Applied	Results	Comments
6.2	Powerline Conducted Emissions	No	N/A	Not required for a battery powered EUT.
6.5, 6.6, 11.12.1, 11.13.2	Spurious Radiated Emissions	Yes	Pass	
11.6	Duty Cycle	Yes	Pass	
11.8.2	Occupied Bandwidth	Yes	Pass	
11.9.2.2.4	Output Power	Yes	Pass	
11.10.2	Power Spectral Density	Yes	Pass	
11.11	Band Edge Compliance	Yes	Pass	
11.11	Spurious Conducted Emissions	Yes	Pass	

Deviations From Test Standards

None

Approved By:



Victor Ratinoff, Operations Manager

Product compliance is the responsibility of the client; therefore, the tests and equipment modes of operation represented in this report were agreed upon by the client, prior to testing. The results of this test pertain only to the sample(s) tested. The specific description is noted in each of the individual sections of the test report supporting this certificate of test. This report reflects only those tests from the referenced standards shown in the certificate of test. It does not include inspection or verification of labels, identification, marking or user information.

REVISION HISTORY

Revision Number	Description	Date	Page Number
00	None		

ACCREDITATIONS AND AUTHORIZATIONS

United States

FCC - Designated by the FCC as a Telecommunications Certification Body (TCB). Certification chambers, Open Area Test Sites, and conducted measurement facilities are listed with the FCC.

A2LA - Accredited by A2LA to ISO / IEC 17065 as a product certifier. This allows Northwest EMC to certify transmitters to FCC and IC specifications.

NVLAP - Each laboratory is accredited by NVLAP to ISO 17025

Canada

ISED - Recognized by Innovation, Science and Economic Development Canada as a Certification Body (CB). Certification chambers and Open Area Test Sites are filed with ISED.

European Union

European Commission – Validated by the European Commission as a Notified Body under the R&TTE Directive.

Australia/New Zealand

ACMA - Recognized by ACMA as a CAB for the acceptance of test data.

Korea

MSIP / RRA - Recognized by KCC's RRA as a CAB for the acceptance of test data.

Japan

VCCI - Associate Member of the VCCI. Conducted and radiated measurement facilities are registered.

Taiwan

BSMI – Recognized by BSMI as a CAB for the acceptance of test data.

NCC - Recognized by NCC as a CAB for the acceptance of test data.

Singapore

IDA – Recognized by IDA as a CAB for the acceptance of test data.

Israel

MOC – Recognized by MOC as a CAB for the acceptance of test data.

Hong Kong

OFCA – Recognized by OFCA as a CAB for the acceptance of test data.

Vietnam

MIC – Recognized by MIC as a CAB for the acceptance of test data.

SCOPE

For details on the Scopes of our Accreditations, please visit:

<http://www.nwemc.com/accreditations/>

<http://gsi.nist.gov/global/docs/cabs/designations.html>

MEASUREMENT UNCERTAINTY

Measurement Uncertainty

When a measurement is made, the result will be different from the true or theoretically correct value. The difference is the result of tolerances in the measurement system that cannot be completely eliminated. To the extent that technology allows us, it has been our aim to minimize this error. Measurement uncertainty is a statistical expression of measurement error qualified by a probability distribution.

A measurement uncertainty estimation has been performed for each test per our internal quality document QM205.4.6. The estimation is used to compare the measured result with its "true" or theoretically correct value. The expanded measurement uncertainty (K=2) can be found included as part of the applicable test description page. Our measurement data meets or exceeds the measurement uncertainty requirements of the applicable specification; therefore, the test data can be compared directly to the specification limit to determine compliance. The calculations for estimating measurement uncertainty are based upon ETSI TR 100 028 (or CISPR 16-4-2 as applicable), and are available upon request.


The following table represents the Measurement Uncertainty (MU) budgets for each of the tests that may be contained in this report.

Test	+ MU	- MU
Frequency Accuracy (Hz)	0.0007%	-0.0007%
Amplitude Accuracy (dB)	1.2 dB	-1.2 dB
Conducted Power (dB)	0.3 dB	-0.3 dB
Radiated Power via Substitution (dB)	0.7 dB	-0.7 dB
Temperature (degrees C)	0.7°C	-0.7°C
Humidity (% RH)	2.5% RH	-2.5% RH
Voltage (AC)	1.0%	-1.0%
Voltage (DC)	0.7%	-0.7%
Field Strength (dB)	5.2 dB	-5.2 dB
AC Powerline Conducted Emissions (dB)	2.4 dB	-2.4 dB

FACILITIES



California Labs OC01-13 41 Tesla Irvine, CA 92618 (949) 861-8918	Minnesota Labs MN01-08, MN10 9349 W Broadway Ave. Brooklyn Park, MN 55445 (612)-638-5136	New York Labs NY01-04 4939 Jordan Rd. Elbridge, NY 13060 (315) 554-8214	Oregon Labs EV01-12 22975 NW Evergreen Pkwy Hillsboro, OR 97124 (503) 844-4066	Texas Labs TX01-09 3801 E Plano Pkwy Plano, TX 75074 (469) 304-5255	Washington Labs NC01-05 19201 120 th Ave NE Bothell, WA 98011 (425)984-6600
NVLAP					
NVLAP Lab Code: 200676-0	NVLAP Lab Code: 200881-0	NVLAP Lab Code: 200761-0	NVLAP Lab Code: 200630-0	NVLAP Lab Code:201049-0	NVLAP Lab Code: 200629-0
Innovation, Science and Economic Development Canada					
2834B-1, 2834B-3	2834E-1	N/A	2834D-1, 2834D-2	2834G-1	2834F-1
BSMI					
SL2-IN-E-1154R	SL2-IN-E-1152R	N/A	SL2-IN-E-1017	SL2-IN-E-1158R	SL2-IN-E-1153R
VCCI					
A-0029	A-0109	N/A	A-0108	A-0201	A-0110
Recognized Phase I CAB for ACMA, BSMI, IDA, KCC/RRA, MIC, MOC, NCC, OFCA					
US0158	US0175	N/A	US0017	US0191	US0157

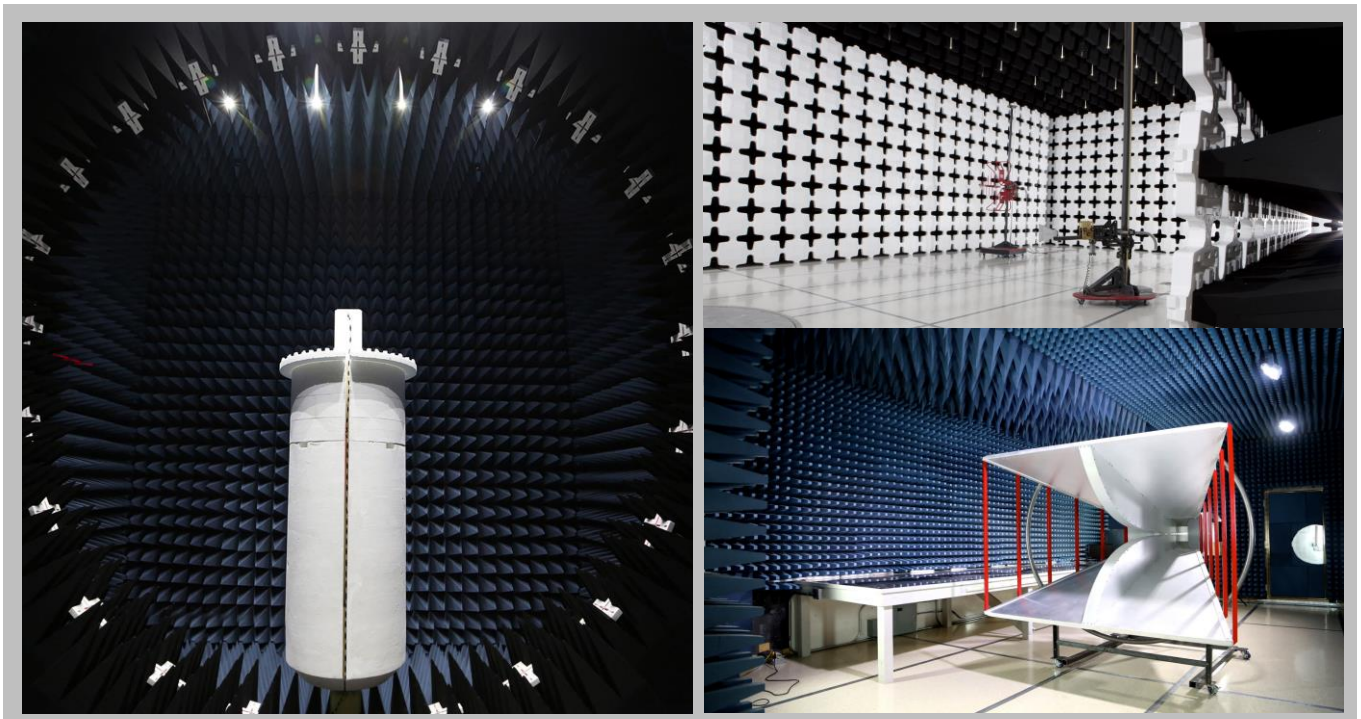

PRODUCT DESCRIPTION

Client and Equipment Under Test (EUT) Information

Company Name:	BD Technologies
Address:	21 Davis Drive
City, State, Zip:	Research Triangle Park, NC 27709
Test Requested By:	Michael Yarger
Model:	Conduit SMARTCAP
First Date of Test:	July 26, 2016
Last Date of Test:	July 26, 2016
Receipt Date of Samples:	July 26, 2016
Equipment Design Stage:	Production
Equipment Condition:	No Damage

Information Provided by the Party Requesting the Test

Functional Description of the EUT:

EUT is a Bluetooth Low Energy radio cap that goes on a insulin injector pen. It is meant to connect and log when the cap was removed and the pen used.

Testing Objective:

To demonstrate compliance of the Bluetooth Low Energy radio to FCC 15.247 requirements.

CONFIGURATIONS

Configuration BDTE0001- 2

EUT			
Description	Manufacturer	Model/Part Number	Serial Number
Conduit SMARTCAP - Direct Connect	BD Technologies	8D013	38

Peripherals in test setup boundary			
Description	Manufacturer	Model/Part Number	Serial Number
Laptop	Hewlett Packard	EliteBook 8460p	CNU20722GQ
Laptop Power Supply	Hewlett Packard	PPP012D-S	WCNXF0AAR5G0A2

Cables					
Cable Type	Shield	Length (m)	Ferrite	Connection 1	Connection 2
USB Cable	Yes	1.2m	No	Conduit SMARTCAP (Board)	Laptop
DC Cable	Yes	1.4m	Yes	Laptop	Laptop Power Supply
AC Cable	No	1.6m	No	Laptop Power Supply	AC Mains

Configuration BDTE0001- 3

EUT			
Description	Manufacturer	Model/Part Number	Serial Number
Conduit SMARTCAP - Low Channel	BD Technologies	8D013	35

Configuration BDTE0001- 4

EUT			
Description	Manufacturer	Model/Part Number	Serial Number
Conduit SMARTCAP - Mid Channel	BD Technologies	8D013	36

Configuration BDTE0001- 5

EUT			
Description	Manufacturer	Model/Part Number	Serial Number
Conduit SMARTCAP - High Channel	BD Technologies	8D013	37

MODIFICATIONS

Equipment Modifications

Item	Date	Test	Modification	Note	Disposition of EUT
1	7/26/2016	Spurious Radiated Emissions	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Northwest EMC following the test.
2	7/26/2016	Duty Cycle	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Northwest EMC following the test.
3	7/26/2016	Occupied Bandwidth	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Northwest EMC following the test.
4	7/26/2016	Output Power	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Northwest EMC following the test.
5	7/26/2016	Power Spectral Density	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Northwest EMC following the test.
6	7/26/2016	Band Edge Compliance	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Northwest EMC following the test.
7	7/26/2016	Spurious Conducted Emissions	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	Scheduled testing was completed.

SPURIOUS RADIATED EMISSIONS

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data. The test data represents the configuration / operating mode/ model that produced the highest emission levels as compared to the specification limit.

MODES OF OPERATION

Transmitting at Low Ch 0 - 2402 MHz, Mid Ch 20 - 2440 MHz, & High Ch 39 - 2480 MHz

POWER SETTINGS INVESTIGATED

Battery

CONFIGURATIONS INVESTIGATED

BDTE0001 - 3

BDTE0001 - 4

BDTE0001 - 5

FREQUENCY RANGE INVESTIGATED

Start Frequency	30 MHz	Stop Frequency	26000 MHz
-----------------	--------	----------------	-----------

SAMPLE CALCULATIONS

Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Interval
Attenuator	Coaxicom	66702 3910AF-20	TKI	3/3/2016	12 mo
Cable	Northwest EMC	8-18GHz RE Cables	OCO	8/26/2015	12 mo
Cable	Northwest EMC	18-26GHz RE Cables	OCK	1/6/2016	12 mo
Cable	Northwest EMC	1-8GHz RE Cables	OCJ	8/26/2015	12 mo
Cable	Northwest EMC	10kHz-1GHz RE Cables	OCH	3/3/2016	12 mo
Cable	ESM Cable Corp.	KMKM-72	OC1	1/6/2016	12 mo
Filter - Low Pass	Micro-Tronics	LPM50004	LFC	11/3/2015	12 mo
Filter - High Pass	Micro-Tronics	HPM50111	HFM	2/9/2016	12 mo
Antenna - Biconilog	EMCO	3142B	AXK	10/6/2014	24 mo
Amplifier - Pre-Amplifier	Miteq	AM-1064-9079	AOO	3/3/2016	12 mo
Amplifier - Pre-Amplifier	Miteq	AMF-6F-18002650-25-10P	AOI	1/6/2016	12 mo
Amplifier - Pre-Amplifier	Miteq	AMF-6F-12001800-30-10P	AOF	8/31/2015	12 mo
Amplifier - Pre-Amplifier	Miteq	AMF-6F-08001200-30-10P	AOE	8/31/2015	12 mo
Amplifier - Pre-Amplifier	Miteq	AMF-4D-010120-30-10P-1	AOP	8/26/2015	12 mo
Antenna - Standard Gain	ETS Lindgren	3160-08	AHT	NCR	0 mo
Antenna - Standard Gain	ETS Lindgren	3160-07	AHR	NCR	0 mo
Antenna - Standard Gain	ETS Lindgren	3160-09	AHN	NCR	0 mo
Antenna - Double Ridge	EMCO	3115	AHB	3/21/2016	24 mo
Analyzer - Spectrum Analyzer	Agilent	N9010A	AFJ	2/9/2016	12 mo

TEST DESCRIPTION

The highest gain of each type of antenna to be used with the EUT was tested. The EUT was configured for low, mid, and high band transmit frequencies. For each configuration, the spectrum was scanned throughout the specified range. In addition, measurements were made in the restricted bands to verify compliance. While scanning, emissions from the EUT were maximized by rotating the EUT on a turntable, adjusting the position of the EUT and the EUT antenna in three orthogonal axis, and adjusting measurement antenna height and polarization. A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.

SPURIOUS RADIATED EMISSIONS




PSA-ESCI 2016.04.26.1
EmiRS 2016.04.26.1

Work Order:	BDTE0001	Date:	07/26/16	
Project:	None	Temperature:	22 °C	
Job Site:	OC10	Humidity:	46.1% RH	
Serial Number:	See Configurations	Barometric Pres.:	1015 mbar	
EUT:	Conduit SMARTCAP			
Configuration:	3, 4, & 5			
Customer:	BD Technologies			
Attendees:	Michael Yarger			
EUT Power:	Battery			
Operating Mode:	Transmitting at Low Ch 0 - 2402 MHz, Mid Ch 20 - 2440 MHz, & High Ch 39 - 2480 MHz			
Deviations:	None			
Comments:	None			

Test Specifications	Test Method
FCC 15.247:2016	ANSI C63.10:2013

Run #	13	Test Distance (m)	3	Antenna Height(s)	1 to 4(m)	Results	Pass
--------------	----	--------------------------	---	--------------------------	-----------	----------------	------

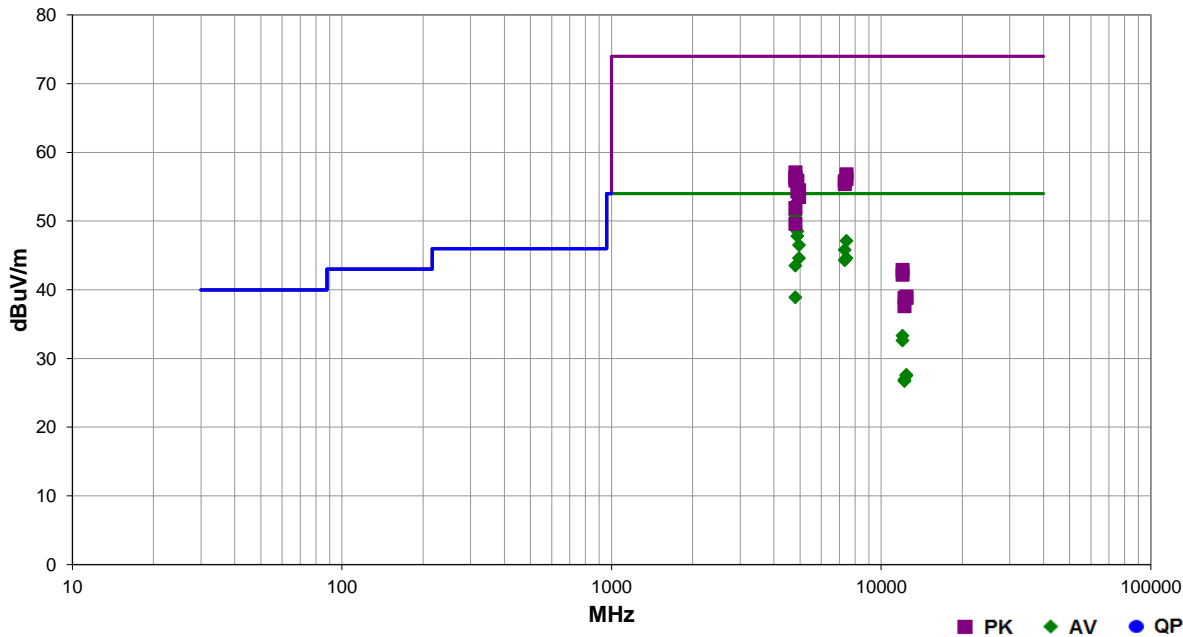

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Antenna Height (meters)	Azimuth (degrees)	Test Distance (meters)	External Attenuation (dB)	Polarity/Transducer Type	Detector	Distance Adjustment (dB)	Adjusted (dBuV/m)	Spec. Limit (dBuV/m)	Compared to Spec. (dB)	Comments
4803.985	42.2	10.4	1.5	232.0	3.0	0.0	Horz	AV	0.0	52.6	54.0	-1.4	EUT Y axis, Low ch
4804.010	40.9	10.4	1.5	261.0	3.0	0.0	Vert	AV	0.0	51.3	54.0	-2.7	EUT Z axis, Low ch
4803.930	40.5	10.4	4.0	159.0	3.0	0.0	Vert	AV	0.0	50.9	54.0	-3.1	EUT X axis, Low ch
4803.935	40.4	10.4	1.5	243.0	3.0	0.0	Horz	AV	0.0	50.8	54.0	-3.2	EUT X axis, Low ch
4883.880	37.9	10.6	1.5	234.0	3.0	0.0	Horz	AV	0.0	48.5	54.0	-5.5	EUT Y axis, Mid ch
4883.975	37.2	10.6	1.5	267.0	3.0	0.0	Vert	AV	0.0	47.8	54.0	-6.2	EUT Z axis, Mid ch
7439.805	30.7	16.4	1.5	157.0	3.0	0.0	Vert	AV	0.0	47.1	54.0	-6.9	EUT Z axis, High ch
4959.985	35.7	10.8	1.5	243.0	3.0	0.0	Horz	AV	0.0	46.5	54.0	-7.5	EUT Y axis, High ch
7326.070	29.6	16.2	1.5	168.0	3.0	0.0	Vert	AV	0.0	45.8	54.0	-8.2	EUT Z axis, Mid ch
4959.990	33.8	10.8	1.5	235.0	3.0	0.0	Vert	AV	0.0	44.6	54.0	-9.4	EUT Z axis, High ch
7439.845	28.2	16.4	1.5	224.0	3.0	0.0	Horz	AV	0.0	44.6	54.0	-9.4	EUT Y axis, High ch
7325.760	28.1	16.2	1.5	76.0	3.0	0.0	Horz	AV	0.0	44.3	54.0	-9.7	EUT Y axis, Mid ch
4803.925	33.1	10.4	1.5	339.0	3.0	0.0	Vert	AV	0.0	43.5	54.0	-10.5	EUT Y axis, Low ch
4804.055	28.5	10.4	1.5	176.0	3.0	0.0	Horz	AV	0.0	38.9	54.0	-15.1	EUT Z axis, Low ch
4804.110	46.7	10.4	1.5	232.0	3.0	0.0	Horz	PK	0.0	57.1	74.0	-16.9	EUT Y axis, Low ch
7440.990	40.4	16.4	1.5	157.0	3.0	0.0	Vert	PK	0.0	56.8	74.0	-17.2	EUT Z axis, High ch
4803.505	46.0	10.4	1.5	243.0	3.0	0.0	Horz	PK	0.0	56.4	74.0	-17.6	EUT X axis, Low ch
4804.255	45.8	10.4	1.5	261.0	3.0	0.0	Vert	PK	0.0	56.2	74.0	-17.8	EUT Z axis, Low ch

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Antenna Height (meters)	Azimuth (degrees)	Test Distance (meters)	External Attenuation (dB)	Polarity/ Transducer Type	Detector	Distance Adjustment (dB)	Adjusted (dBuV/m)	Spec. Limit (dBuV/m)	Compared to Spec. (dB)	Comments
7440.015	39.7	16.4	1.5	224.0	3.0	0.0	Horz	PK	0.0	56.1	74.0	-17.9	EUT Y axis, High ch
4804.145	45.5	10.4	4.0	159.0	3.0	0.0	Vert	PK	0.0	55.9	74.0	-18.1	EUT X axis, Low ch
4883.595	45.3	10.6	1.5	234.0	3.0	0.0	Horz	PK	0.0	55.9	74.0	-18.1	EUT Y axis, Mid ch
7326.280	39.6	16.2	1.5	168.0	3.0	0.0	Vert	PK	0.0	55.8	74.0	-18.2	EUT Z axis, Mid ch
7325.490	39.2	16.2	1.5	76.0	3.0	0.0	Horz	PK	0.0	55.4	74.0	-18.6	EUT Y axis, Mid ch
4960.175	43.7	10.8	1.5	243.0	3.0	0.0	Horz	PK	0.0	54.5	74.0	-19.5	EUT Y axis, High ch
4883.785	43.7	10.6	1.5	267.0	3.0	0.0	Vert	PK	0.0	54.3	74.0	-19.7	EUT Z axis, Mid ch
4959.445	42.7	10.8	1.5	235.0	3.0	0.0	Vert	PK	0.0	53.5	74.0	-20.5	EUT Z axis, High ch
12010.280	41.6	-8.3	1.5	202.0	3.0	0.0	Horz	AV	0.0	33.3	54.0	-20.7	EUT Y axis, Low ch
12010.220	40.9	-8.3	1.5	322.0	3.0	0.0	Vert	AV	0.0	32.6	54.0	-21.4	EUT Z axis, Low ch
4804.355	41.5	10.4	1.5	339.0	3.0	0.0	Vert	PK	0.0	51.9	74.0	-22.1	EUT Y axis, Low ch
4804.475	39.2	10.4	1.5	176.0	3.0	0.0	Horz	PK	0.0	49.6	74.0	-24.4	EUT Z axis, Low ch
12399.400	35.3	-7.7	1.5	308.0	3.0	0.0	Vert	AV	0.0	27.6	54.0	-26.4	EUT Z axis, High ch
12398.510	35.2	-7.7	1.5	287.0	3.0	0.0	Horz	AV	0.0	27.5	54.0	-26.5	EUT Y axis, High ch
12207.590	34.9	-8.0	1.5	229.0	3.0	0.0	Vert	AV	0.0	26.9	54.0	-27.1	EUT Z axis, Mid ch
12209.860	34.7	-8.0	1.8	350.0	3.0	0.0	Horz	AV	0.0	26.7	54.0	-27.3	EUT Y axis, Mid ch
12010.260	51.2	-8.3	1.5	202.0	3.0	0.0	Horz	PK	0.0	42.9	74.0	-31.1	EUT Y axis, Low ch
12010.290	50.5	-8.3	1.5	322.0	3.0	0.0	Vert	PK	0.0	42.2	74.0	-31.8	EUT Z axis, Low ch
12399.300	46.7	-7.7	1.5	308.0	3.0	0.0	Vert	PK	0.0	39.0	74.0	-35.0	EUT Z axis, High ch
12208.030	46.8	-8.0	1.5	229.0	3.0	0.0	Vert	PK	0.0	38.8	74.0	-35.2	EUT Z axis, Mid ch
12398.820	46.5	-7.7	1.5	287.0	3.0	0.0	Horz	PK	0.0	38.8	74.0	-35.2	EUT Y axis, High ch
12210.190	45.6	-8.0	1.8	350.0	3.0	0.0	Horz	PK	0.0	37.6	74.0	-36.4	EUT Y axis, Mid ch

SPURIOUS RADIATED EMISSIONS




PSA-ESCI 2016.04.26.1
EmiRS 2016.04.26.1

Work Order:	BDTE0001	Date:	07/26/16	
Project:	None	Temperature:	22 °C	
Job Site:	OC10	Humidity:	46.1% RH	
Serial Number:	See Configurations	Barometric Pres.:	1015 mbar	
EUT:	Conduit SMARTCAP			
Configuration:	3 & 5			
Customer:	BD Technologies			
Attendees:	Michael Yarger			
EUT Power:	Battery			
Operating Mode:	Transmitting at Low Ch 0 - 2402 MHz & High Ch 39 - 2480 MHz			
Deviations:	None			
Comments:	Band Edge			

Test Specifications	Test Method
FCC 15.247:2016	ANSI C63.10:2013

Run #	19	Test Distance (m)	3	Antenna Height(s)	1.5 to 4(m)	Results	Pass
--------------	----	--------------------------	---	--------------------------	-------------	----------------	------

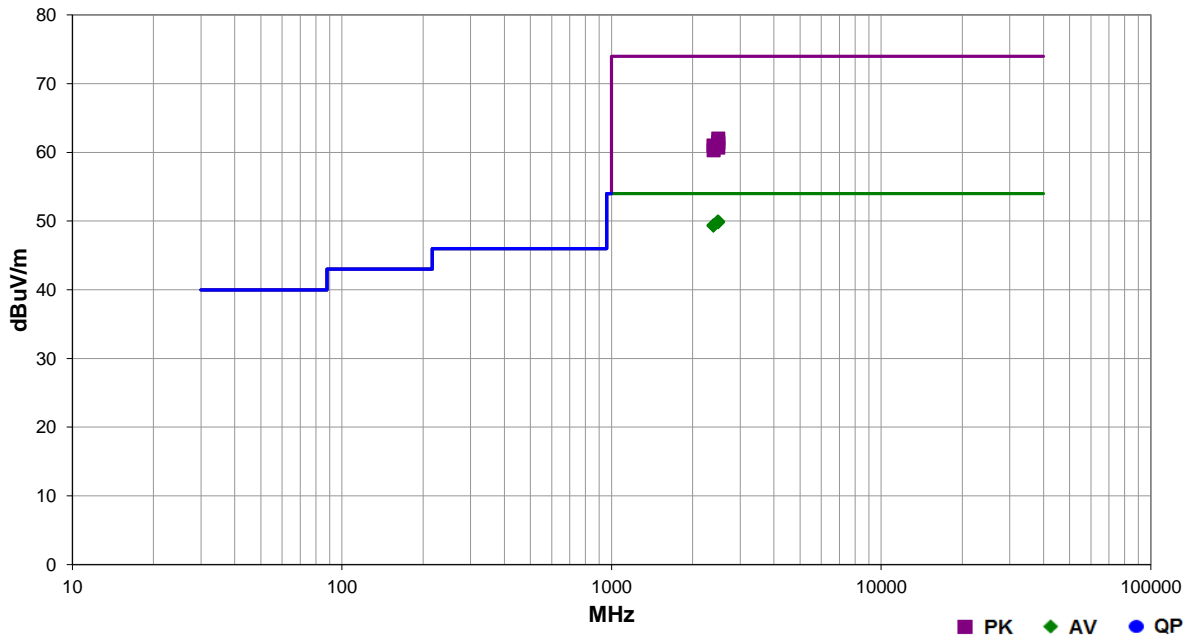

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Antenna Height (meters)	Azimuth (degrees)	Test Distance (meters)	External Attenuation (dB)	Polarity/Transducer Type	Detector	Distance Adjustment (dB)	Adjusted (dBuV/m)	Spec. Limit (dBuV/m)	Compared to Spec. (dB)	Comments
2483.807	28.1	1.8	1.5	255.0	3.0	20.0	Vert	AV	0.0	49.9	54.0	-4.1	EUT Z axis, High ch
2483.540	28.1	1.8	1.5	346.0	3.0	20.0	Horz	AV	0.0	49.9	54.0	-4.1	EUT Y axis, High ch
2485.023	28.1	1.8	1.5	219.0	3.0	20.0	Vert	AV	0.0	49.9	54.0	-4.1	EUT Y axis, High ch
2484.640	28.1	1.8	1.5	299.0	3.0	20.0	Horz	AV	0.0	49.9	54.0	-4.1	EUT X axis, High ch
2483.647	28.1	1.8	1.5	278.0	3.0	20.0	Vert	AV	0.0	49.9	54.0	-4.1	EUT X axis, High ch
2485.467	28.0	1.8	1.5	120.0	3.0	20.0	Horz	AV	0.0	49.8	54.0	-4.2	EUT Z axis, High ch
2388.020	28.1	1.3	1.5	53.0	3.0	20.0	Vert	AV	0.0	49.4	54.0	-4.6	EUT Z axis, Low ch
2388.380	28.0	1.3	2.0	224.0	3.0	20.0	Horz	AV	0.0	49.3	54.0	-4.7	EUT Y axis, Low ch
2485.287	40.2	1.8	1.5	346.0	3.0	20.0	Horz	PK	0.0	62.0	74.0	-12.0	EUT Y axis, High ch
2485.357	39.7	1.8	1.5	120.0	3.0	20.0	Horz	PK	0.0	61.5	74.0	-12.5	EUT Z axis, High ch
2483.553	39.5	1.8	1.5	219.0	3.0	20.0	Vert	PK	0.0	61.3	74.0	-12.7	EUT Y axis, High ch
2484.403	39.5	1.8	1.5	278.0	3.0	20.0	Vert	PK	0.0	61.3	74.0	-12.7	EUT X axis, High ch
2483.803	39.4	1.8	1.5	299.0	3.0	20.0	Horz	PK	0.0	61.2	74.0	-12.8	EUT X axis, High ch
2388.033	39.7	1.3	2.0	224.0	3.0	20.0	Horz	PK	0.0	61.0	74.0	-13.0	EUT Y axis, Low ch
2485.313	38.9	1.8	1.5	255.0	3.0	20.0	Vert	PK	0.0	60.7	74.0	-13.3	EUT Z axis, High ch
2389.860	39.0	1.3	1.5	53.0	3.0	20.0	Vert	PK	0.0	60.3	74.0	-13.7	EUT Z axis, Low ch

DUTY CYCLE

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Generator - Signal	Agilent	E8257D	TGU	2/5/2015	2/5/2018
Cable	Fairview Microwave	SCA1814-0101-120	OCZ	NCR	NCR
Block - DC	Aeroflex	INMET 8535	AMO	4/4/2016	4/4/2017
Attenuator	Fairview Microwave	SA18E-20	TKS	4/4/2016	4/4/2017
Analyzer - Spectrum Analyzer	Agilent	E4440A	AFA	11/19/2015	11/19/2016

TEST DESCRIPTION

The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer. The Duty Cycle (x) of the single channel operation of the radio as controlled by the provided test software was measured for each of the EUT operating modes.

There is no compliance requirement to be met by this test, so therefore no Pass / Fail criteria.

The measurements were made using a zero span on the spectrum analyzer to see the pulses in the time domain. The transmit power was set to its default maximum.


The duty cycle was calculated by dividing the transmission pulse duration (T) by the total period of a single on and total off time.

If the transmit duty cycle < 98 percent, burst gating may have been used during some of the other tests in this report to only take the measurement during the burst duration.

DUTY CYCLE




XMtr 2016.05.06

EUT: Conduit SMARTCAP		Work Order: BDTE0001	
Serial Number: 38		Date: 07/26/16	
Customer: BD Technologies		Temperature: 23.8 °C	
Attendees: Michael Yarger		Humidity: 46.7% RH	
Project: None		Barometric Pres.: 1013 mbar	
Tested by: Mark Baytan		Power: 3.0VDC	
		Job Site: OC13	
TEST SPECIFICATIONS			
FCC 15.247:2016		Test Method	
		ANSI C63.10:2013	
COMMENTS			
Reference level offset: DC Block + 20dB attenuator + cable + patch cable = 23.37 dB			
DEVIATIONS FROM TEST STANDARD			
None			
Configuration #	2	Signature 	


	Pulse Width	Period	Number of Pulses	Value (%)	Limit (%)	Results
BLE/GFSK Low Channel, 2402 MHz	430.7 us	624.9 us	1	68.9	N/A	N/A
BLE/GFSK Low Channel, 2402 MHz	N/A	N/A	5	N/A	N/A	N/A
BLE/GFSK Mid Channel, 2442 MHz	430.9 us	625.1 us	1	68.9	N/A	N/A
BLE/GFSK Mid Channel, 2442 MHz	N/A	N/A	5	N/A	N/A	N/A
BLE/GFSK High Channel, 2480 MHz	431.2 us	625.1 us	1	69	N/A	N/A
BLE/GFSK High Channel, 2480 MHz	N/A	N/A	5	N/A	N/A	N/A

DUTY CYCLE

BLE/GFSK Low Channel, 2402 MHz						
Pulse Width	Period	Number of Pulses	Value (%)	Limit (%)	Results	
430.7 us	624.9 us	1	68.9	N/A	N/A	

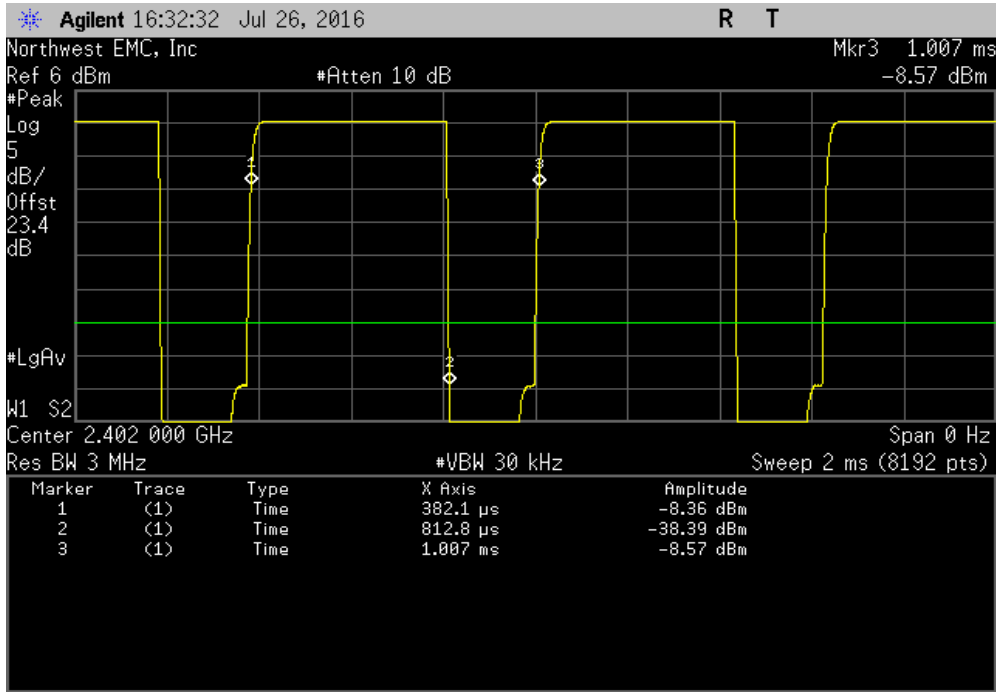


BLE/GFSK Low Channel, 2402 MHz						
Pulse Width	Period	Number of Pulses	Value (%)	Limit (%)	Results	
N/A	N/A	5	N/A	N/A	N/A	

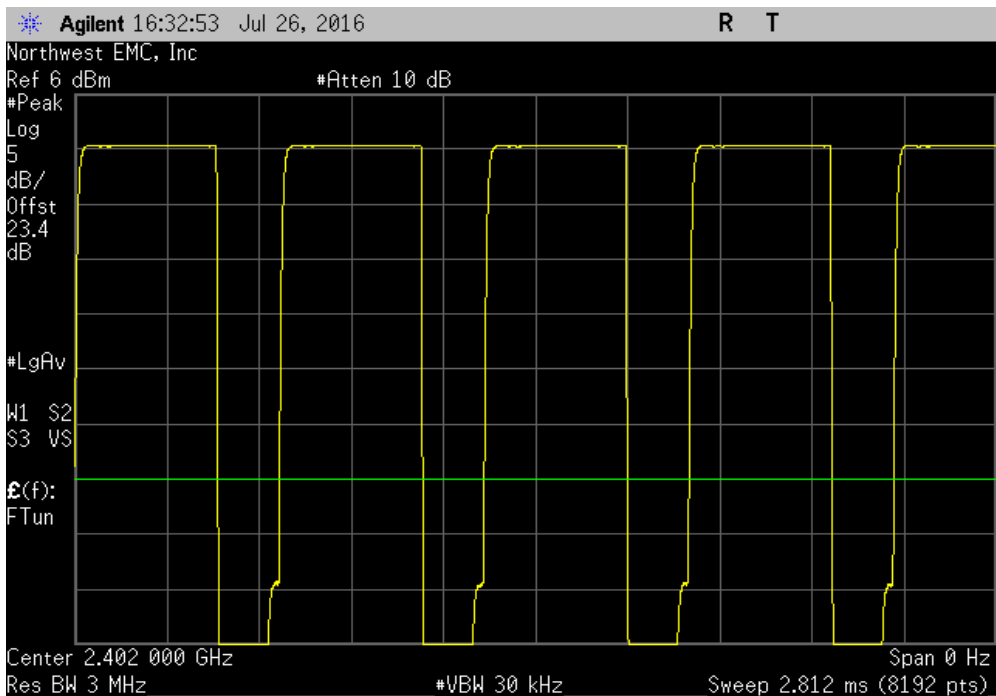


DUTY CYCLE

BLE/GFSK Mid Channel, 2442 MHz						
Pulse Width	Period	Number of Pulses	Value (%)	Limit (%)	Results	
430.9 us	625.1 us	1	68.9	N/A	N/A	

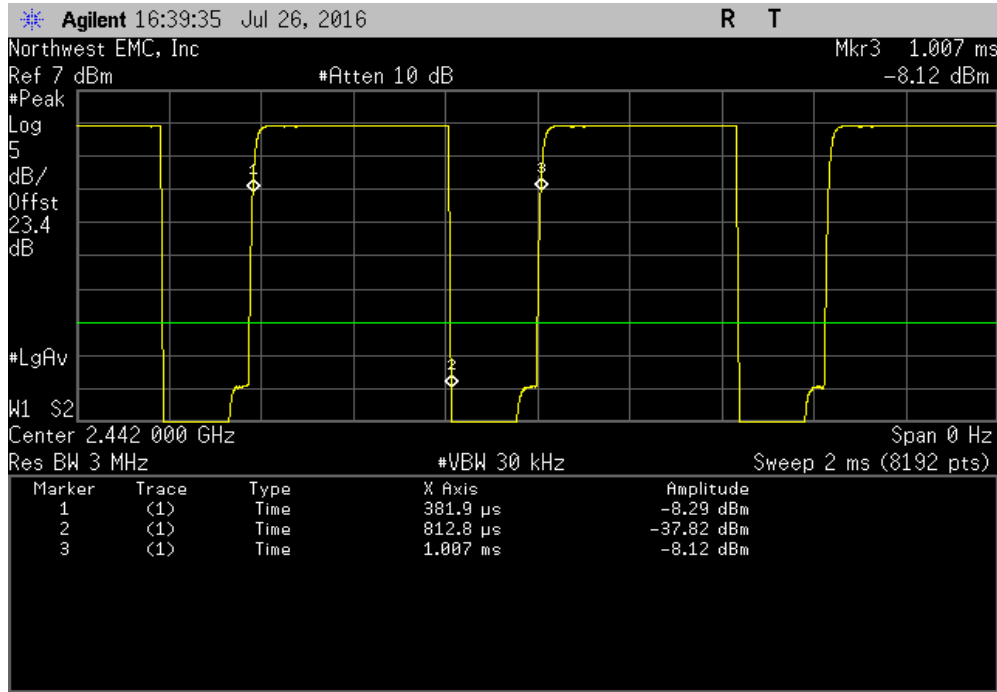


BLE/GFSK Mid Channel, 2442 MHz						
Pulse Width	Period	Number of Pulses	Value (%)	Limit (%)	Results	
N/A	N/A	5	N/A	N/A	N/A	

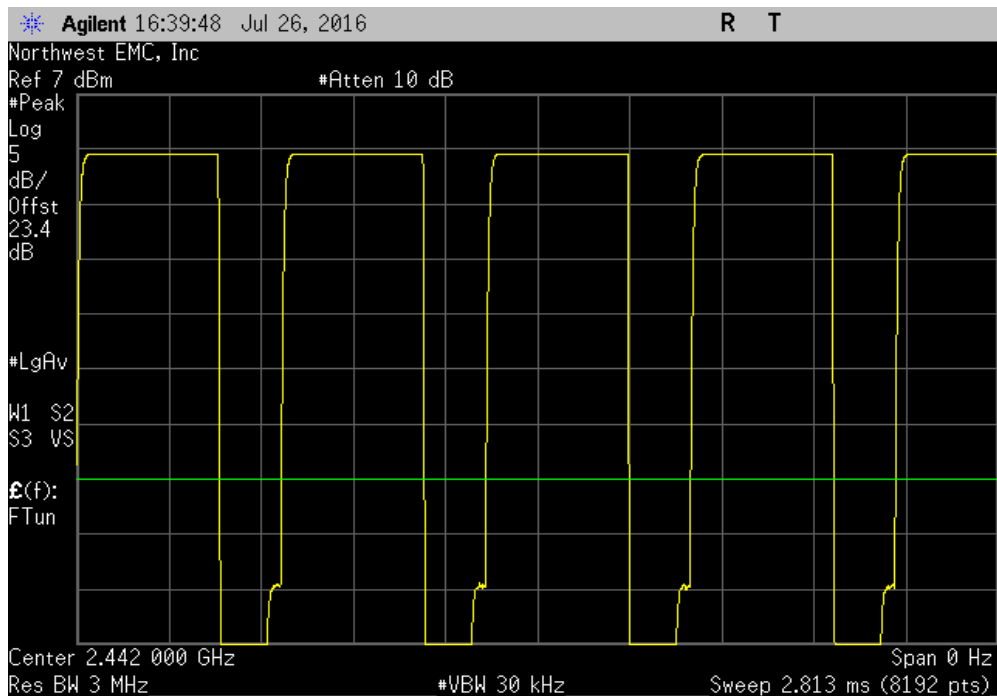


DUTY CYCLE

BLE/GFSK High Channel, 2480 MHz						
Pulse Width	Period	Number of Pulses	Value (%)	Limit (%)	Results	
431.2 us	625.1 us	1	69	N/A	N/A	

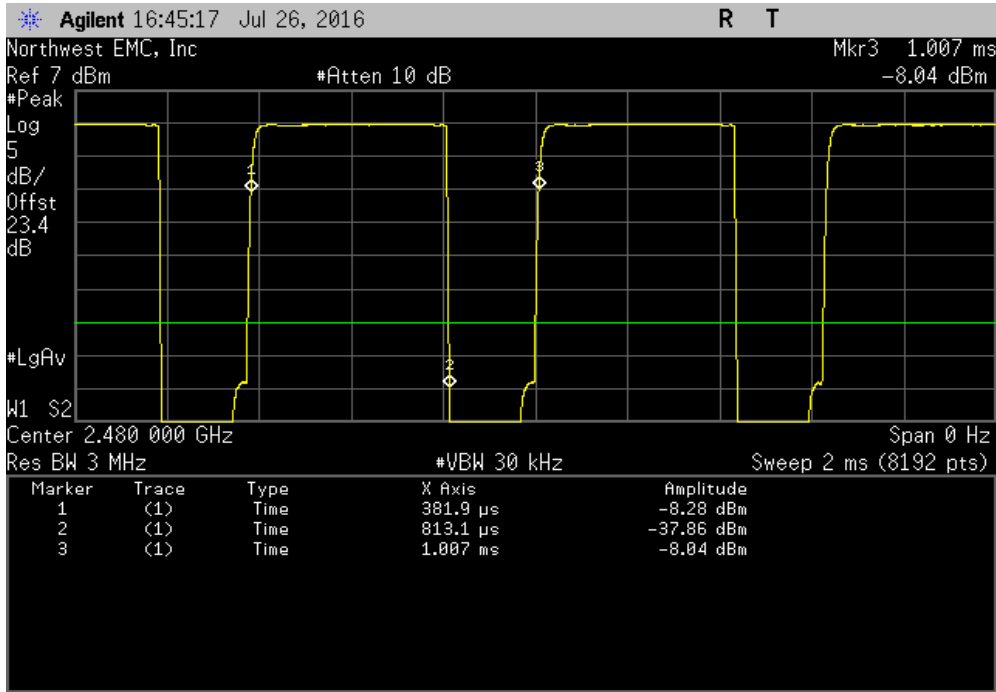

BLE/GFSK High Channel, 2480 MHz						
Pulse Width	Period	Number of Pulses	Value (%)	Limit (%)	Results	
N/A	N/A	5	N/A	N/A	N/A	

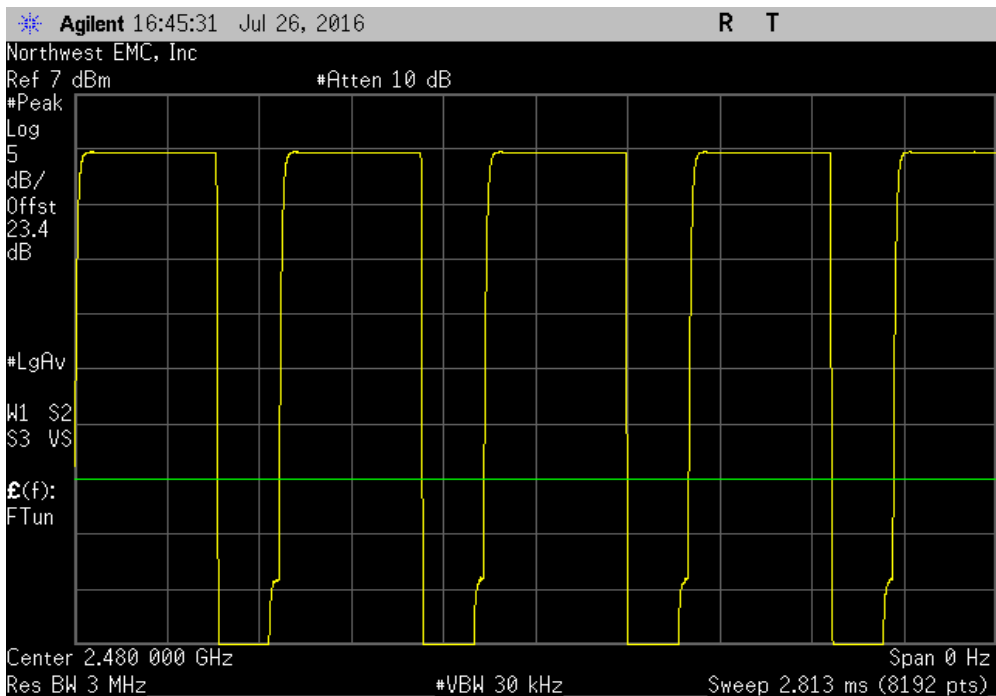

OCCUPIED BANDWIDTH

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Generator - Signal	Agilent	E8257D	TGU	2/5/2015	2/5/2018
Cable	Fairview Microwave	SCA1814-0101-120	OCZ	NCR	NCR
Block - DC	Aeroflex	INMET 8535	AMO	4/4/2016	4/4/2017
Attenuator	Fairview Microwave	SA18E-20	TKS	4/4/2016	4/4/2017
Analyzer - Spectrum Analyzer	Agilent	E4440A	AFA	11/19/2015	11/19/2016

TEST DESCRIPTION


The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer. The EUT was set to the channels and modes listed in the datasheet.

The 6dB occupied bandwidth was measured using 100 kHz resolution bandwidth and 300 kHz video bandwidth. The 99.0% occupied bandwidth was also measured at the same time which can be needed during Output Power depending on the applicable method.

OCCUPIED BANDWIDTH




XMR 2016.05.06


EUT: Conduit SMARTCAP		Work Order: BDTE0001															
Serial Number: 38		Date: 07/26/16															
Customer: BD Technologies		Temperature: 23.7 °C															
Attendees: Michael Yarger		Humidity: 46.3% RH															
Project: None		Barometric Pres.: 1013 mbar															
Tested by: Mark Baytan	Power: 3.0VDC	Job Site: OC13															
TEST SPECIFICATIONS																	
FCC 15.247:2016		Test Method: ANSI C63.10:2013															
COMMENTS																	
Reference level offset: DC Block + 20dB attenuator + cable + patch cable = 23.37 dB																	
DEVIATIONS FROM TEST STANDARD																	
None																	
Configuration #	2	Signature 															
		<table border="1"> <thead> <tr> <th>Value</th> <th>Limit (±)</th> <th>Result</th> </tr> </thead> <tbody> <tr> <td>BLE/GFSK Low Channel, 2402 MHz</td> <td>654.8 kHz</td> <td>500 kHz</td> <td>Pass</td> </tr> <tr> <td>BLE/GFSK Mid Channel, 2442 MHz</td> <td>668.417 kHz</td> <td>500 kHz</td> <td>Pass</td> </tr> <tr> <td>BLE/GFSK High Channel, 2480 MHz</td> <td>655.735 kHz</td> <td>500 kHz</td> <td>Pass</td> </tr> </tbody> </table>	Value	Limit (±)	Result	BLE/GFSK Low Channel, 2402 MHz	654.8 kHz	500 kHz	Pass	BLE/GFSK Mid Channel, 2442 MHz	668.417 kHz	500 kHz	Pass	BLE/GFSK High Channel, 2480 MHz	655.735 kHz	500 kHz	Pass
Value	Limit (±)	Result															
BLE/GFSK Low Channel, 2402 MHz	654.8 kHz	500 kHz	Pass														
BLE/GFSK Mid Channel, 2442 MHz	668.417 kHz	500 kHz	Pass														
BLE/GFSK High Channel, 2480 MHz	655.735 kHz	500 kHz	Pass														

OCCUPIED BANDWIDTH

BLE/GFSK Low Channel, 2402 MHz			Value	Limit	Result
			(≥)		
			654.8 kHz	500 kHz	Pass

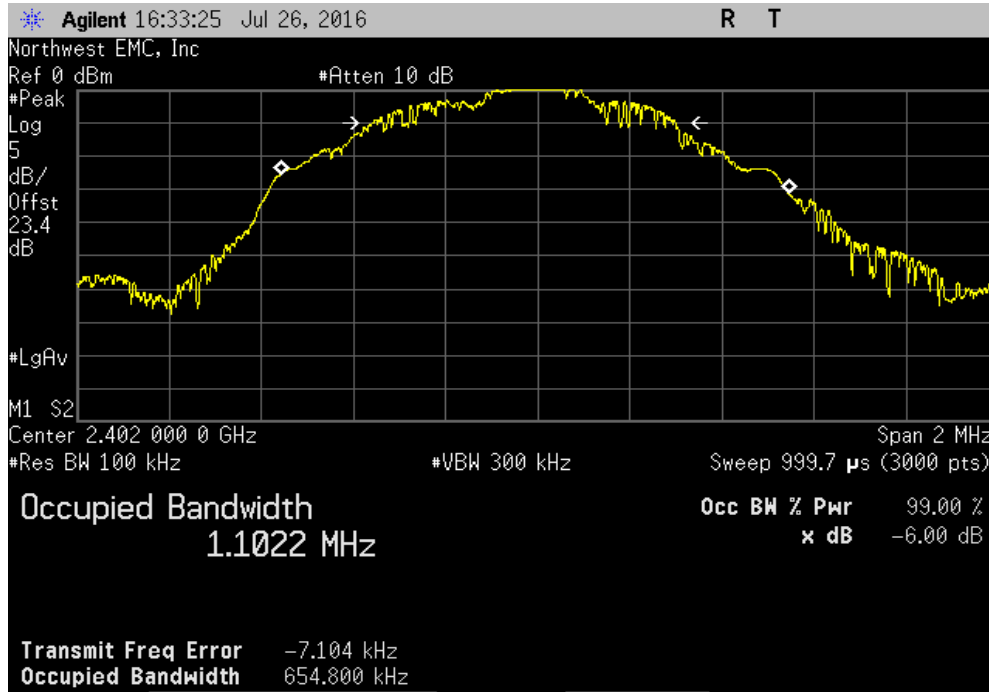


BLE/GFSK Mid Channel, 2442 MHz			Value	Limit	Result
			(≥)		
			668.417 kHz	500 kHz	Pass

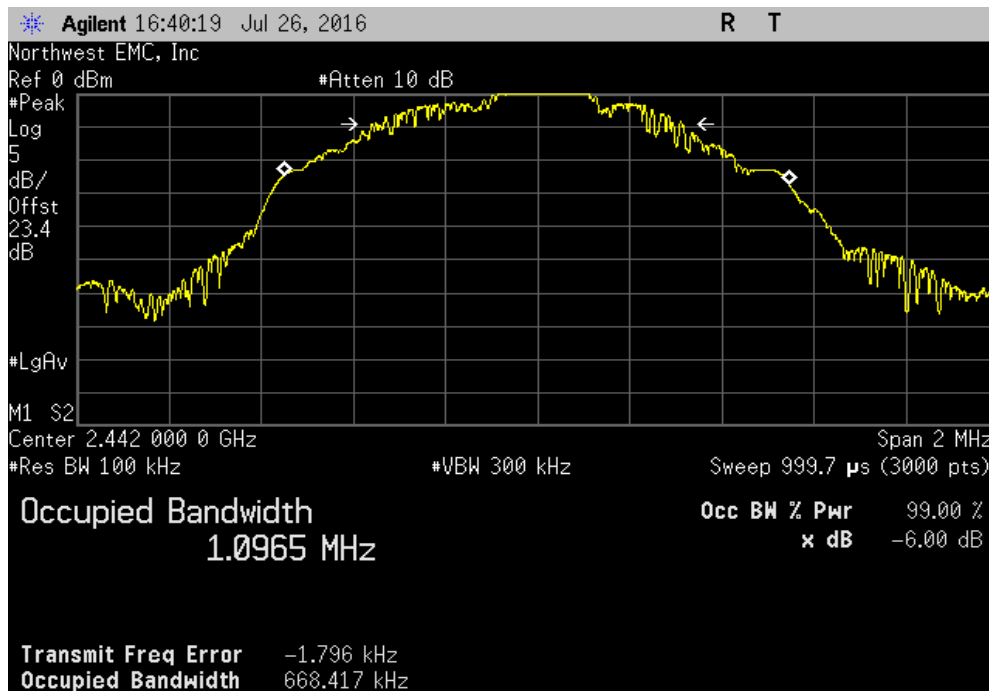

OCCUPIED BANDWIDTH

BLE/GFSK High Channel, 2480 MHz			Value	Limit	Result
			(≥)		
			655.735 kHz	500 kHz	Pass

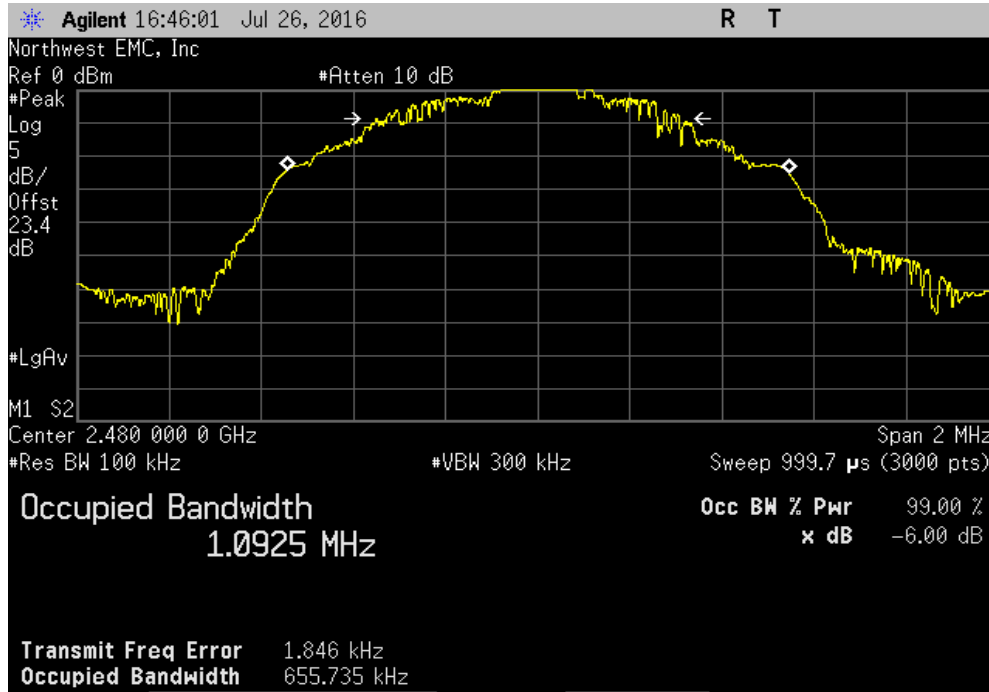

OUTPUT POWER

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Generator - Signal	Agilent	E8257D	TGU	2/5/2015	2/5/2018
Cable	Fairview Microwave	SCA1814-0101-120	OCZ	NCR	NCR
Block - DC	Aeroflex	INMET 8535	AMO	4/4/2016	4/4/2017
Attenuator	Fairview Microwave	SA18E-20	TKS	4/4/2016	4/4/2017
Analyzer - Spectrum Analyzer	Agilent	E4440A	AFA	11/19/2015	11/19/2016


TEST DESCRIPTION

The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer. The transmit frequency was set to the required channels in each band. The transmit power was set to its default maximum.

Prior to measuring peak transmit power the DTS bandwidth (B) and the transmission pulse duration (T) were measured. Both are required to determine the method of measuring Maximum Conducted Output Power. The transmission pulse duration (T) was measured using a zero span on the spectrum analyzer to see the pulses in the time domain.


The method found in ANSI C63.10:2013 Section 11.9.1 was used because the RBW on the analyzer was greater than the DTS Bandwidth of the radio..

OUTPUT POWER


EUT: Conduit SMARTCAP		Work Order: BDTE0001	
Serial Number: 38		Date: 07/26/16	
Customer: BD Technologies		Temperature: 23.8 °C	
Attendees: Michael Yarger		Humidity: 46.8% RH	
Project: None		Barometric Pres.: 1013 mbar	
Tested by: Mark Baytan		Power: 3.0VDC	
		Job Site: OC13	
TEST SPECIFICATIONS			
FCC 15.247:2016		Test Method	
		ANSI C63.10:2013	
COMMENTS			
Reference level offset: DC Block + 20dB attenuator + cable + patch cable = 23.37 dB			
DEVIATIONS FROM TEST STANDARD			
None			
Configuration #	2	Signature 	
		Value	Limit (-)
BLE/GFSK Low Channel, 2402 MHz		1.371 mW	1 W
BLE/GFSK Mid Channel, 2442 MHz		1.453 mW	1 W
BLE/GFSK High Channel, 2480 MHz		1.51 mW	1 W
			Result
			Pass
			Pass
			Pass

OUTPUT POWER

BLE/GFSK Low Channel, 2402 MHz						
				Value	Limit (<)	Result
				1.371 mW	1 W	Pass

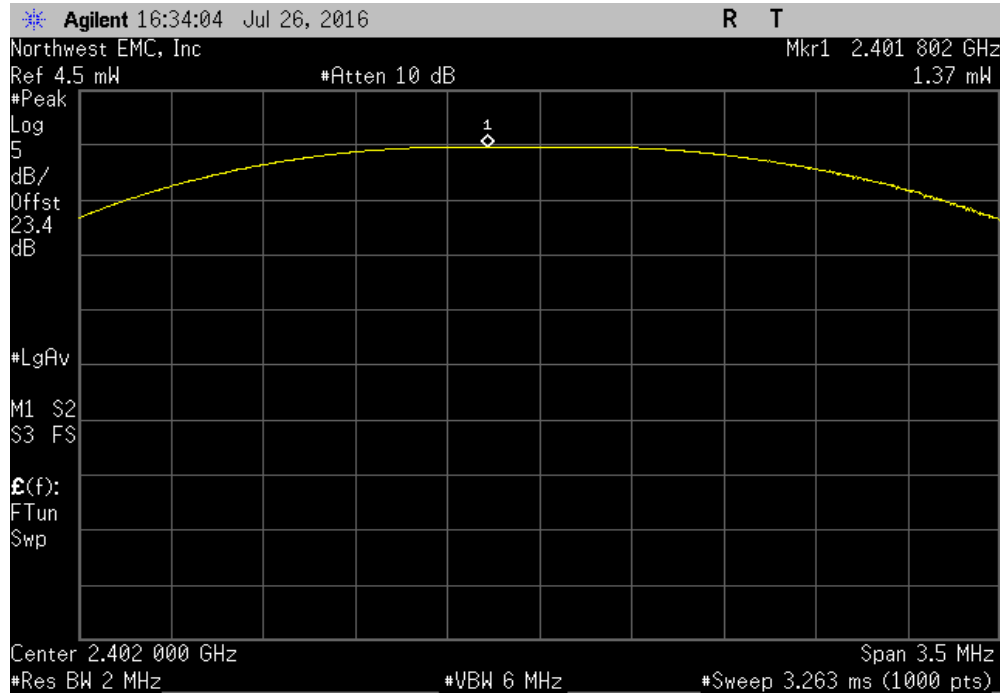


BLE/GFSK Mid Channel, 2442 MHz						
				Value	Limit (<)	Result
				1.453 mW	1 W	Pass

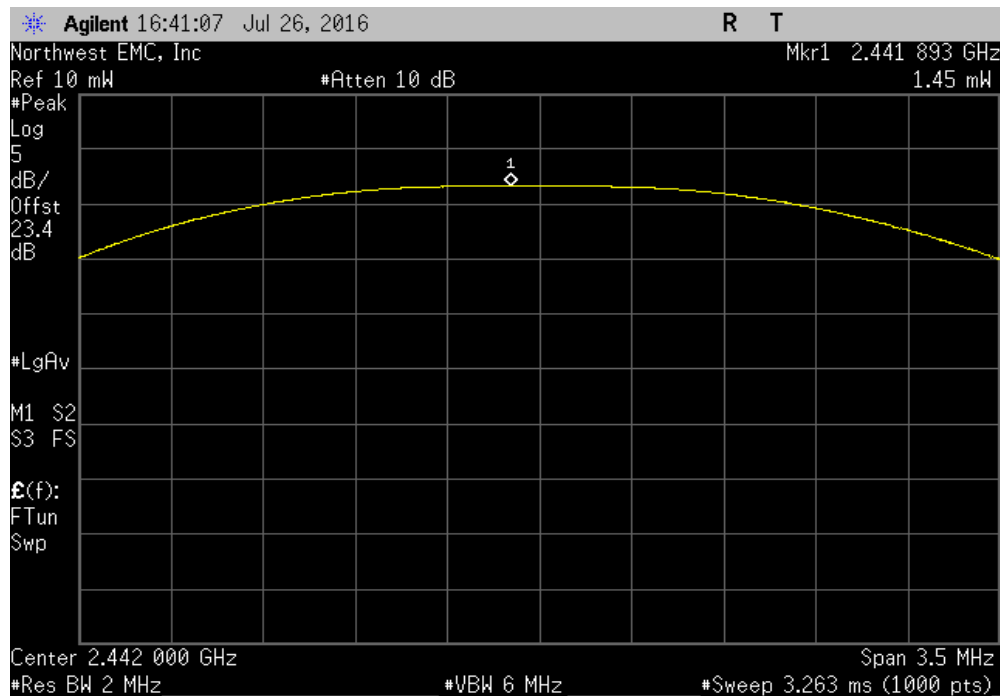

OUTPUT POWER

BLE/GFSK High Channel, 2480 MHz		
Value	Limit (<)	Result
1.51 mW	1 W	Pass

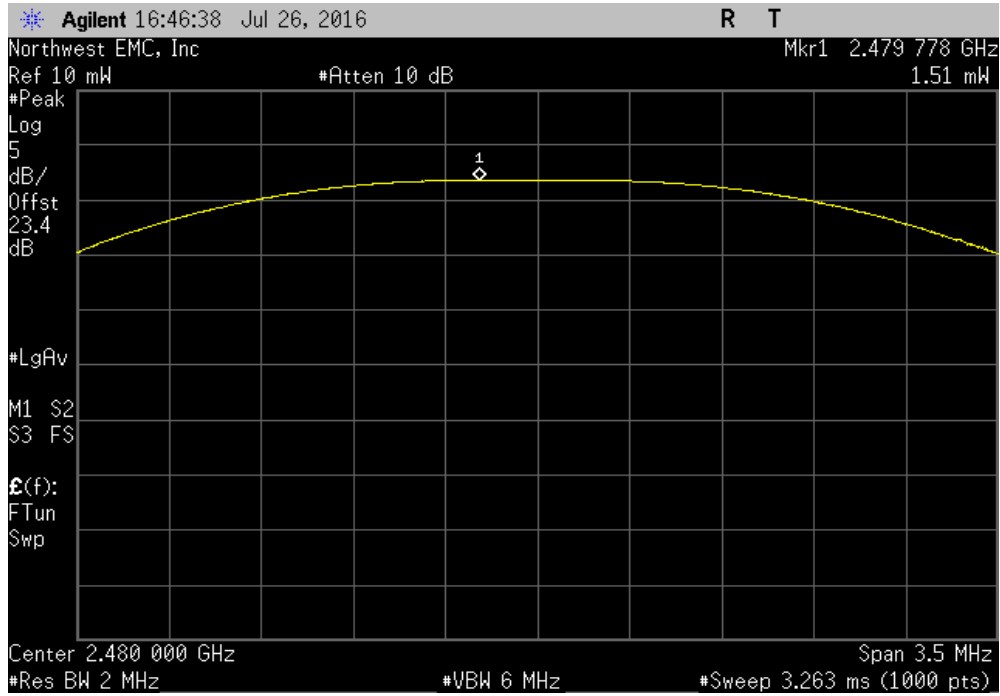

POWER SPECTRAL DENSITY

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Analyzer - Spectrum Analyzer	Agilent	E4440A	AFA	11/19/2015	11/19/2016
Attenuator	Fairview Microwave	SA18E-20	TKS	4/4/2016	4/4/2017
Block - DC	Aeroflex	INMET 8535	AMO	4/4/2016	4/4/2017
Cable	Fairview Microwave	SCA1814-0101-120	OCZ	NCR	NCR
Generator - Signal	Agilent	E8257D	TGU	2/5/2015	2/5/2018

TEST DESCRIPTION


The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer. The maximum power spectral density measurements was measured using the channels and modes as called out on the following data sheets.

Per the procedure outlined in ANSI C63.10 the peak power spectral density was measured in a 3 kHz RBW.

POWER SPECTRAL DENSITY




XMR 2016.05.06


EUT: Conduit SMARTCAP		Work Order: BDTE0001	
Serial Number: 38		Date: 07/26/16	
Customer: BD Technologies		Temperature: 23.6 °C	
Attendees: Michael Yarger		Humidity: 45.5% RH	
Project: None		Barometric Pres.: 1013 mbar	
Tested by: Mark Baytan		Power: 3.0VDC	Job Site: OC13
TEST SPECIFICATIONS			
FCC 15.247:2016		Test Method: ANSI C63.10:2013	
COMMENTS			
Reference level offset: DC Block + 20dB attenuator + cable + patch cable = 23.37 dB			
DEVIATIONS FROM TEST STANDARD			
None			
Configuration #	2	Signature 	
		Value dBm/3kHz	Limit < dBm/3kHz
BLE/GFSK Low Channel, 2402 MHz		-0.034	8
BLE/GFSK Mid Channel, 2442 MHz		0.327	8
BLE/GFSK High Channel, 2480 MHz		-0.164	8
			Results
			Pass
			Pass
			Pass

POWER SPECTRAL DENSITY

BLE/GFSK Low Channel, 2402 MHz				Value	Limit	Results
				dBm/3kHz	< dBm/3kHz	
				-0.034	8	Pass

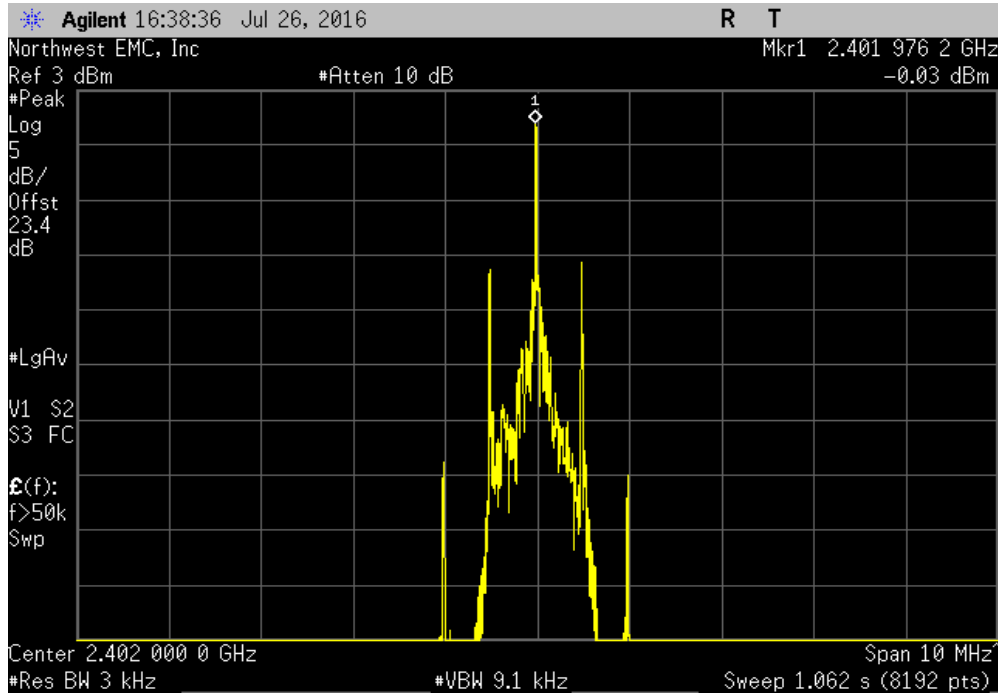


BLE/GFSK Mid Channel, 2442 MHz				Value	Limit	Results
				dBm/3kHz	< dBm/3kHz	
				0.327	8	Pass

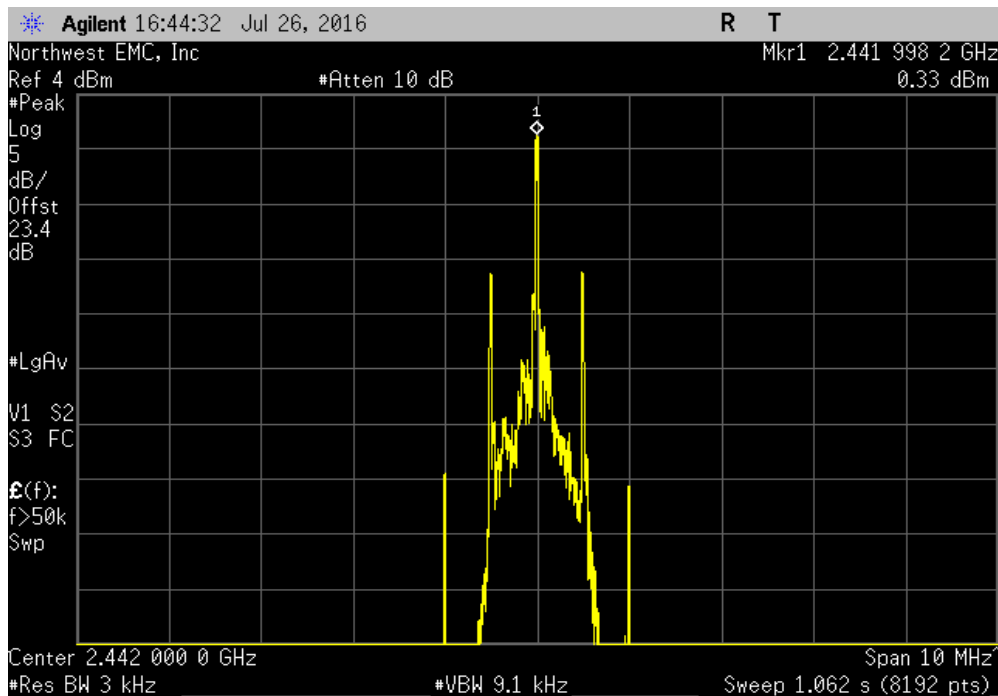

POWER SPECTRAL DENSITY

BLE/GFSK High Channel, 2480 MHz			
	Value	Limit	Results
	dBm/3kHz	< dBm/3kHz	
	-0.164	8	Pass

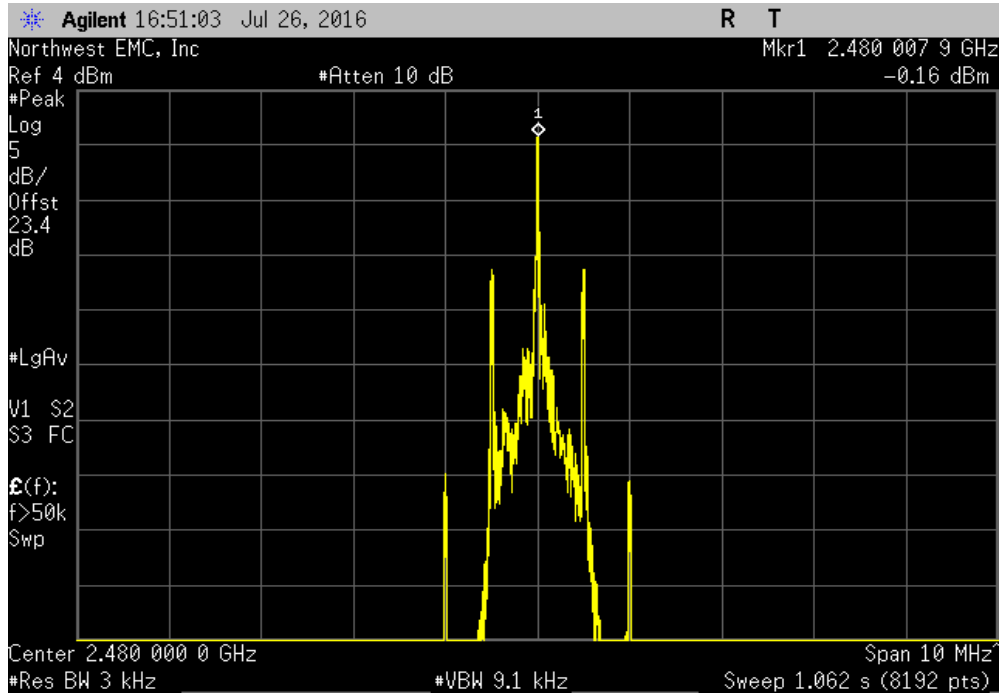

BAND EDGE COMPLIANCE

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Analyzer - Spectrum Analyzer	Agilent	E4440A	AFA	11/19/2015	11/19/2016
Attenuator	Fairview Microwave	SA18E-20	TKS	4/4/2016	4/4/2017
Block - DC	Aeroflex	INMET 8535	AMO	4/4/2016	4/4/2017
Cable	Fairview Microwave	SCA1814-0101-120	OCZ	NCR	NCR
Generator - Signal	Agilent	E8257D	TGU	2/5/2015	2/5/2018

TEST DESCRIPTION


The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer. The spurious RF conducted emissions at the edges of the authorized bands were measured with the EUT set to low and high transmit frequencies in each available band. The channels closest to the band edges were selected. The EUT was transmitting at the data rate(s) listed in the datasheet.

The spectrum was scanned below the lower band edge and above the higher band edge.

BAND EDGE COMPLIANCE




XMR 2016.05.06


EUT: Conduit SMARTCAP		Work Order: BDTE0001	
Serial Number: 38		Date: 07/26/16	
Customer: BD Technologies		Temperature: 23.6 °C	
Attendees: Michael Yarger		Humidity: 46.1% RH	
Project: None		Barometric Pres.: 1013 mbar	
Tested by: Mark Baytan		Power: 3.0VDC	
		Job Site: OC13	
TEST SPECIFICATIONS		Test Method	
FCC 15.247:2016		ANSI C63.10:2013	
COMMENTS			
Reference level offset: DC Block + 20dB attenuator + cable + patch cable = 23.37 dB			
DEVIATIONS FROM TEST STANDARD			
None			
Configuration #	2	Signature 	
		Value (dBc)	Limit ≤ (dBc) Result
BLE/GFSK Low Channel, 2402 MHz		-43.11	-20 Pass
BLE/GFSK High Channel, 2480 MHz		-52.47	-20 Pass

BAND EDGE COMPLIANCE

BLE/GFSK Low Channel, 2402 MHz				Value	Limit	Result
				(dBc)	≤ (dBc)	
				-43.11	-20	Pass

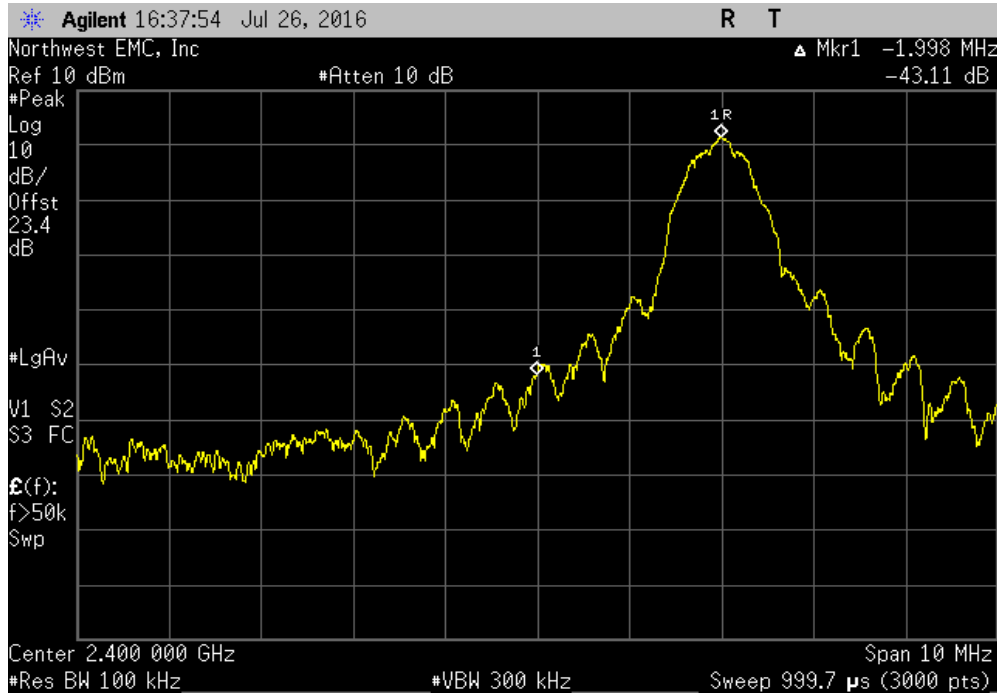

BLE/GFSK High Channel, 2480 MHz				Value	Limit	Result
				(dBc)	≤ (dBc)	
				-52.47	-20	Pass

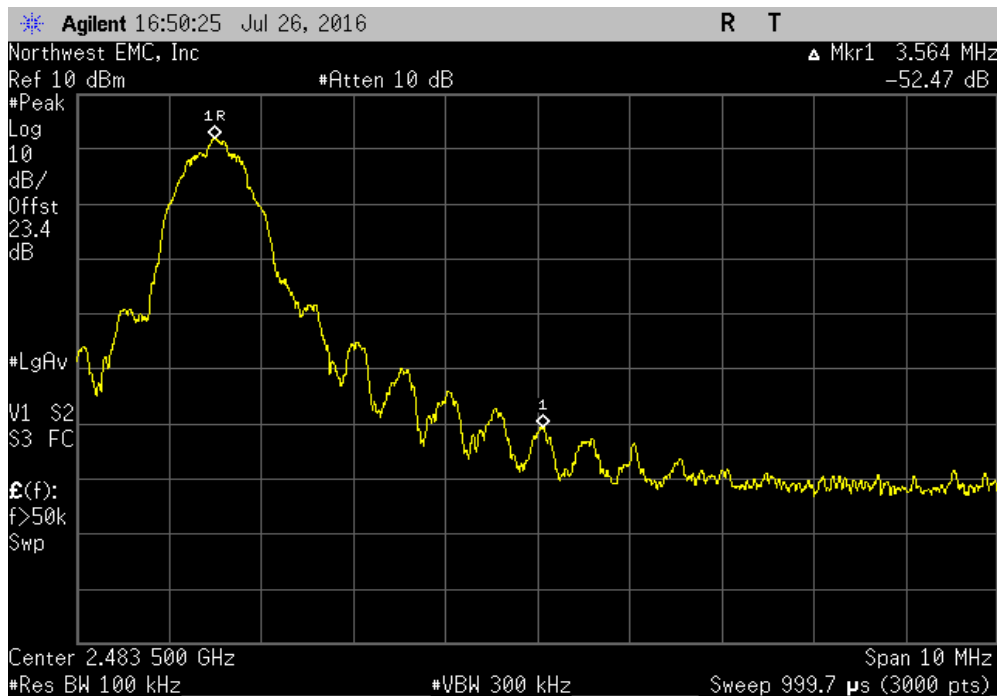

SPURIOUS CONDUCTED EMISSIONS

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Generator - Signal	Agilent	E8257D	TGU	2/5/2015	2/5/2018
Cable	Fairview Microwave	SCA1814-0101-120	OCZ	NCR	NCR
Block - DC	Aeroflex	INMET 8535	AMO	4/4/2016	4/4/2017
Attenuator	Fairview Microwave	SA18E-20	TKS	4/4/2016	4/4/2017
Analyzer - Spectrum Analyzer	Agilent	E4440A	AFA	11/19/2015	11/19/2016


TEST DESCRIPTION

The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer. The spurious RF conducted emissions were measured with the EUT set to low, medium and high transmit frequencies. The EUT was transmitting at the data rate(s) listed in the datasheet. For each transmit frequency, the spectrum was scanned throughout the specified frequency range.

SPURIOUS CONDUCTED EMISSIONS




XMR 2016.05.06


EUT: Conduit SMARTCAP		Work Order: BDTE0001			
Serial Number: 38		Date: 07/26/16			
Customer: BD Technologies		Temperature: 23.6 °C			
Attendees: Michael Yarger		Humidity: 45.5% RH			
Project: None		Barometric Pres.: 1013 mbar			
Tested by: Mark Baytan		Power: 3.0VDC			
TEST SPECIFICATIONS		Test Method			
FCC 15.247:2016		ANSI C63.10:2013			
COMMENTS					
Reference level offset: DC Block + 20dB attenuator + cable + patch cable = 23.37 dB					
DEVIATIONS FROM TEST STANDARD					
None					
Configuration #	2	Signature 			
		Frequency Range	Max Value (dBc)	Limit ≤ (dBc)	Result
BLE/GFSK Low Channel, 2402 MHz		Fundamental	N/A	N/A	N/A
BLE/GFSK Low Channel, 2402 MHz		30 MHz - 12.5 GHz	-42.86	-20	Pass
BLE/GFSK Low Channel, 2402 MHz		12.5 GHz - 25 GHz	-52.96	-20	Pass
BLE/GFSK Mid Channel, 2442 MHz		Fundamental	N/A	N/A	N/A
BLE/GFSK Mid Channel, 2442 MHz		30 MHz - 12.5 GHz	-43.44	-20	Pass
BLE/GFSK Mid Channel, 2442 MHz		12.5 GHz - 25 GHz	-52.41	-20	Pass
BLE/GFSK High Channel, 2480 MHz		Fundamental	N/A	N/A	N/A
BLE/GFSK High Channel, 2480 MHz		30 MHz - 12.5 GHz	-43.21	-20	Pass
BLE/GFSK High Channel, 2480 MHz		12.5 GHz - 25 GHz	-52.84	-20	Pass

SPURIOUS CONDUCTED EMISSIONS

BLE/GFSK Low Channel, 2402 MHz					
Frequency Range		Max Value (dBc)	Limit ≤ (dBc)	Result	
Fundamental		N/A	N/A	N/A	

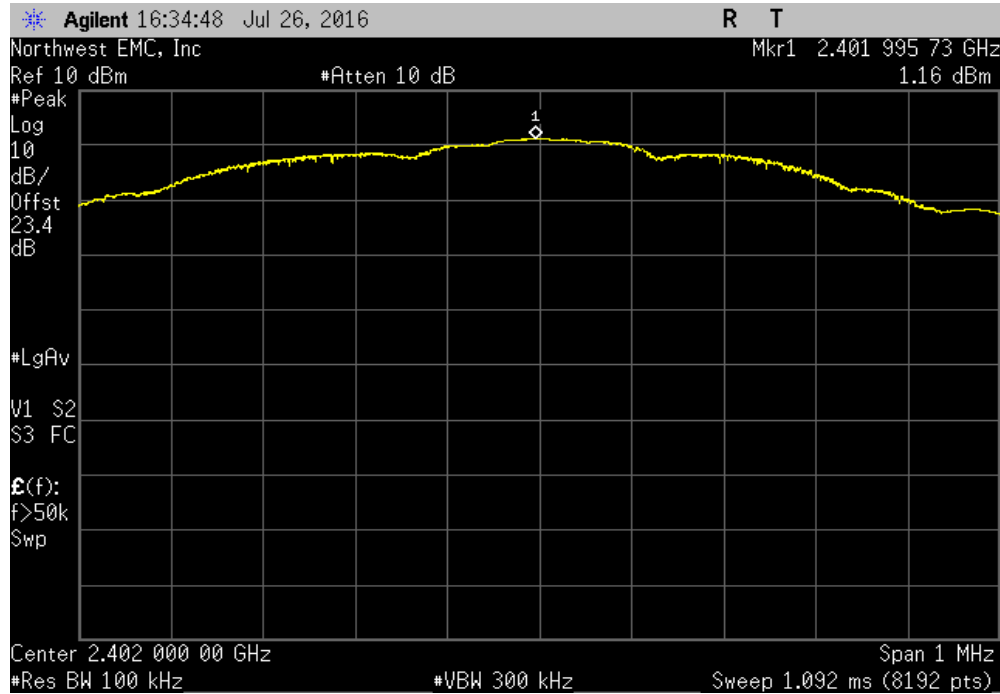


BLE/GFSK Low Channel, 2402 MHz					
Frequency Range		Max Value (dBc)	Limit ≤ (dBc)	Result	
30 MHz - 12.5 GHz		-42.86	-20	Pass	

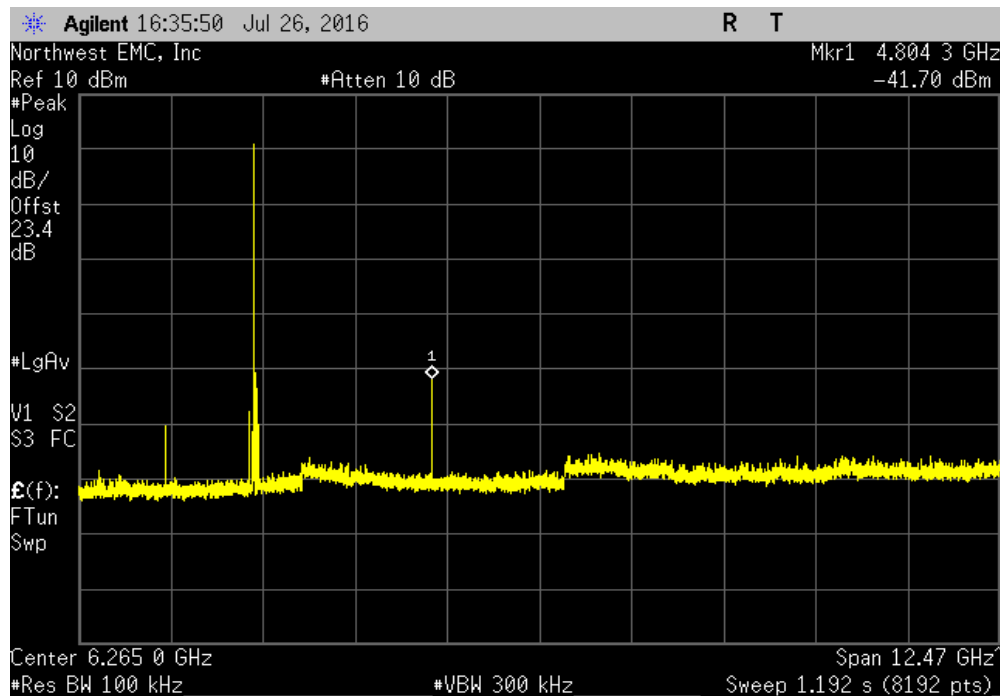


SPURIOUS CONDUCTED EMISSIONS

BLE/GFSK Low Channel, 2402 MHz				
Frequency Range	Max Value (dBc)	Limit ≤ (dBc)	Result	
12.5 GHz - 25 GHz	-52.96	-20	Pass	

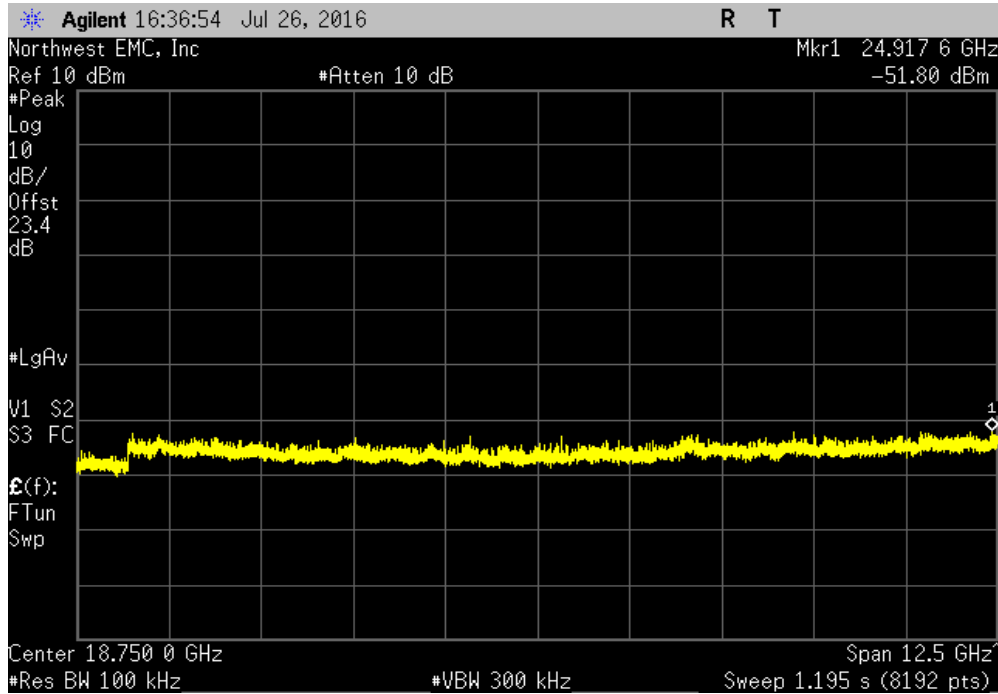


BLE/GFSK Mid Channel, 2442 MHz				
Frequency Range	Max Value (dBc)	Limit ≤ (dBc)	Result	
Fundamental	N/A	N/A	N/A	

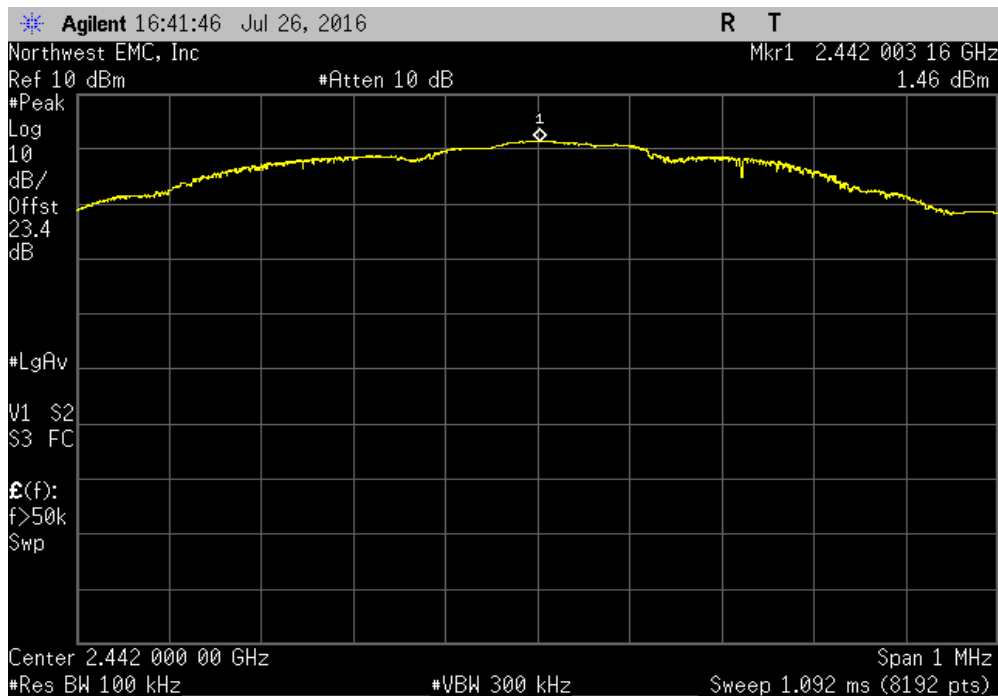


SPURIOUS CONDUCTED EMISSIONS

BLE/GFSK Mid Channel, 2442 MHz				
Frequency Range	Max Value (dBc)	Limit ≤ (dBc)	Result	
30 MHz - 12.5 GHz	-43.44	-20	Pass	

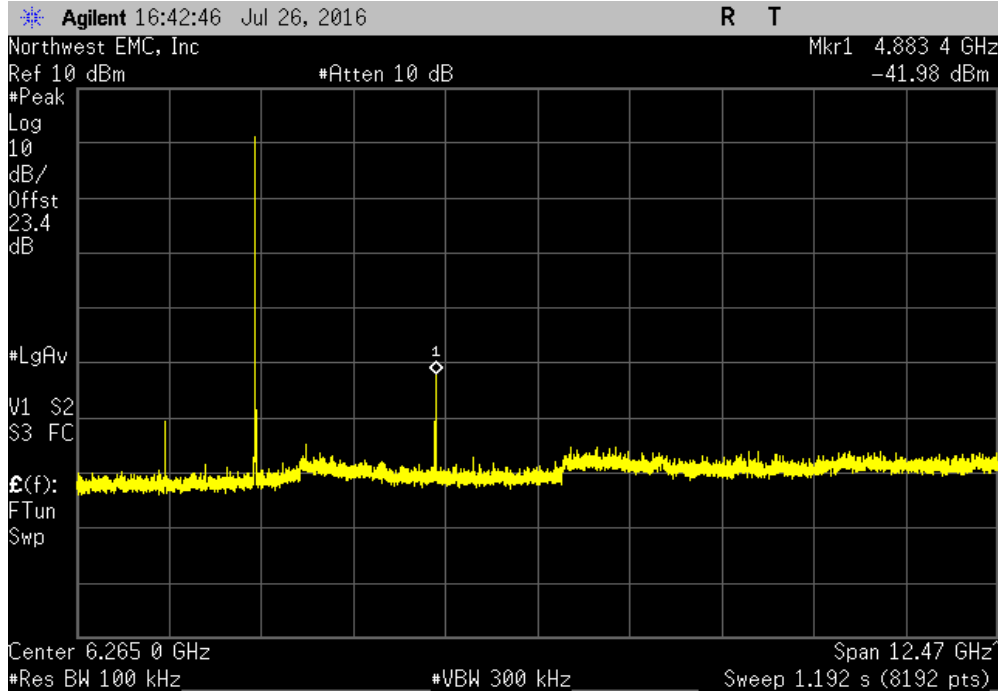


BLE/GFSK Mid Channel, 2442 MHz				
Frequency Range	Max Value (dBc)	Limit ≤ (dBc)	Result	
12.5 GHz - 25 GHz	-52.41	-20	Pass	

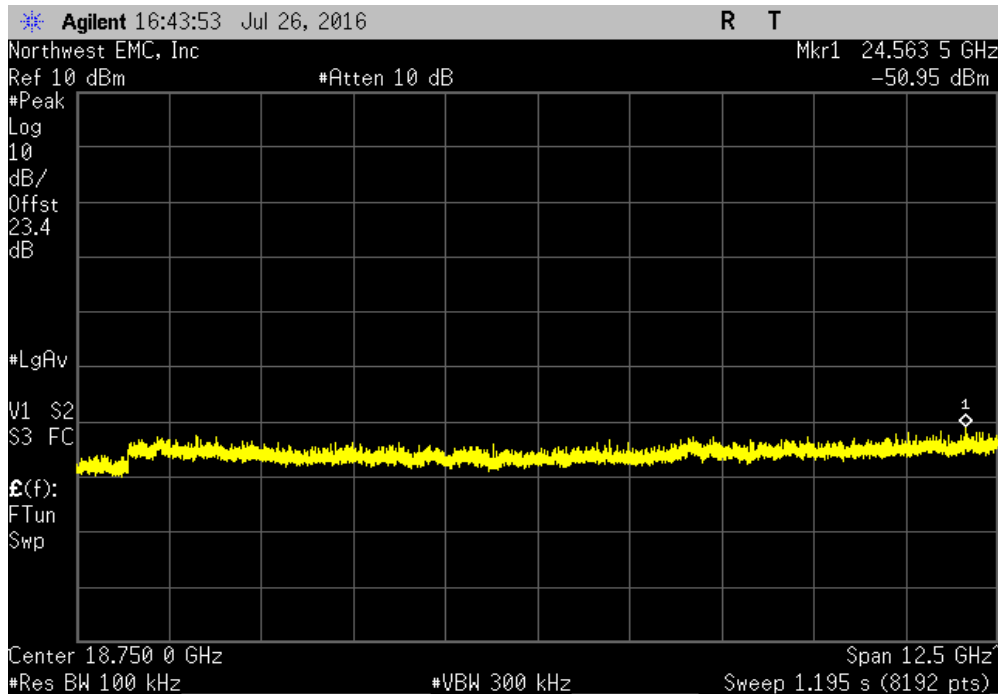


SPURIOUS CONDUCTED EMISSIONS

BLE/GFSK High Channel, 2480 MHz					
Frequency Range		Max Value (dBc)	Limit ≤ (dBc)	Result	
Fundamental		N/A	N/A	N/A	

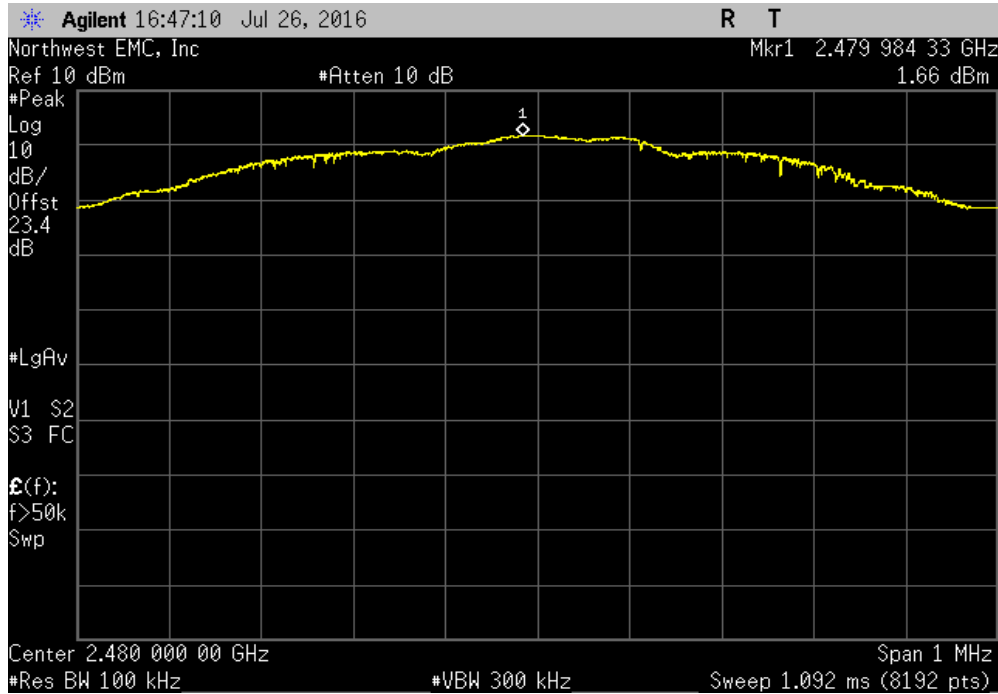

BLE/GFSK High Channel, 2480 MHz					
Frequency Range		Max Value (dBc)	Limit ≤ (dBc)	Result	
30 MHz - 12.5 GHz		-43.21	-20	Pass	

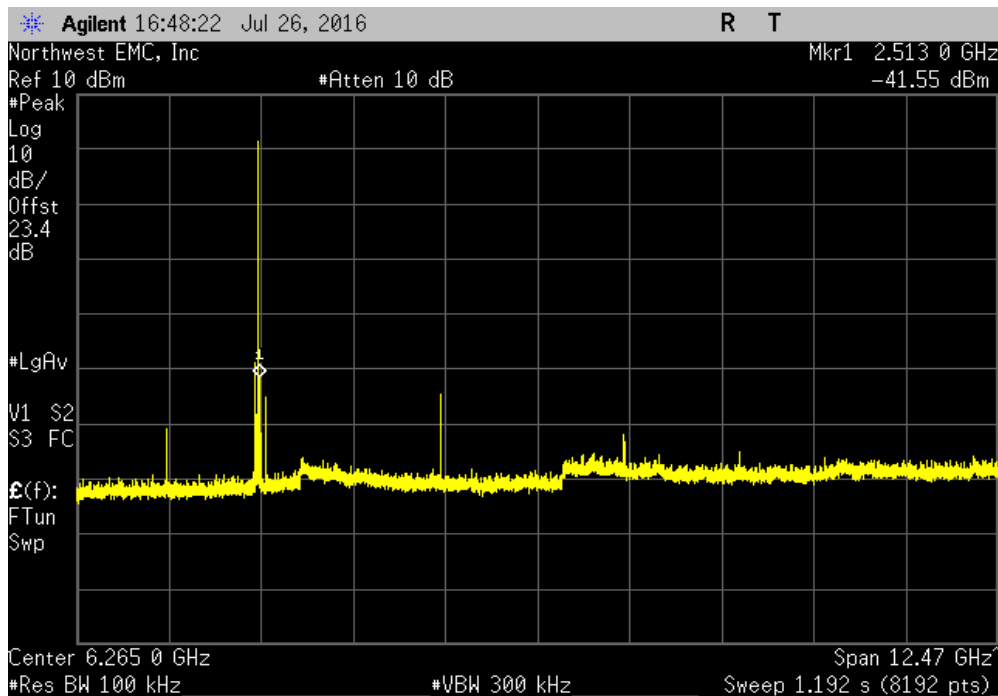

SPURIOUS CONDUCTED EMISSIONS

BLE/GFSK High Channel, 2480 MHz				
Frequency Range	Max Value (dBc)	Limit ≤ (dBc)	Result	
12.5 GHz - 25 GHz	-52.84	-20	Pass	

