


# Test Report of FCC CFR 47 Part 15 Subpart C

On Behalf of

## SHENZHEN HAOHUITONG TECHNOLOGY LTD.


6F Jianda Building, 10# Keyuan Road, Nanshan High-Tech Park, Nanshan,  
Shenzhen, 518053, China

Product Name:	<b>MVOICE SPEAKERPHONE</b>
Model/Type No.:	<b>MVOICE 5000-B</b>
FCC ID:	<b>2AJJA-MVE5000B</b>
Prepared By:	<b>Shenzhen Hongcai Testing Technology Co., Ltd.</b> 1st-3rd Floor, Building C, Shuanghuan Xin Yi Dai Hi-Tech Industrial Park, No.8 Baoqing Road, Baolong Industrial Zone, Longgang District, Shenzhen, Guangdong, China Tel: +86-755-86337020 Fax: +86-755-86337028
Report Number:	HCT16GR187E-1
Tested Date:	August 3~31, 2016
Issued Date:	August 31, 2016
Tested By:	Jerry Zhao/ 

Reviewed By:



Approved By:



Owen.Yang

EMC Technical Supervisor

Tony Wu

EMC Technical Manager

## TABLE OF CONTENTS

<b>1. GENERAL INFORMATION .....</b>	<b>4</b>
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) .....	4
1.2 RELATED SUBMITTAL(S) / GRANT (S) AND TEST METHODOLOGY .....	5
1.3 TEST FACILITY .....	5
<b>2. SYSTEM TEST CONFIGURATION .....</b>	<b>6</b>
2.1 EUT CONFIGURATION .....	6
2.2 EUT EXERCISE .....	6
2.3 GENERAL TEST PROCEDURES .....	6
2.4 MEASUREMENT UNCERTAINTY .....	6
2.5 MEASURE RESULTS EXPLANATION EXAMPLE .....	7
2.6 TEST EQUIPMENT LIST AND DETAILS .....	8
<b>3. SUMMARY OF TEST RESULTS .....</b>	<b>8</b>
<b>4. TEST OF AC POWER LINE CONDUCTED EMISSION.....</b>	<b>9</b>
4.1 APPLICABLE STANDARD .....	9
4.2 TEST SETUP DIAGRAM .....	9
4.3 TEST RESULT .....	9
<b>5. TEST OF HOPPING CHANNEL BANDWIDTH .....</b>	<b>12</b>
5.1 APPLICABLE STANDARD .....	12
5.2 EUT SETUP .....	12
5.3 TEST EQUIPMENT LIST AND DETAILS .....	12
5.4 TEST PROCEDURE .....	12
5.5 TEST RESULT .....	12
<b>6. TEST OF HOPPING CHANNEL SEPARATION.....</b>	<b>18</b>
6.1 APPLICABLE STANDARD .....	18
6.2 EUT SETUP .....	18
6.3 TEST EQUIPMENT LIST AND DETAILS .....	18
6.4 TEST PROCEDURE .....	18
6.5 TEST RESULT .....	18
<b>7. TEST OF NUMBER OF HOPPING FREQUENCY .....</b>	<b>25</b>
7.1 APPLICABLE STANDARD .....	25
7.2 EUT SETUP .....	25
7.3 TEST EQUIPMENT LIST AND DETAILS .....	25
7.4 TEST PROCEDURE .....	25
7.5 TEST RESULT .....	25
<b>8. TEST OF DWELL TIME OF EACH FREQUENCY .....</b>	<b>28</b>
8.1 APPLICABLE STANDARD .....	28
8.2 EUT SETUP .....	28
8.3 TEST EQUIPMENT LIST AND DETAILS .....	28
8.4 TEST PROCEDURE .....	28
8.5 TEST RESULT .....	28
<b>9. TEST OF MAXIMUM PEAK OUTPUT POWER .....</b>	<b>45</b>
9.1 APPLICABLE STANDARD .....	45
9.2 EUT SETUP .....	45
9.3 TEST EQUIPMENT LIST AND DETAILS .....	45
9.4 TEST PROCEDURE .....	45
9.5 TEST RESULT .....	45
<b>10. TEST OF BAND EDGES EMISSION .....</b>	<b>51</b>
10.1 APPLICABLE STANDARD .....	51
10.2 EUT SETUP .....	51
10.3 TEST EQUIPMENT LIST AND DETAILS .....	51
10.4 TEST PROCEDURE .....	51
10.5 TEST RESULT .....	52

<b>11. TEST OF SPURIOUS RADIATED EMISSION .....</b>	<b>58</b>
11.1 APPLICABLE STANDARD .....	58
11.2 EUT SETUP .....	58
11.3 TEST EQUIPMENT LIST AND DETAILS.....	59
11.4 TEST PROCEDURE .....	59
11.5 TEST RESULT .....	60
<b>12. ANTENNA REQUIREMENT .....</b>	<b>71</b>
12.1 STANDARD APPLICABLE .....	71
12.2 ANTENNA CONNECTED CONSTRUCTION .....	71



## 1. GENERAL INFORMATION

### 1.1 Product Description for Equipment Under Test (EUT)

#### Client Information

Applicant:	<b>SHENZHEN HAOHUITONG TECHNOLOGY LTD.</b>
Address of applicant:	6F Jianda Building, 10# Keyuan Road, Nanshan High-Tech Park, Nanshan, Shenzhen, 518053, China
Manufacturer :	<b>SHENZHEN HAOHUITONG TECHNOLOGY LTD.</b>
Address of manufacturer:	6F Jianda Building, 10# Keyuan Road, Nanshan High-Tech Park, Nanshan, Shenzhen, 518053, China

#### General Description of E.U.T

Items	Description
EUT Description:	MVOICE SPEAKERPHONE
Model No.:	MVOICE 5000-B
Frequency Band:	2402~2480MHz
Number of Channels:	79
Type of Modulation:	GFSK, Pi/4 DQPSK, 8-DPSK
Antenna Gain	2.2 dBi
Antenna Type:	Internal Antenna
Rated Voltage:	Input: DC 5V/1A from micro USB

Remark: \* The test data gathered are from the production sample provided by the manufacturer.

## 1.2 Related Submittal(s) / Grant (s) and Test Methodology

FCC Rules Part 15.247: Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz.

ANSI C63.10-2013: American National Standard for Testing Unlicensed Wireless Devices.

DA 00-705: Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems

## 1.3 Test Facility

All measurement required was performed at laboratory of Shenzhen CTL Testing Technology Co., Ltd. Floor 1-A, Baisha Technology Park, No. 3011, Shahexi Road, Nanshan, Shenzhen 518055 China. There is one 3m semi-anechoic chamber and two line conducted labs for final test. The Test Sites meet the requirements in documents ANSI C63.4 and CISPR 22/EN 55022 requirements.

FCC – Registration No.: 970318

Shenzhen CTL Testing Technology Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 970318, December, 2013.

IC Registration No.: 9618B

The 3m alternate test site of Shenzhen CTL Testing Technology Co., Ltd. EMC Laboratory has been registered by Certification and Engineer Bureau of Industry Canada for the performance of with Registration No.: 9618B on November 13, 2013.

HONGCAI TESTING

## 2. SYSTEM TEST CONFIGURATION

### 2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

### 2.2 EUT Exercise

The calibrated antennas used to sample the radiated field strength are mounted on a non-conductive, motorized antenna mast 3 or 10 meters from the leading edge of the turntable.

### 2.3 General Test Procedures

**Conducted Emissions:** The EUT is placed on the table, which is 0.8 m above ground plane According to the requirements in ANSI C63.10-2013 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-Peak detector mode.

**Radiated Emissions:** The EUT is a placed on as turntable, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in ANSI C63.10-2013.

### 2.4 Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 "Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements" and is documented in the Shenzhen CTL Testing Technology Co., Ltd. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Parameter	Uncertainty
Transmitter power conducted	+/- 0.57 dB
Transmitter power Radiated	+/- 2.20 dB
Conducted spurious emission 9KHz-40 GHz	+/- 2.20 dB
Power Line Conducted Emission	+/- 3.20 dB
Radiated Emission	+/- 4.32 dB

Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.



## 2.5 Measure Results Explanation Example




For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable less and attenuator factor.  
 $\text{Offset} = \text{RF cable loss} + \text{attenuator factor}$

Note: Using a temporary antenna connector for the EUT when the conducted measurements are performed.

Equipment	Manufacturer	Model No.	Frequency range(GHz)	Attenuation values(dBm)
Line	Zhenjiang south electronic	RG316	1-12	0.08
Connector	Zhenjiang south electronic	SMA-K/N-J	1-12	0.01

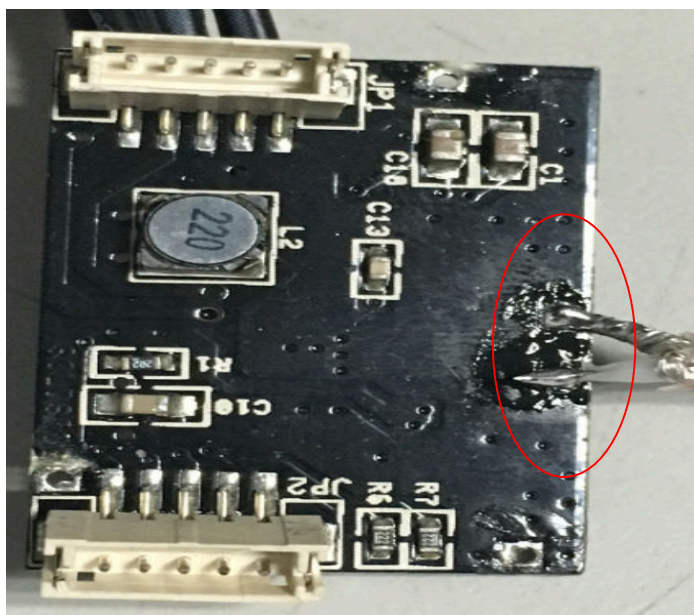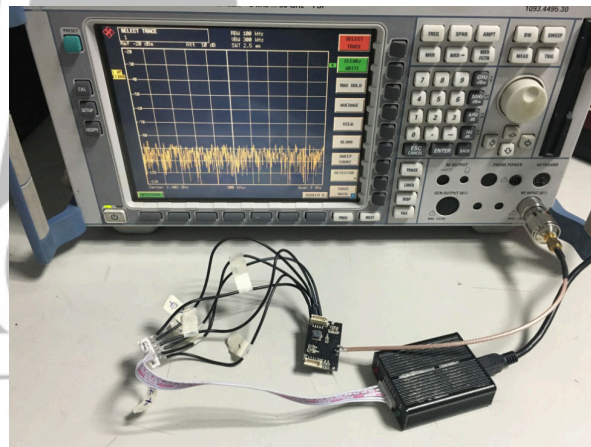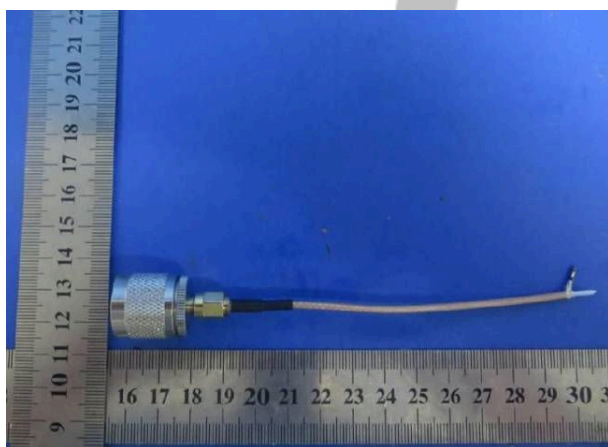

## 2.6 Test Equipment List and Details

Test equipments list of Shenzhen CTL Testing Technology Co., Ltd.

No.	Instrument no.	Equipment	Manufacturer	Model No.	S/N	Last Calculator	Due Calculator
1	BCT-EMC001	EMI Test Receiver	R&S	ESCI	100687	2016-7-25	2017-7-24
2	BCT-EMC002	EMI Test Receiver	R&S	ESPI	100097	2015-11-1	2016-10-31
3	BCT-EMC003	Amplifier	HP	8447D	1937A02492	2016-7-25	2017-7-24
4	BCT-EMC018	TRILOG Broadband Test-Antenna	SCHWARZBECK	VULB9163	9163-324	2016-7-25	2017-7-24
5	BCT-EMC021	Triple-Loop Antenna	EVERFINE	LLA-2	711002	2015-11-1	2016-10-31
6	BCT-EMC026	RF POWER AMPLIFIER	FRANKONIA	FLL-75	1020A1109	2016-7-25	2017-7-24
7	BCT-EMC029	6DB Attenuator	FRANKONIA	N/A	1001698	2016-7-25	2017-7-24
8	BCT-EMC032	10dB attenuator	ELECTRO-METRICS	EM-7600	836	2016-7-25	2017-7-24
9	BCT-EMC036	Spectrum Analyzer	R&S	FSP	100397	2015-11-1	2016-10-31
10	BCT-EMC037	Broadband preamplifier	SCHWARZBECK	BBV9718	9718-182	2016-7-25	2017-7-24
11	BCT-EMC039	Horn Antenna	SCHWARZBECK	BBHA 9120D	0437	2016-7-25	2017-7-24
12	BCT-EMC038	Horn Antenna	SCHWARZBECK	BBHA9170	0483	2016-7-25	2017-7-24

HONGCAI TESTING

## 3. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
FCC §15.207	AC Power Line Conducted Emission	Pass
FCC §15.247(a)(1)	Hopping Channel Bandwidth	Pass
FCC §15.247(a)(1)	Hopping Channel Separation	Pass
FCC §15.247(a)(1)	Number of Hopping Frequency Used	Pass
FCC §15.247(a)(1)(iii)	Dwell Time of Each Frequency	Pass
FCC §15.247(b)(1)	Maximum Peak Output Power	Pass
FCC §15.247(d)	Band Edges Emission	Pass
FCC §15.247(d)	Spurious Radiated Emission	Pass
FCC §15.203/15.247(b)/(c)	Antenna Requirement	Pass



## 4. TEST OF AC POWER LINE CONDUCTED EMISSION


### 4.1 Applicable Standard

Refer to FCC §15.207.

For a Low-power Radio-frequency Device is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency Range (MHz)	Limits ( dBuV)	
	Quasi-Peak	Average
0.150~0.500	66~56	56~46
0.500~5.000	56	46
5.000~30.00	60	50

### 4.2 Test Setup Diagram

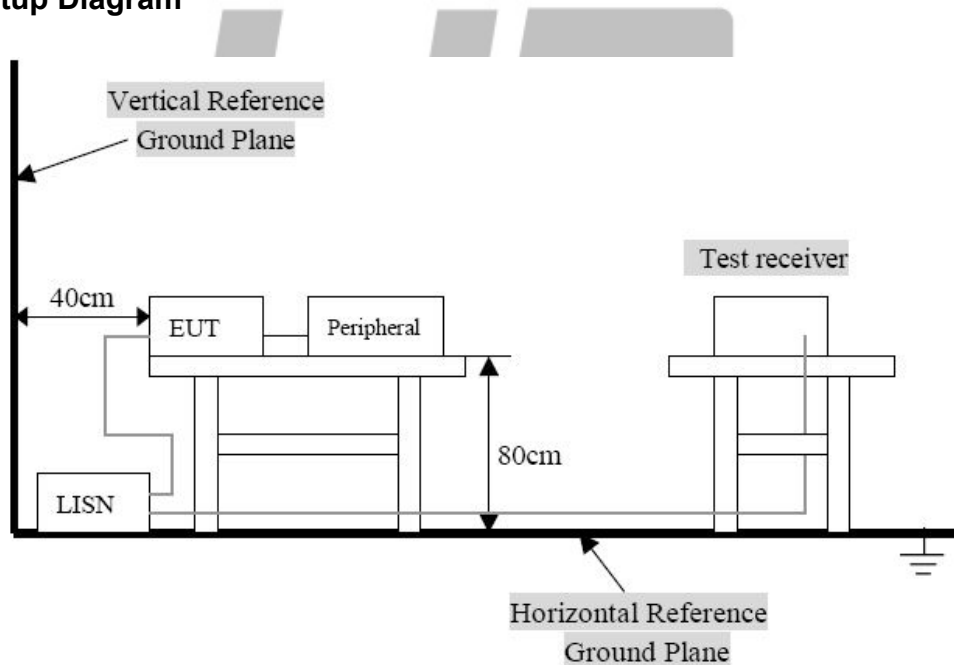

Remark: The EUT was connected to a 120 VAC/ 60Hz power source.

### 4.3 Test Result


Temperature ( °C ) : 23~25	EUT: MVOICE SPEAKERPHONE
Humidity (%RH) : 45~58	M/N: MVOICE 5000-B
Barometric Pressure ( mbar ) : 950~1000	Operation Condition: Tx Mode

## Conducted Emission:

EUT: MVOICE SPEAKERPHONE  
M/N: MVOICE 5000-B  
Operating Condition: Tx Mode  
Test Site: Shielded Room  
Operator: Yang  
Test Specification: DC 5V/1A from micro USB  
Comment: L Line

### SCAN TABLE: "Voltage (150K-30M) FIN"

Short Description: 150K-30M Voltage

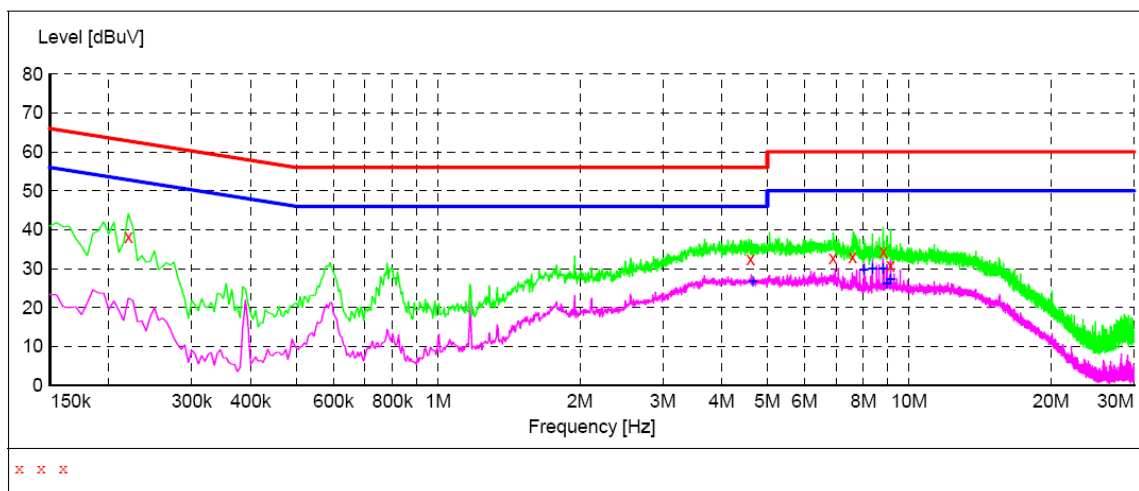

### MEASUREMENT RESULT:

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.220000	38.10	14.5	63	24.7	QP	L1	GND
4.605000	32.60	13.4	56	23.4	QP	L1	GND
6.885000	32.70	13.4	60	27.3	QP	L1	GND
7.580000	32.90	13.6	60	27.1	QP	L1	GND
8.805000	34.30	13.6	60	25.7	QP	L1	GND
9.130000	30.90	13.5	60	29.1	QP	L1	GND

### MEASUREMENT RESULT:


Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
4.660000	26.60	13.4	46	19.4	AV	L1	GND
8.025000	29.80	13.6	50	20.2	AV	L1	GND
8.360000	30.00	13.6	50	20.0	AV	L1	GND
8.805000	30.00	13.6	50	20.0	AV	L1	GND
8.970000	26.30	13.6	50	23.7	AV	L1	GND
9.140000	27.40	13.5	50	22.6	AV	L1	GND

## Conducted Emission:

EUT: MVOICE SPEAKERPHONE  
M/N: MVOICE 5000-B  
Operating Condition: Tx Mode  
Test Site: Shielded Room  
Operator: Yang  
Test Specification: DC 5V/1A from micro USB  
Comment: N Line

### SCAN TABLE: "Voltage (150K-30M) FIN"

Short Description: 150K-30M Voltage

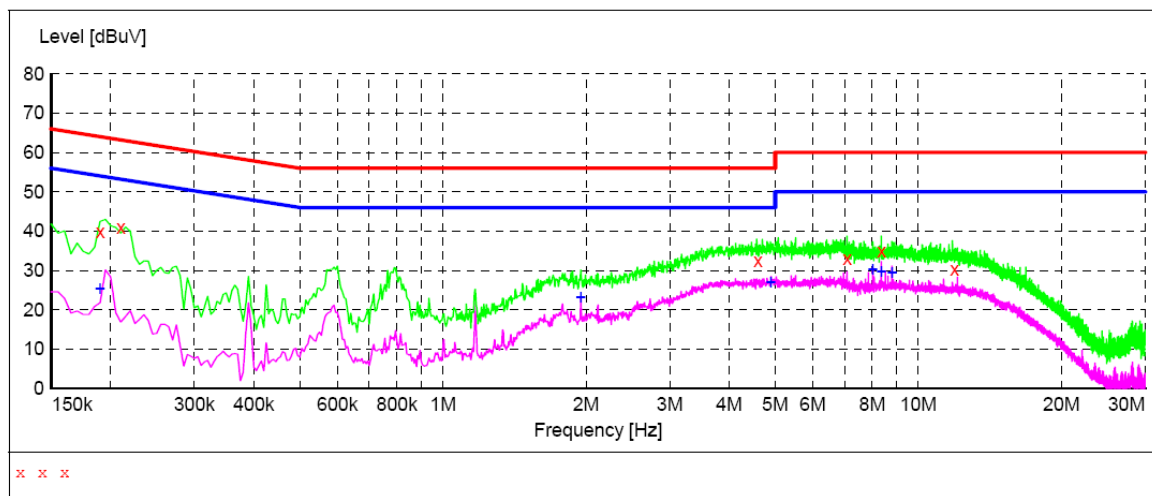

### MEASUREMENT RESULT:

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.190000	39.80	15.0	64	24.2	QP	N	GND
0.210000	41.00	14.7	63	22.2	QP	N	GND
4.595000	32.40	13.4	56	23.6	QP	N	GND
7.080000	33.00	13.5	60	27.0	QP	N	GND
8.360000	34.90	13.6	60	25.1	QP	N	GND
11.915000	30.40	13.1	60	29.6	QP	N	GND

### MEASUREMENT RESULT:


Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.190000	25.30	15.0	54	28.7	AV	N	GND
1.950000	23.20	13.2	46	22.8	AV	N	GND
4.895000	27.00	13.5	46	19.0	AV	N	GND
8.025000	30.20	13.6	50	19.8	AV	N	GND
8.360000	29.70	13.6	50	20.3	AV	N	GND
8.805000	29.60	13.6	50	20.4	AV	N	GND

## 5. Test of Hopping Channel Bandwidth

### 5.1 Applicable Standard

Section 15.247(a)(1): Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

### 5.2 EUT Setup

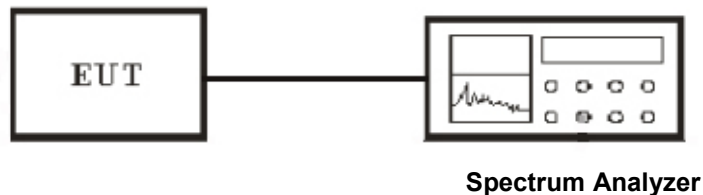

### 5.3 Test Equipment List and Details

See section 2.5.

### 5.4 Test Procedure

1. The transmitter output was connected to the spectrum analyzer through an attenuator.
2. Use the following spectrum analyzer settings:  
 Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel  
 RBW  $\geq$  1% of the 20 dB bandwidth, VBW  $\geq$  RBW  
 Sweep = auto  
 Detector function = peak  
 Trace = max hold
3. The spectrum width with level higher than 20dB below the peak level.
4. Repeat above 1~3 points for the middle and highest channel of the EUT.

### 5.5 Test Result

Temperature ( °C ) : 22~23	EUT: MVOICE SPEAKERPHONE
Humidity (%RH) : 50~54	M/N: MVOICE 5000-B
Barometric Pressure ( mbar ) : 950~1000	Operation Condition: Tx Mode

### BDR 1M

Modulation Type	Channel No.	Frequency (MHz)	20dB Bandwidth (kHz)
GFSK	Low	2402.00	920
GFSK	Middle	2441.00	916
GFSK	High	2480.00	944

### EDR 2M

Modulation Type	Channel No.	Frequency (MHz)	20dB Bandwidth (kHz)
Pi/4 DQPSK	Low	2402.00	1248
Pi/4 DQPSK	Middle	2441.00	1248
Pi/4 DQPSK	High	2480.00	1284

### EDR 3M

Modulation Type	Channel No.	Frequency (MHz)	20dB Bandwidth (kHz)
8-DPSK	Low	2402.00	1272
8-DPSK	Middle	2441.00	1272
8-DPSK	High	2480.00	1272

### BDR 1M Channel Low



## Channel Middle




## Channel High







## EDR 2M Channel Low

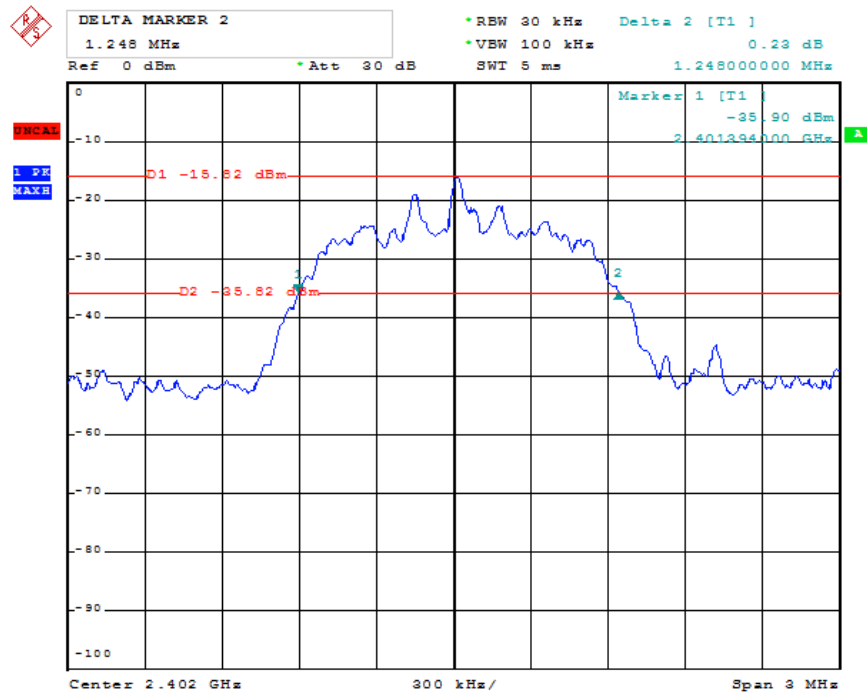


## Channel Middle

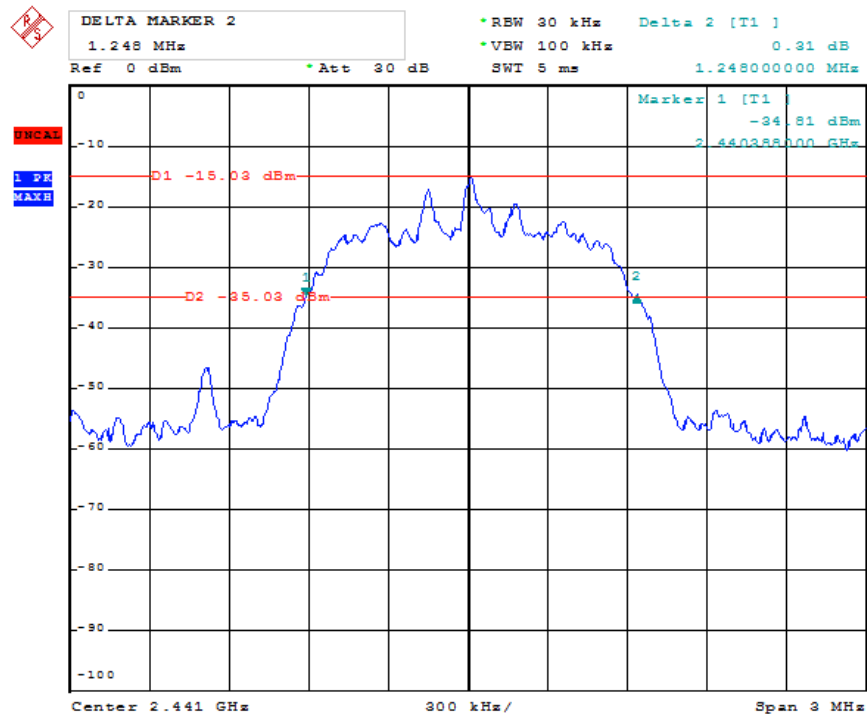


## Channel High

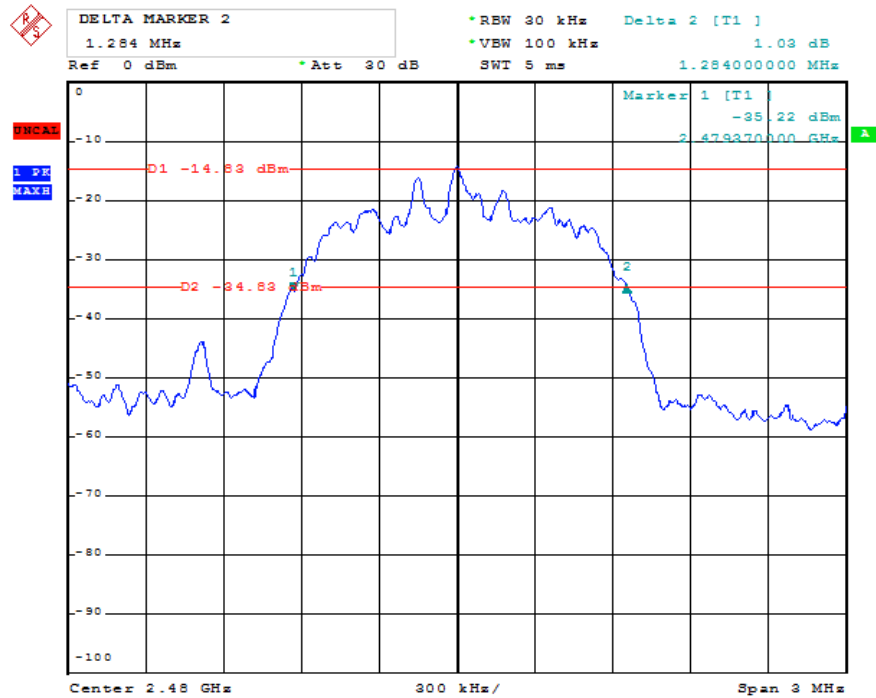


## EDR 3M Channel Low

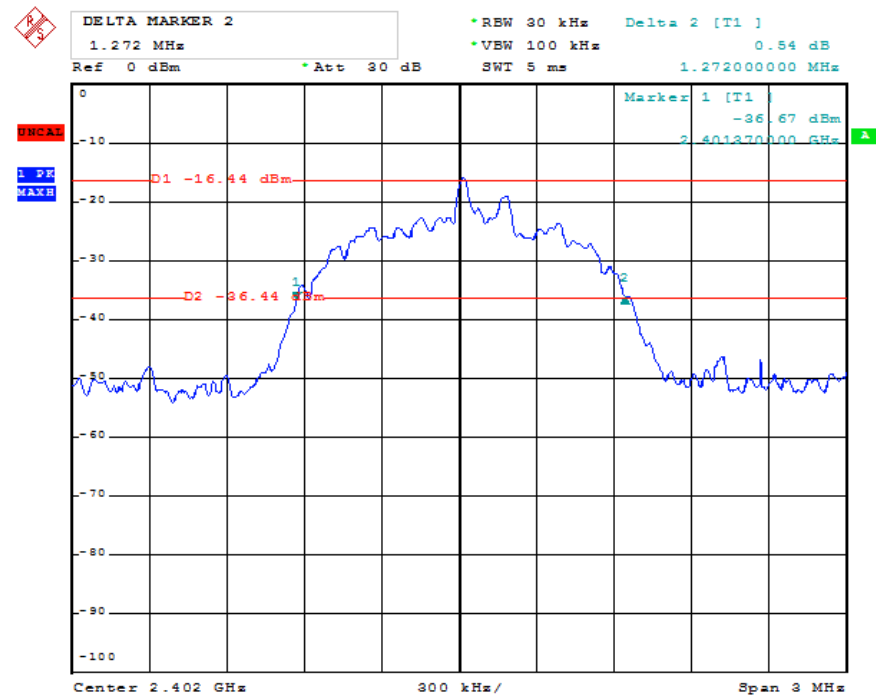

## Channel Middle

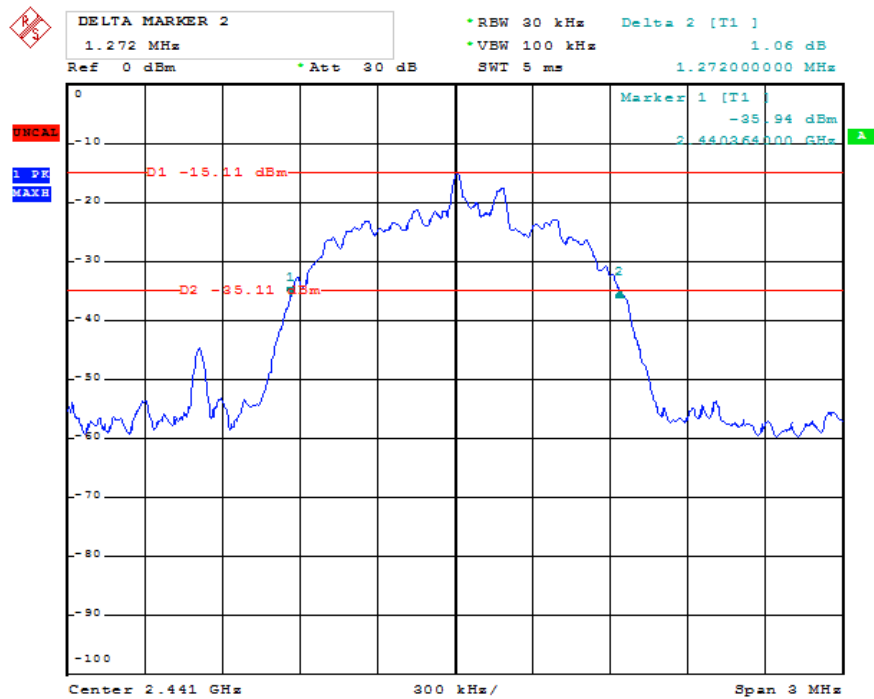

## Channel High

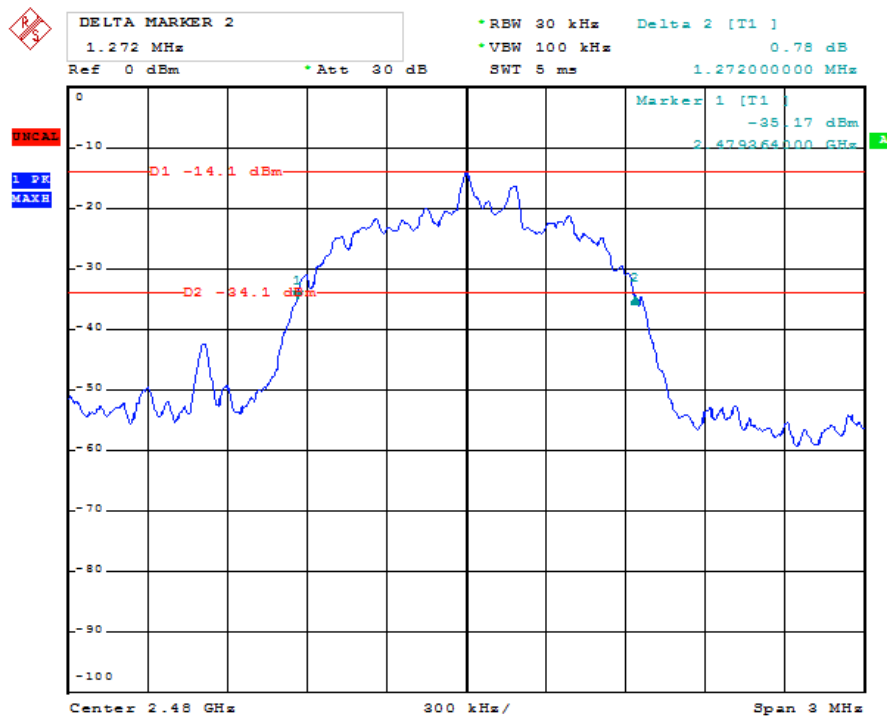


## 6. Test of Hopping Channel Separation

### 6.1 Applicable Standard

Section 15.247(a)(1): Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

### 6.2 EUT Setup

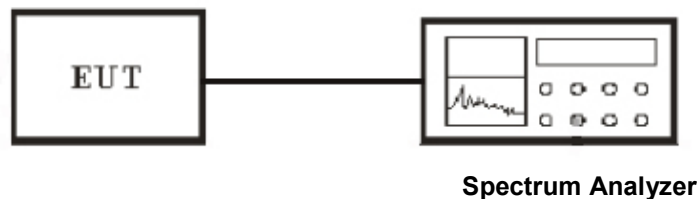

### 6.3 Test Equipment List and Details

See section 2.5.

### 6.4 Test Procedure

1. The transmitter output was connected to the spectrum analyzer through an attenuator.
2. Set RBW of spectrum analyzer to 30KHz and VBW to 100KHz.
3. Set Detector to Peak, Trace to Max Hold and Sweep Time is Auto.
4. The Hopping Channel Separation is defined as the separation between 2 neighboring hopping frequencies.
5. Repeat above 1~3 points for the middle and highest channel of the EUT.

### 6.5 Test Result

Temperature ( °C ) : 22~23	EUT: MVOICE SPEAKERPHONE
Humidity (%RH) : 50~54	M/N: MVOICE 5000-B
Barometric Pressure ( mbar ) : 950~1000	Operation Condition: Tx Mode

**BDR 1M**

Modulation Type	Frequency (MHz)	Channel Separation (MHz)	Min. Limit (kHz)
GFSK	2402~2403	0.992	>25
GFSK	2441~2442	0.988	>25
GFSK	2479~2480	1.000	>25


**EDR 2M**

Modulation Type	Frequency (MHz)	Channel Separation (MHz)	Min. Limit (kHz)
Pi/4 DQPSK	2402~2403	1.004	>25
Pi/4 DQPSK	2441~2442	1.004	>25
Pi/4 DQPSK	2479~2480	1.002	>25


**EDR 3M**

Modulation Type	Frequency (MHz)	Channel Separation (MHz)	Min. Limit (kHz)
8-DPSK	2402~2403	1.000	>25
8-DPSK	2441~2442	1.000	>25
8-DPSK	2479~2480	1.004	>25

## BDR 1M Channel Low

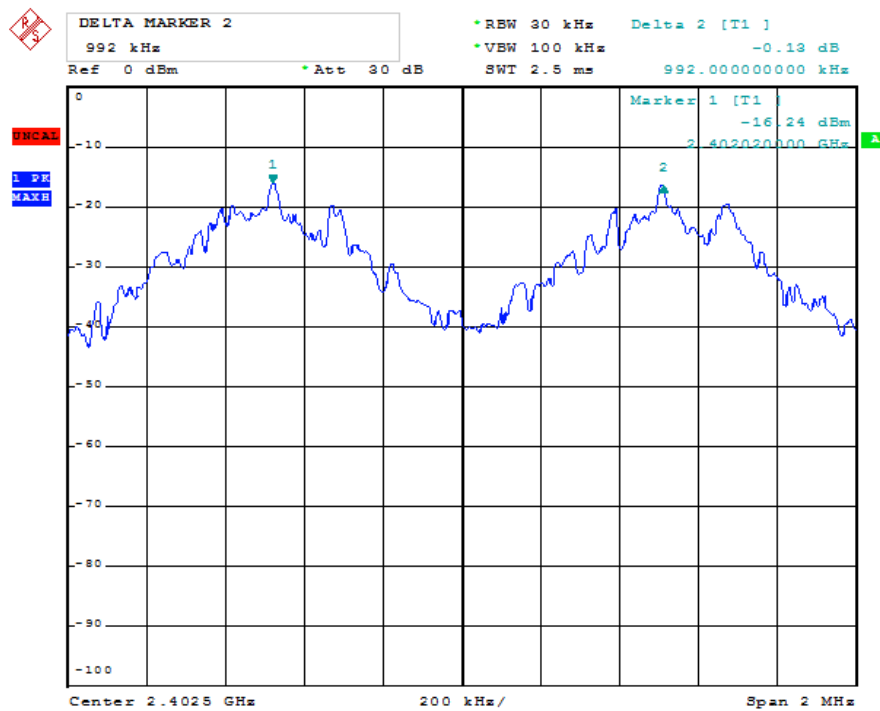


## Channel Middle

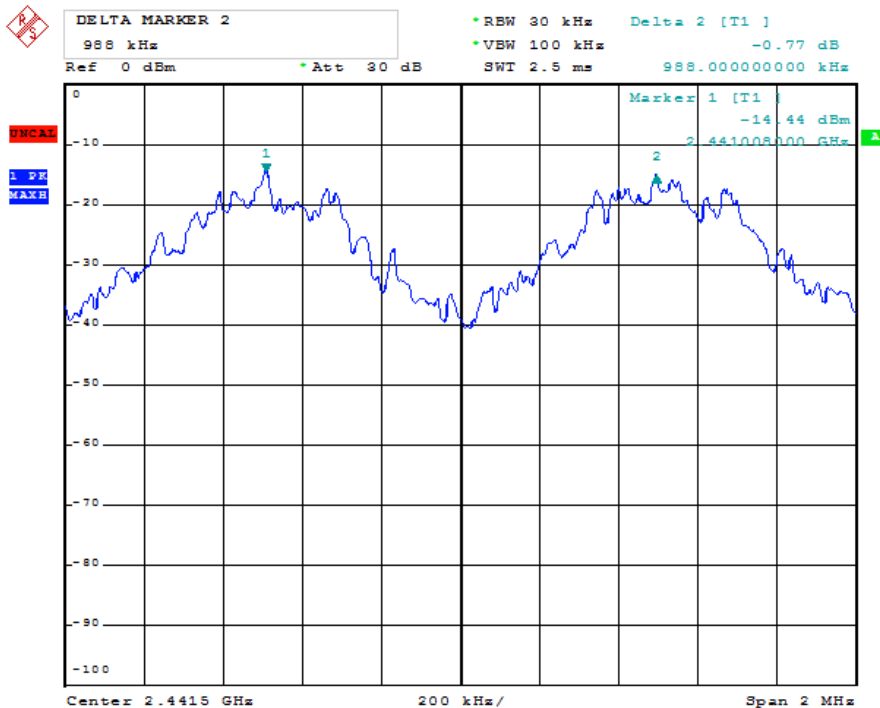





## Channel High

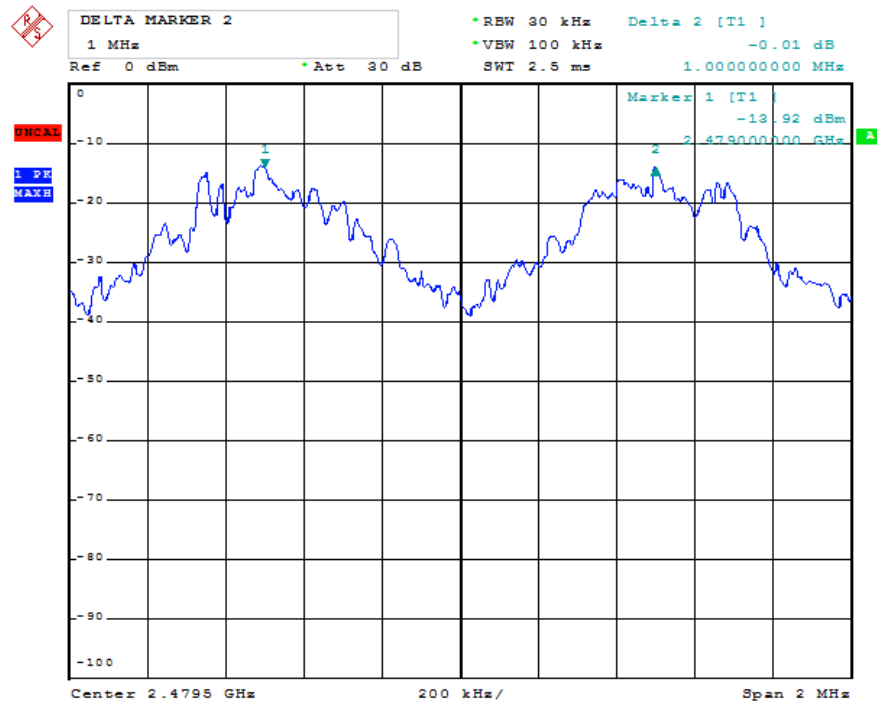


## EDR 2M Channel Low

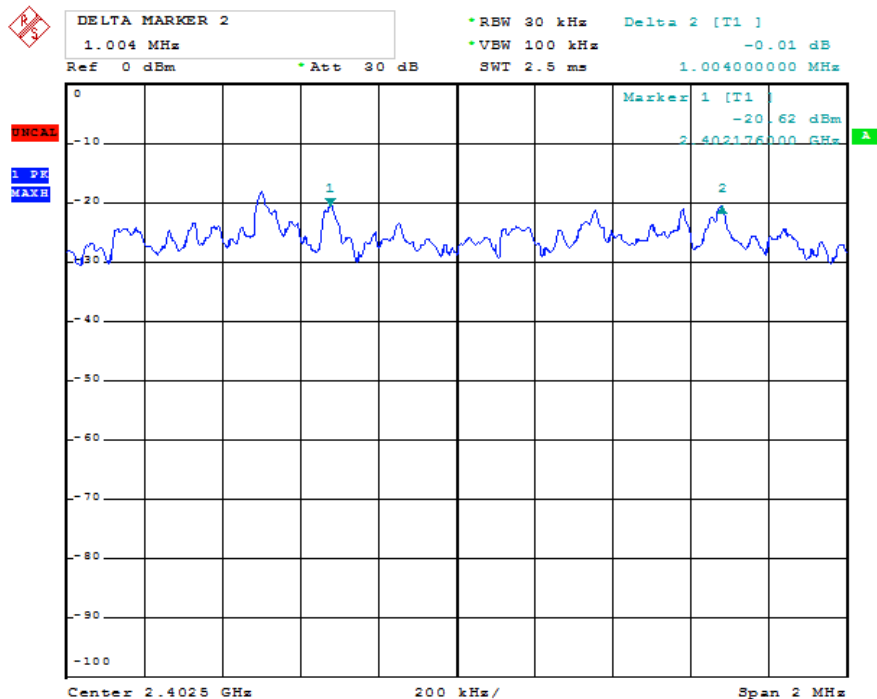


## Channel Middle

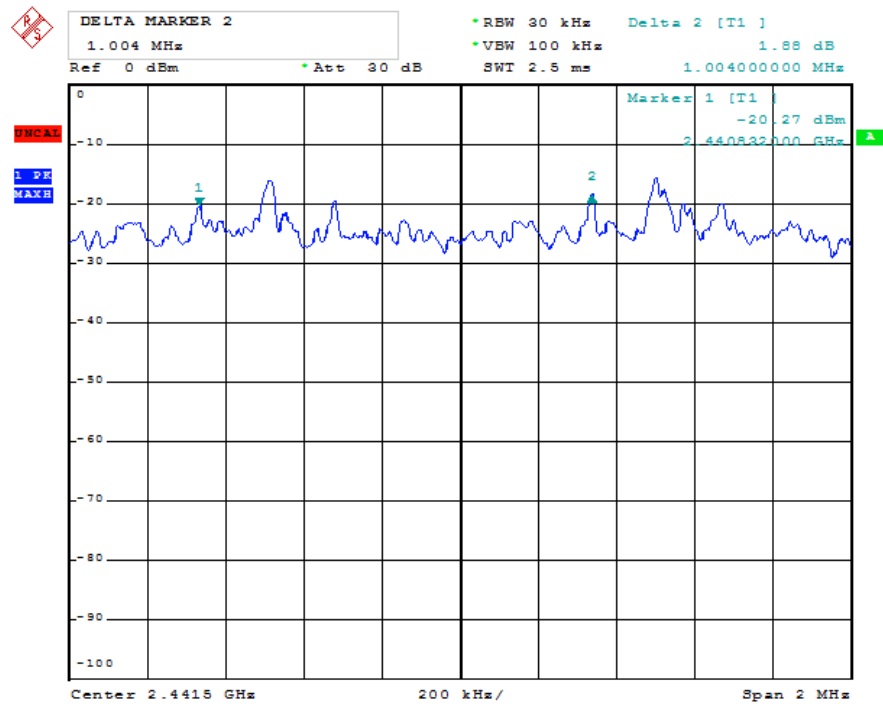


## Channel High

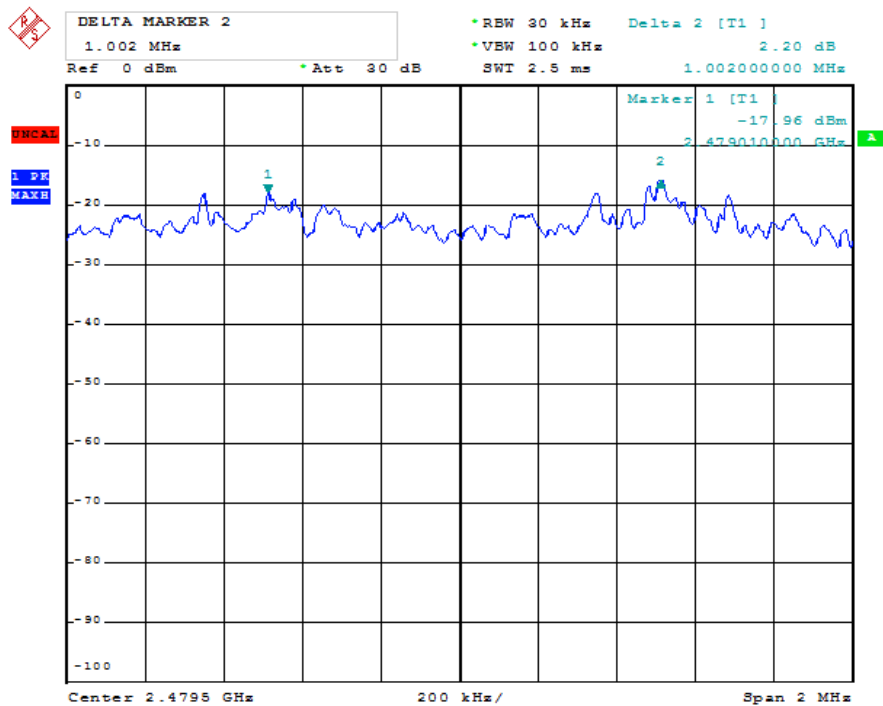


## EDR 3M Channel Low

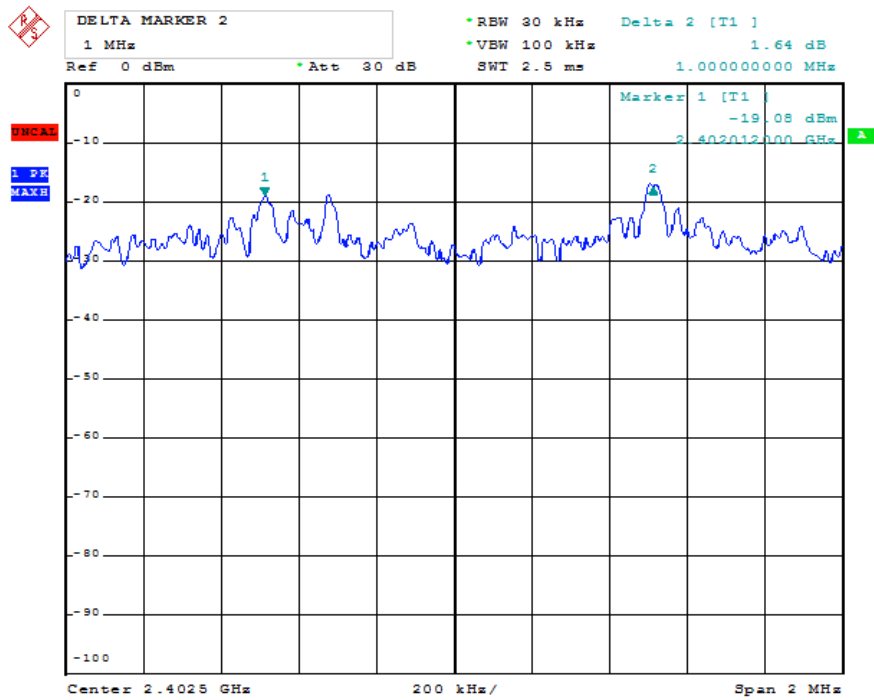

## Channel Middle

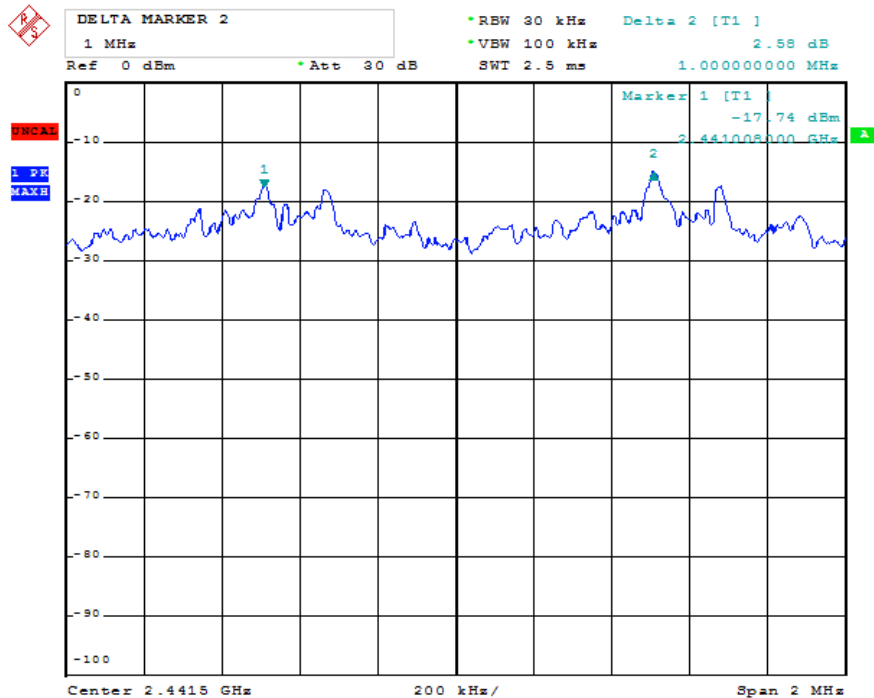

## Channel High

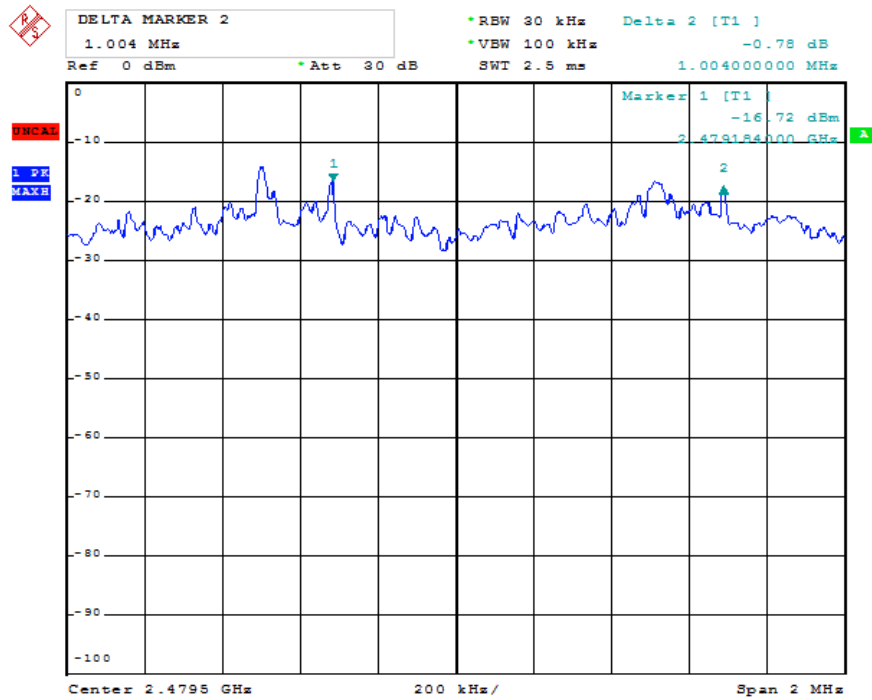


## 7. Test of Number of Hopping Frequency

### 7.1 Applicable Standard

Section 15.247(a)(1)(iii): For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 15 non-overlapping hopping channels. Frequency hopping system which use fewer than 75 hopping frequencies may employ intelligent hopping techniques to avoid interference to other transmissions. Frequency hopping system may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 non-overlapping channels are used.

### 7.2 EUT Setup

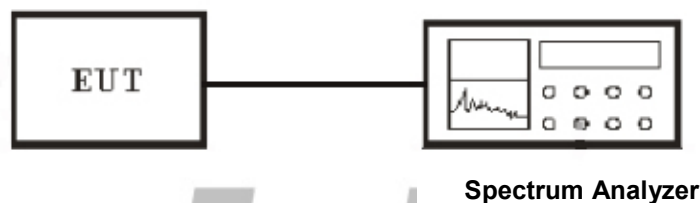

### 7.3 Test Equipment List and Details

See section 2.5.

### 7.4 Test Procedure


1. The transmitter output was connected to the spectrum analyzer through an attenuator.
2. Set RBW of spectrum analyzer to 100KHz and VBW to 100KHz.
3. Set Detector to Peak, Trace to Max Hold and Sweep Time is Auto.
4. Observe frequency hopping in 2400MHz~2483.5MHz, there are at least 32 non-overlapping channels.
5. Repeat above 1~3 points for the middle and highest channel of the EUT.

### 7.5 Test Result


Temperature ( °C ) : 22~23	EUT: MVOICE SPEAKERPHONE
Humidity (%RH) : 50~54	M/N: MVOICE 5000-B
Barometric Pressure ( mbar ) : 950~1000	Operation Condition: Tx Mode

Modulation Type	Frequency (MHz)	Number of Hopping Channels	Min. Limit
GFSK	2402~2480	79	≥ 15
Pi/4 DQPSK	2402~2480	79	≥ 15
8-DPSK	2402~2480	79	≥ 15

## BDR-1M

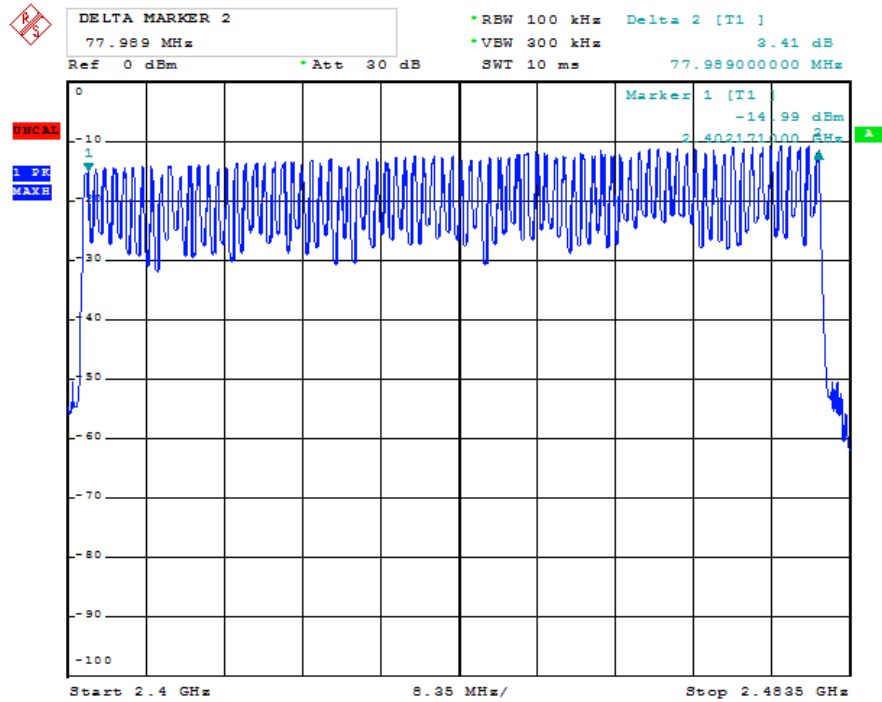


## EDR-2M

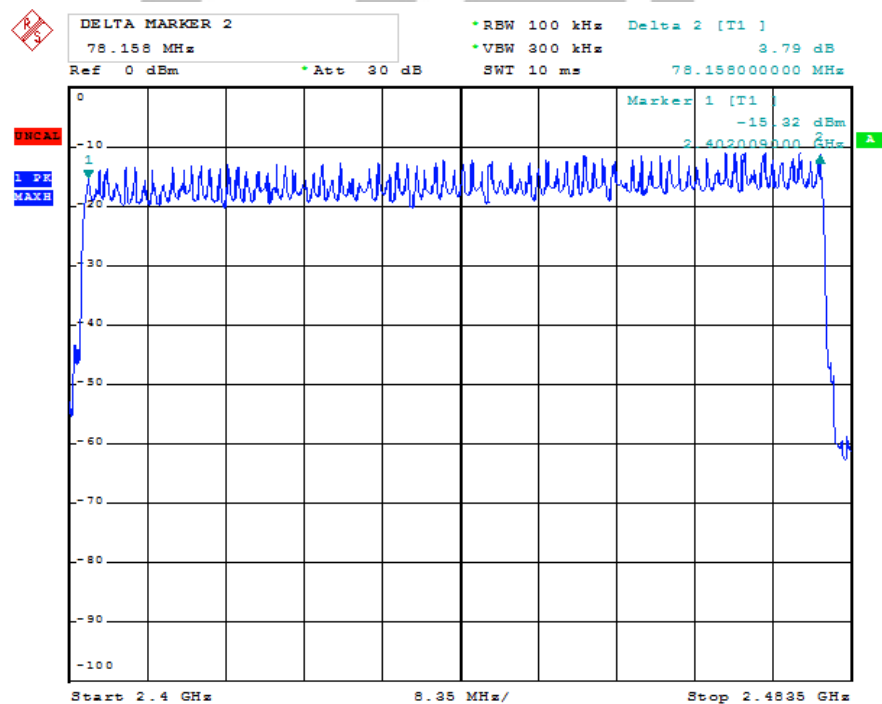



EDR-3M

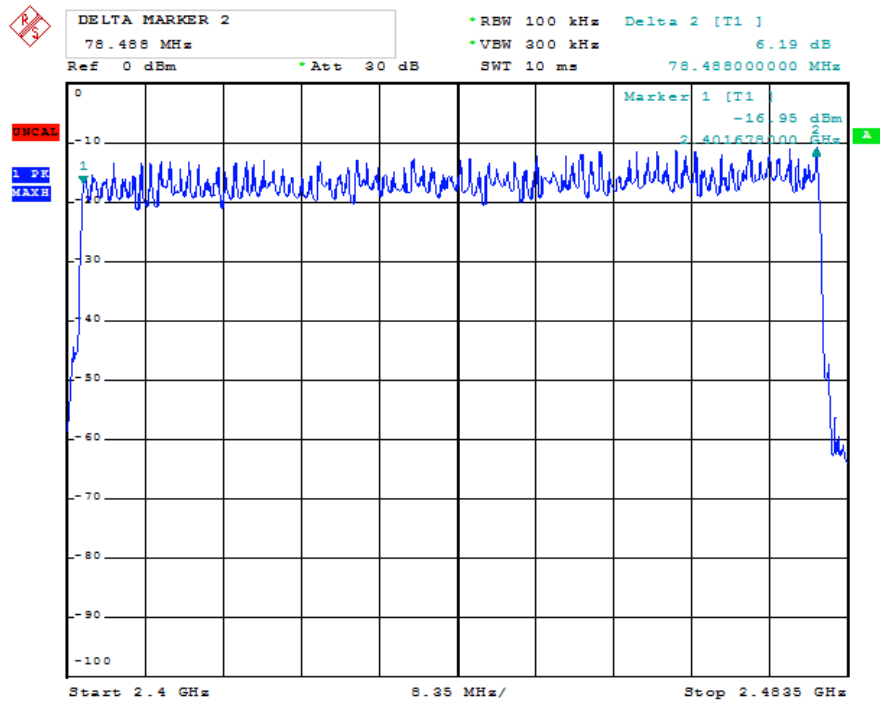


## 8. Test of Dwell Time of Each Frequency

### 8.1 Applicable Standard

Section 15.247(a)(1)(iii): For frequency hopping systems operating in the 2400-2483.5 MHz band The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4seconds multiplied by the number of hopping channels employed.

### 8.2 EUT Setup

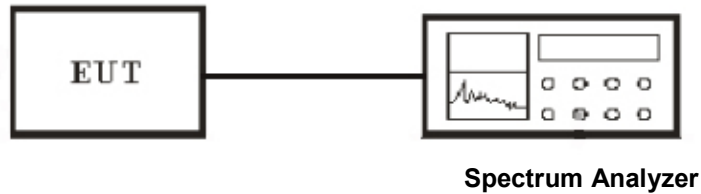

### 8.3 Test Equipment List and Details

See section 2.5.

### 8.4 Test Procedure

1. The transmitter output was connected to the spectrum analyzer through an attenuator.
2. Set RBW of spectrum analyzer to 1000kHz and VBW to 1000kHz.
3. Set Detector to Peak, Trace to Max Hold and Sweep Time is more than once pulse time.
4. Set the center frequency on any frequency would be measure and set the frequency span to zero span.
5. Measure the maximum time duration of one single pulse.

### 8.5 Test Result

Temperature ( °C ) : 22~23	EUT: MVOICE SPEAKERPHONE
Humidity (%RH) : 50~54	M/N: MVOICE 5000-B
Barometric Pressure ( mbar ) : 950~1000	Operation Condition: Tx Mode

DH1

Dwell time=  $t^*(1.6/2/79)*31.6$

DH3

Dwell time=  $t^*(1.6/4/79)*31.6$

DH5

Dwell time=  $t^*(1.6/6/79)*31.6$

### BDR 1M Low Channel

Modulation Type		Reading (ms)	Dwell Time (ms)	Limit (ms)
GFSK	DH1	0.420	134.40	400
GFSK	DH3	1.660	265.60	400
GFSK	DH5	2.912	304.71	400

### Middle Channel

Modulation Type		Reading (ms)	Dwell Time (ms)	Limit (ms)
GFSK	DH1	0.420	134.40	400
GFSK	DH3	1.650	264.00	400
GFSK	DH5	2.912	304.71	400

### High Channel

Modulation Type		Reading (ms)	Dwell Time (ms)	Limit (ms)
GFSK	DH1	0.420	134.40	400
GFSK	DH3	1.650	264.00	400
GFSK	DH5	2.912	304.71	400

### EDR 2M Low Channel

Modulation Type		Reading (ms)	Dwell Time (ms)	Limit (ms)
Pi/4 DQPSK	2DH1	0.400	128.00	400
Pi/4 DQPSK	2DH3	1.680	268.80	400
Pi/4 DQPSK	2DH5	2.920	305.55	400

### Middle Channel

Modulation Type		Reading (ms)	Dwell Time (ms)	Limit (ms)
Pi/4 DQPSK	2DH1	0.405	129.60	400
Pi/4 DQPSK	2DH3	1.660	265.60	400
Pi/4 DQPSK	2DH5	2.926	306.18	400

### High Channel

Modulation Type		Reading (ms)	Dwell Time (ms)	Limit (ms)
Pi/4 DQPSK	2DH1	0.400	128.00	400
Pi/4 DQPSK	2DH3	1.660	265.60	400
Pi/4 DQPSK	2DH5	2.912	304.71	400

### EDR 3M Low Channel

Modulation Type		Reading (ms)	Dwell Time (ms)	Limit (ms)
8-DPSK	3DH1	0.400	128.00	400
8-DPSK	3DH3	1.670	267.20	400
8-DPSK	3DH5	2.912	304.71	400

### Middle Channel


Modulation Type		Reading (ms)	Dwell Time (ms)	Limit (ms)
8-DPSK	3DH1	0.400	128.00	400
8-DPSK	3DH3	1.670	267.20	400
8-DPSK	3DH5	2.912	304.71	400

### High Channel


Modulation Type		Reading (ms)	Dwell Time (ms)	Limit (ms)
8-DPSK	3DH1	0.405	129.60	400
8-DPSK	3DH3	1.660	265.60	400
8-DPSK	3DH5	2.912	304.71	400

HONGCAI TESTING


## BDR-DH1 Channel Low

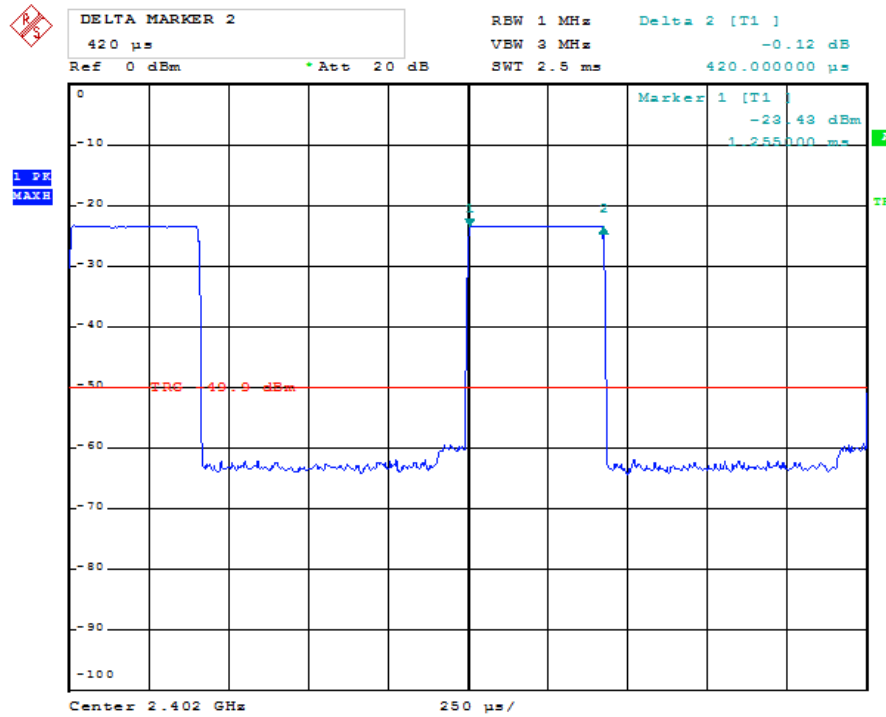


## Channel Middle

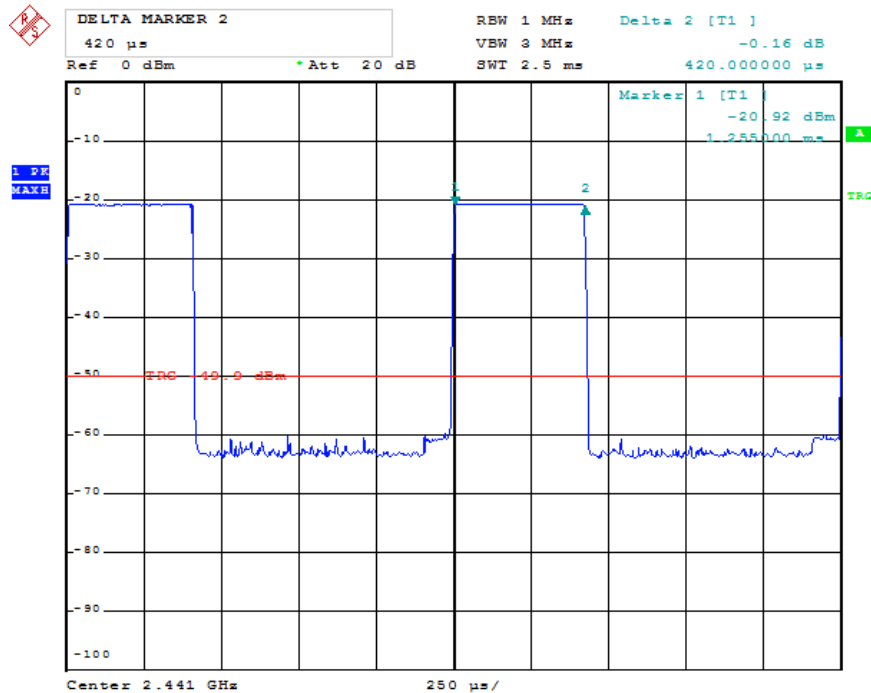

## Channel High

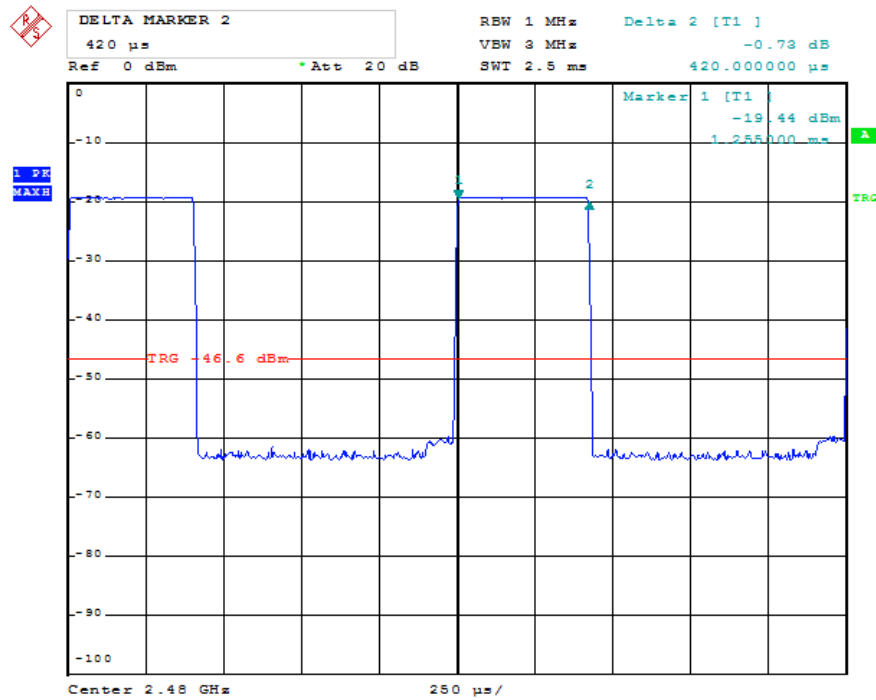


## DH3 Channel Low

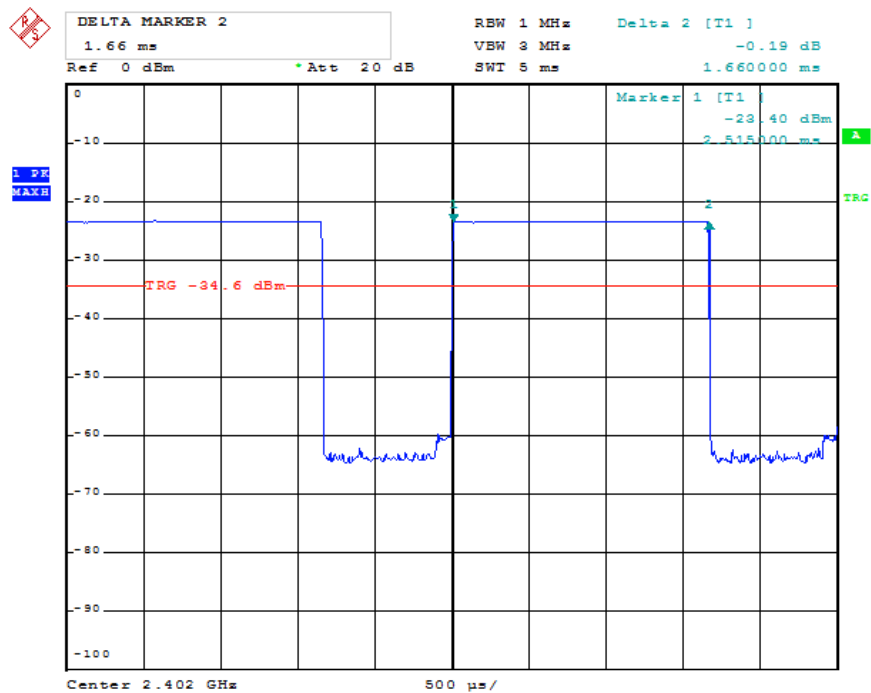





## Channel Middle

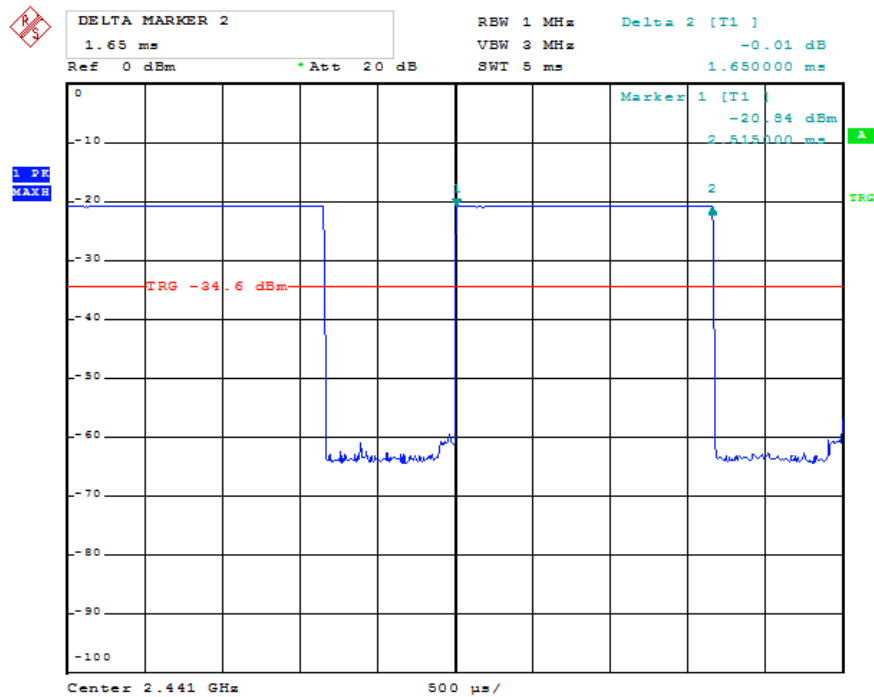


## Channel High

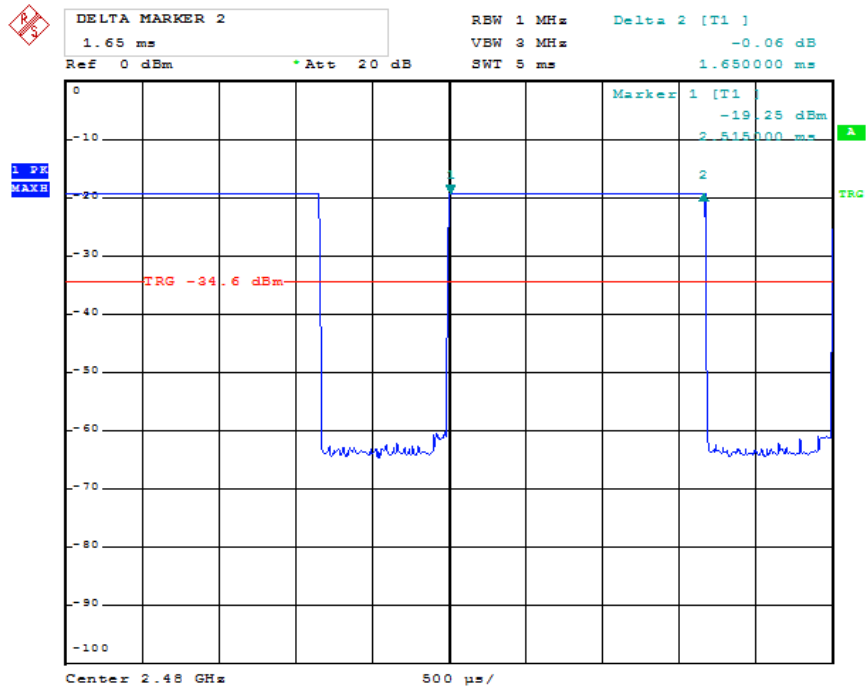


## DH5 Channel Low

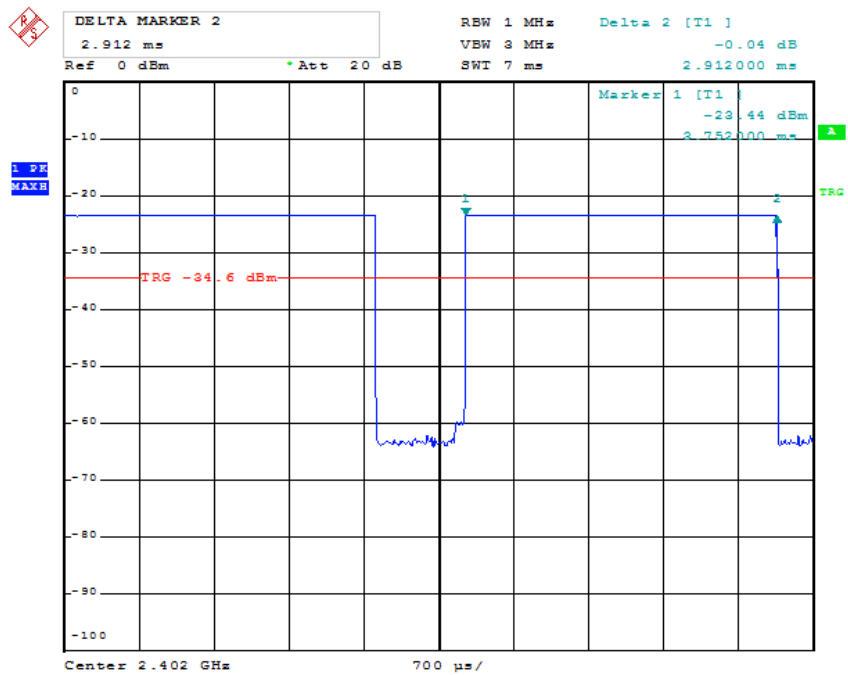


## Channel Middle

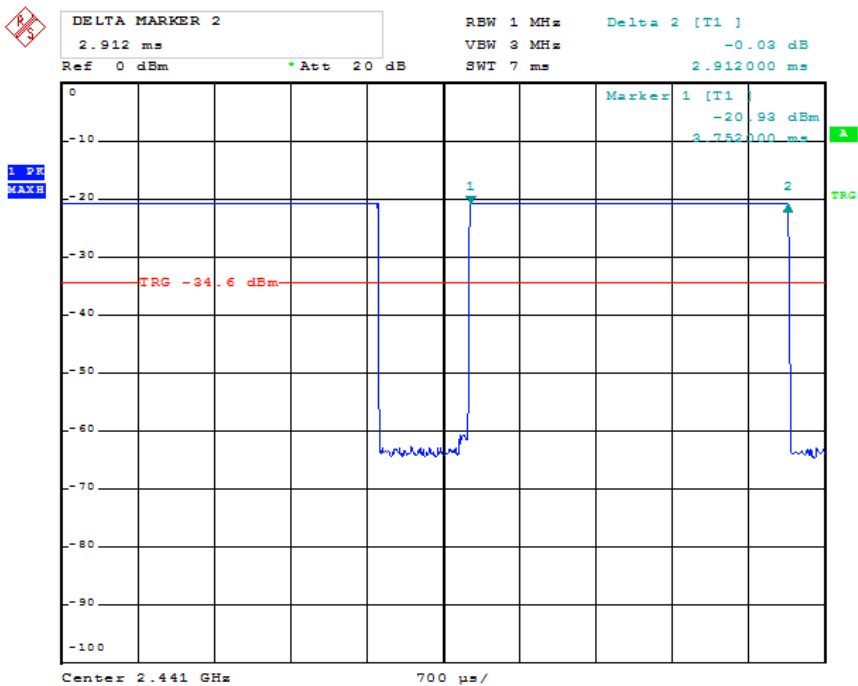


## Channel High

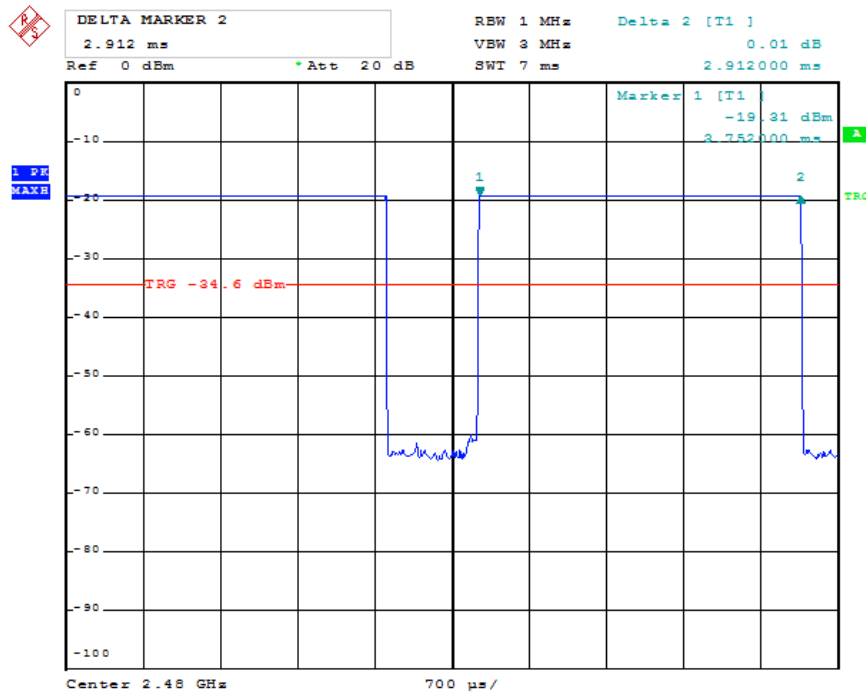


## EDR 2M 2DH1 Channel Low

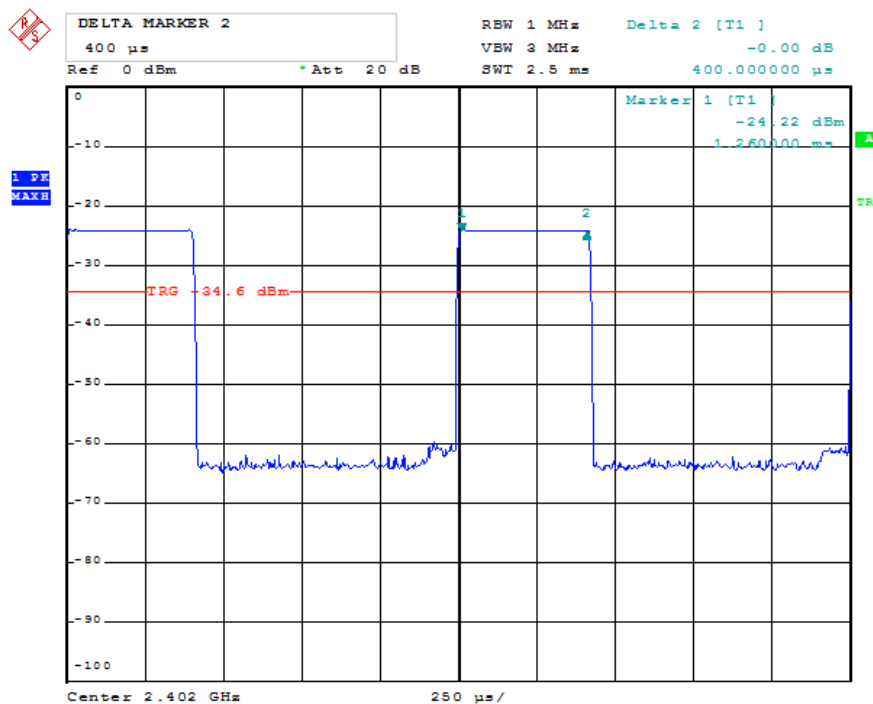


## Channel Middle

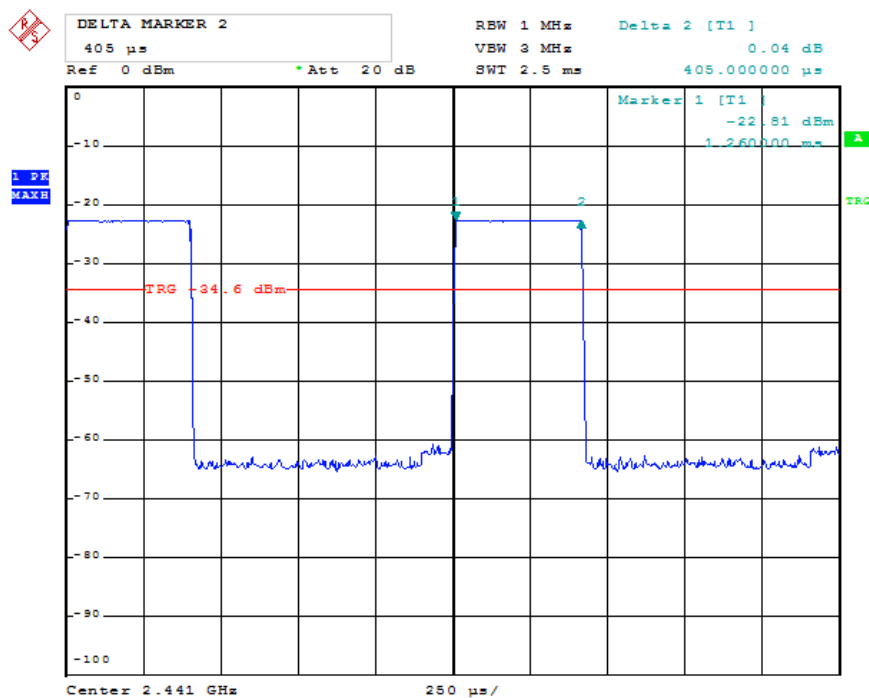


## Channel High

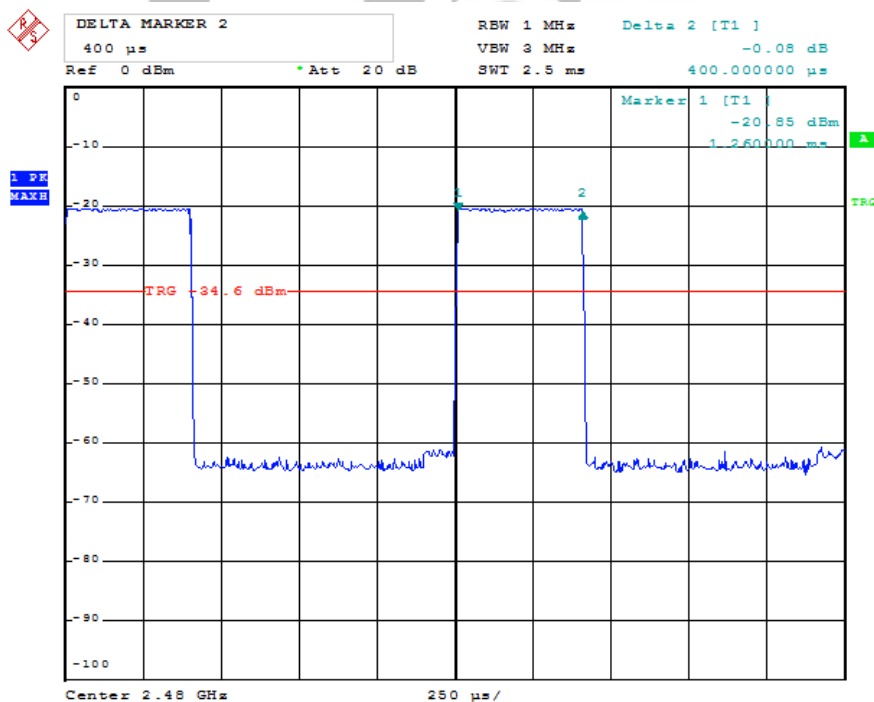


## EDR 2M 2DH3 Channel Low

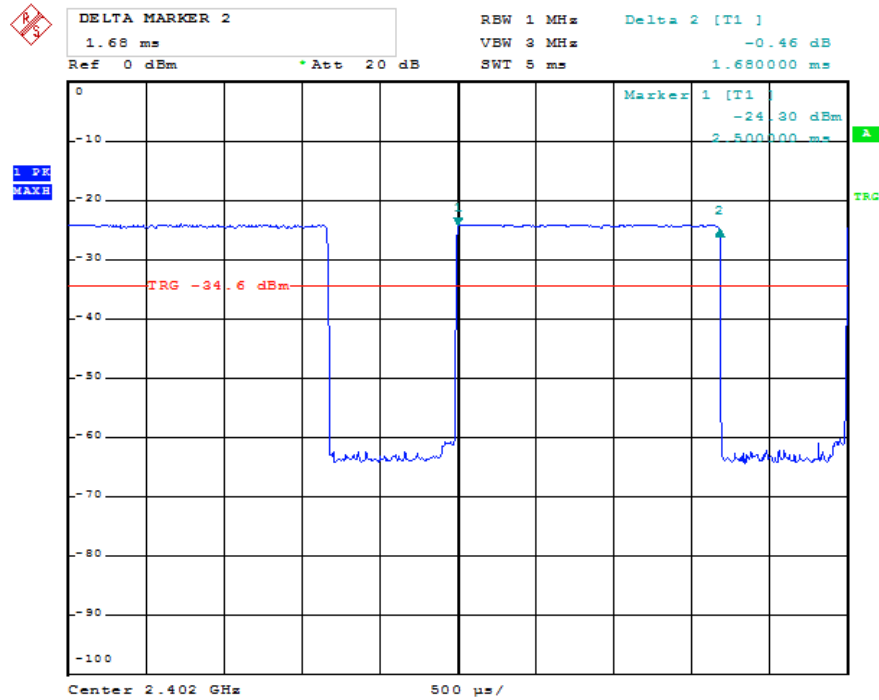


## Channel Middle

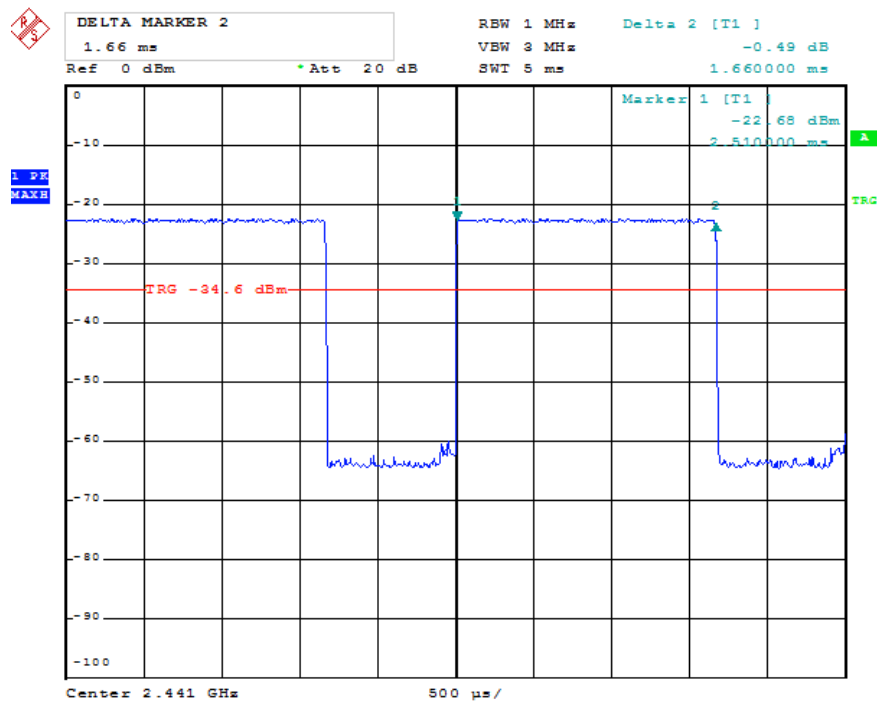


## Channel High

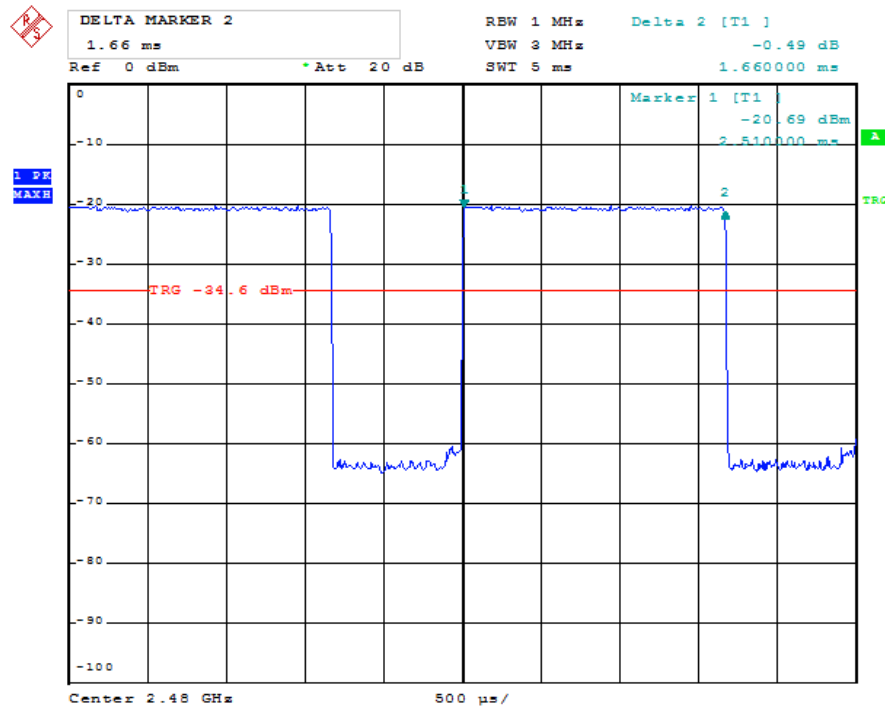


## EDR 2M 2DH5 Channel Low

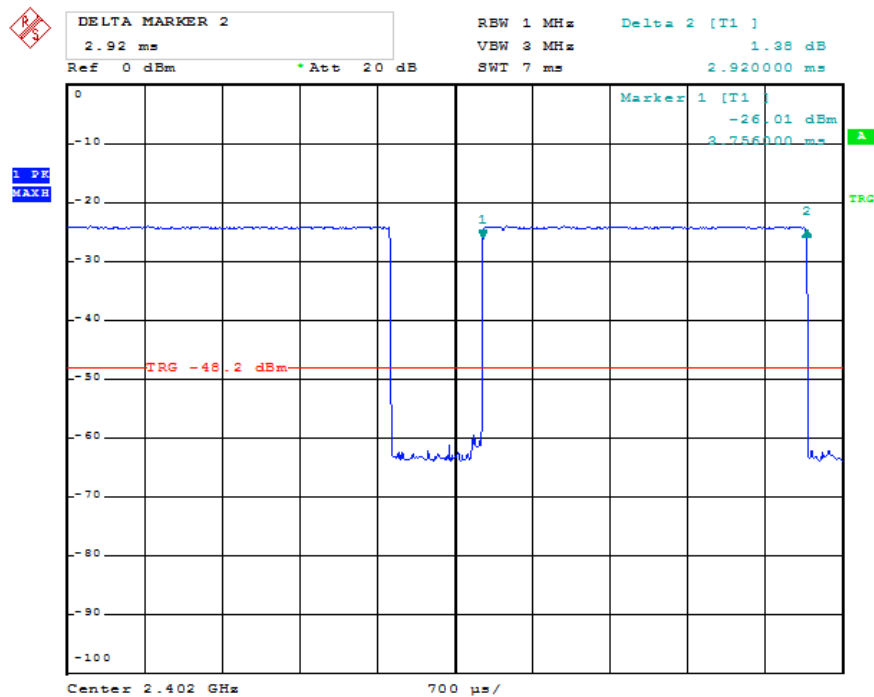


## Channel Middle

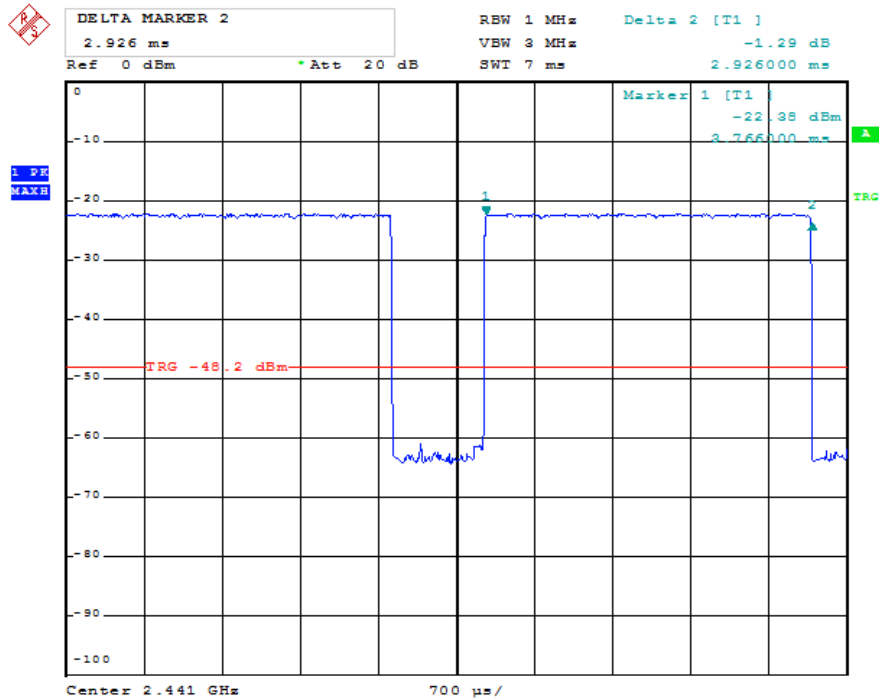


## Channel High

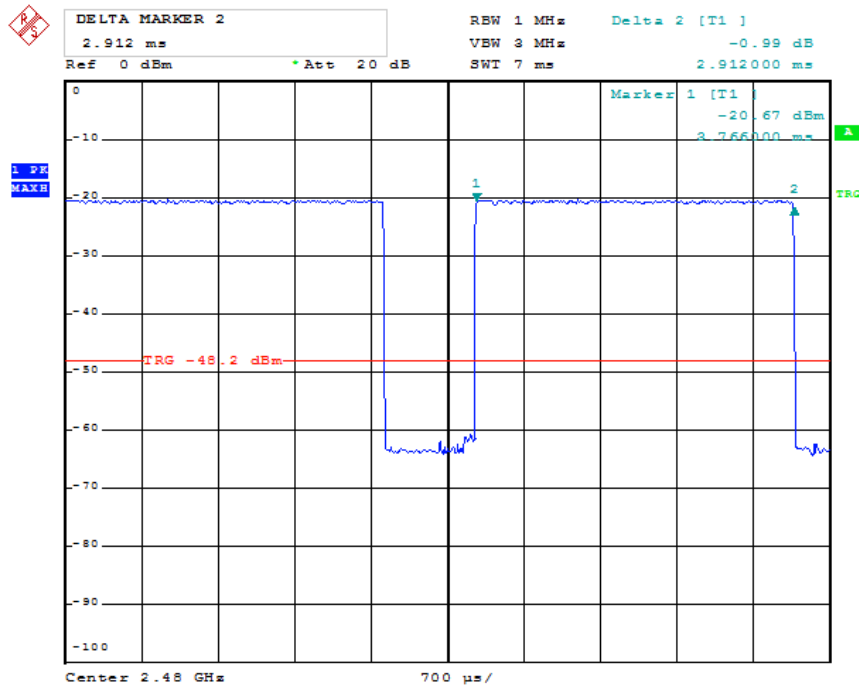

## EDR 3M 3DH1 Channel Low

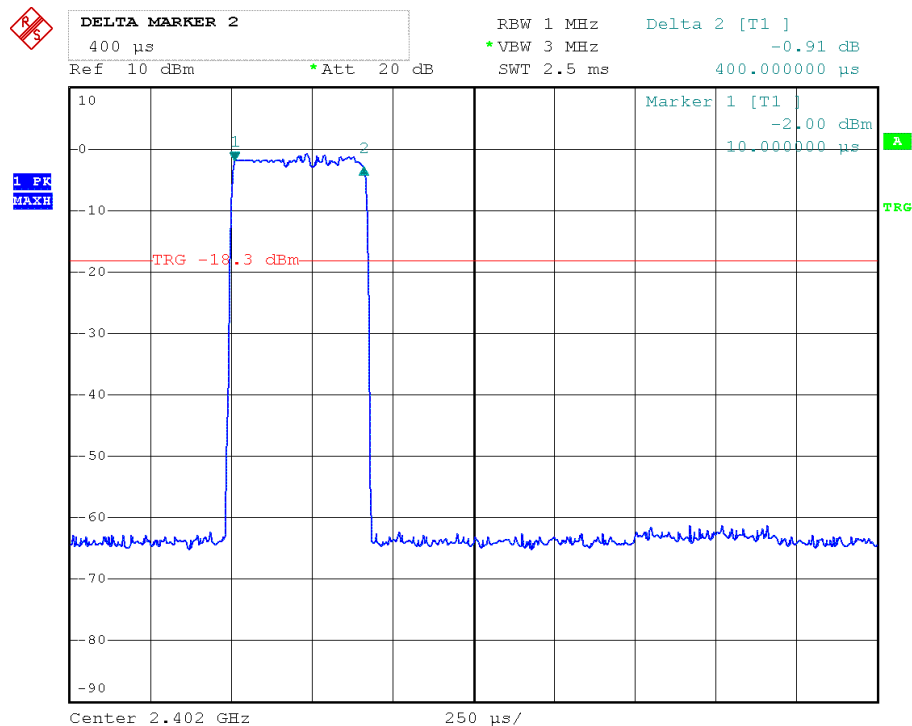


## Channel Middle

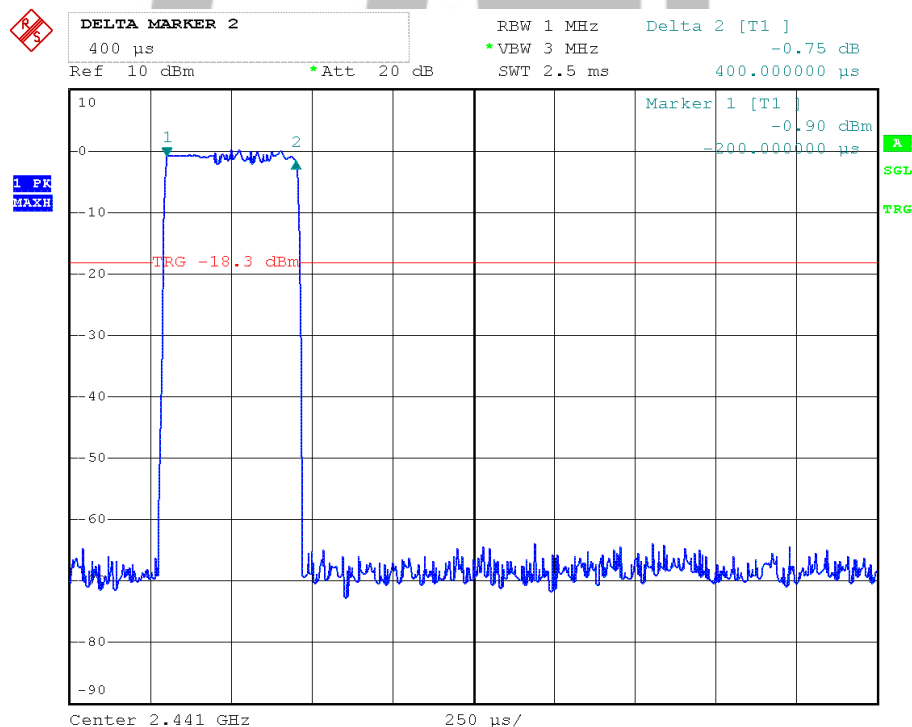





## Channel High

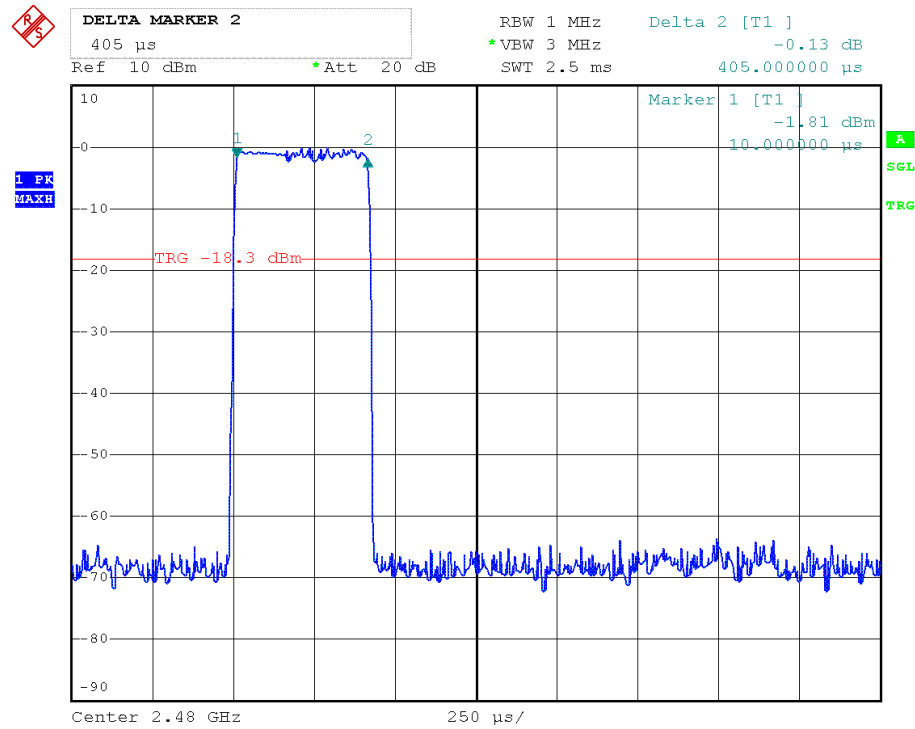


## EDR 3M 3DH3 Channel Low

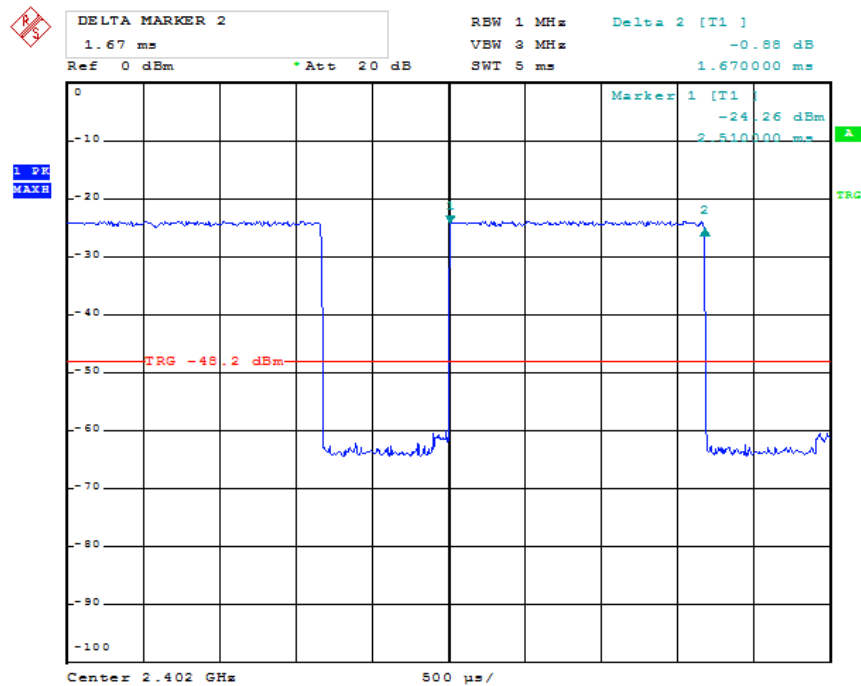


## Channel Middle

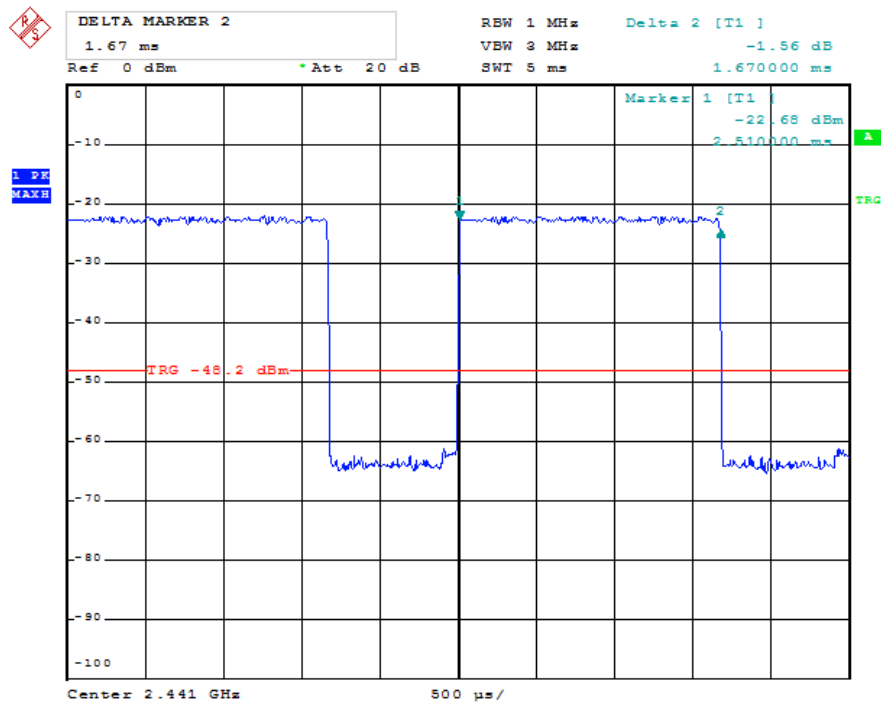


## Channel High

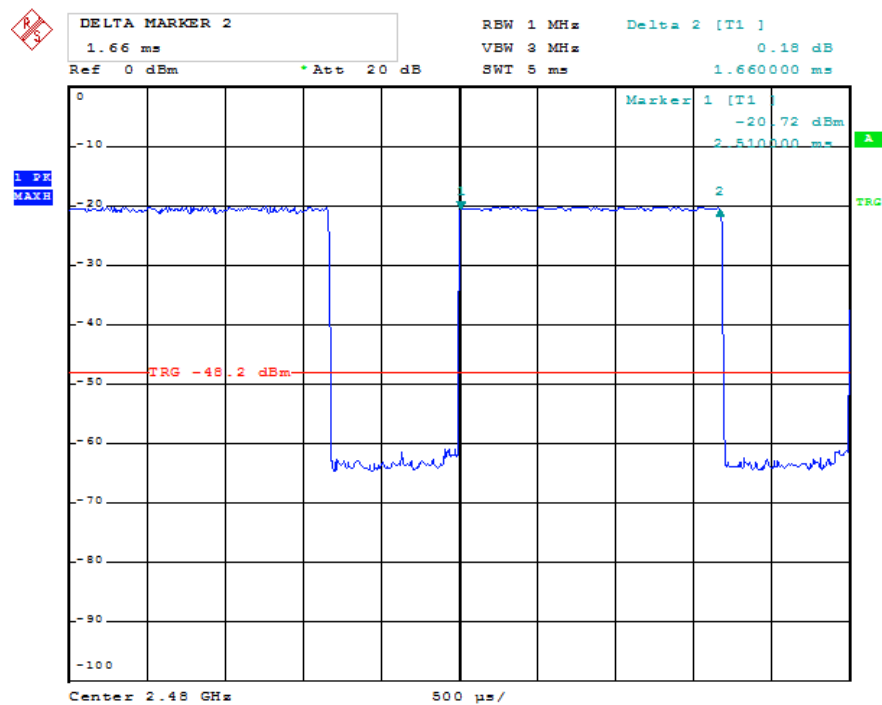


## EDR 3M 3DH5 Channel Low

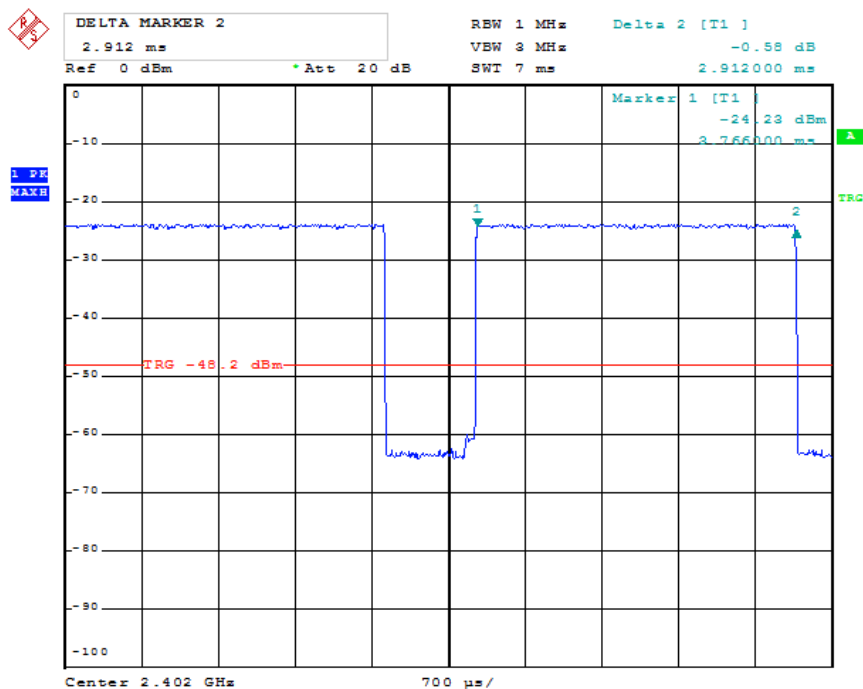

## Channel Middle

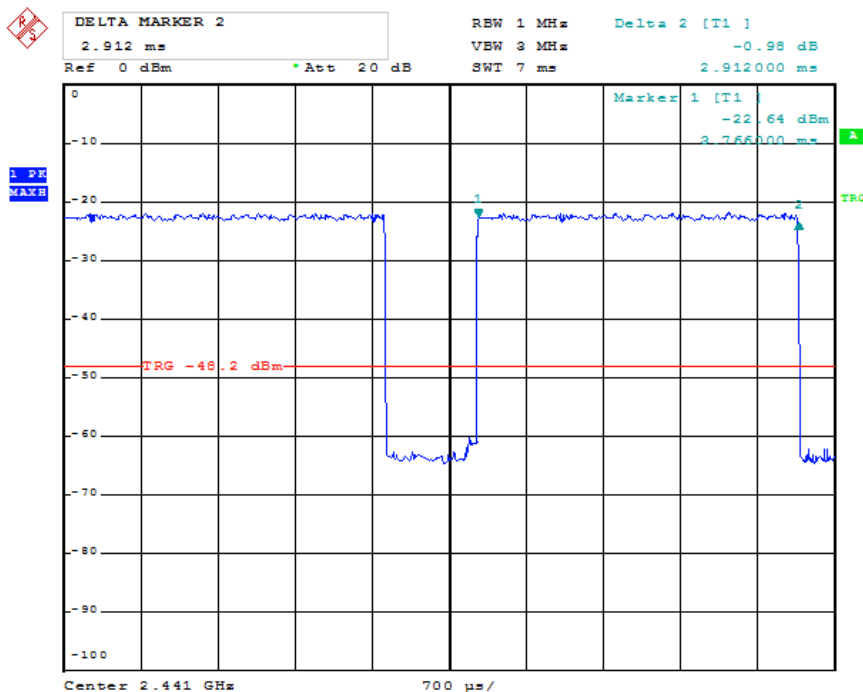

## Channel High

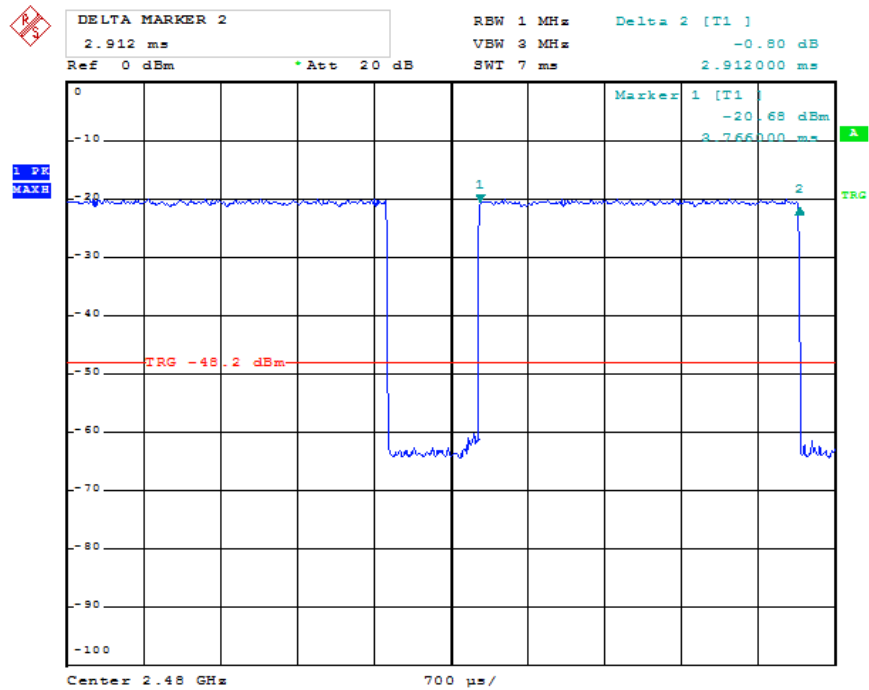


## 9. Test of Maximum Peak Output Power

### 9.1 Applicable Standard

Section 15.247(b)(1): For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels and The maximum peak output power shall not exceed 1 watt. For all other frequency hopping systems in this frequency band, The maximum peak output power shall not exceed 0.125 watt.

### 9.2 EUT Setup

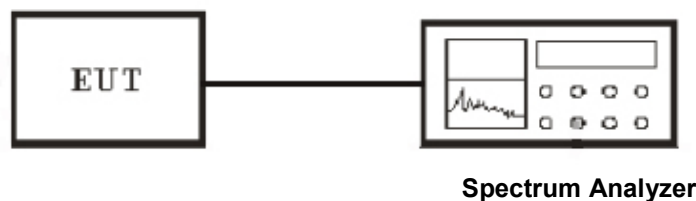

### 9.3 Test Equipment List and Details

See section 2.5.

### 9.4 Test Procedure

1. The transmitter output was connected to the peak power meter and recorded the peak value.
2. Peak power meter parameter set to auto attenuator and filter is the same as.
3. Repeated the 1 for the middle and highest channel of the EUT.

### 9.5 Test Result

Temperature ( °C ) : 22~23	EUT: MVOICE SPEAKERPHONE
Humidity (%RH) : 50~54	M/N: MVOICE 5000-B
Barometric Pressure ( mbar ) : 950~1000	Operation Condition: Tx Mode

### BDR 1M

Modulation Type	Channel No.	Frequency (MHz)	Output Power (dBm)	Limits (dBm)	Result
GFSK	Low	2402.00	-14.32	21	PASS
GFSK	Middle	2441.00	-11.99	21	PASS
GFSK	High	2480.00	-10.66	21	PASS


### EDR 2M

Modulation Type	Channel No.	Frequency (MHz)	Output Power (dBm)	Limits (dBm)	Result
Pi/4 DQPSK	Low	2402.00	-11.89	21	PASS
Pi/4 DQPSK	Middle	2441.00	-10.25	21	PASS
Pi/4 DQPSK	High	2480.00	-9.11	21	PASS


### EDR 3M

Modulation Type	Channel No.	Frequency (MHz)	Output Power (dBm)	Limits (dBm)	Result
8-DPSK	Low	2402.00	-11.75	21	PASS
8-DPSK	Middle	2441.00	-10.16	21	PASS
8-DPSK	High	2480.00	-8.98	21	PASS


### BDR 1M Channel Low

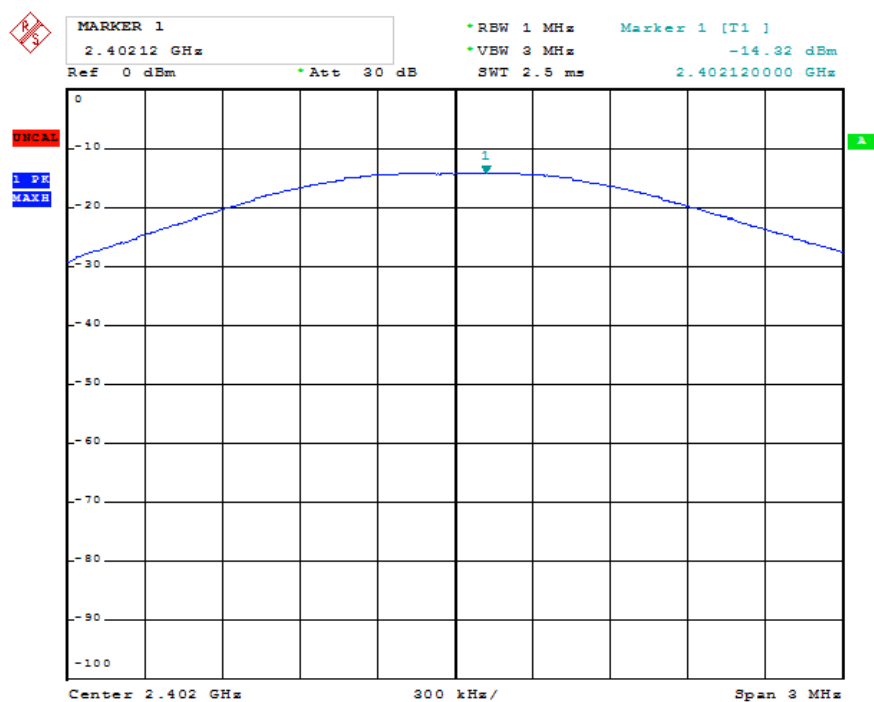


## Channel Middle

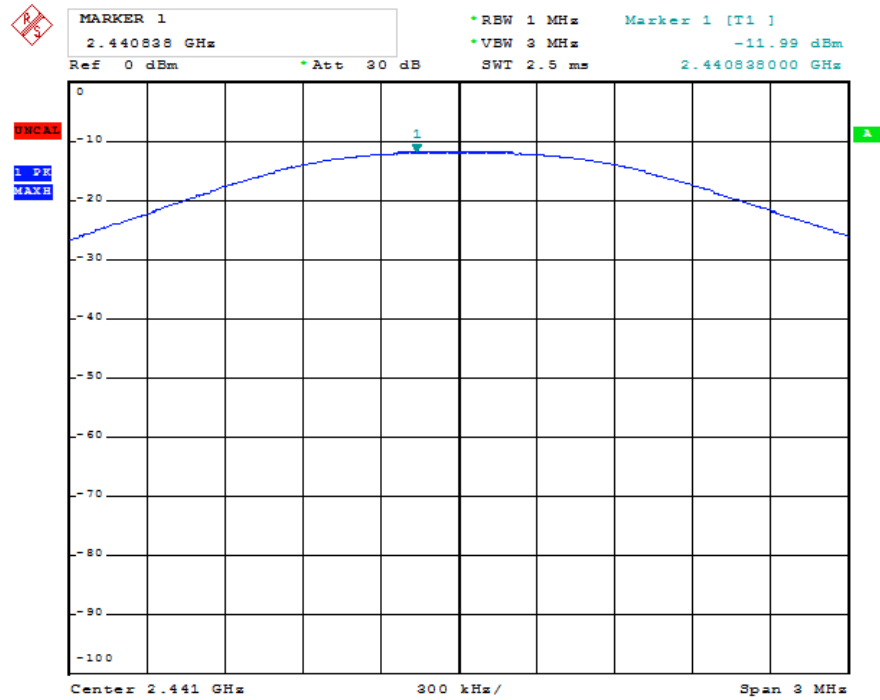


## Channel High

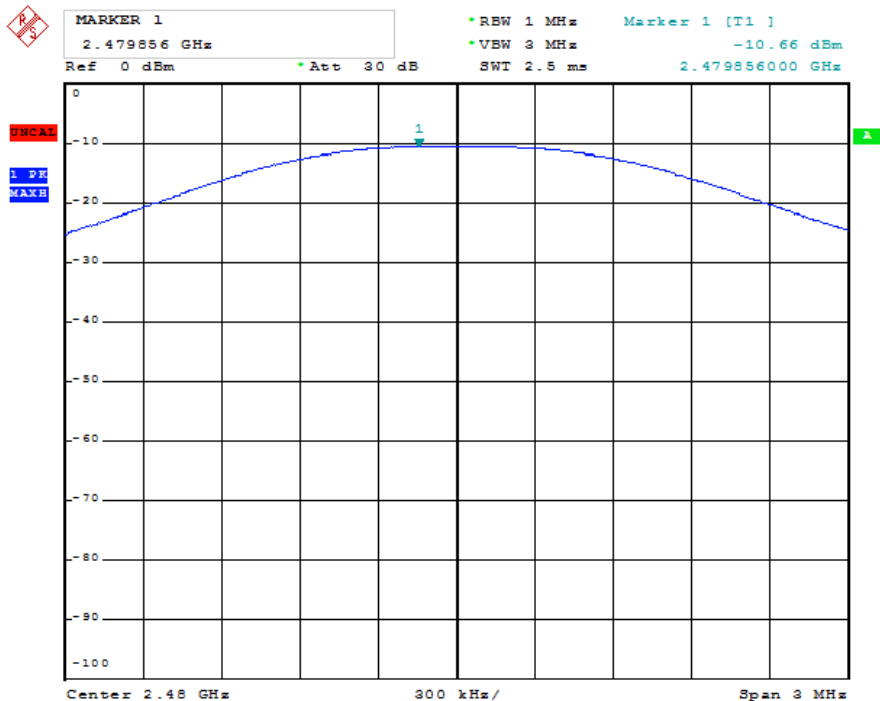

## EDR 2M Channel Low

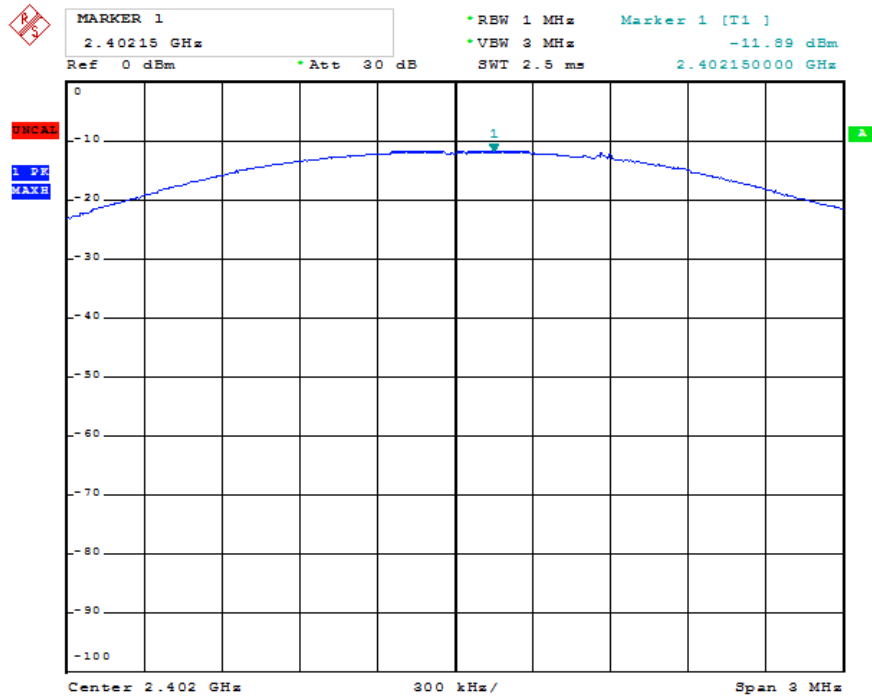


## Channel Middle

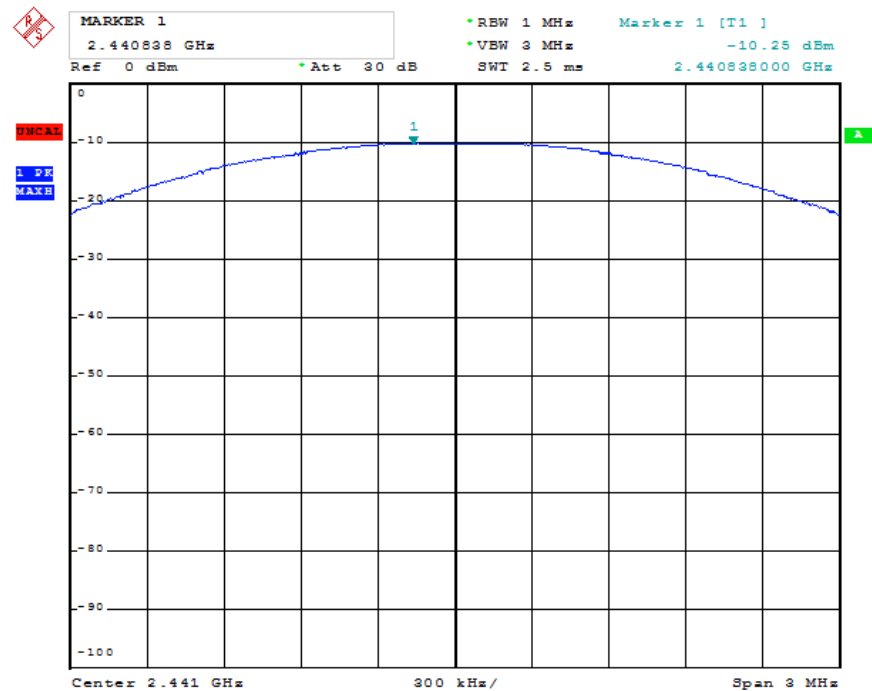





## Channel High

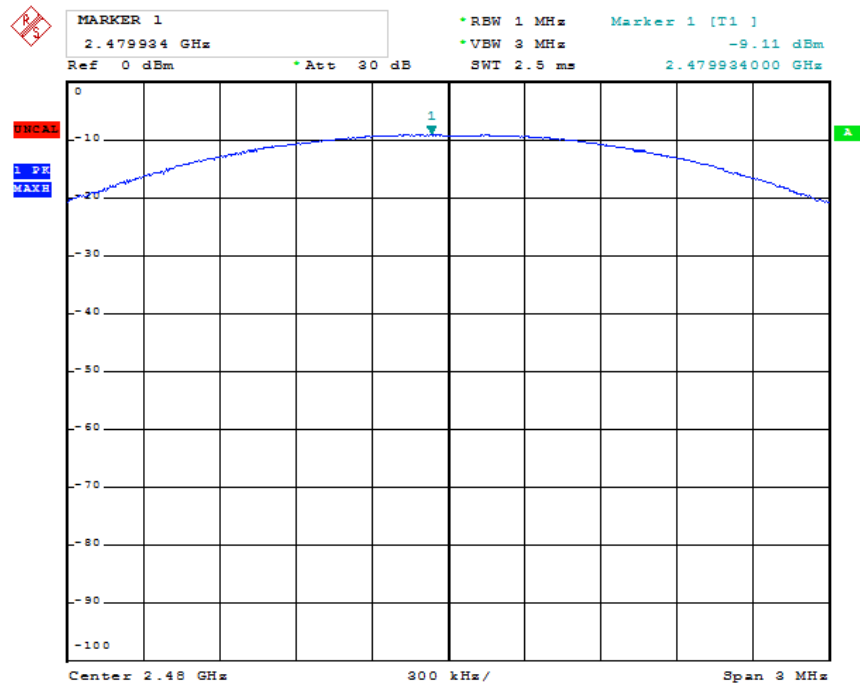


## EDR 3M Channel Low

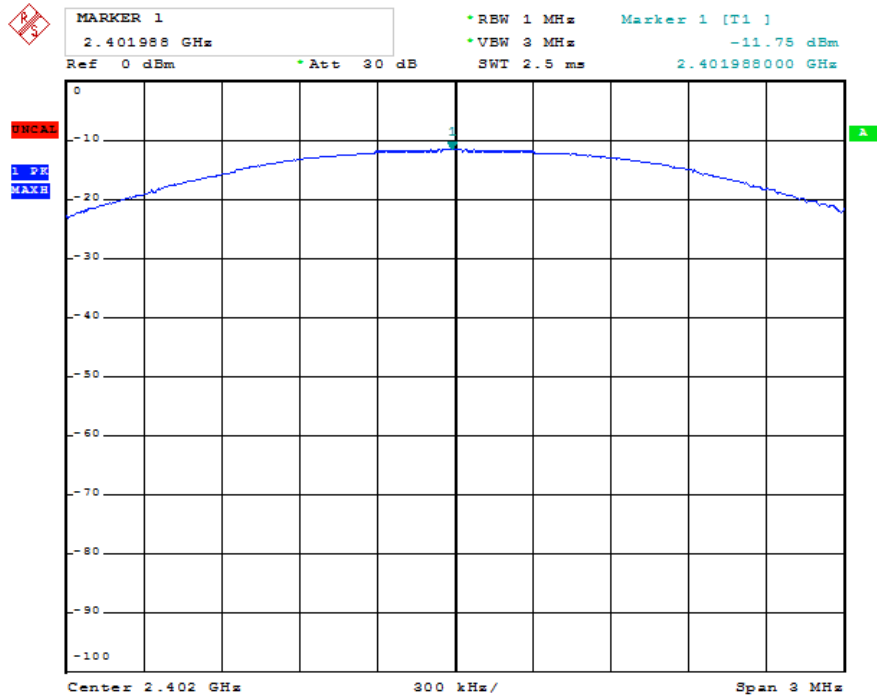

## Channel Middle

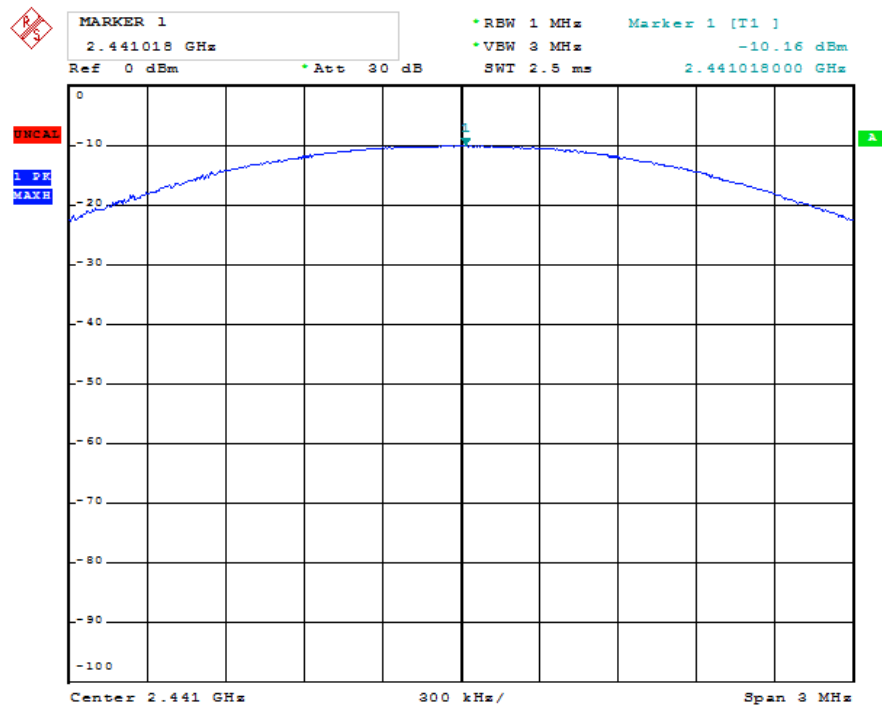

## Channel High

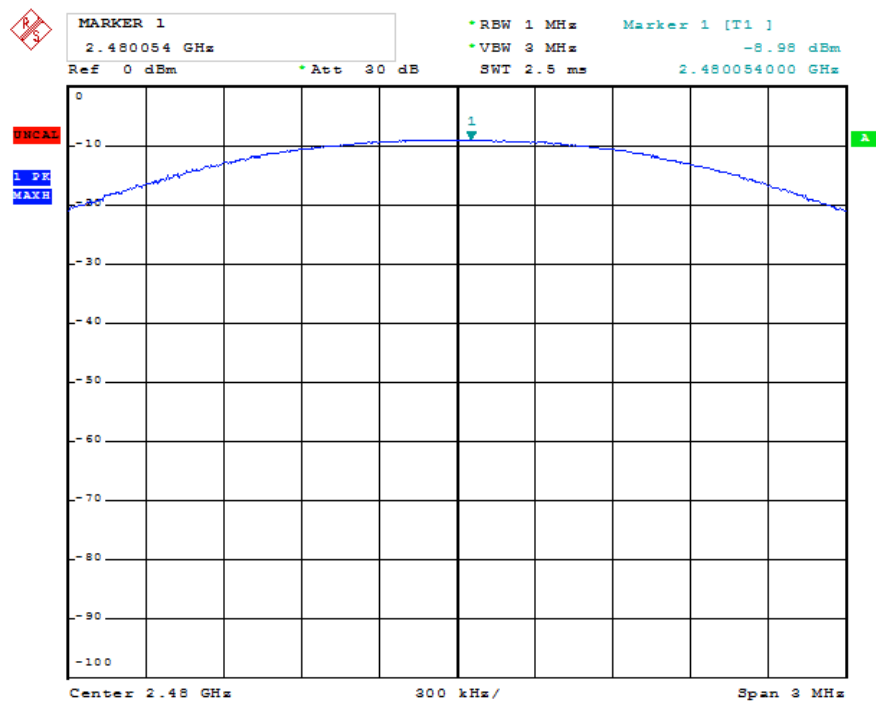

## 10. Test of Band Edges Emission

### 10.1 Applicable Standard

Section 15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. In addition, radiated emissions that fall in the restricted bands, as defined in Section 15.205, must also comply with the radiated emission limits specified in Section 15.209.

### 10.2 EUT Setup

Radiated Measurement Setup


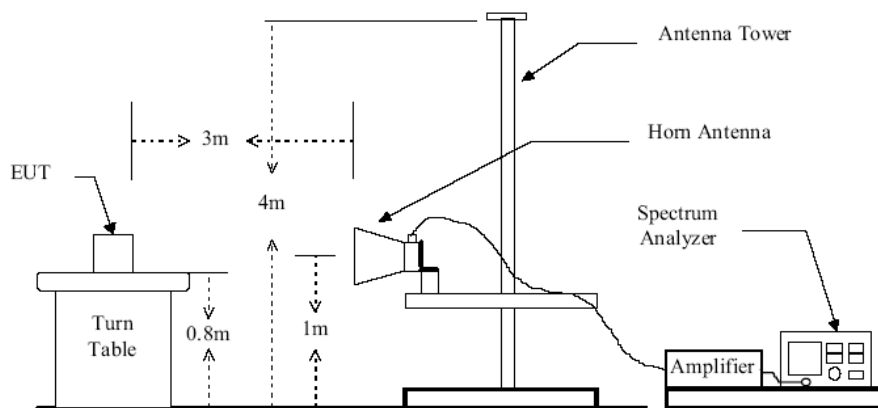


Figure 2 : Frequencies measured above 1 GHz configuration

Conducted Measurement Setup

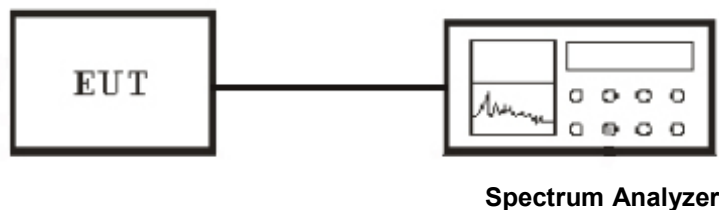

### 10.3 Test Equipment List and Details

See section 2.5.

### 10.4 Test Procedure

Conducted Measurement

1. The transmitter is set to the lowest channel.
2. The transmitter output was connected to the spectrum analyzer via a cable .

3. Set both RBW and VBW of spectrum analyzer to 100KHz with convenient frequency span including 100MHz bandwidth from lower band edge. Then detector set to peak and max hold this trace.
4. The lowest band edges emission was measured and recorded.
5. The transmitter set to the highest channel and repeated 2~4.

#### Radiated Measurement

1. Configure the EUT according to ANSI C63.4-2003
2. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emission field strength of both horizontal and vertical polarization.
4. For band edge emission, the antenna tower was scan (from 1 M to 4 M) and then the turn table was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. For band edge emission, use 1MHz VBW and 1MHz RBW for reading under AV and use 1MHz VBW and 1MHz RBW for reading under PK.

### 10.5 Test Result

Temperature ( °C ) : 22~23	EUT: MVOICE SPEAKERPHONE
Humidity (%RH) : 50~54	M/N: MVOICE 5000-B
Barometric Pressure ( mbar ) : 950~1000	Operation Condition: Tx Mode

#### Radiated Test Result

##### Worst Case BDR 1M

Frequency (MHz)	Antenna Polarization	Emission Read Value (dBμV/m)	Emission Level (dBμV/m)	Margin (dB)	Limits (dBμV/m)	Det.
2388.8	H	27.33	57.23	-16.77	74	PK
2388.8	H	14.31	44.21	-9.79	54	AV
2388.8	V	29.59	59.39	-14.61	74	PK
2388.8	V	14.42	44.32	-9.68	54	AV
2483	H	28.76	58.64	-15.36	74	PK
2483	H	15	44.9	-9.1	54	AV
2483	V	29.68	59.56	-14.44	74	PK
2483	V	15.3	45.2	-8.8	54	AV

### Worst Case EDR 2M

Frequency (MHz)	Antenna Polarization	Emission Read Value (dBμV/m)	Emission Level (dBμV/m)	Margin (dB)	Limits (dBμV/m)	Det.
2388.9	H	30.82	60.72	-13.28	74	PK
2388.9	H	15.62	45.52	-8.48	54	AV
2388.9	V	32.18	61.98	-12.02	74	PK
2388.9	V	16.62	46.52	-7.48	54	AV
2483.2	H	31.04	60.92	-13.08	74	PK
2483.2	H	17.72	47.62	-6.38	54	AV
2483.2	V	33.35	63.23	-10.77	74	PK
2483.2	V	17.94	47.84	-6.16	54	AV

### Worst Case EDR 3M


Frequency (MHz)	Antenna Polarization	Emission Read Value (dBμV/m)	Emission Level (dBμV/m)	Margin (dB)	Limits (dBμV/m)	Det.
2389.7	H	29.52	59.42	-14.58	74	PK
2389.7	H	17.21	47.11	-6.89	54	AV
2389.7	V	31.69	61.49	-12.51	74	PK
2389.7	V	16.22	46.12	-7.88	54	AV
2483.8	H	29.78	59.42	-14.58	74	PK
2483.8	H	16.23	46.13	-7.87	54	AV
2483.8	V	31.38	61.26	-12.74	74	PK
2483.8	V	16.65	46.55	-7.45	54	AV

- Note: 1. Emission Level = Emission Read Value + Correction Factor  
 2. Correction Factor) = Antenna Factor + Cable Loss- amplifier gain  
 3. The other emission levels were very low against the limit.  
 4. Margin value = Emission Level – Limit value


# Conducted Test Result

## BDR 1M


### Low Channel

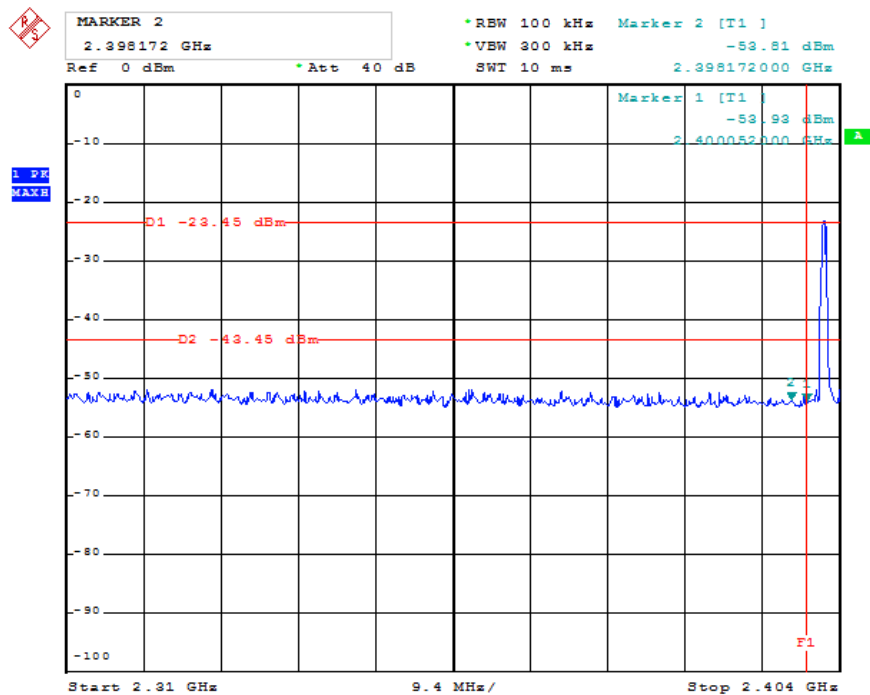


### High Channel

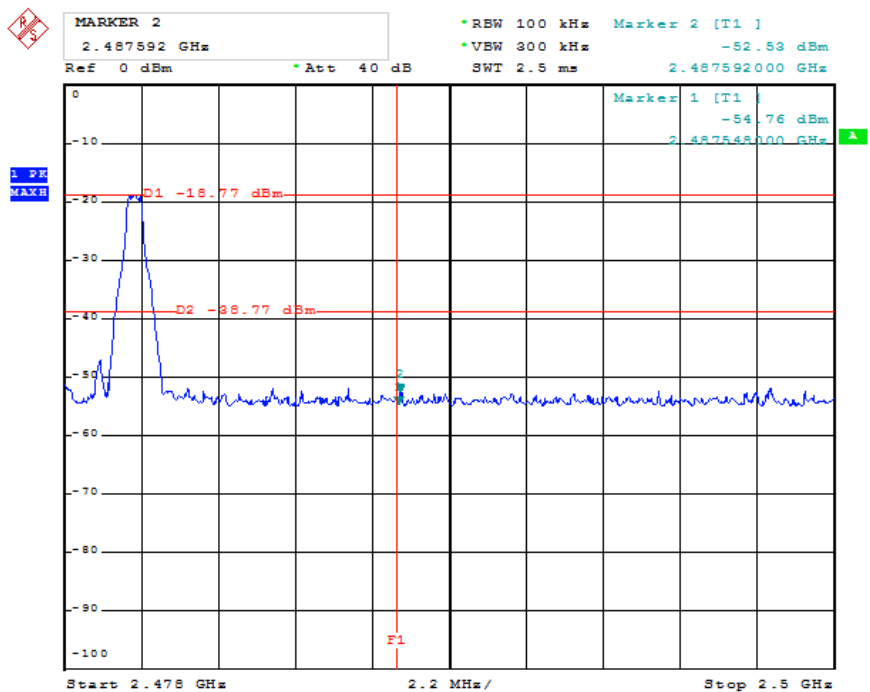


## EDR 2M Low Channel

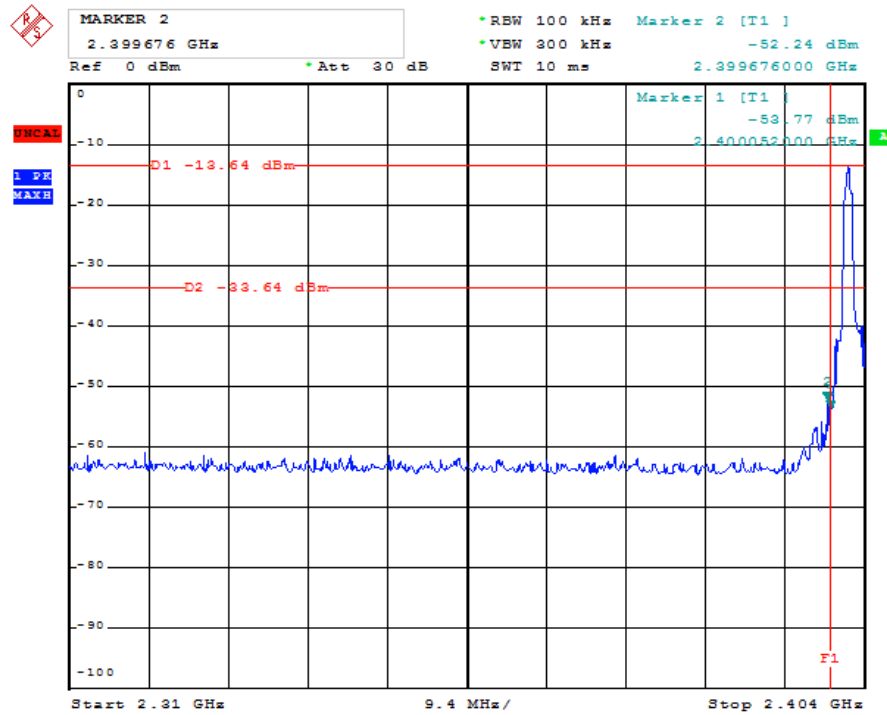


## High Channel

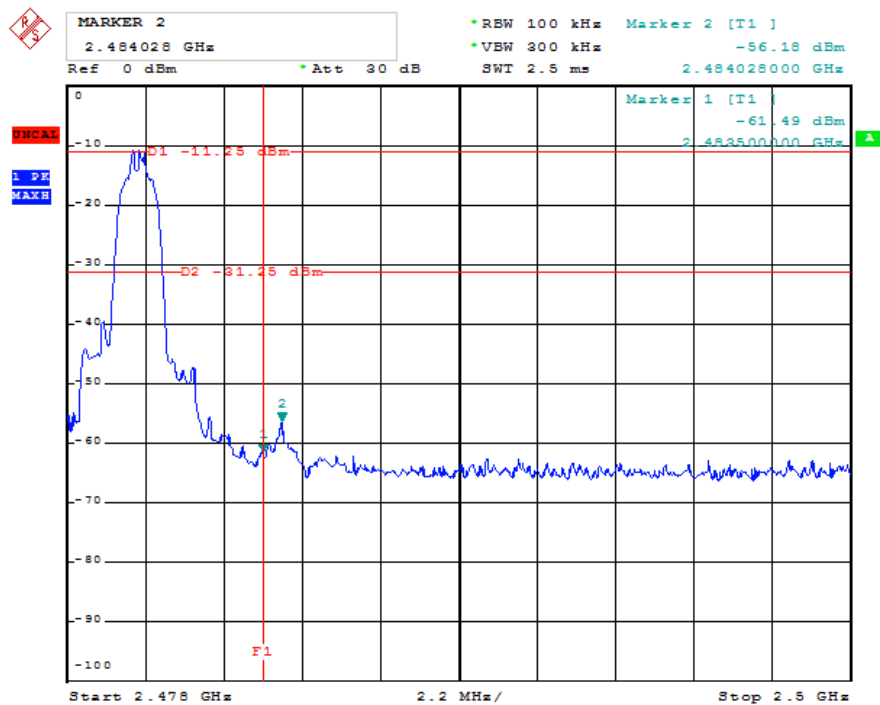

## EDR 3M Low Channel

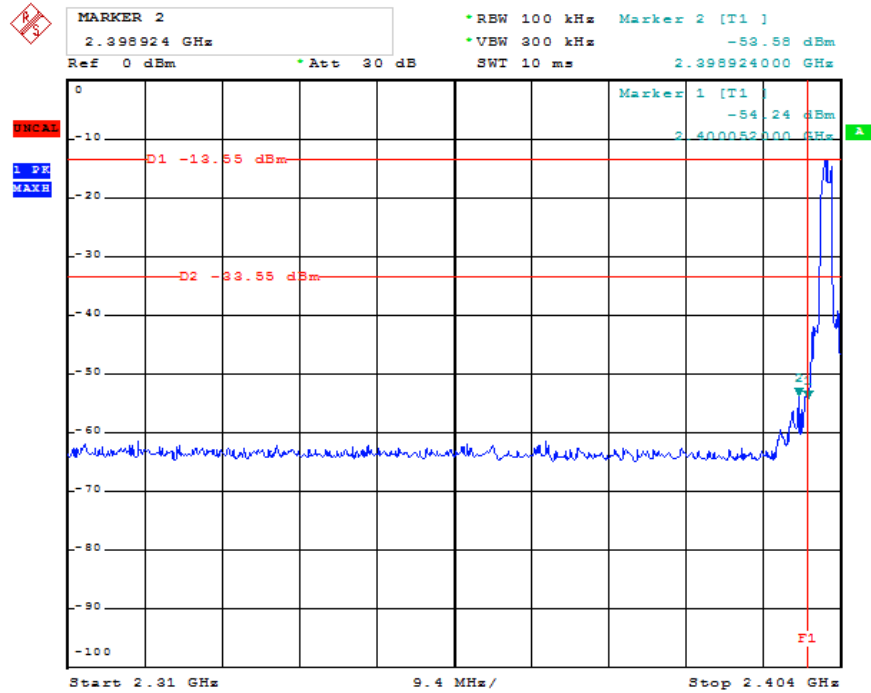


## High Channel

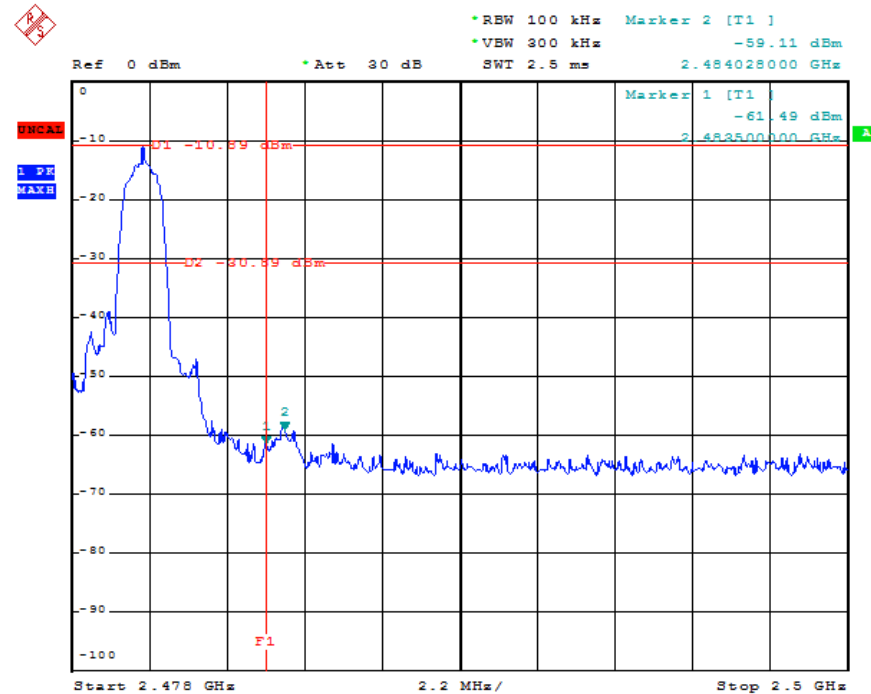




## Hopping Mode Worst case EDR 2M Low

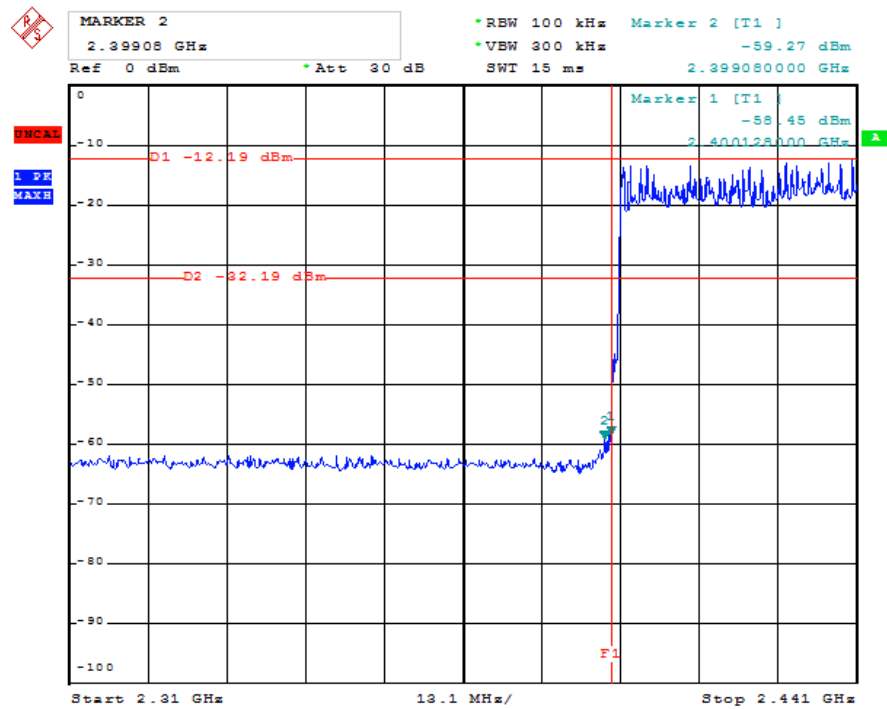

## High

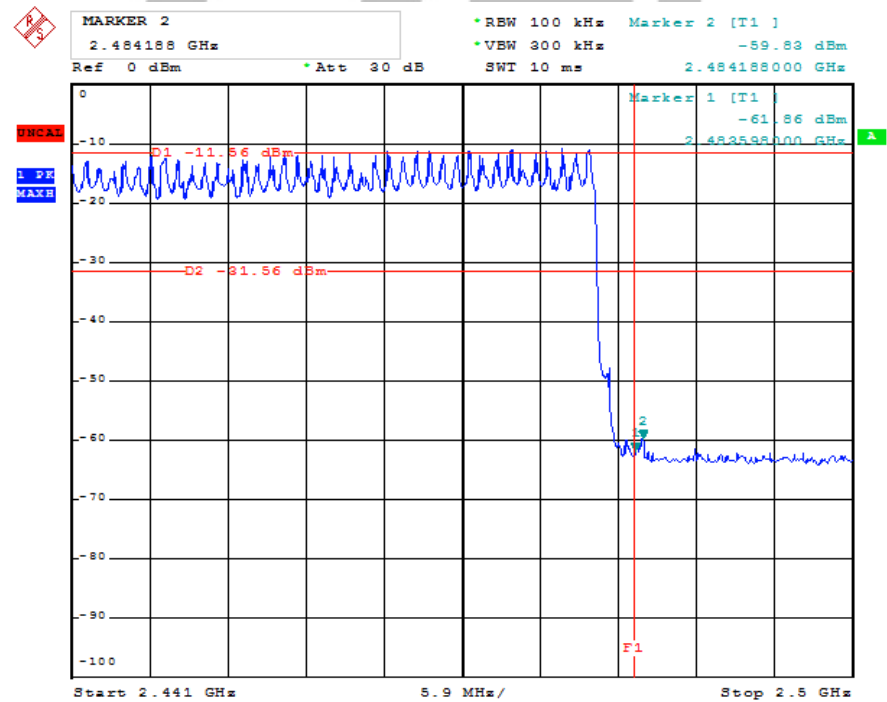

## 11. Test of Spurious Radiated Emission

### 11.1 Applicable Standard

Section 15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. In addition, radiated emissions that fall in the restricted bands, as defined in Section 15.205, must also comply with the radiated emission limits specified in Section 15.209.

### 11.2 EUT Setup

#### Conducted Measurement Setup



#### Radiated Measurement Setup

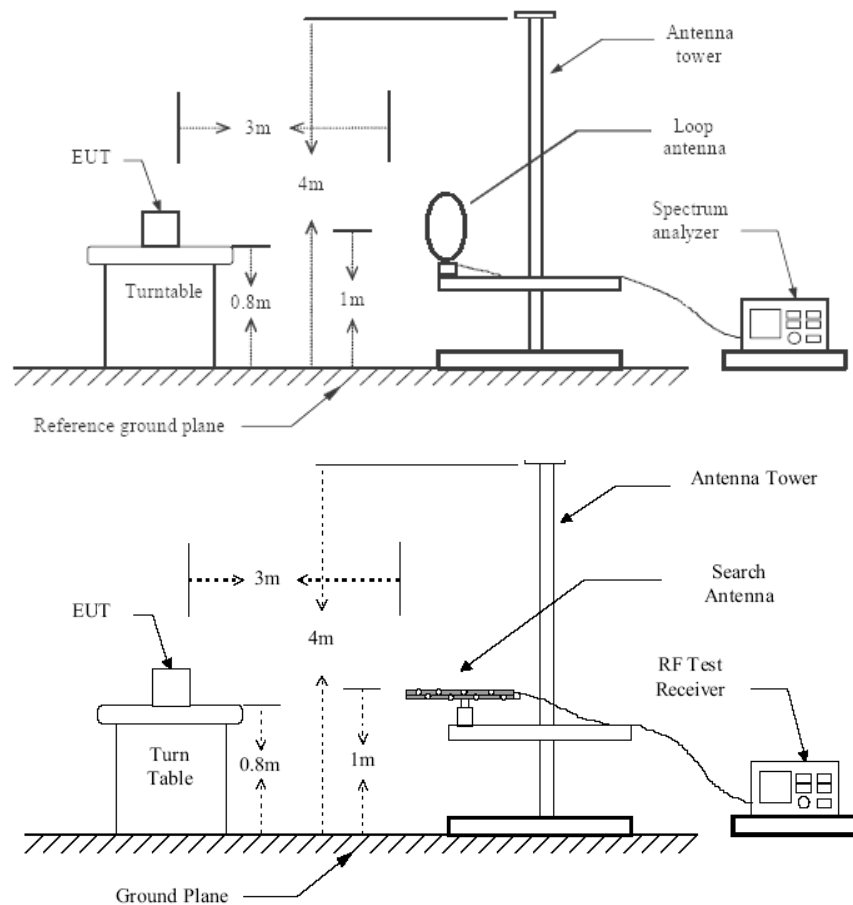


Figure 1 : Frequencies measured below 1 GHz configuration

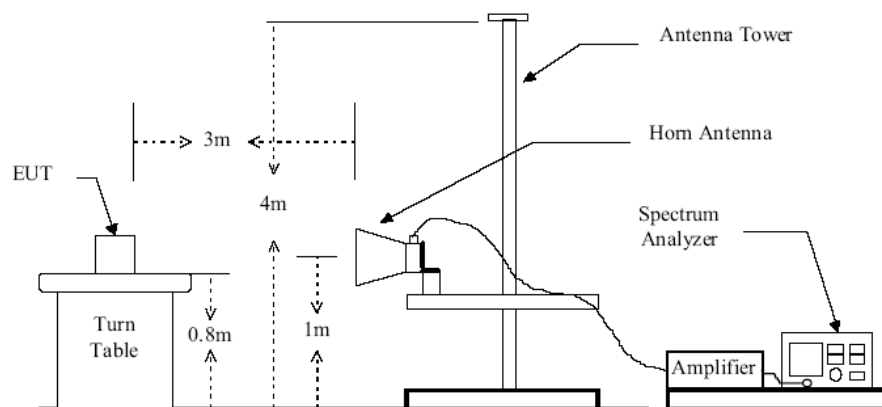


Figure 2 : Frequencies measured above 1 GHz configuration

### 11.3 Test Equipment List and Details

See section 2.5.

### 11.4 Test Procedure

#### Conducted Measurement

1. For emission above 1GHz to 26G,conducted measurement method is used.
2. The transmitter is set to the lowest channel.
3. The transmitter output was connected to the spectrum analyzer via a cable and cable loss is used as the offset of the spectrum analyzer.
4. Set RBW to 1 MHz and VBW to 3 MHz, Then detector set to peak and max hold this trace.
5. The lowest band edges emission was measured and recorded.
6. The transmitter set to the highest channel and repeated 2~4.

#### Radiated Measurement

1. Configure the EUT according to ANSI C63.4-2003
2. The EUT was placed on the top of the turntable 0.8 meter above ground.
3. Receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable. When the frequency spectrum measured started from 9 kHz to 30 MHz, a loop antenna is used. When the frequency spectrum measured started from 30 MHz to 1000 MHz and above 1000 MHz, a broadband receiving antenna and the horn antenna are used.
4. Power on the EUT and all the supporting units.
5. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
6. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emission field strength of both horizontal and vertical polarization.
7. For each suspected emission, the antenna tower was scanned (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.

8. According to the characteristic of the EUT crystals, the range of frequencies was investigated from 9KHz to 30MHz, 30MHz to 1GHz and 1GHz to 26GHz.

9. For emission below 1GHz, Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.


10. For emission above 1GHz, Set the RBW=1MHz,VBW=3MHz for Peak Detector while the RBW=1MHz, VBW=10Hz for Average Detector, Readings are both peak and average values.

11. The pre-test have done for the EUT in three axes and found the worst emission at position shown in test setup photos. The worst case data is recorded in the report. All emission not reported are much lower than the prescribed limits.

### 11.5 Test Result

Temperature ( °C ) : 22~23	EUT: MVOICE SPEAKERPHONE
Humidity (%RH ) : 50~54	M/N: MVOICE 5000-B
Barometric Pressure ( mbar ) : 950~1000	Operation Condition: TX Mode

Note:1. Pre-Scan has been conducted to determine the worst-case mode from all possible mode,we chose the worst data for report.

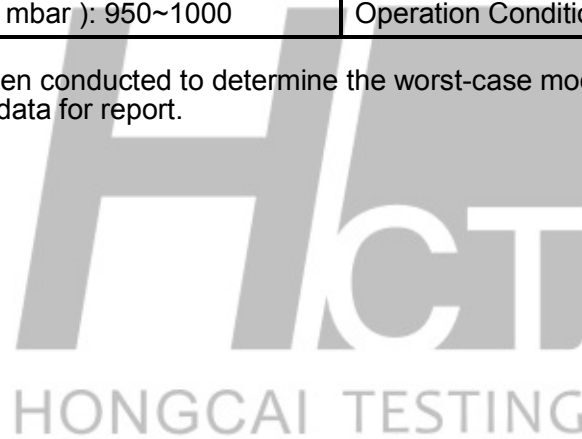


# The worst Spurious Emission Data EDR2M Mode Below 1GHz Channel Low:

EUT: MVOICE SPEAKERPHONE  
M/N: MVOICE 5000-B  
Operating Condition: TX Mode  
Test Site: 3m CHAMBER  
Operator: Chen  
Test Specification: DC 5V/1A FROM MICRO USB  
Comment: Polarization: Horizontal

## **SWEEP TABLE: "test (30M-1G)"**

Short Description:		Field Strength			
Start	Stop	Detector	Meas.	IF	Transducer
Frequency	Frequency		Time	Bandw.	
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	9163-2015

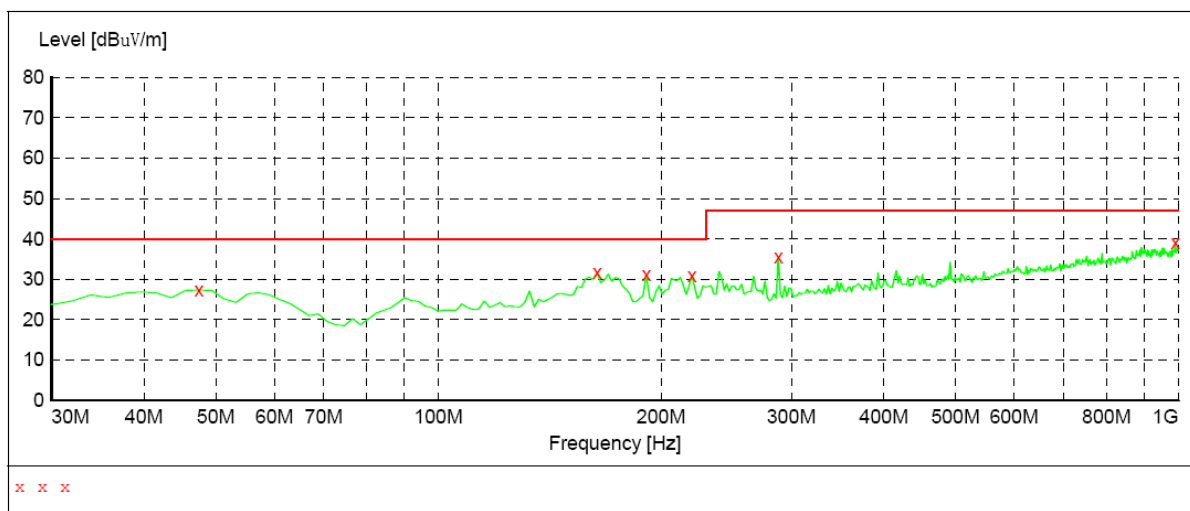

## **MEASUREMENT RESULT:**


Frequency MHz	Level dBuV/m	Transd dB	Limit dBuV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
47.460000	27.40	16.7	40.0	12.6	QP	100.0	0.00	HORIZONTAL
163.860000	31.70	12.9	40.0	8.3	QP	100.0	0.00	HORIZONTAL
191.020000	31.10	13.6	40.0	8.9	QP	100.0	0.00	HORIZONTAL
220.120000	30.90	12.7	40.0	9.1	QP	100.0	0.00	HORIZONTAL
288.020000	35.60	15.0	47.0	11.4	QP	100.0	0.00	HORIZONTAL
990.300000	39.00	25.8	47.0	8.0	QP	100.0	0.00	HORIZONTAL

The worst Spurious Emission Data BDR Mode Below 1GHz Channel Low:

EUT: MVOICE SPEAKERPHONE  
M/N: MVOICE 5000-B  
Operating Condition: TX Mode  
Test Site: 3m CHAMBER  
Operator: Chen  
Test Specification: DC 5V/1A FROM MICRO USB  
Comment: Polarization: Vertical

**SWEEP TABLE: "test (30M-1G) "**

Short Description:		Field Strength			
Start	Stop	Detector	Meas. Time	IF Bandw.	Transducer
Frequency 30.0 MHz	Frequency 1.0 GHz	MaxPeak	Coupled	100 kHz	9163-2015

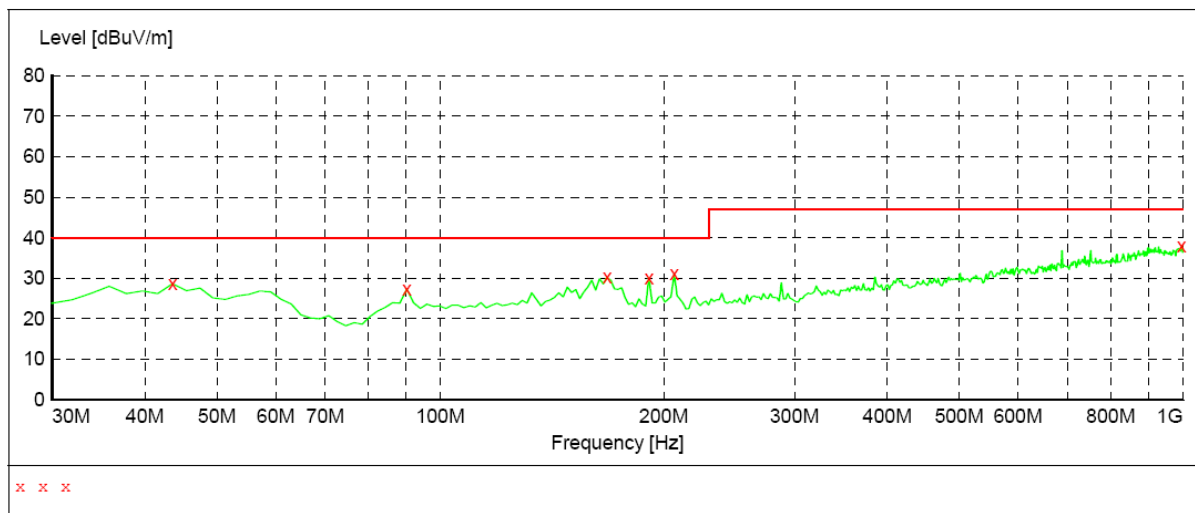

**MEASUREMENT RESULT:**

Frequency MHz	Level dBuV/m	Transd dB	Limit dBuV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
43.580000	28.60	15.8	40.0	11.4	QP	100.0	0.00	VERTICAL
90.140000	27.30	15.0	40.0	12.7	QP	100.0	0.00	VERTICAL
167.740000	30.20	12.7	40.0	9.8	QP	100.0	0.00	VERTICAL
191.020000	30.10	13.6	40.0	9.9	QP	100.0	0.00	VERTICAL
206.540000	31.10	14.1	40.0	8.9	QP	100.0	0.00	VERTICAL
996.120000	38.00	25.9	47.0	9.0	QP	100.0	0.00	VERTICAL

The worst Spurious Emission Data EDR3M Mode Above 1GHz

Channel Low

Channel Low (2402MHz)								
Maximum Frequency (MHz)	Polarity and Level					Limit (dBμV/m)	Margin (dBμV/m)	Mark (P/Q/A)
	Polarity	Height (m)	Reading dBμV	Transd	Result dBμV/m			
2405	H	1	95.86	-8.45	87.41	N/A	N/A	P
			87.7	-8.45	79.25	N/A	N/A	A
2405	V	1	102.67	-8.45	94.22	N/A	N/A	P
			93.71	-8.45	85.26	N/A	N/A	A
4809	H	1	38.72	-0.23	38.49	74	-35.51	P
			28.59	-0.23	28.36	54	-25.64	A
4809	V	1	40.17	-0.23	39.94	74	-34.06	P
			29.79	-0.23	29.56	54	-24.44	A
7207	H	1	37.93	6.08	44.01	74	-29.99	P
			29.19	6.08	35.27	54	-18.73	A
7207	V	1	40.92	6.08	47	74	-27	P
			29.67	6.08	35.75	54	-18.25	A
9605	H	1	38.23	8.99	47.22	74	-26.78	P
			28.01	8.99	37	54	-17	A
9605	V	1	39.93	6.08	46.01	74	-27.99	P
			30.19	6.08	36.27	54	-17.73	A
12022.36	H	1	38.92	12.71	51.63	74	-22.37	P
			28.67	12.71	41.38	54	-12.62	A
12022.36	V	1	40.19	12.71	52.9	74	-21.1	P
			29.92	12.71	42.63	54	-11.37	A
25220.37	----	----	----	----	----	----	----	----

Remark: 1. Transd.=Antenna Factor+Cable Loss-Pre-amplifier

Margin = Level-Limit

Mark: P means Peak Value, Q means Quasi Peak Value, A means Average Value

2. Data of measurement within this frequency range shown “-” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

3. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz.

4. The test limit distance is 3m limit

# Channel Mid

Channel Middle (2441MHz)								
Maximum Frequency (MHz)	Polarity and Level					Limit (dBμV/m)	Margin (dBμV/m)	Mark (P/Q/A)
	Polarity	Height (m)	Reading dBμV	Transd	Result dBμV/m			
2429	H	1	96.88	-7.67	89.21	N/A	N/A	P
			88.71	-7.67	81.04	N/A	N/A	A
2429	V	1	101.69	-7.67	94.02	N/A	N/A	P
			93.22	-7.67	85.55	N/A	N/A	A
4866	H	1	37.59	-0.23	37.36	74	-36.64	P
			28.18	-0.23	27.95	54	-26.05	A
4866	V	1	39.88	-0.23	39.65	74	-34.35	P
			29.67	-0.23	29.44	54	-24.56	A
7335	H	1	38.73	6.19	44.92	74	-29.08	P
			28.88	6.19	35.07	54	-18.93	A
7335	V	1	40.92	6.19	47.11	74	-26.89	P
			29.62	6.19	35.81	54	-18.19	A
9771	H	1	38.58	9.17	47.75	74	-26.25	P
			27.7	9.17	36.87	54	-17.13	A
9771	V	1	40.12	9.17	49.29	74	-24.71	P
			30.18	9.17	39.35	54	-14.65	A
12169	H	1	38.49	12.8	51.29	74	-22.71	P
			28.09	12.8	40.89	54	-13.11	A
12169	V	1	40.98	12.8	53.78	74	-20.22	P
			28.72	12.8	41.52	54	-12.48	A
25377	----	----	----	----	----	----	----	----

Remark: 1. Transd.=Antenna Factor+Cable Loss-Pre-amplifier

Margin = Level-Limit

Mark: P means Peak Value, Q means Quasi Peak Value, A means Average Value

2. Data of measurement within this frequency range shown “-” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

3. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz.

4. The test limit distance is 3m limit



# Channel High

Channel High (2480MHz)								
Maximum Frequency (MHz)	Polarity and Level					Limit (dBμV/m)	Margin (dBμV/m)	Mark (P/Q/A)
	Polarity	Height (m)	Reading dBμV	Transd	Result dBμV/m			
2475	H	1	95.88	-7.35	88.53	N/A	N/A	P
			88.09	-7.35	80.74	N/A	N/A	A
2475	V	1	100.22	-7.35	92.87	N/A	N/A	P
			90.79	-7.35	83.44	N/A	N/A	A
4946	H	1	37.93	-0.23	37.7	74	-36.3	P
			28.59	-0.23	28.36	54	-25.64	A
4946	V	1	40.79	-0.23	40.56	74	-33.44	P
			29.91	-0.23	29.68	54	-24.32	A
7427	H	1	38.19	6.31	44.5	74	-29.5	P
			28.18	6.31	34.49	54	-19.51	A
74278	V	1	39.92	6.31	46.23	74	-27.77	P
			30.13	6.31	36.44	54	-17.56	A
9939	H	1	38.72	9.35	48.07	74	-25.93	P
			29.28	9.35	38.63	54	-15.37	A
9939	V	1	41.19	9.35	50.54	74	-23.46	P
			30.31	9.35	39.66	54	-14.34	A
12356	H	1	38.92	12.89	51.81	74	-22.19	P
			29.12	12.89	42.01	54	-11.99	A
12356	V	1	40.23	12.89	53.12	74	-20.88	P
			30.08	12.89	42.97	54	-11.03	A
24678	----	----	----	----	----	----	----	----

Remark: 1. Transd.=Antenna Factor+Cable Loss-Pre-amplifier  
Margin = Level-Limit  
Mark: P means Peak Value, Q means Quasi Peak Value, A means Average Value  
2. Data of measurement within this frequency range shown “-” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.  
3. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz.  
4. The test limit distance is 3m limit

## WORST-CASE RADIATED EMISSION BELOW 30 MHz


Tx operating BDR Low Channel Mode:

Frequency	Meter Reading	Antenna Factor	Cable Loss	Emission Levels	Limits	Margin	Detector Mode
(MHz)	(dBμV)	(dB/M)	(dB)	(dBμV/M)	(dB μV/M)	(dB)	PK/QP
2.23	24.85	8.02	1.24	34.11	67	-32.89	QP
18.08	23.07	8.42	1.4	32.89	49.5	-16.61	QP
18.69	22.49	8.84	1.29	32.62	49.5	-16.88	QP
23.45	22.89	7.92	1.87	32.68	49.5	-16.82	QP


Note:

1. The pre-test have done for the EUT in three axes and found the worst emission at position shown in test setup photos. The worst case data is recorded in the report.
2. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m)
3. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
4. The other emission levels were very low against the limit.
5. Margin value = Emission level.- Limit value


### Conducted Spurious Emission BDR 1M Channel Low

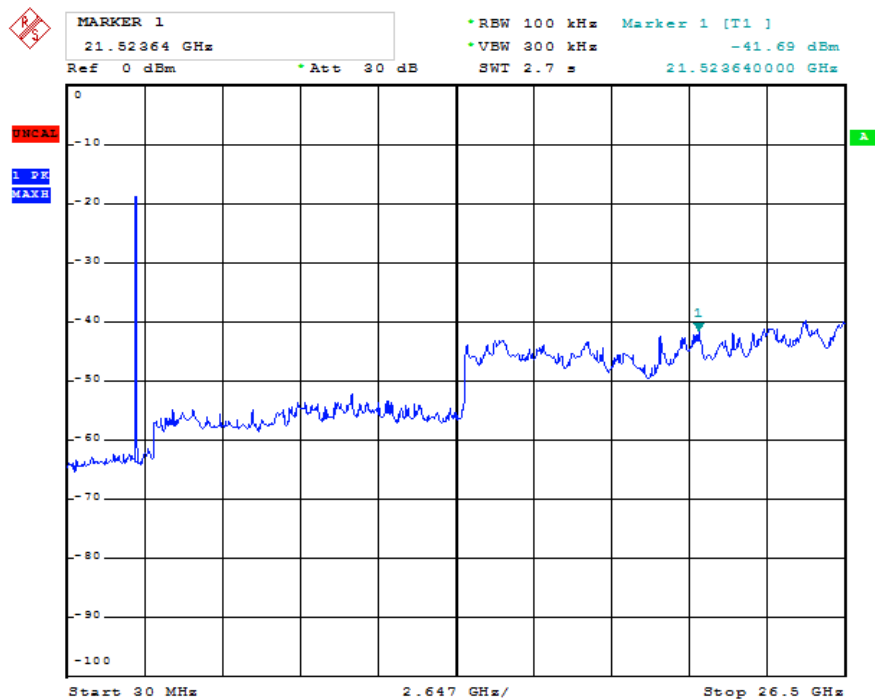


## Channel Mid

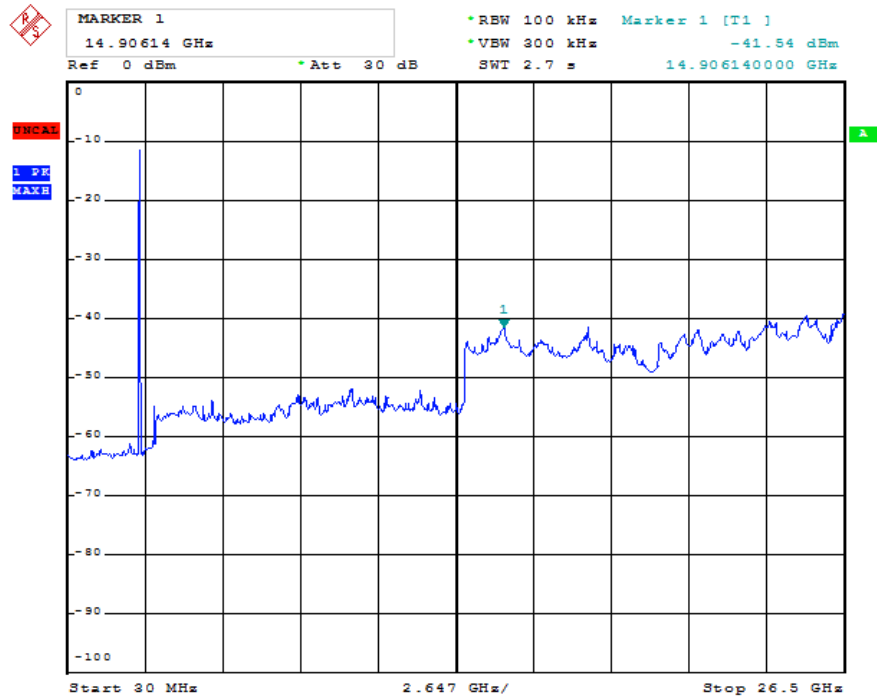


## Channel High

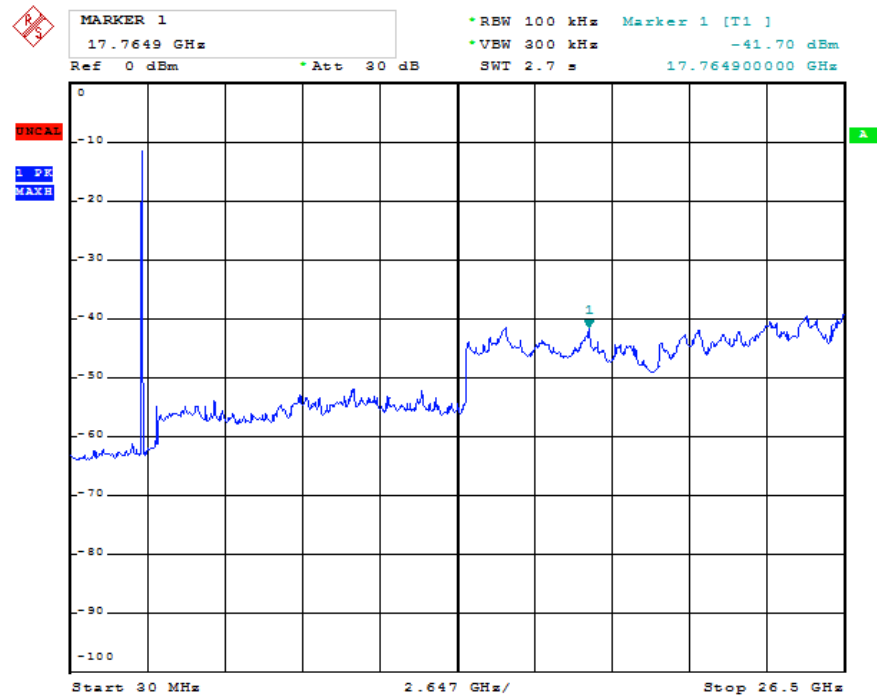


**BDR 2M  
Channel Low**

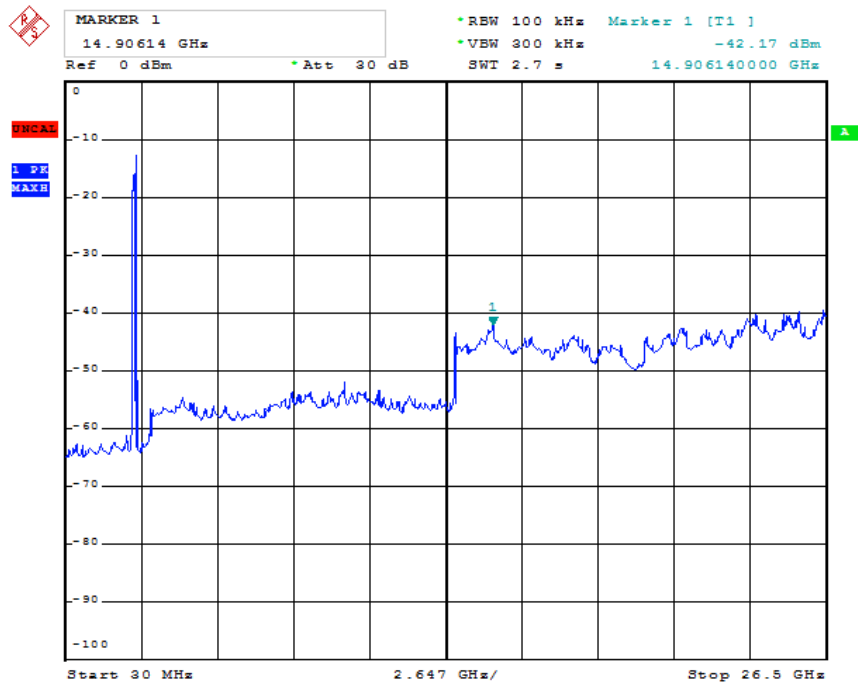


**Channel Middle**

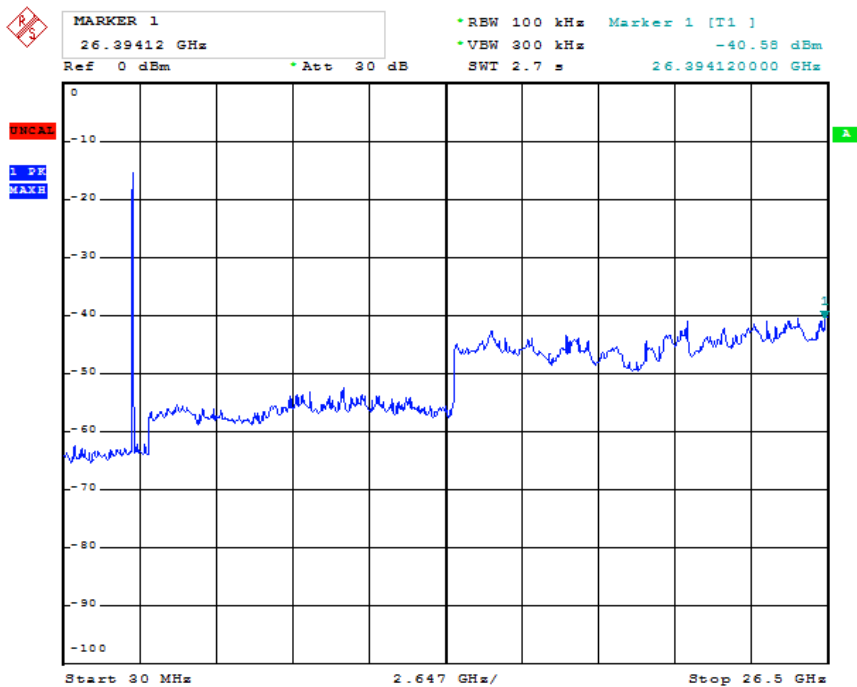


## Channel High

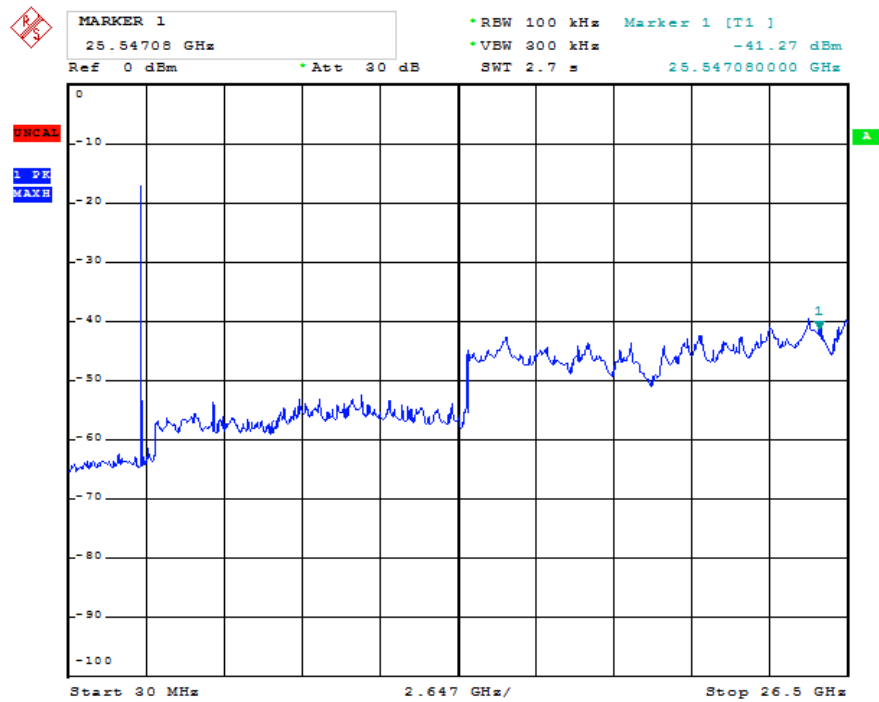


## BDR 3M Channel Low

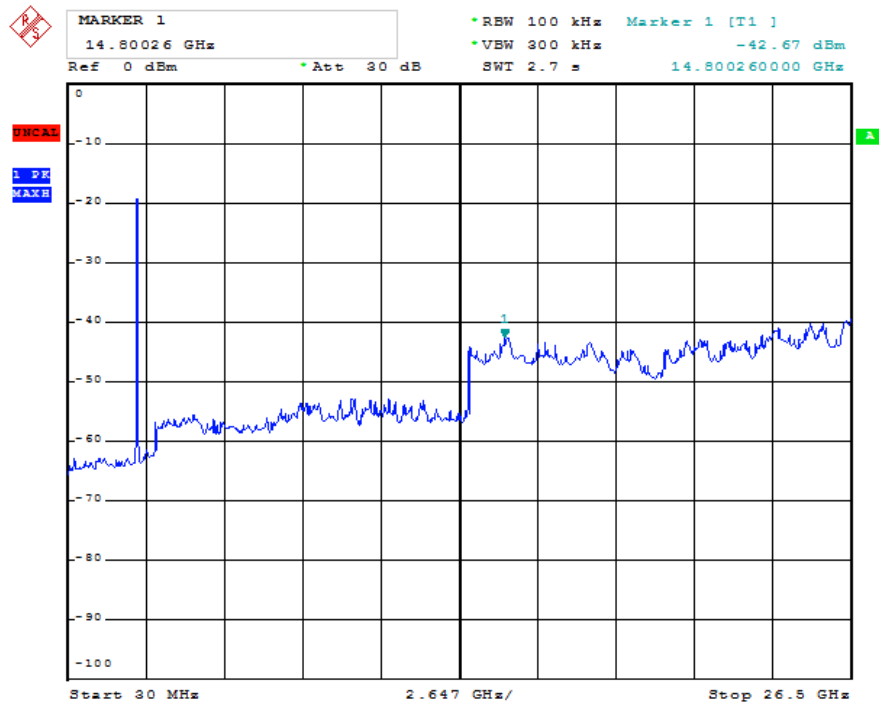

## Channel Middle

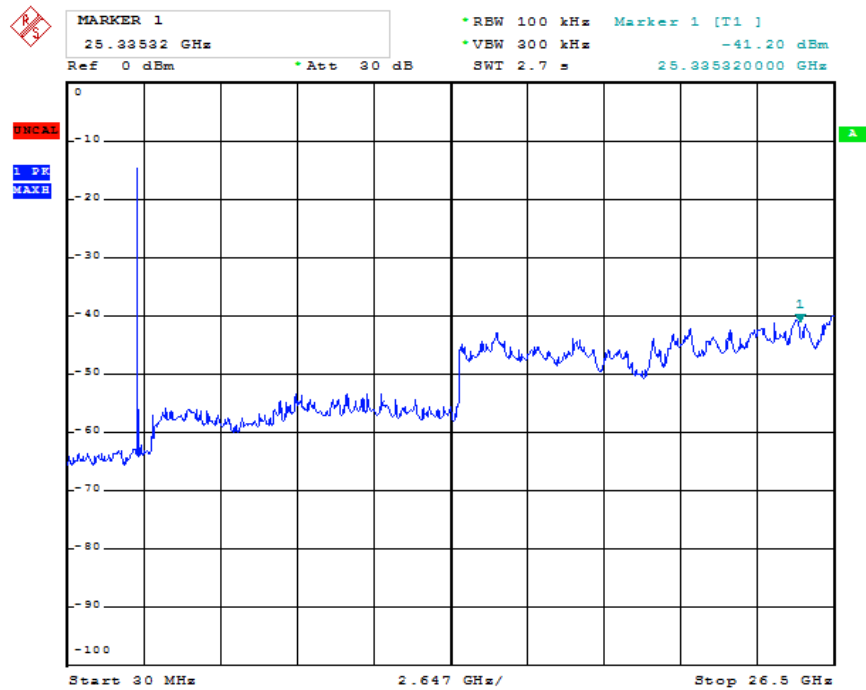

## Channel High

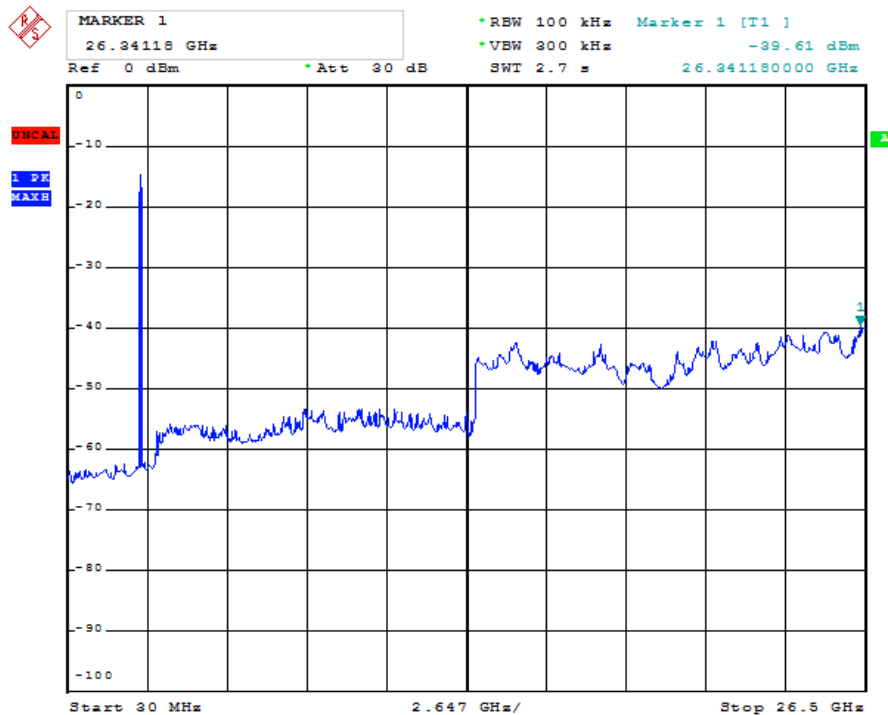

## 12. ANTENNA REQUIREMENT

### 12.1 Standard Applicable

Section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Section 15.247(b)/(c):

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

If the intentional radiator is used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

### 12.2 Antenna Connected Construction

The antenna is designed with permanent attachment and no consideration of replacement. The antenna used in this product is complied with Standard. The maximum Gain of the antenna lower than 6.0dBi and have the definite antenna Specification.