

Testing Report


Customer Name: SHENZHEN MAONO TECHNOLOGY CO., LTD

Product Name: wireless karaoke microphone

Main test Model: MKP100

Reference Standard: *GB/T 9410-2008; ANSI/IEEE Std 149-1979*

Issue Date: 2022.9.26

| | | |
|-------------------|-----------------|---|
| Engineer: Jackson | Date: 2022.9.26 |  |
| Auditor: Eason | Date: 2022.9.26 | |
| Approver: Janson | Date: 2022.9.26 | |

Version

| Version No. | Date | Description | Formulate | Approval |
|-------------|-----------|-------------------------------|-----------|----------|
| A0 | 2022.9.26 | For the first time, formulate | Jackson | Eason |
| | | | | |
| | | | | |

Contents

| | |
|---|---|
| 1.General Information | 3 |
| 1.1 General information of testing institutions | 3 |
| 1.2 Testing principle | 3 |
| 1.3 Test equipment | 4 |
| 1.4 Test environment | 4 |
| 1.5 Statement | 4 |
| 2.Sample Information | 5 |
| 2.1 Client information | 5 |
| 2.2 Description of EUT(S) | 5 |
| 2.3 EUT appearance | 6 |
| 2.4 DUT setup photo of free space OTA testing | 6 |
| 3.Test Results | 7 |
| 3.1 Test standard | 7 |
| 3.2 Test uncertainty | 7 |
| 3.3 Test data | 8 |
| 3.3.1 Typical free space efficiency and gain | 8 |
| 3.3.2 Typical free space radiation pattern | 8 |
| (The following is blank) | 9 |


1.General Information

1.1 General information of testing institutions

| | |
|------------------|--|
| Name | Shenzhen RFI-LAB Communication Technology Co., Ltd. |
| Address | 10/F A, Lingyun Bld, Liufang Rd, Baoan District, SZ |
| Tel | 13798473001 |
| E-mail | lait@tech-now.com |
| Equipment | All the equipment used in the report is fixed in 10/F A, Lingyun Bld, Liufang Rd, Baoan District, SZ |

1.2 Testing principle

Multi-Probe OTA Measurement System

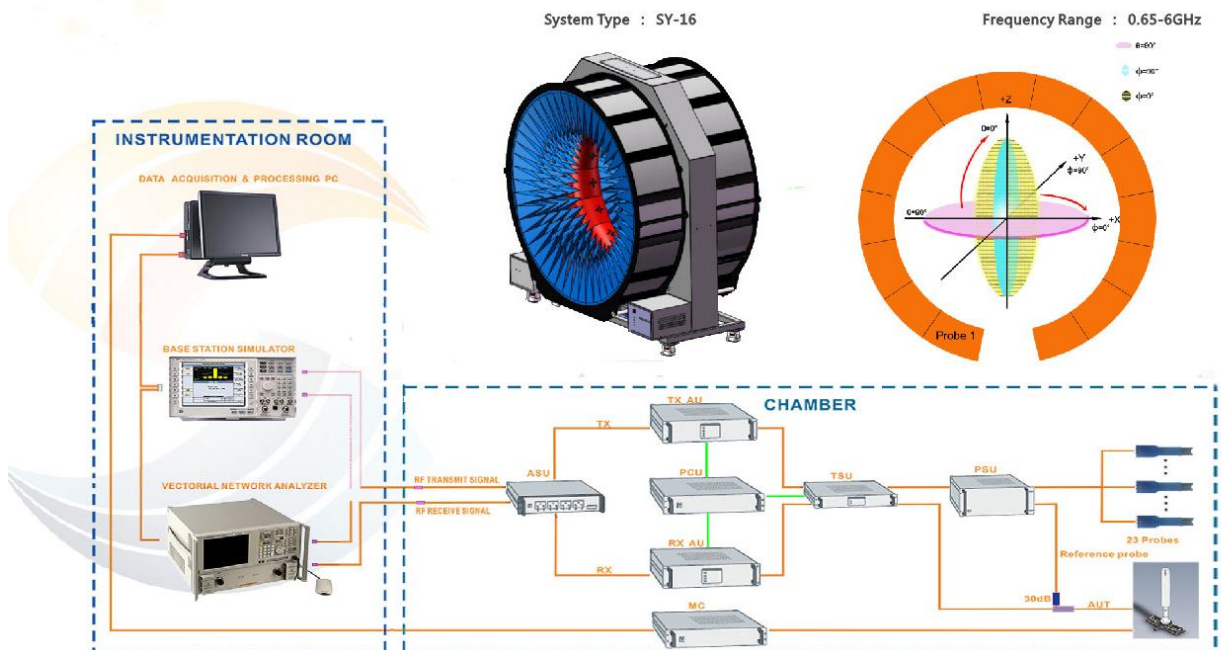

1.3 Test equipment

| Equipment | Model No. | Serial No. | Manufacturer | Calibration date | Next calibration date |
|----------------------------|-----------|----------------|--------------|------------------|-----------------------|
| 16 probe microwave chamber | 3*3*2.5 | RFI-LAB-RF-A00 | SUNYIELD | 2021.3.15 | 2023.3.14 |
| Network Analyzer | E5071C | RFI-LAB-RF-A02 | Agilent | 2022.5.13 | 2023.5.12 |

1.4 Test environment

| | |
|-------------|-----------|
| Temperature | 23.9°C |
| Humidity | 59%RH |
| Pressure | 100.13kPa |

1.5 Statement

- (1) The test results in the report are only applicable to the tested samples and the tested samples work under the environment described in the report.
- (2) Only Shenzhen RFI-LAB Communication Technology Co., Ltd. have the right to modify the report, and the modification information shall be annotated in the revision form.
- (3) Any objection to this report shall be raised within 30 days after formal confirmation of the report.
- (4) This report is invalid if there is any evidence that the sample information provided is falsified.
- (5) The report is invalid without the signature of the auditor and approver.

2. Sample Information

2.1 Client information

| | |
|---------------------|---|
| Name | SHENZHEN MAONO TECHNOLOGY CO., LTD |
| Address | 401, Building47, Software Town of Universiade, No.8288 Longgang Rd., He'ao Community, Yuanshan Street, Longgang District, Shenzhen, China |
| Contacts | Mr.Xiao |
| Tel | 13538218145 |
| E-mail | m13538218145@163.com |
| Manufacturer | Guangdong Dingchuang Smart Manufacturing Company Limited |

2.2 Description of EUT(S)

| | |
|------------------------|---|
| Product Name | wireless karaoke microphone |
| Sample Model | Main test Model: MKP100 Customer supplied model: MKP200; MKP300; MKP400; MKP500; MKP600; MKP700; MKP800; MKP900 |
| Size | / |
| Serial No. | / |
| Test Item | Antenna gain; Efficiency; Radiation pattern |
| Frequency Range | 2400-2500MHz |
| Received Date | 2022.9.23 |
| Test Date | 2022.9.26 |
| Remark | The length of the RF cable is 40mm |

2.3 EUT appearance




2.4 DUT setup photo of free space OTA testing

Planform



Front view

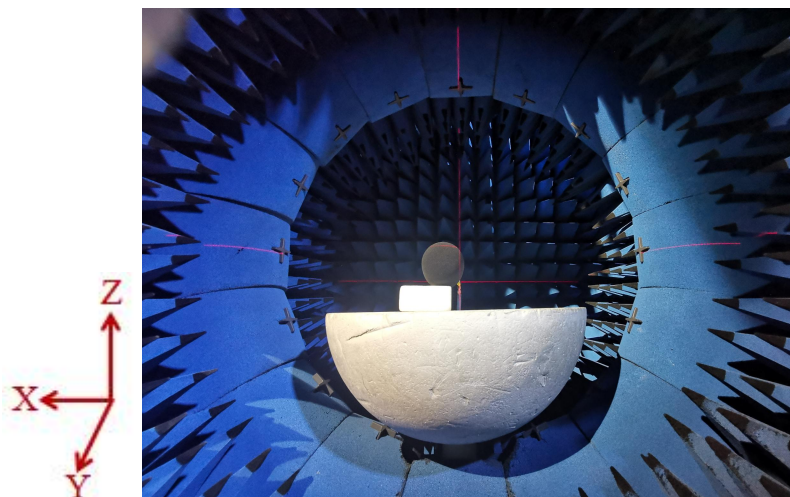

3. Test Results

3.1 Test standard

| Name | Parameter | Method | Standard no. |
|------------------------------|----------------------|--|------------------------|
| Mobile communication antenna | Antenna gain | Generic specification for antennas used in the mobile communications | GB/T 9410-2008 |
| | Radiation pattern | | |
| Antenna | Radiation efficiency | IEEE Standard Test Procedures for Antennas | ANSI/IEEE Std 149-1979 |
| | Gain and directivity | | |

3.2 Test uncertainty

The uncertainty was calculated on the basis of the GUM published by ISO, using the inclusion factor of $K=2$ and the 95% confidence level to express the extended uncertainty.

| Item | Uncertainty |
|----------------------|------------------|
| Antenna gain | $\pm 1\text{dB}$ |
| Radiation efficiency | $\pm 10\%$ |

3.3 Test data


3.3.1 Typical free space efficiency and gain

| Frequency/MHz | 2400 | 2410 | 2420 | 2430 | 2440 | 2450 | 2460 | 2470 | 2480 | 2490 | 2500 |
|---------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| Peak Gain/dBi | 5.17 | 5.29 | 5.24 | 5.48 | 5.4 | 5.67 | 5.73 | 5.86 | 5.94 | 6.08 | 5.95 |
| Efficiency/% | 57.62 | 58.66 | 58.55 | 59.90 | 59.17 | 60.98 | 60.81 | 61.65 | 61.26 | 61.83 | 59.68 |

3.3.2 Typical free space radiation pattern


(1) X-Z Plane:

$V \text{ Phi}=0$

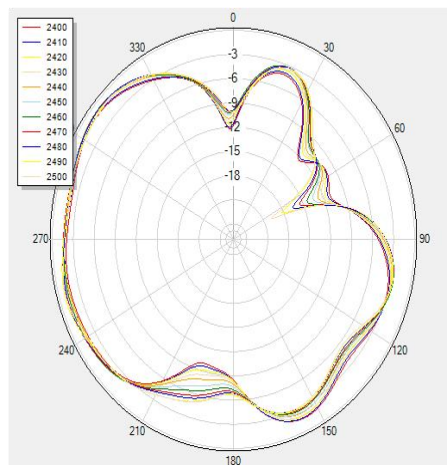


(2) Y-Z Plane:

$V \text{ Phi}=90$

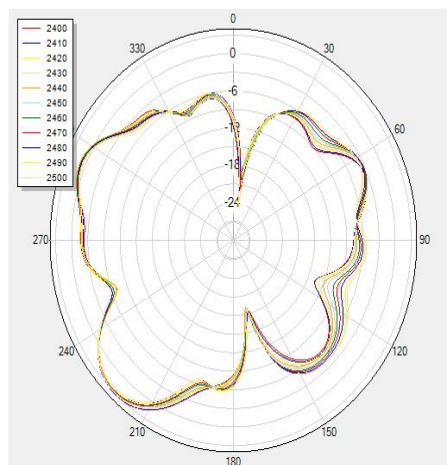


(3) X-Y Plane:

H Theta=90

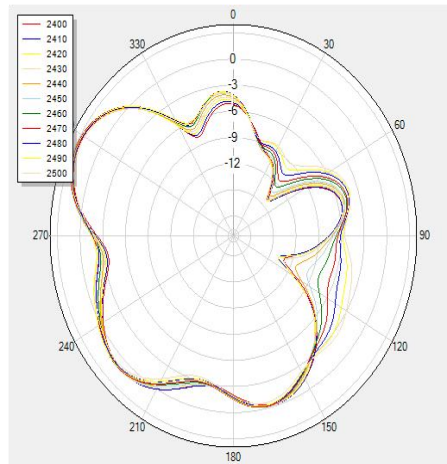

(4) Typical Free Space 3D Radiation Pattern at 2.45GHz:

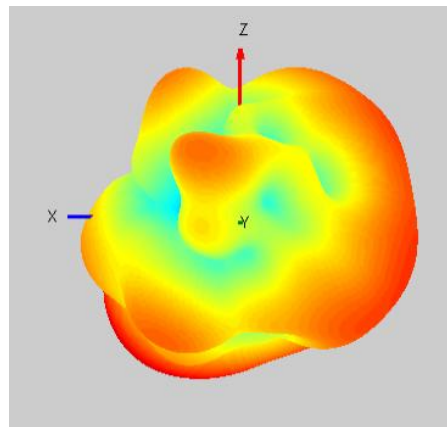

End

(The following is blank)