

Qingdao Richmat Intelligence Technology Inc

FCC Class II Permissive Change Report

Report Type:

FCC Part 15.249 RF report

Model:

HJ RF

REPORT NUMBER:

210301541SHA-001

ISSUE DATE:

June 07, 2021

DOCUMENT CONTROL NUMBER:

TTRF15.249_V1 © 2018 Intertek



Applicant: Qingdao Richmat Intelligence Technology Inc
NO.78 Kongquehe 4th Road, Qingdao Clothing Industry park, Jimo,
Qingdao, Shandong Province, China.

Manufacturer: Qingdao Richmat Intelligence Technology Inc
NO.78 Kongquehe 4th Road, Qingdao Clothing Industry park, Jimo,
Qingdao, Shandong Province, China.

FCC ID: 2AJJGHJRF


SUMMARY:

The equipment complies with the requirements according to the following standard(s) or Specification:


47CFR Part 15 (2019): Radio Frequency Devices (Subpart C)

ANSI C63.10 (2013): American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices

PREPARED BY: **REVIEWED BY:**



Project Engineer
Erick Liu



Reviewer
Daniel Zhao

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

TEST REPORT

Content

REVISION HISTORY	4
MEASUREMENT RESULT SUMMARY	5
1 GENERAL INFORMATION	6
1.1 DESCRIPTION OF EQUIPMENT UNDER TEST (EUT)	6
1.2 TECHNICAL SPECIFICATION	6
1.3 DESCRIPTION OF TEST FACILITY	7
2 TEST SPECIFICATIONS	8
2.1 STANDARDS OR SPECIFICATION	8
2.2 MODE OF OPERATION DURING THE TEST	8
2.3 TEST SOFTWARE LIST	9
2.4 TEST PERIPHERALS LIST	9
2.5 TEST ENVIRONMENT CONDITION:.....	9
2.6 INSTRUMENT LIST	10
2.7 MEASUREMENT UNCERTAINTY	12
3 RADIATED EMISSION	13
3.1 LIMIT	13
3.2 MEASUREMENT PROCEDURE	13
3.3 TEST CONFIGURATION	15
3.4 TEST RESULTS OF RADIATED EMISSIONS	17

Revision History

Report No.	Version	Description	Issued Date
210301541SHA-001	Rev. 01	Initial issue of report	June 07, 2021

Measurement result summary

TEST ITEM	FCC REFERANCE	RESULT
Radiated emission	15.249 & 15.209	Pass
Power line conducted emission	15.207	NA
Assigned bandwidth (20dB bandwidth)	15.215(c)	NA
Antenna requirement	15.203	NA

Notes: 1: NA =Not Applicable

2: Determination of the test conclusion is based on IEC Guide 115 in consideration of measurement uncertainty.

3: Additions, Deviations and Exclusions from Standards: None.

1 GENERAL INFORMATION

1.1 Description of Equipment Under Test (EUT)

Product name:	Module
Type/Model:	HJ RF
Description of EUT:	The report is C2PC report, the following host models were added and tested.
Host models:	HJSR09, HJSR11, HJSR12, HJSR03, HJSR04
Rating:	DC 3.3V
EUT type:	<input checked="" type="checkbox"/> Table top <input type="checkbox"/> Floor standing
Software Version:	/
Hardware Version:	/
Sample received date:	March 15, 2021
Date of test:	March 16, 2021 ~ May 17, 2021

1.2 Technical Specification

Frequency Range:	2405MHz ~ 2480MHz
Type of Modulation:	FSK
Channel Number:	151 channels
Channel Separation:	0.5 MHz
Antenna Information:	PCB antenna, 0dBi

1.3 Description of Test Facility

Name:	Intertek Testing Services Shanghai
Address:	Building 86, No. 1198 Qinzhou Road(North), Shanghai 200233, P.R. China
Telephone:	86 21 61278200
Telefax:	86 21 54262353

The test facility is recognized, certified, or accredited by these organizations:	CNAS Accreditation Lab Registration No. CNAS L0139
	FCC Accredited Lab Designation Number: CN0175
	IC Registration Lab CAB identifier.: CN0051
	VCCI Registration Lab Registration No.: R-14243, G-10845, C-14723, T-12252
	A2LA Accreditation Lab Certificate Number: 3309.02

TEST REPORT**2 TEST SPECIFICATIONS****2.1 Standards or specification**

47CFR Part 15 (2019)

ANSI C63.10 (2013)

2.2 Mode of operation during the test

The host devices are handheld devices, so three axes (X, Y, Z) were observed while the test receiver worked as “max hold” continuously and the highest reading among the whole test procedure was recorded.

The lowest, middle and highest channel were tested as representatives.

Mode	Lowest (MHz)	Middle (MHz)	Highest (MHz)
-	2405	2440	2480

2.3 Test software list

Test Items	Software	Manufacturer	Version
Conducted emission	ESxS-K1	R&S	V2.1.0
Radiated emission	ES-K1	R&S	V1.71

2.4 Test peripherals list

Item No.	Name	Band and Model	Description
1	Laptop computer	DELL 5480	-

2.5 Test environment condition:

Test items	Temperature	Humidity
Radiated emission	19°C	52% RH

2.6 Instrument list

Conducted Emission/Disturbance Power/Tri-loop Test/CDN method					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
<input type="checkbox"/>	Test Receiver	R&S	ESCS 30	EC 2107	2021-07-15
<input type="checkbox"/>	A.M.N.	R&S	ESH2-Z5	EC 3119	2021-11-30
<input type="checkbox"/>	A.M.N.	R&S	ENV 216	EC 3393	2021-07-04
<input type="checkbox"/>	A.M.N.	R&S	ENV4200	EC 3558	2022-06-10
<input type="checkbox"/>	Absorbing clamp	R&S	MDS 21	EC 2108	2022-06-19
<input type="checkbox"/>	CDN	Frankonia	CDN M2M316	EC 5969	2022-03-15
<input type="checkbox"/>	CDN	Schaffner	CDN M316	EC 2113-1	2021-07-16
<input type="checkbox"/>	Attenuator	Weinschel	68-6-44	EC 3043-9	2022-02-05
<input type="checkbox"/>	Tri-loop	Schwarzbeck	HXYZ 9170	EC 3384	2021-10-10
<input type="checkbox"/>	Voltage Probe	Schwarzbeck	TK9420	EC 4888	2021-09-12
<input type="checkbox"/>	Current probe	R&S	EZ-17	EC 3221	2022-03-15
<input type="checkbox"/>	I.S.N.	FCC	FCC-TLISN -T2-02	EC 3754	2022-02-05
<input type="checkbox"/>	I.S.N.	FCC	FCC-TLISN -T4-02	EC 3755	2022-02-05
<input type="checkbox"/>	I.S.N.	FCC	FCC-TLISN -T8-02	EC 3756	2022-02-05
Radiated Emission					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
<input checked="" type="checkbox"/>	Test Receiver	R&S	ESIB 26	EC 3045	2021-09-12
<input checked="" type="checkbox"/>	Bilog Antenna	TESEQ	CBL 6112D	EC 4206	2022-06-10
<input checked="" type="checkbox"/>	Pre-amplifier	R&S	AFS42- 00101800-25-S- 42	EC5262	2022-06-10
<input type="checkbox"/>	Horn antenna	R&S	HF 906	EC 3049	2021-11-17
<input checked="" type="checkbox"/>	Horn antenna	ETS	3117	EC 4792-1	2022-01-09
<input type="checkbox"/>	Horn antenna	TOYO	HAP18-26W	EC 4792-3	2021-07-09
<input checked="" type="checkbox"/>	Active loop antenna	Schwarzbeck	FMZB1519	EC 5345	2022-03-07

TEST REPORT

		EM TEST	NETWAVE-30-400	EC 5383-2	2022-06-19
RF test					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
<input checked="" type="checkbox"/>	PXA Signal Analyzer	Keysight	N9030A	EC 5338	2022-03-05
<input checked="" type="checkbox"/>	Power sensor	Agilent	U2021XA	EC 5338-1	2022-03-05
<input checked="" type="checkbox"/>	Vector Signal Generator	Agilent	N5182B	EC 5175	2022-03-05
<input checked="" type="checkbox"/>	Spectrum analyzer	R&S	CMW500	EC5944	2021-12-23
<input checked="" type="checkbox"/>	MXG Analog Signal Generator	Agilent	N5181A	EC 5338-2	2022-03-05
<input type="checkbox"/>	Mobile Test System	Litepoint	lqxel	EC 5176	2022-01-09
<input type="checkbox"/>	Test Receiver	R&S	ESCI 7	EC 4501	2021-09-12
Tet Site					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
<input type="checkbox"/>	Shielded room	Zhongyu	-	EC 2838	2022-01-07
<input type="checkbox"/>	Shielded room	Zhongyu	-	EC 2839	2022-01-14
<input checked="" type="checkbox"/>	Semi-anechoic chamber	Albatross project	-	EC 3048	2021-07-31
<input type="checkbox"/>	Fully-anechoic chamber	Albatross project	-	EC 3047	2021-07-31
Additional instrument					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
<input checked="" type="checkbox"/>	Spectrum analyzer	Agilent	E7402A	EC 2254	2021-07-15
<input type="checkbox"/>	Therom-Hygrograph	ZJ1-2A	S.M.I.F.	EC 3783	2022-02-28
<input type="checkbox"/>	Therom-Hygrograph	ZJ1-2A	S.M.I.F.	EC 2122	2022-03-11
<input checked="" type="checkbox"/>	Therom-Hygrograph	ZJ1-2A	S.M.I.F.	EC 5198	2022-01-18
<input type="checkbox"/>	Therom-Hygrograph	ZJ1-2A	S.M.I.F.	EC 3326	2022-03-28
<input type="checkbox"/>	Pressure meter	YM3	Shanghai Mengde	EC 3320	2021-07-01

TEST REPORT**2.7 Measurement uncertainty**

The measurement uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Test item	Measurement uncertainty
Maximum peak output power	$\pm 0.74\text{dB}$
Radiated Emissions in restricted frequency bands below 1GHz	$\pm 4.90\text{dB}$
Radiated Emissions in restricted frequency bands above 1GHz	$\pm 5.02\text{dB}$
Emission outside the frequency band	$\pm 2.89\text{dB}$
Power line conducted emission	$\pm 3.19\text{dB}$

3 Radiated emission

Test result: Pass

3.1 Limit

Fundamental Frequency (MHz)	Fundamental limit (dBuV/m)	Harmonic limit (dBuV/m)
<input type="checkbox"/> 902 - 928	94	54
<input checked="" type="checkbox"/> 2400 - 2483.5	94	54
<input type="checkbox"/> 5725 - 5875	94	54
<input type="checkbox"/> 24000 - 24250	108	68

The radiated emissions which fall in the restricted bands, must also comply with the radiated emission limits:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

3.2 Measurement Procedure

For Radiated emission below 30MHz:

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- Both X and Y axes of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

NOTE:

- The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

TEST REPORT**For Radiated emission above 30MHz:**


- a) The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b) The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c) The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d) For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e) The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f) The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is $\geq 1/T$ (Duty cycle < 98%) or $3 \times \text{RBW}$ (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported

3.3 Test Configuration


For Radiated emission below 30MHz:

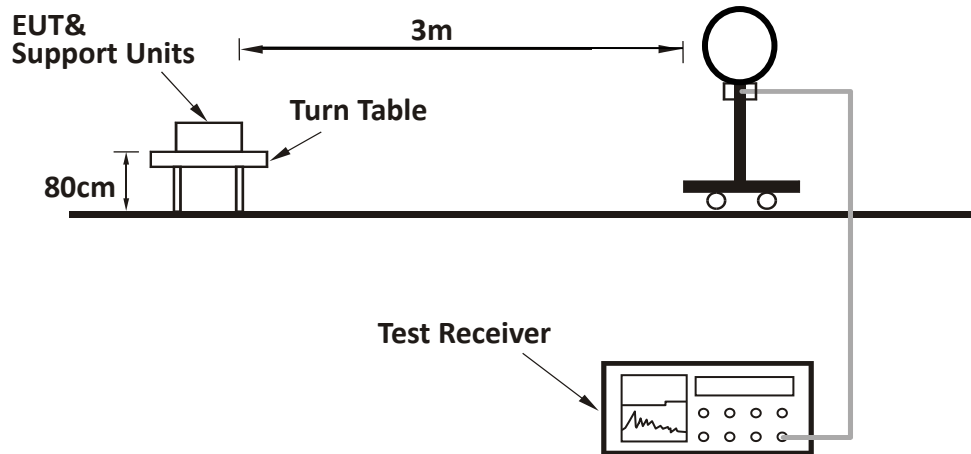

For Radiated emission 30MHz to 1GHz:

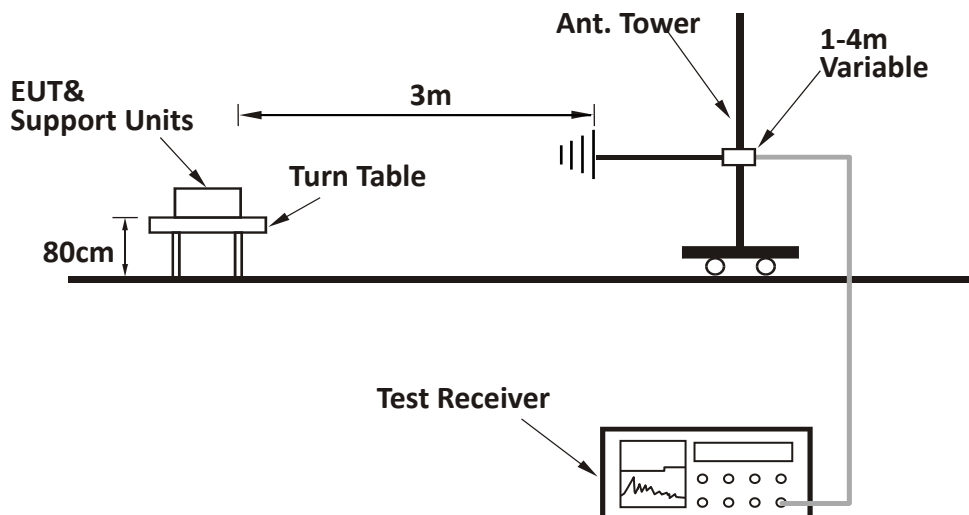

For Radiated emission above 1GHz:

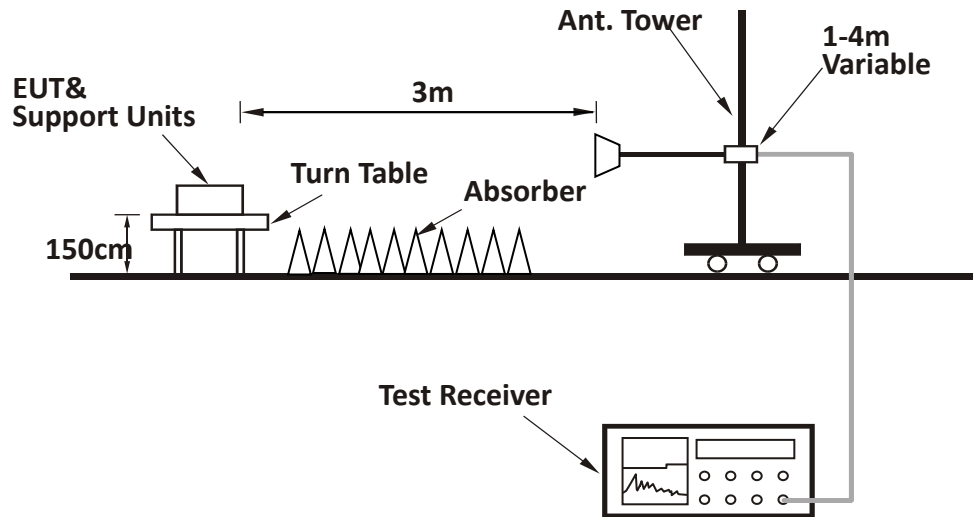

TEST REPORT

3.4 Test Results of Radiated Emissions

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

Test data below 1GHz:

All the models were tested and the worst result was listed in the report as below:

HJSR09:

Antenna	Frequency (MHz)	Corrected Reading (dBuV/m)	Correct Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector
H	30.00	29.20	25.20	40.00	10.80	PK
H	82.48	20.20	14.50	40.00	19.80	PK
H	136.91	24.70	18.90	43.50	18.80	PK
H	309.92	26.60	21.10	46.00	19.40	PK
H	533.47	32.90	26.20	46.00	13.10	PK
H	935.85	38.20	30.00	46.00	7.80	PK
V	30.00	28.40	25.20	40.00	11.60	PK
V	78.60	21.40	14.00	40.00	18.60	PK
V	125.25	24.90	19.30	43.50	18.60	PK
V	177.74	23.90	17.00	43.50	19.60	PK
V	545.13	33.20	26.30	46.00	12.80	PK
V	941.68	38.30	30.10	46.00	7.70	PK

HJSR11:

Antenna	Frequency (MHz)	Corrected Reading (dBuV/m)	Correct Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector
H	30.00	28.20	25.20	40.00	11.80	PK
H	70.82	21.10	13.60	40.00	18.90	PK
H	103.87	24.30	18.50	43.50	19.20	PK
H	253.55	26.00	20.30	46.00	20.00	PK
H	556.79	32.40	26.40	46.00	13.60	PK
H	916.41	38.00	29.80	46.00	8.00	PK

TEST REPORT

V	30.00	28.60	25.20	40.00	11.40	PK
V	74.71	21.80	13.80	40.00	18.20	PK
V	127.19	25.20	19.30	43.50	18.30	PK
V	261.32	26.50	20.90	46.00	19.50	PK
V	541.24	33.00	26.20	46.00	13.00	PK
V	930.02	38.30	30.00	46.00	7.70	PK

HJSR12:

Antenna	Frequency (MHz)	Corrected Reading (dBuV/m)	Correct Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector
H	30.00	28.80	25.20	40.00	11.20	PK
H	74.71	20.70	13.80	40.00	19.30	PK
H	117.47	24.90	19.40	43.50	18.60	PK
H	181.62	24.50	16.90	43.50	19.00	PK
H	550.96	33.10	26.30	46.00	12.90	PK
H	922.24	38.40	29.90	46.00	7.60	PK
V	30.00	28.90	25.20	40.00	11.10	PK
V	74.71	20.80	13.80	40.00	19.20	PK
V	119.42	24.60	19.50	43.50	18.90	PK
V	296.31	25.80	20.70	46.00	20.20	PK
V	533.47	32.80	26.20	46.00	13.20	PK
V	930.02	37.80	30.00	46.00	8.20	PK

HJSR03:

Antenna	Frequency (MHz)	Corrected Reading (dBuV/m)	Correct Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector
H	30.00	28.40	25.20	40.00	11.60	PK
H	74.71	20.50	13.80	40.00	19.50	PK
H	121.36	24.80	19.50	43.50	18.70	PK
H	307.98	26.60	21.00	46.00	19.40	PK
H	554.85	33.00	26.40	46.00	13.00	PK

TEST REPORT

H	881.42	38.10	29.60	46.00	7.90	PK
V	30.00	29.90	25.20	40.00	10.10	PK
V	76.65	21.30	13.90	40.00	18.70	PK
V	136.91	24.60	18.90	43.50	18.90	PK
V	261.32	26.20	20.90	46.00	19.80	PK
V	531.52	33.00	26.10	46.00	13.00	PK
V	955.29	38.10	30.20	46.00	7.90	PK

HJSR04:

Antenna	Frequency (MHz)	Corrected Reading (dBuV/m)	Correct Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector
H	30.00	28.80	25.20	40.00	11.20	PK
H	74.71	20.50	13.80	40.00	19.50	PK
H	119.42	24.90	19.50	43.50	18.60	PK
H	263.27	26.40	20.80	46.00	19.60	PK
H	519.86	33.00	26.00	46.00	13.00	PK
H	935.85	37.80	30.00	46.00	8.20	PK
V	30.00	28.60	25.20	40.00	11.40	PK
V	74.71	21.00	13.80	40.00	19.00	PK
V	117.47	25.70	19.40	43.50	17.80	PK
V	292.42	26.80	20.70	46.00	19.20	PK
V	519.86	32.80	26.00	46.00	13.20	PK
V	924.19	37.90	29.90	46.00	8.10	PK

TEST REPORT

Test result above 1GHz:

HJSR09:

CH	Antenna	Frequency (MHz)	Corrected Reading (dBuV/m)	Correct Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector
L	H	2405.00	86.00	9.17	114.00	28.00	PK
	V	2405.00	85.30	9.59	114.00	28.70	PK
	H	2390.00	52.60	9.19	74.00	21.40	PK
	V	2390.00	52.30	9.61	74.00	21.70	PK
	H	4810.00	47.20	9.13	74.00	26.80	PK
	V	4810.00	46.80	9.24	74.00	27.20	PK
	H	7215.00	48.50	8.59	74.00	25.50	PK
	V	7215.00	48.30	8.69	74.00	25.70	PK
M	H	2440.00	85.70	9.09	114.00	28.30	PK
	V	2440.00	85.10	9.51	114.00	28.90	PK
	H	4880.00	47.20	9.13	74.00	26.80	PK
	V	4880.00	46.70	9.31	74.00	27.30	PK
	H	7320.00	47.80	8.56	74.00	26.20	PK
	V	7320.00	46.90	8.66	74.00	27.10	PK
H	H	2480.00	86.60	9.00	114.00	27.40	PK
	V	2480.00	86.30	9.40	114.00	27.70	PK
	H	2483.50	53.20	8.98	74.00	20.80	PK
	V	2483.50	52.80	9.39	74.00	21.20	PK
	H	4960.00	47.40	9.12	74.00	26.60	PK
	V	4960.00	47.20	9.38	74.00	26.80	PK
	H	7440.00	48.60	8.52	74.00	25.40	PK
	V	7440.00	48.50	8.62	74.00	25.50	PK

HJSR11:

CH	Antenna	Frequency (MHz)	Corrected Reading (dBuV/m)	Correct Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector
L	H	2405.00	93.00	9.17	114.00	21.00	PK
	V	2405.00	92.10	9.59	114.00	21.90	PK
	H	2390.00	53.10	9.19	74.00	20.90	PK
	V	2390.00	52.80	9.61	74.00	21.20	PK
	H	4810.00	49.70	9.13	74.00	24.30	PK
	V	4810.00	49.50	9.24	74.00	24.50	PK

TEST REPORT

	H	7215.00	58.00	8.59	74.00	16.00	PK
	H	7215.00	45.40	8.59	54.00	8.60	AV
	V	7215.00	57.20	8.69	74.00	16.80	PK
	V	7215.00	44.20	8.69	54.00	9.80	AV
M	H	2440.00	92.40	9.09	114.00	21.60	PK
	V	2440.00	92.20	9.51	114.00	21.80	PK
	H	4880.00	52.70	9.13	74.00	21.30	PK
	V	4880.00	51.90	9.31	74.00	22.10	PK
	H	7320.00	58.10	8.56	74.00	15.90	PK
	H	7320.00	45.80	8.56	54.00	8.20	AV
	V	7320.00	57.70	8.66	74.00	16.30	PK
	V	7320.00	45.20	8.66	54.00	8.80	AV
H	H	2480.00	93.10	9.00	114.00	20.90	PK
	V	2480.00	92.80	9.40	114.00	21.20	PK
	H	2483.50	53.20	8.98	74.00	20.80	PK
	V	2483.50	52.80	9.39	74.00	21.20	PK
	H	4960.00	53.10	9.12	74.00	20.90	PK
	V	4960.00	52.60	9.38	74.00	21.40	PK
	H	7440.00	58.20	8.52	74.00	15.80	PK
	H	7440.00	46.10	8.52	54.00	7.90	AV
	V	7440.00	57.90	8.62	74.00	16.10	PK
	V	7440.00	45.50	8.62	54.00	8.50	AV

HJSR12:

CH	Antenna	Frequency (MHz)	Corrected Reading (dBuV/m)	Correct Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector
L	H	2405	90.53	9.17	114.00	23.47	PK
	V	2405	89.80	9.59	114.00	24.20	PK
	H	2390	51.20	9.19	74.00	22.80	PK
	V	2390	50.94	9.61	74.00	23.06	PK
	H	4810	47.20	9.13	74.00	26.80	PK
	V	4810	46.80	9.24	74.00	27.20	PK
	H	7215	55.20	8.59	74.00	18.80	PK
	V	7215	43.50	8.59	54.00	10.50	AV
	H	7215	54.40	8.69	74.00	19.60	PK
	V	7215	43.10	8.69	54.00	10.90	AV

TEST REPORT

M	H	2440	91.30	9.09	114.00	22.70	PK
	V	2440	88.50	9.51	114.00	25.50	PK
	H	4880	46.70	9.13	74.00	27.30	PK
	V	4880	46.40	9.31	74.00	27.60	PK
	H	7320	56.20	8.56	74.00	17.80	PK
	H	7320	43.50	8.56	54.00	10.50	AV
	V	7320	55.90	8.66	74.00	18.10	PK
	V	7320	43.10	8.66	54.00	10.90	AV
H	H	2480	90.83	9.00	114.00	23.17	PK
	V	2480	89.10	9.40	114.00	24.90	PK
	H	2483.5	54.19	8.98	74.00	19.81	PK
	H	2483.5	41.02	8.98	54.00	12.98	AV
	V	2483.5	53.70	9.39	74.00	20.30	PK
	H	4960	46.90	9.12	74.00	27.10	PK
	V	4960	46.70	9.38	74.00	27.30	PK
	H	7440	53.50	8.52	74.00	20.50	PK
	V	7440	53.20	8.62	74.00	20.80	PK

HJSR03:

CH	Antenna	Frequency (MHz)	Corrected Reading (dBuV/m)	Correct Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector
L	H	2405.00	80.70	9.17	114.00	33.30	PK
	V	2405.00	80.10	9.59	114.00	33.90	PK
	H	2390.00	51.20	9.19	74.00	22.80	PK
	V	2390.00	50.60	9.61	74.00	23.40	PK
	H	4810.00	45.60	9.13	74.00	28.40	PK
	V	4810.00	44.70	9.24	74.00	29.30	PK
	H	7215.00	51.20	8.59	74.00	22.80	PK
	V	7215.00	50.60	8.69	74.00	23.40	PK
M	H	2440.00	80.50	9.09	114.00	33.50	PK
	V	2440.00	79.90	9.51	114.00	34.10	PK
	H	4880.00	45.80	9.13	74.00	28.20	PK
	V	4880.00	45.20	9.31	74.00	28.80	PK
	H	7320.00	50.60	8.56	74.00	23.40	PK
	V	7320.00	50.20	8.66	74.00	23.80	PK
H	H	2480.00	80.20	9.00	114.00	33.80	PK

TEST REPORT

	V	2480.00	79.50	9.40	114.00	34.50	PK
	H	2483.50	48.30	8.98	74.00	25.70	PK
	V	2483.50	47.90	9.39	74.00	26.10	PK
	H	4960.00	47.60	9.12	74.00	26.40	PK
	V	4960.00	46.80	9.38	74.00	27.20	PK
	H	7440.00	49.20	8.52	74.00	24.80	PK
	V	7440.00	48.60	8.62	74.00	25.40	PK

HJSR04:

CH	Antenna	Frequency (MHz)	Corrected Reading (dBuV/m)	Correct Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector
L	H	2405.00	85.60	9.17	114.00	28.40	PK
	V	2405.00	85.00	9.59	114.00	29.00	PK
	H	2390.00	51.20	9.19	74.00	22.80	PK
	V	2390.00	50.70	9.61	74.00	23.30	PK
	H	4810.00	47.20	9.13	74.00	26.80	PK
	V	4810.00	46.80	9.24	74.00	27.20	PK
	H	7215.00	53.60	8.59	74.00	20.40	PK
	V	7215.00	53.10	8.69	74.00	20.90	PK
M	H	2440.00	85.30	9.09	114.00	28.70	PK
	V	2440.00	84.20	9.51	114.00	29.80	PK
	H	4880.00	50.60	9.13	74.00	23.40	PK
	V	4880.00	49.90	9.31	74.00	24.10	PK
	H	7320.00	53.20	8.56	74.00	20.80	PK
	V	7320.00	52.80	8.66	74.00	21.20	PK
H	H	2480.00	85.50	9.00	114.00	28.50	PK
	V	2480.00	84.70	9.40	114.00	29.30	PK
	H	2483.50	51.20	8.98	74.00	22.80	PK
	V	2483.50	50.60	9.39	74.00	23.40	PK
	H	4960.00	48.30	9.12	74.00	25.70	PK
	V	4960.00	48.10	9.38	74.00	25.90	PK
	H	7440.00	52.90	8.52	74.00	21.10	PK
	V	7440.00	52.50	8.62	74.00	21.50	PK

TEST REPORT

- Remark: 1. Correct Factor = Antenna Factor + Cable Loss (+ Amplifier, for higher than 1GHz), the value was added to Original Receiver Reading by the software automatically.
2. Corrected Reading = Original Receiver Reading + Correct Factor
3. Margin = Limit - Corrected Reading
4. If the PK Corrected Reading is lower than AV limit, the AV test can be elided.

Example: Assuming Antenna Factor = 30.20dB/m, Cable Loss = 2.00dB,
Gain of Preamplifier = 32.00dB, Original Receiver Reading = 10.00dBuV,
Limit = 40.00dBuV/m.
Then Correct Factor = $30.20 + 2.00 - 32.00 = 0.20\text{dB/m}$;
Corrected Reading = $10\text{dBuV} + 0.20\text{dB/m} = 10.20\text{dBuV/m}$;
Margin = $40.00\text{dBuV/m} - 10.20\text{dBuV/m} = 29.80\text{dB}$.

***** END *****