

# TEST REPORT

ACCORDING TO: FCC 47CFR part 15 subpart C § 15.247 (DTS) and subpart B

FOR:

**Augury Systems Ltd.**  
**Vibration sensor**  
**Model number: AC00009**  
**FCC ID:2AJJIAC00009**

This report is in conformity with ISO/ IEC 17025. The "A2LA Accredited" symbol endorsement applies only to the tests and calibrations that are listed in the scope of Hermon Laboratories accreditation. The test results relate only to the items tested. This test report shall not be reproduced in any form except in full with the written approval of Hermon Laboratories Ltd.



## Table of contents

1	Applicant information.....	3
2	Equipment under test attributes .....	3
3	Manufacturer information .....	3
4	Test details .....	3
5	Tests summary.....	4
6	EUT description.....	5
6.1	General information.....	5
6.2	Test configuration.....	5
6.3	Changes made in EUT .....	5
6.4	EUT test positions .....	6
6.5	Transmitter characteristics .....	7
7	Transmitter tests according to 47CFR part 15 subpart C requirements .....	8
7.1	Minimum 6 dB bandwidth .....	8
7.2	Peak output power .....	12
7.3	Field strength of spurious emissions .....	18
7.4	Band edge radiated emissions .....	42
7.5	Maximum power spectral density (PSD) .....	46
7.6	Antenna requirements .....	51
8	Unintentional emissions .....	52
8.1	Radiated emission measurements .....	52
9	APPENDIX A Test equipment and ancillaries used for tests.....	58
10	APPENDIX B Measurement uncertainties.....	59
11	APPENDIX C Test laboratory description .....	60
12	APPENDIX D Specification references .....	60
13	APPENDIX E Test equipment correction factors.....	61
14	APPENDIX F Abbreviations and acronyms.....	71



## 1 Applicant information

**Client name:** Augury Systems Ltd.  
**Address:** 33 Hanamal street, Haifa 3303132, Israel  
**Telephone:** +972 50 742 5605  
**Fax:** NA  
**E-mail:** ashilo@augury.com  
**Contact name:** Mr. Avital Shilo

## 2 Equipment under test attributes

**Product name:** Vibration sensor  
**Product type:** Transceiver  
**Model(s):** AC00009  
**Serial number:** ZA103  
**Hardware version:** A+1  
**Software release:** 01.01.1056  
**Receipt date** 02-Apr-17

## 3 Manufacturer information

**Manufacturer name:** Augury Systems Ltd.  
**Address:** 33 Hanamal street, Haifa 3303132, Israel  
**Telephone:** +972 50 742 5605  
**Fax:** NA  
**E-Mail:** ashilo@augury.com  
**Contact name:** Mr. Avital Shilo

## 4 Test details

**Project ID:** 29418  
**Location:** Hermon Laboratories Ltd. P.O. Box 23, Binyamina 3055001, Israel  
**Test started:** 02-Apr-17  
**Test completed:** 04-Apr-17  
**Test specification(s):** FCC 47CFR part 15 subpart C § 15.247 (DTS) and subpart B



## 5 Tests summary

Test	Status
<b>Transmitter characteristics</b>	
FCC section 15.247(a)2, 6 dB bandwidth	Pass
FCC section 15.247(b)3, Peak output power	Pass
FCC section 15.247(i), RF exposure	Pass, the exhibit to the application of certification is provided
FCC section 15.247(d), Radiated spurious emissions	Pass
FCC section 15.247(d), Emissions at band edges	Pass
FCC section 15.247(e), Peak power density	Pass
FCC section 15.203, Antenna requirement	Pass
<b>Unintentional emissions</b>	
Section 15.107, Conducted emission at AC power port	Not required
Section 15.109, Radiated emission	Pass

Testing was completed against all relevant requirements of the test standard. The results obtained indicate that the product under test complies in full with the requirements tested.

The test results relate only to the items tested. Pass/ fail decision was based on nominal values.

This test report supersedes the previously issued test report identified by Doc ID:AUGRAD\_FCC.29418.

	Name and Title	Date	Signature
<b>Tested by:</b>	Mr. K. Zushchyk, test engineer	April 4, 2017	
	Mrs. E. Pitt, test engineer		
<b>Reviewed by:</b>	Mrs. M. Cherniavsky, certification engineer	April 6, 2017	
<b>Approved by:</b>	Mr. M. Nikishin, EMC and radio group leader	May 29, 2017	




## 6 EUT description

### 6.1 General information

The EUT is a battery powered, wireless, Tri-Axle vibration sensor. The endpoint is designed to be mounted and monitor rotating machinery. The EUT transmits continuous vibration and temperature data using Bluetooth wireless technology. Spectrum range is the 2.400–2.4835 GHz, the range is divided into 40 Channels with 2 MHz separation.

### 6.2 Test configuration

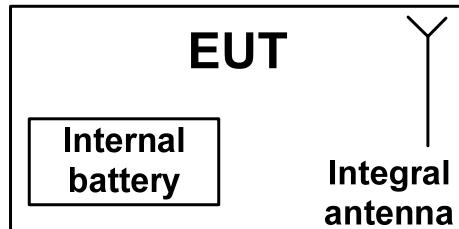

### 6.3 Changes made in EUT

No changes were implemented in the EUT during testing.

## 6.4 EUT test positions

Photograph 6.4.1 EUT in X-axis orthogonal position



Photograph 6.4.2 EUT in Y-axis orthogonal position



Photograph 6.4.3 EUT in Z-axis orthogonal position





## 6.5 Transmitter characteristics

Type of equipment								
<input checked="" type="checkbox"/>	Stand-alone (Equipment with or without its own control provisions)							
	Combined equipment (Equipment where the radio part is fully integrated within another type of equipment)							
	Plug-in card (Equipment intended for a variety of host systems)							
Intended use	Condition of use							
fixed	Always at a distance more than 2 m from all people							
<input checked="" type="checkbox"/> mobile	Always at a distance more than 20 cm from all people							
portable	May operate at a distance closer than 20 cm to human body							
Assigned frequency range	2400-2483.5 MHz							
Operating frequency range	2402 – 2480 MHz							
Maximum rated output power	At transmitter 50 Ω RF output connector			NA				
	Peak output power			7.9 dBm				
Is transmitter output power variable?		X	No					
		Yes		continuous variable				
				stepped variable with stepsize				
				dB				
				minimum RF power				
				dBm				
				maximum RF power				
Antenna connection								
unique coupling	standard connector		X	integral	with temporary RF connector			
					without temporary RF connector			
Antenna/s technical characteristics								
Type	Manufacturer		Model number	Gain				
Internal, printed	Augury Systems		Monopole	1 dBi				
Type of modulation	GFSK (BLE)							
Modulating test signal (baseband)	PRBS							
Transmitter aggregate data rate	1 MBps							
Transmitter power source								
<input checked="" type="checkbox"/> Battery	Nominal rated voltage	3.6 VDC	Battery type	Primary lithium-thionyl chloride (Li-SOCl2), C size				
DC	Nominal rated voltage	VDC						
AC mains	Nominal rated voltage	VAC	Frequency					



HERMON LABORATORIES

<b>Test specification:</b> Section 15.247(a)2, 6 dB bandwidth		
<b>Test procedure:</b> ANSI C63.10 section 11.8.1		
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS
<b>Date(s):</b> 03-Apr-17		
<b>Temperature:</b> 23 °C	<b>Relative Humidity:</b> 45 %	<b>Air Pressure:</b> 1010 hPa
<b>Power:</b> Battery		
<b>Remarks:</b>		

## 7 Transmitter tests according to 47CFR part 15 subpart C requirements

### 7.1 Minimum 6 dB bandwidth

#### 7.1.1 General

This test was performed to measure 6 dB bandwidth of the EUT carrier frequency. Specification test limits are given in Table 7.1.1.

Table 7.1.1 The 6 dB bandwidth limits

Assigned frequency, MHz	Modulation envelope reference points*, dBc	Minimum bandwidth, kHz
2400.0 – 2483.5	6.0	500.0

\* - Modulation envelope reference points provided in terms of attenuation below the peak of modulated carrier.

#### 7.1.2 Test procedure

- 7.1.2.1 The EUT was set up as shown in Figure 7.1.1, energized and its proper operation was checked.
- 7.1.2.2 The EUT was set to transmit modulated carrier.
- 7.1.2.3 The transmitter minimum 6 dB bandwidth was measured with spectrum analyzer as frequency delta between reference points on modulation envelope and provided in Table 7.1.2 and associated plot.

Figure 7.1.1 The 6 dB bandwidth test setup





HERMON LABORATORIES

<b>Test specification:</b> Section 15.247(a)2, 6 dB bandwidth				
<b>Test procedure:</b> ANSI C63.10 section 11.8.1				
<b>Test mode:</b> Compliance				<b>Verdict:</b> PASS
<b>Date(s):</b> 03-Apr-17				
<b>Temperature:</b> 23 °C	<b>Relative Humidity:</b> 45 %	<b>Air Pressure:</b> 1010 hPa	<b>Power:</b> Battery	
<b>Remarks:</b>				

Table 7.1.2 The 6 dB bandwidth test results

ASSIGNED FREQUENCY BAND: 2400-2483.5 MHz

DETECTOR USED: Peak

SWEEP TIME: Auto

RESOLUTION BANDWIDTH: 100 kHz

VIDEO BANDWIDTH: 300 kHz

MODULATION ENVELOPE REFERENCE POINTS: 6.0 dBc

MODULATION: GFSK

BIT RATE: 1 Mbps

Carrier frequency, MHz	6 dB bandwidth, kHz	Limit, kHz	Margin, kHz	Verdict
2402	706.71	500	206.71	Pass
2440	704.48	500	204.48	Pass
2480	710.05	500	210.05	Pass

**Reference numbers of test equipment used**

HL 3818							
---------	--	--	--	--	--	--	--


Full description is given in Appendix A.




HERMON LABORATORIES

<b>Test specification:</b> Section 15.247(a)2, 6 dB bandwidth		
<b>Test procedure:</b> ANSI C63.10 section 11.8.1		
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS
<b>Date(s):</b> 03-Apr-17		
<b>Temperature:</b> 23 °C	<b>Relative Humidity:</b> 45 %	<b>Air Pressure:</b> 1010 hPa
<b>Remarks:</b>		

Plot 7.1.1 The 6 dB bandwidth test result at low frequency

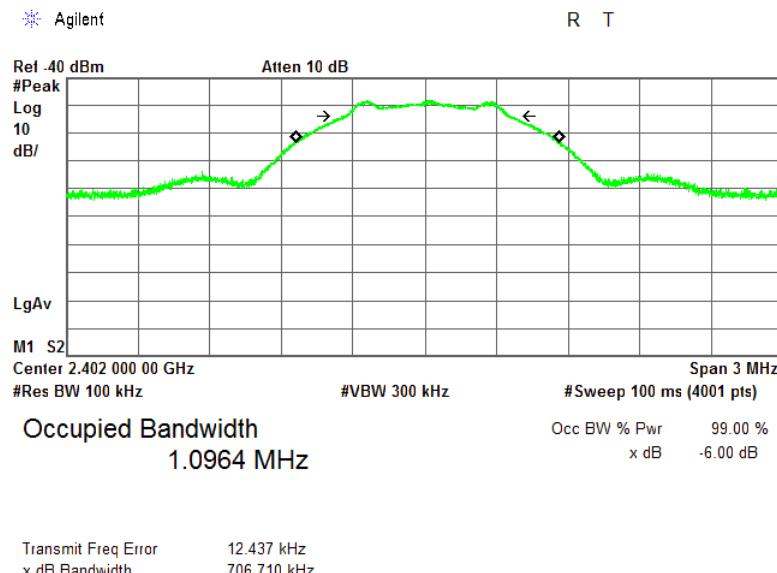

Plot 7.1.2 The 6 dB bandwidth test result at mid frequency

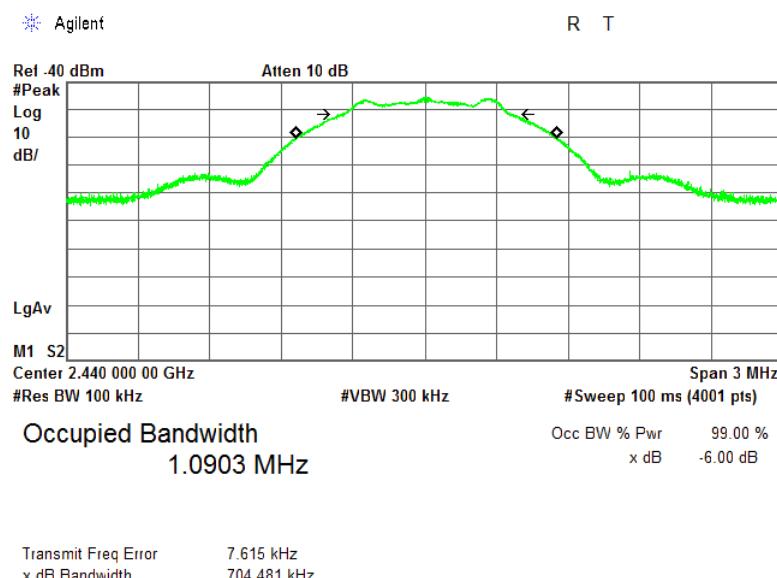




HERMON LABORATORIES

<b>Test specification:</b> Section 15.247(a)2, 6 dB bandwidth		
<b>Test procedure:</b> ANSI C63.10 section 11.8.1		
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS
<b>Date(s):</b> 03-Apr-17		
<b>Temperature:</b> 23 °C	<b>Relative Humidity:</b> 45 %	<b>Air Pressure:</b> 1010 hPa
<b>Power:</b> Battery		
<b>Remarks:</b>		

Plot 7.1.3 The 6 dB bandwidth test result at high frequency

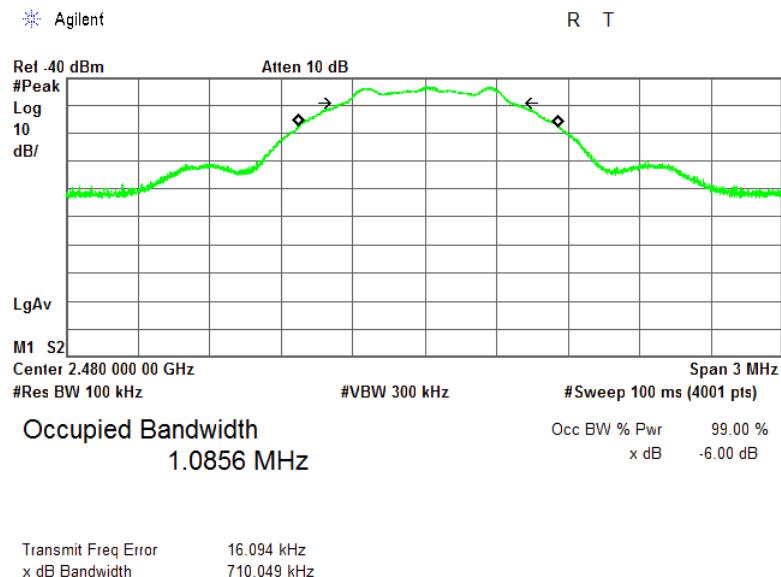



HERMON LABORATORIES

<b>Test specification:</b> Section 15.247(b)3, Maximum output power			
<b>Test procedure:</b> ANSI C63.10 section 11.9.1.1			
<b>Test mode:</b> Compliance			<b>Verdict:</b> PASS
<b>Date(s):</b> 04-Apr-17			
<b>Temperature:</b> 23 °C	<b>Relative Humidity:</b> 45 %	<b>Air Pressure:</b> 1010 hPa	<b>Power:</b> Battery
<b>Remarks:</b>			

## 7.2 Peak output power

### 7.2.1 General

This test was performed to measure the maximum peak output power radiated by transmitter. Specification test limits are given in Table 7.2.1.

Table 7.2.1 Peak output power limits

Assigned frequency range, MHz	Maximum antenna gain, dBi	Peak output power*		Equivalent field strength limit @ 3m, dB(µV/m)**
		W	dBm	
902.0 – 928.0				
2400.0 – 2483.5	6.0	1.0	30.0	131.2
5725.0 – 5850.0				

\*- The limit is provided in terms of conducted RF power at the antenna connector. If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power limit shall be reduced below the stated value as follows:

by 1 dB for every 3 dB that the directional gain of antenna exceeds 6 dBi for fixed point-to-point transmitters operate in 2400-2483.5 MHz band;

without any corresponding reduction for fixed point-to-point transmitters operate in 5725-5850 MHz band;

by the amount in dB that the directional gain of antenna exceeds 6 dBi for the rest of transmitters.

\*\*- Equivalent field strength limit was calculated from the peak output power as follows:  $E = \sqrt{30 \times P \times G} / r$ , where P is peak output power in Watts, r is antenna to EUT distance in meters and G is transmitter antenna gain in dBi.

### 7.2.2 Test procedure

7.2.2.1 The EUT was set up as shown in Figure 7.2.1, energized and its proper operation was checked.

7.2.2.2 The EUT was adjusted to produce maximum available to end user RF output power.

7.2.2.3 The resolution bandwidth of spectrum analyzer was set wider than 6 dB bandwidth of the EUT and the field strength of the EUT carrier frequency was measured with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360° and the measuring antenna height was swept in both vertical and horizontal polarizations.

7.2.2.4 The maximum field strength of the EUT carrier frequency was measured as provided in Table 7.2.2 and associated plots.

7.2.2.5 The maximum peak output power was calculated from the field strength of carrier as follows:

$$P = (E \times d)^2 / (30 \times G),$$

where P is the peak output power in W, E is the field strength in V/m, d is the test distance and G is the transmitter numeric antenna gain over an isotropic radiator.

The above equation was converted in logarithmic units for 3 m test distance:

$$\text{Peak output power in dBm} = \text{Field strength in dB}(\mu\text{V}/\text{m}) - \text{Transmitter antenna gain in dBi} - 95.2 \text{ dB}$$


7.2.2.6 The worst test results (the lowest margins) were recorded in Table 7.2.2.



HERMON LABORATORIES

<b>Test specification:</b> Section 15.247(b)3, Maximum output power		
<b>Test procedure:</b> ANSI C63.10 section 11.9.1.1		
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS
<b>Date(s):</b> 04-Apr-17		
<b>Temperature:</b> 23 °C	<b>Relative Humidity:</b> 45 %	<b>Air Pressure:</b> 1010 hPa
<b>Power:</b> Battery		
<b>Remarks:</b>		

Figure 7.2.1 Setup for carrier field strength measurements

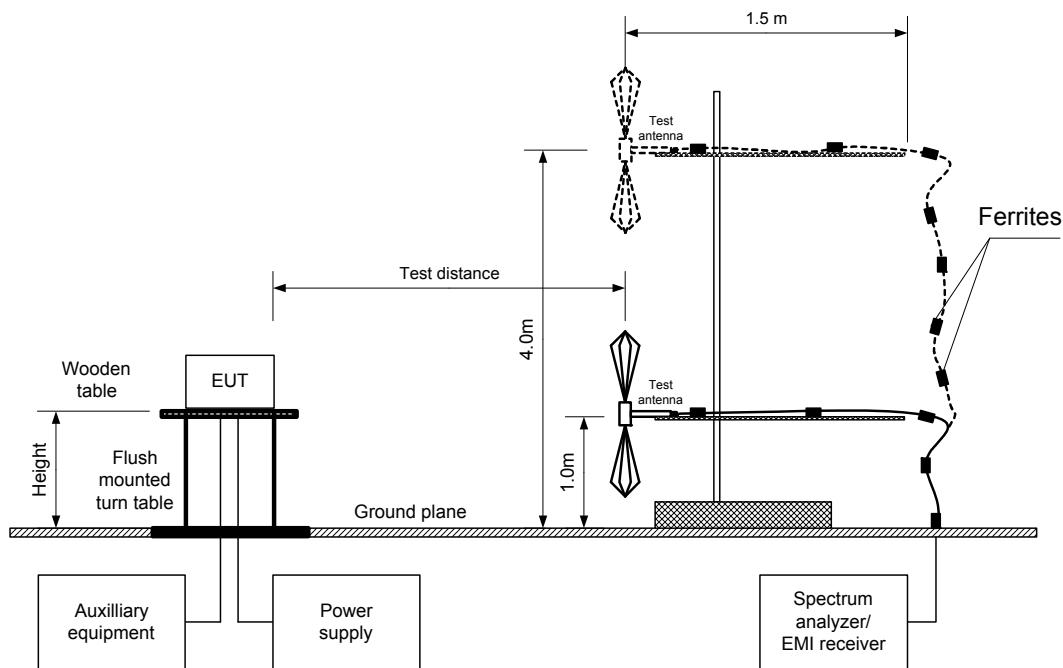



HERMON LABORATORIES

<b>Test specification:</b> Section 15.247(b)3, Maximum output power		
<b>Test procedure:</b> ANSI C63.10 section 11.9.1.1		
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS
<b>Date(s):</b> 04-Apr-17		
<b>Temperature:</b> 23 °C	<b>Relative Humidity:</b> 45 %	<b>Air Pressure:</b> 1010 hPa
<b>Remarks:</b>		

**Table 7.2.2 Peak output power test results**

ASSIGNED FREQUENCY: 2400-2483.5 MHz  
 TEST DISTANCE: 3 m  
 TEST SITE: OATS  
 EUT HEIGHT: 1.5 m  
 DETECTOR USED: Peak  
 TEST ANTENNA TYPE: Double ridged guide (above 1000 MHz)  
 MODULATION: GFSK  
 BIT RATE: 1 Mbps  
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum  
 DETECTOR USED: Peak

Frequency, MHz	Field strength, dB(µV/m)	Antenna polarization	Antenna height, m	Azimuth, degrees*	EUT antenna gain, dBi	Peak output power, dBm**	Limit, dBm	Margin, dB***	Verdict
2402.00	103.90	Horizontal	1.6	208	1	7.70	30	-22.3	Pass
2440.00	102.80	Horizontal	1.5	215	1	6.60	30	-23.4	Pass
2480.00	104.10	Horizontal	1.5	212	1	7.90	30	-22.1	Pass

\*- EUT front panel refer to 0 degrees position of turntable.

\*\*- Peak output power was calculated from the field strength of carrier as follows:  $P = (E \times d)^2 / (30 \times G)$ , where P is the peak output power in W, E is the field strength in V/m, d is the test distance in meters and G is the transmitter numeric antenna gain over an isotropic radiator. The above equation was converted in logarithmic units for 3 m test distance: *Peak output power in dBm = Field strength in dB(µV/m) - Transmitter antenna gain in dBi - 95.2 dB*

\*\*\*- Margin = Peak output power – specification limit.

**Reference numbers of test equipment used**

HL 2909	HL 4114	HL 5103					
---------	---------	---------	--	--	--	--	--

Full description is given in Appendix A.





HERMON LABORATORIES

<b>Test specification:</b> Section 15.247(b)3, Maximum output power		
<b>Test procedure:</b> ANSI C63.10 section 11.9.1.1		
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS
<b>Date(s):</b> 04-Apr-17		
<b>Temperature:</b> 23 °C	<b>Relative Humidity:</b> 45 %	<b>Air Pressure:</b> 1010 hPa
<b>Power:</b> Battery		
<b>Remarks:</b>		

**Plot 7.2.1 Field strength of carrier at low frequency**



TEST SITE:  
TEST DISTANCE:  
EUT POSITION:  
ANTENNA POLARIZATION: Vertical

OATS  
3 m  
X-axis  
ANTENNA POLARIZATION: Horizontal

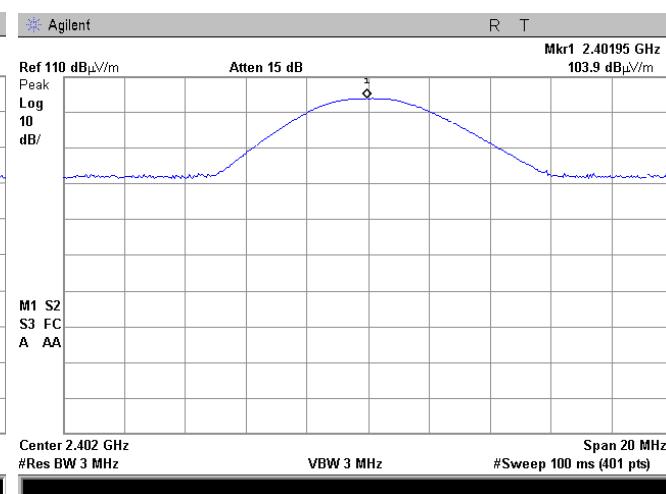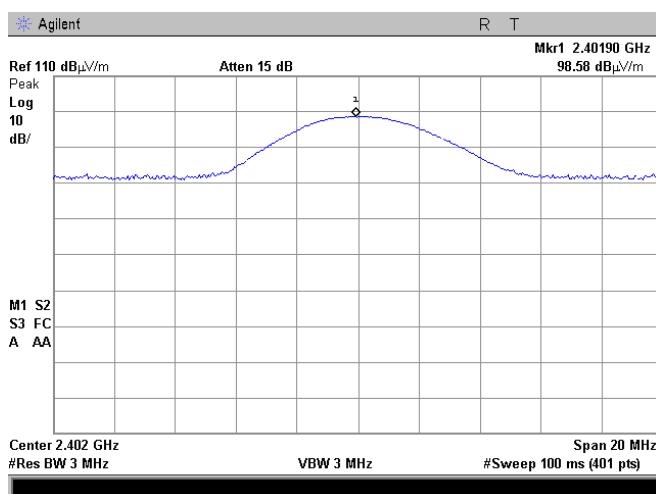**Plot 7.2.2 Field strength of carrier at low frequency**

TEST SITE:  
TEST DISTANCE:  
EUT POSITION:  
ANTENNA POLARIZATION: Vertical

OATS  
3 m  
Y-axis  
ANTENNA POLARIZATION: Horizontal

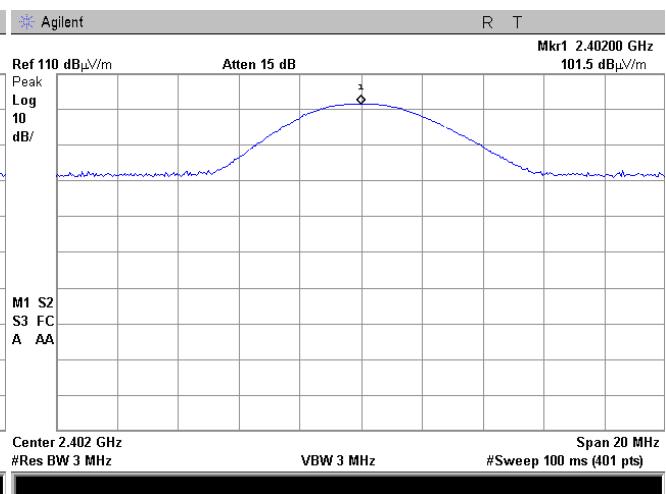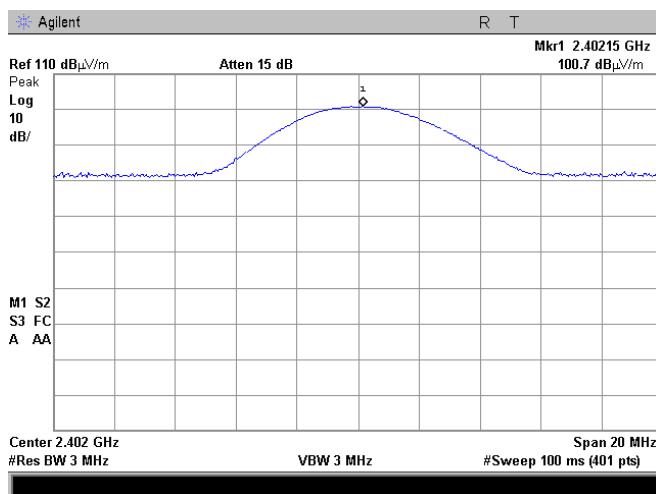




HERMON LABORATORIES

<b>Test specification:</b> Section 15.247(b)3, Maximum output power		
<b>Test procedure:</b> ANSI C63.10 section 11.9.1.1		
<b>Test mode:</b> Compliance	<b>Verdict:</b> PASS	
<b>Date(s):</b> 04-Apr-17		
<b>Temperature:</b> 23 °C	<b>Relative Humidity:</b> 45 %	<b>Air Pressure:</b> 1010 hPa
<b>Remarks:</b>		

**Plot 7.2.3 Field strength of carrier at low frequency**


TEST SITE:  
TEST DISTANCE:  
EUT POSITION:  
ANTENNA POLARIZATION: Vertical

OATS  
3 m  
Z -axis  
ANTENNA POLARIZATION: Horizontal

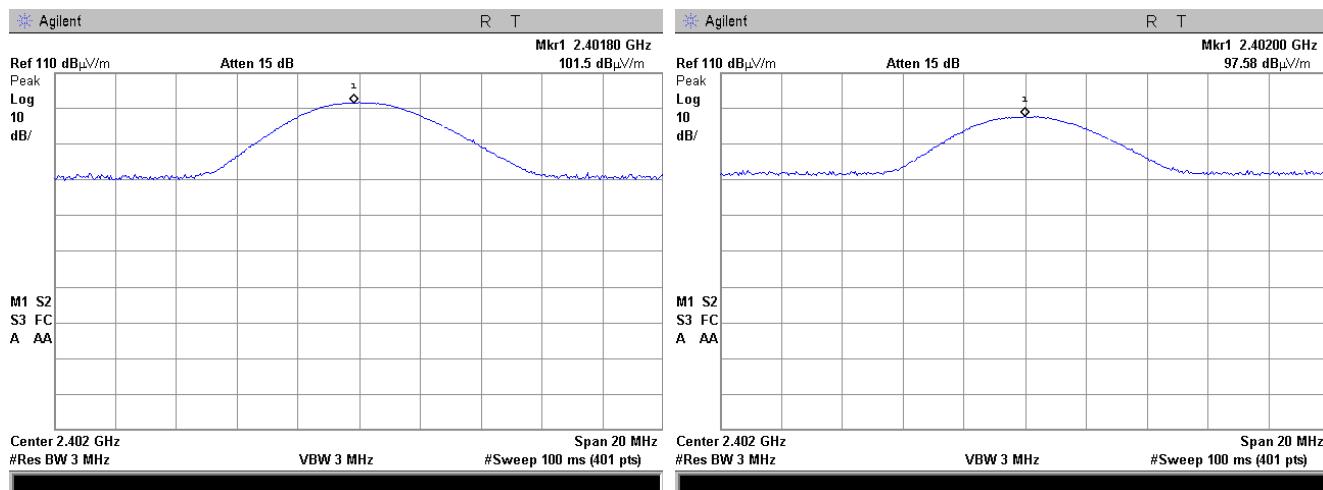**Plot 7.2.4 Field strength of carrier at mid frequency**

TEST SITE:  
TEST DISTANCE:  
EUT POSITION:  
ANTENNA POLARIZATION: Vertical

OATS  
3 m  
X-axis  
ANTENNA POLARIZATION: Horizontal

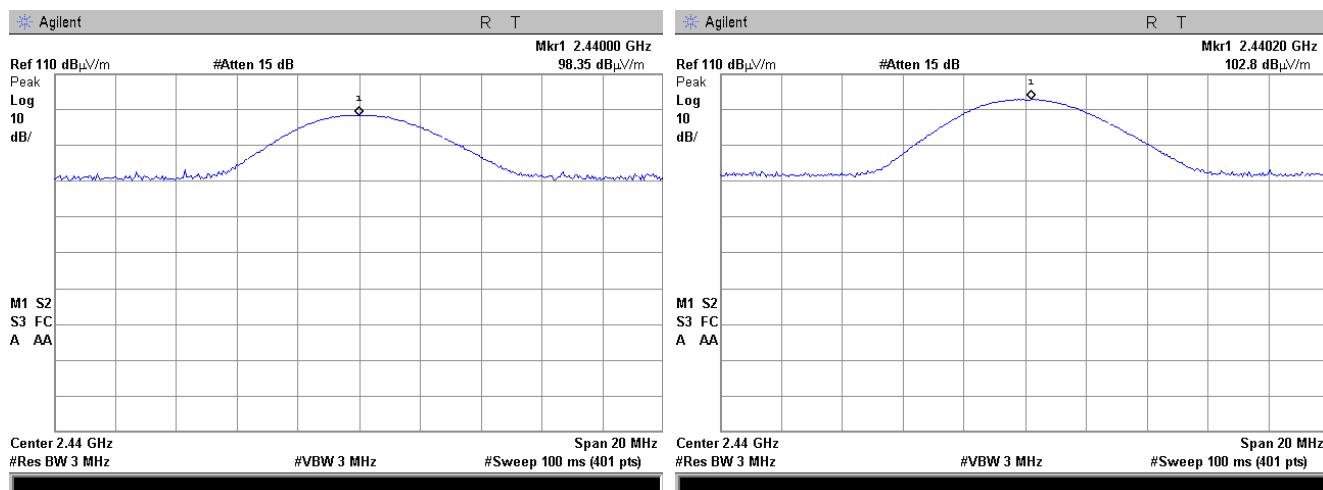





HERMON LABORATORIES

<b>Test specification:</b> Section 15.247(b)3, Maximum output power		
<b>Test procedure:</b> ANSI C63.10 section 11.9.1.1		
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS
<b>Date(s):</b> 04-Apr-17		
<b>Temperature:</b> 23 °C	<b>Relative Humidity:</b> 45 %	<b>Air Pressure:</b> 1010 hPa
<b>Power:</b> Battery		
<b>Remarks:</b>		

**Plot 7.2.5 Field strength of carrier at high frequency**

TEST SITE:  
TEST DISTANCE:  
EUT POSITION:  
ANTENNA POLARIZATION: Vertical

OATS  
3 m  
X-axis  
ANTENNA POLARIZATION: Horizontal

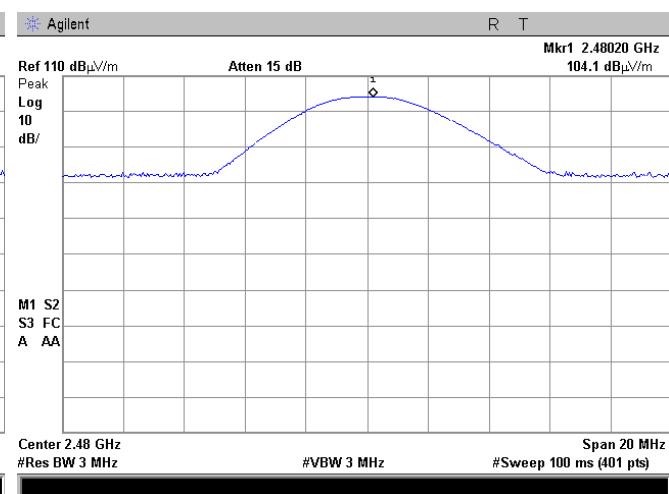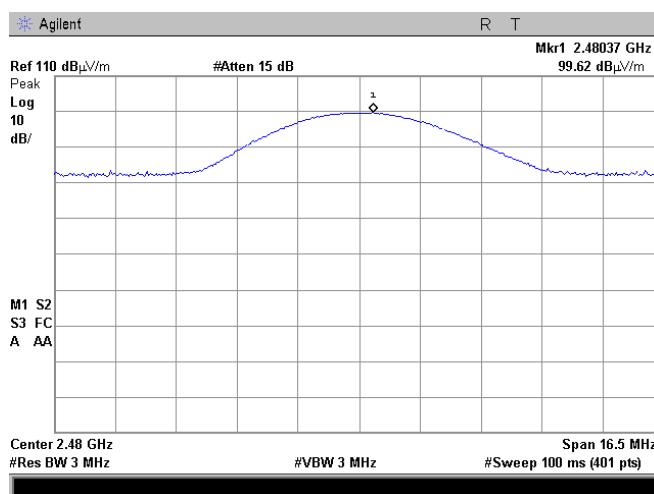



HERMON LABORATORIES

<b>Test specification:</b> Section 15.247(d), Radiated spurious emissions			
<b>Test procedure:</b> ANSI C63.10 section 11.12.1			
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS	
<b>Date(s):</b> 03-Apr-17 - 04-Apr-17			
<b>Temperature:</b> 23 °C	<b>Relative Humidity:</b> 45 %	<b>Air Pressure:</b> 1010 hPa	<b>Power:</b> Battery
<b>Remarks:</b>			

## 7.3 Field strength of spurious emissions

### 7.3.1 General

This test was performed to measure field strength of spurious emissions from the EUT. Specification test limits are given in Table 7.3.1.

Table 7.3.1 Radiated spurious emissions limits

Frequency, MHz	Field strength at 3 m within restricted bands, dB(µV/m)***			Attenuation of field strength of spurious versus carrier outside restricted bands, dBc***	
	Peak	Quasi Peak	Average		
0.009 – 0.090	148.5 – 128.5	NA	128.5 – 108.5**	20.0	
0.090 – 0.110	NA	108.5 – 106.8**	NA		
0.110 – 0.490	126.8 – 113.8	NA	106.8 – 93.8**		
0.490 – 1.705	NA	73.8 – 63.0**	NA		
1.705 – 30.0*		69.5			
30 – 88		40.0			
88 – 216		43.5			
216 – 960		46.0			
960 – 1000		54.0			
1000 – 10 <sup>th</sup> harmonic	74.0	NA	54.0		

\*- The limit for 3 m test distance was calculated using the inverse square distance extrapolation factor as follows:  

$$\text{Lim}_{S_2} = \text{Lim}_{S_1} + 40 \log (S_1/S_2)$$

where  $S_1$  and  $S_2$  – standard defined and test distance respectively in meters.

\*\*- The limit decreases linearly with the logarithm of frequency.

\*\*\* - The field strength limits applied from the lowest radio frequency generated in the device, without going below 9 kHz up to the tenth harmonic of the highest fundamental frequency.

### 7.3.2 Test procedure for spurious emission field strength measurements in 9 kHz to 30 MHz band

7.3.2.1 The EUT was set up as shown in Figure 7.3.1, energized and the performance check was conducted.

7.3.2.2 The specified frequency range was investigated with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360° and the measuring antenna was rotated around its vertical axis.

7.3.2.3 The worst test results (the lowest margins) were recorded and shown in the associated plots.

### 7.3.3 Test procedure for spurious emission field strength measurements above 30 MHz

7.3.3.1 The EUT was set up as shown in Figure 7.3.2, Figure 7.3.3, energized and the performance check was conducted.

7.3.3.2 The specified frequency range was investigated with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360°, the measuring antenna height was changed from 1 to 4 m, its polarization was switched from vertical to horizontal.


7.3.3.3 The worst test results (the lowest margins) were recorded and shown in the associated plots.




HERMON LABORATORIES

<b>Test specification: Section 15.247(d), Radiated spurious emissions</b>		
<b>Test procedure:</b> ANSI C63.10 section 11.12.1		
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS
<b>Date(s):</b> 03-Apr-17 - 04-Apr-17		
<b>Temperature:</b> 23 °C	<b>Relative Humidity:</b> 45 %	<b>Air Pressure:</b> 1010 hPa
<b>Power:</b> Battery		
<b>Remarks:</b>		

**Figure 7.3.1 Setup for spurious emission field strength measurements below 30 MHz**

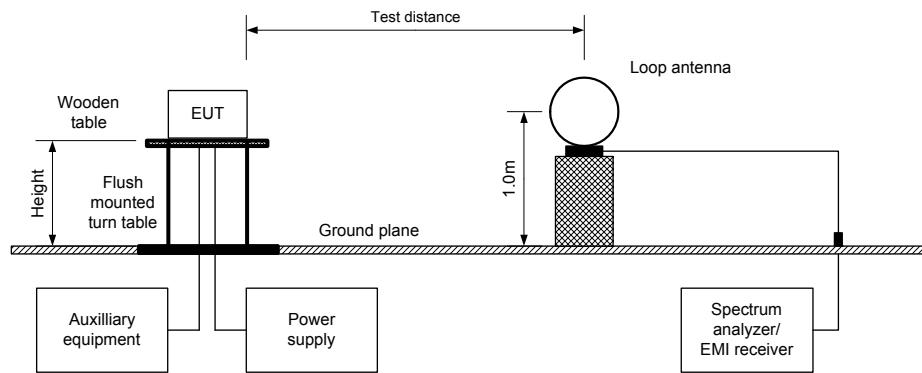

**Figure 7.3.2 Setup for spurious emission field strength measurements from 30 to 1000 MHz**

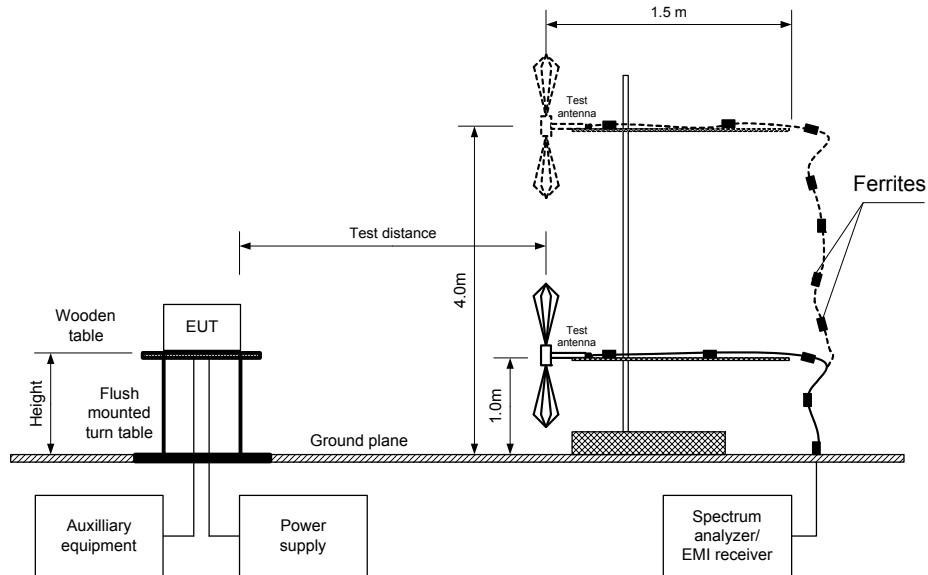




HERMON LABORATORIES

<b>Test specification:</b> Section 15.247(d), Radiated spurious emissions		
<b>Test procedure:</b> ANSI C63.10 section 11.12.1		
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS
<b>Date(s):</b> 03-Apr-17 - 04-Apr-17		
<b>Temperature:</b> 23 °C	<b>Relative Humidity:</b> 45 %	<b>Air Pressure:</b> 1010 hPa
<b>Power:</b> Battery		
<b>Remarks:</b>		

Figure 7.3.3 Setup for spurious emission field strength measurements above 1000 MHz

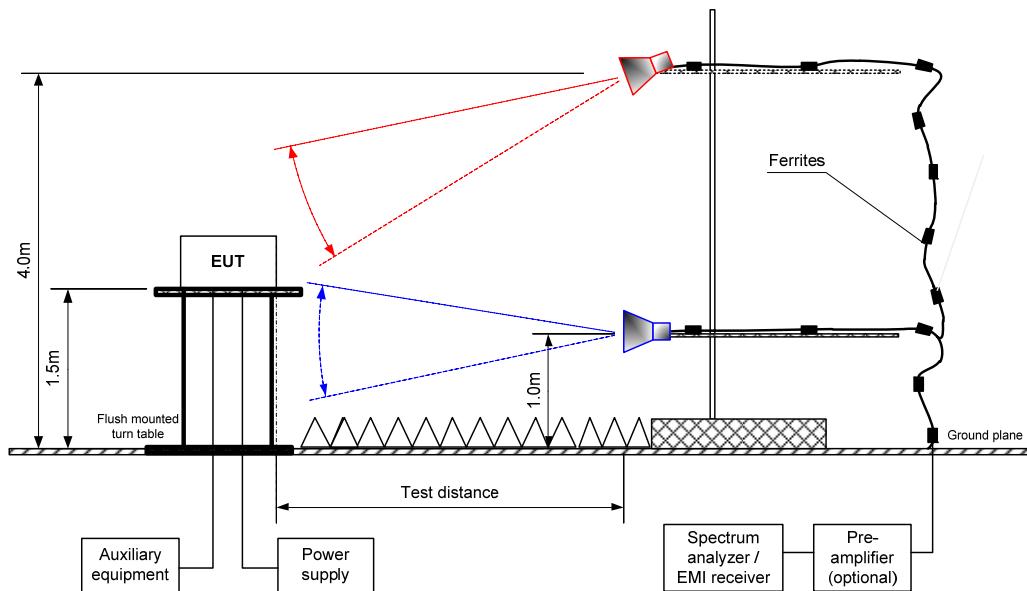



HERMON LABORATORIES

<b>Test specification:</b> Section 15.247(d), Radiated spurious emissions	
<b>Test procedure:</b>	ANSI C63.10 section 11.12.1
<b>Test mode:</b>	Compliance
<b>Date(s):</b>	03-Apr-17 - 04-Apr-17
<b>Temperature:</b> 23 °C	<b>Relative Humidity:</b> 45 %
	<b>Air Pressure:</b> 1010 hPa
	<b>Power:</b> Battery
<b>Remarks:</b>	

**Table 7.3.2 Field strength of emissions outside restricted bands**

ASSIGNED FREQUENCY:	2400-2483.5 MHz
INVESTIGATED FREQUENCY RANGE:	0.009 - 25000 MHz
TEST DISTANCE:	3 m
MODULATION:	GFSK
BIT RATE:	1 Mbps
DUTY CYCLE:	100 %
DETECTOR USED:	Peak
RESOLUTION BANDWIDTH:	100 kHz
VIDEO BANDWIDTH:	300 kHz
TEST ANTENNA TYPE:	Active loop (9 kHz – 30 MHz) Biconical (30 MHz – 200 MHz) Log periodic (200 MHz – 1000 MHz) Biconilog (30 MHz – 1000 MHz) Double ridged guide (above 1000 MHz)
FREQUENCY HOPPING:	Disabled

Frequency, MHz	Field strength of spurious, dB(µV/m)	Antenna polarization	Antenna height, m	Azimuth, degrees*	Field strength of carrier, dB(µV/m)	Attenuation below carrier, dBc	Limit, dBc	Margin, dB**	Verdict
<b>Low carrier frequency</b>									
7206	38.76	Horizontal	1.5	200	102.6	63.84	20.0	43.84	Pass
<b>Mid carrier frequency</b>									
2504	46.28	Horizontal	1.3	90	102.7	56.42	20.0	36.42	Pass
<b>High carrier frequency</b>									
2544	44.99	Horizontal	1.3	90	102.5	57.51	20.0	37.51	Pass

\*- EUT front panel refers to 0 degrees position of turntable.

\*\*- Margin = Attenuation below carrier – specification limit.



HERMON LABORATORIES

<b>Test specification:</b> Section 15.247(d), Radiated spurious emissions		
<b>Test procedure:</b> ANSI C63.10 section 11.12.1		
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS
<b>Date(s):</b>	03-Apr-17 - 04-Apr-17	
<b>Temperature:</b> 23 °C	<b>Relative Humidity:</b> 45 %	<b>Air Pressure:</b> 1010 hPa
<b>Remarks:</b>		<b>Power:</b> Battery

**Table 7.3.3 Field strength of spurious emissions above 1 GHz within restricted bands**

ASSIGNED FREQUENCY: 2400-2483.5 MHz  
 INVESTIGATED FREQUENCY RANGE: 1000 - 25000 MHz  
 TEST DISTANCE: 3 m  
 MODULATION: GFSK  
 BIT RATE: 1 Mbps  
 DUTY CYCLE: 100 %  
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum  
 DETECTOR USED: Peak  
 RESOLUTION BANDWIDTH: 1000 kHz  
 TEST ANTENNA TYPE: Double ridged guide  
 FREQUENCY HOPPING: Disabled

Frequency, MHz	Antenna		Azimuth, degrees*	Peak field strength(VBW=3 MHz)			Average field strength(VBW=10 Hz)			Verdict	
	Polarization	Height, m		Measured, dB(µV/m)	Limit, dB(µV/m)	Margin, dB**	Measured, dB(µV/m)	Calculated, dB(µV/m)	Limit, dB(µV/m)		
<b>Low carrier frequency 2402 MHz</b>											
4804	Vertical	1.5	149	43.98	74	-30.02	39.29	19.29	54	-34.71	Pass
<b>Mid carrier frequency 2440 MHz</b>											
4880	Vertical	1.5	0	44.87	74	-29.13	40.71	20.71	54	-33.29	Pass
7320	Vertical	1.5	200	44.53	74	-29.47	36.40	16.40	54	-37.60	
<b>High carrier frequency 2480 MHz</b>											
4960	Vertical	1.5	0	42.53	74	-31.47	36.83	16.83	54	-37.17	Pass
7440	Vertical	1.5	250	46.33	74	-27.67	39.25	19.25	54	-34.75	

\*- EUT front panel refers to 0 degrees position of turntable.

\*\*- Margin = Measured field strength - specification limit.

\*\*\*- Margin = Calculated field strength - specification limit,

where Calculated field strength = Measured field strength + average factor.

**Table 7.3.4 Average factor calculation**

Transmission pulse		Transmission burst		Transmission train duration, ms	Average factor, dB
Duration, ms	Period, ms	Duration, ms	Period, ms		
10	277	NA	NA	NA	-20

\*- Average factor was calculated as follows

for pulse train shorter than 100 ms:

$$\text{Average factor} = 20 \times \log_{10} \left( \frac{\text{Pulse duration}}{\text{Pulse period}} \times \frac{\text{Burst duration}}{\text{Train duration}} \times \text{Number of bursts within pulse train} \right)$$

for pulse train longer than 100 ms:

$$\text{Average factor} = 20 \times \log_{10} \left( \frac{\text{Pulse duration}}{\text{Pulse period}} \times \frac{\text{Burst duration}}{100 \text{ ms}} \times \text{Number of bursts within 100 ms} \right)$$



HERMON LABORATORIES

<b>Test specification:</b> Section 15.247(d), Radiated spurious emissions		
<b>Test procedure:</b> ANSI C63.10 section 11.12.1		
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS
<b>Date(s):</b> 03-Apr-17 - 04-Apr-17		
<b>Temperature:</b> 23 °C	<b>Relative Humidity:</b> 45 %	<b>Air Pressure:</b> 1010 hPa
<b>Power:</b> Battery		
<b>Remarks:</b>		

**Table 7.3.5 Field strength of spurious emissions below 1 GHz within restricted bands**

ASSIGNED FREQUENCY:	2400-2483.5 MHz
INVESTIGATED FREQUENCY RANGE:	0.009 – 1000 MHz
TEST DISTANCE:	3 m
MODULATION:	GFSK
BIT RATE:	1 Mbps
DUTY CYCLE:	100 %
TRANSMITTER OUTPUT POWER SETTINGS:	Maximum
RESOLUTION BANDWIDTH:	0.2 kHz (9 kHz – 150 kHz) 9.0 kHz (150 kHz – 30 MHz) 120 kHz (30 MHz – 1000 MHz)
VIDEO BANDWIDTH:	> Resolution bandwidth
TEST ANTENNA TYPE:	Active loop (9 kHz – 30 MHz) Biconical (30 MHz – 200 MHz) Log periodic (200 MHz – 1000 MHz) Biconilog (30 MHz – 1000 MHz)
FREQUENCY HOPPING:	Disabled

Frequency, MHz	Peak emission, dB(µV/m)	Quasi-peak			Antenna polarization	Antenna height, m	Turn-table position**, degrees	Verdict
		Measured emission, dB(µV/m)	Limit, dB(µV/m)	Margin, dB*				
No signals were found								

**Reference numbers of test equipment used**

HL 0446	HL 2432	HL 2780	HL 2697	HL 4338	HL 4933	HL 4956	HL 5107
HL 5110	HL 5112						

Full description is given in Appendix A.



HERMON LABORATORIES

<b>Test specification: Section 15.247(d), Radiated spurious emissions</b>					
<b>Test procedure:</b>		ANSI C63.10 section 11.12.1			
<b>Test mode:</b>		Compliance		<b>Verdict:</b> <b>PASS</b>	
<b>Date(s):</b>		03-Apr-17 - 04-Apr-17			
<b>Temperature:</b> 23 °C		<b>Relative Humidity:</b> 45 %		<b>Air Pressure:</b> 1010 hPa	<b>Power:</b> Battery
<b>Remarks:</b>					

**Table 7.3.6 Restricted bands according to FCC section 15.205**

MHz	MHz	MHz	MHz	MHz	GHz
0.09 - 0.11	8.37625 - 8.38675	73 - 74.6	399.9 - 410	2690 - 2900	10.6 - 12.7
0.495 - 0.505	8.41425 - 8.41475	74.8 - 75.2	608 - 614	3260 - 3267	13.25 - 13.4
2.1735 - 2.1905	12.29 - 12.293	108 - 121.94	960 - 1240	3332 - 3339	14.47 - 14.5
4.125 - 4.128	12.51975 - 12.52025	123 - 138	1300 - 1427	3345.8 - 3358	15.35 - 16.2
4.17725 - 4.17775	12.57675 - 12.57725	149.9 - 150.05	1435 - 1626.5	3600 - 4400	17.7 - 21.4
4.20725 - 4.20775	13.36 - 13.41	156.52475 - 156.52525	1645.5 - 1646.5	4500 - 5150	22.01 - 23.12
6.215 - 6.218	16.42 - 16.423	156.7 - 156.9	1660 - 1710	5350 - 5460	23.6 - 24
6.26775 - 6.26825	16.69475 - 16.69525	162.0125 - 167.17	1718.8 - 1722.2	7250 - 7750	31.2 - 31.8
6.31175 - 6.31225	16.80425 - 16.80475	167.72 - 173.2	2200 - 2300	8025 - 8500	36.43 - 36.5
8.291 - 8.294	25.5 - 25.67	240 - 285	2310 - 2390	9000 - 9200	
8.362 - 8.366	37.5 - 38.25	322 - 335.4	2483.5 - 2500	9300 - 9500	Above 38.6




HERMON LABORATORIES

<b>Test specification:</b> Section 15.247(d), Radiated spurious emissions		
<b>Test procedure:</b> ANSI C63.10 section 11.12.1		
<b>Test mode:</b> Compliance	<b>Verdict:</b> <b>PASS</b>	
<b>Date(s):</b> 03-Apr-17 - 04-Apr-17		
<b>Temperature:</b> 23 °C	<b>Relative Humidity:</b> 45 %	<b>Air Pressure:</b> 1010 hPa
<b>Remarks:</b>		


**Plot 7.3.1 Radiated emission measurements at the low carrier frequency**

TEST SITE: Anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical & Horizontal

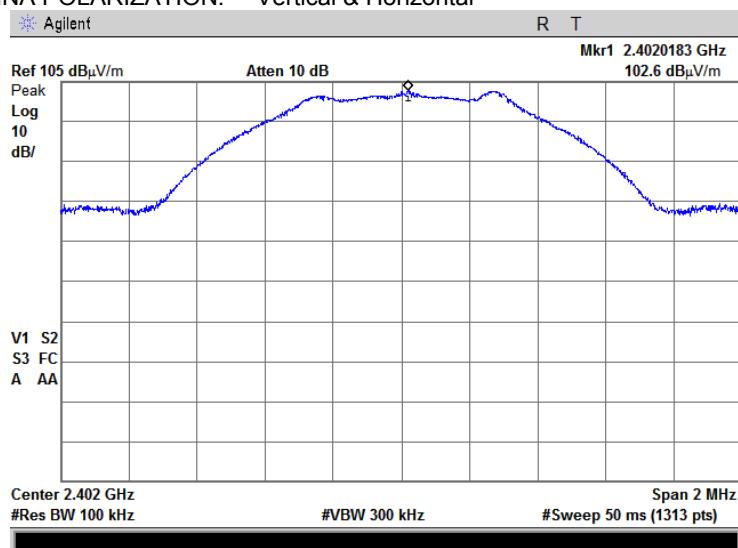

**Plot 7.3.2 Radiated emission measurements at the mid carrier frequency**

TEST SITE: Anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical & Horizontal

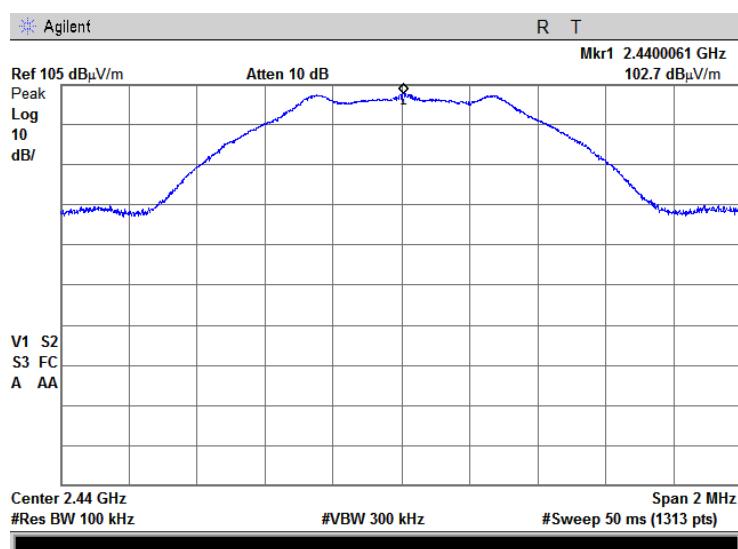




HERMON LABORATORIES

<b>Test specification:</b> Section 15.247(d), Radiated spurious emissions		
<b>Test procedure:</b> ANSI C63.10 section 11.12.1		
<b>Test mode:</b> Compliance	<b>Verdict:</b> PASS	
<b>Date(s):</b> 03-Apr-17 - 04-Apr-17		
<b>Temperature:</b> 23 °C	<b>Relative Humidity:</b> 45 %	<b>Air Pressure:</b> 1010 hPa
<b>Remarks:</b>		


**Plot 7.3.3 Radiated emission measurements at the high carrier frequency**

TEST SITE: Anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical & Horizontal

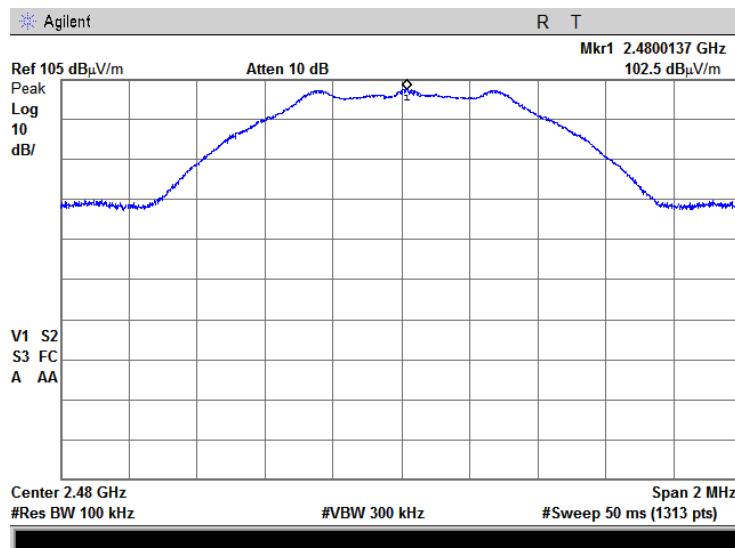

**Plot 7.3.4 Radiated emission measurements from 9 to 150 kHz at the low, mid, high carrier frequency**

TEST SITE: Anechoic chamber  
TEST DISTANCE: 3 m

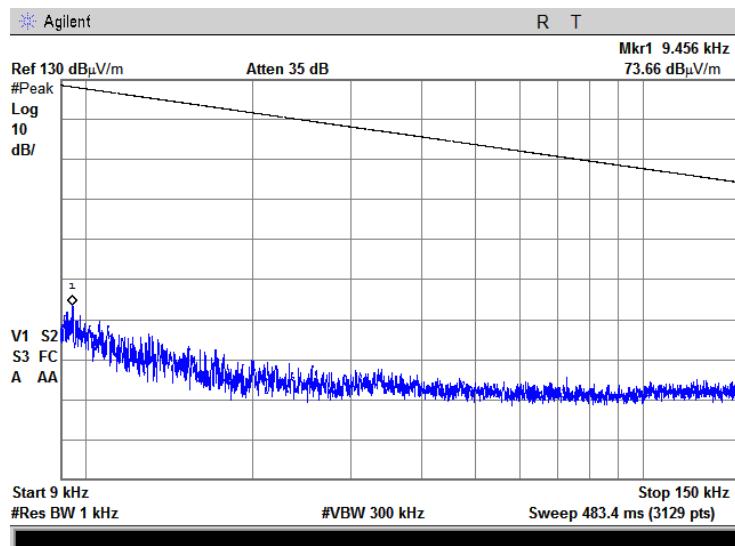




HERMON LABORATORIES

<b>Test specification:</b> Section 15.247(d), Radiated spurious emissions		
<b>Test procedure:</b> ANSI C63.10 section 11.12.1		
<b>Test mode:</b> Compliance	<b>Verdict:</b> PASS	
<b>Date(s):</b> 03-Apr-17 - 04-Apr-17		
<b>Temperature:</b> 23 °C	<b>Relative Humidity:</b> 45 %	<b>Air Pressure:</b> 1010 hPa
<b>Remarks:</b>		


**Plot 7.3.5 Radiated emission measurements from 0.15 to 30 MHz at the low, mid, high carrier frequency**

TEST SITE: Anechoic chamber  
TEST DISTANCE: 3 m

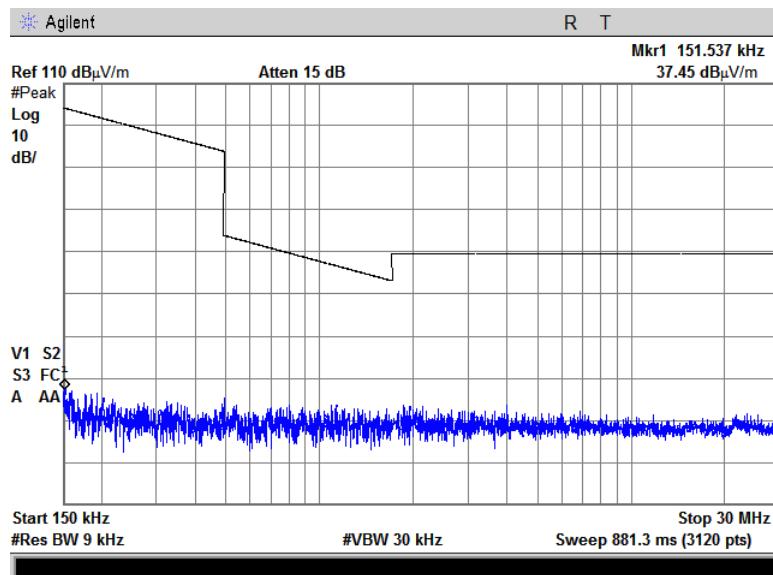

**Plot 7.3.6 Radiated emission measurements from 30 to 1000 MHz at the low, mid, high carrier frequency**

TEST SITE: Anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical and Horizontal

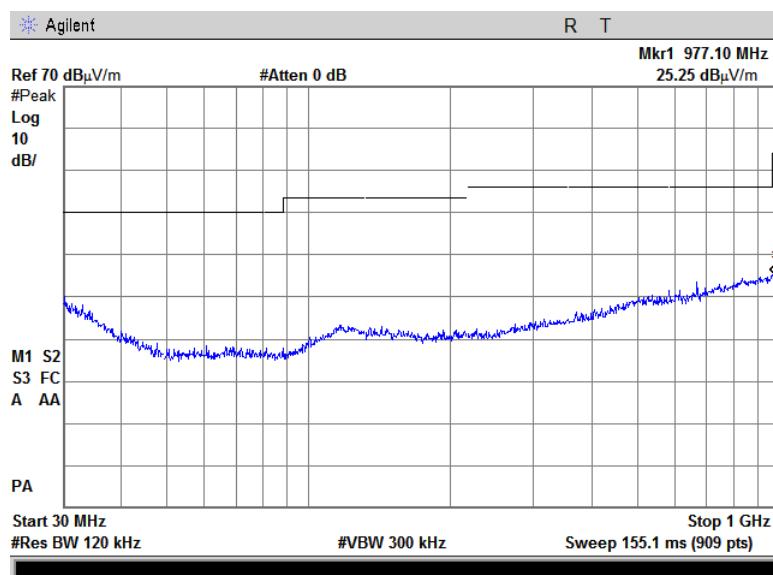




HERMON LABORATORIES

Report ID: AUGRAD\_FCC.29418\_rev1.docx


Date of Issue: 29-May-17

<b>Test specification: Section 15.247(d), Radiated spurious emissions</b>		
<b>Test procedure:</b>	ANSI C63.10 section 11.12.1	
<b>Test mode:</b>	Compliance	<b>Verdict:</b> <b>PASS</b>
<b>Date(s):</b>	03-Apr-17 - 04-Apr-17	
<b>Temperature:</b> 23 °C	<b>Relative Humidity:</b> 45 %	<b>Air Pressure:</b> 1010 hPa
<b>Remarks:</b>		<b>Power:</b> Battery

**Plot 7.3.7 Radiated emission measurements from 1000 to 2390 MHz at the low carrier frequency**

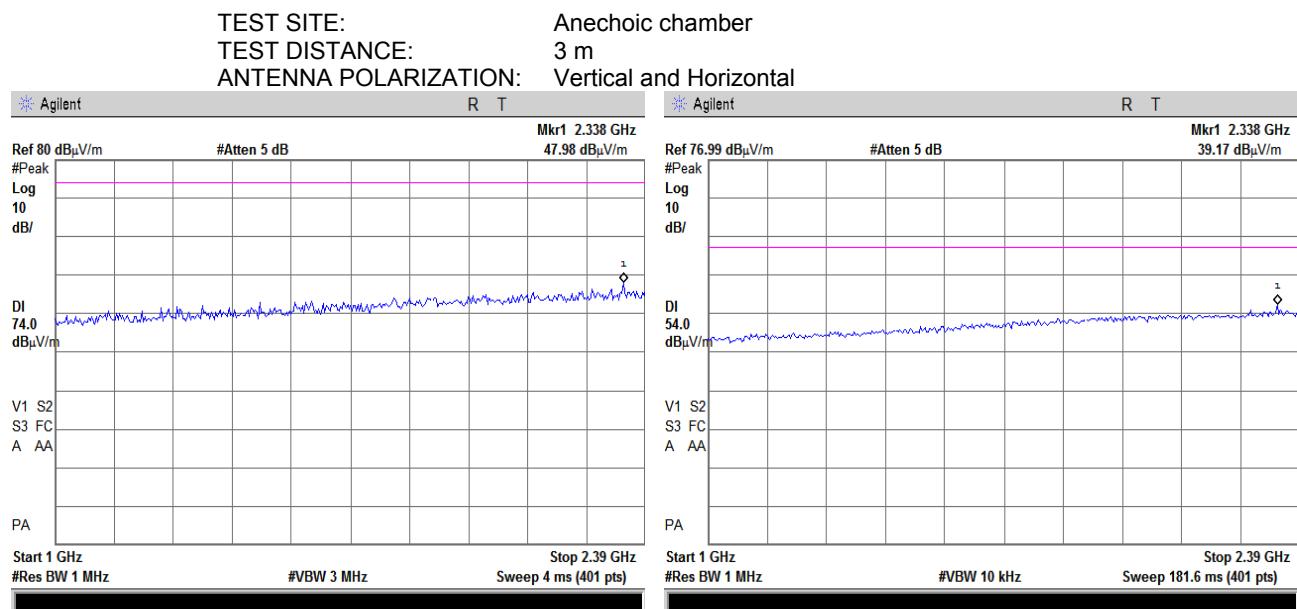

**Plot 7.3.8 Radiated emission measurements from 2483.5 to 3000 MHz at the low carrier frequency**

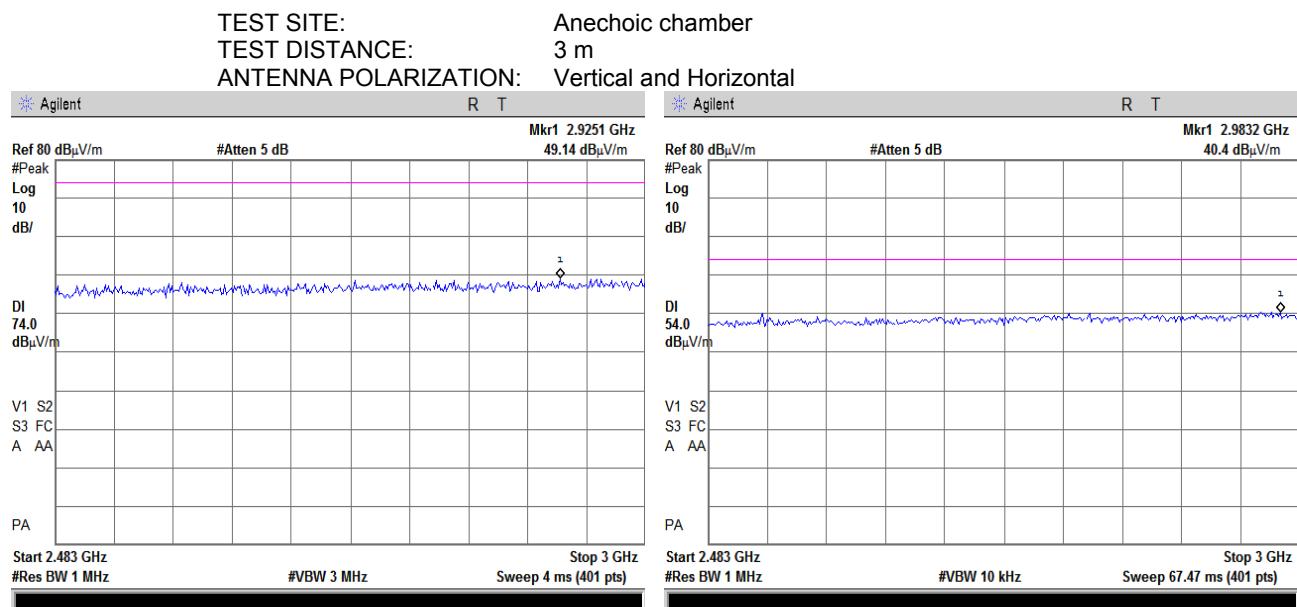




HERMON LABORATORIES

<b>Test specification: Section 15.247(d), Radiated spurious emissions</b>		
<b>Test procedure:</b> ANSI C63.10 section 11.12.1		
<b>Test mode:</b> Compliance		<b>Verdict:</b> <b>PASS</b>
<b>Date(s):</b> 03-Apr-17 - 04-Apr-17		
<b>Temperature:</b> 23 °C	<b>Relative Humidity:</b> 45 %	<b>Air Pressure:</b> 1010 hPa
<b>Power:</b> Battery		
<b>Remarks:</b>		

**Plot 7.3.9 Radiated emission measurements from 1000 to 2400 MHz at the mid carrier frequency**

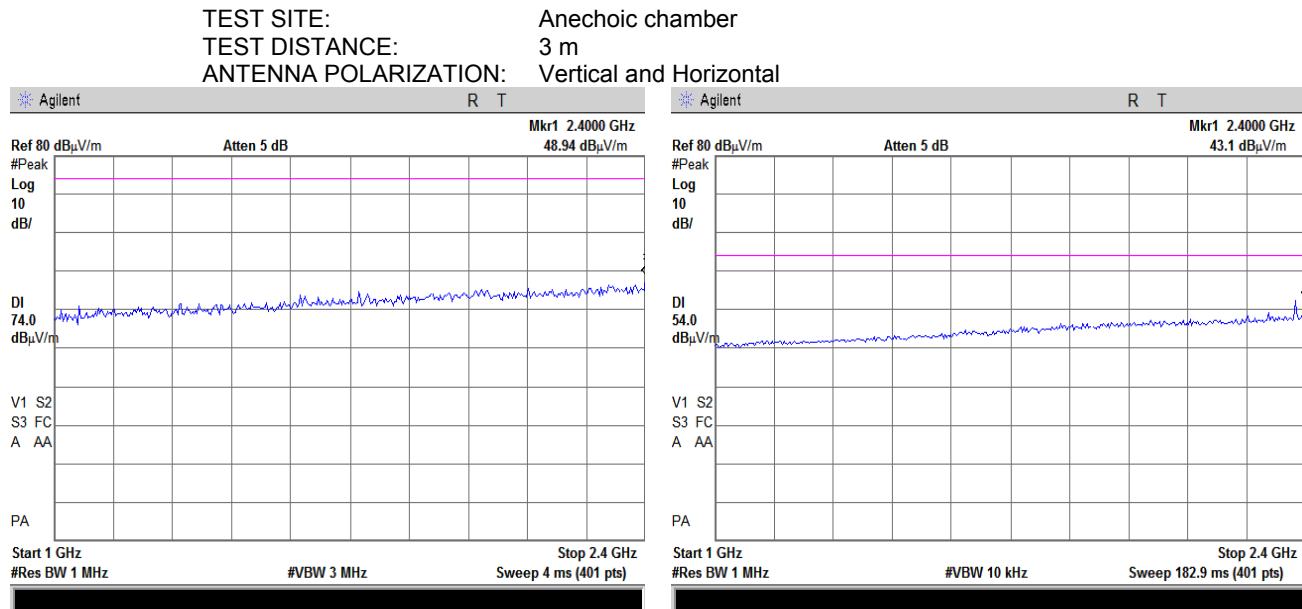





HERMON LABORATORIES

<b>Test specification: Section 15.247(d), Radiated spurious emissions</b>		
<b>Test procedure:</b> ANSI C63.10 section 11.12.1		
<b>Test mode:</b> Compliance	<b>Verdict:</b> <b>PASS</b>	
<b>Date(s):</b> 03-Apr-17 - 04-Apr-17		
<b>Temperature:</b> 23 °C	<b>Relative Humidity:</b> 45 %	<b>Air Pressure:</b> 1010 hPa
<b>Remarks:</b>		

**Plot 7.3.10 Radiated emission measurements from 2483.5 to 3000 MHz at the mid carrier frequency**

TEST SITE: Anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical and Horizontal

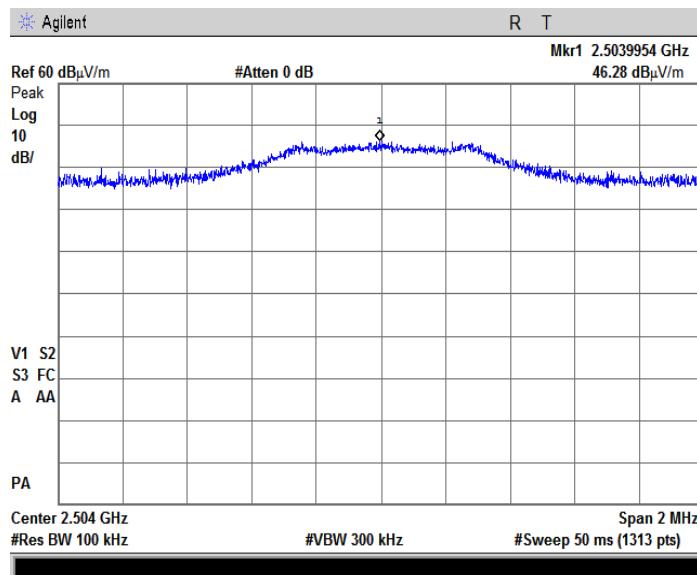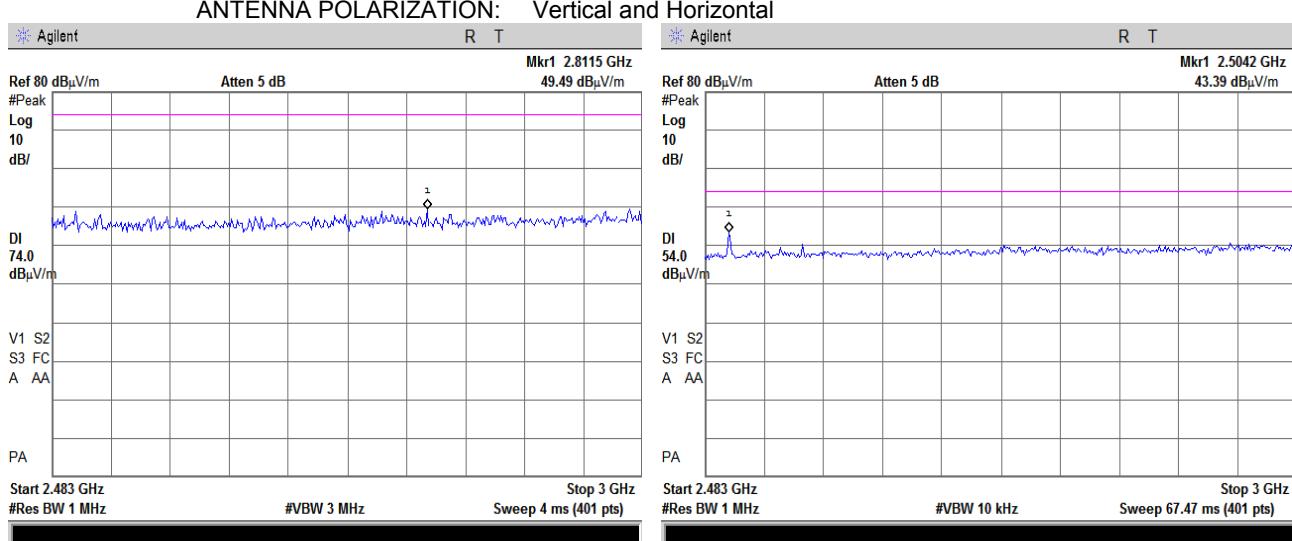





HERMON LABORATORIES

<b>Test specification:</b> Section 15.247(d), Radiated spurious emissions		
<b>Test procedure:</b> ANSI C63.10 section 11.12.1		
<b>Test mode:</b> Compliance	<b>Verdict:</b> PASS	
<b>Date(s):</b> 03-Apr-17 - 04-Apr-17		
<b>Temperature:</b> 23 °C	<b>Relative Humidity:</b> 45 %	<b>Air Pressure:</b> 1010 hPa
<b>Remarks:</b>		

**Plot 7.3.11 Radiated emission measurements from 1000 to 2400 MHz at the high carrier frequency**

TEST SITE: Anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical and Horizontal

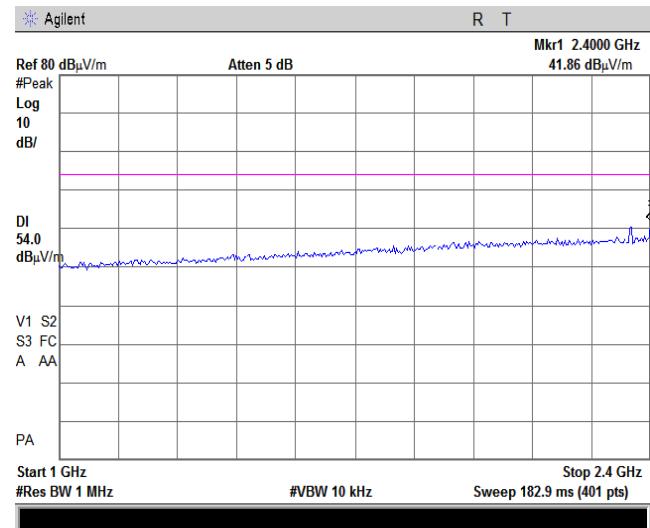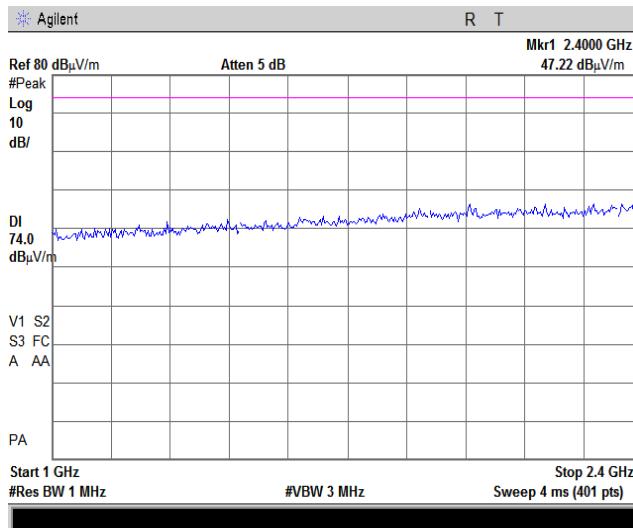






HERMON LABORATORIES

<b>Test specification:</b> Section 15.247(d), Radiated spurious emissions		
<b>Test procedure:</b> ANSI C63.10 section 11.12.1		
<b>Test mode:</b> Compliance	<b>Verdict:</b> PASS	
<b>Date(s):</b> 03-Apr-17 - 04-Apr-17		
<b>Temperature:</b> 23 °C	<b>Relative Humidity:</b> 45 %	<b>Air Pressure:</b> 1010 hPa
<b>Remarks:</b>		

**Plot 7.3.12 Radiated emission measurements from 2485 to 3000 MHz at the high carrier frequency**

TEST SITE: Anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical and Horizontal

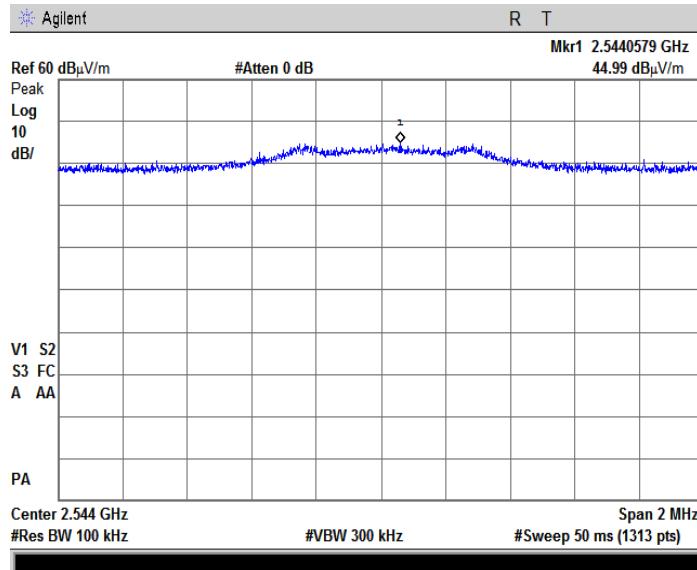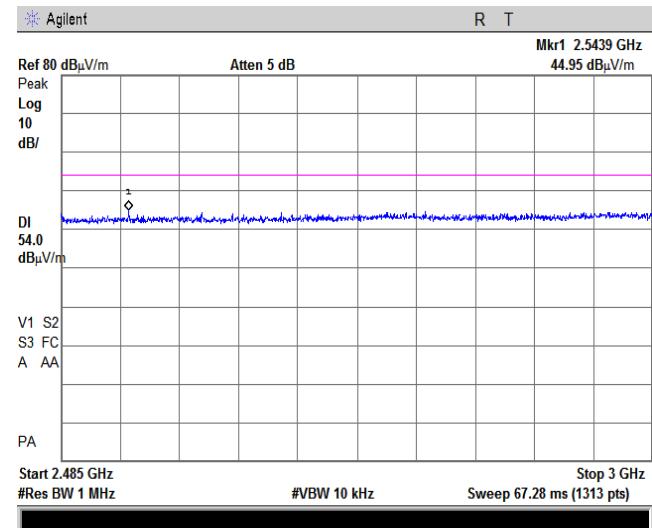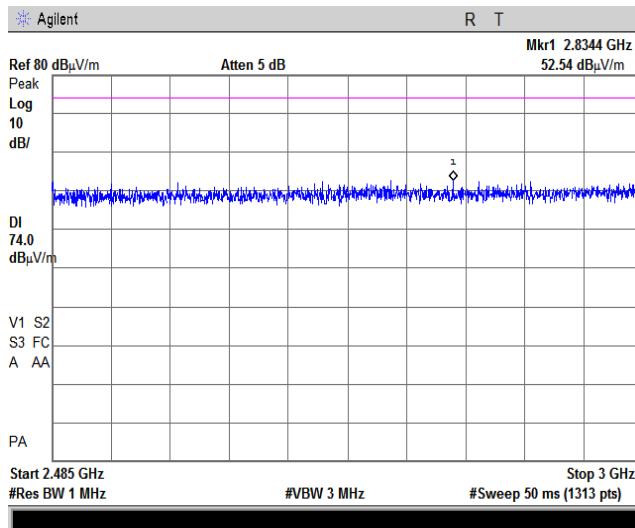





HERMON LABORATORIES

<b>Test specification: Section 15.247(d), Radiated spurious emissions</b>		
<b>Test procedure:</b> ANSI C63.10 section 11.12.1		
<b>Test mode:</b> Compliance	<b>Verdict:</b> <b>PASS</b>	
<b>Date(s):</b> 03-Apr-17 - 04-Apr-17		
<b>Temperature:</b> 23 °C	<b>Relative Humidity:</b> 45 %	<b>Air Pressure:</b> 1010 hPa
<b>Remarks:</b>		

**Plot 7.3.13 Radiated emission measurements from 3000 to 10000 MHz at the low carrier frequency**

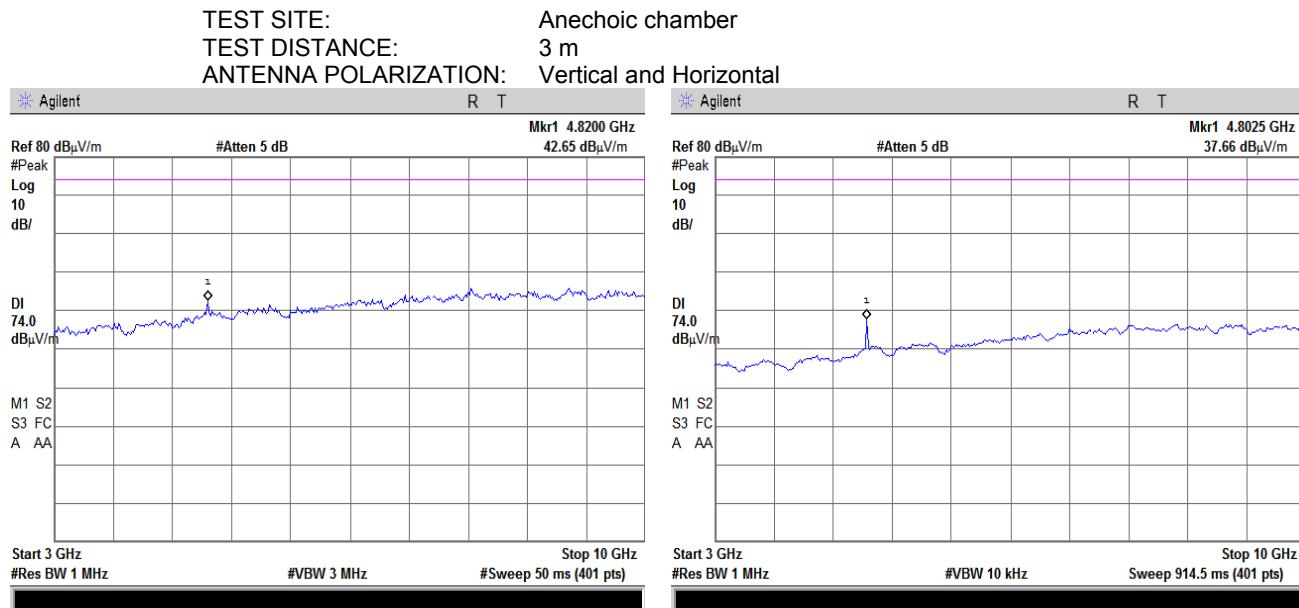

**Plot 7.3.14 Radiated emission measurements from 3000 to 10000 MHz at the mid carrier frequency**

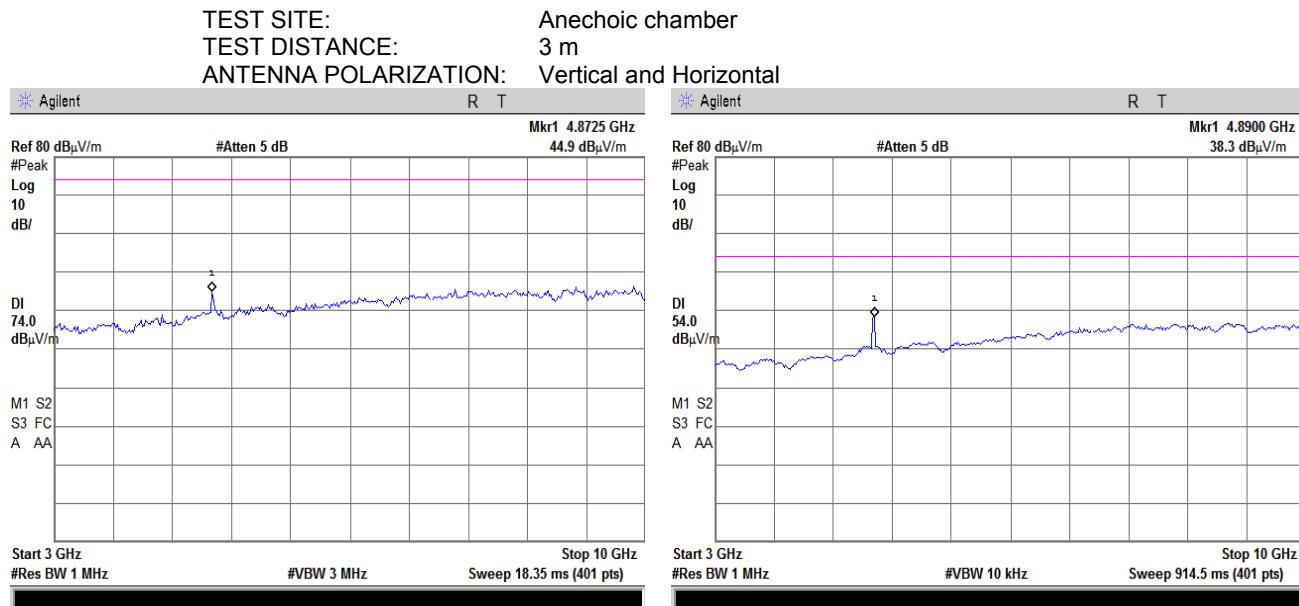




HERMON LABORATORIES

Test specification: Section 15.247(d), Radiated spurious emissions		
Test procedure: ANSI C63.10 section 11.12.1		
Test mode: Compliance	Date(s): 03-Apr-17 - 04-Apr-17	Verdict: PASS
Temperature: 23 °C		Air Pressure: 1010 hPa
Relative Humidity: 45 %		Power: Battery
Remarks:		


## Plot 7.3.15 Radiated emission measurements from 3000 to 10000 MHz at the high carrier frequency

TEST SITE: Anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical and Horizontal

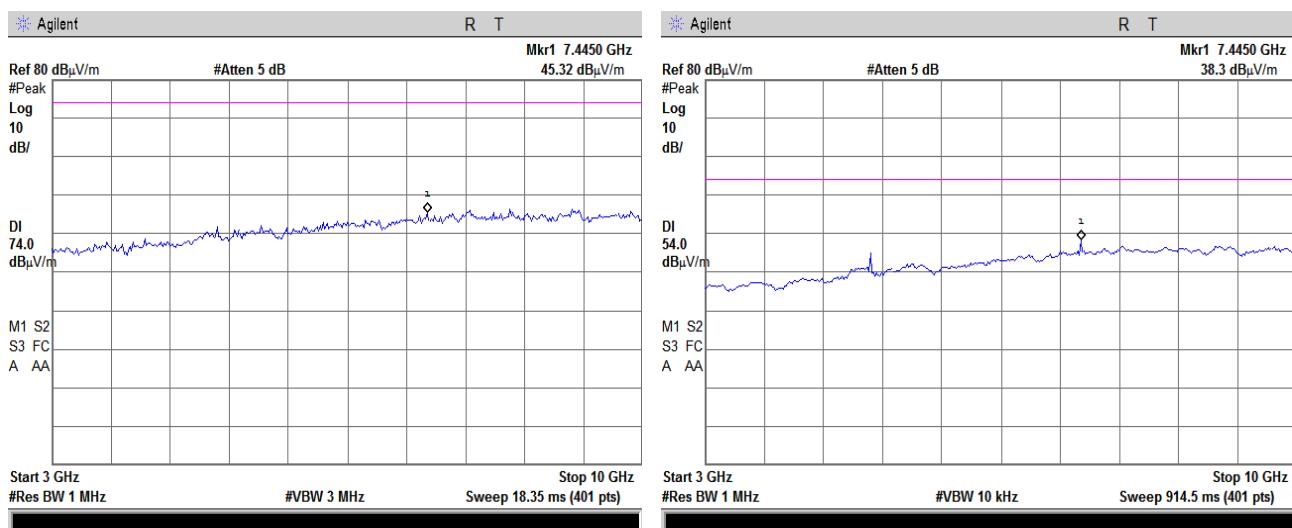

## Plot 7.3.16 Radiated emission measurements from 10000 to 18000 MHz at the low carrier frequency

TEST SITE: Anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical and Horizontal

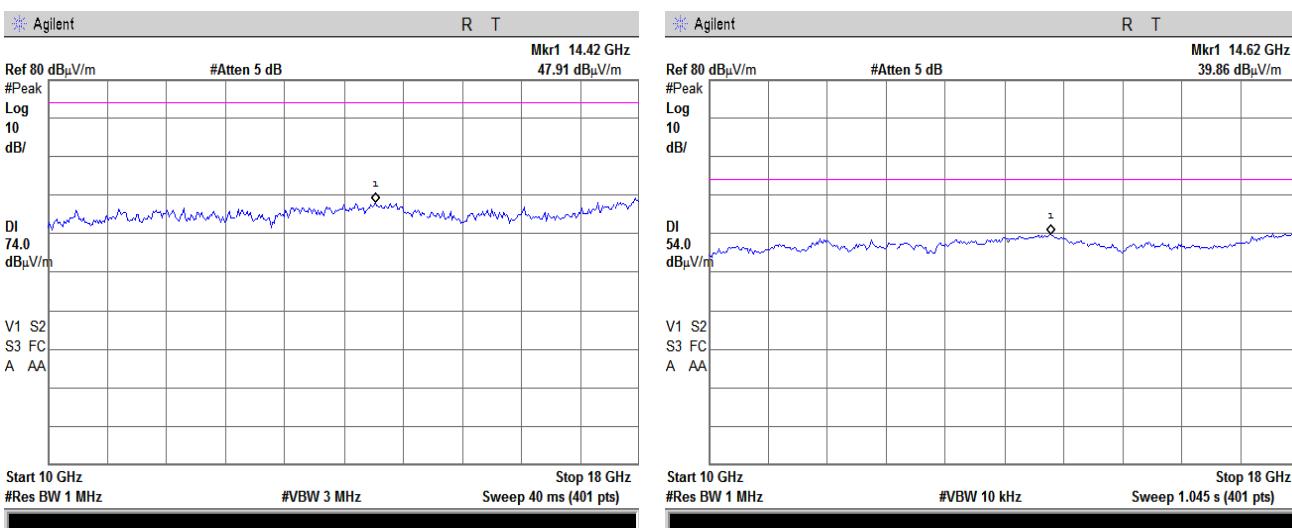




HERMON LABORATORIES

Report ID: AUGRAD\_FCC.29418\_rev1.docx


Date of Issue: 29-May-17

<b>Test specification: Section 15.247(d), Radiated spurious emissions</b>		
<b>Test procedure:</b> ANSI C63.10 section 11.12.1		
<b>Test mode:</b> Compliance	<b>Verdict:</b> <b>PASS</b>	
<b>Date(s):</b> 03-Apr-17 - 04-Apr-17		
<b>Temperature:</b> 23 °C	<b>Relative Humidity:</b> 45 %	<b>Air Pressure:</b> 1010 hPa
<b>Remarks:</b>		

**Plot 7.3.17 Radiated emission measurements from 10000 to 18000 MHz at the mid carrier frequency**

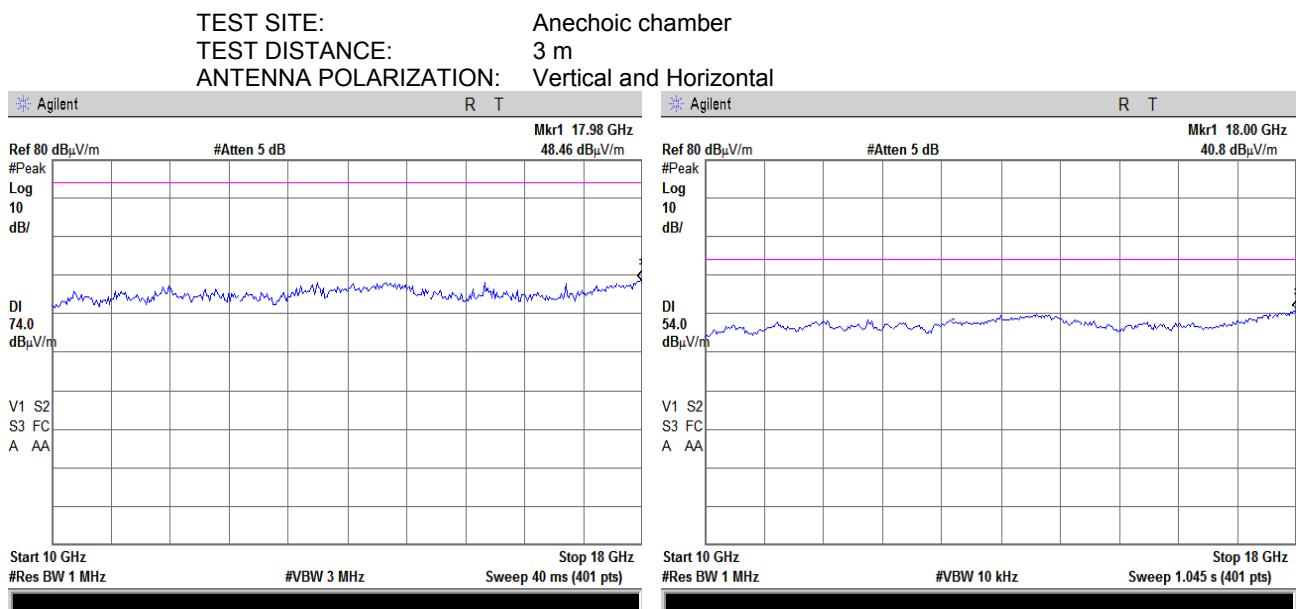

**Plot 7.3.18 Radiated emission measurements from 10000 to 18000 MHz at the high carrier frequency**

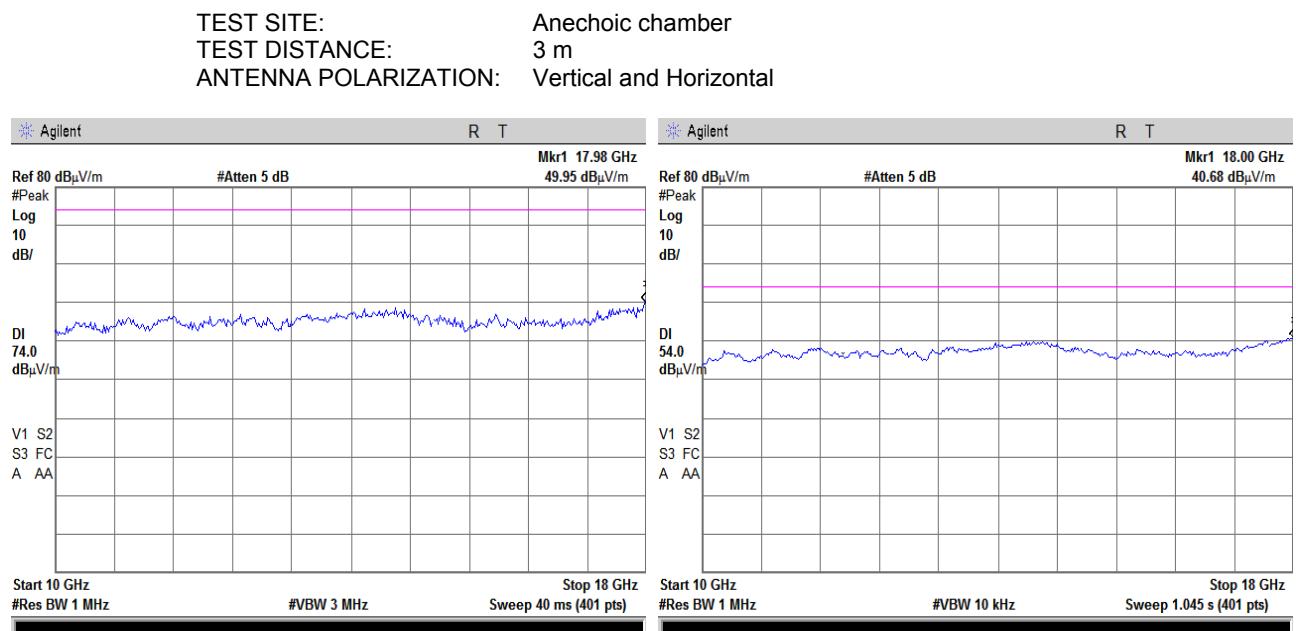




HERMON LABORATORIES

Test specification: Section 15.247(d), Radiated spurious emissions			
Test procedure:		ANSI C63.10 section 11.12.1	
Test mode:		Compliance	
Date(s):		03-Apr-17 - 04-Apr-17	
Temperature: 23 °C	Relative Humidity: 45 %		Air Pressure: 1010 hPa
Remarks:		Power: Battery	


Plot 7.3.19 Radiated emission measurements from 18000 to 25000 MHz at low, mid, the high carrier frequency

TEST SITE: OATS  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical and Horizontal

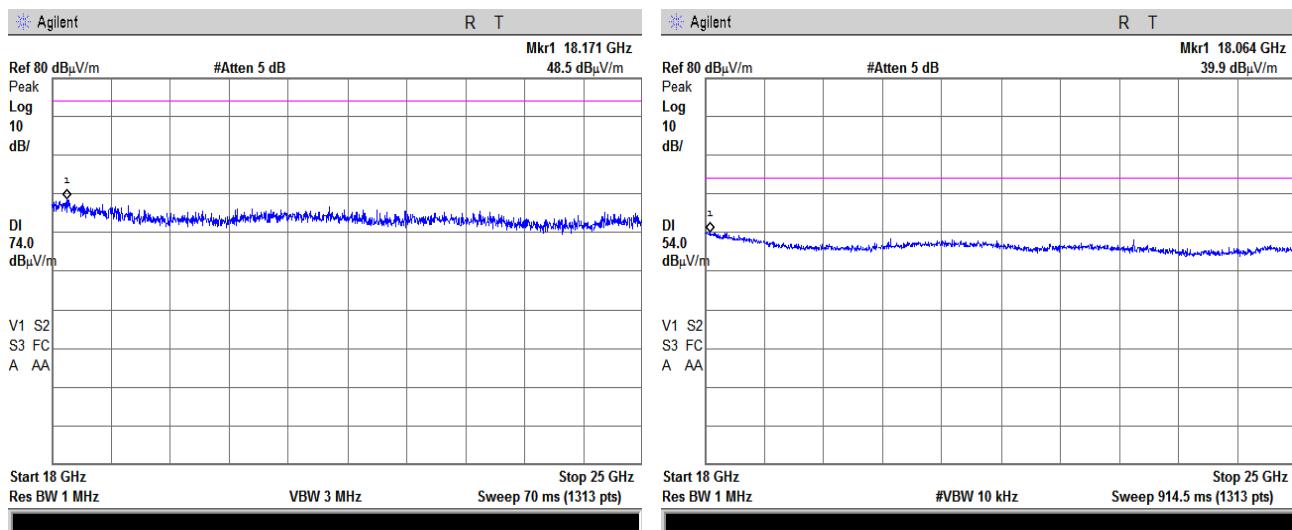

Plot 7.3.20 Radiated emission measurements from 18000 to 25000 MHz at low carrier frequency

TEST SITE: OATS  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical and Horizontal

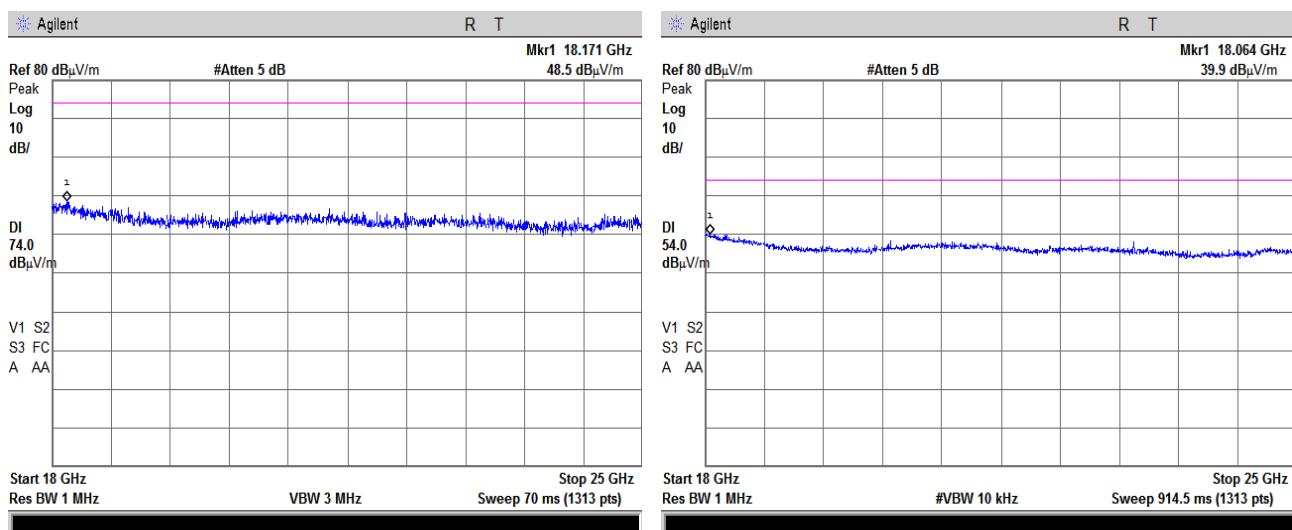




HERMON LABORATORIES


<b>Test specification:</b> Section 15.247(d), Radiated spurious emissions		
<b>Test procedure:</b> ANSI C63.10 section 11.12.1		
<b>Test mode:</b> Compliance	<b>Verdict:</b> PASS	
<b>Date(s):</b> 03-Apr-17 - 04-Apr-17		
<b>Temperature:</b> 23 °C	<b>Relative Humidity:</b> 45 %	<b>Air Pressure:</b> 1010 hPa
<b>Remarks:</b>		

**Plot 7.3.21 Radiated emission measurements from 18000 to 25000 MHz at mid carrier frequency**

TEST SITE: OATS  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical and Horizontal

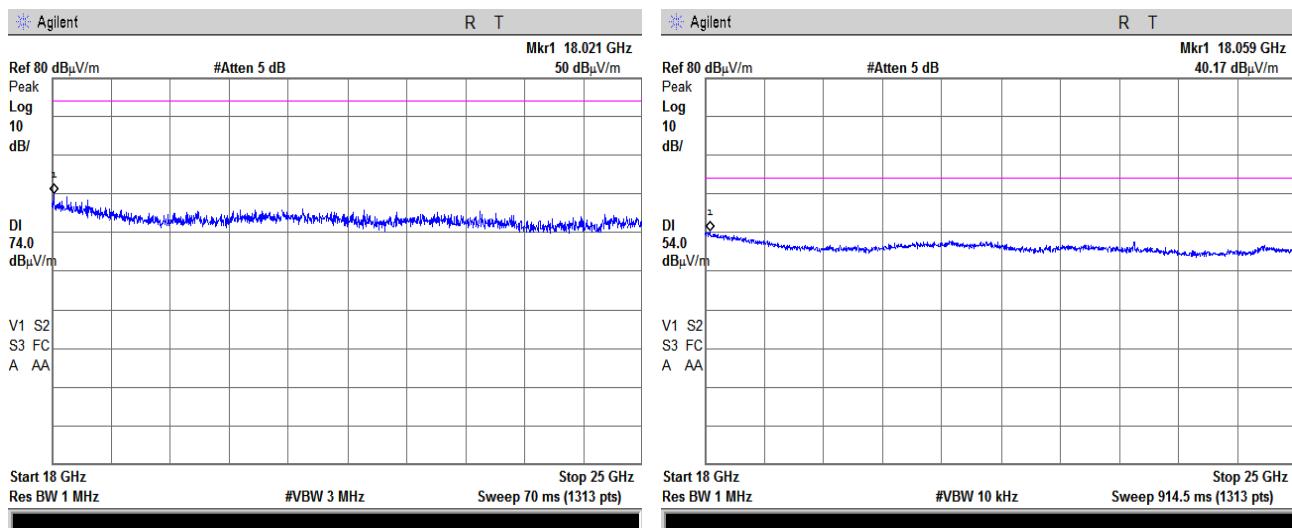**Plot 7.3.22 Radiated emission measurements from 18000 to 25000 MHz at high carrier frequency**

TEST SITE: OATS  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical and Horizontal

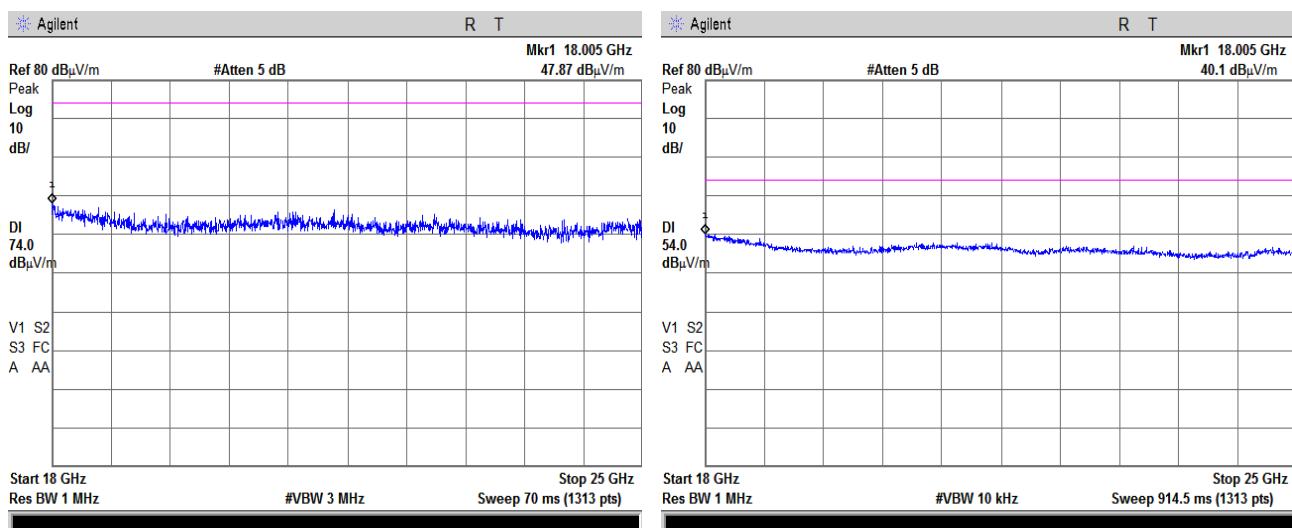





HERMON LABORATORIES

Test specification: Section 15.247(d), Radiated spurious emissions		
Test procedure: ANSI C63.10 section 11.12.1		
Test mode: Compliance	Date(s): 03-Apr-17 - 04-Apr-17	Verdict: PASS
Temperature: 23 °C		Air Pressure: 1010 hPa
Relative Humidity: 45 %		Power: Battery
Remarks:		

Plot 7.3.23 Radiated emission measurements at the second harmonic of low carrier frequency

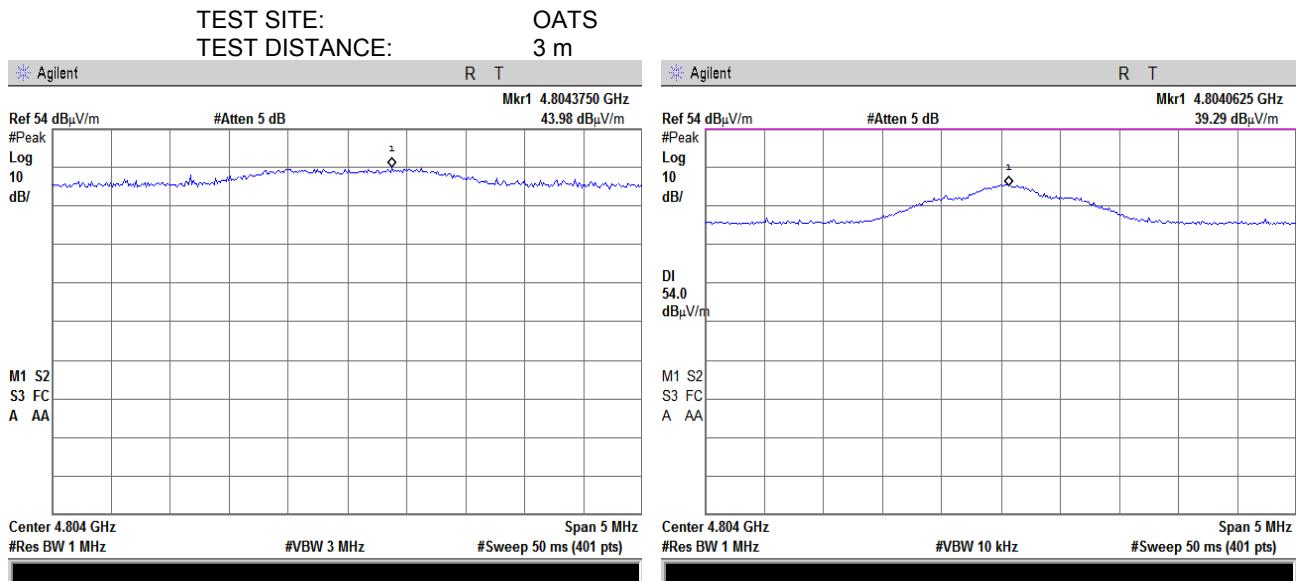

Plot 7.3.24 Radiated emission measurements at the second harmonic of mid carrier frequency

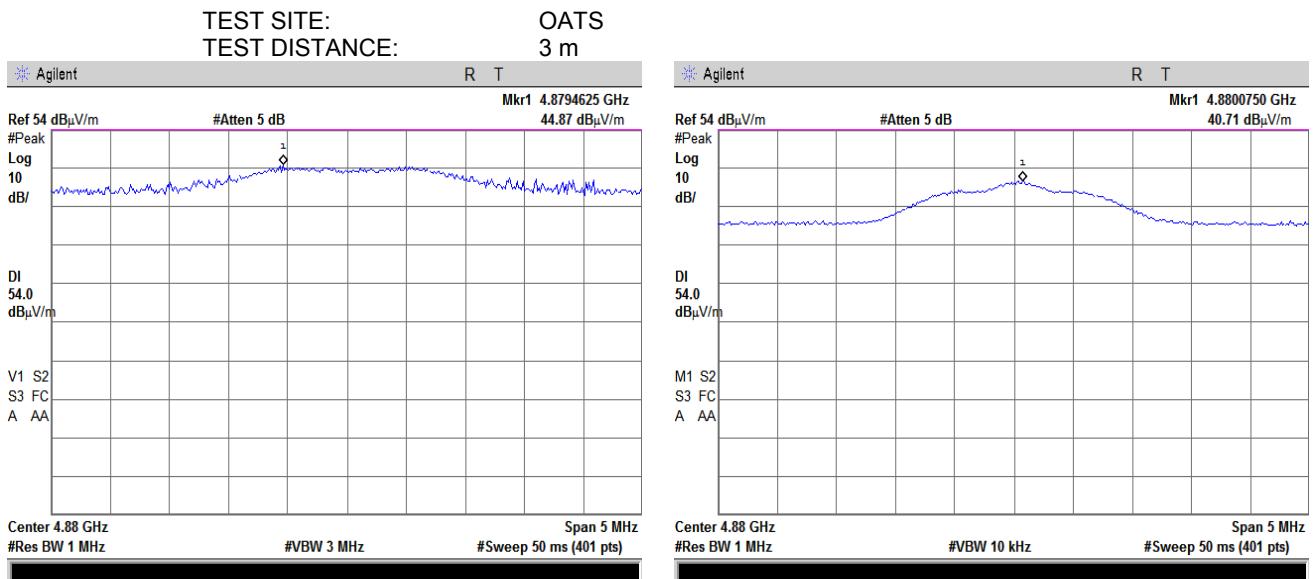




HERMON LABORATORIES

Report ID: AUGRAD\_FCC.29418\_rev1.docx


Date of Issue: 29-May-17

<b>Test specification: Section 15.247(d), Radiated spurious emissions</b>		
<b>Test procedure:</b> ANSI C63.10 section 11.12.1		
<b>Test mode:</b> Compliance	<b>Verdict:</b> <b>PASS</b>	
<b>Date(s):</b> 03-Apr-17 - 04-Apr-17		
<b>Temperature:</b> 23 °C	<b>Relative Humidity:</b> 45 %	<b>Air Pressure:</b> 1010 hPa
<b>Remarks:</b>		

**Plot 7.3.25 Radiated emission measurements at the second harmonic of high carrier frequency**

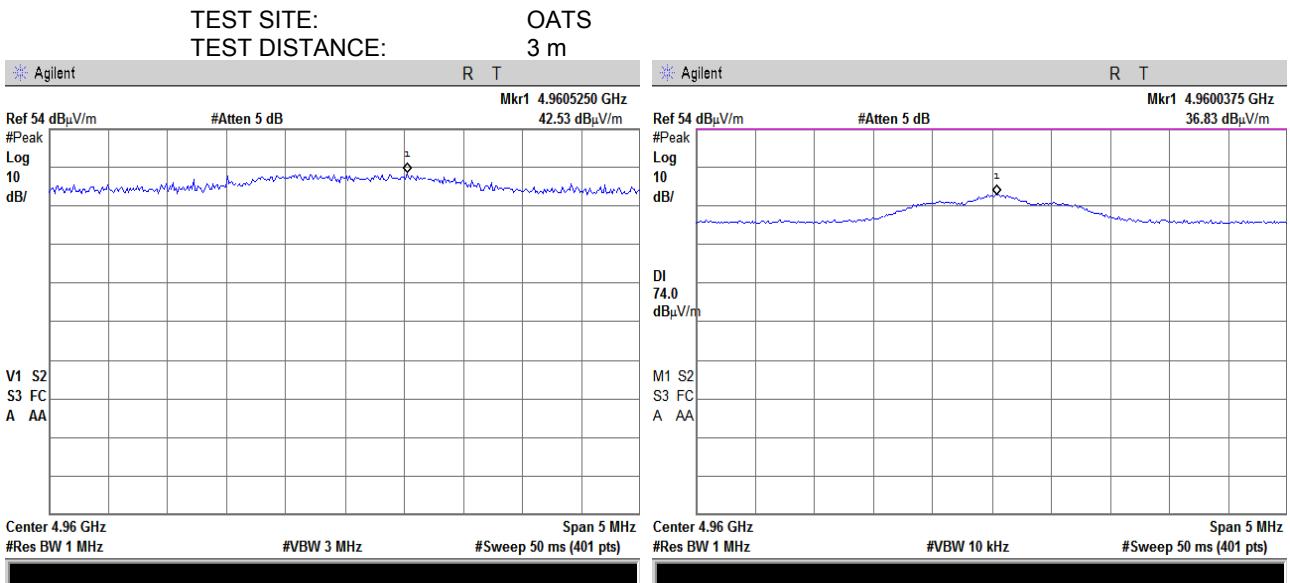





**Plot 7.3.26 Radiated emission measurements at the third harmonic of low carrier frequency**

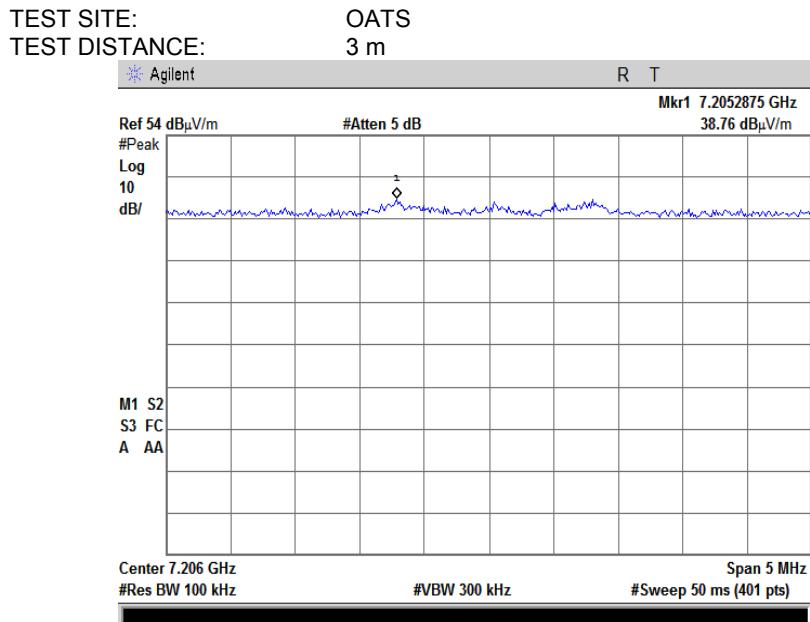



HERMON LABORATORIES

<b>Test specification:</b> Section 15.247(d), Radiated spurious emissions		
<b>Test procedure:</b> ANSI C63.10 section 11.12.1		
<b>Test mode:</b> Compliance	<b>Verdict:</b> PASS	
<b>Date(s):</b> 03-Apr-17 - 04-Apr-17		
<b>Temperature:</b> 23 °C	<b>Relative Humidity:</b> 45 %	<b>Air Pressure:</b> 1010 hPa
<b>Remarks:</b>		

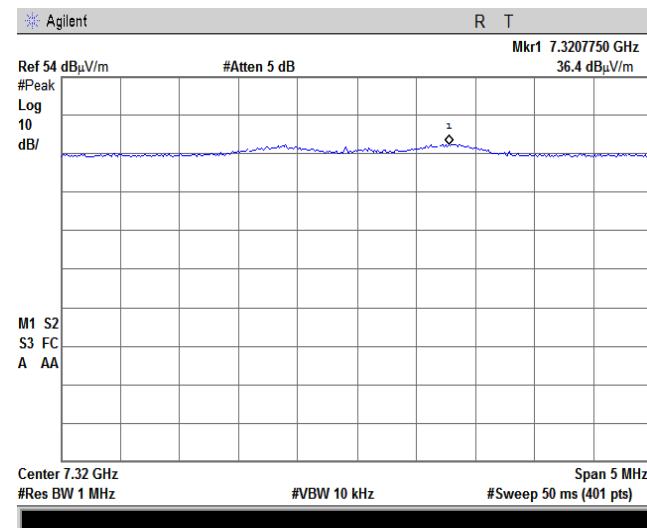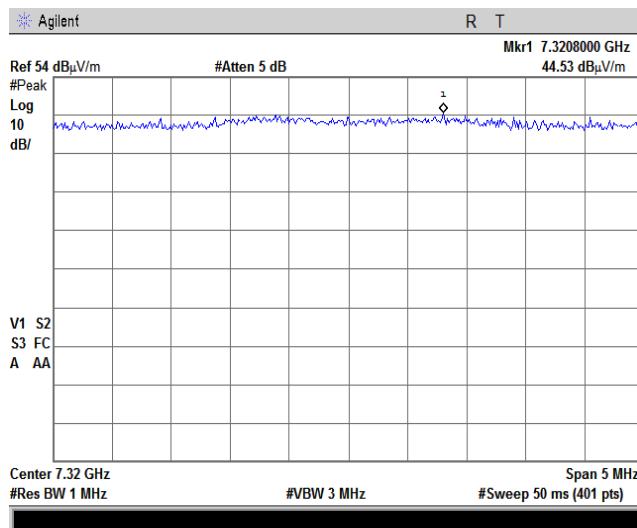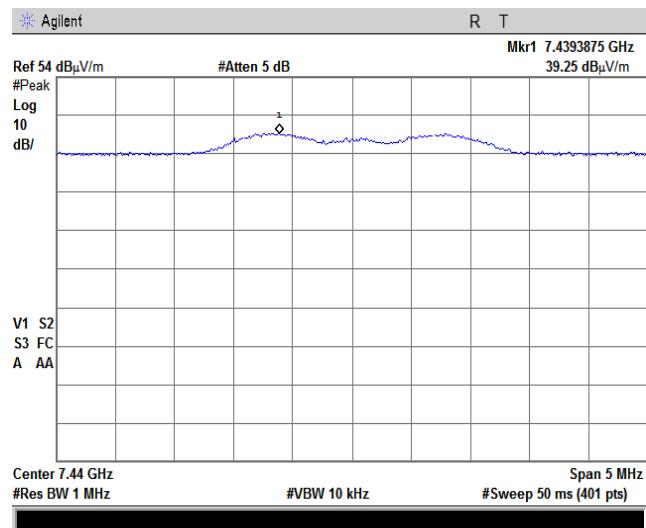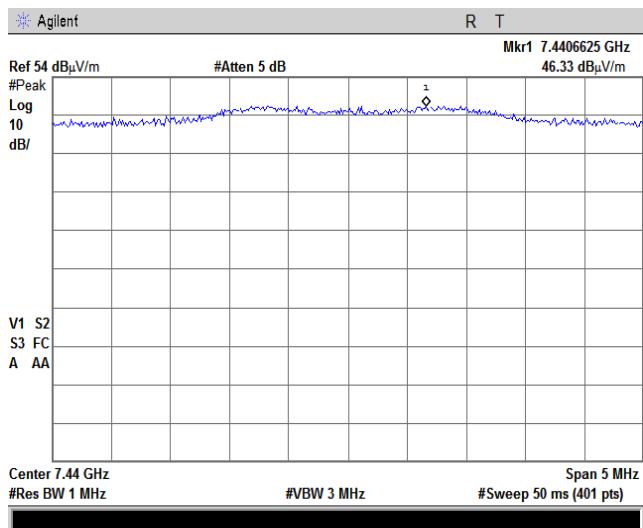
**Plot 7.3.27 Radiated emission measurements at the third harmonic of mid carrier frequency**TEST SITE: OATS  
TEST DISTANCE: 3 m**Plot 7.3.28 Radiated emission measurements at the third harmonic of high carrier frequency**TEST SITE: OATS  
TEST DISTANCE: 3 m




HERMON LABORATORIES

<b>Test specification: Section 15.247(d), Radiated spurious emissions</b>		
<b>Test procedure:</b> ANSI C63.10 section 11.12.1		
<b>Test mode:</b> Compliance	<b>Verdict:</b> <b>PASS</b>	
<b>Date(s):</b> 03-Apr-17 - 04-Apr-17		
<b>Temperature:</b> 23 °C	<b>Relative Humidity:</b> 45 %	<b>Air Pressure:</b> 1010 hPa
<b>Remarks:</b>		

**Plot 7.3.29 Transmission pulse duration**

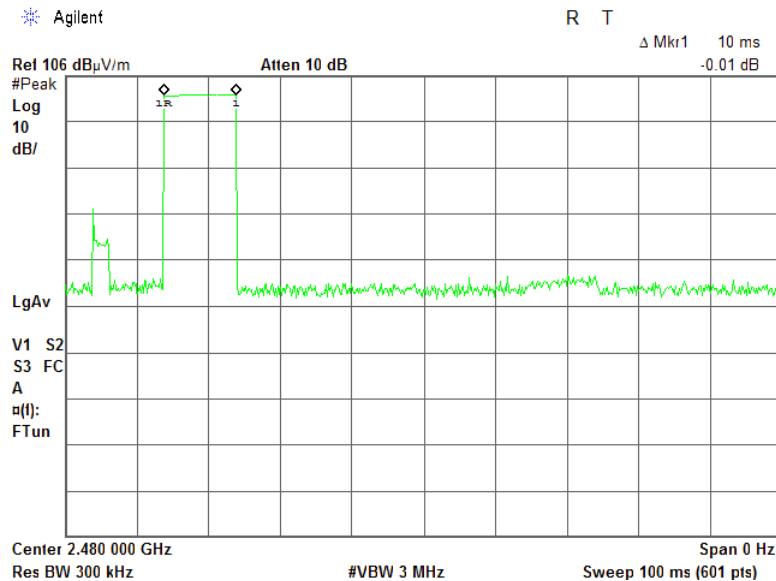

**Plot 7.3.30 Transmission pulse period**

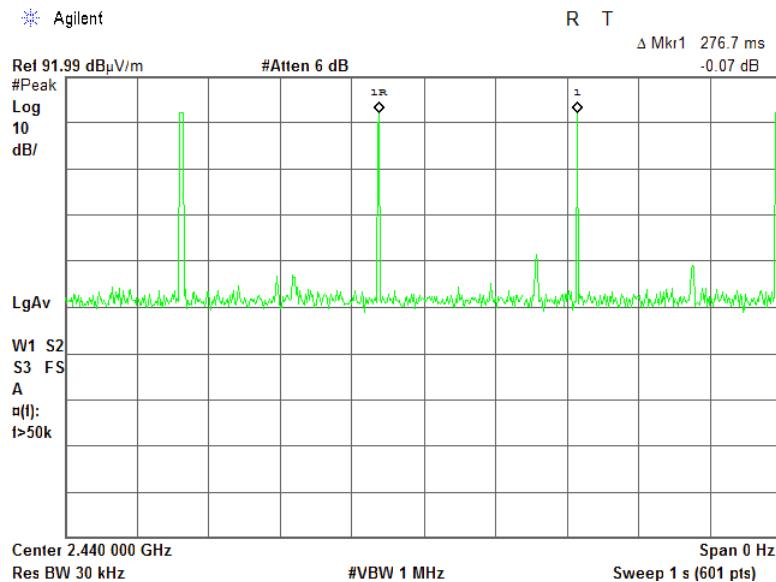



HERMON LABORATORIES

<b>Test specification:</b> Section 15.247(d), Band edge emissions		
<b>Test procedure:</b> ANSI C63.10 section 11.13.3.3		
<b>Test mode:</b> Compliance	<b>Verdict:</b> PASS	<b>PASS</b>
<b>Date(s):</b> 02-Apr-17 - 04-Apr-17		
<b>Temperature:</b> 23 °C	<b>Relative Humidity:</b> 45 %	<b>Air Pressure:</b> 1010 hPa
<b>Remarks:</b>		

## 7.4 Band edge radiated emissions

### 7.4.1 General

This test was performed to measure emissions, radiated from the EUT at the assigned frequency band edges. Specification test limits are given in Table 7.4.1.

Table 7.4.1 Band edge emission limits

Assigned frequency, MHz	Attenuation below carrier*, dBc	Field strength at 3 m within restricted bands, dB(µV/m)	
		Peak	Average
902.0 – 928.0			
2400.0 – 2483.5	20.0	74.0	54.0
5725.0 – 5850.0			

\* - Band edge emission limit is provided in terms of attenuation below the peak of modulated carrier measured with the same resolution bandwidth.

### 7.4.2 Test procedure

- 7.4.2.1 The EUT was set up as shown in Figure 7.4.1, energized normally modulated at the maximum data rate and its proper operation was checked.
- 7.4.2.2 The EUT was adjusted to produce maximum available to end user RF output power at the lowest carrier frequency.
- 7.4.2.3 The spectrum analyzer span was set to capture the carrier frequency and associated modulation products. The resolution bandwidth was set wider than 1 % of the frequency span.
- 7.4.2.4 The spectrum analyzer was set in max hold mode and allowed trace to stabilize. The highest emission level within the authorized band was measured.
- 7.4.2.5 The maximum band edge emission and modulation product outside of the band were measured as provided in Table 7.4.2 and associated plots and referenced to the highest emission level measured within the authorized band.
- 7.4.2.6 The above procedure was repeated with the EUT adjusted to produce maximum RF output power at the highest carrier frequency.

Figure 7.4.1 Band edge emission test setup





HERMON LABORATORIES

Report ID: AUGRAD\_FCC.29418\_rev1.docx

Date of Issue: 29-May-17

<b>Test specification:</b> Section 15.247(d), Band edge emissions						
<b>Test procedure:</b> ANSI C63.10 section 11.13.3.3						
<b>Test mode:</b> Compliance		<b>Verdict:</b> <b>PASS</b>				
<b>Date(s):</b> 02-Apr-17 - 04-Apr-17						
<b>Temperature:</b> 23 °C		<b>Relative Humidity:</b> 45 %	<b>Air Pressure:</b> 1010 hPa	<b>Power:</b> Battery		
<b>Remarks:</b>						

**Table 7.4.2 Band edge emission test results**

ASSIGNED FREQUENCY RANGE: 2400-2483.5 MHz  
 DETECTOR USED: Peak  
 MODULATION: BLE(GFSK)  
 MODULATING SIGNAL: PRBS  
 BIT RATE: 1 Mbps  
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum  
 VIDEO BANDWIDTH:  $\geq$  RBW

**Outside restricted bands**

Frequency MHz	Band edge emission, dBm	Emission at carrier, dBm	Attenuation below carrier, dBc	Limit, dBc	Margin, dB*	Verdict
2400.0	66.27	103.1	36.83	20	16.83	Pass

**In the restricted bands**

Frequency MHz	Peak field strength(VBW=3 MHz)			Average field strength(VBW>10 Hz)			Verdict
	Measured, dB( $\mu$ V/m)	Limit, dB( $\mu$ V/m)	Margin, dB	Measured, dB( $\mu$ V/m)	Limit, dB( $\mu$ V/m)	Margin, dB	
2338.2	62.41	74	-11.59	45.34	54	-8.66	
2483.5	72.42	74	-1.58	47.88	54	-6.12	Pass

**Reference numbers of test equipment used**

HL 2909	HL 4114	HL 5103					
---------	---------	---------	--	--	--	--	--


Full description is given in Appendix A.




HERMON LABORATORIES

Test specification: Section 15.247(d), Band edge emissions		
Test procedure:	ANSI C63.10 section 11.13.3.3	
Test mode:	Compliance	Verdict: PASS
Date(s):	02-Apr-17 - 04-Apr-17	
Temperature: 23 °C	Relative Humidity: 45 %	Air Pressure: 1010 hPa
Power: Battery		
Remarks:		

Plot 7.4.1 The highest band edge emission within the restricted band at low carrier frequency

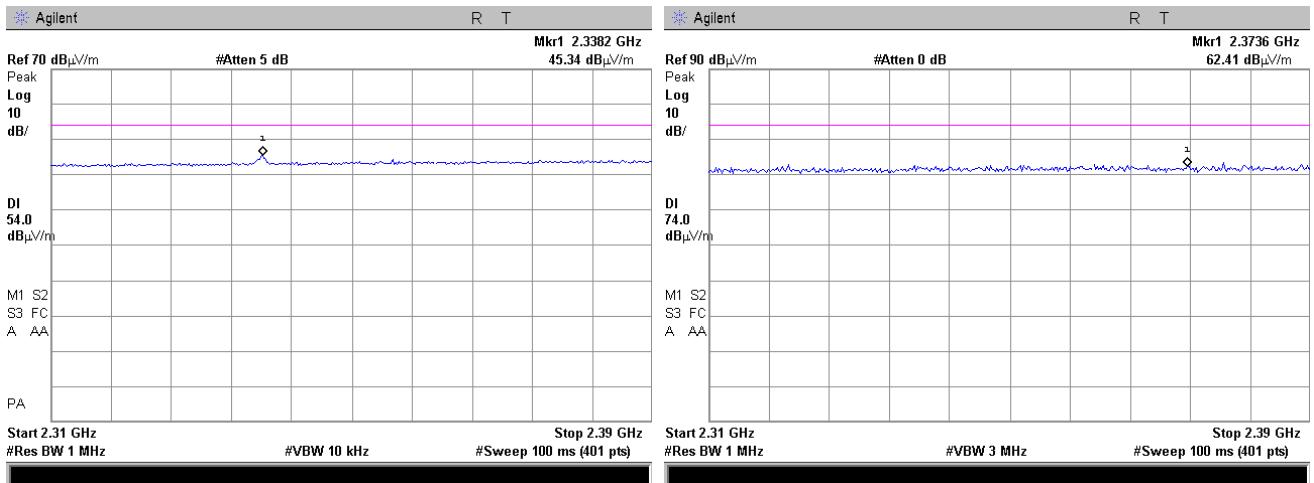

Plot 7.4.2 The highest band edge emission within the restricted band at high carrier frequency

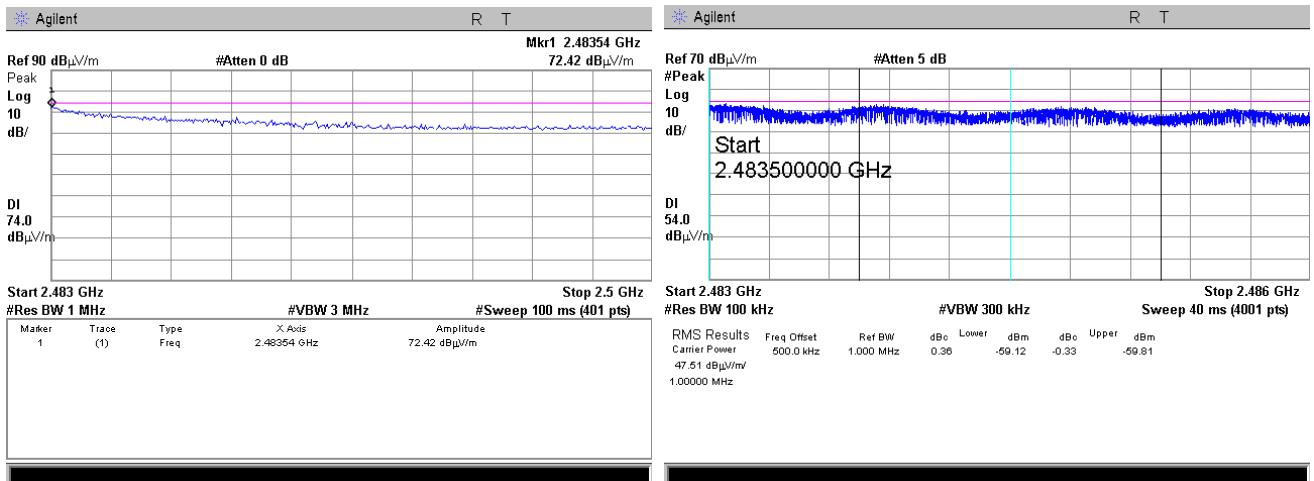





HERMON LABORATORIES

<b>Test specification: Section 15.247(d), Band edge emissions</b>		
<b>Test procedure:</b>	ANSI C63.10 section 11.13.3.3	
<b>Test mode:</b>	Compliance	<b>Verdict:</b> <b>PASS</b>
<b>Date(s):</b>	02-Apr-17 - 04-Apr-17	
<b>Temperature:</b> 23 °C	<b>Relative Humidity:</b> 45 %	<b>Air Pressure:</b> 1010 hPa
<b>Remarks:</b>		

**Plot 7.4.3 The highest band edge emission at low carrier frequency**

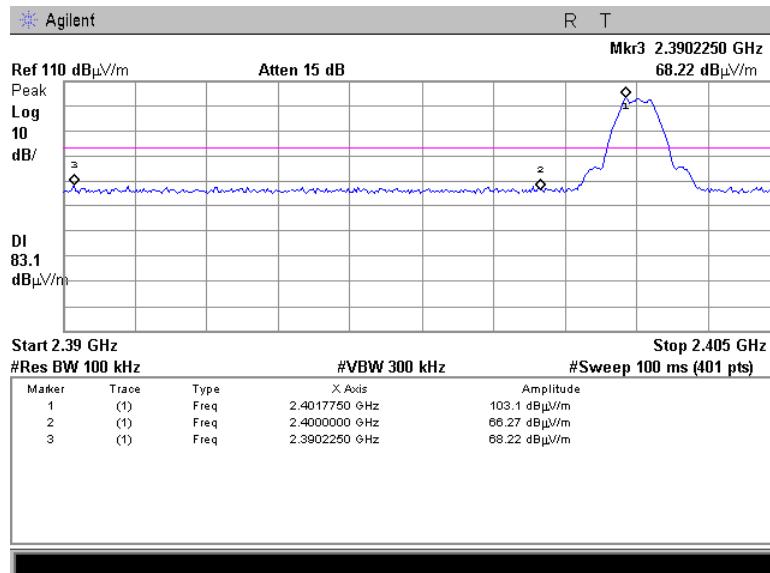

**Plot 7.4.4 The highest band edge emission at high carrier frequency**

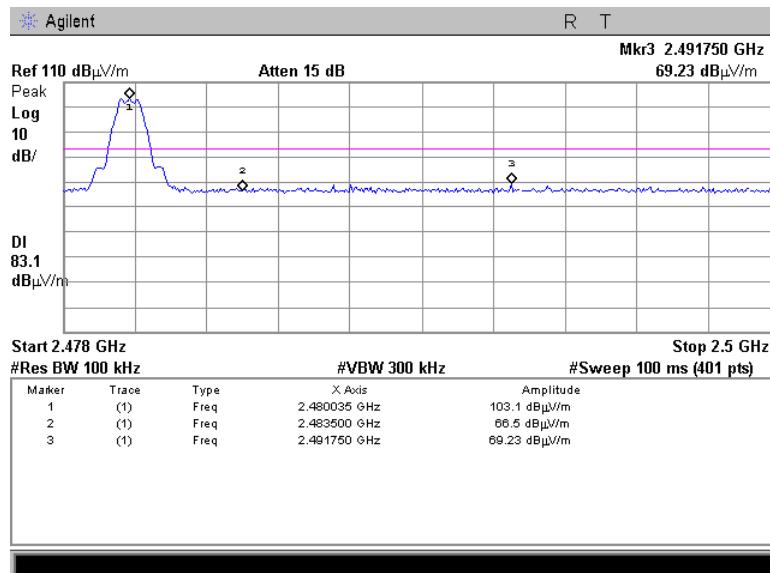



HERMON LABORATORIES

<b>Test specification:</b> Section 15.247(d), Maximum power spectral density		
<b>Test procedure:</b> ANSI C63.10 section 11.10.2		
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS
<b>Date(s):</b> 03-Apr-17		
<b>Temperature:</b> 23 °C	<b>Relative Humidity:</b> 45 %	<b>Air Pressure:</b> 1010 hPa
<b>Power:</b> Battery		
<b>Remarks:</b>		

## 7.5 Maximum power spectral density (PSD)

### 7.5.1 General

This test was performed to measure the peak spectral power density radiated by the transmitter RF antenna. Specification test limits are given in Table 7.5.1.

Table 7.5.1 Peak spectral power density limits

Assigned frequency range, MHz	Measurement bandwidth, kHz	Peak spectral power density, dBm	Equivalent field strength limit @ 3m, dB( $\mu$ V/m)*
902.0 – 928.0			
2400.0 – 2483.5	3.0	8.0	103.2
5725.0 – 5850.0			

\* - Equivalent field strength limit was calculated from the peak spectral power density as follows:  $E = \sqrt{30 \times P} / r$ , where P is peak spectral power density and r is antenna to EUT distance in meters.

### 7.5.2 Test procedure for field strength measurements


- 7.5.2.1 The EUT was set up as shown in Figure 7.5.1, energized and its proper operation was checked.
- 7.5.2.2 The EUT was adjusted to produce maximum available to end user RF output power.
- 7.5.2.3 The field strength of the EUT carrier frequency was measured with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360° and the measuring antenna height was swept in both vertical and horizontal polarizations.
- 7.5.2.4 The maximum power spectral density was measured using a peak detector with resolution bandwidth set to 100 kHz,  $VBW \geq 300$  kHz, sweep time = auto couple, trace mode=max hold.
- 7.5.2.5 The maximum power level was determined in any 100 kHz band within the fundamental EBW. The measured value exceeded the limit, the measurements were repeated with resolution bandwidth set to 30 kHz,  $VBW = 100$  kHz.
- 7.5.2.6 The test results provided in Table 7.5.2 and the associated plots.



HERMON LABORATORIES

<b>Test specification:</b> Section 15.247(d), Maximum power spectral density		
<b>Test procedure:</b> ANSI C63.10 section 11.10.2		
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS
<b>Date(s):</b> 03-Apr-17		
<b>Temperature:</b> 23 °C	<b>Relative Humidity:</b> 45 %	<b>Air Pressure:</b> 1010 hPa
<b>Power:</b> Battery		
<b>Remarks:</b>		

Figure 7.5.1 Setup for carrier field strength measurements

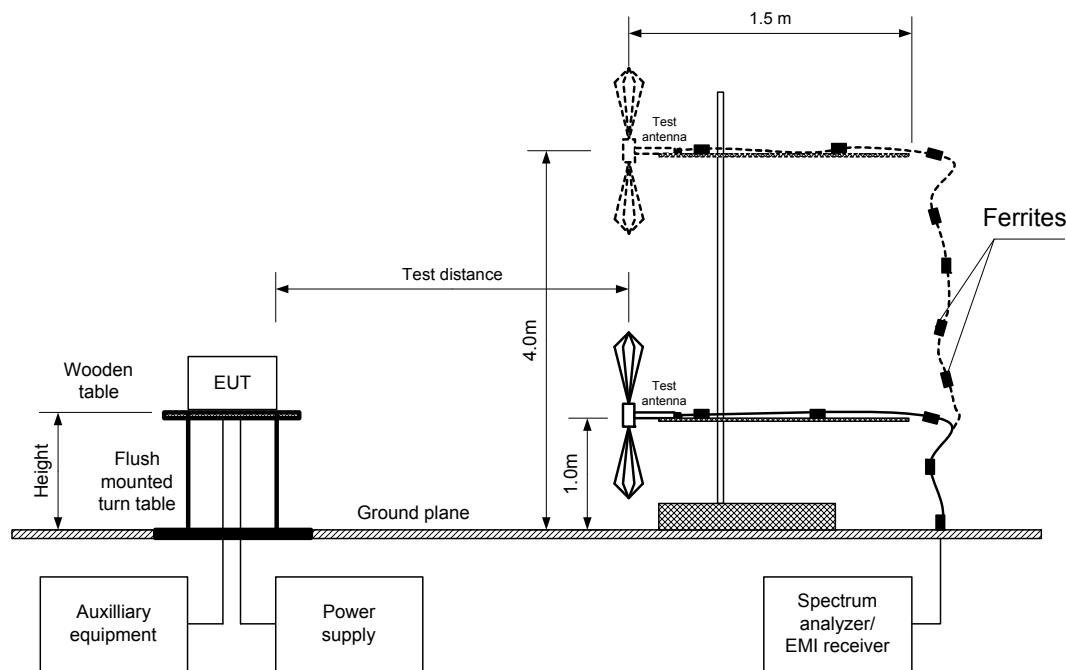



HERMON LABORATORIES

<b>Test specification:</b> Section 15.247(d), Maximum power spectral density		
<b>Test procedure:</b> ANSI C63.10 section 11.10.2		
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS
<b>Date(s):</b> 03-Apr-17		
<b>Temperature:</b> 23 °C	<b>Relative Humidity:</b> 45 %	<b>Air Pressure:</b> 1010 hPa
<b>Power:</b> Battery		
<b>Remarks:</b>		

**Table 7.5.2 Field strength measurement of peak spectral power density**

ASSIGNED FREQUENCY: 2400-2483.5 MHz  
 TEST DISTANCE: 3 m  
 TEST SITE: OATS  
 EUT HEIGHT: 1.5 m  
 DETECTOR USED: Peak  
 RESOLUTION BANDWIDTH: 10 kHz  
 VIDEO BANDWIDTH: 30 kHz  
 TEST ANTENNA TYPE: Double ridged guide (above 1000 MHz)  
 MODULATION: BLE (GFSK)  
 BIT RATE: 1 Mbps

Frequency, MHz	Field strength, dB(µV/m)	EUT antenna gain, dBi	Limit, dB(µV/m)	Margin, dB*	Antenna polarization	Antenna height, m	Turn-table position**, degrees
2402	94.71	1	103.2	-9.49	Horizontal	1.6	208
2440	94.02	1	103.2	-10.18	Horizontal	1.5	215
2480	95.23	1	103.2	-8.97	Horizontal	1.5	215

\*- Margin = Field strength - EUT antenna gain - calculated field strength limit.

\*\*- EUT front panel refer to 0 degrees position of turntable.

**Reference numbers of test equipment used**



HL 2909	HL 4114	HL 5103					
---------	---------	---------	--	--	--	--	--

Full description is given in Appendix A.



HERMON LABORATORIES

<b>Test specification:</b> Section 15.247(d), Maximum power spectral density		
<b>Test procedure:</b> ANSI C63.10 section 11.10.2		
<b>Test mode:</b> Compliance	<b>Verdict:</b> PASS	
<b>Date(s):</b> 03-Apr-17		
<b>Temperature:</b> 23 °C	<b>Relative Humidity:</b> 45 %	<b>Air Pressure:</b> 1010 hPa
<b>Remarks:</b>		

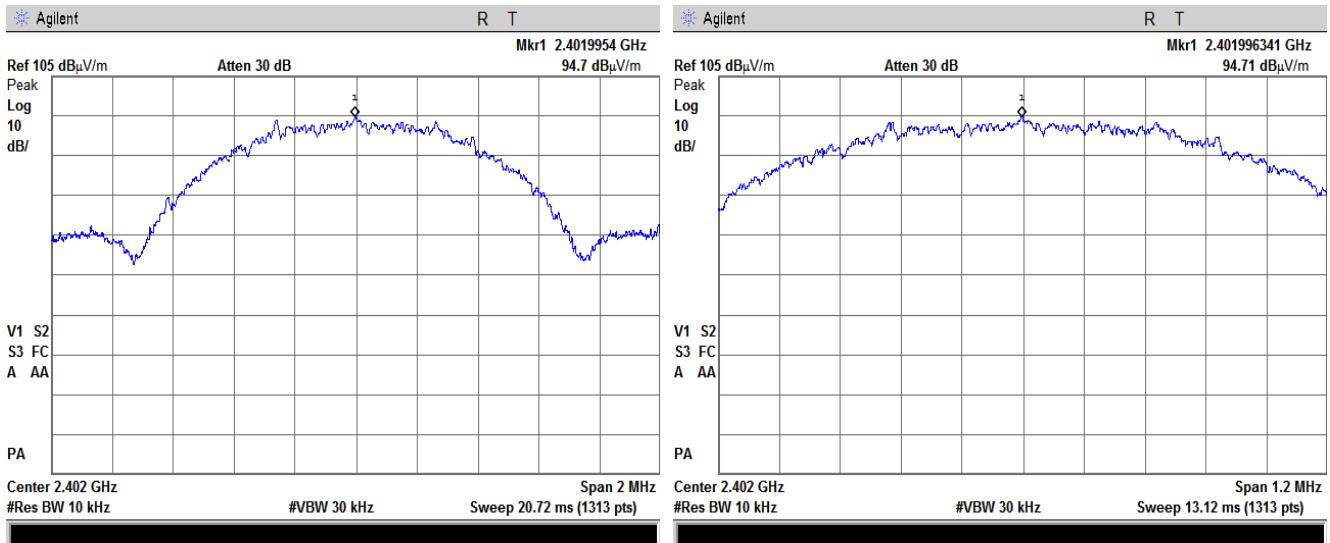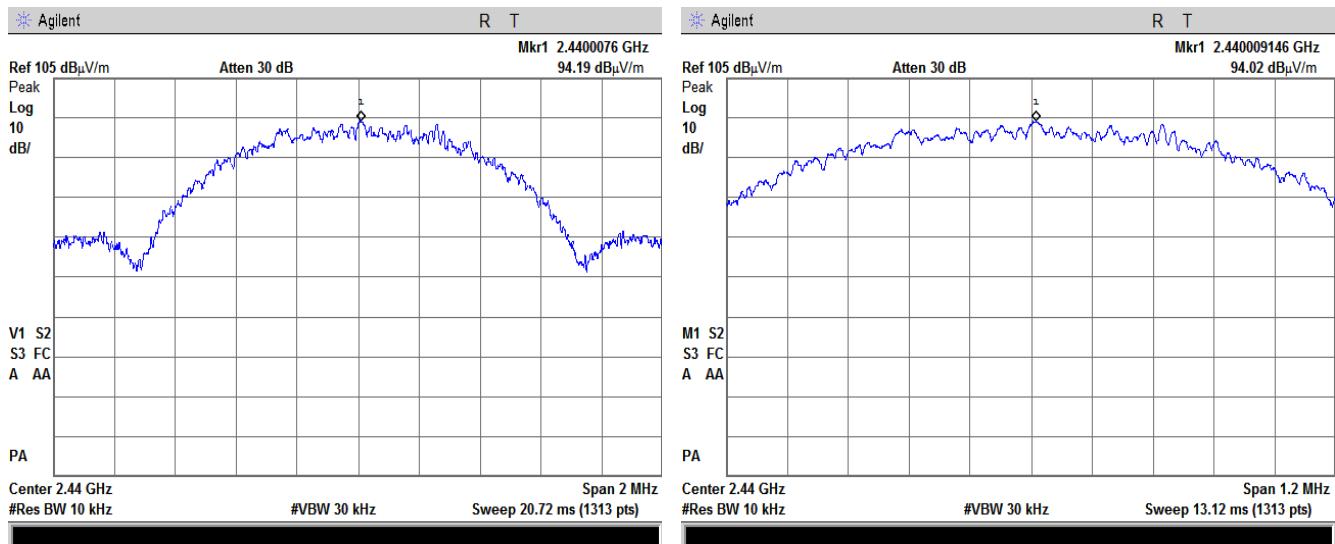
**Plot 7.5.1 Peak spectral power density at low frequency****Plot 7.5.2 Peak spectral power density at mid frequency**



HERMON LABORATORIES

<b>Test specification:</b> Section 15.247(d), Maximum power spectral density		
<b>Test procedure:</b> ANSI C63.10 section 11.10.2		
<b>Test mode:</b> Compliance	<b>Verdict:</b> PASS	
<b>Date(s):</b> 03-Apr-17		
<b>Temperature:</b> 23 °C	<b>Relative Humidity:</b> 45 %	<b>Air Pressure:</b> 1010 hPa
<b>Remarks:</b>		

**Plot 7.5.3 Peak spectral power density at high frequency**

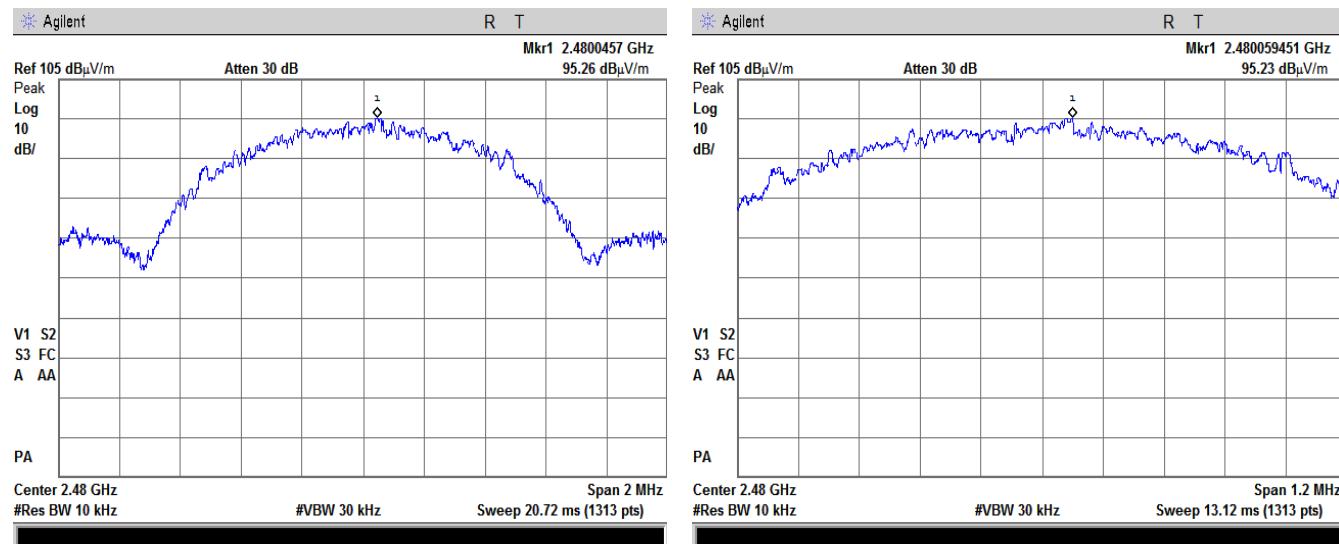



HERMON LABORATORIES

<b>Test specification:</b>	<b>Section 15.203, Antenna requirements</b>		
<b>Test procedure:</b>	Visual inspection		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	PASS
<b>Date(s):</b>	04-Apr-17		
<b>Temperature:</b> 23 °C	<b>Relative Humidity:</b> 45 %	<b>Air Pressure:</b> 1010 hPa	<b>Power:</b> Battery
<b>Remarks:</b>			

## 7.6 Antenna requirements

The EUT was verified for compliance with antenna requirements. A transmitter shall be designed to ensure that no antenna other than that furnished by the responsible party will be used with the device. It may be either permanently attached or employs a unique antenna connector for every antenna proposed for use with the EUT. This requirement does not apply to professionally installed transmitters.

The rationale for compliance with the above requirements was either visual inspection results or supplier declaration. The summary of results is provided in Table 7.6.1.

**Table 7.6.1 Antenna requirements**

Requirement	Rationale	Verdict
The transmitter antenna is permanently attached	Visual inspection	Comply
The transmitter employs a unique antenna connector	NA	
The transmitter requires professional installation	NA	



HERMON LABORATORIES

<b>Test specification:</b> Section 15.109, Radiated emission			
<b>Test procedure:</b> ANSI C63.4, Sections 8.3 and 12.2.5			
<b>Test mode:</b> Compliance			<b>Verdict:</b> PASS
<b>Date(s):</b> 04-Apr-17			
<b>Temperature:</b> 23 °C	<b>Relative Humidity:</b> 45 %	<b>Air Pressure:</b> 1010 hPa	<b>Power:</b> Battery
<b>Remarks:</b>			

## 8 Unintentional emissions

### 8.1 Radiated emission measurements

#### 8.1.1 General

This test was performed to measure radiated emissions from the EUT enclosure. Specification test limits are given in Table 8.1.1.

Table 8.1.1 Radiated emission test limits

Frequency, MHz	Class B limit, dB(µV/m)		Class A limit, dB(µV/m)	
	10 m distance	3 m distance	10 m distance	3 m distance
30 - 88	29.5*	40.0	39.0	49.5*
88 - 216	33.0*	43.5	43.5	54.0*
216 - 960	35.5*	46.0	46.4	56.9*
Above 960	43.5*	54.0	49.5	60.0*

\* The limit for test distance other than specified was calculated using the inverse linear distance extrapolation factor as follows:  $\text{Lim}_{S2} = \text{Lim}_{S1} + 20 \log (S_1/S_2)$ , where  $S_1$  and  $S_2$  – standard defined and test distance respectively in meters.

#### 8.1.2 Test procedure

8.1.2.1 The EUT was set up as shown in Figure 8.1.1 and associated photograph/s, energized and the performance check was conducted.

8.1.2.2 Preliminary measurements were performed in the anechoic chamber at 3 m test distance. The specified frequency range was investigated with biconical and log periodic antennas connected to EMI receiver. To find maximum radiation the turntable was rotated 360°, the measuring antenna height was changed, its polarization was switched from vertical to horizontal and the EUT cables position was varied.

8.1.2.3 The EUT was set up as shown in Figure 8.1.2, energized and the performance check was conducted.

8.1.2.4 Final measurements were performed at the open area test site at 3 m test distance. The EUT wires and cables were arranged to produce maximum emission as it was found during preliminary measurements. The frequencies yield the worst test results (the lowest margins) during preliminary testing were investigated with biconilog antenna connected to EMI receiver. To find maximum radiation the turntable was rotated 360°, the measuring antenna height was changed from 1 to 4 m and its polarization was changed from vertical to horizontal.


8.1.2.5 The worst test results (the lowest margins) were recorded in Table 8.1.2 and shown in the associated plots.



HERMON LABORATORIES

<b>Test specification:</b> Section 15.109, Radiated emission		
<b>Test procedure:</b> ANSI C63.4, Sections 8.3 and 12.2.5		
<b>Test mode:</b> Compliance	<b>Verdict:</b> PASS	
<b>Date(s):</b> 04-Apr-17		
<b>Temperature:</b> 23 °C	<b>Relative Humidity:</b> 45 %	<b>Air Pressure:</b> 1010 hPa
<b>Power:</b> Battery		
<b>Remarks:</b>		

Figure 8.1.1 Setup for radiated emission measurements in anechoic chamber, table-top equipment

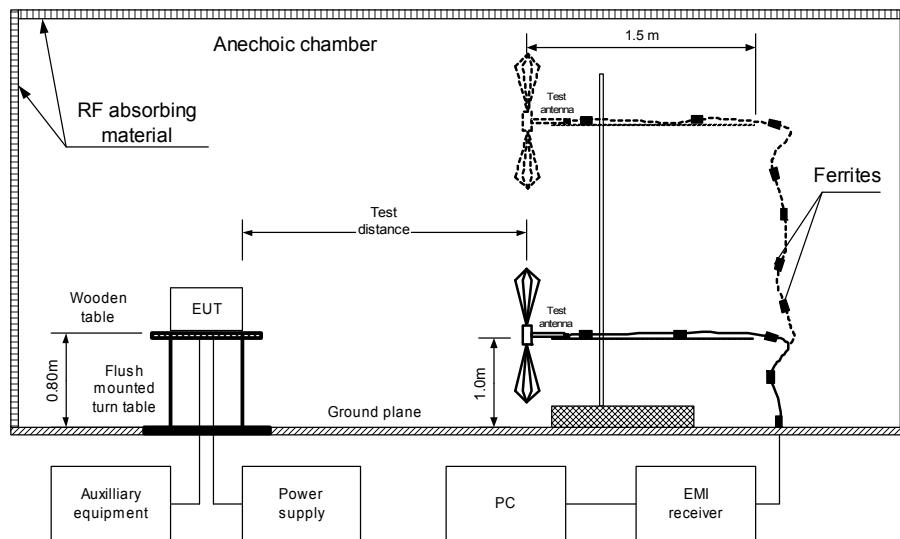

Photograph 8.1.1 Setup for radiated emission measurements






HERMON LABORATORIES

<b>Test specification:</b> Section 15.109, Radiated emission		
<b>Test procedure:</b> ANSI C63.4, Sections 8.3 and 12.2.5		
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS
<b>Date(s):</b> 04-Apr-17		
<b>Temperature:</b> 23 °C	<b>Relative Humidity:</b> 45 %	<b>Air Pressure:</b> 1010 hPa
<b>Power:</b> Battery		
<b>Remarks:</b>		

Figure 8.1.2 Setup for radiated emission measurements at OATS, table-top equipment

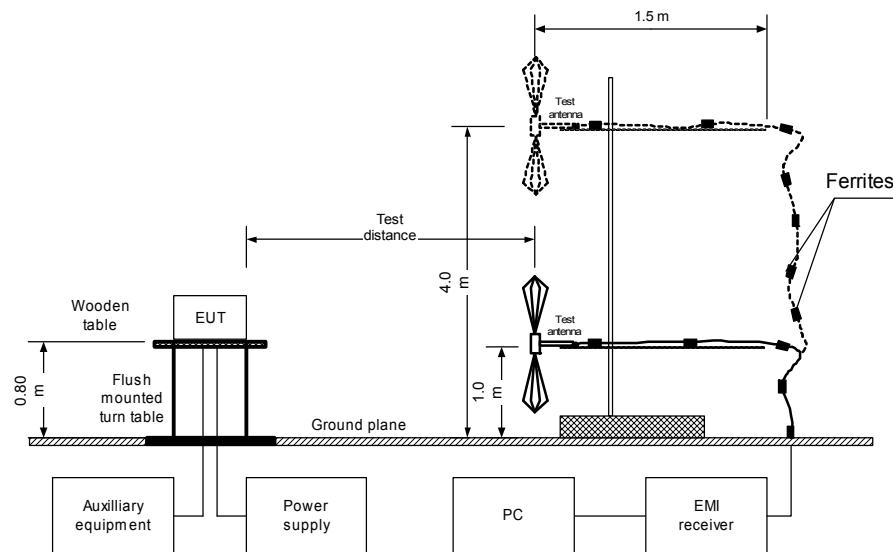

Photograph 8.1.2 Setup for radiated emission measurements





HERMON LABORATORIES

<b>Test specification:</b> Section 15.109, Radiated emission		
<b>Test procedure:</b> ANSI C63.4, Sections 8.3 and 12.2.5		
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS
<b>Date(s):</b> 04-Apr-17		
<b>Temperature:</b> 23 °C	<b>Relative Humidity:</b> 45 %	<b>Air Pressure:</b> 1010 hPa
<b>Power:</b> Battery		
<b>Remarks:</b>		

Table 8.1.2 Radiated emission test results

EUT SET UP: TABLE-TOP  
 LIMIT: Class B  
 EUT OPERATING MODE: Receive  
 TEST SITE: Anechoic chamber  
 TEST DISTANCE: 3 m  
 DETECTORS USED: PEAK / QUASI-PEAK  
 FREQUENCY RANGE: 30 MHz – 1000 MHz  
 RESOLUTION BANDWIDTH: 120 kHz

Frequency, MHz	Peak emission, dB(µV/m)	Quasi-peak			Antenna polarization	Antenna height, m	Turn-table position**, degrees	Verdict
		Measured emission, dB(µV/m)	Limit, dB(µV/m)	Margin, dB*				
No signals were found								Pass

TEST SITE: OATS  
 TEST DISTANCE: 3 m  
 DETECTORS USED: PEAK / AVERAGE  
 FREQUENCY RANGE: 1000 MHz – 12500 MHz  
 RESOLUTION BANDWIDTH: 1000 kHz

Frequency, MHz	Peak			Average			Antenna polarization	Antenna height, m	Turn-table position**, degrees	Verdict
	Measured emission, dB(µV/m)	Limit, dB(µV/m)	Margin, dB*	Measured emission, dB(µV/m)	Limit, dB(µV/m)	Margin, dB*				
4962.5	44.6	74	-29.4	41.1	54	-12.9	Horizontal	1.3	200	Pass

\*- Margin = Measured emission - specification limit.

\*\*- EUT front panel refer to 0 degrees position of turntable.

## Reference numbers of test equipment used

HL 2697	HL 2780	HL 4114	HL 5103	HL 5107	HL 5110		
---------	---------	---------	---------	---------	---------	--	--

Full description is given in Appendix A.




HERMON LABORATORIES



<b>Test specification:</b> Section 15.109, Radiated emission		
<b>Test procedure:</b> ANSI C63.4, Sections 8.3 and 12.2.5		
<b>Test mode:</b> Compliance	<b>Verdict:</b> PASS	
<b>Date(s):</b> 04-Apr-17		
<b>Temperature:</b> 23 °C	<b>Relative Humidity:</b> 45 %	<b>Air Pressure:</b> 1010 hPa
<b>Remarks:</b>		

**Plot 8.1.1 Radiated emission measurements in 30 - 1000 MHz range**

TEST SITE: Anechoic chamber  
 LIMIT: Class B  
 TEST DISTANCE: 3 m  
 EUT OPERATING MODE: Receive  
 ANTENNA POLARIZATION: Vertical & Horizontal

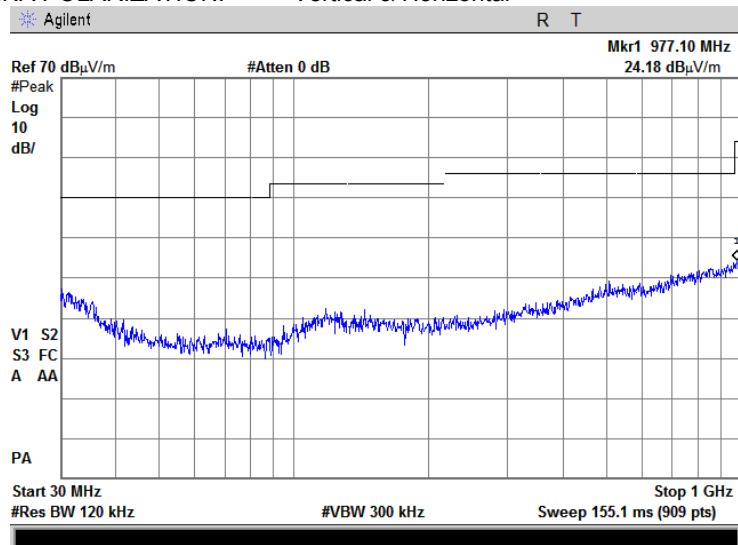**Plot 8.1.2 Radiated emission measurements in 1000 - 6000 MHz range**

TEST SITE: Anechoic chamber  
 LIMIT: Class B  
 TEST DISTANCE: 3 m  
 EUT OPERATING MODE: Receive  
 ANTENNA POLARIZATION: Vertical & Horizontal

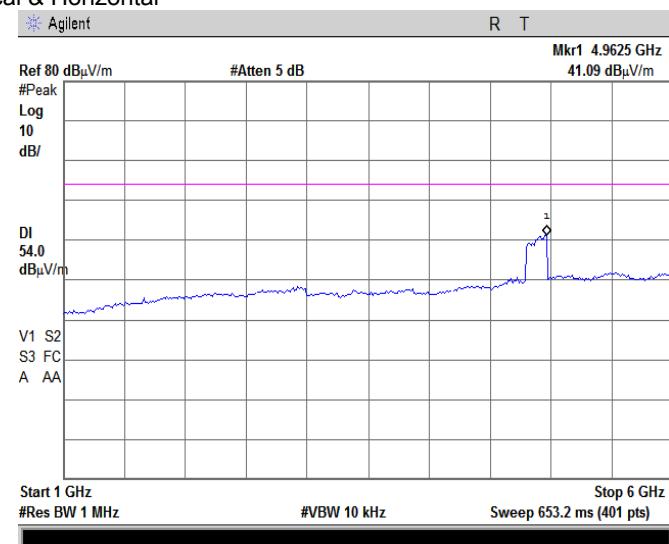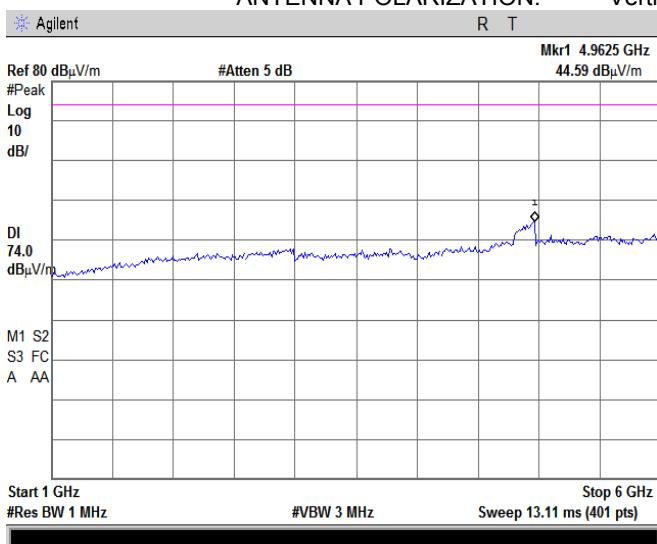





HERMON LABORATORIES

<b>Test specification:</b> Section 15.109, Radiated emission		
<b>Test procedure:</b> ANSI C63.4, Sections 8.3 and 12.2.5		
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS
<b>Date(s):</b> 04-Apr-17		
<b>Temperature:</b> 23 °C	<b>Relative Humidity:</b> 45 %	<b>Air Pressure:</b> 1010 hPa
<b>Remarks:</b>		

**Plot 8.1.3 Radiated emission measurements in 6000 - 12500 MHz range**

TEST SITE: Anechoic chamber  
LIMIT: Class B  
TEST DISTANCE: 3 m  
EUT OPERATING MODE: Receive  
ANTENNA POLARIZATION: Vertical & Horizontal

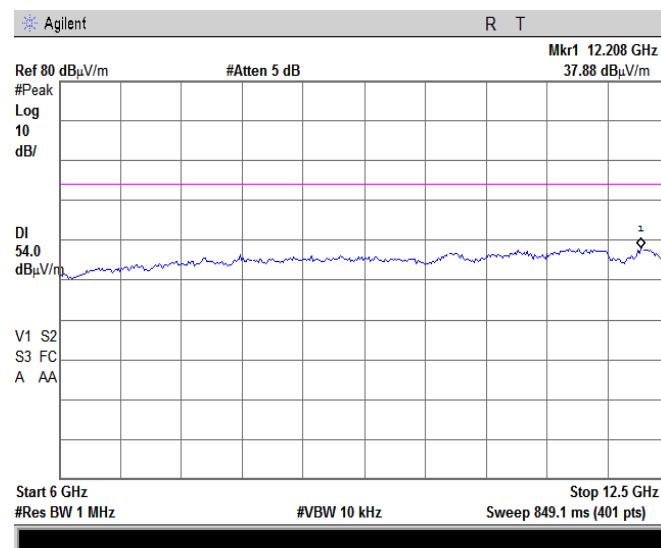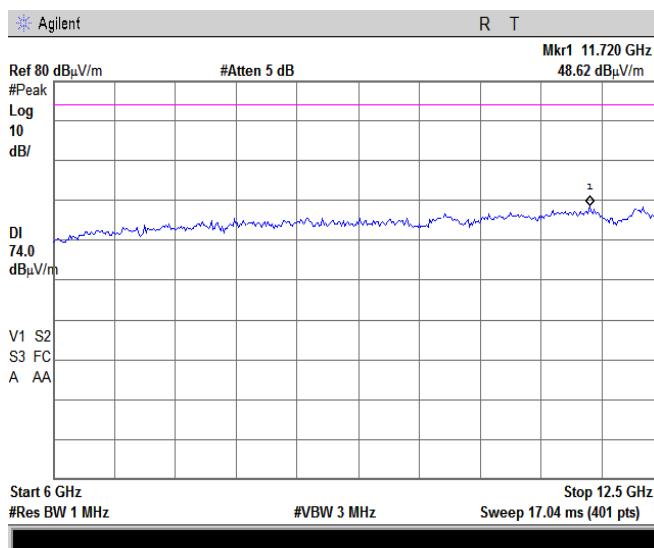



HERMON LABORATORIES

## 9 APPENDIX A Test equipment and ancillaries used for tests

HL No	Description	Manufacturer	Model	Ser. No.	Last Cal./Check	Due Cal./Check
0446	Antenna, Loop, Active, 10 kHz - 30 MHz	EMCO	6502	2857	19-Jan-17	19-Jan-18
2432	Antenna, Double-Ridged Waveguide Horn 1 to 18 GHz	EMC Test Systems	3115	00027177	07-Feb-17	07-Feb-18
2697	Antenna, 30 MHz - 3.0 GHz	Sunol Sciences. Corp. Pleasanton, California USA	JB3	A022805	10-May-16	10-May-17
2780	EMC analyzer, 100 Hz to 26.5 GHz	Agilent Technologies	E7405A	MY451024 62	21-Feb-17	21-Feb-18
2909	Spectrum analyzer, ESA-E, 100 Hz to 26.5 GHz	Agilent Technologies	E4407B	MY414447 62	09-Mar-17	09-Mar-18
3818	PSA Series Spectrum Analyzer, 3 Hz- 44 GHz	Agilent Technologies	E4446A	MY482502 88	03-May-16	03-May-17
4114	Antenna, Double-Ridged Waveguide Horn, 1 to 18 GHz	ETS Lindgren	3117	00123515	17-Jan-17	17-Jan-18
4338	Reject Band Filter, 50 Ohm, 0 to 2170 and 3000 to 18000 MHz, SMA-FM / SMA-M	Micro-Tronics	BRM 50702-02	023	08-May-16	08-May-17
4933	Active Horn Antenna, 1 GHz to 18 GHz	Com-Power Corporation	AHA-118	701046	14-Oct-16	14-Oct-17
4956	Active horn antenna, 18 to 40 GHz	Com-Power Corporation	AHA-840	105004	17-Jan-17	17-Jan-18
5103	RF cable, 18 GHz, 6 m, N-type	Huber-Suhner	SF106A/1 1N/11N/6 000MM	500849/6A	26-Jul-16	26-Jul-17
5107	RF cable, 18 GHz, 4.5 m, N-type	Huber-Suhner	SF106A/1 1N/11N/4 500MM	500845/6A	26-Jul-16	26-Jul-17
5110	RF cable, 18 GHz, 3 m, N-type	Huber-Suhner	ST18A/N m/Nm/300 0	600818/18 A	26-Jul-16	26-Jul-17
5112	RF cable, 40 GHz, 5.5 m, K-type	Huber-Suhner	SF102EA/ 11SK/11S K/5500M M	502494/2E A	26-Jul-16	26-Jul-17



HERMON LABORATORIES

## 10 APPENDIX B Measurement uncertainties

### Expanded uncertainty at 95% confidence in Hermon Labs EMC measurements

Test description	Expanded uncertainty
Conducted carrier power at RF antenna connector	Below 12.4 GHz: $\pm 1.7$ dB 12.4 GHz to 40 GHz: $\pm 2.3$ dB
Conducted emissions at RF antenna connector	9 kHz to 2.9 GHz: $\pm 2.6$ dB 2.9 GHz to 6.46 GHz: $\pm 3.5$ dB 6.46 GHz to 13.2 GHz: $\pm 4.3$ dB 13.2 GHz to 22.0 GHz: $\pm 5.0$ dB 22.0 GHz to 26.8 GHz: $\pm 5.5$ dB 26.8 GHz to 40.0 GHz: $\pm 4.8$ dB
Occupied bandwidth	$\pm 8.0$ %
Duty cycle, timing (Tx ON / OFF) and average factor measurements	$\pm 1.0$ %
Conducted emissions with LISN	9 kHz to 150 kHz: $\pm 3.9$ dB 150 kHz to 30 MHz: $\pm 3.8$ dB
Radiated emissions at 3 m measuring distance Horizontal polarization	Biconilog antenna: $\pm 5.3$ dB Biconical antenna: $\pm 5.0$ dB Log periodic antenna: $\pm 5.3$ dB Double ridged horn antenna: $\pm 5.3$ dB Biconilog antenna: $\pm 6.0$ dB Biconical antenna: $\pm 5.7$ dB Log periodic antenna: $\pm 6.0$ dB Double ridged horn antenna: $\pm 6.0$ dB
Vertical polarization	

Hermon Laboratories is accredited by A2LA for calibration according to present requirements of ISO/IEC 17025 and NCSL Z540-1. The accreditation is granted to perform calibration of parameters that are listed in the Scope of Hermon Laboratories Accreditation.

Hermon Laboratories calibrates its reference and transfer standards by calibration laboratories accredited to ISO/IEC 17025 by a mutually recognized Accreditation Body or by a recognized national metrology institute. All reference and transfer standards used in the calibration system are traceable to national or international standards.

In-house calibration of all test and measurement equipment is performed on a regular basis according to Hermon Laboratories calibration procedures, manufacturer calibration/verification procedures or procedures defined in the relevant standards. The Hermon Laboratories test and measurement equipment is calibrated within the tolerances specified by the manufacturers and/or by the relevant standards.



HERMON LABORATORIES

## 11 APPENDIX C Test laboratory description

Tests were performed at Hermon Laboratories Ltd., which is a fully independent, private, EMC, Radio, Safety, Environmental and Telecommunication testing facility.

Hermon Laboratories is recognized and accredited by the Federal Communications Commission (USA) for 1, 2, 15, 18 parts of Code of Federal Regulations 47 (CFR 47), Test Firm Registration Number is 927748, Designation Number is IL1001; registered by Industry Canada for electromagnetic emissions, file number IC 2186A-1 for OATS, certified by VCCI, Japan (the registration numbers are R-808 for OATS, R-1082 for anechoic chamber, G-869 for RE measurements above 1 GHz, C-845 for conducted emissions site and T-1606 for conducted emissions at telecommunication ports).

The laboratory is accredited by American Association for Laboratory Accreditation (USA) according to ISO/IEC 17025 for electromagnetic compatibility, product safety, telecommunications testing, environmental simulation and calibration (for exact scope please refer to Certificate No. 839.01, 839.03 and 839.04).

Address: P.O. Box 23, Binyamina 3055001, Israel.  
Telephone: +972 4628 8001  
Fax: +972 4628 8277  
e-mail: mail@hermonlabs.com  
website: www.hermonlabs.com

Person for contact: Mr. Michael Nikishin, EMC&Radio group manager

## 12 APPENDIX D Specification references

FCC 47CFR part 15: 2016	Radio Frequency Devices
ANSI C63.10: 2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
ANSI C63.2: 1996	American National Standard for Instrumentation-Electromagnetic Noise and Field Strength, 10 kHz to 40 GHz-Specifications
ANSI C63.4: 2014	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz



HERMON LABORATORIES

## 13 APPENDIX E Test equipment correction factors

Antenna factor  
Active loop antenna  
Model 6502, S/N 2857, HL 0446

Frequency, MHz	Magnetic antenna factor, dB	Electric antenna factor, dB
0.009	-32.8	18.7
0.010	-33.8	17.7
0.020	-38.3	13.2
0.050	-41.1	10.4
0.075	-41.3	10.2
0.100	-41.6	9.9
0.150	-41.7	9.8
0.250	-41.6	9.9
0.500	-41.8	9.8
0.750	-41.9	9.7
1.000	-41.4	10.1
2.000	-41.5	10.0
3.000	-41.4	10.2
4.000	-41.4	10.1
5.000	-41.5	10.1
10.000	-41.9	9.6
15.000	-41.9	9.6
20.000	-42.2	9.3
25.000	-42.8	8.7
30.000	-44.0	7.5

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB( $\mu$ V) to convert it into field strength in dB( $\mu$ V/m).



HERMON LABORATORIES

**Antenna factor**  
**Double-ridged guide horn antenna**  
**Model 3115, serial number: 00027177, HL 2432**

Frequency, MHz	Antenna factor. dB(1/m)
1000.0	24.7
1500.0	25.7
2000.0	27.8
2500.0	28.9
3000.0	30.7
3500.0	31.8
4000.0	33.0
4500.0	32.8
5000.0	34.2
5500.0	34.9
6000.0	35.2
6500.0	35.4
7000.0	36.3
7500.0	37.3
8000.0	37.5
8500.0	38.0
9000.0	38.3
9500.0	38.3
10000.0	38.7
10500.0	38.7
11000.0	38.9
11500.0	39.5
12000.0	39.5
12500.0	39.4
13000.0	40.5
13500.0	40.8
14000.0	41.5
14500.0	41.3
15000.0	40.2
15500.0	38.7
16000.0	38.5
16500.0	39.8
17000.0	41.9
17500.0	45.8
18000.0	49.1

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB( $\mu$ V) to convert it into field strength in dB( $\mu$ V/m).



HERMON LABORATORIES

Antenna calibration  
Sunol Sciences Inc., model JB3, serial number A022805, HL 2697

Frequency, MHz	ACF, dB	Gain, dBi	Num gain	Frequency, MHz	ACF, dB	Gain, dBi	Num gain	Frequency, MHz	ACF, dB	Gain, dBi	Num gain	Frequency, MHz	ACF, dB	Gain, dBi	Num gain
30	22.2	-22.5	0.01	620	19.7	6.3	4.27	1215	24.9	7.0	5.05	1810	28.3	7.1	5.08
35	18.5	-17.4	0.02	625	19.7	6.5	4.42	1220	24.9	7.0	4.99	1815	28.5	6.9	4.91
40	14.7	-12.5	0.06	630	19.6	6.6	4.52	1225	25.1	6.9	4.91	1820	28.6	6.8	4.74
45	11.3	-8.1	0.16	635	19.7	6.5	4.48	1230	25.2	6.8	4.82	1825	28.7	6.8	4.75
45	11.3	-8.1	0.16	640	19.9	6.4	4.40	1235	25.1	7.0	4.96	1830	28.7	6.8	4.76
50	8.9	-4.7	0.34	645	19.9	6.5	4.45	1240	25.0	7.1	5.09	1835	28.7	6.7	4.72
55	7.9	-2.8	0.52	650	19.9	6.5	4.51	1245	25.0	7.1	5.12	1840	28.8	6.7	4.69
60	7.8	-2.1	0.62	655	19.9	6.6	4.60	1250	25.0	7.1	5.15	1845	28.6	6.9	4.90
65	8.5	-2.0	0.63	660	19.9	6.7	4.69	1255	25.0	7.2	5.25	1850	28.4	7.1	5.12
70	9.0	-1.9	0.64	665	19.9	6.7	4.70	1260	24.9	7.3	5.36	1855	28.5	7.0	5.07
75	8.8	-1.1	0.78	670	20.0	6.7	4.71	1265	25.0	7.3	5.31	1860	28.6	7.0	5.01
80	8.4	-0.2	0.97	675	20.1	6.7	4.71	1270	25.1	7.2	5.26	1865	28.5	7.1	5.17
85	8.0	0.8	1.20	680	20.1	6.7	4.71	1275	25.3	7.0	5.05	1870	28.4	7.3	5.33
90	8.2	1.1	1.29	685	20.1	6.8	4.79	1280	25.5	6.8	4.84	1875	28.4	7.2	5.28
95	9.2	0.5	1.13	690	20.1	6.9	4.88	1285	25.4	7.0	4.97	1880	28.5	7.2	5.22
100	10.6	-0.4	0.92	695	20.2	6.8	4.82	1290	25.3	7.1	5.10	1885	28.5	7.2	5.22
110	12.6	-1.6	0.70	705	20.4	6.8	4.75	1300	25.2	7.3	5.33	1895	28.6	7.2	5.24
120	13.9	-2.1	0.62	715	20.5	6.8	4.80	1310	25.5	7.1	5.09	1905	28.5	7.3	5.36
125	14.2	-2.0	0.63	720	20.5	6.9	4.85	1315	25.4	7.2	5.23	1910	28.5	7.4	5.05
130	14.2	-1.7	0.68	725	20.6	6.8	4.81	1320	25.3	7.3	5.36	1915	28.5	7.3	5.38
140	13.4	-0.3	0.94	735	20.9	6.7	4.65	1330	25.6	7.0	5.06	1925	28.6	7.3	5.35
150	12.9	0.8	1.21	745	21.0	6.6	4.59	1340	25.7	7.1	5.09	1935	28.5	7.4	5.54
160	12.7	1.6	1.44	755	21.0	6.8	4.74	1350	25.7	7.1	5.17	1945	28.5	7.5	5.59
165	12.5	2.0	1.59	760	21.0	6.8	4.83	1355	25.8	7.0	5.06	1950	28.6	7.4	5.48
170	11.8	3.3	2.13	770	21.3	6.8	4.74	1360	25.9	6.9	4.95	1955	28.5	7.5	5.65
175	11.8	3.3	2.13	775	21.3	6.8	4.84	1365	26.0	6.9	4.95	1960	28.6	7.5	5.65
180	11.0	3.5	2.20	780	21.3	6.7	4.72	1370	25.8	7.0	5.01	1970	28.9	7.2	5.47
185	11.5	4.0	2.54	785	21.3	6.8	4.77	1380	26.0	7.0	5.08	1975	28.9	7.2	5.37
190	11.8	4.2	2.61	795	21.3	6.8	4.77	1390	26.1	6.9	4.92	1985	29.1	7.1	5.11
200	13.1	3.2	2.07	805	21.4	6.8	4.79	1400	26.2	6.9	4.94	1990	29.1	7.0	5.06
205	12.0	4.4	2.76	800	21.5	6.8	4.77	1405	26.2	6.9	4.94	1995	29.1	7.1	5.07
210	11.0	5.6	3.66	805	21.6	6.7	4.71	1410	26.2	7.0	4.86	2000	29.1	7.1	5.09
215	11.3	5.6	3.59	810	21.7	6.7	4.85	1405	26.1	7.0	5.02	2005	29.1	7.1	5.07
220	11.6	5.5	3.62	815	21.7	6.7	4.72	1410	26.1	7.1	5.09	2010	29.1	7.1	5.16
225	11.7	5.5	3.55	820	21.7	6.8	4.89	1415	26.2	7.0	5.03	2015	29.1	7.1	5.15
230	11.9	5.5	3.57	825	21.7	6.8	4.82	1420	26.3	7.0	4.98	2020	29.2	7.1	5.15
235	12.1	5.5	3.56	830	21.7	6.9	4.85	1425	26.2	7.1	5.10	2025	29.2	7.1	5.18
240	12.3	5.5	3.54	835	21.8	6.8	4.82	1430	26.1	7.2	5.25	2030	29.3	7.0	4.97
245	12.3	5.7	3.71	840	21.9	6.8	4.80	1435	26.1	7.2	5.24	2035	29.3	7.1	5.17
250	12.3	5.9	3.88	845	21.9	6.8	4.83	1440	26.2	7.2	5.24	2040	29.3	7.1	5.00
255	12.5	5.9	3.85	850	21.9	6.9	4.86	1445	26.3	7.1	5.11	2045	29.3	7.1	5.13
260	12.7	5.8	3.83	855	22.0	6.8	4.80	1450	26.5	7.0	4.98	2050	29.2	7.2	4.98
265	13.2	5.5	3.54	860	22.1	6.8	4.74	1455	26.4	7.1	5.07	2050	29.2	7.2	5.27
270	13.7	5.2	3.27	865	22.0	6.9	4.92	1460	26.4	7.1	5.17	2055	29.3	7.2	5.21
275	13.7	5.3	3.39	870	21.9	7.1	5.11	1465	26.4	7.2	5.19	2060	29.5	7.0	5.02
280	13.7	5.4	3.50	875	22.0	7.1	5.08	1470	26.4	7.2	5.22	2065	29.4	7.1	5.08
285	13.7	5.6	3.61	880	22.1	7.0	5.05	1475	26.4	7.1	5.17	2070	29.4	7.1	5.10
290	13.7	5.7	3.72	885	22.1	7.0	5.06	1480	26.5	7.1	5.12	2075	29.5	7.0	5.01
295	13.8	5.8	3.77	890	22.1	7.0	5.06	1485	26.5	7.1	5.14	2080	29.6	6.8	4.81
300	13.9	5.8	3.81	895	22.2	7.1	5.09	1490	26.5	7.1	5.17	2085	29.7	6.9	4.89
305	14.0	5.9	3.85	900	22.2	7.1	5.12	1495	26.5	7.2	5.24	2090	29.7	6.9	4.86
310	14.1	5.9	3.88	905	22.3	7.1	5.09	1500	26.5	7.2	5.31	2095	29.8	6.8	4.85
315	14.3	5.9	3.89	910	22.3	7.0	5.05	1505	26.5	7.2	5.27	2100	29.9	6.8	4.75
320	14.4	5.9	3.90	915	22.4	7.0	4.99	1510	26.6	7.2	5.23	2105	29.8	6.8	4.81
325	14.5	5.9	3.92	920	22.6	6.9	4.92	1515	26.6	7.3	5.30	2110	29.9	6.8	4.80
330	14.6	5.9	3.93	925	22.7	6.9	4.85	1520	26.5	7.3	5.38	2115	29.9	6.8	4.79
335	14.7	6.0	4.02	930	22.8	6.8	4.77	1525	26.6	7.3	5.37	2120	29.9	6.8	4.71
340	14.7	6.2	4.12	935	22.8	6.8	4.83	1530	26.6	7.3	5.36	2125	29.9	6.9	4.89
345	14.9	6.1	4.06	940	22.8	6.9	4.89	1535	26.6	7.4	5.44	2130	29.9	6.9	4.90
350	15.1	6.0	3.99	945	22.8	6.9	4.87	1540	26.5	7.4	5.53	2135	29.8	6.9	4.94
355	15.3	5.9	3.88	950	22.9	6.9	4.85	1545	26.5	7.5	5.58	2140	29.8	7.1	5.08
360	15.6	5.8	3.78	955	23.0	6.8	4.81	1550	26.5	7.5	5.63	2145	29.9	6.9	4.92
365	15.5	5.9	3.89	960	23.1	6.8	4.77	1555	26.7	7.3	5.39	2150	29.9	7.0	4.98
370	15.5	6.0	4.01	965	23.1	6.7	4.73	1560	26.9	7.1	5.16	2155	29.8	7.1	5.10
375	15.6	6.1	4.03	970	23.2	6.7	4.69	1565	26.9	7.2	5.23	2160	29.8	7.1	5.09
380	15.7	6.1	4.05	975	23.3	6.6	4.62	1570	26.9	7.2	5.30	2165	29.9	7.0	5.00
385	15.7	6.2	4.15	980	23.5	6.6	4.54	1575	27.0	7.2	5.23	2170	29.9	7.1	5.07
390	15.7	6.3	4.25	985	23.5	6.6	4.52	1580	27.0	7.1	5.17	2175	29.8	7.2	5.20
395	15.9	6.3	4.22	990	23.6	6.5	4.50	1585	27.0	7.2	5.20	2180	29.8	7.2	5.27
400	16.0	6.2	4.18	995	23.6	6.5	4.48	1590	27.0	7.2	5.22	2185	29.8	7.2	5.27
405	16.3	6.1	4.07	1000	23.7	6.5	4.46	1595	27.0	7.2	5.29	2190	29.8	7.2	5.28
410	16.5	6.0	3.96	1005	23.7	6.5	4.51	1600	27.0	7.3	5.36	2195	29.8	7.2	5.30
415	16.5	6.0	4.00	1010	23.7	6.6	4.57	1605	27.0	7.3	5.38	2200	29.7	7.3	5.38
420	16.6	6.1	4.03	1015	23.7	6.6	4.55	1610	27.0	7.3	5.41	2205	29.7	7.3	5.41



HERMON LABORATORIES

**Antenna factor**  
**Double-ridged waveguide horn antenna**  
**ETS Lindgren, Model 3117, serial number: 00123515, HL 4114**

Frequency, MHz	Antenna factor, dB/m		
	Measured	Manufacturer	Deviation
1000	28.0	28.4	-0.4
1500	28.0	27.4	0.6
2000	31.2	30.9	0.3
2500	32.5	33.4	-0.9
3000	32.9	32.6	0.3
3500	32.7	32.8	-0.1
4000	33.1	33.4	-0.3
4500	33.8	33.9	-0.1
5000	33.8	34.1	-0.3
5500	34.4	34.5	-0.1
6000	35.0	35.2	-0.2
6500	35.4	35.5	-0.1
7000	35.7	35.7	0.0
7500	35.9	35.7	0.2
8000	35.8	35.8	0.0
8500	35.9	35.8	0.1
9000	36.3	36.2	0.1
9500	36.6	36.6	0.0
10000	37.1	37.1	0.0
10500	37.6	37.5	0.1
11000	37.9	37.7	0.2
11500	38.5	38.1	0.4
12000	39.2	38.7	0.5
12500	39.0	38.9	0.1
13000	39.1	39.1	0.0
13500	38.9	38.8	0.1
14000	39.0	38.8	0.2
14500	39.6	39.9	-0.3
15000	39.9	39.7	0.2
15500	39.9	40.1	-0.2
16000	40.7	40.8	-0.1
16500	41.3	41.8	-0.5
17000	42.5	42.1	0.4
17500	41.3	41.2	0.1
18000	41.4	40.9	0.5

Antenna factor is to be added to receiver meter reading in dB( $\mu$ V) to convert to field strength in dB( $\mu$ V/meter)



HERMON LABORATORIES

Antenna factor, HL 4933

**Active Horn Antenna Factor Calibration**

1 GHz to 18 GHz

<b>Equipment:</b>	<b>ACTIVE HORN ANTENNA</b>				
<b>Model:</b>	AHA-118				
<b>Serial Number:</b>	701046				
<b>Calibration Distance:</b>	3 Meter				
<b>Polarization:</b>	Horizontal				
<b>Calibration Date:</b>	11/12/2014				
Frequency (GHz)	Preamplifier Gain (dB)	Antenna Factor with pre-amp (dB/m)	Frequency (GHz)	Preamplifier Gain (dB)	Antenna Factor with pre-amp (dB/m)
1	40.96	-16.47	10	40.94	-1.97
1.5	41.21	-14.53	10.5	40.63	-1.06
2	41.44	-13.30	11	40.74	-1.50
2.5	41.71	-12.87	11.5	40.65	-0.52
3	41.96	-12.26	12	40.76	-0.15
3.5	42.14	-11.77	12.5	41.03	-0.85
4	42.13	-10.91	13	41.37	-0.81
4.5	41.79	-9.41	13.5	41.18	0.05
5	41.44	-7.54	14	40.98	0.36
5.5	40.91	-6.47	14.5	40.81	1.26
6	40.69	-5.48	15	40.65	0.25
6.5	40.64	-5.53	15.5	40.93	-1.05
7	40.76	-4.12	16	41.31	-1.44
7.5	40.94	-3.12	16.5	40.96	-0.80
8	40.68	-1.69	17	40.64	-0.02
8.5	40.08	-1.71	17.5	40.57	1.81
9	40.41	-1.86	18	40.08	3.63
9.5	41.21	-2.73			
Calibration according to ARP 958					
<b>Antenna Factor to be added to receiver reading:</b>					
Meter Reading (dBuV) + Antenna Factor (dB/m) = Corrected Reading (dBuV/m)					



HERMON LABORATORIES

Antenna factor, HL 4956



## Active Horn Antenna Factor Calibration

18 GHz to 40 GHz

<b>Equipment:</b>	ACTIVE HORN ANTENNA				
<b>Model:</b>	AHA-840				
<b>Serial Number:</b>	105004				
<b>Calibration Distance:</b>	3 meter				
<b>Polarization:</b>	Horizontal				
<b>Calibration Date:</b>	1/26/2015				
Frequency (GHz)	Preamplifier Gain (dB)	Antenna Factor with pre-amp (dB/m)	Frequency (GHz)	Preamplifier Gain (dB)	Antenna Factor with pre-amp (dB/m)
18	38.83	-1.06	29.5	42.47	-5.33
18.5	39.34	-2.65	30	41.91	-4.86
19	39.71	-3.88	30.5	41.60	-4.64
19.5	39.87	-4.35	31	41.52	-4.60
20	39.98	-3.97	31.5	41.56	-4.79
20.5	40.42	-3.68	32	41.80	-5.21
21	41.12	-4.06	32.5	42.29	-5.54
21.5	41.74	-5.46	33	42.79	-5.63
22	42.14	-6.22	33.5	42.88	-5.38
22.5	42.35	-6.42	34	42.62	-4.76
23	42.50	-6.59	34.5	42.63	-4.84
23.5	42.65	-6.82	35	43.15	-5.13
24	42.81	-7.01	35.5	43.91	-5.83
24.5	42.86	-7.37	36	44.59	-6.39
25	42.73	-7.53	36.5	45.04	-6.64
25.5	42.77	-7.45	37	45.08	-6.40
26	42.85	-7.21	37.5	44.82	-5.75
26.5	42.98	-7.17	38	44.16	-4.58
27	43.14	-7.22	38.5	42.90	-2.66
27.5	43.18	-7.32	39	42.39	-1.71
28	43.04	-7.10	39.5	43.76	-2.49
28.5	43.01	-6.73	40	45.98	-5.21
Calibration per ANSI C63.5: 2006 Standard Site Method, Equations 1-6 (3-antenna)					
Corrected Reading (dB $\mu$ V/m) = Meter Reading (dB $\mu$ V) + AFE(dB/m)					



HERMON LABORATORIES

**Cable loss**  
**RF Cable, Huber-Suhner, 18 GHz, 6 m, N- type,**  
**SF106A/11N/11N/6000MM, S/N 500849/6A**  
**HL 5103**

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
0.1	0.01	5500	2.43
50	0.22	6000	2.54
100	0.31	6500	2.66
200	0.43	7000	2.76
300	0.53	7500	2.87
400	0.62	8000	2.97
500	0.69	8500	3.07
600	0.76	9000	3.17
700	0.82	9500	3.27
800	0.88	10000	3.36
900	0.94	10500	3.45
1000	0.99	11000	3.54
1100	1.04	11500	3.62
1200	1.08	12000	3.71
1300	1.13	12500	3.79
1400	1.17	13000	3.88
1500	1.21	13500	3.97
1600	1.26	14000	4.05
1700	1.30	14500	4.13
1800	1.33	15000	4.22
1900	1.37	15500	4.30
2000	1.41	16000	4.38
2500	1.59	16500	4.45
3000	1.75	17000	4.52
3500	1.90	17500	4.61
4000	2.04	18000	4.72
4500	2.17		
5000	2.30		



HERMON LABORATORIES

**Cable loss**  
**RF Cable, Huber-Suhner, 18 GHz, 6 m, N- type,**  
**SF106A/11N/11N/4500MM, S/N 500845/6A**  
**HL 5107**

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
0.1	0.01	5500	1.75
50	0.16	6000	1.84
100	0.22	6500	1.92
200	0.31	7000	2.00
300	0.38	7500	2.07
400	0.44	8000	2.15
500	0.49	8500	2.23
600	0.54	9000	2.29
700	0.58	9500	2.38
800	0.63	10000	2.43
900	0.67	10500	2.50
1000	0.71	11000	2.57
1100	0.74	11500	2.63
1200	0.77	12000	2.69
1300	0.81	12500	2.76
1400	0.84	13000	2.82
1500	0.87	13500	2.87
1600	0.91	14000	2.93
1700	0.93	14500	3.00
1800	0.96	15000	3.06
1900	0.99	15500	3.12
2000	1.01	16000	3.18
2500	1.14	16500	3.22
3000	1.26	17000	3.28
3500	1.37	17500	3.36
4000	1.47	18000	3.43
4500	1.57		
5000	1.66		



HERMON LABORATORIES

**Cable loss**  
**RF Cable, Huber-Suhner, 18 GHz, 3 m, N- type,**  
**ST18A/Nm/Nm/3000, S/N 600818/18A**  
**HL 5110**

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
0.1	0.01	5500	1.99
50	0.17	6000	2.10
100	0.24	6500	2.20
200	0.34	7000	2.29
300	0.42	7500	2.38
400	0.48	8000	2.47
500	0.54	8500	2.57
600	0.59	9000	2.65
700	0.64	9500	2.74
800	0.69	10000	2.83
900	0.73	10500	2.91
1000	0.77	11000	2.99
1100	0.82	11500	3.07
1200	0.86	12000	3.14
1300	0.89	12500	3.22
1400	0.93	13000	3.29
1500	0.96	13500	3.37
1600	1.00	14000	3.45
1700	1.03	14500	3.52
1800	1.06	15000	3.59
1900	1.10	15500	3.66
2000	1.13	16000	3.74
2500	1.28	16500	3.80
3000	1.41	17000	3.88
3500	1.54	17500	4.00
4000	1.66	18000	4.02
4500	1.78		
5000	1.89		



HERMON LABORATORIES

**Cable loss**  
**RF Cable, Huber-Suhner, 40 GHz, 5.5 m, K type,**  
**SF102EA/11SK/11SK/5500MM, S/N 502494/2EA**  
**HL 5112**

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
100	0.69	20500	10.18
200	0.97	21000	10.32
300	1.18	21500	10.47
500	1.52	22000	10.60
1000	2.14	22500	10.75
1500	2.62	23000	10.87
2000	3.03	23500	11.00
2500	3.40	24000	11.12
3000	3.73	24500	11.23
3500	4.04	25000	11.35
4000	4.33	25500	11.52
4500	4.60	26000	11.64
5000	4.86	26500	11.73
5500	5.10	27000	11.84
6000	5.34	27500	11.93
6500	5.57	28000	12.05
7000	5.79	28500	12.19
7500	6.00	29000	12.33
8000	6.21	29500	12.44
8500	6.43	30000	12.53
9000	6.62	30500	12.58
9500	6.82	31000	12.71
10000	7.01	31500	12.86
10500	7.17	32000	13.00
11000	7.34	32500	13.11
11500	7.51	33000	13.24
12000	7.68	33500	13.33
12500	7.84	34000	13.44
13000	8.00	34500	13.58
13500	8.16	35000	13.69
14000	8.32	35500	13.81
14500	8.48	36000	13.93
15000	8.63	36500	14.05
15500	8.77	37000	14.24
16000	8.92	37500	14.28
16500	9.08	38000	14.38
17000	9.23	38500	14.50
17500	9.37	39000	14.61
18000	9.51	39500	14.70
18500	9.66	40000	14.83
19000	9.78		
19500	9.92		
20000	10.07		



HERMON LABORATORIES

## 14 APPENDIX F Abbreviations and acronyms

A	ampere
AC	alternating current
AM	amplitude modulation
AVRG	average (detector)
cm	centimeter
dB	decibel
dBm	decibel referred to one milliwatt
dB(µV)	decibel referred to one microvolt
dB(µV/m)	decibel referred to one microvolt per meter
dB(µA)	decibel referred to one microampere
DC	direct current
EIRP	equivalent isotropically radiated power
ERP	effective radiated power
EUT	equipment under test
F	frequency
GHz	gigahertz
GND	ground
H	height
HL	Hermon laboratories
Hz	hertz
k	kilo
kHz	kilohertz
LO	local oscillator
m	meter
MHz	megahertz
min	minute
mm	millimeter
ms	millisecond
µs	microsecond
NA	not applicable
NB	narrow band
OATS	open area test site
Ω	Ohm
PM	pulse modulation
PS	power supply
ppm	part per million ( $10^{-6}$ )
QP	quasi-peak
RE	radiated emission
RF	radio frequency
rms	root mean square
Rx	receive
s	second
T	temperature
Tx	transmit
V	volt
WB	wideband

END OF DOCUMENT