

FCC Test Report

(PART 24)

Report No.: RFBFBE-WTW-P22030942-1

FCC ID: 2AJLF-VAB-1

Test Model: VAB-1

Received Date: 2022/6/7

Test Date: 2022/7/14 ~ 2022/7/30

Issued Date: 2022/8/22

Applicant: DataRemote Incorporated

Address: 18001 Old Cutler Rd. Suite 600, Miami, FL 33157

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Lin Kou Laboratories

Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan

Test Location (1): No.19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kwei Shan Dist., Taoyuan City
33383, Taiwan

Test Location (2): B2F., No.215, Sec. 3, Beixin Rd., Xindian Dist., New Taipei City 231,
Taiwan

FCC Registration / 788550 / TW0003

Designation Number: 427177 / TW0011



This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

Table of Contents

Release Control Record	4
1 Certificate of Conformity	5
2 Summary of Test Results.....	6
2.1 Measurement Uncertainty.....	6
2.2 Test Site and Instruments	7
3 General Information	8
3.1 General Description of EUT	8
3.2 Configuration of System under Test.....	10
3.2.1 Description of Support Units	10
3.3 Test Mode Applicability and Tested Channel Detail	11
3.4 EUT Operating Conditions	14
3.5 General Description of Applied Standards and references.....	14
4 Test Types and Results	15
4.1 Output Power Measurement.....	15
4.1.1 Limits of Output Power Measurement	15
4.1.2 Test Procedures.....	15
4.1.3 Test Setup.....	15
4.1.4 Test Results	15
4.2 Modulation Characteristics Measurement	23
4.2.1 Limits of Modulation Characteristics	23
4.2.2 Test Setup.....	23
4.2.3 Test Procedure	23
4.2.4 Test Results	23
4.3 Frequency Stability Measurement	25
4.3.1 Limits of Frequency Stability Measurement	25
4.3.2 Test Procedure	25
4.3.3 Test Setup.....	25
4.3.4 Test Results	26
4.4 Occupied Bandwidth Measurement.....	33
4.4.1 Test Procedure	33
4.4.2 Test Setup.....	33
4.4.3 Test Result	34
4.5 Band Edge Measurement	41
4.5.1 Limits of Band Edge Measurement	41
4.5.2 Test Setup.....	41
4.5.3 Test Procedures.....	41
4.5.4 Test Results	42
4.6 Peak to Average Ratio	49
4.6.1 Limits of Peak to Average Ratio Measurement	49
4.6.2 Test Setup.....	49
4.6.3 Test Procedures.....	49
4.6.4 Test Results	50
4.7 Conducted Spurious Emissions	57
4.7.1 Limits of Conducted Spurious Emissions Measurement	57
4.7.2 Test Setup.....	57
4.7.3 Test Procedure	57
4.7.4 Test Results	58
4.8 Radiated Emission Measurement.....	67
4.8.1 Limits of Radiated Emission Measurement	67
4.8.2 Test Procedure	67
4.8.3 Deviation from Test Standard	67
4.8.4 Test Setup.....	68
4.8.5 Test Results	69

5 Pictures of Test Arrangements.....	81
Appendix – Information of the Testing Laboratories	82

Release Control Record

Issue No.	Description	Date Issued
RFBFBE-WTW-P22030942-1	Original Release	2022/8/22

1 Certificate of Conformity

Product: Cellular Backup Router

Brand: DATAREMOTE

Test Model: VAB-1

Sample Status: Engineering Sample

Applicant: DataRemote Incorporated

Test Date: 2022/7/14 ~ 2022/7/30

Standards: FCC Part 24, Subpart E

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

Prepared by : Vera Huang , Date: 2022/8/22
Vera Huang / Specialist

Approved by : Jeremy Lin , Date: 2022/8/22
Jeremy Lin / Project Engineer

2 Summary of Test Results

Applied Standard: FCC Part 24 & Part 2			
FCC Clause	Test Item	Result	Remarks
2.1046 24.232	Equivalent Isotropically Radiated Power	Pass	Meet the requirement of limit.
2.1047	Modulation Characteristics	Pass	Meet the requirement.
24.232(d)	Peak to Average Ratio	Pass	Meet the requirement of limit.
2.1055 24.235	Frequency Stability	Pass	Meet the requirement of limit.
2.1049	Occupied Bandwidth	Pass	Meet the requirement of limit.
24.238	Band Edge Measurements	Pass	Meet the requirement of limit.
2.1051 24.238	Conducted Spurious Emissions	Pass	Meet the requirement of limit.
2.1053 24.238	Radiated Spurious Emissions	Pass	Meet the requirement of limit. Minimum passing margin is -29.02 dB at 5640.00 MHz.

Note: Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (±)
Radiated Emissions up to 1 GHz	9 kHz ~ 30 MHz	3.0400 dB
	30 MHz ~ 200 MHz	2.0153 dB
	200 MHz ~ 1000 MHz	2.0224 dB
Radiated Emissions above 1 GHz	1 GHz ~ 18 GHz	1.0121 dB
	18 GHz ~ 40 GHz	1.1508 dB

2.2 Test Site and Instruments

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Antenna Tower Max-Full	UNAT_5+	PAD-CH6-01	N/A	N/A
Antenna Tower Controller Max-Full	MF-7802	N/A	N/A	N/A
Bi_Log Antenna Schwarzbeck	VULB9168	9168-616	2021/10/27	2022/10/26
Preamplifier Agilent	310N	187226	2022/6/14	2023/6/13
Pre-amplifier EMCI	EMC001340	980201	2021/9/15	2022/9/14
RF Coaxial Cable EMCI	5D-NM-BM	140903+140902	2022/1/15	2023/1/14
RF Coaxial Cable ETS-Lindgren	EMC104-SM-SM-10000	Cable-CH1-01(RFC-SMS-100-SMS-120+RFC-SMS-100-SMS-4	2022/6/14	2023/6/13
	RFC-SMS-100-SMS-24-IN	Cable-CH1-02(RFC-SMS-100-SMS-24)	2022/6/14	2023/6/13
Software BV ADT	ADT_Radiated_ V7.6.15.9.5	N/A	N/A	N/A
Test Receiver Agilent	N9038A	MY52260177	2021/9/1	2022/8/31
Turn Table Max-Full	TT-1510	N/A	N/A	N/A
Turn Table Controller Max-Full	MF-7802	N/A	N/A	N/A
Boresight antenna tower fixture BV	BAF-02	8	N/A	N/A
Horn Antenna ETS-Lindgren	3117	00143293	2021/11/14	2022/11/13
Horn Antenna Schwarzbeck	BBHA 9170	BBHA9170241	2021/10/26	2022/10/25
Radio Communication Analyzer Anritsu	MT8821C	6261806803	2022/2/16	2023/2/15

Notes:

1. The test was performed in XD - 966 chamber 6.

2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

3 General Information

3.1 General Description of EUT

Product	Cellular Backup Router	
Brand	DATAREMOTE	
Test Model	VAB-1	
Status of EUT	Engineering Sample	
Power Supply Rating	12Vdc / 19Vdc (from adapter)	
Modulation Type	WCDMA: BPSK, QPSK HSDPA: BPSK HSUPA: QPSK LTE: QPSK, 16QAM	
Frequency Range	WCDMA Band 2	1852.4 ~ 1907.6 MHz
	LTE Band 2 (Channel Bandwidth: 1.4 MHz)	1850.7 ~ 1909.3 MHz
	LTE Band 2 (Channel Bandwidth: 3 MHz)	1851.5 ~ 1908.5 MHz
	LTE Band 2 (Channel Bandwidth: 5 MHz)	1852.5 ~ 1907.5 MHz
	LTE Band 2 (Channel Bandwidth: 10 MHz)	1855.0 ~ 1905.0 MHz
	LTE Band 2 (Channel Bandwidth: 15 MHz)	1857.5 ~ 1902.5 MHz
	LTE Band 2 (Channel Bandwidth: 20 MHz)	1860.0 ~ 1900.0 MHz
Max. EIRP Power	WCDMA Band 2	325.837 mW (25.13 dBm)
	LTE Band 2 (Channel Bandwidth: 1.4 MHz)	261.818 mW (24.18 dBm)
	LTE Band 2 (Channel Bandwidth: 3 MHz)	263.027 mW (24.20 dBm)
	LTE Band 2 (Channel Bandwidth: 5 MHz)	261.818 mW (24.18 dBm)
	LTE Band 2 (Channel Bandwidth: 10 MHz)	263.027 mW (24.20 dBm)
	LTE Band 2 (Channel Bandwidth: 15 MHz)	261.216 mW (24.17 dBm)
	LTE Band 2 (Channel Bandwidth: 20 MHz)	260.016 mW (24.15 dBm)
Emission Designator	WCDMA Band 2	4M15F9W
	LTE Band 2 (Channel Bandwidth: 1.4 MHz)	1M09G7D
	LTE Band 2 (Channel Bandwidth: 3 MHz)	2M70D7W
	LTE Band 2 (Channel Bandwidth: 5 MHz)	4M50G7D
	LTE Band 2 (Channel Bandwidth: 10 MHz)	8M96G7D
	LTE Band 2 (Channel Bandwidth: 15 MHz)	13M4G7D
	LTE Band 2 (Channel Bandwidth: 20 MHz)	17M9D7W
Antenna Type	Refer to Note as below	
Accessory Device	Refer to Note as below	
Data Cable Supplied	Refer to Note as below	

Note:

1. The EUT contains following accessory devices.

AC Adapter 1	Brand	MOSO
	Model	MSS-V2500WR120-030E0-US
	AC Input	100-240V, 50/60Hz, 1A max.
	DC Output	12V, 2.5A
	DC Output Cable	1.5m, Non-shielded
AC Adapter 2	Brand	MOSO
	Model	MS-V3420R190-065L0-US
	AC Input	100-240V, 50/60Hz, 1.5A max.
	DC Output	19V, 3.42A
	DC Output Cable	1.5m, Non-shielded
Ethernet Cable 1	Signal Line	1.5m, Non-shielded, yellow
Ethernet Cable 2	Signal Line	1.5m, Non-shielded, red
Phone Cable	Signal Line	1.5m, Non-shielded, gray
Power Cable 1	Model	BGW-210
	Signal Line	1.5m, Non-shielded, black
Power Cable 2	Model	BGW-320
	Signal Line	1.5m, Non-shielded, white

*After pretesting, Adapter 1 was the worst case and chosen for final test.


2. The antenna information is listed as below.

Antenna Type	Dipole Antenna	
Band	Antenna Gain (dBi)	
	Ant. 1	Ant. 2
WCDMA 2 / LTE 2	1.8	1.8

3. Detail antenna specification please refer to antenna datasheet and/or antenna measurement report.

4. The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.

3.2 Configuration of System under Test

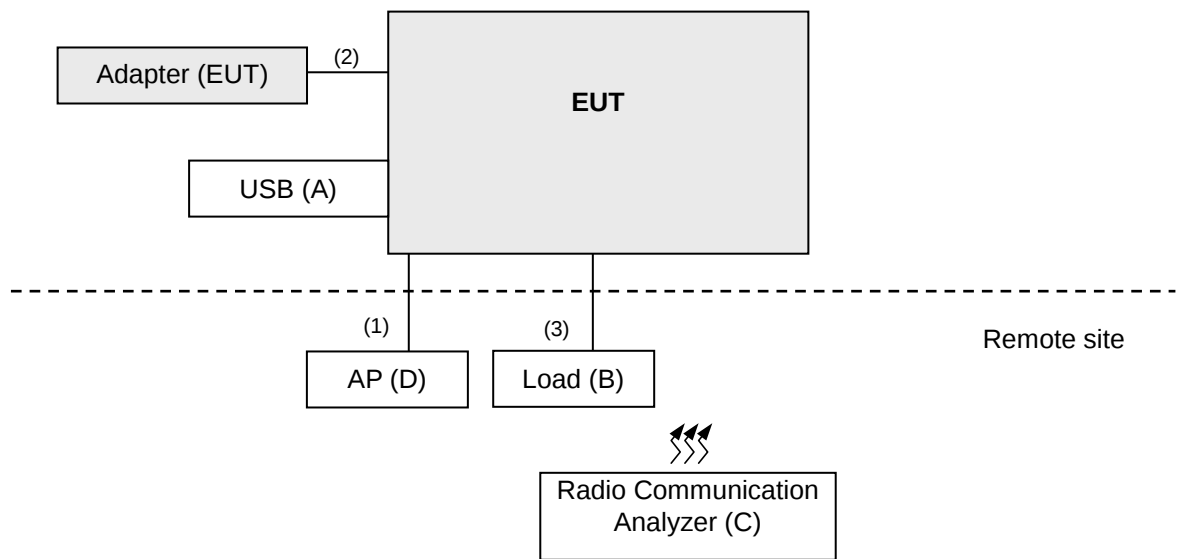

3.2.1 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A	USB	SanDisk	BM210257950Z	N/A	N/A	Supplied by lab
B	Load	N/A	N/A	N/A	N/A	Supplied by lab
C	Radio Communication Analyzer	Anritsu	MT8821C	6261806803	N/A	Supplied by lab
D	AP	ASUS	AC750	H7ITDV002001	NA	Supplied by lab

ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	RJ-45 Cable	4	2	No	0	Supplied by lab
2.	AC Cable	1	1.5	No	0	Supplied by applicant
3.	RJ-41 Cable	1	2	No	0	Supplied by lab

3.3 Test Mode Applicability and Tested Channel Detail

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis, and antenna ports.

The worst case was found when positioned as the table below. Following channel(s) was (were) selected for the final test as listed below:

Band	Radiated Emission
WCDMA Band 2	90 degree
LTE Band 2	0 degree

WCDMA Band 2

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Mode
-	EIRP	9262 to 9538	9262, 9400, 9538	WCDMA, HSDPA, HSUPA
-	Modulation Characteristics	9262 to 9538	9400	WCDMA, HSDPA, HSUPA
-	Frequency Stability	9262 to 9538	9262, 9538	WCDMA
-	Occupied Bandwidth	9262 to 9538	9262, 9400, 9538	WCDMA, HSDPA, HSUPA
-	Band Edge	9262 to 9538	9262, 9538	WCDMA, HSDPA, HSUPA
-	Peak to Average Ratio	9262 to 9538	9262, 9400, 9538	WCDMA, HSDPA, HSUPA
-	Conducted Emission	9262 to 9538	9262, 9400, 9538	WCDMA, HSDPA, HSUPA
-	Radiated Emission Below 1GHz	9262 to 9538	9538	WCDMA
-	Radiated Emission Above 1GHz	9262 to 9538	9262, 9400, 9538	WCDMA

Note: For radiated emission below 1GHz, select the worst radiated emission channel (above 1GHz) for final testing.

LTE Band 2

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Channel Bandwidth	Modulation	RB #
-	EIRP	18607 to 19193	18607, 18900, 19193	1.4 MHz	QPSK / 16QAM	1 Half Full
		18615 to 19185	18615, 18900, 19185	3 MHz	QPSK / 16QAM	1 Half Full
		18625 to 19175	18625, 18900, 19175	5 MHz	QPSK / 16QAM	1 Half Full
		18650 to 19150	18650, 18900, 19150	10 MHz	QPSK / 16QAM	1 Half Full
		18675 to 19125	18675, 18900, 19125	15 MHz	QPSK / 16QAM	1 Half Full
		18700 to 19100	18700, 18900, 19100	20 MHz	QPSK / 16QAM	1 Half Full
-	Modulation Characteristics	18700 to 19100	18900	20 MHz	QPSK / 16QAM	Full
-	Frequency Stability	18607 to 19193	18607, 19193	1.4 MHz	QPSK	Full
		18615 to 19185	18615, 19185	3 MHz	QPSK	Full
		18625 to 19175	18625, 19175	5 MHz	QPSK	Full
		18650 to 19150	18650, 19150	10 MHz	QPSK	Full
		18675 to 19125	18675, 19125	15 MHz	QPSK	Full
		18700 to 19100	18700, 19100	20 MHz	QPSK	Full
-	Occupied Bandwidth	18607 to 19193	18607, 18900, 19193	1.4 MHz	QPSK / 16QAM	Full
		18615 to 19185	18615, 18900, 19185	3 MHz	QPSK / 16QAM	Full
		18625 to 19175	18625, 18900, 19175	5 MHz	QPSK / 16QAM	Full
		18650 to 19150	18650, 18900, 19150	10 MHz	QPSK / 16QAM	Full
		18675 to 19125	18675, 18900, 19125	15 MHz	QPSK / 16QAM	Full
		18700 to 19100	18700, 18900, 19100	20 MHz	QPSK / 16QAM	Full
-	Peak to Average Ratio	18607 to 19193	18607, 18900, 19193	1.4 MHz	QPSK / 16QAM	1
		18615 to 19185	18615, 18900, 19185	3 MHz	QPSK / 16QAM	1
		18625 to 19175	18625, 18900, 19175	5 MHz	QPSK / 16QAM	1
		18650 to 19150	18650, 18900, 19150	10 MHz	QPSK / 16QAM	1
		18675 to 19125	18675, 18900, 19125	15 MHz	QPSK / 16QAM	1
		18700 to 19100	18700, 18900, 19100	20 MHz	QPSK / 16QAM	1

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Channel Bandwidth	Modulation	RB #
-	Band Edge	18607 to 19193	18607, 19193	1.4 MHz	QPSK	1 Half Full
		18615 to 19185	18615, 19185	3 MHz	QPSK	1 Half Full
		18625 to 19175	18625, 19175	5 MHz	QPSK	1 Half Full
		18650 to 19150	18650, 19150	10 MHz	QPSK	1 Half Full
		18675 to 19125	18675, 19125	15 MHz	QPSK	1 Half Full
		18700 to 19100	18700, 19100	20 MHz	QPSK	1 Half Full
-	Conducted Emission	18607 to 19193	18607, 18900, 19193	1.4 MHz	QPSK	1
		18615 to 19185	18615, 18900, 19185	3 MHz	QPSK	1
		18625 to 19175	18625, 18900, 19175	5 MHz	QPSK	1
		18650 to 19150	18650, 18900, 19150	10 MHz	QPSK	1
		18675 to 19125	18675, 18900, 19125	15 MHz	QPSK	1
		18700 to 19100	18700, 18900, 19100	20 MHz	QPSK	1
-	Radiated Emission Below 1GHz	18700 to 19100	18900	20 MHz	QPSK	1
-	Radiated Emission Above 1GHz	18607 to 19193	18607, 18900, 19193	1.4 MHz	QPSK	1
		18625 to 19175	18625, 18900, 19175	5 MHz	QPSK	1
		18700 to 19100	18700, 18900, 19100	20 MHz	QPSK	1

Note:

1. This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation. Therefore, only EIRP, modulation characteristics, occupied bandwidth and peak to average ratio items had been tested under QPSK, 16QAM mode, the other items were performed under QPSK mode only.
2. For radiated emission above 1 GHz, according to 3GPP 36.521 Section 6.6.3.1.4, choose the lowest, 5 MHz & highest channel bandwidth for final test.
3. For radiated emissions below 1 GHz, select the worst radiated emission channel for final testing.

Test Condition:

Test Item	Environmental Conditions	Input Power	Tested By
EIRP	25 deg. C, 65 % RH	120 Vac, 60 Hz	James Yang
Modulation Characteristics	25 deg. C, 65 % RH	120 Vac, 60 Hz	James Yang
Frequency Stability	25 deg. C, 65 % RH	120 Vac, 60 Hz	James Yang
Occupied Bandwidth	25 deg. C, 65 % RH	120 Vac, 60 Hz	James Yang
Band Edge	25 deg. C, 65 % RH	120 Vac, 60 Hz	James Yang
Peak to Average Ratio	25 deg. C, 65 % RH	120 Vac, 60 Hz	James Yang
Conducted Emission	25 deg. C, 65 % RH	120 Vac, 60 Hz	James Yang
Radiated Emission Below 1GHz	26 deg. C, 62 % RH	120 Vac, 60 Hz	Charles Hsiao
Radiated Emission Above 1GHz	25 deg. C, 60 % RH	120 Vac, 60 Hz	Karl Lee

3.4 EUT Operating Conditions

The EUT makes a call to the communication simulator. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency

3.5 General Description of Applied Standards and references

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards and references:

Test Standard:

FCC 47 CFR Part 2

FCC 47 CFR Part 24

ANSI/TIA/EIA-603-E 2016

ANSI 63.26-2015

NOTE: All test items have been performed and recorded as per the above standards.

References Test Guidance:

KDB 971168 D01 Power Meas License Digital Systems v03r01

NOTE: All test items have been performed as a reference to the above KDB test guidance.

4 Test Types and Results

4.1 Output Power Measurement

4.1.1 Limits of Output Power Measurement

Mobile / Portable station are limited to 2 watts e.i.r.p.

4.1.2 Test Procedures

Conducted Power Measurement:

The EUT was set up for the maximum power with WCDMA and LTE link data modulation and link up with simulator (Built-in power meter). Set the EUT to transmit under low, middle and high channel and record the power level shown on simulator.

Maximum EIRP / ERP

The relevant equation for determining the maximum ERP or EIRP from the measured RF output power is given in Equation as follows:

$$\text{EIRP} = P_{\text{Meas}} + G_T$$

$$\text{ERP} = P_{\text{Meas}} + G_T - 2.15$$

where

ERP or EIRP effective radiated power or equivalent isotropically radiated power, respectively (expressed in the same units as P_{Meas} , e.g., dBm or dBW)

P_{Meas} measured transmitter output power or PSD, in dBm or dBW

G_T gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP)

4.1.3 Test Setup

Conducted Power Measurement:



4.1.4 Test Results

Conducted Output Power (dBm)

Band	WCDMA II		
Channel	9262	9400	9538
Frequency (MHz)	1852.4	1880.0	1907.6
RMC 12.2K	23.18	23.33	23.25
HSDPA Subtest-1	22.57	22.71	22.78
HSUPA Subtest-1	22.05	22.11	22.13

LTE Band 2						
BW	MCS Index	RB Size	RB Offset	Low	Mid	High
		Channel		18607	18900	19193
		Frequency (MHz)		1850.7	1880	1909.3
1.4M	QPSK	1	0	22.25	22.15	22.19
		1	2	22.29	22.30	22.38
		1	5	22.31	22.10	22.38
		3	0	21.31	21.58	21.38
		3	1	21.36	21.48	21.60
		3	3	21.37	21.54	21.48
		6	0	21.53	21.57	21.55
	16QAM	1	0	21.32	21.60	21.53
		1	2	21.50	21.53	21.57
		1	5	21.44	21.50	21.51
		3	0	20.50	20.69	20.60
		3	1	20.69	20.65	20.64
		3	3	20.59	20.62	20.70
		6	0	20.55	20.65	20.61

LTE Band 2						
BW	MCS Index	Channel		18615	18900	19185
		Frequency (MHz)		1851.5	1880	1908.5
3M	QPSK	1	0	22.13	22.40	22.40
		1	7	22.29	22.13	22.14
		1	14	22.33	22.11	22.19
		8	0	21.58	21.49	21.48
		8	3	21.37	21.35	21.34
		8	7	21.47	21.41	21.32
		15	0	21.46	21.51	21.51
	16QAM	1	0	21.43	21.58	21.38
		1	7	21.50	21.31	21.36
		1	14	21.54	21.33	21.30
		8	0	20.69	20.54	20.50
		8	3	20.51	20.65	20.78
		8	7	20.55	20.50	20.52
		15	0	20.67	20.70	20.67

LTE Band 2						
BW	MCS Index	Channel		18625	18900	19175
		Frequency (MHz)		1852.5	1880	1907.5
5M	QPSK	1	0	22.16	22.33	22.19
		1	12	22.34	22.11	22.38
		1	24	22.19	22.27	22.30
		12	0	21.33	21.56	21.46
		12	6	21.54	21.35	21.49
		12	13	21.40	21.36	21.51
		25	0	21.51	21.41	21.49
	16QAM	1	0	21.39	21.36	21.56
		1	12	21.39	21.45	21.45
		1	24	21.41	21.39	21.44
		12	0	20.61	20.52	20.63
		12	6	20.72	20.74	20.56
		12	13	20.67	20.61	20.70
		25	0	20.76	20.68	20.55

LTE Band 2						
BW	MCS Index	Channel		18650	18900	19150
		Frequency (MHz)		1855	1880	1905
10M	QPSK	1	0	22.23	22.19	22.40
		1	24	22.33	22.11	22.26
		1	49	22.31	22.31	22.27
		25	0	21.43	21.36	21.31
		25	12	21.47	21.38	21.60
		25	25	21.33	21.47	21.51
		50	0	21.59	21.51	21.54
	16QAM	1	0	21.36	21.52	21.43
		1	24	21.48	21.34	21.44
		1	49	21.50	21.47	21.43
		25	0	20.63	20.76	20.65
		25	12	20.65	20.53	20.50
		25	25	20.77	20.79	20.58
		50	0	20.61	20.50	20.52

LTE Band 2						
BW	MCS Index	Channel		18675	18900	19125
		Frequency (MHz)		1857.5	1880	1902.5
15M	QPSK	1	0	22.22	22.29	22.37
		1	37	22.33	22.34	22.30
		1	74	22.25	22.20	22.34
		36	0	21.45	21.57	21.47
		36	19	21.32	21.39	21.31
		36	39	21.50	21.49	21.36
		75	0	21.53	21.36	21.54
	16QAM	1	0	21.54	21.37	21.46
		1	37	21.47	21.45	21.35
		1	74	21.38	21.38	21.44
		36	0	20.80	20.61	20.52
		36	19	20.63	20.71	20.56
		36	39	20.80	20.73	20.63
		75	0	20.63	20.70	20.58

LTE Band 2						
BW	MCS Index	Channel		18700	18900	19100
		Frequency (MHz)		1860	1880	1900
20M	QPSK	1	0	22.23	22.26	22.30
		1	50	22.19	22.31	22.35
		1	99	22.30	22.22	22.10
		50	0	21.55	21.48	21.34
		50	25	21.38	21.36	21.51
		50	50	21.30	21.47	21.38
		100	0	21.38	21.39	21.33
	16QAM	1	0	21.49	21.30	21.36
		1	50	21.59	21.35	21.57
		1	99	21.37	21.34	21.30
		50	0	20.62	20.68	20.71
		50	25	20.70	20.60	20.61
		50	50	20.76	20.78	20.79
		100	0	20.51	20.56	20.56

EIRP Power (dBm)

Band	WCDMA II		
Channel	9262	9400	9538
Frequency	1852.4	1880	1907.6
RMC 12.2K	24.98	25.13	25.05
HSDPA Subtest-1	24.37	24.51	24.58
HSUPA Subtest-1	23.85	23.91	23.93

*EIRP = Conducted + antenna gain (1.8dBi)

LTE Band 2						
BW	MCS Index	RB Size	RB Offset	Low	Mid	High
		Channel		18607	18900	19193
		Frequency (MHz)		1850.7	1880	1909.3
1.4M	QPSK	1	0	24.05	23.95	23.99
		1	2	24.09	24.10	24.18
		1	5	24.11	23.90	24.18
		3	0	23.11	23.38	23.18
		3	1	23.16	23.28	23.40
		3	3	23.17	23.34	23.28
		6	0	23.33	23.37	23.35
	16QAM	1	0	23.12	23.40	23.33
		1	2	23.30	23.33	23.37
		1	5	23.24	23.30	23.31
		3	0	22.30	22.49	22.40
		3	1	22.49	22.45	22.44
		3	3	22.39	22.42	22.50
		6	0	22.35	22.45	22.41

*EIRP = Conducted + antenna gain (1.8dBi)

LTE Band 2						
BW	MCS Index	Channel		18615	18900	19185
		Frequency (MHz)		1851.5	1880	1908.5
3M	QPSK	1	0	23.93	24.20	24.20
		1	7	24.09	23.93	23.94
		1	14	24.13	23.91	23.99
		8	0	23.38	23.29	23.28
		8	3	23.17	23.15	23.14
		8	7	23.27	23.21	23.12
		15	0	23.26	23.31	23.31
	16QAM	1	0	23.23	23.38	23.18
		1	7	23.30	23.11	23.16
		1	14	23.34	23.13	23.10
		8	0	22.49	22.34	22.30
		8	3	22.31	22.45	22.58
		8	7	22.35	22.30	22.32
		15	0	22.47	22.50	22.47

*EIRP = Conducted + antenna gain (1.8dBi)

LTE Band 2						
BW	MCS Index	Channel		18625	18900	19175
		Frequency (MHz)		1852.5	1880	1907.5
5M	QPSK	1	0	23.96	24.13	23.99
		1	12	24.14	23.91	24.18
		1	24	23.99	24.07	24.10
		12	0	23.13	23.36	23.26
		12	6	23.34	23.15	23.29
		12	13	23.20	23.16	23.31
		25	0	23.31	23.21	23.29
	16QAM	1	0	23.19	23.16	23.36
		1	12	23.19	23.25	23.25
		1	24	23.21	23.19	23.24
		12	0	22.41	22.32	22.43
		12	6	22.52	22.54	22.36
		12	13	22.47	22.41	22.50
		25	0	22.56	22.48	22.35

*EIRP = Conducted + antenna gain (1.8dBi)

LTE Band 2						
BW	MCS Index	Channel		18650	18900	19150
		Frequency (MHz)		1855	1880	1905
10M	QPSK	1	0	24.03	23.99	24.20
		1	24	24.13	23.91	24.06
		1	49	24.11	24.11	24.07
		25	0	23.23	23.16	23.11
		25	12	23.27	23.18	23.40
		25	25	23.13	23.27	23.31
		50	0	23.39	23.31	23.34
	16QAM	1	0	23.16	23.32	23.23
		1	24	23.28	23.14	23.24
		1	49	23.30	23.27	23.23
		25	0	22.43	22.56	22.45
		25	12	22.45	22.33	22.30
		25	25	22.57	22.59	22.38
		50	0	22.41	22.30	22.32

*EIRP = Conducted + antenna gain (1.8dBi)

LTE Band 2						
BW	MCS Index	Channel		18675	18900	19125
		Frequency (MHz)		1857.5	1880	1902.5
15M	QPSK	1	0	24.02	24.09	24.17
		1	37	24.13	24.14	24.10
		1	74	24.05	24.00	24.14
		36	0	23.25	23.37	23.27
		36	19	23.12	23.19	23.11
		36	39	23.30	23.29	23.16
		75	0	23.33	23.16	23.34
	16QAM	1	0	23.34	23.17	23.26
		1	37	23.27	23.25	23.15
		1	74	23.18	23.18	23.24
		36	0	22.60	22.41	22.32
		36	19	22.43	22.51	22.36
		36	39	22.60	22.53	22.43
		75	0	22.43	22.50	22.38

*EIRP = Conducted + antenna gain (1.8dBi)

LTE Band 2						
BW	MCS Index	Channel		18700	18900	19100
		Frequency (MHz)		1860	1880	1900
20M	QPSK	1	0	24.03	24.06	24.10
		1	50	23.99	24.11	24.15
		1	99	24.10	24.02	23.90
		50	0	23.35	23.28	23.14
		50	25	23.18	23.16	23.31
		50	50	23.10	23.27	23.18
		100	0	23.18	23.19	23.13
	16QAM	1	0	23.29	23.10	23.16
		1	50	23.39	23.15	23.37
		1	99	23.17	23.14	23.10
		50	0	22.42	22.48	22.51
		50	25	22.50	22.40	22.41
		50	50	22.56	22.58	22.59
		100	0	22.31	22.36	22.36

*EIRP = Conducted + antenna gain (1.8dBi)

4.2 Modulation Characteristics Measurement

4.2.1 Limits of Modulation Characteristics

N/A


4.2.2 Test Setup




4.2.3 Test Procedure

Connect the EUT to Communication Simulator via the antenna connector. The frequency band is set as EUT supported Modulation and Channels, the EUT output is matched with 50 ohm load, the waveform quality and constellation of the EUT was tested.

4.2.4 Test Results

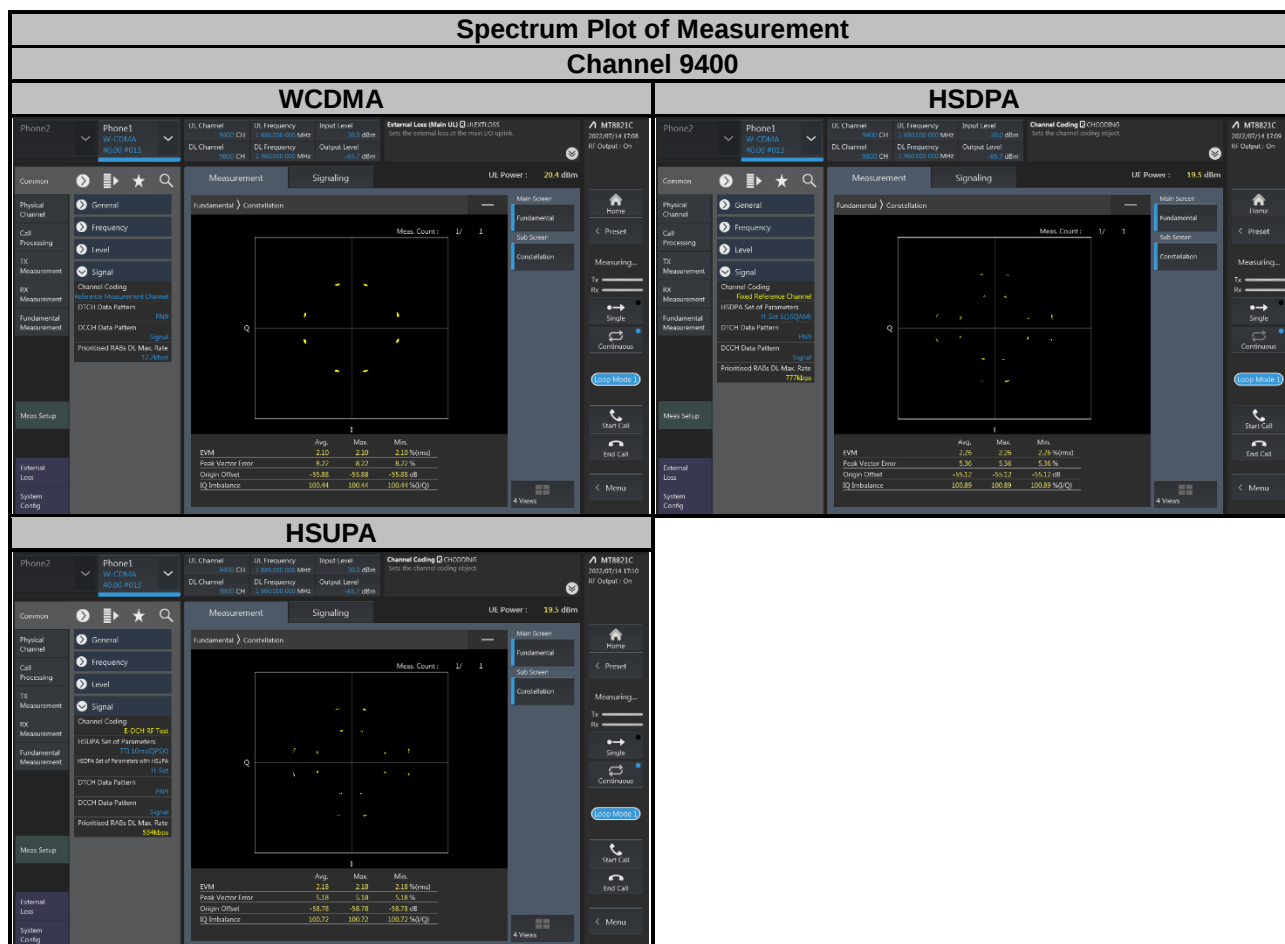

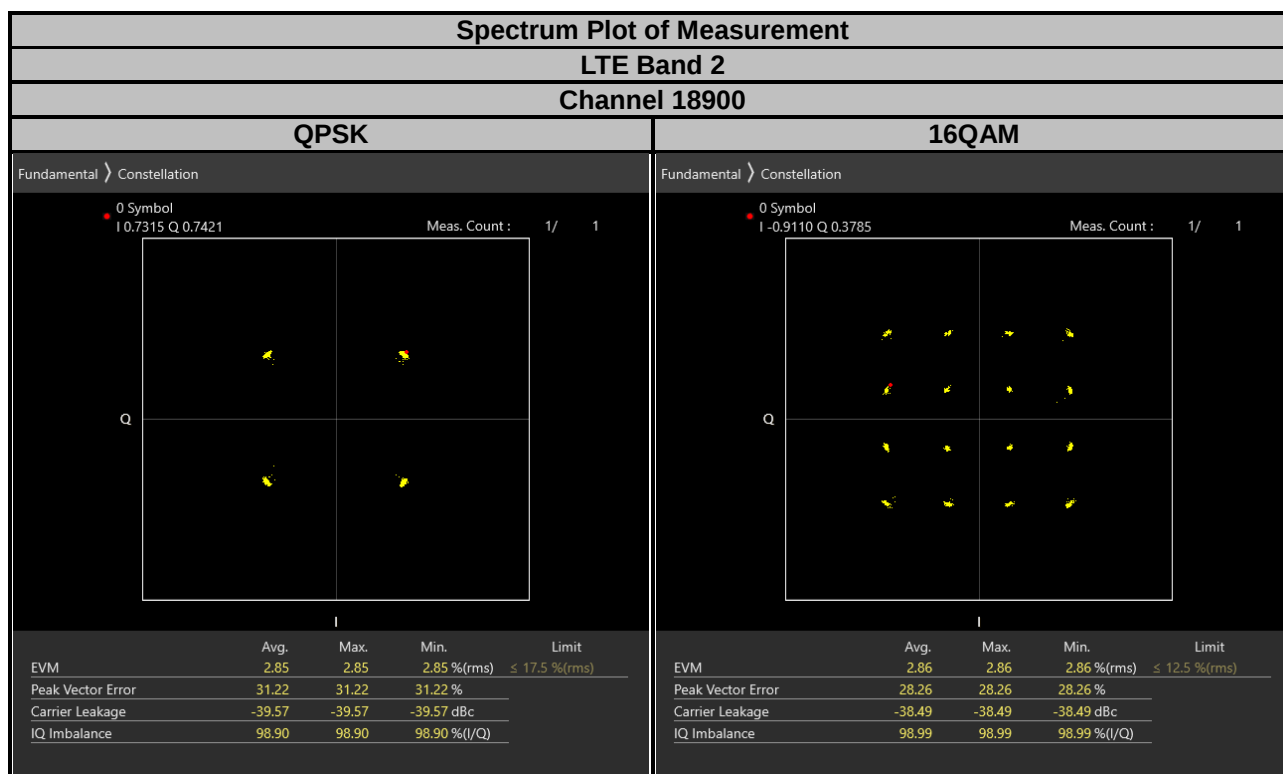

4.3 Frequency Stability Measurement

4.3.1 Limits of Frequency Stability Measurement


The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

4.3.2 Test Procedure

- Device is placed at the oven room. The oven room could control the temperatures and humidity. Power warm up is at least 15 min and power applied should perform before recording frequency error.
- EUT is connected the external power supply to control the AC input power. The test voltage range is from minimum to maximum working voltage. Each step shall be record the frequency error rate.
- The temperature range step is 10 degrees in this test items. All temperature levels shall be hold the $\pm 0.5^{\circ}\text{C}$ during the measurement testing. The each temperature step shall be at least 0.5 hours, consider the EUT could be test under the stability condition.

NOTE: The frequency error was recorded frequency error from the communication simulator.

4.3.3 Test Setup

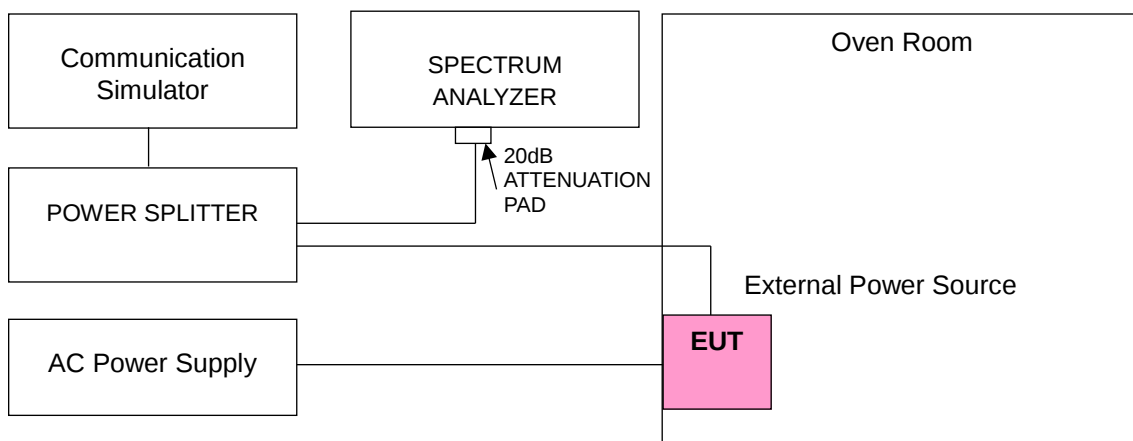

4.3.4 Test Results

Frequency Error vs. Voltage

Voltage (Volts)	WCDMA			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
108	1852.4000032	0.002	1907.6000022	0.001
120	1852.4000021	0.001	1907.6000035	0.002
132	1852.4000037	0.002	1907.6000023	0.001

Note: The applicant defined the normal working voltage is from 108 Vac to 132 Vac.

Frequency Error vs. Temperature

Temp. (°C)	WCDMA			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	1852.4000032	0.002	1907.6000032	0.002
-20	1852.4000029	0.002	1907.6000024	0.001
-10	1852.4000037	0.002	1907.6000017	0.001
0	1852.4000011	0.001	1907.6000037	0.002
10	1852.4000033	0.002	1907.6000021	0.001
20	1852.3999983	-0.001	1907.5999963	-0.002
30	1852.3999966	-0.002	1907.5999973	-0.001
40	1852.3999971	-0.002	1907.5999990	-0.001
50	1852.3999967	-0.002	1907.5999973	-0.001

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 2			
	Channel Bandwidth: 1.4 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
108	1850.7000013	0.001	1909.3000000	0.001
120	1850.7000025	0.001	1909.3000028	0.001
132	1850.7000017	0.001	1909.3000021	0.001

Note: The applicant defined the normal working voltage is from 108 Vac to 132 Vac.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 2			
	Channel Bandwidth: 1.4 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	1850.7000020	0.001	1909.3000038	0.002
-20	1850.7000015	0.001	1909.3000014	0.001
-10	1850.7000027	0.001	1909.3000023	0.001
0	1850.7000018	0.001	1909.3000023	0.001
10	1850.7000036	0.002	1909.3000038	0.002
20	1850.6999962	-0.002	1909.2999980	-0.001
30	1850.6999975	-0.001	1909.2999976	-0.001
40	1850.6999971	-0.002	1909.2999968	-0.002
50	1850.6999976	-0.001	1909.2999967	-0.002

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 2			
	Channel Bandwidth: 3 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
108	1851.5000025	0.001	1908.5000019	0.001
120	1851.5000016	0.001	1908.5000024	0.001
132	1851.5000038	0.002	1908.5000038	0.002

Note: The applicant defined the normal working voltage is from 108 Vac to 132 Vac.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 2			
	Channel Bandwidth: 3 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	1851.5000032	0.002	1908.5000037	0.002
-20	1851.5000032	0.002	1908.5000018	0.001
-10	1851.5000015	0.001	1908.5000026	0.001
0	1851.5000028	0.002	1908.5000037	0.002
10	1851.5000015	0.001	1908.5000020	0.001
20	1851.4999979	-0.001	1908.4999962	-0.002
30	1851.4999979	-0.001	1908.4999985	-0.001
40	1851.4999973	-0.001	1908.4999965	-0.002
50	1851.4999989	-0.001	1908.4999988	-0.001

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 2			
	Channel Bandwidth: 5 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
108	1852.5000013	0.001	1907.5000029	0.002
120	1852.5000029	0.002	1907.5000030	0.002
132	1852.5000027	0.001	1907.5000032	0.002

Note: The applicant defined the normal working voltage is from 108 Vac to 132 Vac.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 2			
	Channel Bandwidth: 5 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	1852.5000012	0.001	1907.5000011	0.001
-20	1852.5000018	0.001	1907.5000010	0.001
-10	1852.5000029	0.002	1907.5000039	0.002
0	1852.5000039	0.002	1907.5000026	0.001
10	1852.5000018	0.001	1907.5000013	0.001
20	1852.4999964	-0.002	1907.4999965	-0.002
30	1852.4999973	-0.001	1907.4999964	-0.002
40	1852.4999963	-0.002	1907.4999986	-0.001
50	1852.4999970	-0.002	1907.4999962	-0.002

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 2			
	Channel Bandwidth: 10 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
108	1855.0000034	0.002	1905.0000030	0.002
120	1855.0000026	0.001	1905.0000017	0.001
132	1855.0000028	0.002	1905.0000011	0.001

Note: The applicant defined the normal working voltage is from 108 Vac to 132 Vac.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 2			
	Channel Bandwidth: 10 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	1855.0000040	0.002	1905.0000018	0.001
-20	1855.0000030	0.002	1905.0000016	0.001
-10	1855.0000015	0.001	1905.0000024	0.001
0	1855.0000039	0.002	1905.0000030	0.002
10	1855.0000037	0.002	1905.0000018	0.001
20	1854.9999989	-0.001	1904.9999969	-0.002
30	1854.9999985	-0.001	1904.9999979	-0.001
40	1854.9999986	-0.001	1904.9999968	-0.002
50	1854.9999965	-0.002	1904.9999960	-0.002

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 2			
	Channel Bandwidth: 15 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
108	1857.5000038	0.002	1902.5000013	0.001
120	1857.5000018	0.001	1902.5000019	0.001
132	1857.5000019	0.001	1902.5000034	0.002

Note: The applicant defined the normal working voltage is from 108 Vac to 132 Vac.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 2			
	Channel Bandwidth: 15 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	1857.5000019	0.001	1902.5000019	0.001
-20	1857.5000012	0.001	1902.5000040	0.002
-10	1857.5000023	0.001	1902.5000038	0.002
0	1857.5000018	0.001	1902.5000013	0.001
10	1857.5000011	0.001	1902.5000029	0.002
20	1857.4999983	-0.001	1902.4999960	-0.002
30	1857.4999990	-0.001	1902.4999970	-0.002
40	1857.4999967	-0.002	1902.4999974	-0.001
50	1857.4999965	-0.002	1902.4999986	-0.001

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 2			
	Channel Bandwidth: 20 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
108	1860.0000017	0.001	1900.0000012	0.001
120	1860.0000026	0.001	1900.0000024	0.001
132	1860.0000022	0.001	1900.0000018	0.001

Note: The applicant defined the normal working voltage is from 108 Vac to 132 Vac.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 2			
	Channel Bandwidth: 20 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	1860.0000040	0.002	1900.0000029	0.002
-20	1860.0000040	0.002	1900.0000027	0.001
-10	1860.0000010	0.001	1900.0000026	0.001
0	1860.0000017	0.001	1900.0000029	0.002
10	1860.0000035	0.002	1900.0000038	0.002
20	1859.9999983	-0.001	1899.9999976	-0.001
30	1859.9999969	-0.002	1899.9999963	-0.002
40	1859.9999974	-0.001	1899.9999990	-0.001
50	1859.9999977	-0.001	1899.9999981	-0.001

4.4 Occupied Bandwidth Measurement


4.4.1 Test Procedure

For the 26dBc bandwidth measurement method, please refer to section 5.4.3 of ANSI C63.26.

- The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be wide enough to see sufficient roll off of the signal to make the measurement.
- The nominal RBW shall be in the range of 1% to 5% of the anticipated OBW, and the VBW shall be set $\geq 3 \times \text{RBW}$.
- Set the reference level of the instrument as required to prevent the signal amplitude from exceeding the maximum spectrum analyzer input mixer level for linear operation. See guidance provided in 4.2.3.
- The dynamic range of the spectrum analyzer at the selected RBW shall be more than 10 dB below the target “-X dB” requirement, i.e., if the requirement calls for measuring the -26 dB OBW, the spectrum analyzer noise floor at the selected RBW shall be at least 36 dB below the reference level.
- Set spectrum analyzer detection mode to peak, and the trace mode to max hold.
- Determine the following reference values: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace (this is the reference value).
- Determine the “-X dB amplitude” as equal to (Reference Value - X). Alternatively, this calculation can be performed on the spectrum analyzer using the delta-marker measurement function.
- Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB amplitude” determined in step f). If a marker is below this “-X dB amplitude” value it should be as close as possible to this value. The OBW is the positive frequency difference between the two markers.
- The OBW shall be reported by providing plot(s) of the measuring instrument display, to include markers depicting the relevant frequency and amplitude information (e.g., marker table). The frequency and amplitude axis and scale shall be clearly labeled. Tabular data may be reported in addition to the plot(s).

For the occupied bandwidth measurement method, please refer to section 5.4.4 of ANSI C63.26.

4.4.2 Test Setup

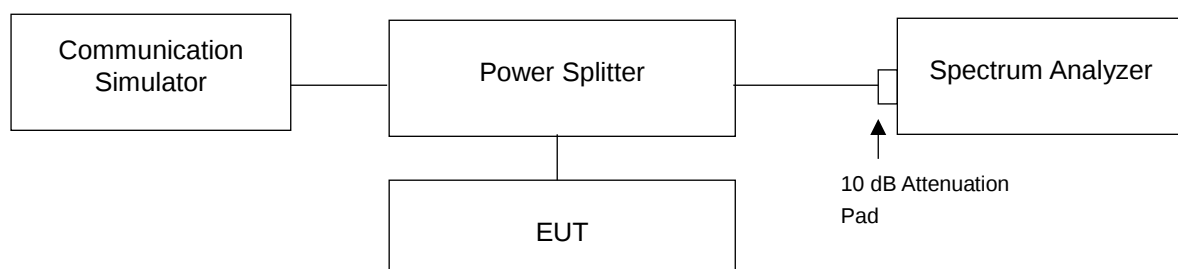


4.4.3 Test Result

WCDMA

Test Condition	Channel	Frequency (MHz)	Occupied bandwidth (MHz)	26dB Bandwidth (MHz)
WCDMA	9262	1852.4	4.14	4.70
WCDMA	9400	1880.0	4.13	4.71
WCDMA	9538	1907.6	4.13	4.69
HSDPA	9262	1852.4	4.14	4.68
HSDPA	9400	1880.0	4.14	4.70
HSDPA	9538	1907.6	4.15	4.70
HSUPA	9262	1852.4	4.14	4.70
HSUPA	9400	1880.0	4.14	4.72
HSUPA	9538	1907.6	4.14	4.70



Spectrum Plot of Worst Value

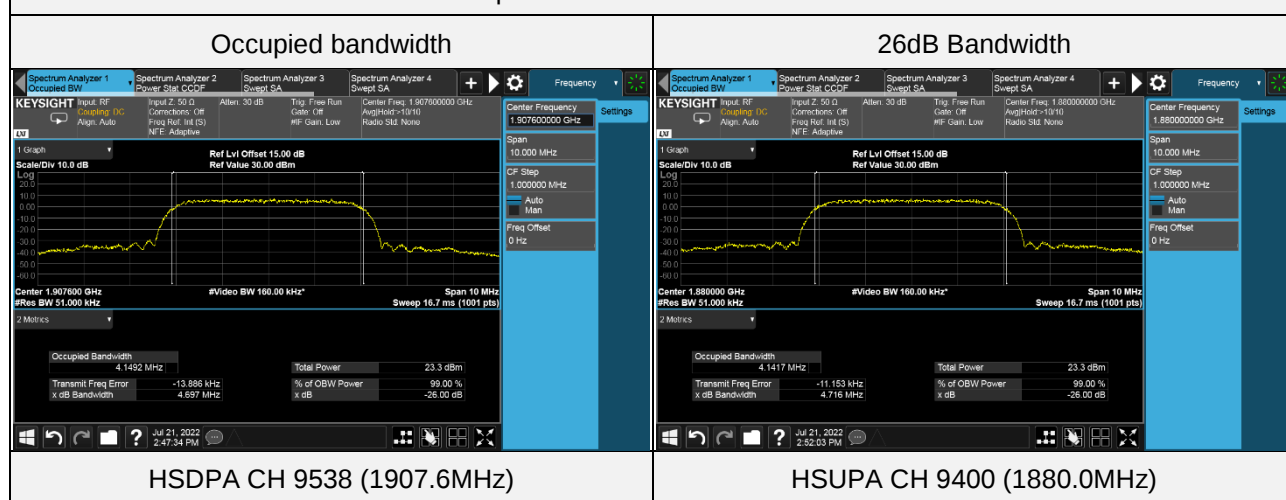

LTE Band 2 (Channel Bandwidth 1.4MHz)

Test Condition	Channel	Frequency (MHz)	Occupied bandwidth (MHz)	26 dB Bandwidth (MHz)
QPSK	18607	1850.7	1.0898	1.248
QPSK	18900	1880	1.0927	1.258
QPSK	19193	1909.3	1.0912	1.268
16QAM	18607	1850.7	1.0878	1.250
16QAM	18900	1880	1.0890	1.250
16QAM	19193	1909.3	1.0893	1.244



Spectrum Plot of Worst Value

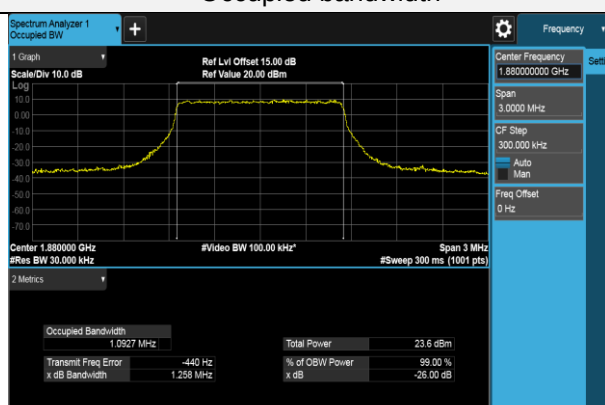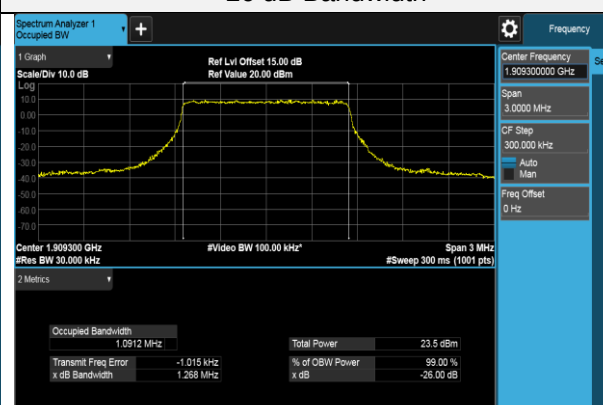Occupied bandwidth	26 dB Bandwidth
	
QPSK CH 18900 (1880MHz)	QPSK CH 19193 (1909.3MHz)

LTE Band 2 (Channel Bandwidth 3MHz)

Test Condition	Channel	Frequency (MHz)	Occupied bandwidth (MHz)	26 dB Bandwidth (MHz)
QPSK	18615	1851.5	2.6981	2.917
QPSK	18900	1880	2.6980	2.911
QPSK	19185	1908.5	2.6979	2.915
16QAM	18615	1851.5	2.6985	2.921
16QAM	18900	1880	2.7000	2.929
16QAM	19185	1908.5	2.6965	2.917



Spectrum Plot of Worst Value

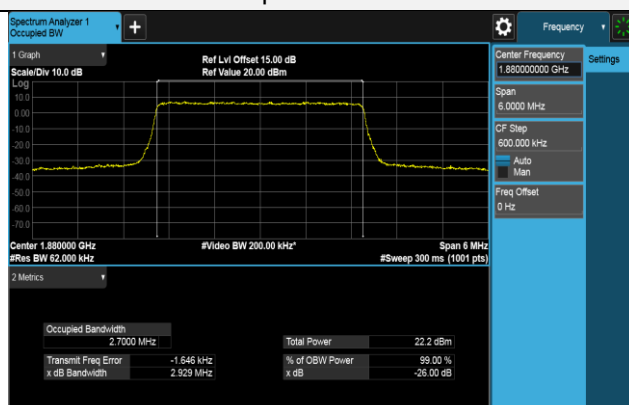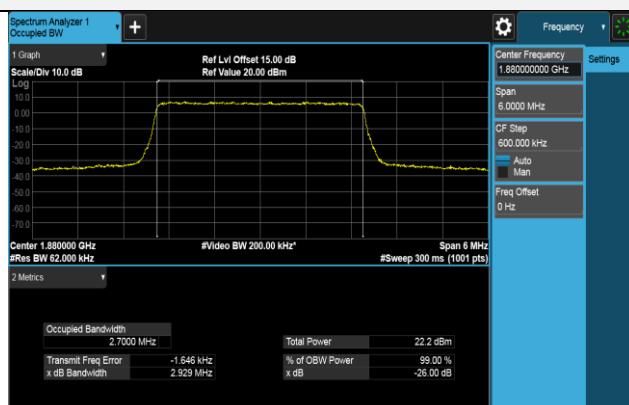Occupied bandwidth	26 dB Bandwidth
	
16QAM CH 18900 (1880MHz)	16QAM CH 18900 (1880MHz)

LTE Band 2 (Channel Bandwidth 5MHz)

Test Condition	Channel	Frequency (MHz)	Occupied bandwidth (MHz)	26 dB Bandwidth (MHz)
QPSK	18625	1852.5	4.4957	4.834
QPSK	18900	1880	4.4941	4.829
QPSK	19175	1907.5	4.4937	4.818
16QAM	18625	1852.5	4.4925	4.828
16QAM	18900	1880	4.4900	4.834
16QAM	19175	1907.5	4.4905	4.831



Spectrum Plot of Worst Value

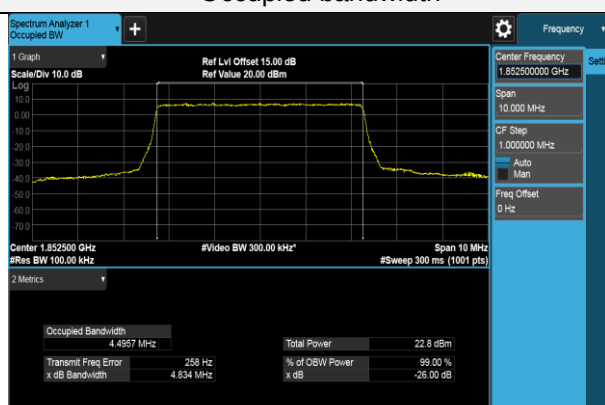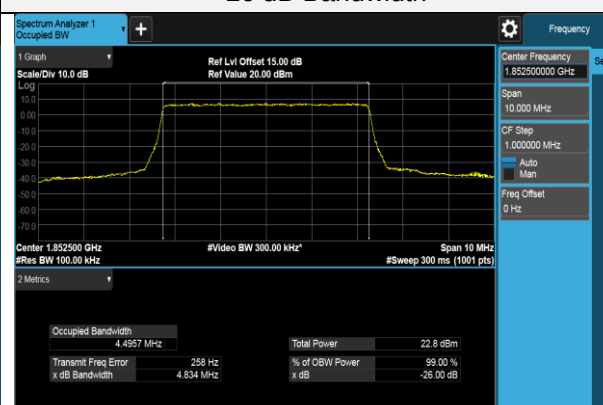Occupied bandwidth	26 dB Bandwidth
	
QPSK CH 18625 (1852.5MHz)	QPSK CH 18625 (1852.5MHz)

LTE Band 2 (Channel Bandwidth 10MHz)

Test Condition	Channel	Frequency (MHz)	Occupied bandwidth (MHz)	26 dB Bandwidth (MHz)
QPSK	18650	1855	8.9621	9.532
QPSK	18900	1880	8.9514	9.505
QPSK	19150	1905	8.9420	9.511
16QAM	18650	1855	8.9591	9.507
16QAM	18900	1880	8.9583	9.505
16QAM	19150	1905	8.9371	9.487



Spectrum Plot of Worst Value

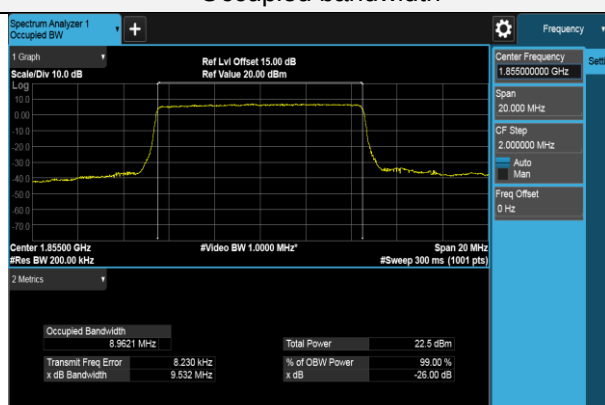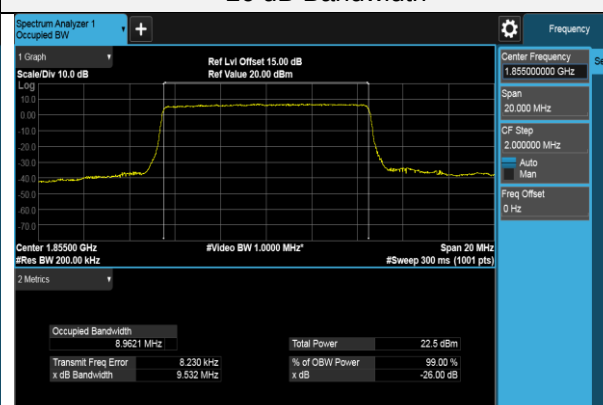Occupied bandwidth	26 dB Bandwidth
	
QPSK CH 18650 (1855MHz)	QPSK CH 18650 (1855MHz)

LTE Band 2 (Channel Bandwidth 15MHz)

Test Condition	Channel	Frequency (MHz)	Occupied bandwidth (MHz)	26 dB Bandwidth (MHz)
QPSK	18675	1857.5	13.4250	14.227
QPSK	18900	1880	13.4274	14.220
QPSK	19125	1902.5	13.4073	14.214
16QAM	18675	1857.5	13.4209	14.224
16QAM	18900	1880	13.4172	14.226
16QAM	19125	1902.5	13.3933	14.210



Spectrum Plot of Worst Value

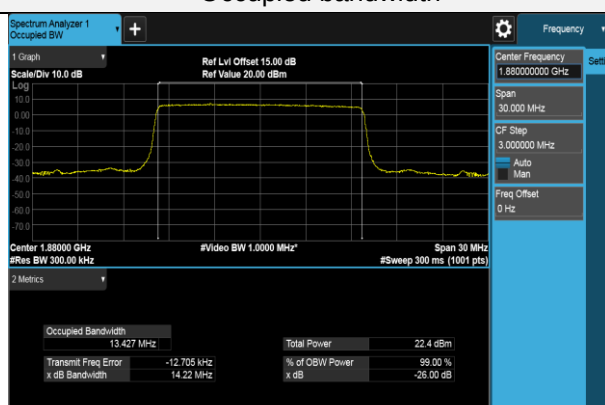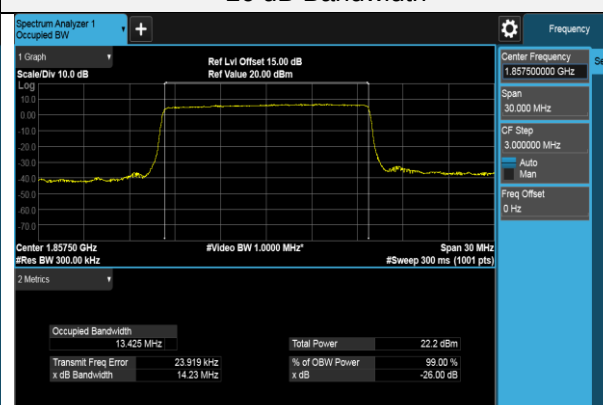Occupied bandwidth	26 dB Bandwidth
 Center Frequency: 1.88000000 GHz Span: 30.000 MHz CF Step: 3.000000 MHz Auto Man Freq Offset: 0 Hz Center 1.88000 GHz #Video BW 1.0000 MHz #Res BW 300.00 kHz #Sweep 300 ms (1001 pts) Occupied Bandwidth: 13.427 MHz Total Power: 22.4 dBm Transmit Freq Error: -12.705 kHz x dB Bandwidth: 14.22 MHz	 Center Frequency: 1.85750000 GHz Span: 30.000 MHz CF Step: 3.000000 MHz Auto Man Freq Offset: 0 Hz Center 1.85750 GHz #Video BW 1.0000 MHz #Res BW 300.00 kHz #Sweep 300 ms (1001 pts) Occupied Bandwidth: 13.425 MHz Total Power: 22.2 dBm Transmit Freq Error: 23.919 kHz x dB Bandwidth: 14.23 MHz
QPSK CH 18900 (1880MHz)	QPSK CH 18675 (1857.5MHz)

LTE Band 2 (Channel Bandwidth 20MHz)

Test Condition	Channel	Frequency (MHz)	Occupied bandwidth (MHz)	26 dB Bandwidth (MHz)
QPSK	18700	1860	17.8893	18.998
QPSK	18900	1880	17.8826	19.009
QPSK	19100	1900	17.8634	18.981
16QAM	18700	1860	17.8932	19.012
16QAM	18900	1880	17.8955	18.989
16QAM	19100	1900	17.8792	19.010

Spectrum Plot of Worst Value

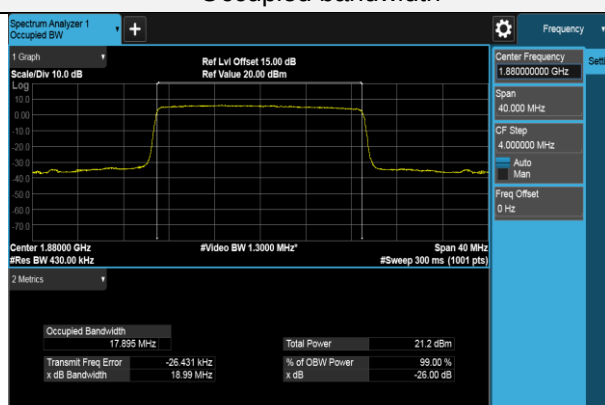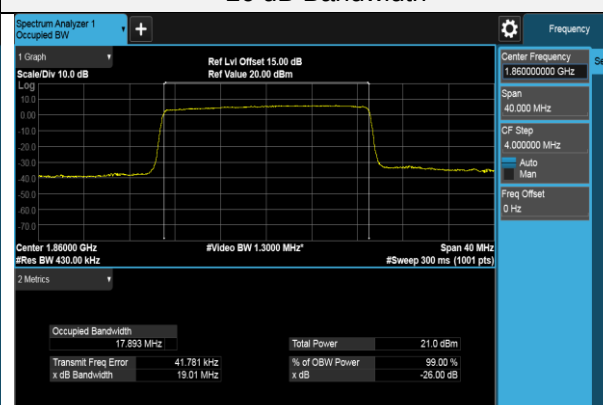
Occupied bandwidth	26 dB Bandwidth
	
16QAM CH 18900 (1880MHz)	16QAM CH 18700 (1860MHz)

4.5 Band Edge Measurement

4.5.1 Limits of Band Edge Measurement

Power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

4.5.2 Test Setup

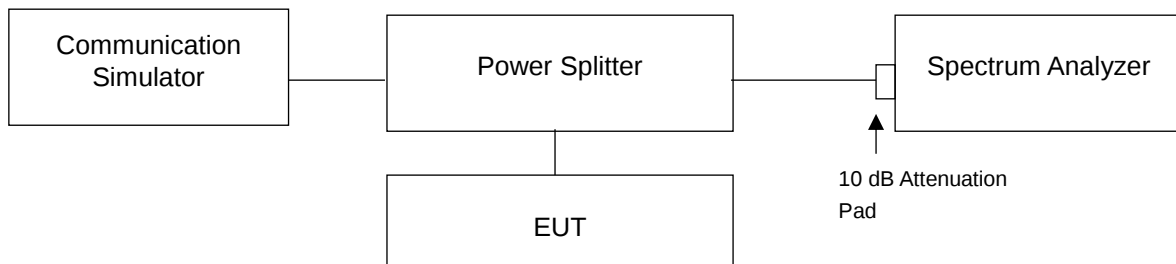


4.5.3 Test Procedures


- All measurements were done at low and high operational frequency range.
- The detector of the spectrum is RMS, and if the device can be configured to transmit continuously (duty cycle $\geq 98\%$), set the (sweep time) $>$ (number of points in sweep) $\times$ (symbol period) (e.g., by a factor of $10 \times$ symbol period $\times$ number of points). Increasing the sweep time (i.e., slowing the sweep speed) will allow for averaging over multiple symbols.
- The center frequency of spectrum is the band edge frequency and span is 5 MHz. RB of the spectrum is 51 kHz and VB of the spectrum is 160 kHz (WCDMA / HSDPA / HSUPA).
- The center frequency of spectrum is the band edge frequency and span is 1 MHz. RB of the spectrum is 15 kHz and VB of the spectrum is 51 kHz (LTE Bandwidth 1.4 MHz).
- The center frequency of spectrum is the band edge frequency and span is 1 MHz. RB of the spectrum is 30 kHz and VB of the spectrum is 100 kHz (LTE Bandwidth 3 MHz).
- The center frequency of spectrum is the band edge frequency and span is 1 MHz. RB of the spectrum is 51 kHz and VB of the spectrum is 160 kHz (LTE Bandwidth 5 MHz).
- The center frequency of spectrum is the band edge frequency and span is 1 MHz. RB of the spectrum is 100 kHz and VB of the spectrum is 300 kHz (LTE Bandwidth 10 MHz).
- The center frequency of spectrum is the band edge frequency and span is 1 MHz. RB of the spectrum is 150 kHz and VB of the spectrum is 470 kHz (LTE Bandwidth 15 MHz).
- The center frequency of spectrum is the band edge frequency and span is 1 MHz. RB of the spectrum is 200 kHz and VB of the spectrum is 1 MHz (LTE Bandwidth 20 MHz).
- Record the max trace plot into the test report.

4.5.4 Test Results


WCDMA

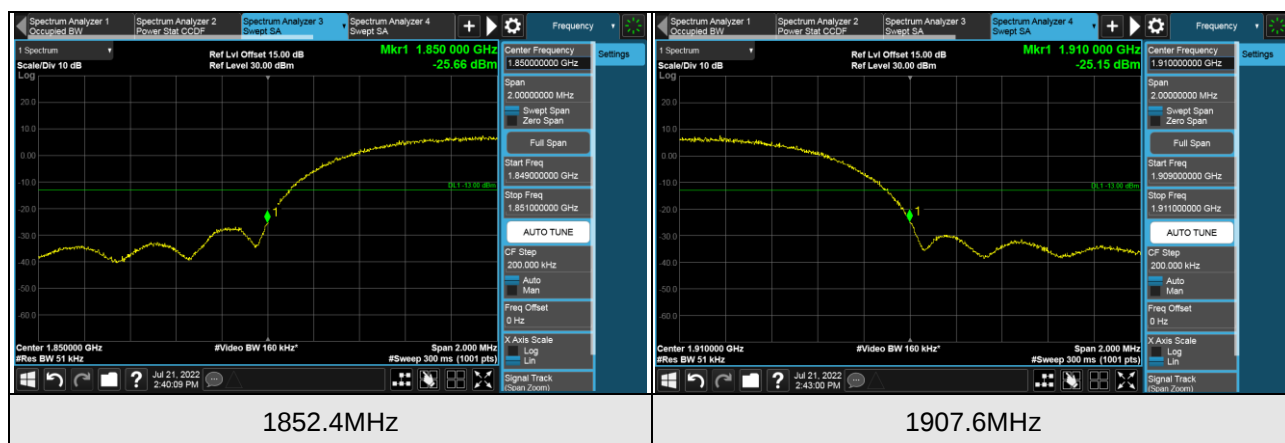


HSDPA

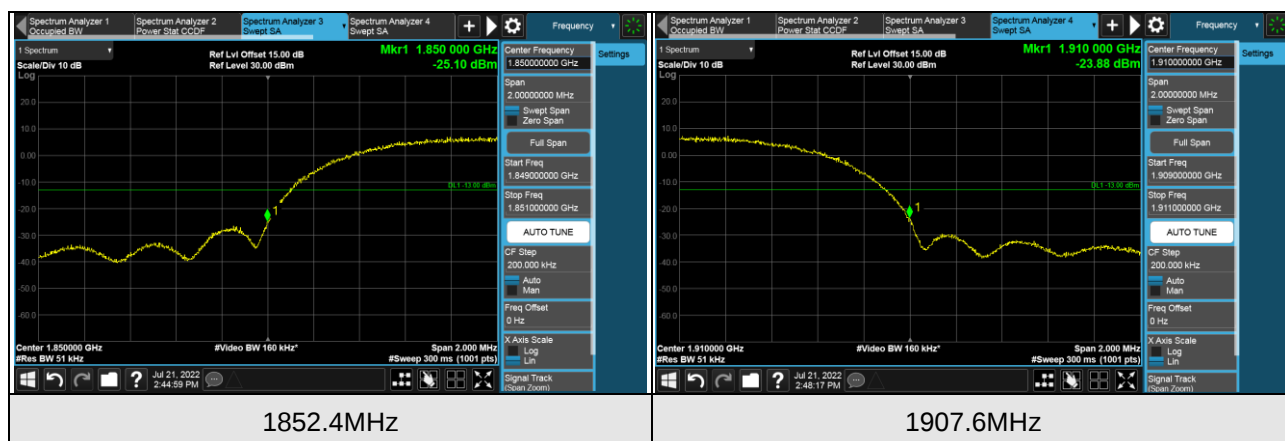


HSUPA

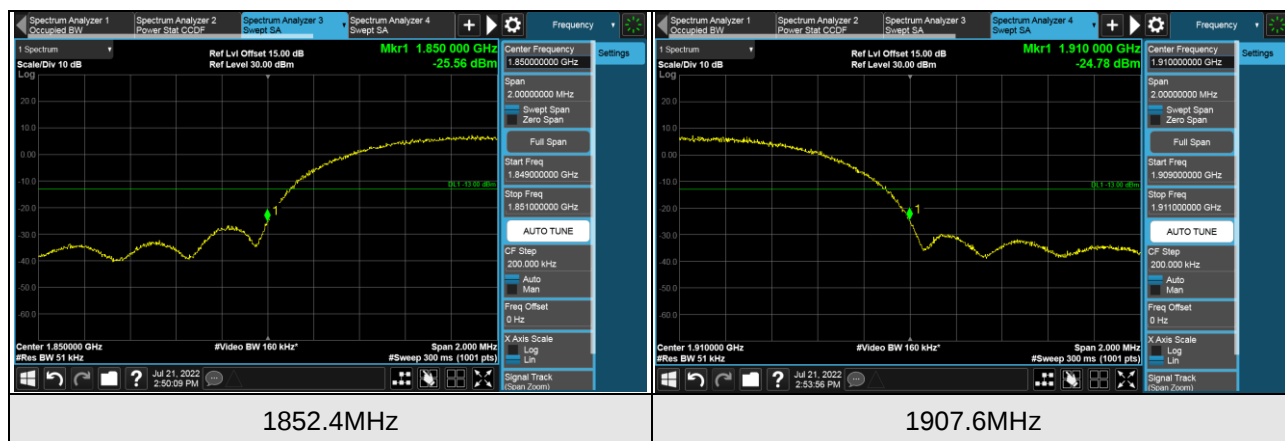


LTE Band 2 (Channel Bandwidth 1.4MHz)

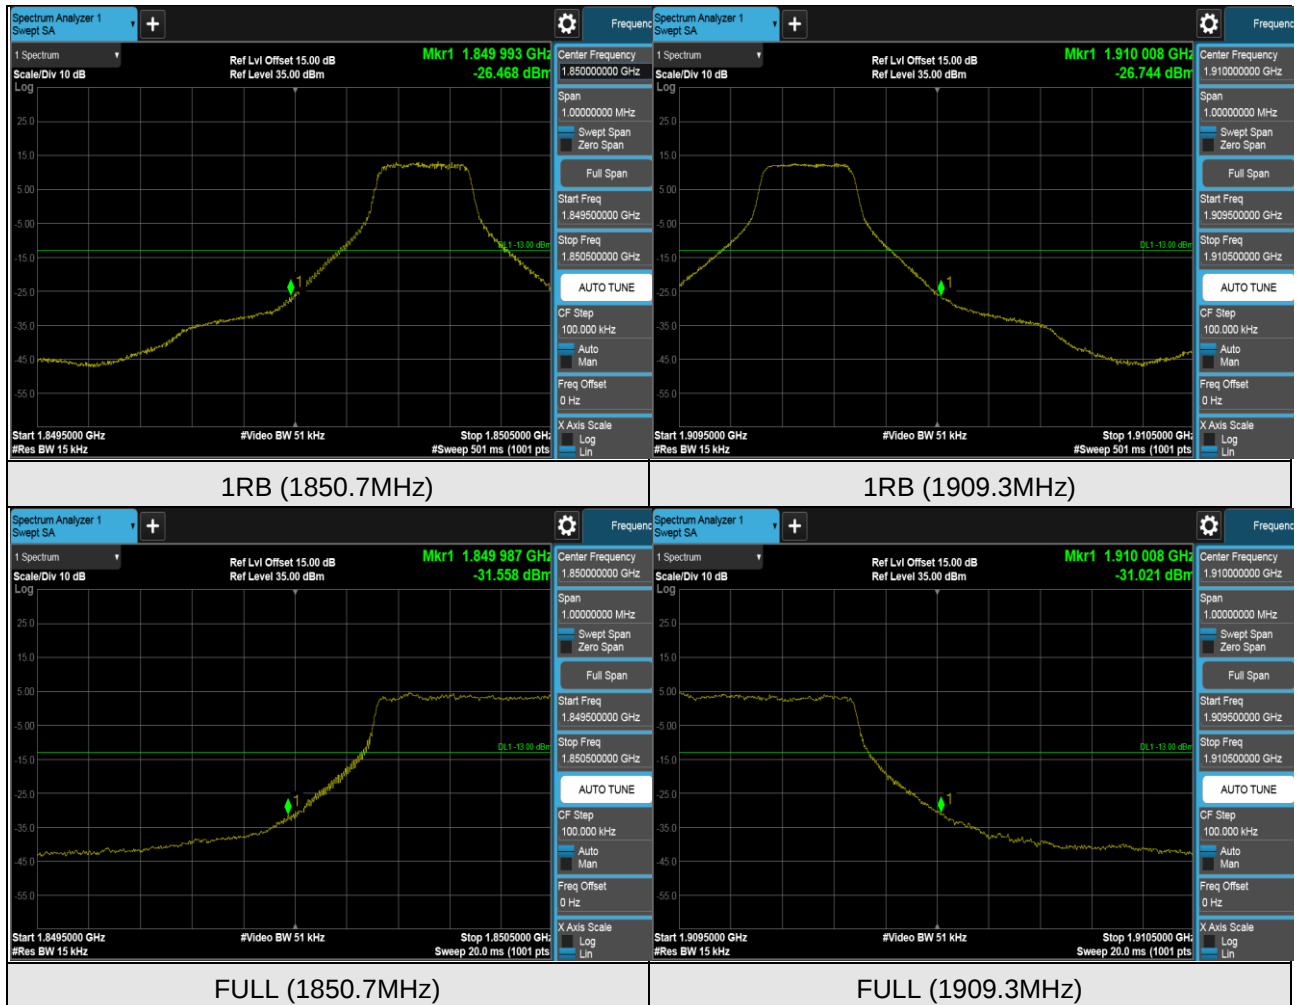


LTE Band 2 (Channel Bandwidth 3MHz)

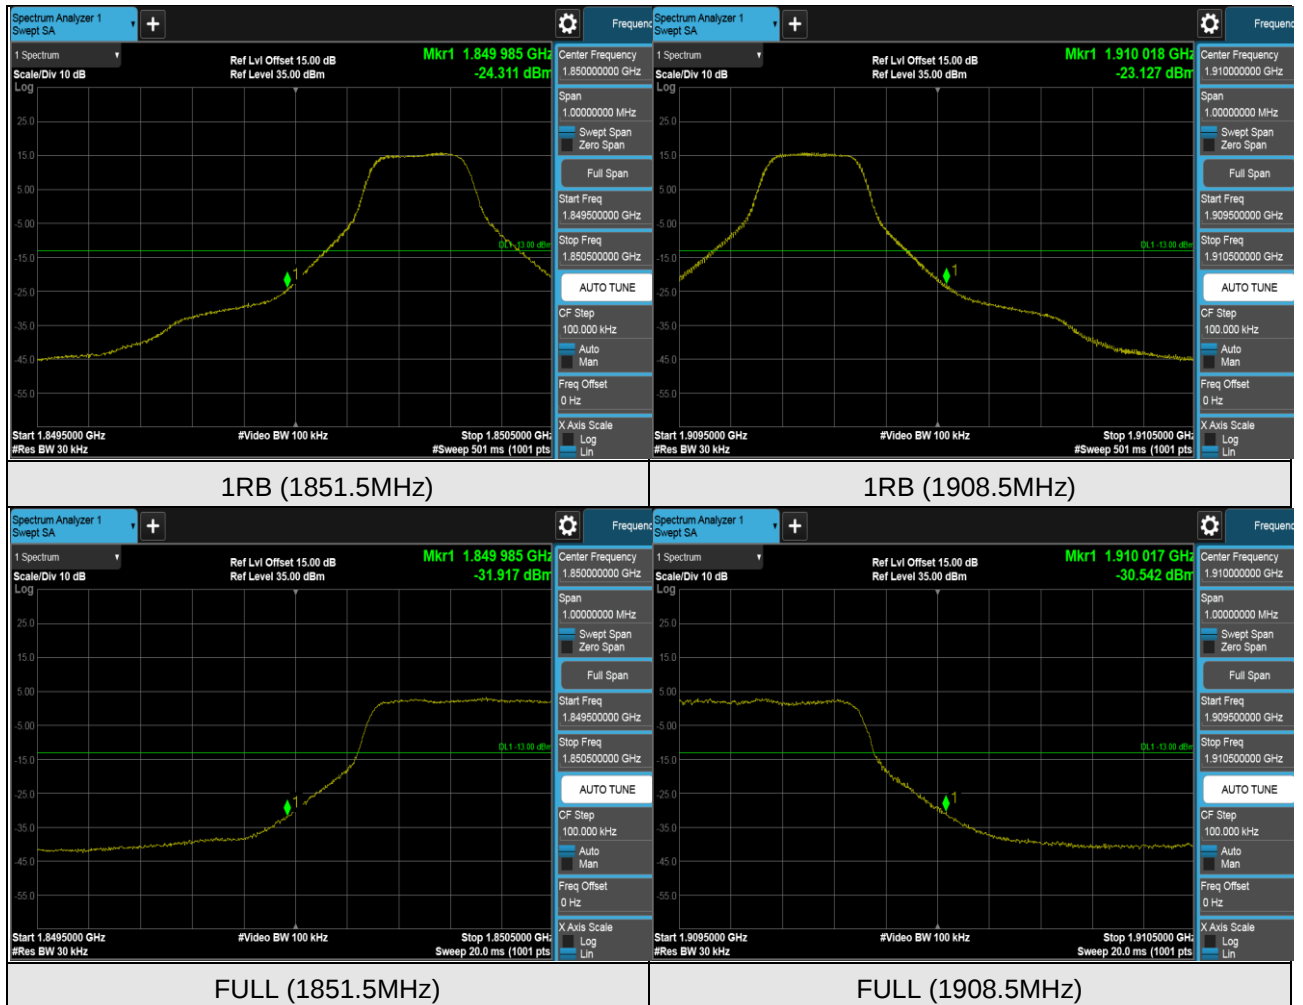


LTE Band 2 (Channel Bandwidth 5MHz)

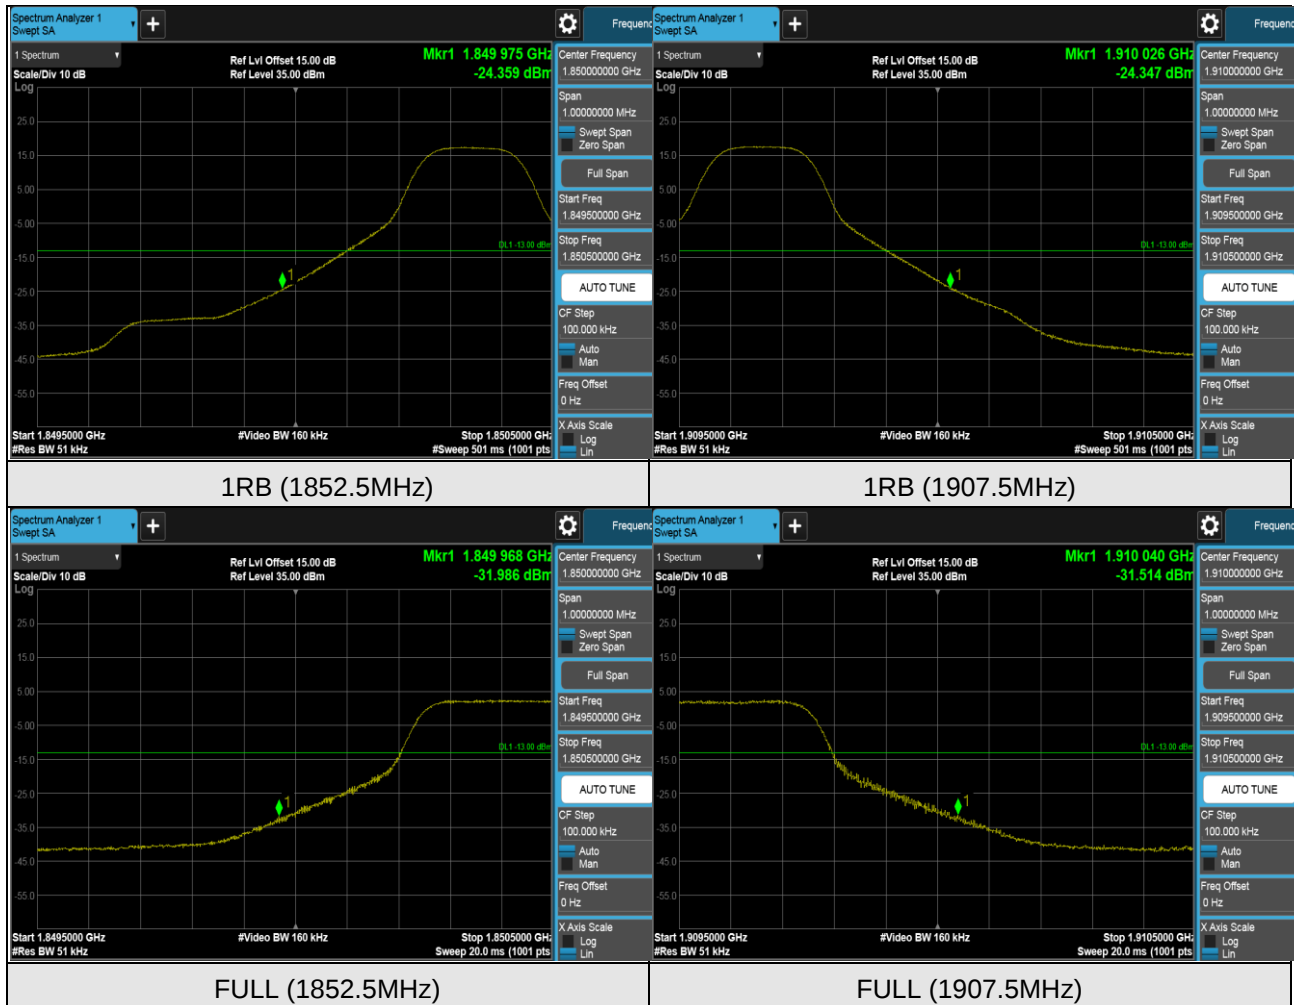

LTE Band 2 (Channel Bandwidth 10MHz)

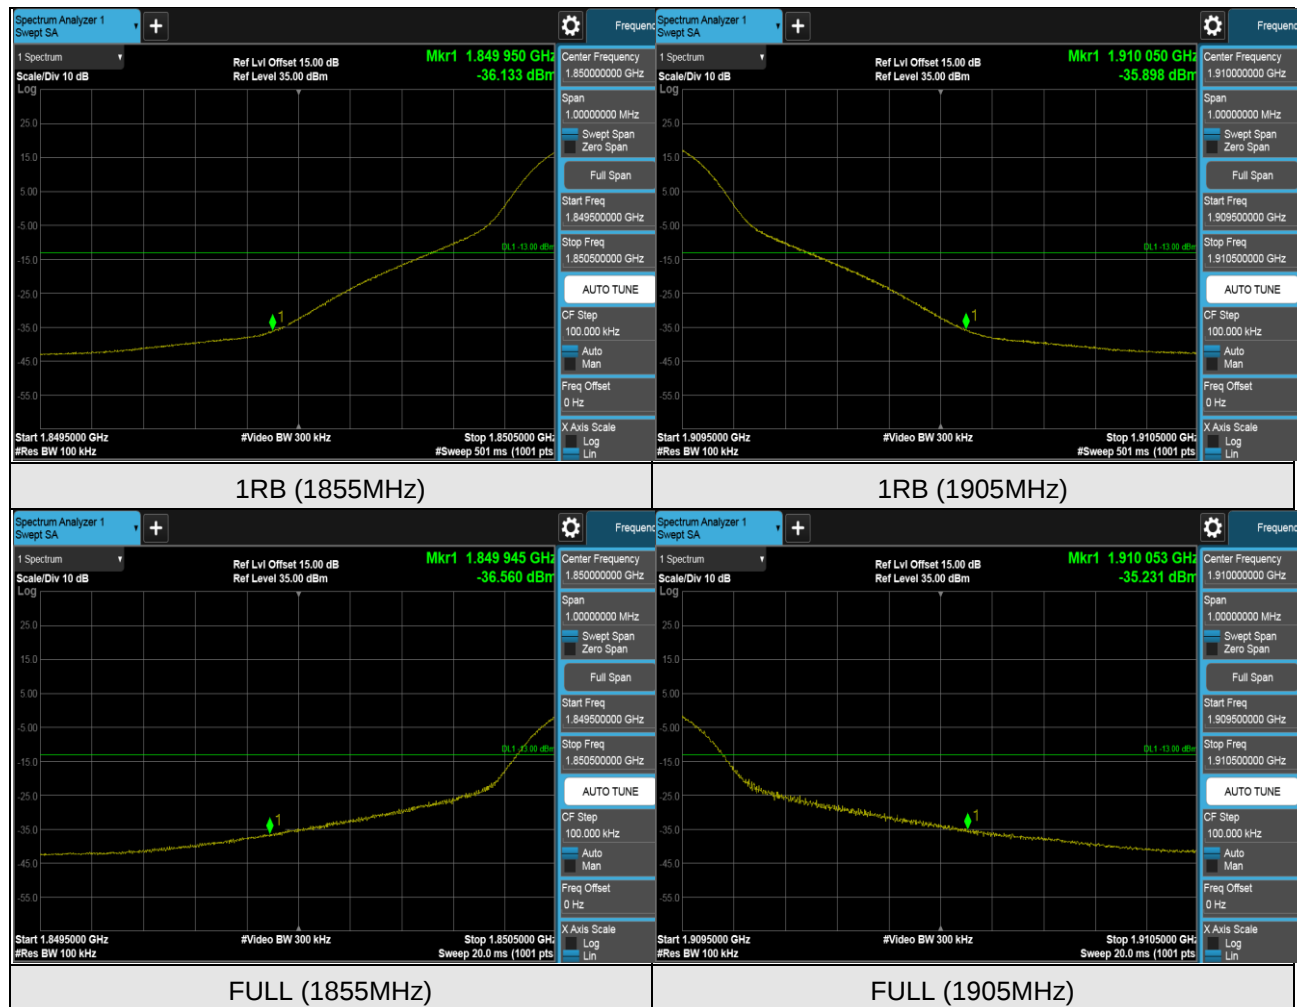

LTE Band 2 (Channel Bandwidth 15MHz)

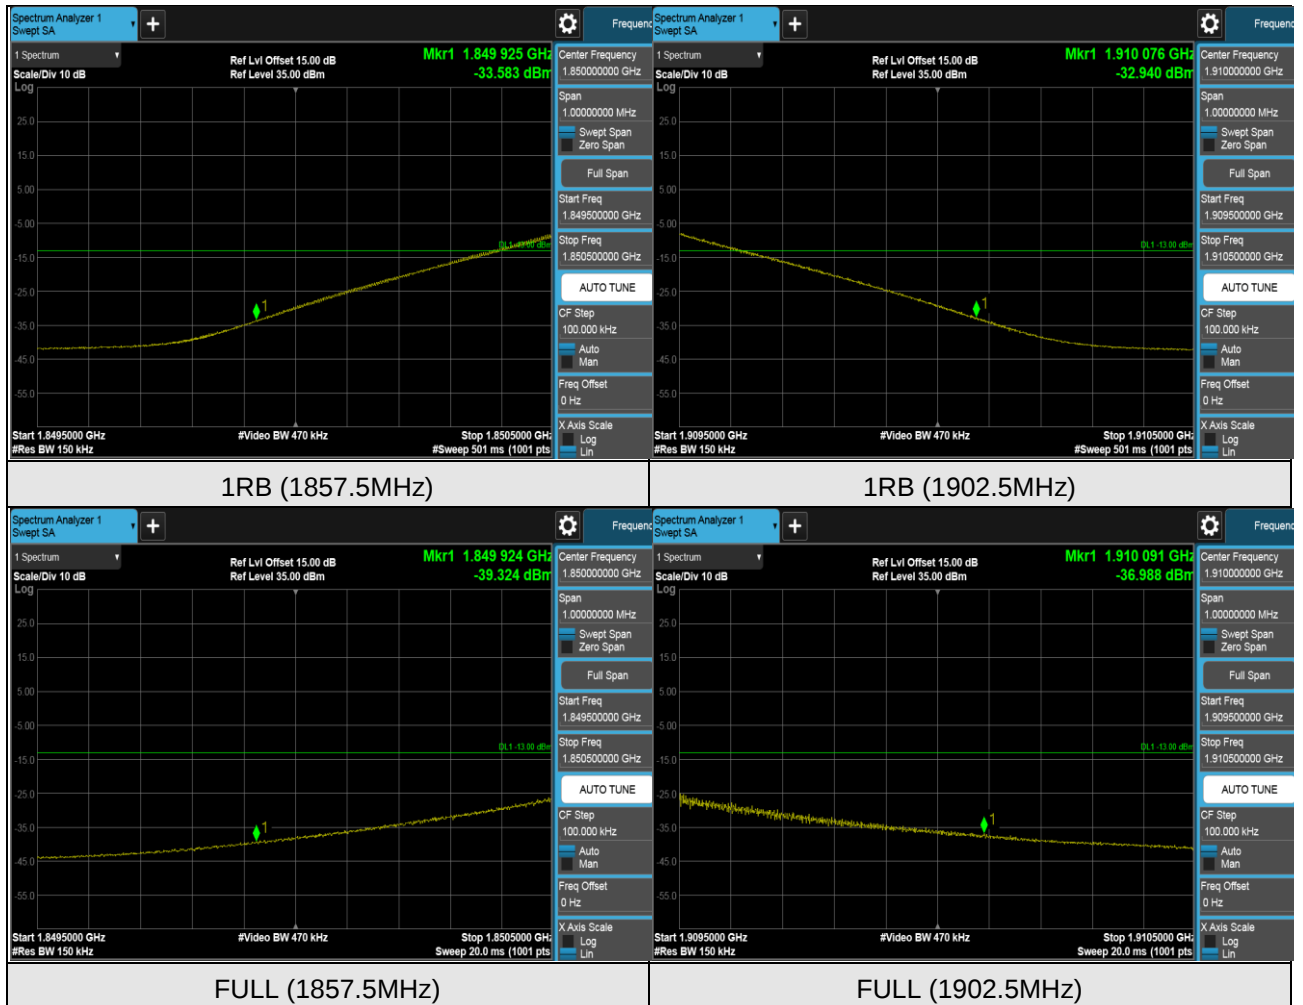

LTE Band 2 (Channel Bandwidth 20MHz)

