



中国认可  
国际互认  
检测  
TESTING  
CNAS L2264

# RF TEST REPORT

**Applicant** UAB TELTONIKA  
**FCC ID** 2AJLOTM2500TLT  
**Brand** TELTONIKA  
**Product** GSM/GPRS/GNSS/BLUETOOTH module  
**Model** TM2500  
**Report No.** RXA1606-0123RF03  
**Issue Date** September 2, 2016

TA Technology (Shanghai) Co., Ltd. tested the above equipment in accordance with the requirements in **FCC CFR47 Part 15C (2015)**. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Performed by: Xianqing Li

Approved by: Kai Xu

---

**TA Technology (Shanghai) Co., Ltd.**

No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China

TEL: +86-021-50791141/2/3

FAX: +86-021-50791141/2/3-8000

## Table of Contents

1	Test Laboratory .....	4
1.1	Notes of the Test Report.....	4
1.2	Test facility .....	4
1.3	Testing Location.....	5
2	General Description of Equipment under Test.....	6
2.1	Client Information.....	6
2.2	General information .....	6
2.3	Applied Standards .....	7
3	Information about the FHSS characteristics .....	8
3.1	Pseudorandom Frequency Hopping Sequence .....	8
3.2	Equal Hopping Frequency Use.....	9
3.3	System Receiver Input Bandwidth.....	9
4	Test Information.....	10
4.1	Test Mode .....	10
4.2	Peak Power Output –Conducted.....	11
4.3	Occupied Bandwidth (20dB).....	13
4.4	Frequency Separation .....	17
4.5	Time of Occupancy (Dwell Time).....	19
4.6	Band Edge Compliance .....	24
4.7	Spurious Radiated Emissions in the Restricted Band.....	27
4.8	Number of hopping Frequency .....	30
4.9	Spurious RF Conducted Emissions.....	32
4.10	Radiates Emission .....	37
4.11	Conducted Emission.....	64
5	Main Test Instruments .....	69
ANNEX A:	EUT Appearance and Test Setup.....	70
A.1	EUT Appearance .....	70
A.2	Test Setup.....	72

## Summary of Measurement Results

<b>Number</b>	<b>Summary of measurements of results</b>	<b>Clause in FCC rules</b>	<b>Verdict</b>
1	Peak Power Output -Conducted	15.247(b)(1)	PASS
2	Occupied Bandwidth (20dB)	15.247(a)(1)	PASS
3	Frequency Separation	15.247(a)(1)	PASS
4	Time of Occupancy (Dwell Time)	15.247(a)(1)(iii)	PASS
5	Band Edge Compliance	15.247(d)	PASS
6	Spurious Radiated Emissions in the restricted band	15.247(d),15.205,15.209	PASS
7	Number of Hopping Frequency	15.247(a)(1)(iii)	PASS
8	Spurious RF Conducted Emissions	15.247(d)	PASS
9	Radiates Emission	15.247(d),15.205,15.209	PASS
10	AC Power Line Conducted Emission	15.207	PASS
Date of Testing: July 28, 2016 ~ August 26, 2016			

# 1 Test Laboratory

## 1.1 Notes of the Test Report

This report shall not be reproduced in full or partial, without the written approval of TA technology (shanghai) co., Ltd. The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. Measurement Uncertainties were not taken into account and are published for informational purposes only. This report is written to support regulatory compliance of the applicable standards stated above. This report must not be used by the client to claim product certification, approval, or endorsement by CNAS or any government agencies.

## 1.2 Test facility

### **CNAS (accreditation number: L2264)**

TA Technology (Shanghai) Co., Ltd. has obtained the accreditation of China National Accreditation Service for Conformity Assessment (CNAS).

### **FCC (recognition number is 428261)**

TA Technology (Shanghai) Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

### **IC (recognition number is 8510A)**

TA Technology (Shanghai) Co., Ltd. has been listed by industry Canada to perform electromagnetic emission measurement.

### **A2LA (Certificate Number: 3857.01)**

TA Technology (Shanghai) Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.

### 1.3 Testing Location

Company: TA Technology (Shanghai) Co., Ltd.  
Address: No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China  
City: Shanghai  
Post code: 201201  
Country: P. R. China  
Contact: Xu Kai  
Telephone: +86-021-50791141/2/3  
Fax: +86-021-50791141/2/3-8000  
Website: <http://www.ta-shanghai.com>  
E-mail: [xukai@ta-shanghai.com](mailto:xukai@ta-shanghai.com)

## 2 General Description of Equipment under Test

### Client Information

<b>Applicant</b>	UAB TELTONIKA
<b>Applicant address</b>	Saltoniskiu st. 10c, Vilnius, Lithuania
<b>Manufacturer</b>	UAB TELTONIKA
<b>Manufacturer address</b>	Saltoniskiu st. 10c, Vilnius, Lithuania

### General information

<b>Model:</b>	TM2500		
<b>IMEI:</b>	357454070000011		
<b>HW Version:</b>	TM2500_01		
<b>SW Version:</b>	TM25_D_00.00.01.00		
<b>Power Supply:</b>	external power supply		
<b>Antenna Type:</b>	Internal Antenna		
<b>Test Mode(s):</b>	Basic Rate	Enhanced Data Rate(EDR)	
<b>Modulation Type:</b>	Frequency Hopping Spread Spectrum (FHSS)		
	GFSK	$\pi/4$ DQPSK	8DQPSK
<b>Packet Type: (Maximum Payload)</b>	DH5	2DH5	3DH5
<b>Max. Conducted Power</b>	-3.74dBm		
<b>Tested Frequency Range(s):</b>	2400 ~ 2483.5 MHz		
<b>Note:</b> 1. The information of the EUT is declared by the manufacturer. Please refer to the specifications or user manual for details.			

## **2.1 Applied Standards**

According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

### **Test standards**

- **FCC CFR47 Part 15C (2015) Radio Frequency Devices**
- **ANSI C63.10 (2013)**
- **DA00-705 Filing and Frequency Measurement Guidelines For Frequency Hopping Spread Spectrum System (2000).**


### 3 Information about the FHSS characteristics

#### 3.1 Pseudorandom Frequency Hopping Sequence

Frequency Hopping Systems. A spread spectrum system in which the carrier is modulated with the coded information in a conventional manner causing a conventional spreading of the RF energy about the frequency carrier. The frequency of the carrier is not fixed but changes at fixed intervals under the direction of a coded sequence. The wide RF bandwidth needed by such a system is not required by spreading of the RF energy about the carrier but rather to accommodate the range of frequencies to which the carrier frequency can hop. The test of a frequency hopping system is that the near term distribution of hops appears random, the long term distribution appears evenly distributed over the hop set, and sequential hops are randomly distributed in both direction and magnitude of change in the hop set.

The selection scheme chooses a segment of 32 hop frequencies spanning about 64 MHz and visits these hops in a pseudo-random order. Next, a different 32-hop segment is chosen, etc. In the page, master page response, slave page response, page scan, inquiry, inquiry response and inquiry scan hopping sequences, the same 32-hop segment is used all the time (the segment is selected by the address; different devices will have different paging segments).

When the basic channel hopping sequence is selected, the output constitutes a pseudo-random sequence that slides through the 79 hops. The principle is depicted in the figure below.

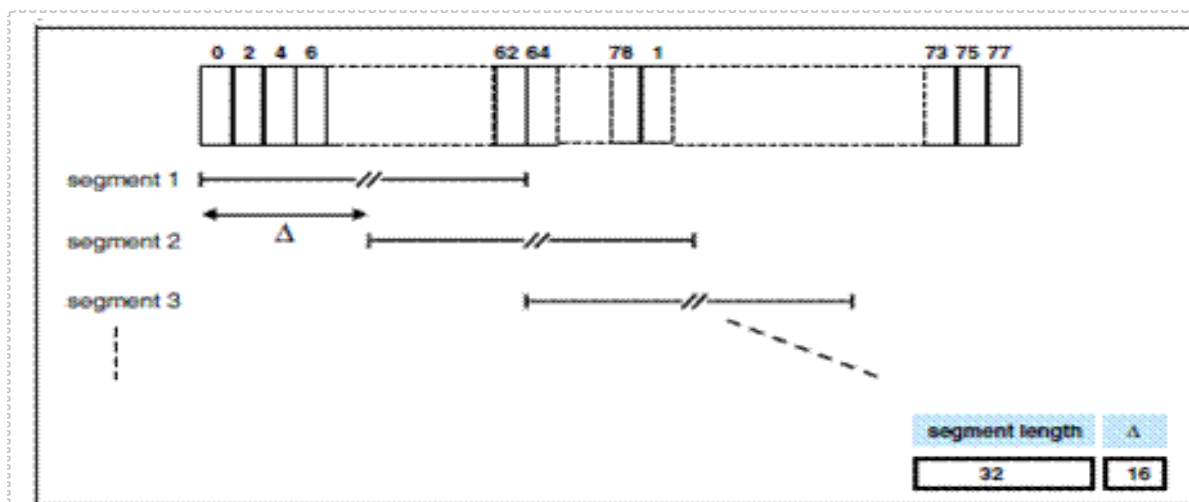

Hop selection scheme in CONNECTION state.

Pseudorandom Frequency Hopping Sequence Table as below:

Channel: 08, 24, 40, 56, 40, 56, 72, 09, 01, 09, 33, 41, 33, 41, 65, 73, 53, 69, 06, 22, 04, 20, 36, 52, 38, 46, 70, 78, 68, 76, 21, 29, 10, 26, 42, 58, 44, 60, 76, 13, 03, 11, 35, 43, 37, 45, 69, 77, 55, 71, 08, 24, 08, 24, 40, 56, 40, 48, 72, 01, 72, 01, 25, 33, 12, 28, 44, 60, 42, 58, 74, 11, 05, 13, 37, 45, etc.

Each frequency used equally on the average by each transmitter.

The system receiver have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shift frequencies in synchronization with the transmitted signals.



### **3.2 Equal Hopping Frequency Use**

All Bluetooth units participating in the Pico net are time and hop-synchronized to the channel. Each new transmission event begins on the next channel in the hopping sequence after the final channel used in the previous transmission event.

### **3.3 System Receiver Input Bandwidth**

Each channel bandwidth is 1MHz. The system receivers have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shift frequencies in synchronization with the transmitted signals.

## 4 Test Information

### 4.1 Test Mode

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

The radiated emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in stand-up position (Z axis) and the worst case was recorded.

Test Modes		
Band	Radiated Test Cases	Conducted Test Cases
BT	DH5 GFSK (Channel 0/39/78)	DH5 GFSK(Channel 0/39/78) 2DH5 $\pi/4$ -DQPSK(Channel 0/39/78) 3DH5 8DQPSK(Channel 0/39/78)

Note: The maximum RF output power levels are DH5 for GFSK modulation, For RSE and CSE, only the maximum RF output power is chosen.

## 4.2 Peak Power Output –Conducted


### Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

### Methods of Measurement

During the process of the testing, The EUT was connected to the spectrum analyzer and Bluetooth test set via a power splitter with a known loss. The EUT is controlled by the Bluetooth test set to ensure max power transmission with proper modulation. The peak detector is used. RBW is set to 2 MHz; VBW is set to 6 MHz. These measurements have been tested at following channels: 0, 39, and 78.

### Test Setup

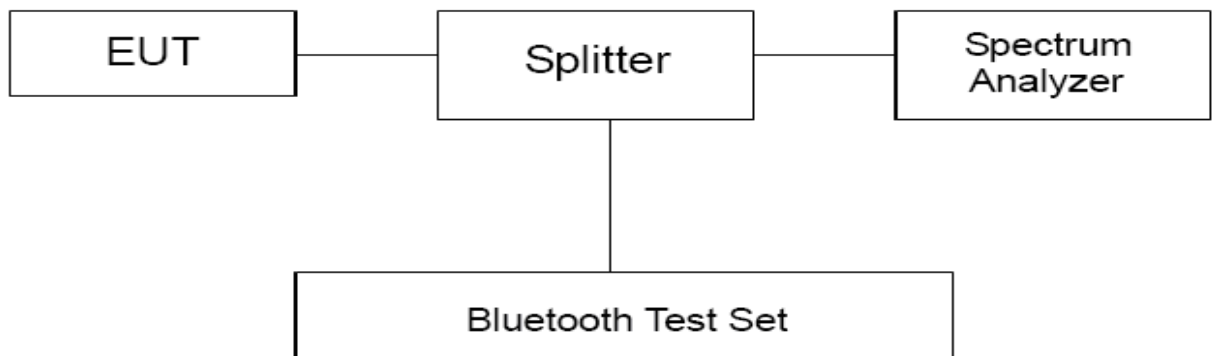

### Limits

Rule Part 15.247 (b) (1) specifies that " For frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts."

Peak Output Power	≤ 0.125W (21dBm)
-------------------	------------------

### Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 2$ ,  $U=0.44$  dB.

**Test Results**

Channel	Frequency (MHz)	Peak Output Power (dBm)			Conclusion
		DH5	2DH5	3DH5	
0	2402	-3.74	-5.41	-5.57	PASS
39	2441	-3.92	-5.45	-5.72	PASS
78	2480	-5.08	-6.66	-6.62	PASS

Note: The measured power density (dBm) has the offset with cable loss already.

### 4.3 Occupied Bandwidth (20dB)


#### Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

#### Method of Measurement

The EUT was connected to the spectrum analyzer and Bluetooth test set via a power splitter with a known loss. The occupied bandwidth is measured using spectrum analyzer. RBW is set to 30kHz and VBW is set to 100kHz on spectrum analyzer. -20dB occupied bandwidths are recorded.

#### Test Setup

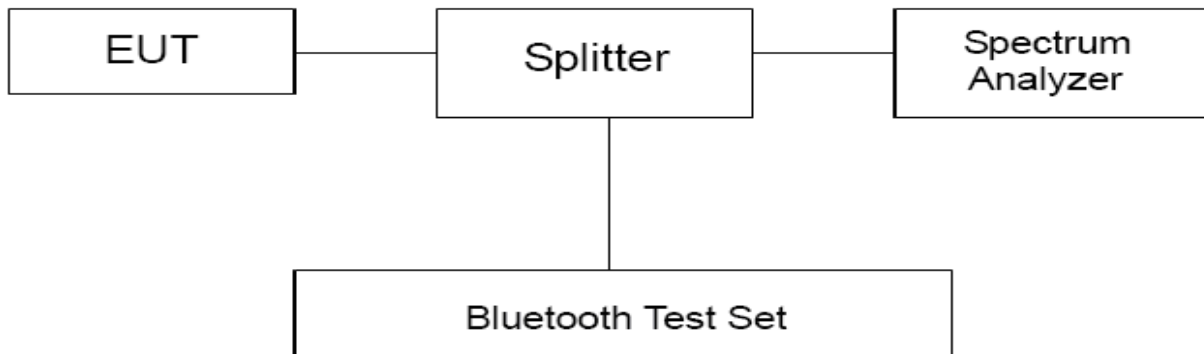

#### Limits







No specific occupied bandwidth requirements in part 15.247(a) (1).




#### Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 2$ ,  $U=936$  Hz.

**Test Results**

Mode	Channel	Frequency (MHz)	20dB Bandwidth(kHz)
DH5	0	2402	736.5
DH5	39	2441	827.6
DH5	78	2480	837.1
2DH5	0	2402	1161
2DH5	39	2441	1149
2DH5	78	2480	1151
3DH5	0	2402	1161
3DH5	39	2441	1161
3DH5	78	2480	1155

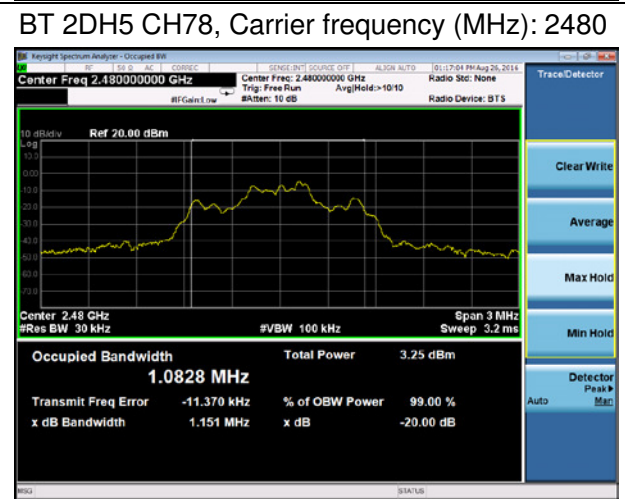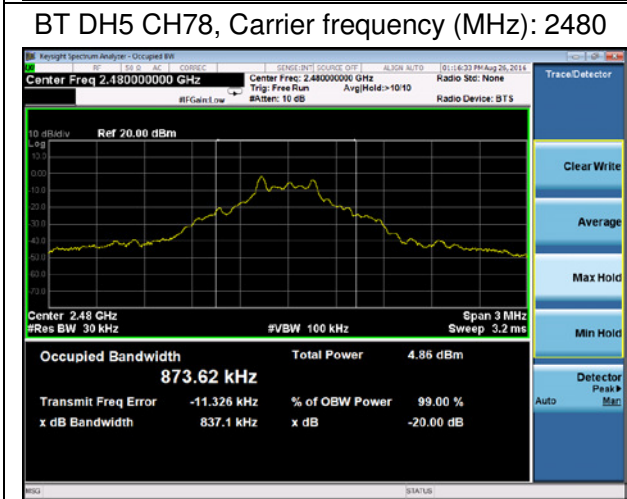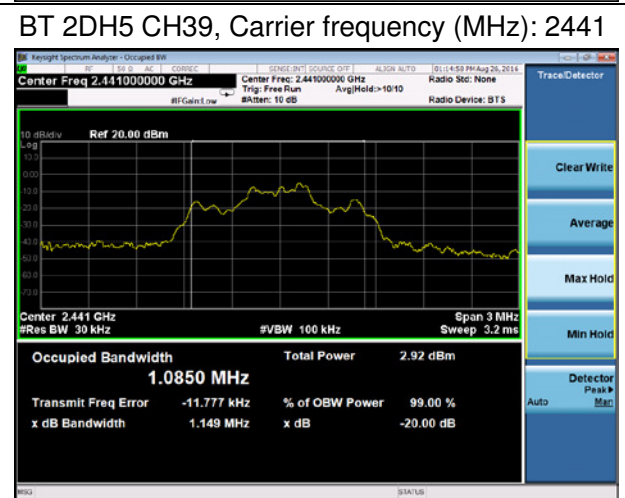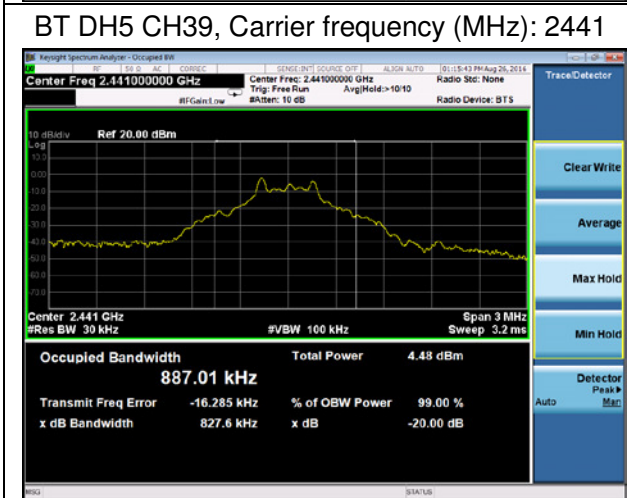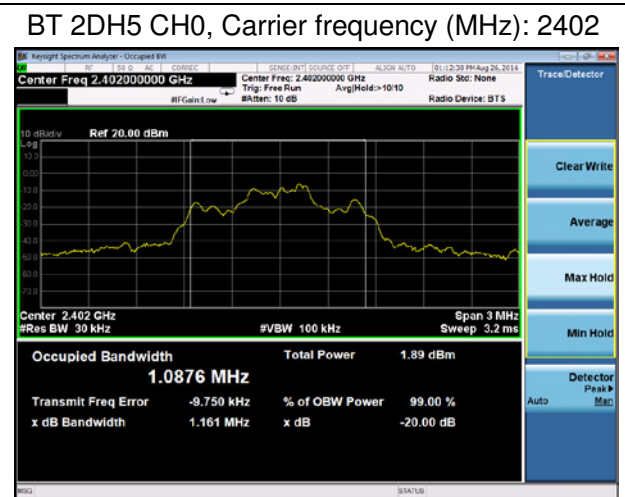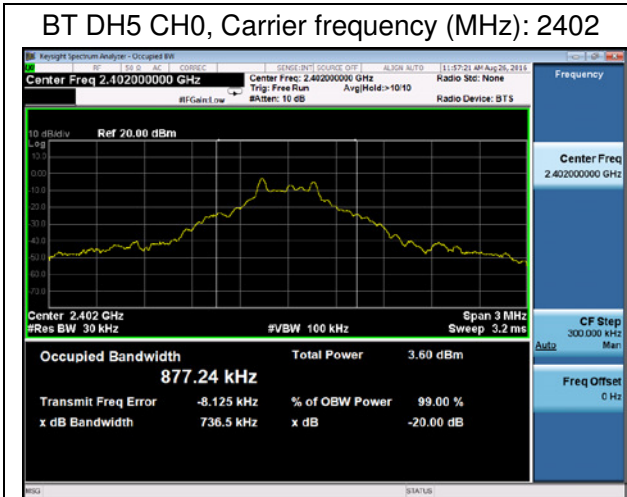

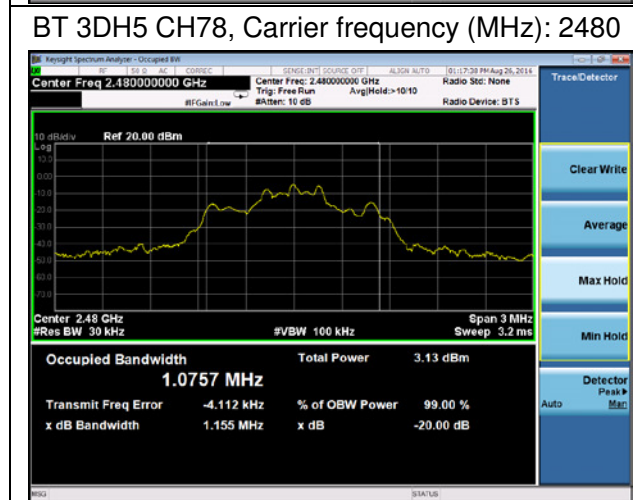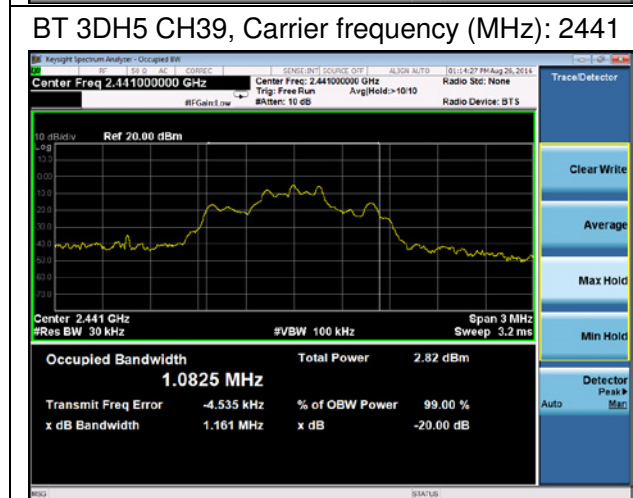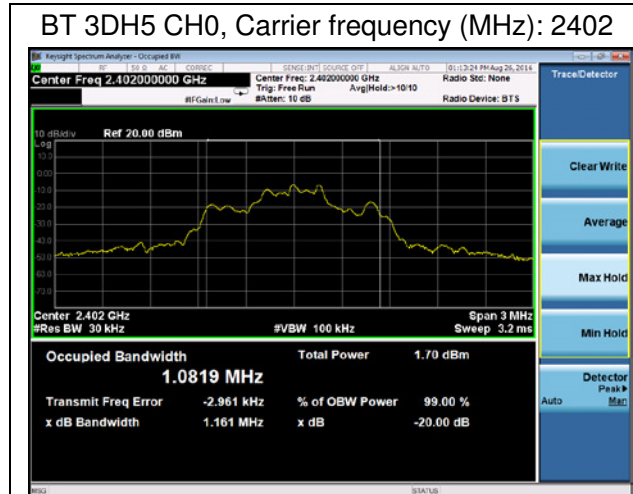



### 4.4 Frequency Separation


#### Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

#### Method of Measurement

The EUT was connected to the spectrum analyzer and Bluetooth test set via a power splitter with a known loss. RBW is set to 30 kHz and VBW is set to 100 kHz on spectrum analyzer. Set EUT on Hopping on mode.

#### Test setup

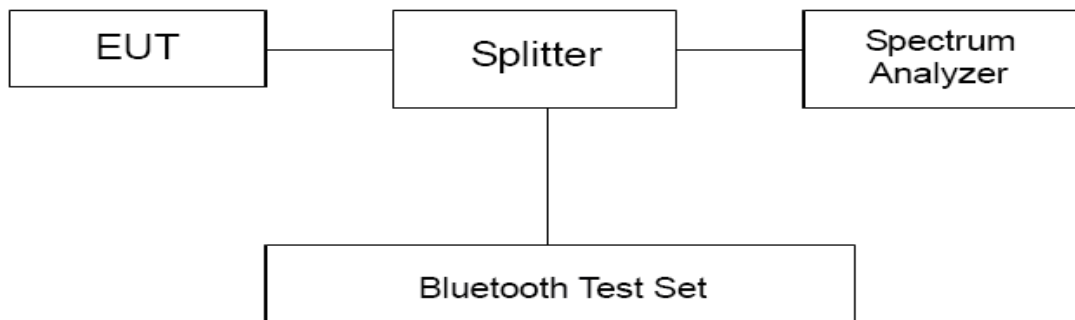

#### Limits

Rule Part 15.247(a)(1) specifies that “Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. ”

Note: The value of two-thirds of 20 dB bandwidth is always greater than 25 kHz.


#### Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 2$ ,  $U=936$  Hz.

Test Results:

Packet type	Carrier frequency (MHz)	Carrier frequency separation(kHz)	20dB Bandwidth(kHz)	Limit (kHz)	Conclusion
DH5	2441	1002.9	827.6	551.7	PASS
2DH5	2441	998.6	1149	766	PASS
3DH5	2441	998.6	1161	774	PASS

Note: The limit is two-thirds of 20 dB bandwidth.

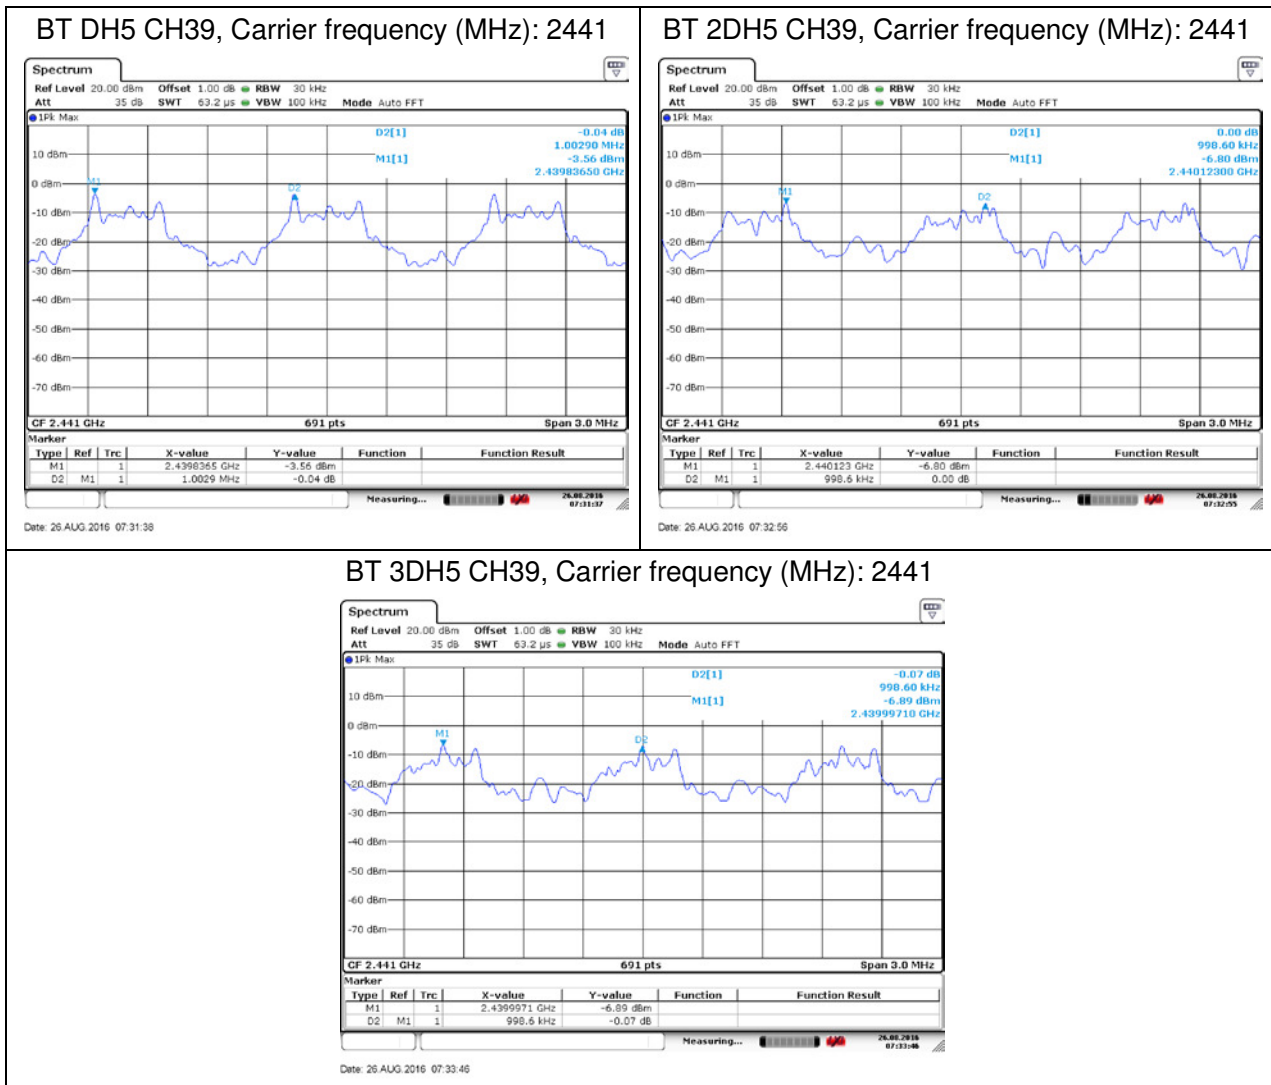

### 4.5 Time of Occupancy (Dwell Time)

**Ambient condition**

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa


**Methods of Measurement**

The EUT was connected to the spectrum analyzer and Bluetooth test set via a power splitter with a known loss. RBW is set to 1MHz and VBW is set to 3MHz on spectrum analyzer .The time slot length is measured of three different packet types, which are available in the Bluetooth technology. Those are DH1, DH3 and DH5 packets. The dwell time is calculated by:

Dwell time = time slot length \* hop rate \* 0.4s with:

- hop rate=1600 \* 1/s for DH1 packet =1600
- hop rate=1600/3 \* 1/s for DH3 packet =533.33
- hop rate=1600/5 \* 1/s for DH5 packet =320

**Test Setup**

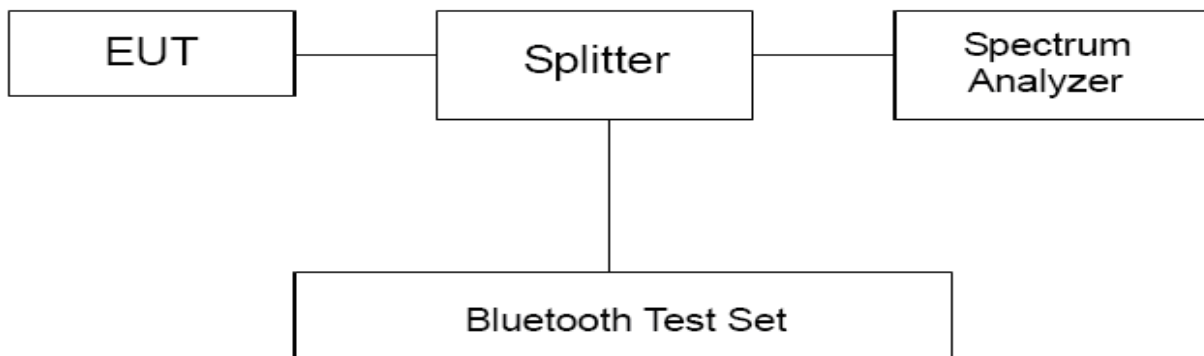

**Limits**

Rule Part 22.913(a) specifies that " Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed."

Dwell time	≤ 400ms
------------	---------







### Measurement Uncertainty




The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 2$ .

Requirements	Uncertainty	
Dwell Time	DH1	$U=0.64\text{ms}$
	DH3	$U=0.80\text{ms}$
	DH5	$U=0.70\text{ms}$
	2DH1	$U=0.64\text{ms}$
	2DH3	$U=0.80\text{ms}$
	2DH5	$U=0.70\text{ms}$
	3DH1	$U=0.64\text{ms}$
	3DH3	$U=0.80\text{ms}$
	3DH5	$U=0.70\text{ms}$

**Test Results:**

<b>Channel 39</b>					
<b>Packet type</b>	<b>hop rate (1/s)</b>	<b>Time slot length(ms)</b>	<b>Dwell time (ms)</b>	<b>Limit (ms)</b>	<b>Conclusion</b>
DH1	1600	0.370	236.80	400	PASS
DH3	533.33	1.630	347.73	400	PASS
DH5	320	2.870	367.36	400	PASS
2DH1	1600	0.380	243.20	400	PASS
2DH3	533.33	1.620	345.60	400	PASS
2DH5	320	2.870	367.36	400	PASS
3DH1	1600	0.380	243.20	400	PASS
3DH3	533.33	1.630	347.73	400	PASS
3DH5	320	2.870	367.36	400	PASS
Note: Dwell time = time slot length * hop rate * 0.4s					

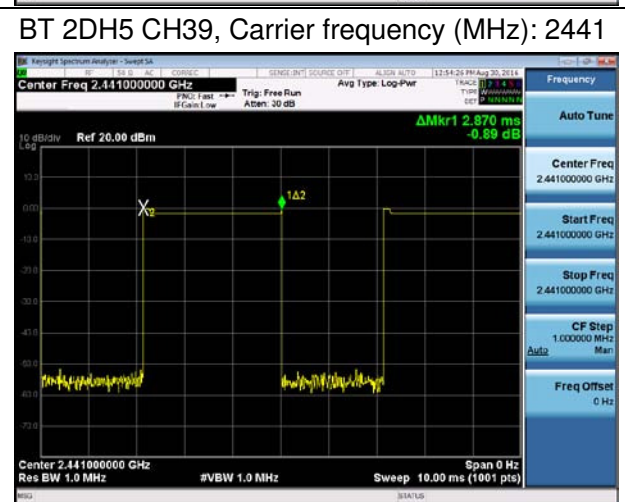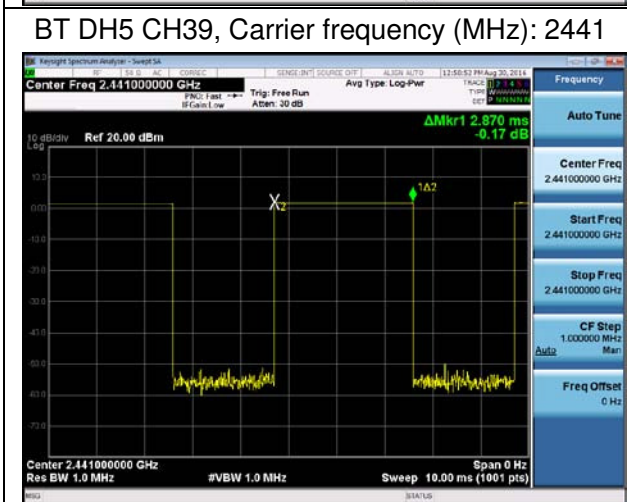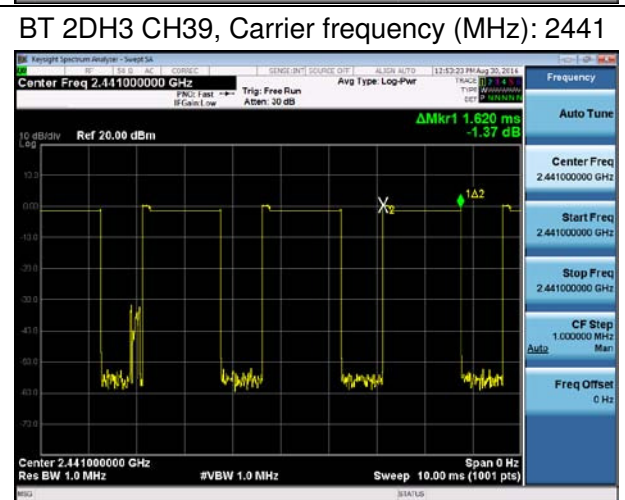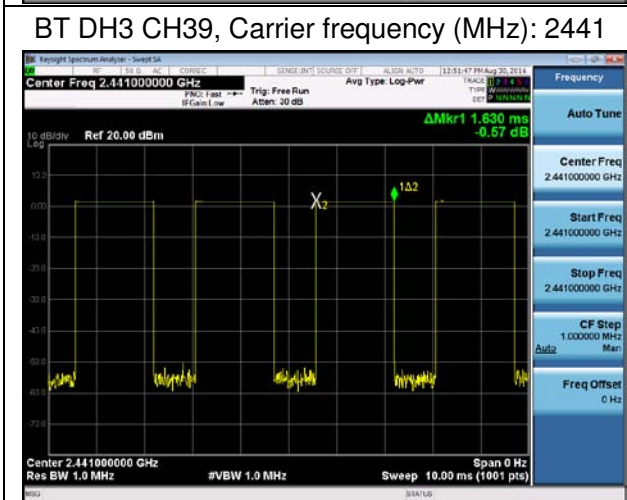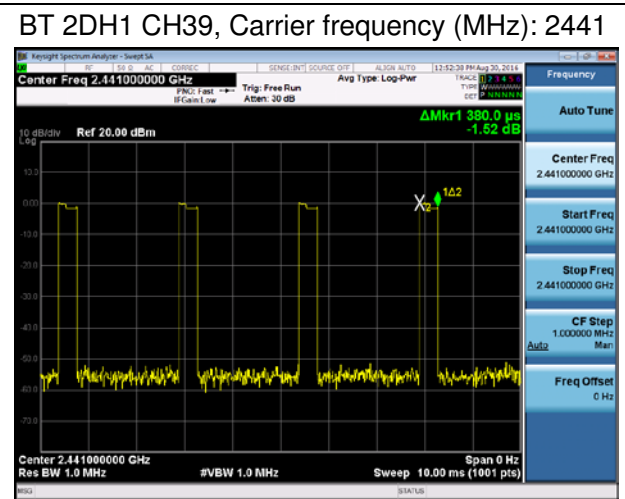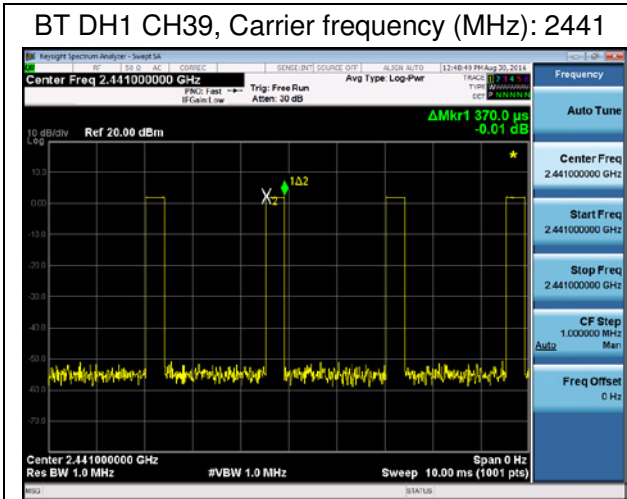

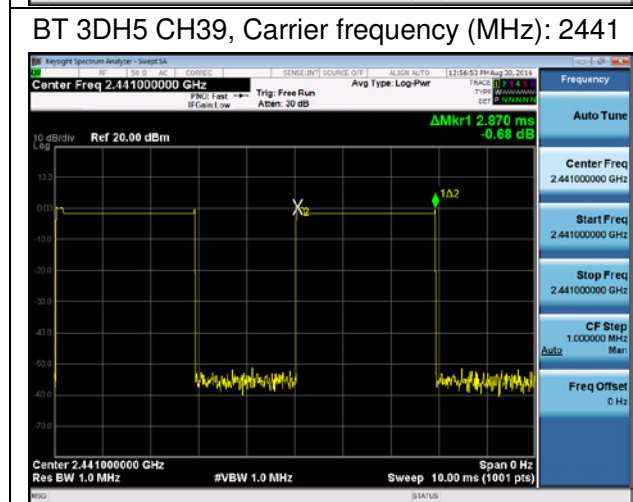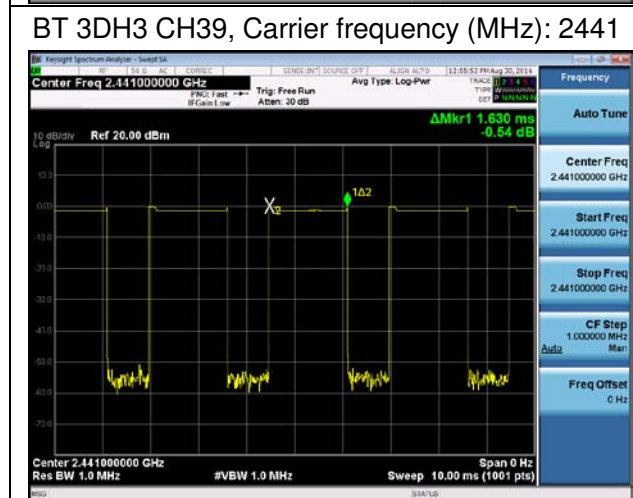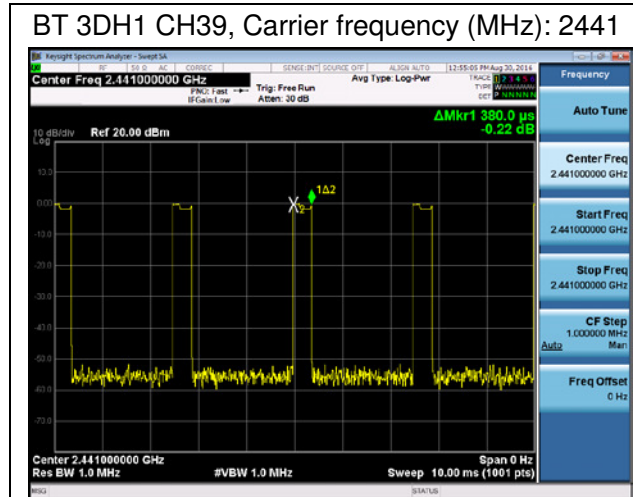

## 4.6 Band Edge Compliance


### Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

### Method of Measurement

The EUT was connected to the spectrum analyzer and Bluetooth test set via a power splitter with a known loss. The lowest and highest channels were measured. The peak detector is used. RBW is set to 100 kHz and VBW is set to 300 kHz on spectrum analyzer. EUT test for Hopping On mode and Hopping Off mode.

### Test Setup

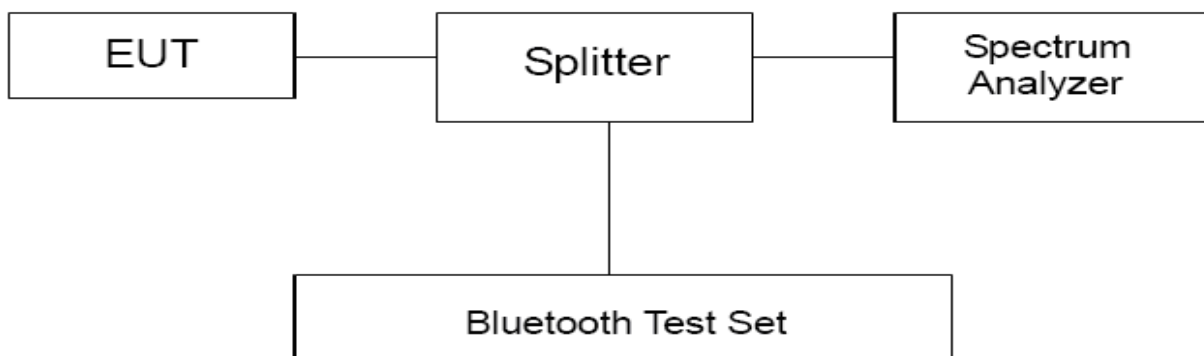

### Limits

Rule Part 15.247(d) specifies that “In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.”

### Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 1.96$ .


Frequency	Uncertainty
2GHz-3GHz	1.407 dB



Test Results


Hopping On

BT DH5 CH0, Carrier frequency (MHz): 2402

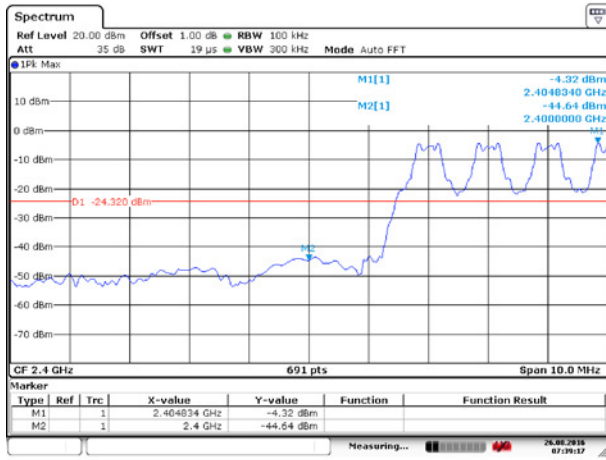


Date: 26 AUG 2016 07:39:17

BT DH5 CH78, Carrier frequency (MHz): 2480

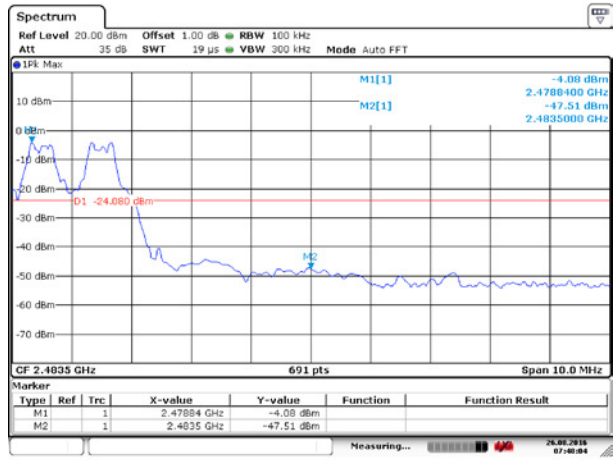

Date: 26 AUG 2016 07:48:05

BT 2DH5 CH0, Carrier frequency (MHz): 2402

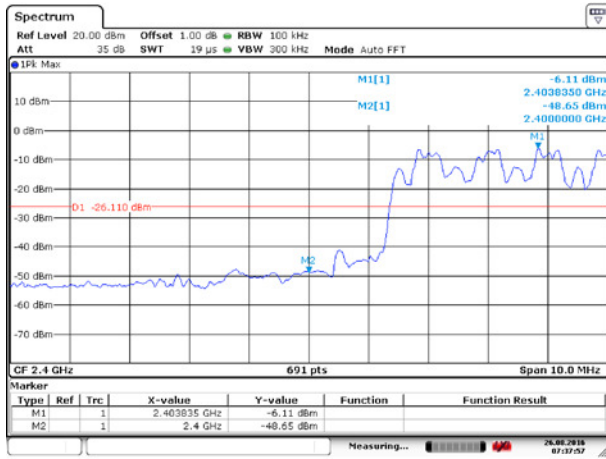


Date: 26 AUG 2016 07:37:57

BT 2DH5 CH78, Carrier frequency (MHz): 2480



Date: 26 AUG 2016 07:45:22

BT 3DH5 CH0, Carrier frequency (MHz): 2402

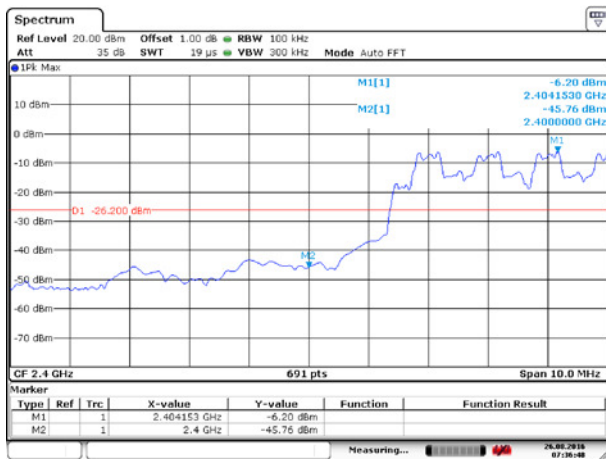







Date: 26 AUG 2016 07:36:49

BT 3DH5 CH78, Carrier frequency (MHz): 2480



Date: 26 AUG 2016 07:44:25

Hopping Off

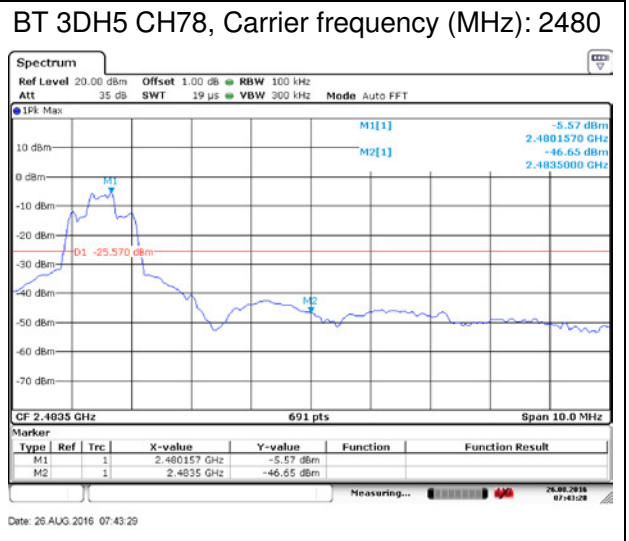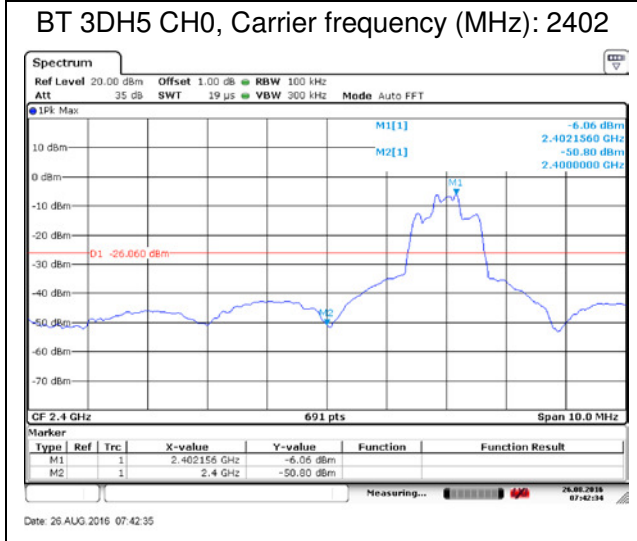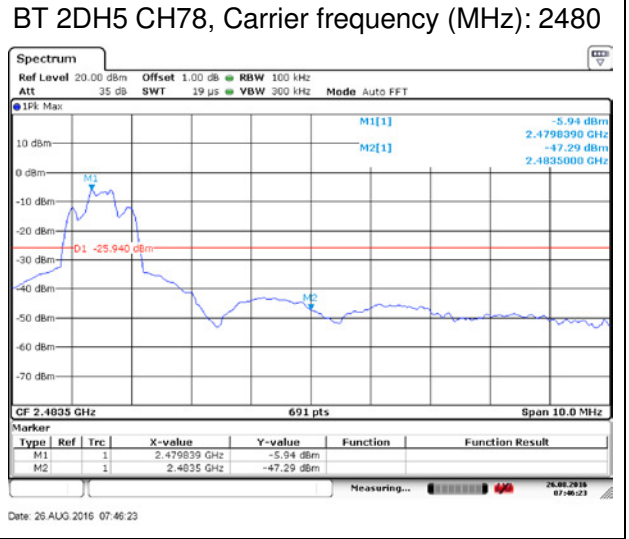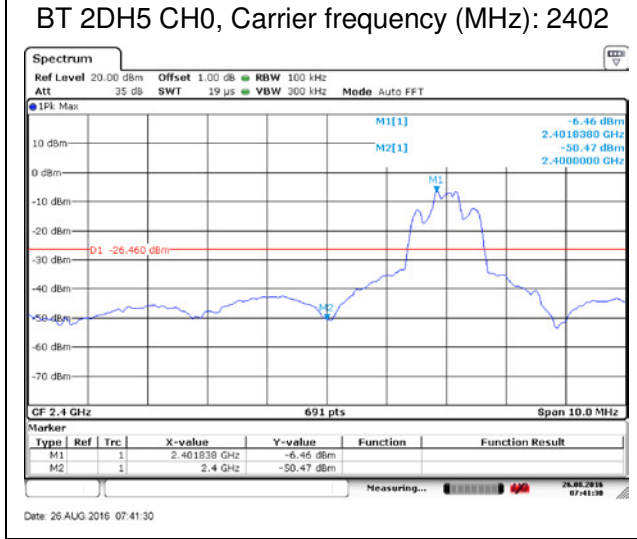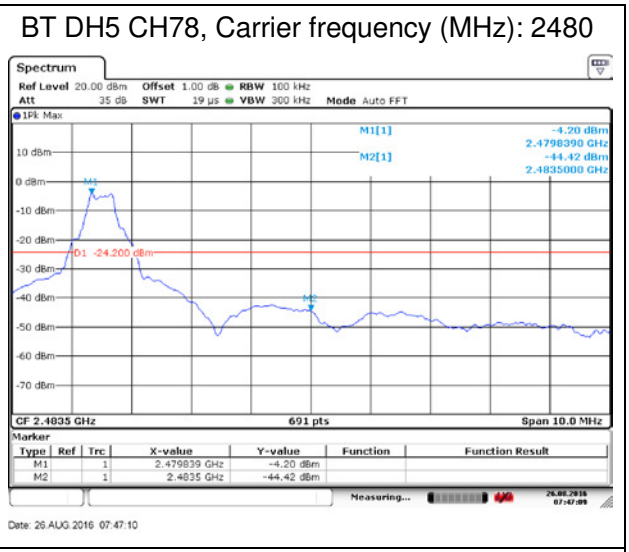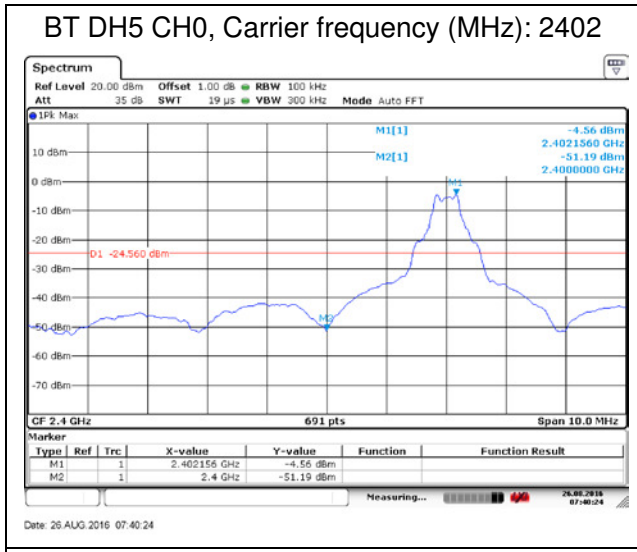

### 4.7 Spurious Radiated Emissions in the Restricted Band

#### Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

The Equipment Under Test (EUT) was set up on a non-conductive table in the semi-anechoic chamber. The test was performed at the distance of 3 m between the EUT and the receiving antenna. The turntable shall be rotated from 0 to 360 degrees for detecting the maximum of radiated spurious signal level. The measurements shall be repeated with orthogonal polarization of the test antenna. The data of cable loss and antenna factor has been calibrated in full testing frequency range before the testing.

Set the spectrum analyzer in the following:


- (a) PEAK: RBW=VBW=1MHz / Sweep=AUTO
- (b) The dwell time per channel of the hopping signal is less than 100 ms, then the reading obtained with the 10 Hz VBW may be further adjusted by a “duty cycle correction factor”, derived from  $20\log(\text{dwell time}/100 \text{ ms})$ , in an effort to demonstrate compliance with the 15.209 limit.

If the emission is pulsed, modify the unit for continuous operation; use the settings shown above, then correct the reading by subtracting the peak- average correction factor, derived from the appropriate duty cycle calculation.

This setting method can refer to **DA00-705**.

The test is in transmitting mode. The field strength of spurious emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis) and docking mode. The worst emission was found in stand-up position (Y axis) and the worst case was recorded.

#### Test setup

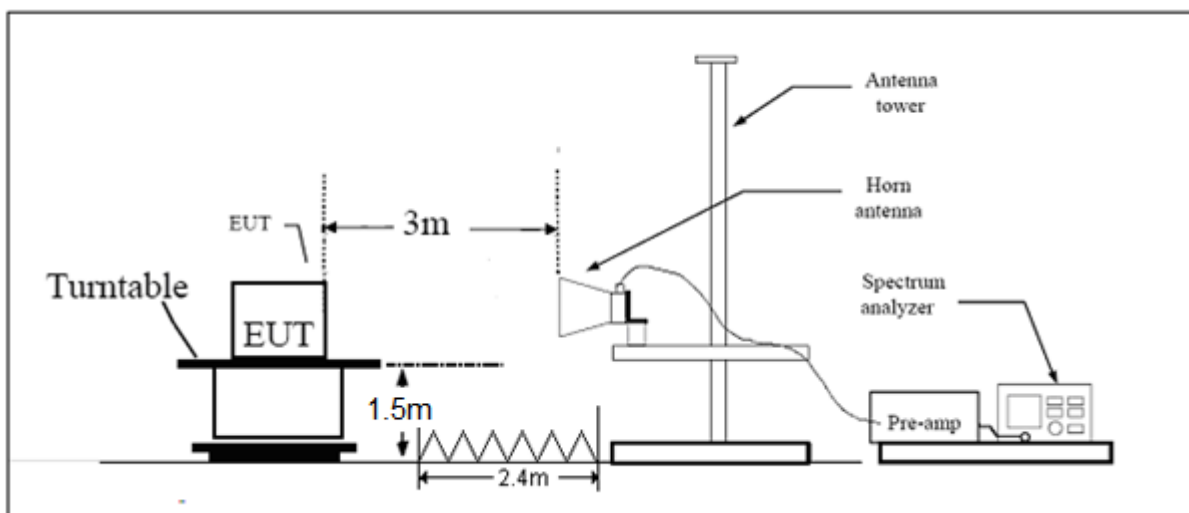

Note: Area side: 2.4mX3.6m

**Limits**

Spurious Radiated Emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
<sup>1</sup> 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	( <sup>2</sup> )
13.36 - 13.41			

Limit in restricted band

Frequency of emission (MHz)	Field strength(uV/m)	Field strength(dBuV/m)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above960	500	54

**§15.35(b)**

There is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit.


Peak Limit=74dBuV/m

Average Limit=54dBuV/m

**Measurement Uncertainty**

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 1.96$ ,  $U = 3.55$  dB.

Test Results:

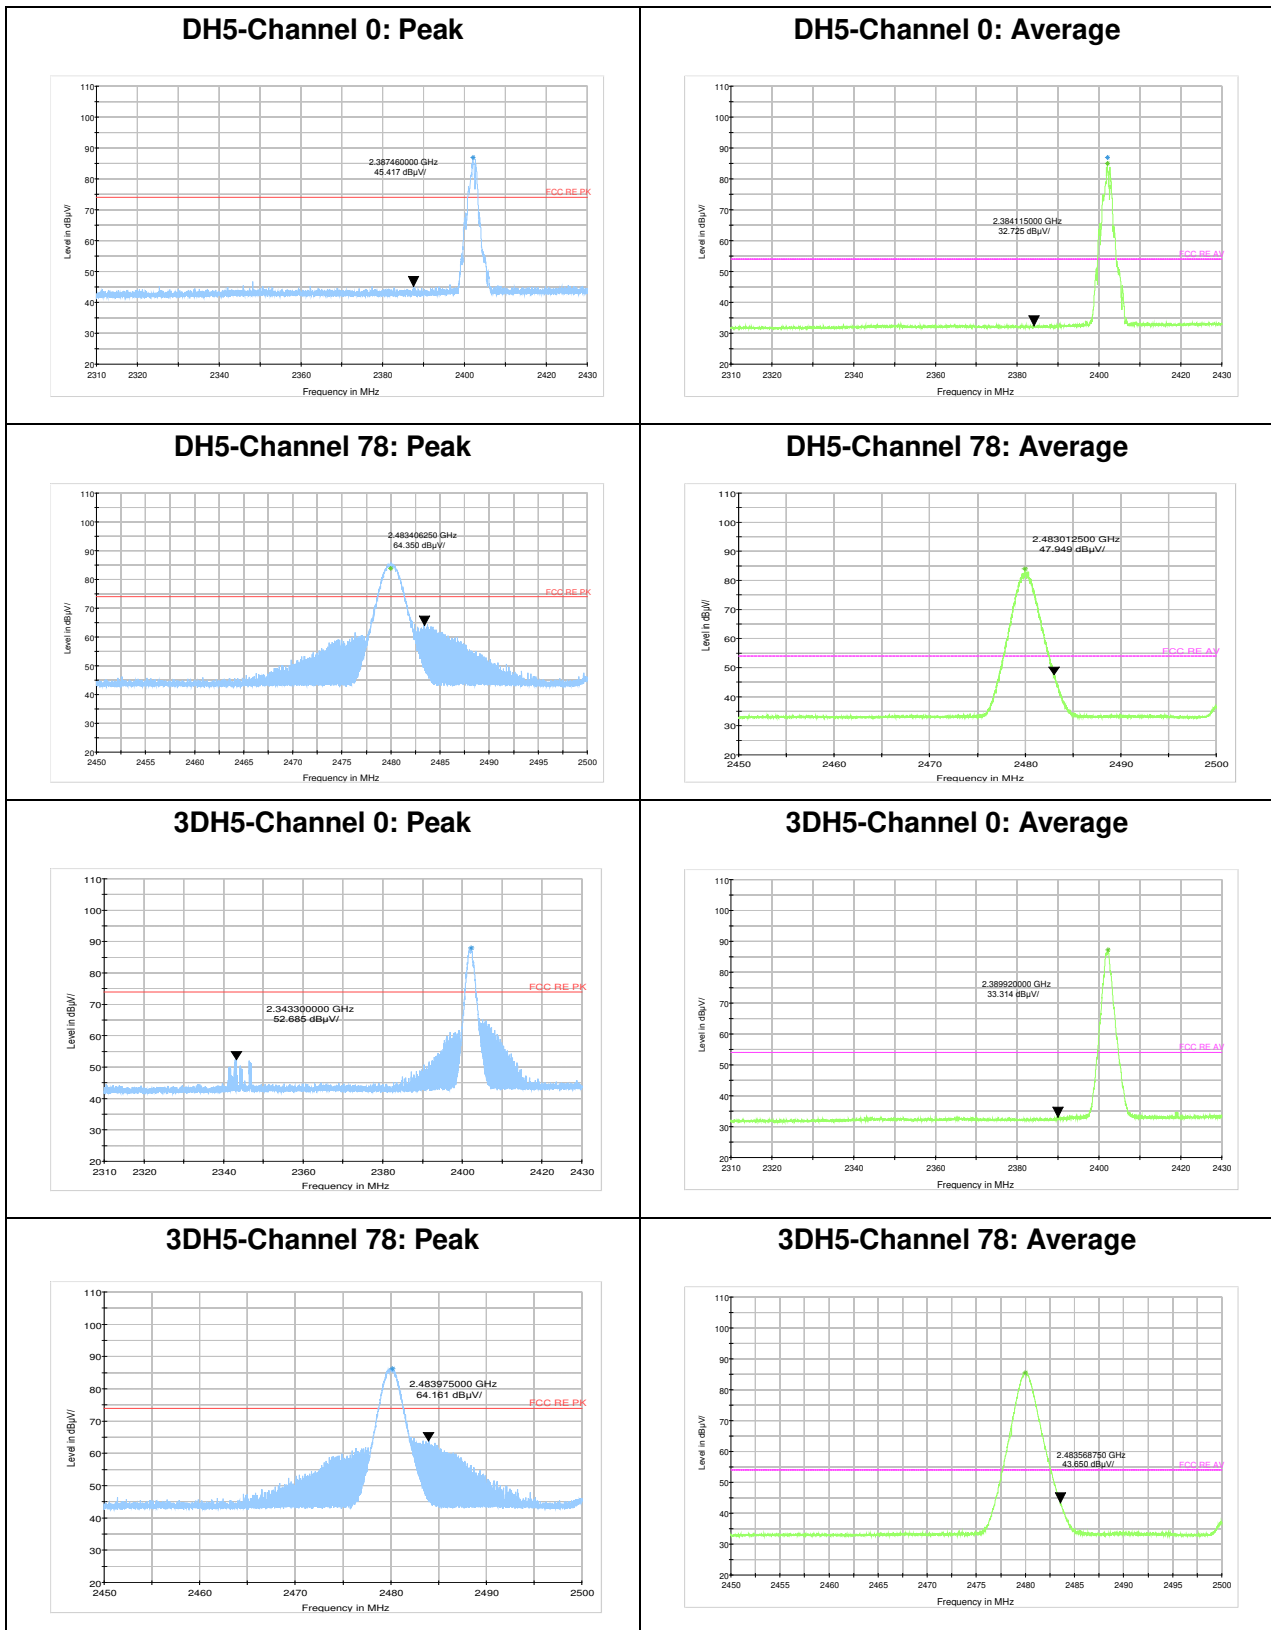

### 4.8 Number of hopping Frequency


#### Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

#### Method of Measurement

The EUT was connected to the spectrum analyzer and Bluetooth test set via a power splitter with a known loss. RBW is set to 1MHz and VBW is set to 1 MHz on spectrum analyzer. Set EUT on Hopping on mode.

#### Test setup

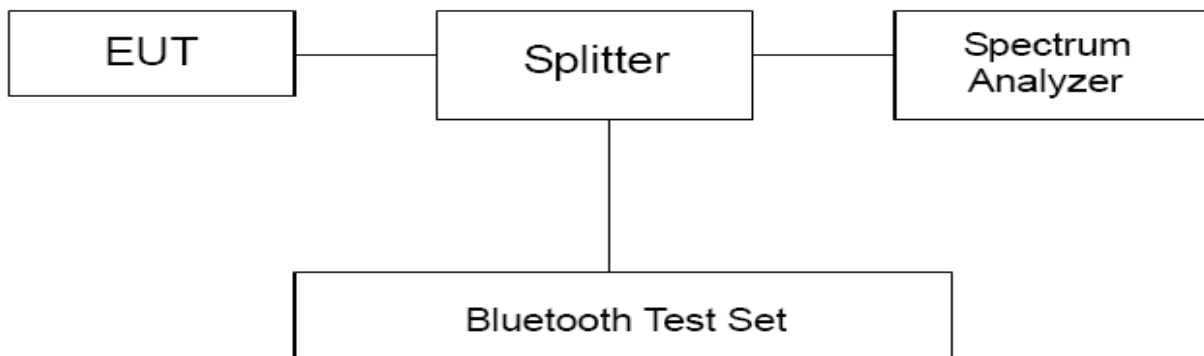

#### Limits





Rule Part 15.247(a) (1) (iii) specifies that” Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels.”

Limits	≥ 15 channels
--------	---------------



Test Results:

	Number of hopping channels	conclusion
DH5	79	PASS
2DH5	79	PASS
3DH5	79	PASS

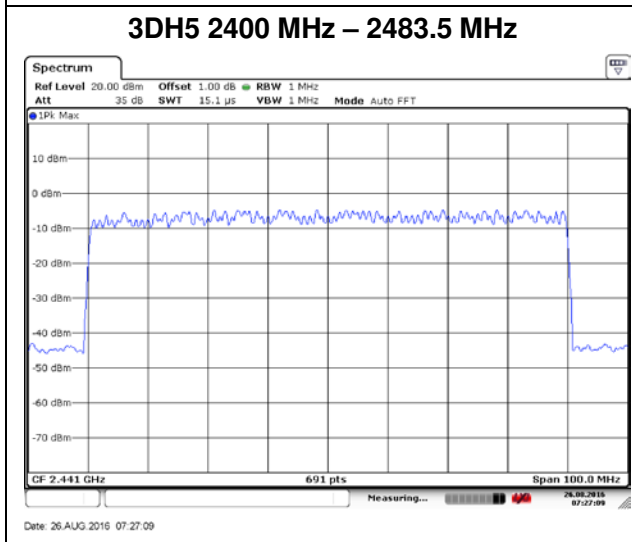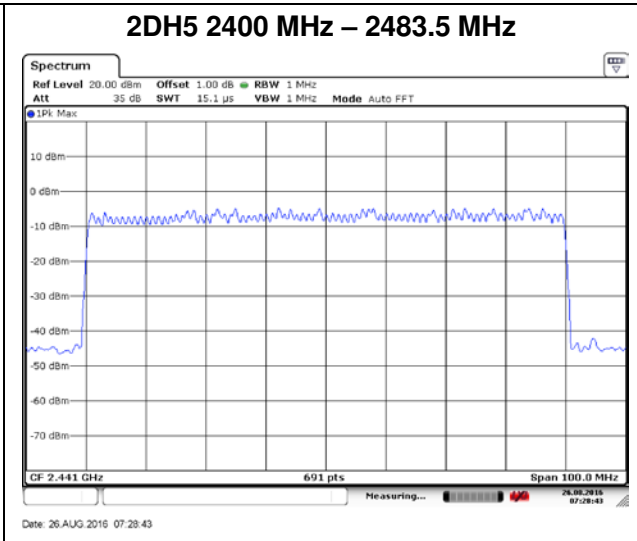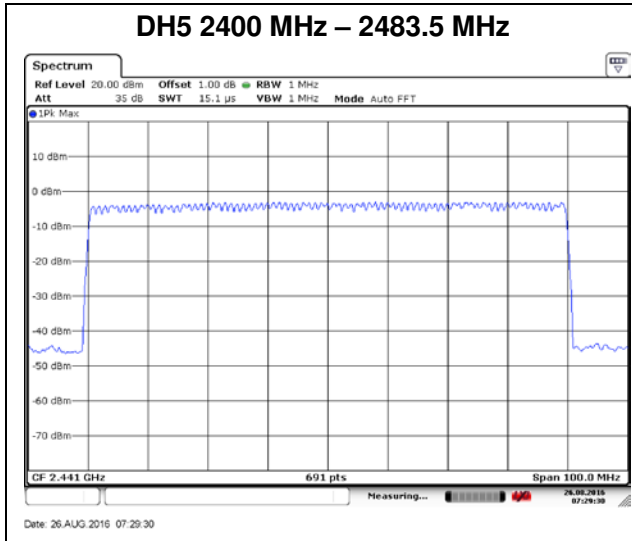

### 4.9 Spurious RF Conducted Emissions

#### Ambient condition


Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

#### Method of Measurement

The EUT was connected to the spectrum analyzer and Bluetooth test set via a power splitter with a known loss. The spectrum analyzer scans from 30MHz to the 10th harmonic of the carrier. The peak detector is used. RBW and VBW are set to 100 kHz, Sweep is set to ATUO.

The test is in transmitting mode.

#### Test setup

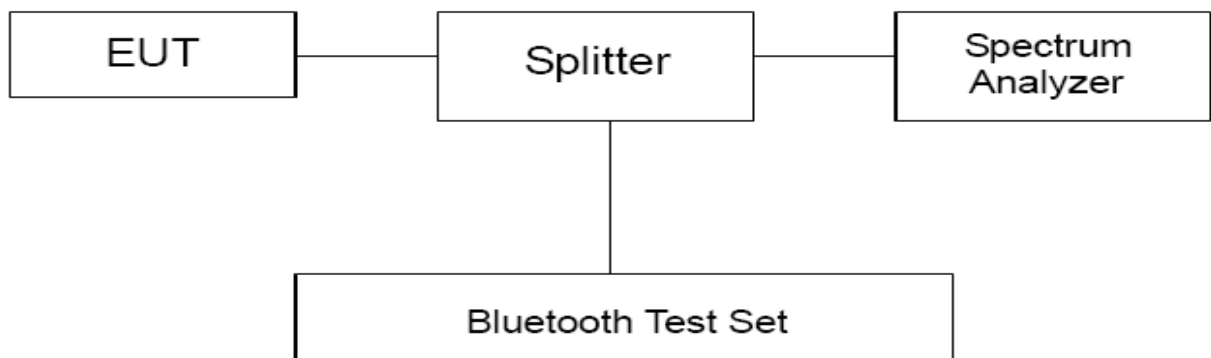

#### Limits

Rule Part 15.247(d) pacifies that “In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.”

Mode	Carrier frequency (MHz)	Reference value (dBm)	Limit
DH5	2402	-4.882	-24.882
	2441	-4.724	-24.724
	2480	-3.804	-23.804
EDR (DH5)	2402	1.880	-18.120
	2441	1.660	-18.340
	2480	2.670	-17.330






### Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 1.96$ .

Frequency	Uncertainty
100kHz-2GHz	0.684 dB
2GHz-26GHz	1.407 dB




Test Results:

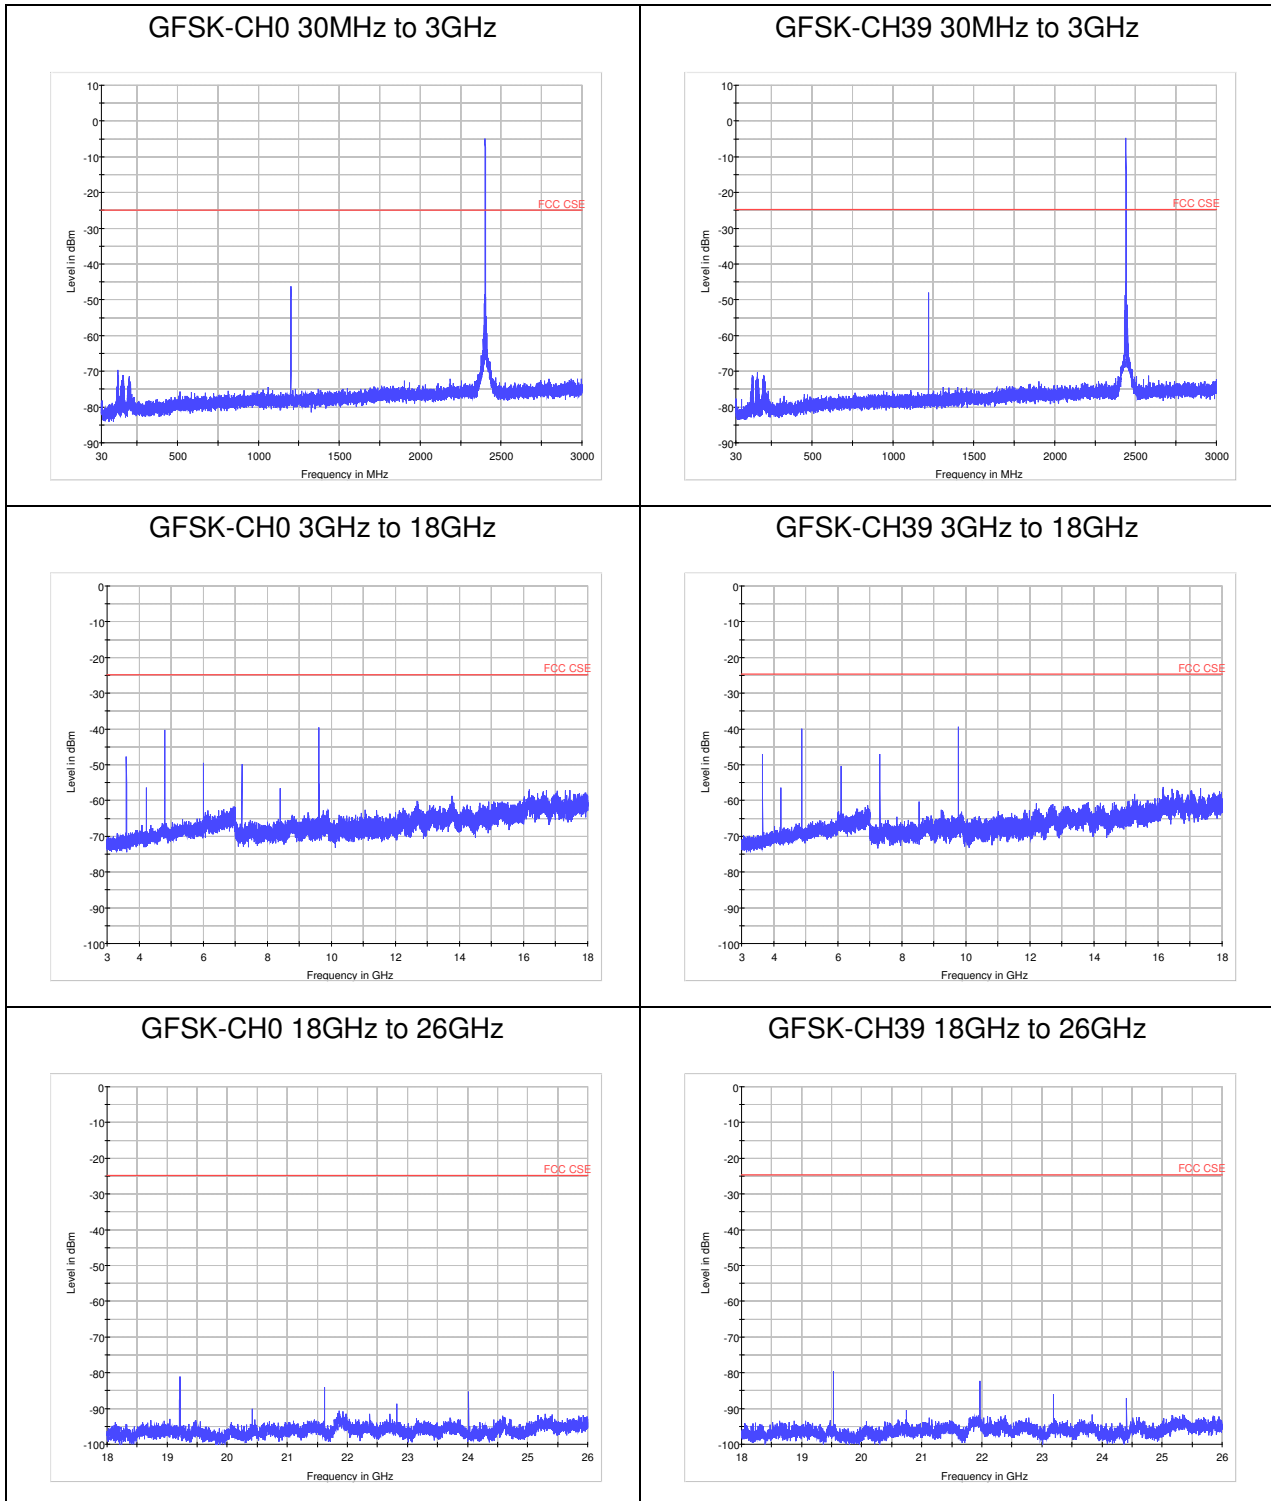





GFSK-CH78 30MHz to 3GHz

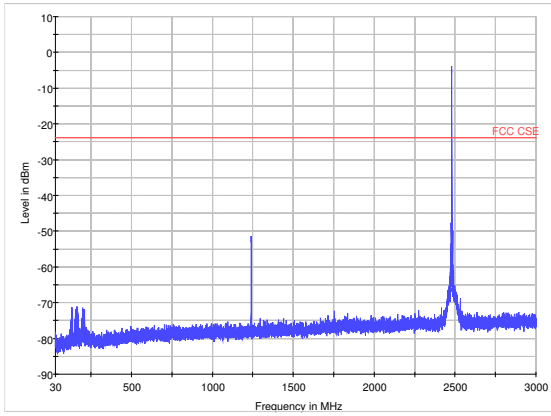


EDR-CH0 30MHz to 3GHz

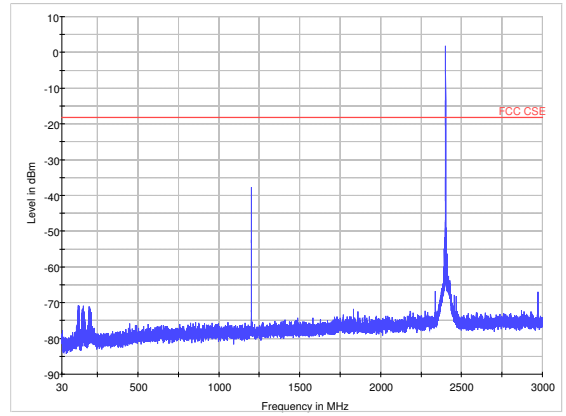


GFSK-CH78 3GHz to 18GHz

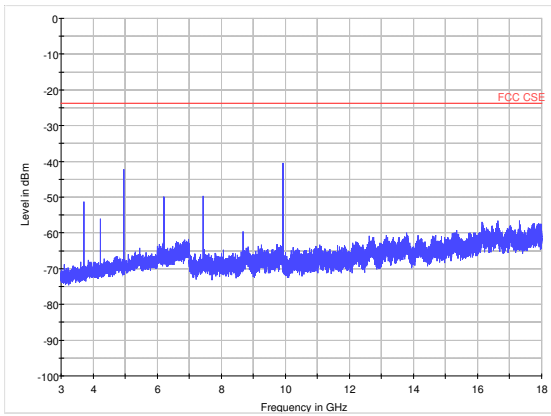


EDR-CH0 3GHz to 18GHz

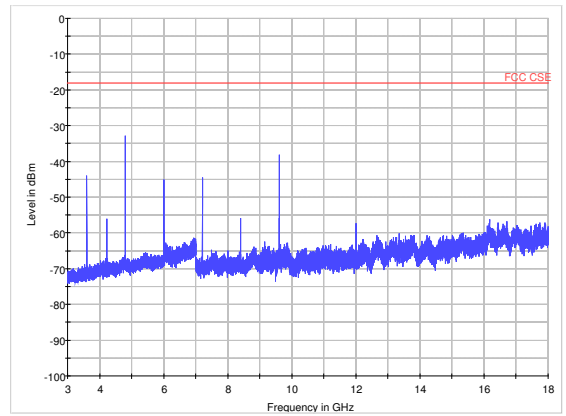

GFSK-CH78 18GHz to 26GHz

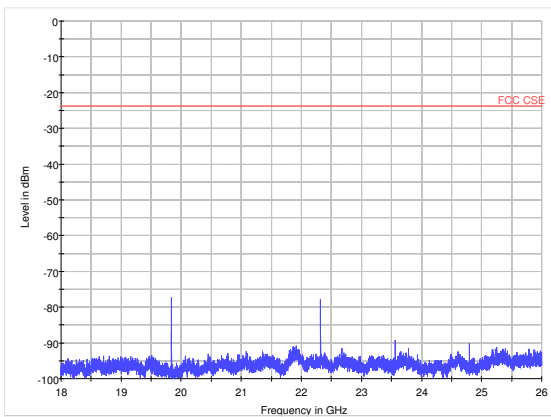


EDR-CH78 18GHz to 26.5GHz

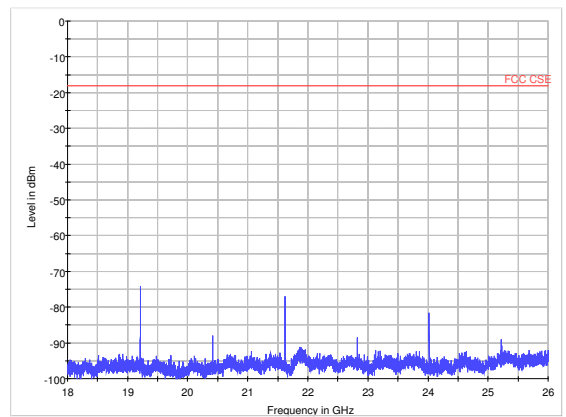





EDR-CH39 30MHz to 3GHz

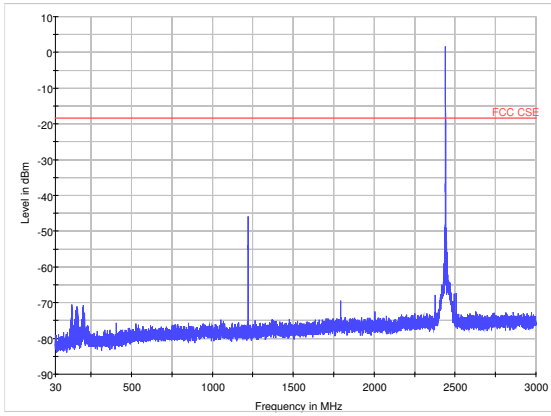


EDR-CH79 30MHz to 3GHz

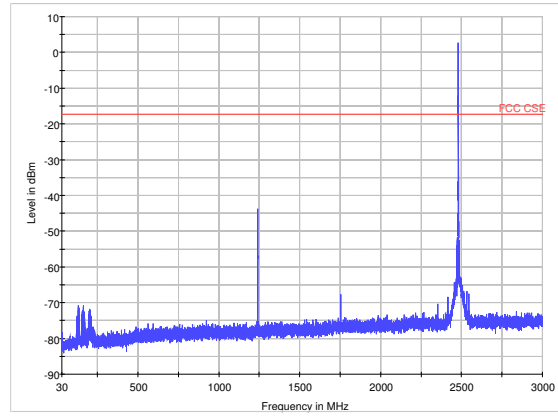


EDR-CH39 3GHz to 18GHz

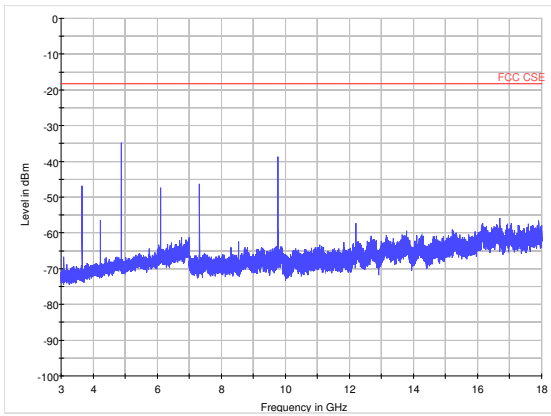


EDR-CH79 3GHz to 18GHz

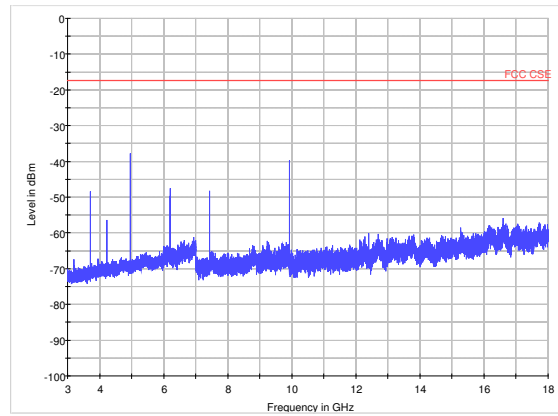

EDR-CH39 18GHz to 26.5GHz

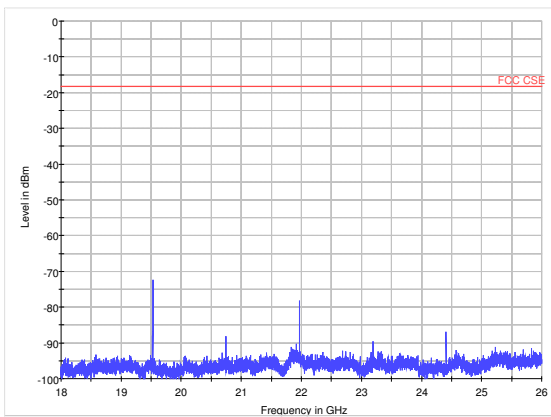

EDR-CH79 18GHz to 26.5GHz

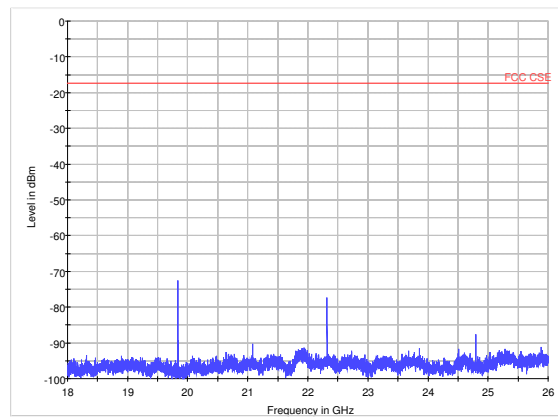

## 4.10 Radiates Emission

### Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	102.5kPa

### Method of Measurement

The test set-up was made in accordance to the general provisions of ANSI C63.10-2013. The Equipment Under Test (EUT) was set up on a non-conductive table in the semi-anechoic chamber. The test was performed at the distance of 3 m between the EUT and the receiving antenna. The radiated emissions measurements were made in a typical installation configuration.

Sweep the whole frequency band through the range from 9 kHz to the 10th harmonic of the carrier, and the emissions less than 20 dB below the permissible value are reported.

During the test, below 30MHz, the center of the loop shall be 1 meters; above 30MHz, the height of receive antenna shall be moved from 1 to 4 meters, and the antenna shall be performed under horizontal and vertical polarization. The turntable shall be rotated from 0 to 360 degrees for detecting the maximum of radiated spurious signal level. The measurements shall be repeated with orthogonal polarization of the test antenna. The data of cable loss and antenna factor has been calibrated in full testing frequency range before the testing.

Set the spectrum analyzer in the following:

Below 1GHz (detector: Peak and Quasi-Peak)

RBW=100kHz / VBW=300kHz / Sweep=AUTO

Above 1GHz(detector: Peak):


(a) PEAK: RBW=1MHz VBW=3MHz/ Sweep=AUTO

(b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO


The radiated emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in stand-up position (Z axis) and the worst case was recorded. Then this mode was measured in the following mode: EUT with cradle and EUT without cradle. The worst emission was found in EUT with cradle mode and the worst case was recorded.

The test is in transmitting mode.


**Test setup**  
**9KHz~~~ 30MHz**

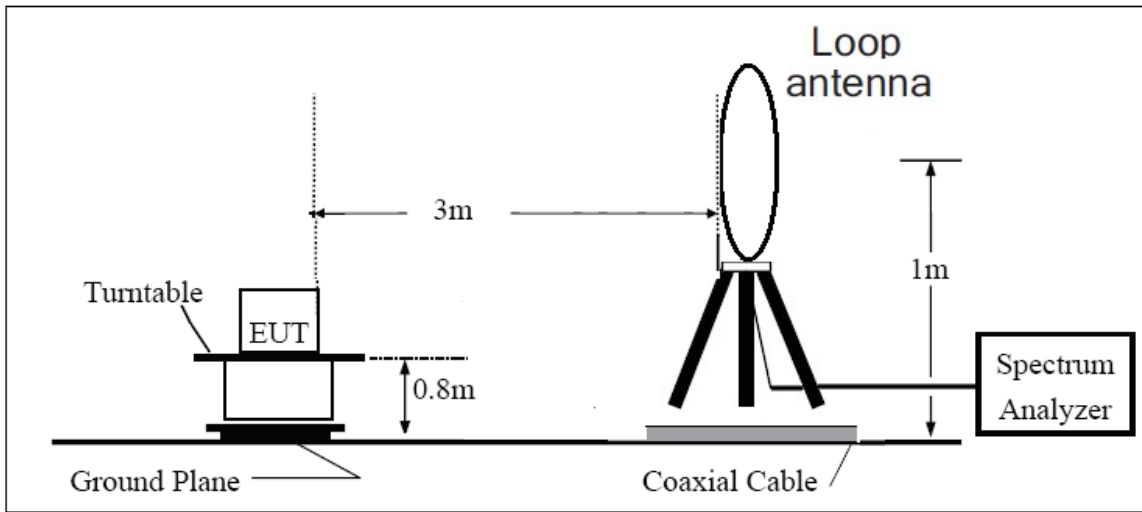

**30MHz~~~ 1GHz**

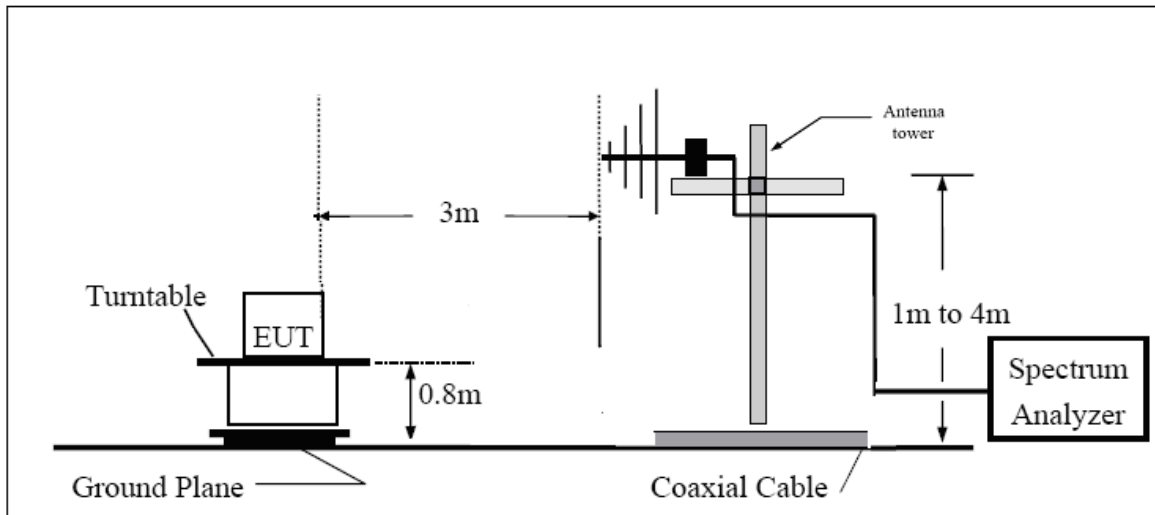

**Above 1GHz**

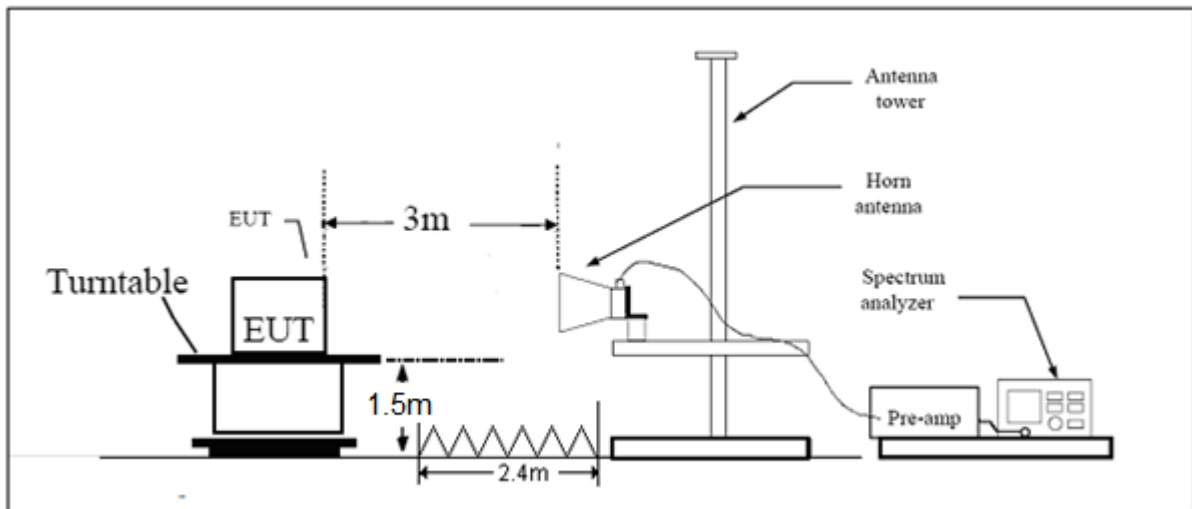

**Limits**

Rule Part 15.247(d) specifies that “In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).”

Limit in restricted band

Frequency of emission (MHz)	Field strength(uV/m)	Field strength(dBuV/m)
0.009–0.490	2400/F(kHz)	/
0.490–1.705	24000/F(kHz)	/
1.705–30.0	30	/
30-88	100	40
88-216	150	43.5
216-960	200	46
Above960	500	54

**§15.35(b)**

There is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit.

**Measurement Uncertainty**

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 1.96$ .

Frequency	Uncertainty
9KHz-30MHz	3.55 dB
30MHz-200MHz	4.19 dB
200MHz-1GHz	3.63 dB
Above 1GHz	3.68 dB

**Test result**


Sweep from 9 kHz to 30MHz, and the emissions more than 20 dB below the permissible value are not reported.

The following graphs display the maximum values of horizontal and vertical by software.

For above 1GHz, Blue trace uses the peak detection, Green trace uses the average detection.

GFSK-Channel 0

RE 0.03-1GHz QP Class B

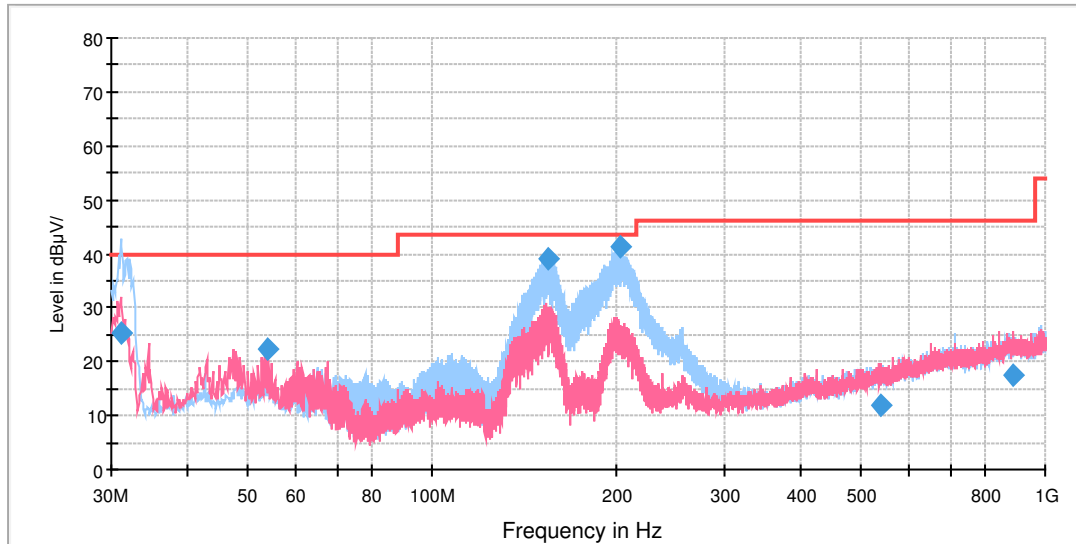


Radiates Emission from 30MHz to 1GHz

Frequency (MHz)	Quasi-Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
31.111250	25.2	101.0	H	194.0	47.7	-22.5	14.8	40.0
54.108750	22.4	101.0	V	157.0	43.3	-20.9	17.6	40.0
154.907500	39.3	122.0	H	58.0	68.5	-29.2	4.2	43.5
202.235000	41.2	126.0	H	270.0	67.5	-26.3	2.3	43.5
539.310000	12.0	126.0	V	167.0	30.3	-18.3	34.0	46.0
888.551250	17.4	126.0	V	350.0	30.0	-12.6	28.6	46.0



RE 1G-3GHz PK+AV

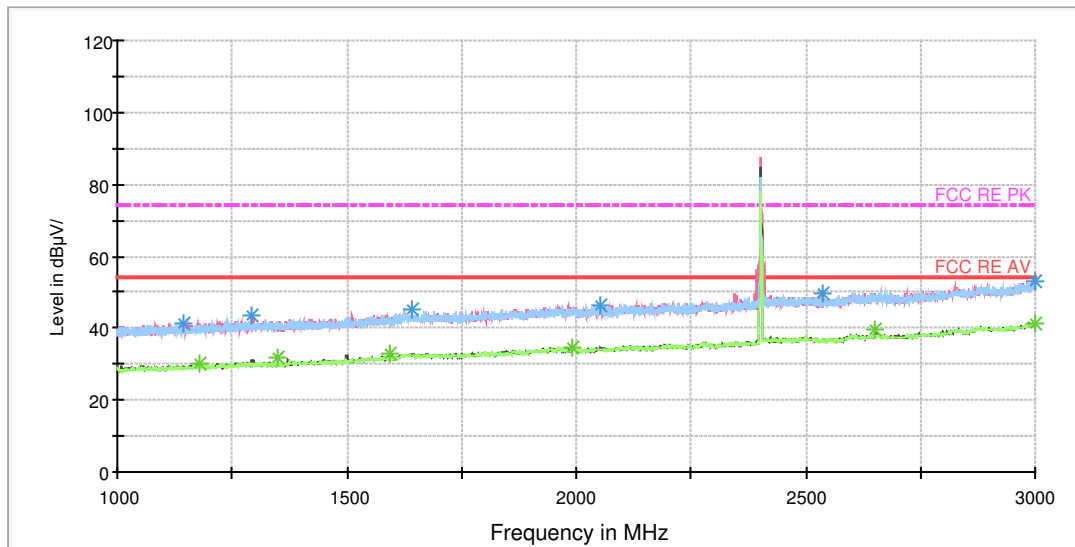


Radiates Emission from 1GHz to 3GHz  
 Note: The signal beyond the limit is carrier.

Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1144.750000	41.4	100.0	H	119.0	49.9	-8.5	32.6	74
1294.000000	43.5	100.0	V	0.0	51.3	-7.8	30.5	74
1642.000000	45.0	100.0	H	0.0	49.8	-4.8	29.0	74
2054.250000	46.5	100.0	V	262.0	49.7	-3.2	27.5	74
3000.000000	52.9	100.0	V	105.0	55.2	2.3	21.1	74
2539.250000	49.6	100.0	V	0.0	50.0	-0.4	24.4	74

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1179.750000	29.9	100.0	V	336.0	37.9	-8.0	24.1	54
1350.000000	31.7	100.0	H	35.0	39.3	-7.6	22.3	54
1594.000000	33.0	100.0	V	336.0	39.4	-6.4	21.0	54
1991.500000	34.7	100.0	V	0.0	38.0	-3.3	19.3	54
2651.000000	39.7	100.0	V	353.0	40.1	0.4	14.3	54
2998.000000	41.5	100.0	V	353.0	43.8	2.3	12.5	54

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

RE 3-18GHz PK+AV

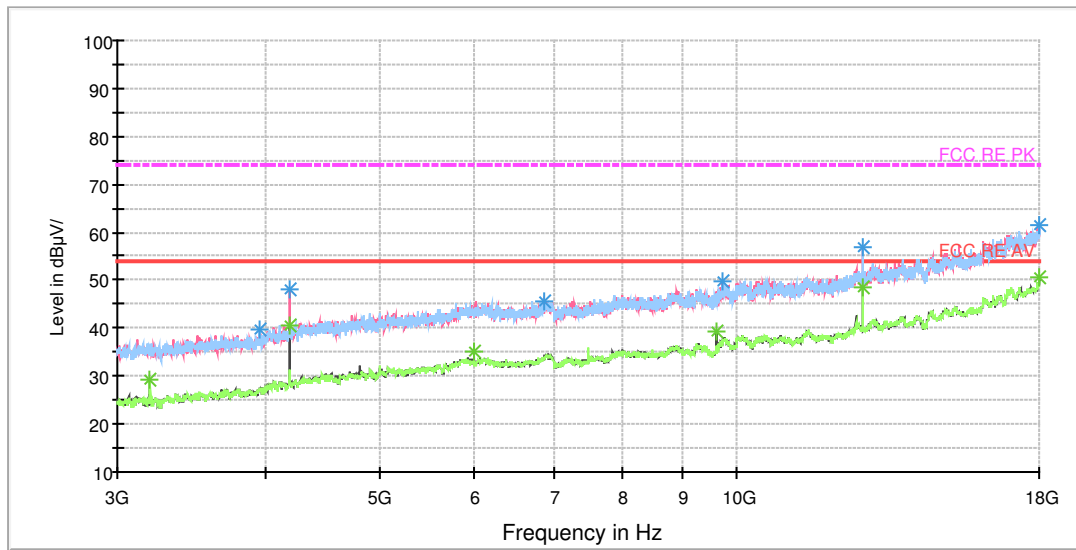


Radiates Emission from 3GHz to 18GHz

Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
3952.500000	39.9	100.0	H	0.0	40.1	0.2	34.1	74
4192.500000	48.0	100.0	V	113.0	49.7	1.7	26.0	74
6890.625000	45.8	100.0	V	97.0	52.7	6.9	28.2	74
9740.625000	49.8	100.0	V	284.0	61.3	11.5	24.2	74
12763.125000	57.1	100.0	V	0.0	72.2	15.1	16.9	74
17988.750000	61.4	100.0	H	76.0	86.7	25.3	12.6	74

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
3198.750000	29.3	100.0	H	261.0	31.0	-1.7	24.7	54
4192.500000	40.6	100.0	V	113.0	42.3	1.7	13.4	54
6001.875000	35.2	100.0	H	245.0	41.3	6.1	18.8	54
9607.500000	39.1	100.0	V	221.0	49.1	10.0	14.9	54
12763.125000	48.6	100.0	V	0.0	63.7	15.1	5.4	54
17996.250000	50.4	100.0	V	284.0	75.8	25.4	3.6	54

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

RE 18-26.5GHz PK+AV

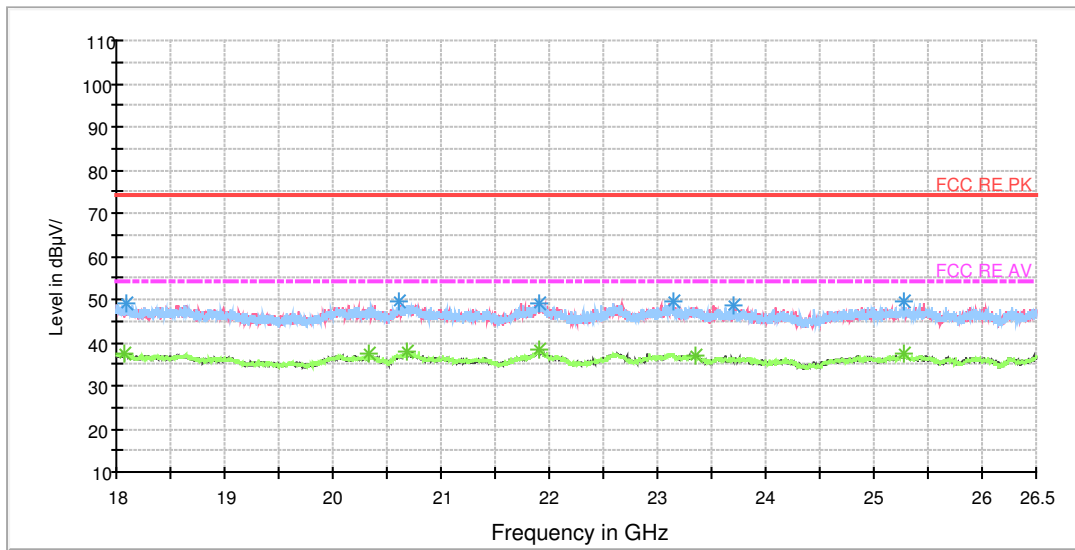


Radiates Emission from 18GHz to 26.5GHz

Frequency (MHz)	Peak (dBuV/m)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
18091.375000	48.8	H	108.0	51.0	-2.2	25.2	74
20603.125000	49.6	H	77.0	56.0	-6.4	24.4	74
21908.937500	49.1	H	0.0	57.1	-8.0	24.9	74
23154.187500	49.6	H	116.0	55.7	-6.1	24.4	74
23697.125000	48.8	V	177.0	54.7	-5.9	25.2	74
25276.000000	49.4	H	90.0	55.2	-5.8	24.6	74

Frequency (MHz)	Average (dBuV/m)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
18071.187500	37.6	H	99.0	39.7	-2.1	16.4	54
20331.125000	37.2	V	267.0	43.2	-6.0	16.8	54
20688.125000	37.7	V	341.0	44.4	-6.7	16.3	54
21906.812500	38.2	H	34.0	46.2	-8.0	15.8	54
23352.875000	37.2	V	354.0	43.1	-5.9	16.8	54
25283.437500	37.3	H	73.0	43.1	-5.8	16.7	54

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)


RE 30M-1GHz QP

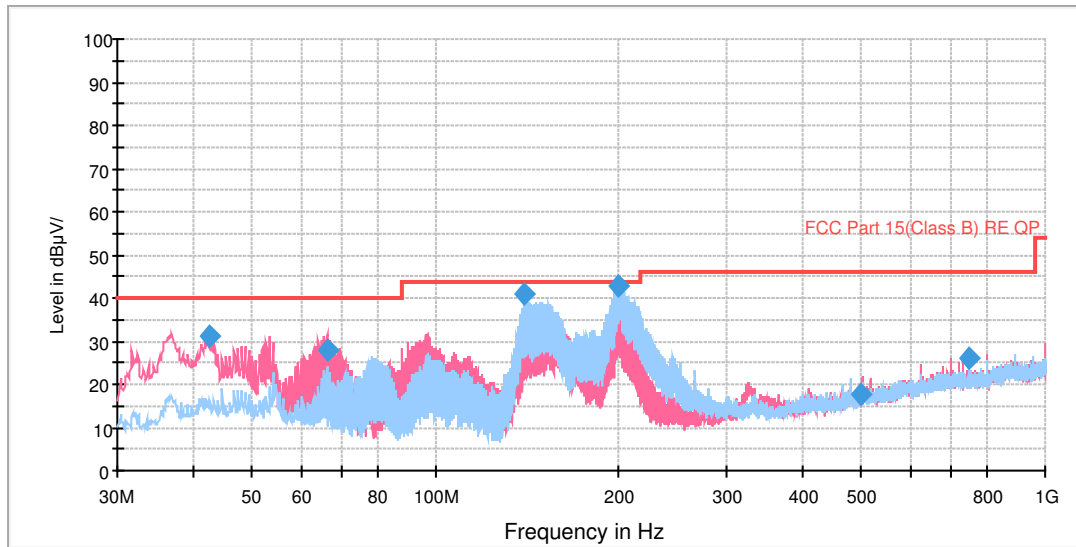

Radiates Emission from 30MHz to 1GHz

Frequency (MHz)	Quasi-Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
42.583475	31.2	101.0	V	170.0	51.7	-20.5	8.8	40.0
66.248116	27.7	101.0	V	104.0	52.2	-24.5	12.3	40.0
139.942869	41.0	126.0	H	327.0	70.6	-29.6	2.5	43.5
199.447784	42.9	101.0	H	175.0	69.2	-26.3	0.6	43.5
499.996250	17.7	101.0	V	228.0	36.7	-19.0	28.3	46.0
750.027500	26.2	101.0	V	207.0	41.6	-15.4	19.8	46.0

RE 1G-3GHz PK+AV

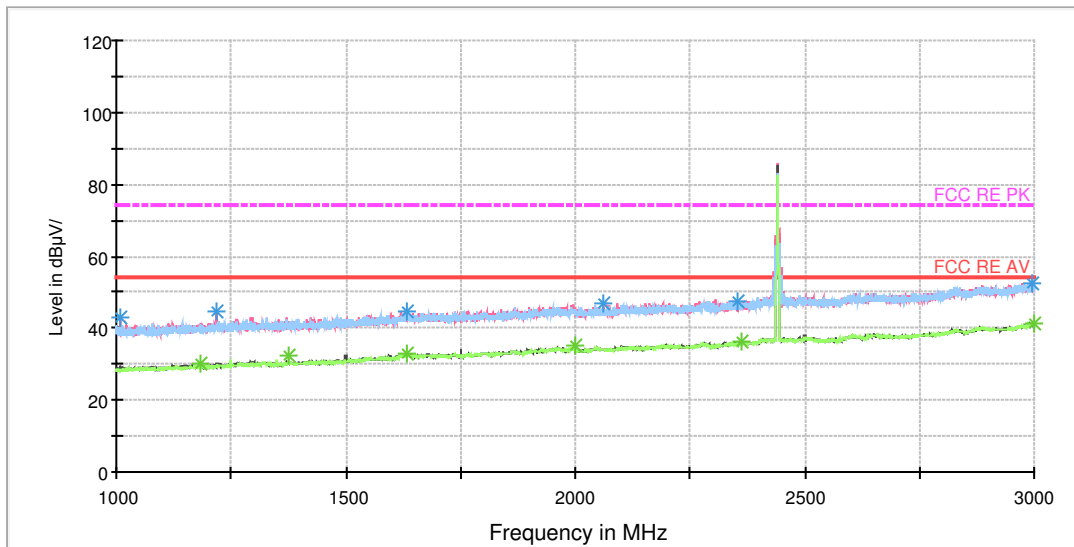


Radiates Emission from 1GHz to 3GHz  
 Note: The signal beyond the limit is carrier.

Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1010.500000	42.9	101.0	V	214.0	52.2	-9.3	31.1	74
1217.500000	44.8	101.0	V	233.0	52.7	-7.9	29.2	74
1635.250000	44.7	101.0	H	147.0	49.4	-4.7	29.3	74
2061.000000	47.1	101.0	V	176.0	50.2	-3.1	26.9	74
2352.250000	47.4	101.0	V	205.0	48.8	-1.4	26.6	74
2995.000000	52.6	101.0	V	354.0	54.9	2.3	21.4	74

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1183.750000	29.9	101.0	V	214.0	38.0	-8.1	24.1	54
1375.000000	32.2	101.0	H	241.0	39.3	-7.1	21.8	54
1633.750000	32.9	101.0	V	205.0	37.6	-4.7	21.1	54
2000.250000	35.0	101.0	V	354.0	38.4	-3.4	19.0	54
2361.500000	36.1	101.0	V	0.0	37.5	-1.4	17.9	54
2999.250000	41.4	101.0	V	270.0	43.7	2.3	12.6	54

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

RE 3-18GHz PK+AV

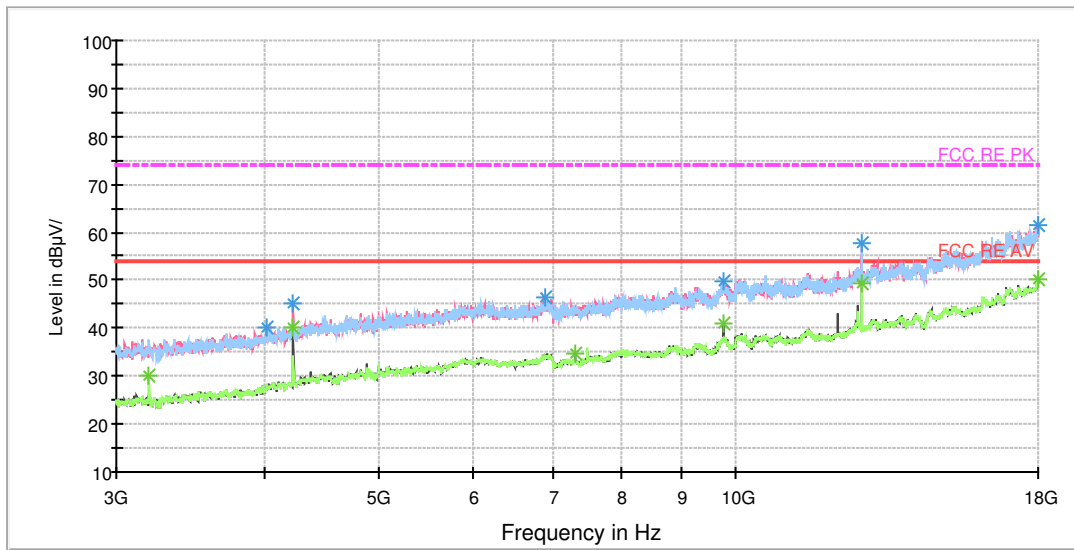


Radiates Emission from 3GHz to 18GHz

Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
4020.000000	40.0	101.0	V	359.0	40.5	0.5	34.0	74
4233.750000	45.3	101.0	V	96.0	47.2	1.9	28.7	74
6903.750000	46.5	101.0	H	0.0	53.5	7.0	27.5	74
9765.000000	49.7	101.0	V	31.0	61.5	11.8	24.3	74
12763.125000	57.8	101.0	V	207.0	72.9	15.1	16.2	74
17968.125000	61.3	101.0	H	59.0	86.3	25.0	12.7	74

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
3198.750000	30.2	101.0	H	90.0	31.9	-1.7	23.8	54
4233.750000	40.2	101.0	V	96.0	42.1	1.9	13.8	54
7321.875000	34.7	101.0	V	274.0	43.2	8.5	19.3	54
9763.125000	41.1	101.0	V	311.0	52.9	11.8	12.9	54
12763.125000	49.2	101.0	H	347.0	64.3	15.1	4.8	54
18000.000000	50.2	101.0	H	13.0	75.6	25.4	3.8	54

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

RE 18-26.5GHz PK+AV

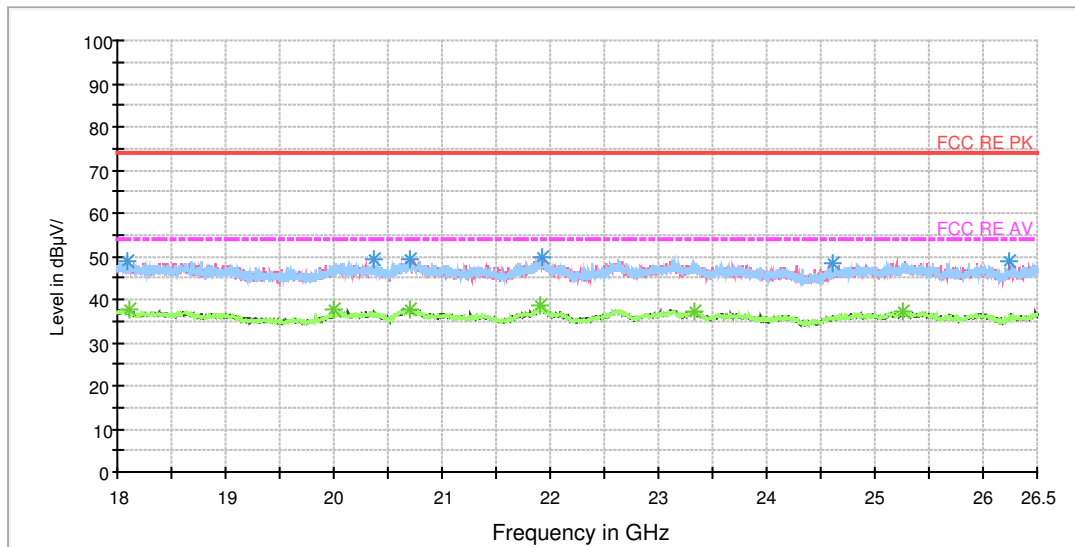


Radiates Emission from 18GHz to 26.5GHz

Frequency (MHz)	Peak (dBuV/m)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
18093.500000	49.0	H	265.0	51.2	-2.2	25.0	74
20375.750000	49.4	V	184.0	55.5	-6.1	24.6	74
20695.562500	49.2	H	163.0	55.9	-6.7	24.8	74
21925.937500	49.8	V	350.0	57.8	-8.0	24.2	74
24616.187500	48.5	H	251.0	54.5	-6.0	25.5	74
26243.937500	48.7	V	233.0	54.1	-5.4	25.3	74

Frequency (MHz)	Average (dBuV/m)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
18109.437500	37.8	V	292.0	40.1	-2.3	16.2	54
19999.625000	37.9	V	328.0	43.6	-5.7	16.1	54
20704.062500	37.7	V	316.0	44.4	-6.7	16.3	54
21899.375000	38.5	H	120.0	46.5	-8.0	15.5	54
23326.312500	37.4	H	138.0	43.4	-6.0	16.6	54
25254.750000	37.3	H	65.0	43.1	-5.8	16.7	54

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

RE 0.03-1GHz QP Class B

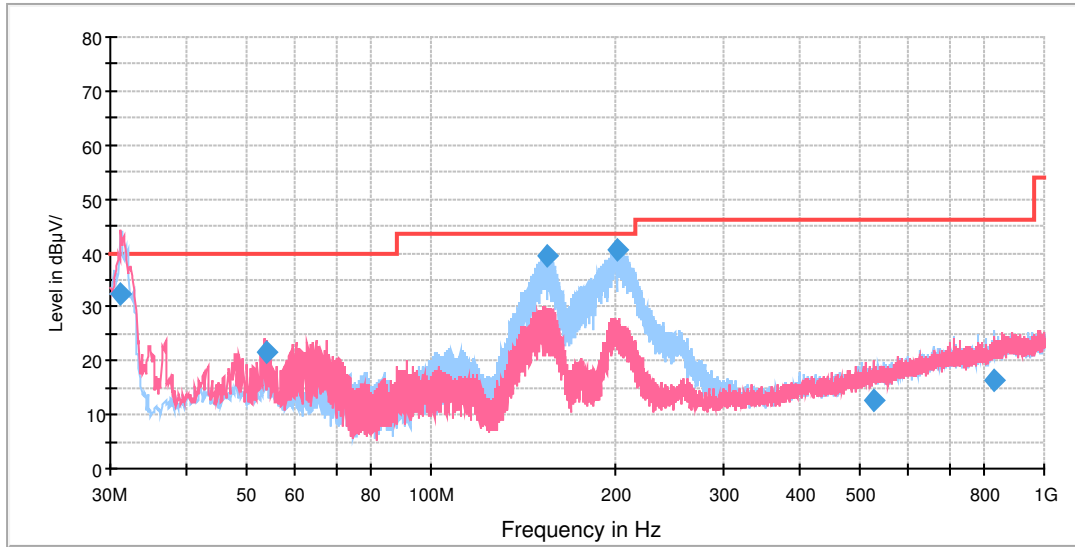


Radiates Emission from 30MHz to 1GHz

Frequency (MHz)	Quasi-Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
31.232500	32.5	101.0	V	337.0	55.0	-22.5	7.5	40.0
54.067500	21.4	101.0	V	205.0	42.3	-20.9	18.6	40.0
154.907500	39.3	121.0	H	64.0	68.5	-29.2	4.2	43.5
201.588750	40.6	126.0	H	284.0	66.9	-26.3	2.9	43.5
528.518750	12.7	126.0	V	173.0	31.2	-18.5	33.3	46.0
827.077500	16.4	101.0	H	102.0	30.2	-13.8	29.6	46.0



RE 1G-3GHz PK+AV

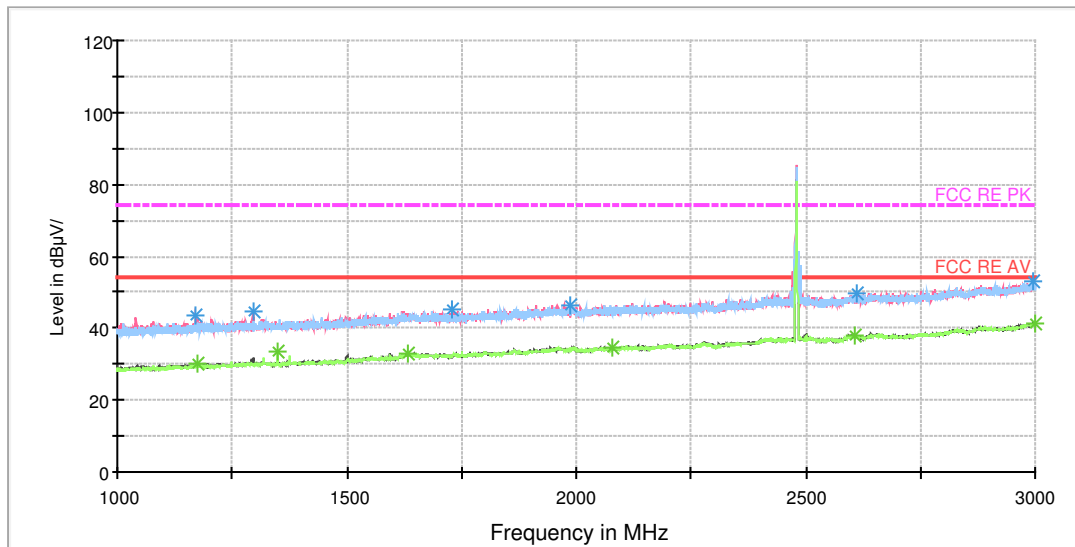


Radiates Emission from 1GHz to 3GHz  
 Note: The signal beyond the limit is carrier.

Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1172.250000	43.4	101.0	V	155.0	51.5	-8.1	30.6	74
1295.000000	44.8	101.0	V	146.0	52.6	-7.8	29.2	74
1727.500000	45.2	101.0	V	220.0	50.3	-5.1	28.8	74
1988.000000	46.5	101.0	V	359.0	50.0	-3.5	27.5	74
2611.750000	49.7	101.0	H	290.0	49.8	0.1	24.3	74
2997.250000	53.0	101.0	H	253.0	55.3	2.3	21.0	74

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1174.750000	30.3	101.0	V	61.0	38.3	-8.0	23.7	54
1350.000000	33.3	101.0	H	243.0	40.9	-7.6	20.7	54
1632.000000	33.0	101.0	V	174.0	37.7	-4.7	21.0	54
2079.500000	34.6	101.0	V	275.0	37.6	-3.0	19.4	54
2608.000000	38.2	101.0	V	31.0	38.4	0.2	15.8	54
2998.250000	41.4	101.0	H	215.0	43.7	2.3	12.6	54

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

RE 3-18GHz PK+AV

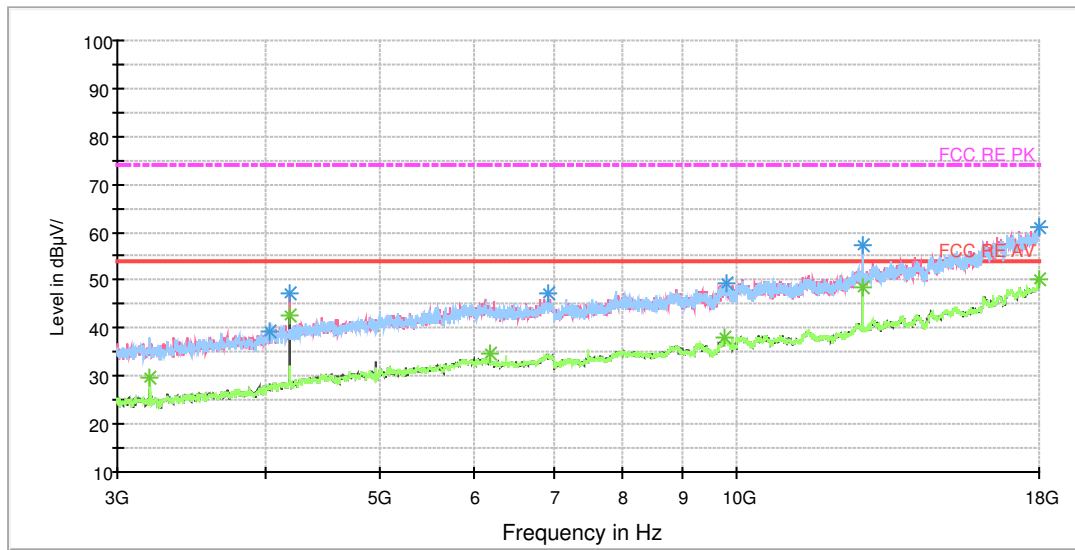


Radiates Emission from 3GHz to 18GHz

Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
4036.875000	39.4	100.0	V	0.0	40.0	0.6	34.6	74
4192.500000	47.5	100.0	V	113.0	49.2	1.7	26.5	74
6930.000000	47.3	100.0	V	0.0	54.1	6.8	26.7	74
9811.875000	49.2	100.0	H	0.0	61.4	12.2	24.8	74
12759.375000	57.2	100.0	V	330.0	72.3	15.1	16.8	74
17998.125000	61.3	100.0	V	144.0	86.7	25.4	12.7	74

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
3198.750000	29.8	100.0	H	263.0	31.5	-1.7	24.2	54
4192.500000	42.8	100.0	V	113.0	44.5	1.7	11.2	54
6198.750000	34.7	100.0	H	247.0	40.7	6.0	19.3	54
9780.000000	37.9	100.0	V	284.0	49.9	12.0	16.1	54
12763.125000	48.7	100.0	V	0.0	63.8	15.1	5.3	54
17996.250000	50.1	100.0	H	139.0	75.5	25.4	3.9	54

**Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)**

RE 18-26.5GHz PK+AV

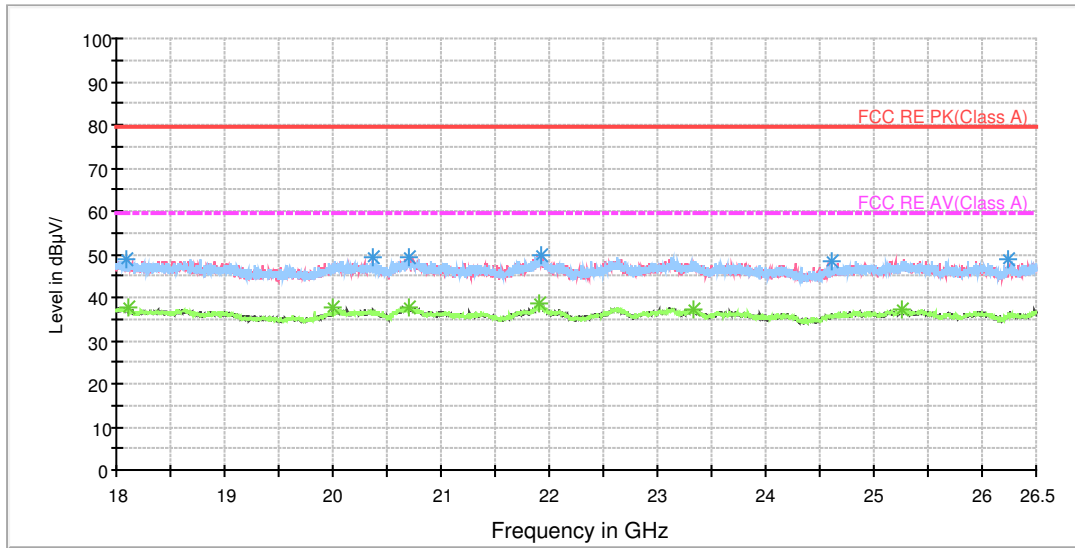

Radiates Emission from 18GHz to 26.5GHz


Frequency (MHz)	Peak (dBuV/m)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
18093.500000	49.0	H	265.0	51.2	-2.2	25.0	74
20375.750000	49.4	V	184.0	55.5	-6.1	24.6	74
20695.562500	49.2	H	163.0	55.9	-6.7	24.8	74
21925.937500	49.8	V	350.0	57.8	-8.0	24.2	74
24616.187500	48.5	H	251.0	54.5	-6.0	25.5	74
26243.937500	48.7	V	233.0	54.1	-5.4	25.3	74

Frequency (MHz)	Average (dBuV/m)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
18109.437500	37.8	V	292.0	40.1	-2.3	16.2	54
19999.625000	37.9	V	328.0	43.6	-5.7	16.1	54
20704.062500	37.7	V	316.0	44.4	-6.7	16.3	54
21899.375000	38.5	H	120.0	46.5	-8.0	15.5	54
23326.312500	37.4	H	138.0	43.4	-6.0	16.6	54
25254.750000	37.3	H	65.0	43.1	-5.8	16.7	54

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)




RE 0.03-1GHz QP Class B

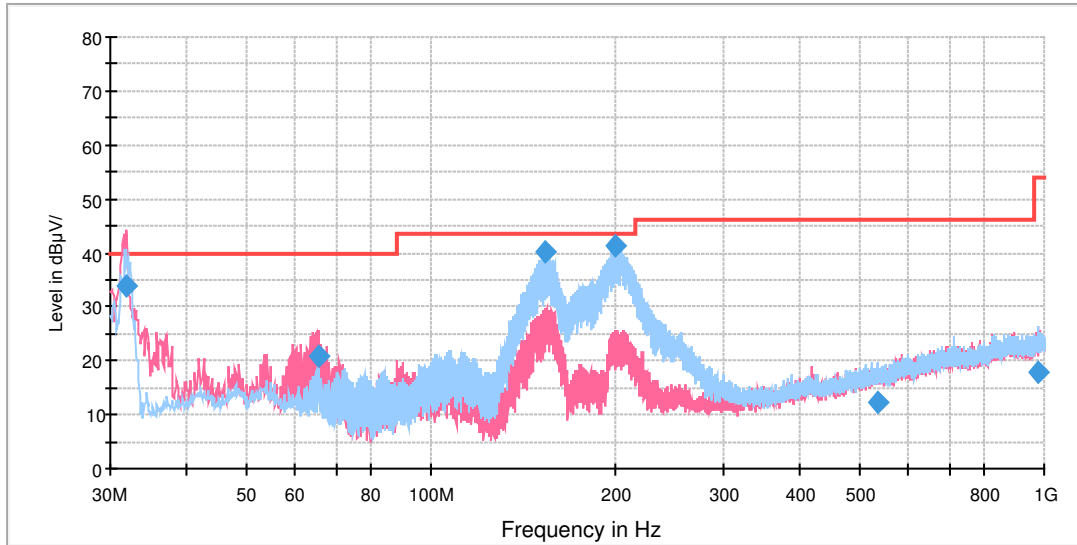

Radiates Emission from 30MHz to 1GHz

Frequency (MHz)	Quasi-Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
31.880000	34.0	100.0	V	291.0	56.5	-22.5	6.0	40.0
65.586250	20.7	100.0	V	16.0	44.8	-24.1	19.3	40.0
153.533750	40.0	125.0	H	70.0	69.2	-29.2	3.5	43.5
199.527500	41.4	125.0	H	91.0	67.7	-26.3	2.1	43.5
535.066250	12.4	125.0	H	230.0	30.7	-18.3	33.6	46.0
977.023750	17.7	125.0	V	334.0	30.1	-12.4	28.3	46.0

RE 1G-3GHz PK+AV

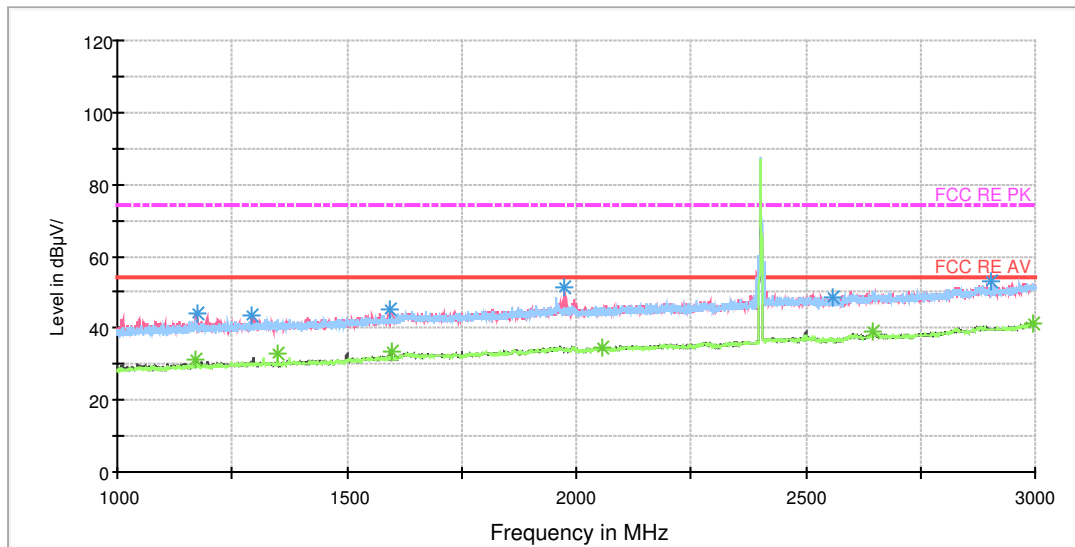


Radiates Emission from 1GHz to 3GHz  
 Note: The signal beyond the limit is carrier.

Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1172.500000	44.3	101.0	V	158.0	52.4	-8.1	29.7	74
1293.250000	43.4	101.0	V	0.0	51.1	-7.7	30.6	74
1596.000000	45.3	101.0	V	168.0	51.7	-6.4	28.7	74
1972.750000	51.3	101.0	V	196.0	54.9	-3.6	22.7	74
2558.500000	48.4	101.0	V	0.0	48.9	-0.5	25.6	74
2904.000000	52.9	101.0	H	30.0	54.9	2.0	21.1	74

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1171.250000	31.5	101.0	V	158.0	39.6	-8.1	22.5	54
1350.000000	33.1	101.0	H	242.0	40.7	-7.6	20.9	54
1596.250000	33.3	101.0	V	0.0	39.7	-6.4	20.7	54
2055.250000	34.8	101.0	V	215.0	38.0	-3.2	19.2	54
2647.750000	38.9	101.0	V	343.0	39.3	0.4	15.1	54
2997.250000	41.3	101.0	H	113.0	43.6	2.3	12.7	54

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

RE 3-18GHz PK+AV

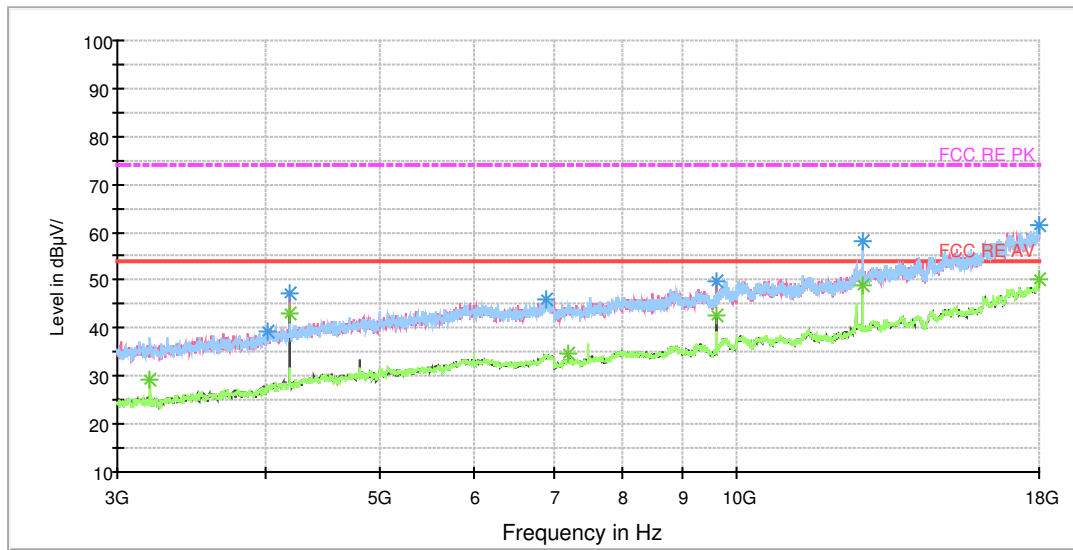


Radiates Emission from 3GHz to 18GHz

Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
4010.625000	39.1	100.0	V	318.0	39.6	0.5	34.9	74
4192.500000	47.3	100.0	V	114.0	49.0	1.7	26.7	74
6896.250000	46.0	100.0	H	278.0	53.0	7.0	28.0	74
9607.500000	49.7	100.0	V	176.0	59.7	10.0	24.3	74
12763.125000	58.2	100.0	H	328.0	73.3	15.1	15.8	74
17985.000000	61.7	100.0	H	0.0	86.9	25.2	12.3	74

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
3198.750000	29.1	100.0	H	262.0	30.8	-1.7	24.9	54
4192.500000	42.9	100.0	V	114.0	44.6	1.7	11.1	54
7205.625000	34.7	100.0	V	271.0	43.4	8.7	19.3	54
9607.500000	42.8	100.0	V	176.0	52.8	10.0	11.2	54
12763.125000	49.0	100.0	H	328.0	64.1	15.1	5.0	54
18000.000000	50.3	100.0	V	0.0	75.7	25.4	3.7	54

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

RE 18-26.5GHz PK+AV

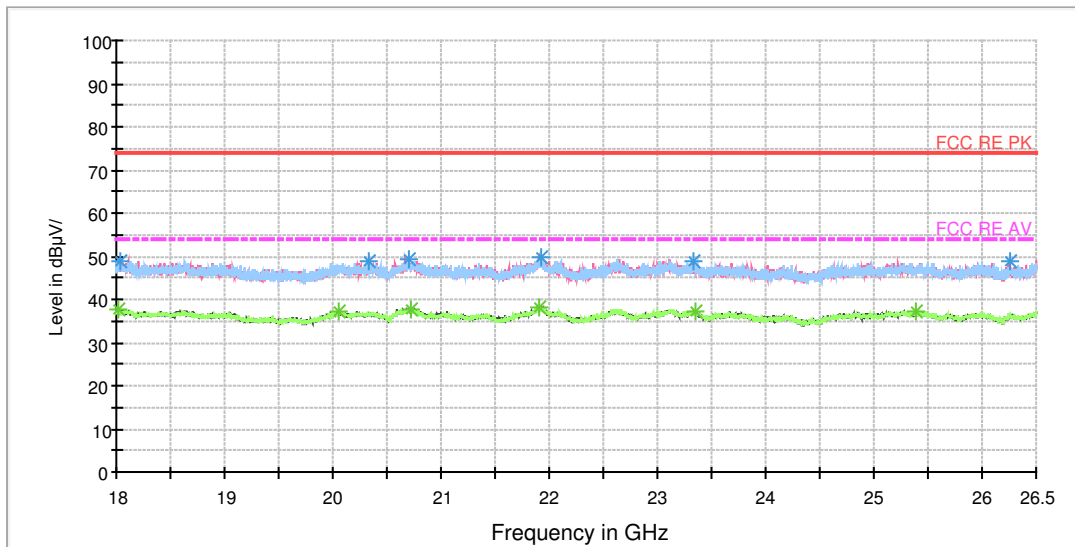


Radiates Emission from 18GHz to 26.5GHz

Frequency (MHz)	Peak (dBuV/m)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
18032.937500	49.0	V	299.0	50.9	-1.9	25.0	74
20324.750000	48.6	V	328.0	54.6	-6.0	25.4	74
20700.875000	49.1	H	43.0	55.8	-6.7	24.9	74
21932.312500	49.7	V	127.0	57.7	-8.0	24.3	74
23340.125000	48.8	V	348.0	54.8	-6.0	25.2	74
26250.312500	49.0	V	299.0	54.4	-5.4	25.0	74

Frequency (MHz)	Average (dBuV/m)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
18023.375000	37.6	V	267.0	39.5	-1.9	16.4	54
20061.250000	37.3	V	336.0	43.0	-5.7	16.7	54
20728.500000	37.9	V	259.0	44.7	-6.8	16.1	54
21899.375000	38.2	V	218.0	46.2	-8.0	15.8	54
23358.187500	37.2	H	68.0	43.1	-5.9	16.8	54
25393.937500	37.4	V	308.0	43.2	-5.8	16.6	54

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

RE 30M-1GHz QP

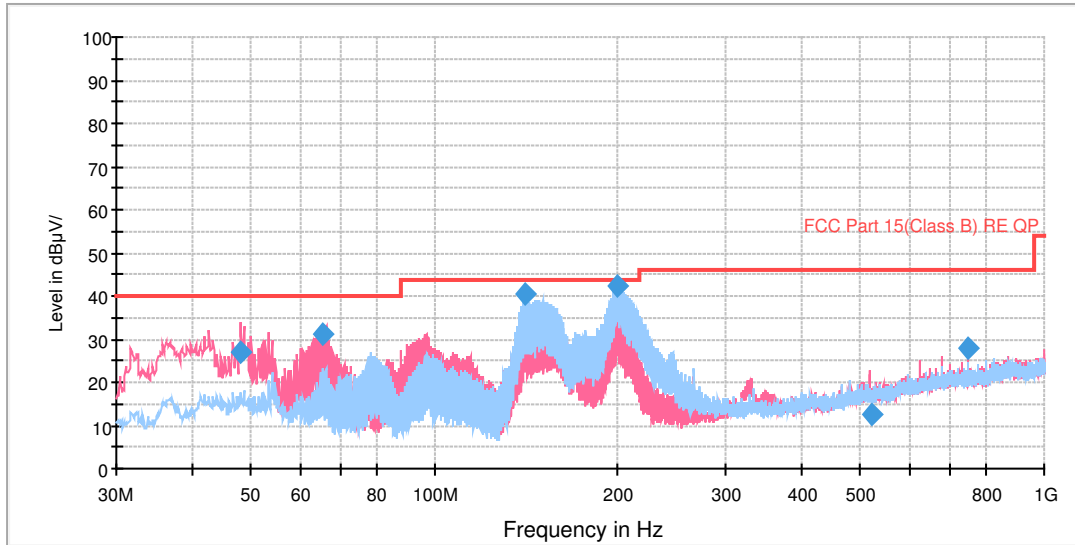


Radiates Emission from 30MHz to 1GHz

Frequency (MHz)	Quasi-Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
47.985138	26.7	101.0	V	194.0	46.9	-20.2	13.3	40.0
65.562434	31.0	101.0	V	29.0	55.1	-24.1	9.0	40.0
140.628550	40.4	126.0	H	338.0	70.0	-29.6	3.1	43.5
199.407784	42.4	101.0	H	162.0	68.7	-26.3	1.1	43.5
519.821750	12.5	126.0	V	62.0	31.5	-19.0	33.5	46.0
749.987500	27.8	101.0	V	172.0	43.2	-15.4	18.2	46.0



RE 1G-3GHz PK+AV

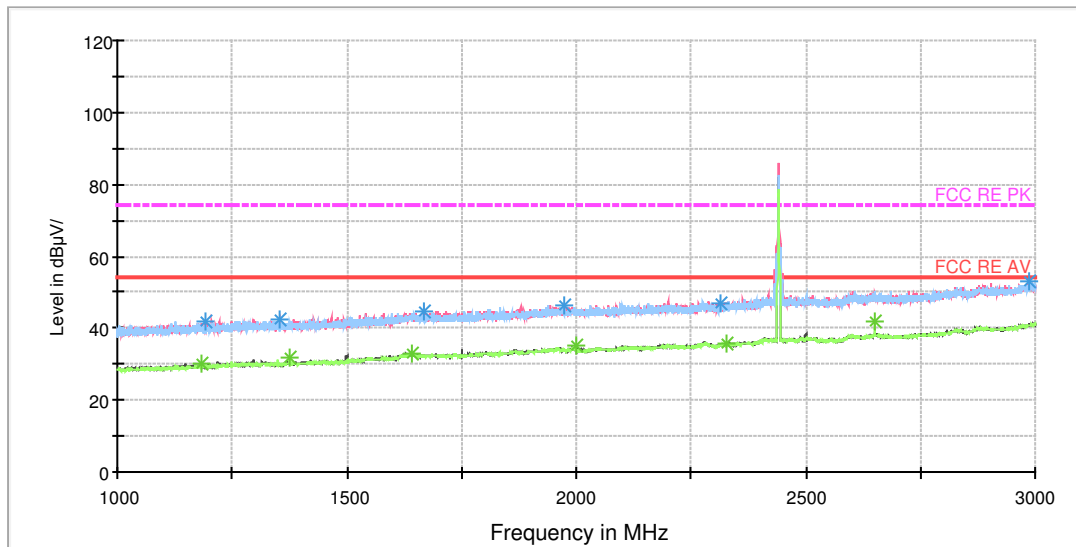


Radiates Emission from 1GHz to 3GHz  
 Note: The signal beyond the limit is carrier.

Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1190.250000	41.8	101.0	V	0.0	50.0	-8.2	32.2	74
1351.750000	42.5	101.0	V	0.0	50.0	-7.5	31.5	74
1666.000000	44.7	101.0	V	0.0	49.8	-5.1	29.3	74
1975.000000	46.5	101.0	H	130.0	50.1	-3.6	27.5	74
2313.250000	46.8	101.0	V	298.0	48.7	-1.9	27.2	74
2985.250000	52.9	101.0	H	309.0	55.1	2.2	21.1	74

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1184.000000	30.1	101.0	V	327.0	38.2	-8.1	23.9	54
1375.000000	31.8	101.0	H	186.0	38.9	-7.1	22.2	54
1640.000000	32.8	101.0	V	140.0	37.5	-4.7	21.2	54
2000.000000	35.2	101.0	V	354.0	38.6	-3.4	18.8	54
2327.250000	35.6	101.0	H	75.0	37.2	-1.6	18.4	54
2650.500000	42.0	101.0	H	158.0	42.4	0.4	12.0	54

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

RE 3-18GHz PK+AV

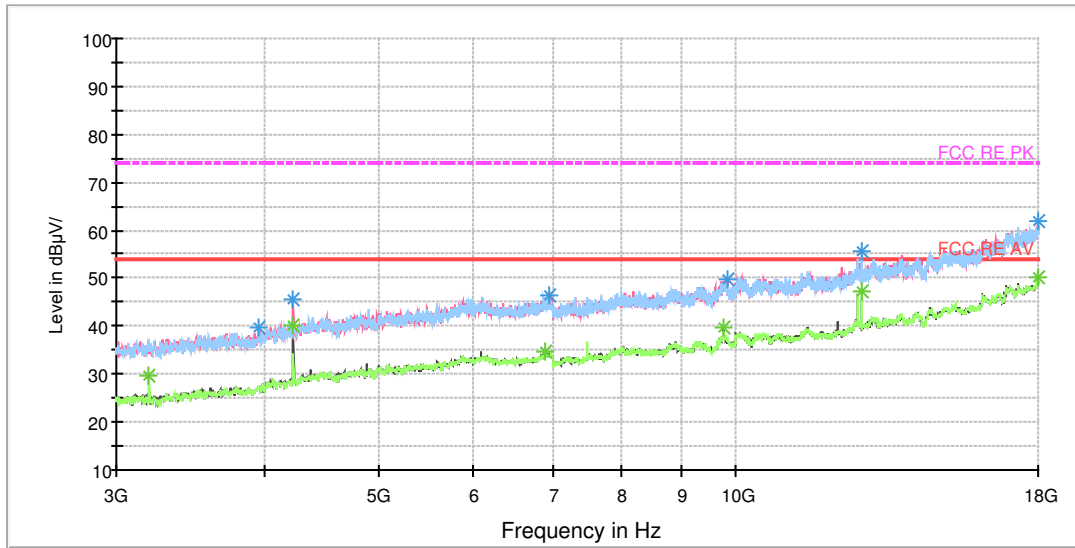


Radiates Emission from 3GHz to 18GHz

Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
3954.375000	39.6	101.0	H	46.0	39.8	0.2	34.4	74
4233.750000	45.6	101.0	V	97.0	47.5	1.9	28.4	74
6965.625000	46.4	101.0	H	108.0	53.0	6.6	27.6	74
9828.750000	49.7	101.0	V	298.0	61.7	12.0	24.3	74
12763.125000	55.8	101.0	H	347.0	70.9	15.1	18.2	74
18000.000000	61.7	101.0	V	328.0	87.1	25.4	12.3	74

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
3198.750000	29.7	101.0	H	91.0	31.4	-1.7	24.3	54
4233.750000	40.1	101.0	V	97.0	42.0	1.9	13.9	54
6915.000000	34.8	101.0	H	139.0	41.7	6.9	19.2	54
9763.125000	39.9	101.0	V	175.0	51.7	11.8	14.1	54
12763.125000	47.2	101.0	H	347.0	62.3	15.1	6.8	54
18000.000000	50.3	101.0	V	328.0	75.7	25.4	3.7	54

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

RE 18-26.5GHz PK+AV

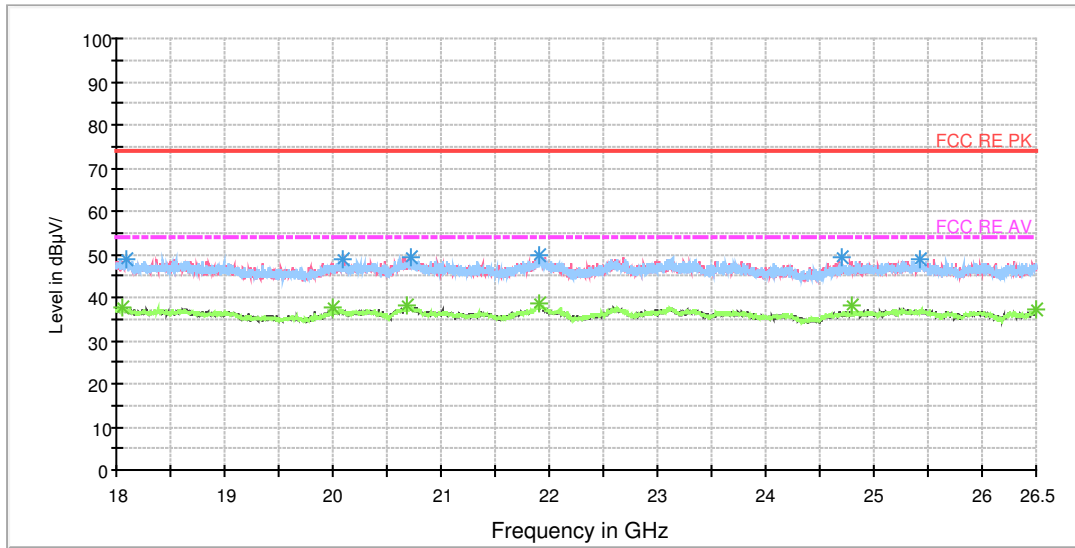


Radiates Emission from 18GHz to 26.5GHz

Frequency (MHz)	Peak (dBuV/m)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
18091.375000	49.0	V	292.0	51.2	-2.2	25.0	74
20093.125000	48.9	H	0.0	54.7	-5.8	25.1	74
20716.812500	49.3	H	109.0	56.0	-6.7	24.7	74
21916.375000	49.9	H	135.0	57.9	-8.0	24.1	74
24709.687500	49.1	H	313.0	55.1	-6.0	24.9	74
25420.500000	49.0	V	51.0	54.8	-5.8	25.0	74

Frequency (MHz)	Average (dBuV/m)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
18048.875000	37.6	H	17.0	39.6	-2.0	16.4	54
19999.625000	37.8	V	334.0	43.5	-5.7	16.2	54
20678.562500	38.0	H	79.0	44.6	-6.6	16.0	54
21910.000000	38.4	V	339.0	46.4	-8.0	15.6	54
24800.000000	38.1	H	160.0	44.1	-6.0	15.9	54
26498.937500	37.4	V	135.0	42.8	-5.4	16.6	54

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)


RE 0.03-1GHz QP Class B

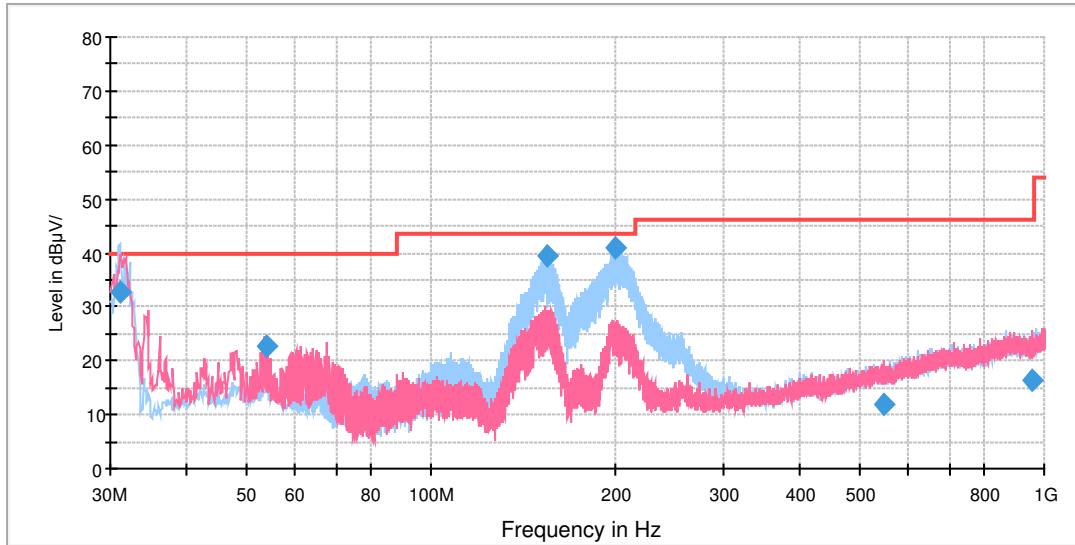

Radiates Emission from 30MHz to 1GHz

Frequency (MHz)	Quasi-Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
31.071250	32.6	101.0	H	232.0	55.1	-22.5	7.4	40.0
54.108750	22.7	101.0	V	173.0	43.6	-20.9	17.3	40.0
154.220000	39.3	126.0	H	66.0	68.5	-29.2	4.2	43.5
199.567500	41.1	126.0	H	278.0	67.4	-26.3	2.4	43.5
547.677500	11.8	126.0	V	181.0	30.1	-18.3	34.2	46.0
956.290000	16.5	101.0	V	318.0	29.5	-13.0	29.5	46.0

RE 1G-3GHz PK+AV

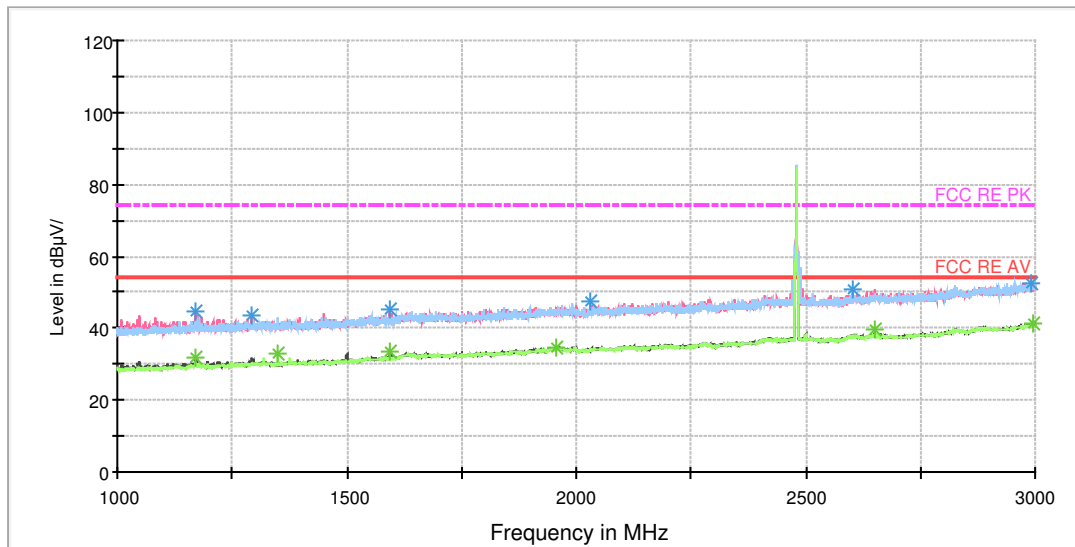


Radiates Emission from 1GHz to 3GHz  
 Note: The signal beyond the limit is carrier.

Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1170.000000	44.4	101.0	V	164.0	52.5	-8.1	29.6	74
1294.500000	43.4	101.0	V	0.0	51.2	-7.8	30.6	74
1593.750000	45.4	101.0	V	174.0	51.8	-6.4	28.6	74
2031.250000	47.5	101.0	V	258.0	50.9	-3.4	26.5	74
2601.250000	50.6	101.0	V	0.0	51.0	0.4	23.4	74
2989.250000	52.6	101.0	V	313.0	54.8	2.2	21.4	74

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1172.000000	31.5	101.0	V	164.0	39.6	-8.1	22.5	54
1350.000000	32.7	101.0	H	222.0	40.3	-7.6	21.3	54
1595.250000	33.6	101.0	V	174.0	40.0	-6.4	20.4	54
1956.500000	34.8	101.0	V	174.0	38.2	-3.4	19.2	54
2650.500000	39.3	101.0	V	145.0	39.7	0.4	14.7	54
2995.750000	41.5	101.0	V	340.0	43.8	2.3	12.5	54

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

RE 3-18GHz PK+AV

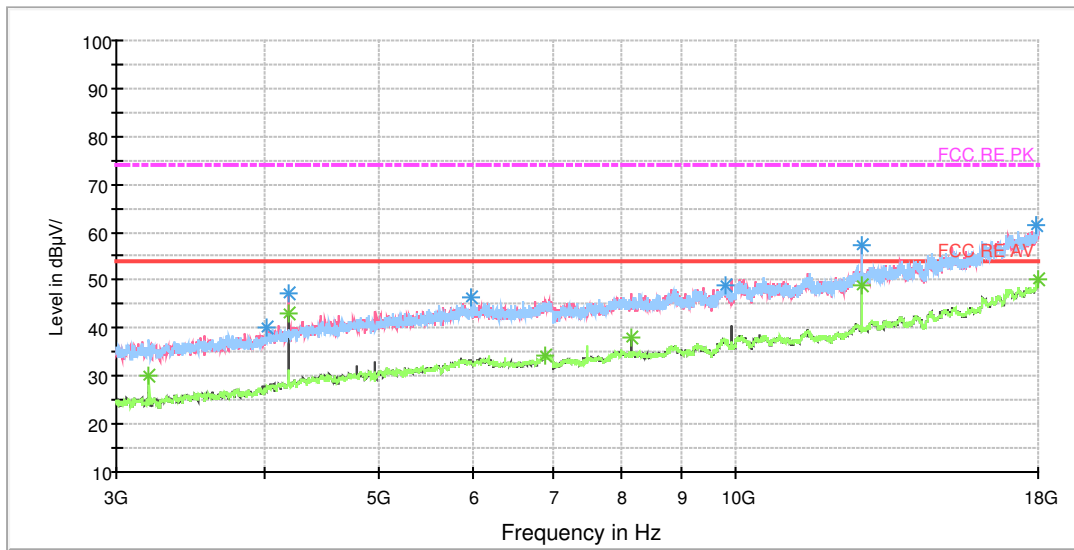


Radiates Emission from 3GHz to 18GHz

Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
4020.000000	40.1	100.0	V	225.0	40.6	-0.5	33.9	74
4192.500000	47.4	100.0	V	114.0	49.1	-1.7	26.6	74
5977.500000	46.3	100.0	H	0.0	52.4	-6.1	27.7	74
9796.875000	49.1	100.0	H	0.0	61.3	-12.2	24.9	74
12761.250000	57.5	100.0	V	0.0	72.6	-15.1	16.5	74
17962.500000	61.4	100.0	H	124.0	86.4	-25.0	12.6	74

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
3198.750000	30.1	100.0	H	263.0	31.8	-1.7	23.9	54
4192.500000	42.9	100.0	V	114.0	44.6	-1.7	11.1	54
6916.875000	34.5	100.0	H	2.0	41.4	-6.9	19.5	54
8156.250000	38.2	100.0	V	349.0	47.3	-9.1	15.8	54
12763.125000	48.9	100.0	V	0.0	64.0	-15.1	5.1	54
17998.125000	50.1	100.0	H	33.0	75.5	-25.4	3.9	54

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

RE 18-26.5GHz PK+AV

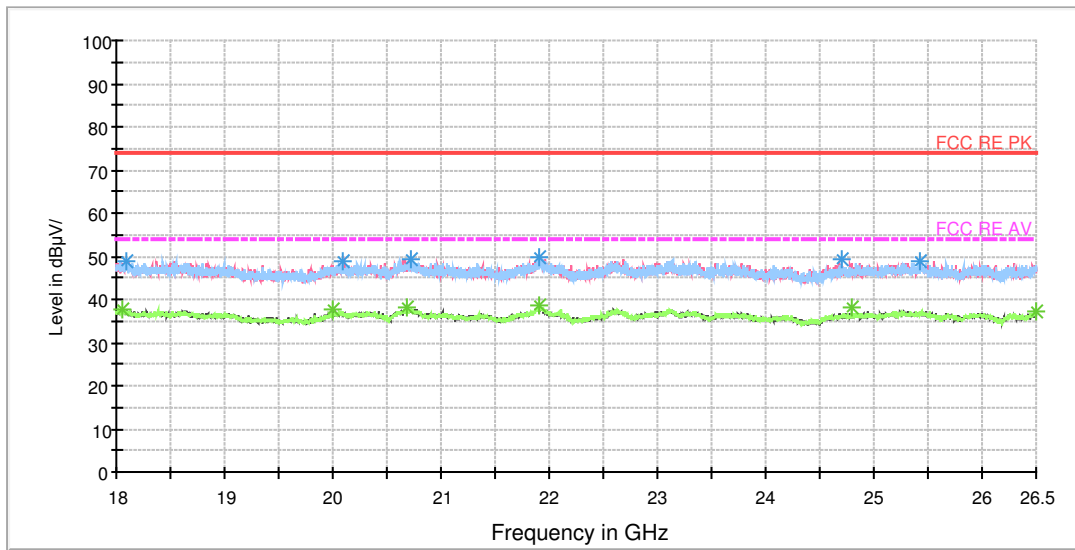

Radiates Emission from 18GHz to 26.5GHz

Frequency (MHz)	Peak (dBuV/m)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
18091.375000	49.0	V	292.0	51.2	-2.2	25.0	74
20093.125000	48.9	H	0.0	54.7	-5.8	25.1	74
20716.812500	49.3	H	109.0	56.0	-6.7	24.7	74
21916.375000	49.9	H	135.0	57.9	-8.0	24.1	74
24709.687500	49.1	H	313.0	55.1	-6.0	24.9	74
25420.500000	49.0	V	51.0	54.8	-5.8	25.0	74

Frequency (MHz)	Average (dBuV/m)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
18048.875000	37.6	H	17.0	39.6	-2.0	16.4	54
19999.625000	37.8	V	334.0	43.5	-5.7	16.2	54
20678.562500	38.0	H	79.0	44.6	-6.6	16.0	54
21910.000000	38.4	V	339.0	46.4	-8.0	15.6	54
24800.000000	38.1	H	160.0	44.1	-6.0	15.9	54
26498.937500	37.4	V	135.0	42.8	-5.4	16.6	54

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

### 4.11 Conducted Emission

#### Ambient condition


Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

#### Methods of Measurement

The EUT is placed on a non-metallic table of 80cm height above the horizontal metal reference ground plane. During the test, the EUT was operating in its typical mode. The test method is according to ANSI C63.10-2013. Connect the AC power line of the EUT to the L.I.S.N. Use EMI receiver to detect the average and Quasi-peak value. RBW is set to 9 kHz, VBW is set to 30kHz. The measurement result should include both L line and N line.

The test is in transmitting mode.

#### Test Setup

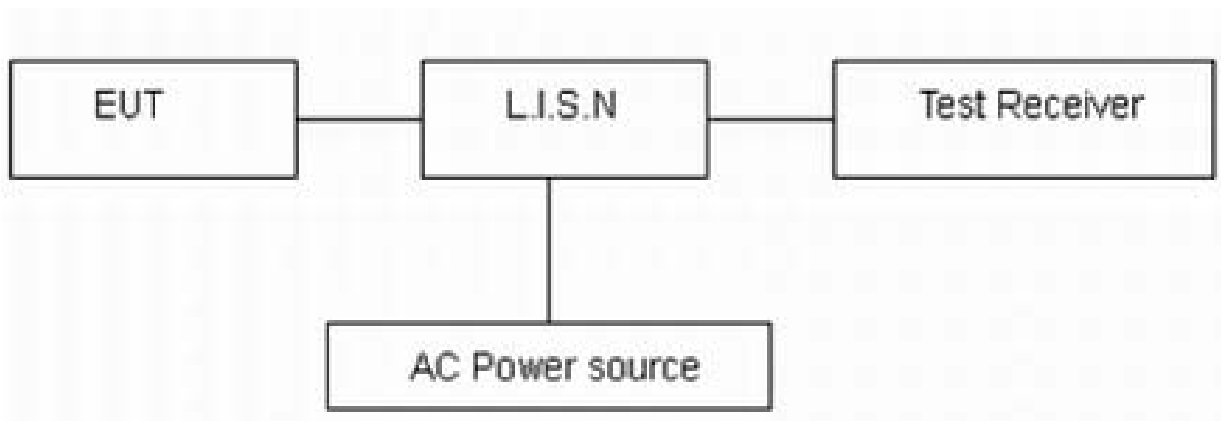

Note: AC Power source is used to change the voltage from 220V/50Hz to 110V/60Hz.

#### Limits

Frequency (MHz)	Conducted Limits(dBμV)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 *	56 to 46 *
0.5 - 5	56	46
5 - 30	60	50

\*: Decreases with the logarithm of the frequency.

#### Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 1.96$ ,  $U=2.69$  dB.




**Test Results:**

Following plots, Blue trace uses the peak detection, Green trace uses the average detection.

Basic Rate-CH0 L Line																																																																																											
	<table border="1"> <thead> <tr> <th colspan="6">Final Measurement Results</th> </tr> <tr> <th>Frequency MHz</th> <th>QP Level dBµV</th> <th>QP Limit dBµV</th> <th>QP Delta dB</th> <th>Phase</th> <th>PE</th> </tr> </thead> <tbody> <tr><td>0.26718</td><td>40.79</td><td>61.21</td><td>20.42</td><td>L1</td><td>gnd</td></tr> <tr><td>0.35312</td><td>48.97</td><td>58.89</td><td>9.92</td><td>L1</td><td>gnd</td></tr> <tr><td>0.61875</td><td>37.45</td><td>56.00</td><td>18.55</td><td>L1</td><td>gnd</td></tr> <tr><td>1.1539</td><td>38.40</td><td>56.00</td><td>17.60</td><td>L1</td><td>gnd</td></tr> <tr><td>14.29453</td><td>25.78</td><td>60.00</td><td>34.22</td><td>L1</td><td>gnd</td></tr> <tr><td>29.43125</td><td>30.82</td><td>60.00</td><td>29.18</td><td>L1</td><td>gnd</td></tr> </tbody> </table> <table border="1"> <thead> <tr> <th>Frequency MHz</th> <th>AV Level dBµV</th> <th>AV Limit dBµV</th> <th>AV Delta dB</th> <th>Phase</th> <th>PE</th> </tr> </thead> <tbody> <tr><td>0.25156</td><td>24.85</td><td>51.71</td><td>26.86</td><td>L1</td><td>gnd</td></tr> <tr><td>0.37265</td><td>25.95</td><td>48.44</td><td>22.49</td><td>L1</td><td>gnd</td></tr> <tr><td>1.03671</td><td>22.10</td><td>46.00</td><td>23.90</td><td>L1</td><td>gnd</td></tr> <tr><td>1.15</td><td>29.23</td><td>46.00</td><td>16.77</td><td>L1</td><td>gnd</td></tr> <tr><td>14.29453</td><td>19.13</td><td>50.00</td><td>30.87</td><td>L1</td><td>gnd</td></tr> <tr><td>28.95078</td><td>24.28</td><td>50.00</td><td>25.72</td><td>L1</td><td>gnd</td></tr> </tbody> </table>	Final Measurement Results						Frequency MHz	QP Level dBµV	QP Limit dBµV	QP Delta dB	Phase	PE	0.26718	40.79	61.21	20.42	L1	gnd	0.35312	48.97	58.89	9.92	L1	gnd	0.61875	37.45	56.00	18.55	L1	gnd	1.1539	38.40	56.00	17.60	L1	gnd	14.29453	25.78	60.00	34.22	L1	gnd	29.43125	30.82	60.00	29.18	L1	gnd	Frequency MHz	AV Level dBµV	AV Limit dBµV	AV Delta dB	Phase	PE	0.25156	24.85	51.71	26.86	L1	gnd	0.37265	25.95	48.44	22.49	L1	gnd	1.03671	22.10	46.00	23.90	L1	gnd	1.15	29.23	46.00	16.77	L1	gnd	14.29453	19.13	50.00	30.87	L1	gnd	28.95078	24.28	50.00	25.72	L1	gnd
Final Measurement Results																																																																																											
Frequency MHz	QP Level dBµV	QP Limit dBµV	QP Delta dB	Phase	PE																																																																																						
0.26718	40.79	61.21	20.42	L1	gnd																																																																																						
0.35312	48.97	58.89	9.92	L1	gnd																																																																																						
0.61875	37.45	56.00	18.55	L1	gnd																																																																																						
1.1539	38.40	56.00	17.60	L1	gnd																																																																																						
14.29453	25.78	60.00	34.22	L1	gnd																																																																																						
29.43125	30.82	60.00	29.18	L1	gnd																																																																																						
Frequency MHz	AV Level dBµV	AV Limit dBµV	AV Delta dB	Phase	PE																																																																																						
0.25156	24.85	51.71	26.86	L1	gnd																																																																																						
0.37265	25.95	48.44	22.49	L1	gnd																																																																																						
1.03671	22.10	46.00	23.90	L1	gnd																																																																																						
1.15	29.23	46.00	16.77	L1	gnd																																																																																						
14.29453	19.13	50.00	30.87	L1	gnd																																																																																						
28.95078	24.28	50.00	25.72	L1	gnd																																																																																						
Basic Rate-CH0 N Line																																																																																											
	<table border="1"> <thead> <tr> <th colspan="6">Final Measurement Results</th> </tr> <tr> <th>Frequency MHz</th> <th>QP Level dBµV</th> <th>QP Limit dBµV</th> <th>QP Delta dB</th> <th>Phase</th> <th>PE</th> </tr> </thead> <tbody> <tr><td>0.25937</td><td>39.09</td><td>61.45</td><td>22.36</td><td>N</td><td>gnd</td></tr> <tr><td>0.35312</td><td>48.37</td><td>58.89</td><td>10.52</td><td>N</td><td>gnd</td></tr> <tr><td>0.63046</td><td>38.25</td><td>56.00</td><td>17.75</td><td>N</td><td>gnd</td></tr> <tr><td>1.1539</td><td>38.62</td><td>56.00</td><td>17.38</td><td>N</td><td>gnd</td></tr> <tr><td>14.3414</td><td>26.08</td><td>60.00</td><td>33.92</td><td>N</td><td>gnd</td></tr> <tr><td>29.15781</td><td>31.26</td><td>60.00</td><td>28.74</td><td>N</td><td>gnd</td></tr> </tbody> </table> <table border="1"> <thead> <tr> <th>Frequency MHz</th> <th>AV Level dBµV</th> <th>AV Limit dBµV</th> <th>AV Delta dB</th> <th>Phase</th> <th>PE</th> </tr> </thead> <tbody> <tr><td>0.24765</td><td>22.38</td><td>51.84</td><td>29.46</td><td>N</td><td>gnd</td></tr> <tr><td>0.32968</td><td>30.30</td><td>49.46</td><td>19.16</td><td>N</td><td>gnd</td></tr> <tr><td>0.61875</td><td>23.35</td><td>46.00</td><td>22.65</td><td>N</td><td>gnd</td></tr> <tr><td>1.13828</td><td>24.31</td><td>46.00</td><td>21.69</td><td>N</td><td>gnd</td></tr> <tr><td>14.3414</td><td>19.36</td><td>50.00</td><td>30.64</td><td>N</td><td>gnd</td></tr> <tr><td>29.28281</td><td>24.41</td><td>50.00</td><td>25.59</td><td>N</td><td>gnd</td></tr> </tbody> </table>	Final Measurement Results						Frequency MHz	QP Level dBµV	QP Limit dBµV	QP Delta dB	Phase	PE	0.25937	39.09	61.45	22.36	N	gnd	0.35312	48.37	58.89	10.52	N	gnd	0.63046	38.25	56.00	17.75	N	gnd	1.1539	38.62	56.00	17.38	N	gnd	14.3414	26.08	60.00	33.92	N	gnd	29.15781	31.26	60.00	28.74	N	gnd	Frequency MHz	AV Level dBµV	AV Limit dBµV	AV Delta dB	Phase	PE	0.24765	22.38	51.84	29.46	N	gnd	0.32968	30.30	49.46	19.16	N	gnd	0.61875	23.35	46.00	22.65	N	gnd	1.13828	24.31	46.00	21.69	N	gnd	14.3414	19.36	50.00	30.64	N	gnd	29.28281	24.41	50.00	25.59	N	gnd
Final Measurement Results																																																																																											
Frequency MHz	QP Level dBµV	QP Limit dBµV	QP Delta dB	Phase	PE																																																																																						
0.25937	39.09	61.45	22.36	N	gnd																																																																																						
0.35312	48.37	58.89	10.52	N	gnd																																																																																						
0.63046	38.25	56.00	17.75	N	gnd																																																																																						
1.1539	38.62	56.00	17.38	N	gnd																																																																																						
14.3414	26.08	60.00	33.92	N	gnd																																																																																						
29.15781	31.26	60.00	28.74	N	gnd																																																																																						
Frequency MHz	AV Level dBµV	AV Limit dBµV	AV Delta dB	Phase	PE																																																																																						
0.24765	22.38	51.84	29.46	N	gnd																																																																																						
0.32968	30.30	49.46	19.16	N	gnd																																																																																						
0.61875	23.35	46.00	22.65	N	gnd																																																																																						
1.13828	24.31	46.00	21.69	N	gnd																																																																																						
14.3414	19.36	50.00	30.64	N	gnd																																																																																						
29.28281	24.41	50.00	25.59	N	gnd																																																																																						
Basic Rate-CH39 L Line																																																																																											
	<table border="1"> <thead> <tr> <th colspan="6">Final Measurement Results</th> </tr> <tr> <th>Frequency MHz</th> <th>QP Level dBµV</th> <th>QP Limit dBµV</th> <th>QP Delta dB</th> <th>Phase</th> <th>PE</th> </tr> </thead> <tbody> <tr><td>0.34921</td><td>48.99</td><td>58.98</td><td>9.99</td><td>L1</td><td>gnd</td></tr> <tr><td>0.61875</td><td>37.69</td><td>56.00</td><td>18.31</td><td>L1</td><td>gnd</td></tr> <tr><td>1.15</td><td>37.76</td><td>56.00</td><td>18.24</td><td>L1</td><td>gnd</td></tr> <tr><td>2.13828</td><td>26.22</td><td>56.00</td><td>29.78</td><td>L1</td><td>gnd</td></tr> <tr><td>14.22421</td><td>24.91</td><td>60.00</td><td>35.09</td><td>L1</td><td>gnd</td></tr> <tr><td>29.15781</td><td>30.30</td><td>60.00</td><td>29.70</td><td>L1</td><td>gnd</td></tr> </tbody> </table> <table border="1"> <thead> <tr> <th>Frequency MHz</th> <th>AV Level dBµV</th> <th>AV Limit dBµV</th> <th>AV Delta dB</th> <th>Phase</th> <th>PE</th> </tr> </thead> <tbody> <tr><td>0.25156</td><td>24.85</td><td>51.71</td><td>26.86</td><td>L1</td><td>gnd</td></tr> <tr><td>0.37265</td><td>25.88</td><td>48.44</td><td>22.56</td><td>L1</td><td>gnd</td></tr> <tr><td>0.62265</td><td>23.83</td><td>46.00</td><td>22.17</td><td>L1</td><td>gnd</td></tr> <tr><td>1.15</td><td>29.04</td><td>46.00</td><td>16.96</td><td>L1</td><td>gnd</td></tr> <tr><td>14.22421</td><td>19.12</td><td>50.00</td><td>30.88</td><td>L1</td><td>gnd</td></tr> <tr><td>28.86484</td><td>23.92</td><td>50.00</td><td>26.08</td><td>L1</td><td>gnd</td></tr> </tbody> </table>	Final Measurement Results						Frequency MHz	QP Level dBµV	QP Limit dBµV	QP Delta dB	Phase	PE	0.34921	48.99	58.98	9.99	L1	gnd	0.61875	37.69	56.00	18.31	L1	gnd	1.15	37.76	56.00	18.24	L1	gnd	2.13828	26.22	56.00	29.78	L1	gnd	14.22421	24.91	60.00	35.09	L1	gnd	29.15781	30.30	60.00	29.70	L1	gnd	Frequency MHz	AV Level dBµV	AV Limit dBµV	AV Delta dB	Phase	PE	0.25156	24.85	51.71	26.86	L1	gnd	0.37265	25.88	48.44	22.56	L1	gnd	0.62265	23.83	46.00	22.17	L1	gnd	1.15	29.04	46.00	16.96	L1	gnd	14.22421	19.12	50.00	30.88	L1	gnd	28.86484	23.92	50.00	26.08	L1	gnd
Final Measurement Results																																																																																											
Frequency MHz	QP Level dBµV	QP Limit dBµV	QP Delta dB	Phase	PE																																																																																						
0.34921	48.99	58.98	9.99	L1	gnd																																																																																						
0.61875	37.69	56.00	18.31	L1	gnd																																																																																						
1.15	37.76	56.00	18.24	L1	gnd																																																																																						
2.13828	26.22	56.00	29.78	L1	gnd																																																																																						
14.22421	24.91	60.00	35.09	L1	gnd																																																																																						
29.15781	30.30	60.00	29.70	L1	gnd																																																																																						
Frequency MHz	AV Level dBµV	AV Limit dBµV	AV Delta dB	Phase	PE																																																																																						
0.25156	24.85	51.71	26.86	L1	gnd																																																																																						
0.37265	25.88	48.44	22.56	L1	gnd																																																																																						
0.62265	23.83	46.00	22.17	L1	gnd																																																																																						
1.15	29.04	46.00	16.96	L1	gnd																																																																																						
14.22421	19.12	50.00	30.88	L1	gnd																																																																																						
28.86484	23.92	50.00	26.08	L1	gnd																																																																																						

Basic Rate-CH39 N Line

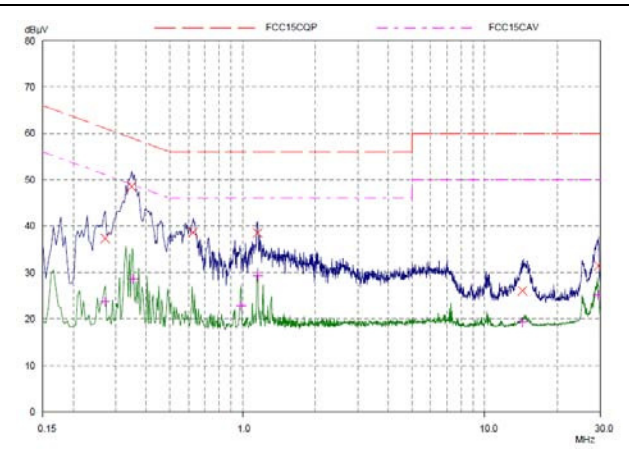


Final Measurement Results

Frequency MHz	QP Level dBµV	QP Limit dBµV	QP Delta dB	Phase	PE
0.27109	37.37	61.08	23.71	N	gnd
0.34921	48.47	58.98	10.51	N	gnd
0.62656	38.61	56.00	17.39	N	gnd
1.1539	38.52	56.00	17.48	N	gnd
14.3414	26.08	60.00	33.92	N	gnd
29.51328	31.47	60.00	28.53	N	gnd

Frequency MHz	AV Level dBµV	AV Limit dBµV	AV Delta dB	Phase	PE
0.27109	23.72	51.08	27.36	N	gnd
0.35312	28.62	48.89	20.27	N	gnd
0.98593	22.79	46.00	23.21	N	gnd
1.1539	29.27	46.00	16.73	N	gnd
14.3414	19.28	50.00	30.72	N	gnd
29.31015	25.28	50.00	24.72	N	gnd

Basic Rate-CH78 L Line

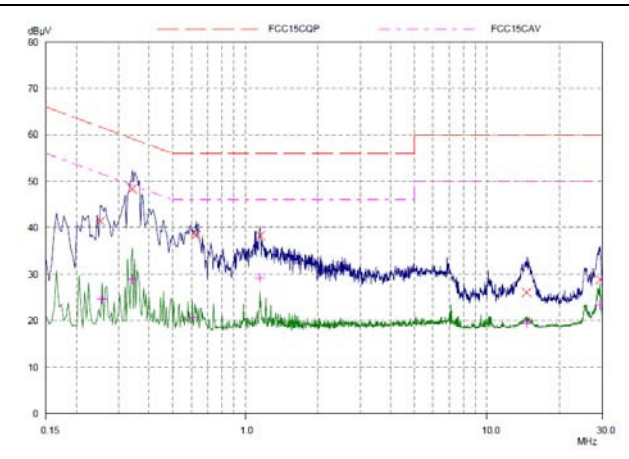


Final Measurement Results

Frequency MHz	QP Level dBµV	QP Limit dBµV	QP Delta dB	Phase	PE
0.25156	41.42	61.71	20.29	L1	gnd
0.3414	48.33	59.17	10.84	L1	gnd
0.62656	38.43	56.00	17.57	L1	gnd
1.1539	38.30	56.00	17.70	L1	gnd
14.60703	26.05	60.00	33.95	L1	gnd
29.48203	28.83	60.00	31.17	L1	gnd

Frequency MHz	AV Level dBµV	AV Limit dBµV	AV Delta dB	Phase	PE
0.25546	24.69	51.58	26.89	L1	gnd
0.3414	29.00	49.17	20.17	L1	gnd
0.60312	20.67	46.00	25.33	L1	gnd
1.15	29.18	46.00	16.82	L1	gnd
14.60703	19.44	50.00	30.56	L1	gnd
29.4	23.31	50.00	26.69	L1	gnd

Basic Rate-CH78 N Line

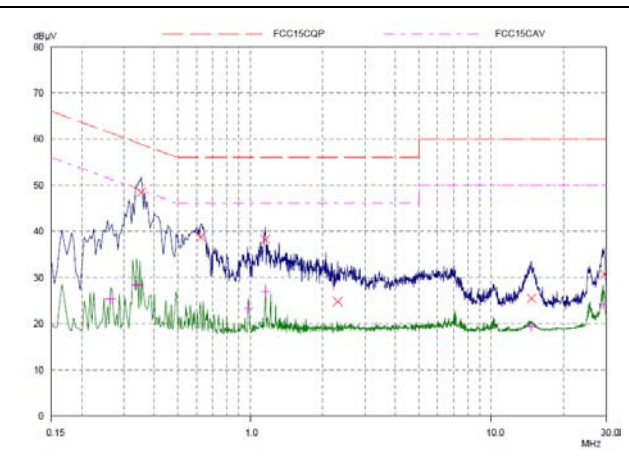


Final Measurement Results

Frequency MHz	QP Level dBµV	QP Limit dBµV	QP Delta dB	Phase	PE
0.35312	48.45	58.89	10.44	N	gnd
0.62656	38.77	56.00	17.23	N	gnd
1.1539	38.22	56.00	17.78	N	gnd
2.31015	24.80	56.00	31.20	N	gnd
14.69687	25.50	60.00	34.50	N	gnd
29.42734	30.72	60.00	29.28	N	gnd

Frequency MHz	AV Level dBµV	AV Limit dBµV	AV Delta dB	Phase	PE
0.26328	25.29	51.33	26.04	N	gnd
0.3375	28.37	49.26	20.89	N	gnd
0.98203	23.25	46.00	22.75	N	gnd
1.15781	26.91	46.00	19.09	N	gnd
14.69687	19.30	50.00	30.70	N	gnd
29.13828	24.10	50.00	25.90	N	gnd

EDR-CH0 L Line

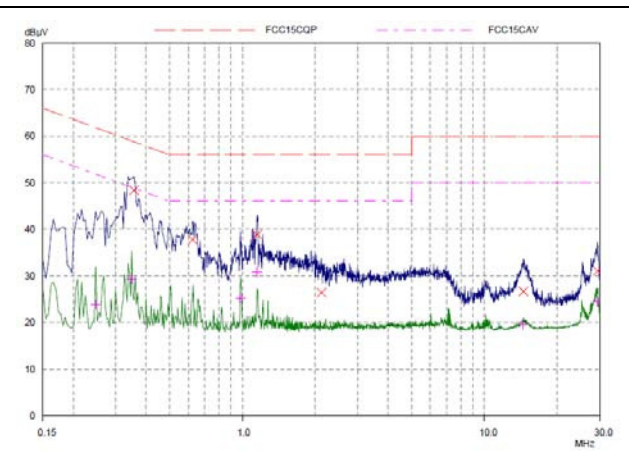


Final Measurement Results

Frequency MHz	QP Level dBµV	QP Limit dBµV	QP Delta dB	Phase	PE
0.35703	48.36	58.80	10.44	L1	gnd
0.62265	37.77	56.00	18.23	L1	gnd
1.15	38.92	56.00	17.08	L1	gnd
2.12265	26.42	56.00	29.58	L1	gnd
14.49375	26.67	60.00	33.33	L1	gnd
29.37265	31.05	60.00	28.95	L1	gnd

Frequency MHz	AV Level dBµV	AV Limit dBµV	AV Delta dB	Phase	PE
0.24765	23.90	51.84	27.94	L1	gnd
0.34921	29.28	48.98	19.70	L1	gnd
0.98203	25.14	46.00	20.86	L1	gnd
1.15	30.87	46.00	15.13	L1	gnd
14.49375	19.59	50.00	30.41	L1	gnd
29.31406	24.46	50.00	25.54	L1	gnd

EDR-CH0 N Line

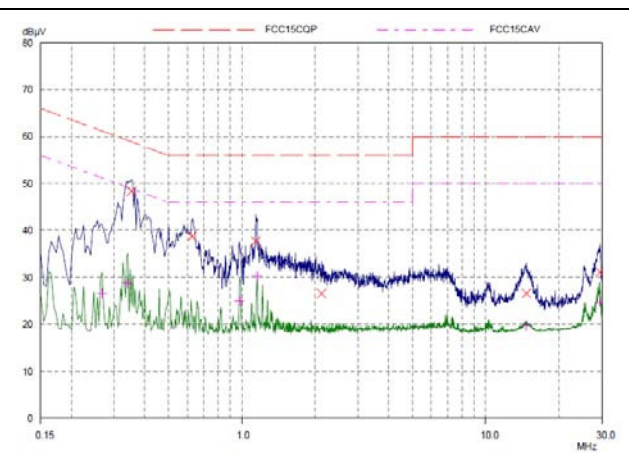


Final Measurement Results

Frequency MHz	QP Level dBµV	QP Limit dBµV	QP Delta dB	Phase	PE
0.35312	48.33	58.89	10.56	N	gnd
0.62656	38.69	56.00	17.31	N	gnd
1.14218	37.70	56.00	18.30	N	gnd
2.12656	26.58	56.00	29.42	N	gnd
14.70078	26.60	60.00	33.40	N	gnd
29.48593	31.13	60.00	28.87	N	gnd

Frequency MHz	AV Level dBµV	AV Limit dBµV	AV Delta dB	Phase	PE
0.26718	26.55	51.21	24.66	N	gnd
0.3414	28.72	49.17	20.45	N	gnd
0.97812	25.07	46.00	20.93	N	gnd
1.15781	30.25	46.00	15.75	N	gnd
14.70078	19.67	50.00	30.33	N	gnd
29.31406	24.79	50.00	25.21	N	gnd

EDR-CH39 L Line

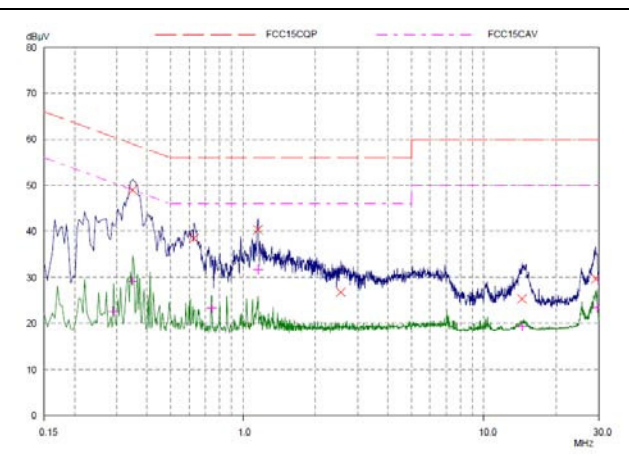

Final Measurement Results


Frequency MHz	QP Level dBµV	QP Limit dBµV	QP Delta dB	Phase	PE
0.34921	48.97	58.98	10.01	L1	gnd
0.62656	38.47	56.00	17.53	L1	gnd
1.1539	40.38	56.00	15.62	L1	gnd
2.54843	26.79	56.00	29.21	L1	gnd
14.4	25.34	60.00	34.66	L1	gnd
29.10703	29.68	60.00	30.32	L1	gnd

Frequency MHz	AV Level dBµV	AV Limit dBµV	AV Delta dB	Phase	PE
0.29062	22.66	50.51	27.85	L1	gnd
0.34921	29.23	48.98	19.75	L1	gnd
0.73984	23.26	46.00	22.74	L1	gnd
1.1539	31.66	46.00	14.34	L1	gnd
14.4	19.28	50.00	30.72	L1	gnd
29.55234	23.49	50.00	26.51	L1	gnd



EDR-CH39 N Line

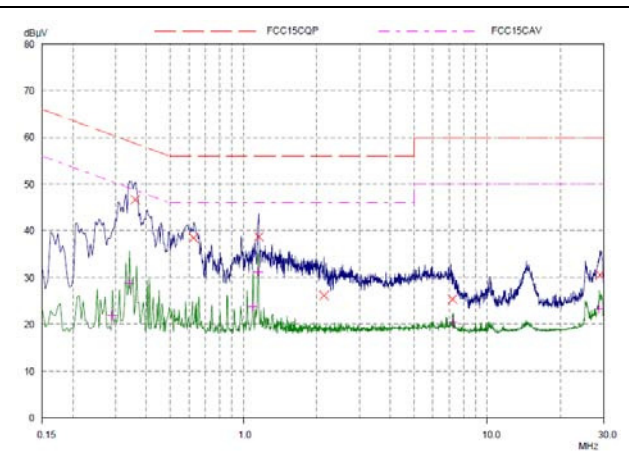


Final Measurement Results					
Frequency MHz	QP Level dBuV	QP Limit dBuV	QP Delta dB	Phase	PE
0.36093	46.68	58.71	12.03	N	gnd
0.62656	38.49	56.00	17.51	N	gnd
1.15781	38.72	56.00	17.28	N	gnd
2.14218	26.16	56.00	29.84	N	gnd
7.20468	25.38	60.00	34.62	N	gnd
28.95468	30.56	60.00	29.44	N	gnd

Frequency MHz	AV Level dBuV	AV Limit dBuV	AV Delta dB	Phase	PE
0.29062	21.95	50.51	28.56	N	gnd
0.3414	28.72	49.17	20.45	N	gnd
1.0914	23.90	46.00	22.10	N	gnd
1.15	31.24	46.00	14.76	N	gnd
7.20468	20.41	50.00	29.59	N	gnd
28.83359	23.39	50.00	26.61	N	gnd

EDR-CH78 L Line

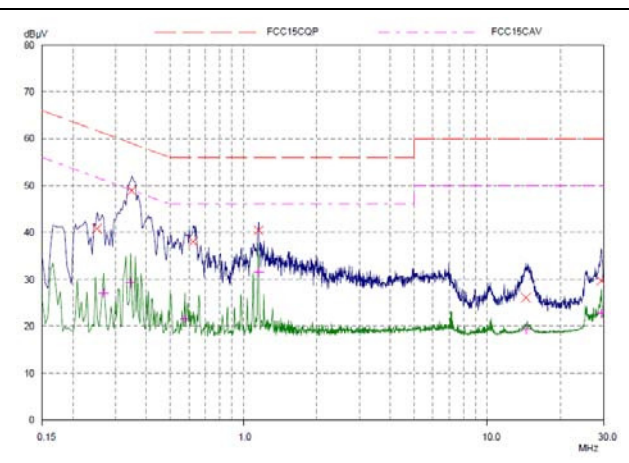


Final Measurement Results					
Frequency MHz	QP Level dBuV	QP Limit dBuV	QP Delta dB	Phase	PE
0.25156	40.82	61.71	20.89	L1	gnd
0.34921	48.91	58.98	10.07	L1	gnd
0.62265	38.03	56.00	17.97	L1	gnd
1.1539	40.46	56.00	15.54	L1	gnd
14.42734	26.08	60.00	33.92	L1	gnd
29.30625	29.68	60.00	30.32	L1	gnd

Frequency MHz	AV Level dBuV	AV Limit dBuV	AV Delta dB	Phase	PE
0.26718	27.15	51.21	24.06	L1	gnd
0.34531	29.28	49.07	19.79	L1	gnd
0.57578	21.70	46.00	24.30	L1	gnd
1.1539	31.59	46.00	14.41	L1	gnd
14.42734	19.36	50.00	30.64	L1	gnd
29.37265	22.73	50.00	27.27	L1	gnd

EDR-CH78 N Line

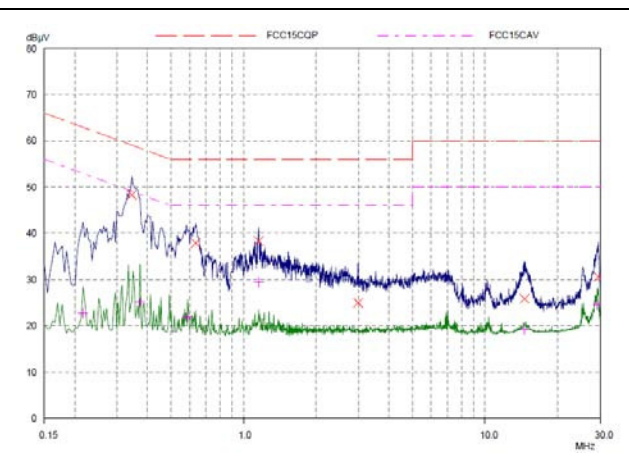

Final Measurement Results					
Frequency MHz	QP Level dBuV	QP Limit dBuV	QP Delta dB	Phase	PE
0.34531	48.33	59.07	10.74	N	gnd
0.63437	37.89	56.00	18.11	N	gnd
1.1539	38.32	56.00	17.68	N	gnd
2.98203	24.99	56.00	31.01	N	gnd
14.56796	25.87	60.00	34.13	N	gnd
29.4625	30.62	60.00	29.38	N	gnd

Frequency MHz	AV Level dBuV	AV Limit dBuV	AV Delta dB	Phase	PE
0.2164	22.74	52.96	30.22	N	gnd
0.37265	25.18	48.44	23.26	N	gnd
0.5875	21.86	46.00	24.14	N	gnd
1.1539	29.45	46.00	16.55	N	gnd
14.56796	19.22	50.00	30.78	N	gnd
29.19296	24.55	50.00	25.45	N	gnd



## 5 Main Test Instruments

Name	Type	Manufacturer	Serial Number	Calibration Date	Expiration Time
BT Base Station Simulator	CBT	R&S	100271	2016-05-21	2017-05-20
Loop Antenna	FMZB1519	SCHWARZBECK	1519-047	2014-02-29	2017-02-28
EMI Test Receiver	ESCS30	R&S	100138	2015-12-17	2016-12-16
Artificial main network	ENV216	R&S	101171	2013-12-18	2016-12-17
Signal Analyzer	FSV30	R&S	100815	2015-12-17	2016-12-16
EMI Test Receiver	ESCI	R&S	100948	2016-06-01	2017-05-31
TRILOG Broadband Antenna	VULB 9163	Schwarzbeck	9163-201	2014-12-06	2017-12-05
Double Ridged Waveguide Horn Antenna	HF907	R&S	100126	2014-12-06	2017-12-05
Power Splitter	SHX-GF2-2-13	Hua Xiang	10120101	NA	NA
Spectrum Analyzer	N9010A	Agilent	MY47191109	2016-05-21	2017-05-20
Standard Gain Horn	3160-09	ETS-Lindgren	00102644	2015-01-30	2018-01-29
RF Cable	SMA 15cm	Agilent	0001	2016-06-06	2016-09-05


\*\*\*\*\*END OF REPORT \*\*\*\*\*

## ANNEX A: EUT Appearance and Test Setup

### A.1 EUT Appearance

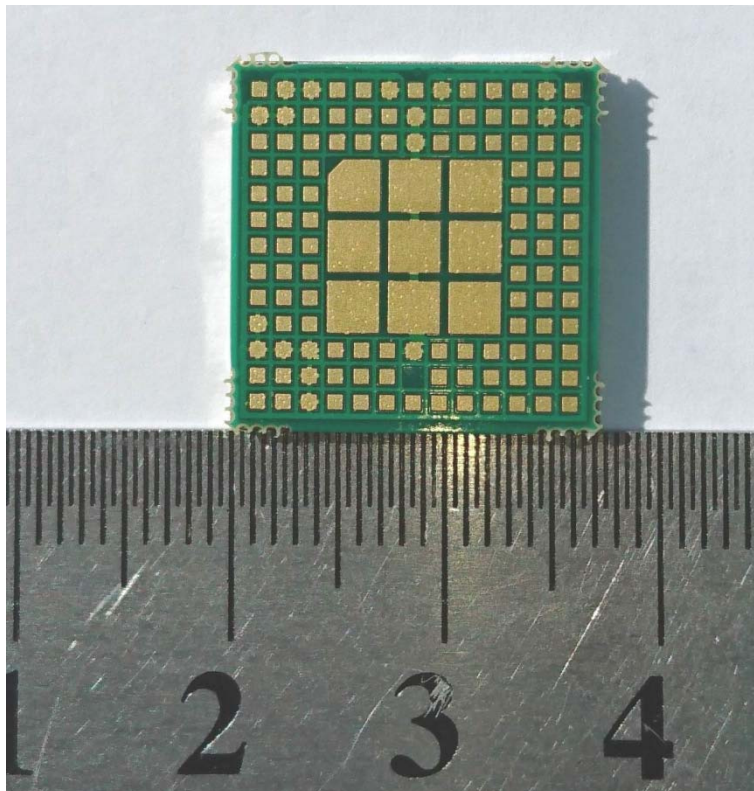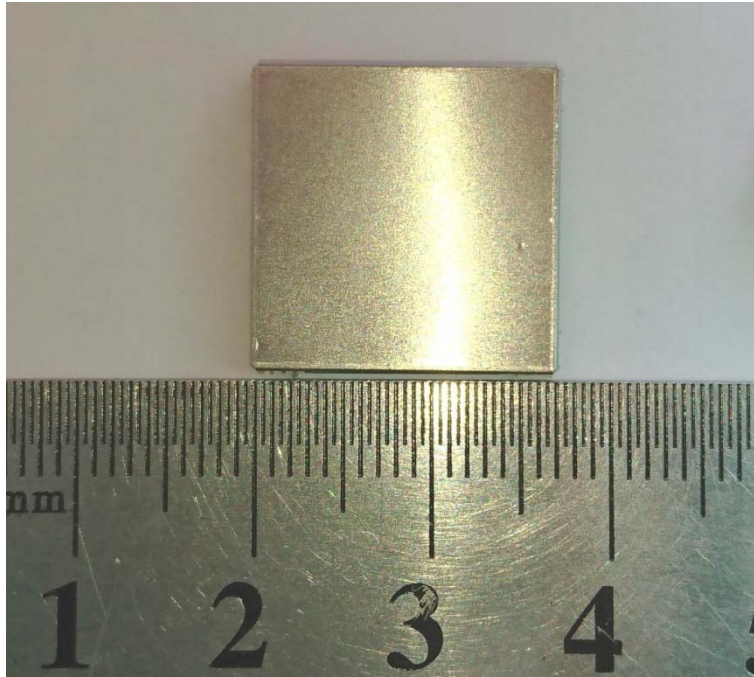


Front Side

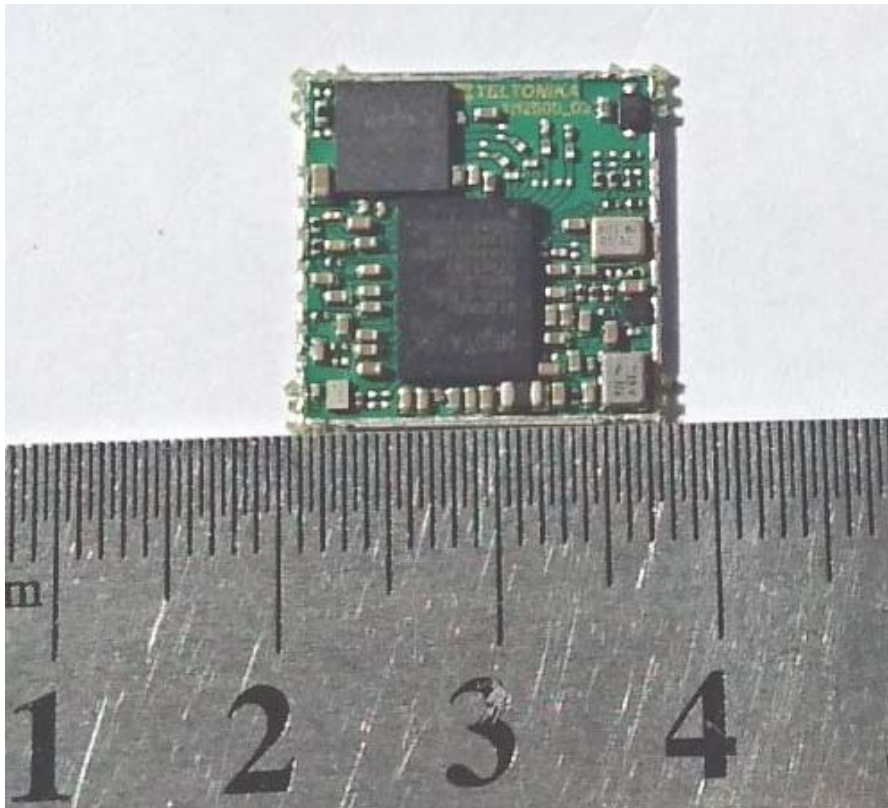


Back Side  
a: EUT  
**Picture 1 EUT**



## A.2 Test Setup

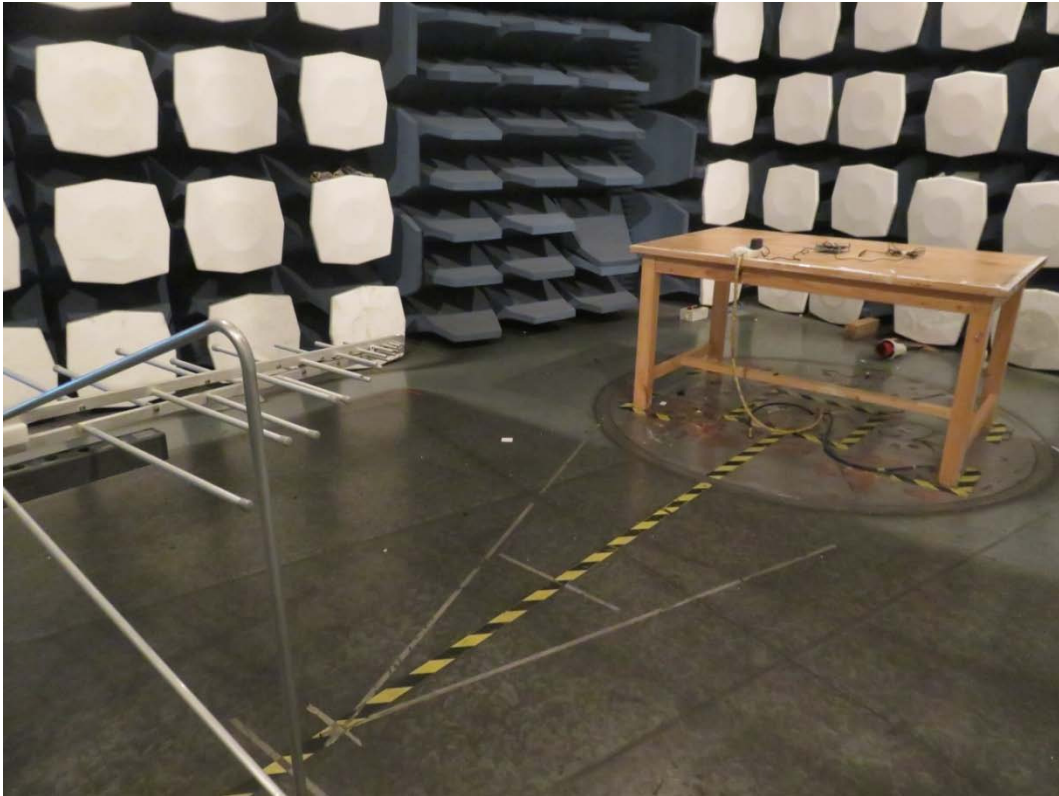

Below 1GHz

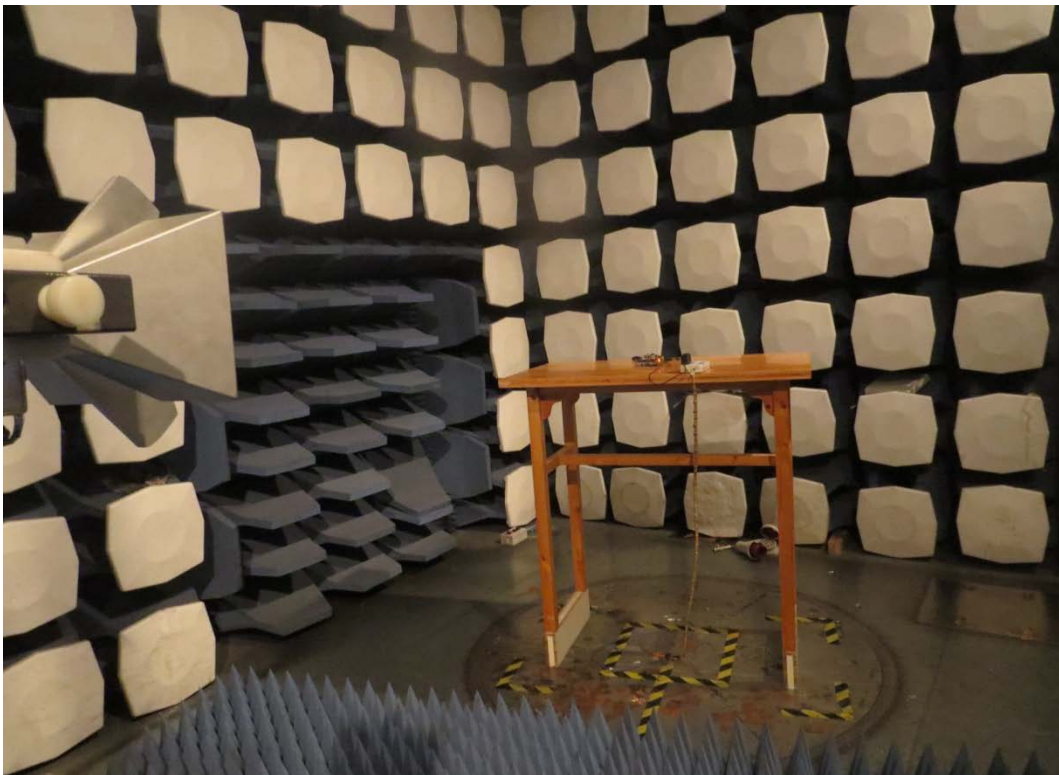

Above 1GHz

**Picture 2 Radiated Emission Test Setup**





**Picture 3 Conducted Emission Test Setup**