

FCC RF TEST REPORT

No. 160800770SHA-001

Applicant : Ningbo UTEC Electric Co.,Ltd
CN8 Far-east Industry Park Yuyao City Zhejiang
Province China

Manufacturer : Ningbo UTEC Electric Co.,Ltd
CN8 Far-east Industry Park Yuyao City Zhejiang
Province China

Product Name : Surface-mounted luminaire with LED

Type/Model : 3702

TEST RESULT : PASS

SUMMARY


The equipment complies with the requirements according to the following standard(s) or specification:

47CFR Part 15 (2014): Radio Frequency Devices

ANSI C63.10 (2013): American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices

Date of issue: Sep 09, 2016

Prepared by:



Jesse Xu (*Project Engineer*)

Reviewed by:



Daniel Zhao (*Reviewer*)

Description of Test Facility

Name: Intertek Testing Service Limited Shanghai
Address: Building No.86, 1198 Qinzhou Road(North), Shanghai 200233, P.R.
China

FCC Registration Number: 236597
IC Assigned Code: 2402B-1

Name of contact: Jonny Jing
Tel: 86 21 61278271
Fax: 86 21 54262353

Content

SUMMARY.....	1
1 GENERAL INFORMATION	5
1.1 Description of Client.....	5
1.2 Identification of the EUT	5
1.3 Technical Specification.....	6
2 TEST SPECIFICATIONS.....	7
2.1 Standards or specification	7
2.2 Mode of operation during the test.....	7
2.3 Test software list	7
2.4 Test peripherals list	7
2.5 Instrument list	8
2.6 Test Summary	9
2.7 Measurement uncertainty.....	10
3 20 DB BANDWIDTH.....	11
3.1 Limit.....	11
3.2 Test Configuration	11
3.3 Test Procedure and test setup.....	11
3.4 Test Protocol	12
4 CARRIER FREQUENCY SEPARATION	18
4.1 Test limit	18
4.2 Test Configuration	18
4.3 Test procedure and test setup.....	18
4.4 Test protocol	19
5 MAXIMUM PEAK OUTPUT POWER	25
5.1 Test limit	25
5.2 Test Configuration	25
5.3 Test procedure and test setup.....	25
5.4 Test Protocol	26
6 EMISSION OUTSIDE THE FREQUENCY BAND.....	32
6.1 Test limit	32
6.2 Test Configuration	32
6.3 Test procedure and test setup.....	32
6.4 Test Protocol	33
7 NUMBER OF HOPPING FREQUENCIES	59
7.1 Test limit	59
7.2 Test Configuration	59
7.3 Test procedure and test setup.....	59
7.4 Test Protocol	60
8 DWELL TIME.....	61
8.1 Test limit	61
8.2 Test Configuration	61
8.3 Test procedure and test setup.....	61
8.4 Test Protocol	62
9 RADIATED EMISSIONS.....	66
9.1 Test limit	66

9.2	Test Configuration	66
9.3	Test procedure and test setup	68
9.4	Test Protocol	69
10	POWER LINE CONDUCTED EMISSION	73
10.1	Limit.....	73
10.2	Test configuration	73
10.3	Test procedure and test set up.....	74
10.4	Test protocol	75
11	OCCUPIED BANDWIDTH	76
11.1	Test limit	76
11.2	Test Configuration	76
11.3	Test procedure and test setup.....	76
11.4	Test protocol	77

1 GENERAL INFORMATION

1.1 Description of Client

Applicant : Ningbo UTEC Electric Co.,Ltd
CN8 Far-east Industry Park Yuyao City Zhejiang
Province China

Name of contact : Diting Wang

Tel : 0574-62760549

Fax : 0574-62760077-8566

Email : dtyj2008@126.com

Manufacturer : Ningbo UTEC Electric Co.,Ltd
CN8 Far-east Industry Park Yuyao City Zhejiang
Province China

1.2 Identification of the EUT

Product Name : Surface-mounted luminaire with LED

Type/model : 3702

FCC ID : 2AJM2UTEC2016

IC : -

1.3 Technical Specification

Operation Frequency : 2400 – 2483.5 MHz
Band
Protocol : 2.1+EDR
Type of Modulation : GFSK, $\pi/4$ -DQPSK, 8DPSK
Channel Number : 79 channels
Description of EUT : EUT is a bluetooth device. We tested it and listed the worst data in this report.

Antenna : PCB antenna, 4.52dBi
Rating : 120Vac, 60Hz, 24W
Category of EUT : Class B
EUT type : ☒ Table top
☐ Floor standing
Sample received date : Aug 15, 2016
Date of test : Aug 16, 2016 – Sep 15, 2016

2 TEST SPECIFICATIONS

2.1 Standards or specification

47CFR Part 15 (2014)
ANSI C63.10 (2013)

2.2 Mode of operation during the test

While testing transmitting mode of EUT, the internal modulation and continuously transmission was applied.

The lowest, middle and highest channel were tested as representatives.

Freq. Band (MHz)	Modulation	Lowest (MHz)	Middle (MHz)	Highest (MHz)
2400-2483.5	GFSK	2402	2441	2480
	$\pi/4$ -DQPSK	2402	2441	2480
	8DPSK	2402	2441	2480

2.3 Test software list

Test Items	Software	Manufacturer	Version
Conducted emission	ESxS-K1	R&S	V2.1.0
Radiated emission	ES-K1	R&S	V1.71

2.4 Test peripherals list

Item No.	Name	Band and Model	Description
1	Laptop computer	HP, EliteBook 2530P	-
2			
3			

2.5 Instrument list

Selected	Instrument	EC no.	Model	Valid until date
☒	Shielded room	EC 2838	GB88	2017-1-8
☒	EMI test receiver	EC 2107	ESCS 30	2016-10-19
☒	A.M.N.	EC 3119	ESH2-Z5	2016-12-16
☐	A.M.N.	EC 3394	ENV 216	2016-8-1
☒	Semi anechoic chamber	EC 3048	-	2017-5-11
☒	EMI test receiver	EC 3045	ESIB26	2016-10-19
☒	Broadband antenna	EC 4206	CBL 6112D	2017-4-27
☒	Horn antenna	EC 3049	HF906	2017-4-27
☐	Horn antenna	EC 4792-1	3117	2017-4-21
☒	Horn antenna	EC 4792-3	HAP18-26W	2017-6-11
☐	Pre-amplifier	EC 5262	pre-amp 18	2017-5-25
☒	Pre-amplifier	EC 4792-2	TPA0118-40	2017-4-10
☐	High Pass Filter	EC 4797-1	WHKX 1.0/15G-10SS	2017-1-8
☒	High Pass Filter	EC 4797-2	WHKX 2.8/18G-12SS	2017-1-8
☐	High Pass Filter	EC 4797-3	WHKX 7.0/1.8G-8SS	2017-1-8
☒	Band Reject Filter	EC 4797-4	WRCGV2400/2483/10SS	2017-1-8
☐	Test Receiver	EC 4501	ESCI 7	2017-1-13
☒	PXA Signal Analyzer	EC5338	N9030A	2017-5-14
☒	Power sensor/Power meter	EC4318	N1911A/N1921A	2017-4-8
☐	Power sensor	EC5338-1	U2021XA	2017-3-5
☐	MXG Analog Signal Generator	EC5338-2	N5181A	2017-3-5
☐	MXG Vector Signal Generator	EC5175	N51812B	2017-1-8

2.6 Test Summary

This report applies to tested sample only. The test results have been compared directly with the limits, and the measurement uncertainty is recorded. This report shall not be reproduced in part without written approval of Intertek Testing Service Shanghai Limited.

TEST ITEM	FCC REFERENCE	IC REFERENCE	RESULT
20 dB bandwidth	15.247(a)(1)	-	Tested
Carrier frequency separation	15.247(a)(1)	-	Pass
Maximum peak output power	15.247(b)(1)	-	Pass
Radiated emissions	15.205 & 15.209	-	Pass
Emission outside the frequency band	15.247(d)	-	Pass
Number of hopping frequencies	15.247(a)(1)(iii)	-	Pass
Dwell time	15.247(a)(1)(iii)	-	Pass
Power line conducted emission	15.207	-	Pass
Occupied bandwidth	-	-	-

Notes: 1: NA =Not Applicable

2: This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

2.7 Measurement uncertainty

The measurement uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

TEST ITEM	MEASUREMENT UNCERTAINTY
Maximum peak output power	$\pm 0.74\text{dB}$
Radiated Emissions in restricted frequency bands below 1GHz	$\pm 4.90\text{dB}$
Radiated Emissions in restricted frequency bands above 1GHz	$\pm 5.02\text{dB}$
Emission outside the frequency band	$\pm 2.89\text{dB}$
Power line conducted emission	$\pm 3.19\text{dB}$


3 20 dB Bandwidth

Test result: Pass

3.1 Limit

- ☐ Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.
- ☒ Frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125mW.

3.2 Test Configuration

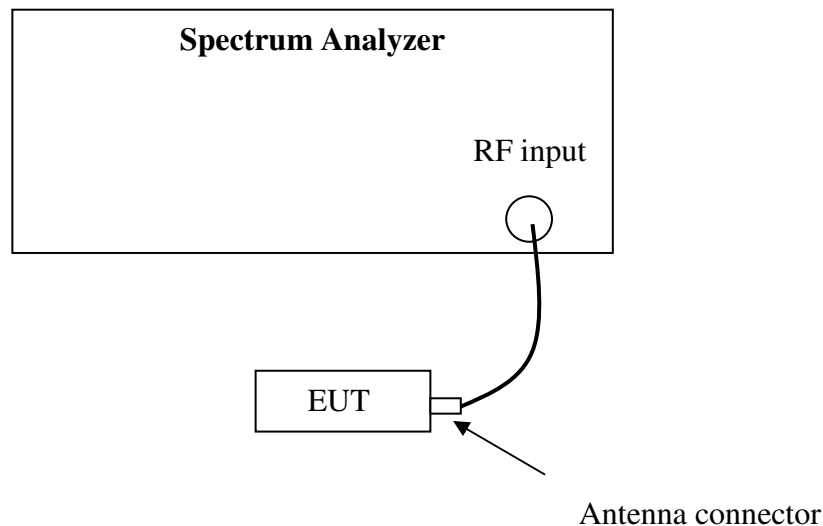

3.3 Test Procedure and test setup

The EUT was tested according to DA 00-705 (Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems)

The 20 bandwidth per FCC § 15.247(a)(1) is measured using the Spectrum Analyzer with Span = 2 to 3 times the 20 dB bandwidth, $RBW \geq 1\%$ of the 20 dB bandwidth, $VBW \geq RBW$, Sweep = auto, Detector = peak, Trace = max hold.
The test was performed at 3 channels (lowest, middle and highest channel).


3.4 Test Protocol

Temperature: 22°C

Relative Humidity: 54%

Modulation	Channel	20dB Bandwidth (kHz)	Two-thirds of Bandwidth (kHz)
GFSK	L	1062	708.35
	M	1061	707.68
	H	1053	702.35

Channel L

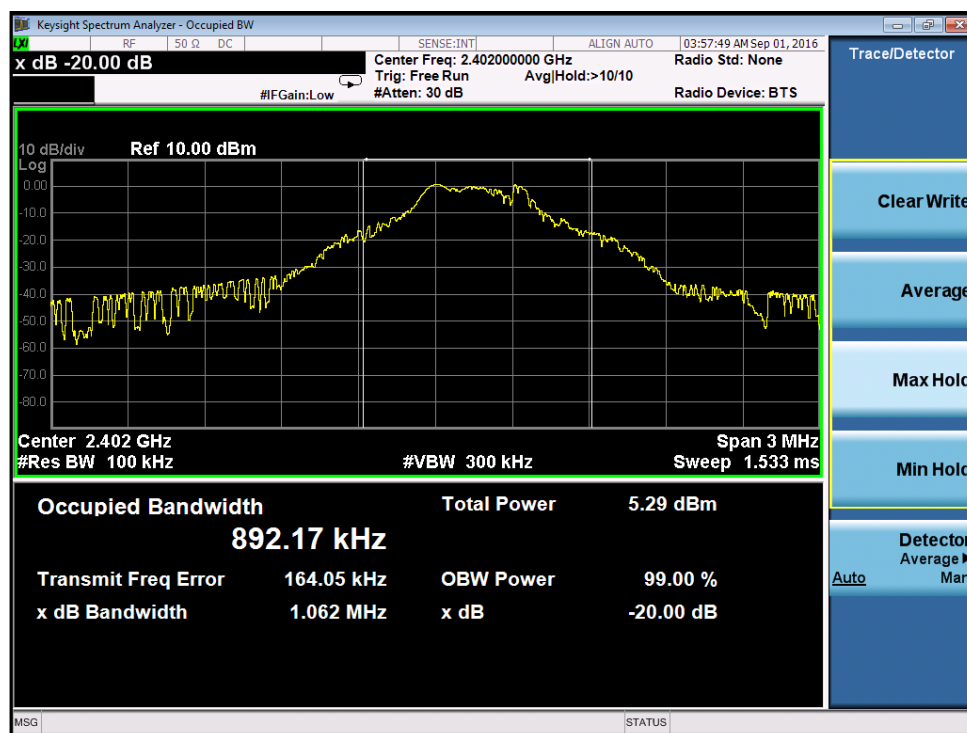

Channel M




Channel H




Modulation	Channel	20dB Bandwidth (kHz)	Two-thirds of Bandwidth (kHz)
$\pi/4$ -DQPSK	L	1309	873.10
	M	1310	873.77
	H	1311	874.43


Channel L

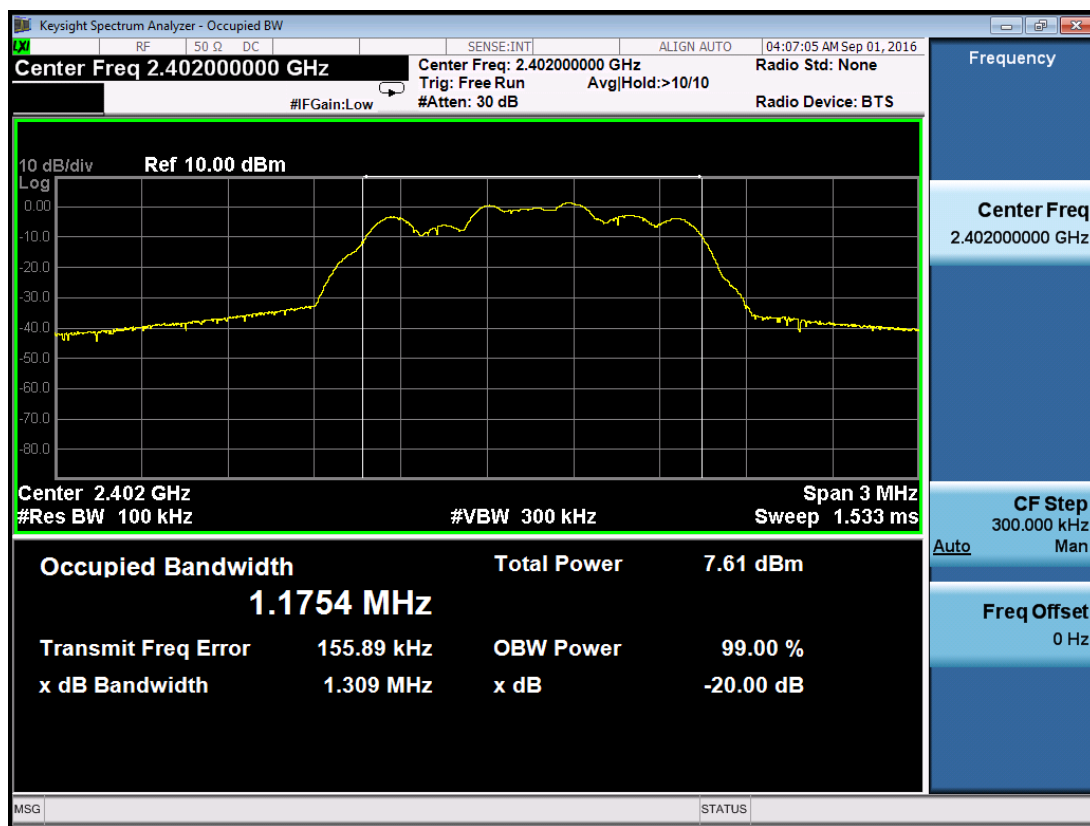

Channel M

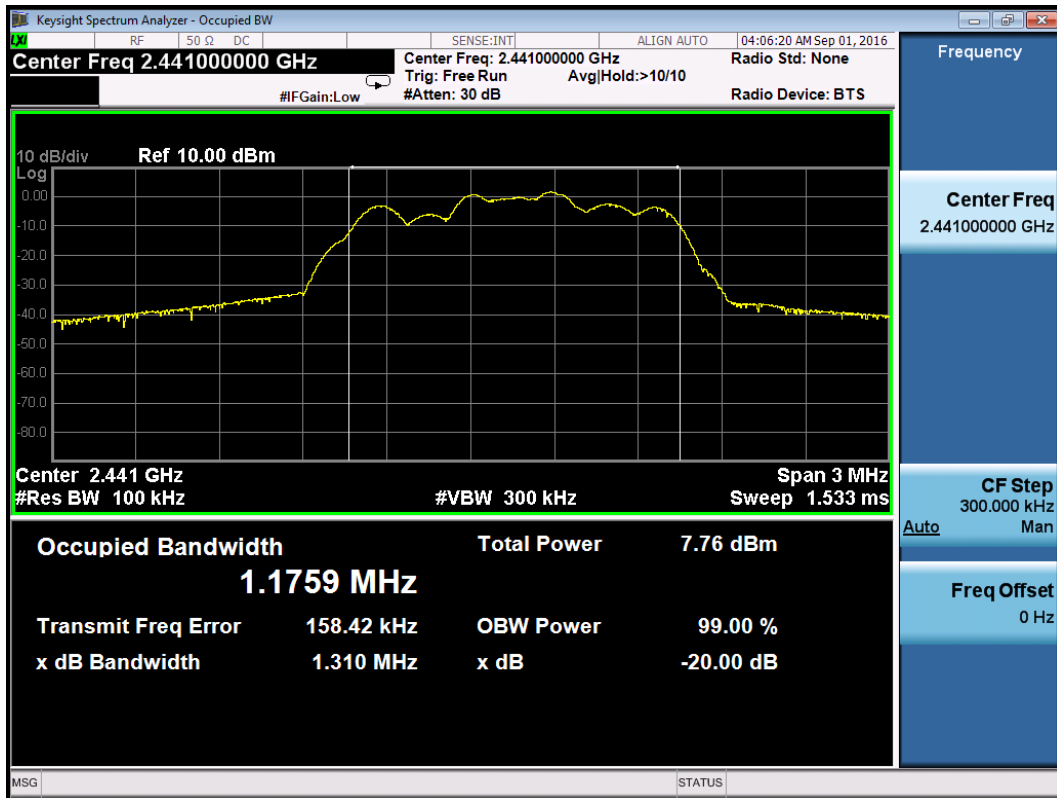


Channel H

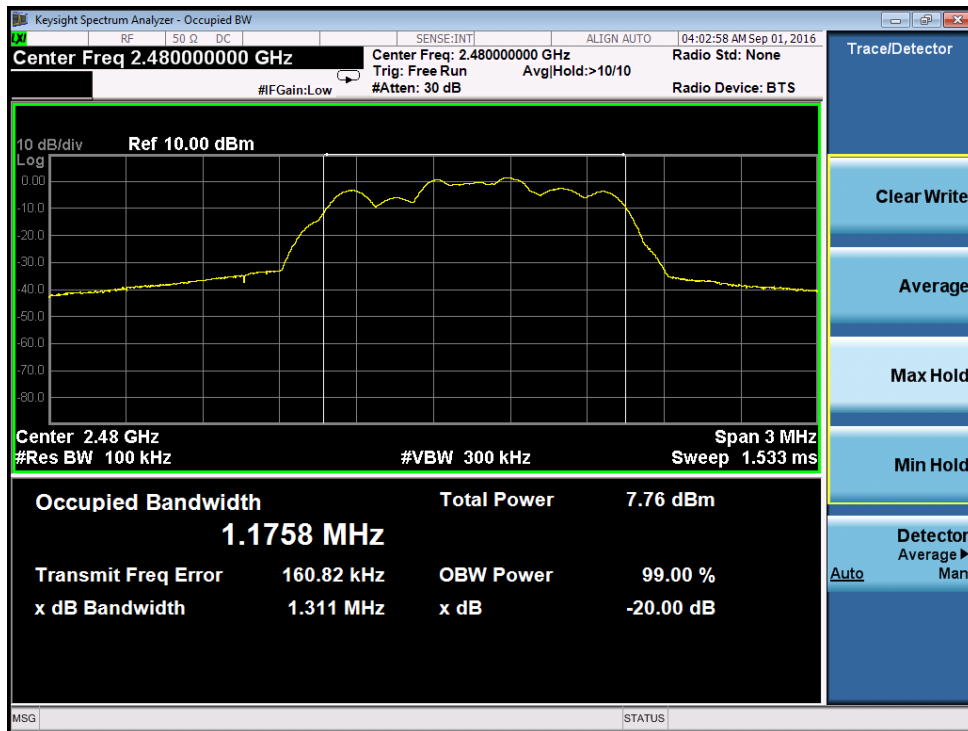


Modulation	Channel	20dB Bandwidth (kHz)	Two-thirds of Bandwidth (kHz)
8DPSK	L	1295	863.76
	M	1297	865.09
	H	1296	864.43


Channel L

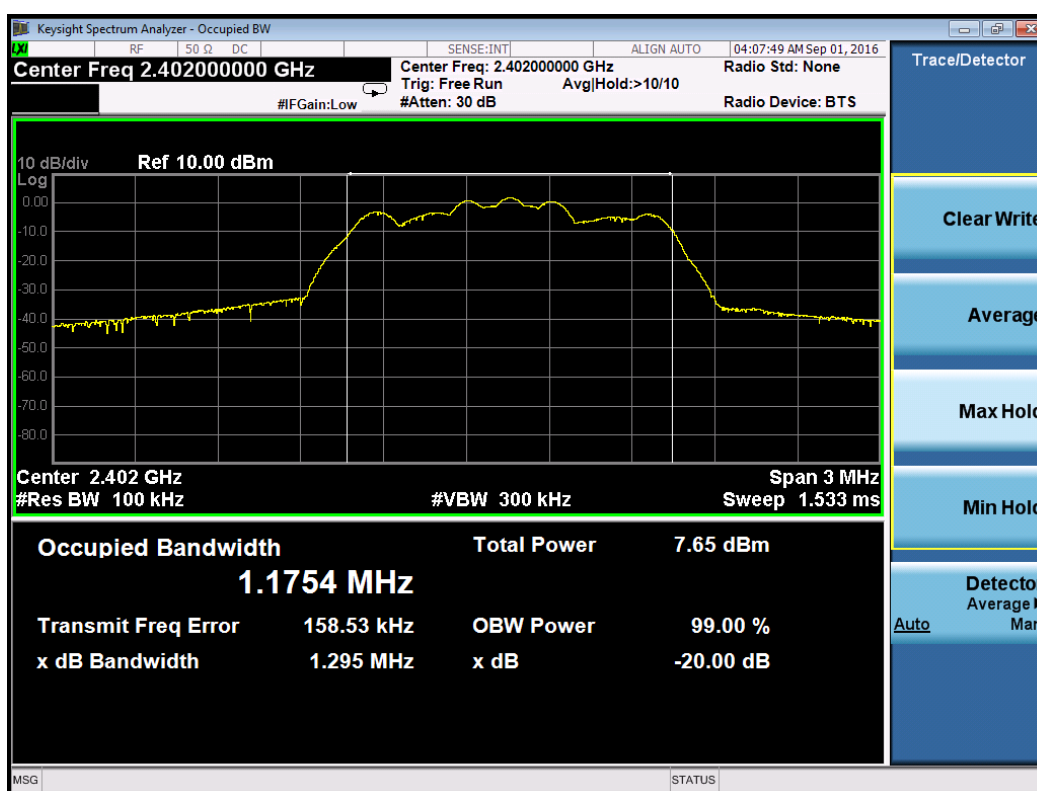

Channel M

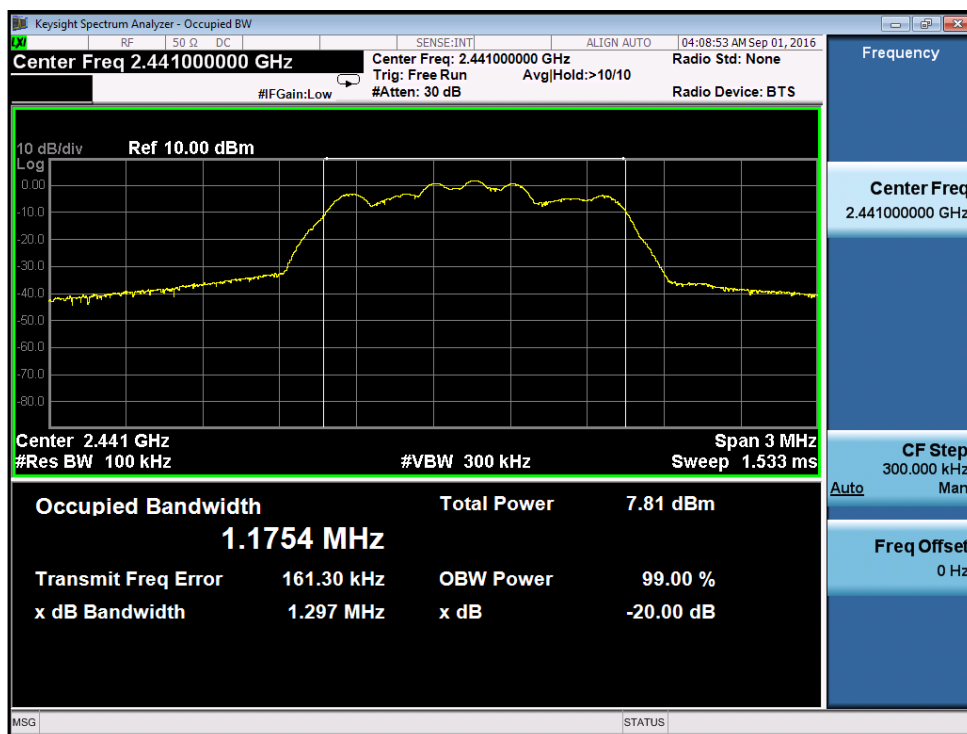

Channel H

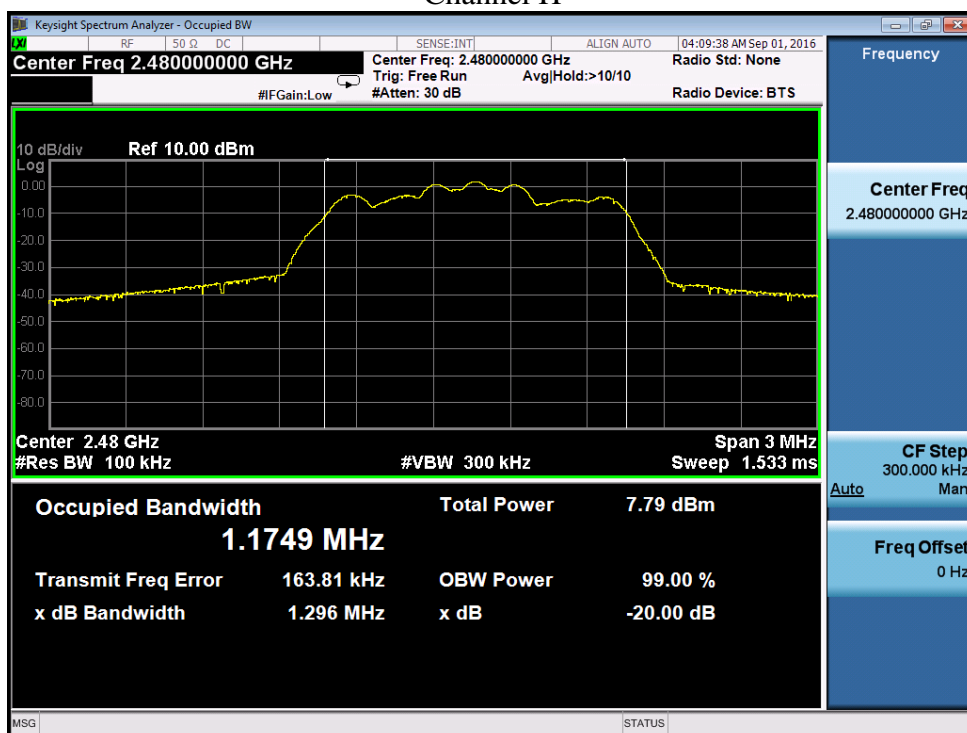

4 Carrier frequency separation


Test result: Pass

4.1 Test limit

☐ Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

☒ Frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125mW.

4.2 Test Configuration

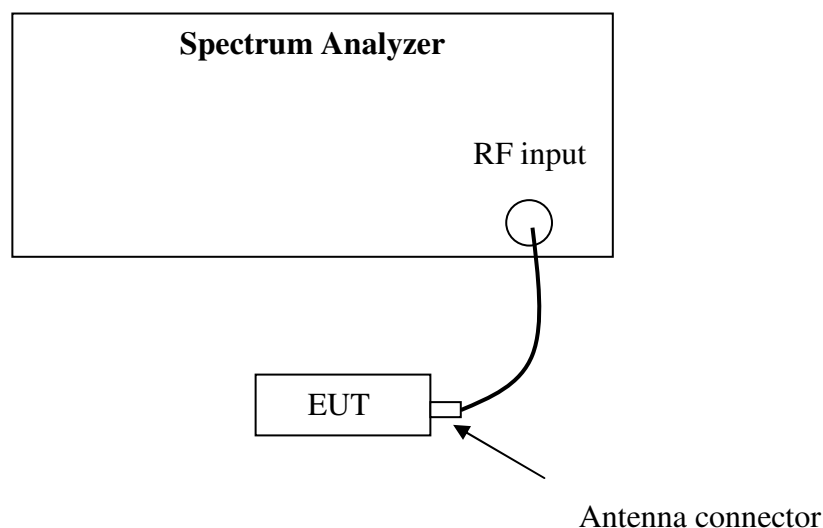

4.3 Test procedure and test setup

The EUT was tested according to DA 00-705 (Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems)

The Carrier frequency separation per FCC § 15.247(a)(1) is measured using the Spectrum Analyzer with Span can capture two adjacent channels, $RBW \geq 1\%$ of the span, $VBW \geq RBW$, Sweep = auto, Detector = peak, Trace = max hold.

The test was performed at 3 channels (lowest, middle and highest channel).

4.4 Test protocol


Temperature: 22 °C
Relative Humidity: 54 %

Modulation	Channel	Frequency Separation (kHz)	Limit (kHz)
GFSK	L	1004	≥ 708.35
	M	1006	≥ 707.68
	H	1004	≥ 702.35

Channel L



Channel M

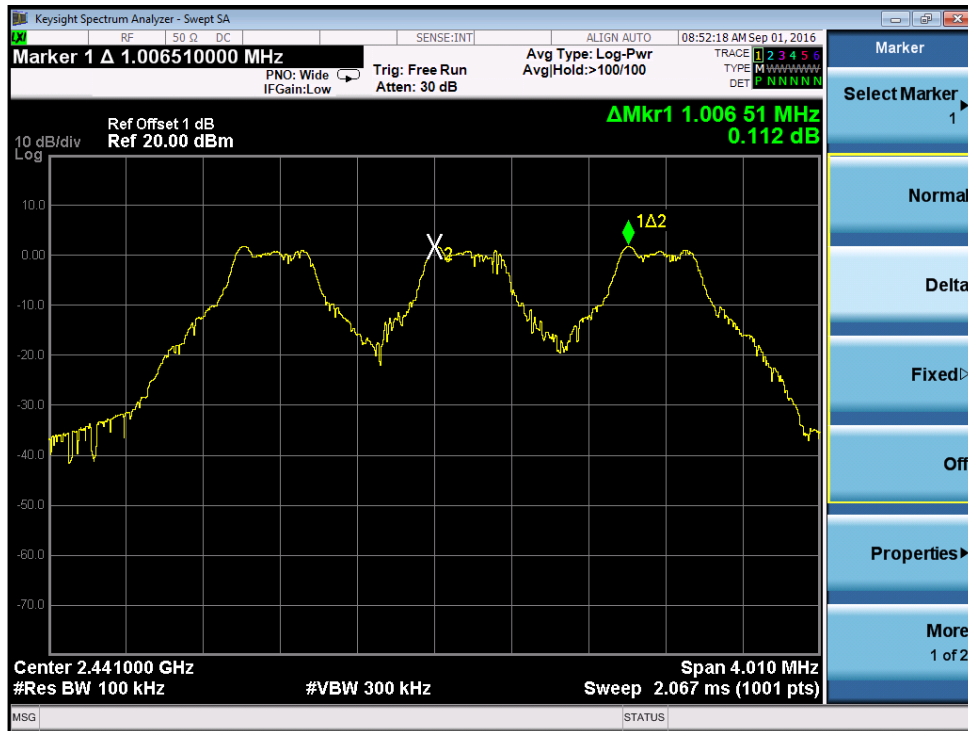

Channel H




Modulation	Channel	Frequency Separation (kHz)	Limit (kHz)
$\pi/4$ -DQPSK	L	1012	≥ 873.10
	M	1012	≥ 873.77
	H	1000	≥ 874.43

Channel L



Channel M

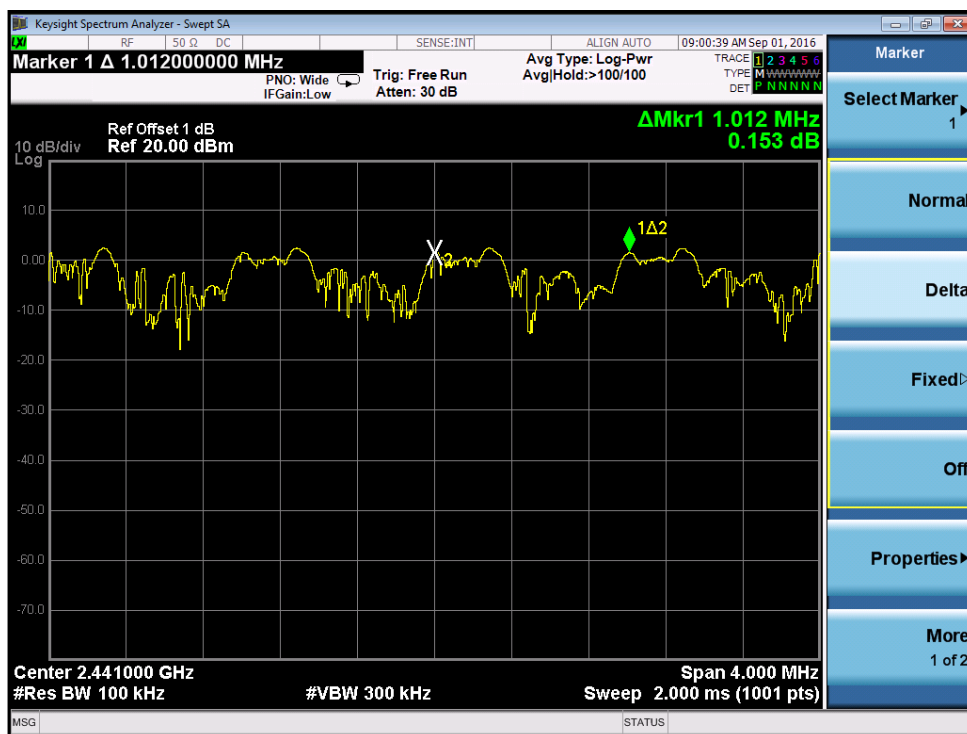

Channel H



Modulation	Channel	Frequency Separation (kHz)	Limit (kHz)
8DPSK	L	1008	≥ 863.76
	M	1008	≥ 865.09
	H	1008	≥ 864.43

Channel L



Channel M



Channel H



5 Maximum peak output power

Test result: Pass

5.1 Test limit


For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt

For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts

If the transmitting antenna of directional gain greater than 6dBi is used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt.

5.2 Test Configuration

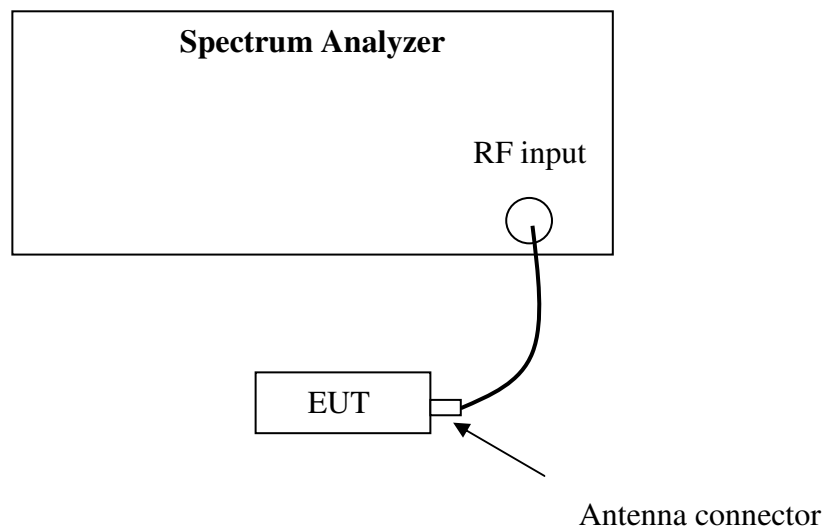

5.3 Test procedure and test setup

The EUT was tested according to DA 00-705 (Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems)


The Maximum peak output power per FCC § 15.247(b) is measured using the Spectrum Analyzer with Span = 5 times the 20 dB bandwidth, $RBW \geq$ the 20 dB bandwidth, $VBW \geq RBW$, Sweep = auto, Detector = peak, Trace = max hold.

The test was performed at 3 channels (lowest, middle and highest channel).

5.4 Test Protocol


Temperature: 22°C
Relative Humidity: 54%

L Channel

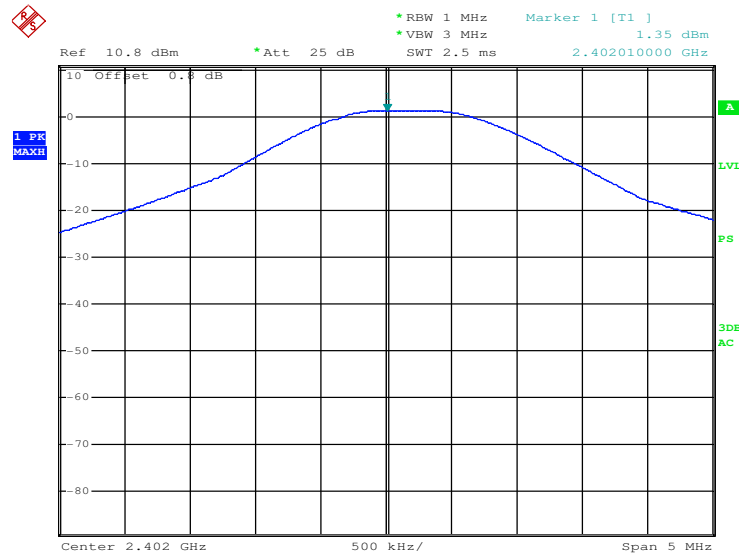


Date: 18.OCT.2016 12:42:42

M Channel

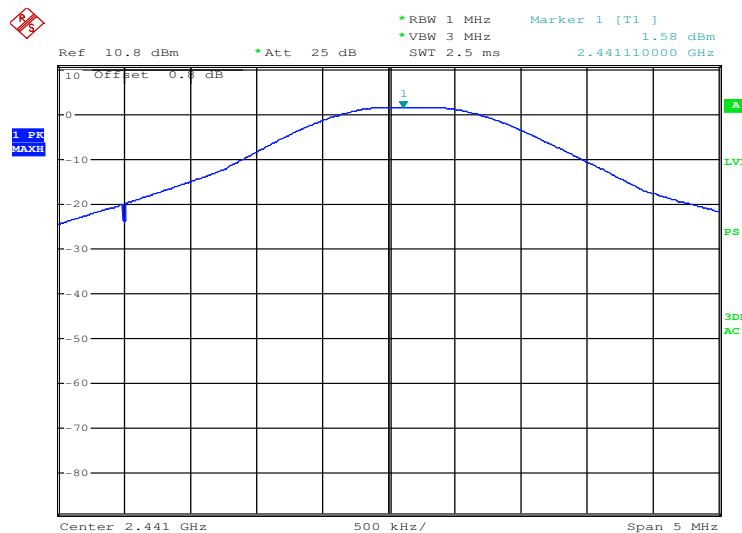

Date: 18.OCT.2016 12:46:50


H Channel

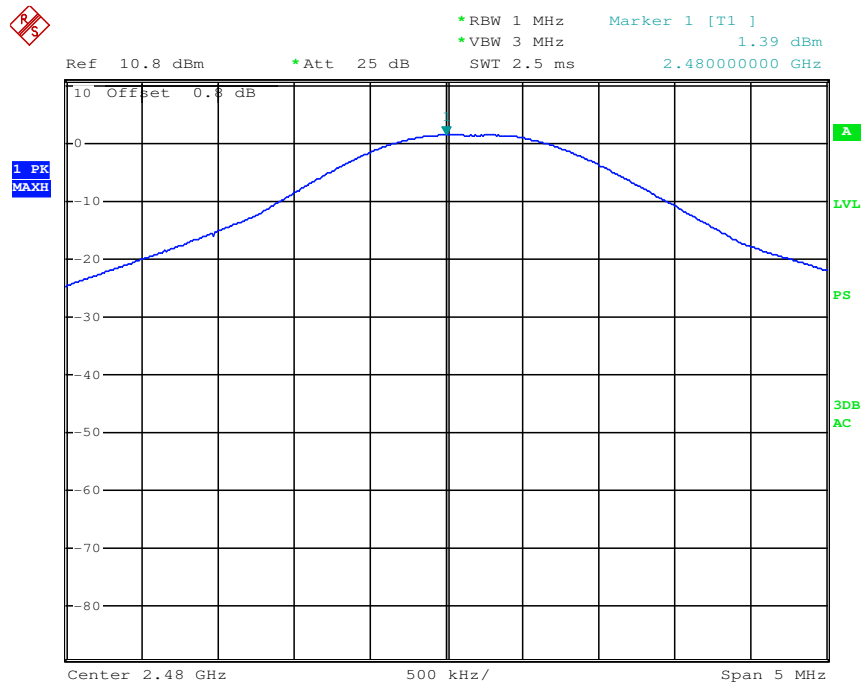

Date: 18.OCT.2016 12:48:08


Modulation	Channel	Conducted Power (dBm)	Limit (dBm)
GFSK	L	1.35	≤ 21.00
	M	1.58	≤ 21.00
	H	1.39	≤ 21.00

L Channel

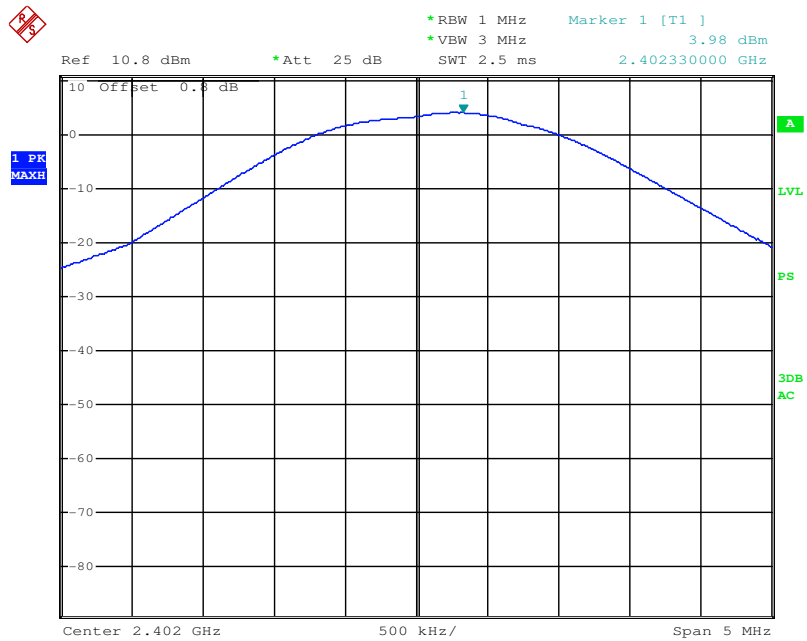


Date: 18.OCT.2016 13:04:23

M Channel

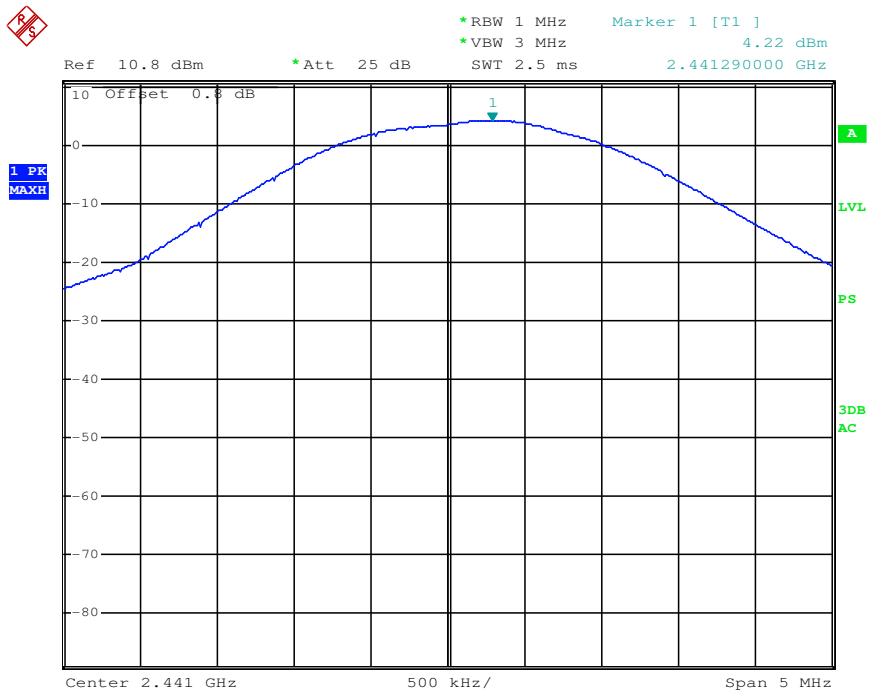

Date: 18.OCT.2016 13:05:39


H Channel

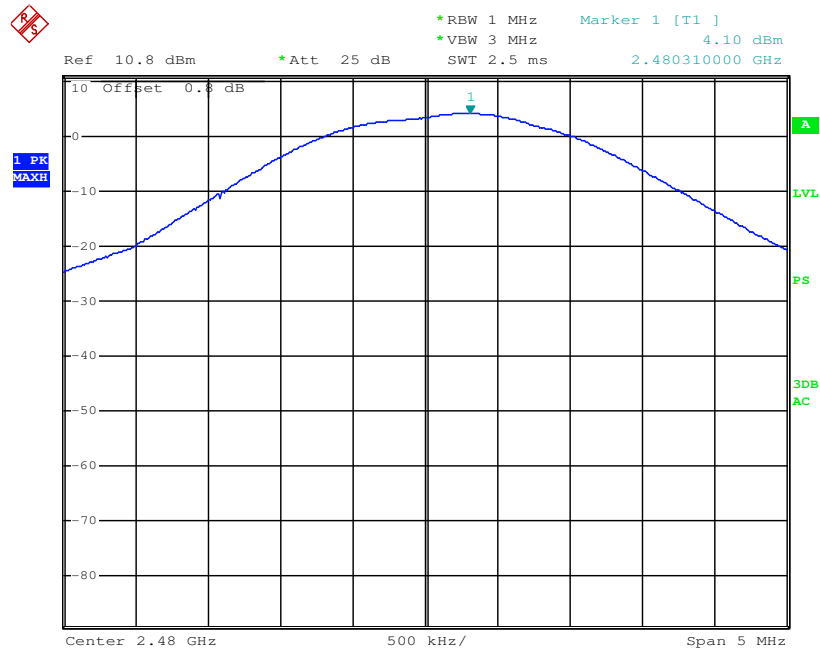

Date: 18.OCT.2016 13:07:15


Modulation	Channel	Conducted Power (dBm)	Limit (dBm)
$\pi/4$ -DQPSK	L	3.98	≤ 21.00
	M	4.22	≤ 21.00
	H	4.10	≤ 21.00

L Channel

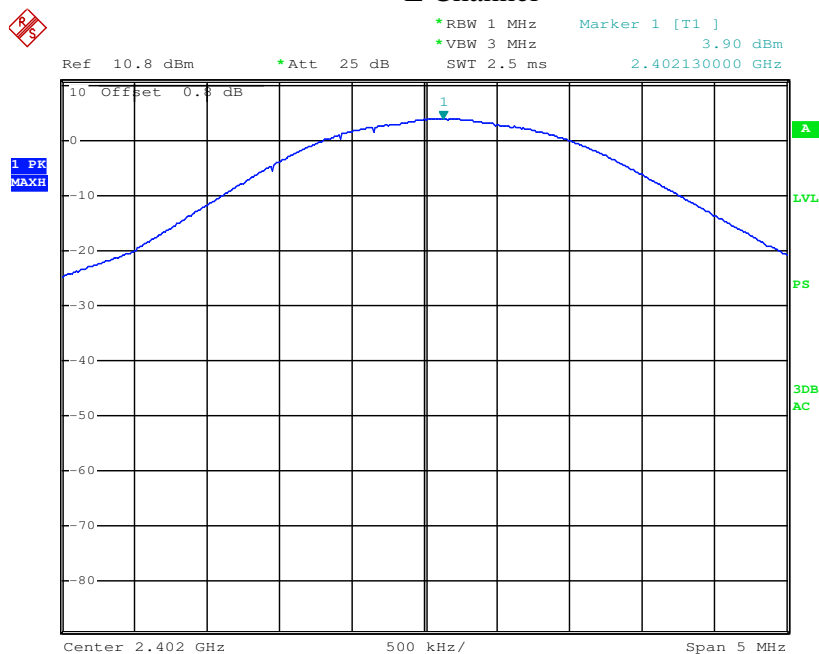


Date: 18.OCT.2016 13:09:47

M Channel

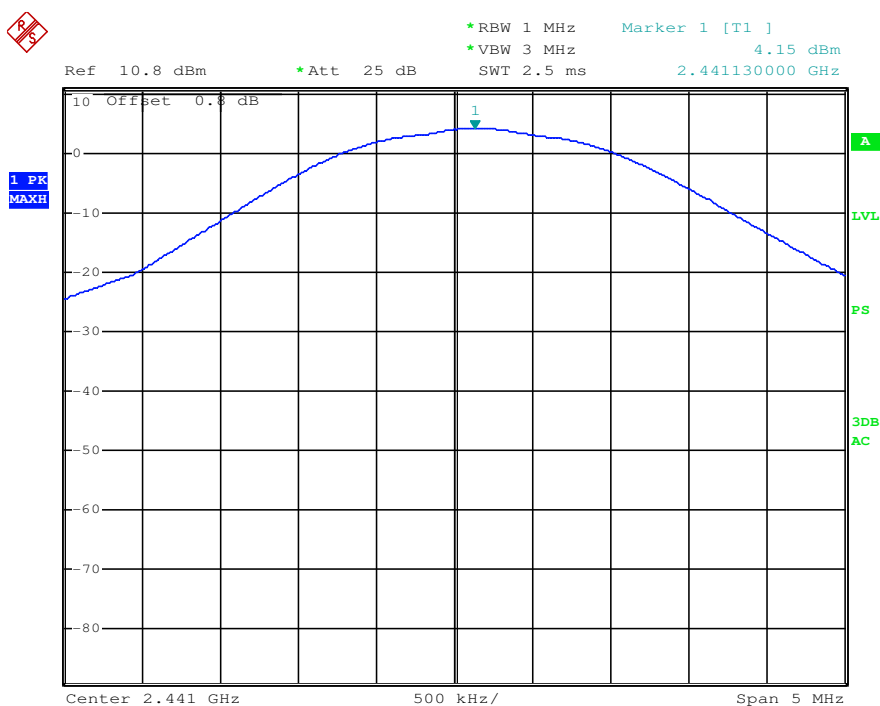

Date: 18.OCT.2016 13:15:21

H Channel

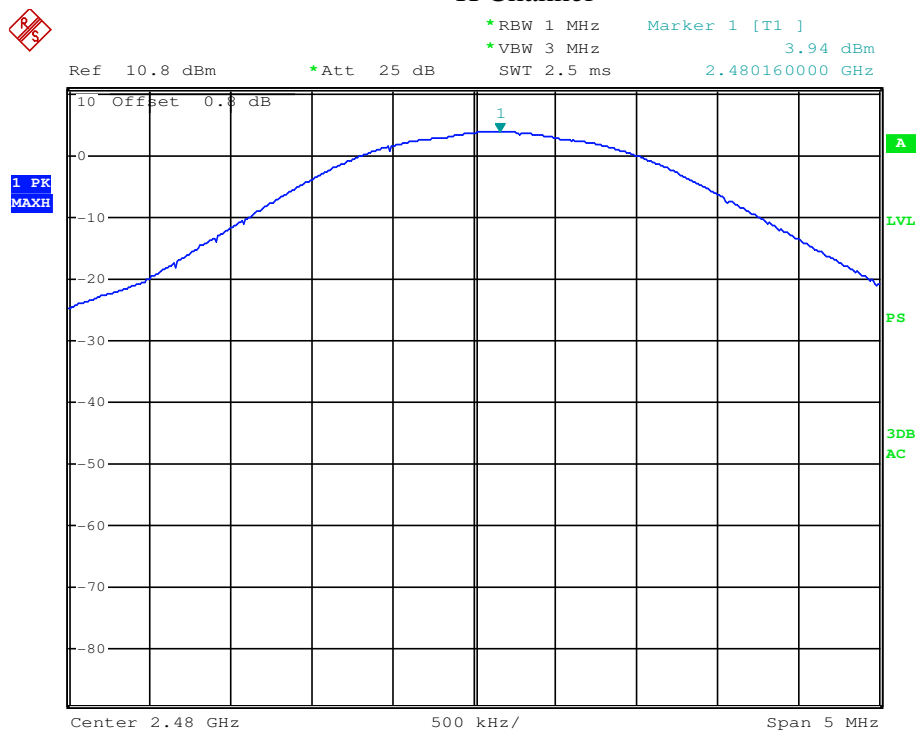

Date: 18.OCT.2016 13:16:47

Modulation	Channel	Conducted Power (dBm)	Limit (dBm)
8DPSK	L	3.90	≤ 21.00
	M	4.15	≤ 21.00
	H	3.94	≤ 21.00


6 Emission outside the frequency band

Test result: Pass

6.1 Test limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.

6.2 Test Configuration

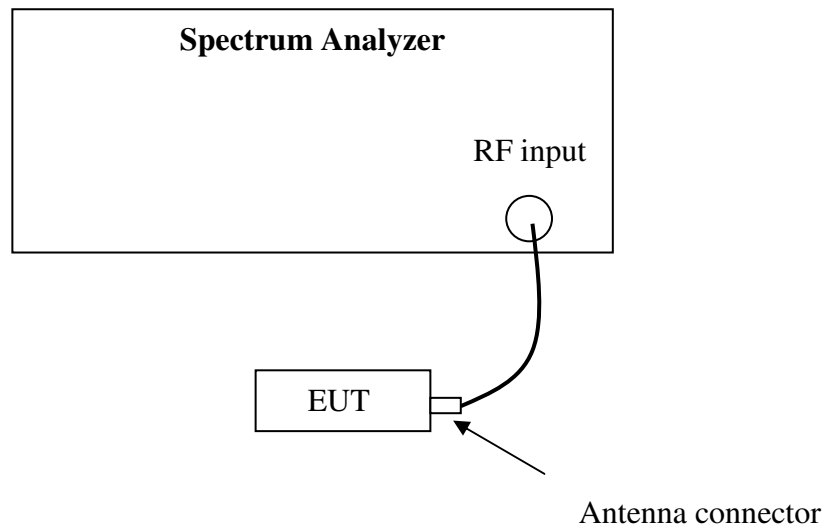

6.3 Test procedure and test setup

The EUT was tested according to DA 00-705 (Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems)

The Emission outside the frequency band per FCC § 15.247(d) is measured using the Spectrum Analyzer with Span wide enough capturing all spurious from the lowest emission frequency of the EUT up to 10th harmonics, RBW = 100kHz, VBW ≥ RBW, Sweep = auto, Detector = peak, Trace = max hold. The test was performed at 3 channels (lowest, middle and highest channel).


6.4 Test Protocol



Temperature: 22°C


Relative Humidity: 54%

Modulation	Channel	Max reading among band (dBm)	The most restrict Attenuation outside band (MHz)	Limit (dB)
GFSK	L	-0.884	2398	≥20
	M	1.21	2437	≥20
	H	1.29	2483.56	≥20
	Hopping	9.961	2484	≥20


Channel L


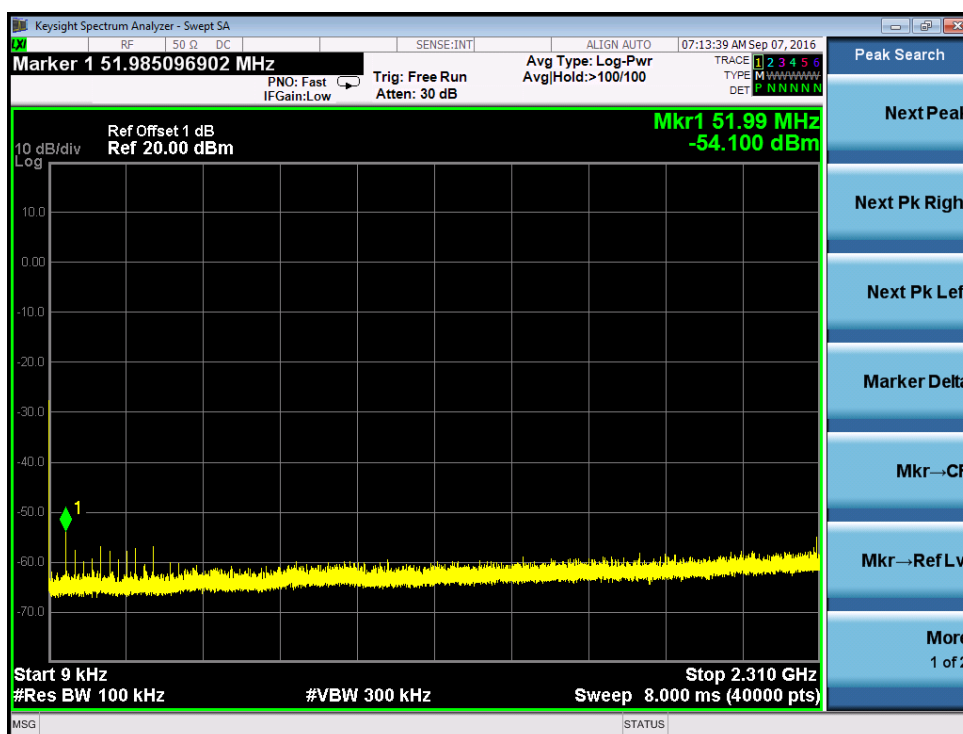


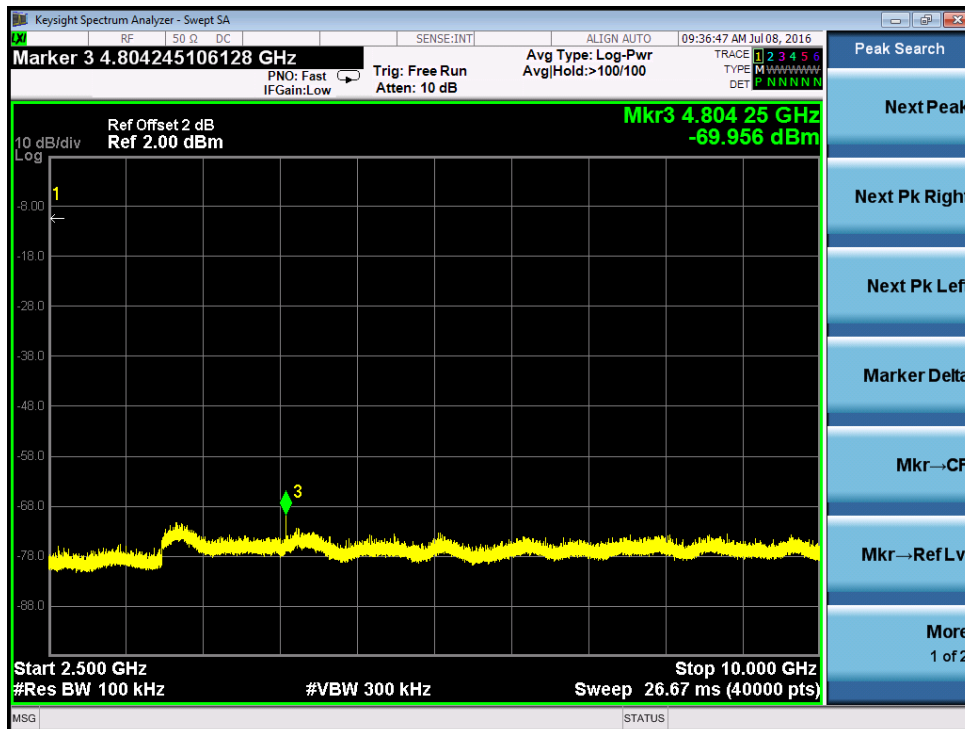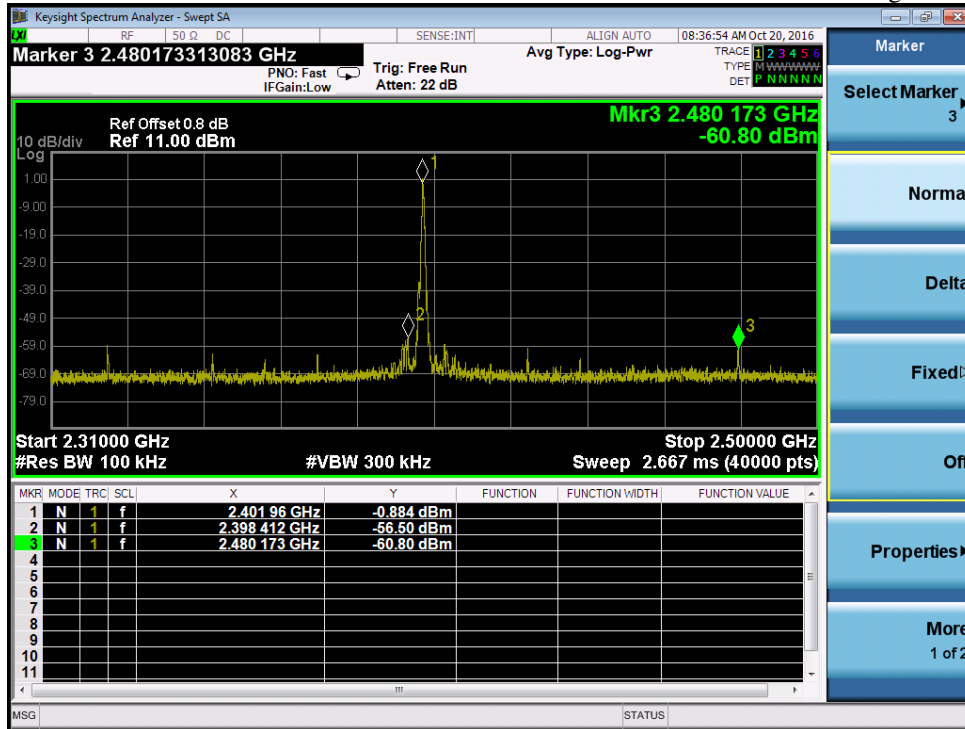


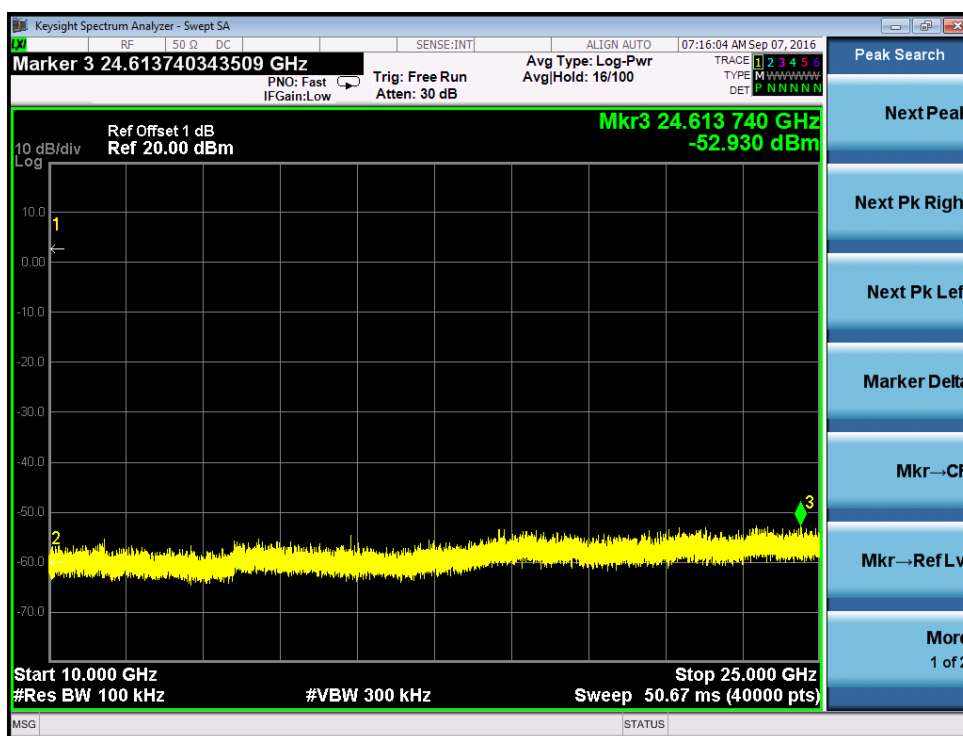



Channel M

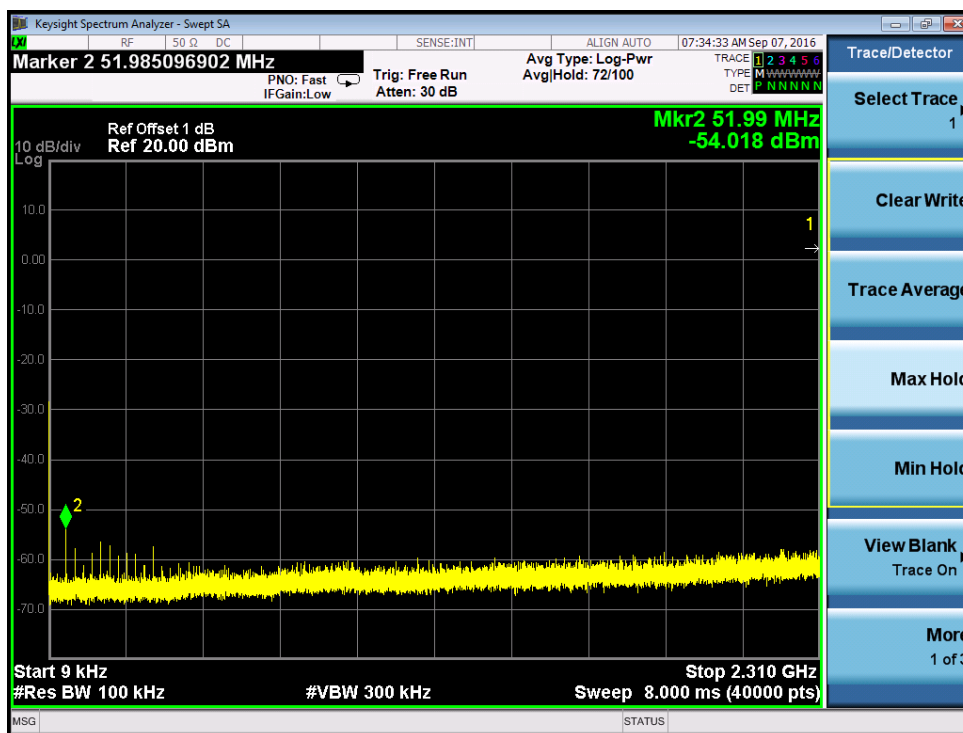

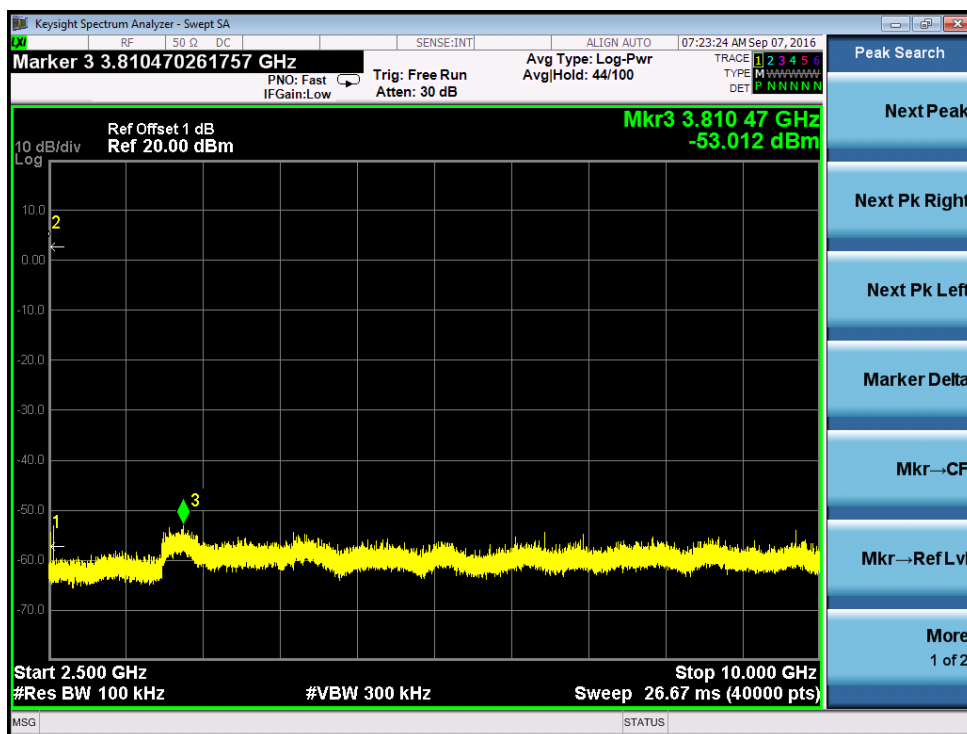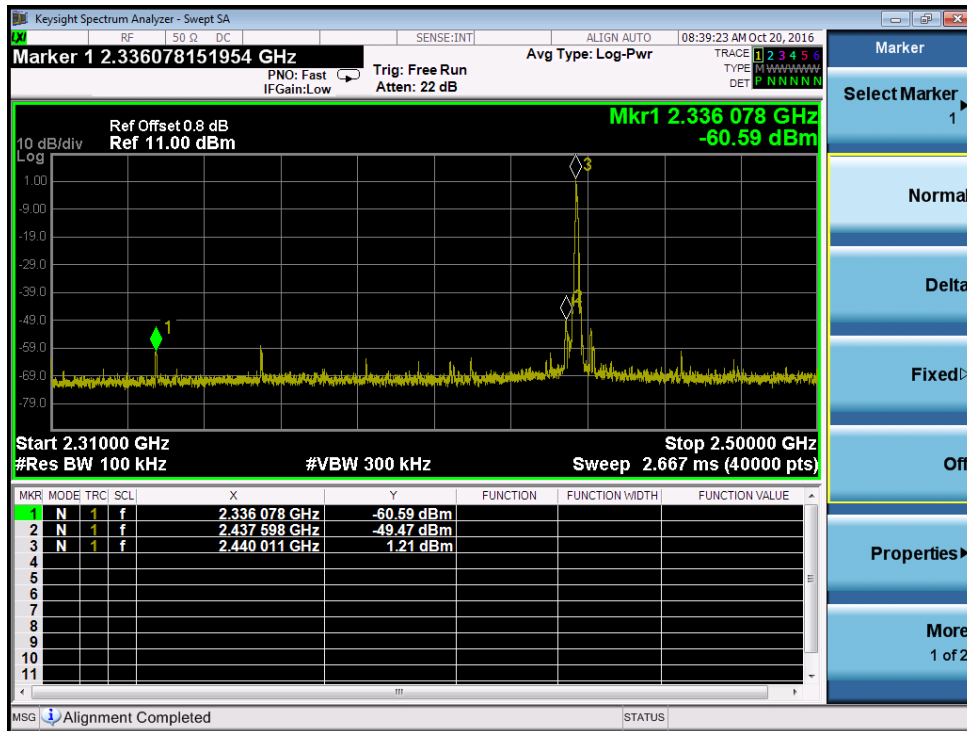






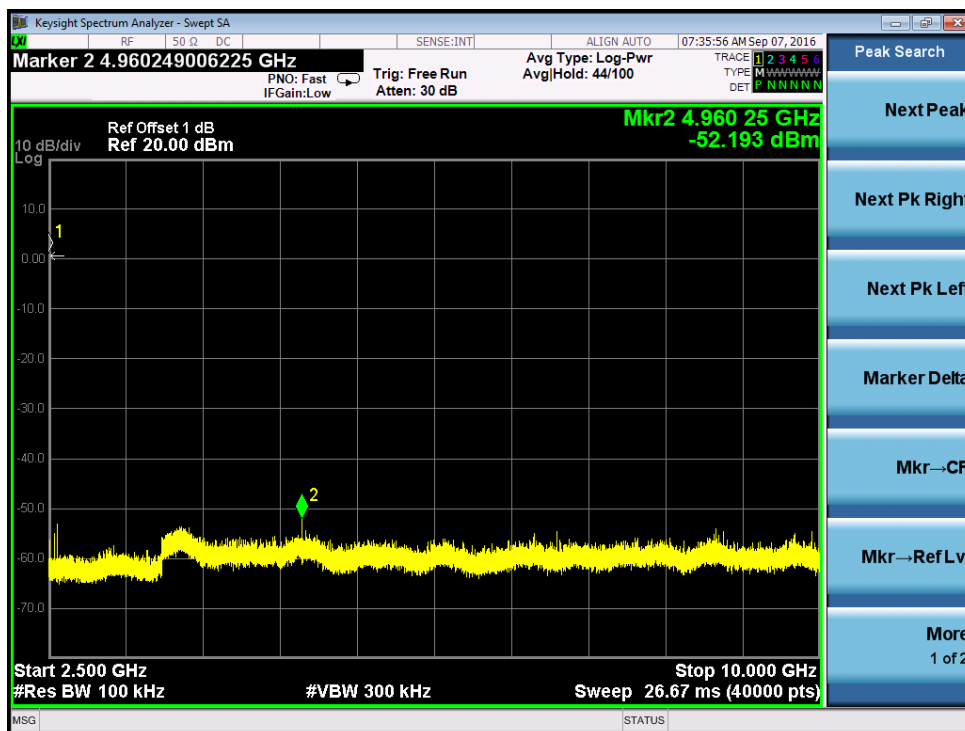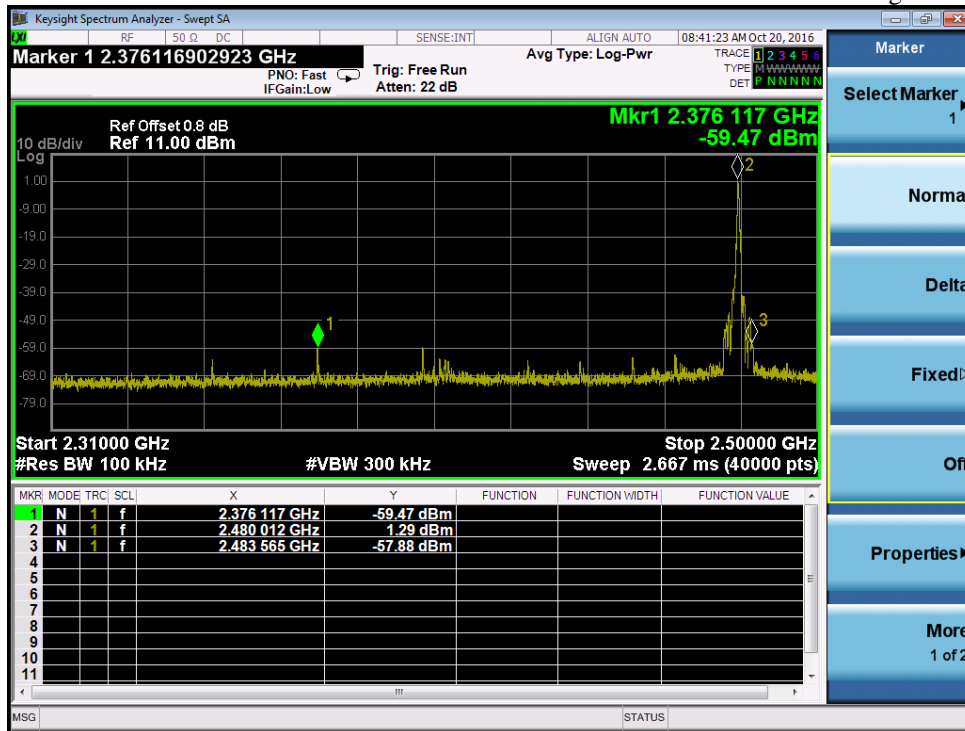


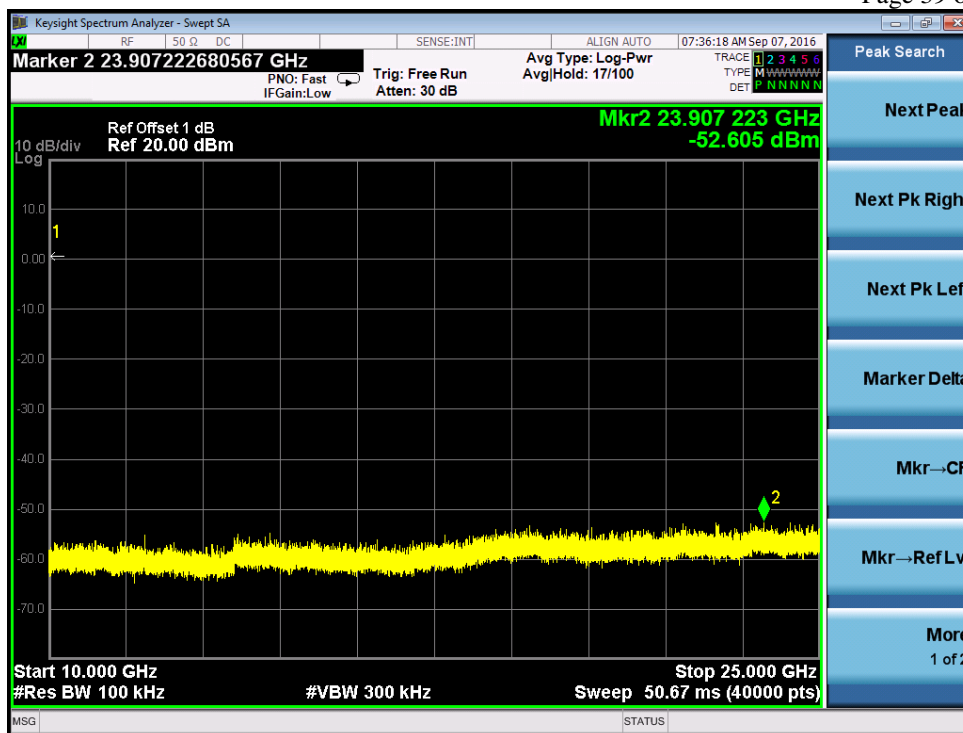

Hopping


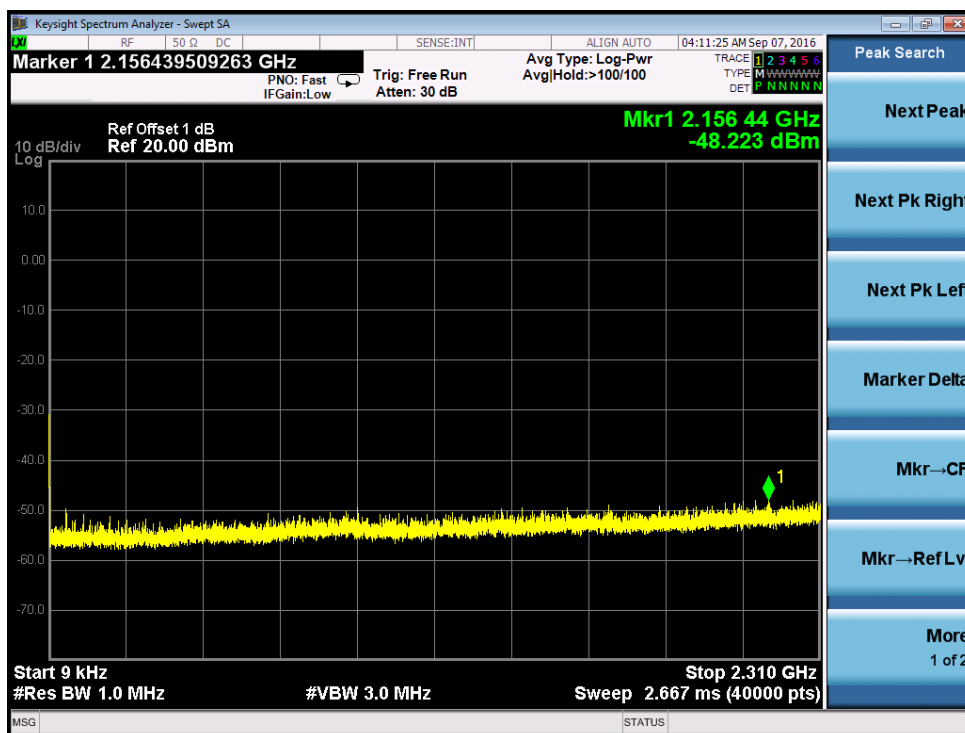


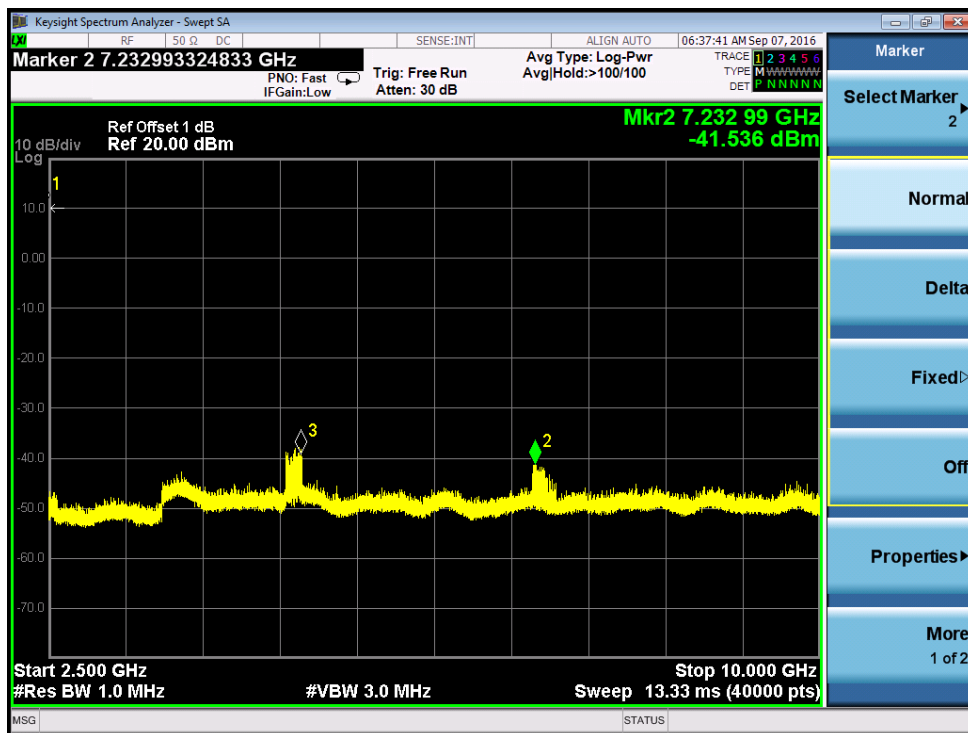
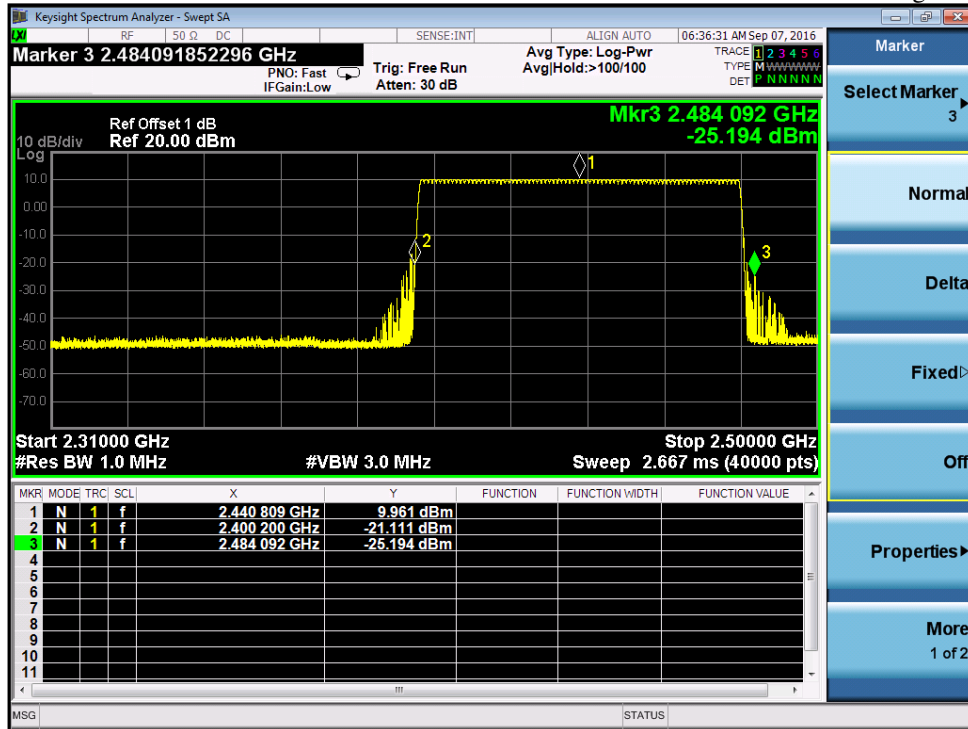


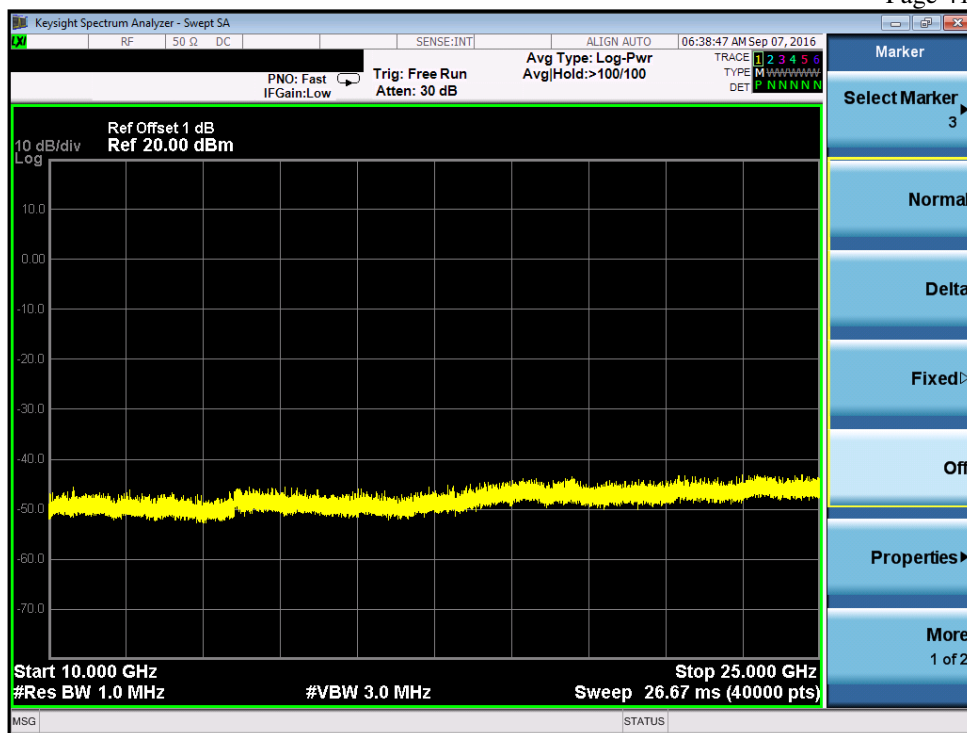



Modulation	Channel	Max reading among band (dBm)	The most restrict Attenuation outside band (MHz)	Limit (dB)
$\pi/4$ -DQPSK	L	1.808	2399	≥ 20
	M	1.939	2467	≥ 20
	H	2.012	2483.56	≥ 20
	Hopping	10.135	2399	≥ 20



Channel L

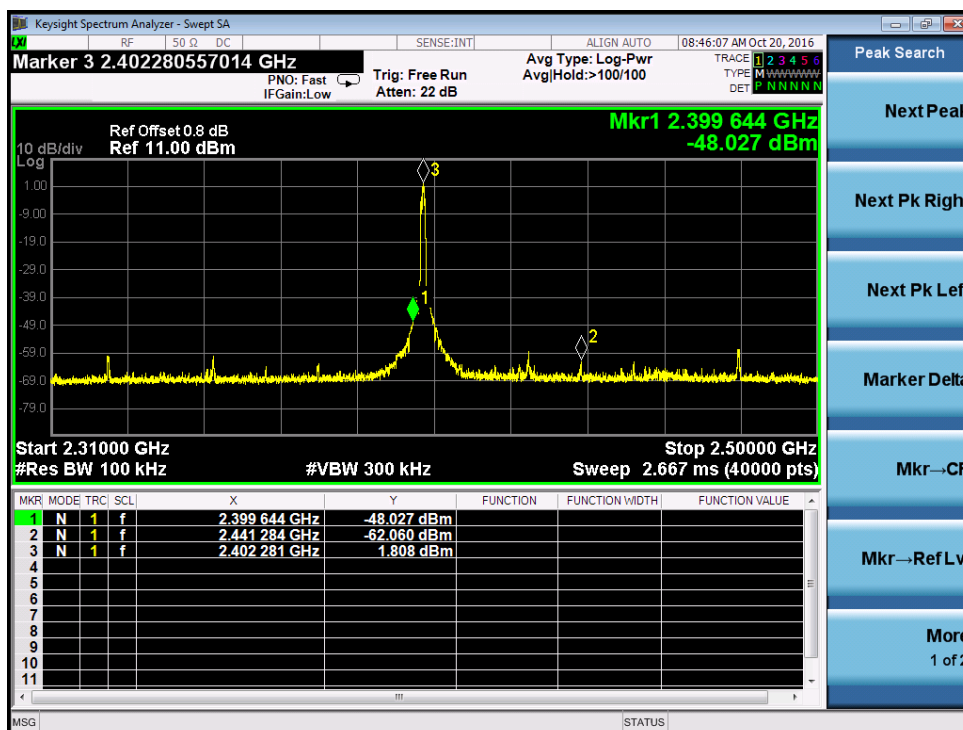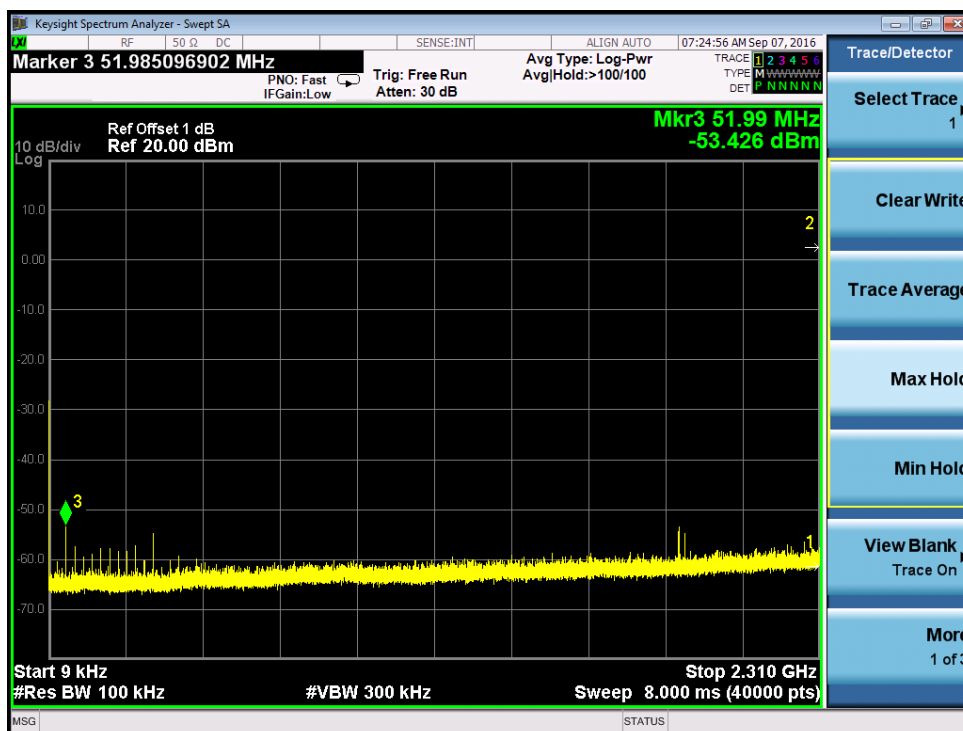

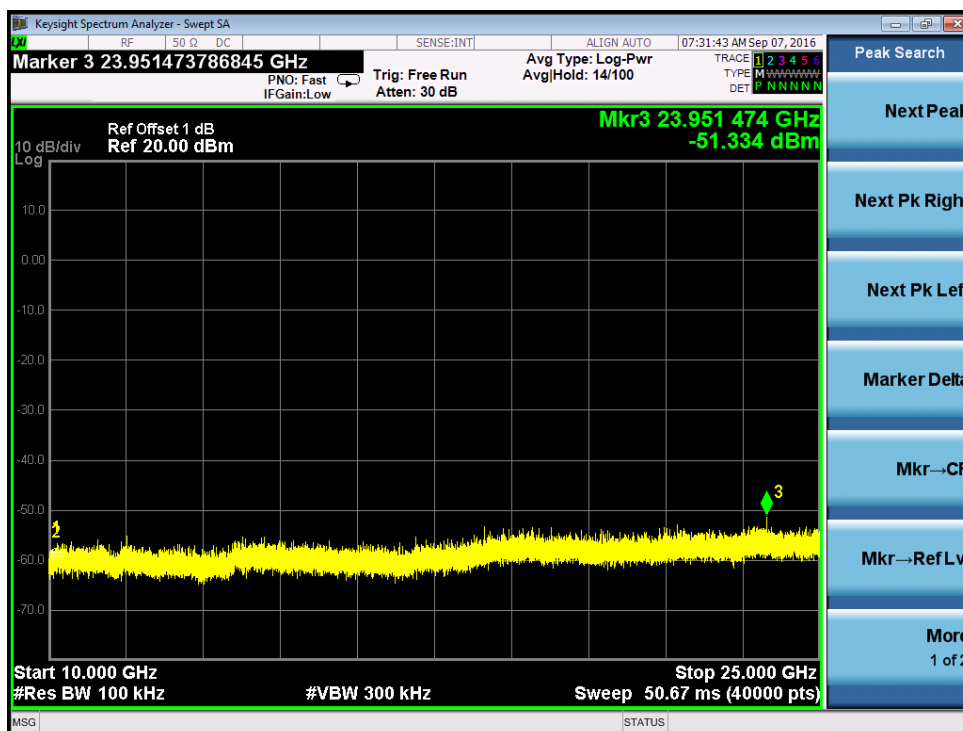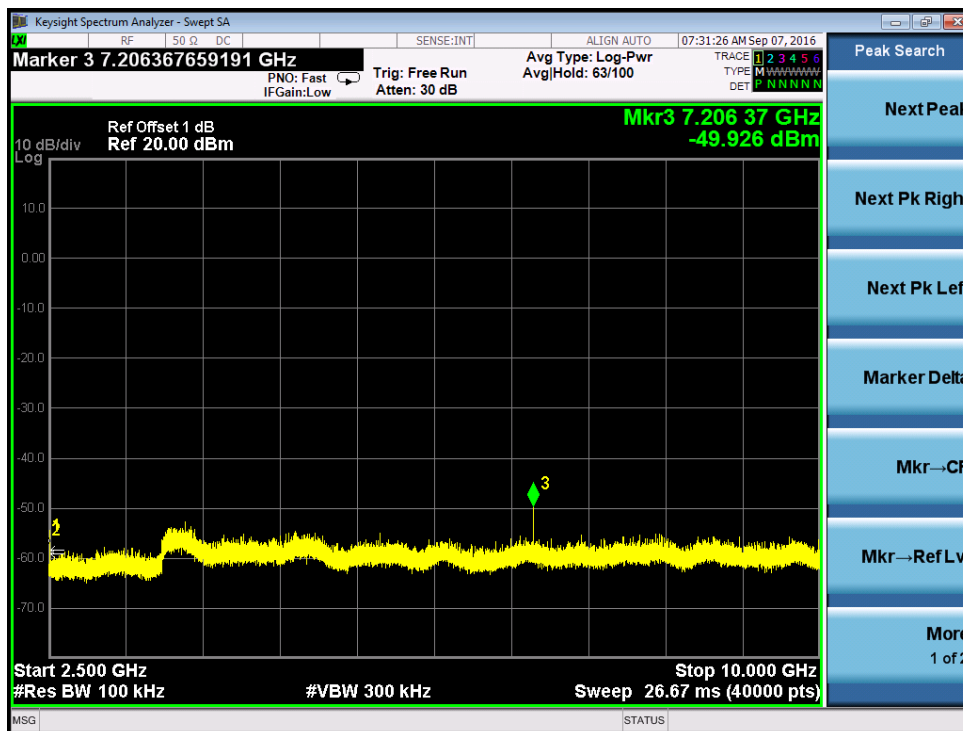




Channel M

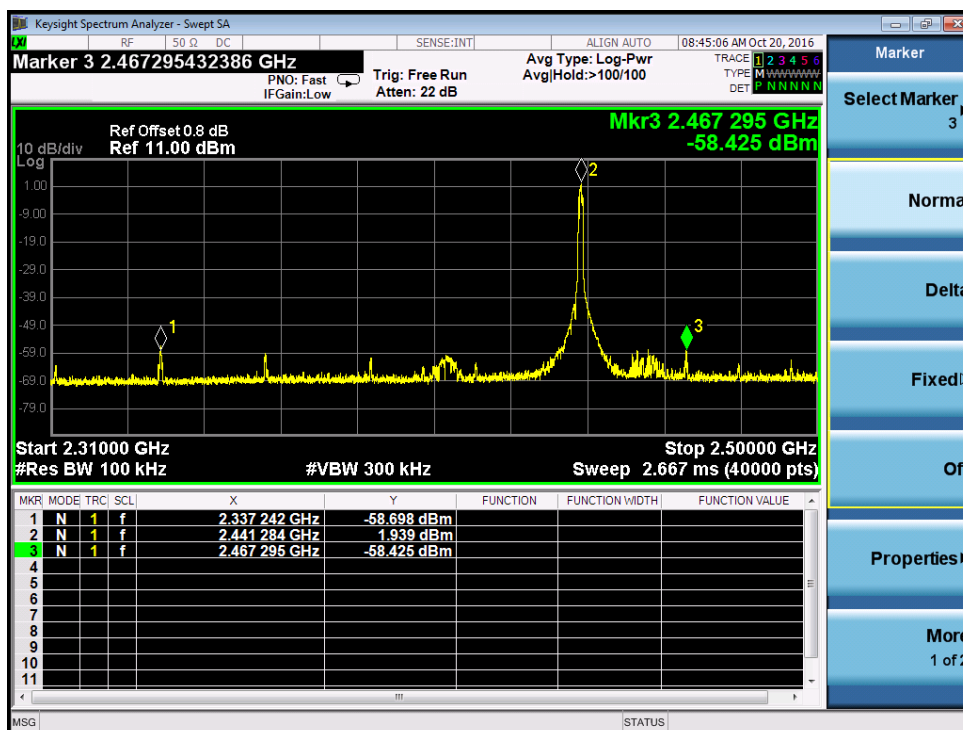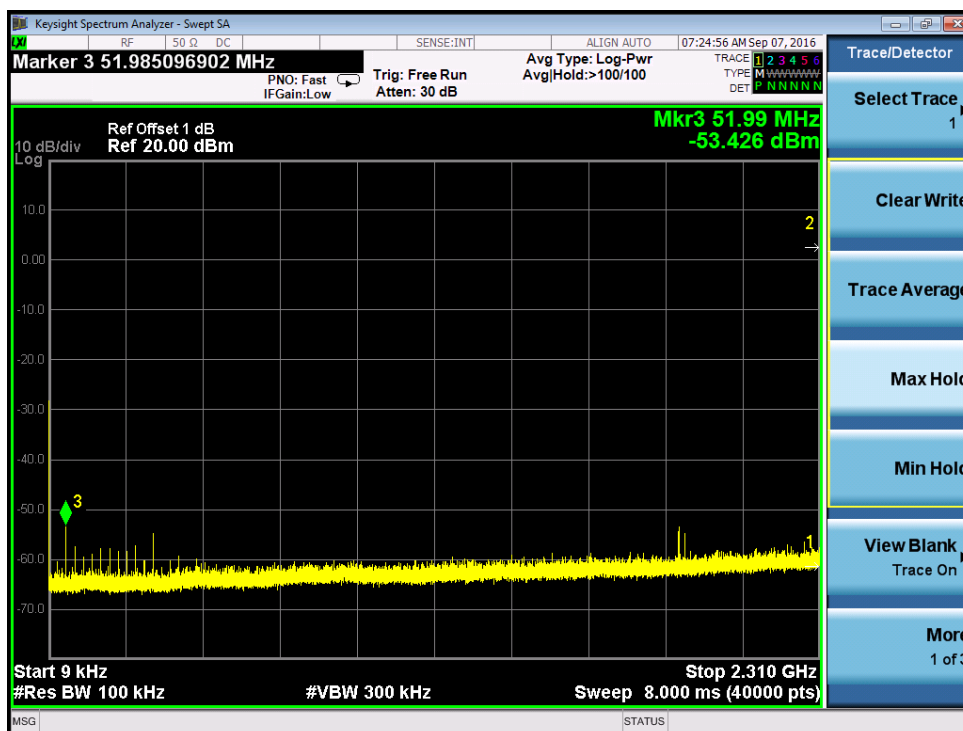

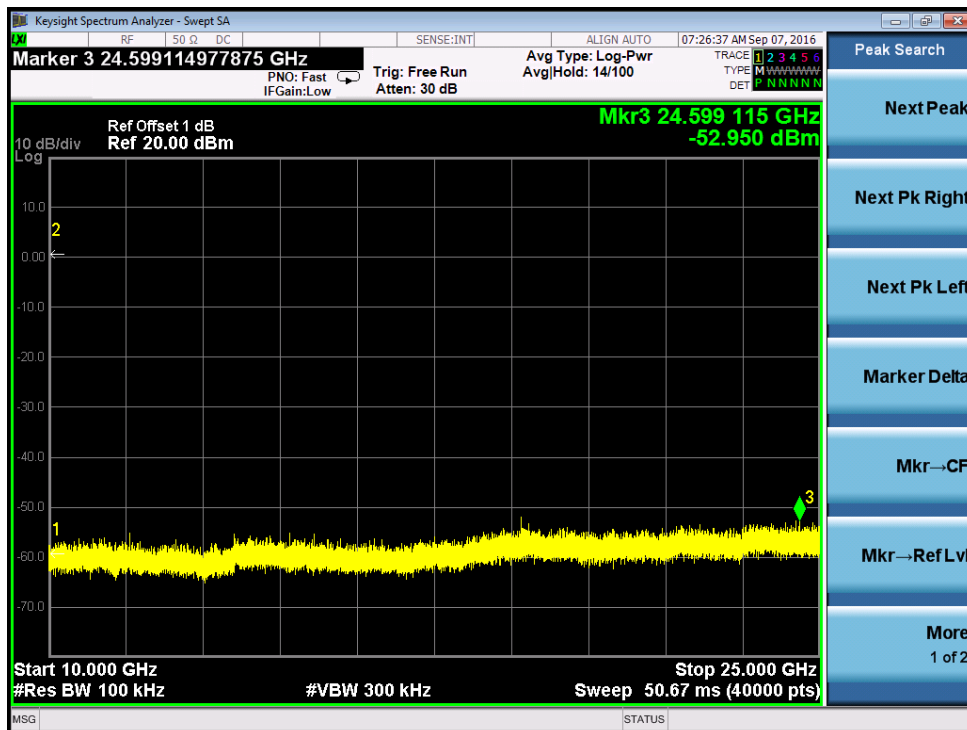
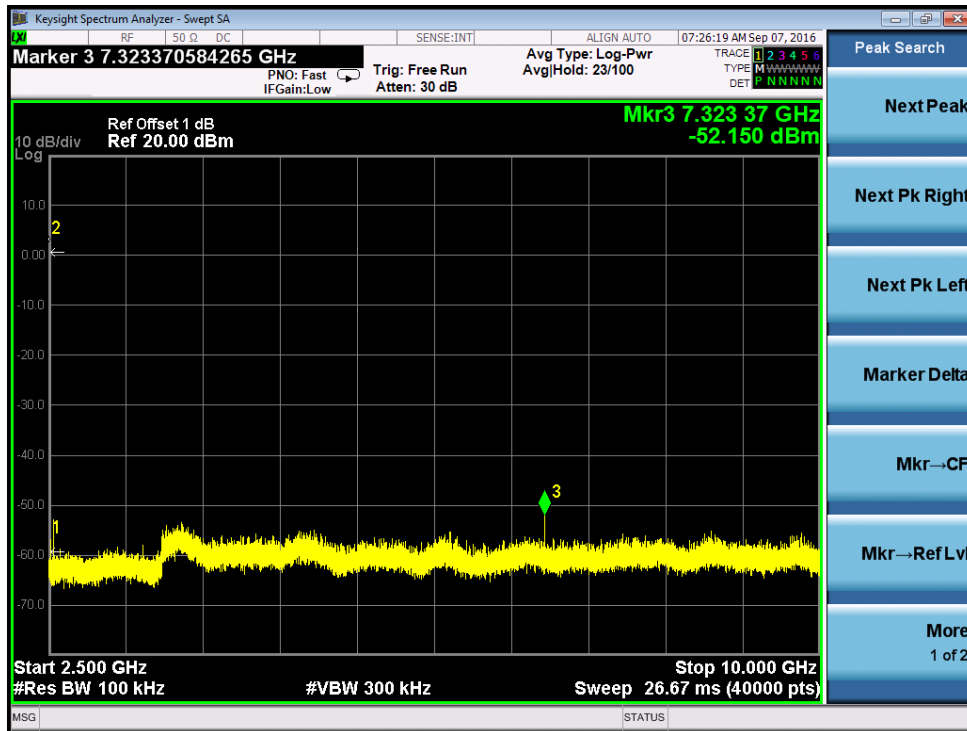



Channel H

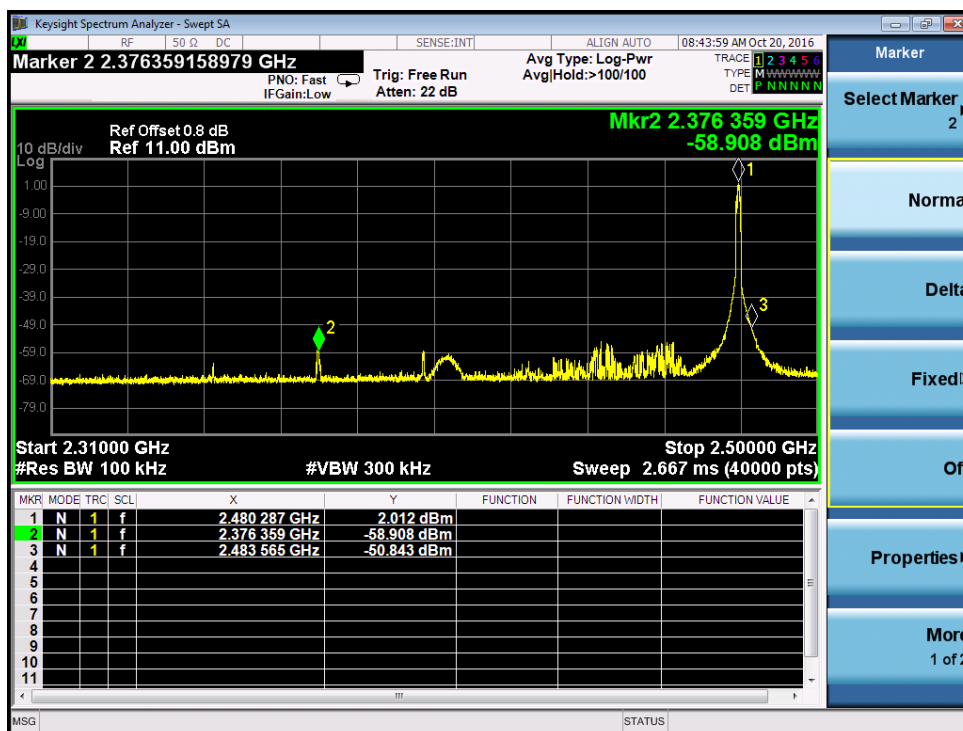

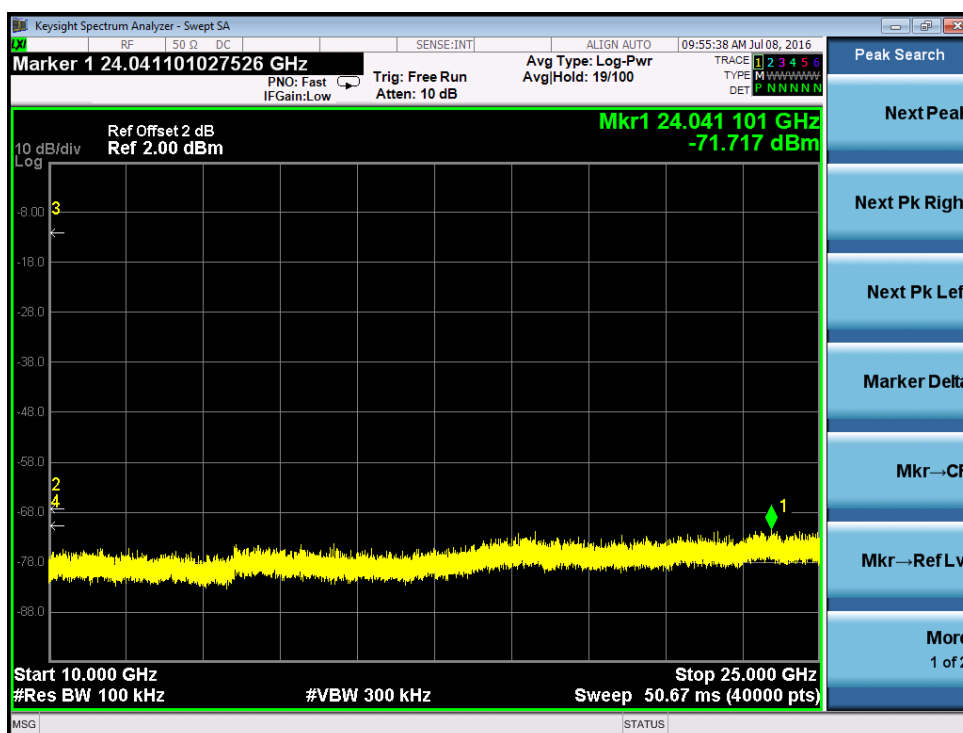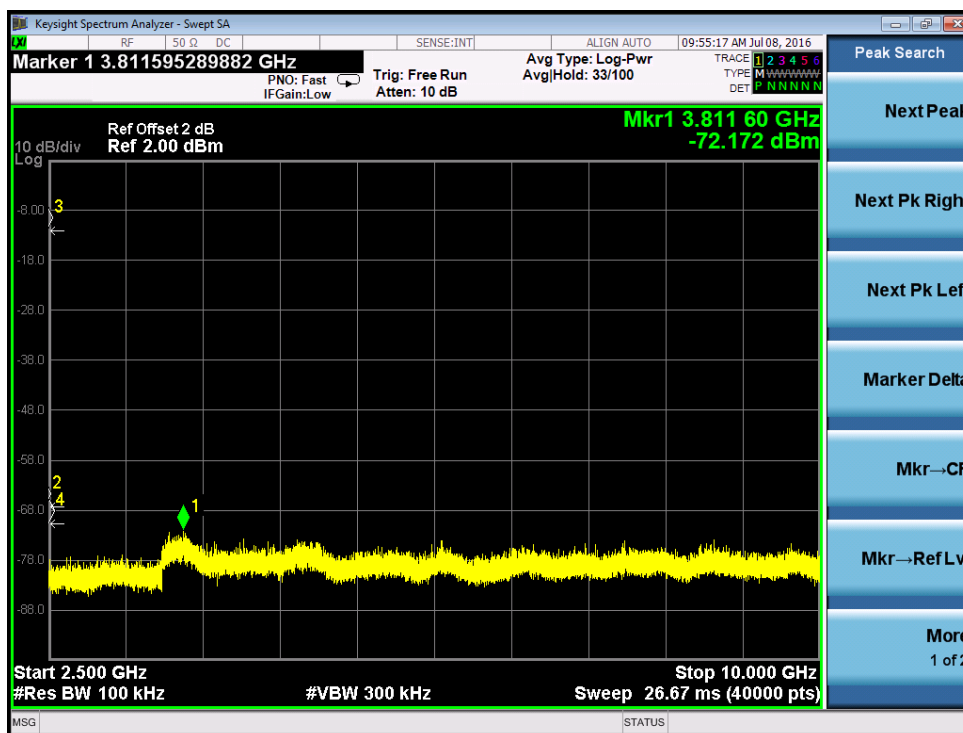


Hopping

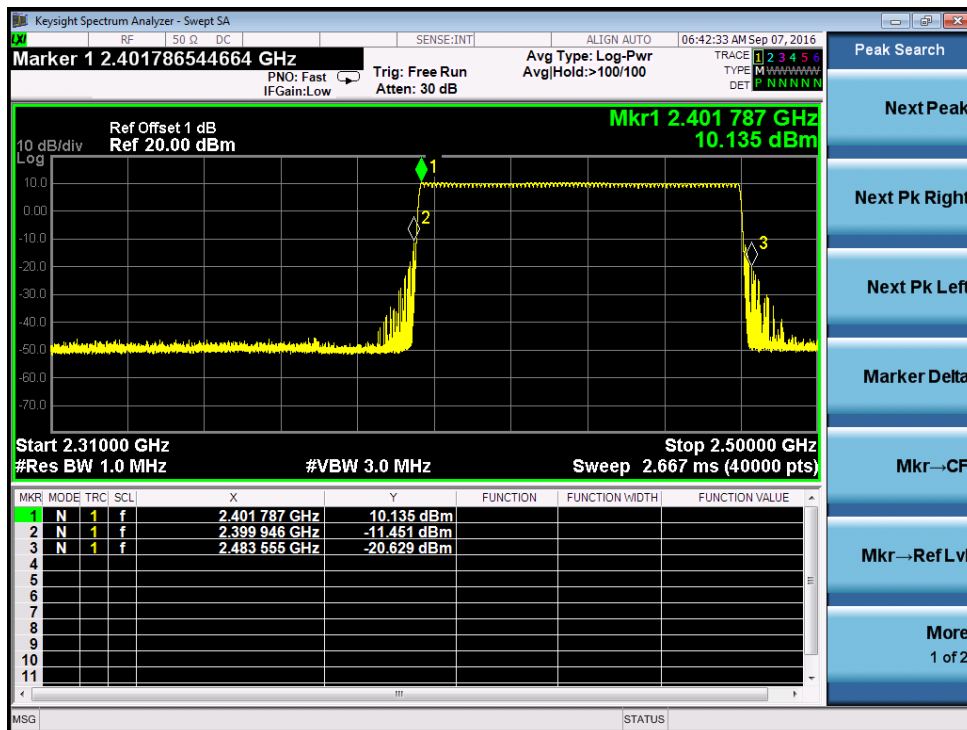
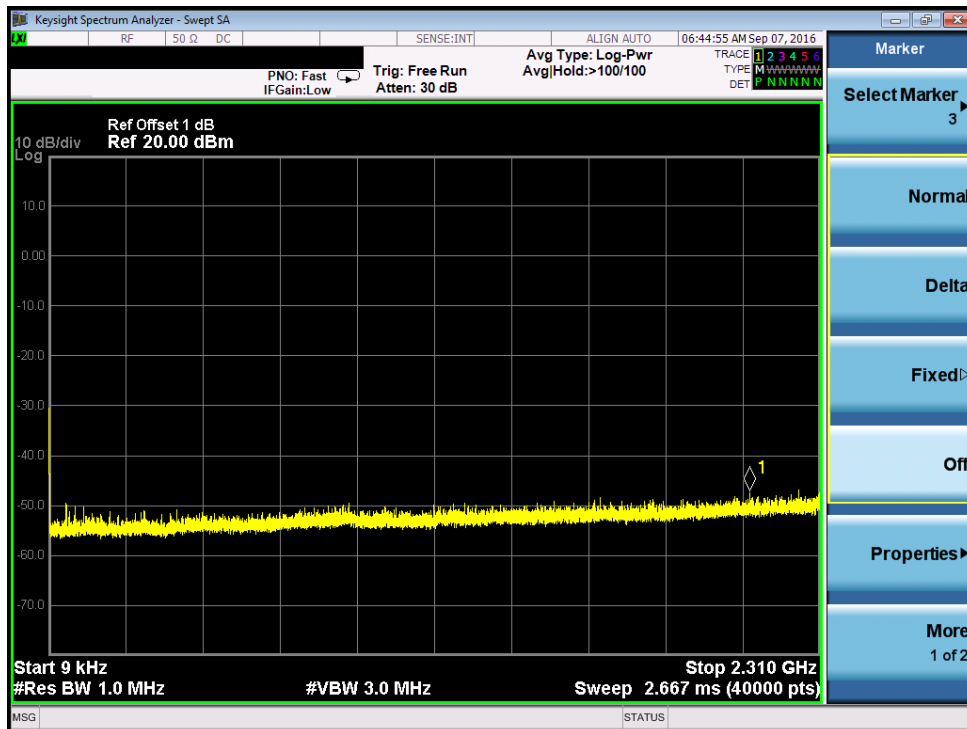


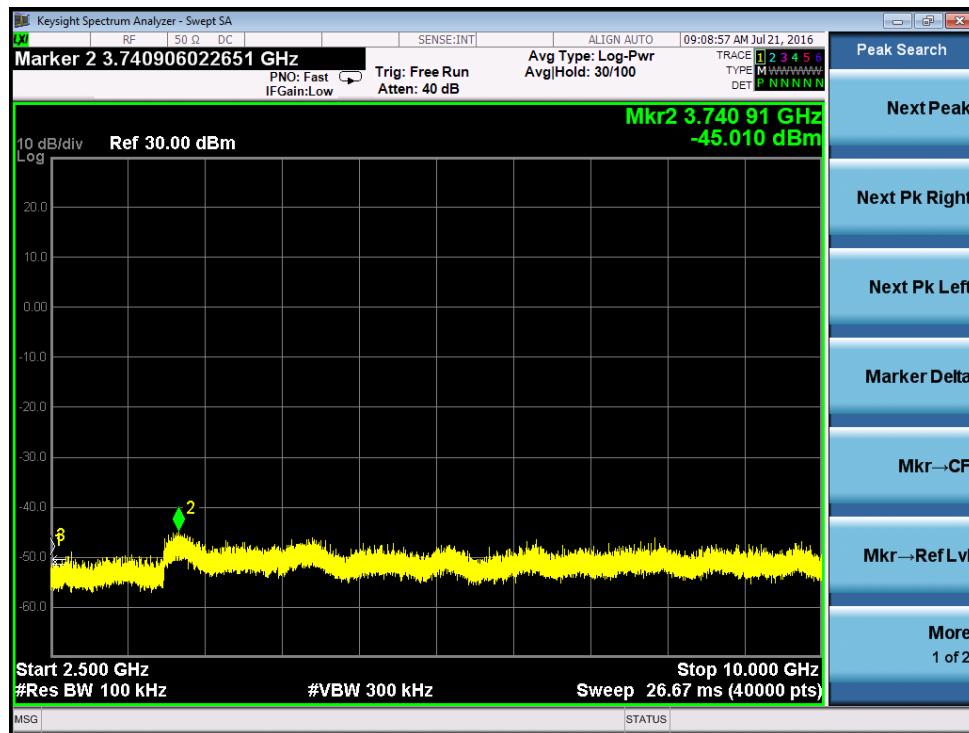


Modulation	Channel	Max reading among band (dBm)	The most restrict Attenuation outside band (MHz)	Limit (dB)
8DPSK	L	2.092	2399	≥ 20
	M	2.235	2462	≥ 20
	H	2.314	2483.509	≥ 20
	Hopping	9.966	2398	≥ 20


Channel L


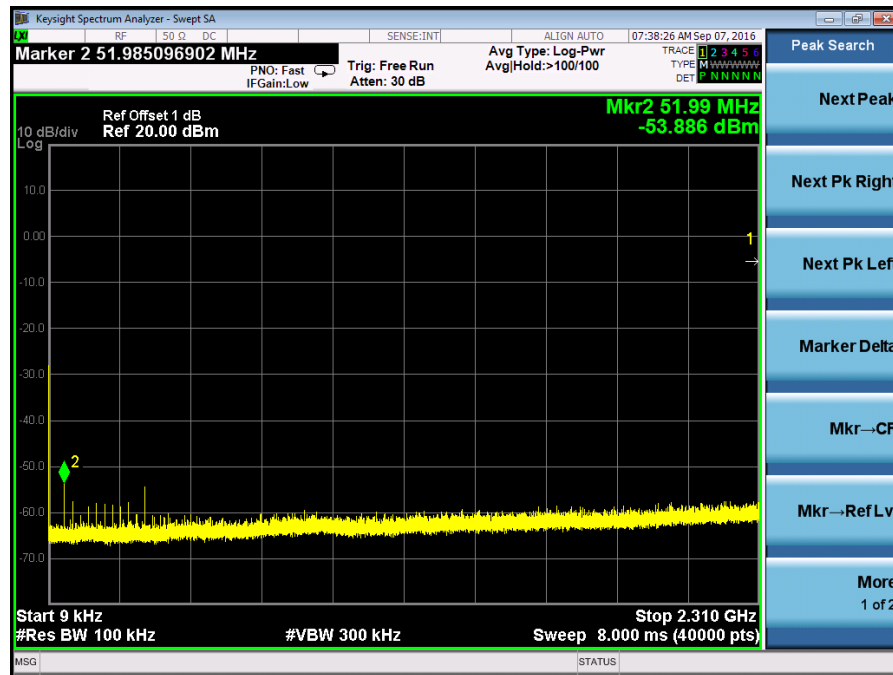


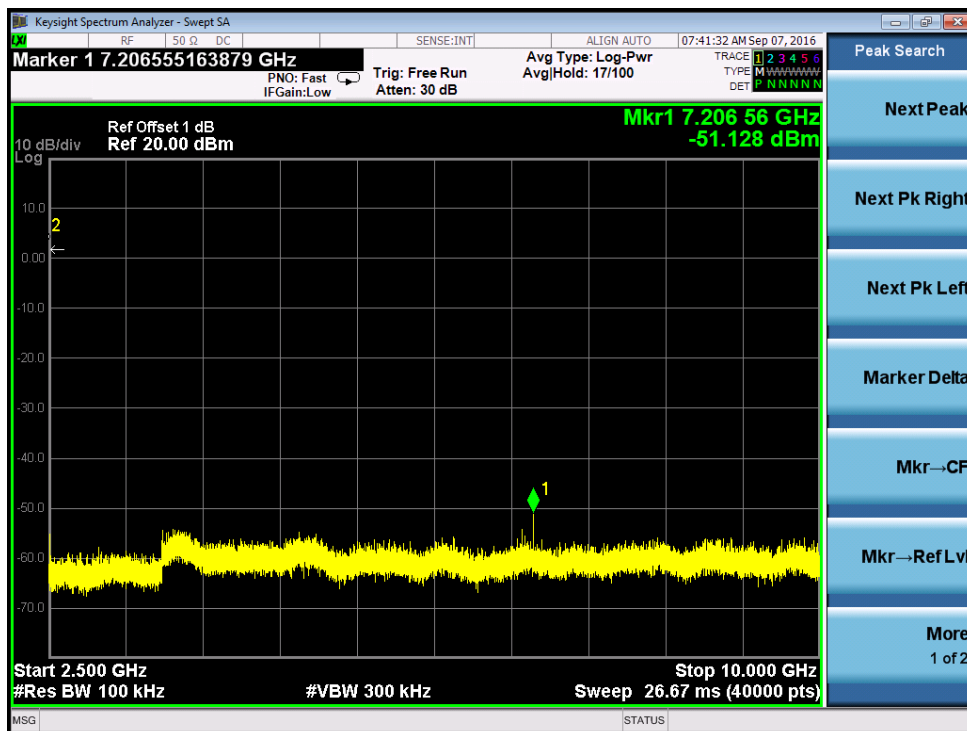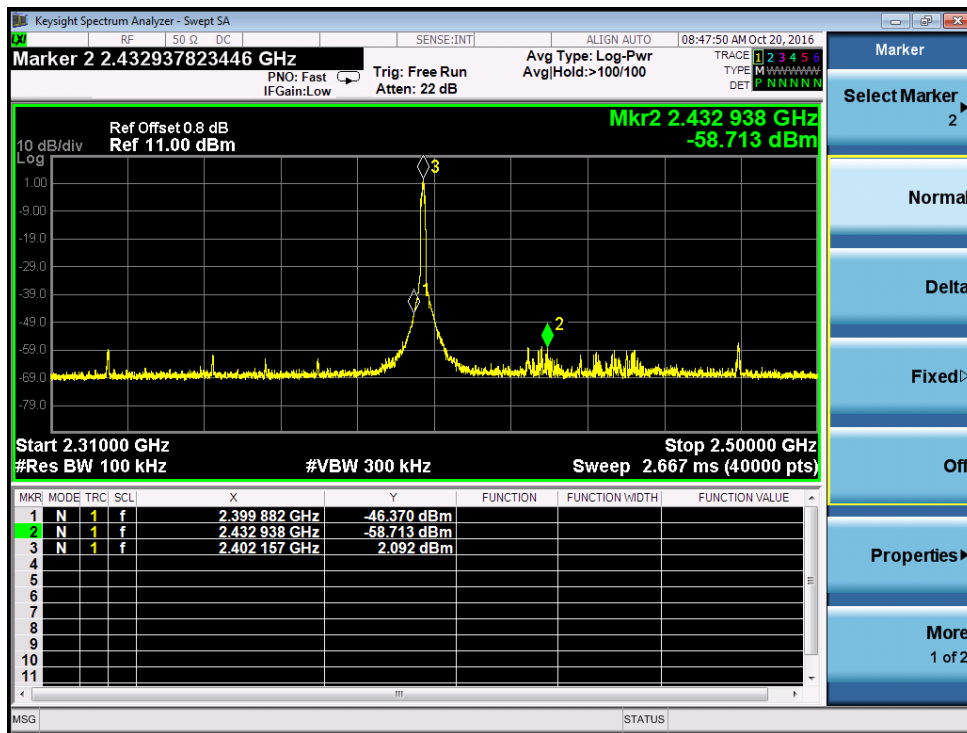


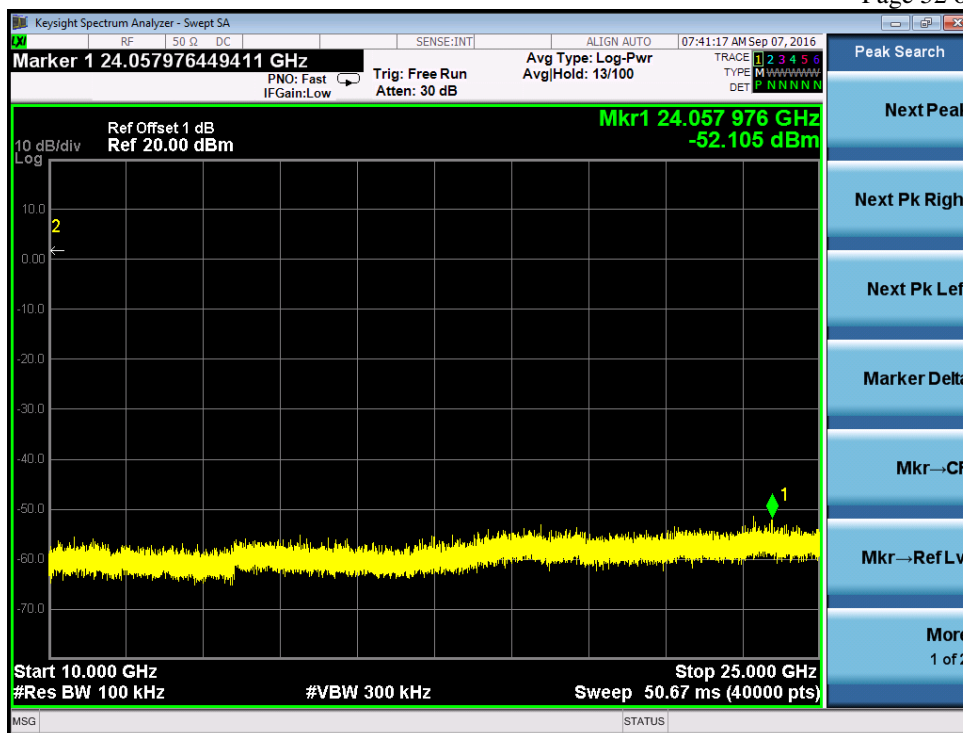


Channel M


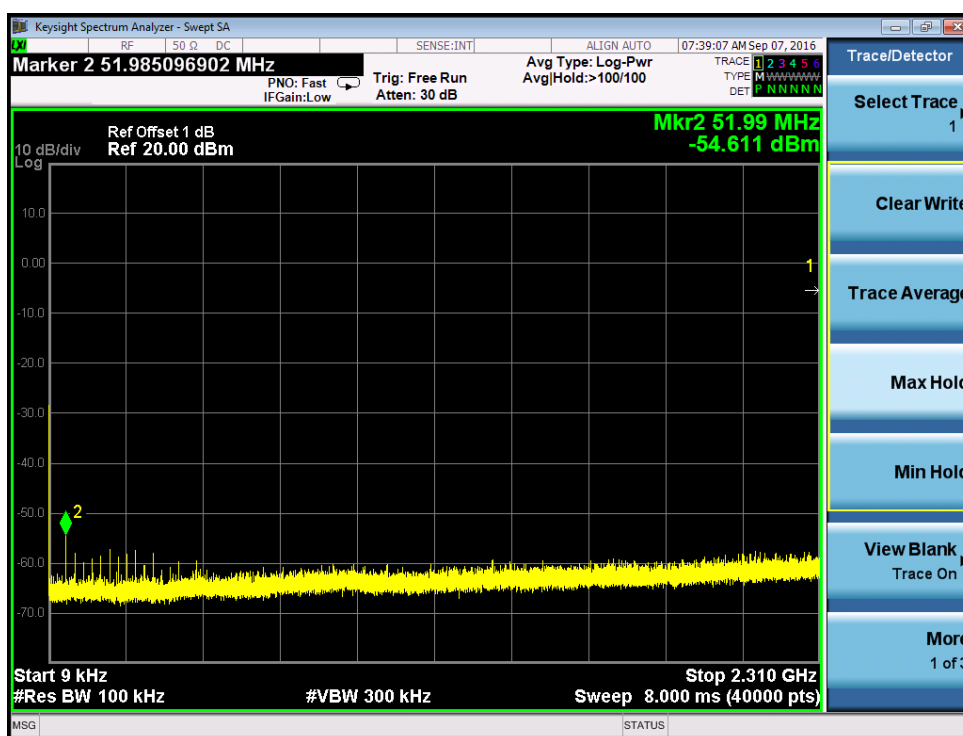


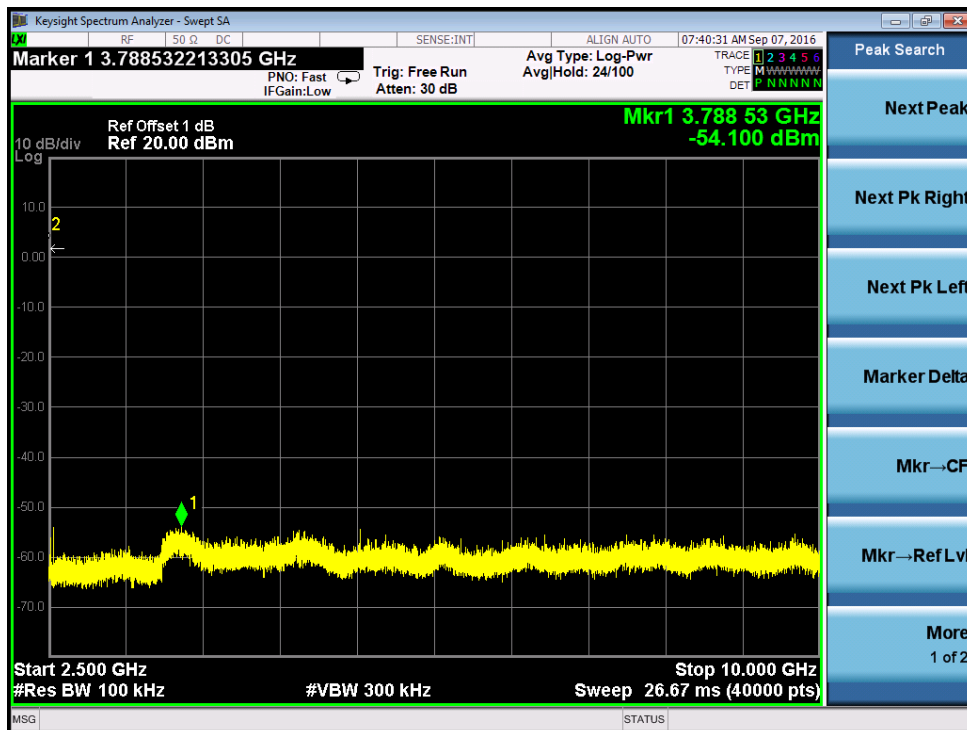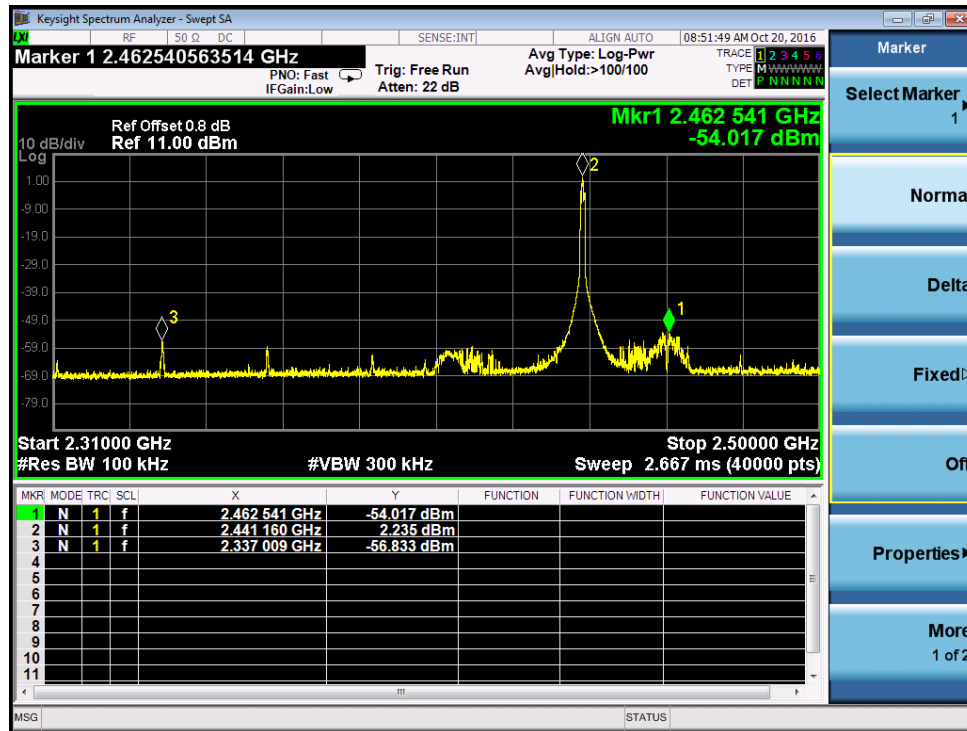


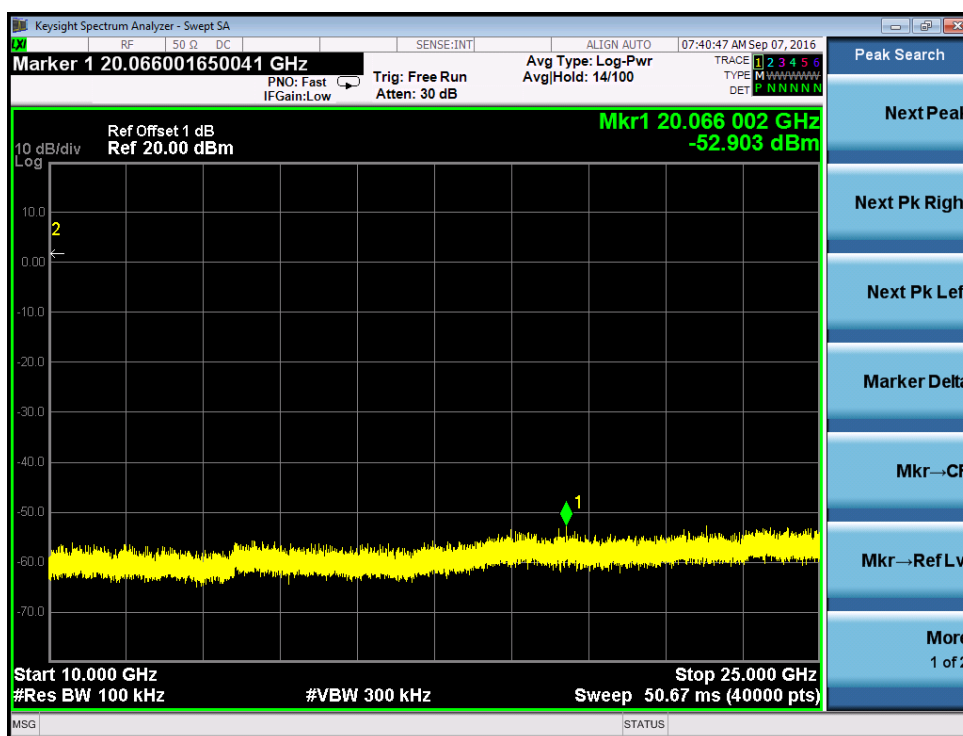


Channel H


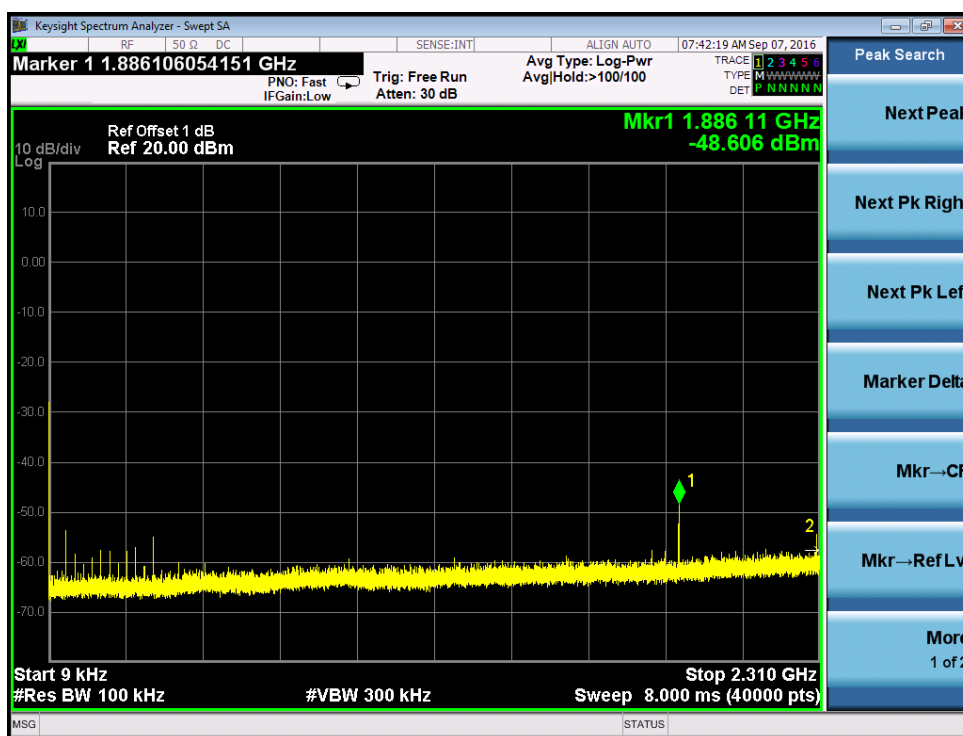


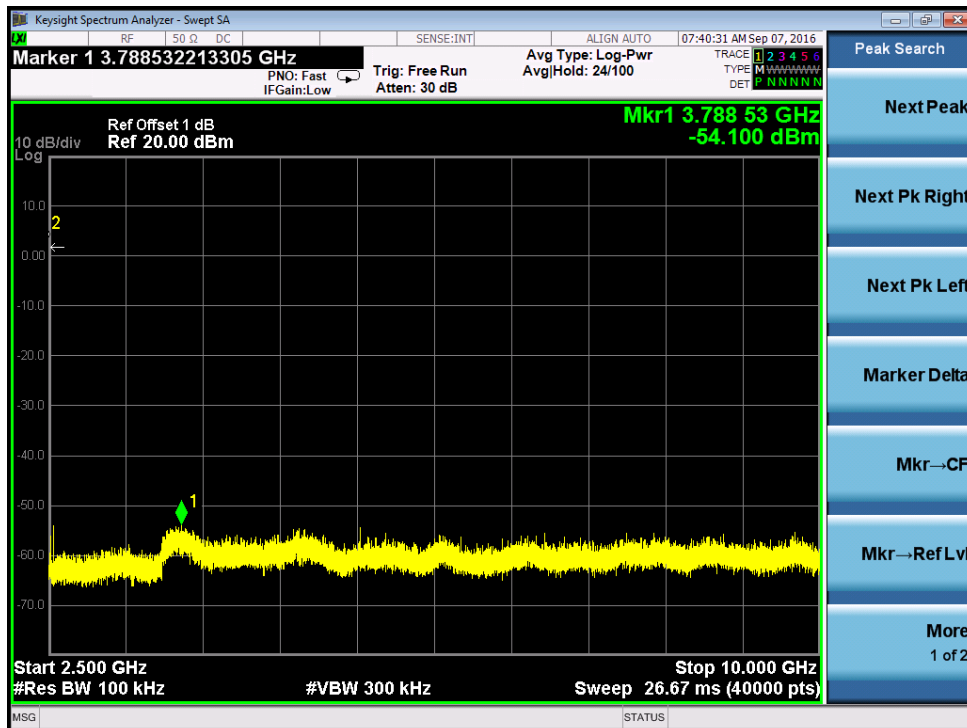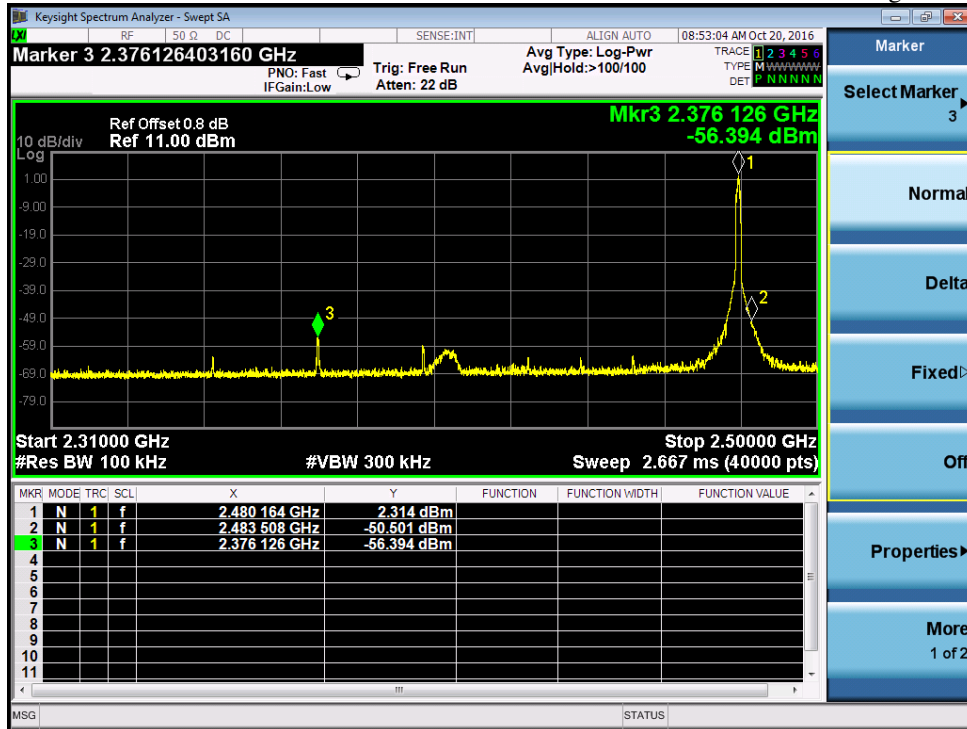


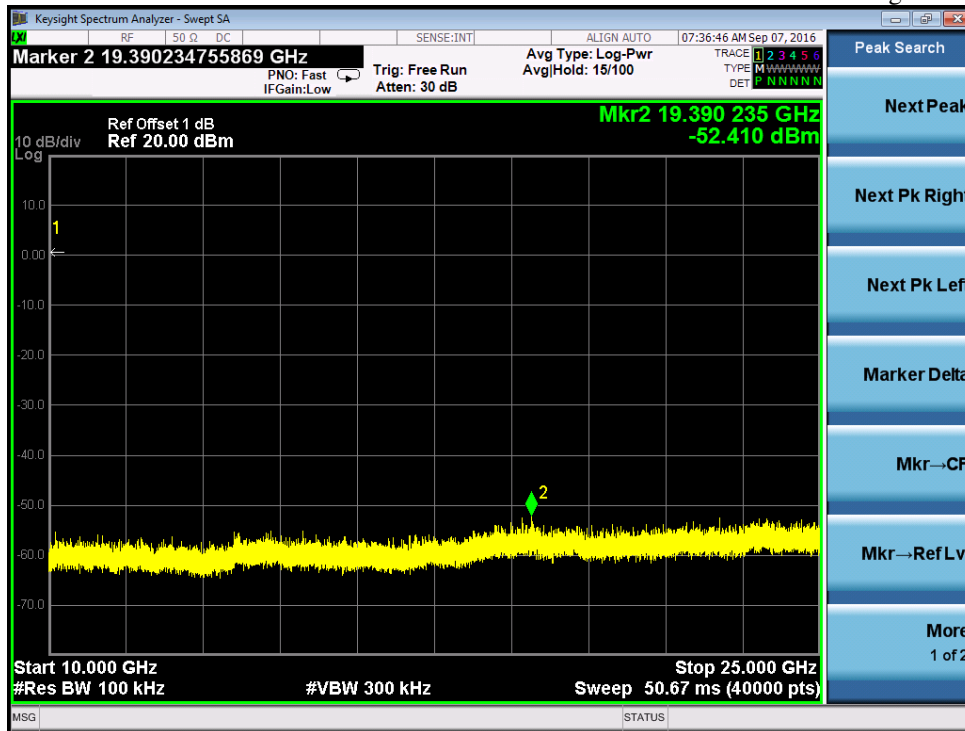

Hopping

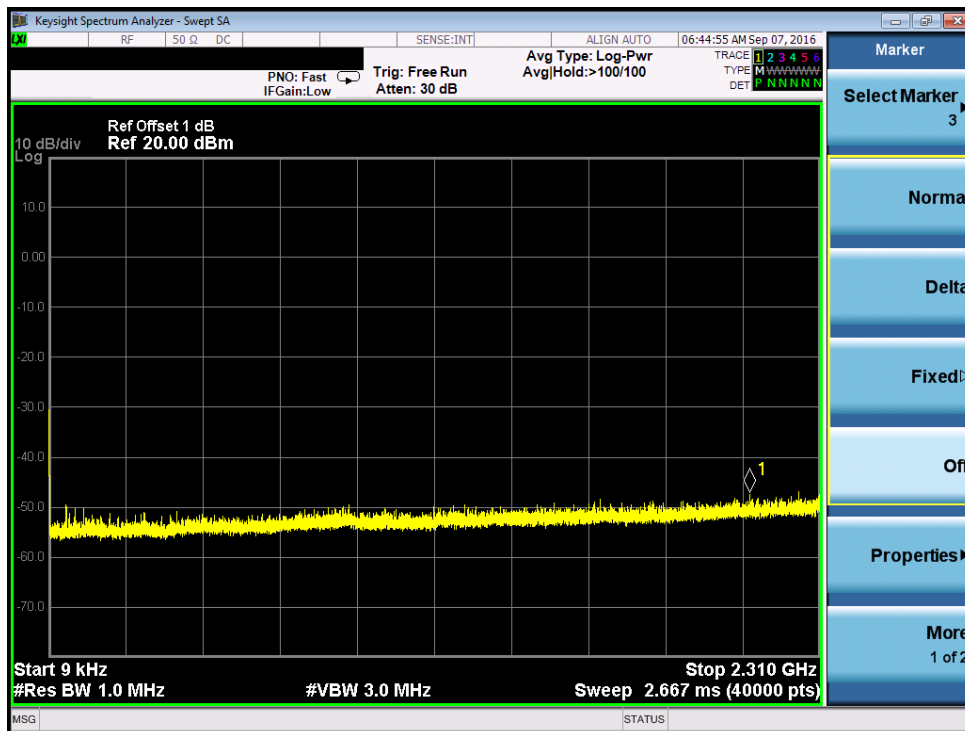

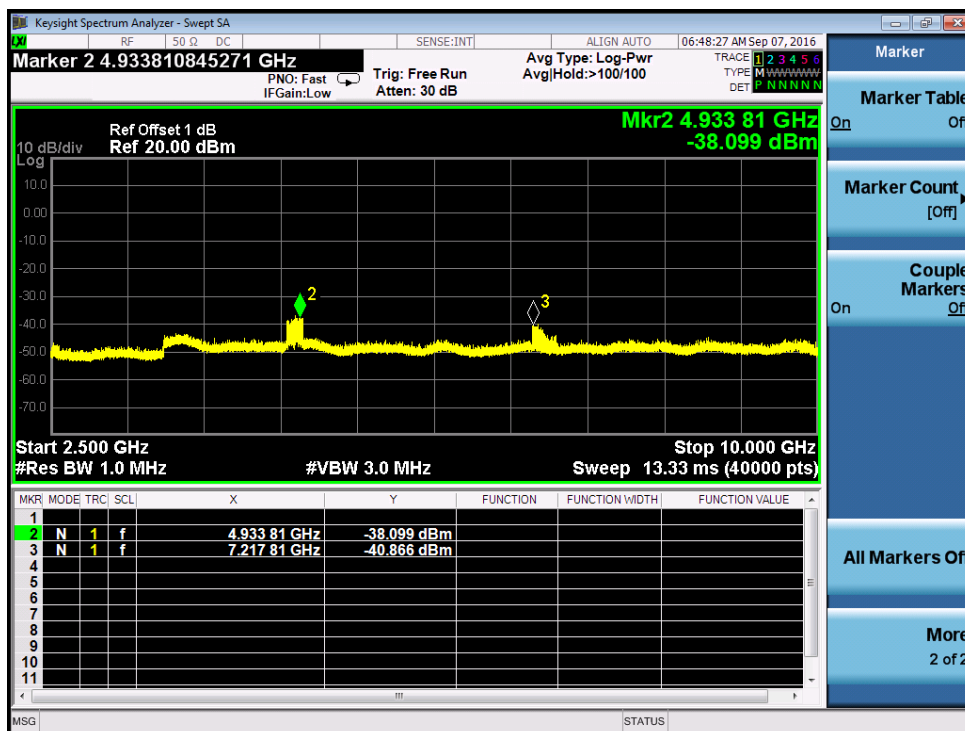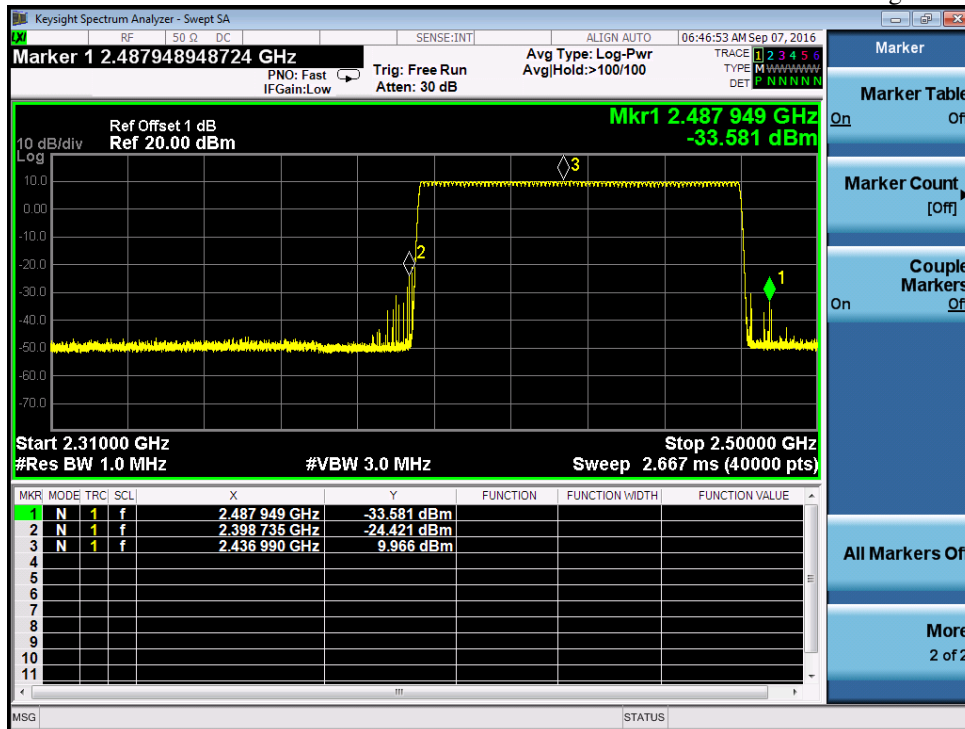

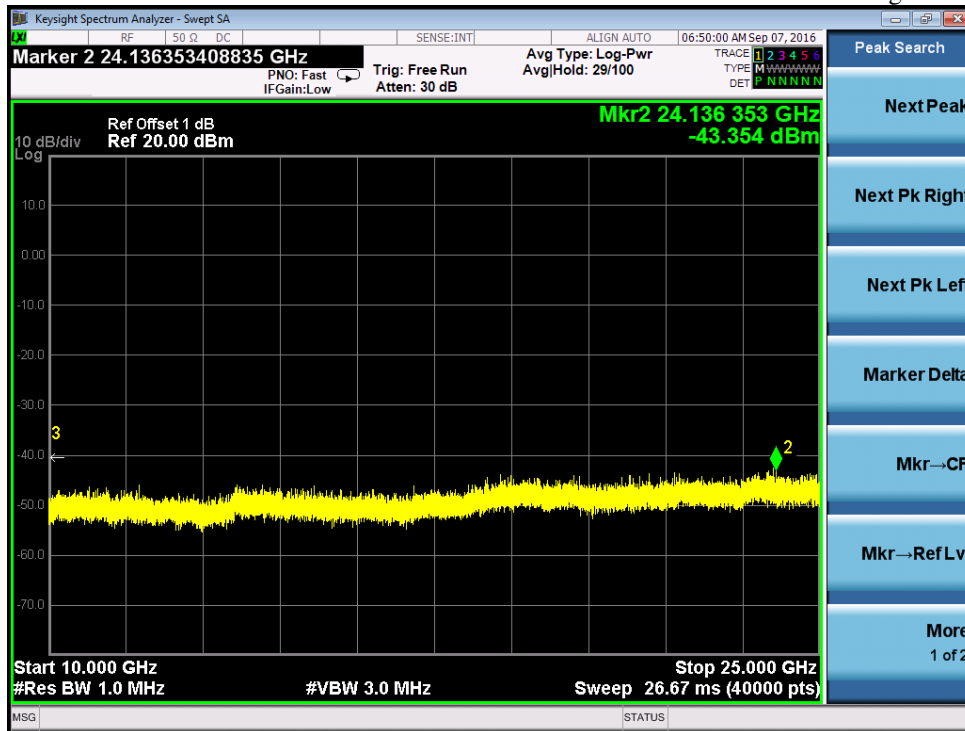


7 Number of hopping frequencies

Test result: Pass

7.1 Test limit

Number of Hopping Frequencies in the 2400-2483.5 MHz band shall use at least 15 channels.

7.2 Test Configuration

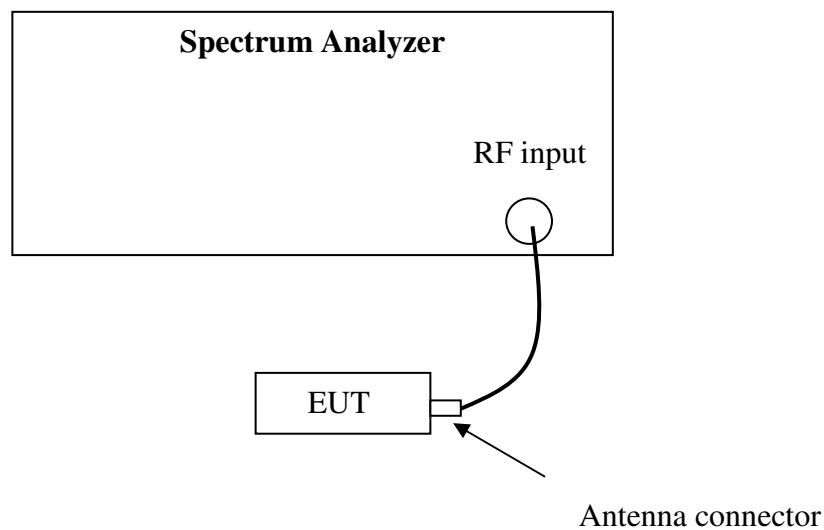

7.3 Test procedure and test setup


The EUT was tested according to DA 00-705 (Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems).

The Number of hopping frequencies per FCC § 15.247(a)(1)(iii) is measured using the Spectrum Analyzer with RBW=100kHz, VBW $\geq$ RBW, Sweep = auto, Detector = peak, Trace = max hold.

7.4 Test Protocol

Temperature: 22°C
Relative Humidity: 54%

Number of Hopping Frequencies	Limit
79	≥15

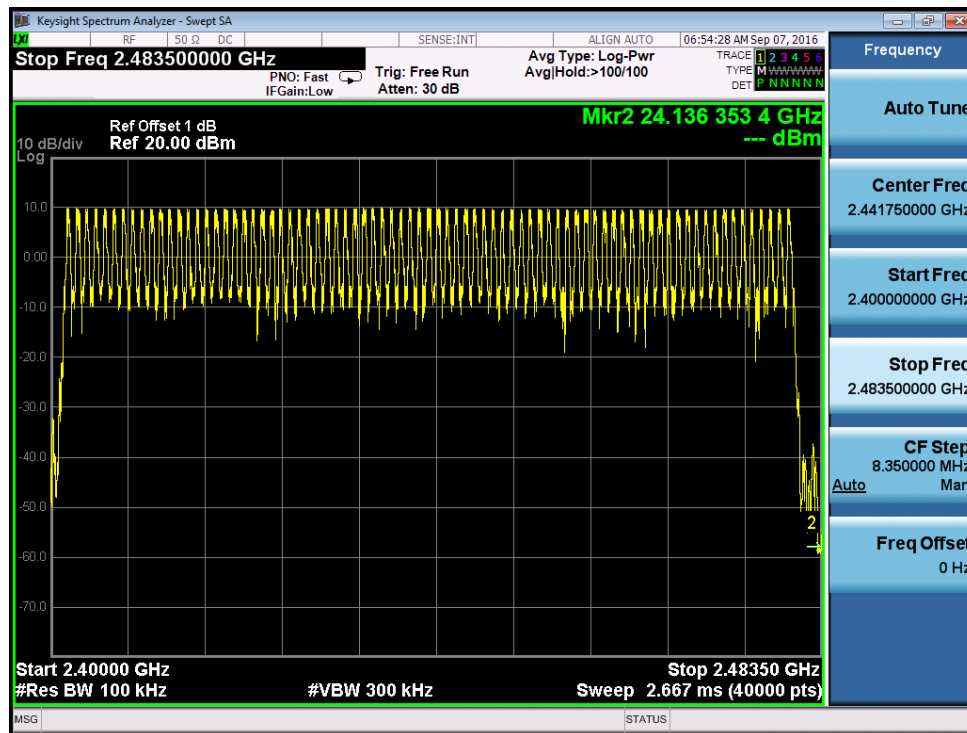


8 Dwell time

Test result: **Pass**

8.1 Test limit

The dwell time on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

8.2 Test Configuration

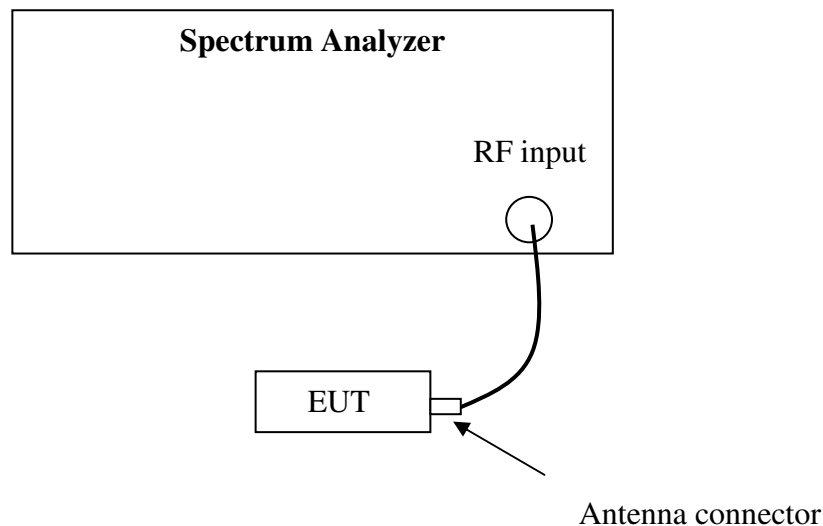

8.3 Test procedure and test setup

The EUT was tested according to DA 00-705 (Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems).

Dwell time per FCC § 15.247(a)(1)(iii) is measured using the Spectrum Analyzer with Span = 0, RBW=1MHz, VBW $\geq$ RBW, Sweep can capture the entire dwell time, Detector = peak, Trace = max hold.

8.4 Test Protocol



Temperature: 22°C
Relative Humidity: 54%

Packet	Occupancy time for single hop (ms) O	Channel	Real observed period (s) P	Hops among Observed period I	Dwell time (ms) T	Limit (s)
DH1	0.428	L	3.16	32	136.96	≤0.4
		M	3.16	32	136.96	
		H	3.16	32	136.96	
DH3	1.681	L	3.16	16	268.96	
		M	3.16	16	268.96	
		H	3.16	16	268.96	
DH5	2.926	L	3.16	11	321.86	
		M	3.16	11	321.86	
		H	3.16	11	321.86	



Remark: 1. There are 79 channels in all. So the complete observed period $P = 0.4 * 79 = 31.6$ s.

2. Average time of occupancy $T = O * I * 31.6 / P$



DH1

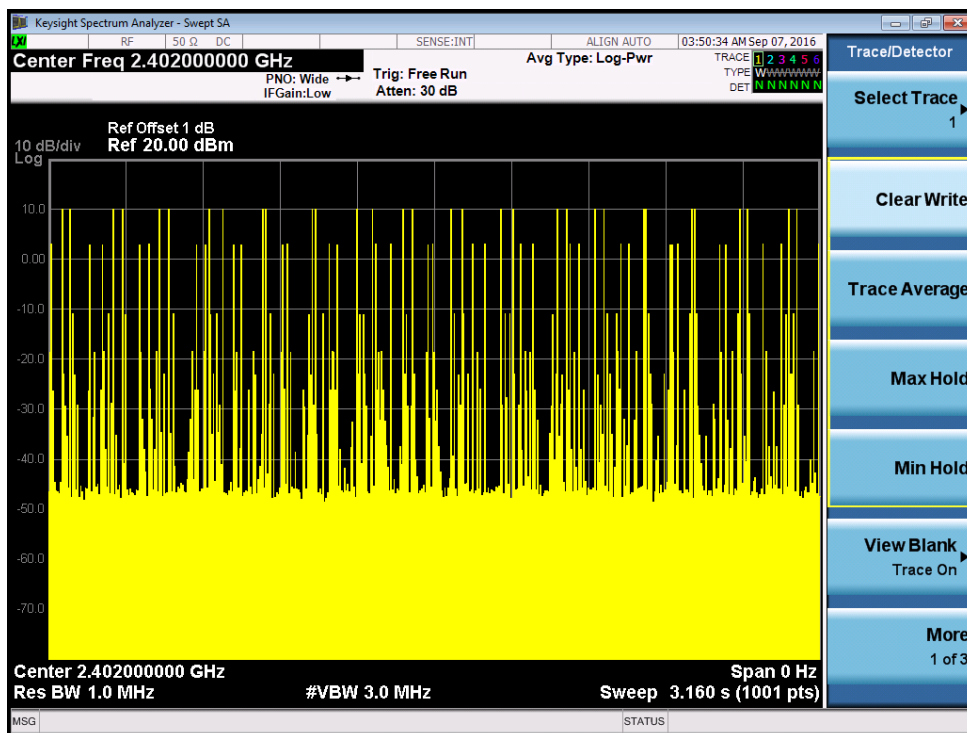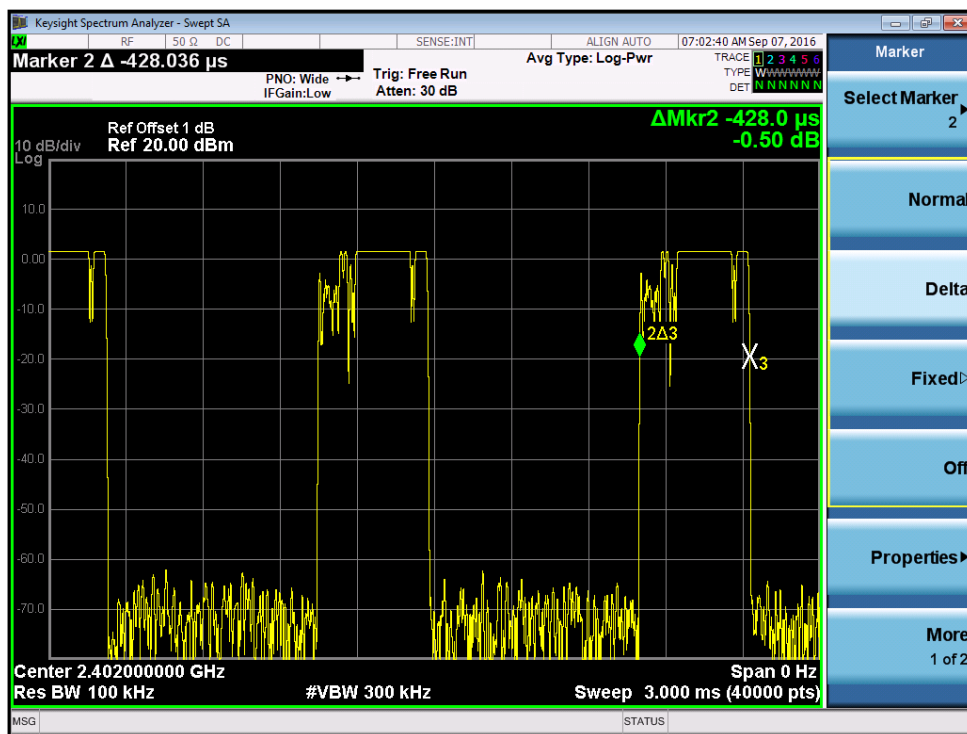

DH3

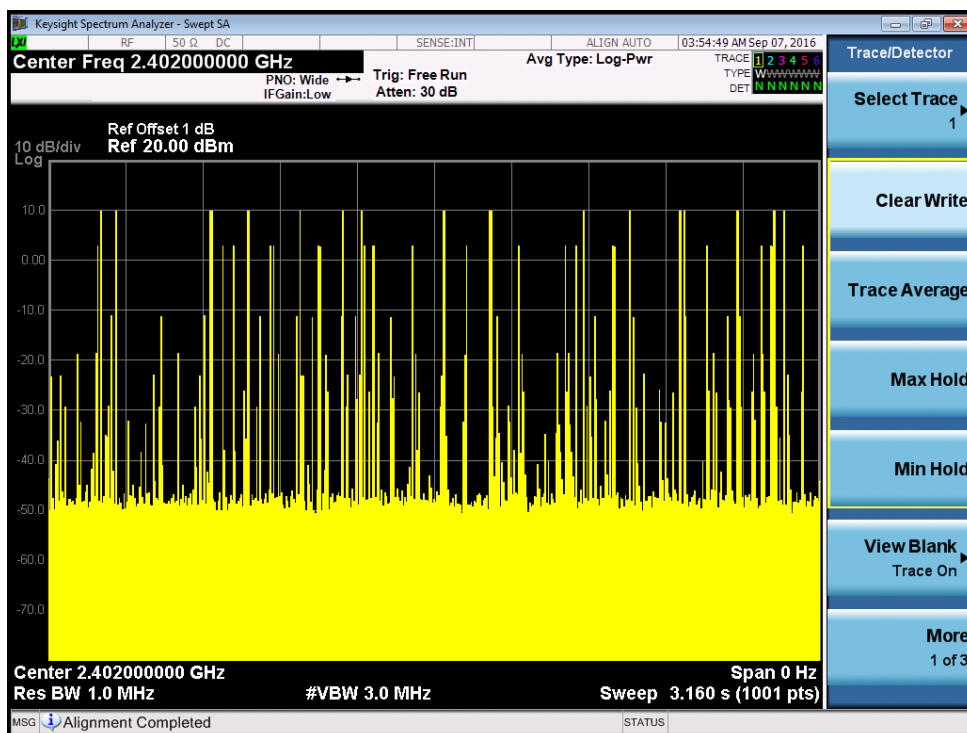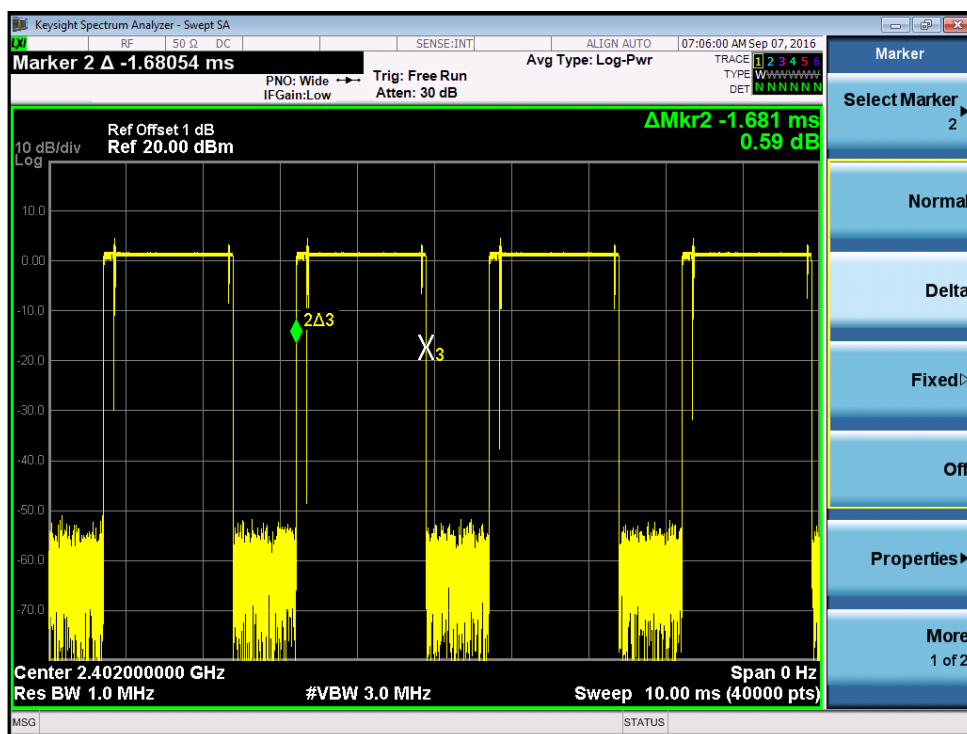

DH5

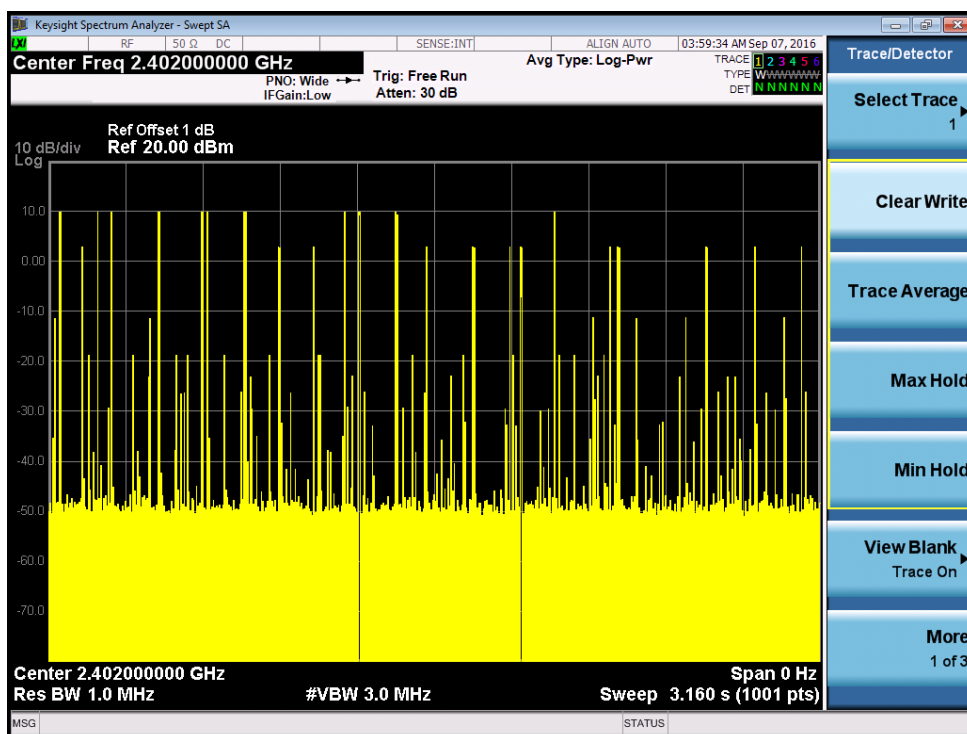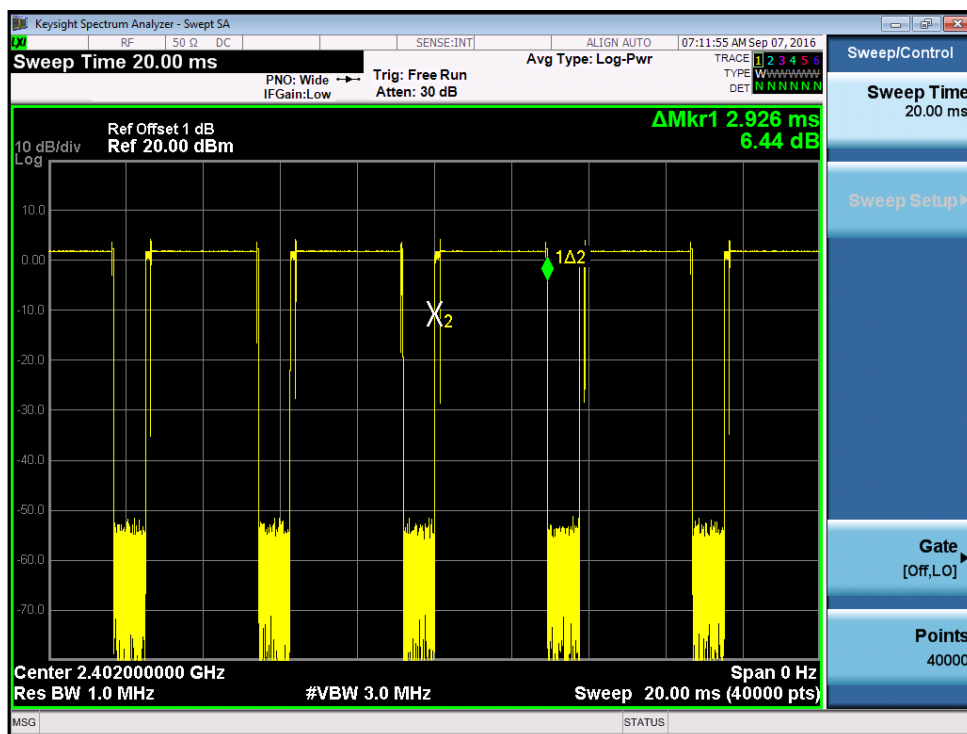

9 Radiated Emissions

Test result: Pass


9.1 Test limit

The radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) showed as below:


Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

9.2 Test Configuration

Frequency range below 1GHz:

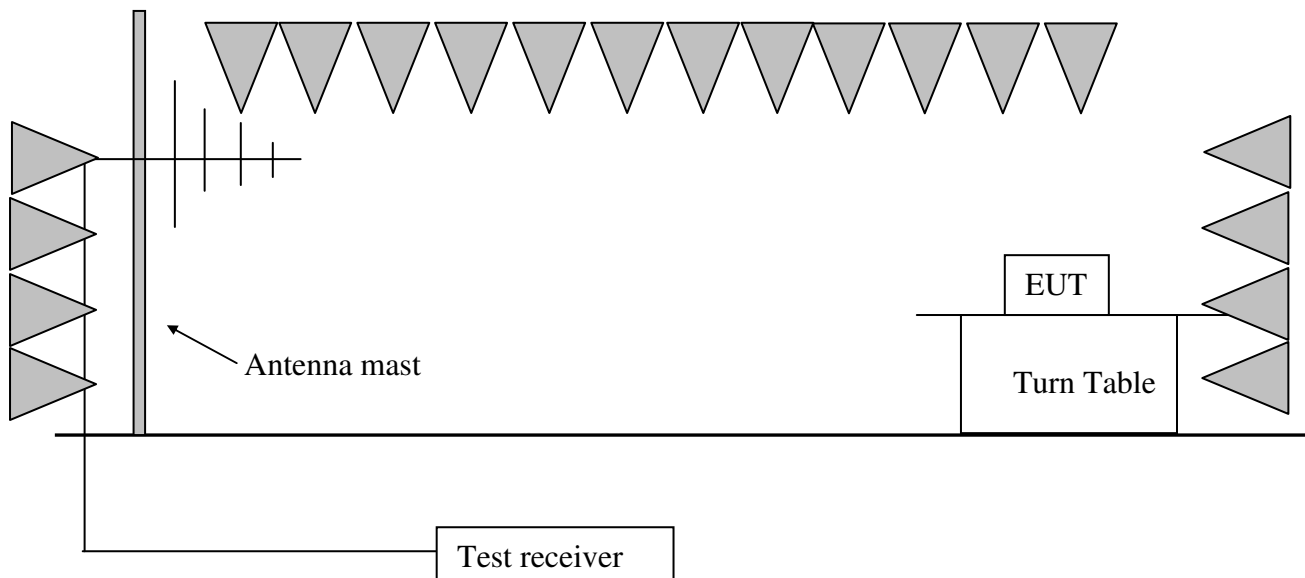

Frequency range above 1GHz:

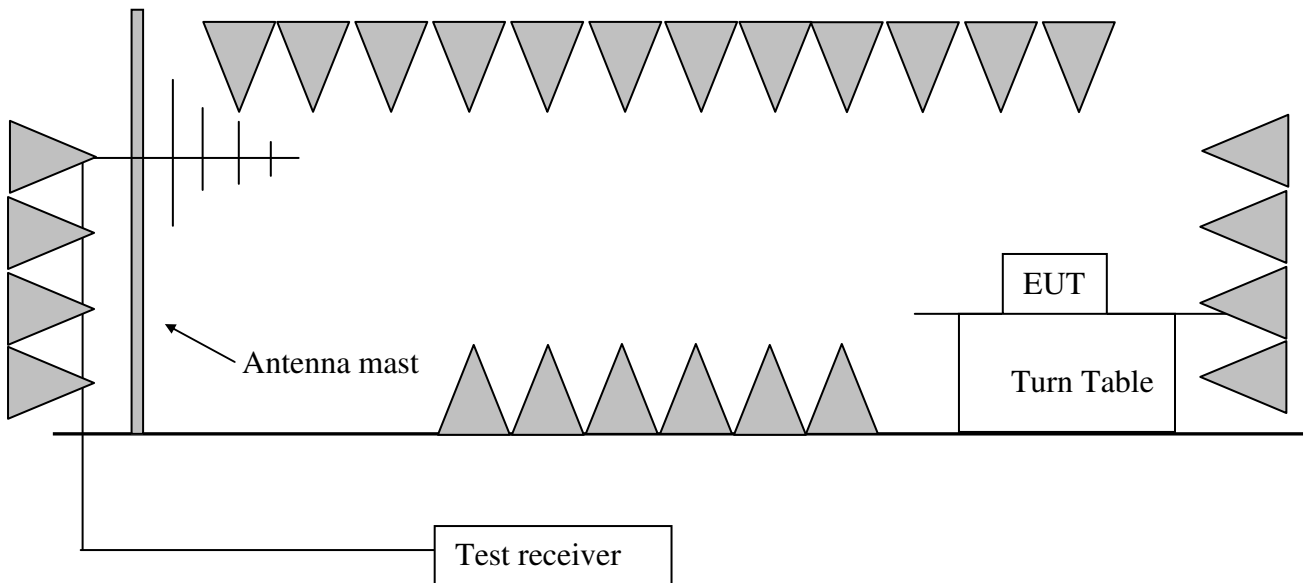

9.3 Test procedure and test setup

The radiated emissions were tested according to the procedure of ANSI C63.10 for compliance to FCC 47CFR 15.247 requirements.

The measurement was applied in a semi-anechoic chamber. While testing for spurious emission higher than 1GHz, if applied, the pre-amplifier would be equipped just at the output terminal of the antenna.

Tabletop devices shall be placed on a nonconducting platform with nominal top surface dimensions 1 m by 1.5 m. For emissions testing at or below 1 GHz, the table height shall be 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height shall be 1.5 m.

The turntable rotated 360 degrees to determine the position of the maximum emission level. The EUT was set 3 meters away from the receiving antenna which was mounted on an antenna mast. The antenna moved up and down between from 1 meter to 4 meters to find out the maximum emission level.

The radiated emission was measured using the Spectrum Analyzer with the resolutions bandwidth set as:

RBW = 300 Hz, VBW = 1 kHz (9 kHz~150 kHz);
RBW = 10 kHz, VBW = 30 kHz (150 kHz~30MHz);
RBW = 100 kHz, VBW = 300 kHz (30MHz~1GHz for PK)
RBW = 1MHz, VBW = 3MHz (>1GHz for PK);

Remark:

1. Factor= Antenna Factor + Cable Loss (-Amplifier, is employed)
2. Measured level= Original Receiver Reading + Factor
3. Margin = Limit – Measured level
4. If the PK measured level is lower than AV limit, the AV test can be elided.

Example:

Assuming Antenna Factor = 30.20dB/m, Cable Loss = 2.00dB,
Gain of Preamplifier = 32.00dB, Original Receiver Reading = 10dBuV.
Then Factor = 30.20 + 2.00 – 32.00 = 0.20dB/m;
Measured level = 10dBuV + 0.20dB/m = 10.20dBuV/m
Assuming limit = 54dBuV/m,
Measured level = 10.20dBuV/m, then Margin = 54 - 10.20 = 43.80dBuV/m.

9.4 Test Protocol

Temperature: 22°C


Relative Humidity: 54%

All the two models of product were tested and the worst data was listed in the report.


The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

The worst waveform from 30MHz to 1000MHz (GFSK, 2402MHz) is listed as below:

Horizontal

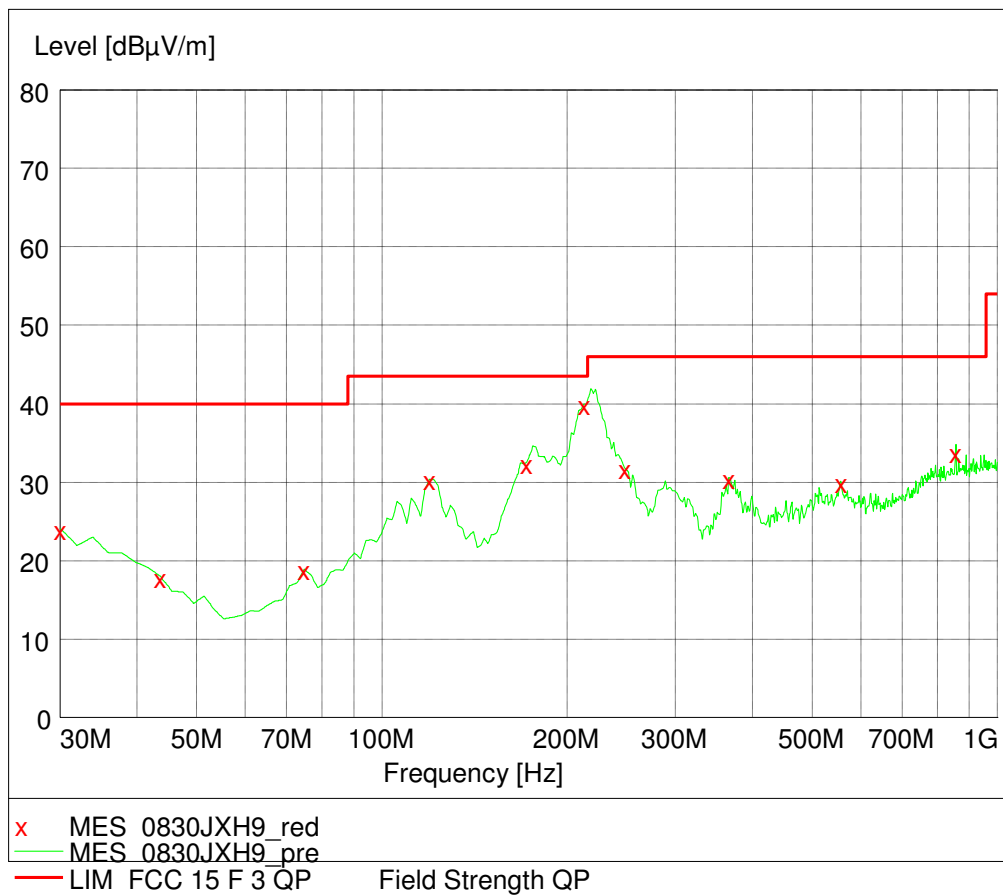

Vertical

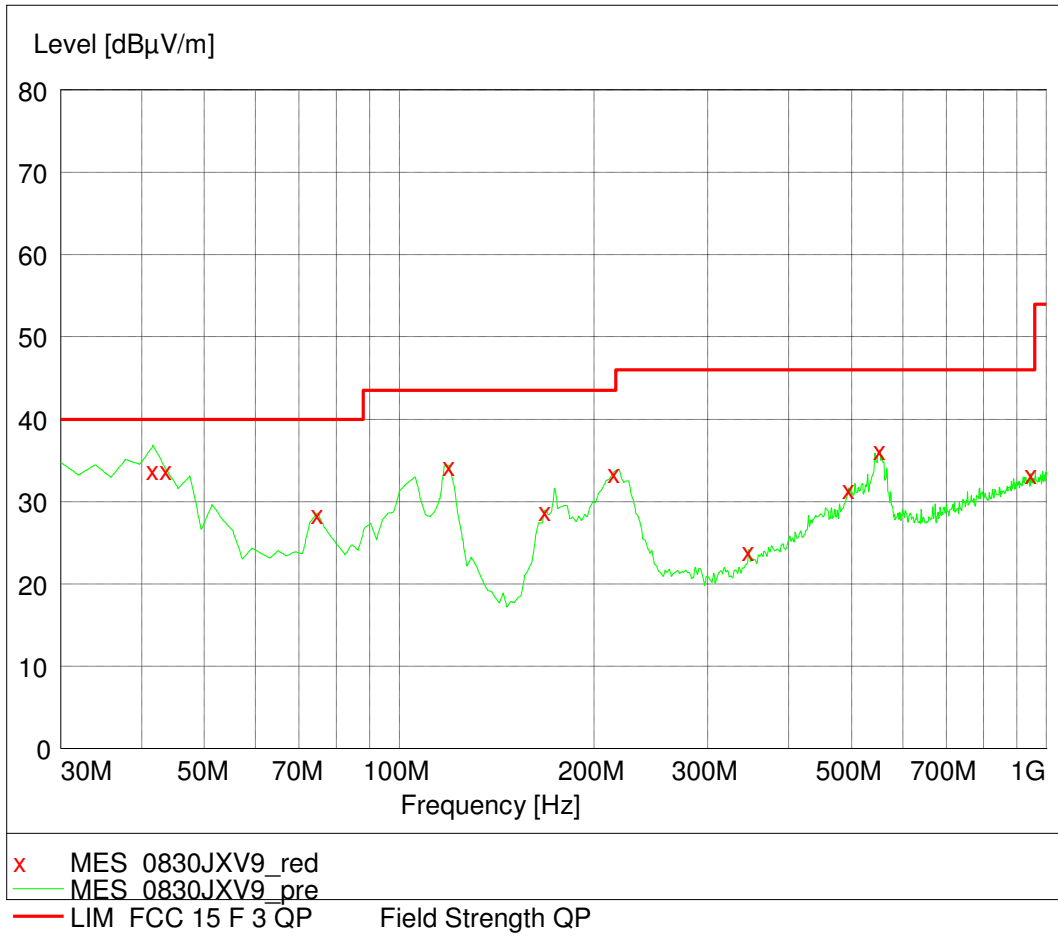

Test result below 1GHz:

Antenna	Frequency (MHz)	Corrected Reading (dBuV/m)	Correct Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector
H	212.00	40.00	13.18	43.50	3.50	QP
H	463.48	*	24.79	46.00	*	QP
H	496.53	*	19.86	46.00	*	QP
V	41.00	34.89	21.40	40.00	5.11	QP
V	125.15	35.02	12.70	40.00	4.98	QP
V	58.95	*	10.22	40.00	*	QP
V	72.76	*	9.30	40.00	*	QP
V	527.63	*	20.10	46.00	*	QP
Note: * means the emission level 15dB lower than the relevant limit.						

Test result above 1GHz:

The emission within the frequency range of 1GHz to 25GHz was tested.

GFSK:

Channel	Antenna	Frequency (MHz)	Corrected Reading (dBuV/m)	Correct Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector
L	V	2402.20	94.60	34.34	Fundamental	/	PK
	V	2389.60	52.20	34.29	54.00	1.80	AV
	V	4803.61	51.20	-3.55	54.00	2.80	AV
M	V	2441.20	93.80	34.60	Fundamental	/	PK
	V	4883.77	50.14	-3.35	54.00	3.86	AV
H	V	2480.20	93.92	34.62	Fundamental	/	PK
	V	2483.60	51.65	34.63	54.00	2.35	AV
	V	4963.93	53.60	-3.16	4.00	0.40	AV

$\pi/4$ -DQPSK:

Channel	Antenna	Frequency (MHz)	Corrected Reading (dBuV/m)	Correct Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector
L	V	2402.20	92.20	34.34	Fundamental	/	PK
	V	2388.65	52.25	34.25	54.00	1.75	AV
	V	4803.61	48.50	-3.55	54.00	5.50	AV
M	V	2441.20	92.60	34.60	Fundamental	/	AV
	V	4883.77	47.50	-3.35	54.00	6.50	AV
H	V	2480.20	92.45	34.62	Fundamental	/	AV
	V	2483.72	51.65	34.65	54.00	2.35	AV
	V	4963.93	52.20	-3.16	4.00	1.80	AV

8DPSK:

Channel	Antenna	Frequency (MHz)	Corrected Reading (dBuV/m)	Correct Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector
L	V	2402.20	93.40	34.34	Fundamental	/	PK
	V	2389.27	52.20	34.30	54.00	1.80	AV
	V	4803.61	48.80	-3.55	54.00	5.20	AV
M	V	2441.20	93.84	34.60	Fundamental	/	AV
	V	4883.77	49.50	-3.35	54.00	4.50	AV
H	V	2480.20	92.14	34.62	Fundamental	/	AV
	V	2483.72	51.65	34.65	54.00	2.35	AV
	V	4963.93	51.70	-3.16	54.00	2.30	AV

- Remark: 1. Correct Factor = Antenna Factor + Cable Loss (-Amplifier, is employed)
2. Corrected Reading = Original Receiver Reading + Correct Factor
3. Margin = limit – Corrected Reading

Example: Assuming Antenna Factor = 30.20dB/m, Cable Loss = 2.00dB,
Gain of Preamplifier = 32.00dB, Original Receiver Reading = 10dBuV.
Then Correct Factor = 30.20 + 2.00 – 32.00 = 0.20dB/m; Corrected Reading
= 10dBuV + 0.20dB/m = 10.20dBuV/m
Assuming limit = 54dBuV/m, Corrected Reading = 10.20dBuV/m, then
Margin = 54 - 10.20 = 43.80dBuV/m


10 Power line conducted emission

Test result: **Pass**

10.1 Limit

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	QP	AV
0.15-0.5	66 to 56*	56 to 46 *
0.5-5	56	46
5-30	60	50
* Decreases with the logarithm of the frequency.		

10.2 Test configuration

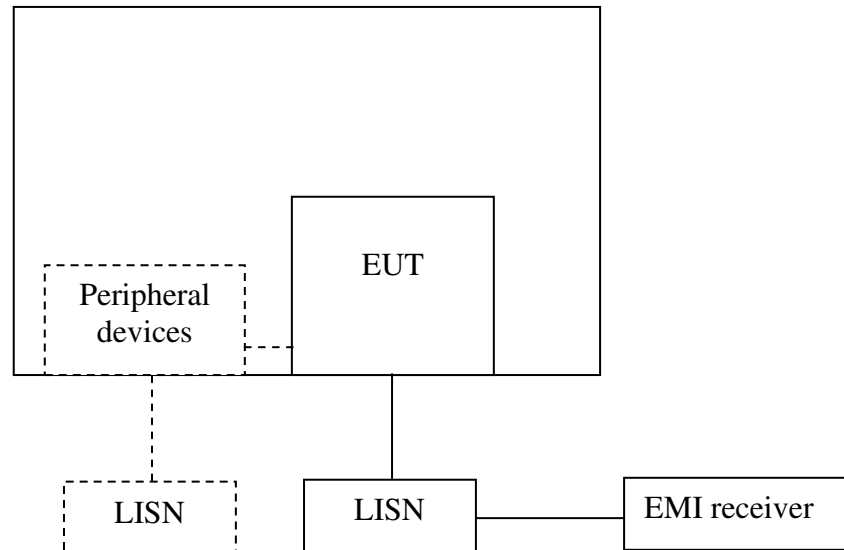

☒ For table top equipment, wooden support is 0.8m height table

☐ For floor standing equipment, wooden support is 0.1m height rack.

10.3 Test procedure and test set up

Measured levels of ac power-line conducted emission shall be the emission voltages from the voltage probe, where permitted, or across the 50 Ω LISN port (to which the EUT is connected), where permitted, terminated into a 50 Ω measuring instrument. All emission voltage and current measurements shall be made on each current-carrying conductor at the plug end of the EUT power cord by the use of mating plugs and receptacles on the LISN, if used. Equipment shall be tested with power cords that are normally supplied or recommended by the manufacturer and that have electrical and shielding characteristics that are the same as those cords normally supplied or recommended by the manufacturer. For those measurements using a LISN, the 50 Ω measuring port is terminated by a measuring instrument having 50 Ω input impedance. All other ports are terminated in 50 Ω loads.


Tabletop devices shall be placed on a platform of nominal size 1 m by 1.5 m, raised 80 cm above the reference ground plane. The vertical conducting plane or wall of an RF-shielded (screened) room shall be located 40 cm to the rear of the EUT. Floor-standing devices shall be placed either directly on the reference ground-plane or on insulating material as described in ANSI C63.4. All other surfaces of tabletop or floor-standing EUTs shall be at least 80 cm from any other grounded conducting surface, including the case or cases of one or more LISNs.

The bandwidth of the test receiver is set at 9 kHz.

10.4 Test protocol

Temperature: 22°C
Relative Humidity: 54%

All the three models of product were tested and the worst data (GFSK, 2402MHz) was listed in the report.

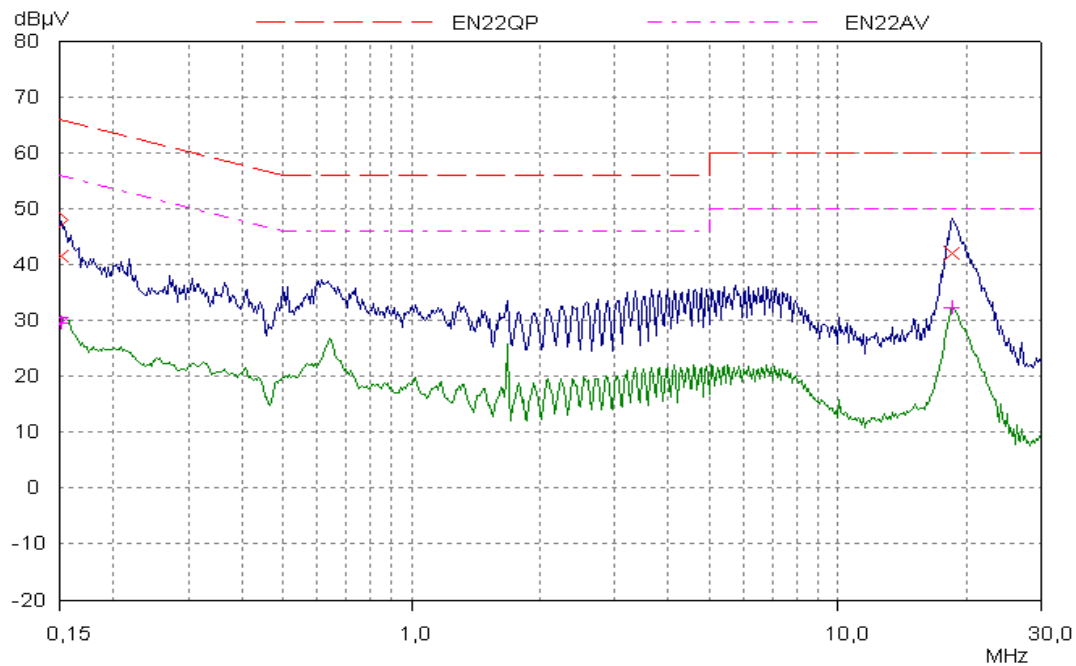

Test Data:

Frequency (MHz)	Quasi-peak			Average		
	level dB(μV)	Limit dB(μV)	Margin (dB)	level dB(μV)	limit dB(μV)	Margin (dB)
0.15	41.48	65.93	24.45	29.55	55.93	26.38
0.25	*	*	*	*	*	*
1.167	*	*	*	*	*	*
1.719	*	*	*	*	*	*
2.229	*	*	*	*	*	*
18.49	42.09	60.00	17.91	32.18	50.00	17.82
Remark: If the margin higher than 20dB, it would be marked as *.						


11 Occupied Bandwidth

Test Status: NA

11.1 Test limit

None

11.2 Test Configuration

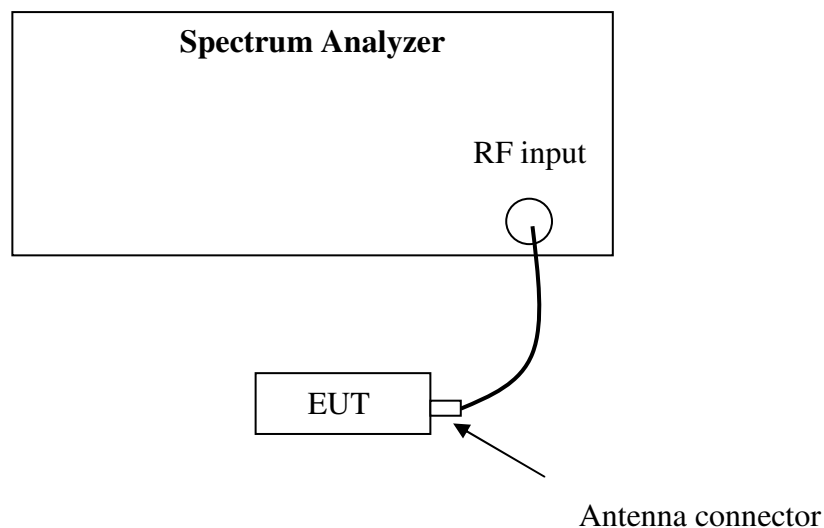

11.3 Test procedure and test setup

The occupied bandwidth per RSS-Gen Issue 4 Clause 6.6 was measured using the Spectrum Analyzer.

11.4 Test protocol

Temperature : °C
Relative Humidity : %

Modulation	Mode	99% Bandwidth (MHz)