



FCC PART 27
FCC PART 22H, PART 24E
MEASUREMENT AND TEST REPORT

For

SACO TRADING LLC

2170 NW 87th Ave, Doral, FL 33172, United States

FCC ID: 2AJMFAFFIXT737

Report Type: Original Report	Product Type: Tablet PC
Report Number: RSZ160902003-00D	
Report Date: 2016-10-19	
Oscar Ye 	
Reviewed By: Engineer	
Prepared By: Bay Area Compliance Laboratories Corp. (Kunshan) Chenghu Road, Kunshan Development Zone No.248, Kunshan, Jiangsu, China Tel: +86-0512-86175000 Fax: +86-0512-88934268 www.baclcorp.com.cn	

Note: This test report is prepared for the customer shown above and for the equipment described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp.

TABLE OF CONTENTS

GENERAL INFORMATION.....	3
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	3
OBJECTIVE	3
RELATED SUBMITTAL(S)/GRANT(S).....	3
TEST METHODOLOGY	3
MEASUREMENT UNCERTAINTY.....	4
TEST FACILITY	4
SYSTEM TEST CONFIGURATION.....	5
JUSTIFICATION	5
EQUIPMENT MODIFICATIONS	5
SUPPORT EQUIPMENT LIST AND DETAILS	5
BLOCK DIAGRAM OF TEST SETUP:	5
SUMMARY OF TEST RESULTS	6
TEST EQUIPMENT LIST	7
FCC §1.1307(B) & §2.1093 - RF EXPOSURE INFORMATION.....	8
APPLICABLE STANDARD	8
TEST RESULT	8
FCC §2.1047 - MODULATION CHARACTERISTIC	9
§2.1046; § 22.913 (A); § 24.232 (C); §27.50 (D) (H) - RF OUTPUT POWER.....	10
APPLICABLE STANDARDS.....	10
TEST PROCEDURE	10
TEST DATA	10
FCC §2.1049, §22.917, §22.905 & §24.238 & §27.53 - OCCUPIED BANDWIDTH	27
APPLICABLE STANDARDS.....	27
TEST PROCEDURE	27
TEST DATA	27
FCC §2.1051, §22.917(A) & §24.238(A) & §27.53 - SPURIOUS EMISSIONS AT ANTENNA TERMINALS ..	66
APPLICABLE STANDARDS.....	66
TEST PROCEDURE	66
TEST DATA	66
FCC § 2.1053; § 22.917 (A); § 24.238 (A); §27.53 (H) (M) SPURIOUS RADIATED EMISSIONS.....	92
TEST PROCEDURE	92
TEST DATA	92
FCC § 22.917 (A);§ 24.238 (A); §27.53 (H)(M) - BAND EDGES	96
APPLICABLE STANDARDS.....	96
TEST PROCEDURE	96
TEST DATA	96
FCC §2.1055, §22.355 & §24.235 & §27.54 - FREQUENCY STABILITY.....	132
APPLICABLE STANDARDS.....	132
TEST PROCEDURE	132
TEST DATA	133

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The *SACO TRADING LLC*'s product, model number: *AFFIX T737 (FCC ID: 2AJMFAFFIXT737)* or the "EUT" in this report was a *Tablet PC*, which was measured approximately: 19.1 cm (L) × 11.1 cm (W) × 1.1 cm (H), rated with input voltage: DC 3.7V rechargeable Li-ion battery or DC 5.0 V from adapter.

Adapter Information:

Model: FLD0710-5:0V1.50A

Input: AC 100-240V, 50/60Hz, 0.6A

Output: DC 5.0 V, 1.5A

**All measurement and test data in this report was gathered from production sample serial number: 1603192 (Assigned by BACL, Kunshan). The EUT supplied by the applicant was received on 2016-09-02.*

Objective

This test report is prepared on behalf of *SACO TRADING LLC* in accordance with Part 2, Part 22-Subpart H, Part 24-Subpart E and Part 27 of the Federal Communication Commission's rules.

The objective is to determine the compliance of EUT with FCC rules for output power, modulation characteristic, occupied bandwidth, and spurious emission at antenna terminal, spurious radiated emission, frequency stability, and band edge.

Related Submittal(s)/Grant(s)

FCC Part 15B JBP, Part 15.247 DSS & DTS submissions with FCC ID: 2AJMFAFFIXT737.

Test Methodology

All tests and measurements indicated in this document were performed in accordance with the Code of Federal Regulations Title 47 Part 2, Sub-Part J as well as the following parts:

Part 22 Subpart H - Public Mobile Services

Part 24 Subpart E - Personal Communication Services

Part 27 – Miscellaneous wireless communications services

Applicable Standards: TIA/EIA 603-D.

All radiated and conducted emissions measurements were performed at Bay Area Compliance Laboratories Corp. (Kunshan). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement Uncertainty

Item		Uncertainty
AC Power Lines Conducted Emissions		± 3.26 dB
RF conducted test with spectrum		± 0.9 dB
RF Output Power with Power meter		± 0.5 dB
Radiated emission	30MHz~1GHz	± 5.91 dB
	Above 1G	± 4.92 dB
Occupied Bandwidth		± 0.5 kHz
Temperature		± 1.0 °C
Humidity		$\pm 6\%$

Test Facility

The test site used by Bay Area Compliance Laboratories Corp. (Kunshan) to collect test data is located on the Chenghu Lake Road, Kunshan Development Zone No.248, Kunshan, Jiangsu, China

Test site at Bay Area Compliance Laboratories Corp. (Kunshan) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on November 06, 2014. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 815570. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

SYSTEM TEST CONFIGURATION

Justification

The EUT was configured for testing according to TIA/EIA-603-D.

The final qualification test was performed with the EUT operating at normal mode.


Equipment Modifications

No modifications were made to the EUT.

Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
Rohde & Schwarz	Wideband Radio Communication Tester	CMW500	1201.0002K50-116218-UY
Rohde & Schwarz	Universal Radio Communication Tester	CMU200	110605

Block Diagram of Test Setup:

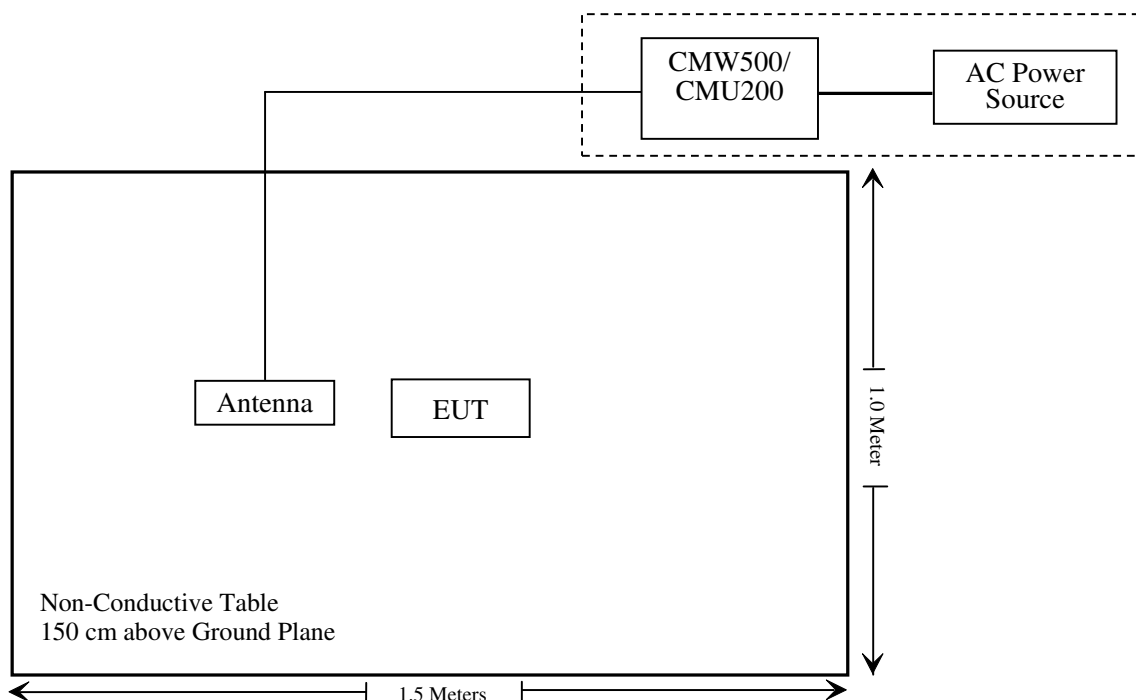

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§1.1307 (b)(1), §2.1093	RF Exposure Information	Compliance*
§2.1046; § 22.913 (a); § 24.232 (c); §27.50 (d) (h)	RF Output Power	Compliance
§ 2.1047	Modulation Characteristics	Not Applicable
§ 2.1049; § 22.905; § 22.917; § 24.238; §27.53	Occupied Bandwidth	Compliance
§ 2.1051; § 22.917 (a); § 24.238 (a); §27.53 (h)(m)	Spurious Emissions at Antenna Terminal	Compliance
§ 2.1053; § 22.917 (a); § 24.238 (a); §27.53 (h)(m)	Spurious Radiated Emissions	Compliance
§ 22.917 (a); § 24.238 (a); §27.53 (h)(m)	Band Edge	Compliance
§ 2.1055; § 22.355; § 24.235; §27.54;	Frequency stability	Compliance

Compliance*: Please refer to SAR report released by BACL, report number: RSZ160902003-20.

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Radiated Emission Test					
Sonoma Instrument	Amplifier	330	171377	2016-09-16	2017-09-16
Rohde & Schwarz	EMI Test Receiver	ESCI	100195	2015-11-12	2016-11-11
Sunol Sciences	Broadband Antenna	JB3	A090314-2	2015-11-07	2016-11-06
Sunol Sciences	Broadband Antenna	JB3	A090314-1	2015-11-07	2016-11-06
Mini	Pre-amplifier	ZVA-183-S+	857001418	2016-09-16	2017-09-15
DUCOMMUN	Pre-amplifier	ALN-22093530-01	990147	2016-09-16	2017-09-15
EMCO	Horn Antenna	3116	9510-2384	2015-11-07	2016-11-06
Rohde & Schwarz	Signal Analyzer	FSIQ26	100048	2015-11-12	2016-11-11
Rohde & Schwarz	Signal Analyzer	FSV40	101116	2016-07-04	2017-07-03
ETS	Horn Antenna	3115	6229	2015-11-07	2016-11-06
ETS	Horn Antenna	3115	9311-4159	2015-11-07	2016-11-06
R&S	Auto test Software	EMC32	V 09.10.0	NCR	NCR
HP	Signal Generator	E4421B	3426A01336	2015-11-04	2016-11-03
BACL	RF cable	KS-LAB-012	KS-LAB-012	2015-12-16	2016-12-15
BACL	RF cable	KS-LAB-010	KS-LAB-010	2015-12-16	2016-12-15
RF Conducted test					
BACL	TS 8997 Cable-01	T-KS-EMC086	T-KS-EMC086	2015-12-10	2016-12-09
BACL	RF cable	KS-LAB-012	KS-LAB-012	2015-12-16	2016-12-15
WEINSCHL	3dB Attenuator	5326	N/A	2016-06-18	2017-06-18
Rohde & Schwarz	OSP120 BASE UNIT	OSP120	101247	2016-07-04	2017-07-03
Rohde & Schwarz	Signal Analyzer	FSIQ26	100048	2015-11-12	2016-11-11
Rohde & Schwarz	Universal Radio Communication Tester	CMU200	110605	2015-11-11	2016-11-11
R&S	Wideband Radio Communication tester	CMW500	1201.002K50-116218-UY	2016-09-08	2017-09-07
HONOVA	Power Splitter	ZFRSC-14-S+	019411452	2016-06-12	2017-06-12
WEINSCHL	10dB Attenuator	5328	N/A	2016-06-18	2017-06-18

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC §1.1307(b) & §2.1093 - RF EXPOSURE INFORMATION

Applicable Standard

FCC§1.1307, §2.1093.

Test Result

Compliance, please refer to the SAR report: RSZ160902003-20.

FCC §2.1047 - MODULATION CHARACTERISTIC

According to FCC § 2.1047(d) , Part 22H & 24E, Part 27 there is no specific requirement for digital modulation, therefore modulation characteristic is not presented.

§2.1046; § 22.913 (a); § 24.232 (c); §27.50 (d) (h) - RF OUTPUT POWER**Applicable Standards**

According to FCC §2.1046 and §22.913 (a), the ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 watts.

According to FCC §2.1046 and §24.232 (c), mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications..


According to §27.50(d), the maximum EIRP must not exceed 1Watts (30dBm) for 1710-1755MHz. The peak-to-average power ratio (PAPR) of the transmitter output power must not exceed 13 dB.

According to §27.50(h), the maximum EIRP must not exceed 2Watts (33dBm) for 2500-2570MHz.

According to §27.50(C), Portable stations (hand-held devices) in the 600 MHz uplink band and the 698-746 MHz band, and fixed and mobile stations in the 600 MHz uplink band are limited to 3 watts ERP.

Test Procedure*Conducted method:*

The RF output of the transmitter was connected to the CMW500/CMU200 through sufficient attenuation.

*Radiated method:*

TIA603-D section 2.2.17

Test Data**Environmental Conditions**

Temperature:	25°C
Relative Humidity:	51 %
ATM Pressure:	101.0 kPa

The testing was performed by Peter Jiang on 2016-09-29

Conducted Power**Cellular Band (Part 22H)**

Mode	Channel	Frequency (MHz)	Average Output Power (dBm)	Limit (dBm)
GSM	128	824.2	32.75	38.45
	190	836.6	32.78	38.45
	251	848.8	32.70	38.45

Mode	Channel	Frequency (MHz)	Average Output Power (dBm)				Limit (dBm)
			1 slot	2 slots	3 slots	4 slots	
GPRS	128	824.2	32.77	32.12	30.33	29.10	38.45
	190	836.6	32.86	32.16	30.37	29.15	38.45
	251	848.8	32.72	32.02	30.33	29.10	38.45

Mode	Test Condition	Test Mode	3GPP Sub Test	Average Output Power (dBm)		
				Low Frequency	Middle Frequency	High Frequency
WCDMA (Band V)	Normal	RMC		22.03	22.12	22.11
		HSDPA	1	20.76	20.98	20.85
			2	20.75	20.72	20.82
			3	20.72	20.84	20.85
			4	20.73	21.02	20.88
		HSUPA	1	20.77	20.78	20.88
			2	20.79	20.96	20.81
			3	20.85	20.99	20.77
			4	20.75	20.99	20.86
			5	20.72	20.98	20.83
		DC-HSDPA	1	20.79	21.01	20.41
			2	20.42	20.72	20.32
			3	20.52	20.74	20.75
			4	20.42	20.62	20.85
		HSPA+	1	20.61	20.85	20.88

PCS Band (Part 24E)

Mode	Channel	Frequency (MHz)	Average Output Power (dBm)	Limit (dBm)
GSM	512	1850.2	29.42	33
	661	1880.0	29.33	33
	810	1909.8	29.46	33

Mode	Channel	Frequency (MHz)	Average Output Power (dBm)				Limit (dBm)
			1 slot	2 slots	3 slots	4 slots	
GPRS	512	1850.2	29.78	28.56	26.88	25.42	33
	661	1880.0	29.68	28.65	26.69	25.64	33
	810	1909.8	29.59	28.72	26.58	25.53	33

Mode	Test Condition	Test Mode	3GPP Sub Test	Average Output Power (dBm)		
				Low Frequency	Middle Frequency	High Frequency
WCDMA (Band II)	Normal	RMC		22.01	22.13	22.10
		HSDPA	1	20.52	20.70	20.61
			2	20.40	20.66	20.72
			3	20.46	20.68	20.72
			4	20.52	20.76	20.74
		HSUPA	1	21.23	21.96	21.86
			2	20.45	20.76	20.71
			3	20.64	20.70	20.68
			4	20.46	20.76	20.74
			5	20.42	20.72	20.79
		DC-HSDPA	1	21.25	21.53	21.53
			2	20.74	20.92	20.98
			3	20.55	20.56	20.77
			4	20.76	20.88	20.71
		HSPA+	1	21.57	21.54	21.68

AWS Band (Part 27)

Mode	Test Condition	Test Mode	3GPP Sub Test	Average Output Power (dBm)		
				Low Frequency	Middle Frequency	High Frequency
WCDMA (Band IV)	Normal	RMC		22.22	22.13	22.05
		HSDPA	1	20.46	20.58	20.57
			2	20.65	20.79	20.86
			3	20.01	20.03	20.42
			4	20.77	20.35	20.42
		HSUPA	1	21.53	21.361	21.49
			2	20.29	20.24	20.33
			3	20.54	20.65	20.56
			4	20.57	20.56	20.75
			5	20.56	20.67	20.45
		DC-HSDPA	1	21.34	21.46	21.57
			2	21.22	21.11	21.24
			3	20.57	20.22	21.62
			4	20.46	20.31	21.75
		HSPA+	1	21.57	21.77	21.54

Peak-to-average ratio (PAR)**Cellular Band**

Mode	Channel	PAR (dB)	Limit (dB)
GSM	Low	0.35	13
	Middle	0.32	13
	High	0.33	13

Mode	Channel	PAR (dB)	Limit (dB)
WCDMA (BPSK)	Low	3.01	13
	Middle	3.31	13
	High	3.58	13
HSDPA (16QAM)	Low	3.12	13
	Middle	3.29	13
	High	3.51	13
HSUPA (BPSK)	Low	3.15	13
	Middle	3.43	13
	High	3.43	13
HSPA+ (16QAM)	Low	3.21	13
	Middle	3.30	13
	High	3.26	13

PCS Band

Mode	Channel	PAR (dB)	Limit (dB)
GSM	Low	0.30	13
	Middle	0.39	13
	High	0.32	13

Mode	Channel	PAR (dB)	Limit (dB)
WCDMA (BPSK)	Low	3.56	13
	Middle	3.99	13
	High	3.11	13
HSDPA (16QAM)	Low	3.51	13
	Middle	4.03	13
	High	3.03	13
HSUPA (BPSK)	Low	3.63	13
	Middle	3.95	13
	High	3.21	13
HSPA+ (16QAM)	Low	3.46	13
	Middle	3.52	13
	High	3.39	13

AWS Band

Mode	Channel	PAR (dB)	Limit (dB)
WCDMA (BPSK)	Low	3.13	13
	Middle	3.35	13
	High	3.22	13
HSDPA (16QAM)	Low	3.17	13
	Middle	3.46	13
	High	3.15	13
HSUPA (BPSK)	Low	3.23	13
	Middle	3.29	13
	High	3.28	13
HSPA+ (16QAM)	Low	3.24	13
	Middle	3.17	13
	High	3.13	13

Radiated Power**ERP & EIRP****GSM Mode:**

Frequency (MHz)	Receiver Reading (dBμV)	Turntable Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Height (m)	Polar (H/V)	S.G. Level (dBm)	Cable loss (dB)	Antenna Gain (dB)			
ERP for Cellular Band (Part 22H), Middle Channel										
836.60	91.69	134	1.6	H	20.6	0.46	4.75	24.89	38.45	13.56
836.60	90.41	254	2.0	V	19.4	0.46	4.75	23.69	38.45	14.76
EIRP for PCS Band (Part 24E), Low Channel										
1850.20	77.42	46	1.7	H	13.2	0.31	10.4	23.29	33	9.71
1850.20	75.52	178	1.7	V	11.3	0.31	10.4	21.39	33	11.61

WCDMA Mode:

Frequency (MHz)	Receiver Reading (dBμV)	Turntable Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Height (m)	Polar (H/V)	S.G. Level (dBm)	Cable loss (dB)	Antenna Gain (dB)			
ERP for WCDMA Band V (Part 22H), High Channel										
846.60	78.51	132	2.0	H	7.5	0.46	4.75	16.79	38.45	21.66
846.60	76.22	75	1.7	V	5.2	0.46	4.75	13.49	38.45	23.96
EIRP for WCDMA Band II (Part 24E), Middle Channel										
1880.00	70.32	12	1.8	H	6.6	0.31	10.4	16.69	33	16.31
1880.00	69.37	75	1.8	V	5.8	0.31	10.4	15.89	33	17.11
EIRP for WCDMA Band IV (Part 27), Low Channel										
1712.40	71.26	245	1.7	H	6.4	0.30	9.90	16.00	30	14.00
1712.40	71.17	190	1.6	V	6.3	0.30	9.90	15.90	30	14.10

Note:

All above data were tested with no amplifier.

Absolute Level = SG Level - Cable loss + Antenna Gain

Margin = Limit- Absolute Level

LTE Band 2:**Maximum Output Power**

Bandwidth (MHz)	Modulation	RB size/RB Offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
1.4	QPSK	RB Size=1, RB Offset=0	22.78	22.35	22.25
		RB Size=1, RB Offset=2	22.16	22.24	22.12
		RB Size=1, RB Offset=5	22.26	22.32	22.10
		RB Size=3, RB Offset=0	22.53	22.69	21.96
		RB Size=3, RB Offset=1	21.86	21.65	21.75
		RB Size=3, RB Offset=2	21.67	21.98	21.35
		RB Size=6, RB Offset=0	21.99	21.76	21.12
	16QAM	RB Size=1, RB Offset=0	22.32	21.52	21.53
		RB Size=1, RB Offset=2	22.12	21.24	21.12
		RB Size=1, RB Offset=5	21.86	21.63	21.01
		RB Size=3, RB Offset=0	21.88	21.25	21.45
		RB Size=3, RB Offset=1	21.68	21.61	21.24
		RB Size=3, RB Offset=2	21.24	21.11	21.12
		RB Size=6, RB Offset=0	20.90	20.96	20.32
3.0	QPSK	RB Size=1, RB Offset=0	22.55	22.12	21.65
		RB Size=1, RB Offset=7	22.12	22.09	21.56
		RB Size=1, RB Offset=14	22.32	22.31	21.68
		RB Size=8, RB Offset=0	21.88	21.78	21.45
		RB Size=8, RB Offset=4	21.65	21.44	21.82
		RB Size=8, RB Offset=7	21.48	21.12	21.36
		RB Size=15, RB Offset=0	20.89	21.01	21.45
	16QAM	RB Size=1, RB Offset=0	22.12	21.86	21.67
		RB Size=1, RB Offset=7	21.86	21.78	21.96
		RB Size=1, RB Offset=14	21.64	21.96	21.53
		RB Size=8, RB Offset=0	20.78	20.32	20.86
		RB Size=8, RB Offset=4	20.54	20.68	20.12
		RB Size=8, RB Offset=7	20.26	20.67	20.24
		RB Size=15, RB Offset=0	20.67	20.67	20.36

Bandwidth (MHz)	Modulation	RB size/RB Offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
5.0	QPSK	RB Size=1, RB Offset=0	22.64	22.76	22.35
		RB Size=1, RB Offset=12	22.35	22.42	22.01
		RB Size=1, RB Offset=24	22.15	22.32	21.98
		RB Size=12, RB Offset=0	21.10	21.45	21.79
		RB Size=12, RB Offset=6	21.02	21.69	21.38
		RB Size=12, RB Offset=11	21.21	21.24	21.55
		RB Size=25, RB Offset=0	21.32	21.01	21.32
	16QAM	RB Size=1, RB Offset=0	22.45	21.46	21.45
		RB Size=1, RB Offset=12	21.45	21.62	21.25
		RB Size=1, RB Offset=24	21.32	21.12	21.22
		RB Size=12, RB Offset=0	20.25	20.44	20.86
		RB Size=12, RB Offset=6	20.16	20.23	20.36
		RB Size=12, RB Offset=11	20.32	20.82	21.46
		RB Size=25, RB Offset=0	20.95	20.42	20.85
10.0	QPSK	RB Size=1, RB Offset=0	22.53	22.02	22.66
		RB Size=1, RB Offset=24	22.23	22.03	22.35
		RB Size=1, RB Offset=49	21.93	22.12	22.45
		RB Size=25, RB Offset=0	21.75	21.32	21.12
		RB Size=25, RB Offset=12	21.52	21.12	21.35
		RB Size=25, RB Offset=24	21.03	21.22	21.12
		RB Size=50, RB Offset=0	20.32	21.24	21.15
	16QAM	RB Size=1, RB Offset=0	22.31	22.15	21.42
		RB Size=1, RB Offset=24	21.15	21.66	21.45
		RB Size=1, RB Offset=49	21.36	21.65	21.34
		RB Size=25, RB Offset=0	20.93	20.45	20.64
		RB Size=25, RB Offset=12	20.35	20.76	20.64
		RB Size=25, RB Offset=24	20.98	20.72	20.75
		RB Size=50, RB Offset=0	20.67	20.52	20.44

Bandwidth (MHz)	Modulation	RB size/RB Offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
15.0	QPSK	RB Size=1, RB Offset=0	22.15	22.32	22.45
		RB Size=1, RB Offset=37	21.35	22.21	22.32
		RB Size=1, RB Offset=74	21.68	22.23	22.15
		RB Size=36, RB Offset=0	21.45	21.64	21.25
		RB Size=36, RB Offset=18	21.65	21.77	21.32
		RB Size=36, RB Offset=37	21.77	21.45	21.15
		RB Size=75, RB Offset=0	21.24	21.64	21.42
	16QAM	RB Size=1, RB Offset=0	22.12	22.75	21.98
		RB Size=1, RB Offset=37	21.12	22.46	21.99
		RB Size=1, RB Offset=74	21.02	21.32	21.65
		RB Size=36, RB Offset=0	20.45	20.76	20.45
		RB Size=36, RB Offset=18	20.10	20.99	20.83
		RB Size=36, RB Offset=37	20.23	20.45	20.82
		RB Size=75, RB Offset=0	20.64	20.54	20.81
20.0	QPSK	RB Size=1, RB Offset=0	22.10	22.12	22.46
		RB Size=1, RB Offset=49	21.85	21.64	22.35
		RB Size=1, RB Offset=99	21.64	21.75	21.65
		RB Size=50, RB Offset=0	21.32	21.26	21.76
		RB Size=50, RB Offset=24	21.24	21.63	21.75
		RB Size=50, RB Offset=49	21.35	21.62	21.88
		RB Size=100, RB Offset=0	20.64	20.14	20.75
	16QAM	RB Size=1, RB Offset=0	21.61	22.39	22.09
		RB Size=1, RB Offset=49	21.51	22.64	21.98
		RB Size=1, RB Offset=99	21.98	22.45	22.46
		RB Size=50, RB Offset=0	20.78	20.45	20.35
		RB Size=50, RB Offset=24	20.66	20.84	20.86
		RB Size=50, RB Offset=49	20.75	20.55	20.13
		RB Size=100, RB Offset=0	20.24	20.65	20.21

Peak-to-average ratio (PAR)

Modulation	Middle Channel (dB)	PAR Limit (dB)	Result
QPSK(1RB Size)	5.86	13	Pass
QPSK (100%RB Size)	6.05	13	Pass
16QAM (1RB Size)	5.97	13	Pass
16QAM (100%RB Size)	6.13	13	Pass

QPSK:

Frequency (MHz)	Receiver Reading (dBμV)	Turn table Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)
			Height (m)	Polar (H/V)	SG Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)		
Middle Channel									
1.4 MHz Bandwidth									
1880	69.42	174	1.9	H	6.2	0.31	10.4	16.29	38.45
1880	68.71	124	1.5	V	5.2	0.31	10.4	15.29	38.45
3 MHz Bandwidth									
1880	68.83	46	1.3	H	5.2	0.31	10.4	15.29	38.45
1880	67.97	157	1.7	V	4.4	0.31	10.4	14.49	38.45
5 MHz Bandwidth									
1880	68.75	32	2.0	H	5.1	0.31	10.4	15.19	38.45
1880	66.72	149	1.0	V	3.2	0.31	10.4	13.29	38.45
10MHz Bandwidth									
1880	69.15	224	1.2	H	5.5	0.31	10.4	15.59	38.45
1880	67.55	200	1.1	V	4.0	0.31	10.4	14.09	38.45
15 MHz Bandwidth									
1880	67.07	164	1.8	H	3.4	0.31	10.4	14.49	38.45
1880	67.11	145	1.6	V	3.5	0.31	10.4	13.59	38.45
20 MHz Bandwidth									
1880	66.92	214	2.4	H	3.3	0.31	10.4	13.39	38.45
1880	66.81	210	1.8	V	3.2	0.31	10.4	13.29	38.45

16QAM:

Frequency (MHz)	Receiver Reading (dBμV)	Turn table Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)
			Height (m)	Polar (H/V)	SG Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)		
Middle Channel									
1.4 MHz Bandwidth									
1880	69.33	198	1.8	H	5.7	0.31	10.4	15.79	38.45
1880	67.28	124	2.0	V	3.7	0.31	10.4	13.79	38.45
3 MHz Bandwidth									
1880	68.73	151	1.9	H	5.1	0.31	10.4	15.19	38.45
1880	66.98	25	1.8	V	3.4	0.31	10.4	13.49	38.45
5 MHz Bandwidth									
1880	68.83	146	1.8	H	5.2	0.31	10.4	15.29	38.45
1880	67.88	152	1.4	V	4.3	0.31	10.4	14.39	38.45
10 MHz Bandwidth									
1880	68.63	210	2.2	H	5.0	0.31	10.4	15.09	38.45
1880	68.18	325	1.6	V	4.6	0.31	10.4	14.69	38.45
15 MHz Bandwidth									
1880	67.63	124	1.5	H	4.0	0.31	10.4	14.09	38.45
1880	66.78	348	2.1	V	3.2	0.31	10.4	13.29	38.45
20 MHz Bandwidth									
1880	67.53	85	2.0	H	3.9	0.31	10.4	13.99	38.45
1880	66.38	320	2.0	V	2.8	0.31	10.4	12.89	38.45

LTE Band 4:**Maximum Output Power**

Bandwidth (MHz)	Modulation	RB size/RB Offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
1.4	QPSK	RB Size=1, RB Offset=0	22.34	22.17	22.21
		RB Size=1, RB Offset=2	21.85	21.29	21.54
		RB Size=1, RB Offset=5	22.64	22.55	22.20
		RB Size=3, RB Offset=0	22.68	22.23	22.18
		RB Size=3, RB Offset=1	22.67	22.22	22.08
		RB Size=3, RB Offset=2	22.69	22.29	21.98
		RB Size=6, RB Offset=0	21.65	21.26	21.55
	16QAM	RB Size=1, RB Offset=0	21.68	21.56	21.32
		RB Size=1, RB Offset=2	21.65	21.75	21.45
		RB Size=1, RB Offset=5	21.60	21.25	21.37
		RB Size=3, RB Offset=0	20.68	20.22	20.29
		RB Size=3, RB Offset=1	20.60	20.86	20.34
		RB Size=3, RB Offset=2	20.64	20.58	20.28
		RB Size=6, RB Offset=0	20.53	20.2*	20.20
3.0	QPSK	RB Size=1, RB Offset=0	22.51	22.42	22.20
		RB Size=1, RB Offset=7	22.65	22.55	22.25
		RB Size=1, RB Offset=14	22.52	22.02	22.24
		RB Size=8, RB Offset=0	21.60	21.75	21.27
		RB Size=8, RB Offset=4	21.52	21.25	21.26
		RB Size=8, RB Offset=7	21.14	21.55	21.22
		RB Size=15, RB Offset=0	21.60	21.46	21.29
	16QAM	RB Size=1, RB Offset=0	21.75	21.85	21.45
		RB Size=1, RB Offset=7	21.68	21.60	21.27
		RB Size=1, RB Offset=14	21.64	21.52	21.33
		RB Size=8, RB Offset=0	21.42	21.35	21.25
		RB Size=8, RB Offset=4	20.82	20.75	20.91
		RB Size=8, RB Offset=7	20.44	20.35	20.40
		RB Size=15, RB Offset=0	20.54	20.45	20.39

Bandwidth (MHz)	Modulation	RB size/RB Offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
5.0	QPSK	RB Size=1, RB Offset=0	22.71	22.33	22.42
		RB Size=1, RB Offset=12	22.65	22.23	22.39
		RB Size=1, RB Offset=24	22.53	22.24	22.34
		RB Size=12, RB Offset=0	21.68	21.32	21.38
		RB Size=12, RB Offset=6	20.65	21.29	21.37
		RB Size=12, RB Offset=11	21.64	21.26	21.36
		RB Size=25, RB Offset=0	21.61	21.22	21.33
	16QAM	RB Size=1, RB Offset=0	21.79	21.29	21.69
		RB Size=1, RB Offset=12	21.78	21.24	21.67
		RB Size=1, RB Offset=24	21.68	21.23	21.62
		RB Size=12, RB Offset=0	21.62	21.34	21.35
		RB Size=12, RB Offset=6	21.45	21.35	21.38
		RB Size=12, RB Offset=11	20.89	21.03	20.93
		RB Size=25, RB Offset=0	20.58	20.31	20.32
10.0	QPSK	RB Size=1, RB Offset=0	22.3	22.39	22.27
		RB Size=1, RB Offset=24	22.48	22.22	22.32
		RB Size=1, RB Offset=49	22.58	22.29	22.28
		RB Size=25, RB Offset=0	21.63	21.32	21.28
		RB Size=25, RB Offset=12	21.6	21.29	21.3
		RB Size=25, RB Offset=24	21.71	21.3	21.28
		RB Size=50, RB Offset=0	21.61	21.29	21.29
	16QAM	RB Size=1, RB Offset=0	21.66	21.86	21.29
		RB Size=1, RB Offset=24	21.53	21.69	21.11
		RB Size=1, RB Offset=49	21.62	21.77	21.20
		RB Size=25, RB Offset=0	21.23	21.33	21.36
		RB Size=25, RB Offset=12	20.98	20.97	20.99
		RB Size=25, RB Offset=24	20.92	20.76	20.75
		RB Size=50, RB Offset=0	20.62	20.35	20.39

Bandwidth (MHz)	Modulation	RB size/RB Offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
15.0	QPSK	RB Size=1, RB Offset=0	21.72	22.54	22.39
		RB Size=1, RB Offset=37	22.32	22.27	22.43
		RB Size=1, RB Offset=74	22.76	22.37	22.42
		RB Size=36, RB Offset=0	21.12	21.42	21.46
		RB Size=36, RB Offset=18	21.11	21.43	21.47
		RB Size=36, RB Offset=37	21.09	21.45	21.49
		RB Size=75, RB Offset=0	21.51	21.47	21.49
	16QAM	RB Size=1, RB Offset=0	21.02	21.88	21.75
		RB Size=1, RB Offset=37	21.64	21.61	21.80
		RB Size=1, RB Offset=74	21.91	21.75	21.82
		RB Size=36, RB Offset=0	20.48	20.39	20.47
		RB Size=36, RB Offset=18	20.41	20.45	20.51
		RB Size=36, RB Offset=37	20.46	20.41	20.49
		RB Size=75, RB Offset=0	20.78	20.43	20.48
20.0	QPSK	RB Size=1, RB Offset=0	22.95	22.63	22.28
		RB Size=1, RB Offset=49	22.72	22.25	22.09
		RB Size=1, RB Offset=99	22.55	22.41	22.11
		RB Size=50, RB Offset=0	21.81	21.46	21.38
		RB Size=50, RB Offset=24	21.73	21.41	21.35
		RB Size=50, RB Offset=49	21.69	21.37	21.31
		RB Size=100, RB Offset=0	21.75	21.38	21.37
	16QAM	RB Size=1, RB Offset=0	22.12	21.91	21.83
		RB Size=1, RB Offset=49	21.92	21.54	21.51
		RB Size=1, RB Offset=99	22.01	21.72	21.69
		RB Size=50, RB Offset=0	20.69	20.43	20.39
		RB Size=50, RB Offset=24	20.72	20.41	20.41
		RB Size=50, RB Offset=49	20.71	20.42	20.38
		RB Size=100, RB Offset=0	20.75	20.42	20.42

Peak-to-average ratio (PAR)

Modulation	Middle Channel (dB)	PAR Limit (dB)	Result
QPSK(1RB Size)	5.94	13	Pass
QPSK (100%RB Size)	6.05	13	Pass
16QAM (1RB Size)	6.11	13	Pass
16QAM (100%RB Size)	6.31	13	Pass

QPSK:

Frequency (MHz)	Receiver Reading (dBμV)	Turn table Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)
			Height (m)	Polar (H/V)	SG Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)		
Middle Channel									
1.4 MHz Bandwidth									
1732.50	72.11	165	1.5	H	7.2	0.30	9.90	16.80	30
1732.50	70.50	111	1.5	V	5.7	0.30	9.90	15.30	30
3 MHz Bandwidth									
1732.50	71.82	152	1.4	H	7.0	0.30	9.90	16.60	30
1732.50	70.30	42	2.1	V	5.5	0.30	9.90	15.10	30
5 MHz Bandwidth									
1732.50	71.71	155	1.1	H	11.9	0.30	9.90	16.50	30
1732.50	70.17	172	1.4	V	5.3	0.30	9.90	14.90	30
10MHz Bandwidth									
1732.50	70.86	211	2.0	H	6.0	0.30	9.90	15.60	30
1732.50	68.37	145	2.0	V	3.5	0.30	9.90	13.10	30
15 MHz Bandwidth									
1732.50	70.59	204	2.0	H	5.8	1.60	6.90	15.10	30
1732.50	69.90	112	1.4	V	5.1	1.60	6.90	14.40	30
20 MHz Bandwidth									
1732.50	68.83	245	2.0	H	4.0	0.30	9.90	13.60	30
1732.50	67.42	175	1.8	V	2.6	0.30	9.90	12.20	30

16QAM:

Frequency (MHz)	Receiver Reading (dBμV)	Turn table Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)
			Height (m)	Polar (H/V)	SG Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)		
Middle Channel									
1.4 MHz Bandwidth									
1732.50	71.52	254	1.5	H	6.7	0.30	9.90	16.30	30
1732.50	69.79	160	1.6	V	5.0	0.30	9.90	14.60	30
3 MHz Bandwidth									
1732.50	71.33	360	1.6	H	6.5	0.30	9.90	16.10	30
1732.50	69.81	174	2.0	V	5.0	0.30	9.90	14.60	30
5 MHz Bandwidth									
1732.50	70.29	254	1.5	H	5.4	0.30	9.90	15.00	30
1732.50	69.13	145	1.4	V	4.3	0.30	9.90	13.90	30
10 MHz Bandwidth									
1732.50	70.60	220	1.0	H	5.8	0.30	9.90	15.40	30
1732.50	70.11	152	1.5	V	5.2	0.30	9.90	14.80	30
15 MHz Bandwidth									
1732.50	70.96	157	1.6	H	6.1	0.30	9.90	15.70	30
1732.50	69.91	156	1.7	V	5.0	0.30	9.90	14.60	30
20 MHz Bandwidth									
1732.50	68.80	161	1.2	H	4.0	0.30	9.90	13.60	30
1732.50	68.11	125	1.9	V	3.3	0.30	9.90	12.90	30

Note:

All above data were tested with no amplifier

Absolute Level = SG Level - Cable loss + Antenna Gain

Margin = Limit- Absolute Level

FCC §2.1049, §22.917, §22.905 & §24.238 & §27.53 - OCCUPIED BANDWIDTH


Applicable Standards

FCC 47 §2.1049, §22.917, §22.905, §24.238 and §27.53.

Test Procedure

The RF output of the transmitter was connected to the simulator and the spectrum analyzer through sufficient attenuation.

The resolution bandwidth of the spectrum analyzer was set at 5 kHz (Cellular /PCS) & 100 kHz (WCDMA) and the 26 dB & 99% bandwidth was recorded.

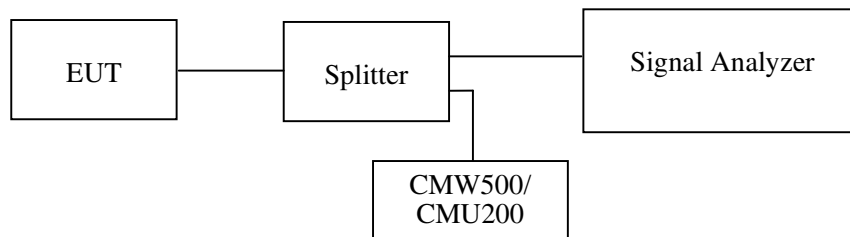

Test Data

Environmental Conditions

Temperature:	26~25 °C
Relative Humidity:	48~55 %
ATM Pressure:	100.0~101.0 kPa

The testing was performed by Peter Jiang and Chris Wang from 2016-09-16 to 2016-09-17.

EUT operation mode: Transmitting

Test Result: Compliance. Please refer to the following tables and plots.

Cellular Band (Part 22H)

Mode	Frequency (MHz)	99% Occupied Bandwidth (kHz)	26 dB Emission Bandwidth (kHz)
GSM(GMSK)	836.6	246.493	314.629

Mode	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26 dB Emission Bandwidth (MHz)
RMC (BPSK)	836.6	4.208	4.850
HSUPA (BPSK)	836.6	4.188	4.830
HSDPA (16QAM)	836.6	4.208	4.890

PCS Band (Part 24E)

Mode	Frequency (MHz)	99% Occupied Bandwidth (kHz)	26 dB Emission Bandwidth (kHz)
GSM(GMSK)	1880.0	242.485	314.629


Mode	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26 dB Emission Bandwidth (MHz)
RMC (BPSK)	1880.0	4.208	4.830
HSUPA (BPSK)	1880.0	4.208	4.850
HSDPA (16QAM)	1880.0	4.188	4.870

AWS Band (Part 27)


Mode	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26 dB Emission Bandwidth (MHz)
RMC (BPSK)	1732.6	4.208	4.850
HSUPA (BPSK)	1732.6	4.208	4.830
HSDPA (16QAM)	1732.6	4.208	4.830



Cellular Band (Part 22H)

26 dB Bandwidth for GSM (GMSK) Mode

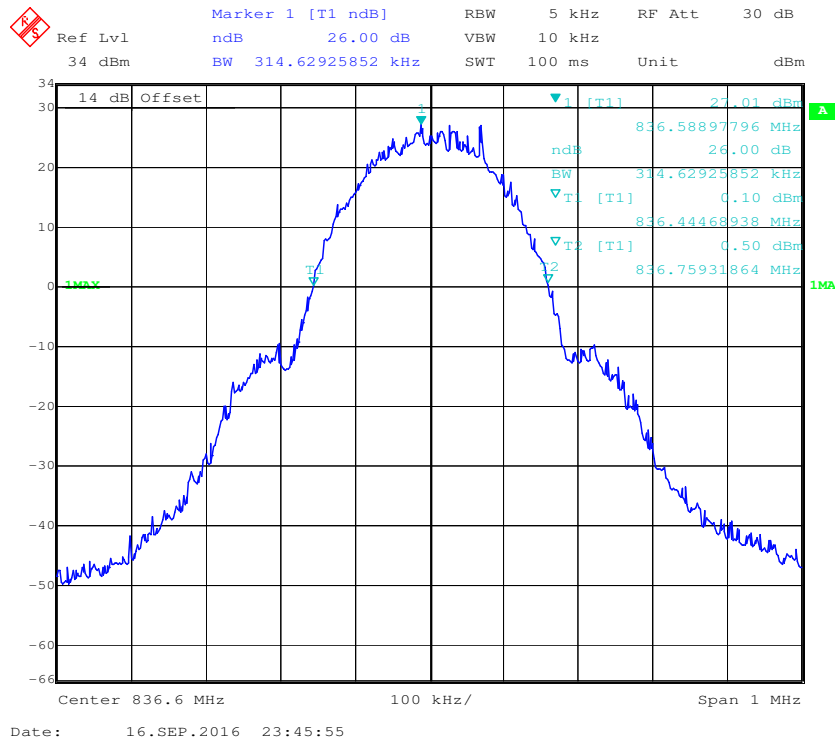


26 dB Bandwidth for WCDMA (BPSK) Mode

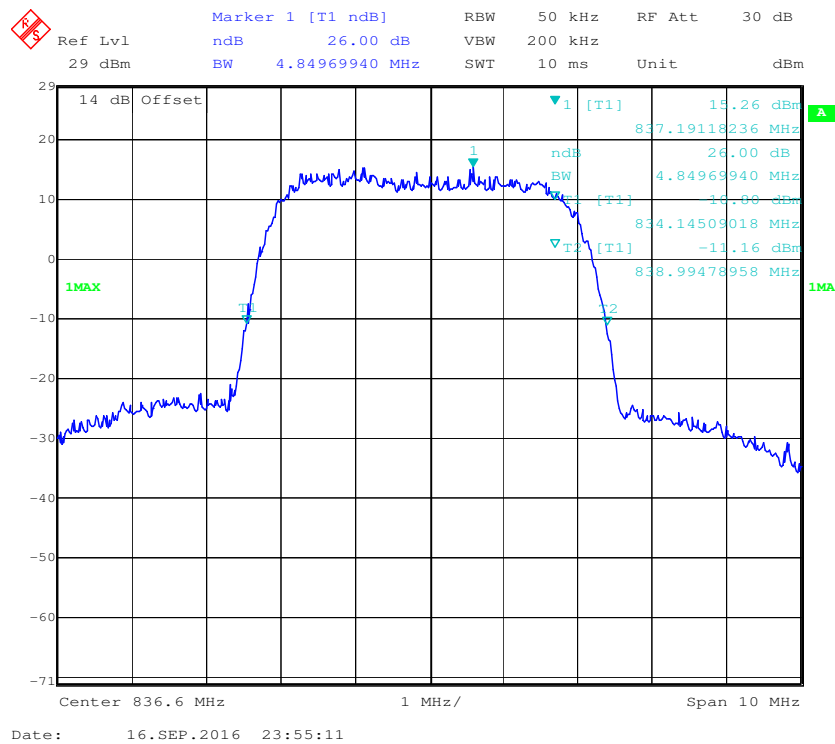


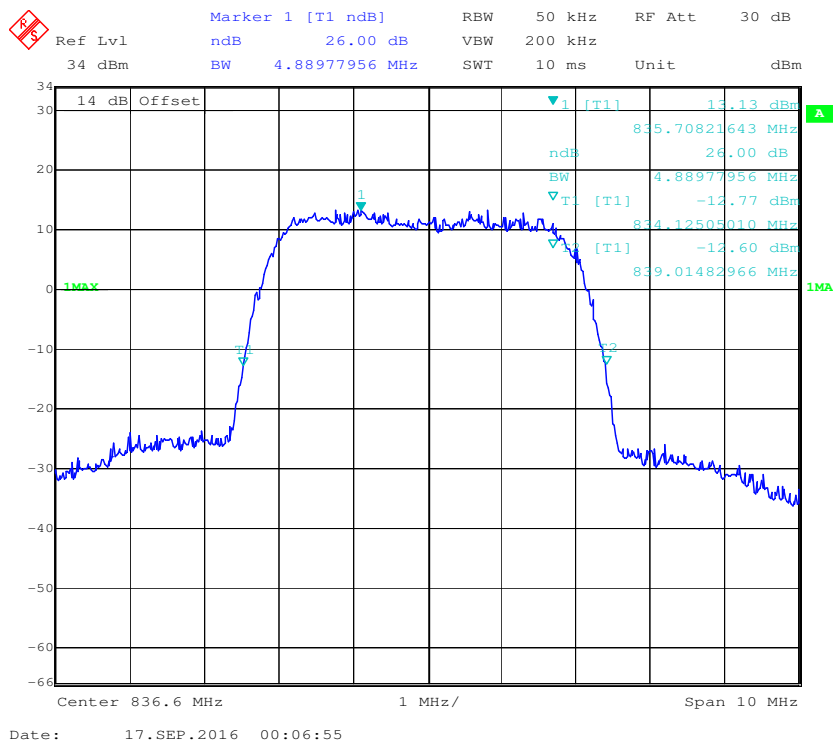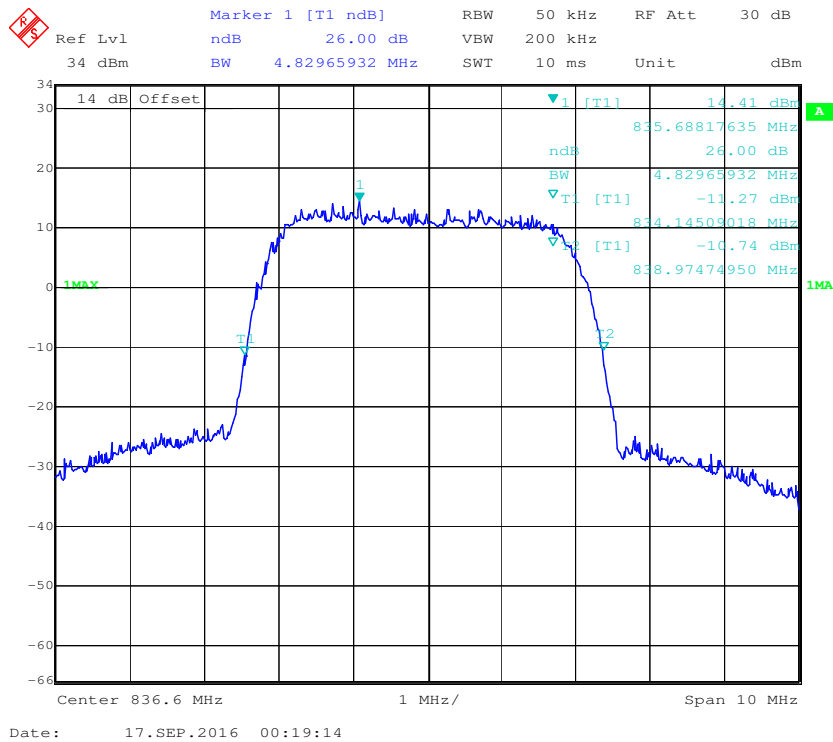


99% Occupied Bandwidth for GSM (GMSK) Mode

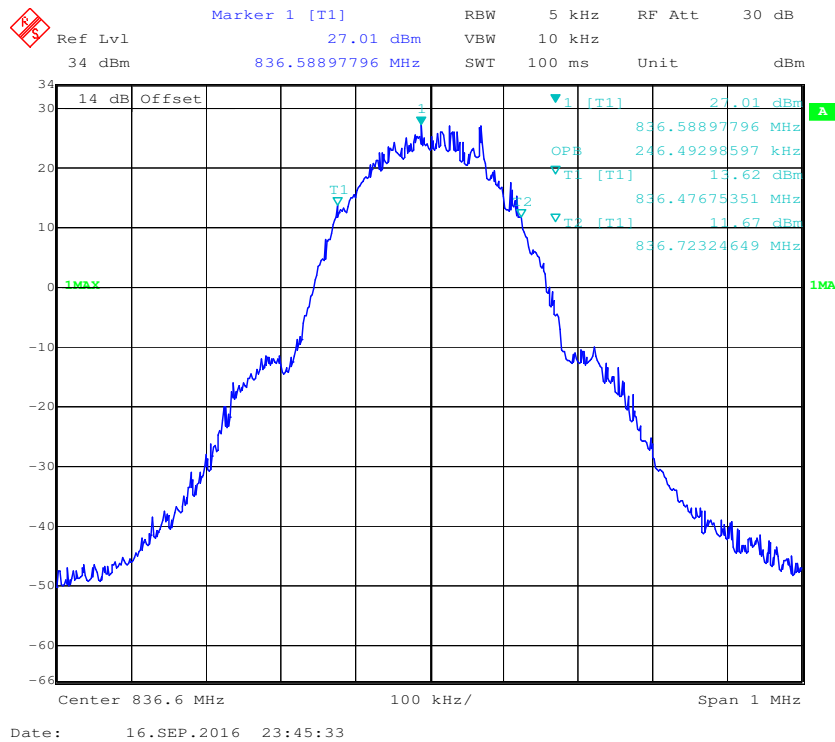


99% Occupied Bandwidth for WCDMA (BPSK) Mode

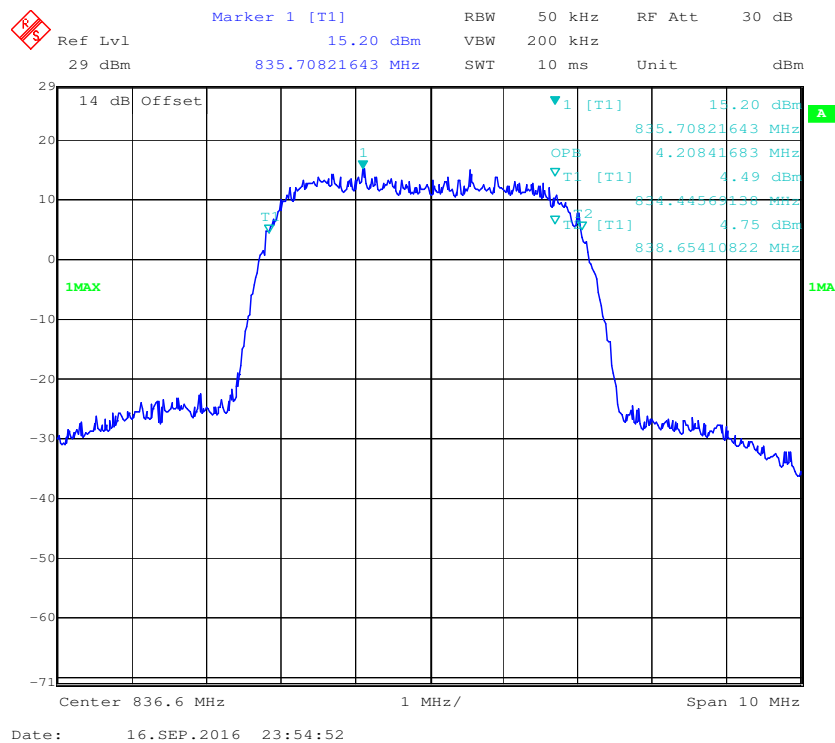

99% Occupied Bandwidth for HSUPA (BPSK) Mode

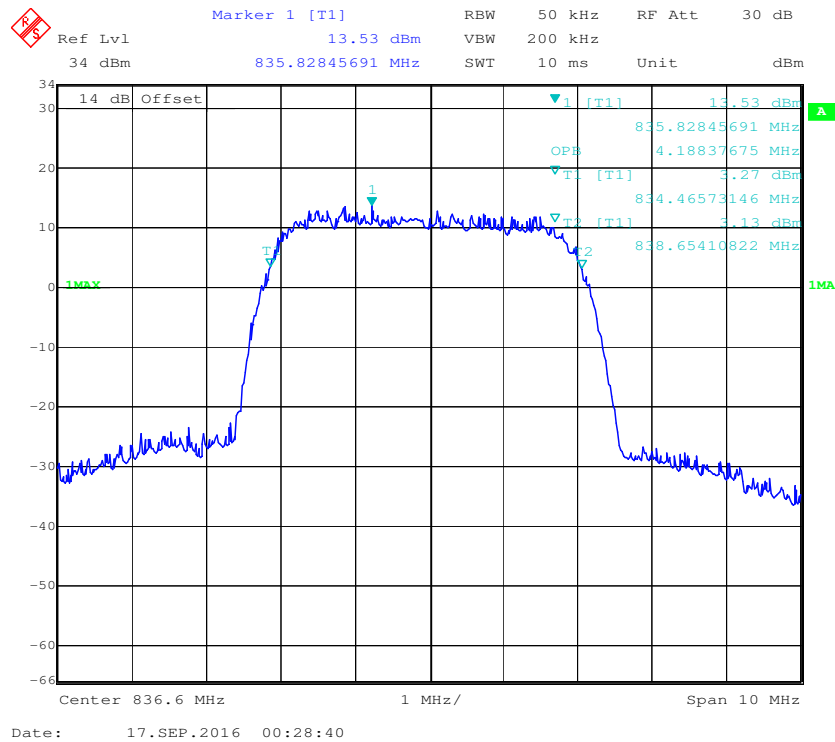


99% Occupied Bandwidth for HSDPA (16QAM) Mode

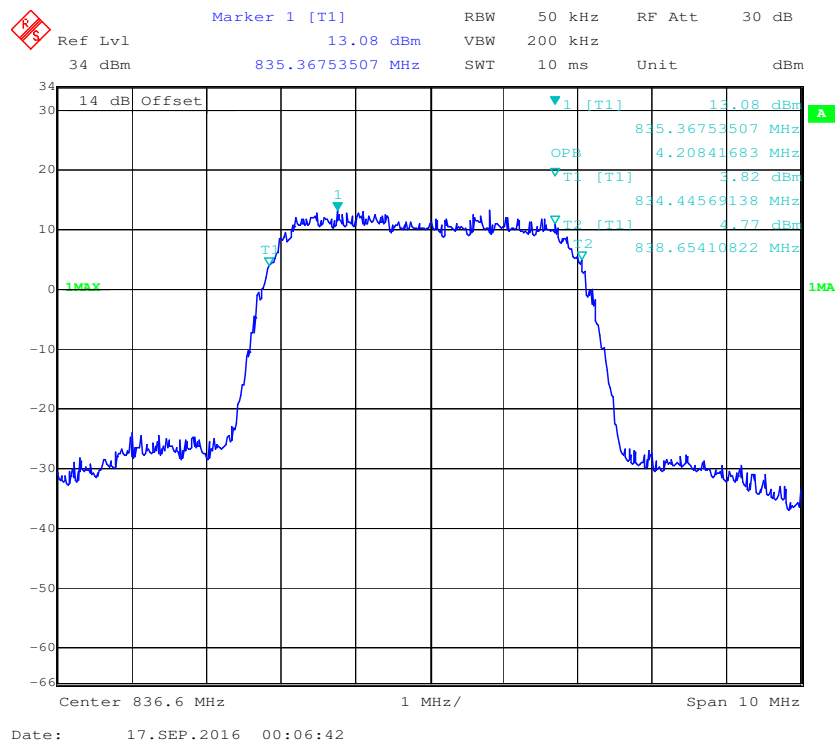




PCS Band (Part 24E)



26 dB Bandwidth for GSM (GMSK) Mode

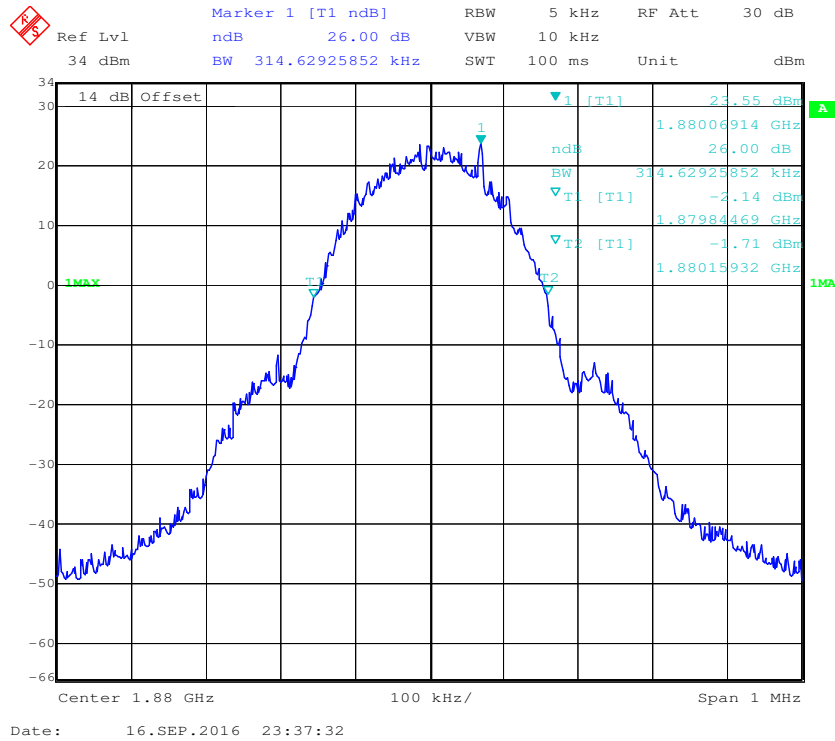


26 dB Bandwidth for WCDMA (BPSK) Mode

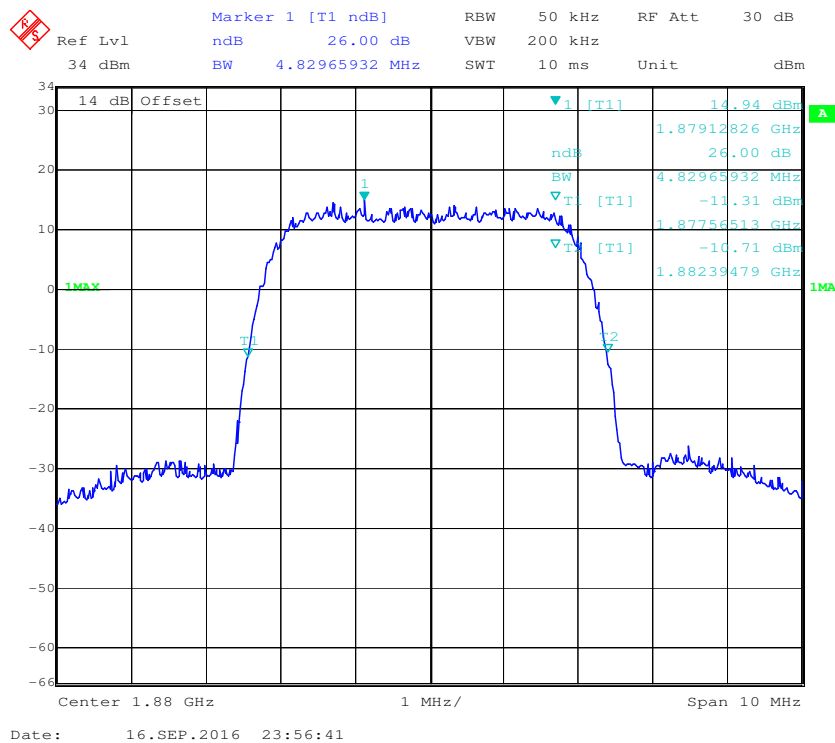

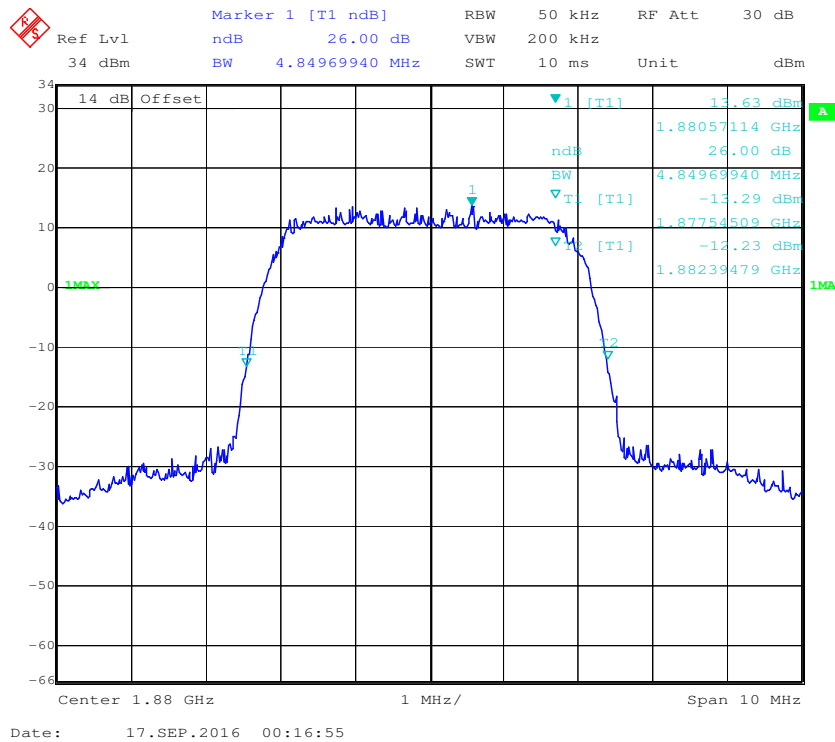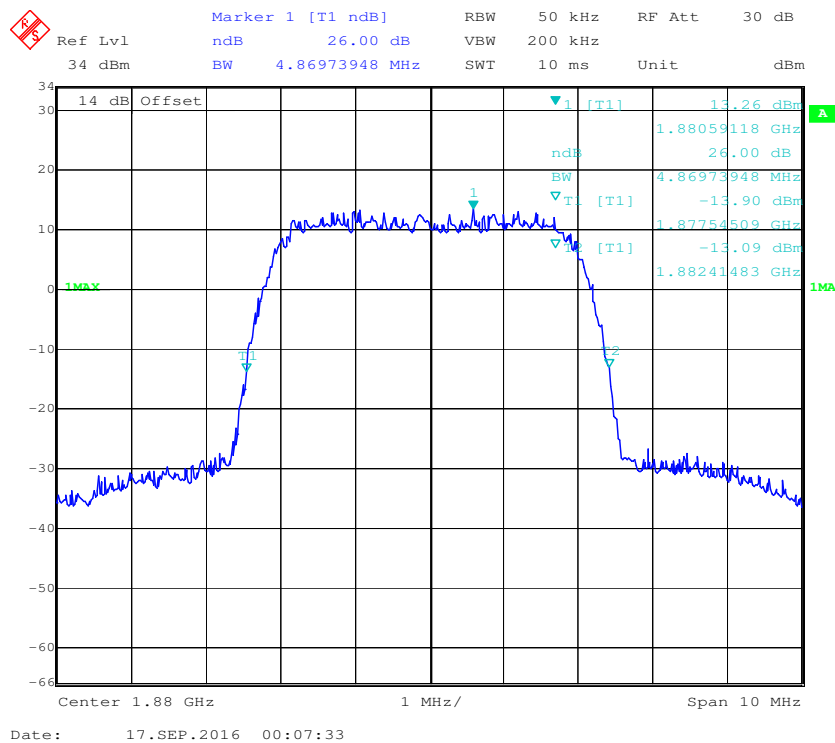
26 dB Bandwidth for HSUPA (BPSK) Mode**26 dB Bandwidth for HSDPA (16QAM) Mode**

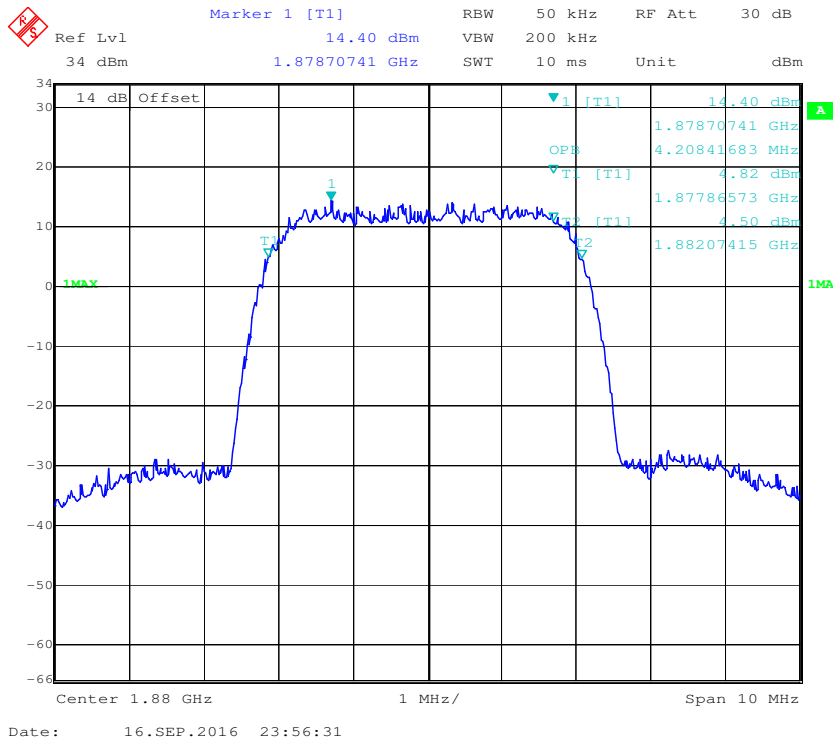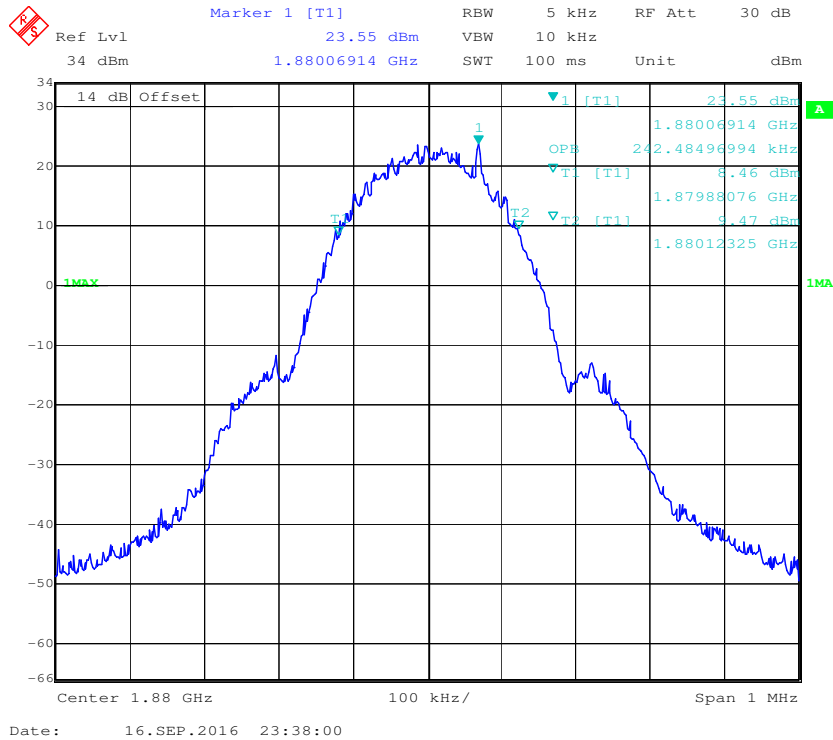


99% Occupied Bandwidth for HSUPA (BPSK) Mode

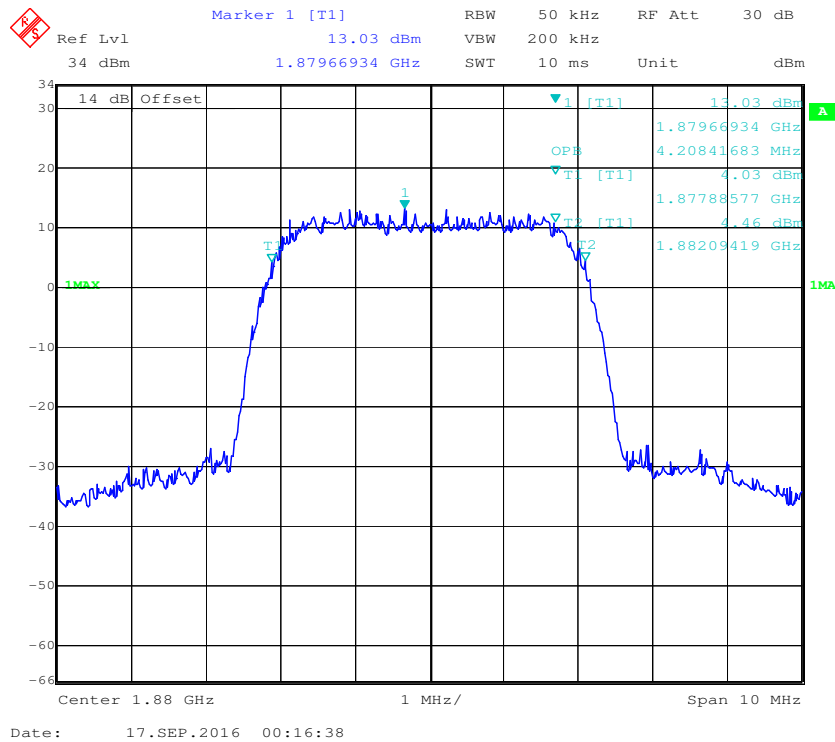


99% Occupied Bandwidth for HSDPA (16QAM) Mode

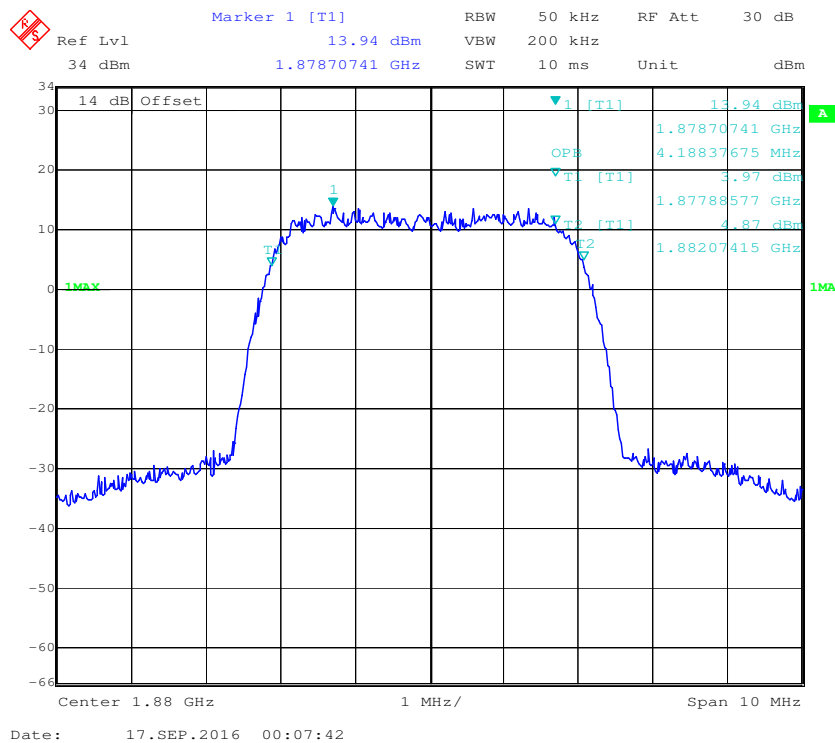


AWS Band (Part 27) 26 dB Bandwidth for WCDMA (BPSK) Mode

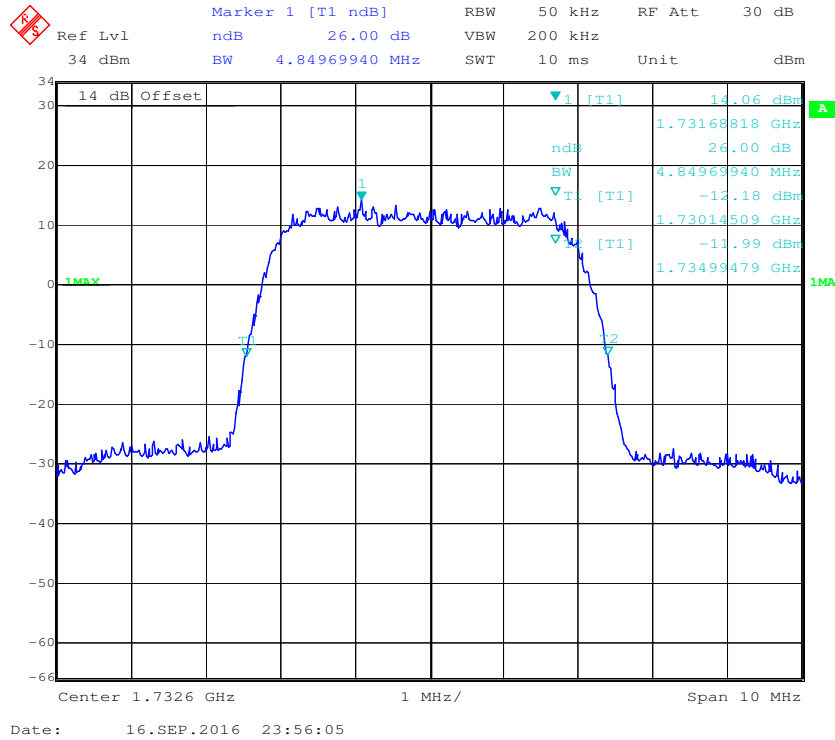


26 dB Bandwidth for HSUPA (BPSK) Mode


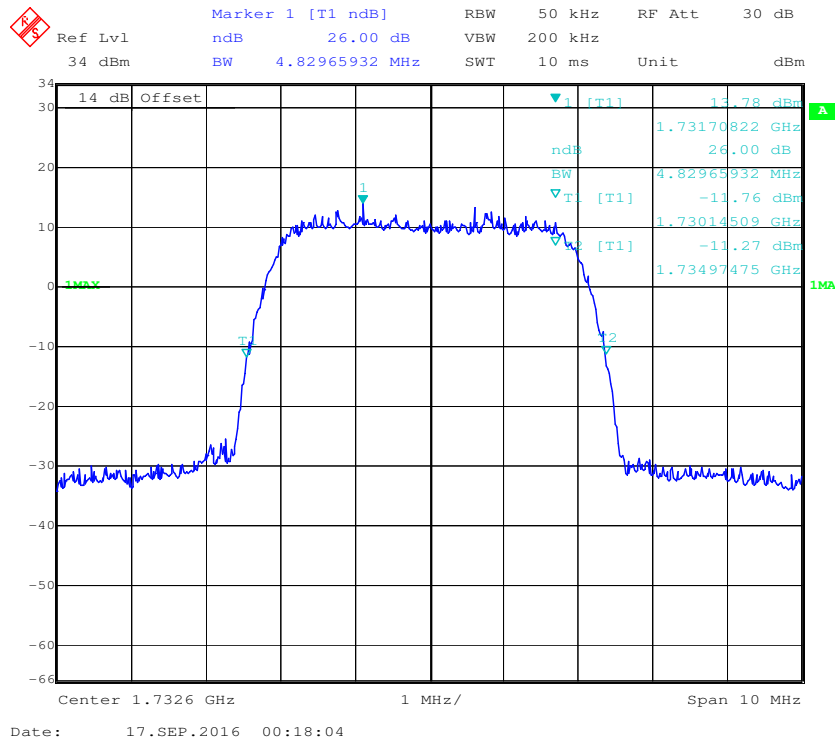


26 dB Bandwidth for HSDPA (16QAM) Mode

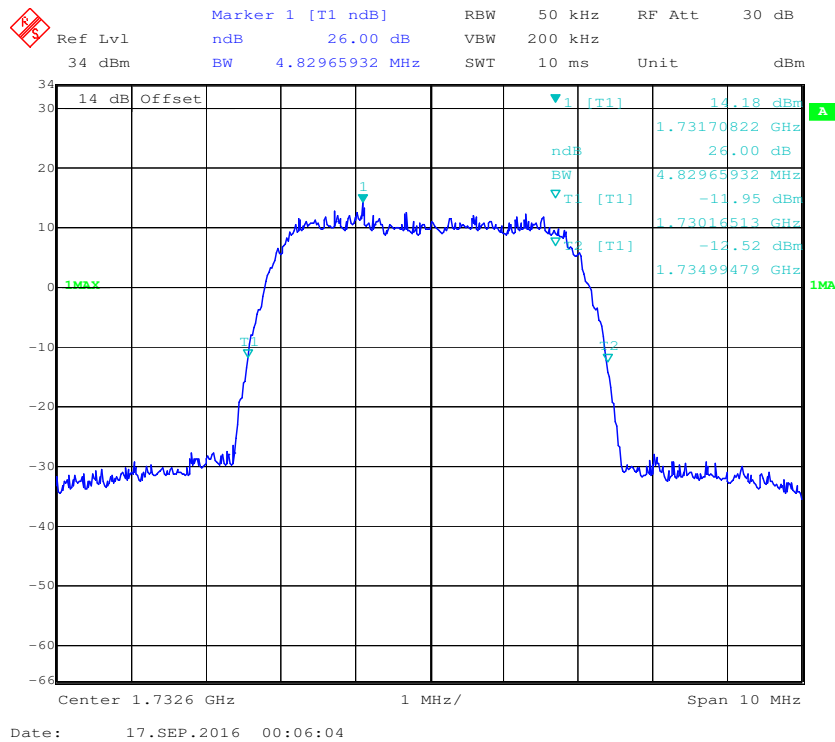



99% Occupied Bandwidth for WCDMA (BPSK) Mode


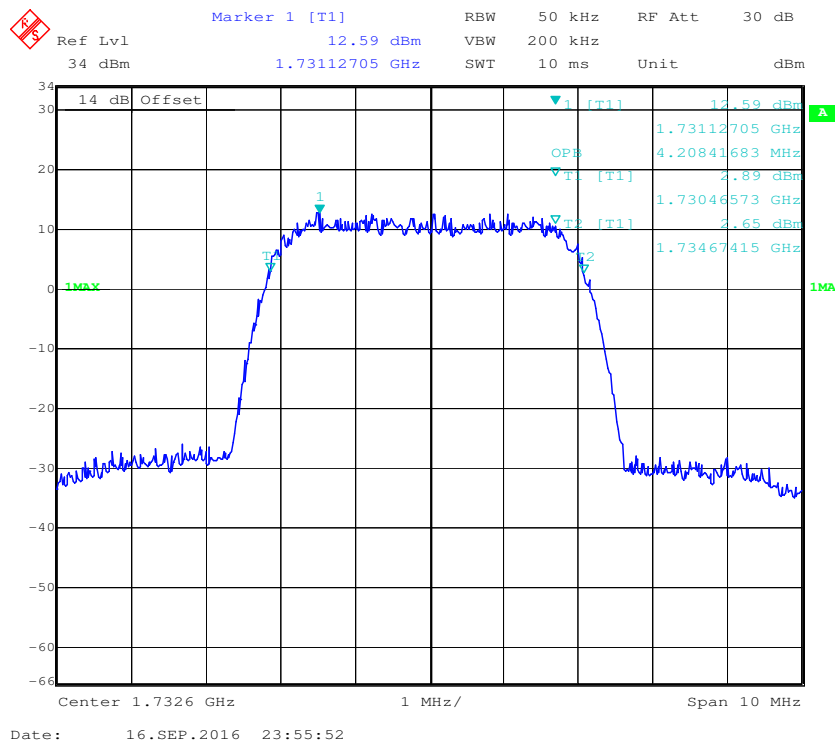


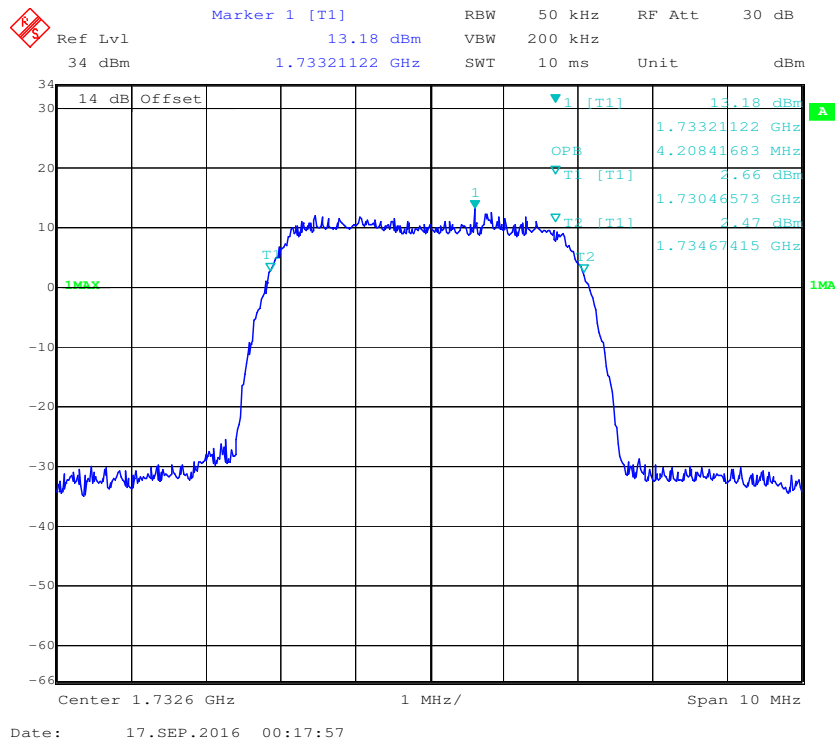
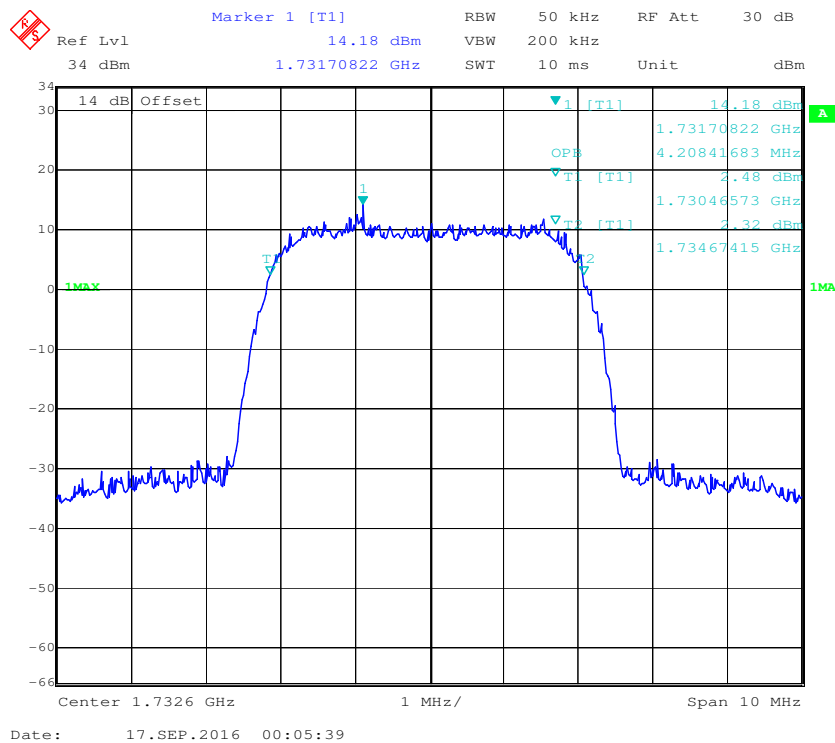
99% Occupied Bandwidth for HSUPA (BPSK) Mode**99% Occupied Bandwidth for HSDPA (16QAM) Mode**



LTE Band 2: (Middle Channel)



Bandwidth (MHz)	Modulation	99% Occupied Bandwidth (MHz)	26 dB Emission Bandwidth (MHz)
1.4	QPSK	1.088	1.251
	16QAM	1.094	1.275
3.0	QPSK	2.693	2.922
	16QAM	2.681	2.958
5.0	QPSK	4.489	5.010
	16QAM	4.489	4.890
10.0	QPSK	8.938	9.780
	16QAM	8.938	9.579
15.0	QPSK	13.467	14.609
	16QAM	13.467	14.729
20.0	QPSK	17.876	19.559
	16QAM	17.876	19.399

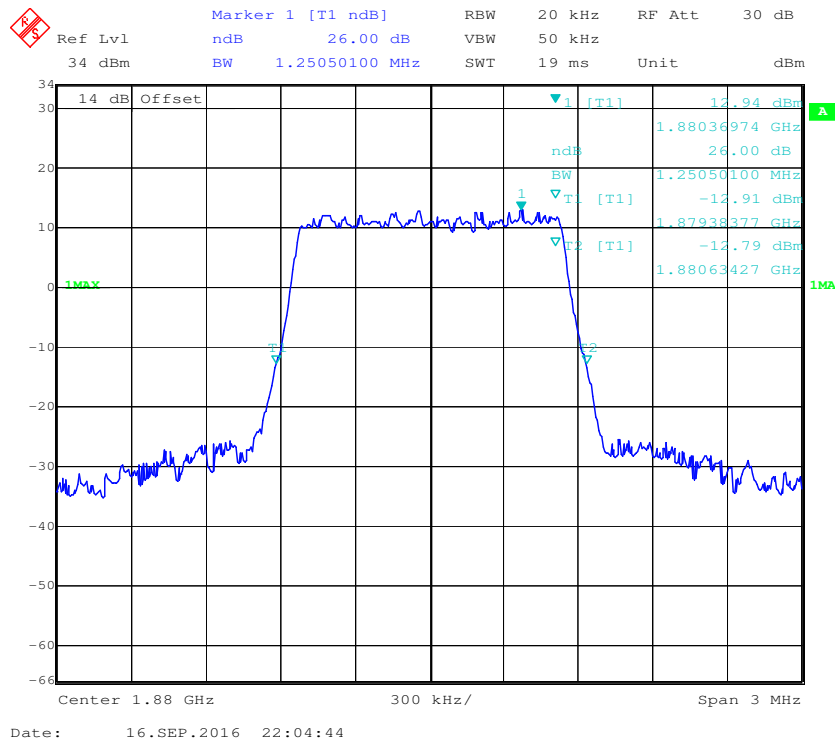
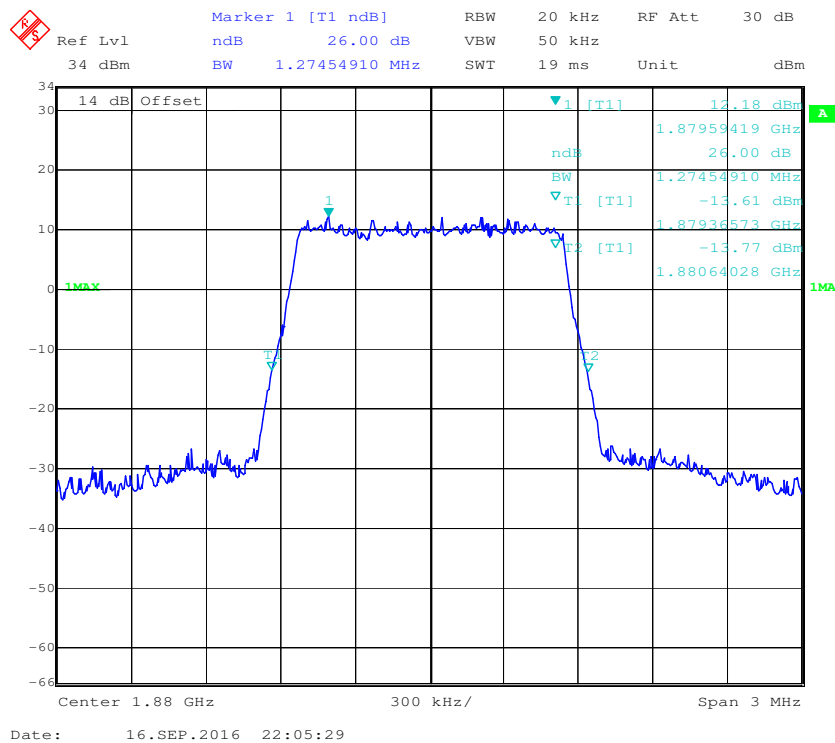
QPSK (1.4 MHz) - 26 dB Bandwidth, Middle channel**16-QAM (1.4 MHz) - 26 dB Bandwidth, Middle channel**

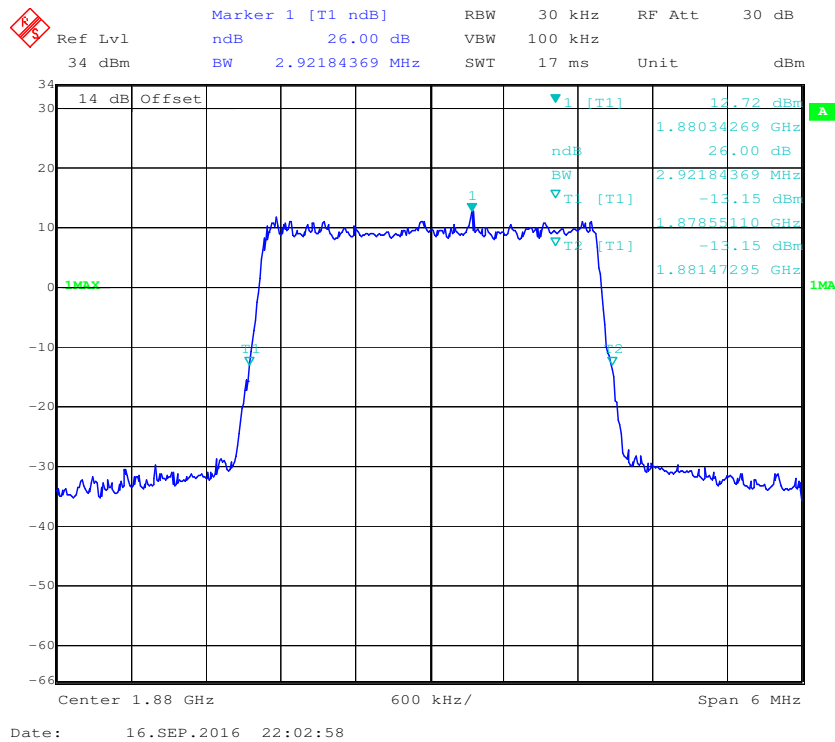
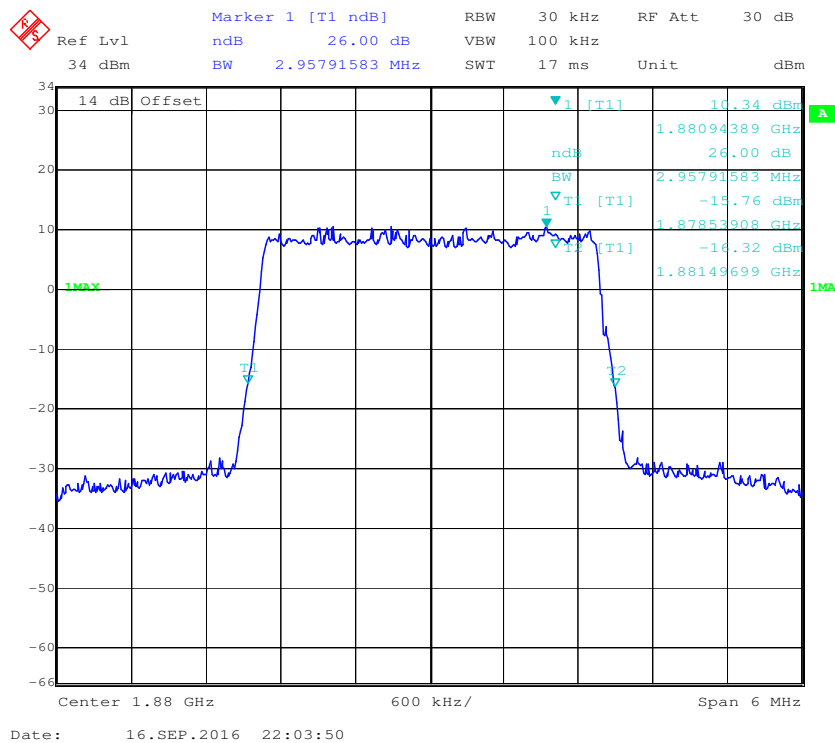
QPSK (3.0 MHz) - 26 dB Bandwidth, Middle channel**16-QAM (3.0 MHz) - 26 dB Bandwidth, Middle channel**

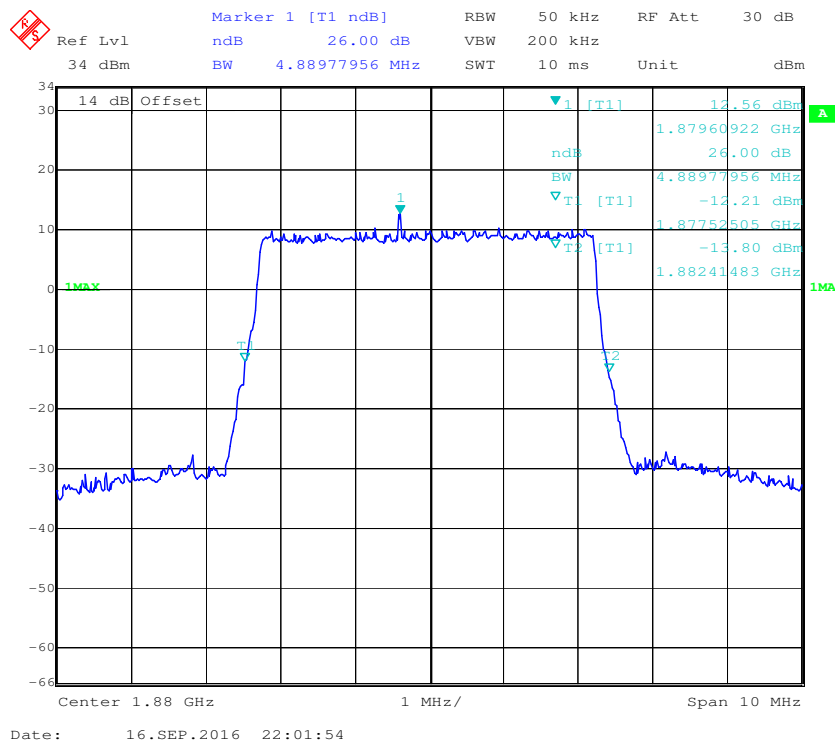
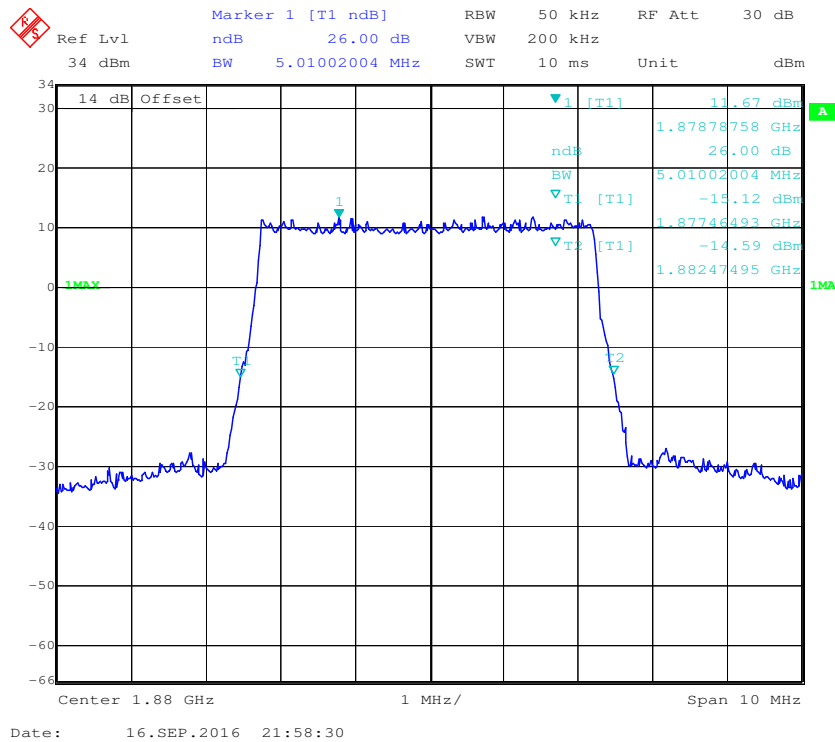


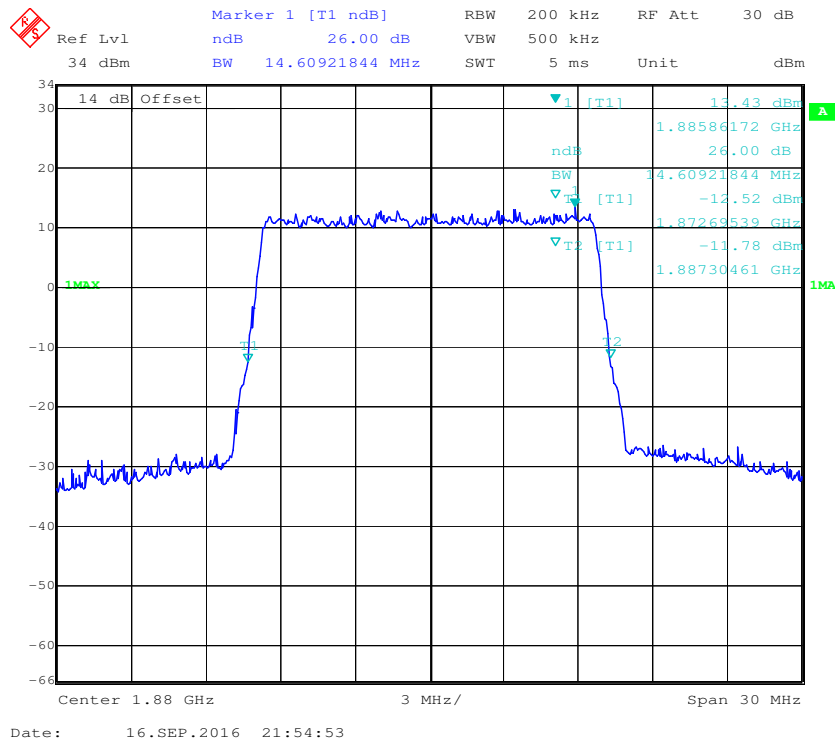
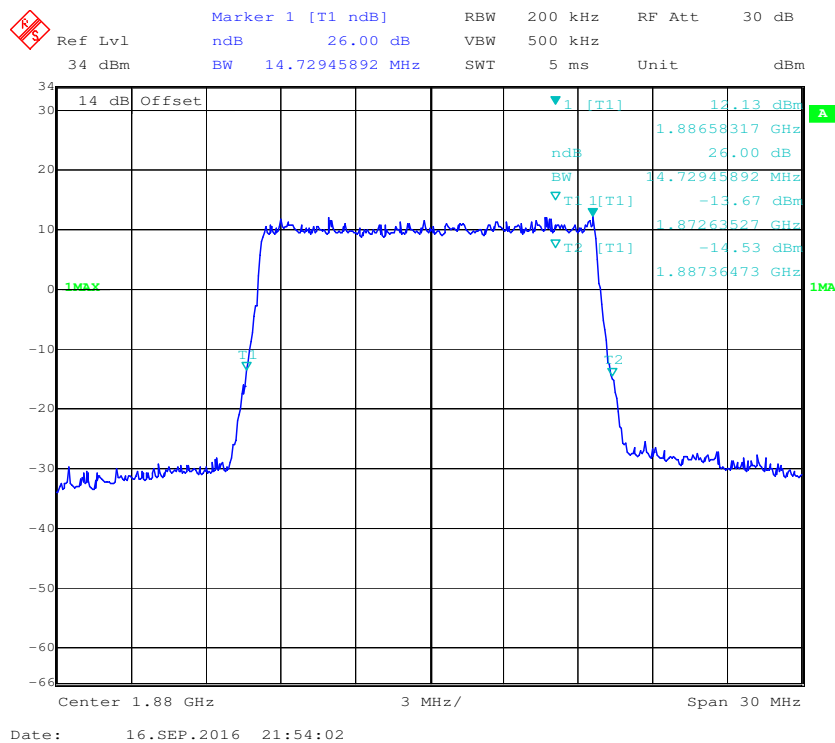
QPSK (15.0 MHz) - 26 dB Bandwidth, Middle channel**16-QAM (15.0 MHz) - 26 dB Bandwidth, Middle channel**

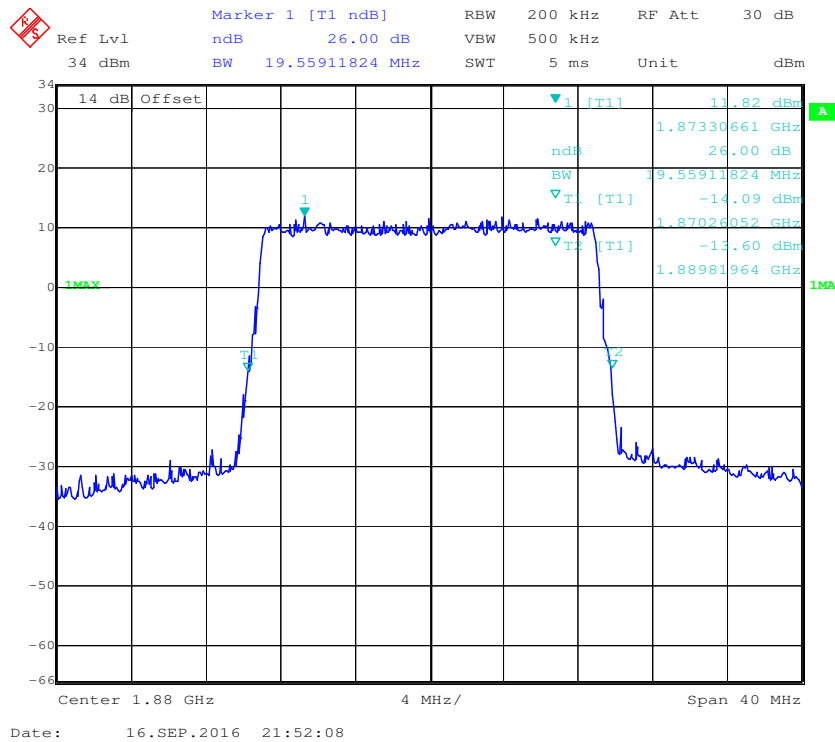
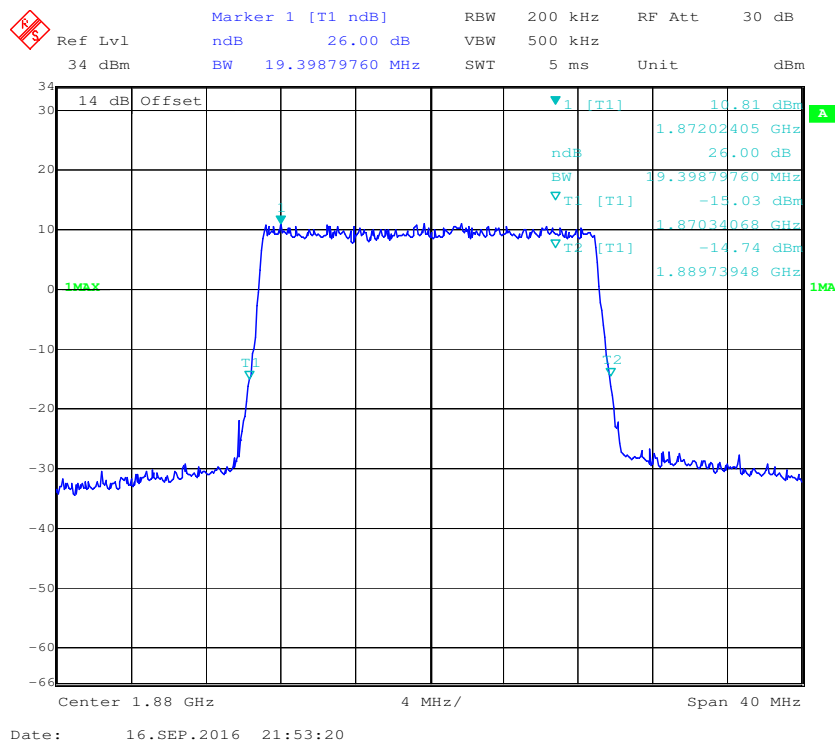
QPSK (20.0 MHz) - 26 dB Bandwidth, Middle channel**16-QAM (20.0 MHz) - 26 dB Bandwidth, Middle channel**

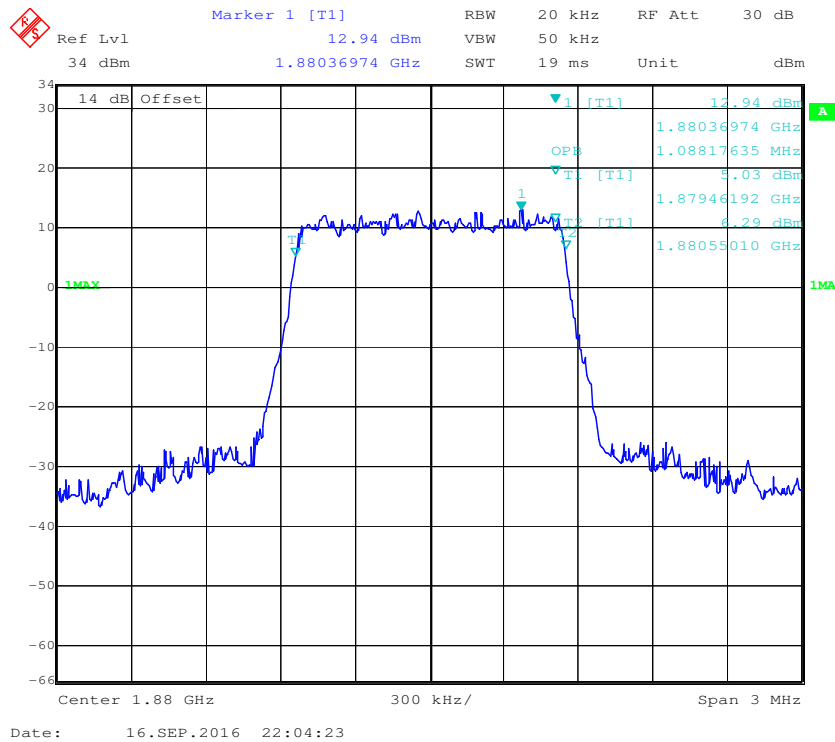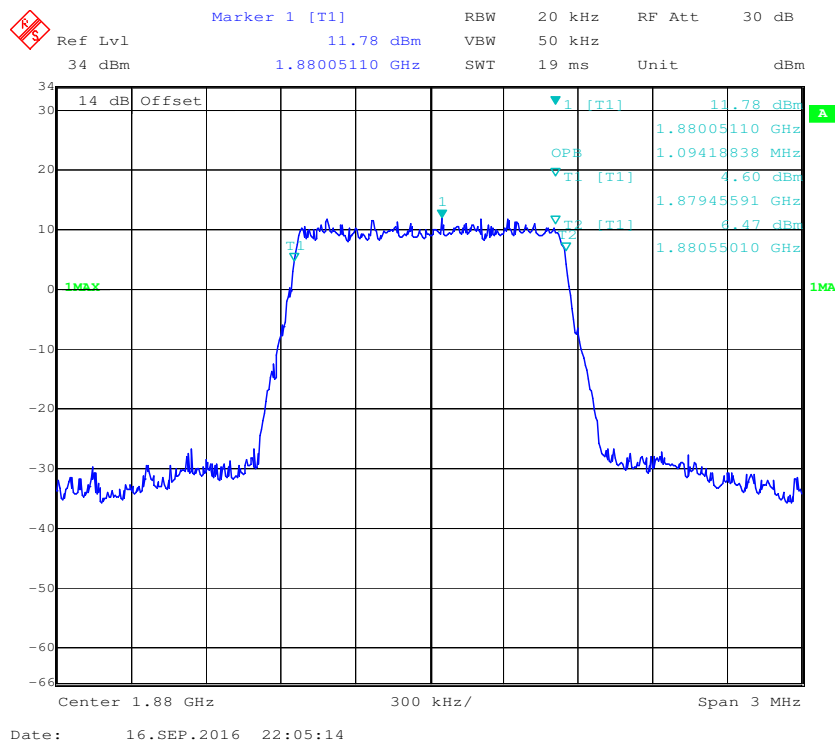QPSK (1.4 MHz) - 99% Occupied Bandwidth, Middle channel**16-QAM (1.4 MHz) - 99% Occupied Bandwidth, Middle channel**

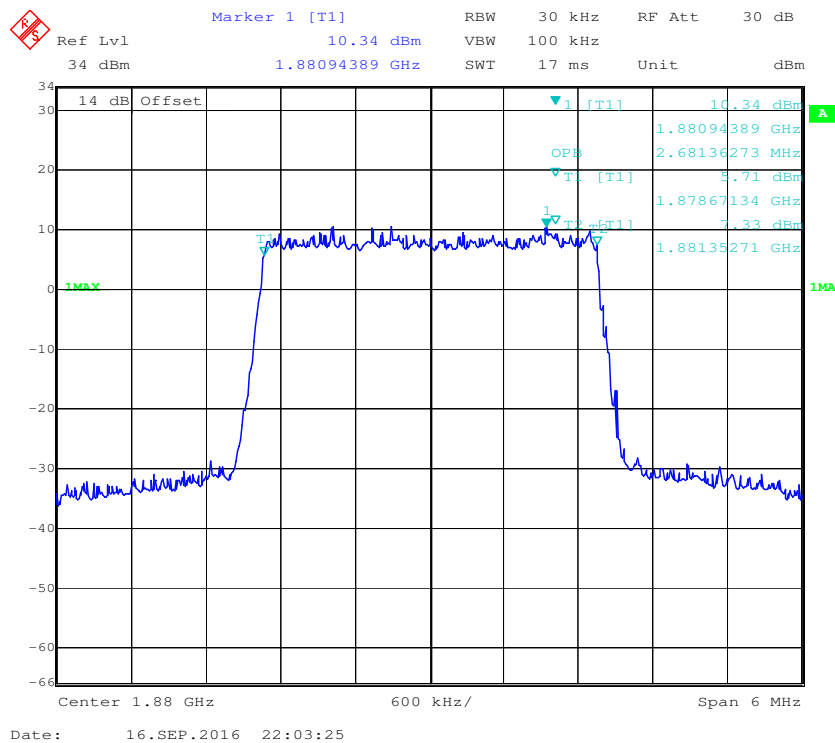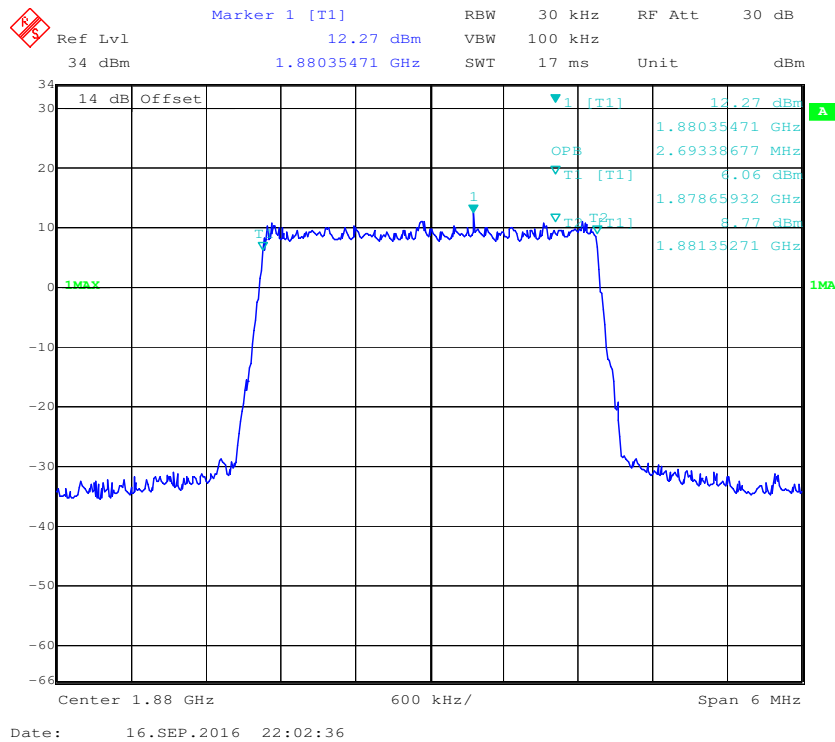

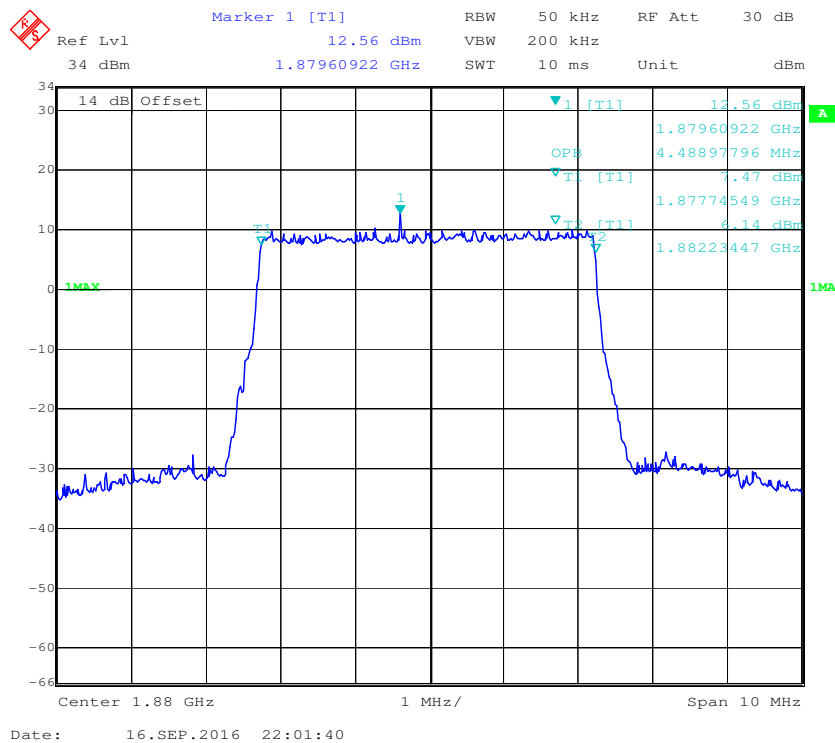
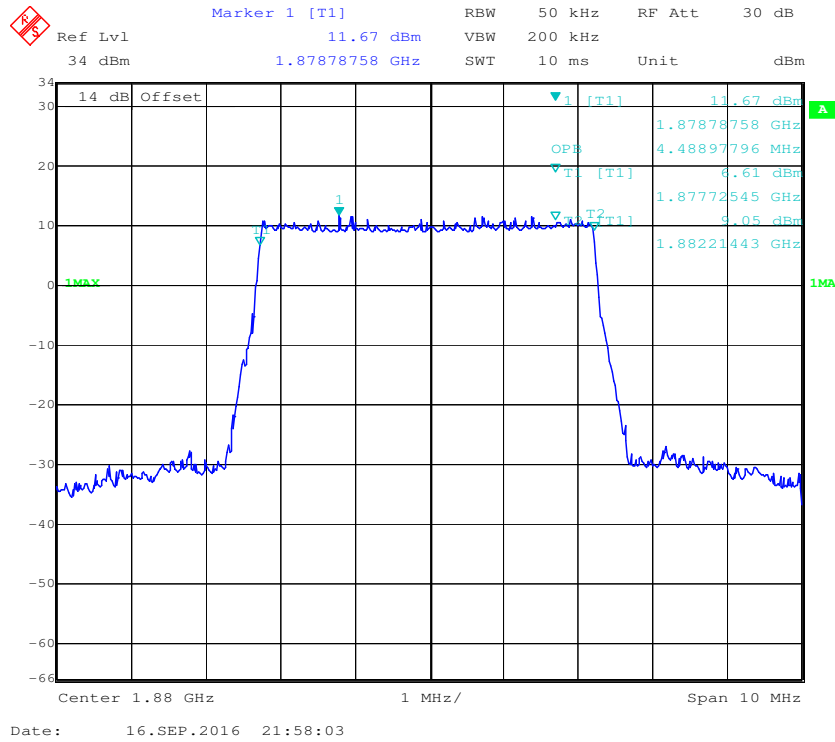


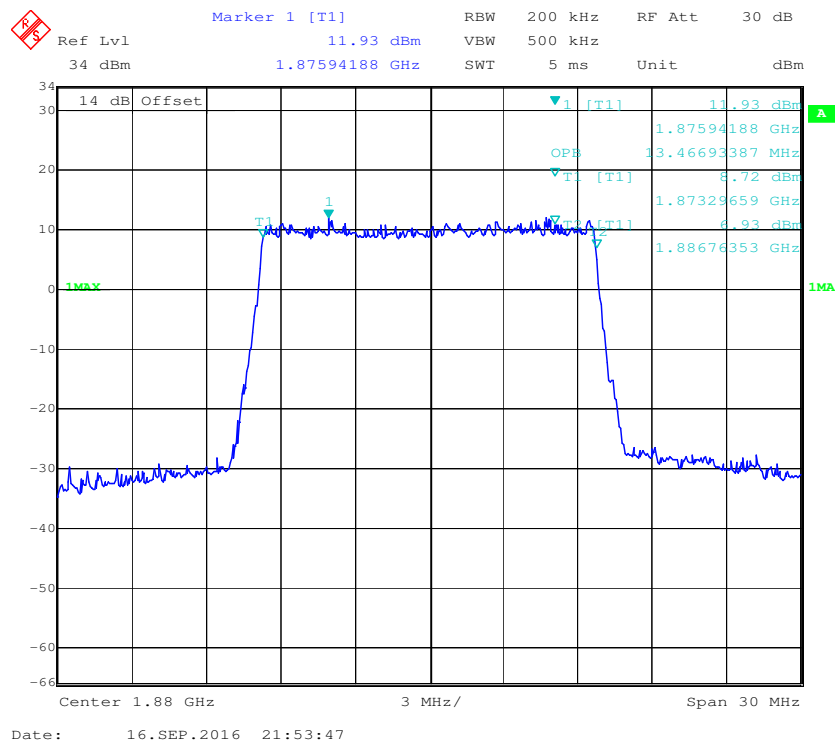
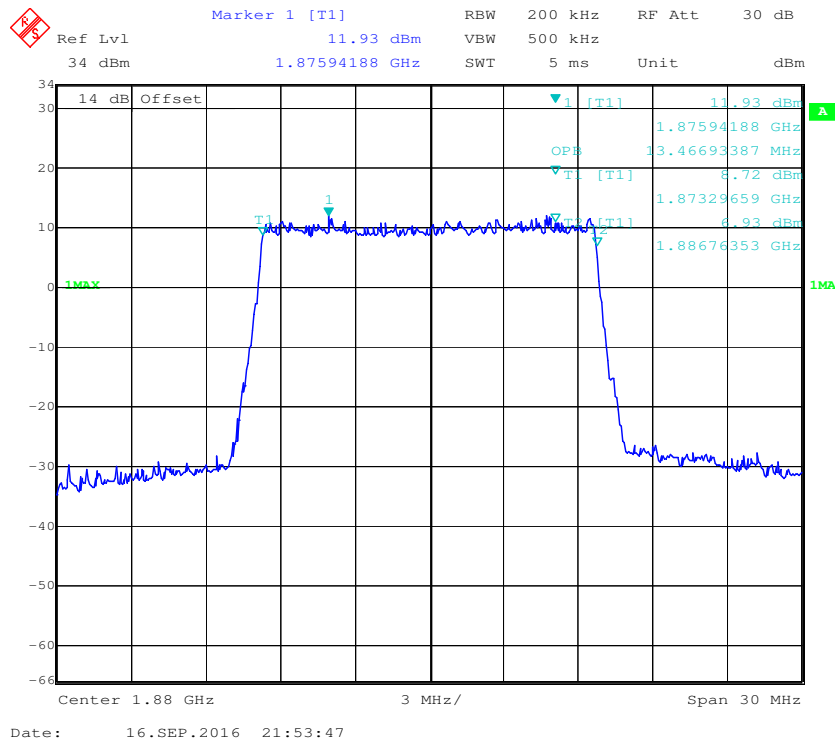


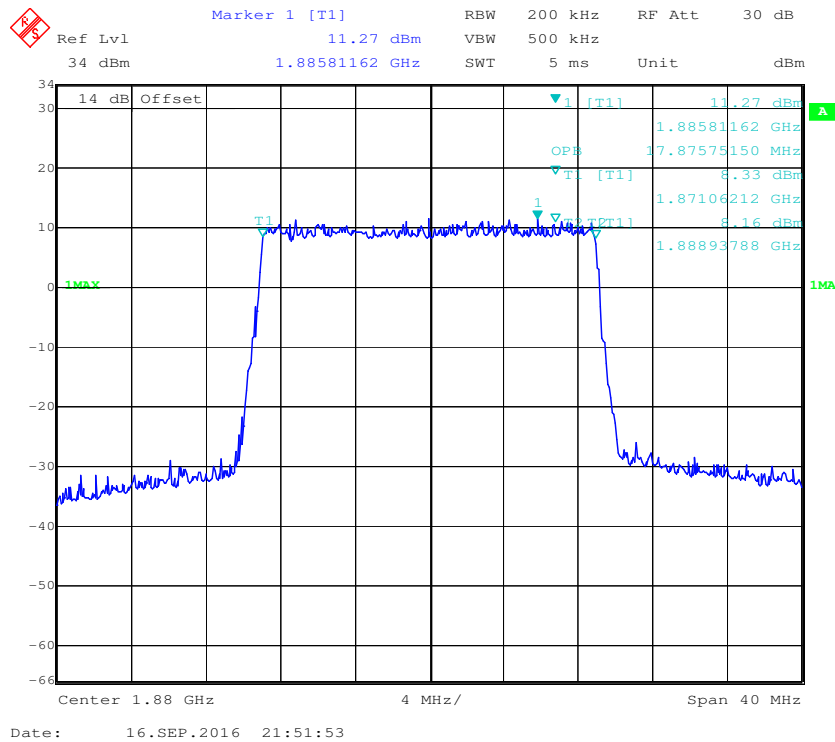
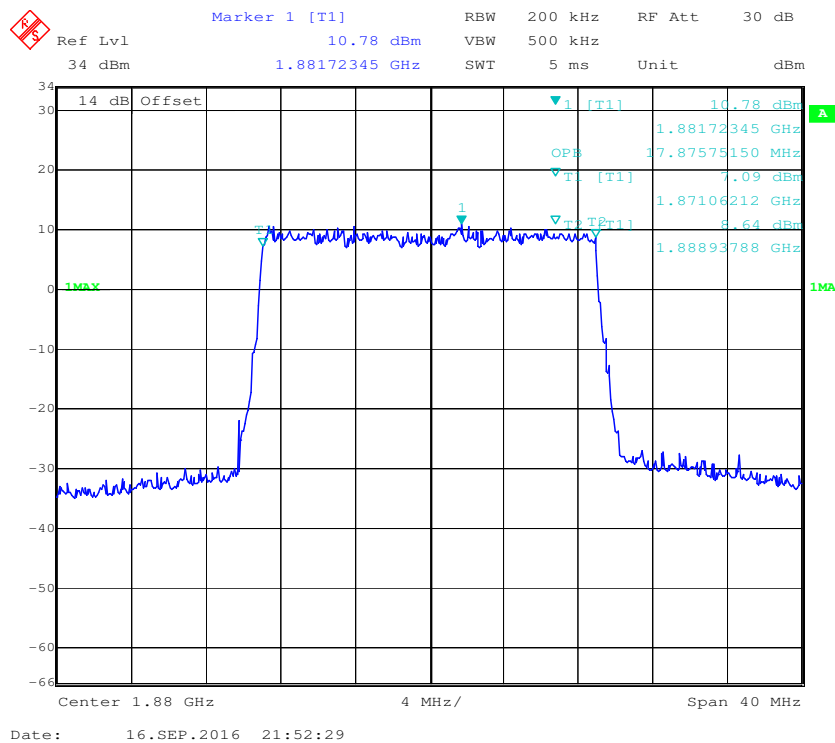
QPSK (20.0 MHz) - 99% Occupied Bandwidth, Middle channel**16-QAM (20.0 MHz) - 99% Occupied Bandwidth, Middle channel**



LTE Band 4: (Middle Channel)



Bandwidth (MHz)	Modulation	99% Occupied Bandwidth (MHz)	26 dB Emission Bandwidth (MHz)
1.4	QPSK	1.088	1.251
	16QAM	1.094	1.275
3.0	QPSK	2.693	2.922
	16QAM	2.693	2.934
5.0	QPSK	4.489	4.990
	16QAM	4.509	4.930
10.0	QPSK	9.018	9.860
	16QAM	8.938	9.699
15.0	QPSK	13.527	14.850
	16QAM	13.527	14.729
20.0	QPSK	17.876	19.319
	16QAM	17.956	19.319

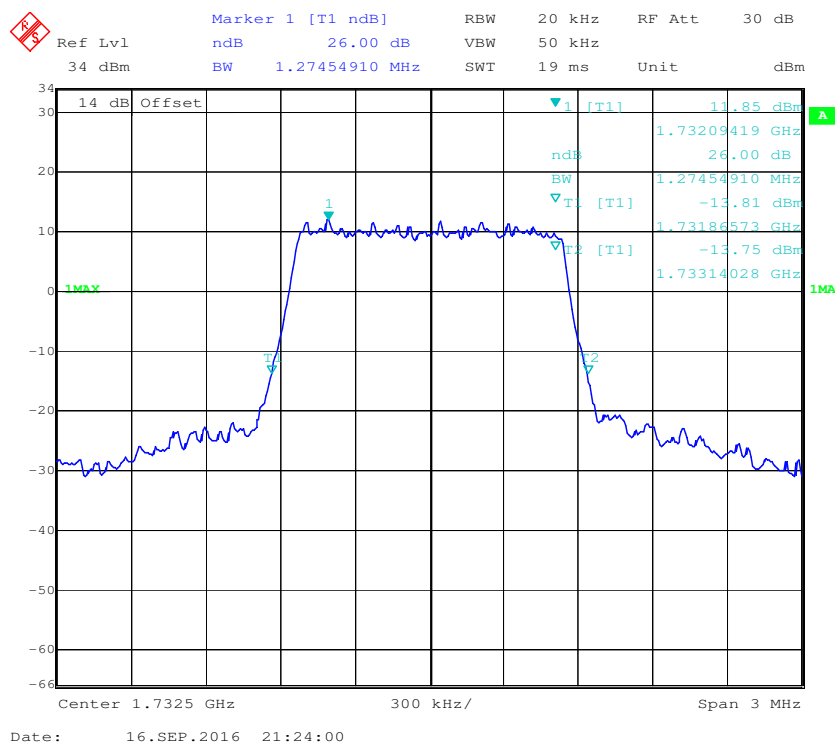
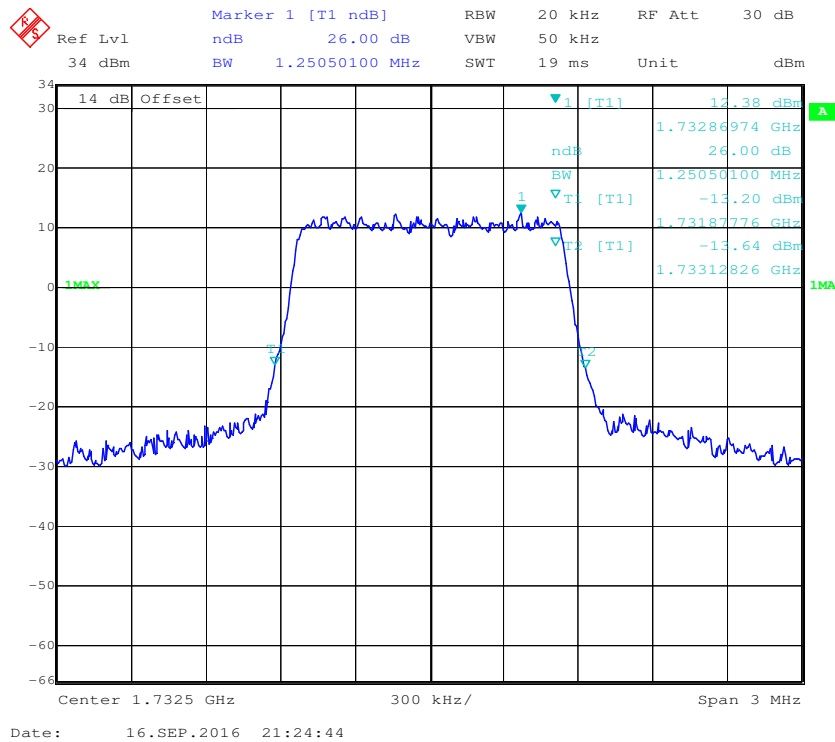


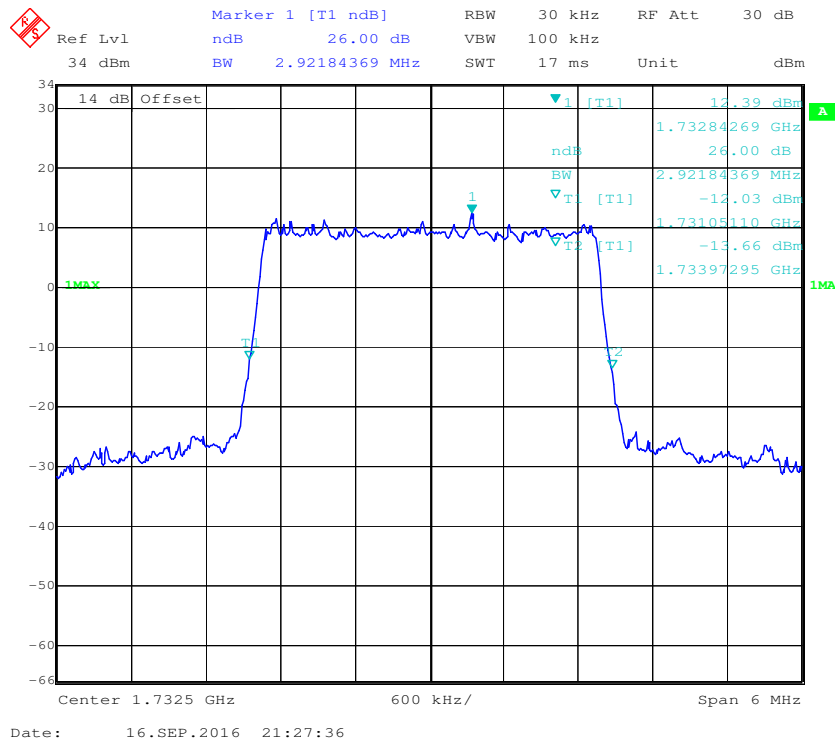
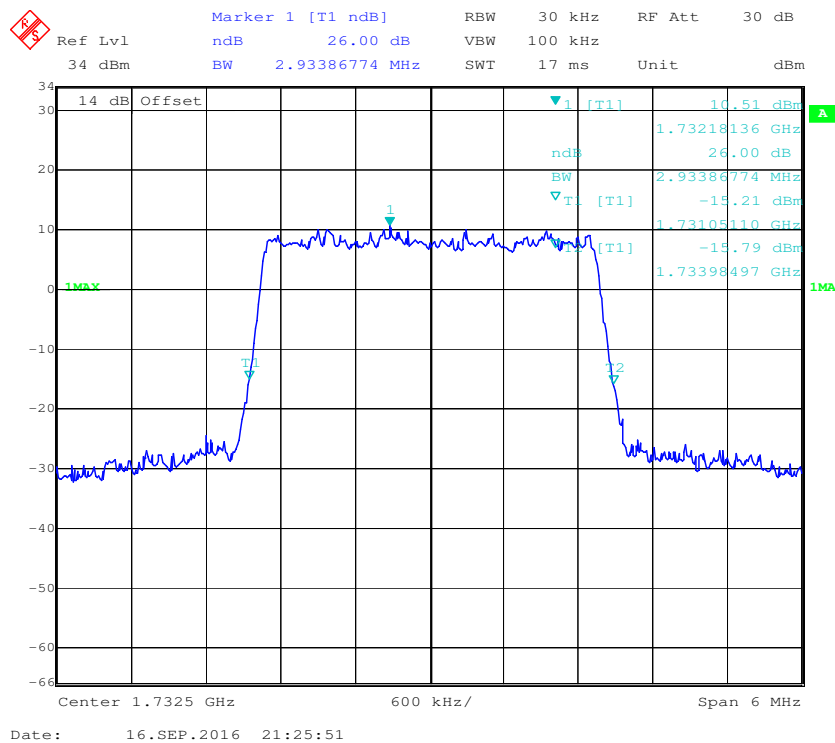
QPSK (3.0 MHz) - 26 dB Bandwidth, Middle channel**16-QAM (3.0 MHz) - 26 dB Bandwidth, Middle channel**

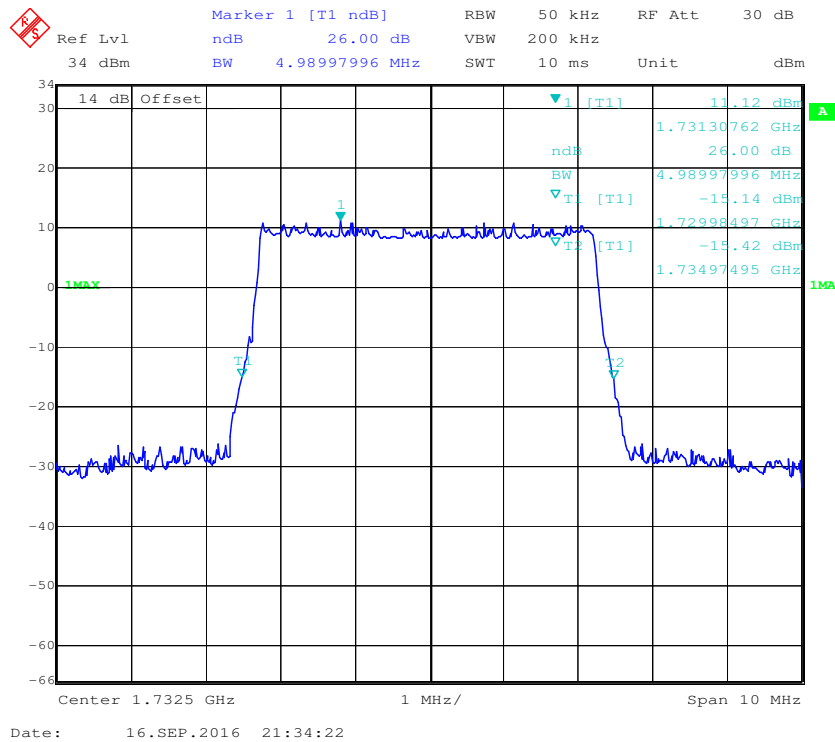
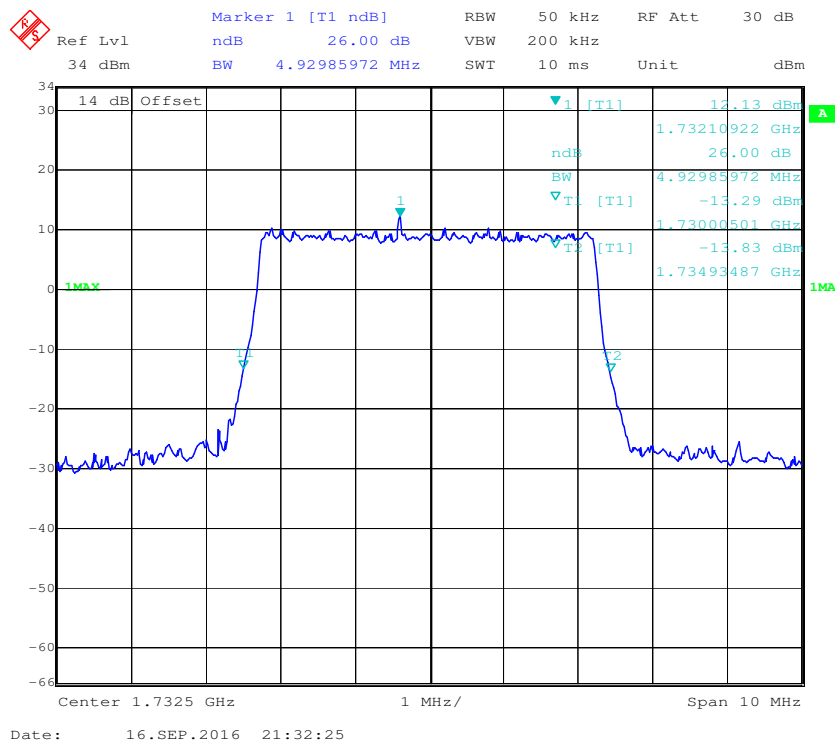
QPSK (5.0 MHz) - 26 dB Bandwidth, Middle channel**16-QAM (5.0 MHz) - 26 dB Bandwidth, Middle channel**

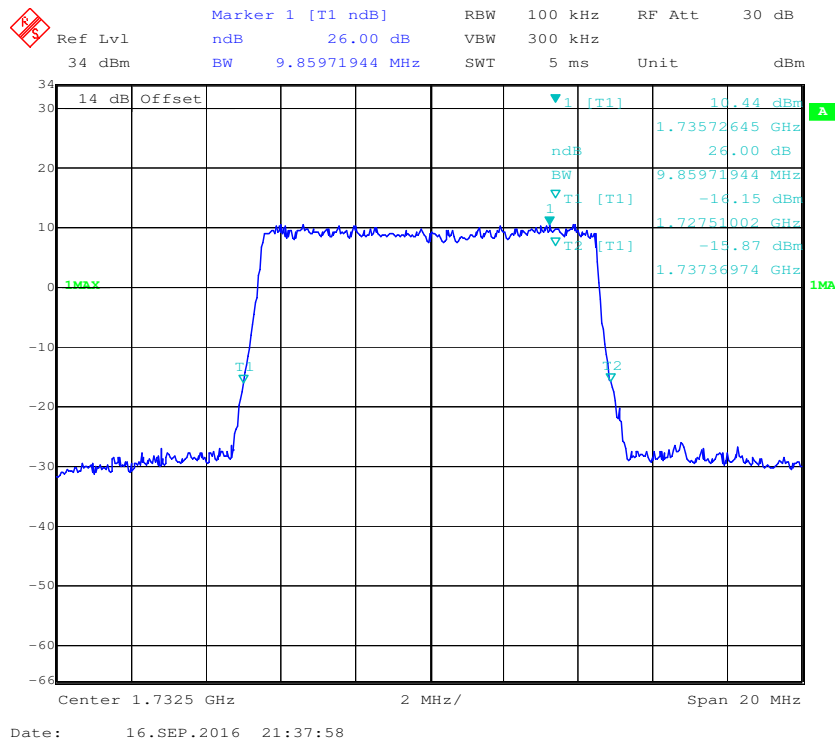
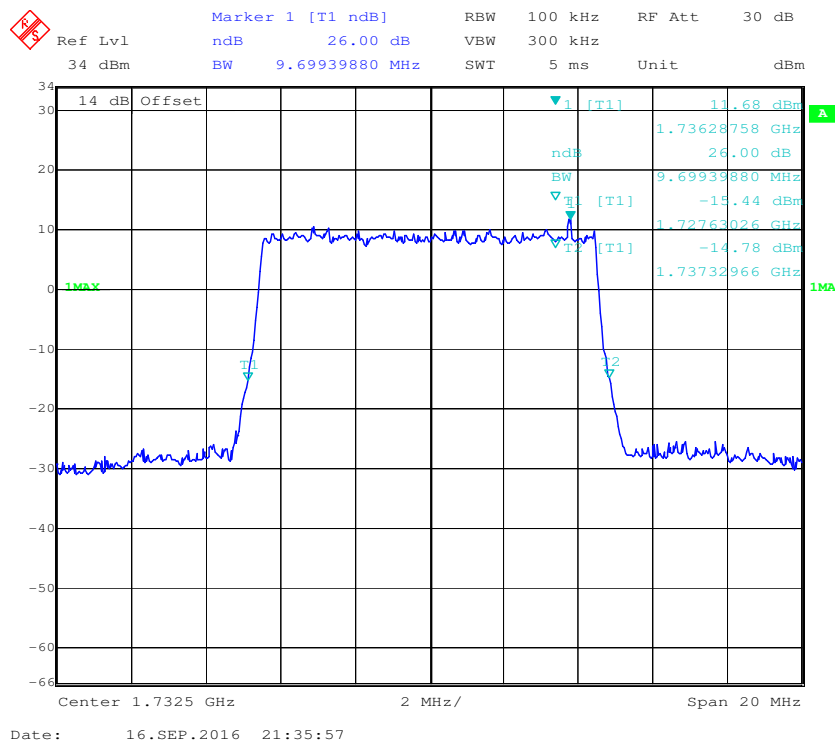
QPSK (10.0 MHz) - 26 dB Bandwidth, Middle channel**16-QAM (10.0 MHz) - 26 dB Bandwidth, Middle channel**

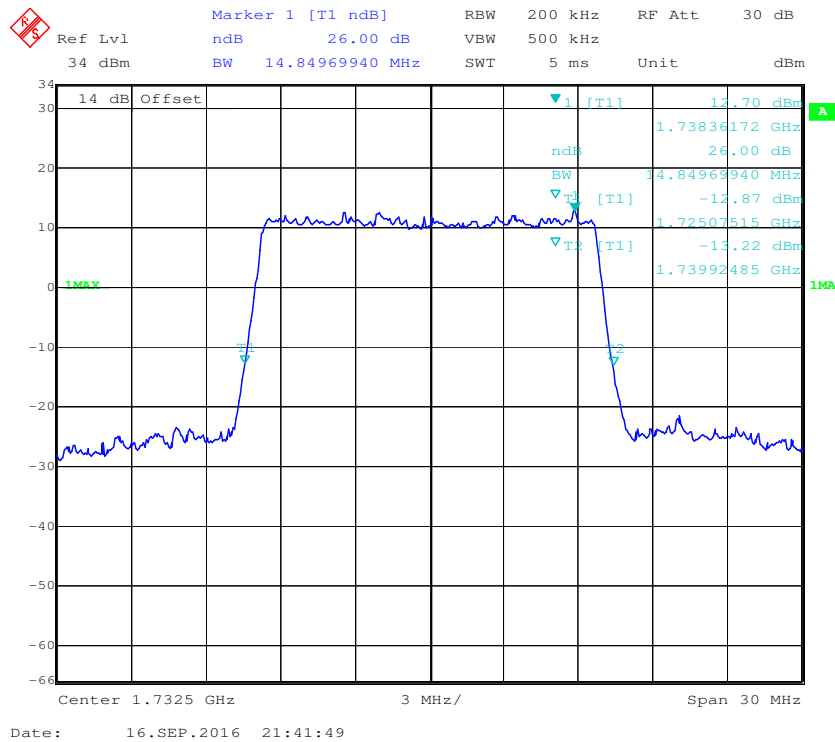
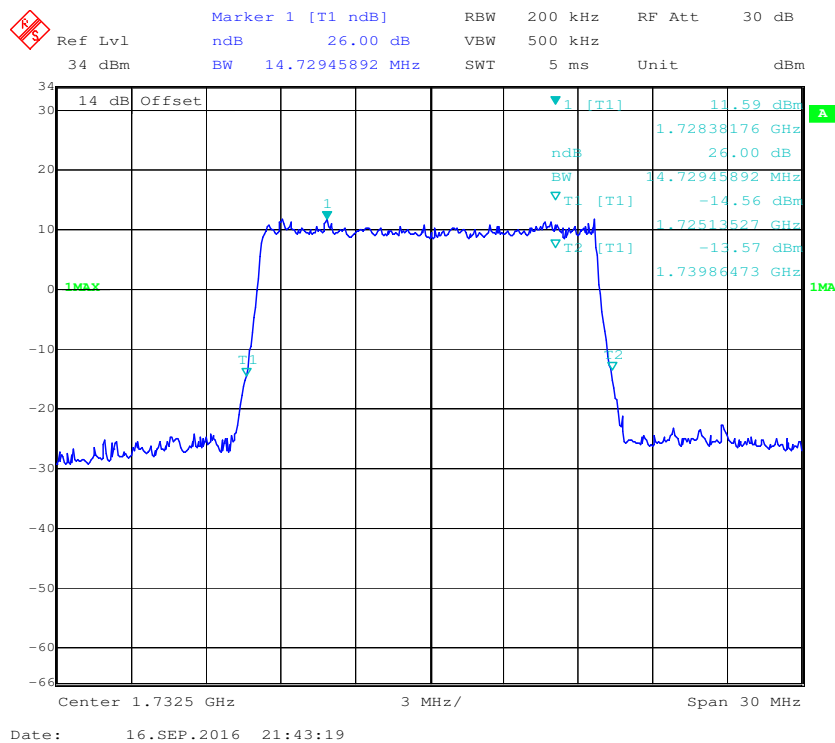
QPSK (15.0 MHz) - 26 dB Bandwidth, Middle channel**16-QAM (15.0 MHz) - 26 dB Bandwidth, Middle channel**

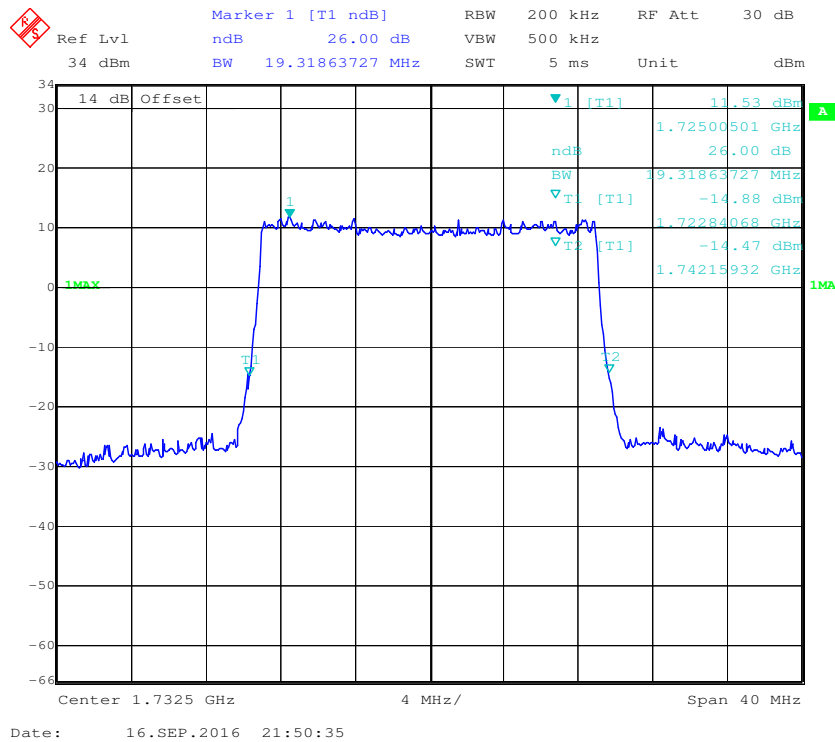
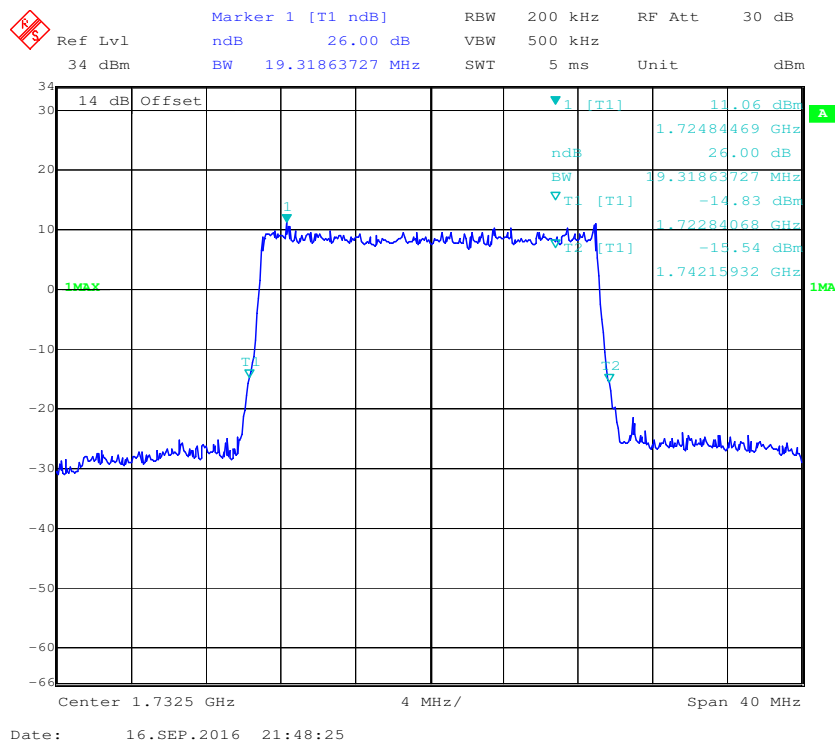
QPSK (20.0 MHz) - 26 dB Bandwidth, Middle channel**16-QAM (20.0 MHz) - 26 dB Bandwidth, Middle channel**

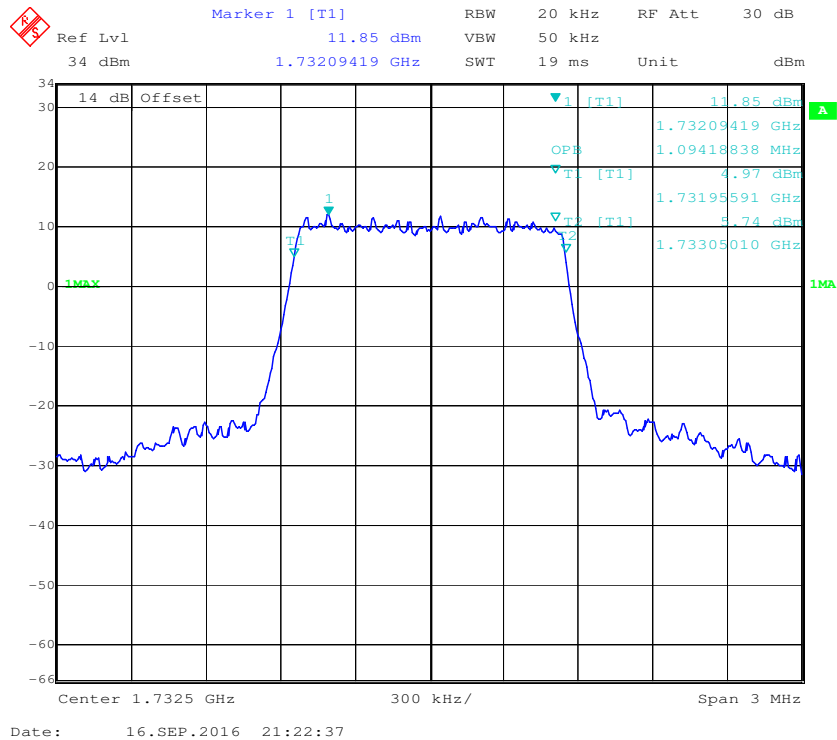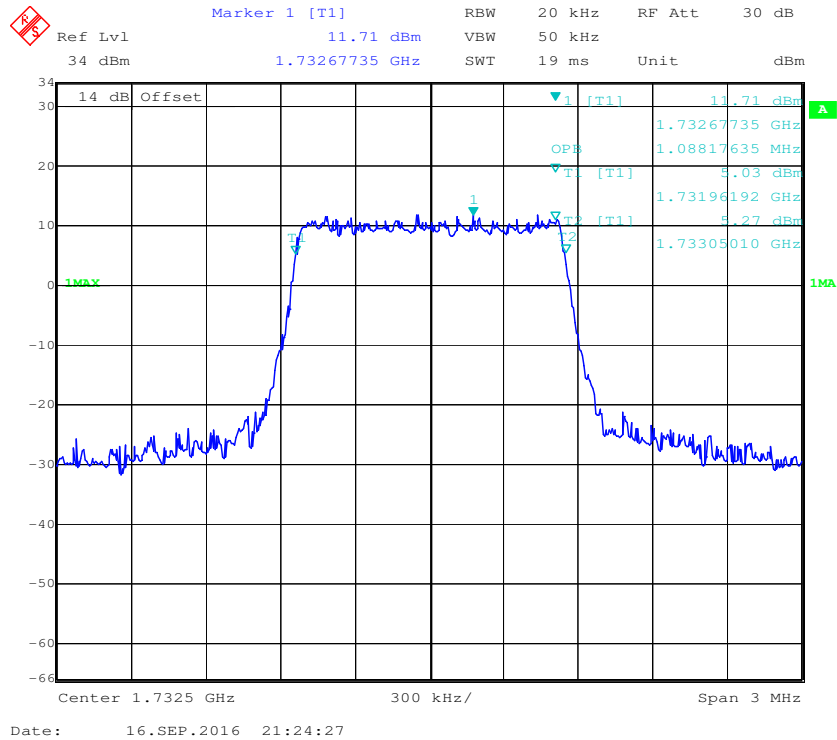

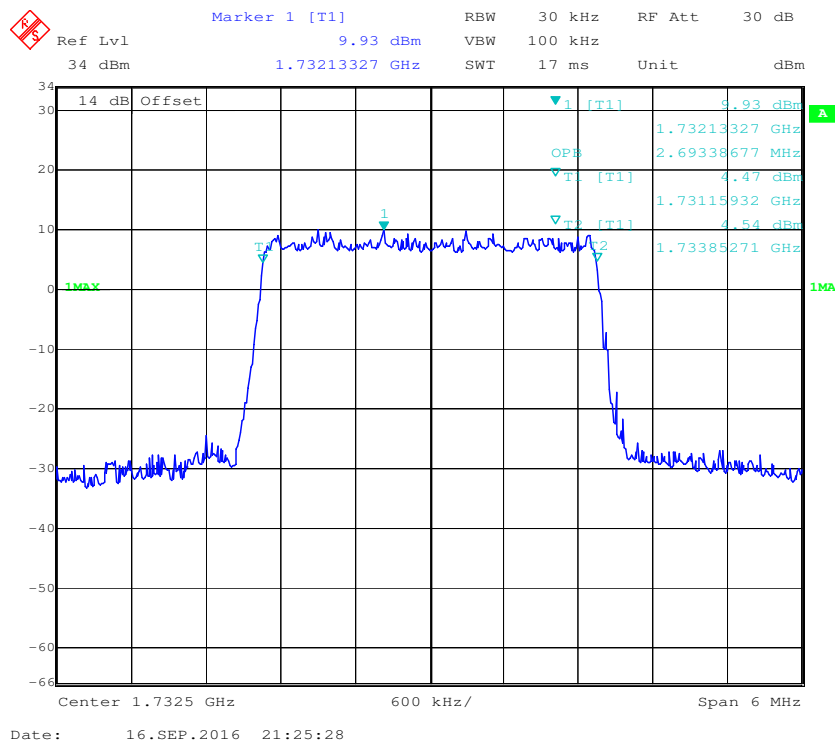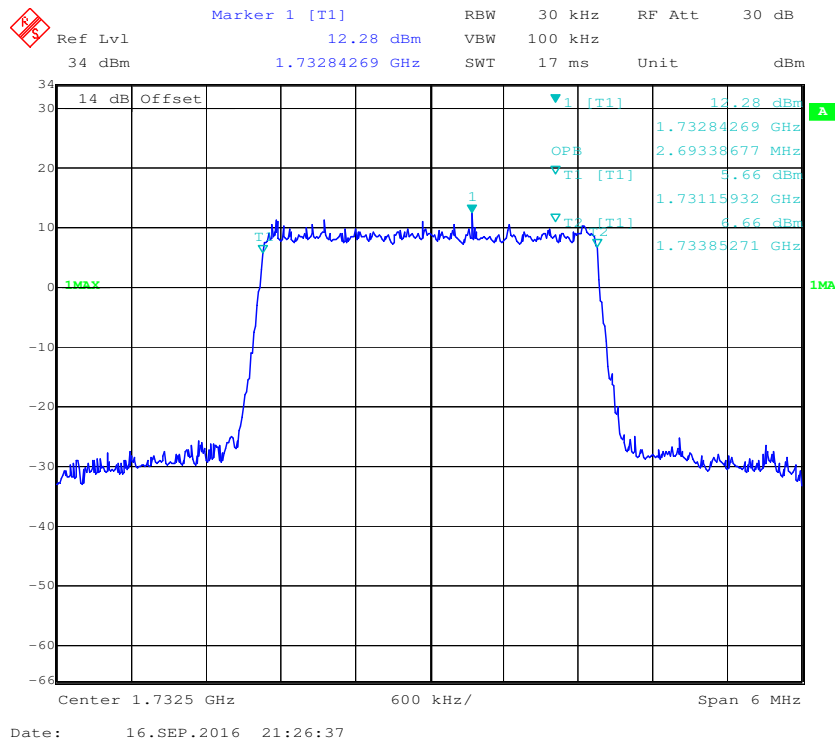

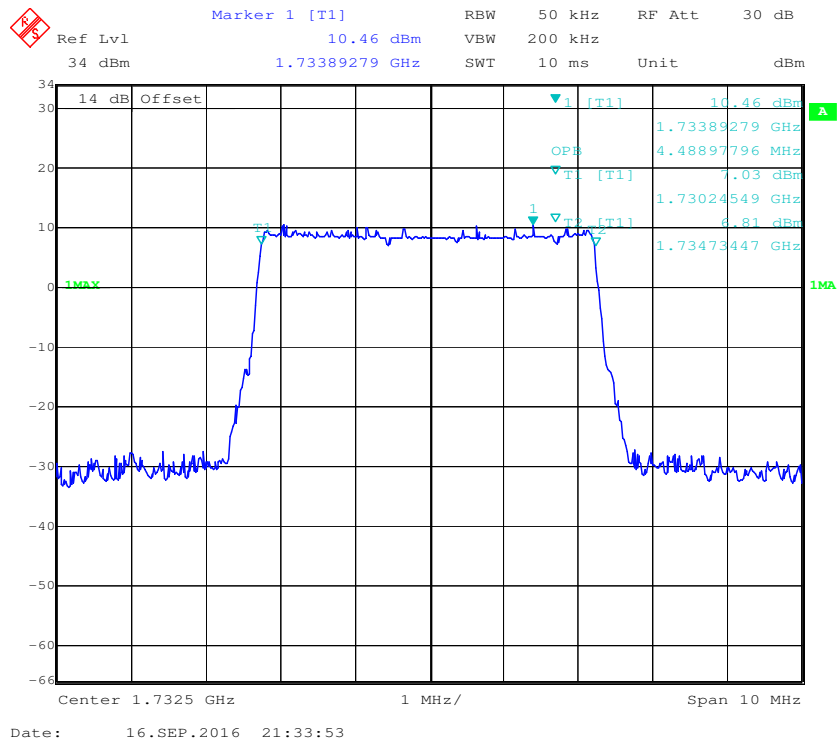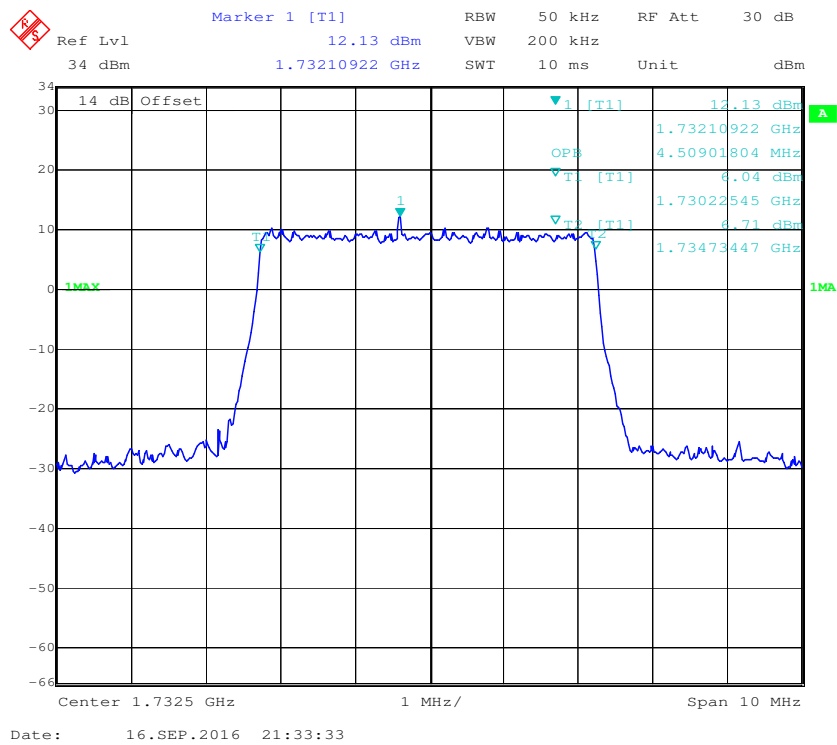QPSK (5.0 MHz) - 99% Occupied Bandwidth, Middle channel**16-QAM (5.0 MHz) - 99% Occupied Bandwidth, Middle channel**

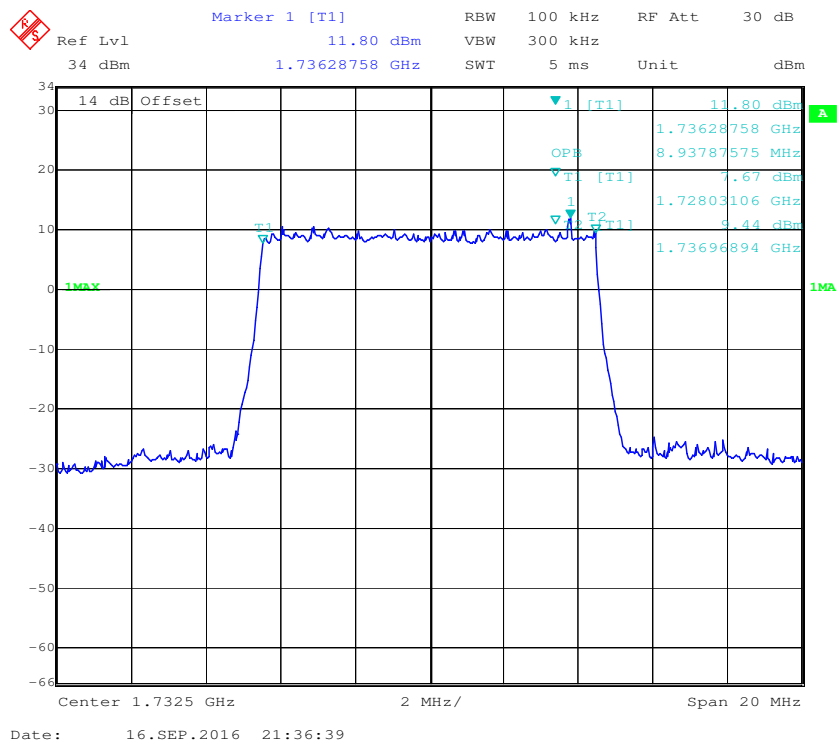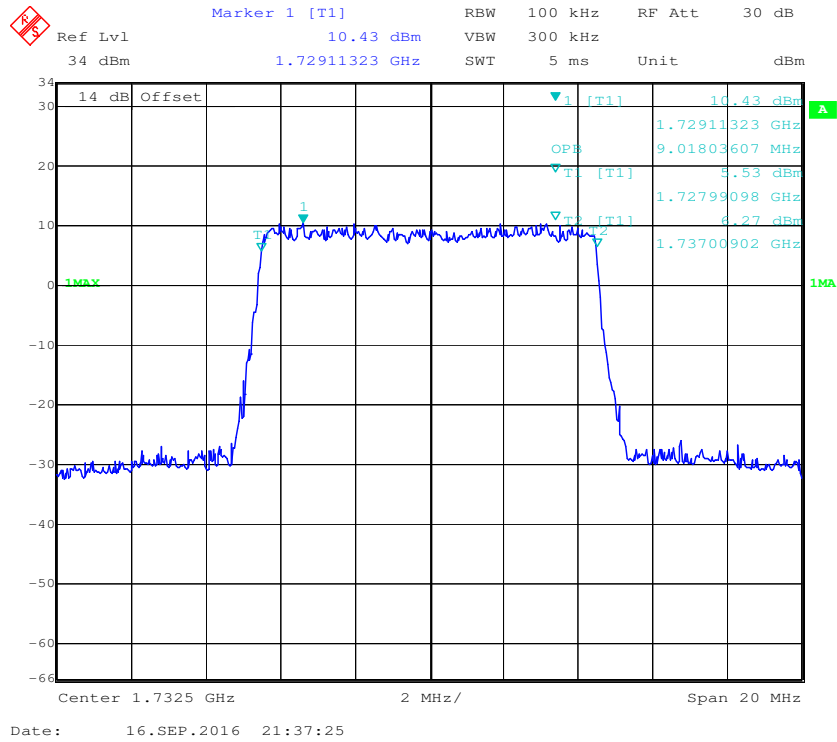

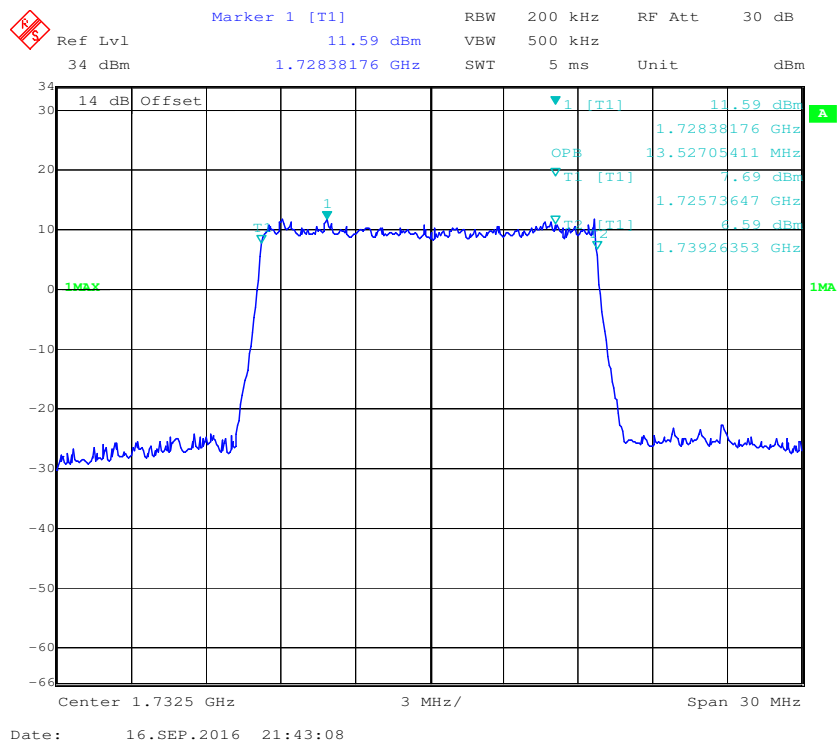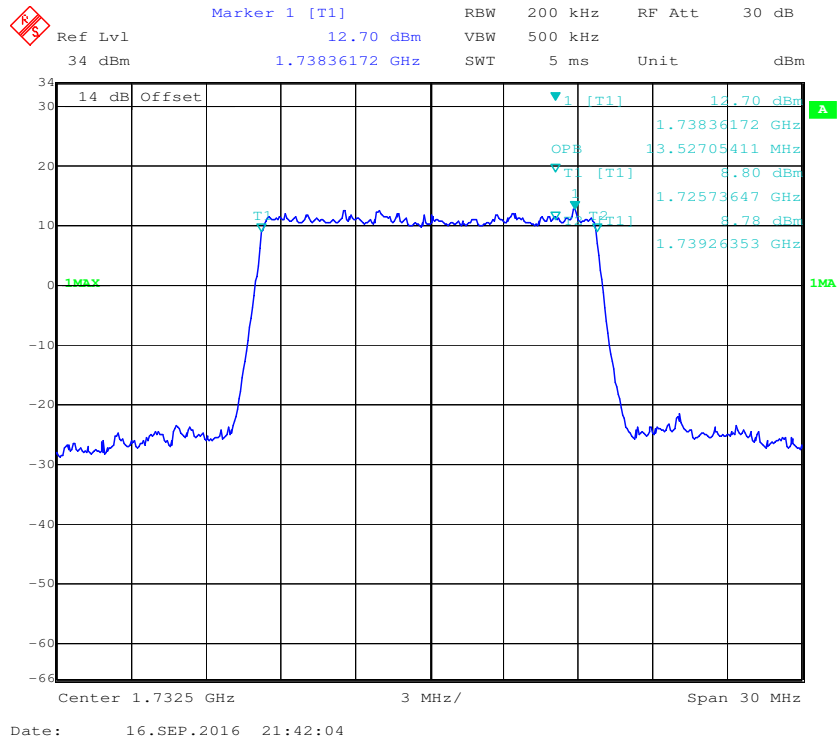

FCC §2.1051, §22.917(a) & §24.238(a) & §27.53 - SPURIOUS EMISSIONS AT ANTENNA TERMINALS


Applicable Standards

FCC §2.1051, §22.917(a) and §24.238(a) and §27.53(h)(m).

The spectrum was to be investigated to the tenth harmonics of the highest fundamental frequency as specified in § 2.1051.

Test Procedure

The RF output of the transceiver was connected to a spectrum analyzer and simulator through appropriate attenuation. The resolution bandwidth of the spectrum analyzer was set at 100 kHz for below 1 GHz and 1 MHz for above 1 GHz. Sufficient scans were taken to show any out of band emissions up to 10th harmonic.

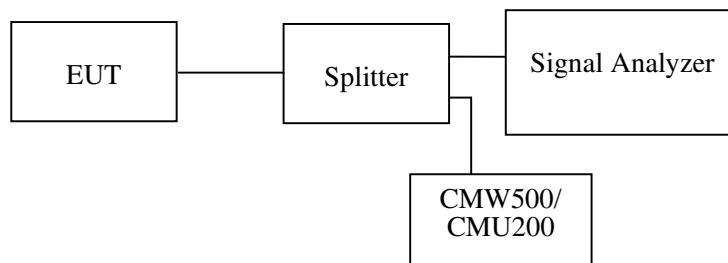

Test Data

Environmental Conditions


Temperature:	25 °C
Relative Humidity:	55 %
ATM Pressure:	101.0 kPa

The testing was performed by Peter Jiang on 2016-09-16.

Please refer to the following plots.


Cellular Band (Part 22H)

30 MHz – 1 GHz (GSM Mode)

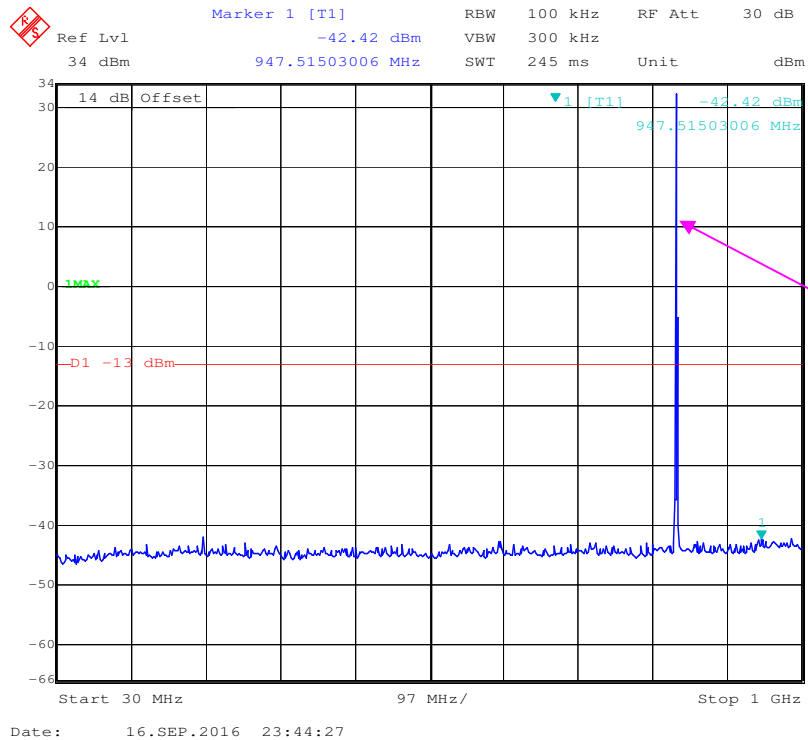


Fundamental test


1 GHz – 20 GHz (GSM Mode)

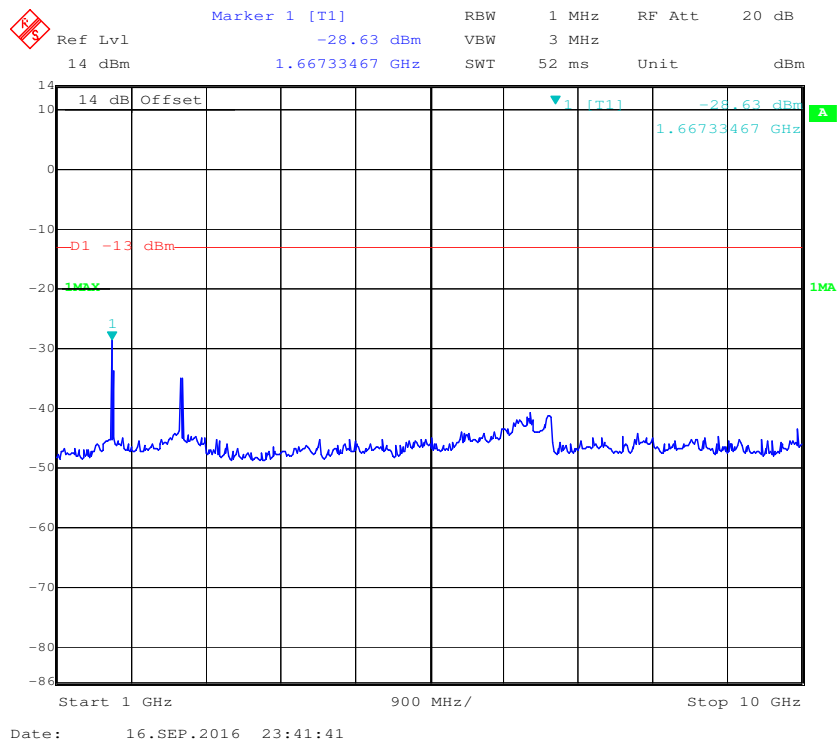

30 MHz – 1 GHz (WCDMA Mode)

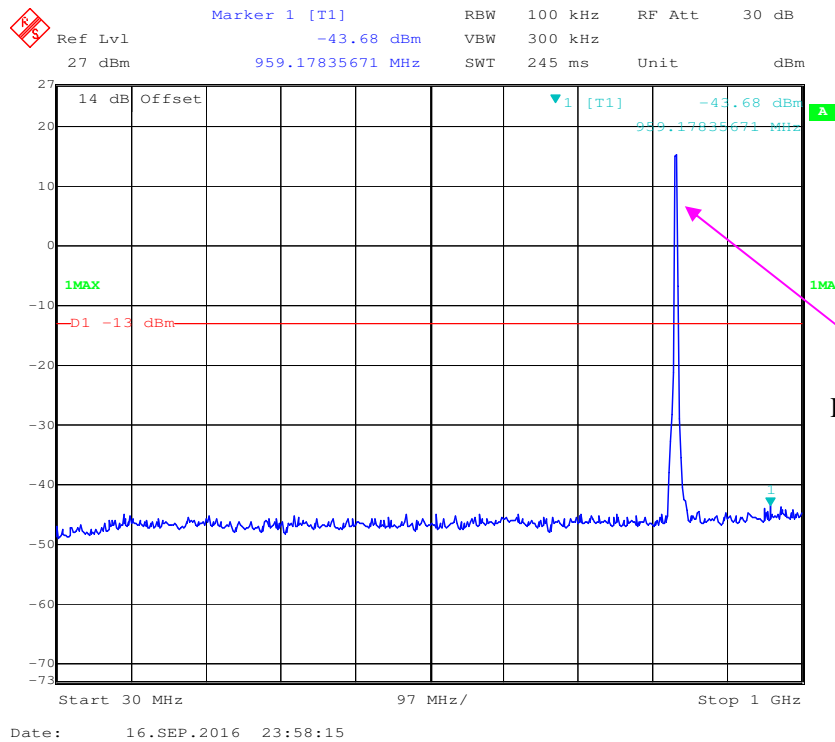


1 GHz – 10 GHz (WCDMA Mode)

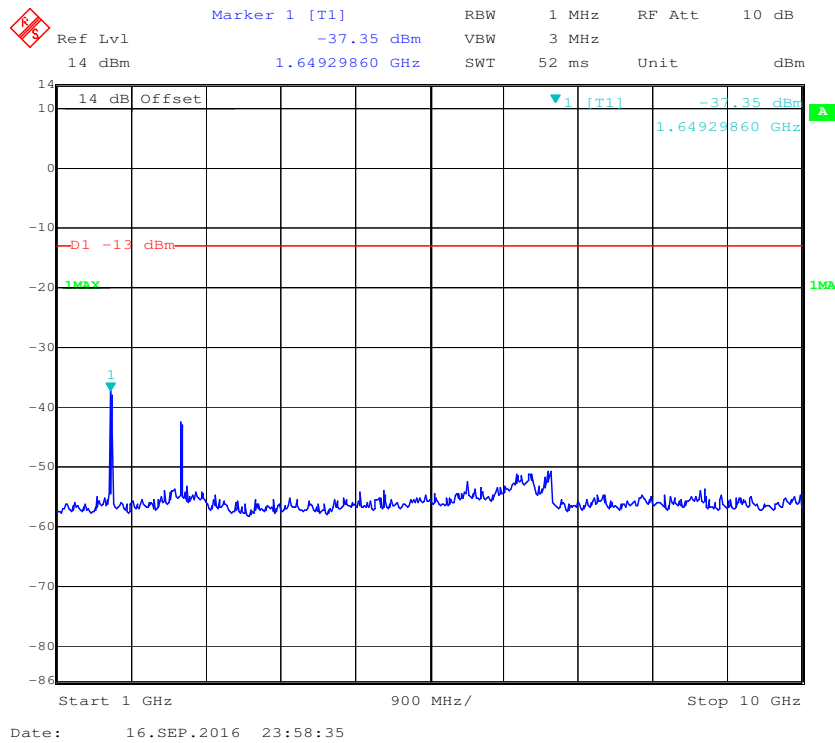


PCS Band (Part 24E)


30 MHz – 1 GHz (GSM Mode)

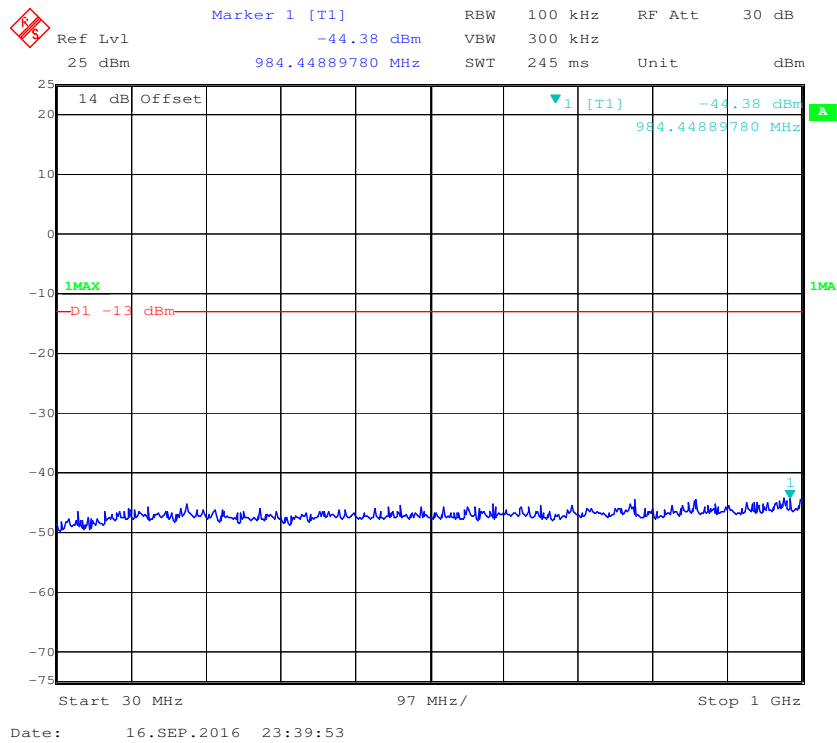


1 GHz – 2 GHz (GSM Mode)

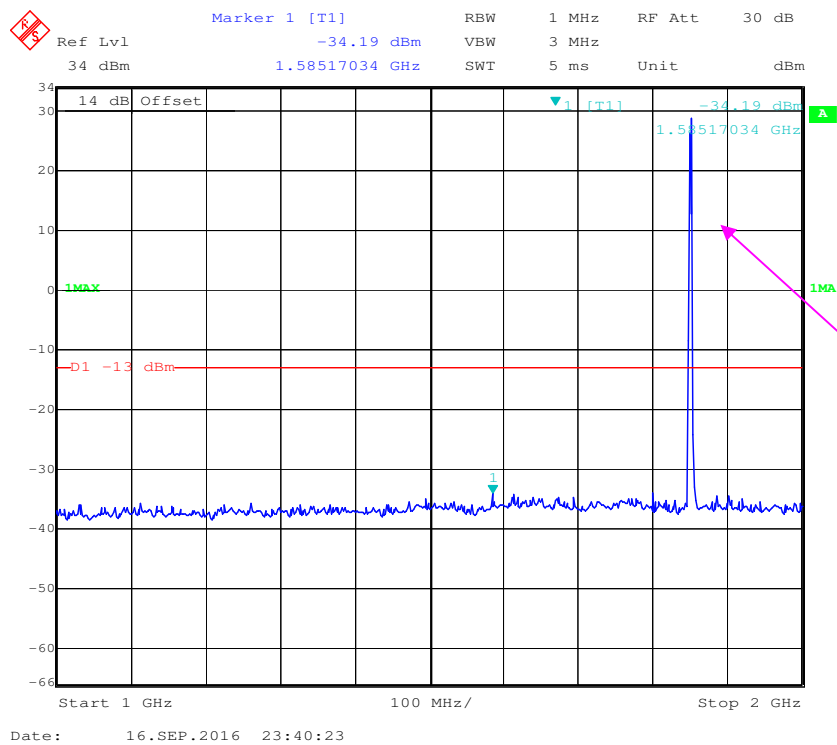


2 GHz – 20 GHz (GSM Mode)

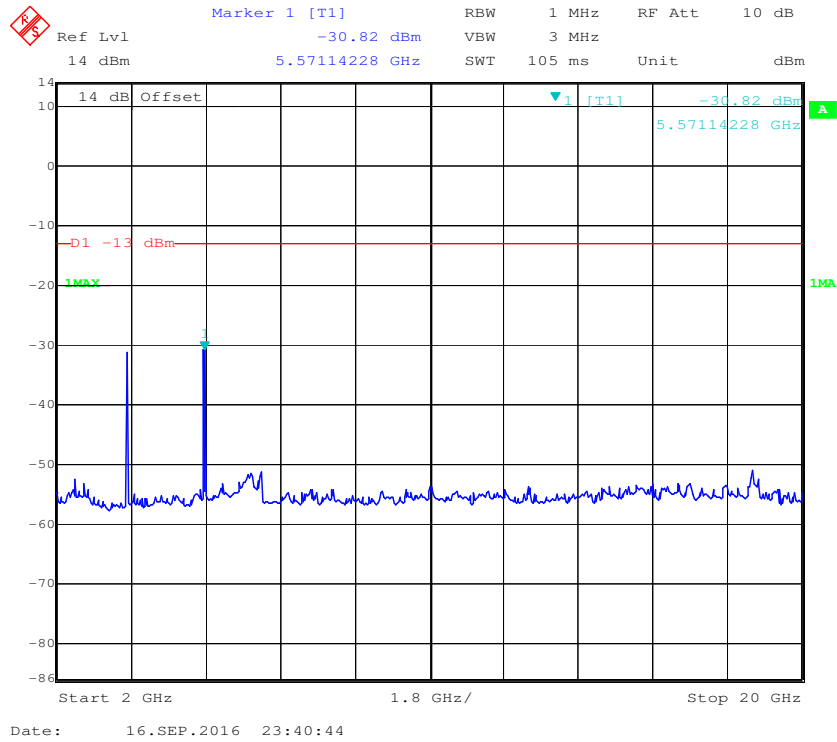


30 MHz – 1 GHz (WCDMA Mode)

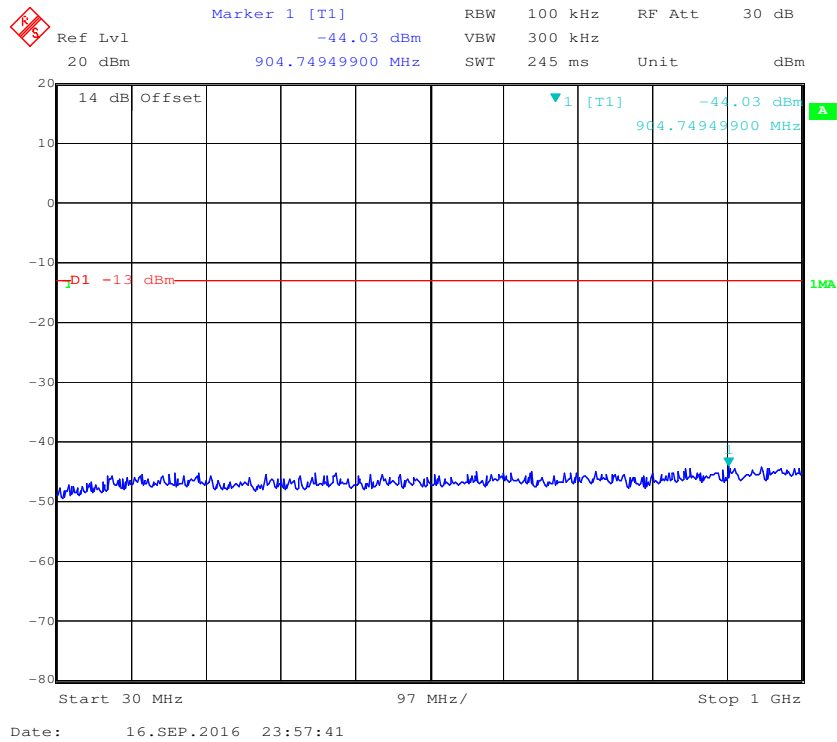

1 GHz – 2 GHz (WCDMA Mode)

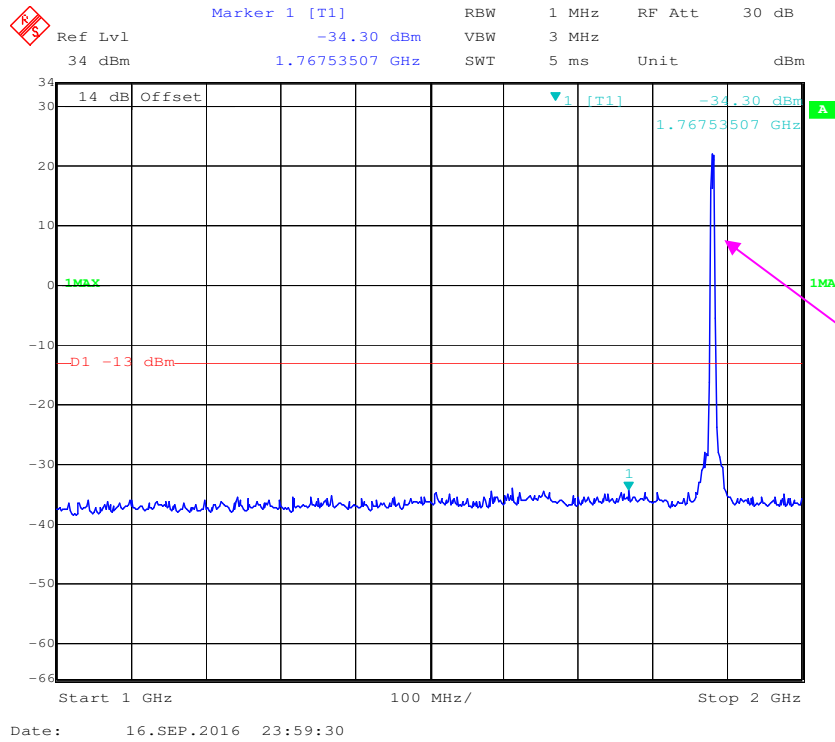


2 GHz – 20 GHz (WCDMA Mode)

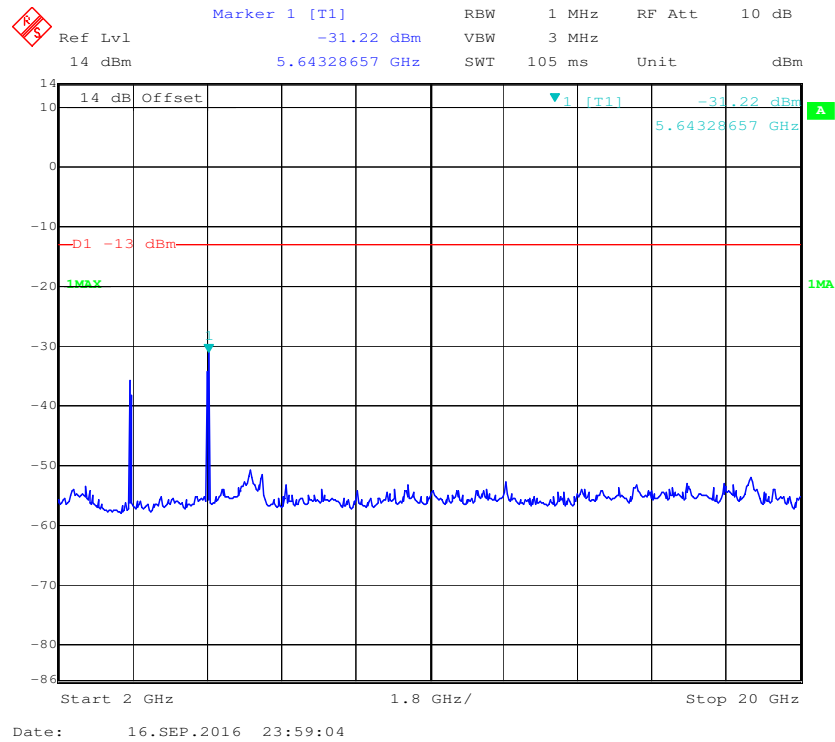




AWS Band (Part 27)

30 MHz – 1 GHz (WCDMA Mode)

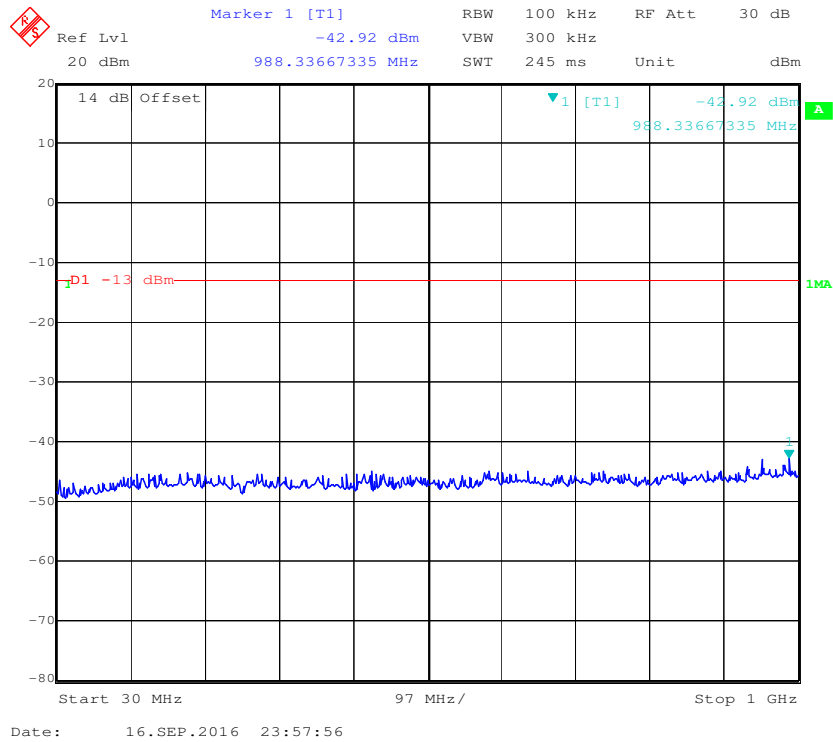


1 GHz – 2 GHz (WCDMA Mode)

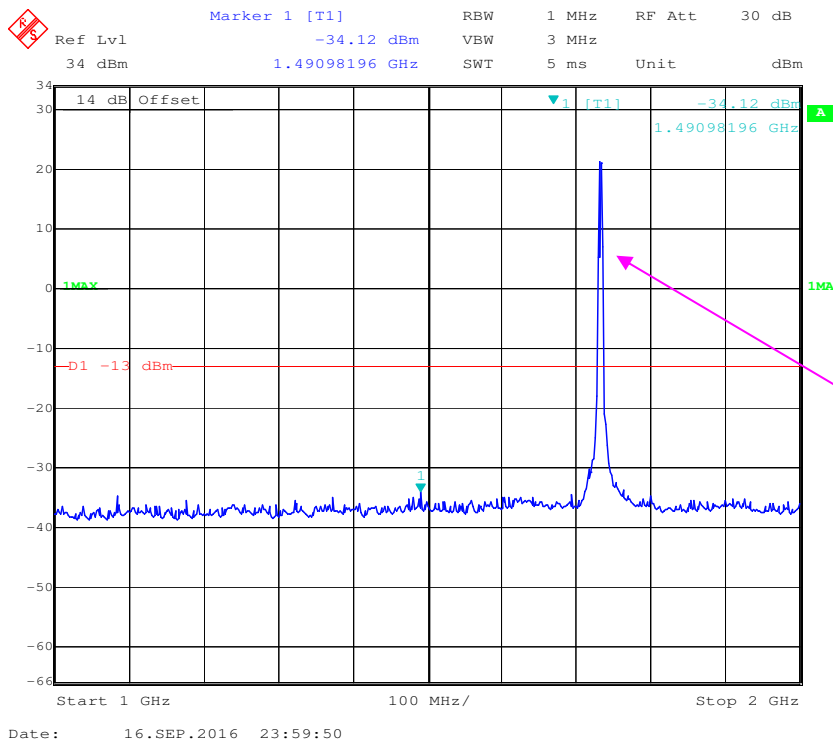

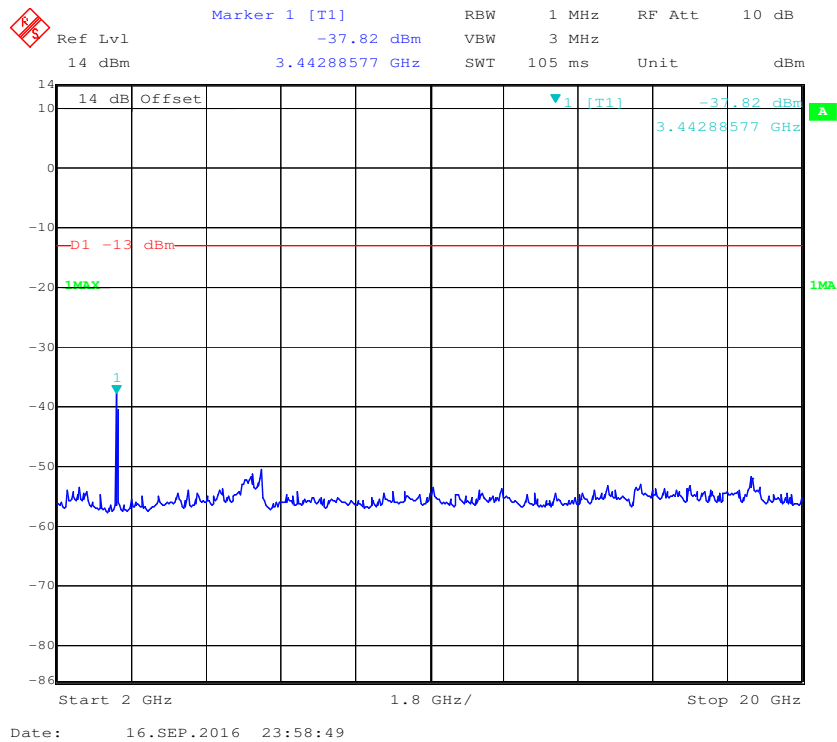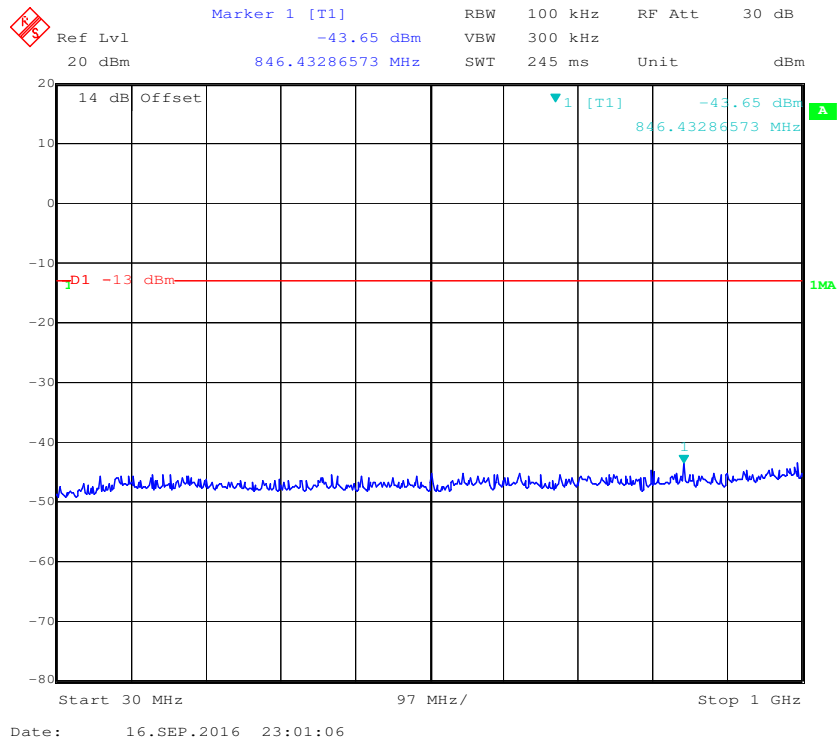
2 GHz – 20 GHz (WCDMA Mode)**LTE Band 2:****30 MHz - 1 GHz (1.4 MHz, Middle Channel)**

1 GHz – 2 GHz (1.4 MHz, Middle Channel)

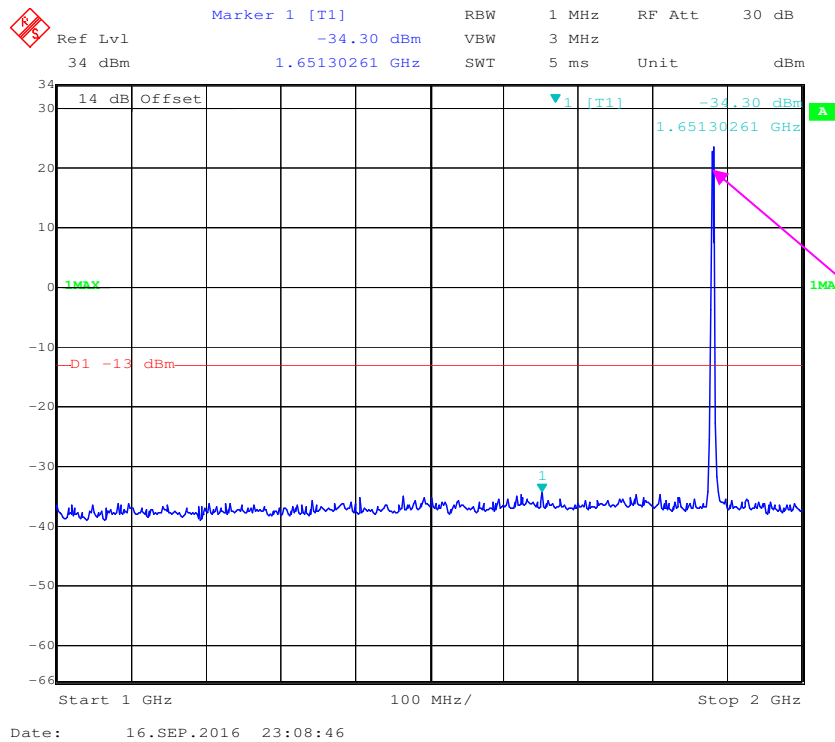


Fundamental test


2 GHz – 20 GHz (1.4 MHz, Middle Channel)

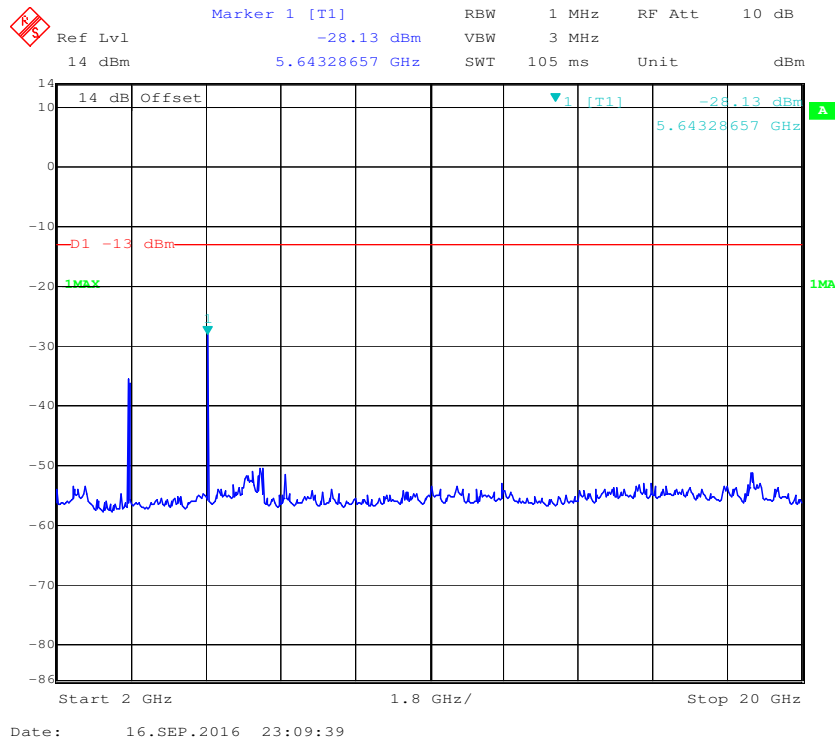


30 MHz - 1 GHz (3.0 MHz, Middle Channel)

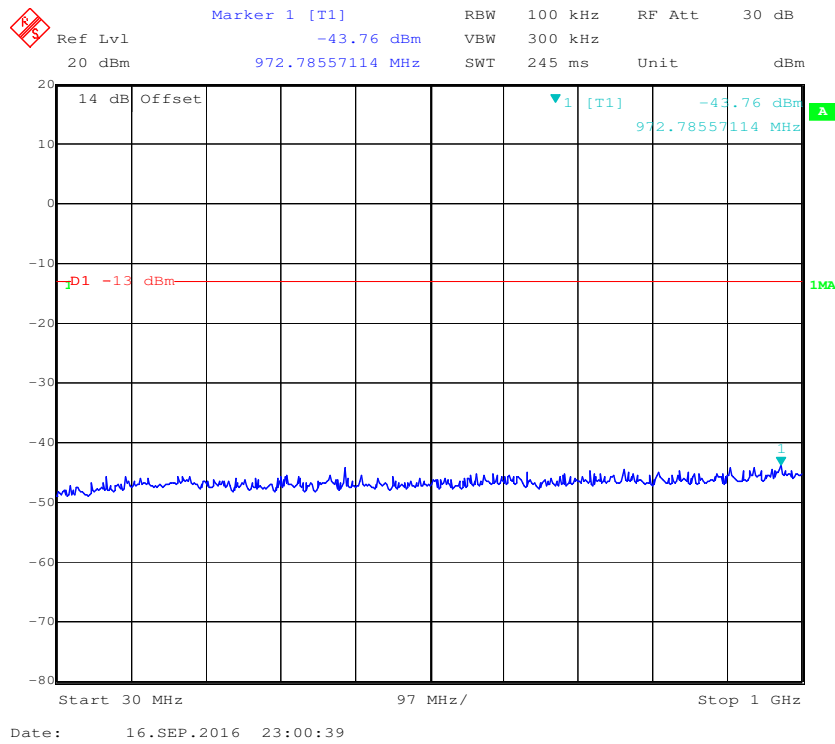


1 GHz - 2 GHz (3.0 MHz, Middle Channel)

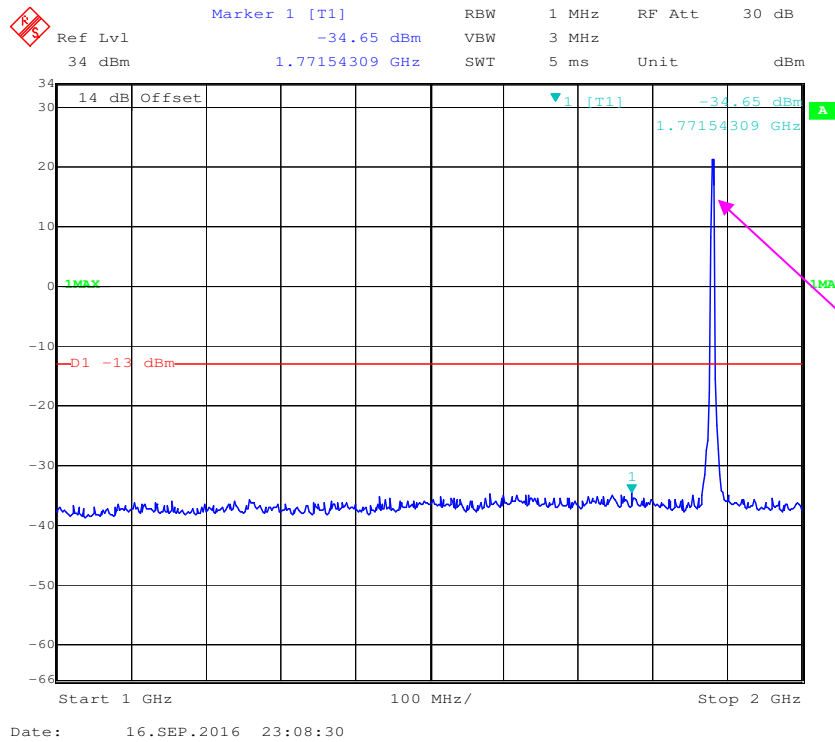


2 GHz – 20 GHz (3.0 MHz, Middle Channel)

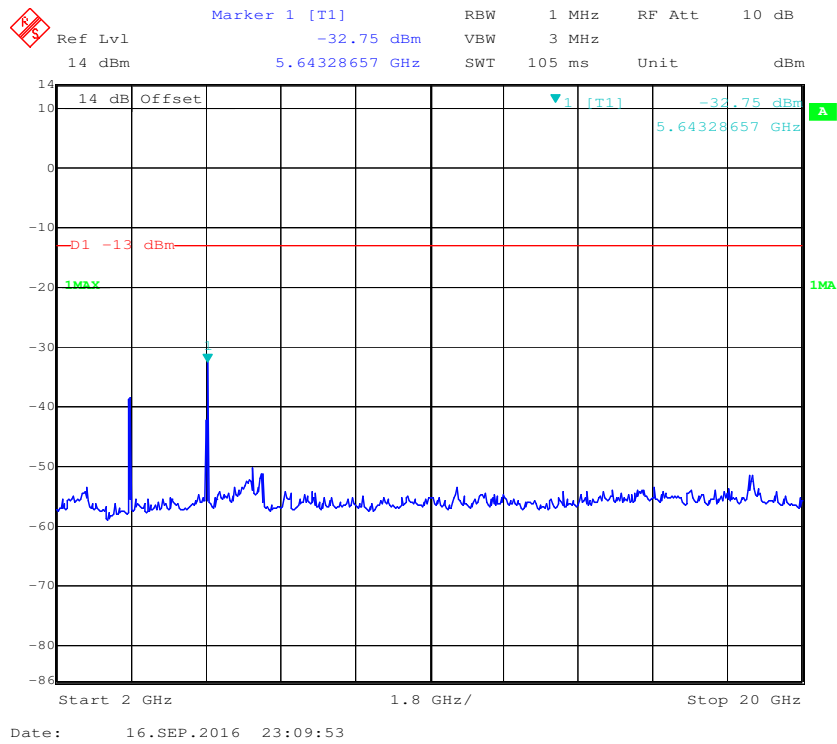


30 MHz - 1 GHz (5.0 MHz, Middle Channel)

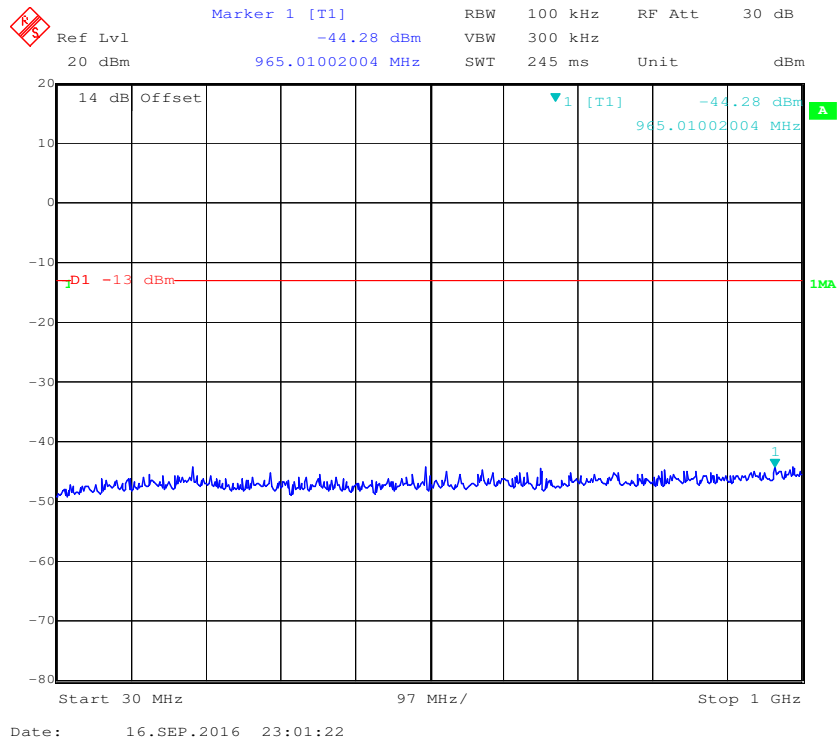

1 GHz – 2 GHz (5.0 MHz, Middle Channel)

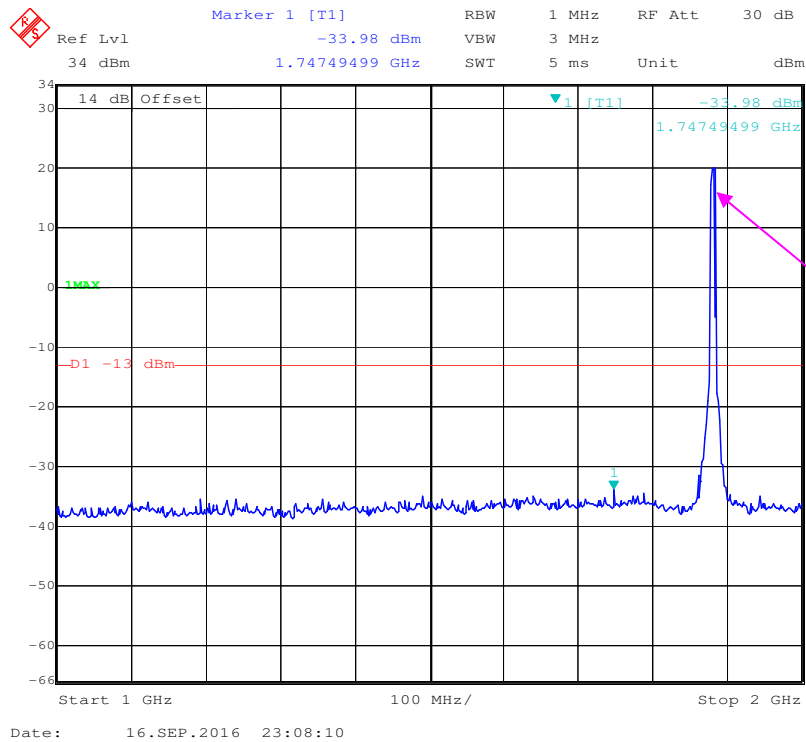

2 GHz – 20 GHz (5.0 MHz, Middle Channel)

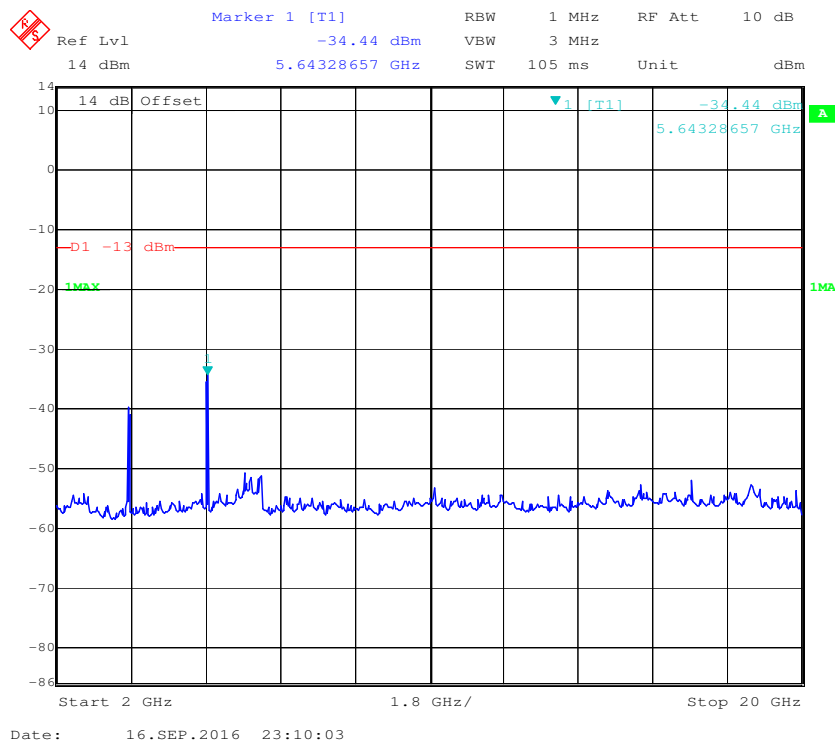

Ref Lvl 20 dBm Marker 1 [T1] -43.99 dBm RBW 100 kHz RF Att 30 dB

949.45891784 MHz VBW 300 kHz Unit dBm

SWT 245 ms

14 dB Offset

▼1 [T1] -43.99 dBm

949.45891784 MHz

D1 -13 dBm

Start 30 MHz 97 MHz/ Stop 1 GHz

Date: 16.SEP.2016 23:01:36

Ref Lvl 34 dBm

Marker 1 [T1] -34.55 dBm

RBW 1 MHz RF Att 30 dB

VBW 3 MHz

SWT 5 ms Unit dBm

14 dB Offset

1.73747495 GHz

1.73747495 GHz

-34.55 dBm

-13 dBm

Start 1 GHz


100 MHz/

Stop 2 GHz


Date: 16.SEP.2016 23:07:54

Fundamental test


2 GHz – 20 GHz (10.0 MHz, Middle Channel)

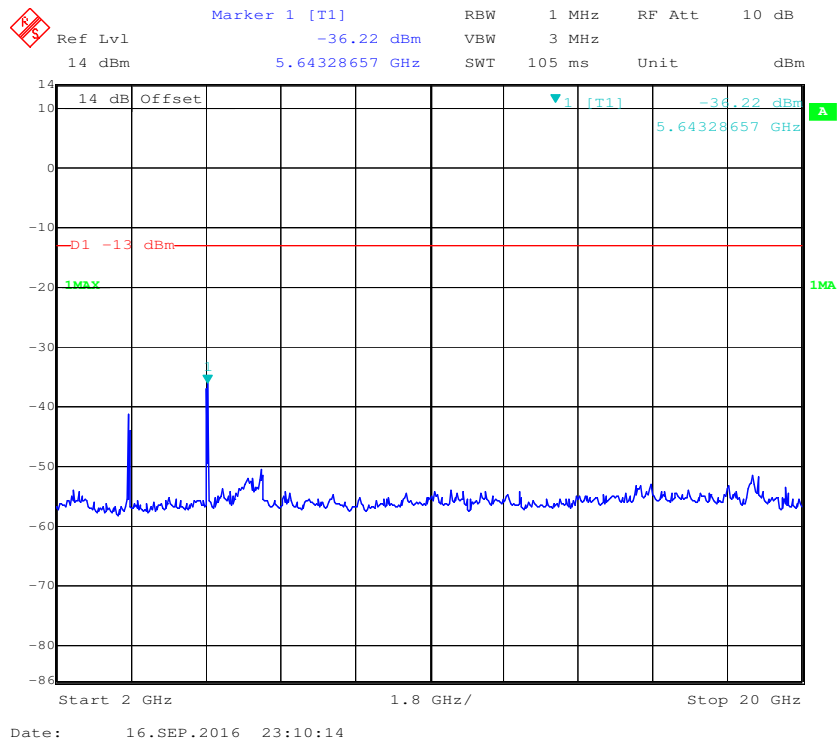


30 MHz - 1 GHz (15.0 MHz, Middle Channel)

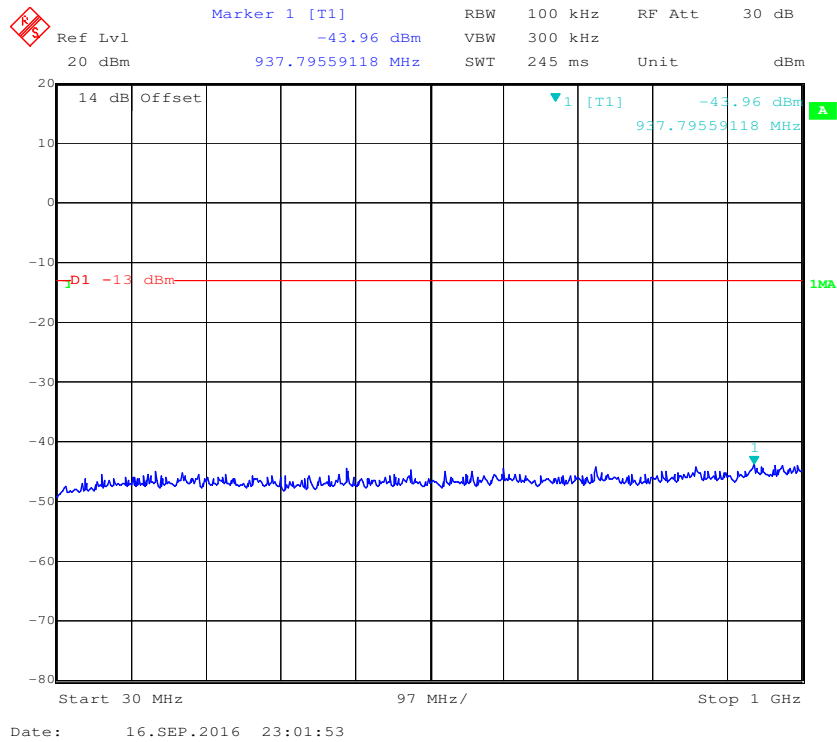


1 GHz –2 GHz (15.0 MHz, Middle Channel)

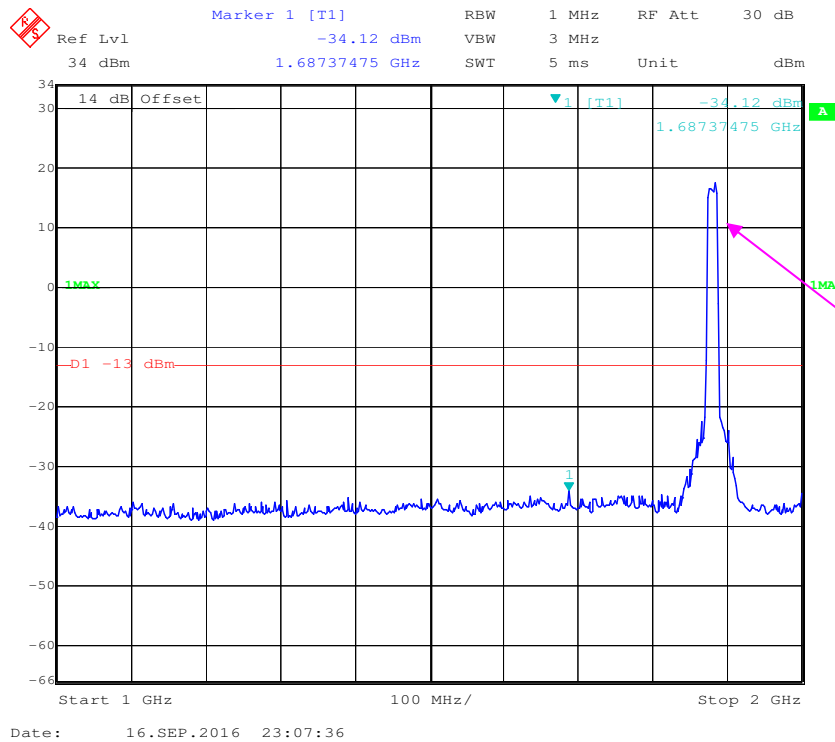


2 GHz –20 GHz (15.0 MHz, Middle Channel)

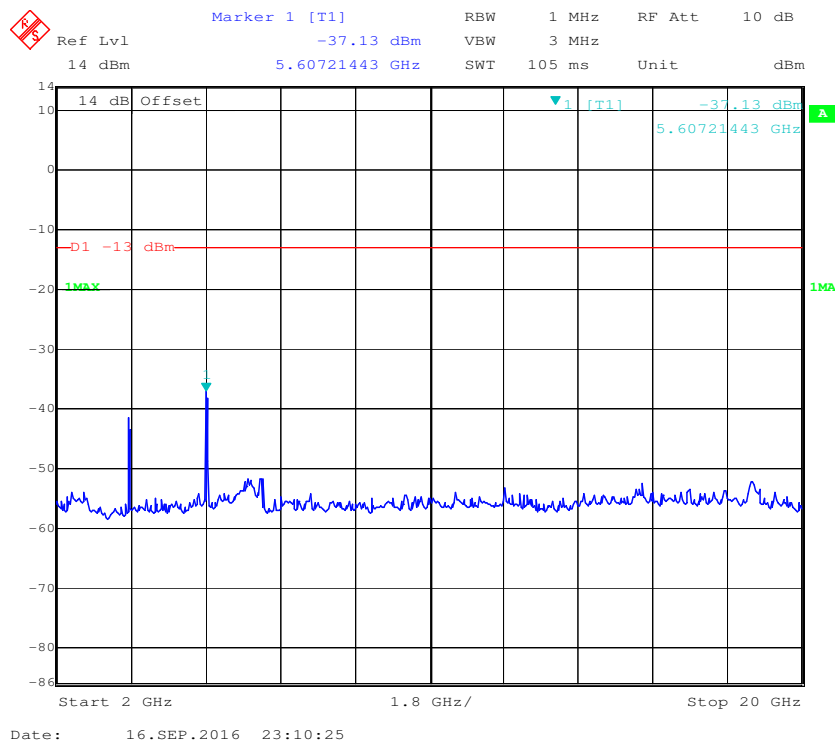


30 MHz - 1 GHz (20.0 MHz, Middle Channel)

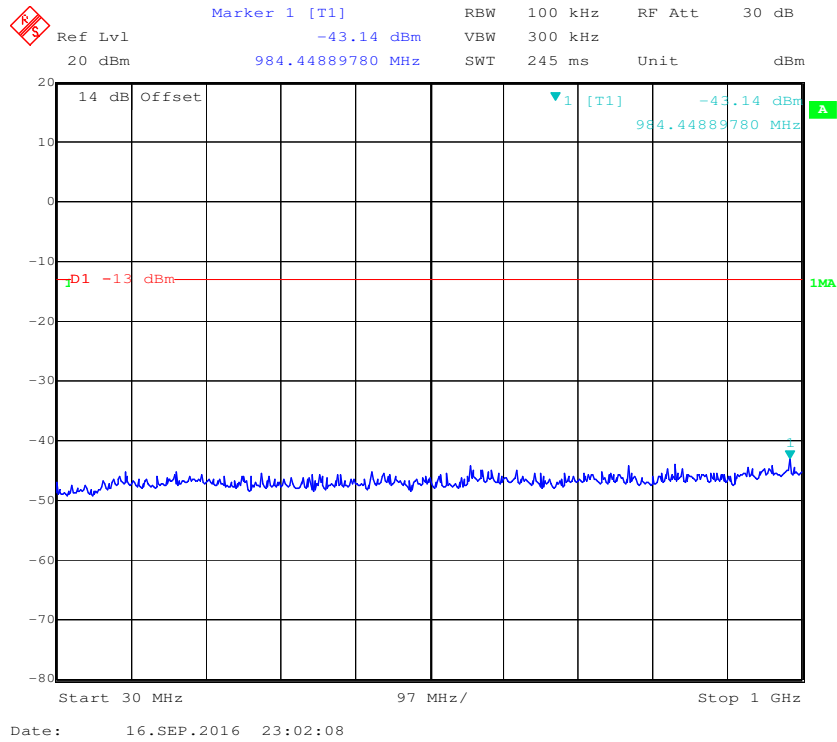


1 GHz - 2 GHz (20.0 MHz, Middle Channel)

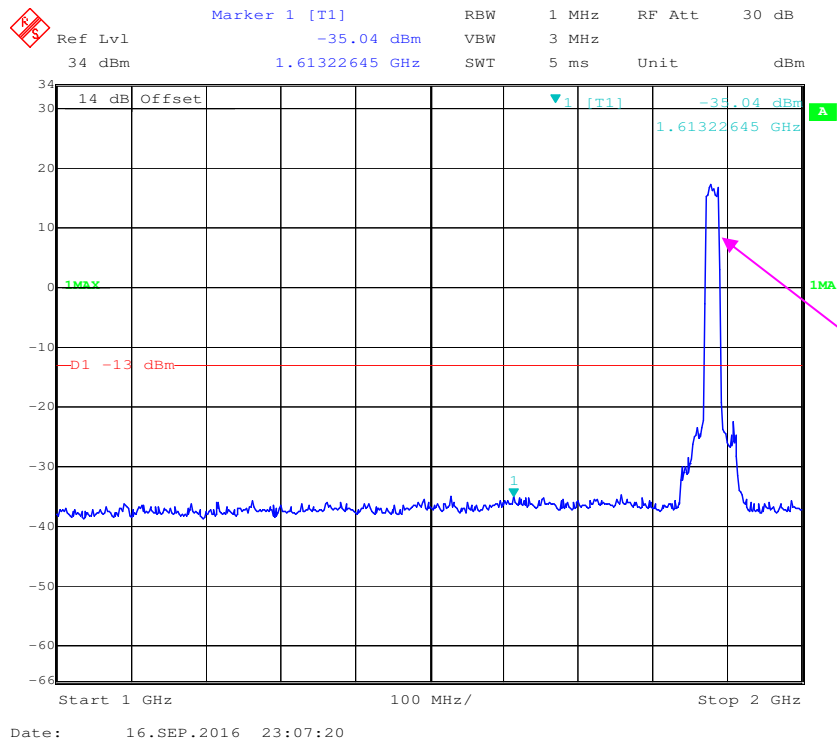

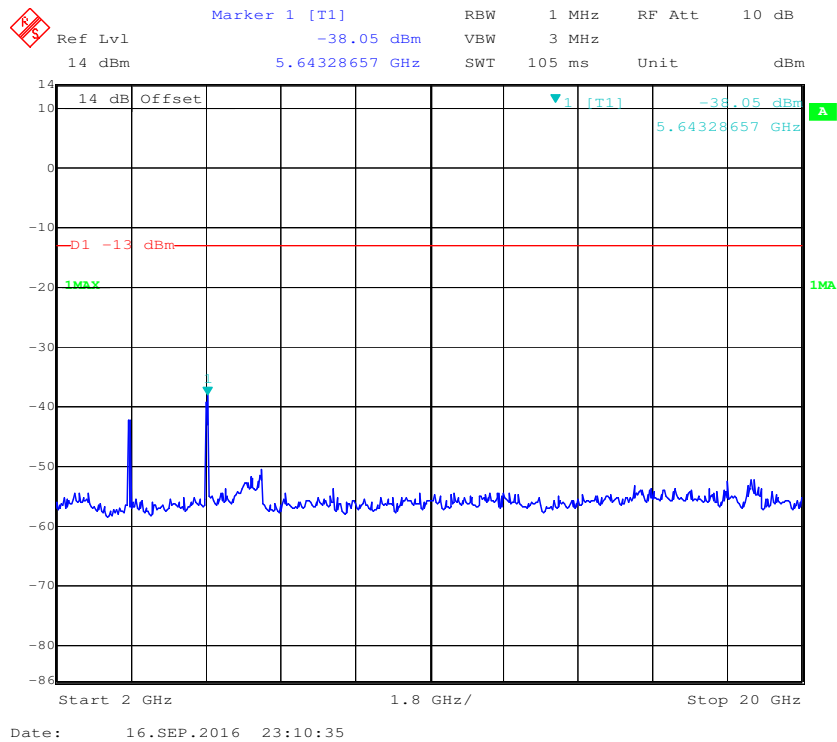


LTE Band 4:

30 MHz - 1 GHz (1.4 MHz, Middle Channel)

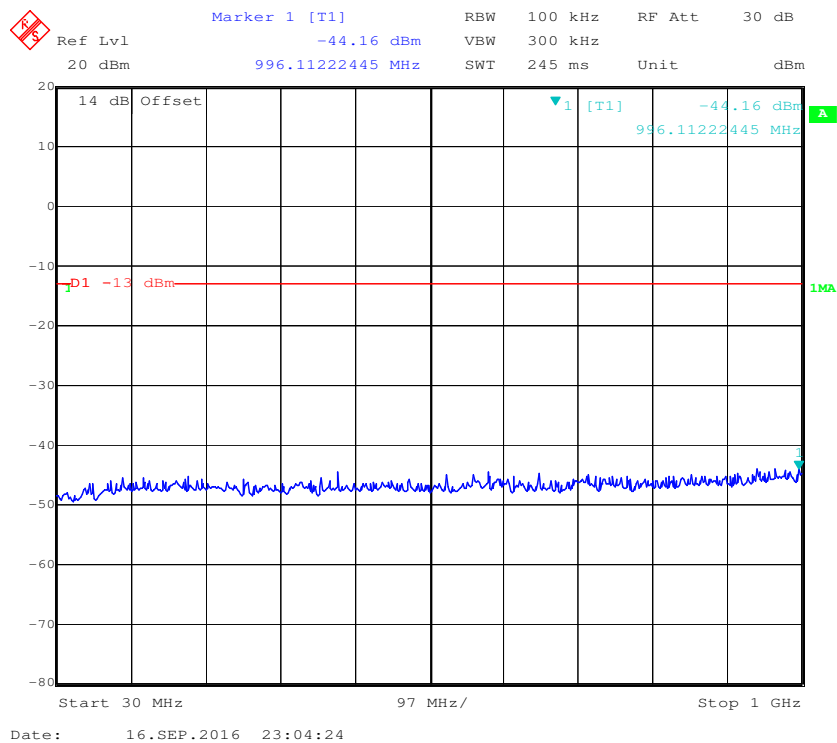


1 GHz – 2 GHz (1.4 MHz, Middle Channel)

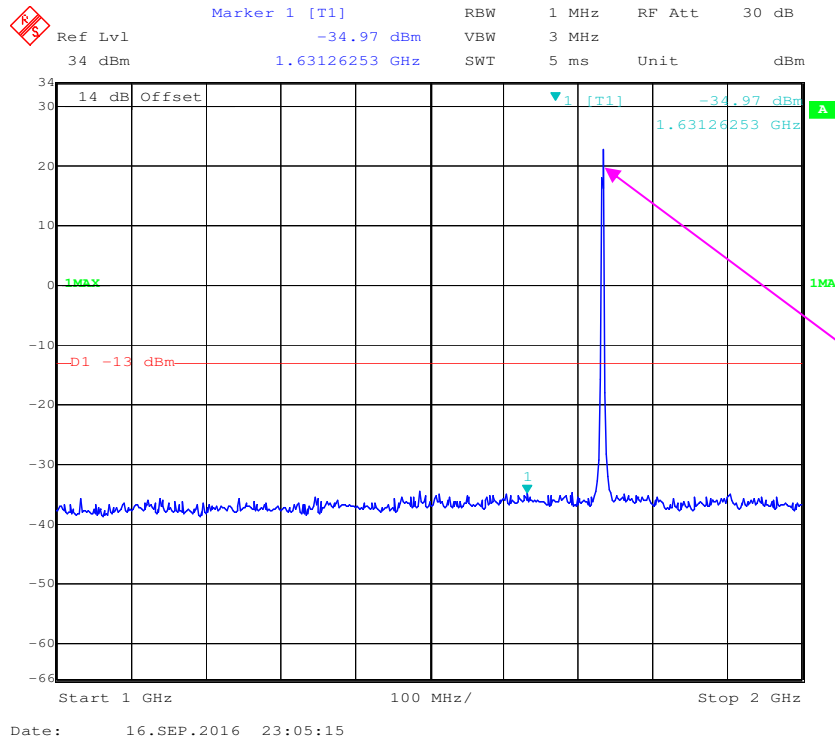


Fundamental test


2 GHz – 20 GHz (1.4 MHz, Middle Channel)


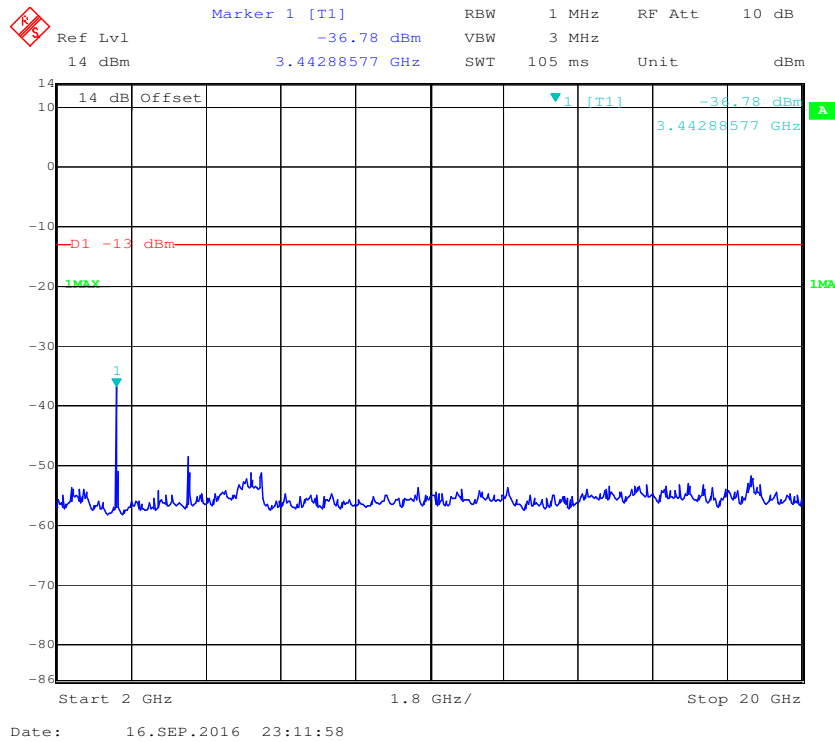


30 MHz - 1 GHz (3.0 MHz, Middle Channel)

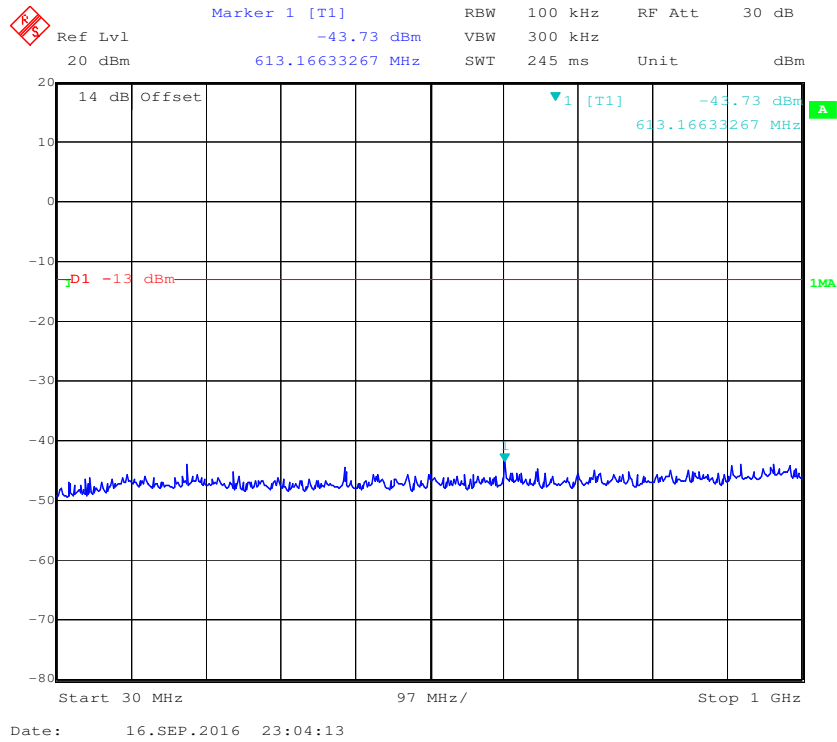


1 GHz - 2 GHz (3.0 MHz, Middle Channel)

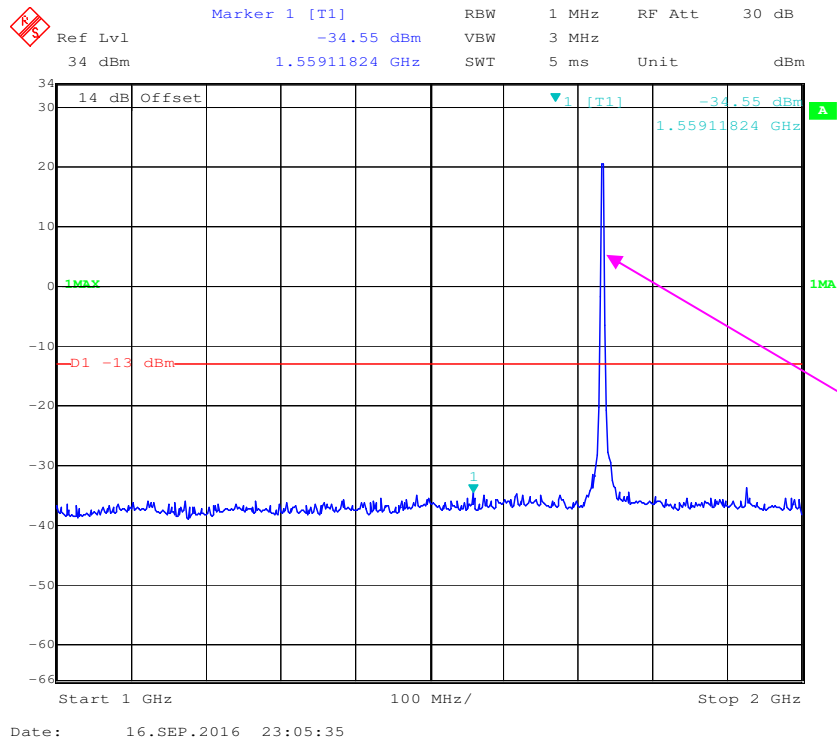


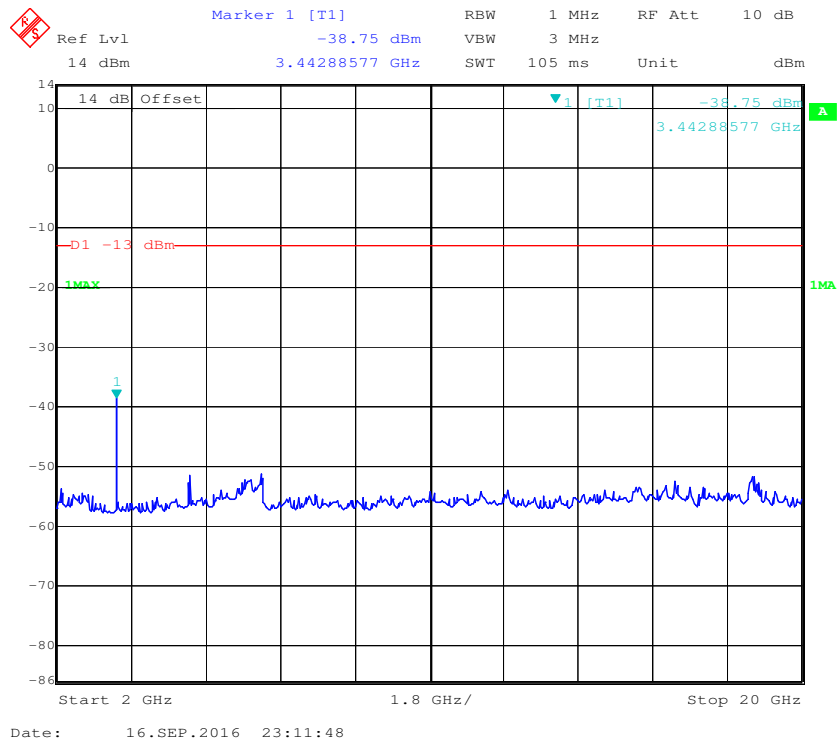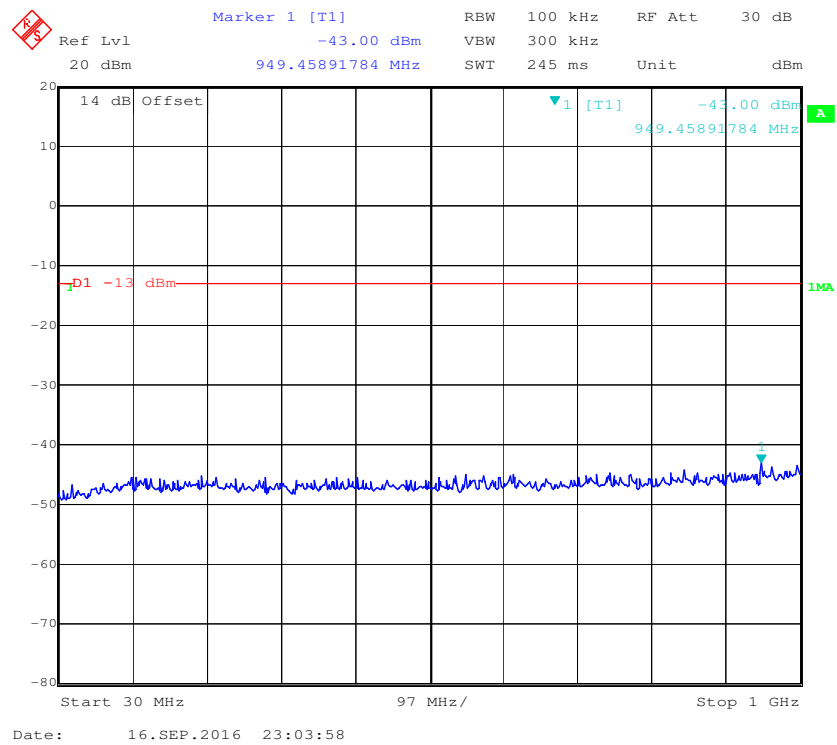2 GHz – 20 GHz (3.0 MHz, Middle Channel)**30 MHz - 1 GHz (5.0 MHz, Middle Channel)**


1 GHz – 2 GHz (5.0 MHz, Middle Channel)

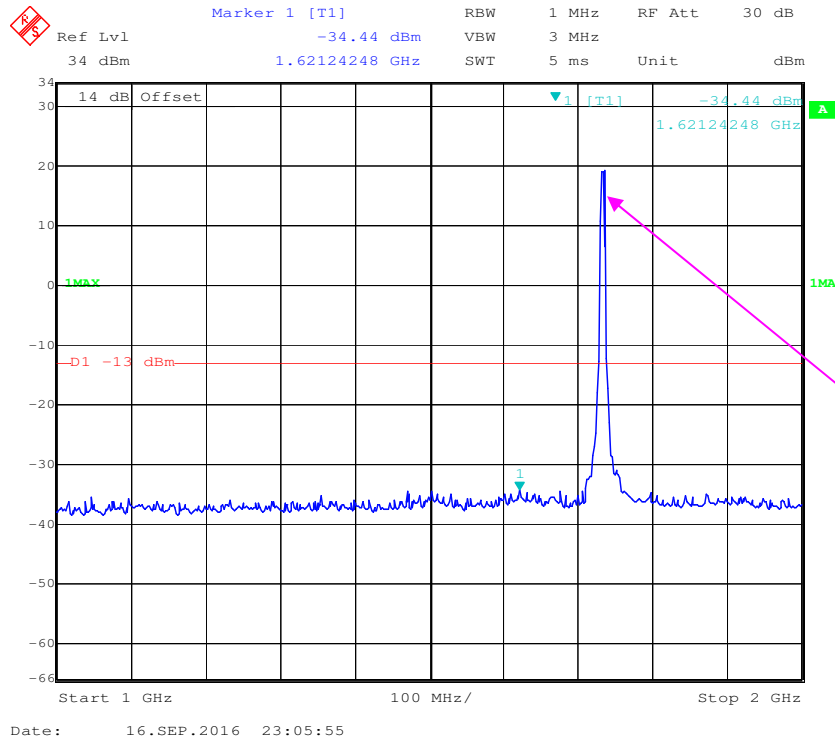


2 GHz – 20 GHz (5.0 MHz, Middle Channel)

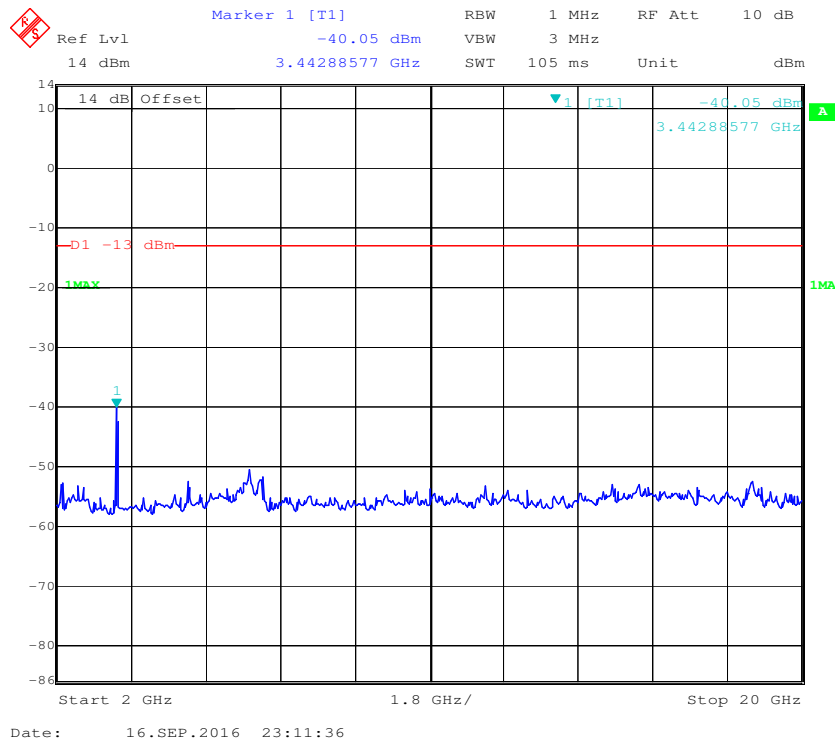


30 MHz - 1 GHz (10.0 MHz, Middle Channel)

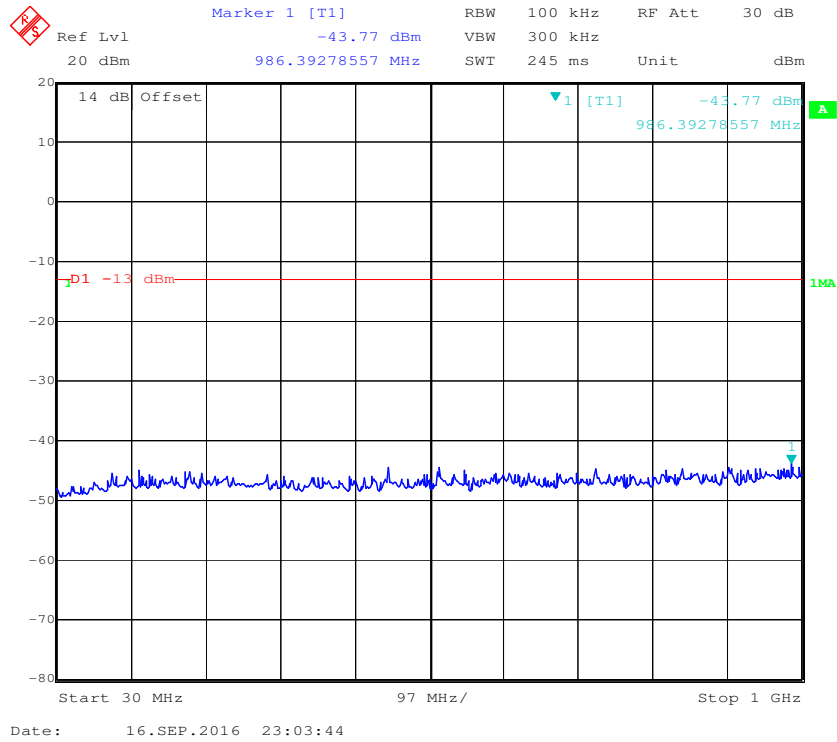


1 GHz - 2 GHz (10.0 MHz, Middle Channel)

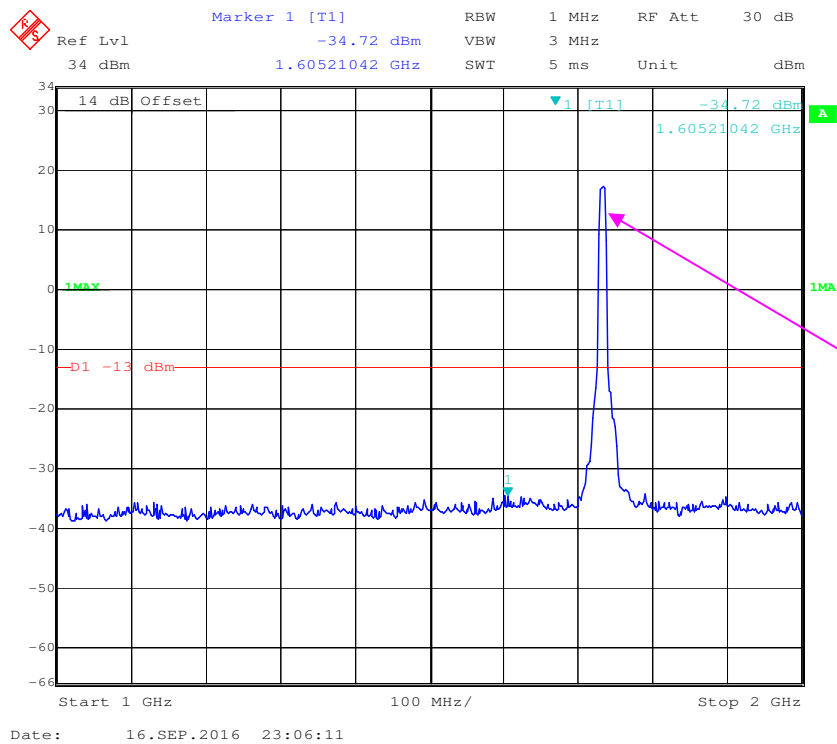


2 GHz – 20 GHz (10.0 MHz, Middle Channel)

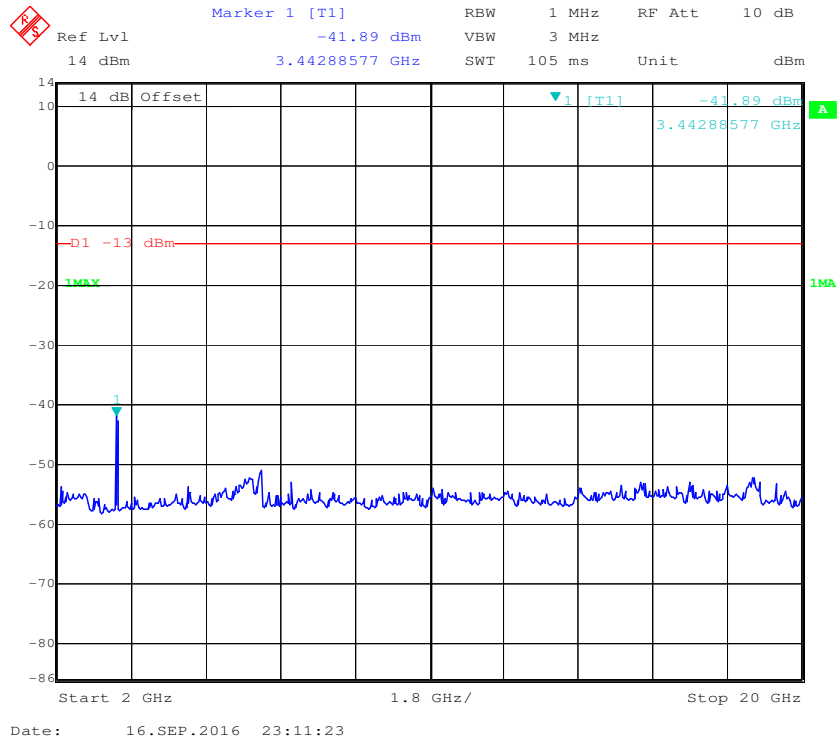


30 MHz - 1 GHz (15.0 MHz, Middle Channel)

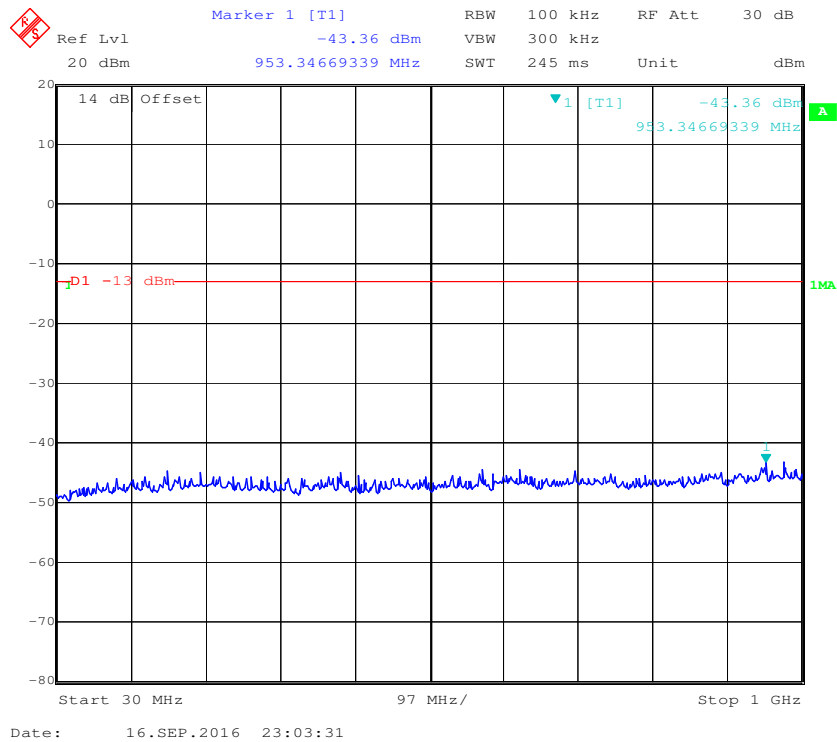


1 GHz –2 GHz (15.0 MHz, Middle Channel)

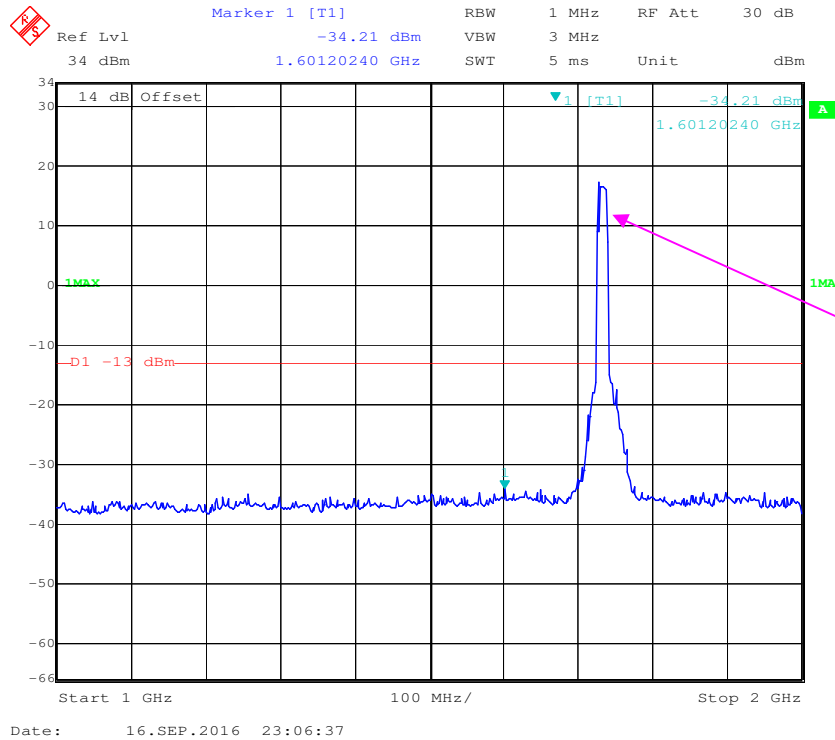


2 GHz –20 GHz (15.0 MHz, Middle Channel)

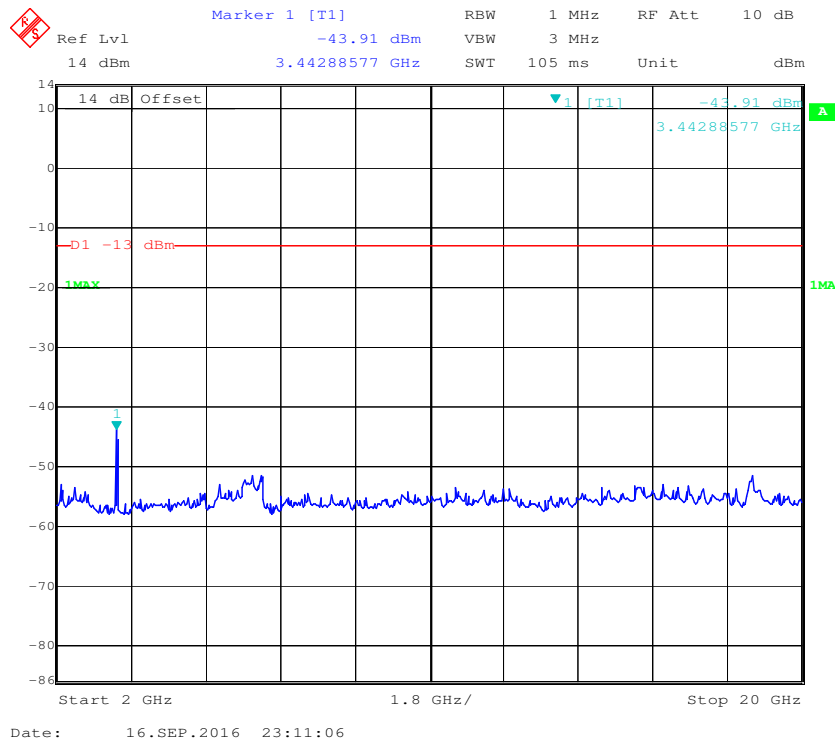

30 MHz - 1 GHz (20.0 MHz, Middle Channel)

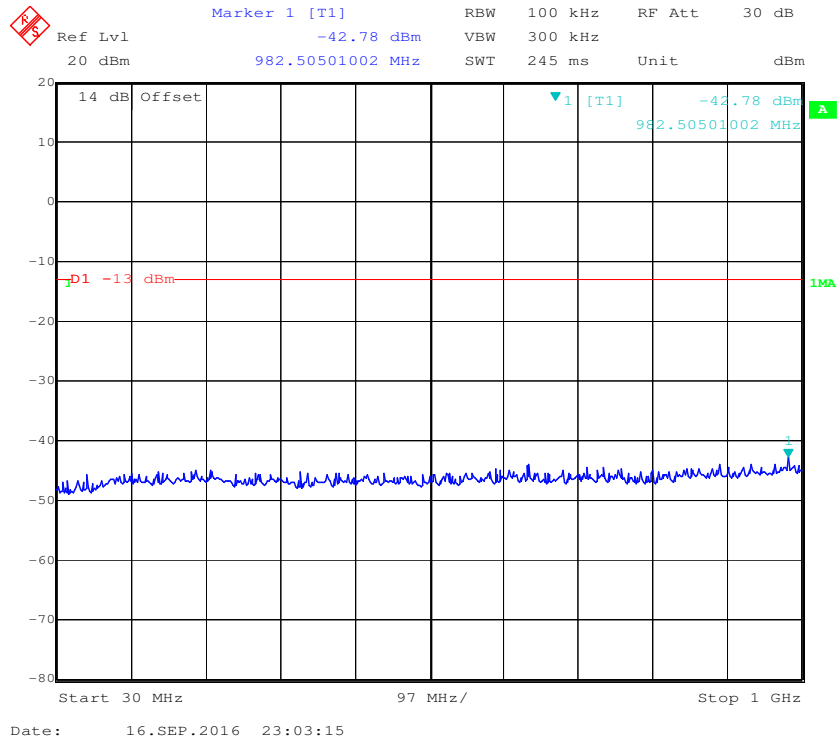

1 GHz - 2 GHz (20.0 MHz, Middle Channel)

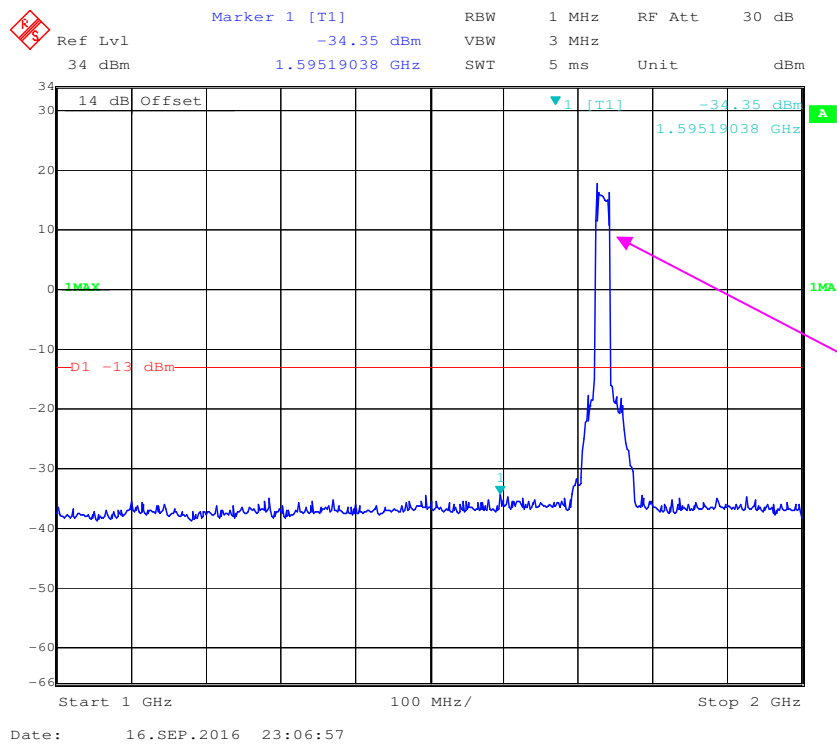

Ref Lvl 14 dBm Marker 1 [T1] -43.24 dBm RBW 1 MHz VBW 3 MHz RF Att 10 dB Unit dBm

14 dB Offset 3.44288577 GHz 1 [T1] -43.24 dBm 3.44288577 GHz

-13 dBm

Start 2 GHz 1.8 GHz/ Stop 20 GHz

Date: 16.SEP.2016 23:10:52

FCC § 2.1053; § 22.917 (a); § 24.238 (a); §27.53 (h) (m) SPURIOUS RADIATED EMISSIONS

FCC § 2.1053, §22.917(a) and § 24.238(a) and § 27.53(h)(m)

For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

Test Procedure

The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load which was also placed on the turntable.

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.

The frequency range up to tenth harmonic of the fundamental frequency was investigated.

Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

Spurious emissions in dB = $10 \lg (\text{TX pwr in Watts}/0.001)$ – the absolute level

Spurious attenuation limit in dB = $43 + 10 \log_{10} (\text{power out in Watts})$ or,

Spurious attenuation limit in dB = $55 + 10 \log_{10} (\text{power out in Watts})$

Test Data**Environmental Conditions**

Temperature:	25 °C
Relative Humidity:	51 %
ATM Pressure:	101.0 kPa

The testing was performed by Peter Jiang on 2016-09-26.

Test mode: Transmitting (Pre-scan with Low, Middle, High channel, and the worst case data as below)

30 MHz ~ 10 GHz:

Cellular Band (Part 22H)

Frequency (MHz)	Receiver Reading (dBμV)	Turntable Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Height (m)	Polar (H/V)	SG Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)			
GSM Mode										
931.27	36.91	336	2.0	H	-60.1	0.47	5.05	-55.52	-13	42.52
931.27	33.55	296	1.9	V	-63.5	0.47	5.05	-58.92	-13	45.92
1673.20	60.52	219	1.3	H	-44.9	0.30	9.40	-35.80	-13	22.80
1673.20	58.52	34	1.8	V	-46.9	0.30	9.40	-37.80	-13	24.80
2509.80	66.42	158	1.7	H	-39.0	0.43	10.60	-28.83	-13	15.83
2509.80	62.62	66	1.3	V	-42.8	0.43	10.60	-32.63	-13	19.63
WCDMA Mode										
931.27	29.83	30	1.6	H	-67.2	0.47	5.05	-62.62	-13	49.62
931.27	33.96	82	1.0	V	-63.5	0.47	5.05	-58.92	-13	45.92
1693.20	49.52	223	1.3	H	-55.9	0.30	9.40	-46.80	-13	33.80
1693.20	47.22	201	1.9	V	-58.2	0.30	9.40	-49.10	-13	36.10

30 MHz ~ 20 GHz:**PCS Band (Part 24E)**

Frequency (MHz)	Receiver Reading (dBμV)	Turntable Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Height (m)	Polar (H/V)	SG Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)			
GSM Mode										
931.27	32.9	270	1.7	H	-64.1	0.47	5.05	-59.52	-13	46.52
931.27	33.6	304	1.2	V	-63.4	0.47	5.05	-58.82	-13	45.82
3700.40	56.93	74	2.4	H	-35.8	2.42	12.60	-25.62	-13	12.62
3700.40	53.13	39	1.5	V	-39.6	2.42	12.60	-29.42	-13	16.42
WCDMA Mode										
931.27	32.14	83	1.0	H	-64.9	0.47	5.05	-60.32	-13	47.32
931.27	33.63	219	1.4	V	-63.4	0.47	5.05	-58.82	-13	45.82
3760.00	60.53	177	1.5	H	-32.2	2.42	12.6	-22.02	-13	9.02
3760.00	55.03	220	1.9	V	-37.7	2.42	12.6	-27.52	-13	14.52

30 MHz ~ 18 GHz:**AWS Band (Part 27)**

Frequency (MHz)	Receiver Reading (dBμV)	Turntable Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Height (m)	Polar (H/V)	SG Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)			
WCDMA Mode										
931.27	33.84	30	1.6	H	-63.2	0.47	5.05	-58.62	-13	45.62
931.27	33.79	82	1.0	V	-63.5	0.47	5.05	-58.92	-13	45.92
3424.80	38.67	223	1.3	H	-55.9	2.34	12.40	-45.84	-13	32.84
3424.80	34.31	201	1.9	V	-58.2	2.34	12.40	-48.14	-13	35.14

For LTE:*Test mode: Transmitting (Pre-scan with all the bandwidth, and worse case as below)*

Frequency	Receiver	Turntable	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
(MHz)	Reading (dBμV)	Angle Degree	Height (m)	Polar (H/V)	SG Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)			
Band 2										
Test frequency range: 30 MHz ~ 20 GHz										
931.27	33.17	316	1.3	H	-63.8	0.47	5.05	-59.22	-13	46.22
931.27	33.51	86	1.3	V	-63.5	0.47	5.05	-58.92	-13	45.92
3760.00	60.93	109	2.2	H	-31.8	2.42	12.6	-21.62	-13	8.62
3760.00	57.43	166	1.3	V	-35.3	2.42	12.6	-25.12	-13	12.12
Band 4										
Test frequency range: 30 MHz ~ 18 GHz										
931.27	33.53	160	2.3	H	-63.5	0.47	5.05	-58.92	-13	45.92
931.27	33.36	343	2.1	V	-63.6	0.47	5.05	-59.02	-13	46.02
3465.00	48.64	278	2.4	H	-35.2	2.34	12.40	-25.14	-13	12.14
3465.00	43.27	205	1.4	V	-40.7	2.34	12.40	-30.64	-13	17.64

Note:

1) Absolute Level = SG Level - Cable loss + Antenna Gain

2) Margin = Limit- Absolute Level

FCC § 22.917 (a); § 24.238 (a); § 27.53 (h)(m) - BAND EDGES

Applicable Standards

According to § 22.917(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

According to § 24.238(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.


According to FCC § 27.53 (h)(m), the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log(P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log(P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log(P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log(P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log(P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

Test Procedure

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.

The center of the spectrum analyzer was set to block edge frequency

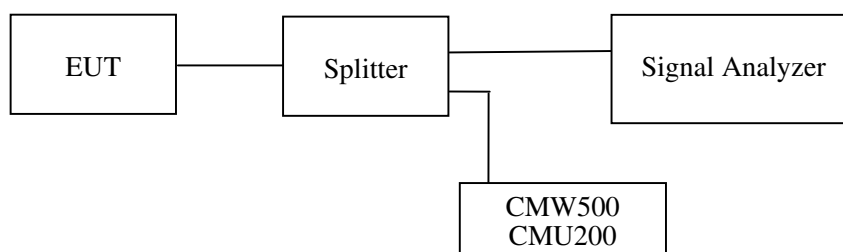

Test Data



Environmental Conditions



Temperature:	25~26 °C
Relative Humidity:	48~55 %
ATM Pressure:	100.0~101.0 kPa



The testing was performed by Chris Wang from 2016-09-16 to 2016-09-17.



EUT operation mode: Transmitting

Test Result: Compliance. Please refer to the following plots.

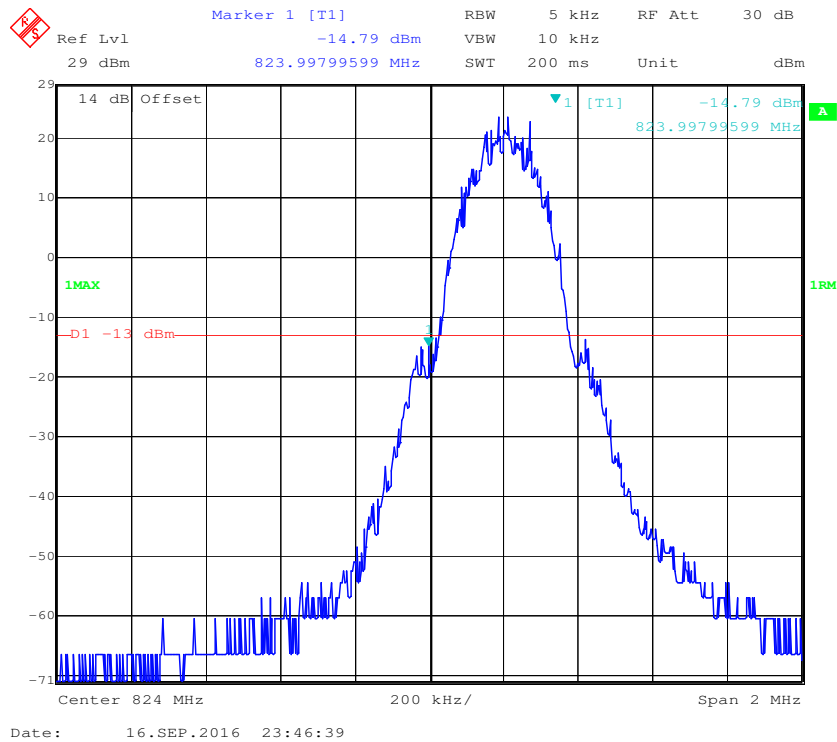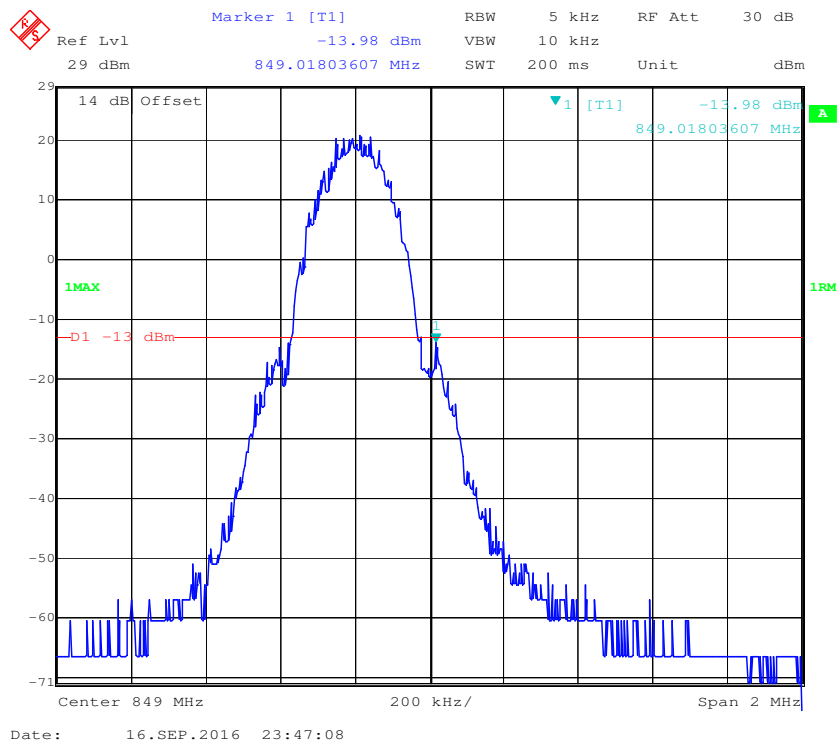
Cellular Band, Left Band Edge for GSM (GMSK) Mode**Cellular Band, Right Band Edge for GSM (GMSK) Mode**

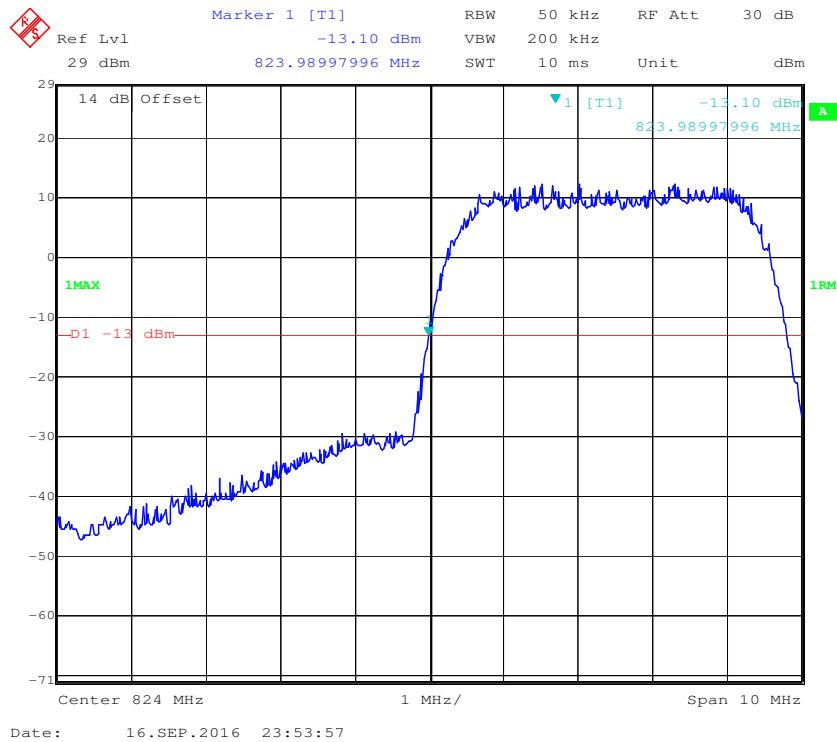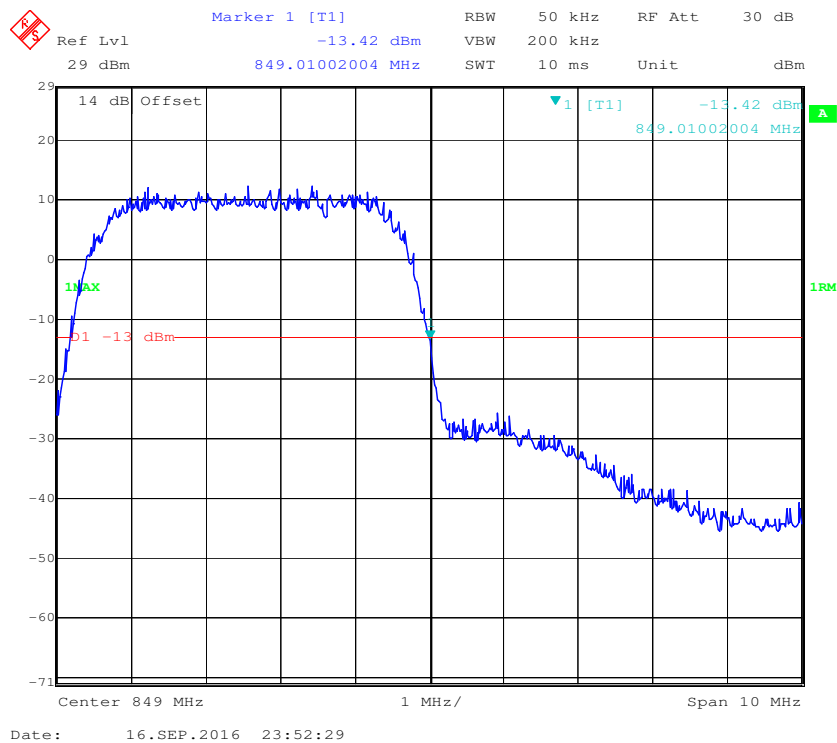Cellular Band, Left Band Edge for WCDMA (BPSK) Mode**Cellular Band, Right Band Edge for WCDMA (BPSK) Mode**

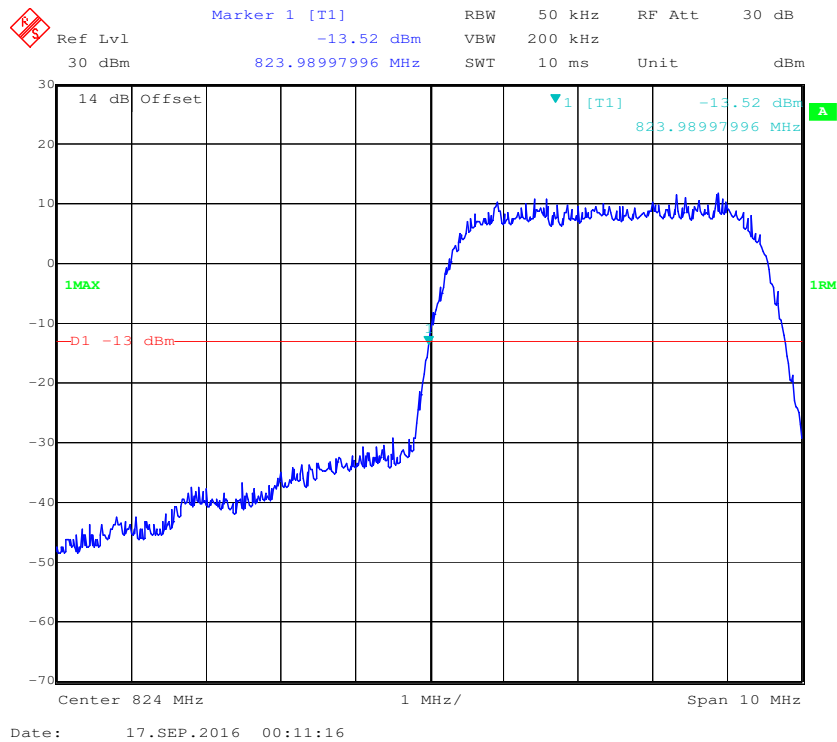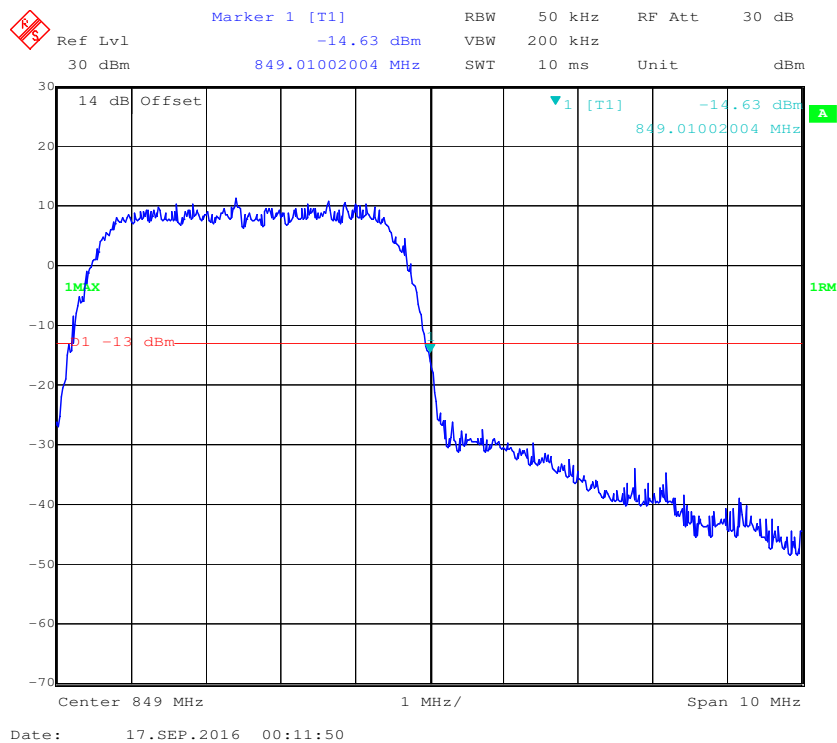
Cellular Band, Left Band Edge for HSDPA (16QAM) Mode**Cellular Band, Right Band Edge for HSDPA (16QAM) Mode**

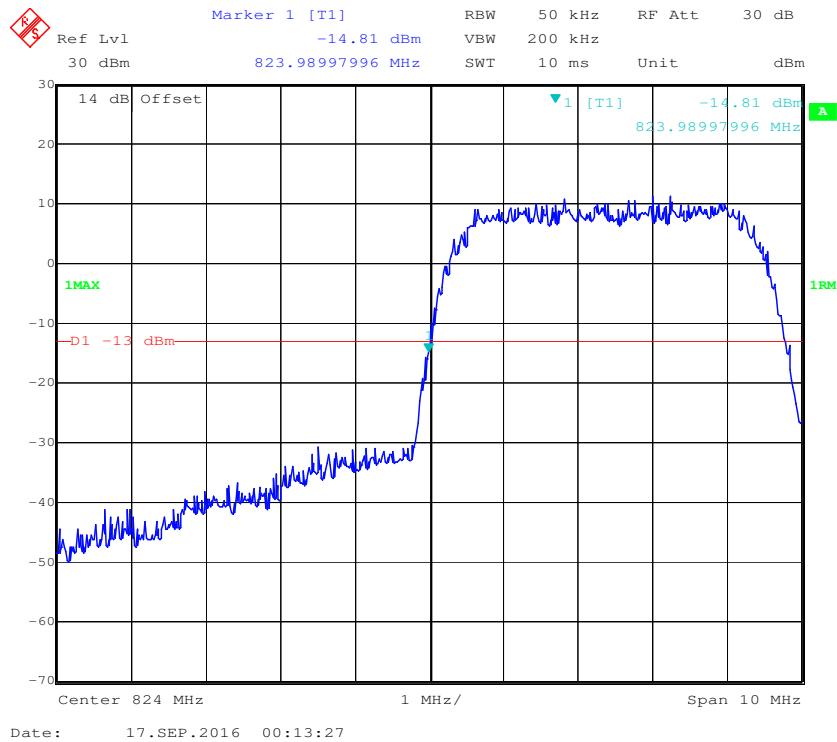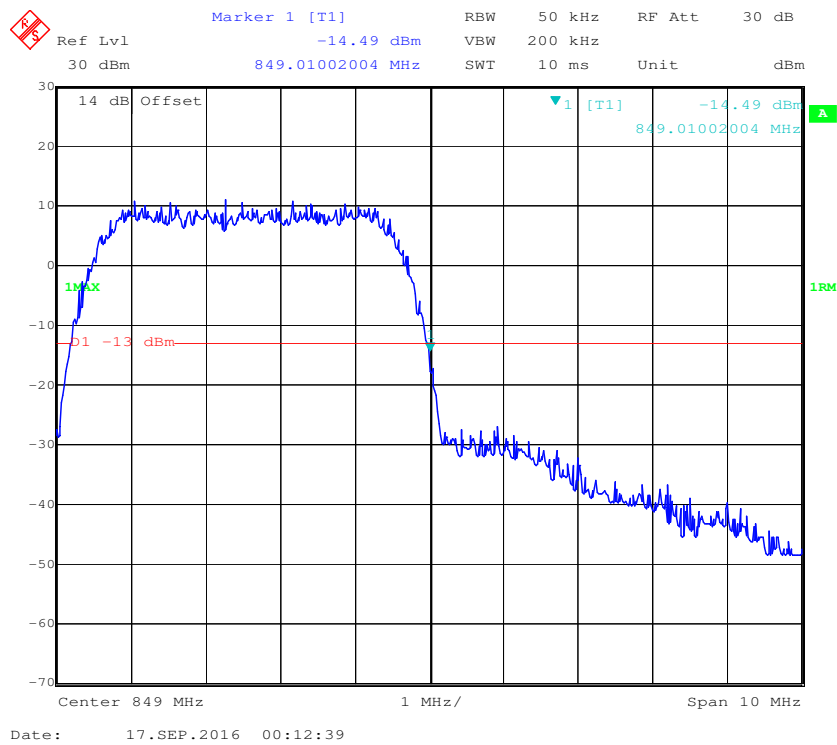Cellular Band, Left Band Edge for HSUPA (BPSK) Mode**Cellular Band, Right Band Edge for HSUPA (BPSK) Mode**


PCS Band, Left Band Edge for GSM (GMSK) Mode

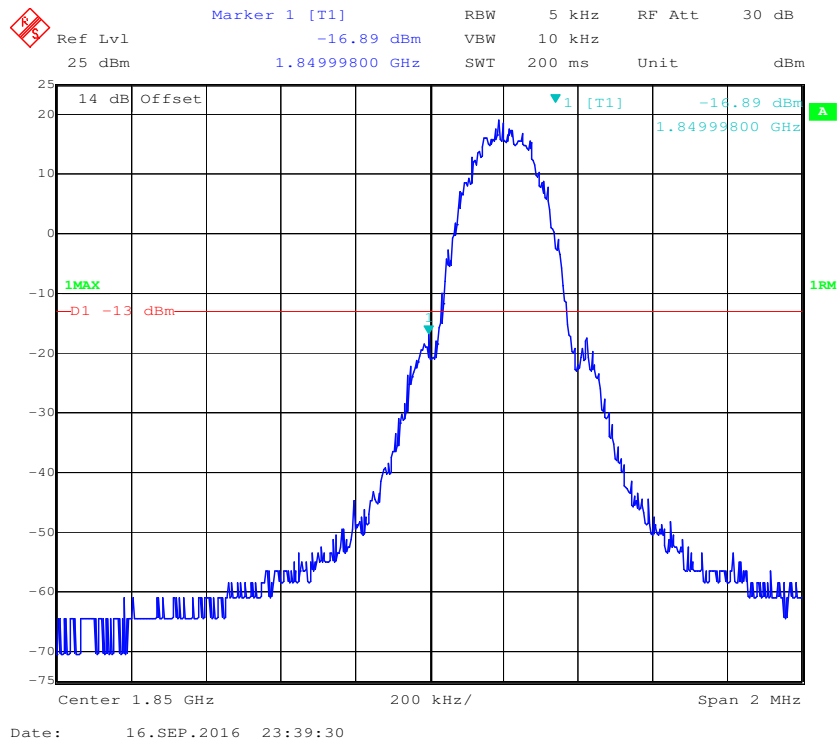


PCS Band, Right Band Edge for GSM (GMSK) Mode


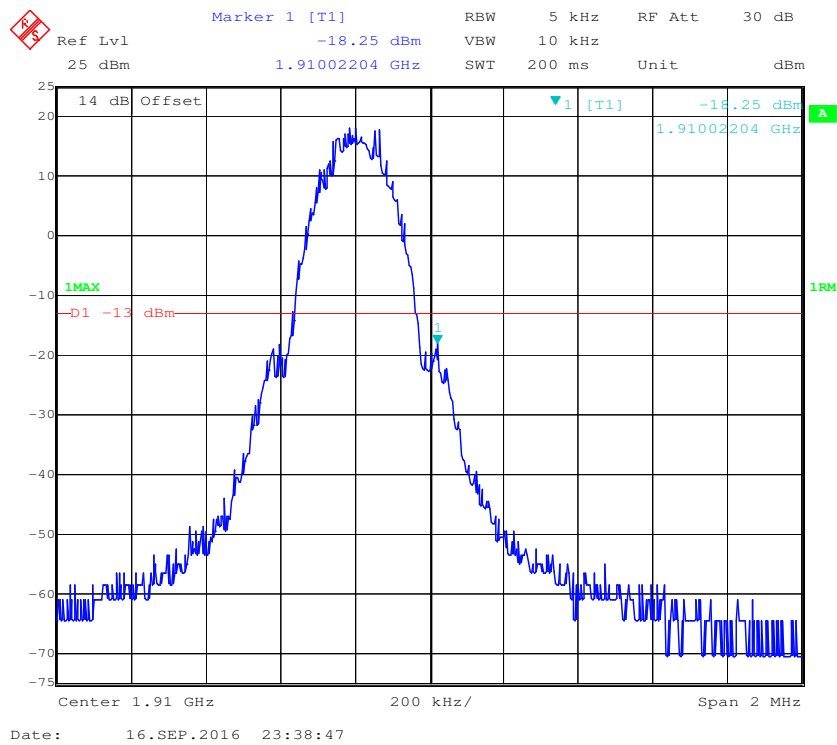


PCS Band, Left Band Edge for WCDMA (BPSK) Mode

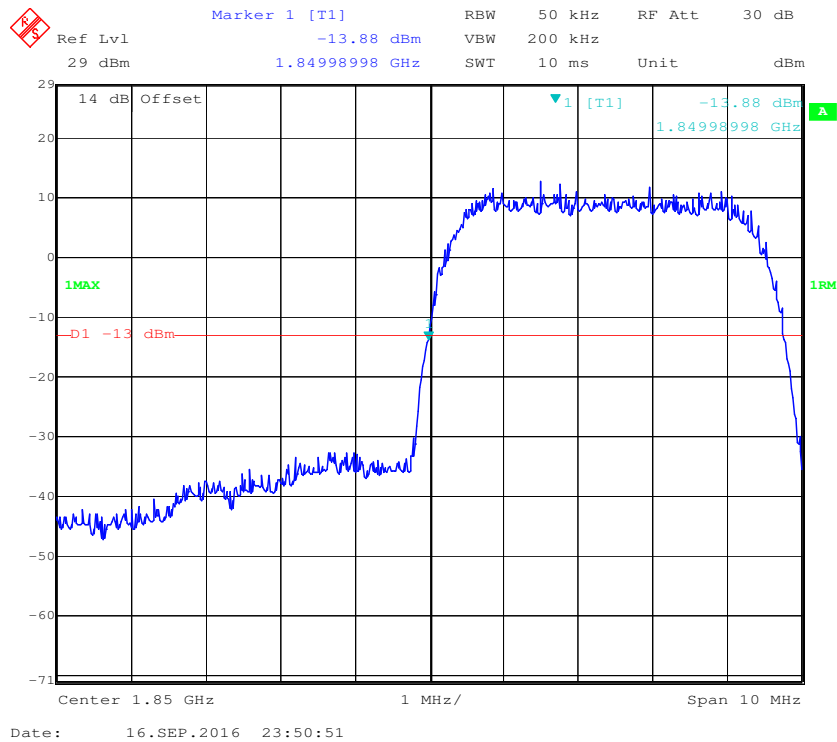


PCS Band, Right Band Edge for WCDMA (BPSK) Mode

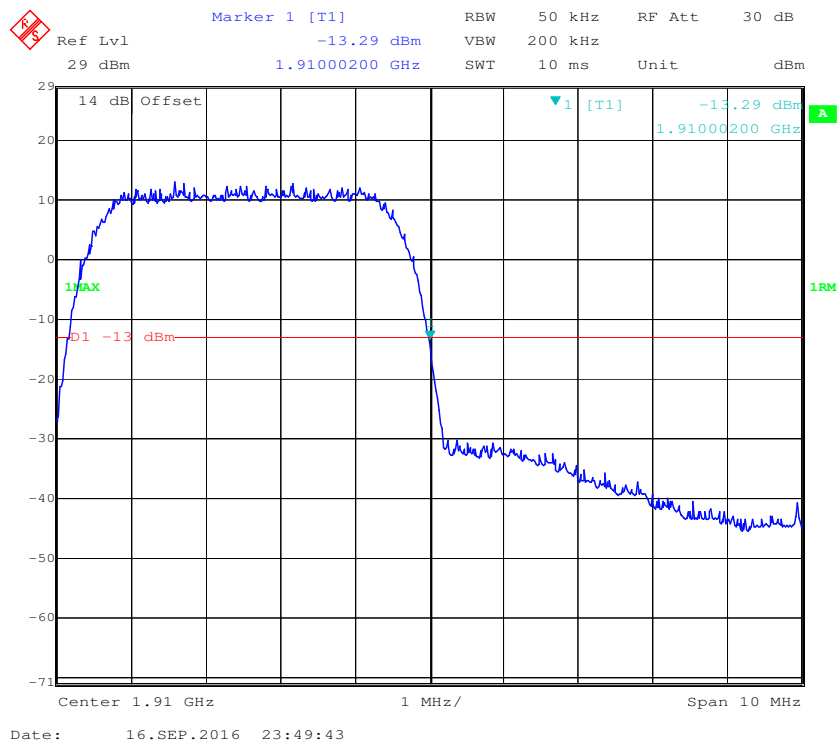


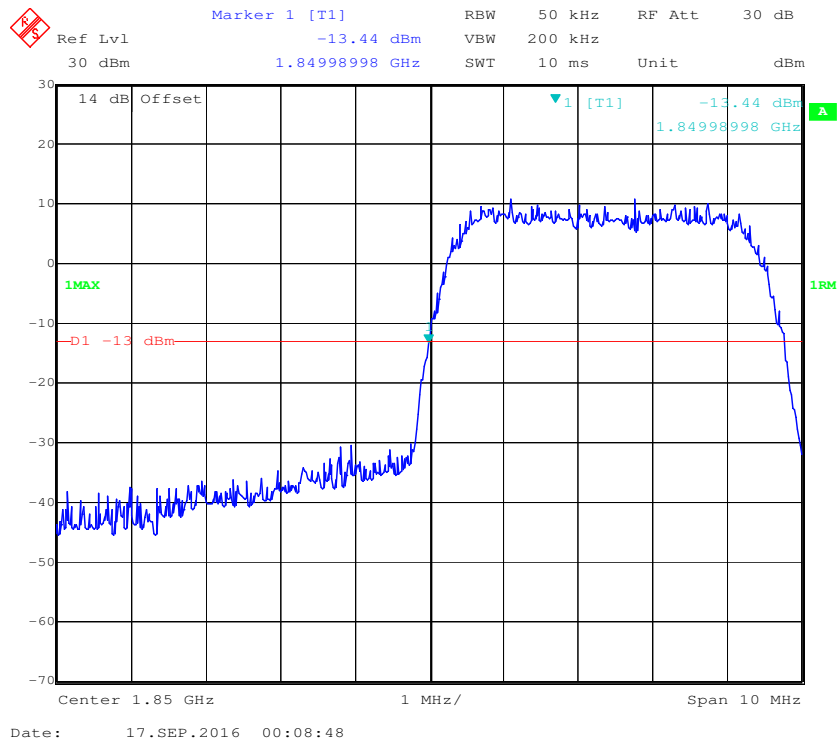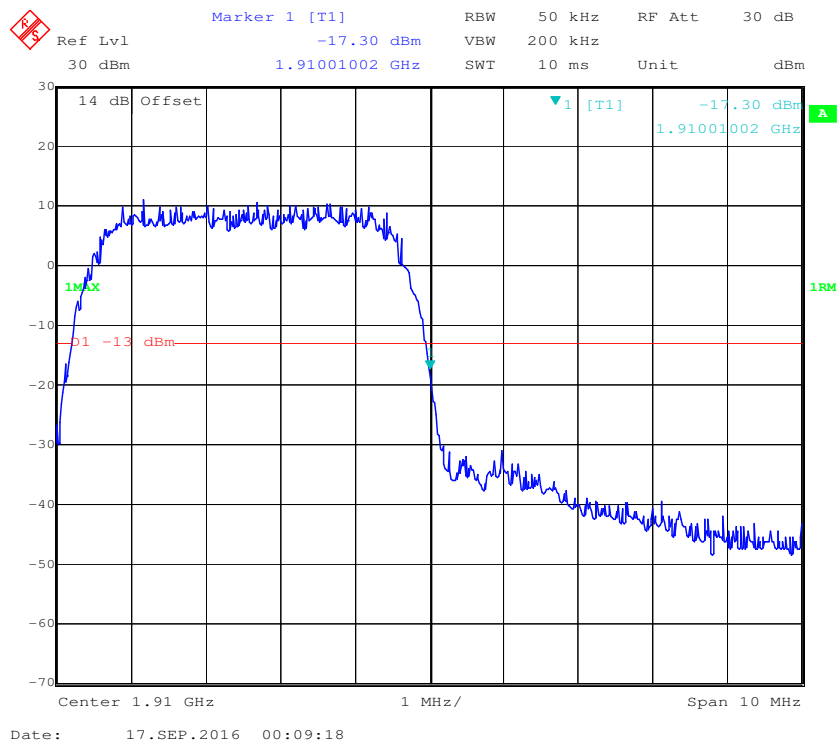PCS Band, Left Band Edge for HSDPA (16QAM) Mode**PCS Band, Right Band Edge for HSDPA (16QAM) Mode**


PCS Band, Left Band Edge for HSUPA (BPSK) Mode

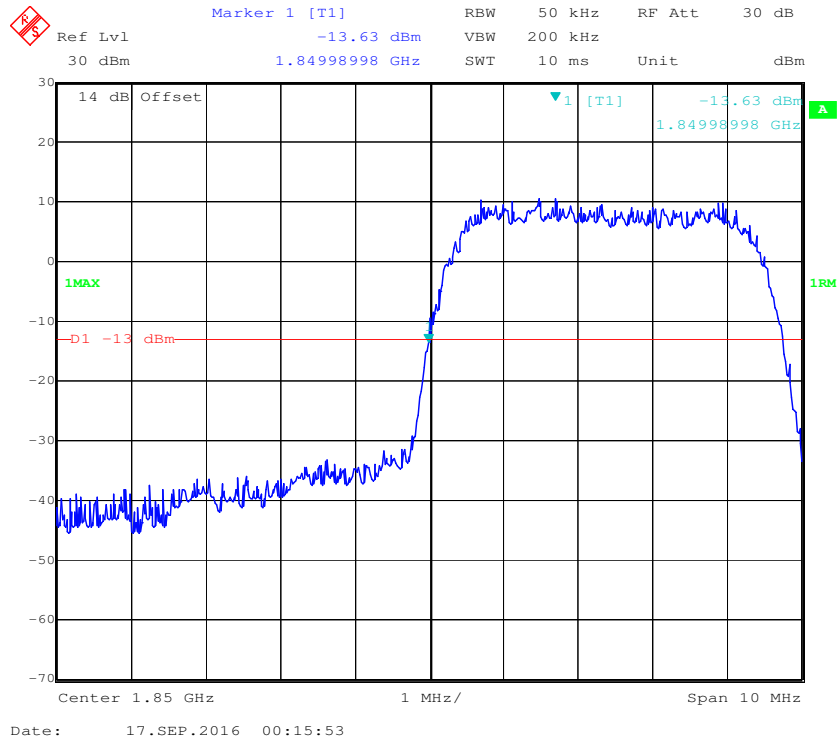


PCS Band, Right Band Edge for HSUPA (BPSK) Mode

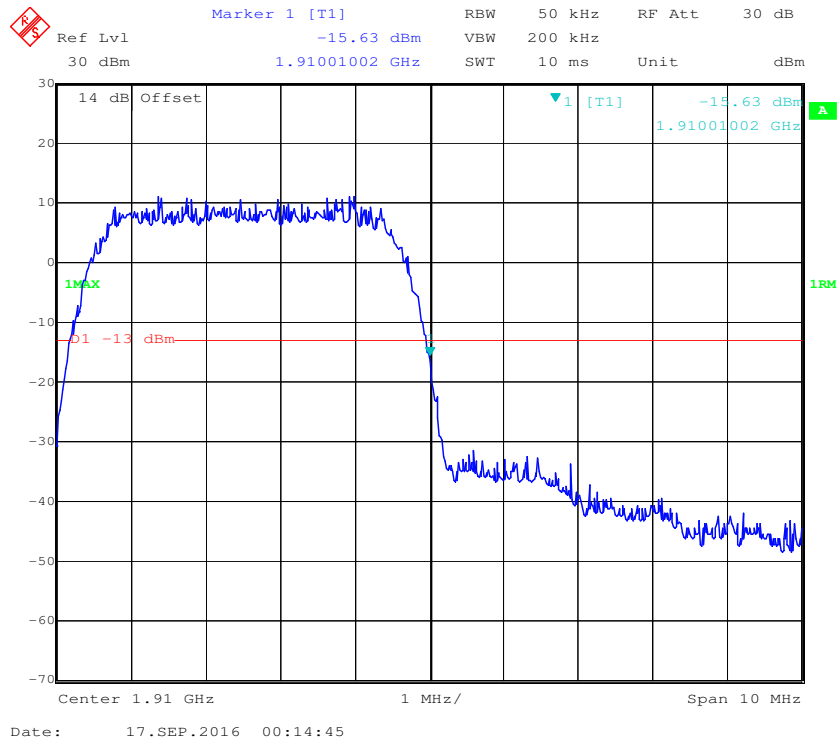


AWS Band, Left Band Edge for WCDMA (BPSK) Mode

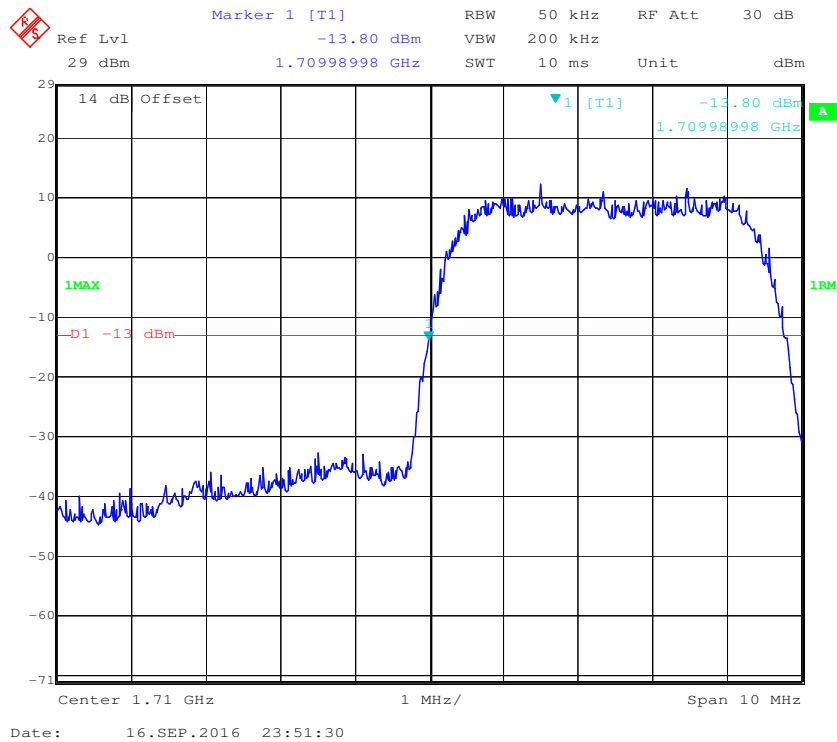


AWS Band, Right Band Edge for WCDMA (BPSK) Mode

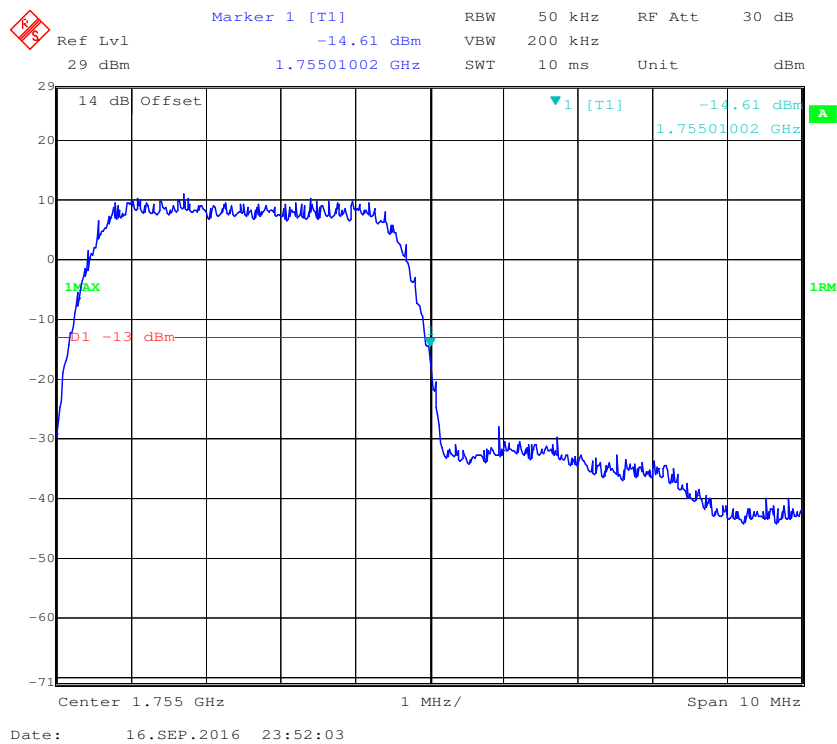


AWS Band, Left Band Edge for HSDPA (16QAM) Mode

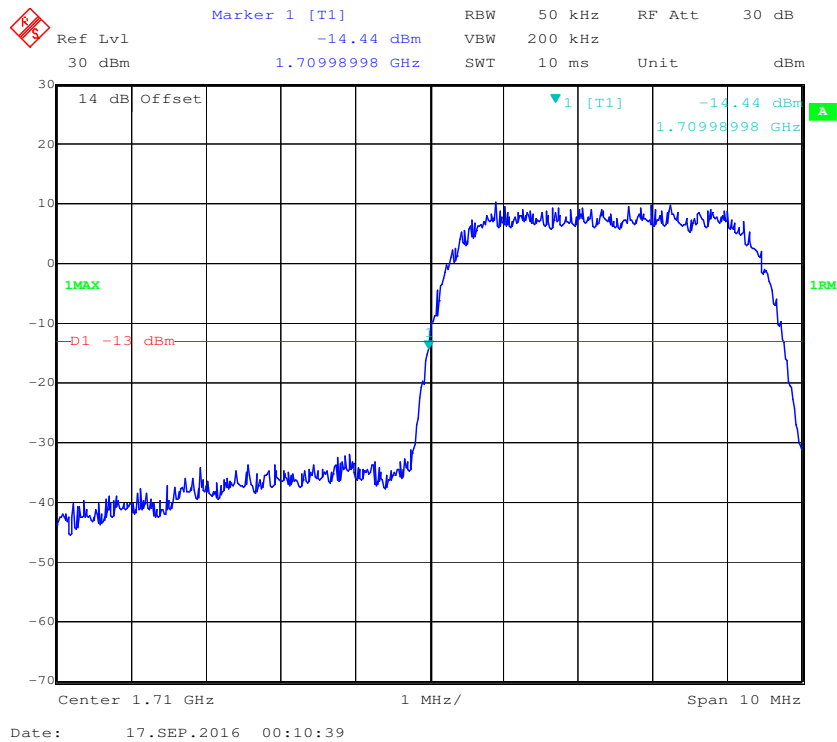


AWS Band, Right Band Edge for HSDPA (16QAM) Mode

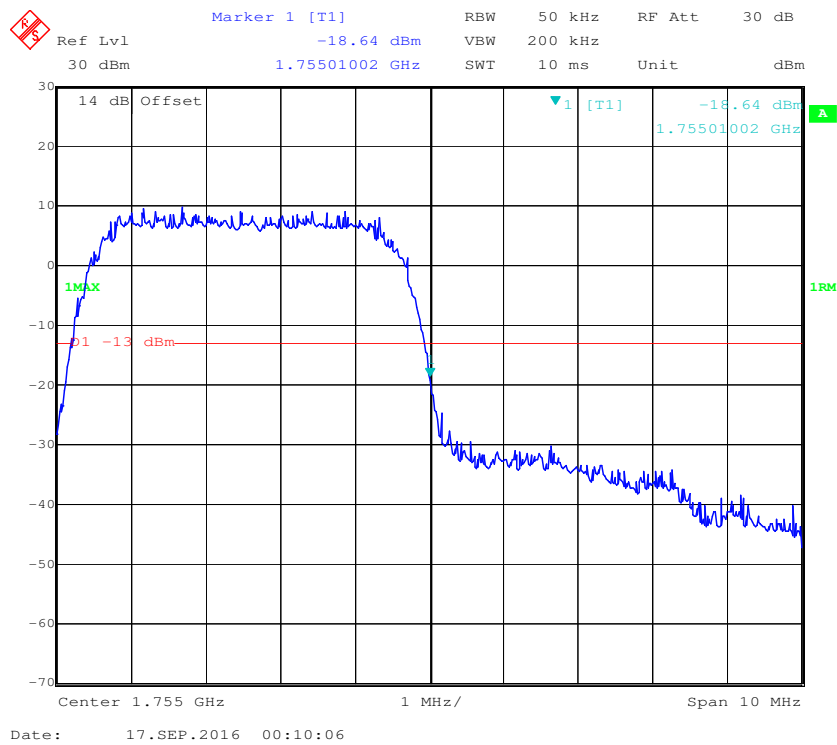

AWS Band, Left Band Edge for HSUPA (BPSK) Mode

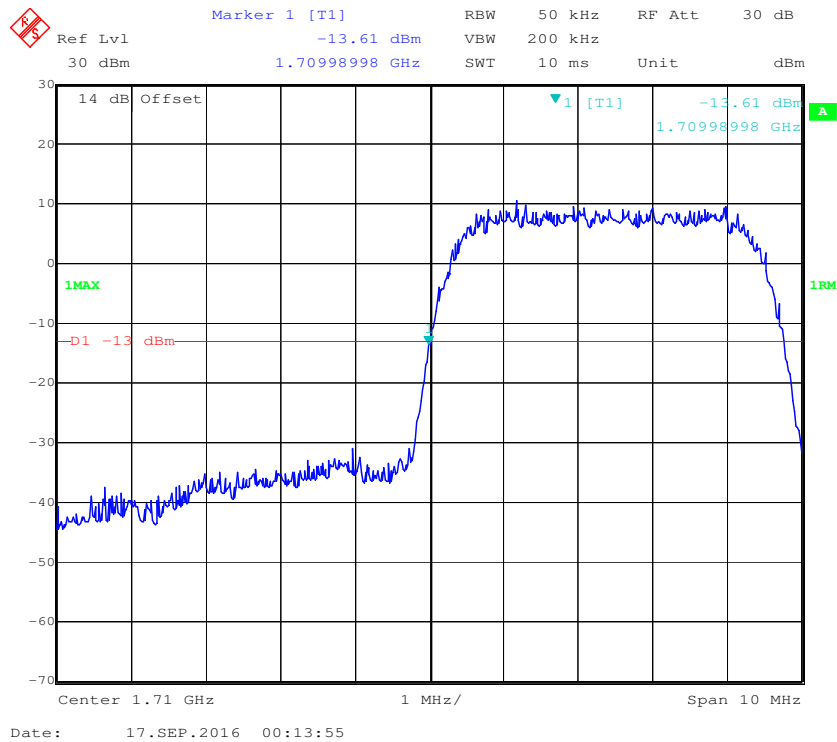


AWS Band, Right Band Edge for HSUPA (BPSK) Mode

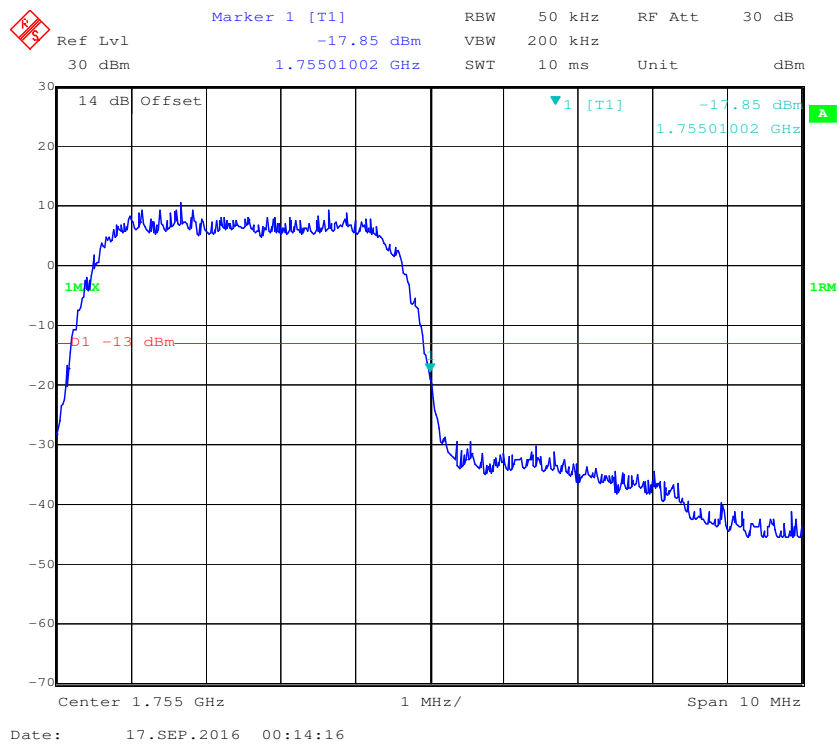




Band 2:



QPSK (1.4 MHz, FULL RB) - Left Band Edge


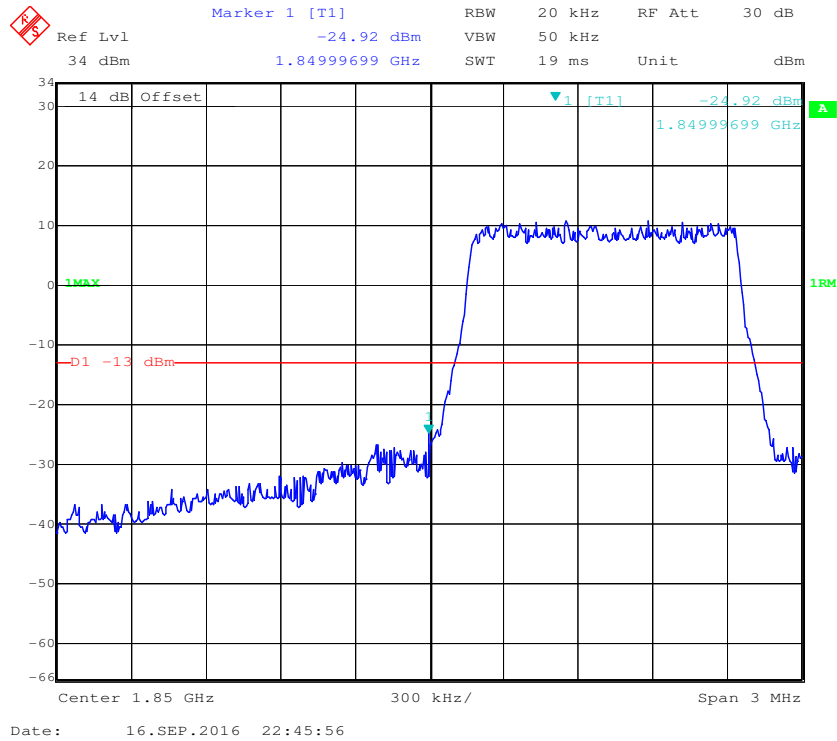


QPSK (1.4 MHz, FULL RB) - Right Band Edge

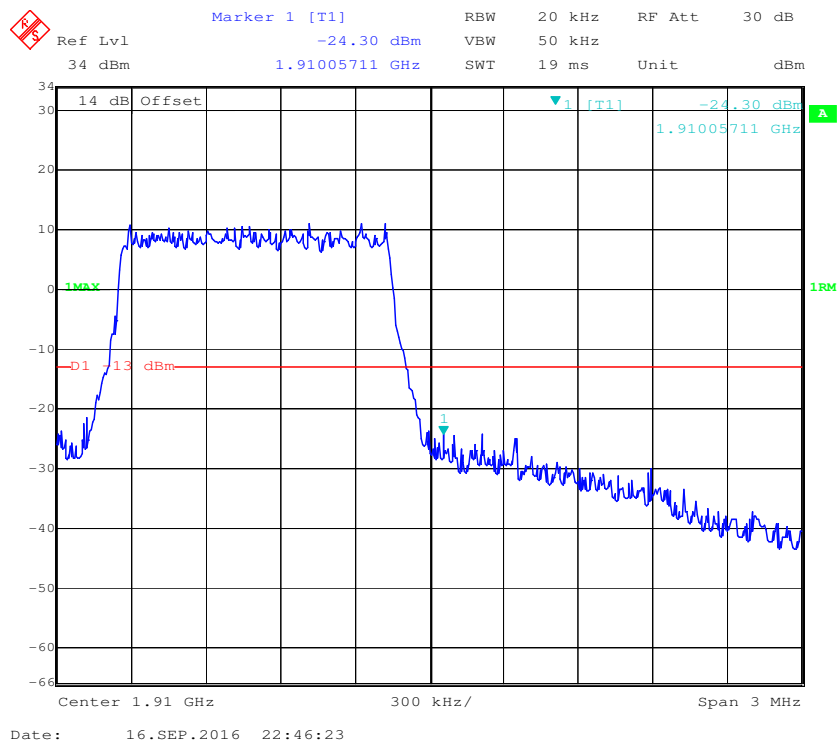


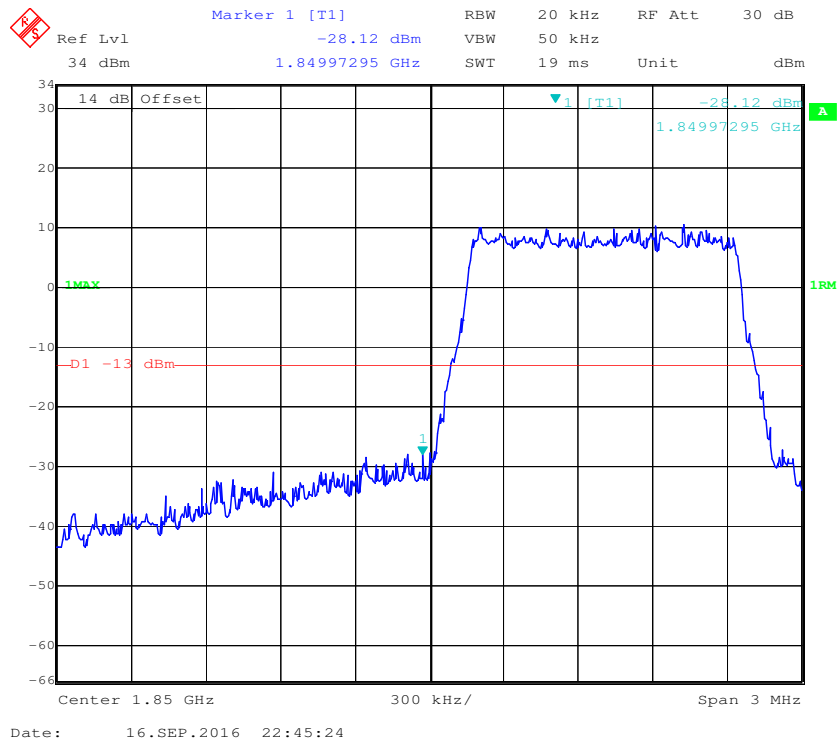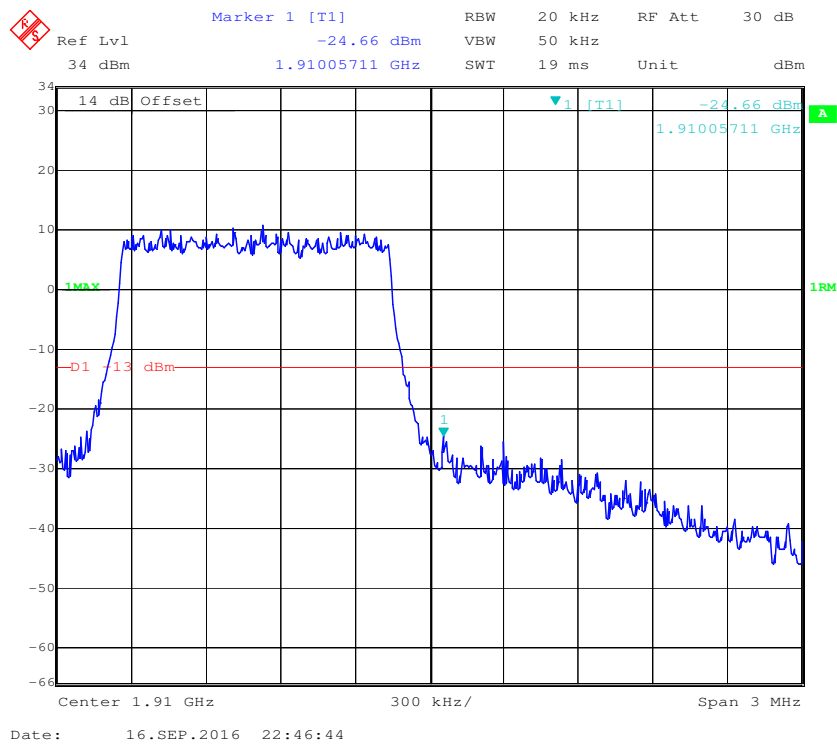16-QAM (1.4 MHz, FULL RB) - Left Band Edge**16-QAM (1.4 MHz, FULL RB) - Right Band Edge**

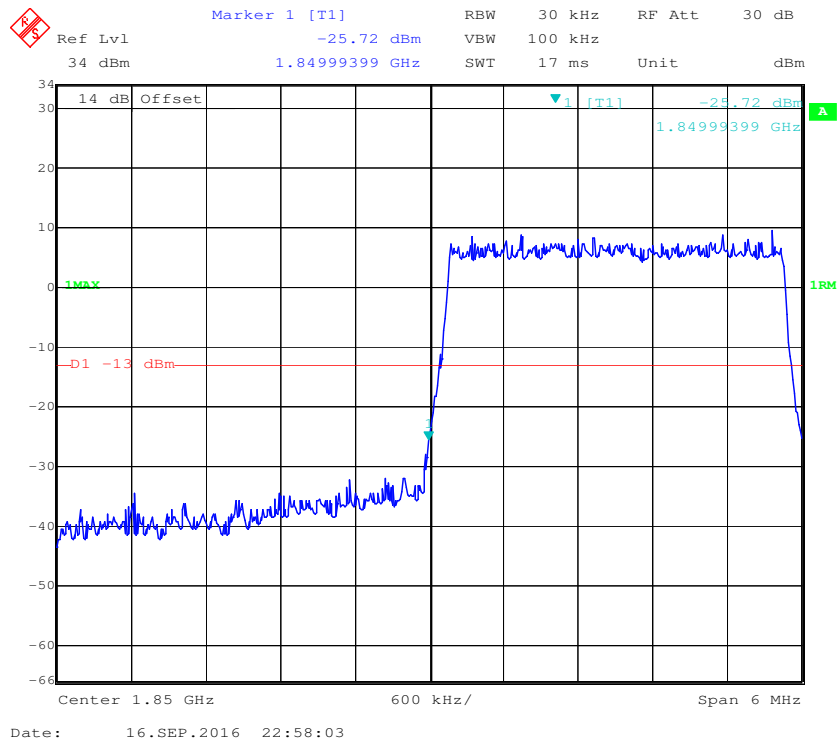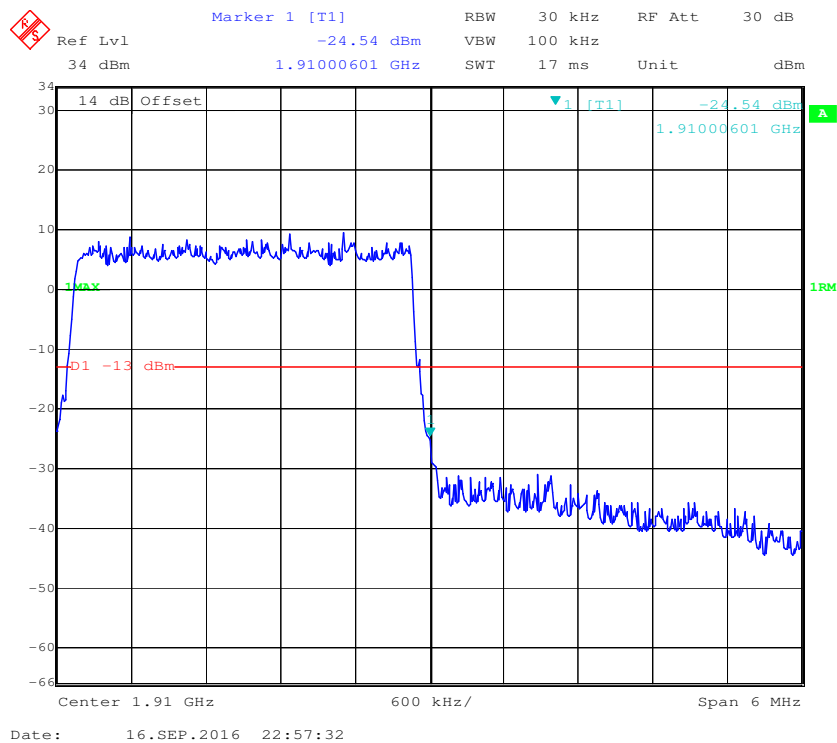
QPSK (3.0 MHz, FULL RB) - Left Band Edge**QPSK (3.0 MHz, FULL RB) - Right Band Edge**

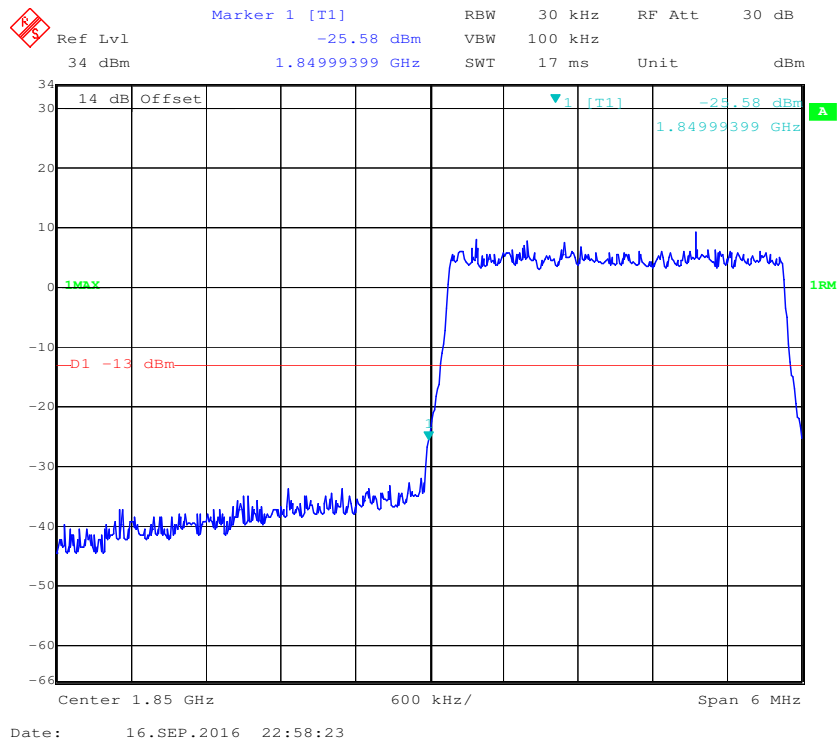
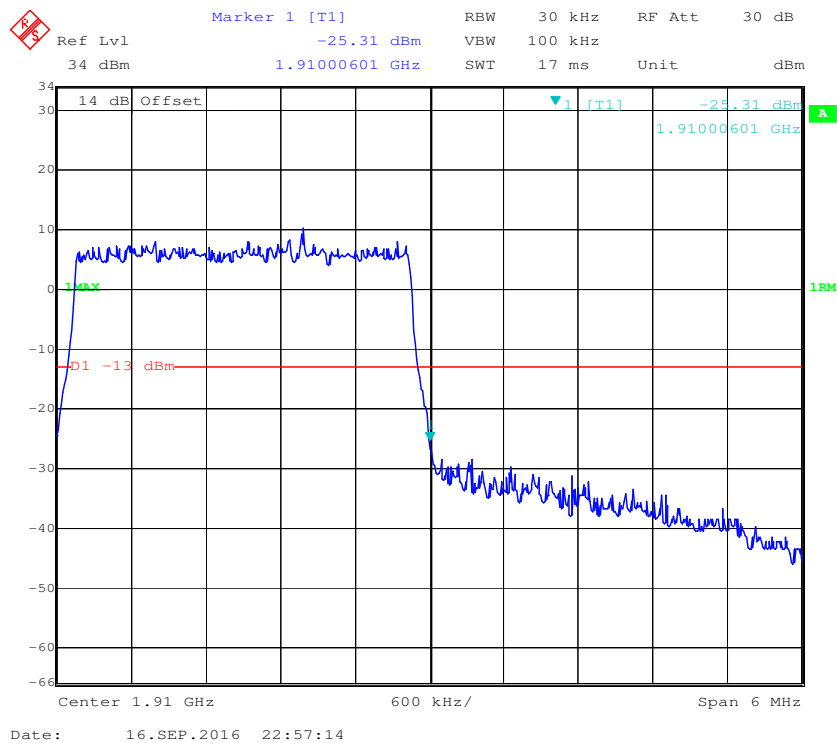
16-QAM (3.0 MHz, FULL RB) - Left Band Edge**16-QAM (3.0 MHz, FULL RB) - Right Band Edge**

QPSK (5.0 MHz, FULL RB) - Left Band Edge

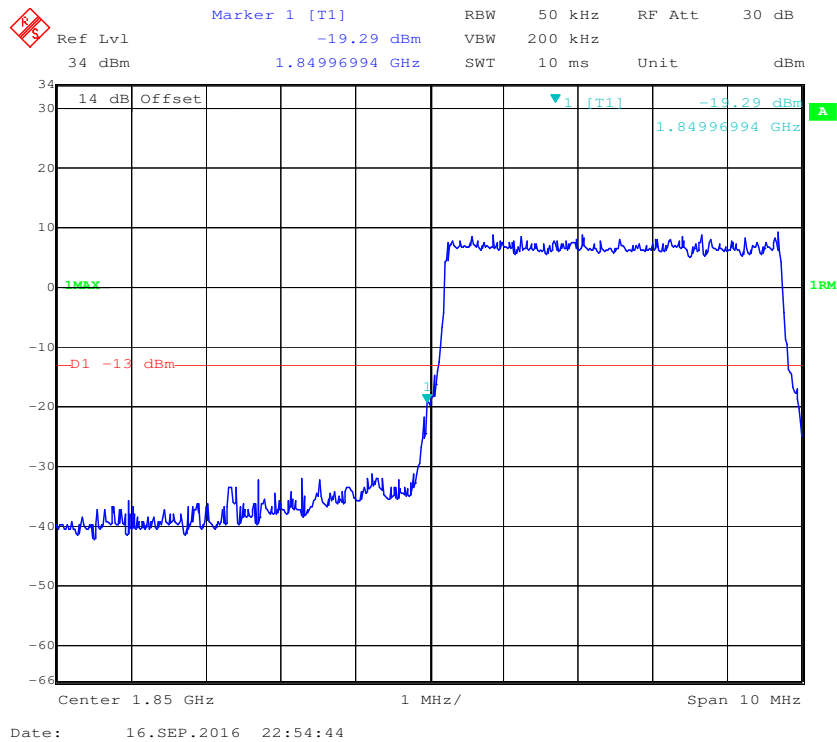


QPSK (5.0 MHz, FULL RB) - Right Band Edge

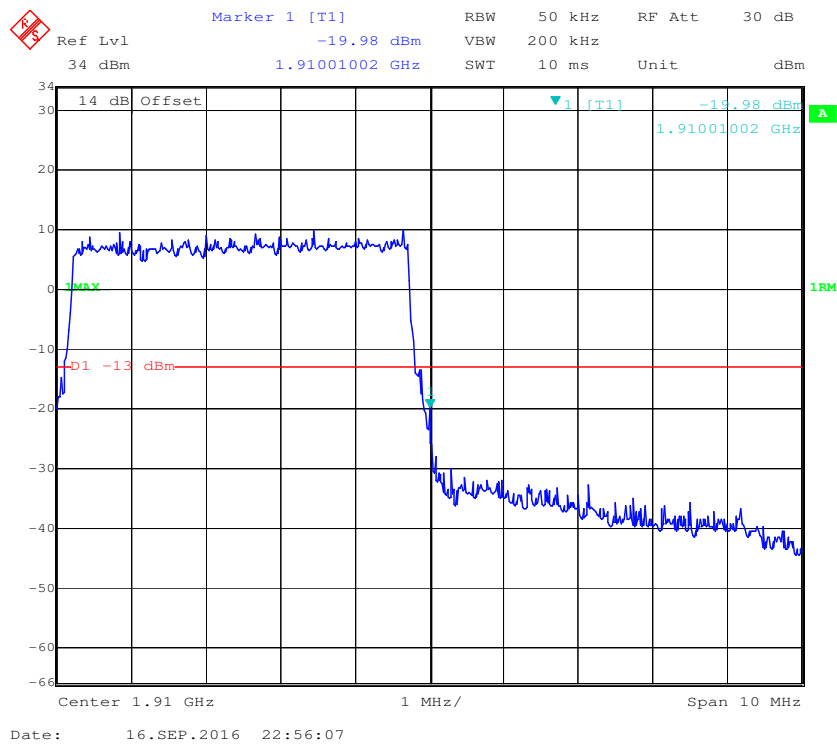


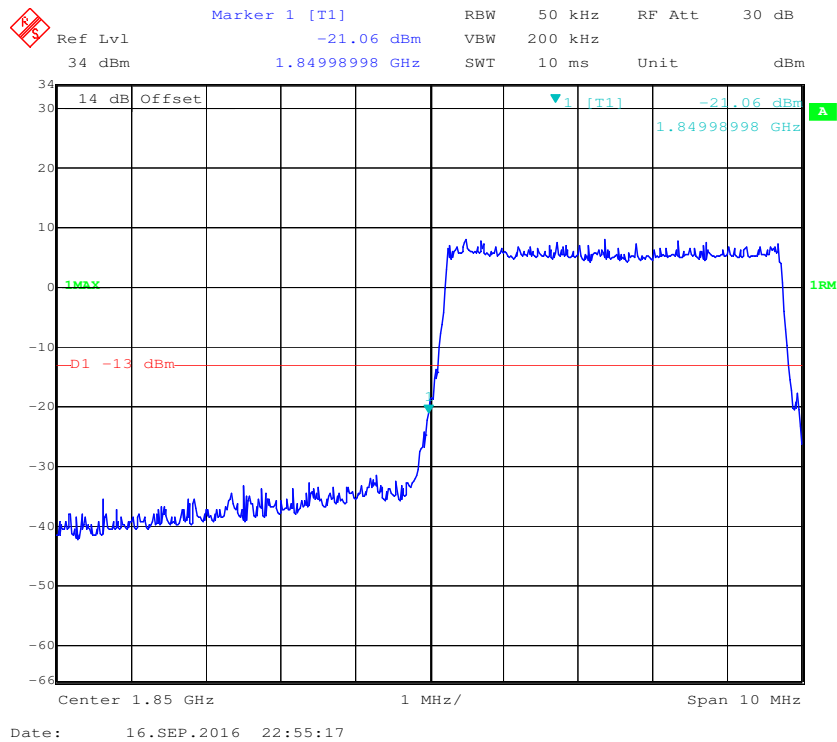
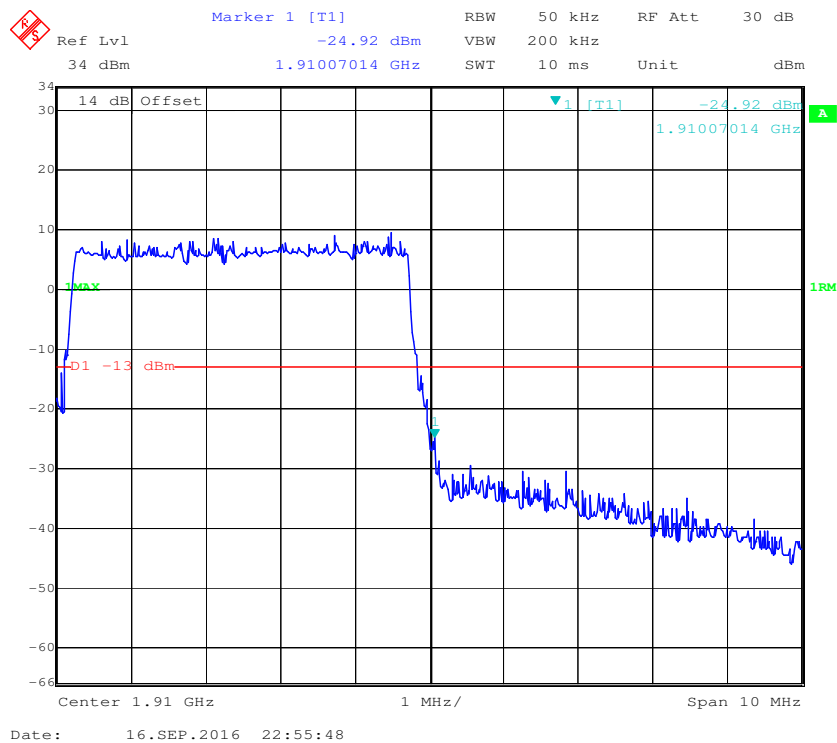
16-QAM (5.0 MHz, FULL RB) - Left Band Edge**16-QAM (5.0 MHz, FULL RB) - Right Band Edge**



QPSK (10.0 MHz, FULL RB) - Left Band Edge

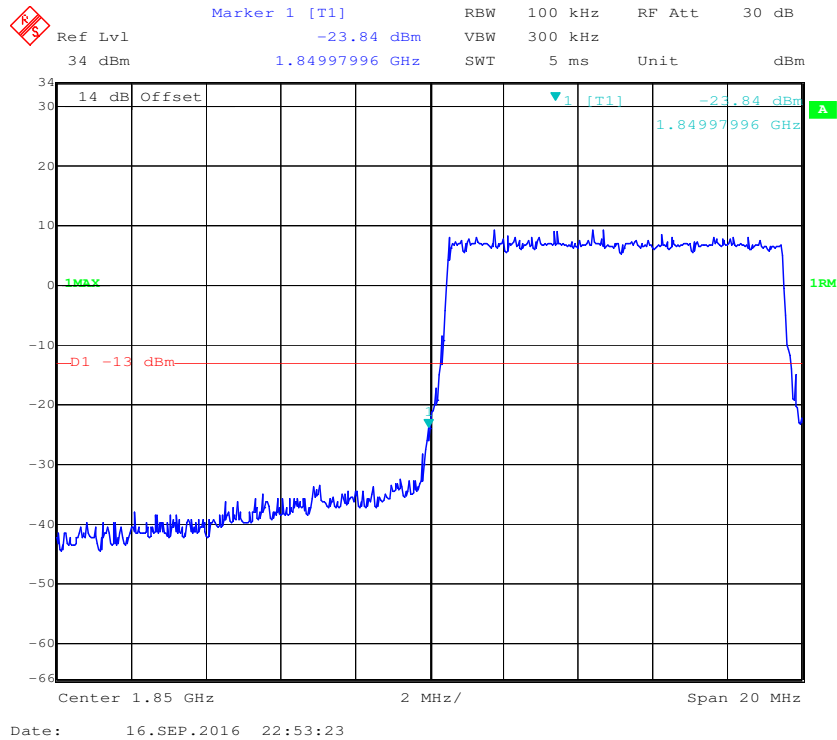


QPSK (10.0 MHz, FULL RB) - Right Band Edge

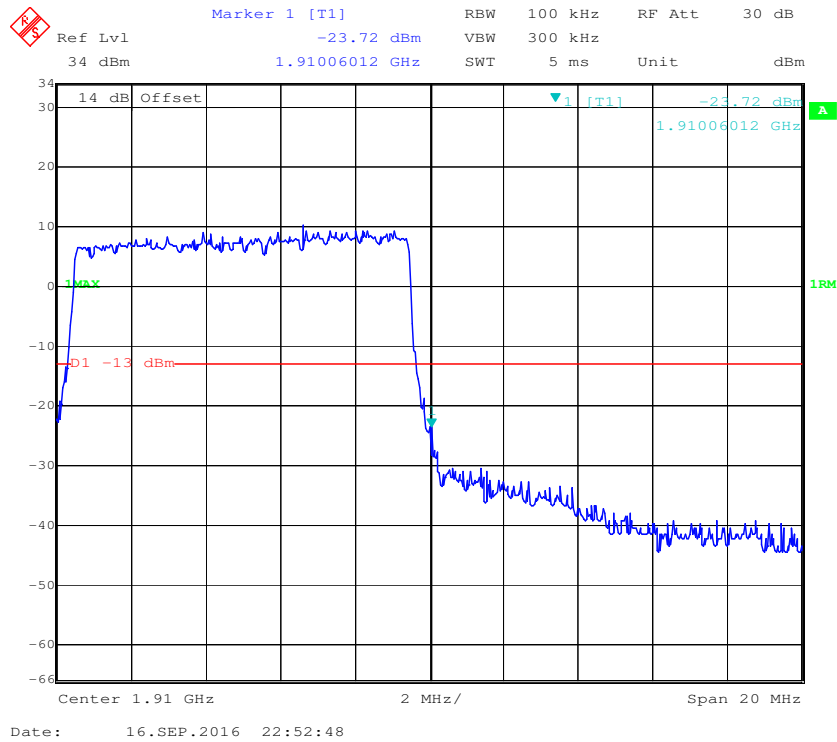

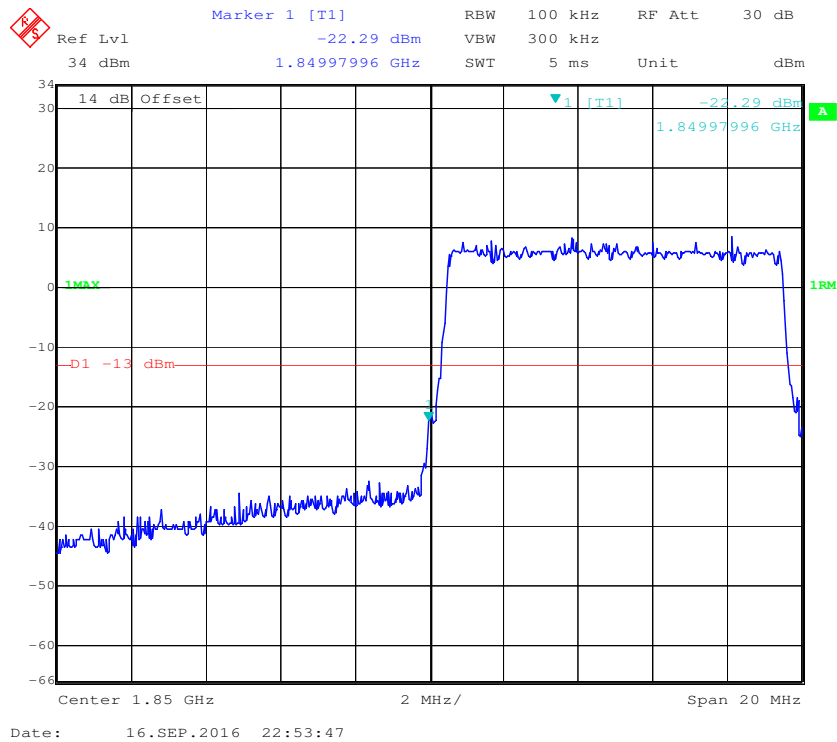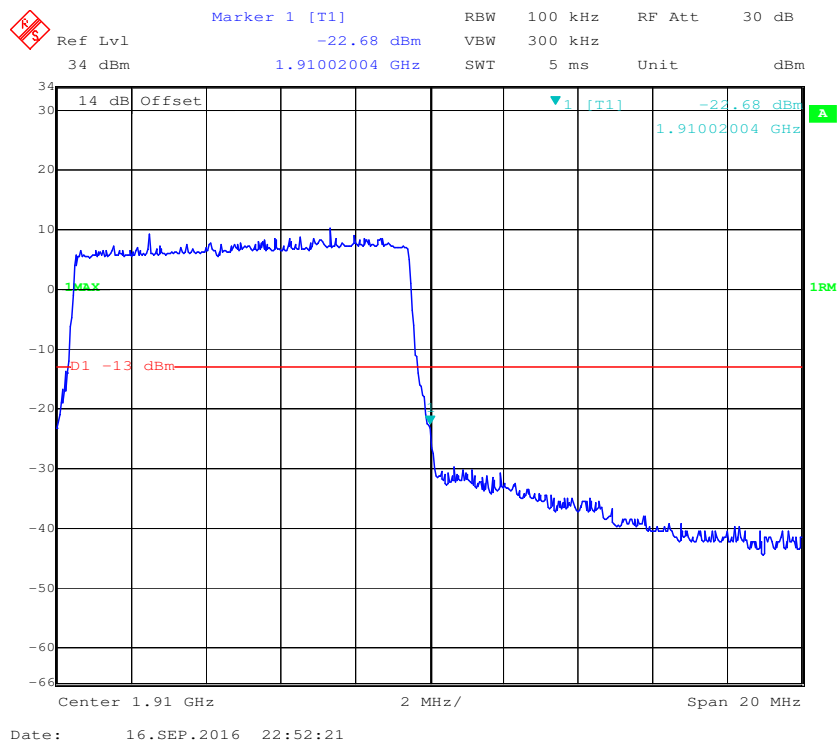
16-QAM (10.0 MHz, FULL RB) - Left Band Edge**16-QAM (10.0 MHz, FULL RB) - Right Band Edge**

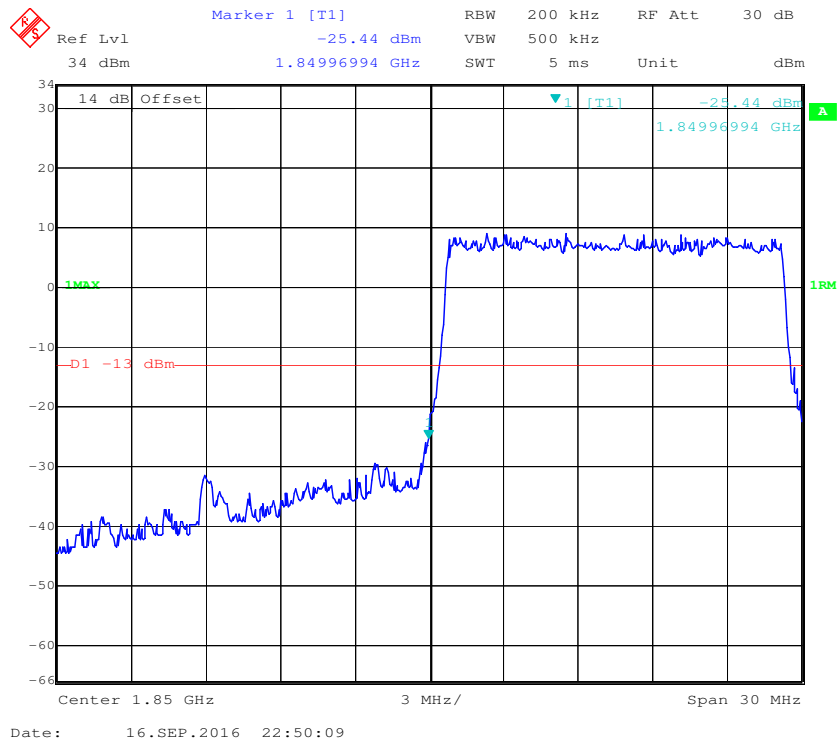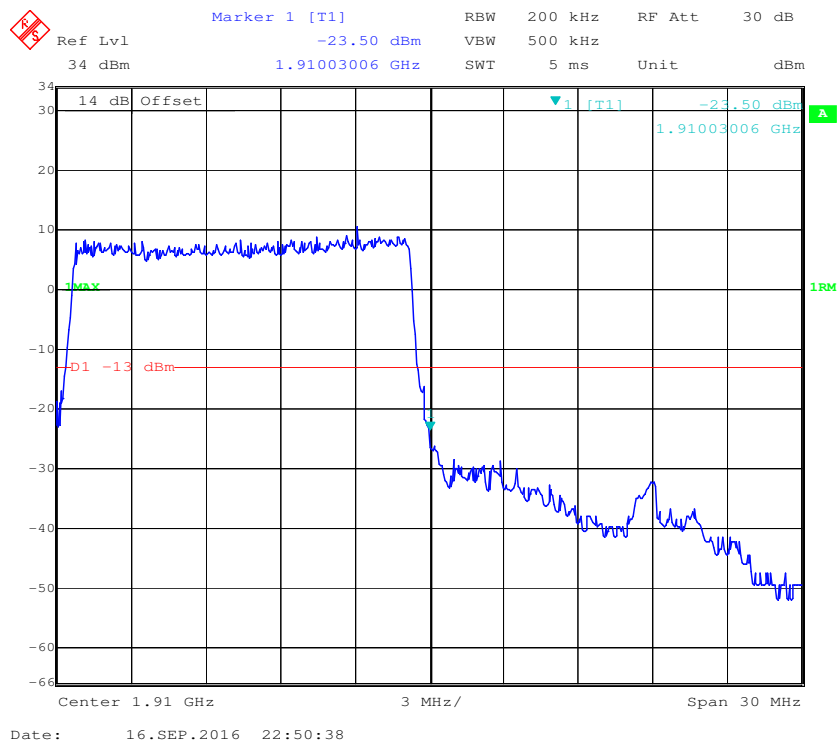QPSK (15.0 MHz, FULL RB) - Left Band Edge**QPSK (15.0 MHz, FULL RB) - Right Band Edge**


16-QAM (15.0 MHz, FULL RB) - Left Band Edge

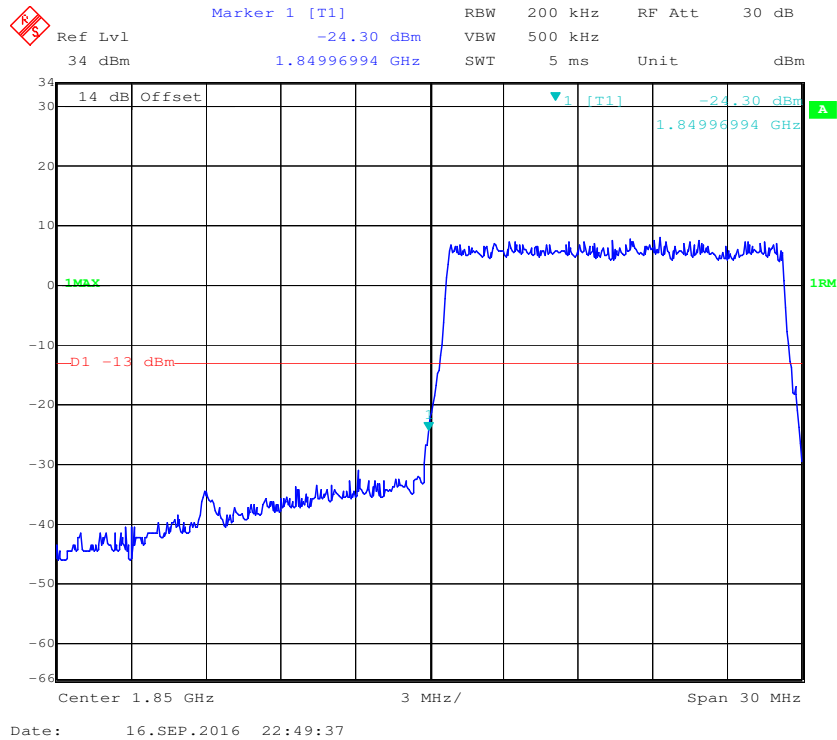


16-QAM (15.0 MHz, FULL RB) - Right Band Edge


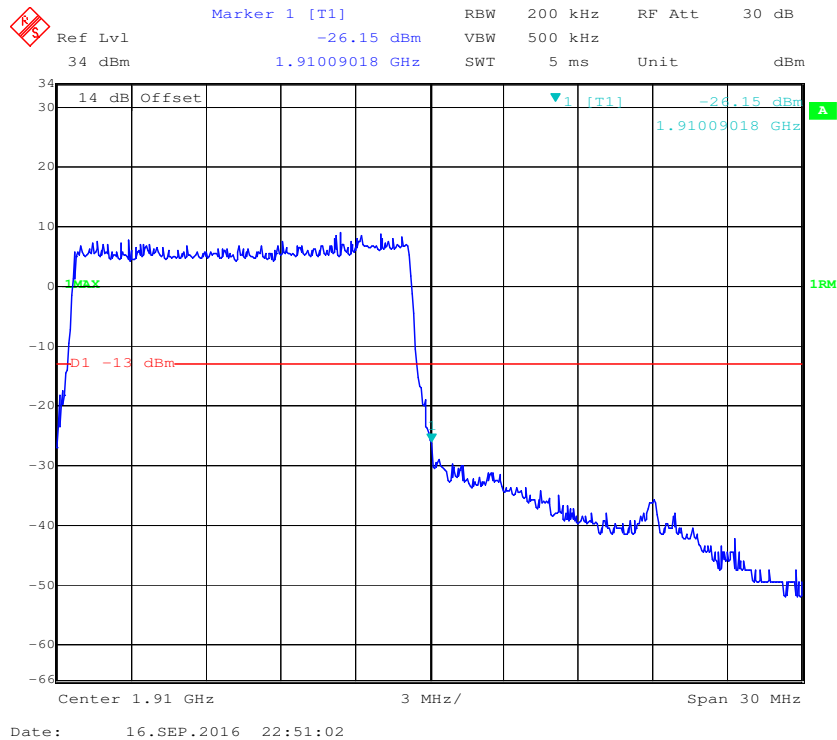


QPSK (20.0 MHz, FULL RB) - Left Band Edge

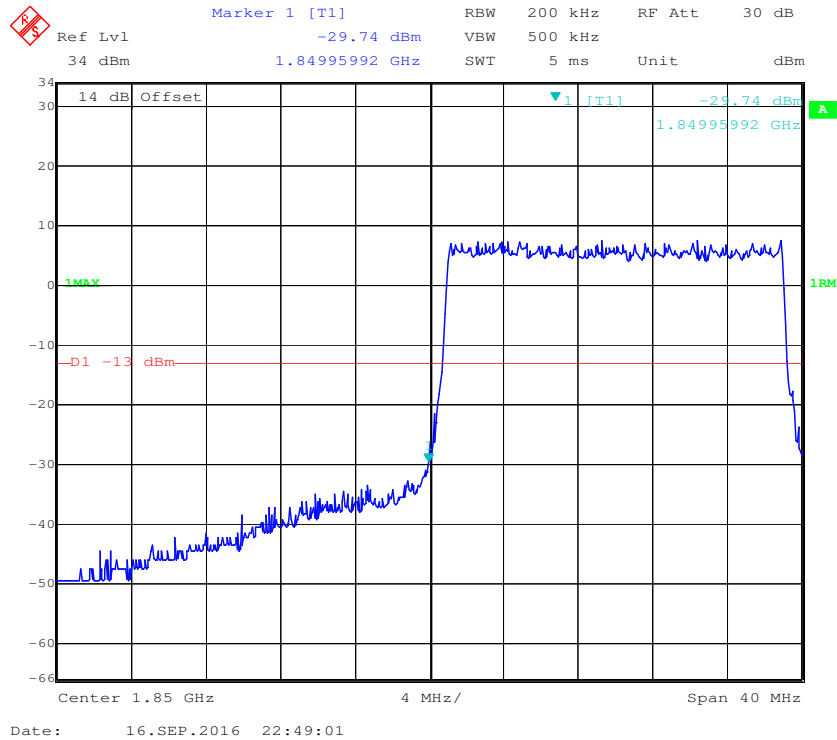


QPSK (20.0 MHz, FULL RB) - Right Band Edge

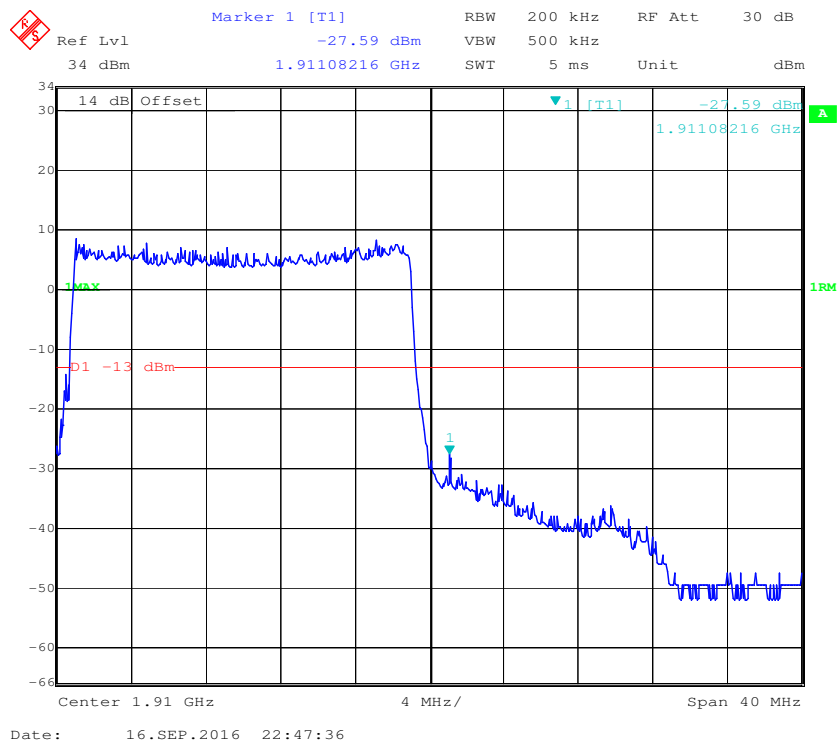

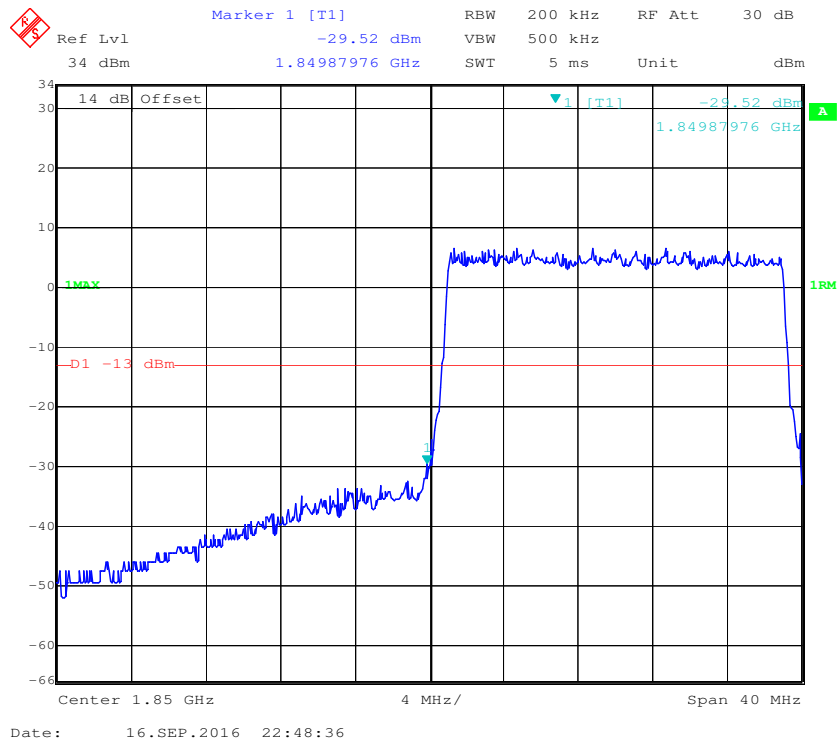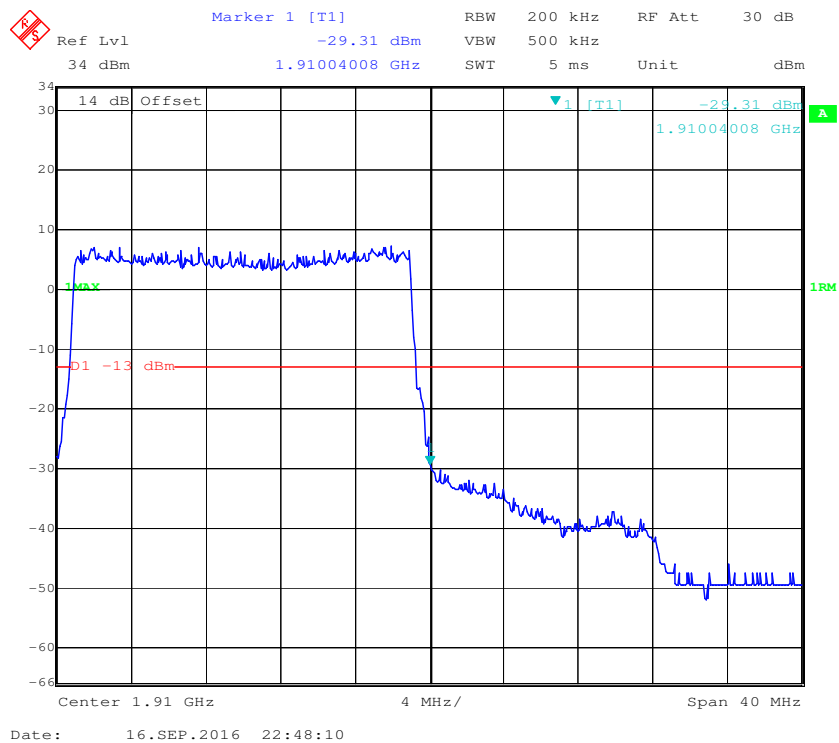
16-QAM (20.0 MHz, FULL RB) - Left Band Edge**16-QAM (20.0 MHz, FULL RB) - Right Band Edge**



Band 4:



QPSK (1.4 MHz, FULL RB) - Left Band Edge


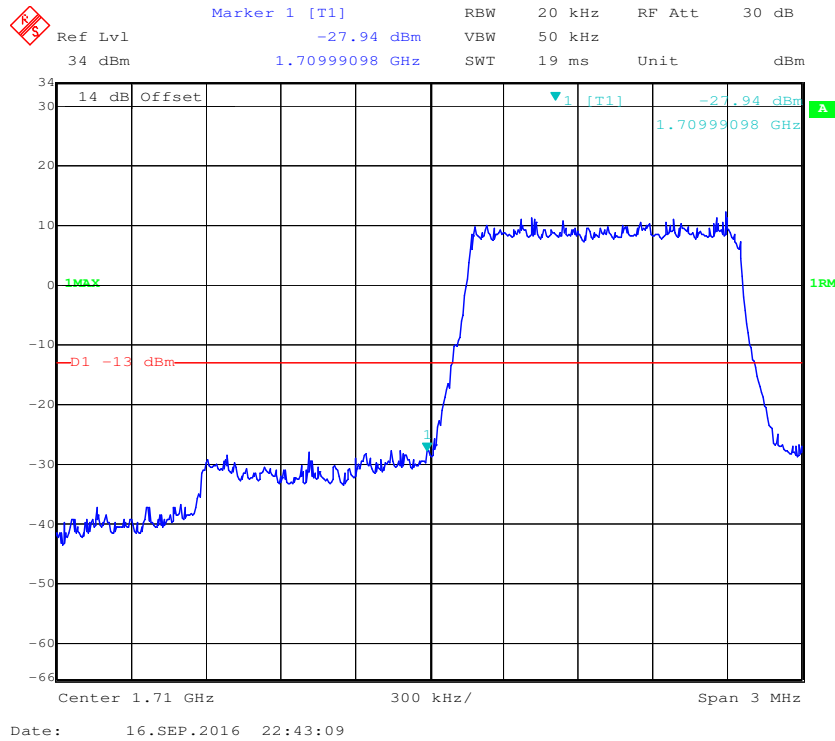


QPSK (1.4 MHz, FULL RB) - Right Band Edge

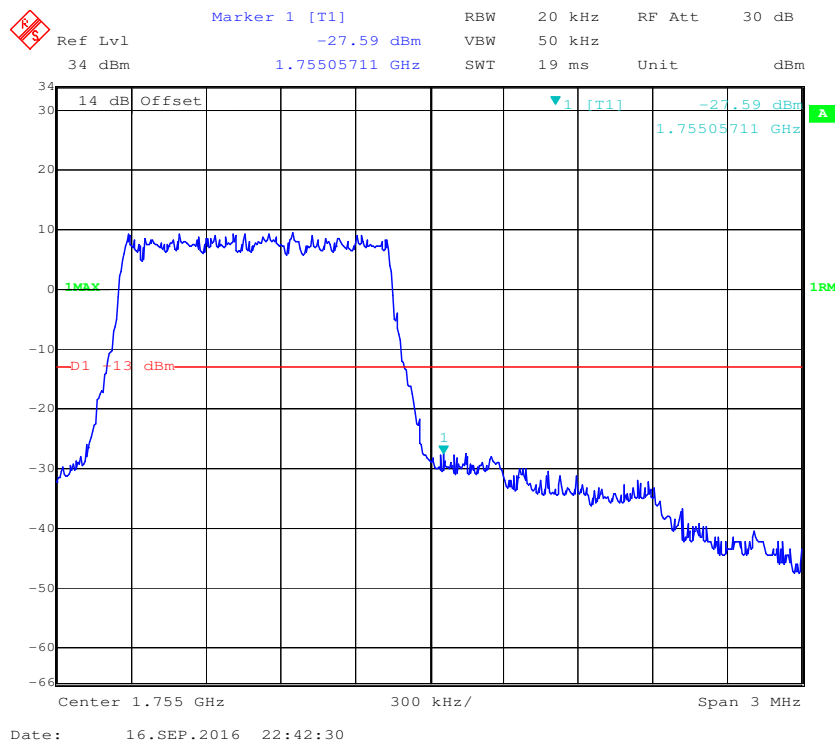


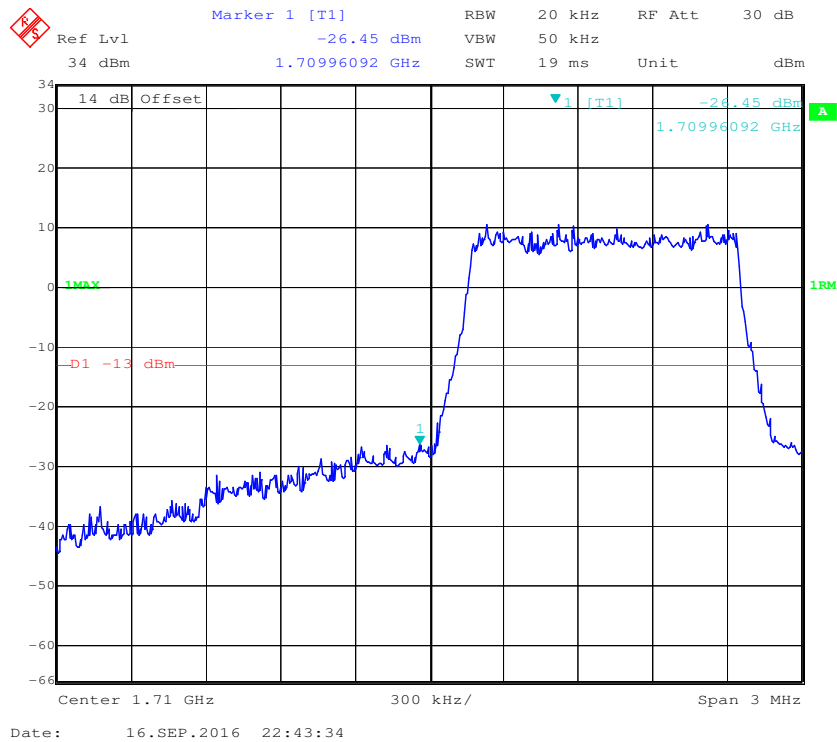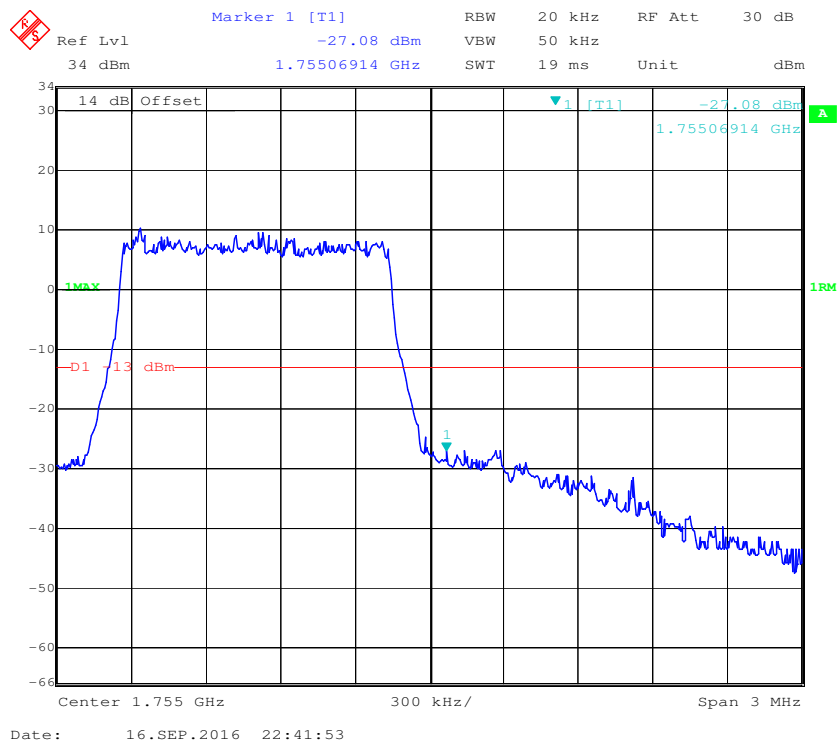16-QAM (1.4 MHz, FULL RB) - Left Band Edge**16-QAM (1.4 MHz, FULL RB) - Right Band Edge**

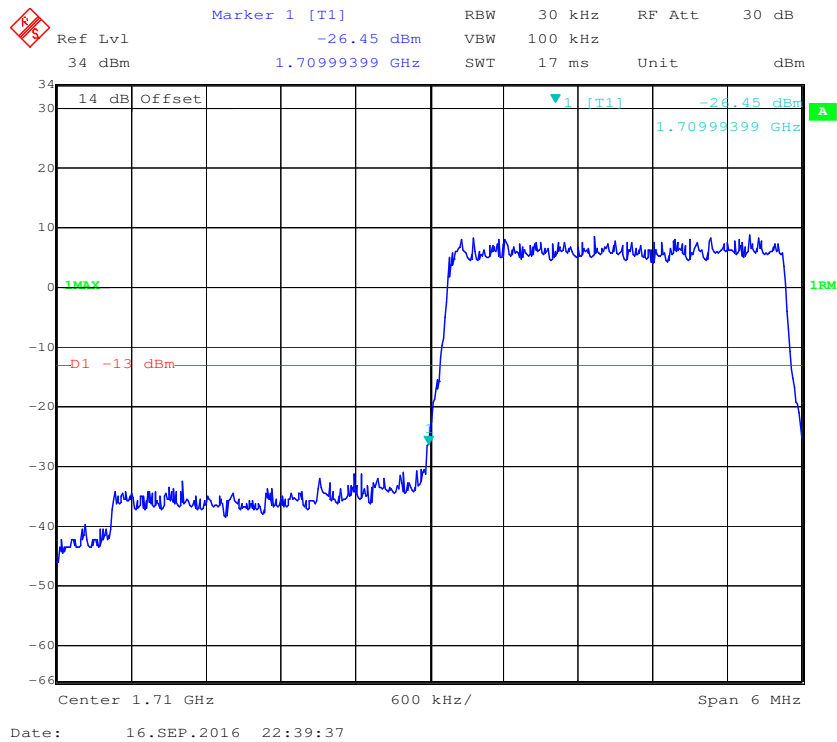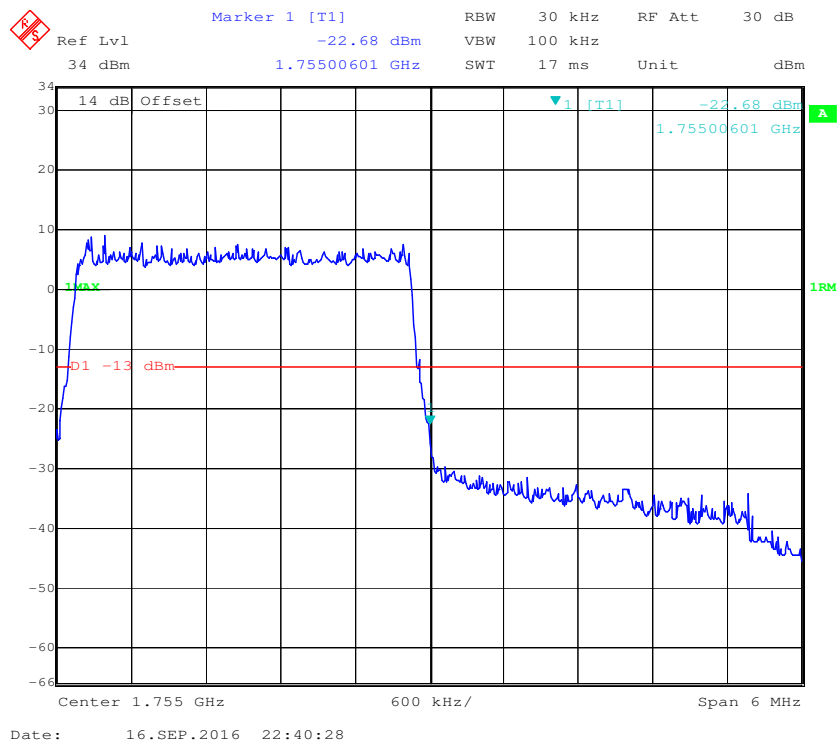
QPSK (3.0 MHz, FULL RB) - Left Band Edge**QPSK (3.0 MHz, FULL RB) - Right Band Edge**

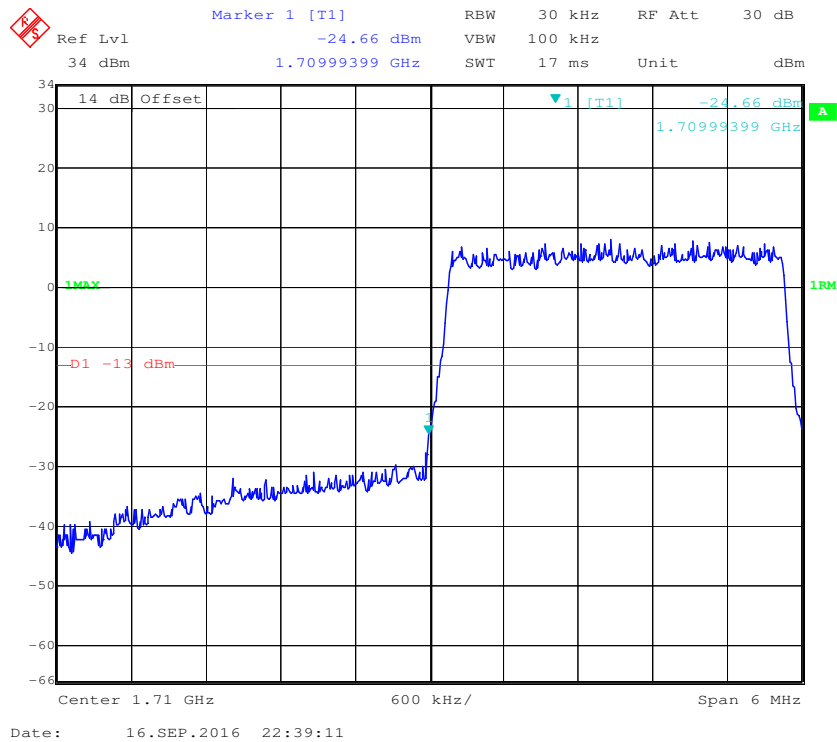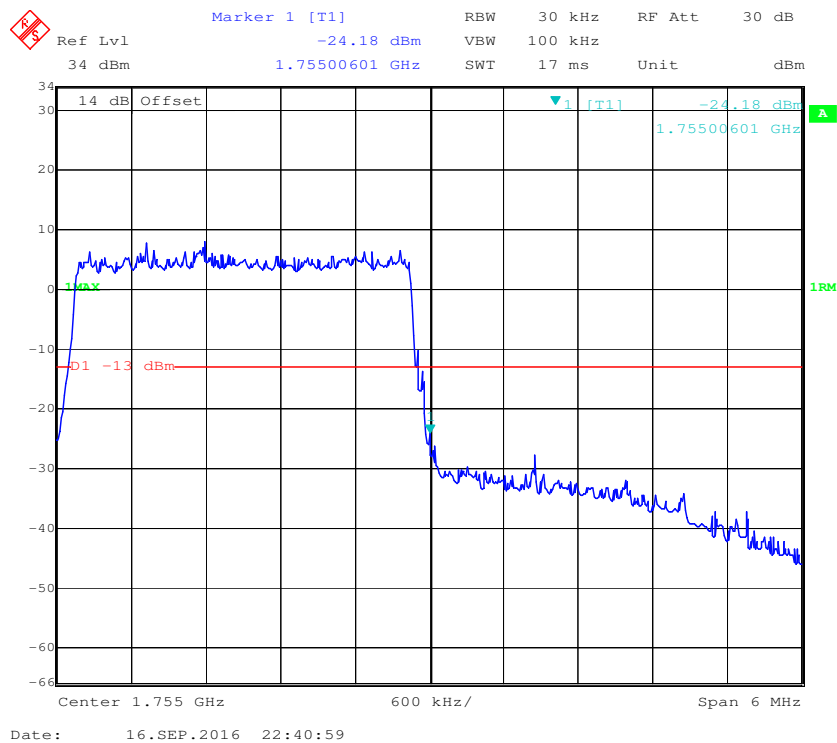16-QAM (3.0 MHz, FULL RB) - Left Band Edge**16-QAM (3.0 MHz, FULL RB) - Right Band Edge**


QPSK (5.0 MHz, FULL RB) - Left Band Edge

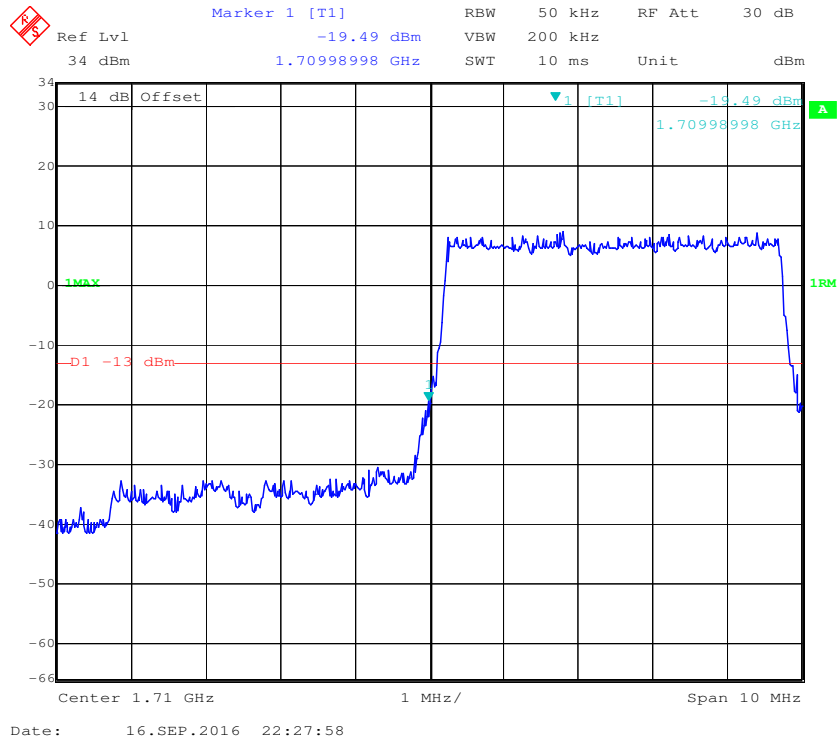


QPSK (5.0 MHz, FULL RB) - Right Band Edge

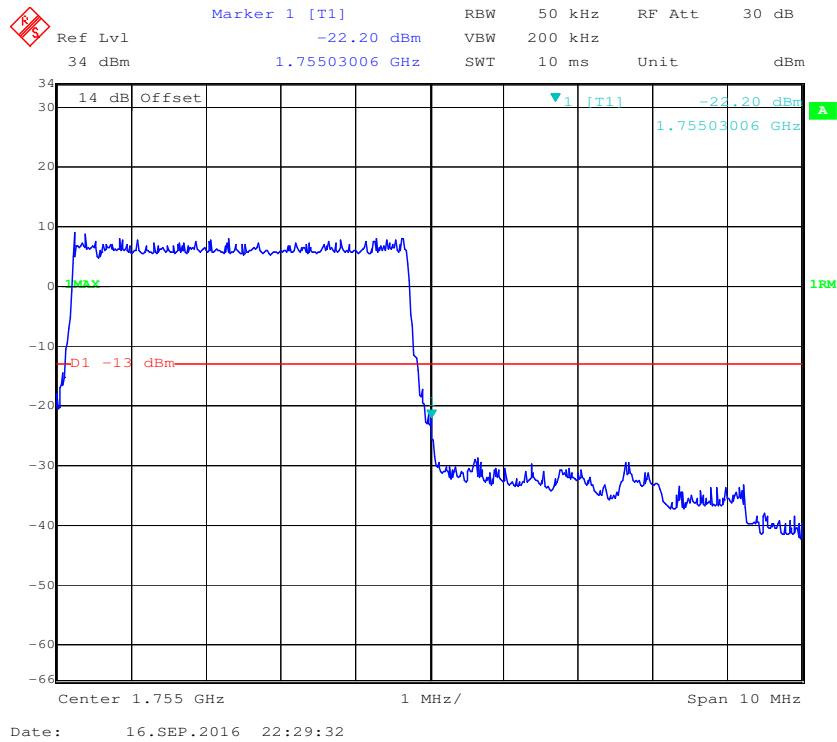


16-QAM (5.0 MHz, FULL RB) - Left Band Edge

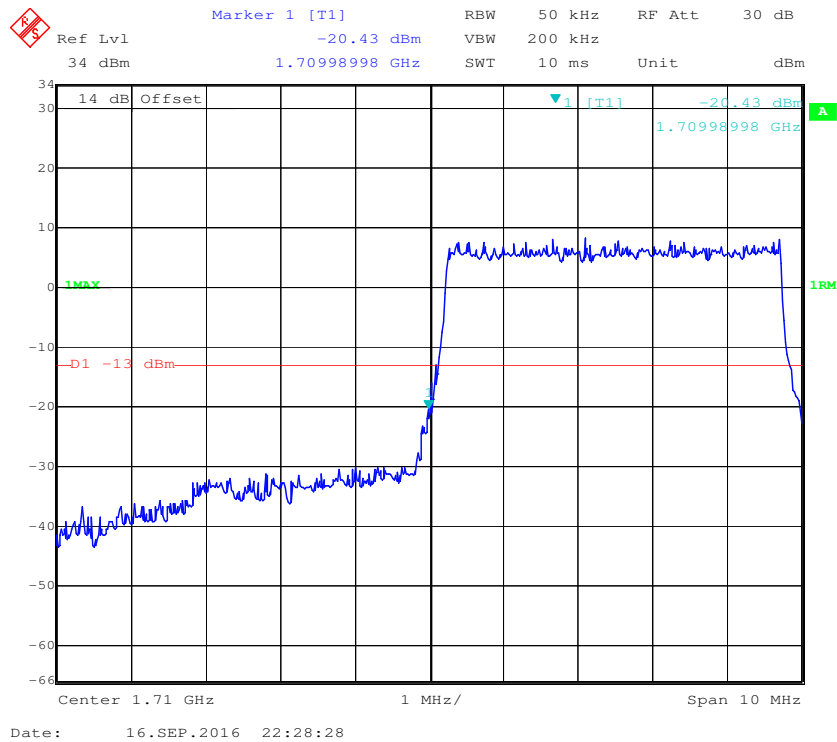


16-QAM (5.0 MHz, FULL RB) - Right Band Edge

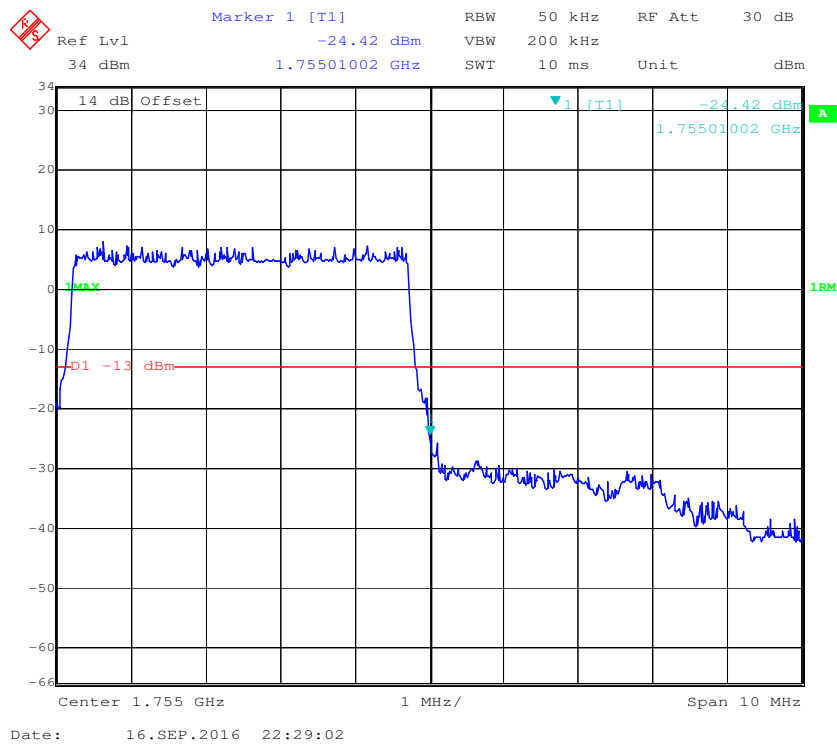


QPSK (10.0 MHz, FULL RB) - Left Band Edge

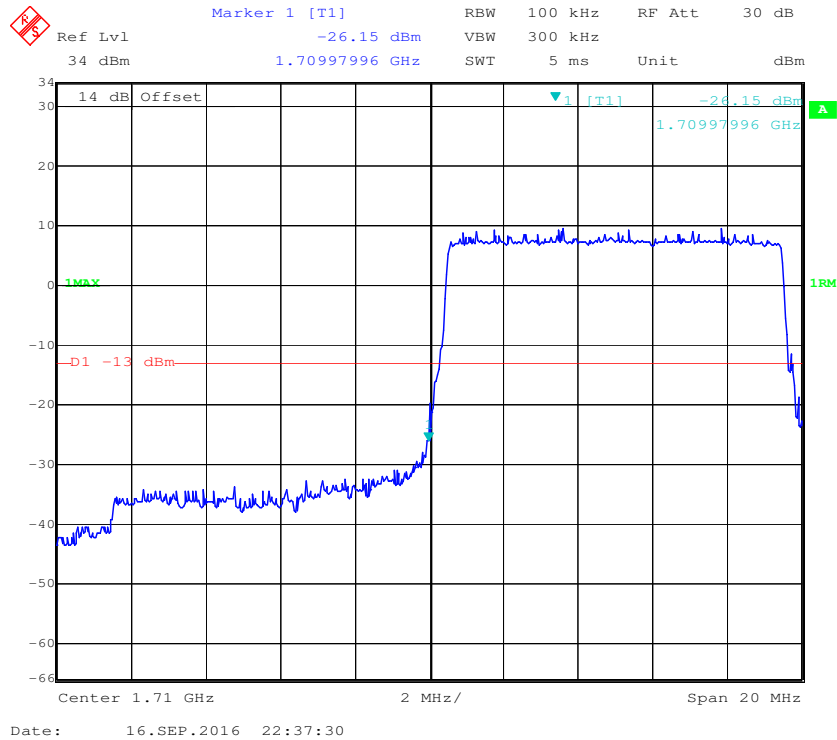


QPSK (10.0 MHz, FULL RB) - Right Band Edge

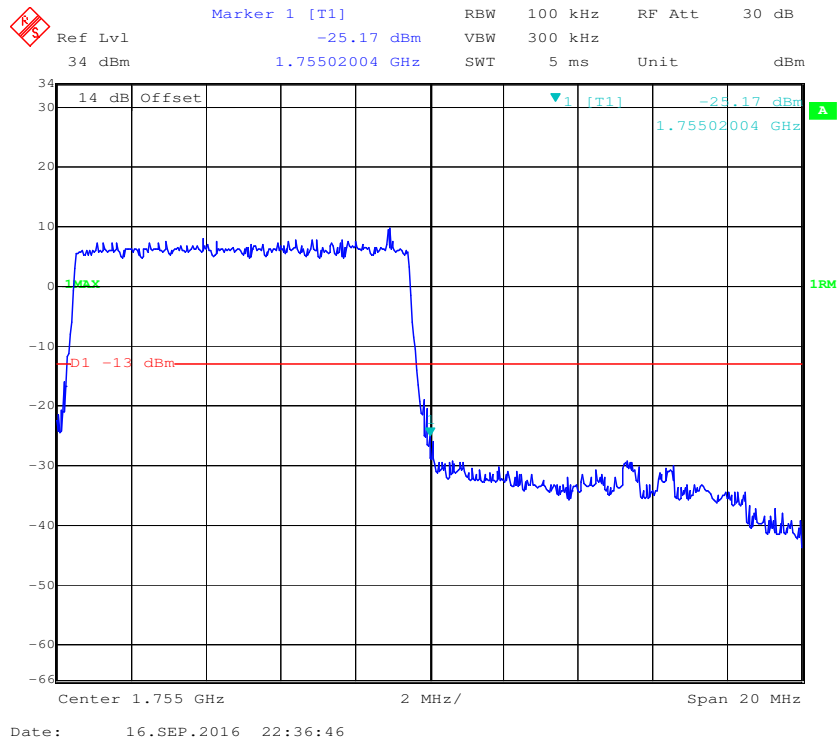


16-QAM (10.0 MHz, FULL RB) - Left Band Edge

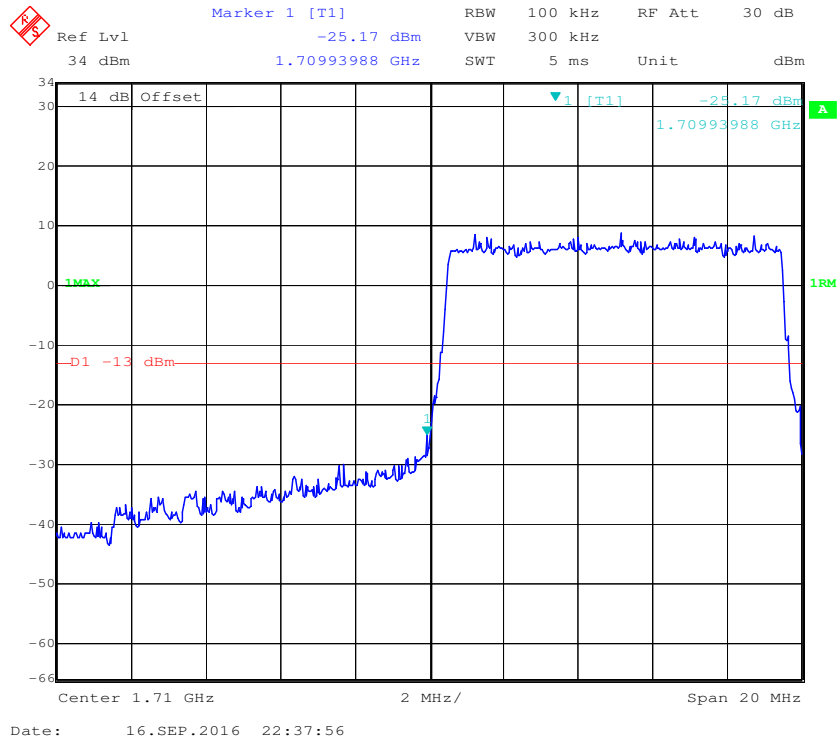


16-QAM (10.0 MHz, FULL RB) - Right Band Edge


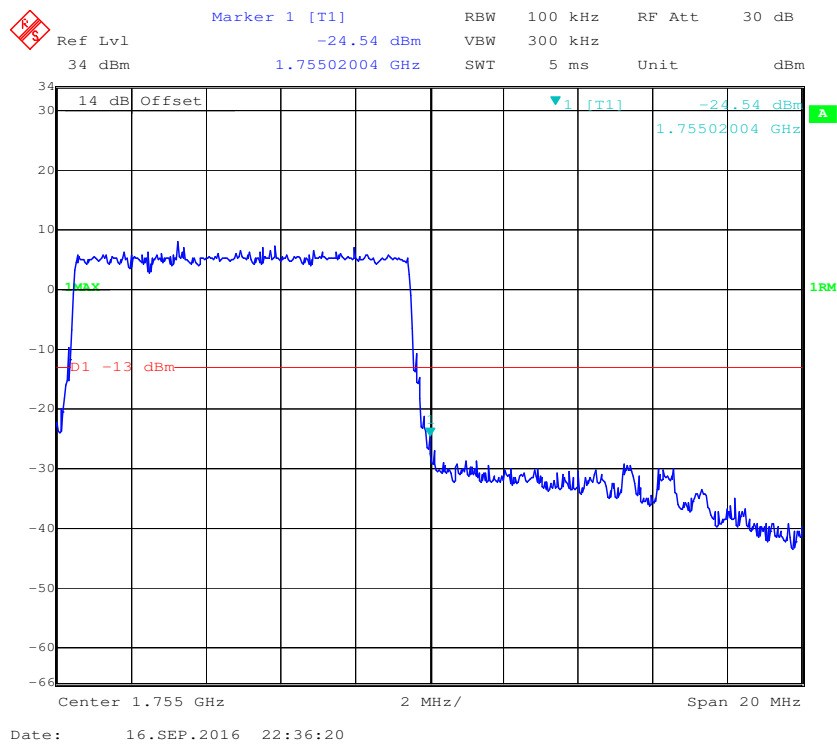


QPSK (15.0 MHz, FULL RB) - Left Band Edge

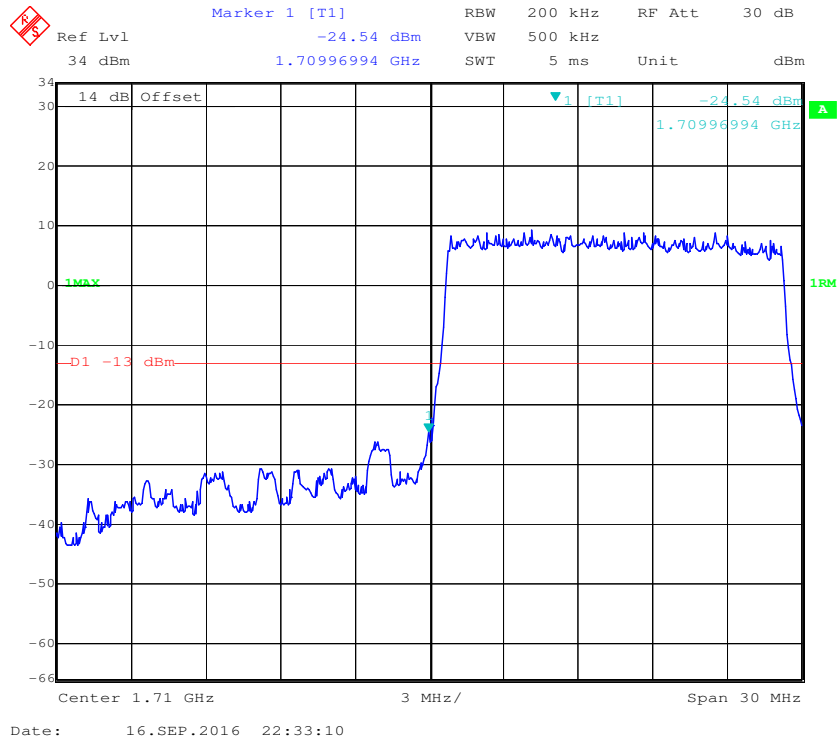


QPSK (15.0 MHz, FULL RB) - Right Band Edge

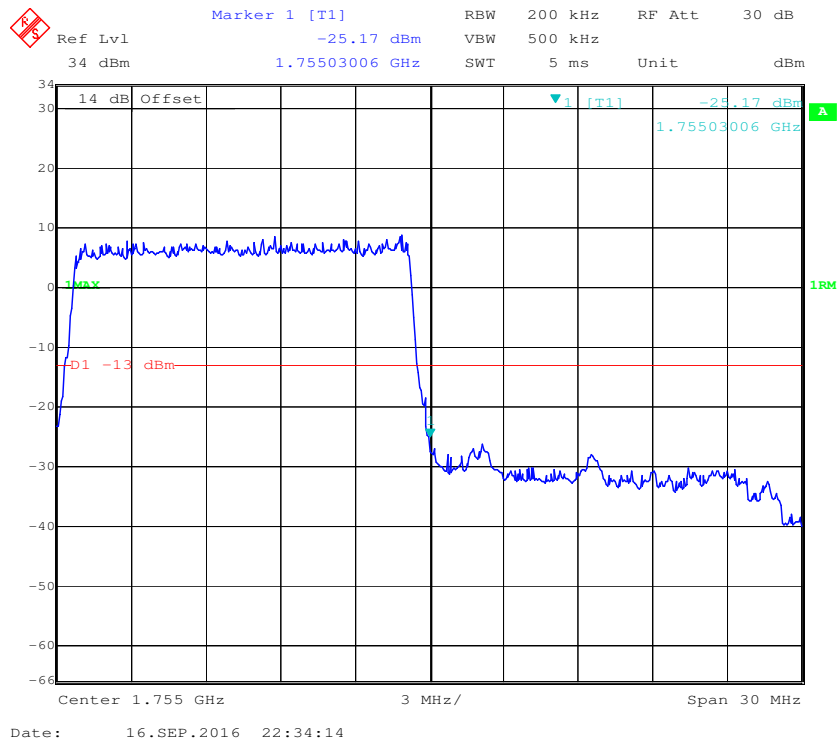


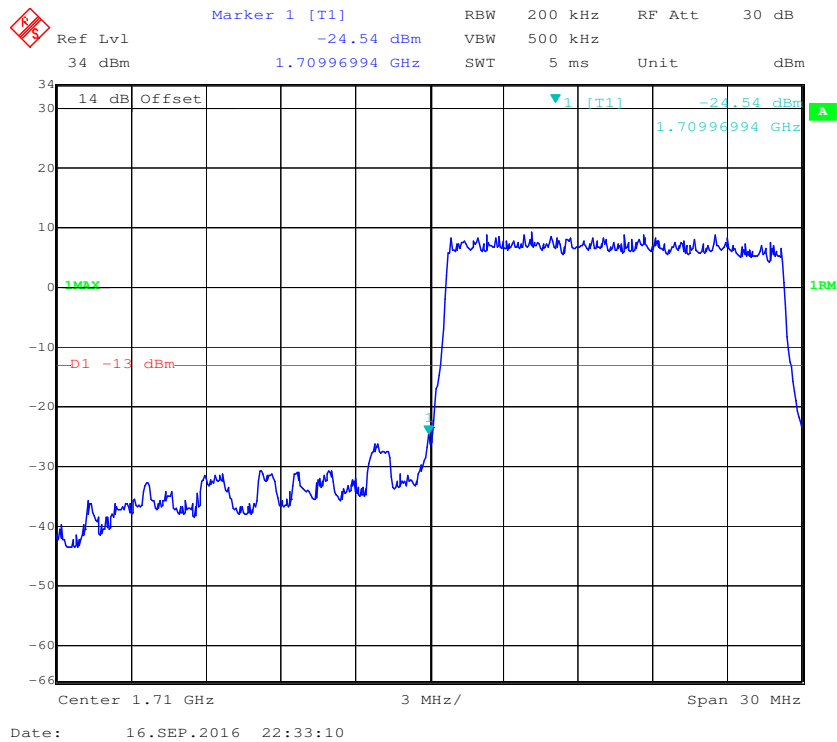
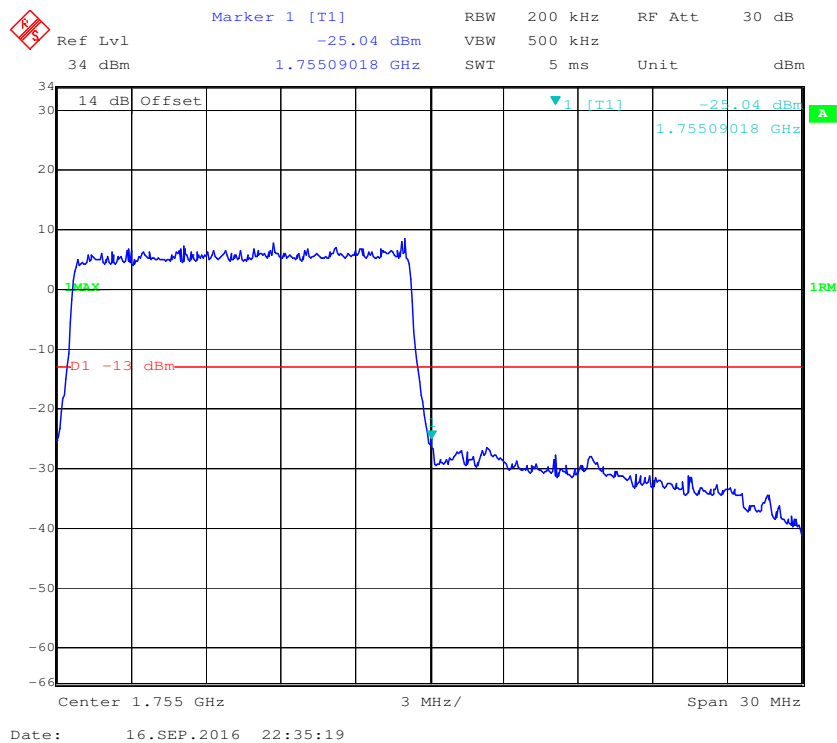
16-QAM (15.0 MHz, FULL RB) - Left Band Edge**16-QAM (15.0 MHz, FULL RB) - Right Band Edge**

QPSK (20.0 MHz, FULL RB) - Left Band Edge

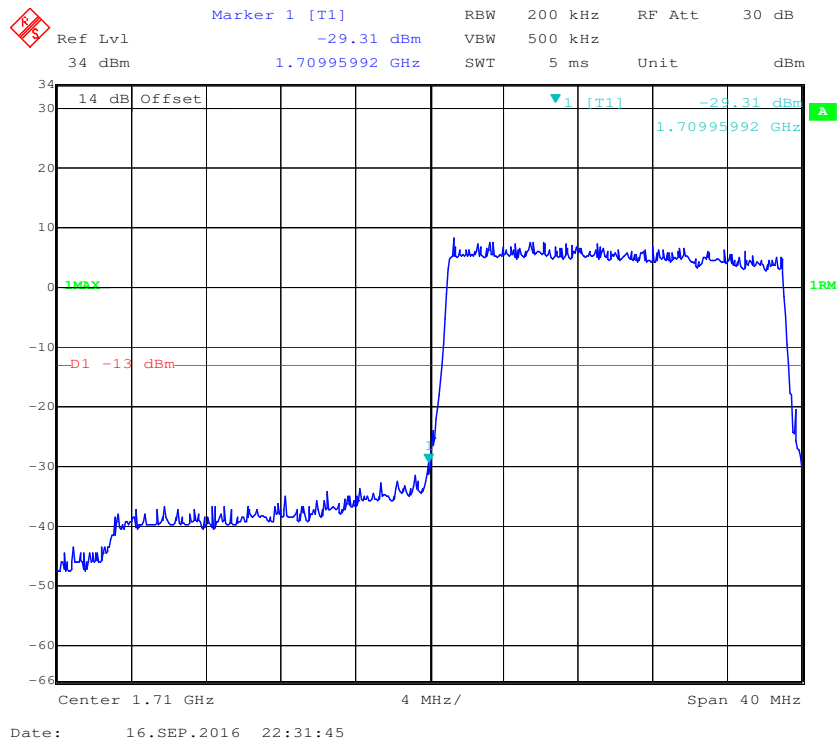

QPSK (20.0 MHz, FULL RB) - Right Band Edge

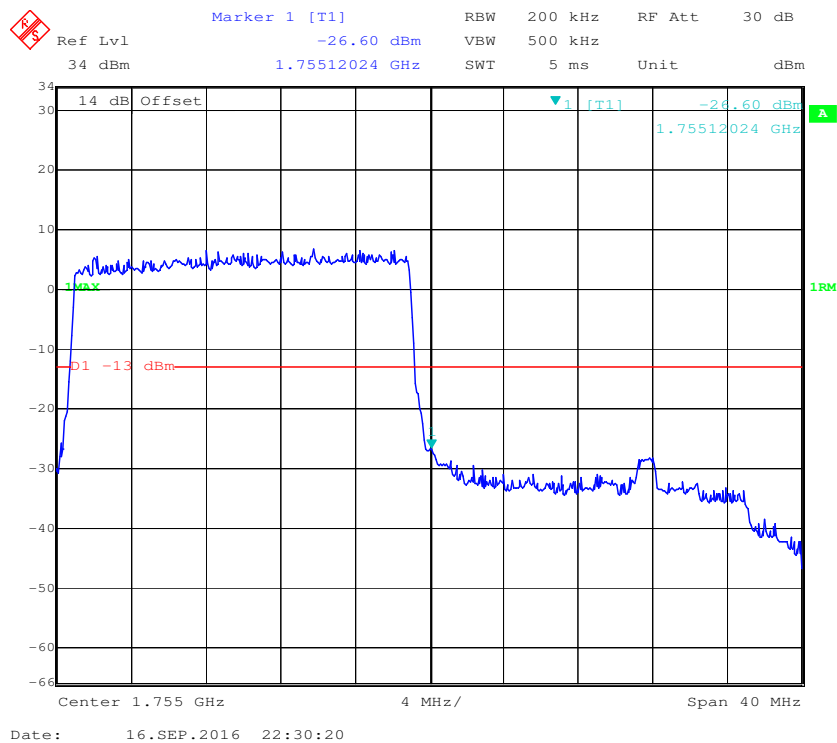

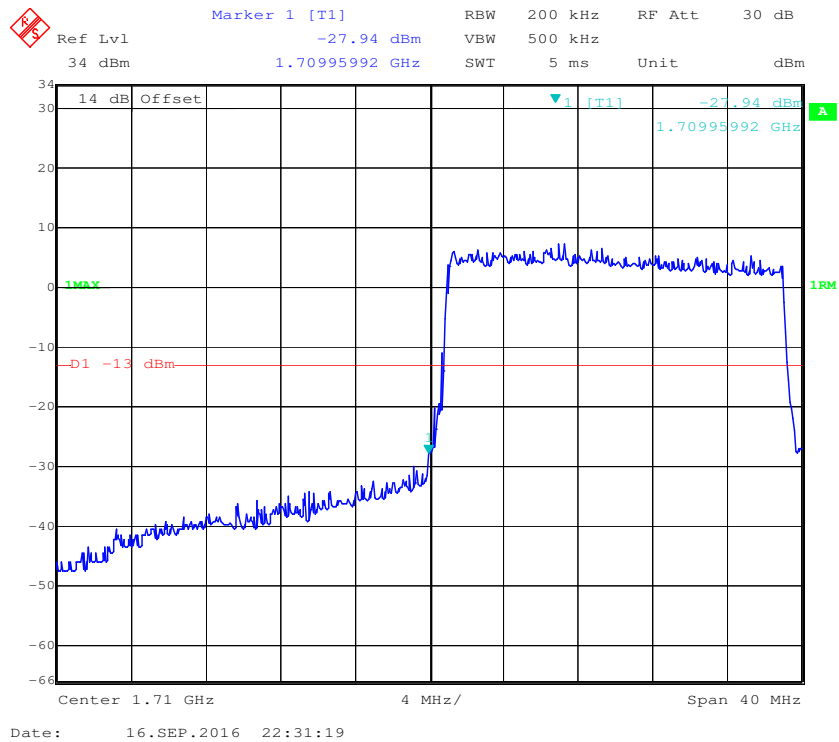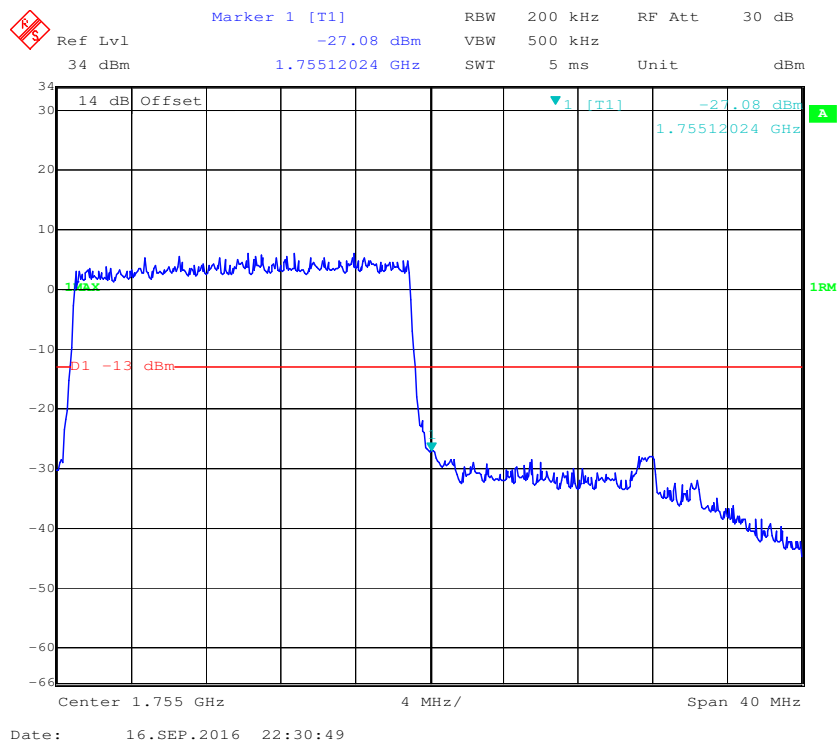16-QAM (20.0 MHz, FULL RB) - Left Band Edge**16-QAM (20.0 MHz, FULL RB) - Right Band Edge**

FCC §2.1055, §22.355 & §24.235 & §27.54 - FREQUENCY STABILITY**Applicable Standards**

FCC § 2.1055, §22.355, §24.235 and & §27.54.

According to FCC §2.1055, the frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

According to §22.355, the carrier frequency of each transmitter in the Public Mobile Services must be maintained within the tolerances given in Table below:

Frequency Tolerance for Transmitters in the Public Mobile Services

Frequency Range (MHz)	Base, fixed (ppm)	Mobile > 3 watts (ppm)	Mobile ≤ 3 watts (ppm)
25 to 50	20.0	20.0	50.0
50 to 450	5.0	5.0	50.0
450 to 512	2.5	5.0	5.0
821 to 896	1.5	2.5	2.5
928 to 929.	5.0	N/A	N/A
929 to 960.	1.5	N/A	N/A
2110 to 2220	10.0	N/A	N/A


According to §24.235, the frequency stability shall be sufficient to ensure that the fundamental emissions stays within the authorized frequency block.

Test Procedure

Frequency Stability vs. Temperature: The equipment under test was connected to an external DC power supply and the RF output was connected to communication test set via feed-through attenuators. The EUT was placed inside the temperature chamber. The DC leads and RF output cable exited the chamber through an opening made for the purpose.

After the temperature stabilized for approximately 20 minutes, the frequency output was recorded from the communication test set.

Frequency Stability vs. Voltage: For hand carried, battery powered equipment; reduce primary supply voltage to the battery operating end point which shall be specified by the manufacturer.

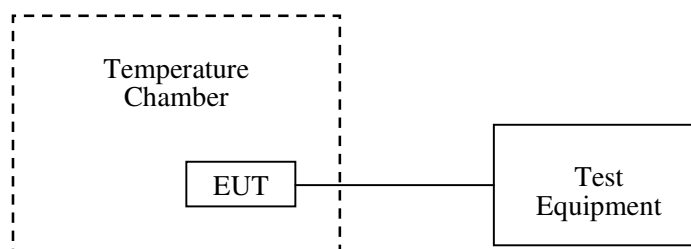

Test Data**Environmental Conditions**

Temperature:	25 °C
Relative Humidity:	55 %
ATM Pressure:	101.0 kPa

The testing was performed by Peter Jiang on 2016-09-23.

EUT operation mode: Transmitting

Test Result: Compliance. Please refer to the following tables.

Cellular Band (Part 22H)**GSM Mode**

Middle Channel, $f_0=836.6$ MHz				
Temperature (°C)	Voltage Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-30	3.7	3	0.003586	2.5
-20		5	0.005977	2.5
-10		0	0	2.5
0		2	0.002391	2.5
10		4	0.004781	2.5
20		3	0.003586	2.5
30		5	0.005977	2.5
40		-1	-0.001195	2.5
50		0	0	2.5
25	V min.= 3.5	1	0.001195	2.5
25	V max.= 4.2	3	0.003586	2.5

WCDMA Mode

Middle Channel, $f_0=836.6$ MHz				
Temperature (°C)	Voltage Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-30	3.7	1	0.001195	2.5
-20		3	0.003586	2.5
-10		-4	-0.004781	2.5
0		0	0	2.5
10		-2	-0.002391	2.5
20		1	0.001195	2.5
30		-1	-0.001195	2.5
40		2	0.002391	2.5
50		0	0	2.5
25	V min.= 3.5	-3	-0.003586	2.5
25	V max.= 4.2	2	0.002391	2.5

PCS Band (Part 24E)**GSM Mode**

Middle Channel, f_0 =1880.0 MHz				
Temperature (°C)	Voltage Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Result
-30	3.7	7	0.003723	pass
-20		8	0.004255	pass
-10		6	0.003191	pass
0		9	0.004787	pass
10		12	0.006383	pass
20		7	0.003723	pass
30		9	0.004787	pass
40		6	0.003191	pass
50		8	0.004255	pass
25	V min.= 3.5	10	0.005319	pass
25	V max.= 4.2	7	0.003723	pass

WCDMA Mode

Middle Channel, f_0 =1880.0 MHz				
Temperature (°C)	Voltage Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Result
-30	3.7	4	0.002128	pass
-20		0	0	pass
-10		3	0.001596	pass
0		0	0	pass
10		-2	-0.001064	pass
20		3	0.001596	pass
30		-1	-0.000532	pass
40		2	0.001064	pass
50		-1	-0.000532	pass
25	V min.= 3.5	-4	-0.002128	pass
25	V max.= 4.2	3	0.001596	pass

AWS Band (Part 27)**WCDMA Mode**

Middle Channel, $f_0 = 1732.6$ MHz				
Temperature (°C)	Voltage Supplied (V_{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-30	3.7	4	0.002309	pass
-20		0	0	pass
-10		3	0.001732	pass
0		0	0	pass
10		-2	-0.001154	pass
20		3	0.001732	pass
30		-1	-0.000577	pass
40		2	0.001154	pass
50		-1	-0.000577	pass
25	V min.= 3.5	-4	-0.002309	pass
25	V max.= 4.2	3	0.001732	pass

Band 2:

20.0 MHz Middle Channel, $f_0 = 1880$ MHz				
Temperature (°C)	Voltage Supplied (V_{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Result
-30	3.7	-1	-0.000532	pass
-20		2	0.001064	pass
-10		3	0.001596	pass
0		1	0.000532	pass
10		0	0.000000	pass
20		4	0.002128	pass
30		2	0.001064	pass
40		4	0.002128	pass
50		-1	-0.000532	pass
25	V min.= 3.5	1	0.000532	pass
25	V max.= 4.2	-2	-0.001064	pass

Band 4:

20.0 MHz Middle Channel, $f_0 = 1732.5$ MHz				
Temperature (°C)	Voltage Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Result
-30	3.7	-2	-0.001154	pass
-20		0	0	pass
-10		2	0.001154	pass
0		3	0.001732	pass
10		-1	-0.000577	pass
20		1	0.000577	pass
30		0	0	pass
40		3	0.001732	pass
50		1	0.000577	pass
25	V min.= 3.5	2	0.001154	pass
25	V max.= 4.2	0	0	pass

***** END OF REPORT *****