

## FCC TEST REPORT

For

Shenzhen Sunshine Technology Development Co.,Ltd

Multi-rotor Unmanned aerial vehicles

Test Model: Onagofly 1 plus

Prepared for : Shenzhen Sunshine Technology Development Co.,Ltd  
Address : 16th Floor H Unit, Baoneng Science and Technology, Qingxiang Road, Longhua street, Longhua District, Shenzhen City, Guangdong, China

Prepared by : Shenzhen LCS Compliance Testing Laboratory Ltd.  
Address : 1/F., Xingyuan Industrial Park, Tongda Road, Bao'an Avenue, Bao'an District, Shenzhen, Guangdong, China

Tel : (+86)755-82591330  
Fax : (+86)755-82591332  
Web : www.LCS-cert.com  
Mail : webmaster@LCS-cert.com

Date of receipt of test sample : August 22, 2015  
Number of tested samples : 1  
Sample number : 16081911  
Date of Test : August 22, 2015 - September 06, 2015  
Date of Report : September 06, 2015

# FCC TEST REPORT

FCC CFR 47 PART 15 C(15.247): 2015

Report Reference No. .... : LCS1608221817E

Date of Issue..... : September 06, 2015

Testing Laboratory Name ..... : Shenzhen LCS Compliance Testing Laboratory Ltd.

Address..... : 1/F., Xingyuan Industrial Park, Tongda Road, Bao'an Avenue,  
Bao'an District, Shenzhen, Guangdong, China

Testing Location/ Procedure ..... : Full application of Harmonised standards ☒  
Partial application of Harmonised standards ☐  
Other standard testing method ☐

Applicant's Name..... : Shenzhen Sunshine Technology Development Co.,Ltd

Address..... : 16th Floor H Unit, Baoneng Science and Technology, Qingxiang  
Road, Longhua street, Longhua District, Shenzhen City,  
Guangdong, China

## Test Specification

Standard ..... : FCC CFR 47 PART 15 C(15.247): 2015 / ANSI C63.10: 2013

Test Report Form No..... : LCSEMC-1.0

TRF Originator..... : Shenzhen LCS Compliance Testing Laboratory Ltd.

Master TRF ..... : Dated 2011-03

**Shenzhen LCS Compliance Testing Laboratory Ltd. All rights reserved.**

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen LCS Compliance Testing Laboratory Ltd. is acknowledged as copyright owner and source of the material. Shenzhen LCS Compliance Testing Laboratory Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test Item Description..... : Multi-rotor Unmanned aerial vehicles

Trade Mark..... : anago

Test Model ..... : Onagofly 1 plus

Ratings ..... : DC 7.4V by li-ion polymer battery(900mAh)  
Recharged Voltage: DC 7.4V/2A

Result ..... : Positive

Compiled by:




Dick Su/ File administrators

Supervised by:



Glin Lu/ Technique principal

Approved by:



Gavin Liang/ Manager

## FCC -- TEST REPORT

<b>Test Report No. : LCS1608221817E</b>	<u>September 06, 2015</u> Date of issue
---	--

Test Model.....	: Onagofly 1 plus
EUT.....	: Multi-rotor Unmanned aerial vehicles
<b>Applicant.....</b>	<b>: Shenzhen Sunshine Technology Development Co.,Ltd</b>
Address.....	: 16th Floor H Unit, Baoneng Science and Technology, Qingxiang Road, Longhua street, Longhua District, Shenzhen City, Guangdong, China
Telephone.....	: /
Fax.....	: /
<b>Manufacturer.....</b>	<b>: Shenzhen Sunshine Technology Development Co.,Ltd</b>
Address.....	: 16th Floor H Unit, Baoneng Science and Technology, Qingxiang Road, Longhua street, Longhua District, Shenzhen City, Guangdong, China
Telephone.....	: /
Fax.....	: /
<b>Factory.....</b>	<b>: Shenzhen Sunshine Technology Development Co.,Ltd</b>
Address.....	: 16th Floor H Unit, Baoneng Science and Technology, Qingxiang Road, Longhua street, Longhua District, Shenzhen City, Guangdong, China
Telephone.....	: /
Fax.....	: /

<b>Test Result</b>	<b>Positive</b>
--------------------	-----------------

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

## Revision History

Revision	Issue Date	Revisions	Revised By
00	September 06, 2016	Initial Issue	Gavin Liang


## TABLE OF CONTENTS

<b>1. GENERAL INFORMATION .....</b>	<b>6</b>
1.1. DESCRIPTION OF DEVICE (EUT) .....	6
1.2. HOST SYSTEM CONFIGURATION LIST AND DETAILS .....	7
1.3. EXTERNAL I/O .....	7
1.4. DESCRIPTION OF TEST FACILITY .....	8
1.5. LIST OF MEASURING EQUIPMENT .....	8
1.6. STATEMENT OF THE MEASUREMENT UNCERTAINTY .....	9
1.7. MEASUREMENT UNCERTAINTY .....	9
1.8. DESCRIPTION OF TEST MODES .....	9
<b>2. TEST METHODOLOGY .....</b>	<b>11</b>
2.1. EUT CONFIGURATION .....	11
2.2. EUT EXERCISE .....	11
2.3. GENERAL TEST PROCEDURES .....	11
<b>3. SYSTEM TEST CONFIGURATION .....</b>	<b>12</b>
3.1. JUSTIFICATION .....	12
3.2. EUT EXERCISE SOFTWARE .....	12
3.3. SPECIAL ACCESSORIES .....	12
3.4. BLOCK DIAGRAM/SCHEMATICS .....	12
3.5. EQUIPMENT MODIFICATIONS .....	12
3.6. TEST SETUP .....	12
<b>4. SUMMARY OF TEST RESULTS.....</b>	<b>13</b>
<b>5. TEST RESULT .....</b>	<b>14</b>
5.1. MAXIMUM CONDUCTED OUTPUT POWER MEASUREMENT .....	14
5.2. MAXIMUM AVERAGE CONDUCTED OUTPUT POWER MEASUREMENT .....	16
5.2. POWER SPECTRAL DENSITY MEASUREMENT .....	18
5.3. 6 dB SPECTRUM BANDWIDTH MEASUREMENT .....	24
5.4. RADIATED EMISSIONS MEASUREMENT .....	35
5.5. CONDUCTED SPURIOUS EMISSIONS AND BAND EDGES TEST .....	<a href="#">5249</a>
5.6. POWER LINE CONDUCTED EMISSIONS .....	<a href="#">5754</a>
5.7. ANTENNA REQUIREMENTS.....	<a href="#">6057</a>

## **1. GENERAL INFORMATION**

### **1.1. Description of Device (EUT)**

EUT	: Multi-rotor Unmanned aerial vehicles
Test Model	: Onagofly 1 plus
Hardware Version	: F110_Pro_M8_V1.2
Software Version	: /
Power Supply	: DC 7.4V by li-ion polymer battery(900mAh) Recharged Voltage: DC 7.4V/2A
EUT Support	: WIFI
Radios Application	
2.4G WIFI Technology	:
Operating Frequency	: 2412.00-2462.00MHz
Channel Spacing	: 5MHz
Channel Number	: 11 Channels for 20MHz Bandwidth 7 Channels for 40MHz Bandwidth
Modulation Type	: 802.11b: DSSS; 802.11g/n: OFDM
Antenna Description	: IFA Antenna(Chain 0), 5.0dBi(Max.) For 2.4G Band; IFA Antenna(Chain 1), 5.0dBi(Max.) For 2.4G Band

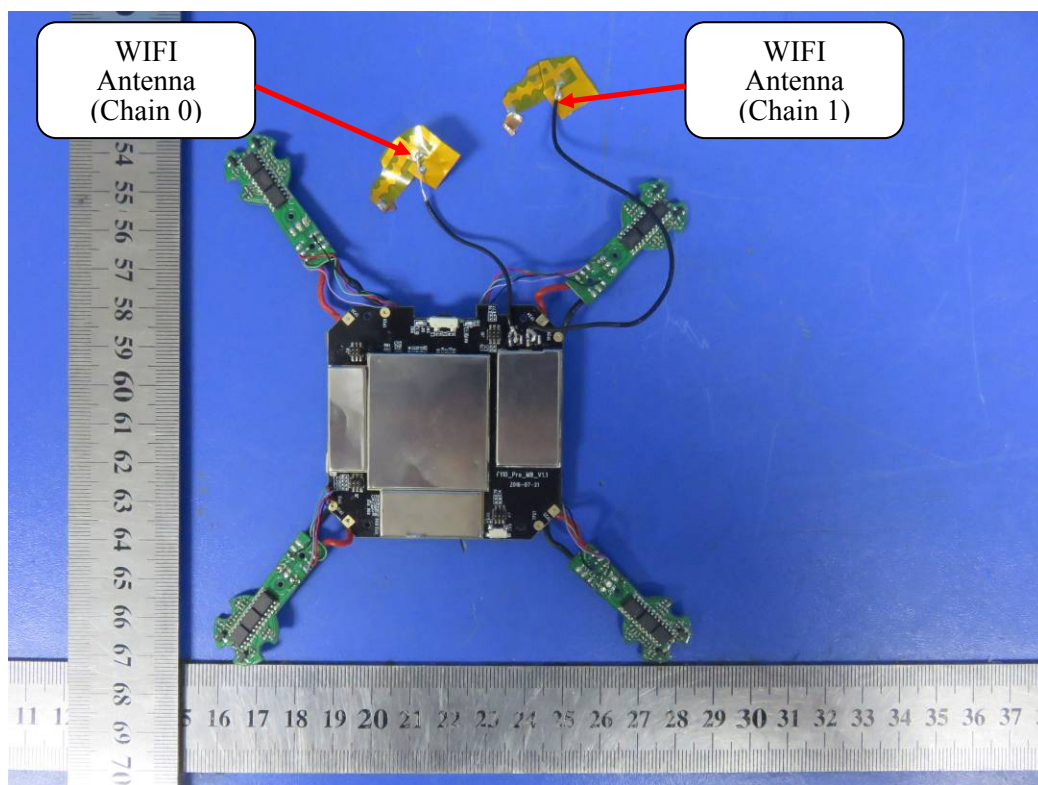

## 1.2. Host System Configuration List and Details

Manufacturer	Description	Model	Serial Number	Certificate
Lenovo	PC	B470	--	DOC
Lenovo	AC/DC ADAPTER	ADP-90DDB	--	DOC

## 1.3. External I/O

I/O Port Description	Quantity	Cable
USB Port	1	N/A
TF Card Slot	1	N/A

## 1.4. Description of Test Facility

CNAS Registration Number. is L4595.

FCC Registration Number. is 899208.

Industry Canada Registration Number. is 9642A-1.

VCCI Registration Number. is C-4260 and R-3804.

ESMD Registration Number. is ARCB0108.

UL Registration Number. is 100571-492.

TUV SUD Registration Number. is SCN1081.

TUV RH Registration Number. is UA 50296516-001

## 1.5. List Of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Cal Date	Due Date
EMC Receiver	R&S	ESCS 30	100174	9kHz – 2.75GHz	June 18,2016	June 17,2017
Signal analyzer	Agilent	E4448A(External mixers to 40GHz)	US44300469	9kHz~40GHz	July 16,2016	July 15,2017
LISN	MESS Tec	NNB-2/16Z	99079	9KHz-30MHz	June 18,2016	June 17,2017
LISN (Support Unit)	EMCO	3819/2NM	9703-1839	9KHz-30MHz	June 18,2016	June 17,2017
RF Cable-CON	UTIFLEX	3102-26886-4	CB049	9KHz-30MHz	June 18,2016	June 17,2017
ISN	SCHAFFNER	ISN ST08	21653	9KHz-30MHz	June 18,2016	June 17,2017
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	30M-1GHz 3m	June 18,2016	June 17,2017
Amplifier	SCHAFFNER	COA9231A	18667	9kHz-2GHz	June 18,2016	June 17,2017
Amplifier	Agilent	8449B	3008A02120	1GHz-26.5GHz	July 16,2016	July 15,2017
Amplifier	MITEQ	AMF-6F-260400	9121372	26.5GHz-40GHz	July 16,2016	July 15,2017
Spectrum Analyzer	Agilent	E4407B	MY41440292	9k-26.5GHz	July 16,2016	July 15,2017
MAX Signal Analyzer	Agilent	N9020A	MY50510140	20Hz~26.5GHz	Oct. 27, 2015	Oct. 26, 2016
Loop Antenna	R&S	HFH2-Z2	860004/001	9k-30MHz	June 18,2016	June 17,2017
By-log Antenna	SCHWARZBECK	VULB9163	9163-470	30MHz-1GHz	June 10,2016	June 09,2017
Horn Antenna	EMCO	3115	6741	1GHz-18GHz	June 10,2016	June 09,2017
Horn Antenna	SCHWARZBECK	BBHA9170	BBHA9170154	15GHz-40GHz	June 10,2016	June 09,2017
RF Cable-R03m	Jye Bao	RG142	CB021	30MHz-1GHz	June 18,2016	June 17,2017
RF Cable-HIGH	SUHNER	SUCOFLEX 106	03CH03-HY	1GHz-40GHz	June 18,2016	June 17,2017
Spectrum Meter	R&S	FSP 30	100023	9kHz-30GHz	July 16,2016	July 15,2017
Power Meter	R&S	NRVS	100444	DC-40GHz	June 18,2016	June 17,2017
Power Sensor	R&S	NRV-Z51	100458	DC-30GHz	June 18,2016	June 17,2017
Power Sensor	R&S	NRV-Z32	10057	30MHz-6GHz	June 18,2016	June 17,2017
RF CABLE-1m	JYE Bao	RG142	CB034-1m	20MHz-7GHz	June 18,2016	June 17,2017
RF CABLE-2m	JYE Bao	RG142	CB035-2m	20MHz-1GHz	June 18,2016	June 17,2017

Note: All equipment through GRGT EST calibration



## 1.6. Statement of The Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. To CISPR 16 – 4 “Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements” and is documented in the LCS quality system acc. To DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

## 1.7. Measurement Uncertainty

Test Item		Frequency Range	Uncertainty	Note
Radiation Uncertainty	:	9KHz~30MHz	3.10dB	(1)
		30MHz~200MHz	2.96dB	(1)
		200MHz~1000MHz	3.10dB	(1)
		1GHz~26.5GHz	3.80dB	(1)
		26.5GHz~40GHz	3.90dB	(1)
Conduction Uncertainty	:	150kHz~30MHz	1.63dB	(1)
Power disturbance	:	30MHz~300MHz	1.60dB	(1)

(1). This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

## 1.8. Description Of Test Modes

The EUT has been tested under operating condition.

The EUT was set to transmit at 100% duty cycle. This test was performed with EUT in X, Y, Z position and the worse case was found when EUT in Y position.

For pre-testing, the input Voltage/Frequency AC 120V/60Hz and AC 240V/60Hz were used. We found that the Input AC 120V/60Hz was the worst case and used for the full test and recorded in this report.

Worst-case mode and channel used for 150kHz-30 MHz power line conducted emissions was determined to be 802.11n(HT20) mode(Low Channel, Chain 0 + Chain 1).

Worst-case mode and channel used for 9kHz-1000 MHz radiated emissions was determined to be 802.11n(HT20) mode(Low Channel, Chain 0 + Chain 1).

Worst-Case data rates were utilized from preliminary testing of the Chipset, worst-case data rates used during the testing are as follows:

802.11b Mode: 1 Mbps, DSSS.

802.11g Mode: 6 Mbps, OFDM.

802.11n(HT20) Mode: MCS0, OFDM.

802.11n(HT40) Mode: MCS0, OFDM.

Antenna & Bandwidth For 2.4G WIFI Part:

Antenna	Chain 0		Chain 1	
Bandwidth Mode	20MHz	40MHz	20MHz	40MHz
802.11b	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
802.11g	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
802.11n(HT20)	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
802.11n(HT40)	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>

### Channel List & Frequency

802.11b/g/n(HT20):

Frequency Band	Channel No.	Frequency(MHz)	Channel No.	Frequency(MHz)
2412~2462MHz	1	2412	7	2442
	2	2417	8	2447
	3	2422	9	2452
	4	2427	10	2457
	5	2432	11	2462
	6	2437	--	--

802.11n(HT40):

Frequency Band	Channel No.	Frequency(MHz)	Channel No.	Frequency(MHz)
2422~2452MHz	1	--	7	2442
	2	--	8	2447
	3	2422	9	2452
	4	2427	10	--
	5	2432	11	--
	6	2437	--	--

## **2. TEST METHODOLOGY**

All measurements contained in this report were conducted with ANSI C63.10: 2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

The radiated testing was performed at an antenna-to-EUT distance of 3 meters. All radiated and conducted emissions measurement was performed at Shenzhen LCS Compliance Testing Laboratory Ltd..

### **2.1. EUT Configuration**

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

### **2.2. EUT Exercise**

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.

According to FCC's request, Test Procedure KDB558074 D01 DTS Meas Guidance v03r05 and KDB 6622911 are required to be used for this kind of FCC 15.247 digital modulation device.

According to its specifications, the EUT must comply with the requirements of the Section 15.203, 15.205, 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

### **2.3. General Test Procedures**

#### **2.3.1 Conducted Emissions**

According to the requirements in Section 6.2 of ANSI C63.10: 2013, AC power-line conducted emissions shall be measured in the frequency range between 0.15 MHz and 30MHz using Quasi-peak and average detector modes.

#### **2.3.2 Radiated Emissions**

The EUT is placed on a turn table and the turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 6.3 of ANSI C63.10: 2013

### **3. SYSTEM TEST CONFIGURATION**

#### **3.1. Justification**

The system was configured for testing in a continuous transmit condition.

#### **3.2. EUT Exercise Software**

N/A

#### **3.3. Special Accessories**

N/A

#### **3.4. Block Diagram/Schematics**

Please refer to the related document

#### **3.5. Equipment Modifications**

Shenzhen LCS Compliance Testing Laboratory Ltd. has not done any modification on the EUT.

#### **3.6. Test Setup**

Please refer to the test setup photo.

## 4. SUMMARY OF TEST RESULTS

Applied Standard: FCC Part 15 Subpart C		
FCC Rules	Description of Test	Result
§15.247(b)(3)	Maximum Conducted Output Power	Compliant
§15.247(e)	Power Spectral Density	Compliant
§15.247(a)(2)	6dB Bandwidth	Compliant
§15.209, §15.247(d)	Radiated and Conducted Spurious Emissions	Compliant
§15.205	Emissions at Restricted Band	Compliant
§15.207(a)	Line Conducted Emissions	Compliant
§15.203	Antenna Requirements	Compliant

## 5. TEST RESULT

### 5.1. Maximum Conducted Output Power Measurement


#### 5.1.1. Standard Applicable

According to §15.247(b)(3), For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850MHz bands: 1 Watt.

#### 5.1.2. Test Procedures

The transmitter output (antenna port) was connected to the power meter.

#### 5.1.3. Test Setup Layout

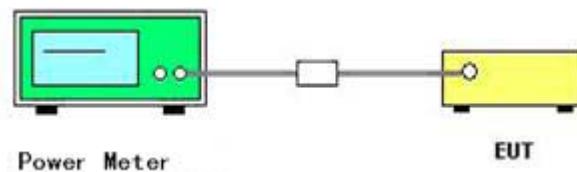

#### 5.1.4. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 5.1.5. Test Result of Maximum Conducted Output Power

Temperature	25°C	Humidity	60%
Test Engineer	Kyle	Configurations	802.11b/g/n

#### 802.11b

Channel	Frequency (MHz)	Conducted Power(dBm, Peak)		Max. Limit (dBm)	Result
		Chain 0	Chain 1		
1	2412	17.64	17.37	30	Complies
6	2437	18.57	18.77	30	Complies
11	2462	19.12	18.57	30	Complies

#### 802.11g

Channel	Frequency (MHz)	Conducted Power(dBm, Peak )		Max. Limit (dBm)	Result
		Chain 0	Chain 1		
1	2412	18.71	18.21	30	Complies
6	2437	18.81	18.15	30	Complies
11	2462	18.49	18.07	30	Complies

802.11n(HT20)

Channel	Frequency (MHz)	Conducted Power(dBm, Peak )			Max. Limit (dBm)	Result
		Chain 0	Chain 1	Chain 0+ Chain 1		
1	2412	18.66	18.53	21.61	30	Complies
6	2437	18.55	18.43	21.50	30	Complies
11	2462	18.32	17.85	21.10	30	Complies

802.11n(HT40)

Channel	Frequency (MHz)	Conducted Power(dBm, Peak)			Max. Limit (dBm)	Result
		Chain 0	Chain 1	Chain 0+ Chain 1		
3	2422	19.41	18.80	22.13	30	Complies
6	2437	19.03	18.52	21.79	30	Complies
9	2452	19.25	18.86	22.07	30	Complies

## 5.2. Maximum Average Conducted Output Power Measurement


### 5.2.1. Limits

No limits, for reporting purposes only.

### 5.2.2. Test Procedures

The transmitter output (antenna port) was connected to the power meter, recorded measured values in Average detector

### 5.2.3. Test Setup Layout

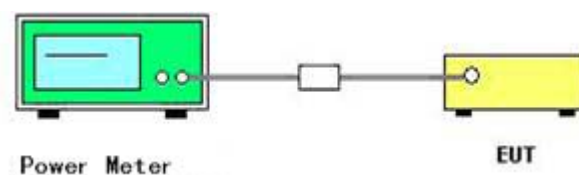

### 5.2.4. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

### 5.1.5. Test Result of Maximum Average Conducted Output Power

Temperature	25°C	Humidity	60%
Test Engineer	Kyle	Configurations	802.11b/g/n

#### 802.11b

Channel	Frequency (MHz)	Conducted Power(dBm, Average)		Max. Limit (dBm)	Result
		Chain 0	Chain 1		
1	2412	15.56	15.15	30	Complies
6	2437	16.29	15.86	30	Complies
11	2462	16.63	15.94	30	Complies

#### 802.11g

Channel	Frequency (MHz)	Conducted Power(dBm, Average)		Max. Limit (dBm)	Result
		Chain 0	Chain 1		
1	2412	14.56	14.06	30	Complies
6	2437	14.39	14.11	30	Complies
11	2462	14.34	14.05	30	Complies



802.11n(HT20)

Channel	Frequency (MHz)	Conducted Power(dBm, Average)			Max. Limit (dBm)	Result
		Chain 0	Chain 1	Chain 0+ Chain 1		
1	2412	13.98	13.57	16.79	30	Complies
6	2437	13.61	13.62	16.63	30	Complies
11	2462	13.46	13.34	16.41	30	Complies

802.11n(HT40)

Channel	Frequency (MHz)	Conducted Power(dBm, Average)			Max. Limit (dBm)	Result
		Chain 0	Chain 1	Chain 0+ Chain 1		
3	2422	12.43	11.86	15.16	30	Complies
6	2437	12.46	11.82	15.16	30	Complies
9	2452	12.76	12.06	15.43	30	Complies

## 5.2. Power Spectral Density Measurement


### 5.2.1. Standard Applicable

According to §15.247(e): For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

### 5.2.2. Test Procedures

- 1) The transmitter was connected directly to a Spectrum Analyzer through a directional couple.
- 2) The power was monitored at the coupler port with a Spectrum Analyzer. The power level was set to the maximum level.
- 3) Set the RBW = 3 kHz.
- 4) Set the VBW  $\geq 3 \times$  RBW
- 5) Set the span to 1.5 times the DTS channel bandwidth.
- 6) Detector = peak.
- 7) Sweep time = auto couple.
- 8) Trace mode = max hold.
- 9) Allow trace to fully stabilize.
- 10) Use the peak marker function to determine the maximum power level in any 3 kHz band segment within the fundamental EBW.

### 5.2.3. Test Setup Layout

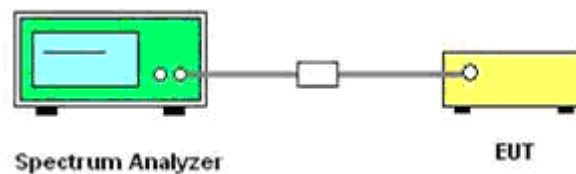

### 5.2.4. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

## 5.2.5. Test Result of Power Spectral Density

Temperature	25°C	Humidity	60%
Test Engineer	Kyle	Configurations	802.11b/g/n

## 802.11b

Channel	Frequency (MHz)	Power Density(dBm/3KHz)		Max. Limit (dBm/3KHz)	Result
		Chain 0	Chain 1		
1	2412	-17.100	-17.918	8	Complies
6	2437	-16.705	-18.133	8	Complies
11	2462	-16.288	-18.814	8	Complies

## 802.11g

Channel	Frequency (MHz)	Power Density(dBm/3KHz)		Max. Limit (dBm/3KHz)	Result
		Chain 0	Chain 1		
1	2412	-18.282	-19.131	8	Complies
6	2437	-17.875	-19.182	8	Complies
11	2462	-17.690	-19.664	8	Complies

## 802.11n(HT20)

Channel	Frequency (MHz)	Power Density(dBm/3KHz)			Max. Limit (dBm/3KHz)	Result
		Chain 0	Chain 1	Chain 0+Chain 1		
1	2412	-18.409	-19.101	-15.73	8	Complies
6	2437	-18.694	-19.263	-15.96	8	Complies
11	2462	-17.774	-19.804	-15.65	8	Complies


## 802.11n(HT40)

Channel	Frequency (MHz)	Power Density(dBm/3KHz)			Max. Limit (dBm/3KHz)	Result
		Chain 0	Chain 1	Chain 0+Chain 1		
3	2422	-21.037	-22.131	-18.54	8	Complies
6	2437	-21.124	-21.711	-18.42	8	Complies
9	2452	-20.975	-22.137	-18.51	8	Complies

Note: The measured power density (dBm) has the offset with cable loss already.


## power density / Chain 0

## Measurement of Power Spectral Density

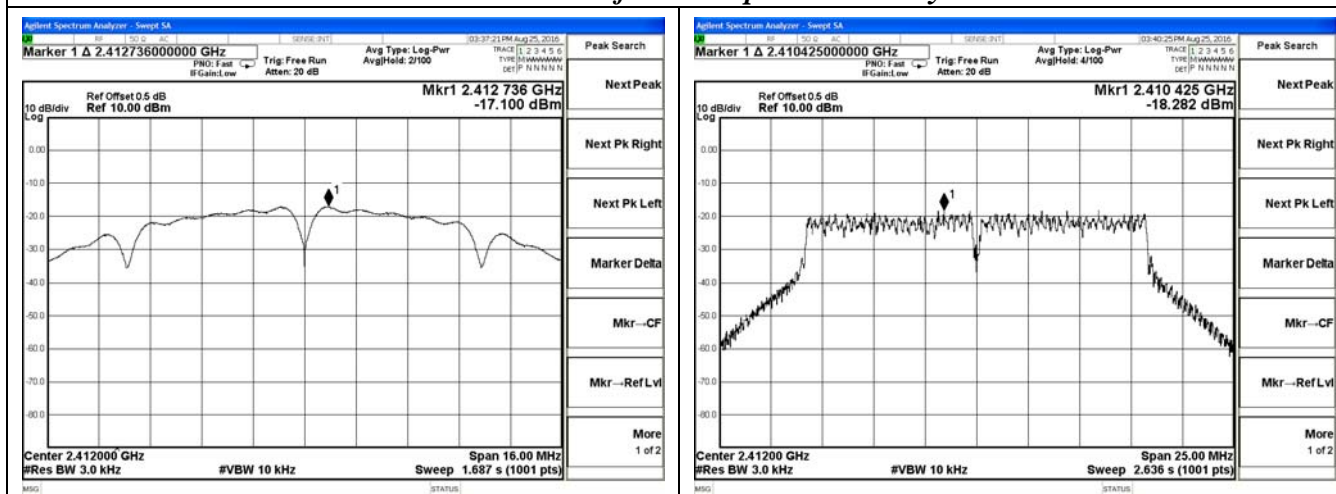


## 802.11b Test frequency: 2412MHz

## 802.11g Test frequency: 2412MHz

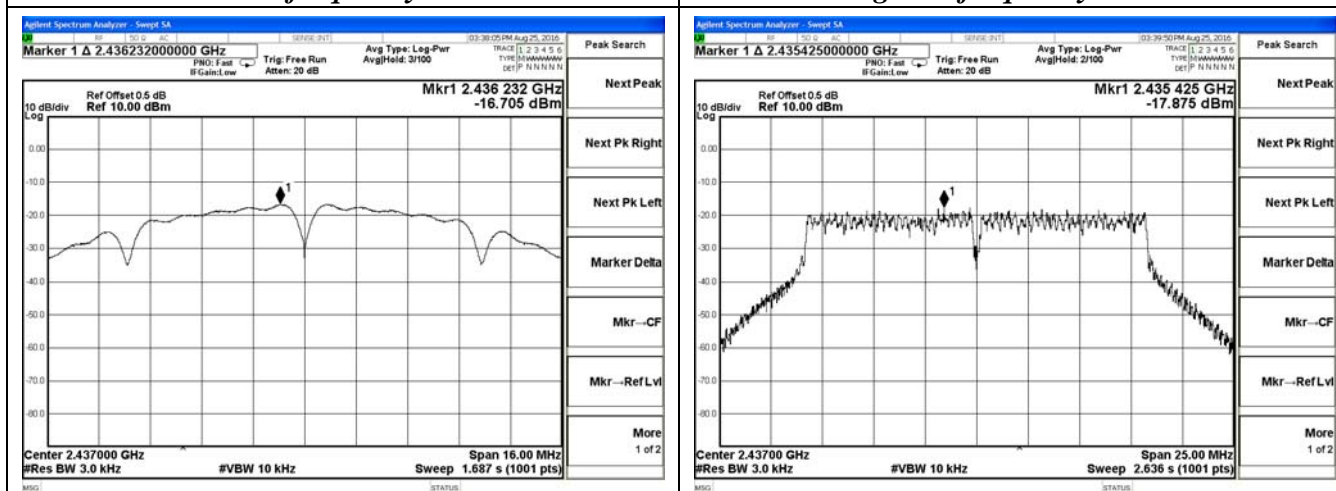

## 802.11b Test frequency: 2437MHz


## 802.11g Test frequency: 2437MHz

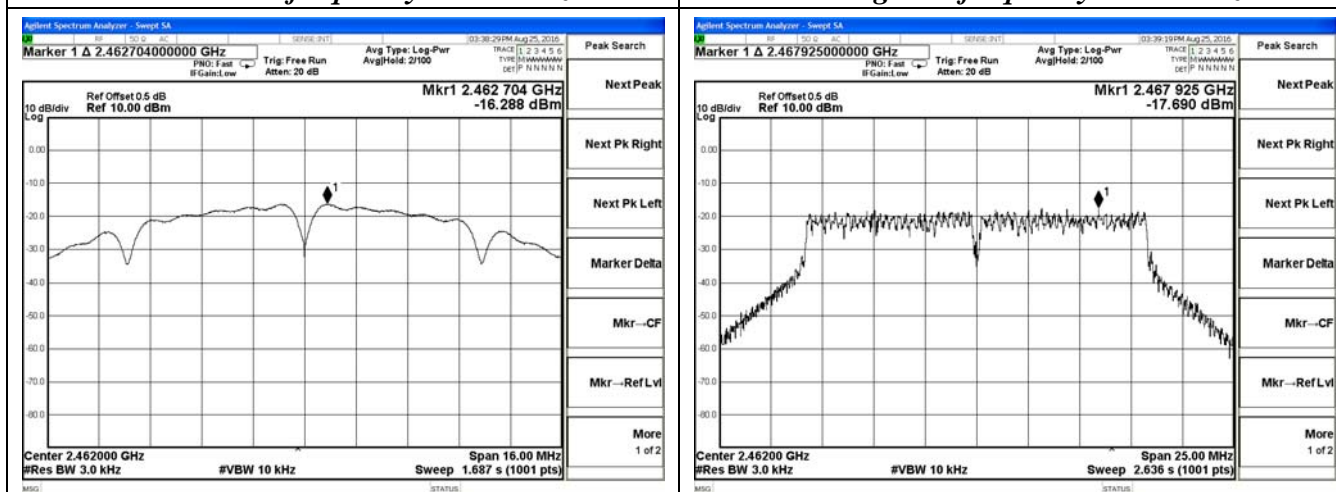

## 802.11b Test frequency: 2462MHz


## 802.11g Test frequency: 2462MHz

### Measurement of Power Spectral Density

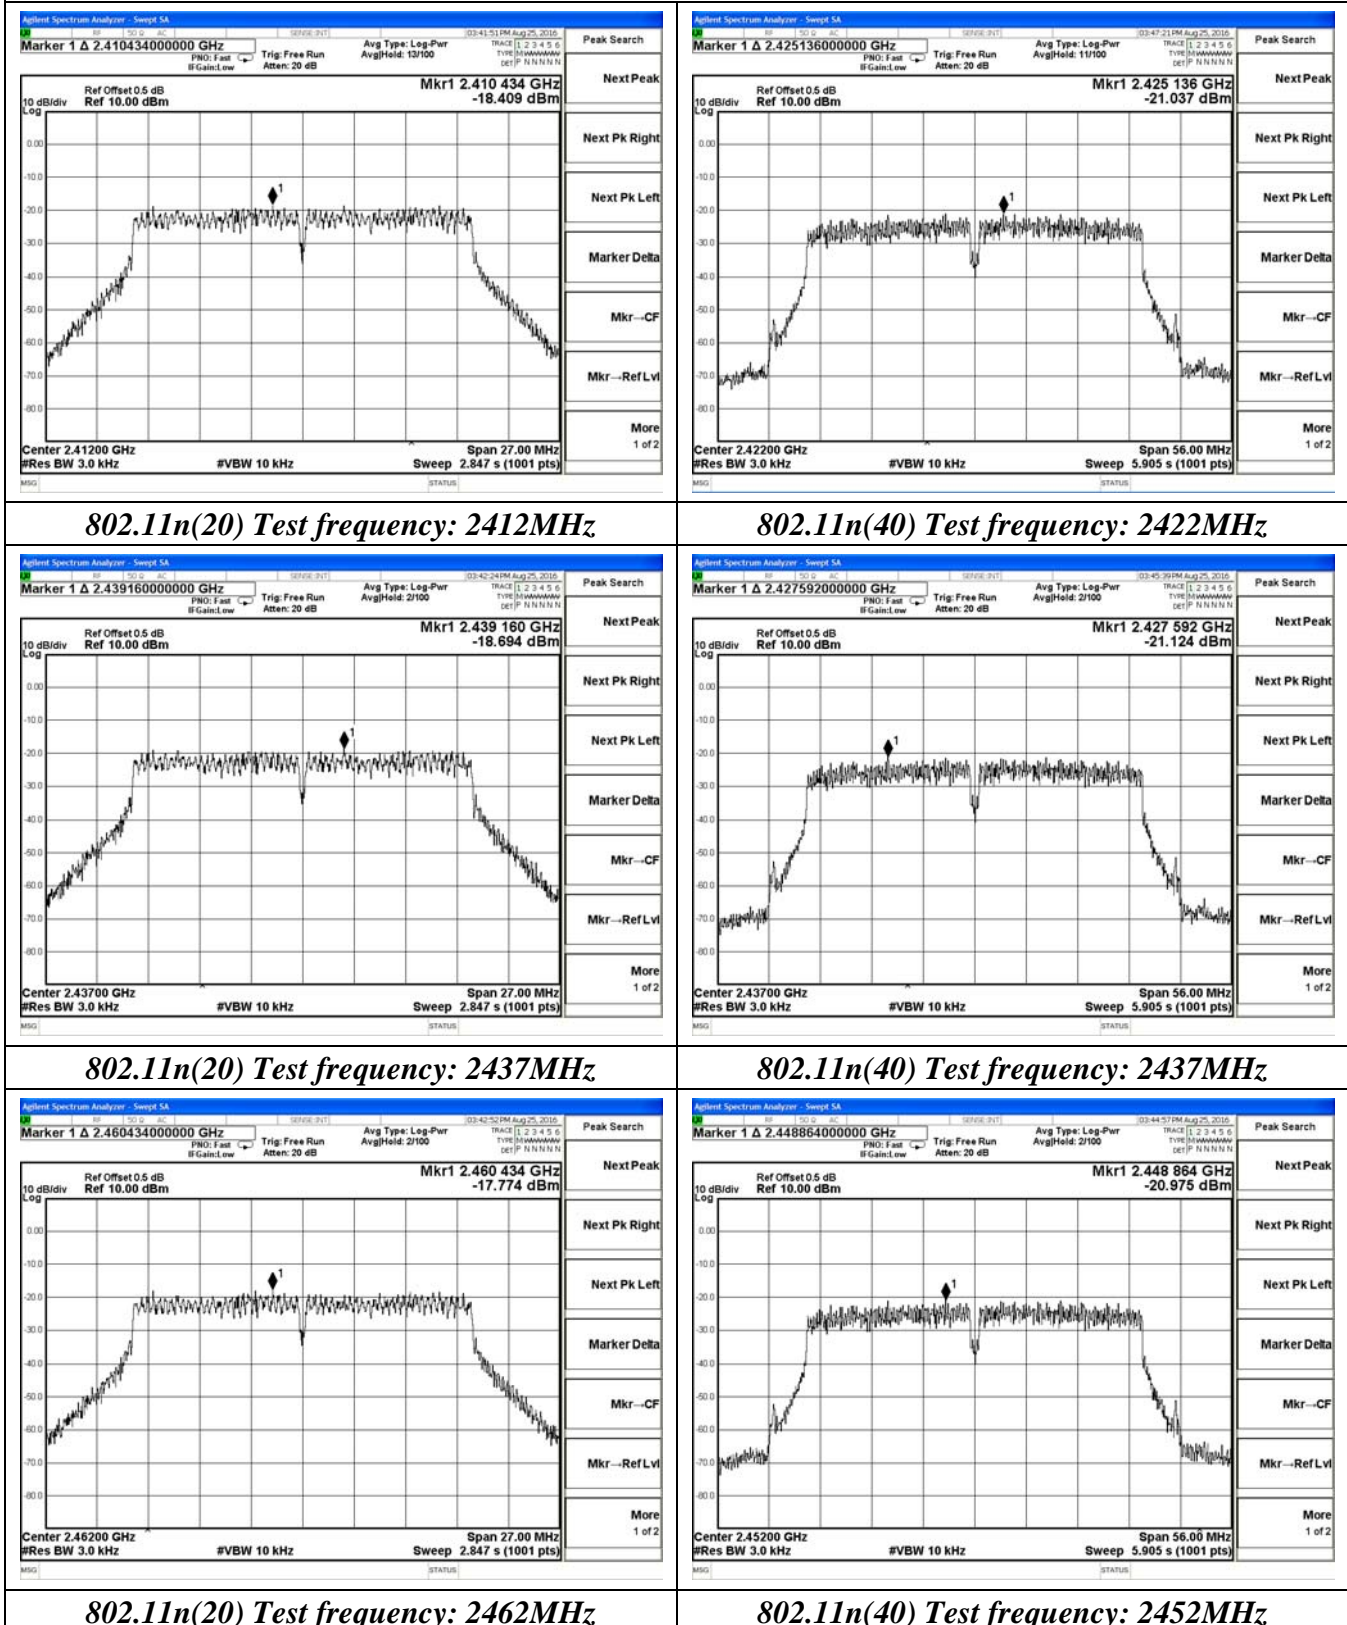


## power density / Chain 1

## Measurement of Power Spectral Density

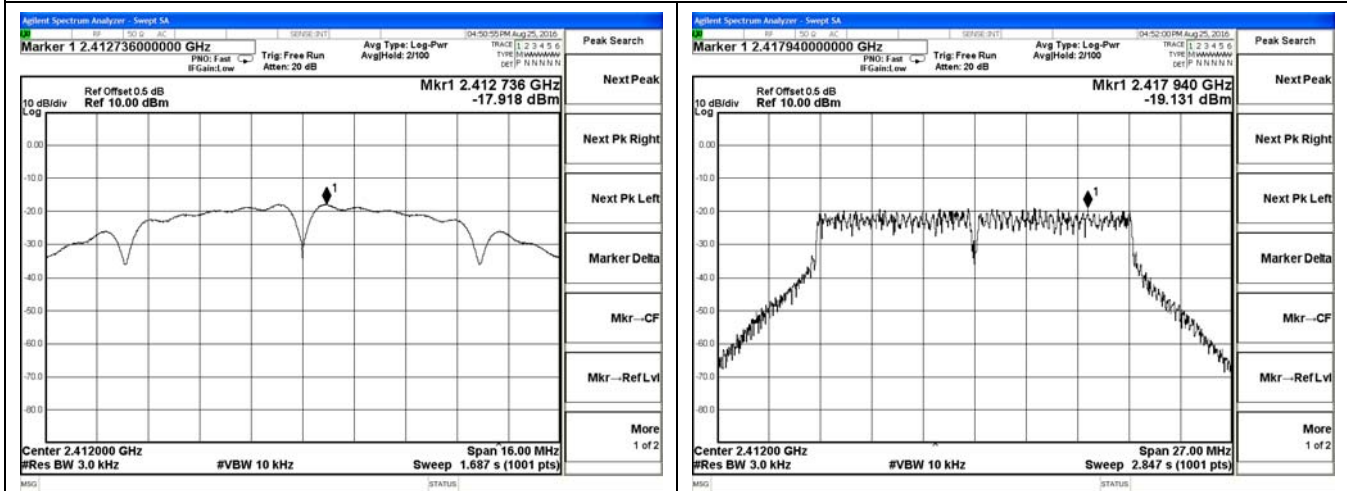


802.11b Test frequency: 2412MHz

802.11g Test frequency: 2412MHz

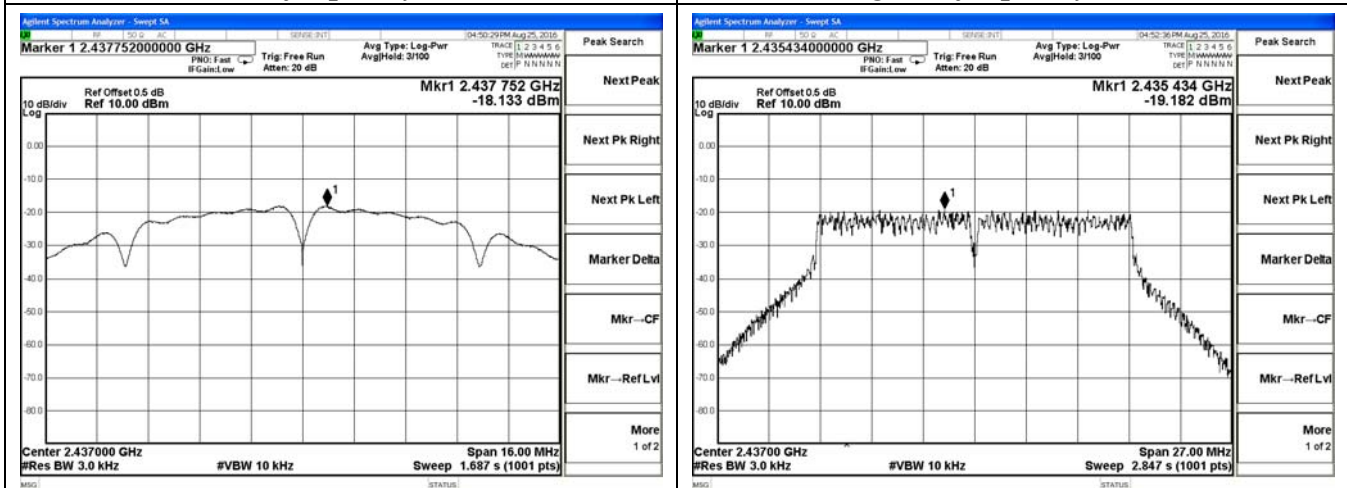

802.11b Test frequency: 2437MHz


802.11g Test frequency: 2437MHz

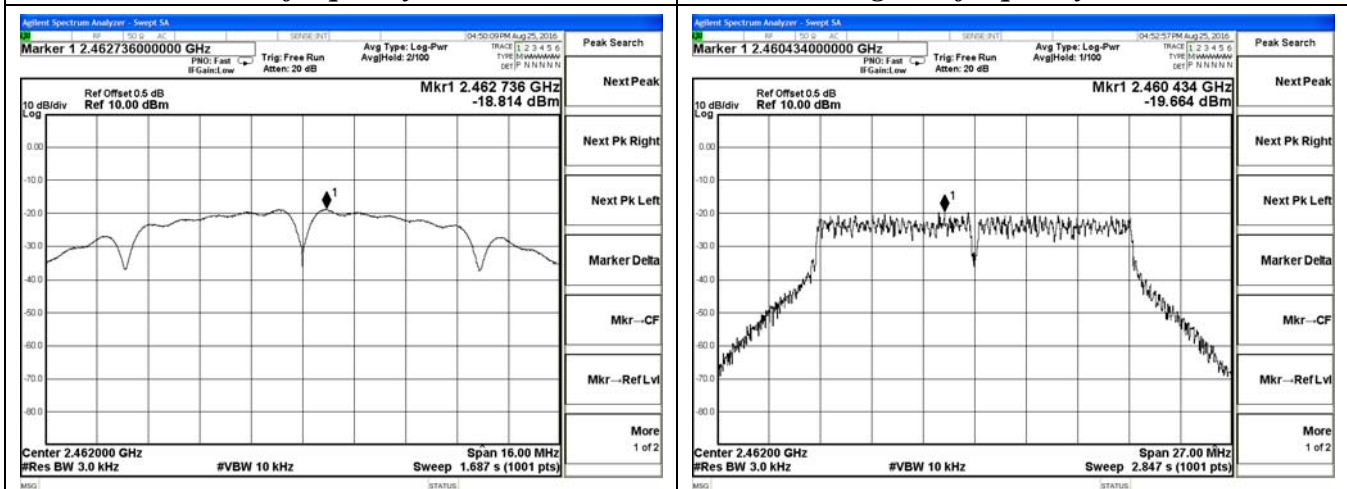

802.11b Test frequency: 2462MHz

802.11g Test frequency: 2462MHz

### Measurement of Power Spectral Density

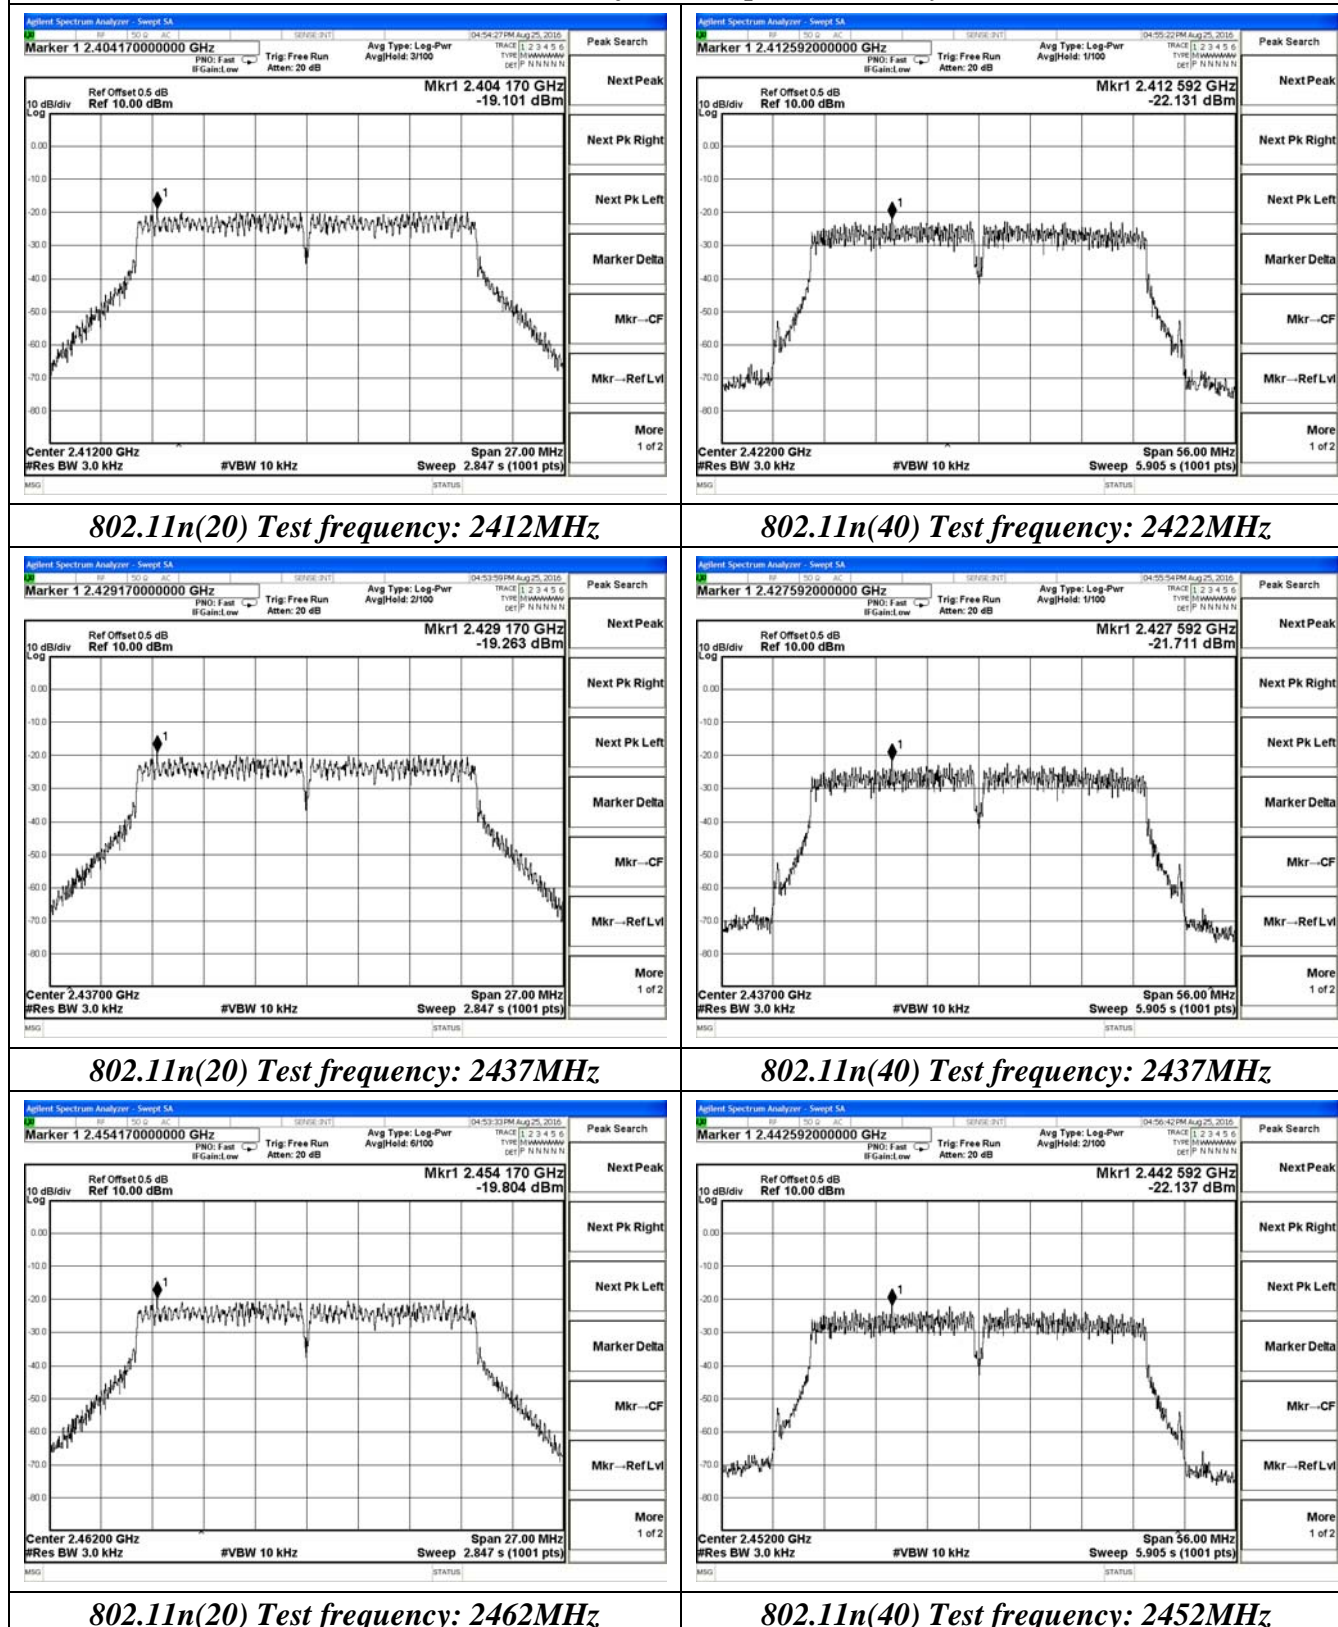



### 5.3. 6 dB Spectrum Bandwidth Measurement

#### 5.3.1. Standard Applicable

According to §15.247(a)(2): Systems using digital modulation techniques may operate in the 902-928 MHz, 2400-2483.5MHz, and 5725-5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

#### 5.3.2. Instruments Setting


The following table is the setting of the Spectrum Analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	> RBW
Detector	Peak
Trace	Max Hold
Sweep Time	100ms

#### 5.3.3. Test Procedures

- 1) The transmitter output (antenna port) was connected to the spectrum analyser in peak hold mode.
- 2) The resolution bandwidth and the video bandwidth were set according to KDB558074 D01 DTS Meas. Guidance v03r02.
- 3) Measured the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6dB relative to the maximum level measured in the fundamental emission.
- 4) Measured the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 20dB relative to the maximum level measured in the fundamental emission.

#### 5.3.4. Test Setup Layout

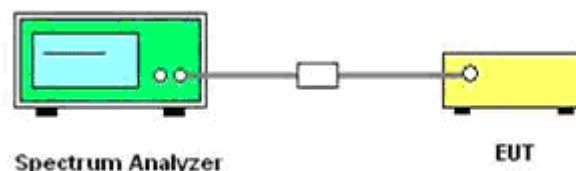

#### 5.3.5. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.



## 5.3.6. Test Result of Spectrum Bandwidth

Temperature	25°C	Humidity	60%
Test Engineer	Kyle	Configurations	802.11b/g/n

## 802.11b

Channel	Frequency	6dB Bandwidth (MHz, Chain 0)	6dB Bandwidth (MHz, Chain 1)	Min. Limit (kHz)	Result
1	2412	10.10	10.10	500	Complies
6	2437	10.09	10.10	500	Complies
11	2462	10.09	10.09	500	Complies

## 802.11g

Channel	Frequency	6dB Bandwidth (MHz, Chain 0)	6dB Bandwidth (MHz, Chain 1)	Min. Limit (kHz)	Result
1	2412	16.57	16.57	500	Complies
6	2437	16.57	16.57	500	Complies
11	2462	16.57	16.57	500	Complies

## 802.11n(HT20)


Channel	Frequency	6dB Bandwidth (MHz, Chain 0)	6dB Bandwidth (MHz, Chain 1)	Min. Limit (kHz)	Result
1	2412	17.83	17.83	500	Complies
6	2437	17.84	17.83	500	Complies
11	2462	17.83	17.83	500	Complies

## 802.11n(HT40)



Channel	Frequency	6dB Bandwidth (MHz, Chain 0)	6dB Bandwidth (MHz, Chain 1)	Min. Limit (kHz)	Result
3	2422	36.45	36.46	500	Complies
6	2437	36.46	36.47	500	Complies
9	2452	36.43	36.48	500	Complies

## 6dB Spectrum Bandwidth / Chain 0

### Measurement of 6dB Spectrum Bandwidth


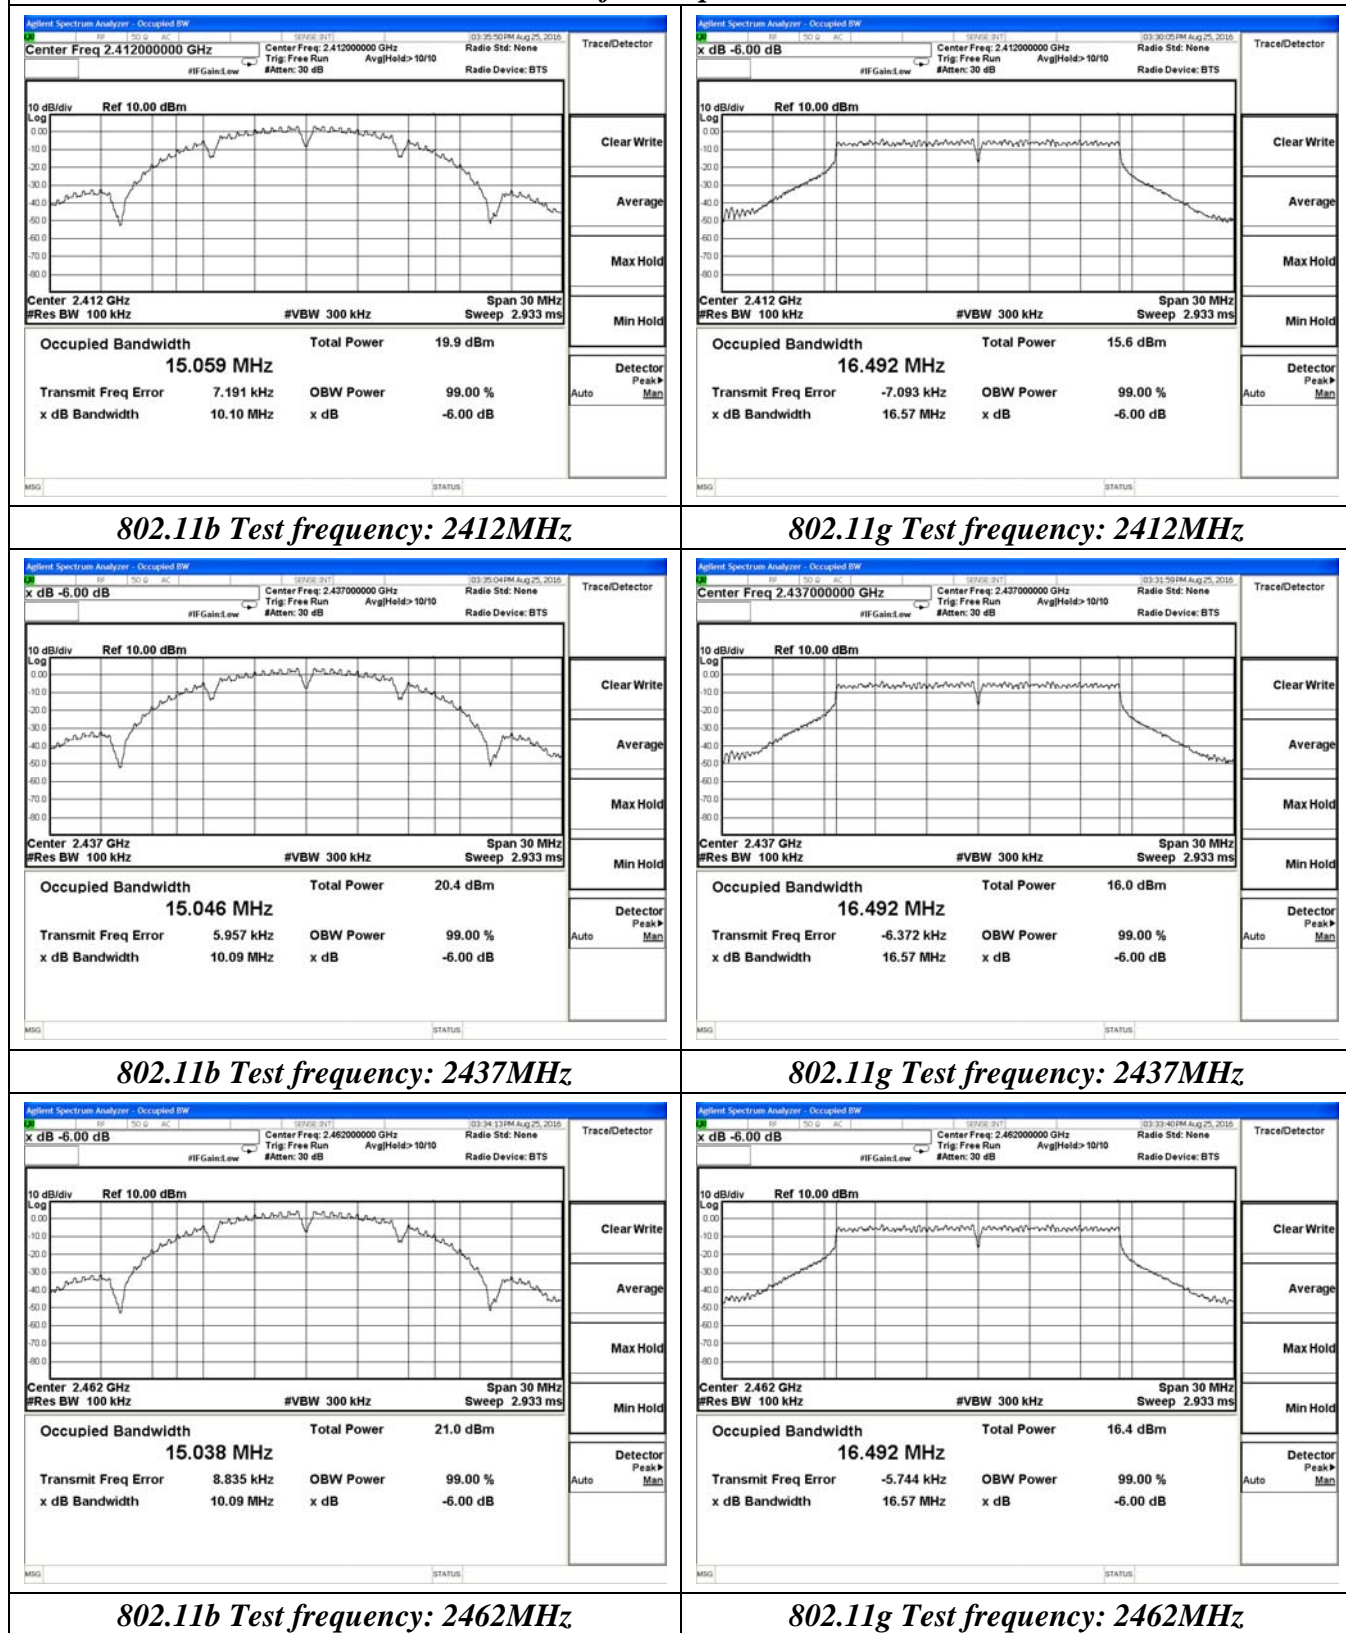


### Measurement of Power Spectral Density

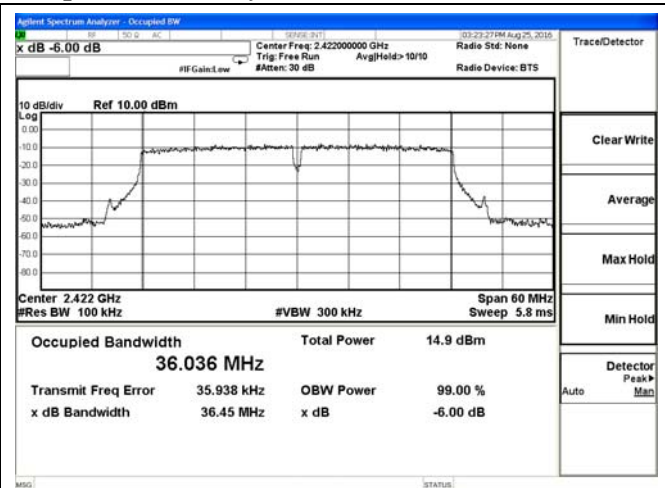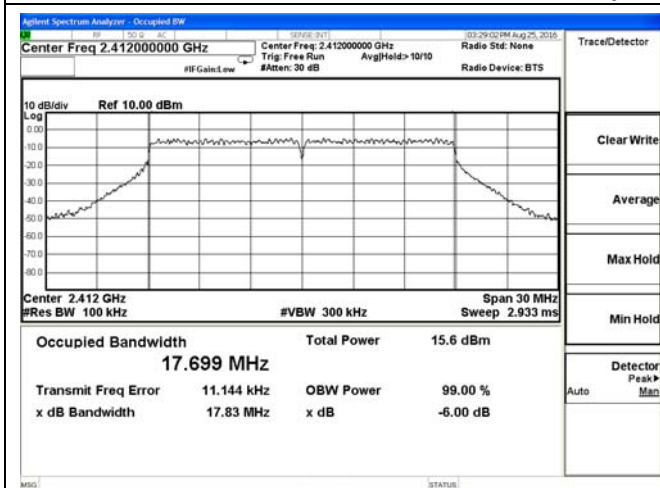



**802.11n(20) Test frequency: 2412MHz**

**802.11n(40) Test frequency: 2422MHz**

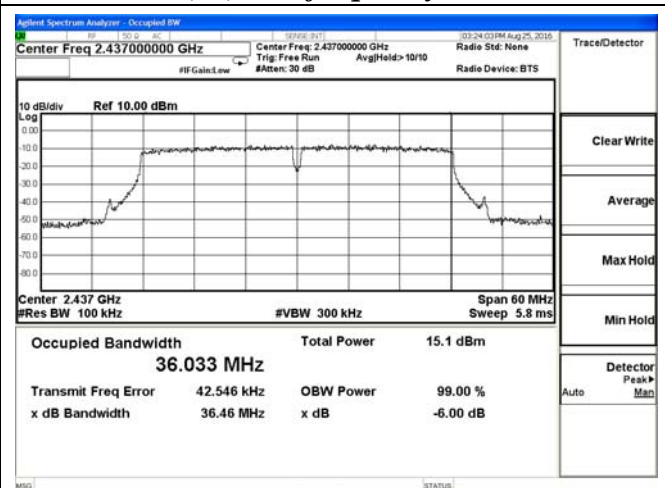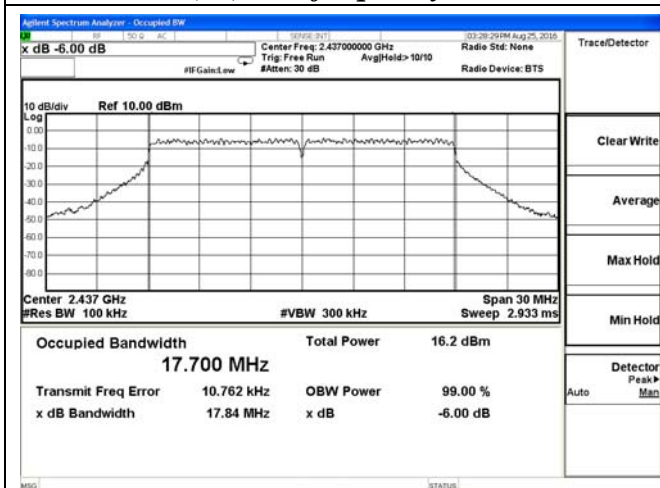

**802.11n(20) Test frequency: 2437MHz**

**802.11n(40) Test frequency: 2437MHz**

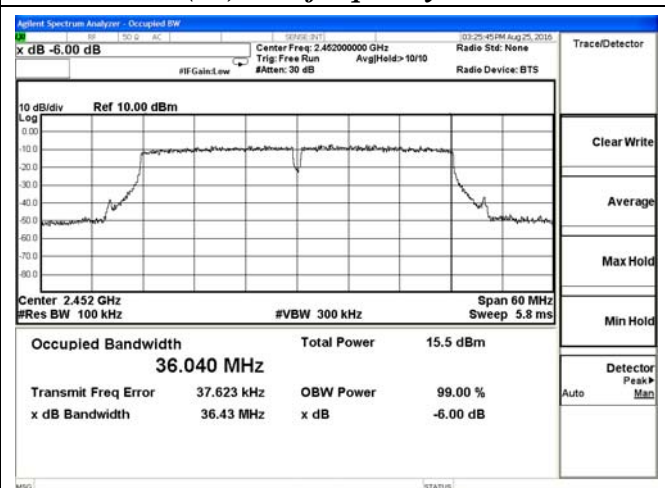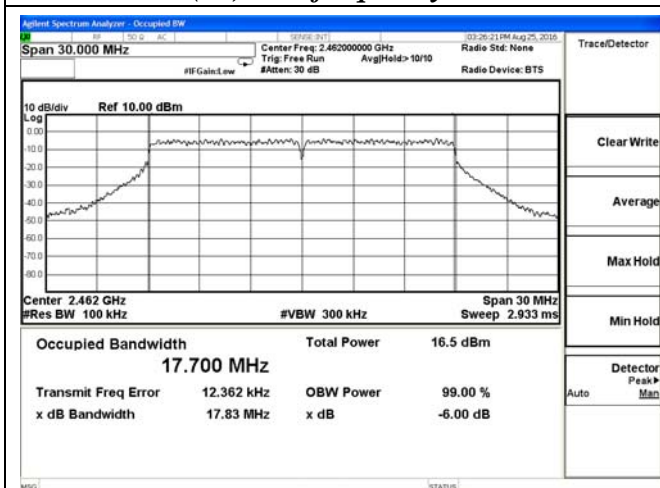


**802.11n(20) Test frequency: 2462MHz**

**802.11n(40) Test frequency: 2452MHz**

## 6dB Spectrum Bandwidth / Chain 1

### Measurement of 6dB Spectrum Bandwidth

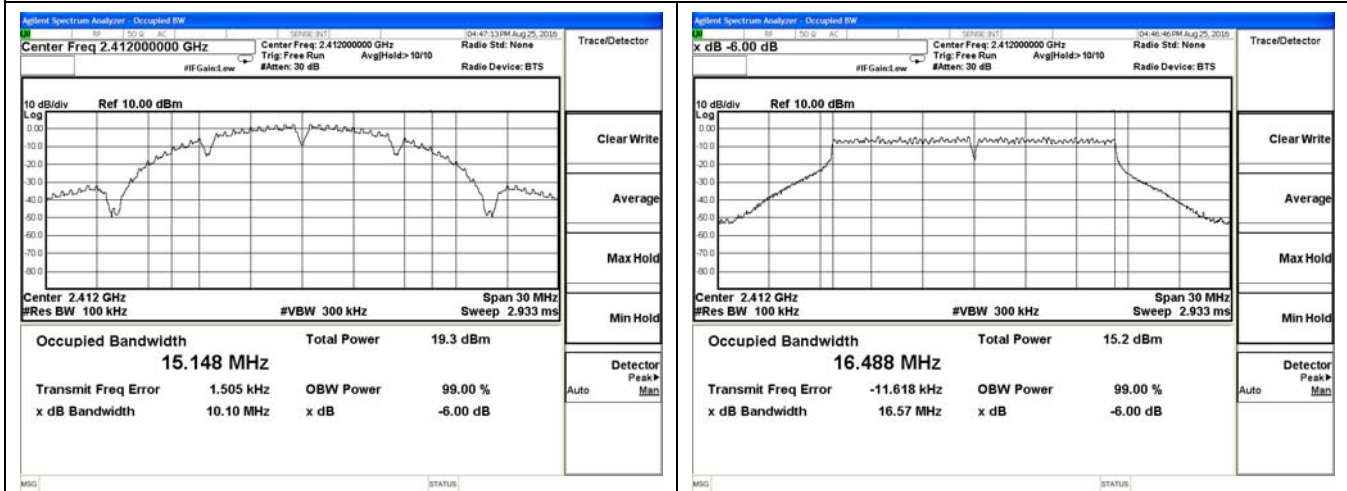


### 802.11b Test frequency: 2412MHz

### 802.11g Test frequency: 2412MHz



### 802.11b Test frequency: 2437MHz



### 802.11g Test frequency: 2437MHz

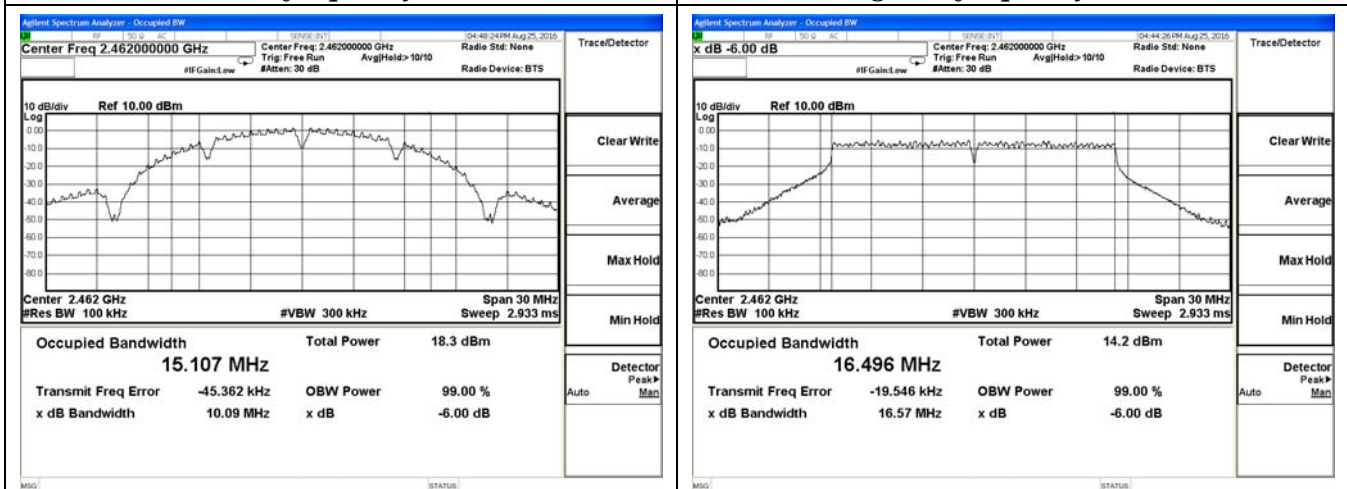

### 802.11b Test frequency: 2462MHz



### 802.11g Test frequency: 2462MHz

### Measurement of Power Spectral Density

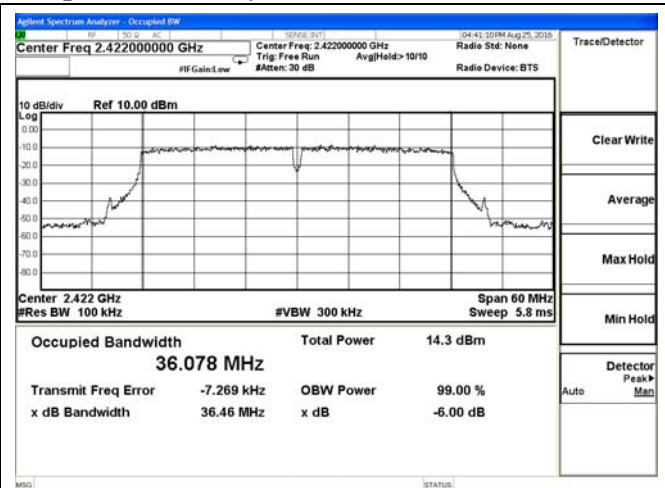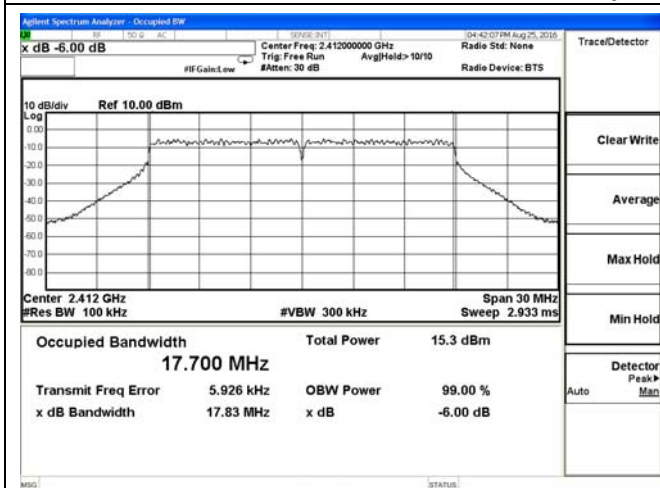



**802.11n(20) Test frequency: 2412MHz**

**802.11n(40) Test frequency: 2422MHz**

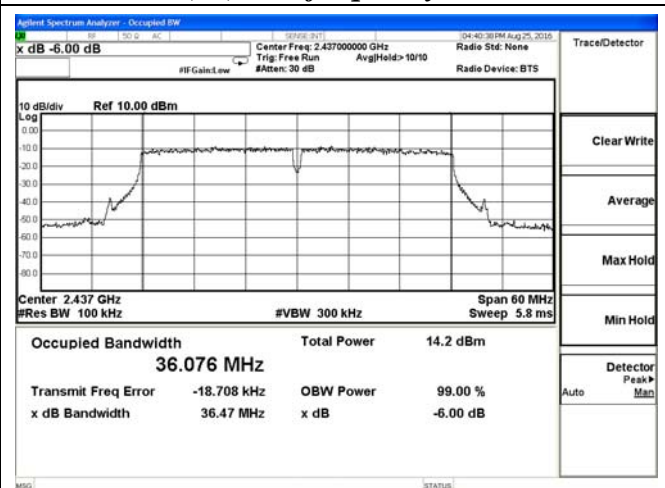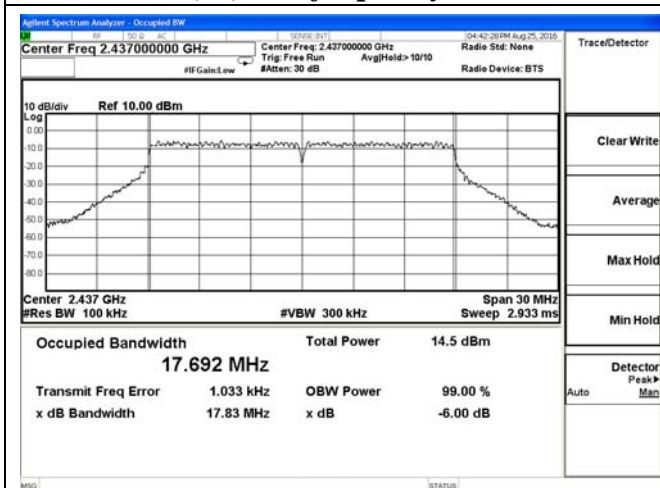

**802.11n(20) Test frequency: 2437MHz**

**802.11n(40) Test frequency: 2437MHz**

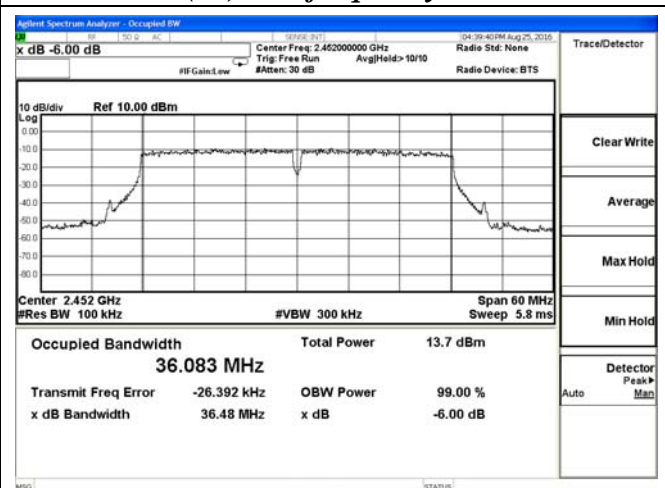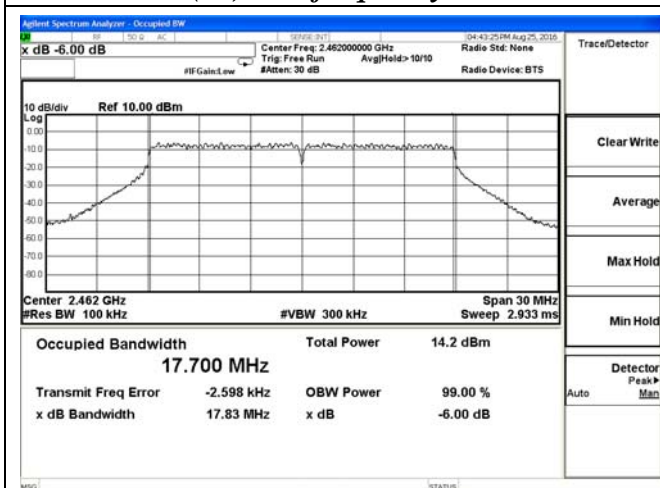

**802.11n(20) Test frequency: 2462MHz**

**802.11n(40) Test frequency: 2452MHz**

802.11b

Channel	Frequency	20dB Bandwidth (MHz, Chain 0)	20dB Bandwidth (MHz, Chain 1)	Limit
1	2412	17.15	17.17	Non-specified
6	2437	17.15	17.16	
11	2462	17.15	17.17	

802.11g

Channel	Frequency	20dB Bandwidth (MHz, Chain 0)	20dB Bandwidth (MHz, Chain 1)	Limit
1	2412	18.09	18.05	Non-specified
6	2437	18.10	18.20	
11	2462	18.10	18.21	

802.11n(HT20)

Channel	Frequency	20dB Bandwidth (MHz, Chain 0)	20dB Bandwidth (MHz, Chain 1)	Limit
1	2412	19.41	19.33	Non-specified
6	2437	19.40	19.33	
11	2462	19.40	19.32	


802.11n(HT40)

Channel	Frequency	20dB Bandwidth (MHz, Chain 0)	20dB Bandwidth (MHz, Chain 1)	Limit
3	2422	37.34	37.54	Non-specified
6	2437	37.38	37.51	
9	2452	37.34	37.56	





## 20dB Bandwidth / Chain 0


## Measurement of 20dB Spectrum Bandwidth

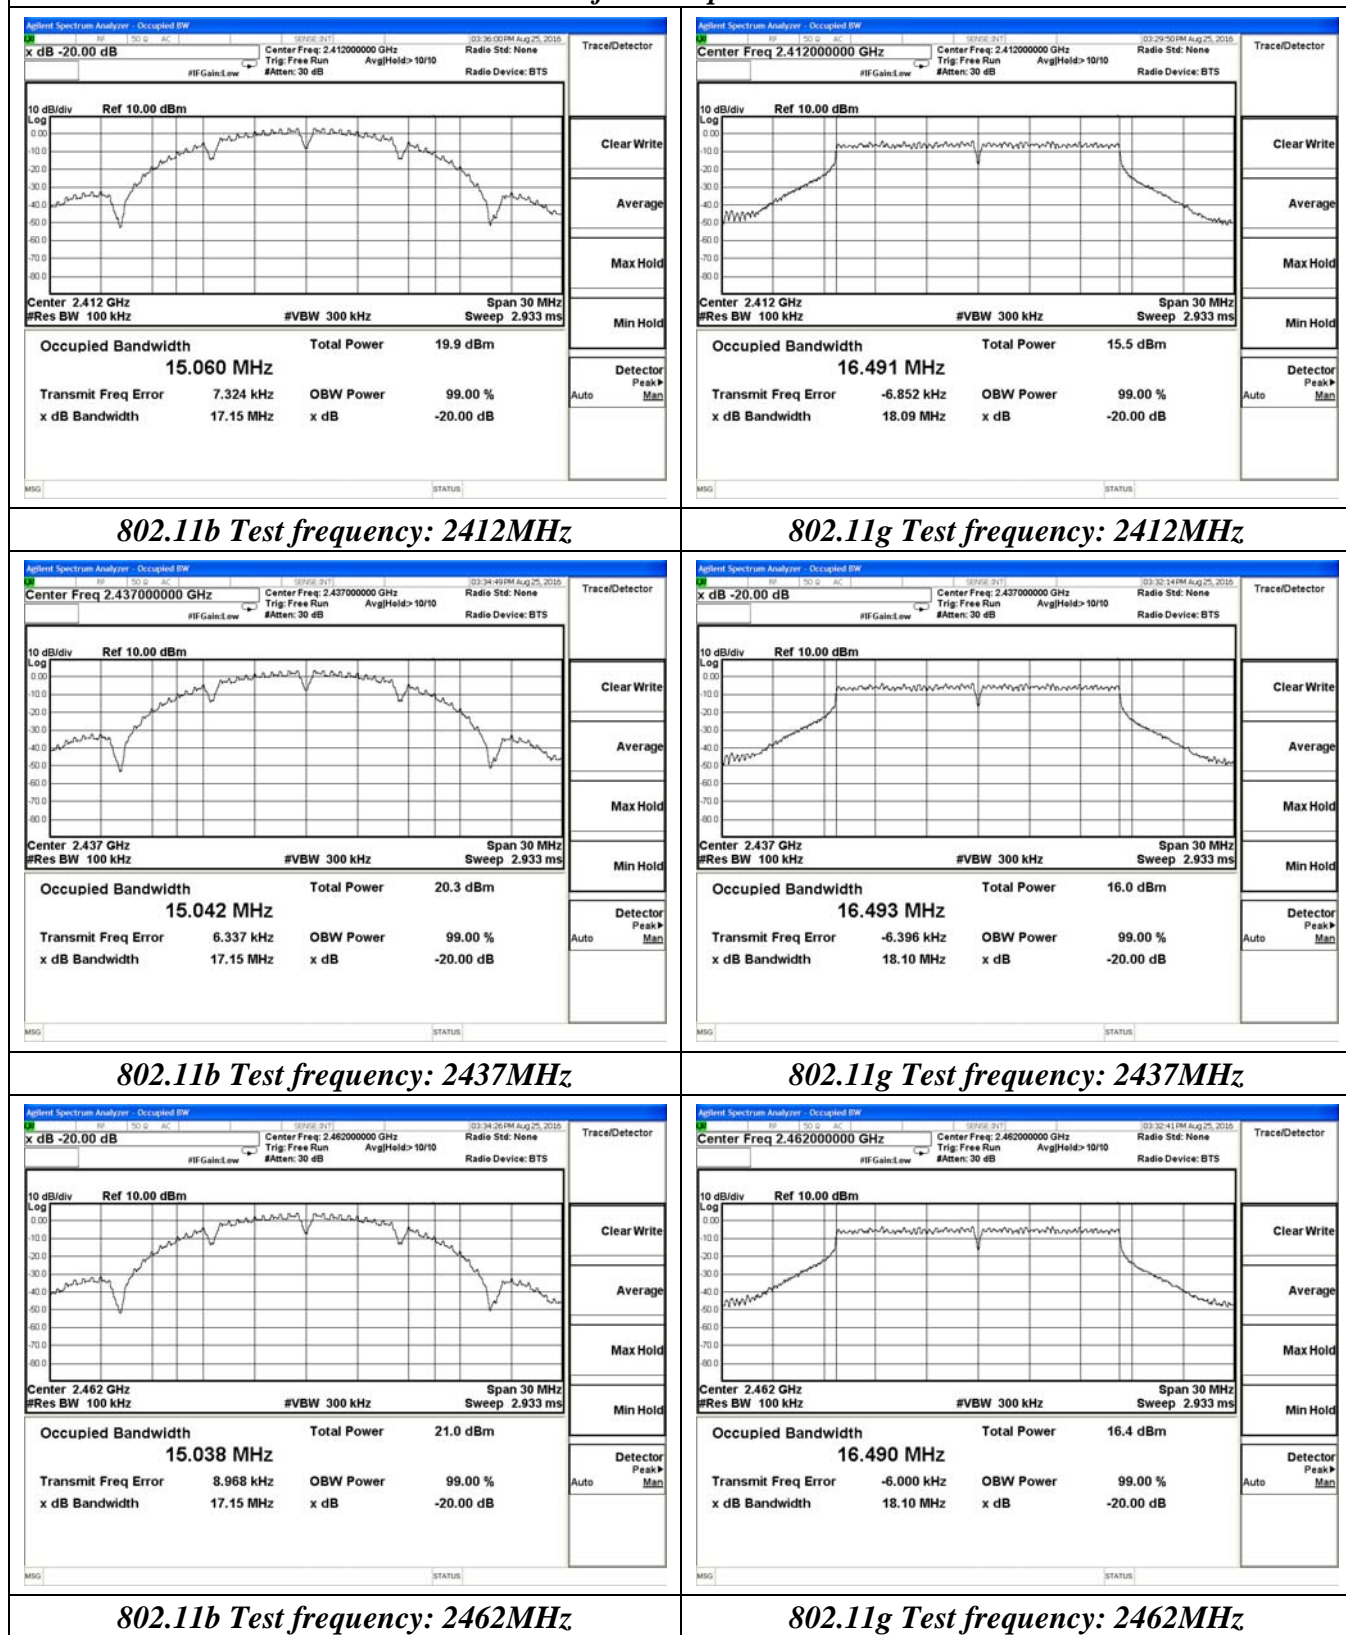



### Measurement of 20dB Spectrum Bandwidth

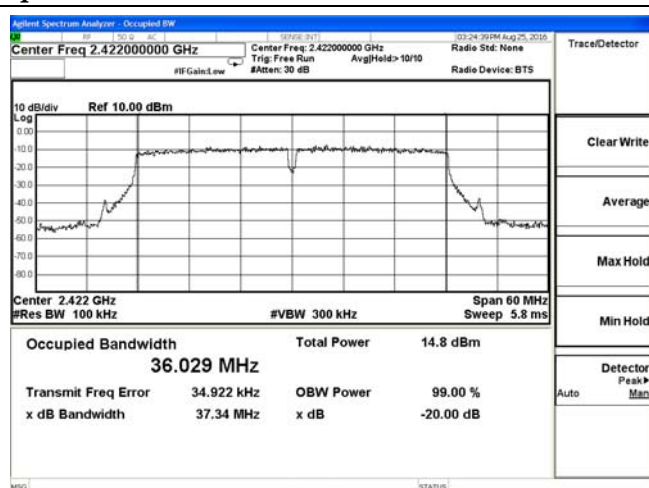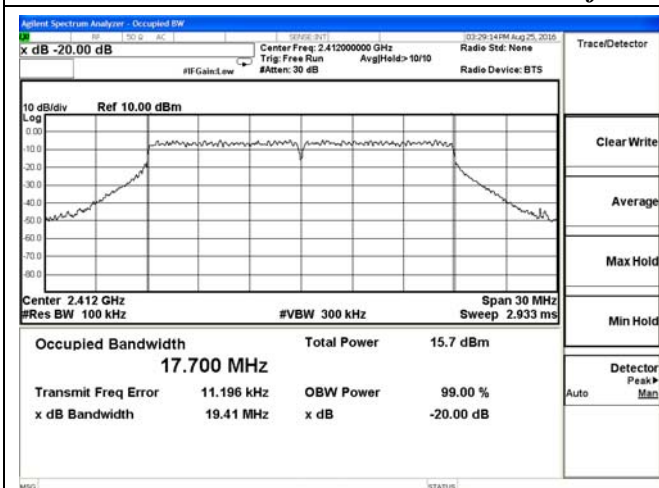

**802.11n(20) Test frequency: 2412MHz**

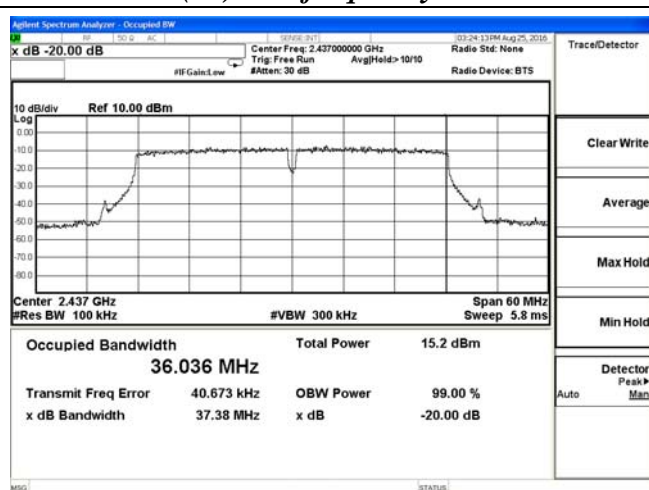

**802.11n(20) Test frequency: 2437MHz.**

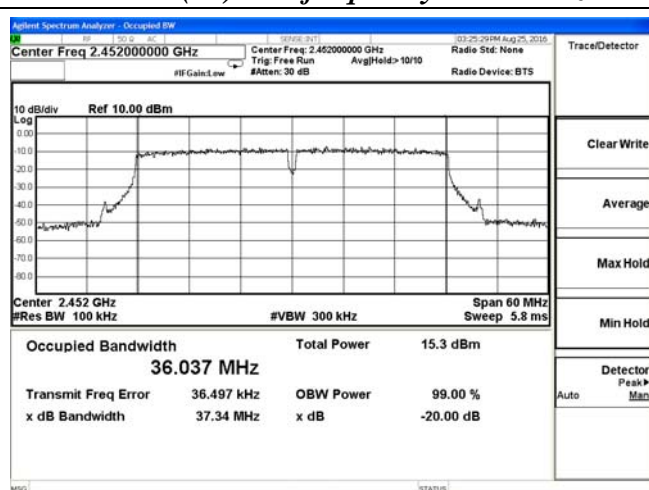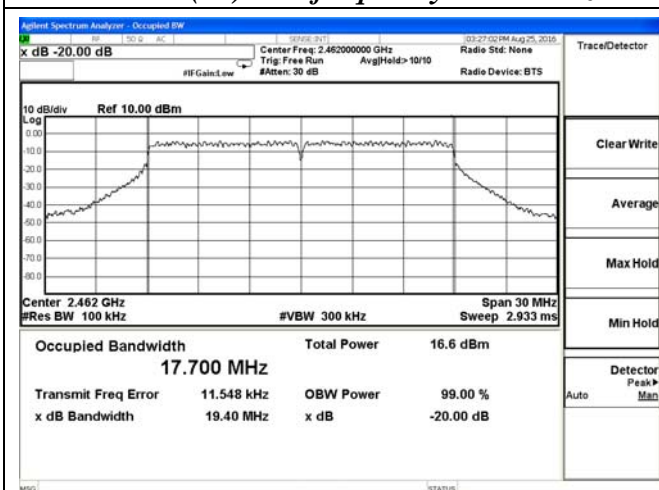

**802.11n(20) Test frequency: 2462MHz**

**802.11n(40) Test frequency: 2452MHz**




## 20dB Bandwidth / Chain 1

### Measurement of 20dB Spectrum Bandwidth




### 802.11b Test frequency: 2412MHz

### 802.11g Test frequency: 2412MHz

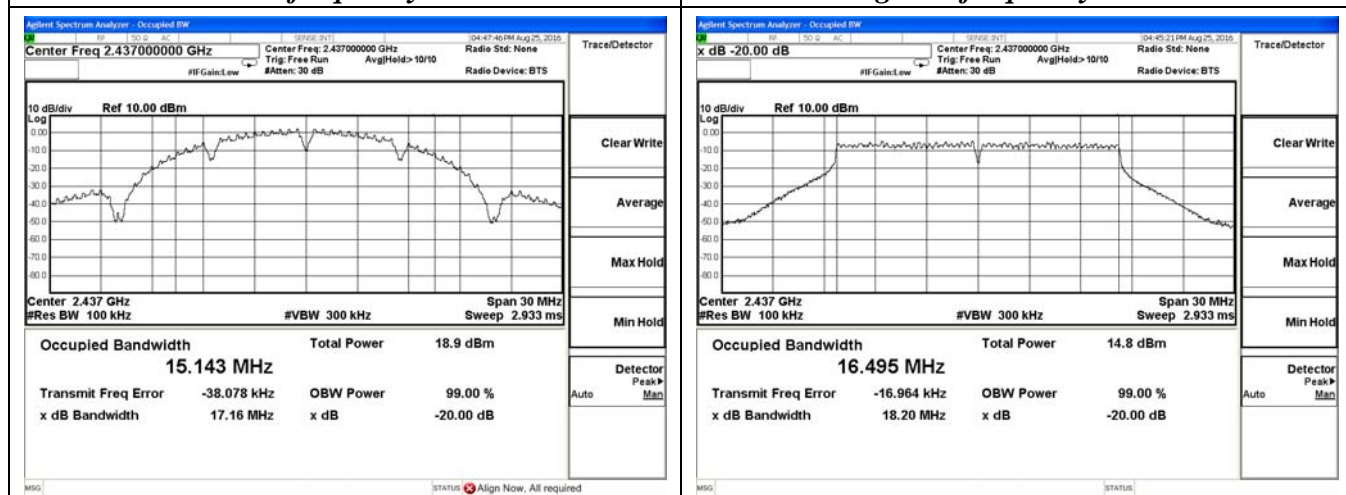

### 802.11b Test frequency: 2437MHz


### 802.11g Test frequency: 2437MHz

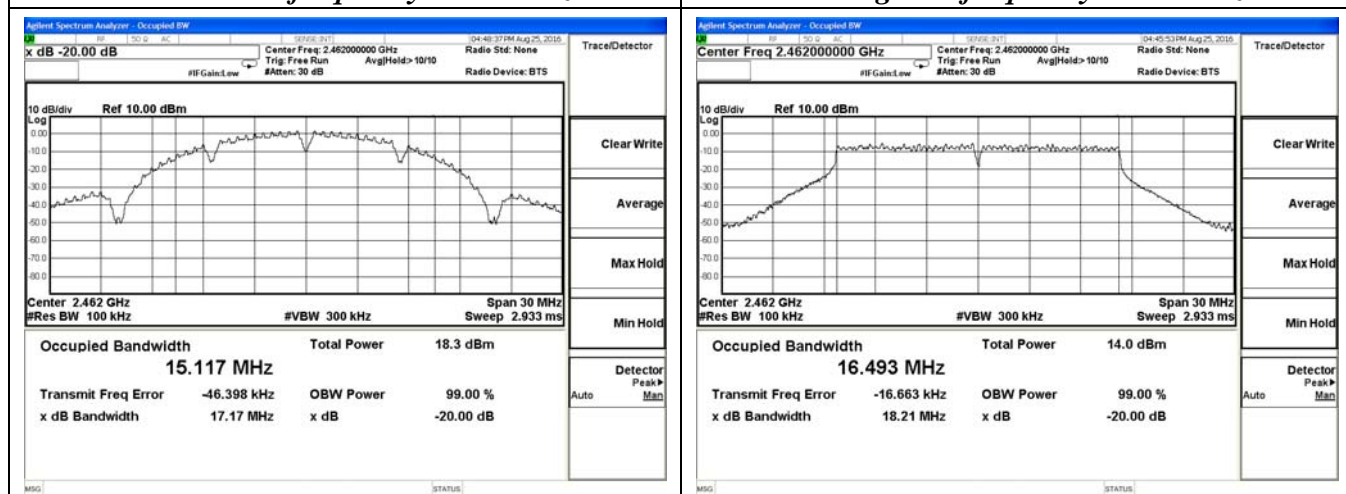


### 802.11b Test frequency: 2462MHz

### 802.11g Test frequency: 2462MHz


### Measurement of 20dB Spectrum Bandwidth

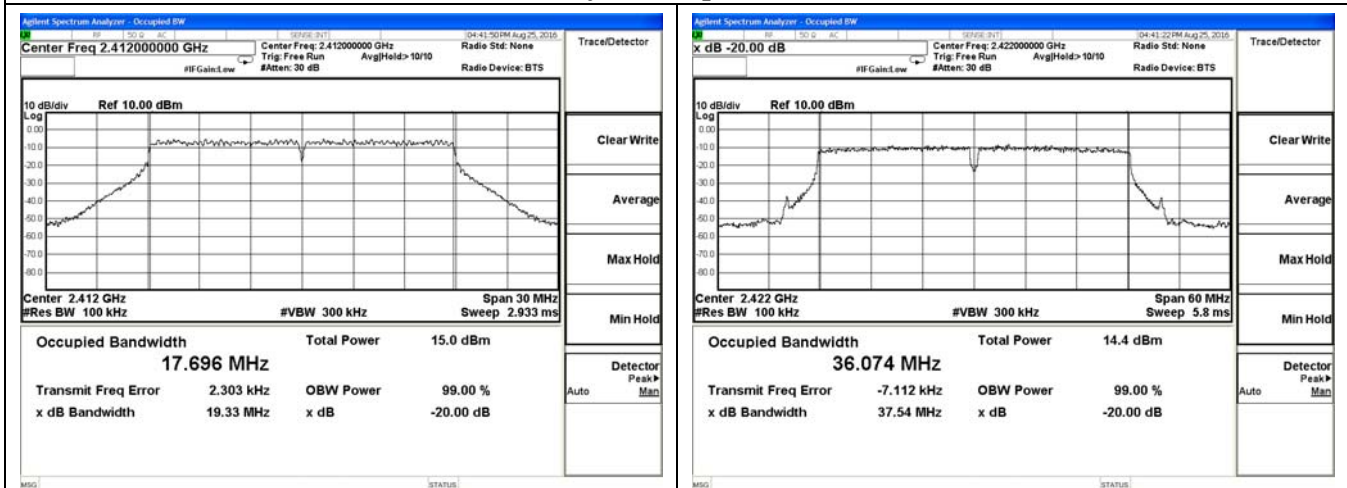


### 802.11n(20) Test frequency: 2412MHz

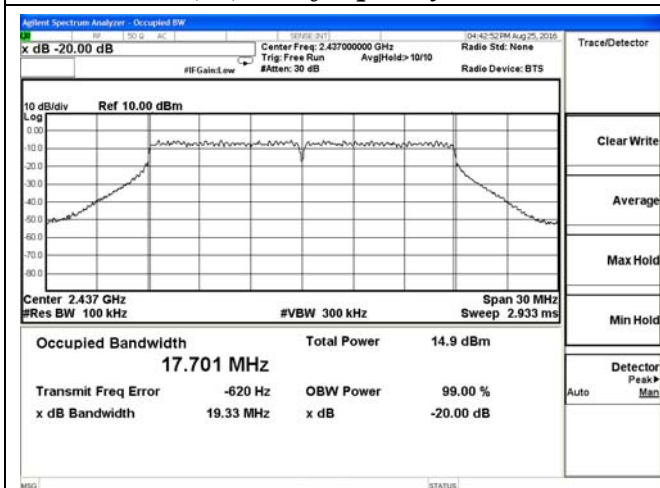


### 802.11n(40) Test frequency: 2422MHz

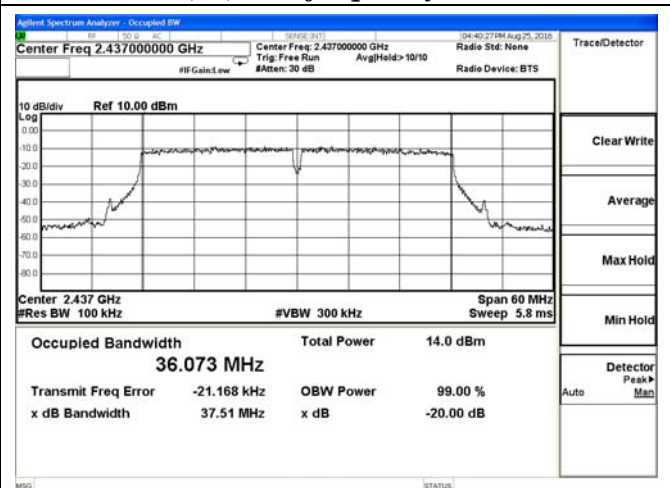

### 802.11n(20) Test frequency: 2437MHz

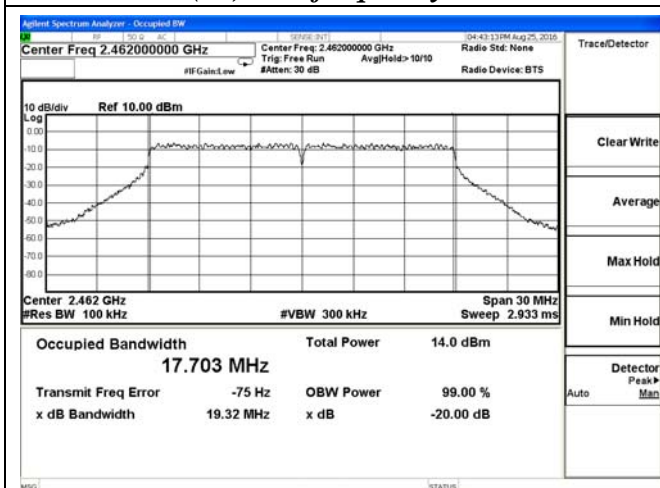

### 802.11n(40) Test frequency: 2437MHz

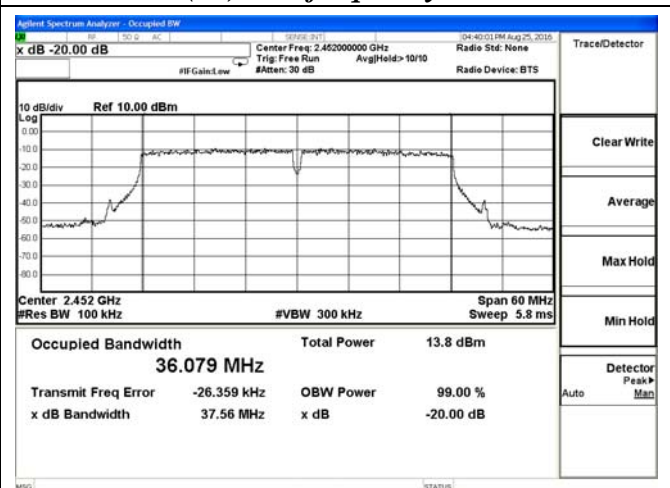

### 802.11n(20) Test frequency: 2462MHz



### 802.11n(40) Test frequency: 2452MHz



## 5.4. Radiated Emissions Measurement

### 5.4.1. Standard Applicable

According to §15.247 (d): 20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies(MHz)	Field Strength(microvolts/meter)	Measurement Distance(meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

### 5.4.2. Instruments Setting

The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (Emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (Emission in non-restricted band)	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 100kHz for QP

### 5.4.3. Test Procedures

#### **1) Sequence of testing 9 kHz to 30 MHz**

##### **Setup:**

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 0.8 m height is used.
- If the EUT is a floor standing device, it is placed on the ground.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

##### **Premeasurement:**

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna height is 0.8 meter.
- At each turntable position the analyzer sweeps with peak detection to find the maximum of all emissions

##### **Final measurement:**

- Identified emissions during the premeasurement the software maximizes by rotating the turntable position (0° to 360°) and by rotating the elevation axes (0° to 360°).
- The final measurement will be done in the position (turntable and elevation) causing the highest emissions with QPK detector.
- The final levels, frequency, measuring time, bandwidth, turntable position, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement and the limit will be stored.

## **2) Sequence of testing 30 MHz to 1 GHz**

### **Setup:**

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a table with 0.8 m height is used, which is placed on the ground plane.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

### **Premeasurement:**

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height changes from 1 to 3 meter.
- At each turntable position, antenna polarization and height the analyzer sweeps three times in peak to find the maximum of all emissions.

### **Final measurement:**

- The final measurement will be performed with minimum the six highest peaks.
- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position ( $\pm 45^\circ$ ) and antenna movement between 1 and 4 meter.
- The final measurement will be done with QP detector with an EMI receiver.
- The final levels, frequency, measuring time, bandwidth, antenna height, antenna polarization, turntable angle, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement with marked maximum final measurements and the limit will be stored.

### **3) Sequence of testing 1 GHz to 18 GHz**

#### **Setup:**

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

#### **Premeasurement:**

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height scan range is 1 meter to 2.5 meter.
- At each turntable position and antenna polarization the analyzer sweeps with peak detection to find the maximum of all emissions.

#### **Final measurement:**

- The final measurement will be performed with minimum the six highest peaks.
- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position ( $\pm 45^\circ$ ) and antenna movement between 1 and 4 meter. This procedure is repeated for both antenna polarizations.
- The final measurement will be done in the position (turntable, EUT-table and antenna polarization) causing the highest emissions with Peak and Average detector.
- The final levels, frequency, measuring time, bandwidth, turntable position, EUT-table position, antenna polarization, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement with marked maximum final measurements and the limit will be stored.

#### **4) Sequence of testing above 18 GHz**

##### **Setup:**

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 1 meter.
- The EUT was set into operation.


##### **Premeasurement:**

- The antenna is moved spherical over the EUT in different polarisations of the antenna.


##### **Final measurement:**

- The final measurement will be performed at the position and antenna orientation for all detected emissions that were found during the premeasurements with Peak and Average detector.
- The final levels, frequency, measuring time, bandwidth, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement and the limit will be stored.

#### 5.4.4. Test Setup Layout

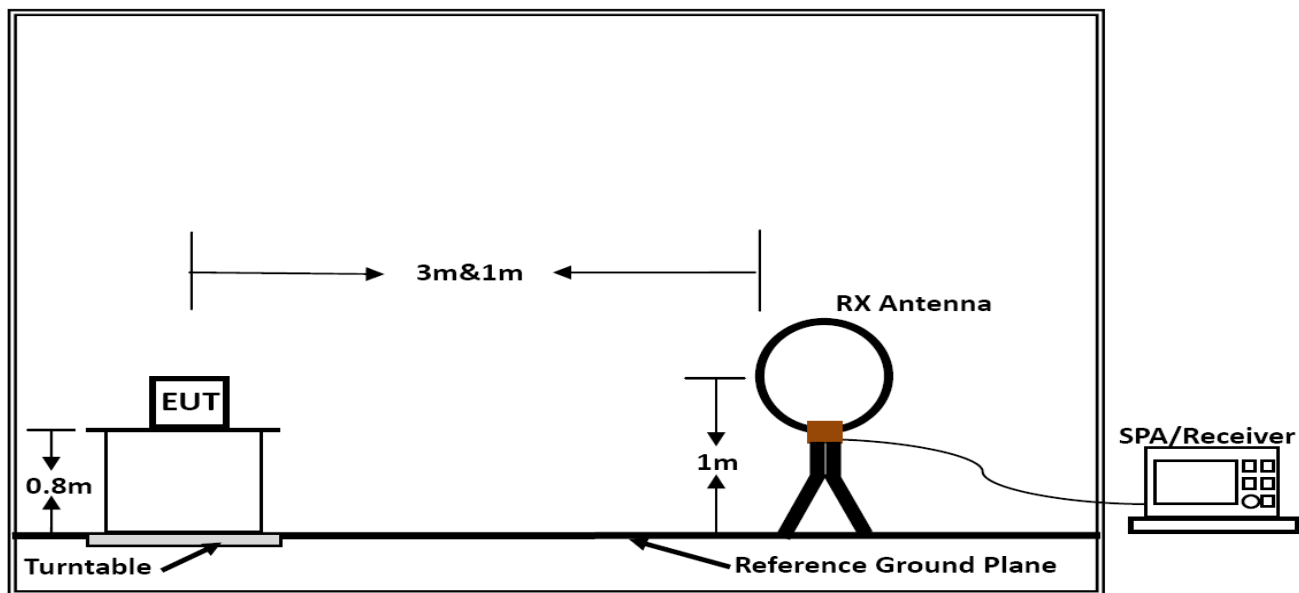


**Below 30MHz**

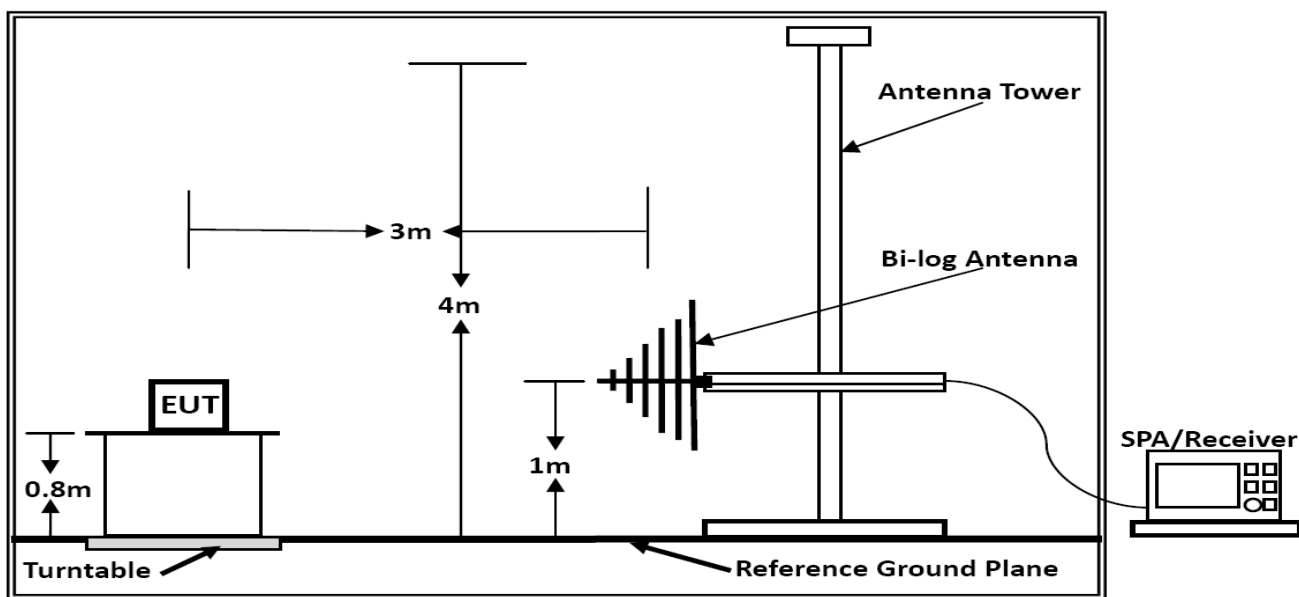

**Below 1GHz**



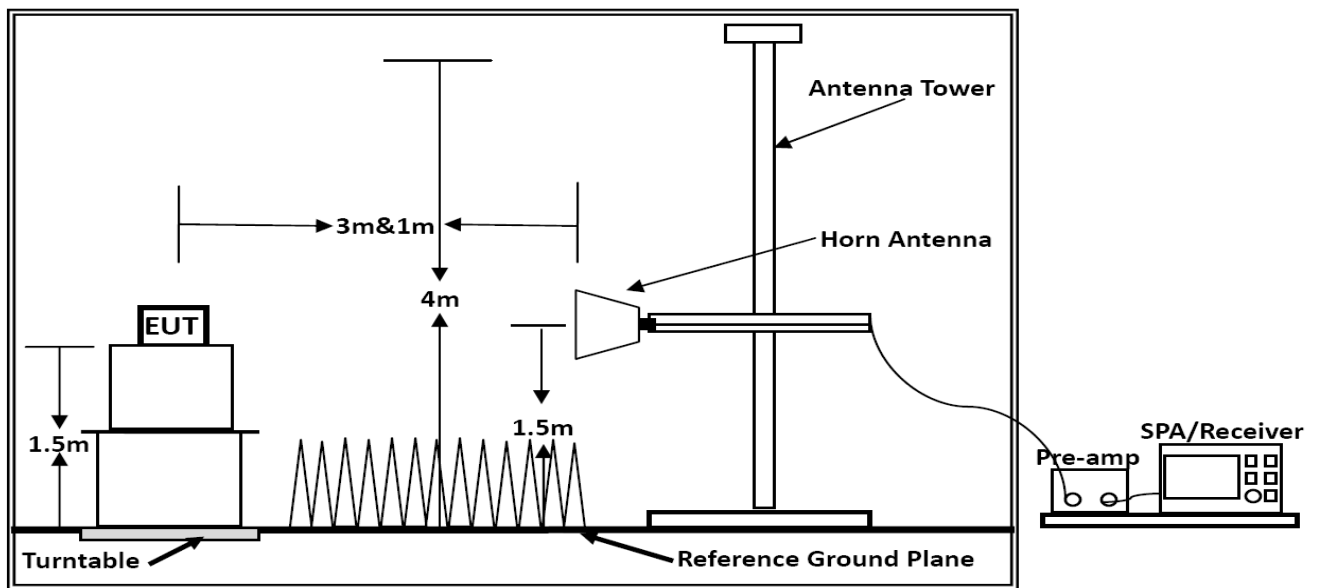

#### Above 1GHz

Above 10 GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1.5m.

Distance extrapolation factor =  $20 \log (\text{specific distance [3m]} / \text{test distance [1.5m]})$  (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor [6 dB].

#### 5.4.5. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

## 5.4.6. Results of Radiated Emissions (9kHz~30MHz)

Temperature	25°C	Humidity	60%
Test Engineer	Kyle	Configurations	802.11b/g/n

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Over Limit (dBuV)	Remark
-	-	-	-	See Note

Note:


The radiated emissions from 9kHz to 30MHz are at least 20dB below the official limit and no need to report.

## 5.4.7. Results of Radiated Emissions (30MHz~1GHz)

Note: Only record the worst test result in this report.


## The Test Result For Configuration 1(DC 7.4V)

Test result for 802.11n(HT20) (Low Channel, Chain 0 + Chain 1)

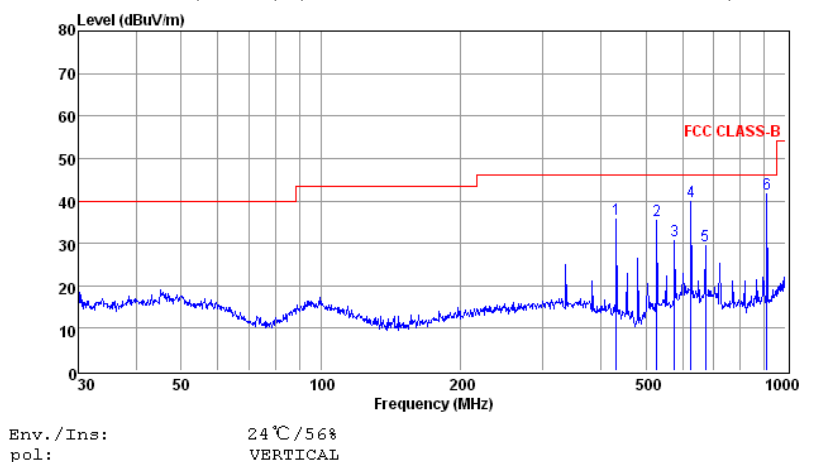

	Freq	Reading	CabLos	Antfac	Measured	Limit	Over	Remark
	MHz	dBm	dB	dB/m	dBm	dBm	dB	
1	432.55	18.97	1.18	15.53	35.68	46.00	-10.32	QP
2	528.25	16.80	1.46	17.11	35.37	46.00	-10.63	QP
3	576.64	11.22	1.49	18.01	30.72	46.00	-15.28	QP
4	625.08	19.94	1.49	18.54	39.97	46.00	-6.03	QP
5	672.84	9.21	1.65	18.71	29.57	46.00	-16.43	QP
6	912.86	18.63	1.86	21.17	41.66	46.00	-4.34	QP

Note: 1. All readings are Quasi-peak values.  
2. Measured= Reading + Antenna Factor + Cable Loss  
3. The emission that are 20db below the official limit are not reported

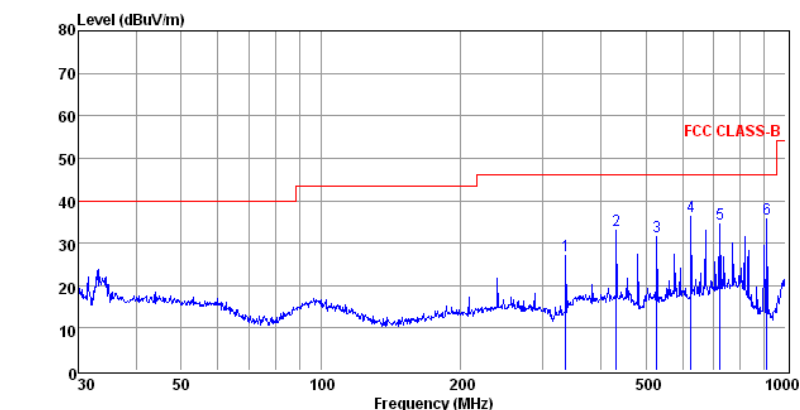

Env./Ins: 24 °C / 56%  
pol: HORIZONTAL

	Freq	Reading	CabLos	Antfac	Measured	Limit	Over	Remark
	MHz	dBm	dB	dB/m	dBm	dBm	dB	
1	336.04	12.07	1.09	13.96	27.12	46.00	-18.88	QP
2	432.55	16.18	1.18	15.53	32.89	46.00	-13.11	QP
3	528.25	12.94	1.46	17.11	31.51	46.00	-14.49	QP
4	625.08	16.34	1.49	18.54	36.37	46.00	-9.63	QP
5	721.73	13.78	1.63	19.08	34.49	46.00	-11.51	QP
6	912.86	12.80	1.86	21.17	35.83	46.00	-10.17	QP

Note: 1. All readings are Quasi-peak values.  
2. Measured= Reading + Antenna Factor + Cable Loss  
3. The emission that ate 20db blow the official limit are not reported

\*\*\*Note:

Pre-scan all mode and recorded the worst case results in this report (802.11n(HT20) (Low Channel, Chain 0 + Chain 1)).

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Only recorded the worst test case in this report.

## 5.4.8. Results for Radiated Emissions (Above 1GHz)

Note: Only recorded the worst test result in this report.

802.11b / Chain 0

Channel 1

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4824.16	53.98	33.06	35.04	3.94	55.94	74	-18.06	Peak	Horizontal
4824.19	44.63	33.06	35.04	3.94	46.59	54	-7.41	Average	Horizontal
4824.16	54.62	33.06	35.04	3.94	56.58	74	-17.42	Peak	Vertical
4824.19	43.79	33.06	35.04	3.94	45.75	54	-8.25	Average	Vertical

Channel 6

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4874.23	52.83	33.16	35.15	3.96	54.80	74	-19.20	Peak	Horizontal
4874.26	44.01	33.16	35.15	3.96	45.98	54	-8.02	Average	Horizontal
4874.23	54.10	33.16	35.15	3.96	56.07	74	-17.93	Peak	Vertical
4874.26	44.88	33.16	35.15	3.96	46.85	54	-7.15	Average	Vertical

Channel 11

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4924.31	52.58	33.26	35.14	3.98	54.68	74	-19.32	Peak	Horizontal
4924.34	41.67	33.26	35.14	3.98	43.77	54	-10.23	Average	Horizontal
4924.31	51.33	33.26	35.14	3.98	53.43	74	-20.57	Peak	Vertical
4924.34	41.28	33.26	35.14	3.98	43.38	54	-10.62	Average	Vertical

802.11g / Chain 0

Channel 1

Freq. MHz	Reading dBuv	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuv/m	Limit dBuv/m	Margin dB	Remark	Pol.
4824.15	57.60	33.06	35.04	3.94	59.56	74	-14.44	Peak	Horizontal
4824.17	49.11	33.06	35.04	3.94	51.07	54	-2.93	Average	Horizontal
4824.15	57.82	33.06	35.04	3.94	59.78	74	-14.22	Peak	Vertical
4824.17	49.07	33.06	35.04	3.94	51.03	54	-2.97	Average	Vertical

Channel 6

Freq. MHz	Reading dBuv	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuv/m	Limit dBuv/m	Margin dB	Remark	Pol.
4874.26	54.26	33.16	35.15	3.96	56.23	74	-17.77	Peak	Horizontal
4874.29	44.32	33.16	35.15	3.96	46.29	54	-7.71	Average	Horizontal
4874.26	55.97	33.16	35.15	3.96	57.94	74	-16.06	Peak	Vertical
4874.29	45.60	33.16	35.15	3.96	47.57	54	-6.43	Average	Vertical

Channel 11

Freq. MHz	Reading dBuv	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuv/m	Limit dBuv/m	Margin dB	Remark	Pol.
4924.37	55.87	33.26	35.14	3.98	57.97	74	-16.03	Peak	Horizontal
4924.40	44.93	33.26	35.14	3.98	47.03	54	-6.97	Average	Horizontal
4924.37	55.83	33.26	35.14	3.98	57.93	74	-16.07	Peak	Vertical
4924.40	47.18	33.26	35.14	3.98	49.28	54	-4.72	Average	Vertical

## 802.11n(HT20) / Chain 0 + Chain 1

## Channel 1

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4824.21	53.43	33.06	35.04	3.94	55.39	74	-18.61	Peak	Horizontal
4824.24	43.85	33.06	35.04	3.94	45.81	54	-8.19	Average	Horizontal
4824.21	57.18	33.06	35.04	3.94	59.14	74	-14.86	Peak	Vertical
4824.24	44.33	33.06	35.04	3.94	46.29	54	-7.71	Average	Vertical

## Channel 6

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4874.37	53.51	33.16	35.15	3.96	55.48	74	-18.52	Peak	Horizontal
4874.39	43.02	33.16	35.15	3.96	44.99	54	-9.01	Average	Horizontal
4874.37	54.53	33.16	35.15	3.96	56.50	74	-17.50	Peak	Vertical
4874.39	44.09	33.16	35.15	3.96	46.06	54	-7.94	Average	Vertical

## Channel 11

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4924.44	51.47	33.26	35.14	3.98	53.57	74	-20.43	Peak	Horizontal
4924.46	42.40	33.26	35.14	3.98	44.50	54	-9.50	Average	Horizontal
4924.44	53.19	33.26	35.14	3.98	55.29	74	-18.71	Peak	Vertical
4924.46	43.90	33.26	35.14	3.98	46.00	54	-8.00	Average	Vertical

## 802.11n(HT40) / Chain 0 + Chain 1

## Channel 3

Freq. MHz	Reading dBuv	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuv/m	Limit dBuv/m	Margin dB	Remark	Pol.
4844.17	51.00	33.06	35.04	3.94	52.96	74	-21.04	Peak	Horizontal
4844.19	40.71	33.06	35.04	3.94	42.67	54	-11.33	Average	Horizontal
4844.17	51.76	33.06	35.04	3.94	53.72	74	-20.28	Peak	Vertical
4844.19	40.48	33.06	35.04	3.94	42.44	54	-11.56	Average	Vertical

## Channel 6

Freq. MHz	Reading dBuv	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuv/m	Limit dBuv/m	Margin dB	Remark	Pol.
4874.34	49.68	33.16	35.15	3.96	51.65	74	-22.35	Peak	Horizontal
4874.37	39.59	33.16	35.15	3.96	41.56	54	-12.44	Average	Horizontal
4874.34	50.08	33.16	35.15	3.96	52.05	74	-21.95	Peak	Vertical
4874.37	38.92	33.16	35.15	3.96	40.89	54	-13.11	Average	Vertical

## Channel 9

Freq. MHz	Reading dBuv	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuv/m	Limit dBuv/m	Margin dB	Remark	Pol.
4904.33	49.60	33.26	35.14	3.98	51.70	74	-22.30	Peak	Horizontal
4904.36	37.89	33.26	35.14	3.98	39.99	54	-14.01	Average	Horizontal
4904.33	51.01	33.26	35.14	3.98	53.11	74	-20.89	Peak	Vertical
4904.36	42.52	33.26	35.14	3.98	44.62	54	-9.38	Average	Vertical

**Notes:**

1. Measuring frequencies from 9k~10th harmonic or 26.5GHz (which is less), No emission found between lowest internal used/generated frequency to 30MHz.
2. Radiated emissions measured in frequency range from 30MHz~10th harmonic or 26.5GHz (which is less) were made with an instrument using Peak detector mode.
3. The radiated emissions from 18GHz to 25GHz are at least 20dB below the official limit and no need to report.

## 5.4.9. Results of Band Edges Test (Radiated)

Note: Only recorded the worst test result in this report.

802.11b / Chain 0

Tx-2412

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
2372.67	45.41	32.90	35.16	3.51	46.65	74	-27.35	Peak	Horizontal
2372.70	37.50	32.90	35.16	3.51	38.75	54	-15.25	Average	Horizontal
2390.00	48.43	32.92	35.16	3.54	49.73	74	-24.27	Peak	Horizontal
2389.97	36.68	32.92	35.16	3.54	37.98	54	-16.02	Average	Horizontal
2400.00	56.65	32.92	35.16	3.54	57.95	74	-16.05	Peak	Horizontal
2399.97	46.63	32.92	35.16	3.54	47.93	54	-6.07	Average	Horizontal
2372.67	47.39	32.90	35.16	3.51	48.63	74	-25.37	Peak	Vertical
2372.70	37.08	32.90	35.16	3.51	38.33	54	-15.67	Average	Vertical
2390.00	49.37	32.92	35.16	3.54	50.67	74	-23.33	Peak	Vertical
2389.97	38.66	32.92	35.16	3.54	39.96	54	-14.04	Average	Vertical
2400.00	55.94	32.92	35.16	3.54	57.24	74	-16.76	Peak	Vertical
2399.97	47.59	32.92	35.16	3.54	48.89	54	-5.11	Average	Vertical

Tx-2462

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
2483.50	49.80	33.06	35.18	3.60	51.28	74	-22.72	Peak	Horizontal
2483.53	39.23	33.06	35.18	3.60	40.73	54	-13.27	Average	Horizontal
2487.41	44.99	33.08	35.18	3.62	46.51	74	-27.49	Peak	Horizontal
2487.43	36.67	33.08	35.18	3.62	38.19	54	-15.81	Average	Horizontal
2483.50	48.66	33.06	35.18	3.60	50.14	74	-23.86	Peak	Vertical
2483.53	39.30	33.06	35.18	3.60	40.80	54	-13.20	Average	Vertical
2487.41	44.91	33.08	35.18	3.62	46.43	74	-27.57	Peak	Vertical
2487.43	34.35	33.08	35.18	3.62	35.87	54	-18.13	Average	Vertical



802.11g / Chain 0

Tx-2412

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
2376.14	45.53	32.90	35.16	3.51	46.77	74	-27.23	Peak	Horizontal
2376.17	37.56	32.90	35.16	3.51	38.81	54	-15.19	Average	Horizontal
2390.00	50.53	32.92	35.16	3.54	51.83	74	-22.17	Peak	Horizontal
2389.97	36.25	32.92	35.16	3.54	37.55	54	-16.45	Average	Horizontal
2400.00	64.83	32.92	35.16	3.54	66.13	74	-7.87	Peak	Horizontal
2399.97	47.56	32.92	35.16	3.54	48.86	54	-5.14	Average	Horizontal
2376.14	47.09	32.90	35.16	3.51	48.33	74	-25.67	Peak	Vertical
2376.17	36.66	32.90	35.16	3.51	37.91	54	-16.09	Average	Vertical
2390.00	48.69	32.92	35.16	3.54	49.99	74	-24.01	Peak	Vertical
2389.97	39.53	32.92	35.16	3.54	40.83	54	-13.17	Average	Vertical
2400.00	61.54	32.92	35.16	3.54	62.84	74	-11.16	Peak	Vertical
2399.97	48.30	32.92	35.16	3.54	49.60	54	-4.40	Average	Vertical

Tx-2462

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
2483.50	50.40	32.90	35.16	3.51	51.88	74	-22.12	Peak	Horizontal
2483.51	39.18	32.90	35.16	3.51	40.68	54	-13.32	Average	Horizontal
2487.61	48.91	32.92	35.16	3.54	50.43	74	-23.57	Peak	Horizontal
2487.63	35.32	32.92	35.16	3.54	36.84	54	-17.16	Average	Horizontal
2483.50	49.02	32.90	35.16	3.51	50.50	74	-23.50	Peak	Vertical
2483.51	38.11	32.90	35.16	3.51	39.61	54	-14.39	Average	Vertical
2487.61	48.24	32.92	35.16	3.54	49.76	74	-24.24	Peak	Vertical
2487.63	38.65	32.92	35.16	3.54	40.17	54	-13.83	Average	Vertical

802.11n(HT20) / Chain 0 + Chain 1

Tx-2412

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
2377.54	45.28	32.90	35.16	3.51	46.53	74	-27.47	Peak	Horizontal
2377.57	36.69	32.90	35.16	3.51	37.94	54	-16.06	Average	Horizontal
2390.00	47.70	32.92	35.16	3.54	49.00	74	-25.00	Peak	Horizontal
2389.97	36.33	32.92	35.16	3.54	37.63	54	-16.37	Average	Horizontal
2400.00	64.45	32.92	35.16	3.54	65.75	74	-8.25	Peak	Horizontal
2399.97	49.48	32.92	35.16	3.54	50.78	54	-3.22	Average	Horizontal
2377.54	43.32	32.90	35.16	3.51	44.57	74	-29.43	Peak	Vertical
2377.57	38.24	32.90	35.16	3.51	39.49	54	-14.51	Average	Vertical
2390.00	49.41	32.92	35.16	3.54	50.71	74	-23.29	Peak	Vertical
2389.99	39.39	32.92	35.16	3.54	40.69	54	-13.31	Average	Vertical
2400.00	63.57	32.92	35.16	3.54	64.87	74	-9.13	Peak	Vertical
2399.97	47.70	32.92	35.16	3.54	49.00	54	-5.00	Average	Vertical

Tx-2462

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
2483.50	48.66	33.06	35.18	3.60	50.14	74	-23.86	Peak	Horizontal
2483.51	36.66	33.06	35.18	3.60	38.16	54	-15.84	Average	Horizontal
2489.44	44.69	33.08	35.18	3.62	46.21	74	-27.79	Peak	Horizontal
2489.47	34.48	33.08	35.18	3.62	36.00	54	-18.00	Average	Horizontal
2483.50	48.54	33.06	35.18	3.60	50.02	74	-23.98	Peak	Vertical
2483.53	37.01	33.08	35.18	3.60	38.51	54	-15.49	Average	Vertical
2489.44	47.50	33.08	35.18	3.62	49.02	74	-24.98	Peak	Vertical
2489.47	34.98	33.08	35.18	3.62	36.50	54	-17.50	Average	Vertical

802.11n(HT40) / Chain 0 + Chain 1

Tx-2422

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
2371.83	43.63	32.90	35.16	3.51	44.88	74	-29.12	Peak	Horizontal
2371.86	33.61	32.90	35.16	3.51	34.86	54	-19.14	Average	Horizontal
2390.00	44.50	32.92	35.16	3.54	45.80	74	-28.20	Peak	Horizontal
2389.97	37.72	32.92	35.16	3.54	39.02	54	-14.98	Average	Horizontal
2400.00	64.38	32.92	35.16	3.54	65.68	74	-8.32	Peak	Horizontal
2399.97	46.94	32.92	35.16	3.54	48.24	54	-5.76	Average	Horizontal
2371.83	42.94	32.90	35.16	3.51	44.19	74	-29.81	Peak	Vertical
2371.86	35.23	32.90	35.16	3.51	36.48	54	-17.52	Average	Vertical
2390.00	46.88	32.92	35.16	3.54	48.18	74	-25.82	Peak	Vertical
2389.99	36.25	32.92	35.16	3.54	37.55	54	-16.45	Average	Vertical
2400.00	66.83	32.92	35.16	3.54	68.13	74	-5.87	Peak	Vertical
2399.97	49.21	32.92	35.16	3.54	50.51	54	-3.49	Average	Vertical

Tx-2452

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
2483.50	46.52	33.06	35.18	3.60	48.00	74	-26.00	Peak	Horizontal
2483.51	36.75	33.06	35.18	3.60	38.25	54	-15.75	Average	Horizontal
2486.86	42.32	33.08	35.18	3.62	43.84	74	-30.16	Peak	Horizontal
2486.89	32.89	33.08	35.18	3.62	34.41	54	-19.59	Average	Horizontal
2483.50	45.70	33.06	35.18	3.60	47.18	74	-26.82	Peak	Vertical
2483.51	35.78	33.06	35.18	3.60	37.28	54	-16.72	Average	Vertical
2486.86	44.88	33.08	35.18	3.62	46.40	74	-27.60	Peak	Vertical
2486.89	33.47	33.08	35.18	3.62	34.99	54	-19.01	Average	Vertical

## 5.5. Conducted Spurious Emissions and Band Edges Test

### 5.5.1. Standard Applicable

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### 5.5.2. Instruments Setting

The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Detector	Peak
Attenuation	Auto
RB / VB (Emission in restricted band)	100KHz/300KHz
RB / VB (Emission in non-restricted band)	100KHz/300KHz

### 5.5.3. Test Procedures

The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz

The spectrum from 9kHz to 26.5GHz is investigated with the transmitter set to the lowest, middle, and highest channels.

### 5.5.4. Test Setup Layout

This test setup layout is the same as that shown in section 5.3.4.

### 5.5.5. EUT Operation during Test


The EUT was programmed to be in continuously transmitting mode.

## 5.5.6. Test Results of Conducted Spurious Emissions

Note: Only recorded the worst test case in this report.


## Conducted Spurious Emissions / Chain 0

## Measurement of Conducted Spurious Emissions

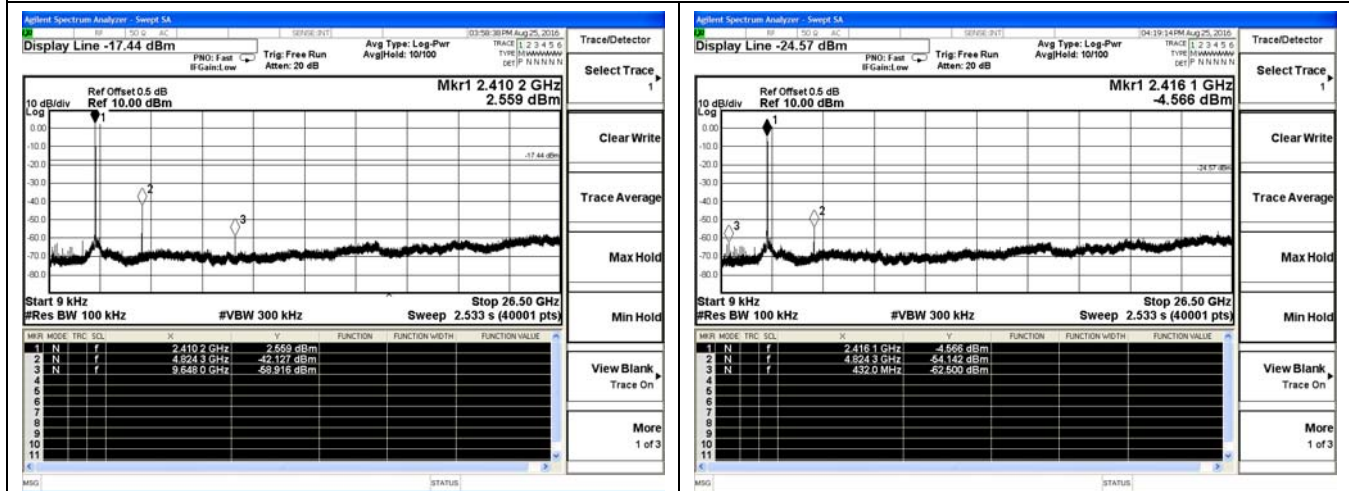


## 802.11b Test frequency: 2412MHz

## 802.11g Test frequency: 2412MHz

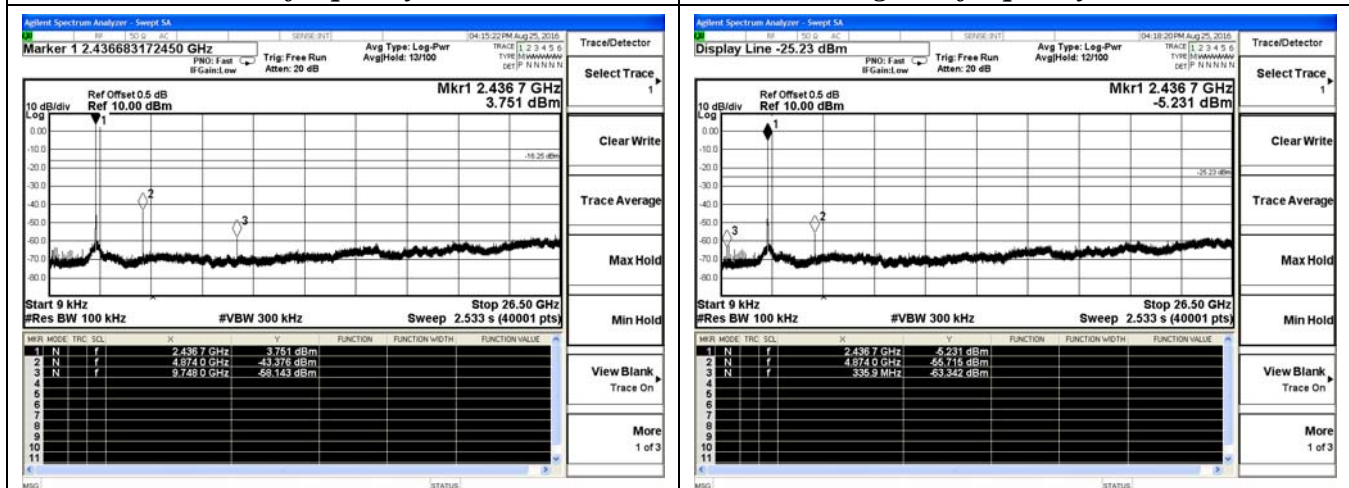

## 802.11b Test frequency: 2437MHz

## 802.11g Test frequency: 2437MHz




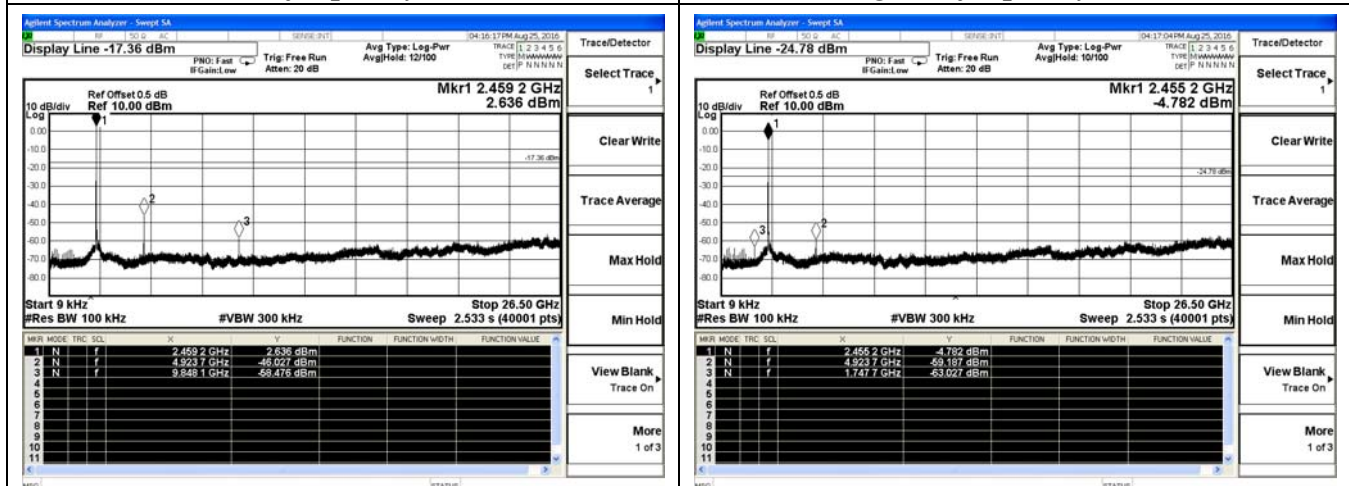


## 802.11b Test frequency: 2462MHz

## 802.11g Test frequency: 2462MHz

## Conducted Spurious Emissions / Chain 0+ Chain 1

## Measurement of Conducted Spurious Emissions

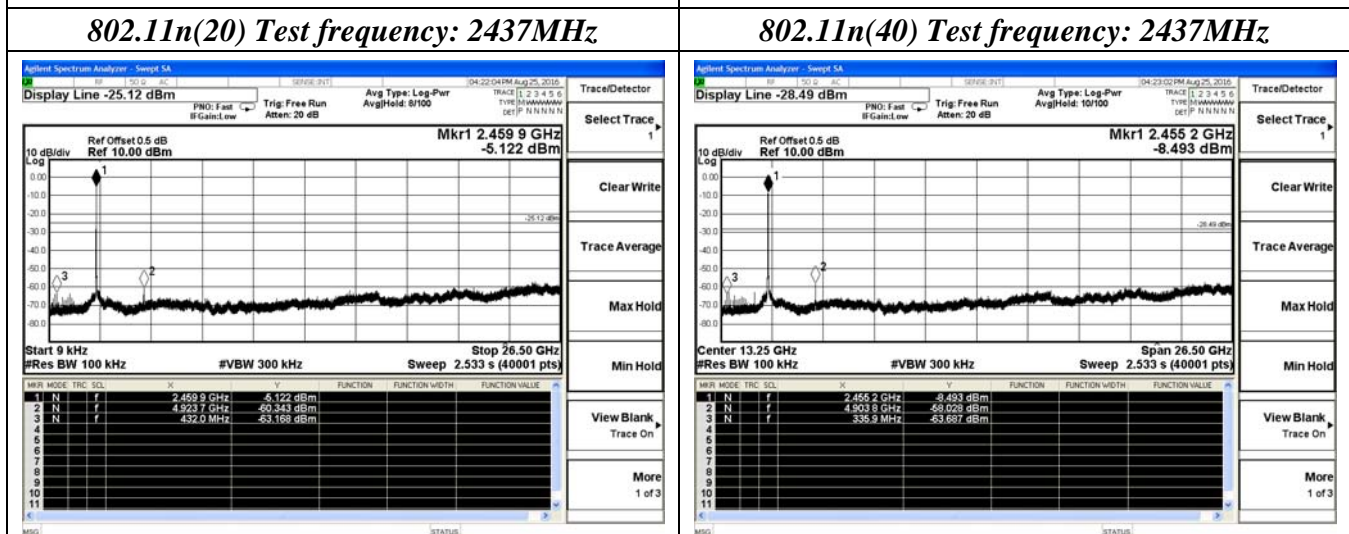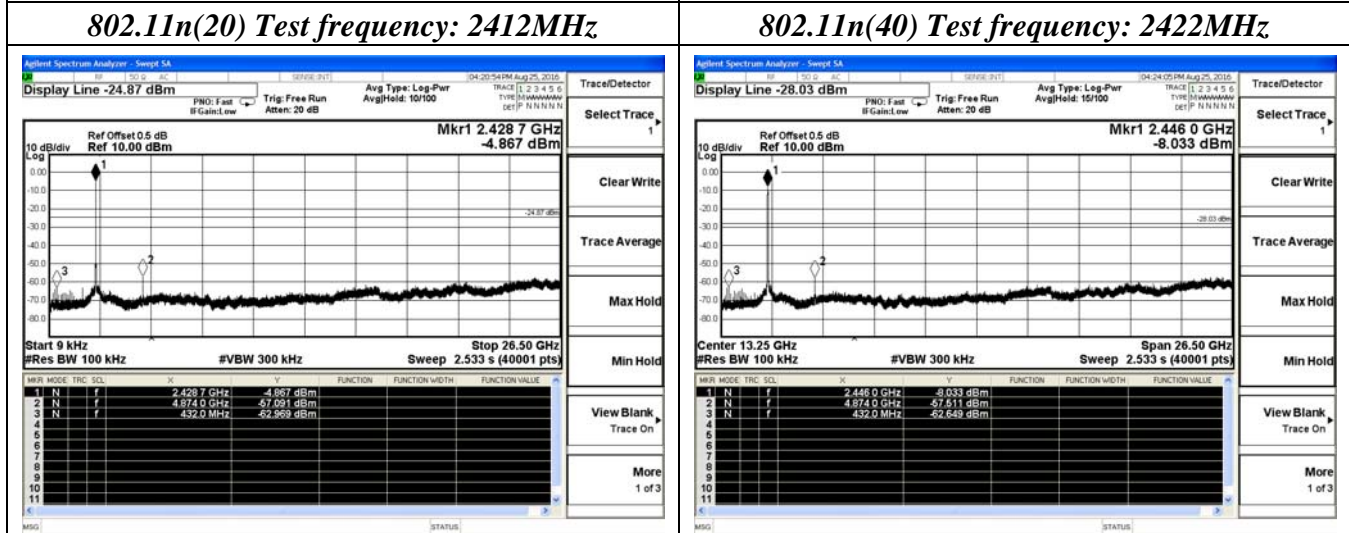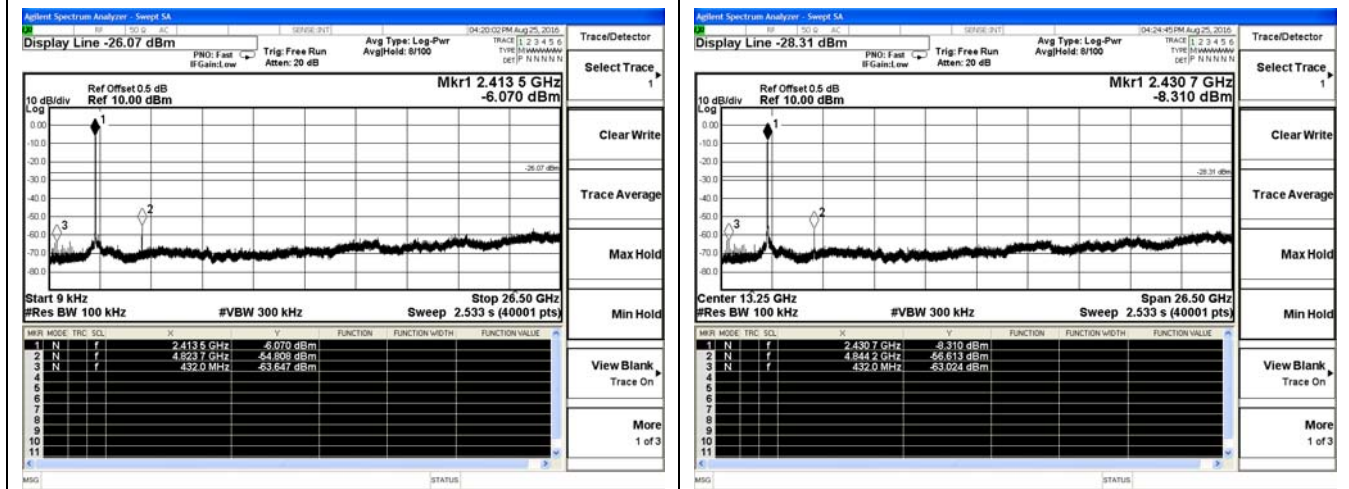


## 5.5.7. Test Results of Band Edges Test

Only recorded the worst test case in this report.

## Conducted Spurious Emissions / Chain 01


## Measurement of Conducted Spurious Emissions

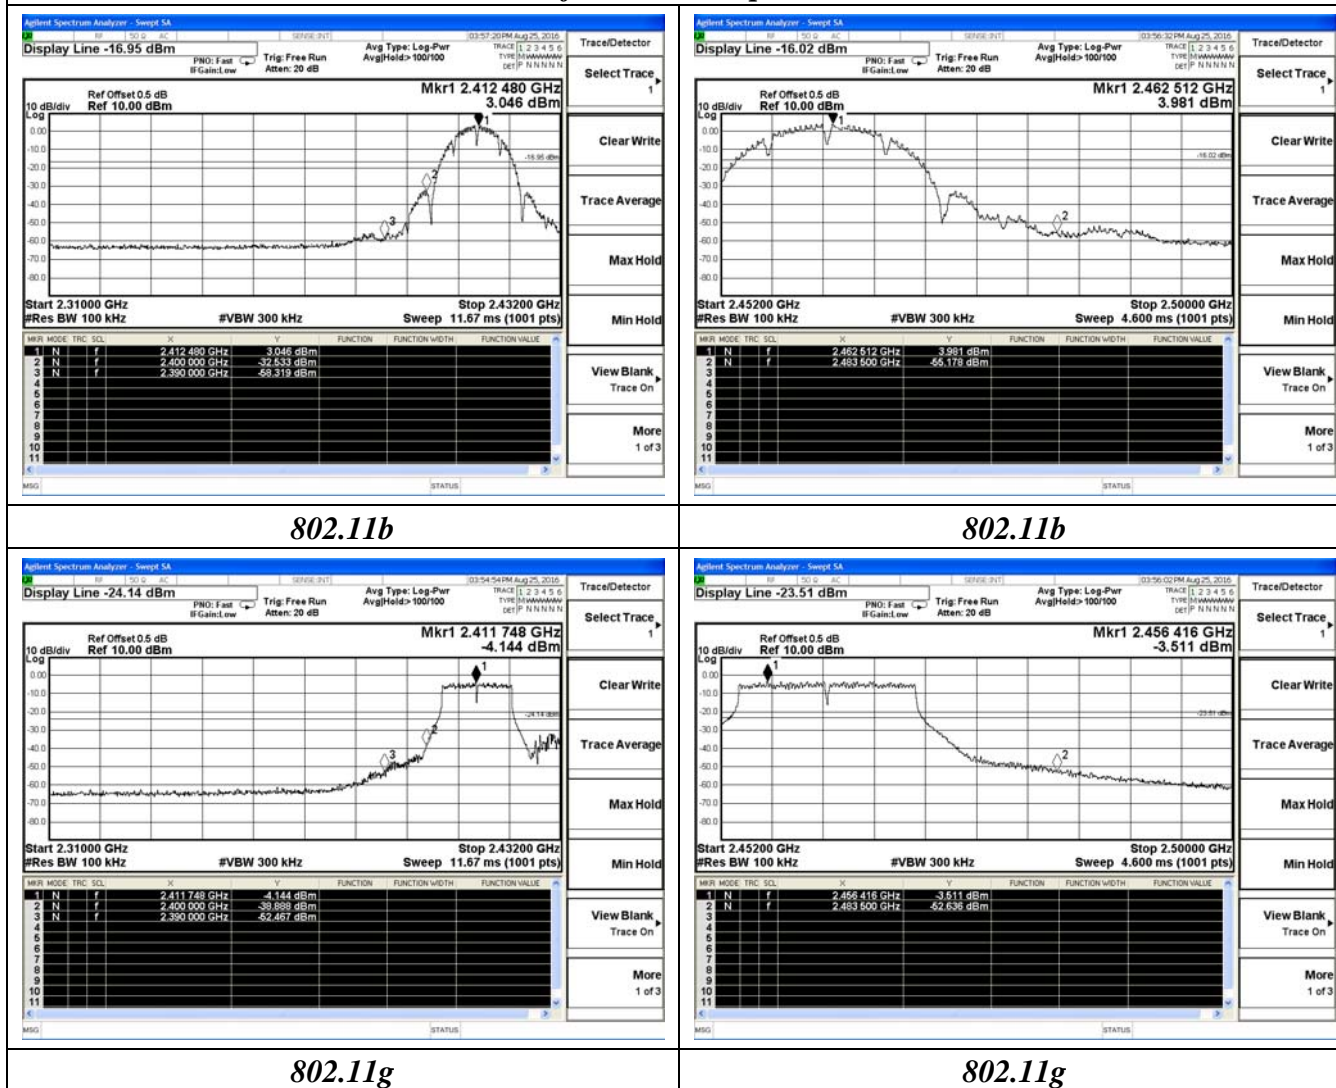



## Conducted Spurious Emissions / Chain 0+ Chain 1

### Measurement of Conducted Spurious Emissions

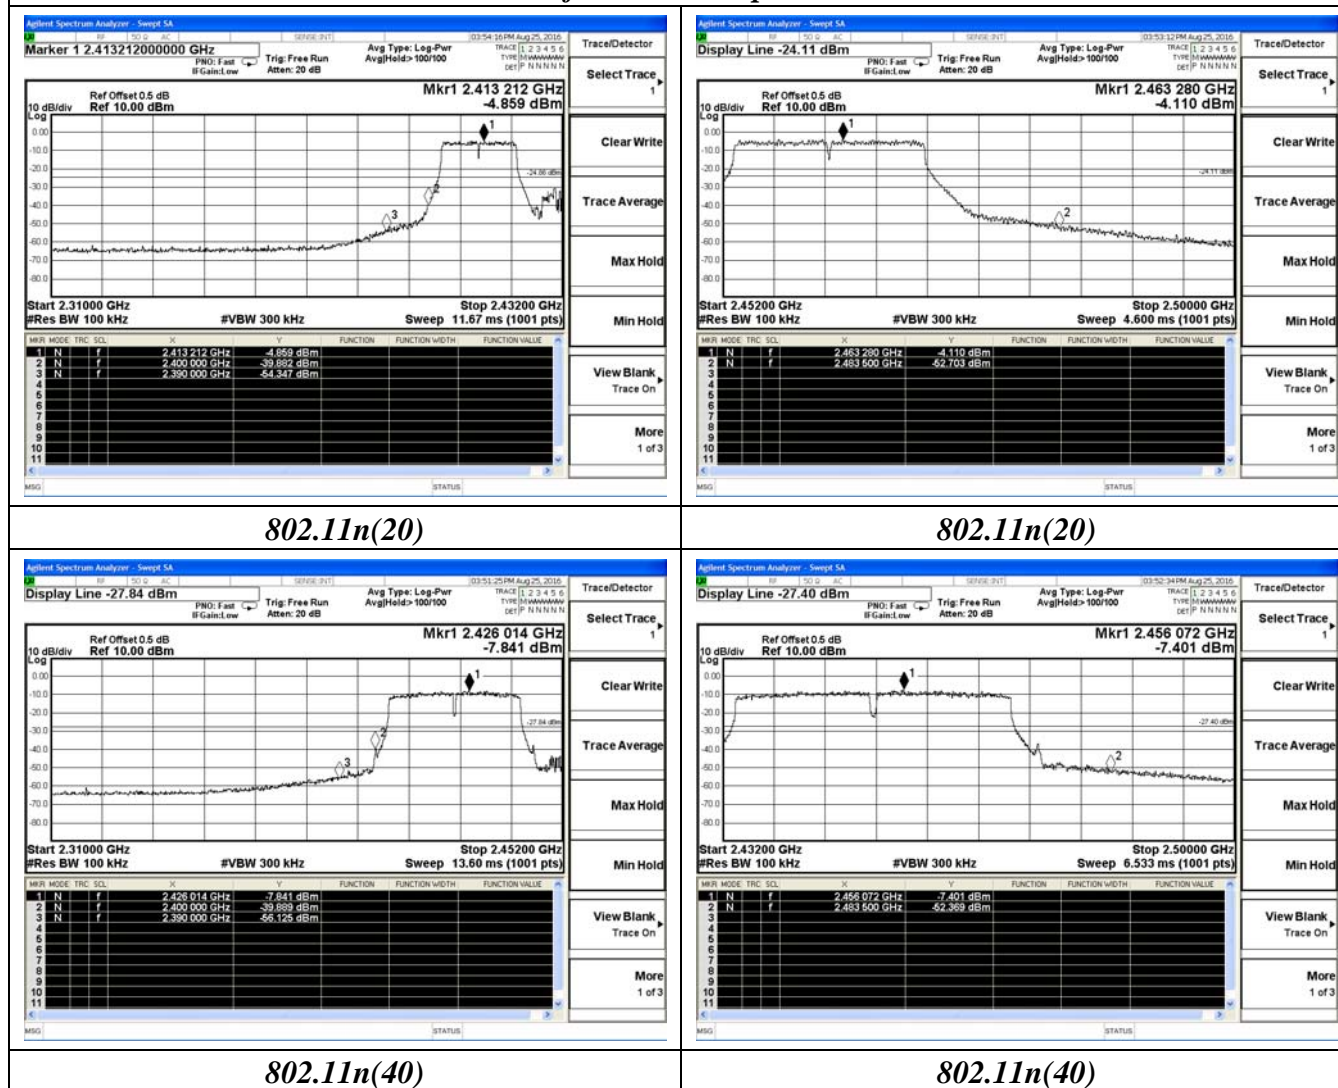




## 5.6. Power line conducted emissions

### 5.6.1 Standard Applicable

According to §15.207 (a): For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range is listed as follows:

Frequency Range (MHz)	Limits (dBμV)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

### 5.6.2 Block Diagram of Test Setup

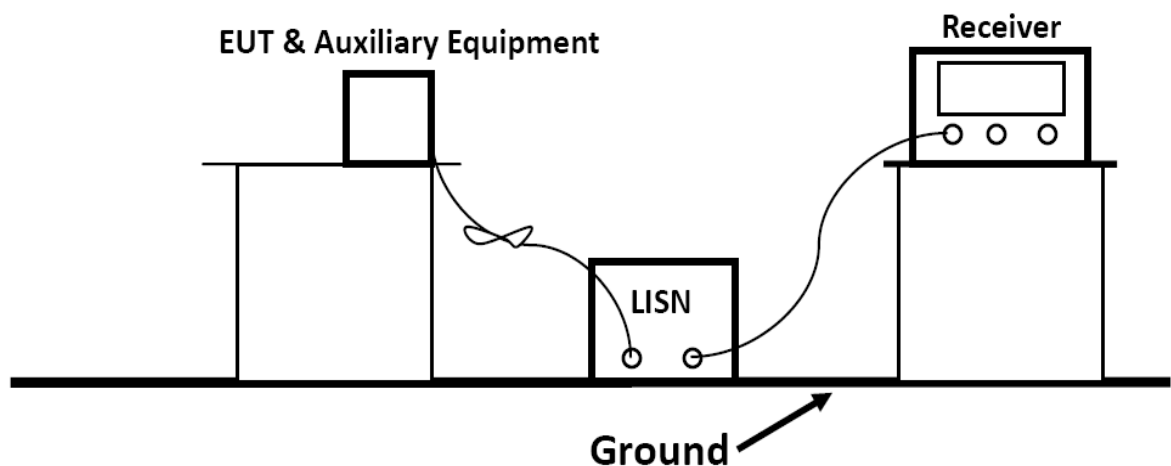


### 5.6.3 Test Results

PASS.

Only recorded the worst test case in this report.


The test data please refer to following page.

## The Test Result For Input AC 120V/60Hz

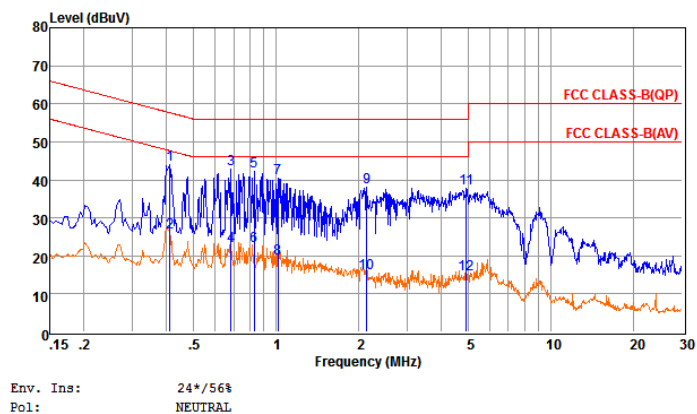

Freq	Reading	LisnFac	CabLos	Atten_Fac	Measured	Limit	Over	Remark
MHz	dBuV	dB	dB	dB	dBuV	dBuV	dB	
1 0.41048	24.49	9.61	0.04	10.00	44.14	57.64	-13.50	QP
2 0.41058	6.40	9.61	0.04	10.00	26.05	47.64	-21.59	Average
3 0.68626	23.10	9.63	0.04	10.00	42.77	56.00	-13.23	QP
4 0.68636	3.00	9.63	0.04	10.00	22.67	46.00	-23.33	Average
5 0.83047	22.51	9.63	0.04	10.00	42.18	56.00	-13.82	QP
6 0.83057	2.92	9.63	0.04	10.00	22.59	46.00	-23.41	Average
7 1.01569	20.70	9.63	0.05	10.00	40.38	56.00	-15.62	QP
8 1.01689	-0.23	9.63	0.05	10.00	19.45	46.00	-26.55	Average
9 2.13259	18.49	9.63	0.05	10.00	38.17	56.00	-17.83	QP
10 2.13359	-4.09	9.63	0.05	10.00	15.59	46.00	-30.41	Average
11 4.92572	17.95	9.66	0.06	10.00	37.67	56.00	-18.33	QP
12 4.92672	-4.61	9.66	0.06	10.00	15.11	46.00	-30.89	Average

Remarks: 1. Measured = Reading + Lisn Factor +Cable Loss+Atten\_Fac.  
2. The emission levels that are 20dB below the official limit are not reported.

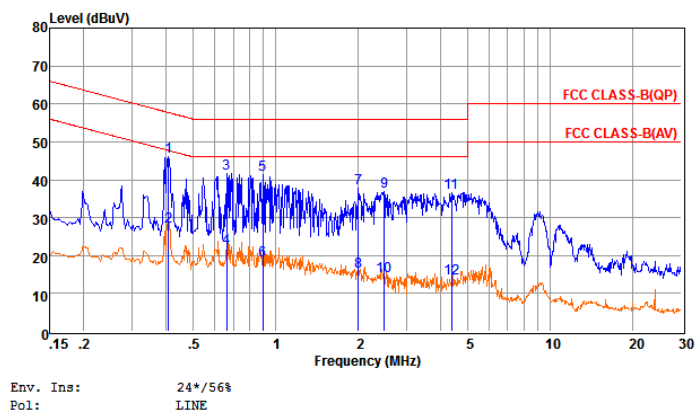


Freq	Reading	LisnFac	CabLos	Atten_Fac	Measured	Limit	Over	Remark
MHz	dBuV	dB	dB	dB	dBuV	dBuV	dB	
1 0.40615	26.53	9.62	0.04	10.00	46.19	57.73	-11.54	QP
2 0.40625	8.02	9.62	0.04	10.00	27.68	47.72	-20.04	Average
3 0.66127	22.07	9.64	0.04	10.00	41.75	56.00	-14.25	QP
4 0.66137	2.39	9.64	0.04	10.00	22.07	46.00	-23.93	Average
5 0.89917	21.75	9.63	0.05	10.00	41.43	56.00	-14.57	QP
6 0.89927	-0.94	9.63	0.05	10.00	18.74	46.00	-27.26	Average
7 2.00122	18.15	9.64	0.05	10.00	37.84	56.00	-18.16	QP
8 2.00222	-3.81	9.64	0.05	10.00	15.88	46.00	-30.12	Average
9 2.48678	17.04	9.64	0.05	10.00	36.73	56.00	-19.27	QP
10 2.48778	-5.24	9.64	0.05	10.00	14.45	46.00	-31.55	Average
11 4.36060	17.00	9.65	0.06	10.00	36.71	56.00	-19.29	QP
12 4.36760	-5.84	9.65	0.06	10.00	13.87	46.00	-32.13	Average

Remarks: 1. Measured = Reading + Lisn Factor +Cable Loss+Atten\_Fac.  
2. The emission levels that are 20dB below the official limit are not reported.

Note: Pre-scan all modes and recorded the worst case results in this report.


## The Test Result For Input AC 240V/60Hz

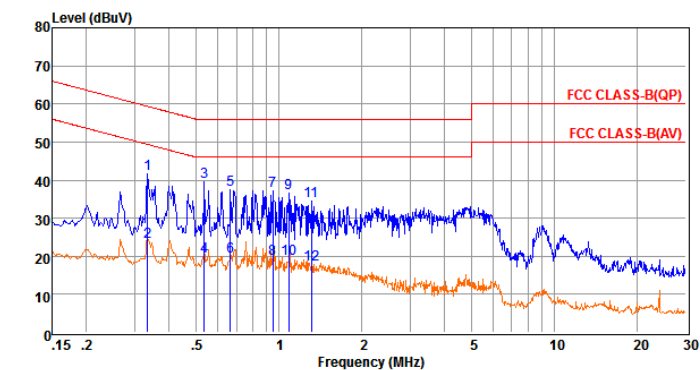

Env. Ins: 24\*/56%  
Pol: LINE

Freq	Reading	LisnFac	CabLos	Atten_Fac	Measured	Limit	Over	Remark
MHz	dBuV	dB	dB	dB	dBuV	dBuV	dB	
1 0.33385	21.94	9.62	0.03	10.00	41.59	59.35	-17.76	QP
2 0.33395	4.04	9.62	0.03	10.00	23.69	49.35	-25.66	Average
3 0.53498	19.88	9.62	0.04	10.00	39.54	56.00	-16.46	QP
4 0.53508	0.25	9.62	0.04	10.00	19.91	46.00	-26.09	Average
5 0.66478	17.68	9.64	0.04	10.00	37.36	56.00	-18.64	QP
6 0.66488	0.15	9.64	0.04	10.00	19.83	46.00	-26.17	Average
7 0.94809	17.58	9.63	0.05	10.00	37.26	56.00	-18.74	QP
8 0.94819	-0.27	9.63	0.05	10.00	19.41	46.00	-26.59	Average
9 1.08237	16.95	9.63	0.05	10.00	36.63	56.00	-19.37	QP
10 1.08337	-0.22	9.63	0.05	10.00	19.46	46.00	-26.54	Average
11 1.30982	14.83	9.63	0.05	10.00	34.51	56.00	-21.49	QP
12 1.31082	-1.84	9.63	0.05	10.00	17.84	46.00	-28.16	Average

Remarks: 1. Measured = Reading + Lisn Factor +Cable Loss+Atten\_Fac.  
2. The emission levels that are 20dB below the official limit are not reported.

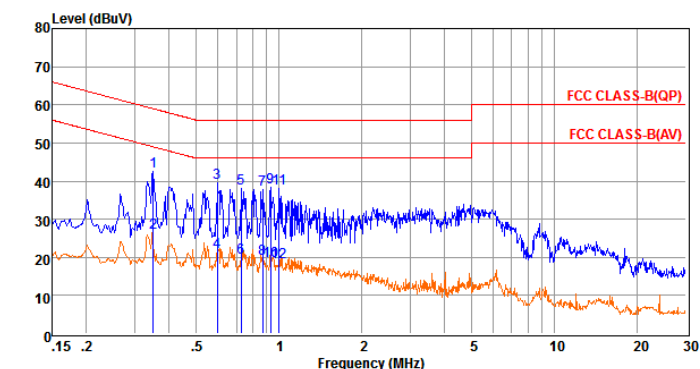

Env. Ins: 24\*/56%  
Pol: NEUTRAL

Freq	Reading	LisnFac	CabLos	Atten_Fac	Measured	Limit	Over	Remark
MHz	dBuV	dB	dB	dB	dBuV	dBuV	dB	
1 0.35015	22.75	9.61	0.03	10.00	42.39	58.96	-16.57	QP
2 0.35025	6.70	9.61	0.03	10.00	26.34	48.96	-22.62	Average
3 0.59794	20.00	9.63	0.04	10.00	39.67	56.00	-16.33	QP
4 0.59804	1.87	9.63	0.04	10.00	21.54	46.00	-24.46	Average
5 0.72744	18.27	9.63	0.04	10.00	37.94	56.00	-18.06	QP
6 0.72754	0.38	9.63	0.04	10.00	20.05	46.00	-25.95	Average
7 0.87103	17.99	9.63	0.04	10.00	37.66	56.00	-18.34	QP
8 0.87113	-0.18	9.63	0.04	10.00	19.49	46.00	-26.51	Average
9 0.93314	18.68	9.63	0.05	10.00	38.36	56.00	-17.64	QP
10 0.93324	-0.58	9.63	0.05	10.00	19.10	46.00	-26.90	Average
11 0.99968	18.32	9.63	0.05	10.00	38.00	56.00	-18.00	QP
12 0.99978	-0.88	9.63	0.05	10.00	18.80	46.00	-27.20	Average

Remarks: 1. Measured = Reading + Lisn Factor +Cable Loss+Atten\_Fac.  
2. The emission levels that are 20dB below the official limit are not reported.

Note: Pre-scan all modes and recorded the worst case results in this report.

## 5.7. Antenna Requirements

### 5.7.1. Standard Applicable

According to § 15.203, An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

### 5.7.2. Antenna Connector Construction

The antenna used for transmitting is permanently attached and no consideration of replacement. Please see EUT photo for details.

### 5.7.3. Results: Compliance.

-----THE END OF TEST REPORT-----